US006356395B1

(12) **United States Patent**
Tawa et al.

(10) **Patent No.: US 6,356,395 B1**
(45) **Date of Patent: Mar. 12, 2002**

(54) **LIGHT INTENSITY DISTRIBUTION CONVERTING DEVICE AND OPTICAL DATA STORAGE APPARATUS**

(75) Inventors: **Fumihiro Tawa**; **Shinya Hasegawa**, both of Kawasaki (JP)

(73) Assignee: **Fujitsu Limited**, Kawasaki (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/365,824**

(22) Filed: **Aug. 3, 1999**

(30) **Foreign Application Priority Data**

Sep. 14, 1998 (JP) 10-260281

(51) **Int. Cl.**[7] **G02B 3/00**
(52) **U.S. Cl.** **359/642**; 359/641; 359/719
(58) **Field of Search** 359/708, 718–719, 359/721, 237, 641–642; 369/116, 44.23, 100, 112

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,545,653 A	*	10/1985	Brenden et al.	359/719
4,904,062 A	*	2/1990	Morishita et al.	359/708
5,442,615 A	*	8/1995	Ohsato et al.	369/100
5,467,335 A		11/1995	Braat	369/100
5,499,262 A	*	3/1996	Nakata	372/108
5,553,174 A		9/1996	Snyder	385/15
6,014,260 A	*	1/2000	Godard et al.	359/719

FOREIGN PATENT DOCUMENTS

JP	62-150315	7/1987
JP	63-188115	8/1988
JP	3-75612	3/1991
JP	3-92815	4/1991
JP	6-223401	8/1994
JP	06223401 A	8/1994
JP	2900648	3/1999

OTHER PUBLICATIONS

French Search Report, Sep. 18, 2000.


* cited by examiner

Primary Examiner—Jordan M. Schwartz
(74) *Attorney, Agent, or Firm*—Armstrong, Westerman, Hattori, LLP

(57) **ABSTRACT**

A light intensity distribution converting device is formed by a transparent body having a first curved surface, a second curved surface, and an outer circumferential surface extending between the first and second curved surfaces. One of first and second surfaces has a concave surface configuration and the other has a convex surface configuration. Diverging light is made incident to the first curved surface, for example. The light intensity distribution of light made incident to the body from first curved surface is different from that of light emerging the body from the second curved surface, due to refractions at the first and second curved surfaces. The light intensity distribution converting device can be used as a collimator lens or an objective lens in an optical data storing apparatus.

25 Claims, 18 Drawing Sheets

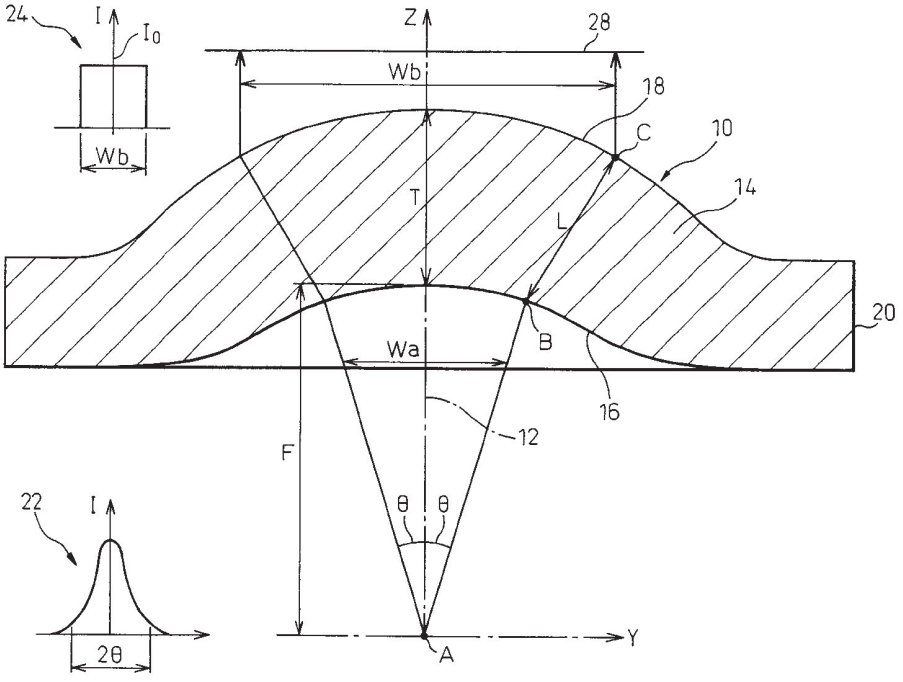

IPR2025-00331
Samsung Electronics Co., Ltd. v. Sinotechnix, LLC.
Samsung's Exhibit 1004
EX1004, Page 1

Fig. 1

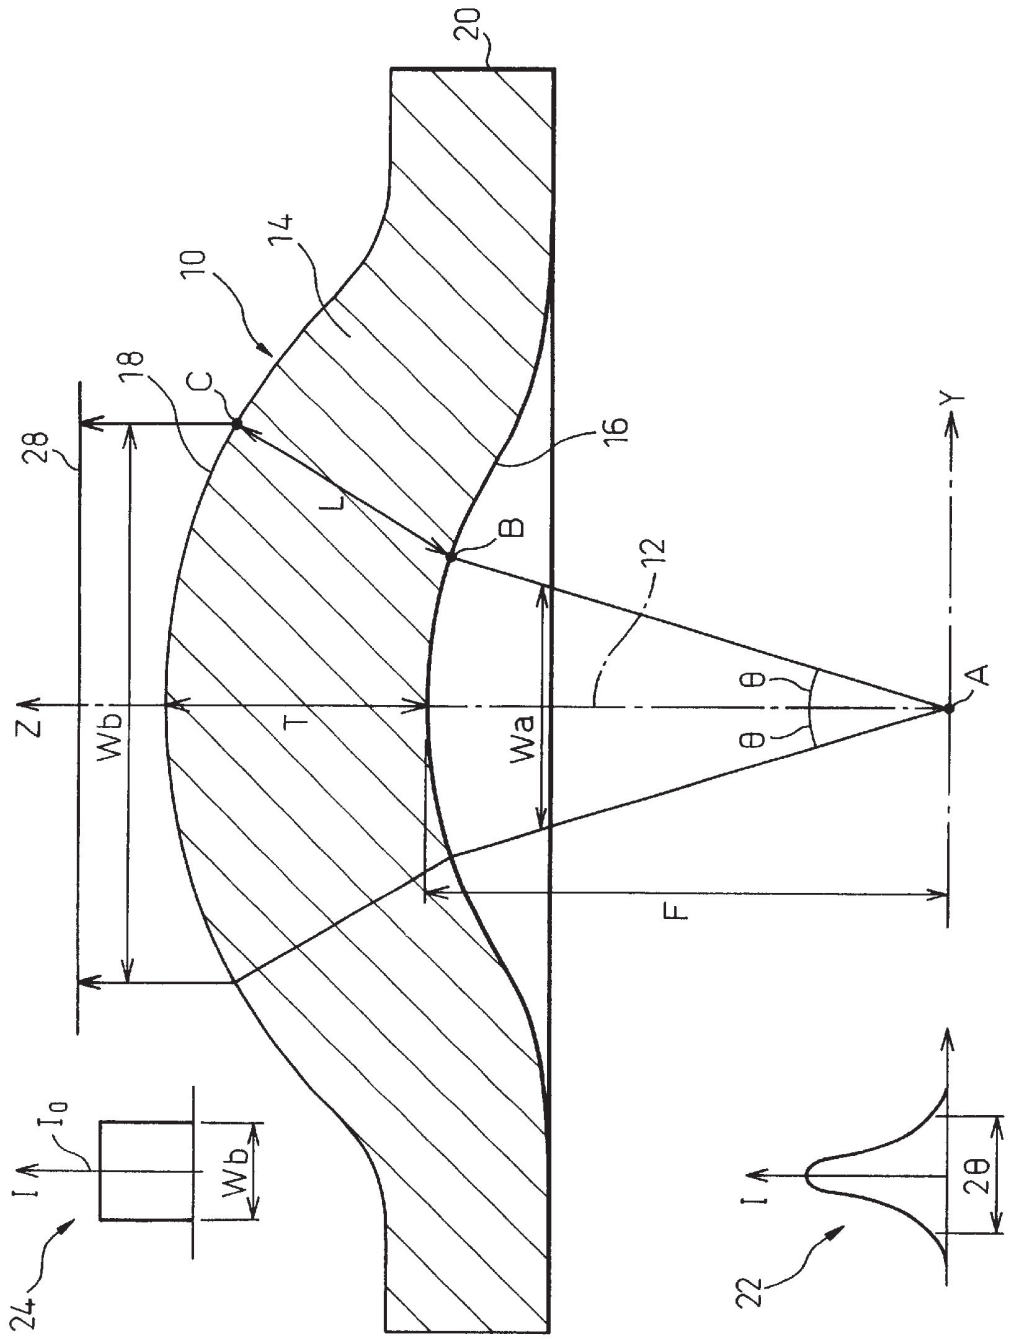


Fig. 2

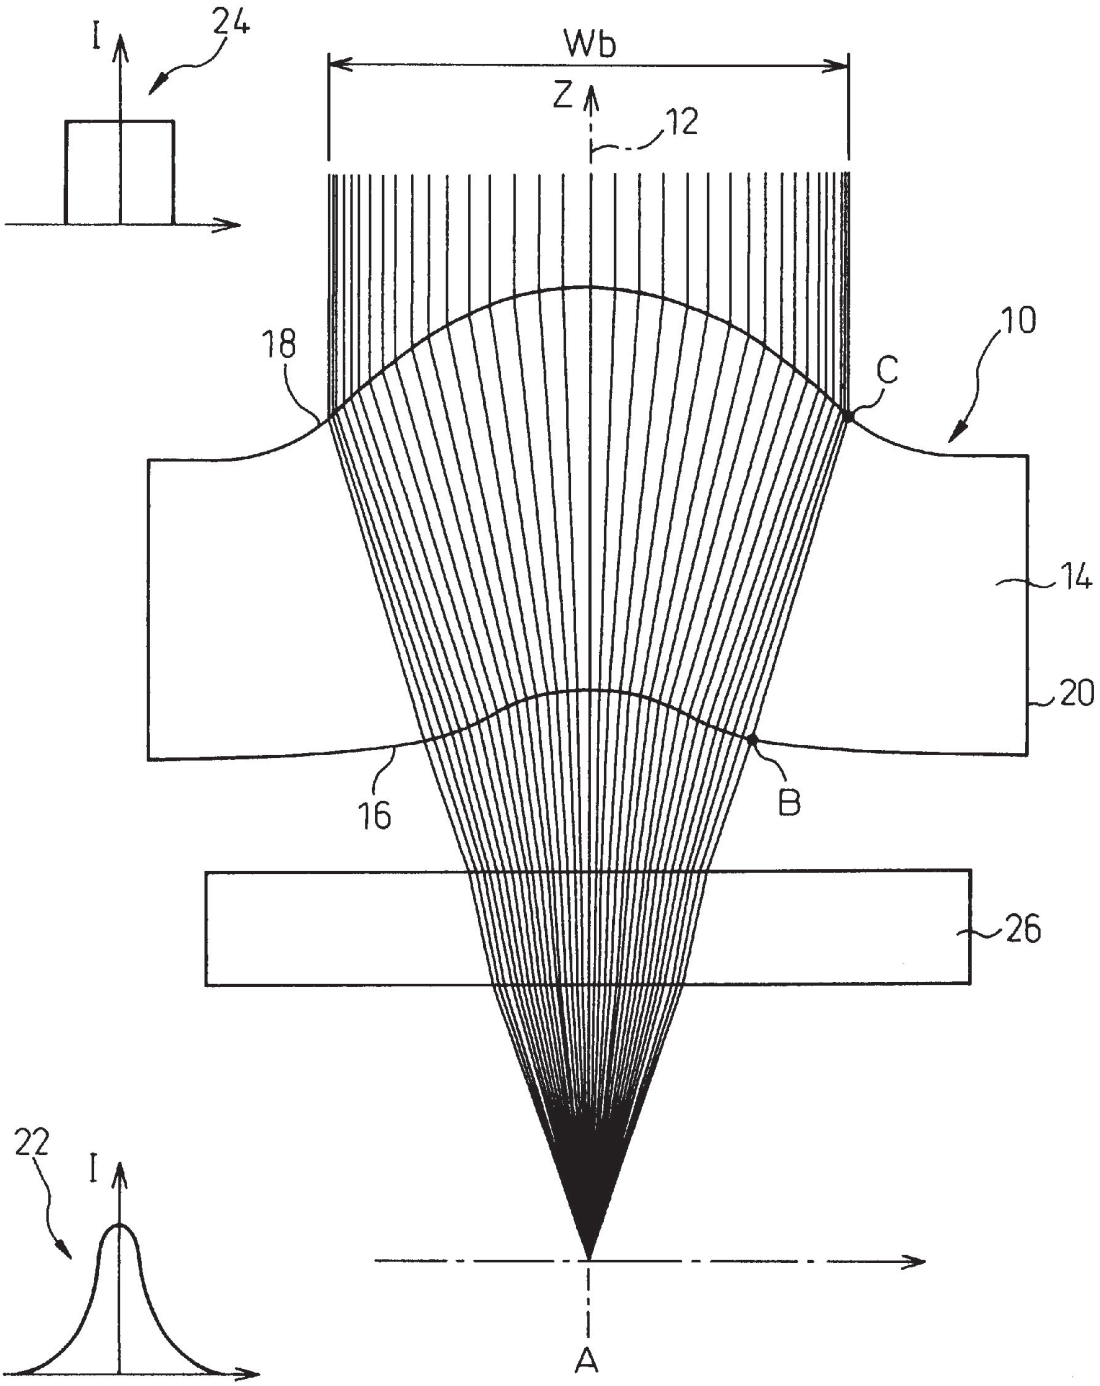


Fig. 3

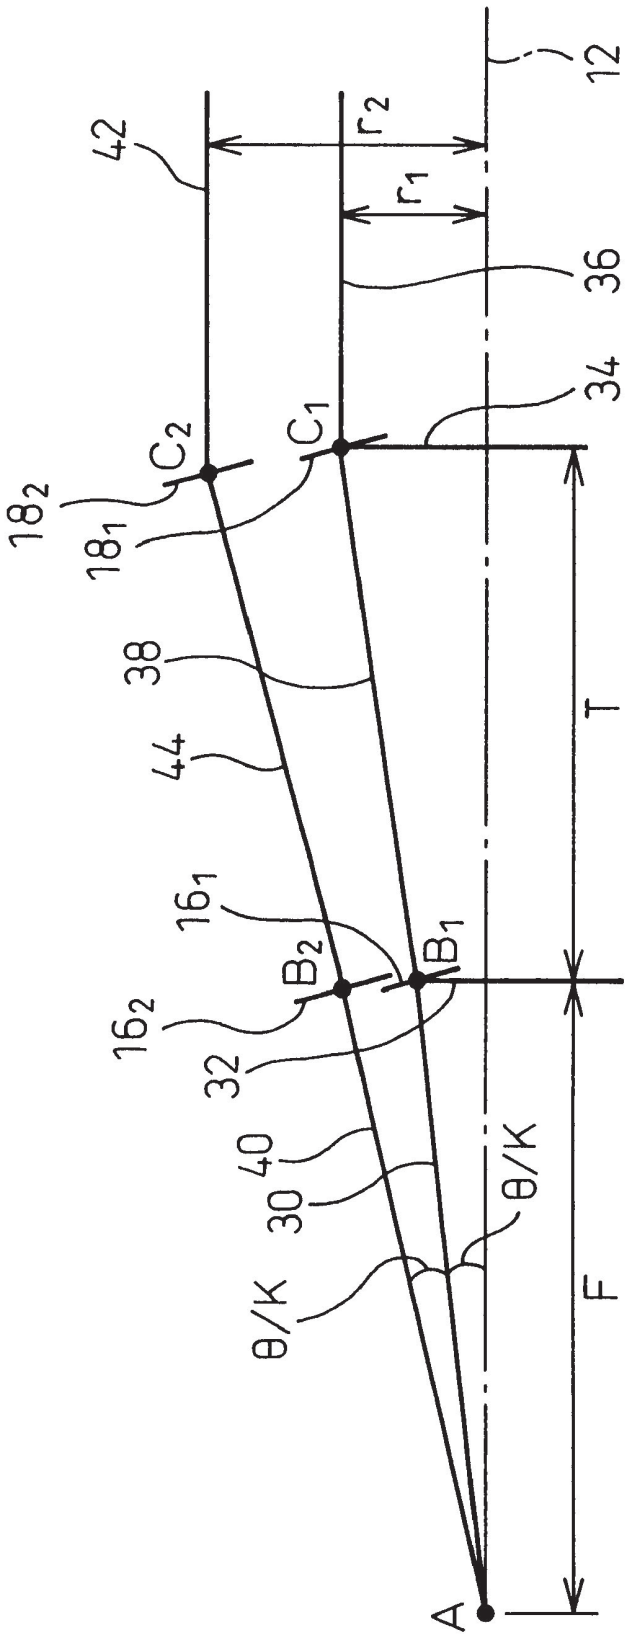


Fig. 4

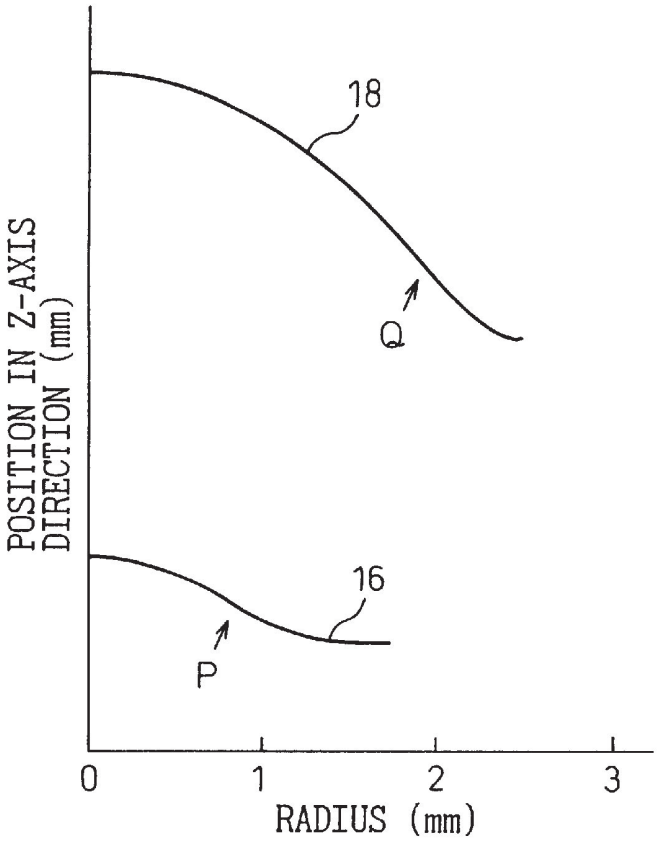

18
Q
16
P
POSITION IN Z-AXIS DIRECTION (mm)
0
1
2
3
RADIUS (mm)

Fig. 5

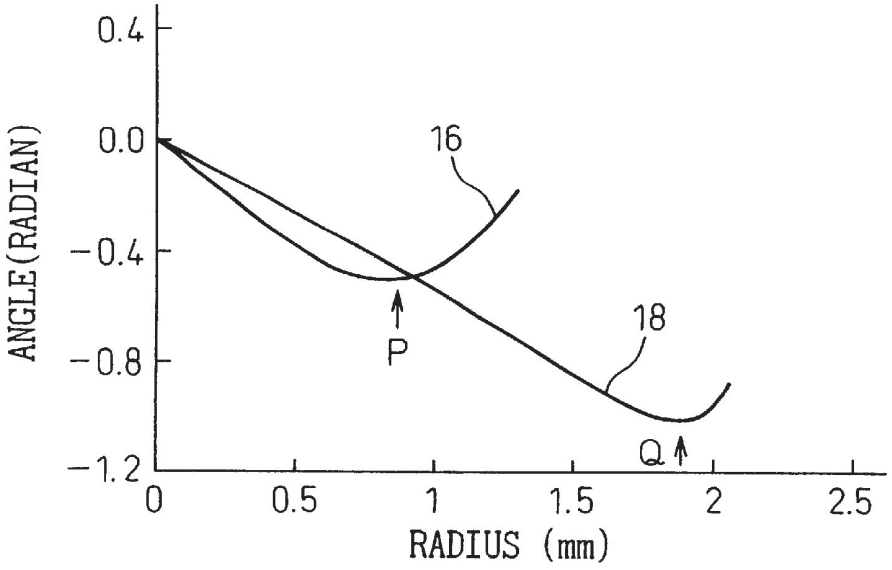

0.4
0.0
−0.4
−0.8
−1.2
ANGLE(RADIAN)
16
P
18
Q
0
0.5
1
1.5
2
2.5
RADIUS (mm)

Fig. 6A

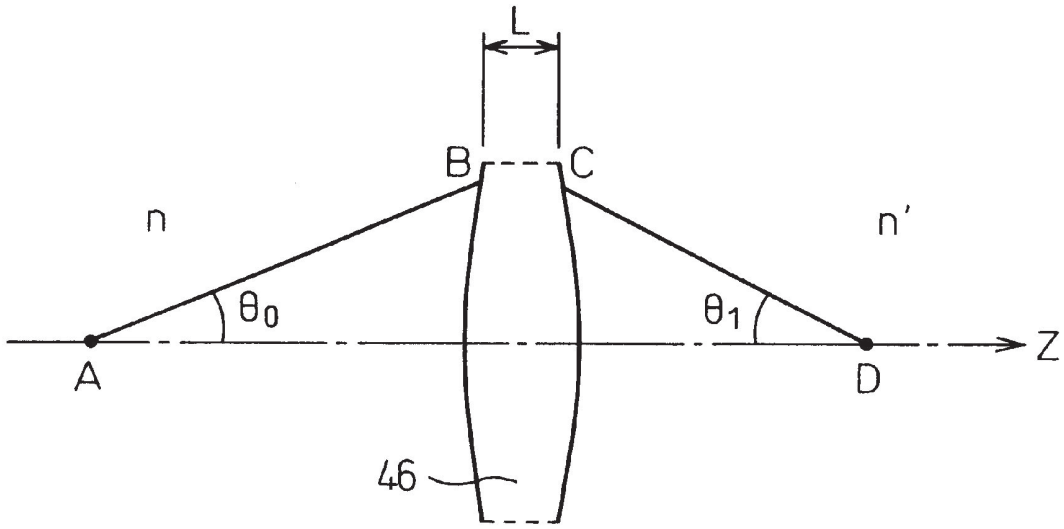


Fig. 6B

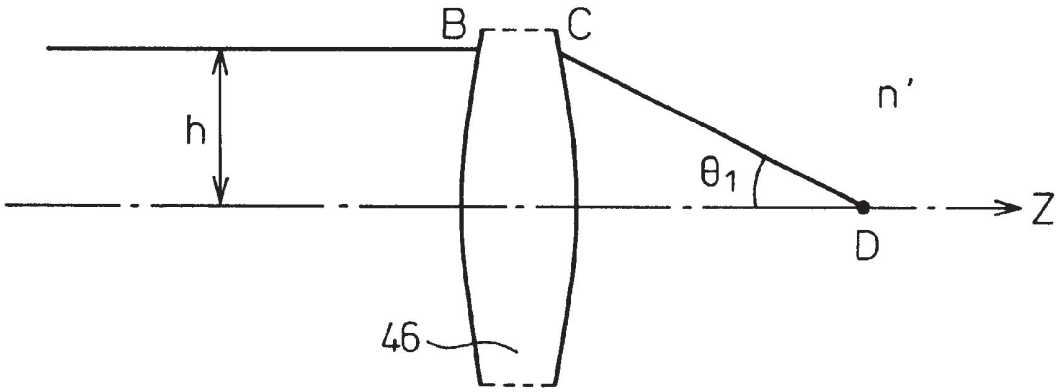


Fig. 7

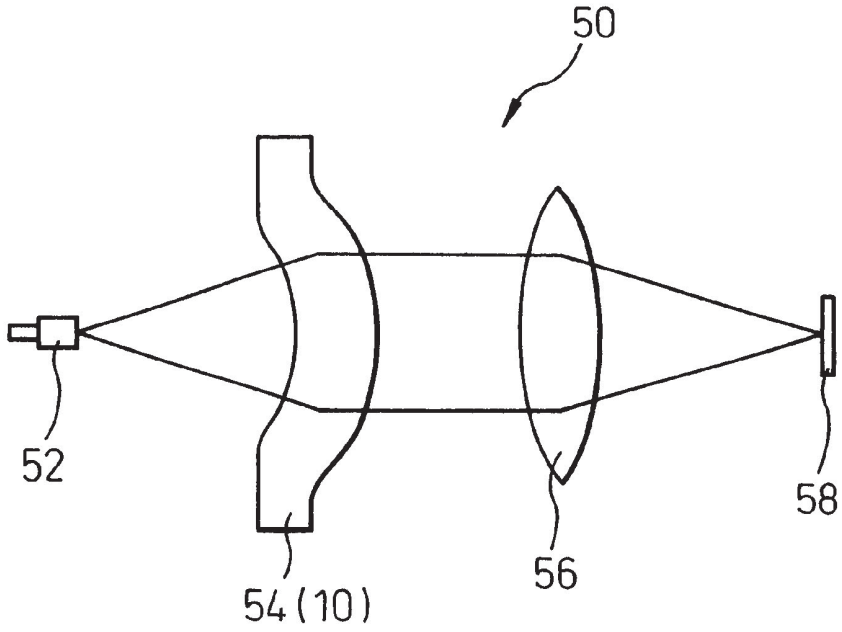


Fig. 8

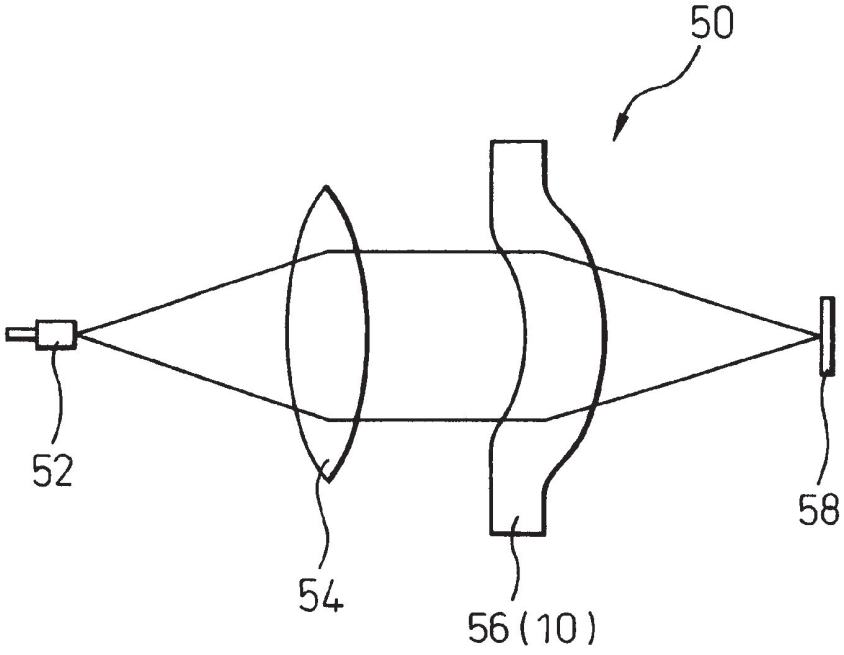


Fig. 9A

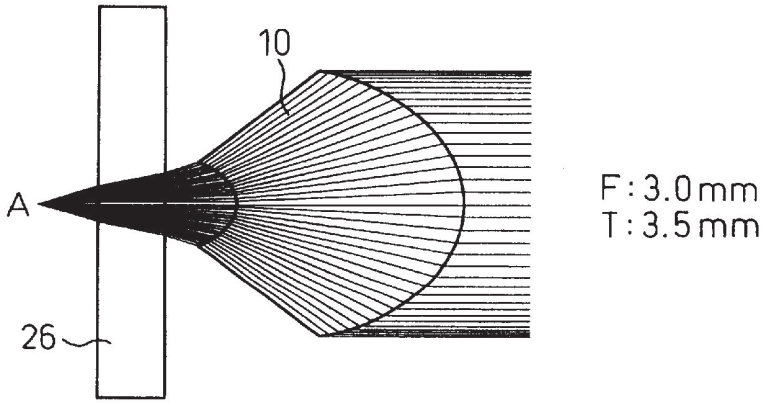


Fig. 9B

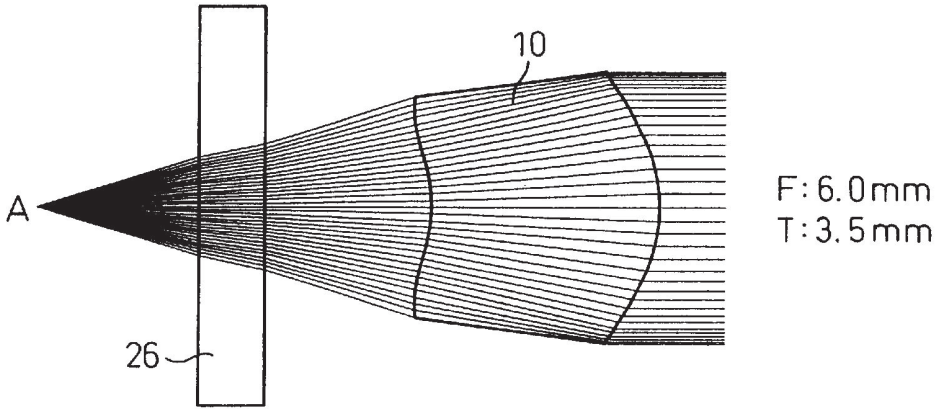


Fig. 9C



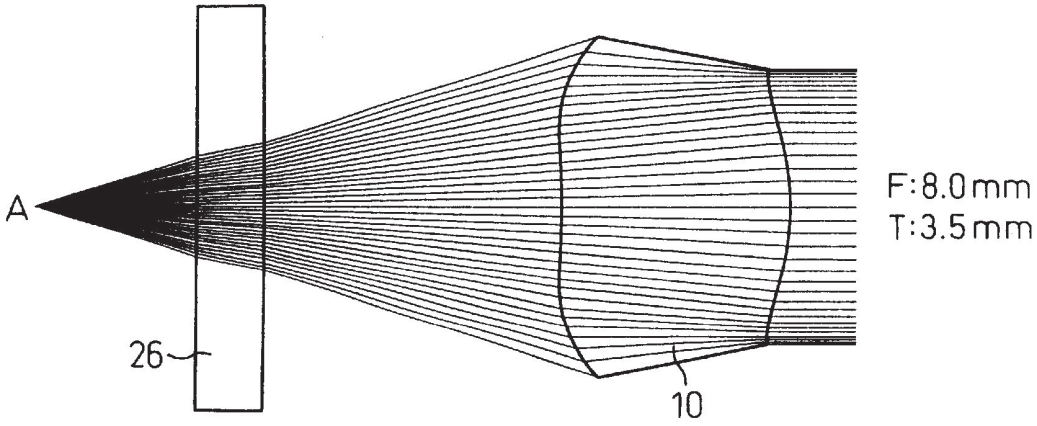


Fig. 10A

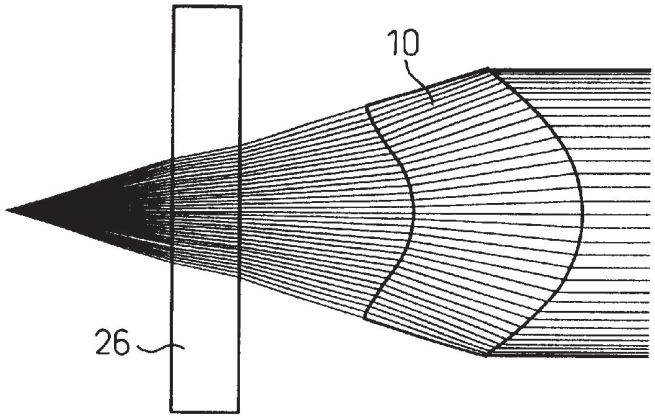


T: 2.5mm
F: 6.0mm

Fig. 10B

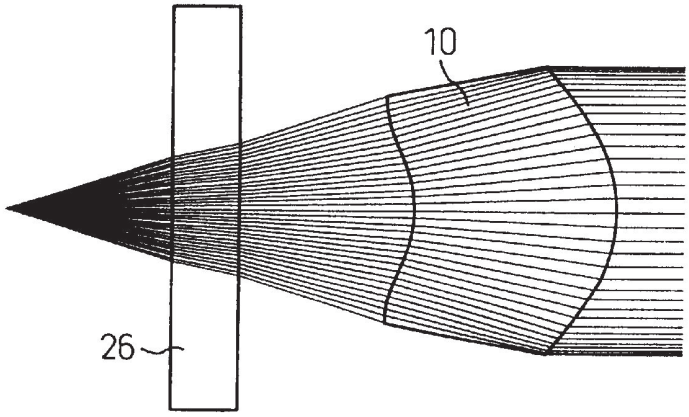

T: 3.0 mm
F: 6.0 mm

Fig. 10C

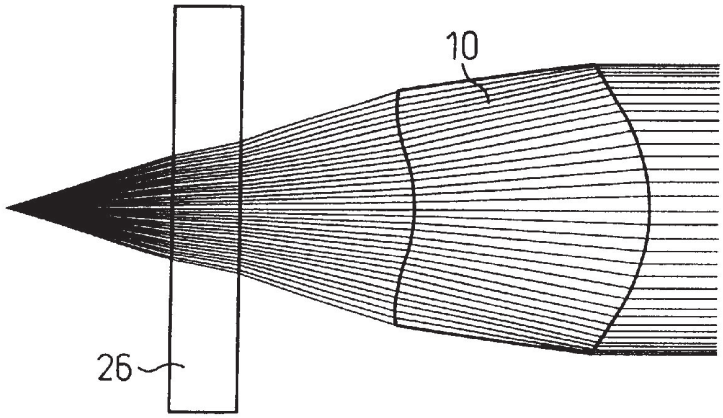

T: 3.5 mm
F: 6.0 mm

Fig. 11A

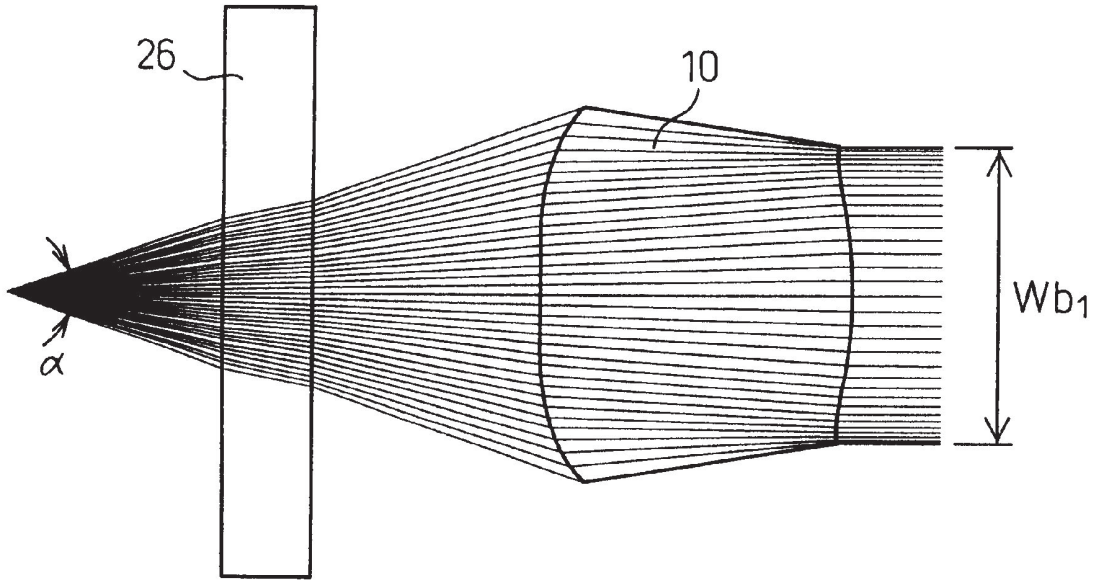


Fig. 11B

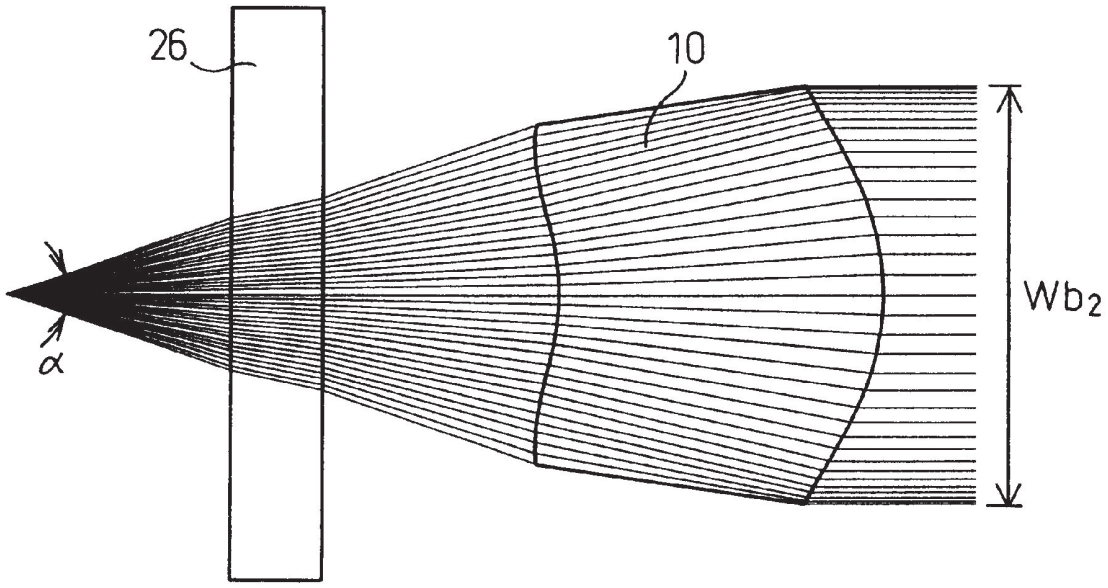


Fig. 12A

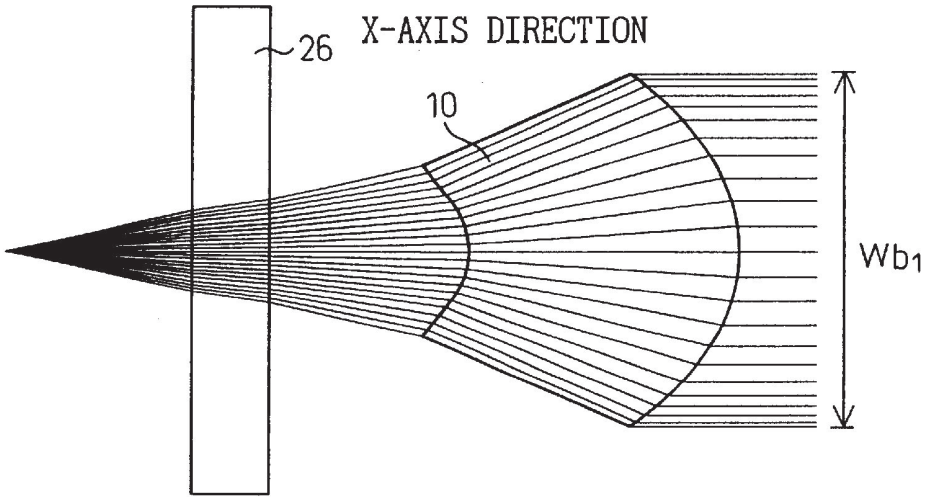


Fig. 12B

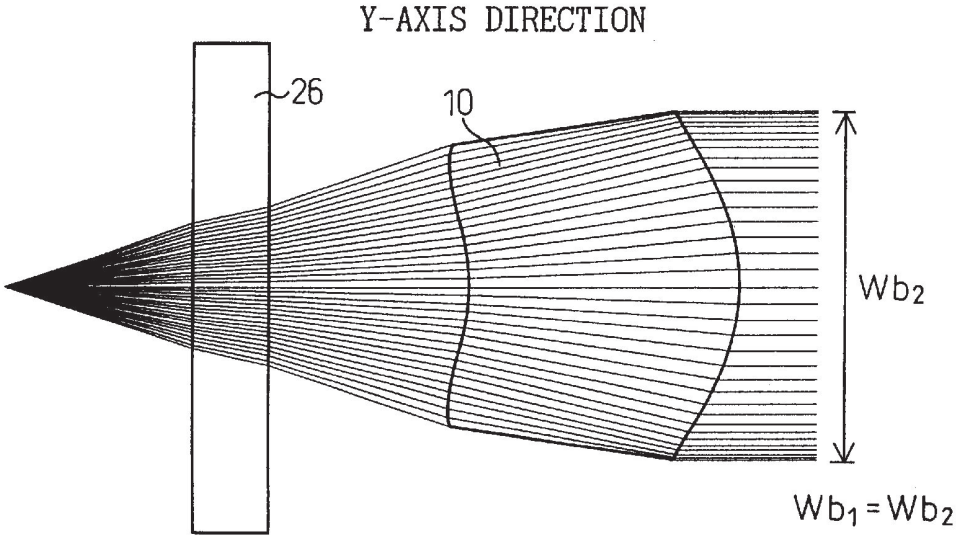


Fig. 12C




Fig.13A

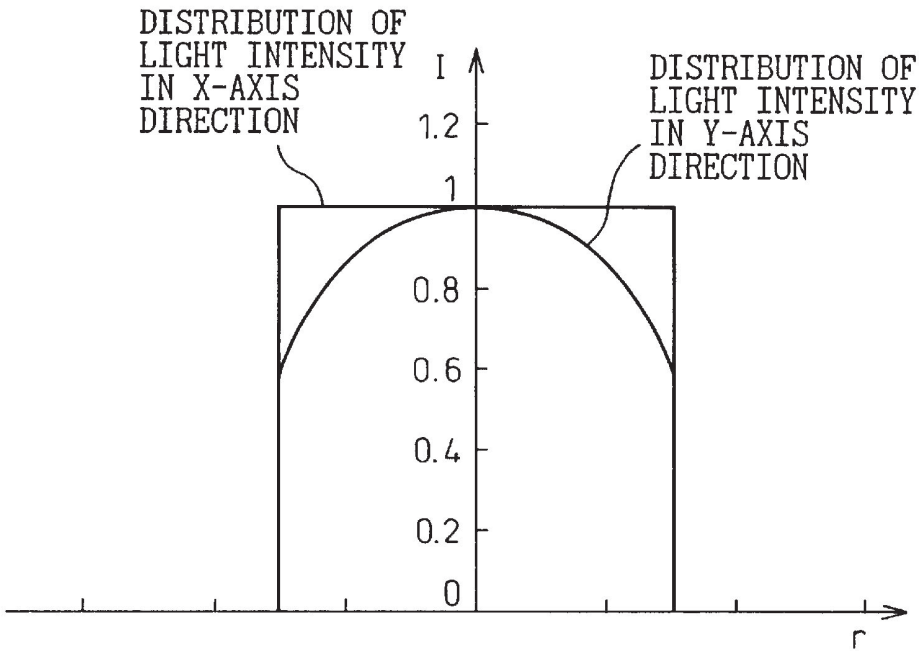


Fig.13B

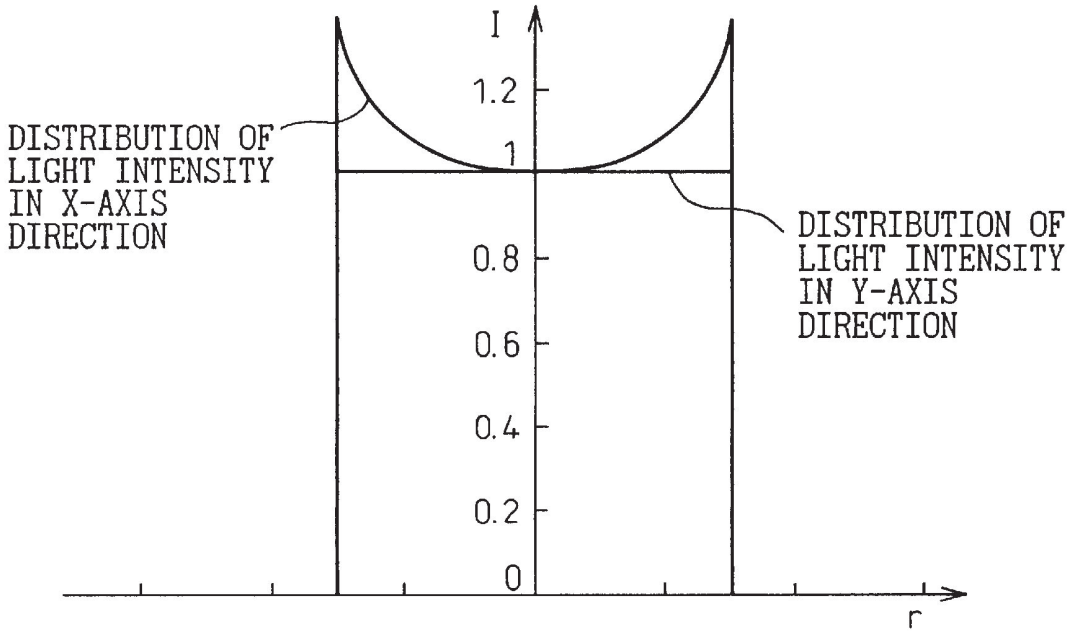


Fig.14A

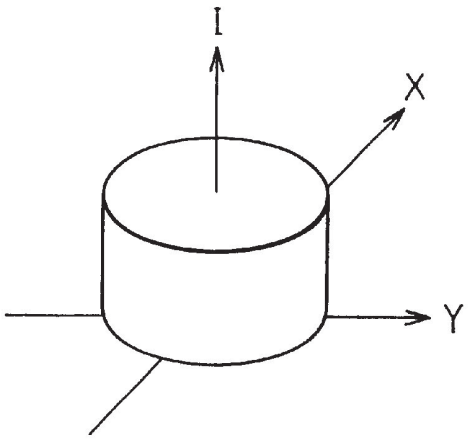


Fig.14B

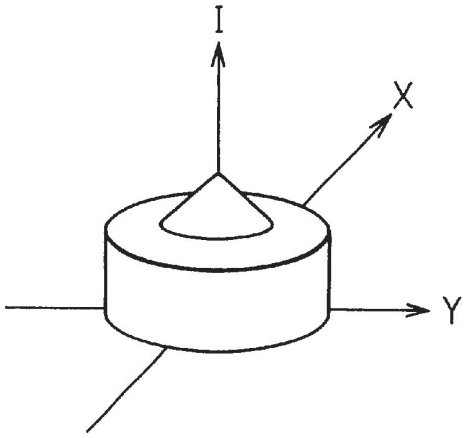


Fig.14C

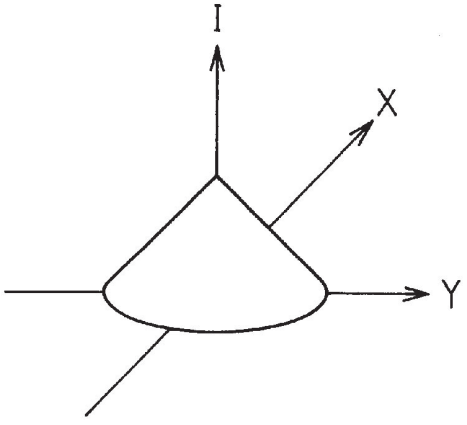


Fig. 15

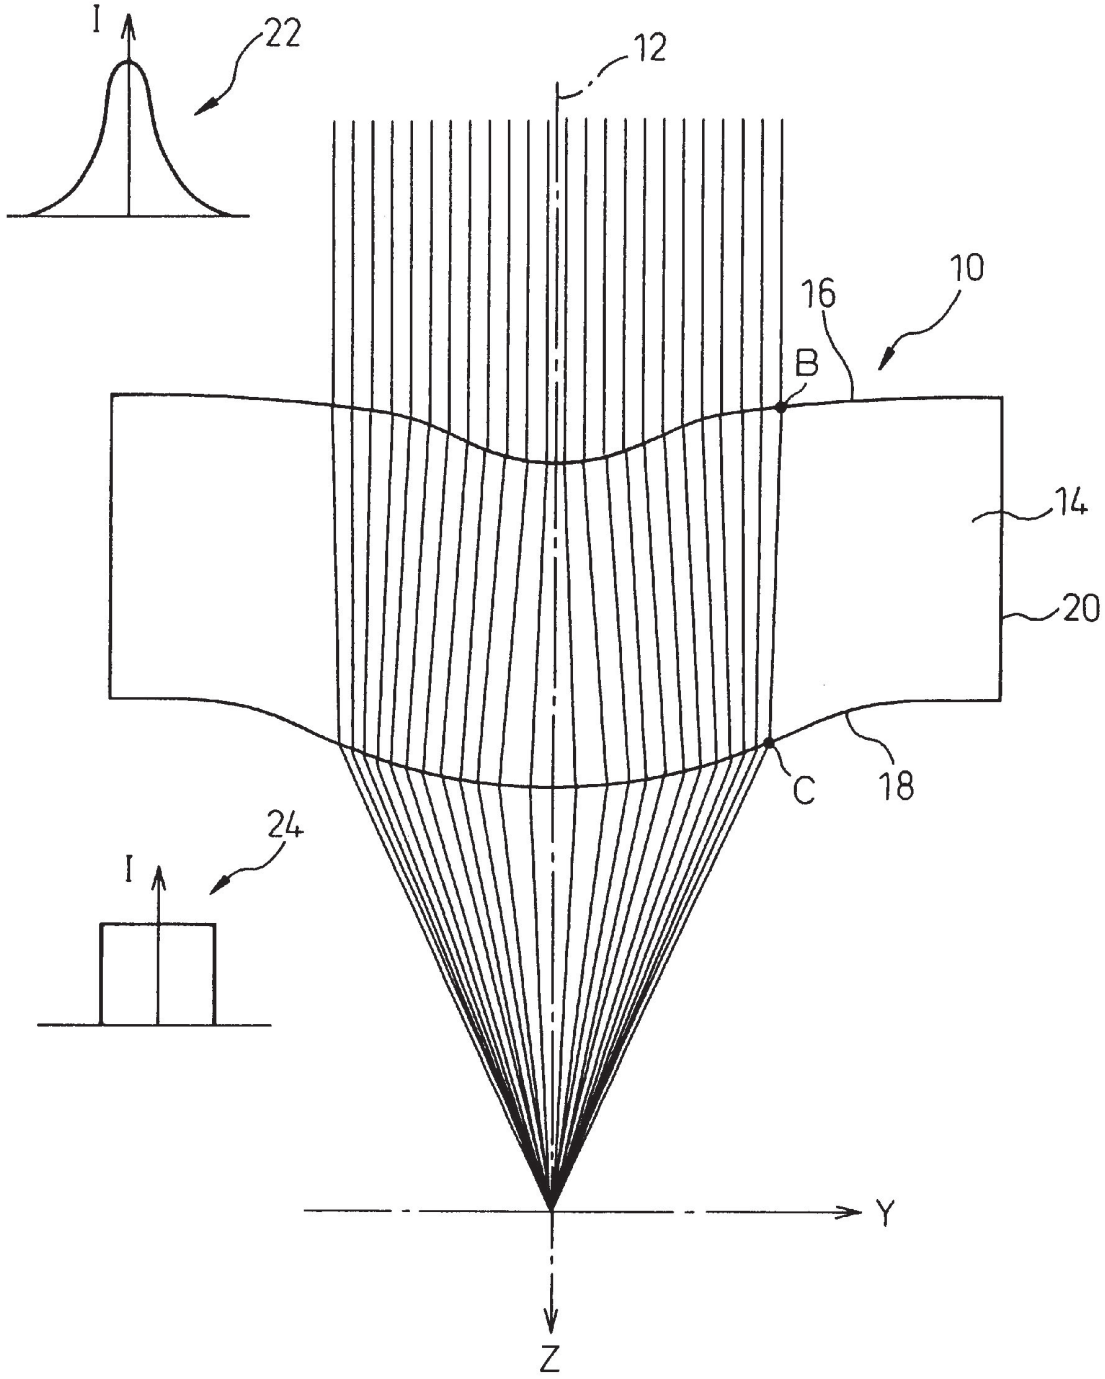


Fig. 16

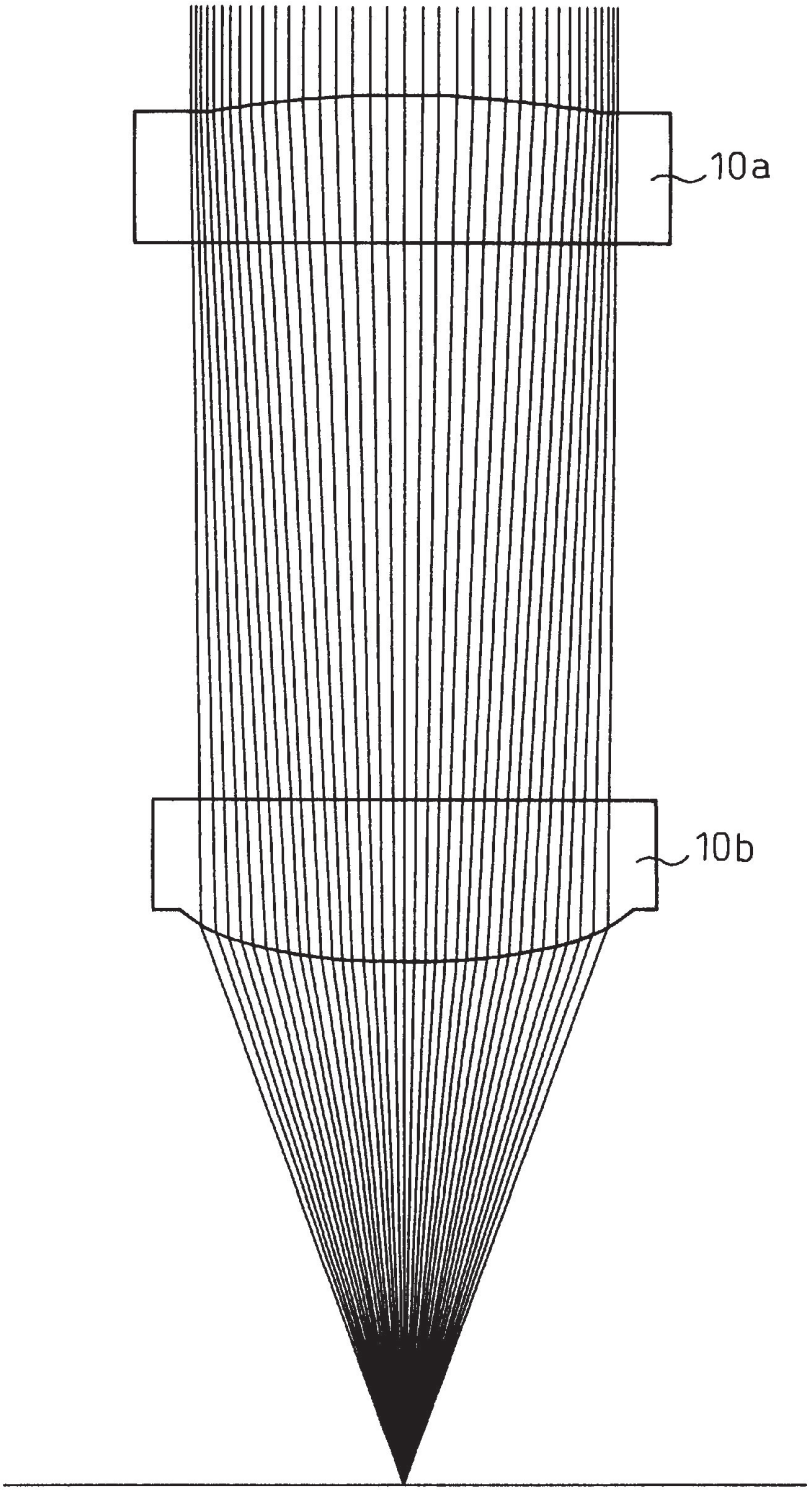


Fig. 17

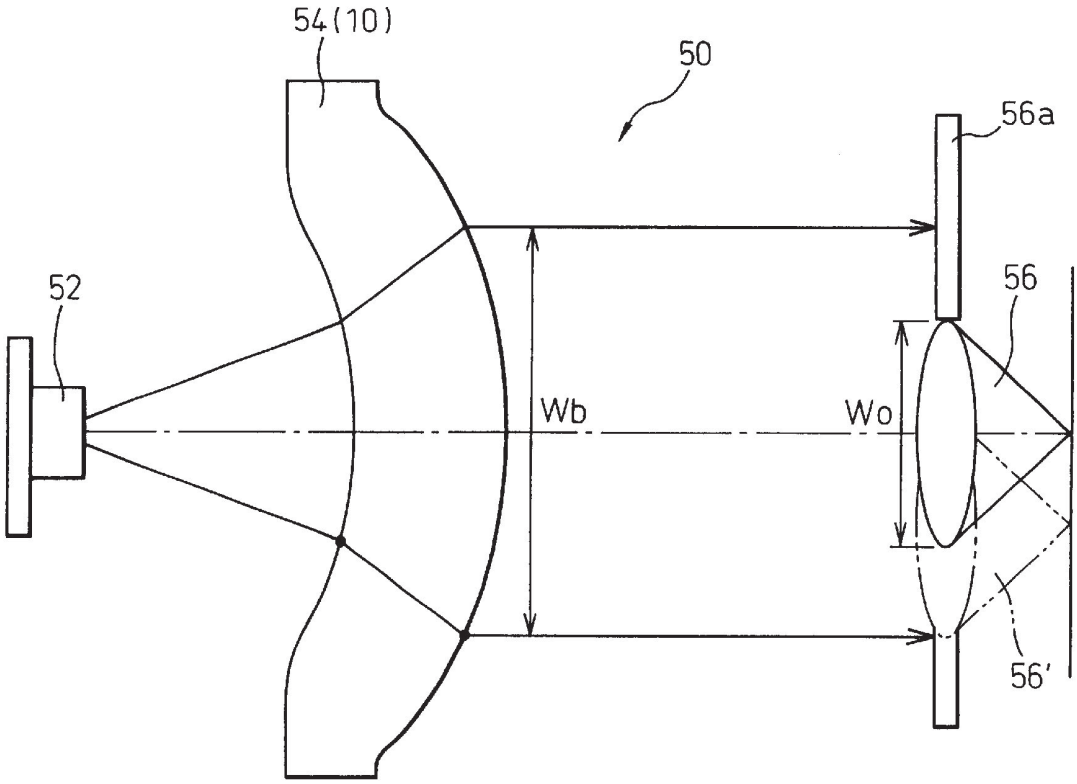


Fig. 18A

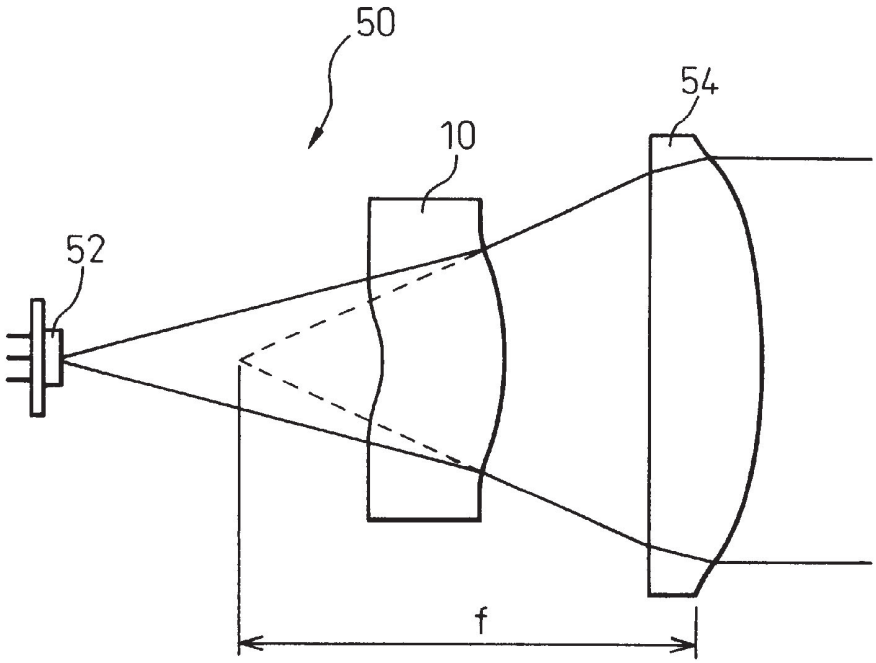


Fig. 18B

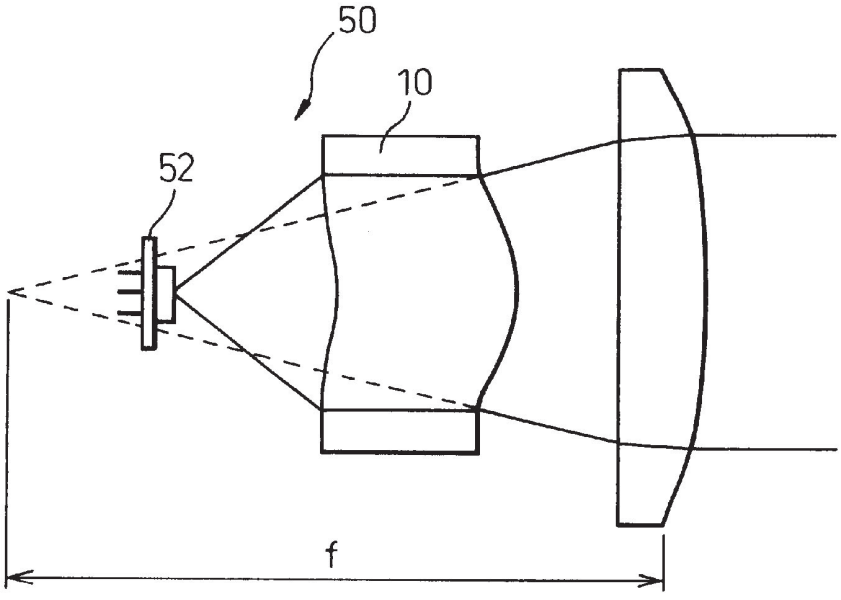


Fig. 19


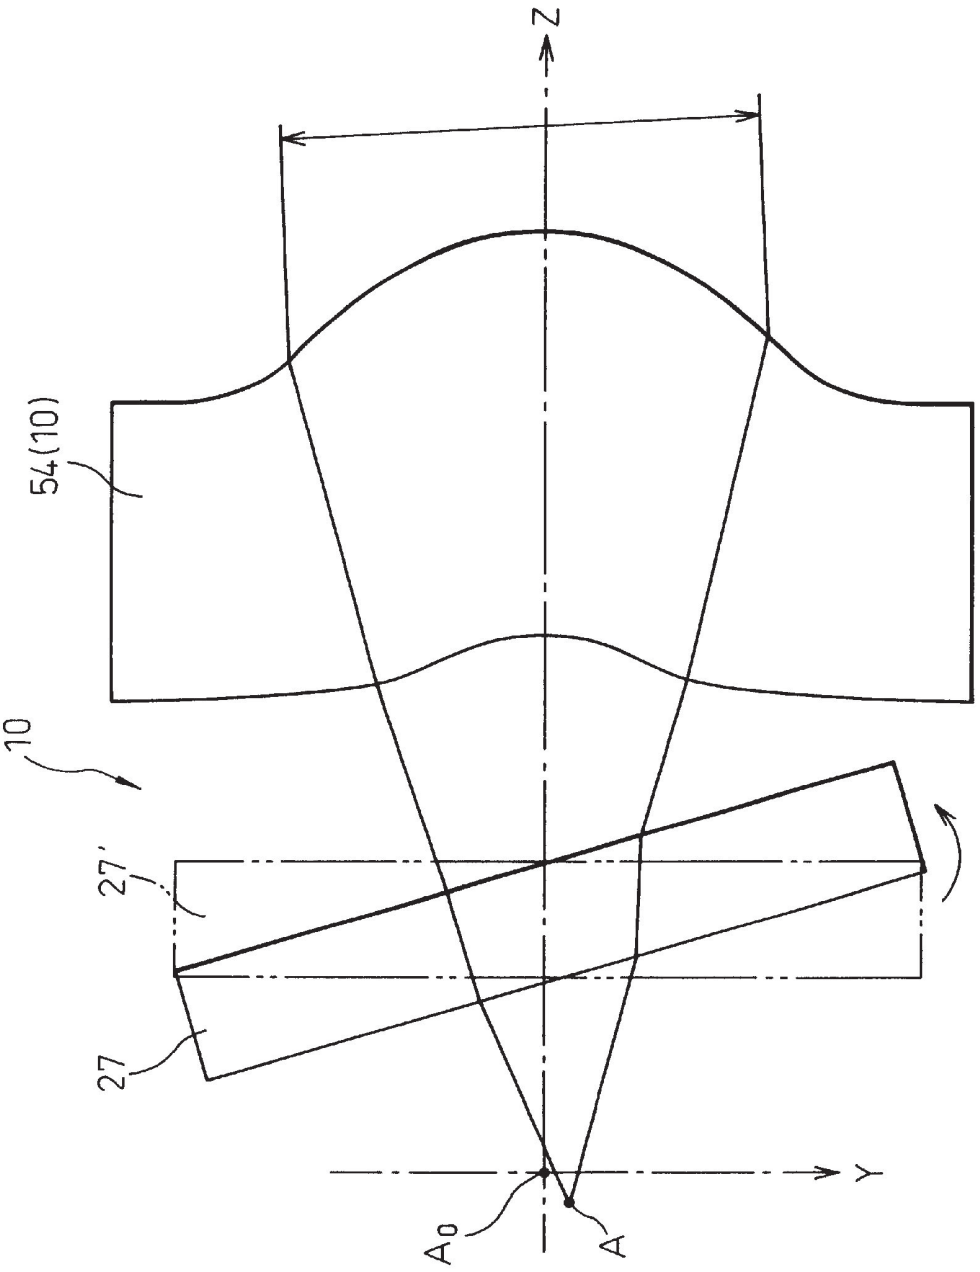


Fig. 20

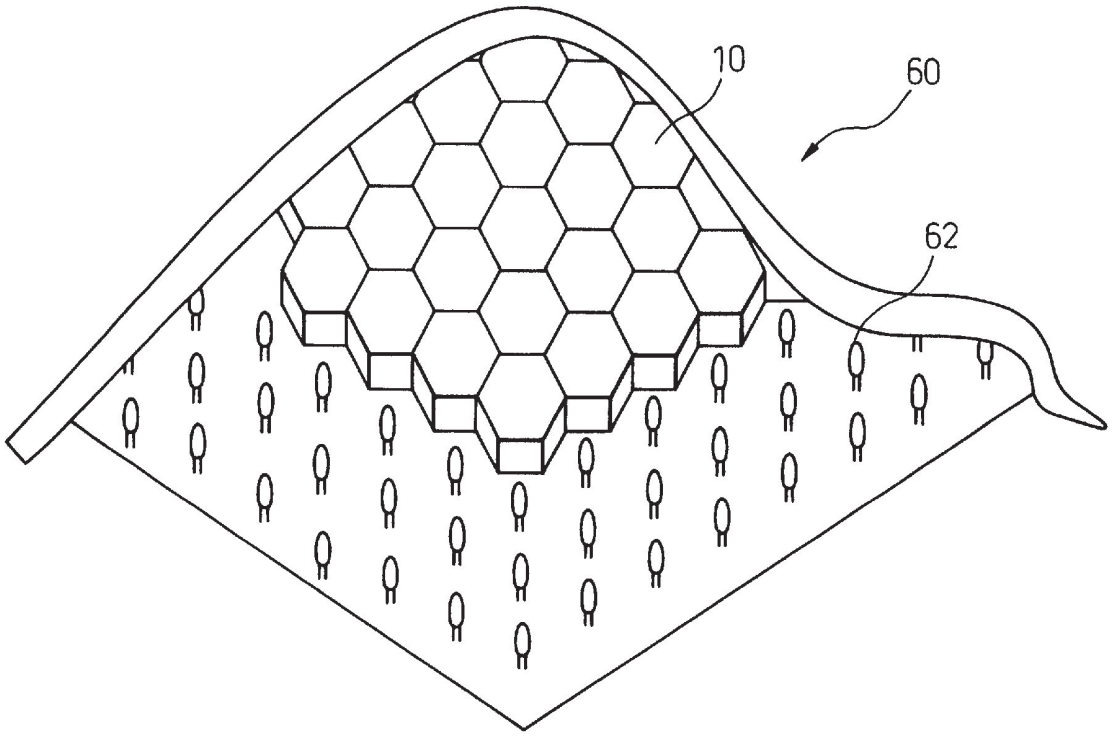

LIGHT INTENSITY DISTRIBUTION CONVERTING DEVICE AND OPTICAL DATA STORAGE APPARATUS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a light intensity distribution converting device which converts the intensity distribution of incident light to output the converted light, and to an optical data storage apparatus using the same.

2. Description of the Related Art

An optical system for an optical data storage apparatus comprises a laser source, a collimator lens, and an objective lens. In such a system, the diameter of a beam spot is required to be small to enhance the density of an optical disc apparatus, and an increase in the quantity of light is required to improve the transmission speed.

To minimize the spot diameter in conventional optical systems, attempts have been directed to an increase in the numerical aperture NA of an objective lens or reduction of the wavelength of the laser. However, an increase in the NA of an objective lens tends to enhance aberrations. Shortening of the laser wavelength relies upon an improvement of the laser source proper and cannot be realized by improving the optical disc apparatus. Also, the quantity of light can be increased only by a realization of a higher power laser.

In optical theory, it is known that when condensing a pencil of light, a pencil of light having a uniform light intensity distribution can form a beam spot diameter smaller, and close to the diffraction limit, than a pencil of light having a Gaussian light intensity distribution. This effect is equivalent to a provision of a spot diameter, using a laser whose wavelength is shorter than that of the laser being used by several tens of nm, for the objective lens of the same NA.

In general, since the light intensity on a wave front of the pencil of light has a Gaussian distribution, the aperture of an objective lens upon which the light is made incident is restricted. Therefore, efforts have been made to minimize the beam spot diameter by making only the light in the vicinity of an optical axis, whose intensity distribution can be considered approximately uniform, incident upon the objective lens. In the attempts, naturally, no light outside the aperture diameter is used, and therefore, the utilization efficiency of light of the light source is reduced. If the aperture diameter to be used is expanded to cover light whose intensity distribution cannot be considered uniform in order to increase the light utilization efficiency, the beam spot diameter will be then larger than that for the uniform light intensity distribution. As can be understood from the foregoing, the uniformity of the light intensity is not compatible with the reduction of loss of the quantity of light.

A light intensity distribution converting device which converts collimated light having a Gaussian intensity distribution into collimated light having a uniform light intensity distribution has been proposed in Japanese Patent Application No. 10-57003 filed prior to the present application. This light intensity distribution converting device can be disposed between a collimator lens and an objective lens in an optical disc apparatus which is comprised of a laser source, the collimator lens, and the objective lens. The objective lens receives parallel light beams having a uniform light intensity distribution, so that a small diameter of a beam spot can be obtained. However, this light intensity distribution converting device is an additional element in the optical disc apparatus.

Japanese Unexamined Patent Publication No. 63-188115 discloses a beam forming optical apparatus in which light having a Gaussian light intensity distribution can be converted to light having a uniform light intensity distribution by two lenses. In this prior art, the two lenses are constructed so as not to satisfy the sine condition. However, this requires a small machining tolerance. Therefore, to reduce the tolerance, one of the two lenses is designed to dissatisfy the sine condition and the other is designed to satisfy the sine condition. In this solution in which the light intensity distribution is converted using spherical aberrations, a wave front aberration is inevitably produced, and therefore, the optical device cannot be used as a small optical element for an optical disc apparatus or the like.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a light intensity distribution converting device which can convert a given light intensity distribution to a desired one, so that wave front aberrations and the beam spot diameter can be reduced, and also to provide an optical data storage apparatus using the light intensity distribution converting device.

According to the present invention, there is provided a light intensity distribution converting device comprising a body having a central axis, a first curved surface transversely extending with respect to the central axis, a second curved surface transversely extending with respect to the central axis, and an outer circumferential surface extending between said first and second curved surfaces, one of the first and second curved surfaces having a concave surface configuration at approximately a center portion thereof, the other having a convex surface configuration at or near a center portion thereof, at least one of incident light and emerging light is diverging or converging light and the first and second curved surfaces being formed such that the light intensity distribution of incident light, due to refractions at the first and second curved surfaces is different from that of emerging light while the light passes from the first curved surface to the second curved surface.

Using this light intensity distribution converting device, emerging light having a uniform intensity distribution can be obtained from incident light having a Gaussian intensity distribution. In an optical data storage apparatus according to the present invention, the light intensity distribution converting device is used as a collimator lens and/or an objective lens. For example, if the light intensity distribution converting device is used as a collimator lens for an optical disc apparatus, the objective lens of the device receives light having a uniform intensity distribution, so that a smaller beam spot diameter can be obtained. If the light intensity distribution converting device is used as an objective lens for an optical storage apparatus, the objective lens has functions to convert the light intensity distribution and to condense the light.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more apparent from the following description of the preferred embodiments, with reference to the accompanying drawings, in which:

FIG. **1** is a cross-sectional view of a light intensity distribution converting device in accordance with a first embodiment of the present invention;

FIG. **2** is a view of a light intensity distribution converting device similar to the light intensity distribution converting device shown in FIG. **1** and showing a plurality of small optical paths extending therethrough;

FIG. **3** is an explanatory diagram showing the determination of shapes of first and second curved surfaces of a light intensity distribution converting device;

FIG. **4** is a view showing configurations of first and second curved surfaces of a light intensity distribution converting device;

FIG. **5** is a view showing inclinations of first and second curved surfaces of FIG. **4**;

FIGS. **6**A and **6**B are views illustrating the Law of sines for a lens;

FIG. **7** is a view showing an example of an optical disc apparatus including the light intensity distribution converting device shown in FIGS. **1** and **2**;

FIG. **8** is a view showing another example of the optical disc apparatus including the light intensity distribution converting device.

FIGS. **9**A to **9**C are views showing modified examples of a light intensity distribution converting device;

FIGS. **10**A to **10**C are views showing modified examples of a light intensity distribution converting device;

FIGS. **11**A and **11**B are views showing modified examples of a light intensity distribution converting device;

FIGS. **12**A to **12**C show a modified example of a light intensity distribution converting device;

FIGS. **13**A and **13**B are views showing an example of a light intensity distribution having different characteristics in X-axis and Y-axis directions;

FIGS. **14**A to **14**C are views showing a different examples of a light intensity distribution;

FIG. **15** is a view showing a modified example of a light intensity distribution converting device;

FIG. **16** is a view showing a modified example of a light intensity distribution converting device;

FIG. **17** is a view showing a modified example of an optical disc apparatus;

FIGS. **18**A and **18**B are views showing a modified example of an optical disc apparatus;

FIG. **19** is a view of a modified example of an optical disc apparatus; and

FIG. **20** is a view showing a lighting apparatus including a light intensity distribution converting device.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be explained below. FIG. **1** shows a first embodiment of the light intensity distribution converting device **10** according to the present invention and FIG. **2** shows a light intensity distribution converting device **10** similar to the light intensity distribution converting device **10** shown in FIG. **1** and a plurality of small optical paths extending therethrough.

In FIGS. **1** and **2**, the light intensity distribution converting device **10** comprises a transparent body **14** having a central axis **12**. The body **14** is made of a transparent material, such as glass, having an isotropic refractive index. The body **14** has a first curved surface **16** transversely extending with respect to the central axis **12**, a second curved surface **18** located on the side opposite to the first curved surface **16** and transversely extending with respect to the central axis **12**, and an outer circumferential surface **20** extending between the first curved surface **16** and the second curved surface **18**.

In FIGS. **1** and **2**, point A represents a radiation point, point B represents an incident point of light onto the first curved surface **16**, and point C represents a light emerging point on the second curved surface **18**. In these figures, the Z-axis passing through the point A defines the optical axis directions and the Y-axis and the X-axis correspond to directions parallel to and perpendicular to the sheet of the drawing, respectively. T designates the thickness of the light intensity distribution converting device **10** on the optical axis, and L designates the length of a specific optical path in the light intensity distribution converting device **10**. Point A can be, for example, a laser, which radiates diverging light having Gaussian light intensity distribution **22** which is in rotation-symmetry with respect to the Z-axis. The light intensity distribution converting device **10** is an optical device, having a rotation-symmetric shape regarding the Z-axis, and a refractive index n. In FIG. **2**, a flat plate **26** whose refractive index is n' is disposed perpendicularly to the Z-axis and between the radiation point A and the light intensity distribution converting device **10**. The flat plate **26** can be used as a glass cover for the laser.

The first curved surface **16** is defined by a generally shallow rounded concave surface and the second curved surface **18** is defined by a generally rounded convex surface. The inclinations of the first and the second curved surfaces **16** and **18** are 0 at the center of the body **14**, and gradually increase with the measuring points moving from the center of body to the radially outer portion thereof, and reach certain values and then gradually decrease. Namely, the first and the second curved surfaces have inflection points on their inclinations. (see FIG. **5** which will be discussed hereinafter)

In the light intensity distribution converting device **10**, the light intensity distribution of light emitted therefrom is different from that of light made incident thereupto, due to refractions of light caused at the first curved surface **16** and the second curved surface **18**. In the embodiment, diverging light having a Gaussian light intensity distribution **22** is made incident to the body **14** at the first curved surface **16**, and passes through the body **14**. The light emerges the body **14** from the second curved surface **18** as parallel light having a uniform light intensity distribution **24**.

The inclination of the second curved surface **18** is determined such that the light emerging the body from the point C travels in parallel with the Z-axis. The optical path lengths, taken for small optical paths of the light from the radiation point A to the surface **28** which lie in a plane perpendicular to the Z-axis and which is located beyond the point C are identical to each other. Consequently, this light intensity distribution converting device **10** not only converts the light intensity distribution at the point A, but also serves as a collimator lens.

Wa represents the aperture diameter of incident light upon the light intensity distribution converting device **10**, and Wb represents the aperture diameter of the light emerging therefrom. An emerging angle for the incidence aperture diameter Wa at the point A is indicated by θ. Upon designing the light intensity distribution converting device **10**, the total quantity of light Q within the incidence aperture diameter Wa (within the emission angle θ) for diverging light having a Gaussian light intensity distribution **22** is obtained. Since the total quantity of incident light is equal to the total quantity of emission light, and since the emission light has a uniform light intensity distribution, we have the following equation where I_0 represents the intensity of the emitting light.

$$Q=I_0\times\pi(Wb/2)^2$$

In other words, the intensity I_0 of the emitting light can be obtained by dividing the total quantity of light in the

incidence aperture diameter Wa by a required emission aperture area. The uniform light intensity distribution makes it possible to maximize the light utilization efficiency.

The design of the first and the second curved surfaces **16** and **18** will be explained below. For the incident light, quantities of the light Q_1, Q_2, ~Q_k of concentric areas of ΔI_1, ΔI_2, ΔI_k having an identical center which are formed by dividing the radiation angle θ, for example, by k into θ/k, are obtained. Thereafter, concentric areas ΔO_1, ΔO_2, ΔO_k having an identical center, which have the same light quantities as Q_1, Q_2, Q_k respectively, are obtained for the emission light. Hence, the radius r_k of the area ΔO_k of the emission light corresponding to the area ΔI_k of the incident light is obtained from the equation of $Q_k=I_0\times x\pi(r^2k-r^2k-1)$

FIG. **3** is an enlarged partial view of FIGS. **1** and **2**. The flat plate **26** shown in FIG. **2** is omitted in FIG. **3**. It is apparent that if it were present, the calculation below could be carried out likewise, taking the flat plate **26** into consideration. First, the distance F between the radiation point A and the light intensity distribution converting device **10** and the thickness T of the light intensity distribution converting device **10** are set, based upon stored data and tests. A straight line **30** is drawn from the radiation point A at an angle of θ/k with respect to the central axis **12**, and the intersection between the straight line **30** and a line **32** perpendicular to the central axis **12** at the distance F is defined as B_1. The intersection between a line **34** perpendicular to the central axis **12** at the distance F+T and a straight line **36** corresponding to the radius r_1 is defined as C_1. A line **38** connecting the point B_1 and C_1 is drawn.

The inclination $\mathbf{16}_1$ of a micro part of the first curved surface **16**, which passes through the point B_1 is determined so that the optical path of the incident light corresponds to the line **30**, and the optical path of the refracted light corresponds to the line **38**. Thereafter, the inclination $\mathbf{18}_1$ of a micro part of the second curved surface **18**, which passes through the point C_1 is determined so that the optical path of the incident light corresponds to the line **38**, and the optical path of the refracted light corresponds to the line **36** and is parallel with the central axis line **12**.

Next, in the same manner as the previous calculation, points B_2 and C_2 are determined by drawing a line **40** from the radiation point A at an angle 2 θ/k with respect to the central axis line **12**, and drawing a line **42** corresponding to the radius r_1+r_2, respectively. Thereafter, a line **44** connecting the points B_2 and C_2 is drawn. Thus, the inclination $\mathbf{16}_2$ of a micro part of the first curved surface **16**, which passes through the point B_1, and the inclination $\mathbf{18}_2$ of a micro part of the second curved surface **18**, which passes through the point C_2, are determined. It should be noted here that the point B_2 is not always located on the line **32**, and should be located so as to smoothly connect the inclination $\mathbf{16}_1$ and the inclination $\mathbf{16}_2$. Likewise, the point C_2 is determined so that the inclination $\mathbf{18}_1$ and the inclination $\mathbf{18}_2$ are smoothly connected. Consequently, the shapes of the first curved surface and the second curved surface can be determined by repeating the above-mentioned calculations.

The distance F between the radiation point A and the light intensity distribution converting device **10** and the thickness T to be predetermined can be calculated, based on the conditions on identical optical path length (to the surface **28** normal to the Z-axis) for light beams having different radiation angle; the inclination at the point C, at which emission light is collimated; and smoothly connected curved surfaces on the B and C sides. In order to meet desired conditions more appropriately, it is possible to perform calculations in which the distance F and thickness T thus obtained are changed.

The result thus obtained is shown in FIG. **2**, by way of example, with the optical path for each micro radiation angle. On the emerging side of the second curved surface **18**, the distance between the central beams in the vicinity of the optical axis is large and that between the peripheral beams is small. The shape of the light intensity distribution converting device **10** varies considerably depending on the distance F between the radiation point A and the device **10**, the thickness T of the device **10**, and the emission aperture diameter Wb. This will be explained later referring to FIGS. **9** to **12**.

FIG. **4** shows the shape of the first and second curved surface **16** and **18** of the light intensity distribution converting device **10** shown in FIG. **2**. The radius represents the position in the X-axis or the Y-axis direction. In FIG. **5**, the inclinations of the first and second curved surfaces **16** and **18** in FIG. **4** are plotted. These figures show that the first curved surface **16** has an inflection point P of the inclination and the second curved surface **18** has an inflection point Q of the inclination. Also, the inflection points P and Q are indicated at P and Q in FIG. **4**. In the light intensity distribution converting device **10**, which receives divergent light and emits collimated light and which converts the light intensity distribution, the first and second curved surfaces **16** and **18** have the inflection points P and Q of the inclination respectively. In embodiments which will be explained hereinafter, the first and second curved surfaces **16** and **18** have inflection points of inclination. In an alternative arrangement of the present invention, the body **14** can be formed to have a refraction distribution, instead of the surface configuration having inflection points of inclination.

FIGS. **6**A and **6**B show the law of sines for lens. In FIG. **6**A, the Z-axis represents the optical axis direction. Light, emitted from the point A on the Z-axis at the emission angle θ_0, enters an element **46** at the point B. The light is refracted, deflected and transmitted through the element **46** by the distance L, and is refracted and deflected at the point C and emitted therefrom. The light is thereafter converged onto the point D on the Z-axis at angle θ_1. Here, the point A is the object focal point and the point D is the image focal point.

If the light intensity distribution of the light radiated at the point A is symmetric with respect to the Z-axis, the light intensity distribution of the emission light can be converted to be different from that of the incident light by continuously changing the lateral magnification of light beams radiated at different angles θ_0. The lateral magnification β is obtained from following equation,

$$\beta=(n \sin \theta_0)/(n' \sin \theta_1)$$

where, n represents the refractive index of the medium upon which light is incident and n' represents the refractive index of the medium from which light is emitted. Conventionally, the collimator lens has been produced to satisfy the sine conditions. In the present invention, the light intensity distribution converting device **10**, which can be used as a collimator lens, is intentionally prepared so as not to satisfy the sine conditions.

As shown in FIG. **6**B, if the object point is infinite, the focal length f is obtained by the following equation,

$$f=h/(n' \sin \theta_1)$$

where, h designates the height of the incident light parallel to the Z-axis. The light intensity distribution of the emission light different from that of the incident light can be obtained by changing the values of h/sin θ_1 at the image point. In either case, the distance L and the refractive angle at the

points C and B are selected and the surface of the element is continuous, so that a difference in the optical length of light beams emitted from the object point at different angles between the object point and the image point is not larger than the Rayleigh's limit.

The light intensity distribution converting device **10** of the present invention can convert a given light intensity distribution into an optional continuous light intensity distribution, so that the wave front aberration caused by an axial misalignment or a manufacturing error, such as an irregular thickness, can be reduced. Also, if the device **10** has a lens function, it can be used as a collimator lens and, hence, the number of the elements of an optical apparatus can be reduced. If the body **14** of the light intensity distribution converting element **10** is designed to have an isotropic refractive index, the body can be formed to be symmetrical with respect to the optical axis. Since the light intensity distribution is converted by the refraction, the light absorption or reflection loss can be minimized. As the light path length of the light beams is identical, the spot diameter can be reduced up to the diffraction limit.

FIG. **7** shows an optical disc apparatus **50** including the light intensity distribution converting device **10** shown in FIGS. **1** and **2**. The optical disc apparatus **50** is provided with a laser source **52**, a collimator lens **54**, and an objective lens **56**. The collimator lens **54** consists of the light intensity distribution converting device **10** explained referring to FIGS. **1** to **3**. The advantages expected from this arrangement are as mentioned before. Typically, the laser source **52** radiates diverging light having a Gaussian light intensity distribution. The laser, radiated from the laser source **52**, is converted to collimated light having a uniform light intensity distribution by the collimator lens **54** consisting of the light intensity distribution converting device **10**. The light is thereafter condensed and made incident upon the disc **58** by the objective lens **56**. Consequently, the objective lens **56** can scan the disc **58**, using a larger quantity of light of a smaller spot diameter.

FIG. **8** also shows an optical disc apparatus **50** including the light intensity distribution converting device **10**. The optical disc apparatus **50** is provided with the laser source **52**, the collimator lens **53**, and the objective lens **56**. The objective lens consists of a light intensity distribution converting device **10** which will be discussed hereinafter. The objective lens **56** can scan the disc **58** with a larger quantity of light of a smaller spot diameter.

FIGS. **9**A to **12**C show modified embodiments of the light intensity distribution converting device **10** shown in FIG. **1** to **3**. These examples show various shapes of the light intensity distribution converting device **10** when the distance F between the radiation point A and the light intensity distribution converting device **10** and the thickness T thereof were changed. FIGS. **9**A to **9**C show shapes of the light intensity distribution converting device **10** when the distance F was changed, while the thickness T was constant. The thickness of the flat plate **26** was 1 mm. The shape of the light intensity distribution converting device differs depending on the distance F between the radiation point A and the device **10**. The shorter the distance F, the larger the curvatures of the first and second curved surfaces **16** and **18**.

FIGS. **10**A to **10**C show various shapes of the light intensity distribution converting device **10** when the thickness T was changed while the distance F was constant. The thickness of the flat plate **26** was 1 mm. The shape of the light intensity distribution converting device differs depending on the thickness T of the light intensity distribution converting device **10**. The curvatures of the first and second surfaces of **16** and **18** increase as the thickness T decreases. FIGS. **11**A and **11**B show examples in which the aperture diameters Wb of the light emitting therefrom were different, while the distance F between the radiation point A and the light intensity distribution converting device **10** and the thickness T thereof were constant. In these examples, F was 8.0 mm and T was 3.5 mm. The aperture diameter Wb**1** of the emission light in FIG. **11**A was 3 mm, and the same Wb**2** in FIG. **11**B was 4 mm. Note that, half angles α with respect to the aperture diameter Wa of the incident light at the radiation point A were both 18 degrees. Also, in the examples shown in FIG. **9** and FIG. **10**, the half angles α were 18 degrees. As can be seen from the foregoing, since the light intensity distribution converting device **10** has a freedom in shape to some extent, an optimum shape light intensity distribution converting device **10** according to the requirements of dimensional precision or an optical system to be used together therewith can be obtained.

FIGS. **12**A to **12**C show different examples of the light intensity distribution converting device **10**. FIG. **12**C shows the emission characteristics at the radiation point A. In this embodiment, the light radiated from the point A has an elliptic light intensity distribution in which the X-axis defines the major axis and the Y-axis defines the minor axis. If the radiation aperture diameters Wb**1** and Wb**2** in the X-axis direction and in the Y-axis direction are equal, the cross sectional shape of the light intensity distribution converting device **10** in the X-axis direction shown in FIG. **12**A is different from that in the Y-axis direction shown in FIG. **12**B. Thus, collimated light having a perfect circular uniform light intensity distribution can be obtained from the incident light having an elliptic light intensity distribution.

In FIGS. **13**A and **13**B, in case of the light at the radiation point A having an elliptic light intensity distribution, the light intensity distribution in the X-axis direction can be different from that in the Y-axis direction by making the shape of the light intensity distribution converting device **10** rotation-symmetrical with respect to the Z-axis. For example, as shown in FIG. **13**A, while the light intensity distribution in the X-axis direction is uniform, that in the Y-axis direction is of a dome. As shown in FIG. **13**B, the light intensity distribution in the Y-axis direction is uniform, but that in the X-axis direction is in the shape of bowl.

FIGS. **14**A to **14**C show examples of a variety of converted light intensity distributions. A cylindrical uniform light intensity distribution is shown in FIG. **14**A. A light intensity distribution having a combination of a cylinder and a cone, in which the intensity is high particularly at the center thereof is shown in FIG. **14**B. A conical light intensity distribution is shown in FIG. **14**C. In the present invention, the light intensity distribution converting device **10**, which can emit light having various light intensity distributions, can be obtained.

In the above mentioned embodiments, the light intensity distribution converting device **10** has been applied to a collimating type element which converts the diverging light having a Gaussian light intensity distribution on the wave front into the collimated light having a uniform light intensity distribution. The light intensity distribution converting device **10** shown in FIG. **15** is an objective lens type element which converts collimated light having a Gaussian light intensity distribution on the wave front into the converging light having a uniform intensity distribution on the wave front. This type of the light intensity distribution converting device **10**, which also can be manufactured in the same process as explained referring to FIGS. **1** to **3**, can be used as an objective lens **56** shown in FIG. **8**.

In the aforementioned embodiments, the shape of the device shape is determined so that the wave front aberration is less than the Rayleigh's limit. It is apparent that the light intensity distribution converting device can be applied to an optical system in which the beam spot diameter is not reduced to the diffraction limit. Though the light intensity distribution converting device **10** is made of a single piece in the above mentioned embodiments, it is possible to make the light intensity distribution converting device **10** of two (or more) elements **10***a*, **10***b* as shown in FIG. **16**. In this alternative, the total thickness T of the device **10** is relatively large to restrict the wave front aberration, but the thickness of each element **10***a* (**10***b*) can be small, thus resulting in easy production of the device. Also, it is possible to minimize the production error by forming one side of each element **10***a*, **10***b* flat, and to minimize the assembling error by utilizing of the aberrations caused by the flat surfaces. Additionally, changing the distance between the two elements **10***a*, **10***b* can change the light intensity distribution.

FIG. **17** shows an embodiment of an optical disc apparatus **50** comprised of a light source **52**, a collimator lens **54** made of the light intensity distribution converting device **10**, and an objective lens **56**. The latter is supported by a holder **56***a*. In this embodiment, the objective lens **56** is disposed within the collimated light, having a uniform light intensity distribution, emitted from the collimator lens **54** (the light intensity distribution converting device **10**). Therefore, even if the position of the objective lens **56** is deviated as indicated by **56'**, as long as the positional deviation of the aperture diameter (Wo) occurs within the aperture diameter Wb of the light emitting from the device **10**, a predetermined quantity of light having a uniform light intensity distribution can be always made incident upon the objective lens **56**. Consequently, the objective lens **56** can emit a predetermined quantity of light of a small spot diameter. Requirements on the precision of assembling the optical system and drive seeking accuracy of the objective lens **56** can be considerably eased.

FIGS. **18**A and **18**B shows another embodiment of an optical disc apparatus **50** provided with the light source **52**, the light intensity distribution converting device **10**, the collimator lens **54**, and the objective lens (not shown in the figure). In this embodiment, the light intensity distribution converting device **10** is disposed between the light source **52** and the collimator lens **54**, and converts NA or the divergent angle of the incident light and modifies the light intensity distribution.

In FIG. **18**A, the light intensity distribution converting device **10** is arranged so that the diverging light, which enters the light intensity distribution converting device **10**, is emitted therefrom at an increased divergent angle. In FIG. **18**B, the light intensity distribution converting device **10** is arranged so that the diverging light, which enters the light intensity distribution converting device **10**, is emitted therefrom at a reduced diverged angle.

The focal length of the collimator lens **54** is represented by f. In many cases, the distance between the light source **52** and the collimator lens **54** cannot be shortened to provide a necessary axial accuracy. However, in the arrangement shown in FIGS. **18**A and **18**B, the quantity of light which can be received by the collimator lens **54** can be increased, as if the distance between the light source **52** and the collimator lens **54** were shortened. Consequently, the utilization efficiency and the beam spot diameter can be improved.

FIG. **19** shows an embodiment of the optical apparatus **50** comprised of a light source **52** (radiation point A), a transparent plane-parallel plate **27**, a collimator lens **54** (the light intensity distribution converting device **10**), and an objective lens (not shown). In this embodiment, the plane-parallel plate **27**, disposed between the light source **52** and the collimator lens **54**, is tiltable with respect to the optical axis. A wave front aberration produced at the imaging point located behind the objective lens can be corrected by tilting the plane-parallel plate **27**.

If the correct position of the radiation point A is A_0, and the correct position of the plane-parallel plate **27** is **27'**, the deviation of the radiation point A increases the wave front aberration caused at the imaging point located behind the objective lens. To prevent this, the wave front aberration produced at the imaging point after the objective lens is corrected by tilting the plane-parallel plate **27** to adjust the deviation in the optical path length, according to the positional deviation of the point A.

FIG. **20** shows an embodiment of a lighting apparatus **60** using a light source **62** and the light intensity distribution converting device **10**. In this embodiment, the light source **62** composed of light emitters, such as light emitting diodes, is a two-dimensional arrangement, and the light intensity distribution converting devices of a honeycomb shape are arranged corresponding to the light emitters. Each light intensity distribution converting device **10** receives diverging light from the light emitters, and outputs light having a uniform light intensity distribution. Since many light intensity distribution converting devices are disposed in a plane, light having a uniform distribution can be emitted from the same plane. Consequently, the lighting apparatus can be used for, for example, a backlight of a display and can increase the illuminance in a given direction without light quantity loss. Also, because the light which is converged by a lens, etc., does not exhibit a scattered point distribution owing to a uniform light intensity distribution, this lighting apparatus can be used when an LED array or the like is used for a lighting device for a microscope.

As explained heretofore, in the present invention, a light intensity distribution converting device, which can convert an optional light intensity distribution into a desired one, can reduce wave front aberrations and can increase the freedom of design of the beam condensing performance or the spot shape. The device produces strong light and can reduce a loss in the quantity of light. Also, the light intensity distribution converting device can be used in place of a collimator lens which collimates diverging light, or an objective lens which converts collimated light into converging light, and hence not only can the wave front aberrations be restricted but also the shape of a beam spot can be reduced without increasing the number of elements in the optical apparatus.

What is claimed is:

1. A light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is

converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface, and

wherein the arrangement is such that diverging light is converted into parallel light, wherein an exit pupil is larger than an entrance pupil.

2. A light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with a different light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface, and

wherein the arrangement is such that diverging light with a Gaussian light intensity distribution is converted into parallel light which has such a light intensity distribution that intensity is lower at the central portion and is higher at the peripheral portion.

3. A light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with a different light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface, and

wherein the arrangement is such that parallel light with a Gaussian light intensity distribution is converted into converging light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion.

4. A light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, said device comprising:

a body including a first curved surface extending transversely a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface, and

wherein the arrangement is such that diverging light with a first divergent angle is converted into diverging light with a second divergent angle different from the first divergent angle.

5. An optical data storage apparatus comprising a light source, a collimator lens, and an objective lens, at least one of said collimator lens and said objective lens being arranged as a light intensity distribution converting device, said light intensity distribution converting device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passes from the first curved surface to the second curved surface.

6. An optical data storage apparatus according to claim **5**, further comprising a transparent flat plate disposed between said light source and said collimator lens, said collimator lens being arranged as said light intensity distribution converting device, said transparent flat plate being arranged tiltable with respect to the optical axis so that a wave front aberration at an image forming point located after the objective lens can be compensated by tilting said flat plate.

7. An optical data storage apparatus according to claim **5**, wherein said collimator lens is arranged as said light intensity distribution converting device, and an aperture diameter of light emerging from said light intensity distribution converting device is different from an effective aperture diameter of the objective lens.

8. An optical device comprising:

a light source, and

a light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface, and

wherein the arrangement is such that diverging light with a first divergent angle is converted into diverging light with a second divergent angle different from the first divergent angle.

9. A light intensity distribution converting device, said device comprising:

a body including a first curved surface transversely extending with respect to a central axis, a second curved surface transversely extending with respect to the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the first and second curved surfaces being formed such that a light intensity distribution of incident light is different from that of emerging light, due to refraction of light caused while the light passes from the first curved surface to the second curved surface,

wherein the arrangement is such that diverging light with a Gaussian light intensity distribution is converted into parallel light which has such a light intensity distribution that intensity is lower at the central portion and is higher at the peripheral portion.

10. A light intensity distribution converting device, said device comprising:

a body including a first curved surface transversely extending with respect to a central axis, a second curved surface transversely extending with respect to the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the first and second curved surfaces being formed such that a light intensity distribution of incident light is different from that of emerging light, due to refraction of light caused while the light passes from the first curved surface to the second curved surface,

wherein the arrangement is such that parallel light with a Gaussian light intensity distribution is converted into converging light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion.

11. A light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity is converted into the emerging light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion.

12. A light intensity distribution converting device according to claim **11**, wherein the curvature of at least one of said first curved surface and said second curved surface is provided with an inflection point.

13. A light intensity distribution converting device according to claim **11**, wherein said device has a cross-sectional shape having a symmetry axis identical to a symmetry axis of the light intensity distribution of incident light.

14. A light intensity distribution converting device according to claim **11**, wherein said first curved surface and said second curved surface are in rotation-symmetry with respect to the central axis.

15. A light intensity distribution converting device, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface; and

one of said first curved surface and said second curved surface having a concave surface configuration at approximately a center portion thereof,

wherein said body is arranged such that diverging light with a first divergent angle is converted into diverging light with a second divergent angle different from the first diverging angle, and

wherein said body is constructed such that the incident light is converted into the emerging light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion.

16. An optical device comprising:

a light source; and

a light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion, due to refraction of light caused while the light passed from the first curved surface to the second curved surface.

17. The optical device according to claim 16, wherein a radiation point of said light source is positioned on the basis of at least shapes of the first and second curved surfaces.

18. An optical device comprising:

a light source; and

a light intensity distribution converting device, said device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface; and

one of said first curved surface and said second curved surface having a concave surface configuration at approximately a center portion thereof,

wherein said body is arranged such that diverging light with a first divergent angle is converted into diverging light with a second divergent angle different from the first diverging angle, and

wherein said body is constructed such that incident light is converted into emerging light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion.

19. The optical device according to claim 18, wherein said optical device comprises at least an optical data storage apparatus.

20. A light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface, and

wherein a collimator lens is arranged as the light intensity converting device.

21. A light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface, and

wherein an objective lens is arranged as the light intensity converting device.

22. An optical device, including a collimator lens being arranged as a light intensity distribution converting device, comprising:

a light source; and

said light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, the collimator lens of said light intensity distribution converting device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface.

23. An optical device, including an objective lens being arranged as the light intensity distribution converting device, comprising:

a light source; and

said light intensity distribution converting device which is used for at least one of incident light and emerging light being diverging light or converging light, the objective lens of said light intensity distribution converting device comprising:

a body including a first curved surface extending transversely of a central axis, a second curved surface extending transversely of the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the other having a convex surface configuration at approximately a center portion thereof,

wherein said body is constructed such that the incident light with a Gaussian light intensity distribution is converted into the emerging light with an approximately uniform light intensity distribution, due to refraction of light caused while the light passed from the first curved surface to the second curved surface.

24. An optical device comprising:

a light source; and

a light intensity distribution converting device, said device comprising:

a body including a first curved surface transversely extending with respect to a central axis, a second curved surface transversely extending with respect to the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the first and second curved surfaces being formed such that a light intensity distribution of incident light is different from that of emerging light, due to refraction of light caused while the light passes from the first curved surface to the second curved surface,

wherein the arrangement is such that diverging light with a Gaussian light intensity distribution is converted into parallel light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion.

25. An optical device comprising:

a light source; and

a light intensity distribution converting device, said device comprising:

a body including a first curved surface transversely extending with respect to a central axis, a second curved surface transversely extending with respect to the central axis, and an outer circumferential surface extending between said first curved surface and said second curved surface;

one of said first and second curved surfaces having a concave surface configuration at approximately a center portion thereof; and

the first and second curved surfaces being formed such that a light intensity distribution of incident light is different from that of emerging light, due to refraction of light caused while the light passes from the first curved surface to the second curved surface,

wherein the arrangement is such that parallel light with a Gaussian light intensity distribution is converted into converging light which has such a light intensity distribution that the intensity is lower at the central portion and is higher at the peripheral portion.

* * * * *