

Please type a plus sign (+) inside this box →

+

7-18-01

Alpro

PTO/SB/16 (8-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Express Mail Label No.: EL648833702US

Date of Deposit: July 17, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

Marco Jimenez

INVENTOR(S)

Given Name (first and middle [if any])	Family Name or Surname	RESIDENCE (City and either State or Foreign Country)
Michael A. Stephen Angie	SHEHA PETILLI ZEVALLOS	Pasadena, CA Pasadena, CA Pasadena, CA

☐ Additional inventors are being named on the ___ separately numbered sheets attached hereto.

TITLE OF THE INVENTION (280 characters max)

POSITION DETERMINATION SYSTEM

CORRESPONDENCE ADDRESS

Direct all correspondence to:

Place Customer Number Bar Code Label here

☒ Customer Number 25224

Type Customer Number here



25224

PATENT TRADEMARK OFFICE

☐ Firm or
Individual Name

David T. Yang
MORRISON & FOERSTER LLP

Address 555 W. Fifth Street, Suite 33500, Los Angeles, CA 90013

Country United States of America Telephone (213) 892-5587 Fax (213) 892-5454

ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages 20

☐ CD(s), Number

☒ Drawing(s) Number of Sheets 9

☐ Other (specify) _____

☒ Application Data Sheet, See 37 CFR 1.76

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT

☒ Applicant claims small entity status. See 37 CFR 1.27.

☐ A check or money order is enclosed to cover the filing fees.

☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account No.: 03-1952 (see Fee Transmittal sheet).

☐ Payment by credit card. Form PTO-2038 is attached.

FILING FEE
AMOUNT(\$)
\$75.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,

SIGNATURE

TYPED or PRINTED NAME: David T. Yang

TELEPHONE: (213) 892-5587

Date: July 17, 2001

REGISTRATION NO. 44,415
(if appropriate)

Docket Number: 513163000100

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Commissioner for Patents, Washington, D.C. 20231

la-501144

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL
FOR FY 2001**

Patent fees are subject to annual revision.

TOTAL AMOUNT OF PAYMENT**(\$75.00)****Complete if Known**

Application Number

Not yet known

Filing Date

Concurrently herewith

First Named Inventor

Michael A. SHEHA

Examiner Name

*

Group Art Unit

*

Attorney Docket No.

513163000100

METHOD OF PAYMENT

- 1.
- ☒
- The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit
Account
Number

03-1952

Deposit
Account
Name

Morrison & Foerster LLP

- ☒
- Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
-
- ☒
- Applicant claims small entity status. See 37 CFR 1.27

- 2.
- ☐
- Payment Enclosed:

☐ Check ☐ Credit Card ☐ Money Order ☐ Other**FEE CALCULATION****1. BASIC FILING FEE**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	75

SUBTOTAL (1)**(\$75.00)****2. EXTRA CLAIM FEES**

			Extra Claims	Fee from below	Fee Paid
Total Claims	*	- 20** =	*	x	= \$
Independent Claims		- 3** =	*	x	= \$
Multiple Dependent					= \$
Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	
103	18	203	9	Claims in excess of 20	
102	80	202	40	Independent claims in excess of 3	
104	270	204	135	Multiple dependent claims, if not paid	
109	80	209	40	**Reissue independent claims over original patent	
110	18	210	9	**Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2)**(\$)***

** or number previously paid, if greater; For reissues, see above.

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for <i>ex parte</i> reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions of the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	180	126	180	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per properties (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify)

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3)**(\$)****SUBMITTED BY**

Name (Print/Type)

David T. Yang

Registration No.
(Attorney/Agent)

44,415

Complete (if applicable)

Telephone

(213) 892-5587

Signature

Date

July 17, 2001

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Washington, DC 20231

la-501153

Initial Information Data Sheet

Inventor Information

Inventor One Given Name: Michael A.
Family Name: SHEHA
Name Suffix:
Postal Address Line One 515 S. Madison Ave., #2
Postal Address Line Two
City: Pasadena
State or Province: CA
Postal or Zip Code: 91101 US
Citizenship Country: United States of America

Inventor Two Given Name: Stephen
Family Name: PETILLI
Name Suffix:
Postal Address Line One 818 Old Mill Road
Postal Address Line Two
City: Pasadena
State or Province: CA
Postal or Zip Code: 91108 US
Citizenship Country: United States of America

Inventor Three Given Name: Angie
Family Name: ZEVALLOS
Name Suffix:
Postal Address Line One 515 S. Madison Ave., #2
Postal Address Line Two
City: Pasadena
State or Province: CA
Postal or Zip Code: 91101 US
Citizenship Country: United States of America

Correspondence Information

Name Line One: David T. Yang
Name Line Two: Morrison & Foerster LLP
Address Line One: 555 W. 5th Street
Address Line Two: 35th Floor
City: Los Angeles
State or Province: California
Postal or Zip Code: 90013
Telephone: 213-892-5587
Fax: 213-892-5454
Electronic Mail: Dyang@mofo.com

Application Information

Title Line One: POSITION DETERMINATION SYSTEM
Total Drawing Sheets: 9
Formal Drawings?: Yes
Application Type: provisional
Docket Number: 513163000100

Representative Information

Representative Customer Number:



25224

PATENT TRADEMARK OFFICE

Continuity Information

This application is a:
> Application One:
Filing Date:

which is a:
>>Application Two:
Filing Date:

which is a:
>>>Application Three:
Filing Date:

Prior Foreign Applications

Foreign Application One:
Filing Date:
Country:
Priority Claimed:

la-501148

POSITION DETERMINATION SYSTEM

BACKGROUND OF THE INVENTION

5 1. Field of Invention

This invention relates to location and navigational systems and to the determination of local and remote position information in ad-hoc landline and wireless systems, including the utilization of unique identification addresses, such as telephone numbers or Internet Protocol (IP) addresses, for such
10 purposes as providing real-time location information, maps, routing, and direction finding.

2. Description of the Related Art

Navigational systems, defined as systems that provide a unit's local position and a way of planning a course around the unit's local position, sometimes to a remote position, such as in-vehicle navigations systems do,
15 are well know in the art. Typically, an in-vehicle navigation system consists of a display screen, processing unit, storage unit, and user input mechanism. The storage system typically contains, for example, maps and travel information used for navigational purposes. Travel information may include
20 such items as points of interest, local restaurants, theaters, municipality locations, and the like.

Determining a local position in a navigation system has typically been done by integrating or connecting Global Positioning System (GPS) technology into the local navigational system. New positioning determination
25 systems include network-assisted wireless location systems, such as TOA (Time-of-Arrival), and network assisted GPS systems for determining the local navigation system's position. The unit's location is then displayed on the device and is available for various applications, such as in the case of a commuter seeking the shortest route to a location in a specific area or a user
30 wanting to find the nearest gas station.

Destination locations are typically determined by manually accessing stored information from a local database or navigational information storage

system, such as a DVD disc or CD-ROM discs. Location information is found by searching through categories of information until the desired location is found, or alternatively, by cross referencing telephone numbers with addresses by means of the local storage system. Conventionally, numerous
5 discs, or even numerous sets of discs, are required to provide adequate detailed geographic coverage, including address and telephone information about a given metropolitan area. That is, conventional in-vehicle navigation systems require that an extensive collection of storage discs be carried within the vehicle. Additionally, prior art DVD and CD-ROM disc based systems
10 require periodic updating. That is, even after a user has purchased a set of discs, new replacement discs must be acquired, for example, as new roads and points of interest information are updated.

As an additional drawback, some navigation systems that do not have the storage capability, such as wireless PDAs (Personal Digital Assistant) or
15 typical cell phones, are not able to implement cross referencing of telephone numbers to addresses locally due to the large memory and storage size requirements of such an operation and low computational power of the devices. Furthermore, since most businesses and individuals can change their telephone numbers numerous times while at their current address
20 determining destination locations from telephone numbers on a locally-stored database inherently causes the information to be out of date and inaccurate. These and other changes, such as a new telephone line or an area code change, would invalidate the current version of locally-stored DVD or CD-ROM disc information. As a further drawback, mobile navigation devices and
25 stationary landline computing devices are not always associated with telephone numbers, but rather Internet Protocol (IP) addresses or the like.

Convention art systems are typically incapable of obtaining position information over dynamically-configured connections such as, for example, current fleet tracking systems that require predefined user and/or device
30 configurations before the transfer of position information is possible. Current systems for determining the location of numerous mobile navigation devices typically require users to register each device's network address, or the like,

60305975, 071701
T04740, 52650209

into a database. These types of systems typically have user/asset account creation procedures that are static and not dynamic. Each remote unit, which has access to its current position information from a connected positioning device or other positioning means, has an application that responds to a request for position information from a centralized server. These systems are viable options for organizations that must govern the tracking of assets that belong to the organization. However, should an outside system or individual desire to track another organization's asset for a short period of time and for one time only, the organization must then provide the network address of that asset as well as possibly providing permission to the outside organization or individual for the duration of their tracking needs. Once the permitted tracking has been accomplished, the system must shut down the outside account and possibly change the network address for security purposes. Additional security measures may be necessary to disable access by the outside user if the system has a firewall or other network security system in place.

Thus, a need exists for a system that determines local and/or remote position information which does not require an extensive collection of DVD or CD-ROM discs, which is able to provide location and destination address or position information given a telephone number, and which is up-to-date and reliable and can be accessed via a networked online server(s). Additionally, the need exists for a system that determines local and/or remote position information of devices that are not always associated by telephone numbers, but IP addresses or the like, and which can obtain such position information instantaneously and share it, by means of authentication and authorization protocols, without requiring any prior configuration.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an improved system for obtaining real-time remote and/or local position information in various environments for a plurality of purposes, such as mapping, routing, and direction finding.

It is another object of the present invention to provide a method for entering a telephone number by various means such as by using numeric, alphanumeric, speech-enabled interface, or software Application Interface (API), or the like, for the purpose of determining position information associated with the telephone number by searching a networked database.

It is yet another object of the present invention to provide a method for entering a unique identification token, such as an e-mail address, that can be used on a networked server system utilizing authentication and authorization procedures, in order to determine position information and to pass that information between a plurality of unique users or applications on various devices. The duration of the position information transfer can be governed by a defined transfer period that can be set prior to the start of the transfer or at any time thereafter.

It is yet another object of the invention to provide an alternative form of Caller-ID (Map Caller-ID) to a local computing telephone device for display of the caller's position information. Alternatively, using another computing device, a caller's position information is transferred to a predefined local computer, via the Internet, telephone, or wireless network, and the position information to a caller is displayed on a capable viewing device identified and configured by the destination telephone user. This position information transfer is done utilizing authentication and authorization procedures or telephone-to-position information correlation procedures for caller identification. Additionally, similar information containing Map Caller-ID information about the destination telephone number can be transferred to the originating caller.

It is a further object of this invention to provide the calculation of position and route information, such as driving directions, as well as the ability

to provide azimuth, elevation, altitude, altitude difference, line-of-sight (LOS) distance, and curved earth LOS distance measurements, between the local and remote positions calculated from the position information obtained using the methods previously described.

5 It is a further object of this invention to enable a local device, such as a wireless telephone or PDA, to acquire local or remote position information through the methods described above, and to pass any or all of that information to an additional navigation or computing device, such as an in-vehicle navigation system or a mobile computer, in order for that additional
10 navigation or computing device to make better use of the acquired position information, such as for improved route calculation and/or improved display. This passing of information to an additional device can occur via another (or same) wireless, infrared or dedicated wired connection.

 It is still a further object of this invention to provide means for
15 downloading a predefined set of data containing telephone numbers correlated to position-specific information, such as latitude and longitude coordinates address information, and/or map information of varying size and resolution, from a networked server to a mobile device. The data transfer can occur via a wireless link, such as a cellular telephone or Bluetooth connection,
20 via an infrared connection, or via a dedicated wired connection, such as a serial or USB connection. The information contained in the batch transfer consists of either a subset of or the entire dataset stored on the networked server. The data batch transfer can also employ geographical boundary restrictions. The data can be updated incrementally, when differences
25 between the local and networked server's database is found, or when necessary, such as when a mobile system expects to travel out-of-range of its expected wireless coverage zone (as initiated by a push or pull architecture with the online networked server) and data updates are obtained for the region(s) where wireless connectivity will not be available.

30 It is yet another object of this invention to provide these aforementioned capabilities on various forms of devices, such as computing

devices, telephone (both wired and wireless) devices, and devices with voice-over-IP (VoIP) capability.

These and other objects are met by the position determination, mapping, and routing system disclosed herein that assist the user, or a software application, in determining local and/or remote position(s) by using an online database and/or networked authentication and authorization connection server. There are three primary cases that apply to this invention: 1) landline-to-landline systems, 2) landline-to-mobile systems, and 3) mobile-to-mobile systems. The objective of each of these systems is the same, to determine either or both of the local and remote devices' position information.

In accordance with one embodiment of the present invention, for a landline-to-landline application, such as a call made between two standard telephones, a user can dial a telephone number to a remote device. The act of dialing the telephone number to another remote landline telephone, such as a residential telephone, triggers the transfer of position information, such as in the form of a map, to either one or both of the local and/or remote telephone devices. If the local and/or remote telephone devices do not incorporate a display unit, the position information can be routed to an adjacent computing and/or display device, such as a personal computer or cable television's set top box, that is connected to a network, such as a telephone or wireless network or the Internet. In this case, users who are initiating or receiving the telephone calls have their local telephone numbers stored into a database that resides on a secure network. Once the user has logged on to the personal computer via authentication and authorization procedures, any call that originates or is destined to their telephone number can identify the position of the other landline telephone number, based on predetermined privacy settings associated with the other landline telephone number. Alternatively, the user placing the call can obtain similar information about the destination telephone number.

In accordance with another embodiment of the present invention, for a landline-to-mobile application, such as a call made between a standard telephone and a wireless telephone, a user (or application) can dial a

telephone number to a remote location. In one embodiment, if a user of a mobile telephone dials or specifies a landline telephone number, such as a business telephone number, the system would correlate the business telephone number to position-relevant information, such as address information and latitude and longitude coordinates. If the mobile telephone is connected to a position determination system, the mobile telephone would be able to provide navigational information, such as route information in the form of real-time driving directions, or else a map and address of the destination telephone number can be displayed on the mobile telephone.

10 In accordance with another embodiment of the present invention, for the mobile-to-mobile application, which is slightly similar to a landline-to-mobile application, position information can be obtained in various embodiments. In one embodiment, if a mobile device user specifies a telephone number of another position-enabled mobile device, the system would query the remote mobile device and verify its privacy setting. If there are no privacy settings, the system would request the position information from the remote mobile device and forward it back to the local mobile device. The local mobile device would then be able to navigate in real-time to the remote mobile device. In another embodiment, the destination remote mobile device receiving the telephone call obtains the position information from the calling local mobile device, based on permission settings of the calling local mobile device, for the performance of various operations, such as mapping and calculating driving directions. In this case, the calling local mobile device has privacy settings that determines the period of the position transfer to the destination remote mobile device. The period setting can be set for the duration of the call or for a predetermined length of time, and the position transfer can be terminated by the calling or receiving device at anytime. The calling local mobile device can also choose not to reveal its local position to the destination remote mobile device for privacy purposes at anytime and can conversely enable position transfer permissions at anytime and for any period of time or as long as the call is active.

In order to determine the position information of a remote landline or wireless device in order to obtain driving directions to that device or other related information about that device, in one embodiment, a user can initiate a position request by entering a unique identification token, such as an e-mail address. The remote user that is logged on to a wireless or landline position-enabled computing device is verified by the networked server's authentication and authorization protocol procedures. The server queries the remote party of the position request for permission on whether the position request can be granted based on criteria such as duration of request. If granted, both parties have access to each other's position information, which can be used for real-time driving directions or collaboration purposes. Once a user requests to terminate the transfer, either after a pre-defined time period ends or abruptly due to manual intervention by either party, the position transfer is preferably terminated by the system. In another embodiment, each device has privacy settings that allow the device to prevent or limit other calling devices from obtaining position information. These privacy settings can include allowance of position information transfers only when a voice or video connection is established and/or only with the device owner's permission. Other settings may include allowing any remote device to request position information for any specified amount of time.

Wireless and/or landline devices are not always suited to post-process the local and remote position information obtained from some of the methods previously described. In one embodiment, a wireless telephone that obtains both local and remote position information can pass the obtained position information to another device which can better process and/or display the data. This is applicable to current wireless phones that have limited resources, such as a small display area, low processing capability, limited memory, and short battery duration, in contrast to an in-vehicle navigation system that typically has an abundance of these resources. It is therefore advantageous and convenient, since most in-vehicle navigation system do not possess wireless capability, for the wireless telephone to pass the remote and/or the local, position information to the in-vehicle navigation system for

processing and display of the route and map information. In this embodiment, the connection between the wireless telephone and in-vehicle navigation system can be established via a wireless connection, such as a Bluetooth connection, an infrared connection, or a wired connection such as a serial or
5 USB cable.

Mobile devices do not always have access to a networked server for obtaining the latest updated database information, such as when wireless hardware access is not possible or when there is a lack of wireless network coverage. For this reason, another embodiment of the present invention
10 provides a means to download batches of position information while the mobile device is connected using, for example, a wireless, infrared, or wired connection to the online networked database server, such as, for example, a mobile device connected to a PC as a conduit to the Internet and thus connected to the online networked database server. This can apply to
15 wireless devices that have a predefined wireless coverage chart stored internally for the purpose of determining when a device is near the boundary of wireless coverage. If the mobile device is near such a boundary, the device can request, or pull, data from the online server that is necessary until the device is within the expected wireless coverage again. Alternatively, the
20 system would correlate the mobile device's position to a wireless coverage chart, and upon a boundary edge, the system would send, or push, data for the area where there is no wireless coverage from the online server to the mobile device. In another embodiment, a mobile device, such as an in-vehicle navigation system, prior to leaving for a destination would download a batch
25 of information for a specific geographical region from an online networked database server, since the car might not have Wide Area Network (WAN) access, such as a mobile Internet cellular telephone with Internet access would. In this embodiment, the in-vehicle navigation system preferably downloads the information from either a wireless, infrared, or wired
30 connection to a networked online server. This data transfer can be initiated from various public points, such as, for example, a car garage or a gas station with a wireless networked-enabled hub.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates how a typical landline-to-landline connection can be established using a plurality of different telephone and/or computing devices.

FIG. 2 illustrates how a typical landline-to-mobile connection can be established using a plurality of different telephone and/or computing devices.

FIG 3. illustrates how a typical mobile-to-mobile connection can be established using a plurality of different telephone and/or computing devices.

FIG 4. illustrates an example of a Map Caller-ID indicator on a computing device display unit or television display.

FIG 5. illustrates an example of a Map Caller-ID indicator and a display window detailing a plurality of various possible features utilizing the position and/or address location information of the remote caller and local device or person that is called.

FIG 6. illustrates an example of using a mobile telephone to obtain position information of the remote device and possibly the local device's position information and then pass that information to another more capable processing and/or display device such as an in-vehicle navigation system via some form of wired, wireless, or infrared connection to process and/or display the data.

FIG 7. illustrates an example of using a wireless connection to download a set of correlated telephone-to-address and/or position dataset information when a wireless connection is not possible or unnecessary.

FIG 8. illustrates several predefined wireless coverage areas overlaid with a driving route that extends within and outside the wireless coverage areas.

FIG 9. illustrates an example of a standard telephone and an advanced telephone device with an integrated display unit.

DETAILED DESCRIPTION OF THE EMBODIMENT

60305975, 071701

The various embodiments of the present invention will be described with reference to Figs. 1 - 9. In the landline-to-landline example, as illustrated in FIG. 1, a user places a telephone call from a standard telephone **5 and 54** to a destination telephone, such as another landline telephone **8 and 55**. The landline standard telephones are typically connected to the telephone network **2** through a dedicated landline connection **9a and 9b**. The telephone number that is dialed is known to the telephone network **2**. When a standard telephone **5 and 54** is used to place a telephone call the telephone network **2** updates the online database and application server (ODAS) **3** with the originating and destination telephone numbers. In one embodiment this is typically done using a signaling system 7 (SS7) architecture via a connection **10** to the ODAS **3**. The destination telephone **8 and 55** has an extended form of Caller-ID, such as consisting of a display, a processing unit, and a MODEM. This extended form of Caller-ID shall be denoted as Map Caller-ID, since it provides remote caller position information, and may include local address position information. In this embodiment Map Caller-ID works similarly to Caller-ID since a modem message is typically sent between the first and second rings over the dedicated landline connection **9b** to the destination telephone **8**. The difference is that Map Caller-ID includes additional position information fields of various formats, and can include map information at varying resolutions of both the originating and destination telephone number's locations. Typical Caller-ID is sent from the telephone network exchange **2** to the subscriber telephone **8** in one of many different formats and methods, depending on telephone carrier provider and/or region (i.e., USA, Finland, Netherlands, Japan, etc.).

In one embodiment the display unit on the destination telephone **8** can display the caller's name, telephone number, address, and can provide a map illustration of varying resolutions configured by the user through the telephone network **2**. Additionally, the telephone **8** can provide route and driving direction information between the originating telephone number's location **5** and the destination telephone number's location **8**. The ODAS **3** determines

the destination telephone's **8** position information by performing a reverse telephone number lookup, thus retrieving both geographical and address information of the called telephone **8** associated with its telephone number. This information is sent to the telephone network **2** to be incorporated into the
5 Map Caller-ID data format.

Additionally in FIG. 1, an advanced telephone **8** and **55** can establish a call with a standard telephone **5** and **54**. Both telephones are typically connected to a telephone network **2** by means of a dedicated landline connection **9a** and **9b**. Since a typical standard telephone device **5** and **54** is
10 incapable of displaying position information or decoding and processing the data from the telephone network **2**, an accompany device can be used to facilitate such requirements, such as, for example, a personal computer (PC) **23a** or Smart Television (TV) **23b**.

In one embodiment, a Smart TV consists of a television with an
15 integrated or attached cable television's set-top box, such as WebTV or Scientific Atlanta set-top commercial units. When a telephone device **8** dials a destination telephone **5** number, the number is typically sent to the telephone network **2** by means of a landline connection **9b**. In this embodiment, the destination telephone **5** is not an advanced telephone **55** capable of decoding
20 and displaying the Map Caller-ID information sent by the telephone network **2** over the dedicated landline connection **9a** as previously described. Therefore, in order for the destination telephone **5** to have access to the Map Caller-ID information, it must be sent to an accompanying device **6**, such as a PC **23a** or Smart TV **23b**, that is capable of displaying and processing the Map Caller-
25 ID information. These devices, PC **23a** or Smart TV **23b**, typically have data connections in place that provide Internet connections, such as dial-up, DSL, Cable, or ISDN connections to the Internet. In this embodiment, the PC **23a** or Smart TV **23b** have a dedicated (i.e., always enabled) connection to the Internet via a DSL or Cable TV connection **14** to the subscriber's Internet
30 Service Provider (ISP) **4**. In another embodiment, the connection **14** to the device **6** can be a wireless connection, such as a CDMA, TDMA, or GSM wireless data connection.

Therefore, in this embodiment, when a telephone **8** dials a destination standard telephone **5**, the destination telephone number is sent over the dedicated landline connection **9b** to the telephone network **2**. The ODAS **3** is sent both the originating and destination telephone numbers via the telephone network connection **10**. In another embodiment, accompanying information, such as user identification information associated with each telephone number is also sent to the ODAS **3**. The ODAS **3** is also connected to the Internet, Intranet or Extranet **1** that is connected to the ISP **4**, which is connected to the PC **23a** or Smart TV **23b** by a dedicated connection **14**. The ODAS **3** is preferably notified that a telephone call is being established by the telephone network **2**. Included in this notification is the telephone number and user identification information for both the originating and destination telephone numbers. In this embodiment, every telephone account user has a username and password for the ODAS **3**. When the ODAS **3** is notified from the telephone network **2** that a telephone call is being established, the ODAS **3** correlates both the origin and destination telephone users' identifications to verify if the user is signed-on to the ODAS **3** using authentication and authorization protocols. These authentication and authorization protocols establish that a user is genuine and verify the level of authority each user is granted, such as for differentiating services provided by the ODAS **3**. These protocols also provide presence capability by notifying the ODAS **3** that a particular user is signed-on to the system on a particular device, such as the PC **23a** or Smart TV **23b**.

After the telephone network **2** has notified and sent the ODAS **3** all of the appropriate information, the ODAS **3** validates that the users associated with the origin and destination telephone numbers are signed-on to the ODAS **3**. In this embodiment, only the user of the destination telephone number is signed-on to the server **3**, but this can also apply to the user of the originating telephone number. After the system has verified that the destination telephone number user is signed-on, the ODAS **3** sends a notification to the device **6** that the user is signed-on. In this embodiment, this information is typically sent to the Internet, Intranet or Extranet **1** through a dedicated

connection **11** and then is connected to the user's ISP **4** which is also connected to the Internet, Intranet or Extranet **1** by a dedicated connection **13**. In this embodiment, the ISP has a dedicated connection **14** to the end device **6**, thus the ODAS **3** has a pathway to the end user's device **6**, such as the PC **23a** or Smart TV **23b**.

In this embodiment, the notification appears on the user's display device **6** just prior or during the ringing or notification that the telephone has an incoming telephone call. In one embodiment, the display **24** of the user's device shows that he or she is signed-on and can have numerous miscellaneous window(s) **25** open at the time the Map Caller-ID notification window is activated. The Map Caller-ID notification window **26** typically contains only the originating user identification and telephone number, but may also contain map information of varying resolution. In one embodiment, the user may use a mouse icon **28** to activate the original notification window **26** to access additional information. In this embodiment, if the user does not activate the original notification window **26** for additional information, the notification window **26** will disappear after a predefined time period. After the notification window **26** has been activated by the mouse icon **28**, which is controlled by the user, the notification window **26** closes and a new information window **30** appears.

In one embodiment, this new information window **30** is a detailed Map Caller-ID information window of varying resolution displaying the originating position information, such as a map location **33** of the caller, and the user's location position information, such as a map location **34** of the destination telephone number. The window **30** can also provide a driving route **29** of varying resolution and driving directions **35** of varying resolution. The window **30** can also display remote location direction heading information relative to local position information **31** in addition to elevation, line-of-sight distances, and curved Earth line-of-sight distances. Additionally, the window **30** can display all of the identification information **32** of both the originating and destination users, such as addresses and telephone numbers, and provide driving direction distance information for the optimal route based on criteria

such as time-of-day turn restrictions and highway or surface street preferred usage.

In the landline-to-mobile example, as illustrated in FIG. 2, a user of a mobile device **18a**, such as a cellular telephone or wireless voice-enabled PDA, dials or inputs a telephone number. Since in this embodiment, the destination telephone number is associated with a landline device **5**, the system is able to utilize methods previously described in the landline-to-landline example for obtaining the destination telephone number's relevant position information. The difference of this example from the previous lies in the information transfer path back to the originating mobile device.

In another embodiment, a user placing a telephone call from a landline device **5**, such as a standard telephone, to a mobile device **18a**, such as a cellular telephone or wireless voice-enabled PDA, dials or inputs a telephone number. The telephone number that is dialed from the landline telephone device **5** is known to the telephone network **2**, and, in this embodiment, is sent over a dedicated landline connection **9c**. The telephone network notifies the ODAS **3** that a telephone call is being established by means of a dedicated connection **10**. In another embodiment, this dedicated connection can be established via a connection **12** to the Internet, Intranet or Extranet **1** and then by a connection **11** to the ODAS **3**. Once the ODAS **3** has been notified of all the appropriate information, the system verifies, by using authorization and authentication protocols, if the user of both the originating and destination telephone numbers are signed-on to the system. For this embodiment, the landline notification method is the same as previously described in the landline-to-landline example, except that the ODAS **3** must request the location of the mobile device **18a**, since the device can always be moving, prior or during to the connection of the telephone call.

The location of the mobile device is typically calculated by the mobile device **18a** by using an onboard positioning information device **19a** that is connected to the mobile device, or by getting network-assisted position information **21a** from the wireless network **22** through a separate or same wireless connection, such as, for example, Time-Of-Arrival (TOA) algorithm

techniques. The position information can also be obtained from a combination of an onboard positioning information device **19a**, such as a GPS receiver, and a network-assisted approach **21a**, such as having the network send ephemeris data to the GPS receiver to help achieve faster time-to-fix techniques.

The mobile device location information can be provided only, due to privacy settings, if the user configured the mobile device **18a** to allow position information to while calls are received. In another embodiment, the privacy configuration also includes settings such as the option to never send position information, or to send position information while receiving and/or sending calls, and whether the transfer of position information should be allowed only for an instance or for a given period of time. This provides the user the opt-in capability for position information transfer.

In this embodiment, the mobile device Map Caller-ID notification is sent to the mobile device as a conventional Caller-ID message is sent, except additional information is added to the original message. This information is sent to the telephone network **2** via a direct connection **10**, and then to the wireless network **22** via a direct connection **15**. The wireless network **22** is connected to the wireless device **18a** by means of a wireless connection **20**, such as a radio frequency (RF), optical, or infrared connection, using various connection standards, such as CDMA, GSM, GPRS, WCDMA, or CDMA2000. In one embodiment, the Map Caller-ID information sent to the mobile device contains the originating position and user identification information, since the local position information **19** or **21** is already known. In another embodiment, the Map Caller-ID information is sent directly to the wireless network **22** through a dedicated connection **17**.

All of the Map Caller-ID information provided in the landline-to-mobile example is similar to that provided in the landline-to-landline example, except the mobile device's **18a** position can change. In this embodiment, after the telephone call has been established, the mobile device, based on its privacy settings, continually sends updated position information to the ODAS **3**. The ODAS **3** then sends the new updated position information to users of both the

mobile device **18a** and landline display device **6**. For this scenario, since the landline device position information never changes, it is unnecessary to send updated position information about the landline device to the mobile device **18a**. Providing real-time position information allows both the mobile device **18a** and the landline display device **6** to display their real-time positions on a map of varying resolution, and to route and display driving direction information as the mobile device changes its position. In this embodiment, this position information exchange can last for the length of the telephone call or for a specified period of time which is determined by both the user of the originating mobile device **5** and the user of the landline destination **18a** telephone.

In the mobile-to-mobile example, as illustrated in FIG. 3, a user placing a telephone call from a mobile device **18b**, such as a cellular telephone or wireless voice-enabled PDA, dials or inputs a telephone number of another mobile device **18c**. In this embodiment, since both the originating and destination telephone numbers are associated with mobile devices, the position information of each device can be updated in the ODAS **3** prior to establishing the telephone call, depending on each mobile device's **18b** and **18c** privacy settings. In another embodiment, peer-to-peer position information transfer is possible.

In this embodiment, all position information is allowed to be transferred for all scenarios on each mobile device **18b** and **18c**. When a mobile device **18b** dials a telephone number, the position information and destination telephone number is transferred to the wireless network **22** by means of a wireless connection **20b**. The position information is calculated, prior to the transfer, by means of an onboard positioning information device **19b** that is connected to the mobile device **18b**, or by receiving position information from the wireless network **22** using a network assisted positioning approach **21b**. The ODAS **3** receives both the originating and destination telephone numbers, users' account information, and position information for both mobile devices **18b** and **18c**. In one embodiment, the information from the mobile device **18b** is relayed to the ODAS **3** through the wireless connection **20b** into

the wireless network **22**, and through the dedicated server connection **17**. In another embodiment, the information from the mobile device **18b** is relayed to the ODAS **3** through the wireless connection **20b** into the wireless network **22**, through the dedicated connection **16** into the Internet, Intranet or Extranet **1**,
5 and then through the dedicated connection **11** to the ODAS **3**. In another embodiment, the ODAS **3** requests position information from the destination mobile device **18c**. This request, after reaching the wireless network **22**, is sent across the wireless connection **20c** to the mobile device **18c**.

The mobile device **18c** then preferably forwards its current position
10 information back to the ODAS **3**. In one embodiment, prior to the destination mobile device **18c** receiving the telephone call from the originating mobile device **18b**, the wireless network sends the position information, obtained from the ODAS **3**, in the form of a Map Caller-ID, as previously described. In this embodiment, both the originating and destination mobile device receive
15 the Map Caller-ID information. The mobile devices **18b** and **18c** continually send their updated position information to the ODAS **3**, when the position information has changed significantly as compared to the positioning error probability and as determined by the positioning technology or network configuration. The ODAS **3** periodically updates each mobile device with the
20 other's position information, thus providing real-time driving directions and route information. In another embodiment, the position information transfer can be sent in a peer-to-peer configuration, thus circumventing the ODAS **3**.

A mobile or landline device can also request position information of another mobile or landline device by only specifying a telephone number,
25 without having to initiate a telephone call. For a landline-to-landline position request, the specified telephone number is correlated to its position information using telephone information from a known database or sets of databases. In one embodiment, the online database that contains this information only includes users that do not have unlisted telephone numbers.
30 In another embodiment, users can define a group of specific users that have access to this information. This is also accomplished by utilizing a group database and authorization and authentication protocols to identify users that

are permitted to access this information. When a mobile device's position information is requested, the system, based on privacy settings, responds with the appropriate position information to the requesting user's device. In another embodiment, using the authorization and authentication protocols a user can request the position of a mobile device, similarly to requesting the position of a landline device.

Using a mobile device **18d**, as illustrated in FIG. 6, it is possible to obtain the unit's local position and a destination position for the purpose of navigation. However, a typical mobile navigational device **18d**, such as a cellular phone or wireless PDA, does not possess all of the capabilities or is not optimal for navigational purposes. An accompanying device **37**, such as an in-vehicle navigational device usually installed in a motor vehicle **39a**, is better suited for navigational displays and computations. In one embodiment, once the mobile device **18d** has obtained either the local or remote position information, via a wireless, such as a Bluetooth or 802.11b, connection, or a wired, such as a USB or serial, connection, or an infrared or optical connection, it is sent by such connection **38** to a complementary connection interface device **36** that is connected to the navigational device. A typical navigational device contains a processor **40**, a position determining system **41**, a memory or storage device **42**, a user interface **43**, and a display **44**. In some embodiments, a user interface **43** and display **44** are combined as a touch sensitive display. Once the position has been obtained, as previously described, the navigational device can utilize this position information to provide typical navigational functionality, such as routing, driving directions, mapped information, etc.

In another embodiment, the mobile device **18d** calculates all of the navigational information internally by means of the ODAS **3** and passes the information over to the another device **37**, such as a mobile computer, via a compatible connection interface **36** only to better display the information. As the mobile device **18d** moves, or its position changes, position and/or data information is sent to the navigational device **37**, via the interface connection **36** for real-time accurate data updates on the navigational device **37**.

One feature of this system is the use of a telephone number to obtain position information associated with the telephone number from a networked online server. The system utilizes an ODAS **3** to facilitate this function, where the database is updated so that the data is always accurate and reliable. Thus
5 if a mobile navigational device **45**, such as a PDA, cellular telephone, or mobile computer, requires telephone-to-position information capability, and it does not have wireless connectivity or will travel outside known wireless coverage regions, the mobile navigational device can download a batch of data specific to the geographical region where there is no wireless coverage
10 from the ODAS **3** when appropriate, thus providing the most accurate and reliable data to the user or application requesting this information.

In one embodiment, as illustrated in FIG. 7 a motor vehicle **39b** contains a mobile navigational device **45**, such as a PDA, cellular telephone, or mobile computer in the vehicle. Since the mobile navigational device **45**
15 does not have a wireless connection, it is not possible to connect to the ODAS **3** while driving. However, the mobile navigational device **45** has a USB port and can download the expected geographical region where the motor vehicle **39b** is expected to travel. In this embodiment, the mobile navigational device **45** can connect via a USB cable **46** to a USB hub **47** that has a connection **48**
20 to the Internet, Intranet or Extranet **1** which is connected **11** to the ODAS **3**. The mobile navigational device **45** then downloads all of the data necessary to perform the telephone number to position information calculations while en route, insuring that the data is the most accurate possible for this application.

In another embodiment, a motor vehicle **39b** contains a mobile
25 navigational device **45**, such as a PDA, cellular telephone, or mobile computer, which has wireless connectivity. In this embodiment, the mobile navigational device **45** can obtain telephone number to position information from the ODAS **3** by connecting through the wireless connection **46** to the wireless network interface **47**, which is then connected **48** to the Internet,
30 Intranet or Extranet **1** which is then connected **11** to the ODAS **3**. Having a connection from the mobile navigational device **45** to the ODAS **3** is dependent on having wireless coverage. If the mobile navigational device **45**

is not within a wireless coverage area, the mobile navigational device **45** can not obtain position information given a telephone number because it does not have access to the ODAS **3**. Since wireless coverage is known in advance, it is possible to store the wireless coverage charts on the ODAS **3** or on the
5 mobile navigational device **45**. In one embodiment, the wireless coverage charts are stored on the mobile navigational device **45** and updated when changed. Therefore when the mobile navigational device **45** is traveling inside known wireless regions, the mobile navigational device **45** will extrapolate its course to determine when it will travel outside of wireless coverage. The
10 system will download, or pull, all of the nearby data information along the expected route from the ODAS **3** until the system is expected to be within a wireless coverage area again.

In another embodiment, as illustrated in FIG 8, the mobile navigational device **45** calculates a route **53** from a **START** position to a **FINISH** position.
15 The route **53** information is then correlated to an online wireless coverage chart that is stored on the ODAS **3**. The online wireless coverage chart contains regions **49 and 50 and 51** where there is wireless coverage. The ODAS **3** calculates the regions **52** surrounding the expected route **53** that have no wireless coverage. The ODAS **3** then sends, or pushes, the relational
20 data that is not obtainable due to lack of wireless coverage connectivity to the mobile navigational device **45**. This insures that the data for telephone to position information is always up-to-date, reliable, and accurate.

It should be noted that the present invention may be embodied in forms other than the preferred embodiments described above without departing from
25 the spirit or essential characteristics thereof. The specification contained herein provides sufficient disclosure for one skilled in the art to implement the various embodiments of the present invention, including the preferred embodiment, which should be considered in all aspect as illustrative and not restrictive; all changes or alternatives that fall within the meaning and range or
30 equivalency of the claim are intended to be embraced within.

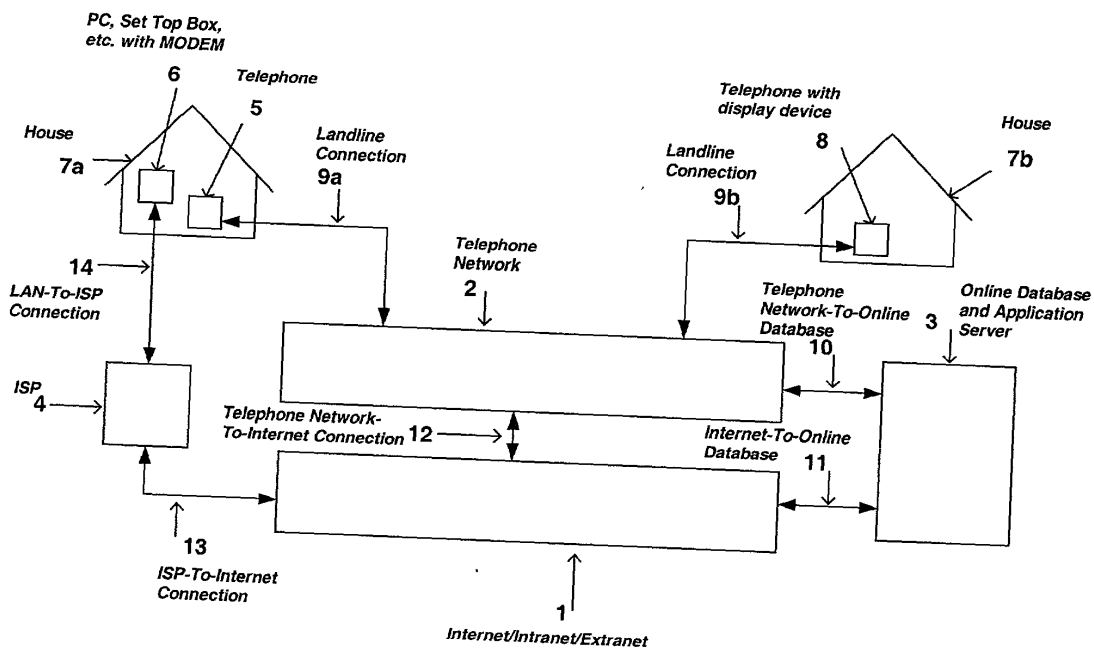


FIG. 1

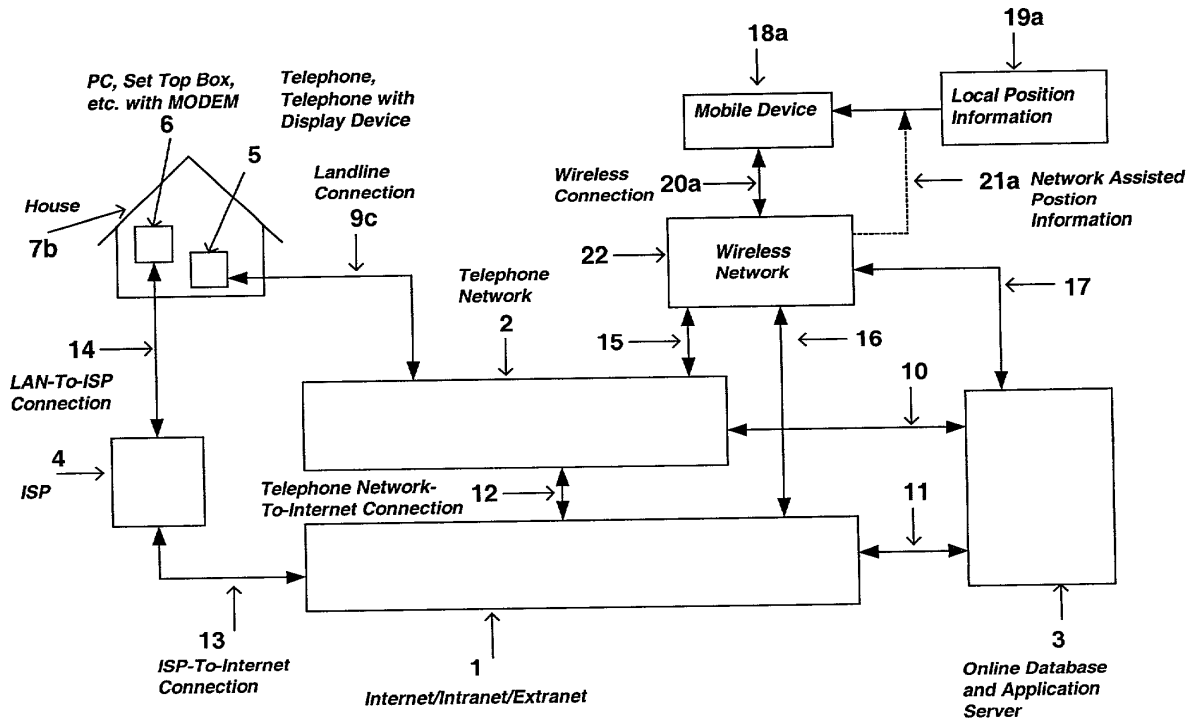


FIG. 2

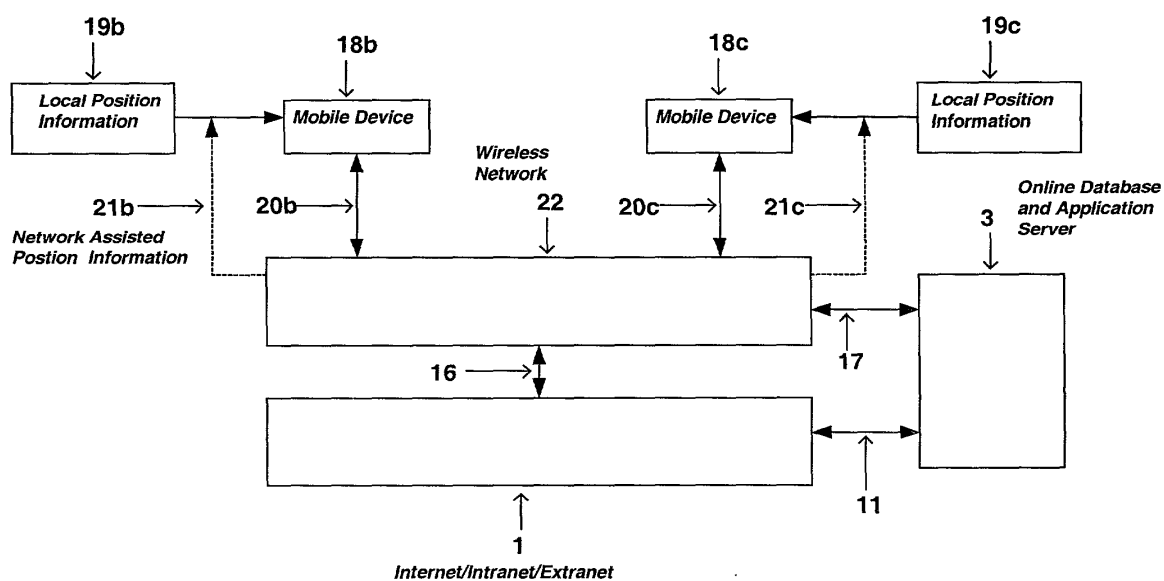


FIG. 3

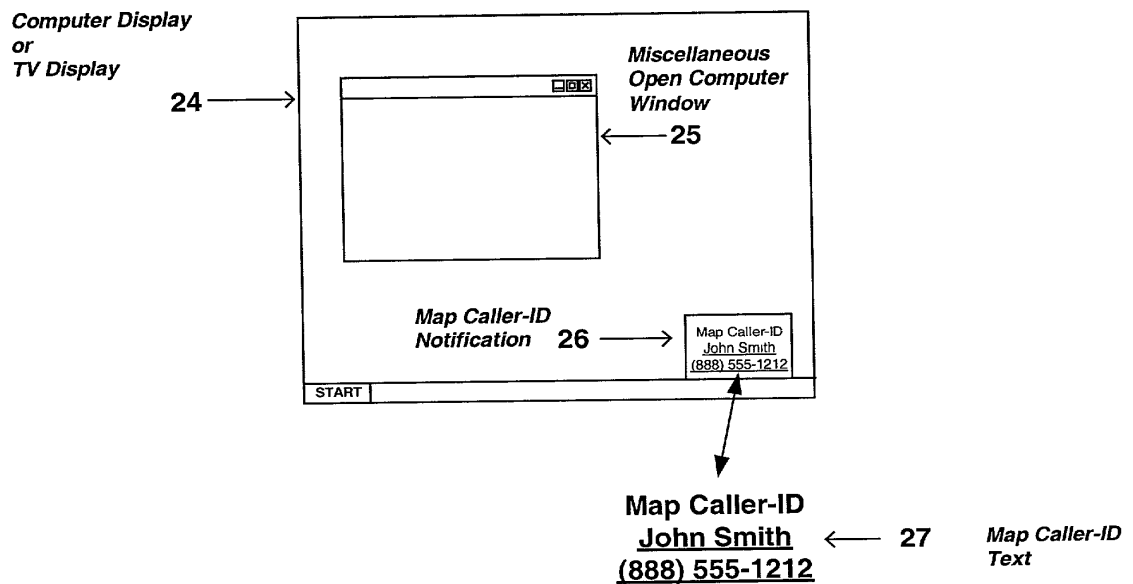
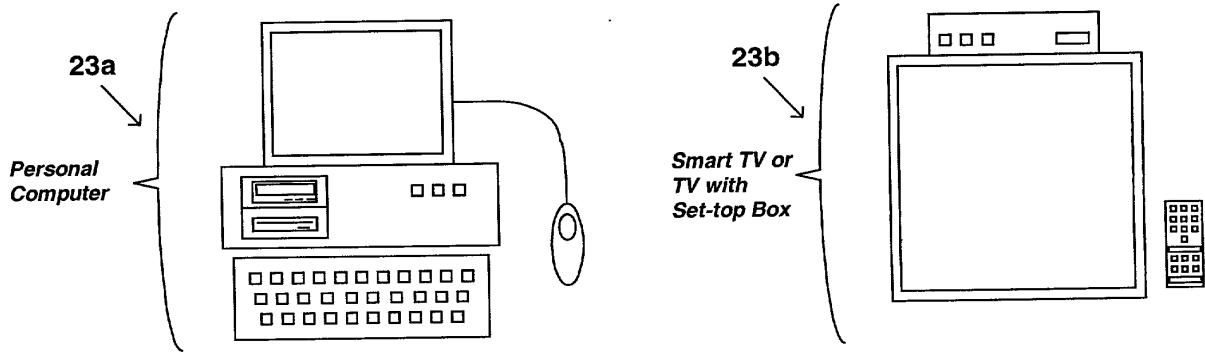


FIG. 4


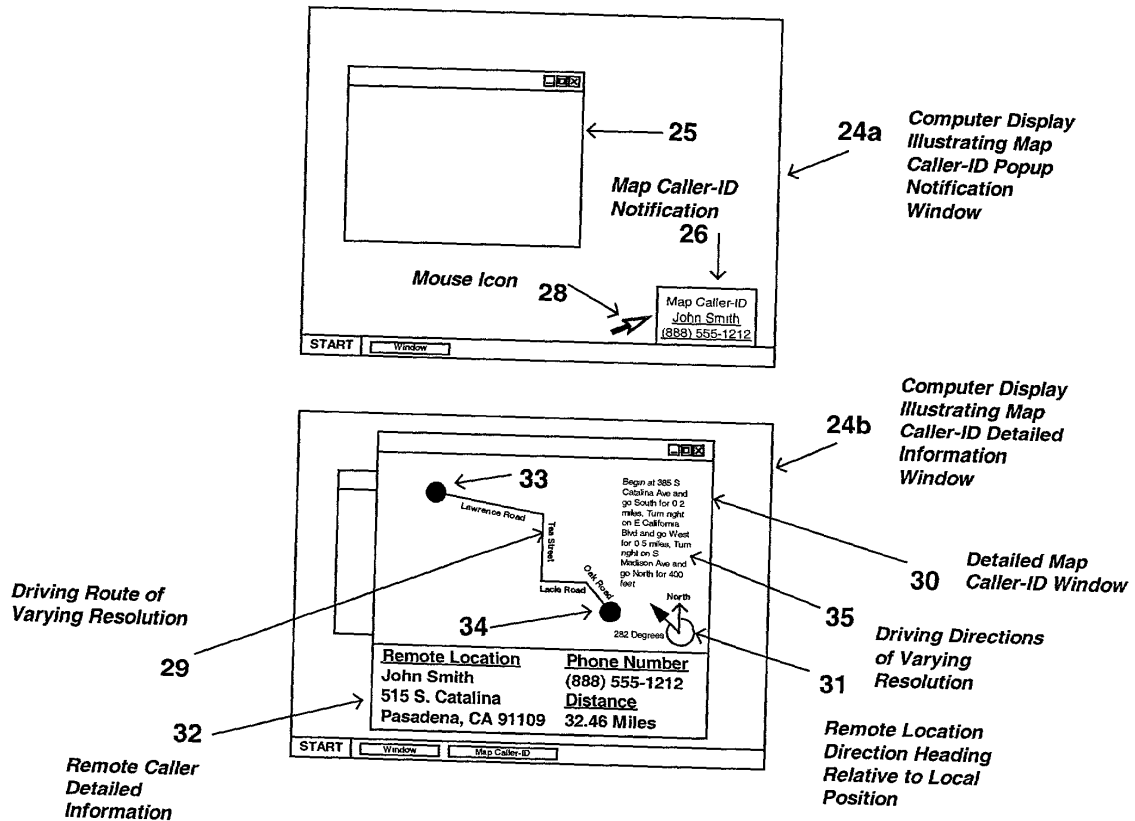


FIG. 5

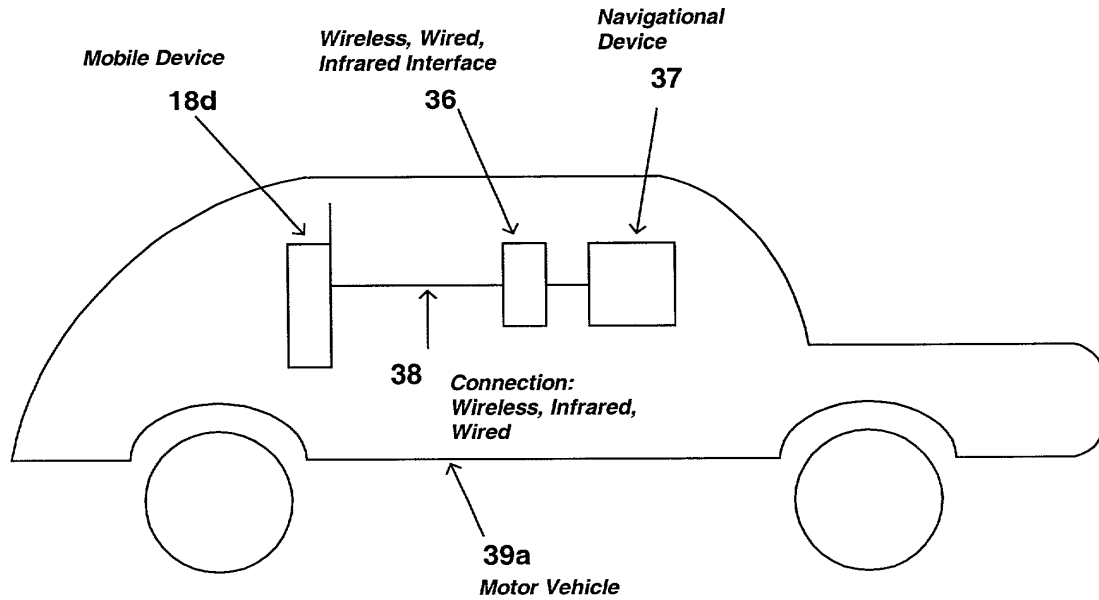

37 → **Navigational Device**

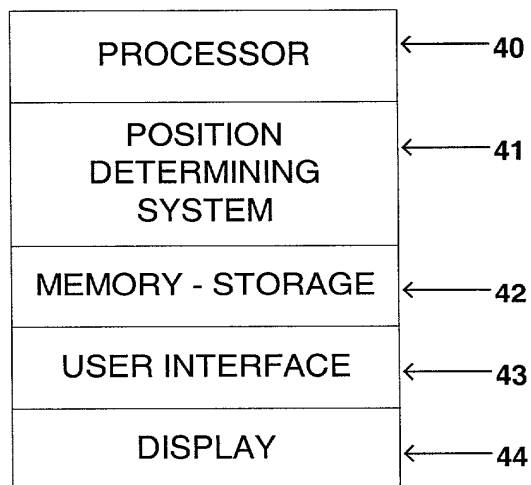


FIG. 6

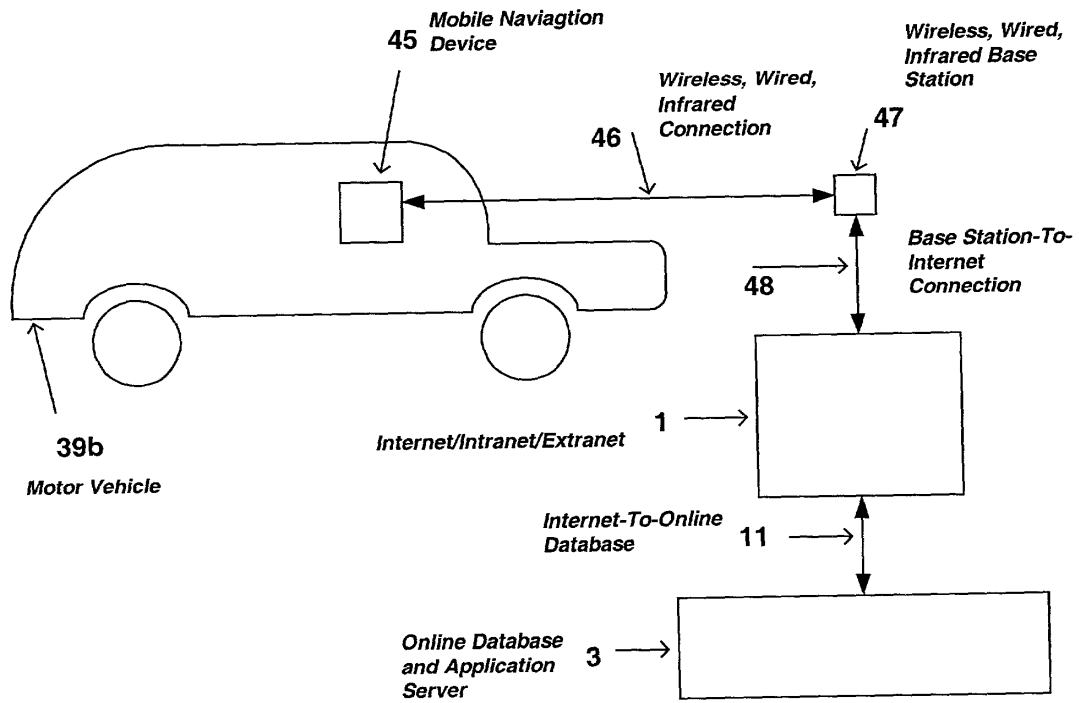


FIG. 7

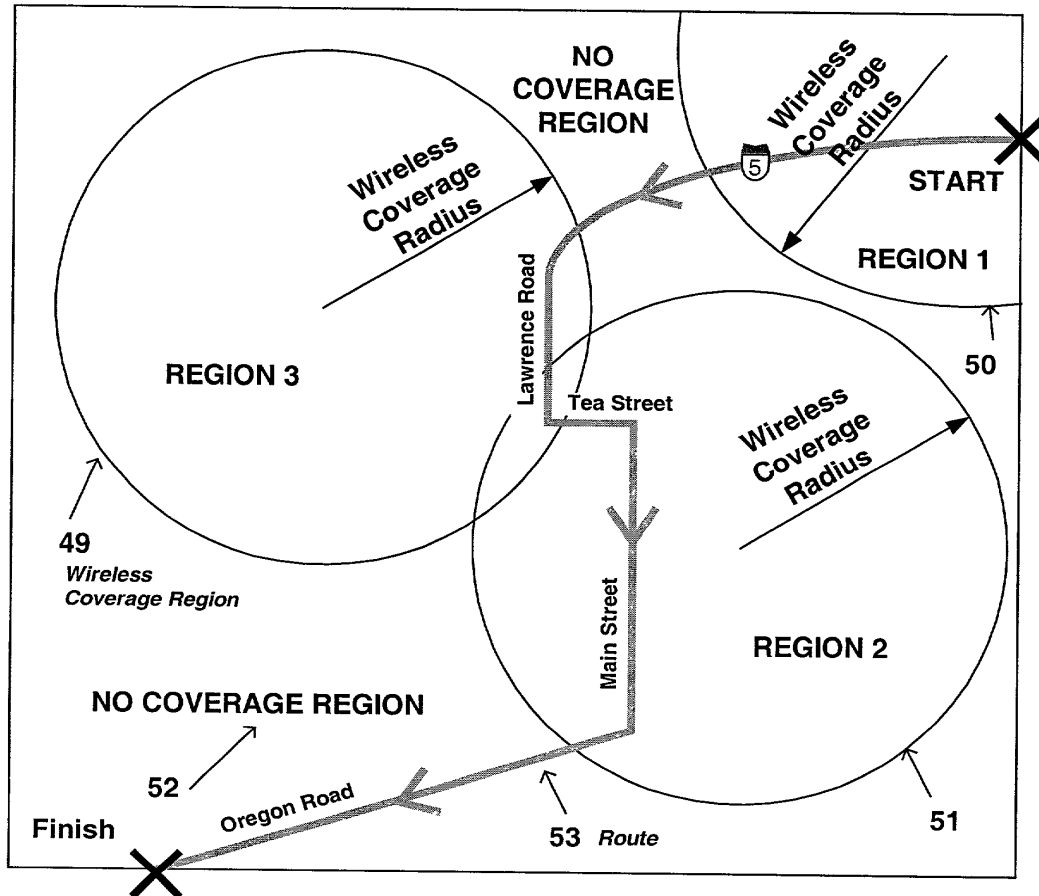


FIG. 8

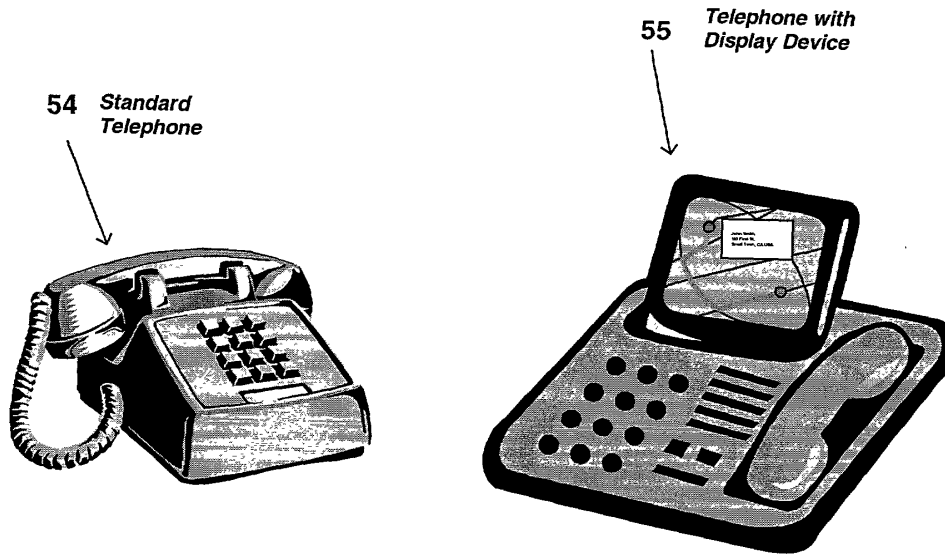


FIG. 9