



US006292657B1

(12) **United States Patent**
Laursen et al.

(10) **Patent No.:** **US 6,292,657 B1**
(45) **Date of Patent:** **Sep. 18, 2001**

(54) **METHOD AND ARCHITECTURE FOR
MANAGING A FLEET OF MOBILE
STATIONS OVER WIRELESS DATA
NETWORKS**

(75) Inventors: **Andrew L. Laursen**, San Mateo;
Maurice A. Jeffery, Los Altos, both of
CA (US)

(73) Assignee: **Openwave Systems Inc.**, Redwood
City, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/114,588**

(22) Filed: **Jul. 13, 1998**

(51) **Int. Cl.**⁷ **H04Q 7/20**; H04M 1/66

(52) **U.S. Cl.** **455/411**; 455/419; 455/31.2;
709/219; 709/225

(58) **Field of Search** 455/410, 411,
455/418, 419, 420, 417, 466, 31.2, 31.3,
38.1, 517; 340/825.44; 709/217, 219, 223,
225, 328

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,450,071	*	9/1995	DeLuca et al.	340/825.44
5,524,135	*	6/1996	Mizikovsky et al.	455/411
5,872,926	*	2/1999	Levac et al.	455/417 X
5,890,075	*	3/1999	Cyr et al.	455/411 X
6,040,784	*	3/2000	Miller	455/38.1 X
6,078,820	*	6/2000	Wells et al.	455/466

OTHER PUBLICATIONS

"HDTP Specification," *Unwired Planet, Inc.*, Version 1.1,
Part No. HDTP-SPEC-DOC-101, Jul. 15, 1997, pp. 1-40.
"HDML 2.0 Language Reference," *Unwired Planet, Inc.*,
Version 2.0, Part No. HDMLREF-DOC-200, Revision D,
Jul. 1997, pp. 1-56.

HDTP Specification Version 1.1, Jul. 15, 1997; Unwired
Planet, 40 pages.

HDML Specification Version 2.0, Jul. 1997; Unwired Planet,
56 pages.

* cited by examiner

Primary Examiner—William Trost


Assistant Examiner—Philip J. Sobutka

(74) *Attorney, Agent, or Firm*—Blakely, Sokoloff, Taylor &
Zafman, LLP; Jordan M. Becker

(57) **ABSTRACT**

The present invention discloses a fleet managing system in
which fleet data can be securely managed and disseminated
to a selective group of mobile stations serviced by a carrier
infrastructure. The fleet managing system relies on a series
of consecutive transitive trusts between pairs of components
in the system so that all communications from a provision-
ing entity to the mobile stations are secure. The access to the
fleet managing system is guarded with a challenge response
every time there is a request arriving at the system while the
mobile stations are verified by an account manager in the
system to ensure that the fleet data is eventually pushed to
the correct group of mobile stations. Apart distinctly from
existing fleet managing systems for mobile stations, the
present invention provides secure means for an authorized
entity, from anywhere at any time, to control the dissemi-
nation of mobile data to a specified group of mobile stations
without incurring additional costs to or direct involvement
of a service carrier.

26 Claims, 10 Drawing Sheets

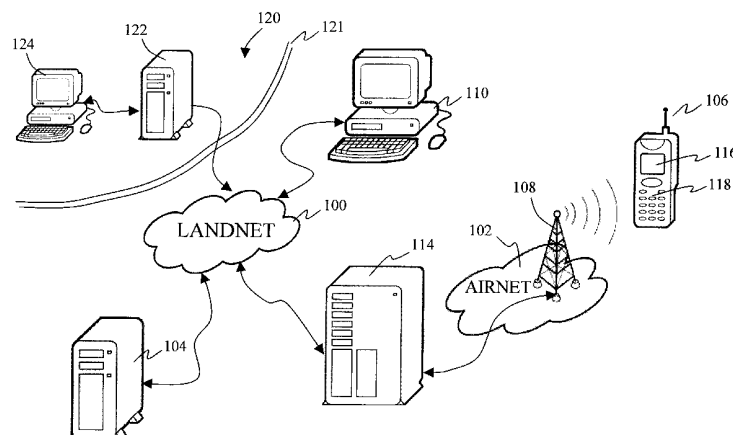

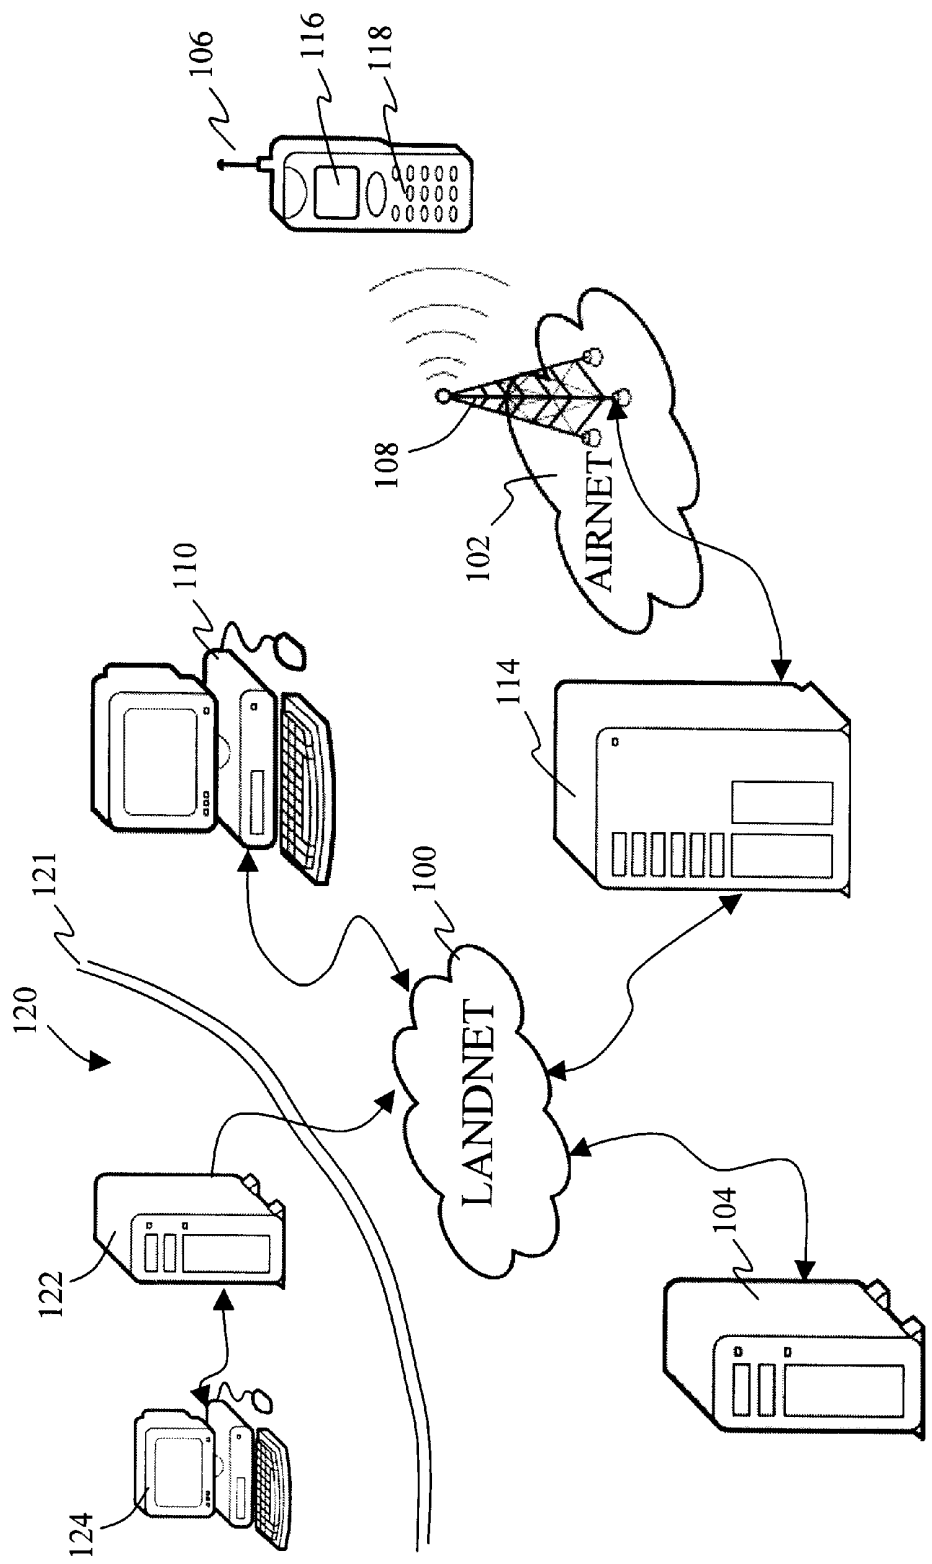


Fig. 1

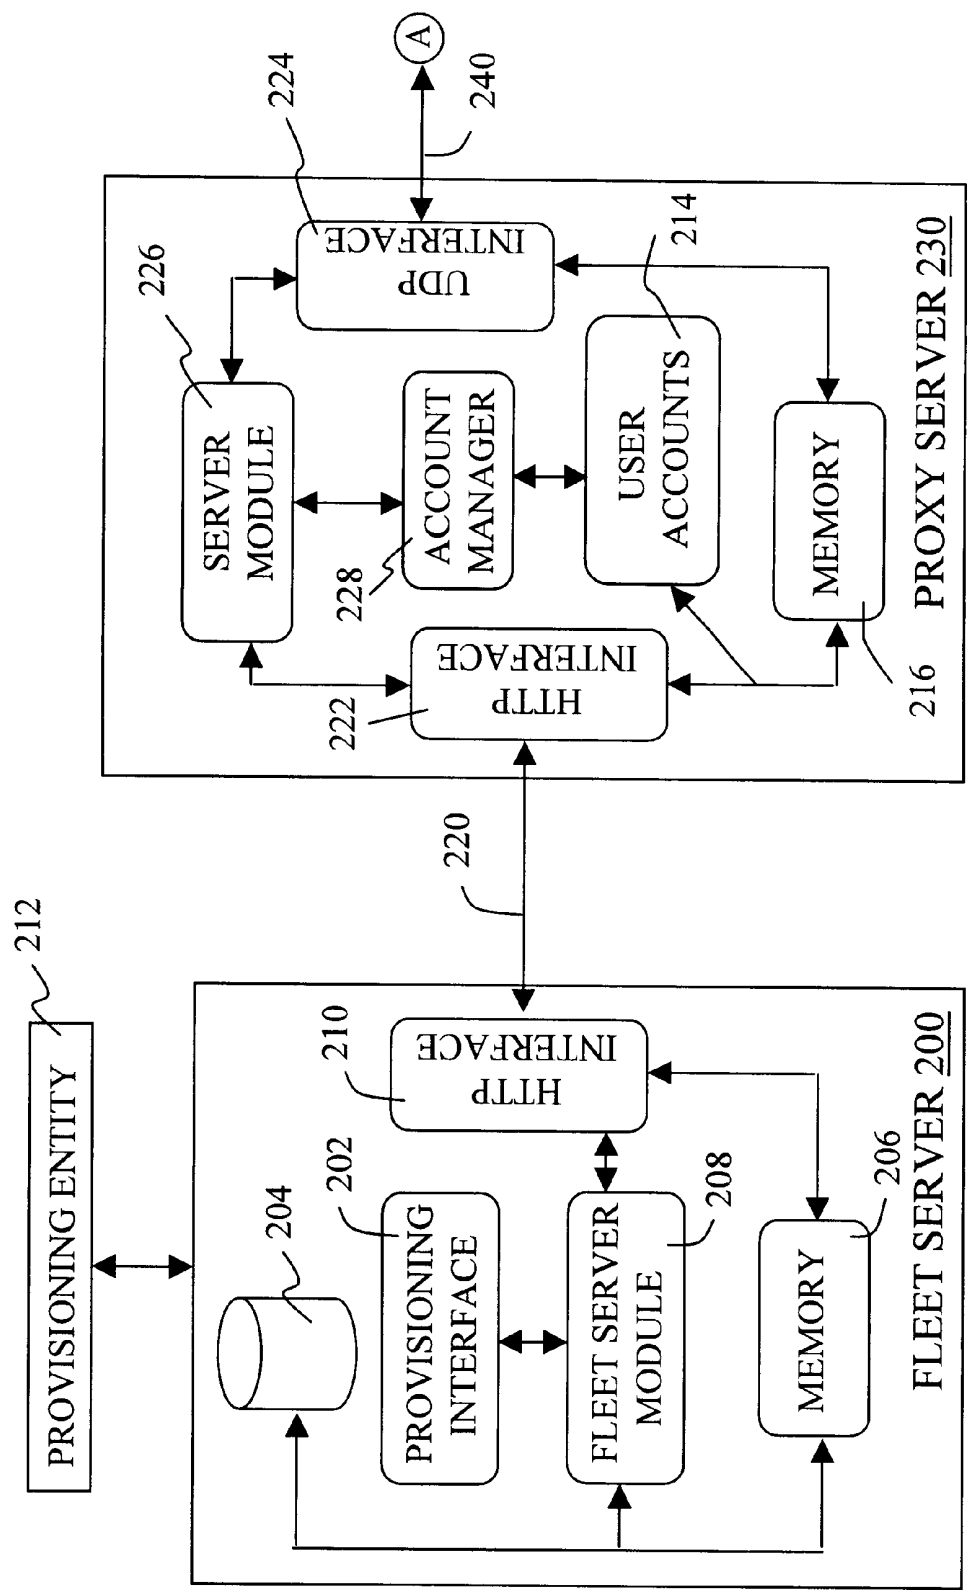


Fig. 2A

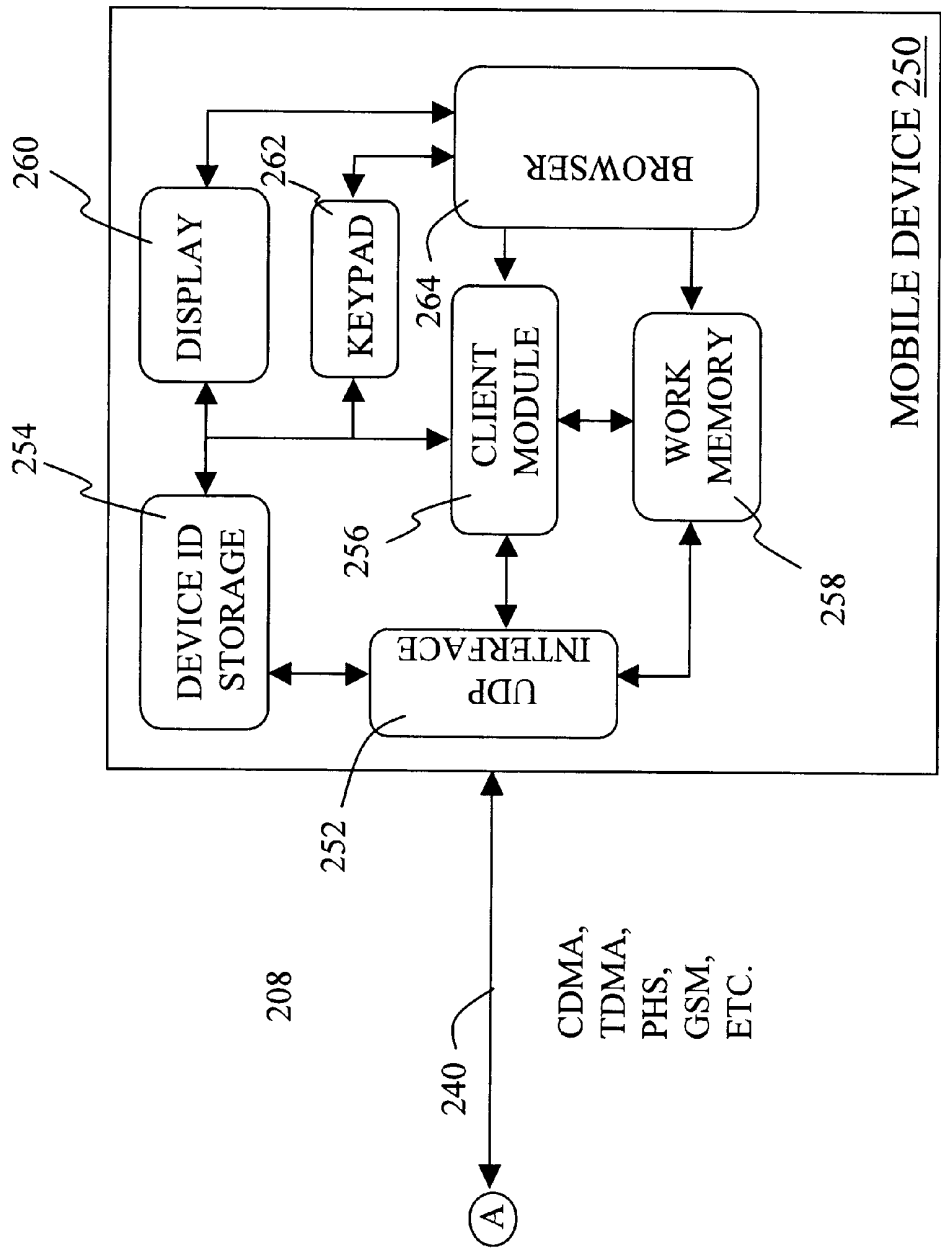


Fig. 2B

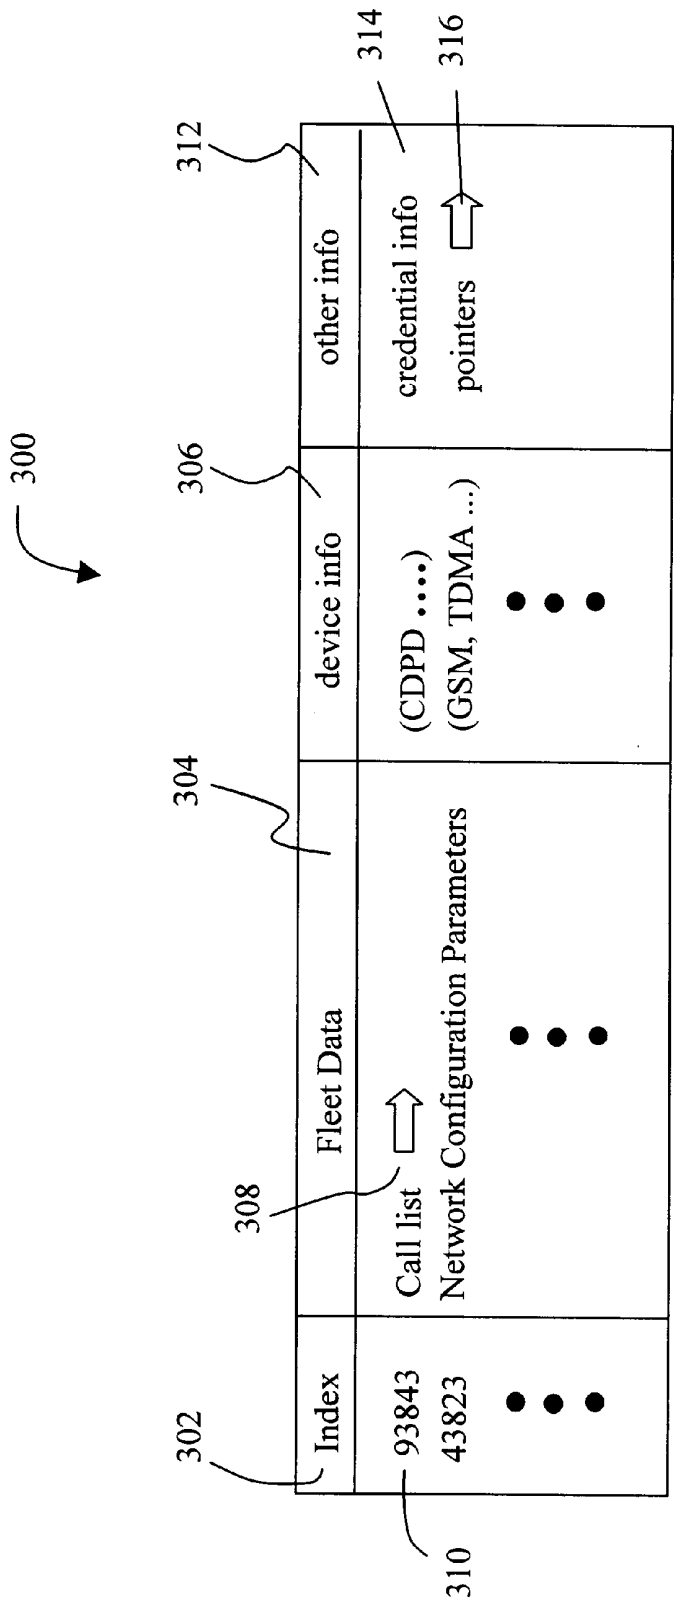


Fig. 3

400

402		404		406	408
Device ID	Subscriber ID	Group ID	User Info	410	
6508171453	861234567-10905_pn.mobile.att.net	C	(CDPD, GSM ...)	• • •	
204.213.5.56	853131117-10905_pn.mobile.att.net	D	(GSM ...)		
• • •	• • •	• • •			

Fig. 4

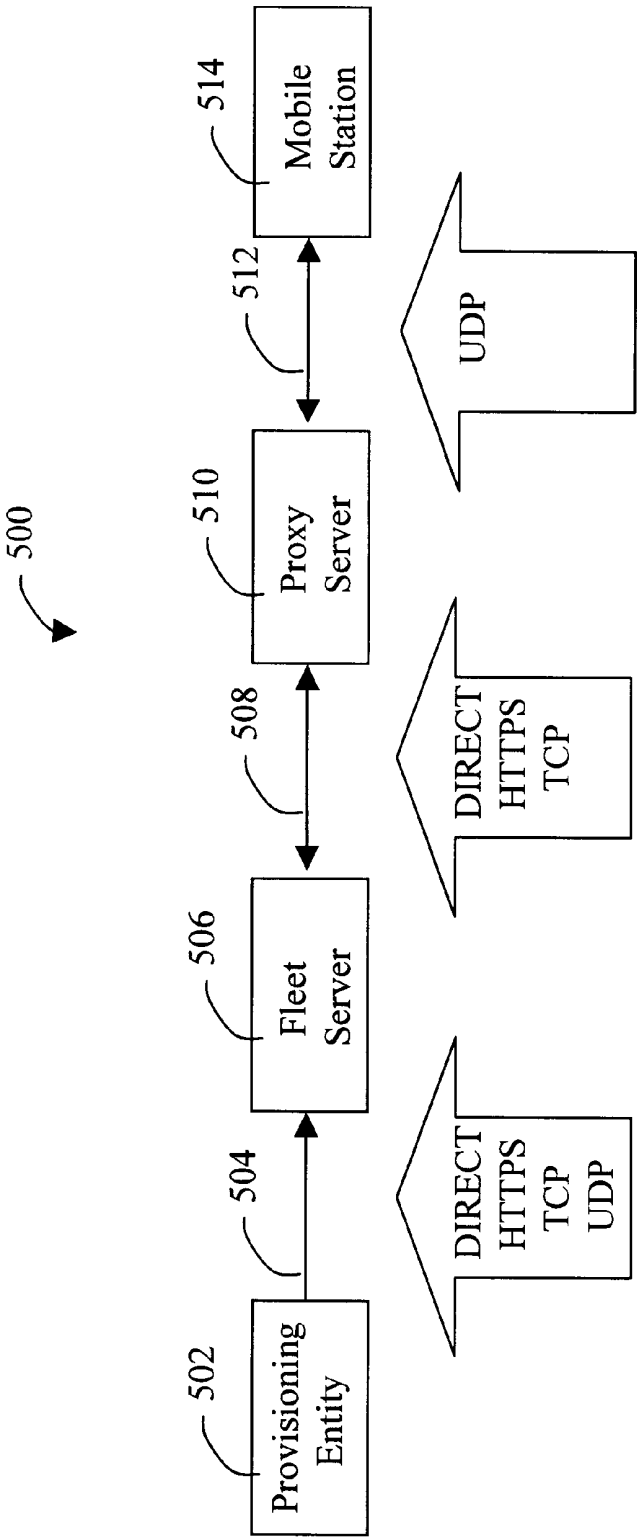


Fig. 5A

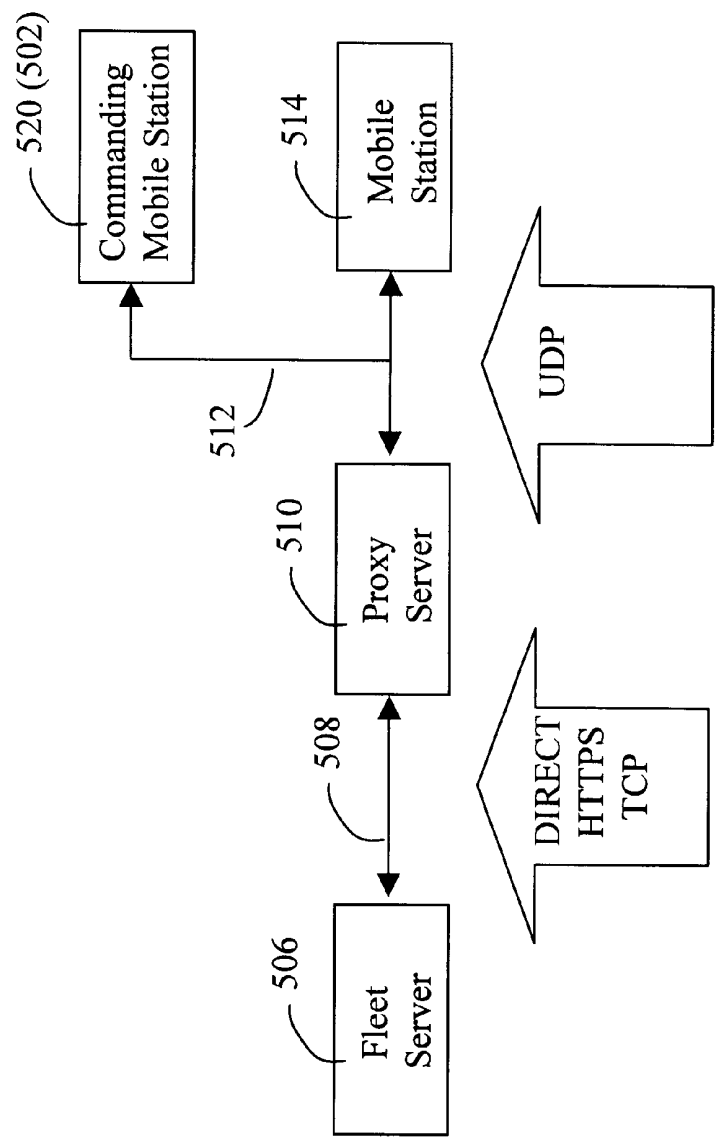


Fig. 5B

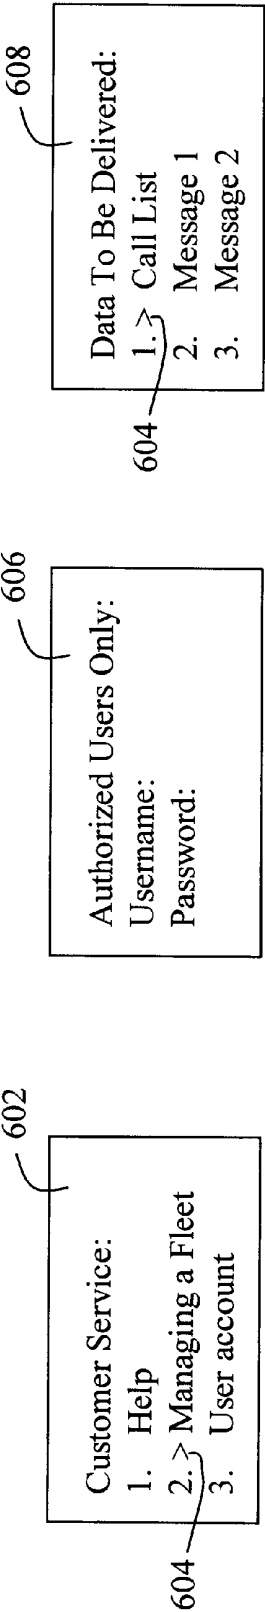


Fig. 6A

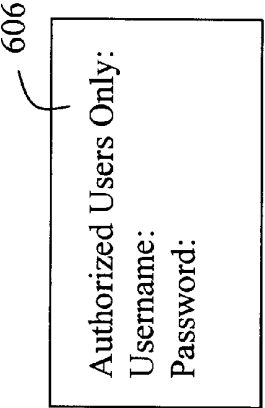


Fig. 6B

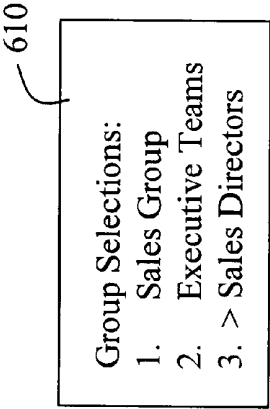


Fig. 6D

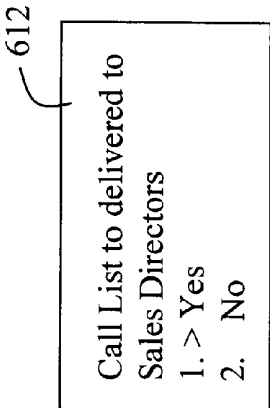
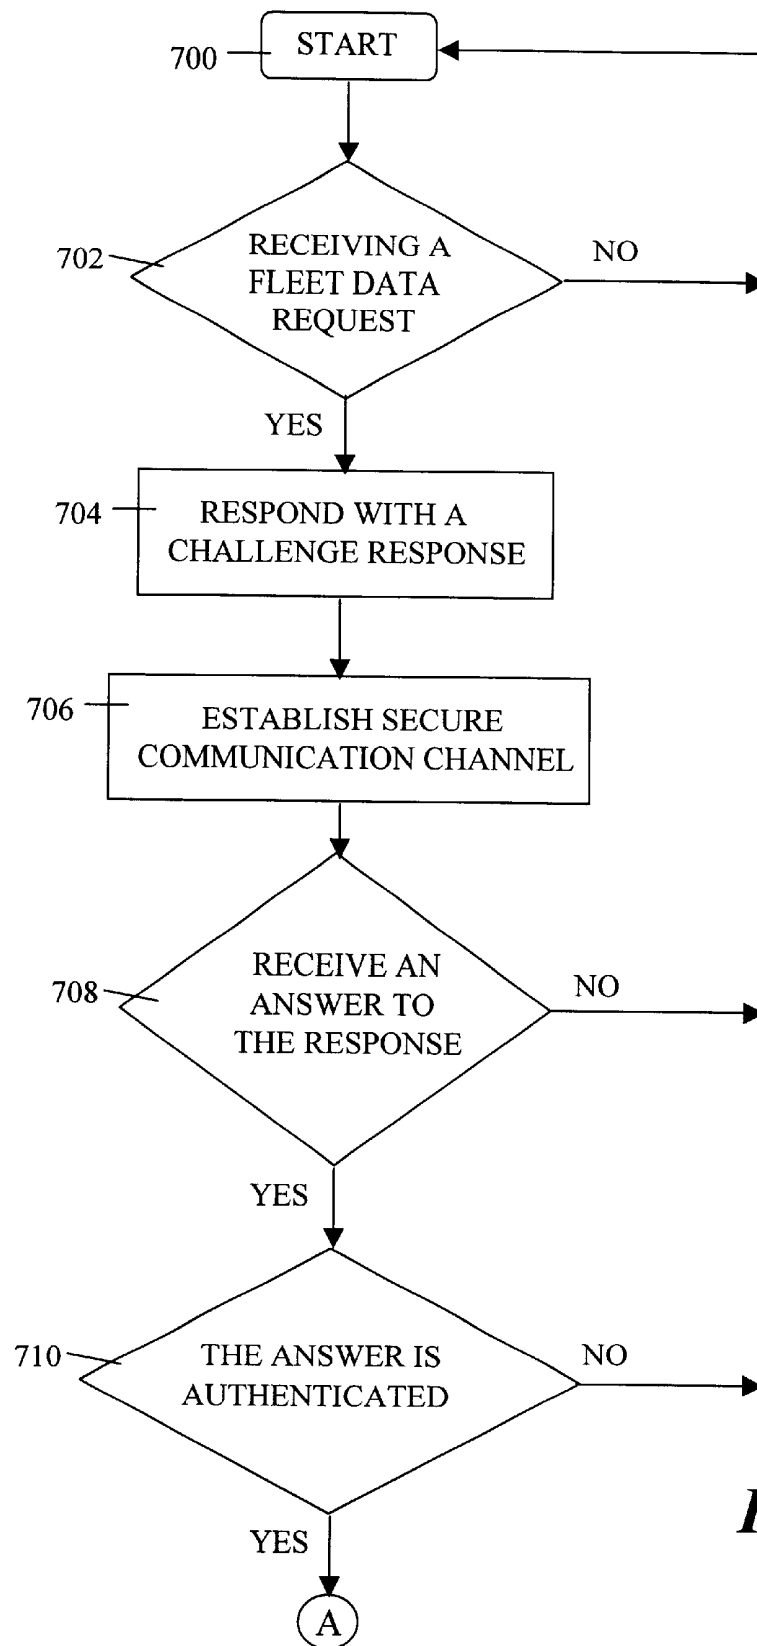
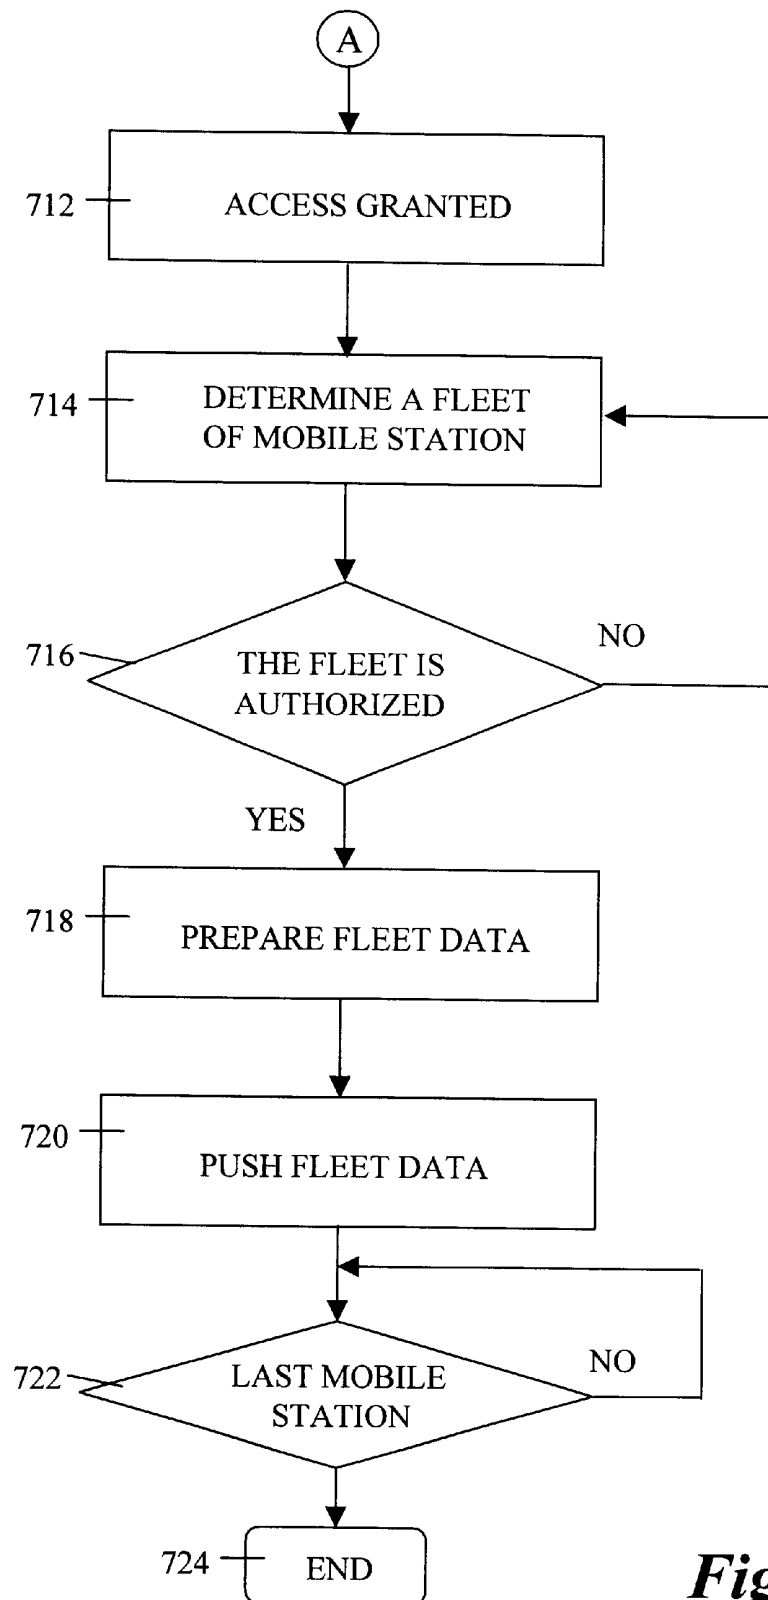


Fig. 6E

Fig. 6C

**Fig. 7A**

**Fig. 7B**

METHOD AND ARCHITECTURE FOR MANAGING A FLEET OF MOBILE STATIONS OVER WIRELESS DATA NETWORKS

BACKGROUND OF THE INVENTION

1. Field of Invention

This invention relates to management of wireless mobile stations and more particularly relates to a method and architecture for managing a selective set of mobile devices or stations via secure communication systems.

2. Description of the Related Art

Two-way interactive communication mobile devices are among the fastest emerging communication devices that enable users to receive, collect, analyze, review and disseminate information as they travel or move about. The new mobile devices combine voice, data, and personal digital assistant (PDA) functionalities into a single portable device that provides not only the convenience of making phone calls but also the capability of accessing a myriad of public and enterprise information services on the Internet from anywhere at anytime. It is evident that the evolution of the mobile devices has been fueled by the demand for immediate access to information and made possible by the convergence of computing and communications technologies.

The essence of the services to the mobile devices provided by service providers (carriers) is the production and dissemination of mobile data including voice and messages over wireless communication networks. Many service providers offer various services through the devices, such as timed delivery of subscribed information, user accessible customer cares and customized group communications. To facilitate convenient uses of the services, the service providers need to set up human-staffed call centers or interactive response systems, allowing users to call in, for example, to inquire account information, request service changes or send specific information to a particular group of users. In a wireless environment, however, the call-in requests and facilities incur tremendous overhead costs to the service providers.

There is, therefore, a great need for a generic solution that provides the convenience of the services but without incurring substantial costs to the service providers. For example, an entity that may be a user or a corporation wants to update a call list to a selective group of the mobile devices so that a group call can be made within the group. Rather than asking a service provider to update the call list every time there is a change to the list, it is desirable for the entity to update and disseminate the list to a selective group of mobile devices through a secure communication means whenever the entity desires. There is a more practical example; a corporation wants to propagate an urgent proprietary message to its sale team on customer sites provided that the team members each have such mobile device. From the business perspective of the corporation, it is preferable or more secure for the corporation to directly broadcast the message to its sales team rather than forwarding the message to the service provider for further distribution. This leads to the need of secure management of mobile devices by an authorized entity over a secure communication means through which the authorized entity can disseminate or push mobile data to a selected group of mobile devices via the infrastructure of a service provider.

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above described problems and has particular applications

to secure management of mobile devices or stations by an authorized entity that may be a carrier, a business, a corporation or an individual. Practically there are many applications that need to immediately distribute information to a number of selective users through the mobile devices. The information, collectively referred to as mobile data or fleet data, may include, but not be limited to, commercial information, proprietary message and group call lists and typically is concerned to certain users. Distinct from existing fleet managing systems for mobile stations, the present invention provides secure means for an authorized entity to control the dissemination of mobile data to a specified group of mobile stations via a carrier infrastructure but without incurring substantial costs to the carrier. Further, by virtue of the present invention, the authorized entity can access the fleet managing systems from anywhere at anytime.

To ensure authorized and authenticated access to the mobile station managing system, according to one aspect of the present invention, the mobile station managing system relies on a series of consecutive transitive trust between pairs of components therein so that the access to the system and data management are always secure. This is provided by using secure communication protocols and multiple verifications and authentication among all the components.

According to one embodiment, the present invention is an architecture for securely managing a plurality of mobile stations, the architecture comprising:

- a carrier infrastructure providing a radio link to the plurality of the mobile stations over a wireless data network using a first communication protocol;
- a fleet managing system coupled to the carrier infrastructure, the fleet managing system comprising a proxy server, the proxy server further comprising an account manager managing a plurality of user accounts, each corresponding to one of the mobile stations; and
- a proxy server module;
- a memory receiving fleet data;
- a provisioning interface providing secure access to the memory;

wherein the provisioning interface receives a request to push the fleet data in the memory to the plurality of the mobile stations, and

wherein the proxy server module pushes the fleet data, via the carrier infrastructure, to the plurality of the mobile stations over the wireless data network after the request is authenticated by the provisioning interface and verified by the account manager.

According to another embodiment, the present invention is a method for securely managing a plurality of mobile stations serviced by a carrier infrastructure, the method comprising:

- sending a request from a provisioning entity to push fleet data to the plurality of the mobile stations;
- receiving a challenge response from a fleet managing system in response to the request;
- accessing the fleet managing system by supplying correct credential information to the challenge response;
- wherein the fleet managing system comprises:
 - an account manager managing a plurality of user accounts, each corresponding to one of the mobile stations;
 - a proxy server module;
 - a memory; and
 - a provisioning interface providing secure access to the memory;

preparing the fleet data to be received in the memory;
determining the plurality of the mobile stations verified by
the account manager with the plurality of the user
accounts; and

executing the request to cause the fleet data pushed by the
proxy server module to the plurality of the mobile
stations.

Accordingly, an important object of the present invention
is to provide secure means for an authorized entity to control
the dissemination of mobile data to a specified group of
mobile stations from anywhere at any time.

Other objects, together with the foregoing are attained in
the exercise of the invention in the following description and
resulting in the embodiment illustrated in the accompanying
drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features, aspects, and advantages of the
present invention will become better understood with regard
to the following description, appended claims, and accom-
panying drawings where:

FIG. 1 shows a schematic representation of a data network
in which the present invention may be practiced;

FIGS. 2A and 2B demonstrates the system architecture of
the fleet managing system of the present invention;

FIG. 3 illustrates an exemplary layout of fleet data rep-
resented in a database used in one embodiment of the present
invention;

FIG. 4 illustrates an exemplary layout of a plurality of
user accounts in a proxy server that services a plurality of
mobile stations, each of the mobile stations corresponding to
one of the user account in the proxy server;

FIG. 5A shows an overview of the fleet managing system
having multilevel transitive trust between pairs of entities;

FIG. 5B shows a different view of FIG. 5A when the
provisioning entity is one of the mobile stations serviced by
the proxy server;

FIGS. 6A–6E depicts, respectively, exemplary displays to
illustrate procedures of executing a fleet data request from
accessing the provisioning entity, answering a challenge
response, accessing fleet data, determining a fleet group
finally to executing the request; and

FIGS. 7A and 7B show a systematic process flowchart of
the fleet managing system according to one embodiment of
the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Notation and Nomenclature

In the following detailed description of the present
invention, numerous specific details are set forth in order to
provide a thorough understanding of the present invention.
However, it will become obvious to those skilled in the art
that the present invention may be practiced without these
specific details. In other instances, well known methods,
procedures, components, and circuitry have not been
described in detail to avoid unnecessarily obscuring aspects
of the present invention.

The detailed descriptions of the present invention in the
following are presented largely in terms of procedures,
steps, logic blocks, processing, and other symbolic repre-
sentations that resemble of data processing devices coupled
to networks. These process descriptions and representations

are the means used by those experienced or skilled in the art
to most effectively convey the substance of their work to
others skilled in the art. The present invention is a method
and architecture for managing a fleet of mobile stations over
wireless data networks. The method along with the archi-
tecture to be described in detail below is a self-consistent
sequence of processes or steps leading to a desired result.
These steps or processes are those requiring physical
manipulations of physical quantities. Usually, though not
necessarily, these quantities may take the form of electrical
signals capable of being stored, transferred, combined,
compared, displayed and otherwise manipulated in a com-
puter system or electronic computing devices. It proves
convenient at times, principally for reasons of common
usage, to refer to these signals as bits, values, elements,
symbols, operations, messages, terms, numbers, or the like.
It should be borne in mind that all of these similar terms are
to be associated with the appropriate physical quantities and
are merely convenient labels applied to these quantities.
Unless specifically stated otherwise as apparent from the
following description, it is appreciated that throughout the
present invention, discussions utilizing terms such as “pro-
cessing” or “sending” or “verifying” or “displaying” or the
like, refer to the actions and processes of a computing device
that manipulates and transforms data represented as physical
quantities within the computing device’s registers and
memories into other data similarly represented as physical
quantities within the computing device or other electronic
devices.

The Preferred Embodiment

Referring now to the drawings, in which like numerals
refer to like parts throughout the several views. FIG. 1
illustrates a schematic configuration in which the present
invention may be practiced. Landnet 100 is a landline
network that may be the Internet, the Intranet and a data
network of other private networks. Coupled to landnet 100
are a personal computer (PC) 110 and a network server 104.
Personal computer 110 may be a Pentium II -based desktop
personal computer. Preferably, personal computer 110 runs
a HyperText Markup Language (HTML) browser, such as
Netscape Navigator from Netscape Communications Cor-
poration (<http://www.netscape.com/>) via landnet 100 using
HyperText Transfer Protocol (HTTP) to access information
stored in network server 104 that may be a workstation from
SUN Microsystems Inc (<http://www.sun.com/>). The infor-
mation stored in network server 104 may be hypermedia
information including fleet data.

As the present invention concerns secure delivery of
information by an authorized entity via a secure communi-
cation system to a selective set of mobile stations or devices,
the fleet data used herein means mobile data or information
transportable in the secure communication system. Further
the selective set of mobile stations is sometimes referred to
as a fleet of mobile stations sharing the same fleet data. The
fleet data may include, but not necessarily limited to, a call
list, alphanumeric messages, priority levels of the fleets,
encryption information, a list of fixed control points and
default values to affect the mobile stations. It will be soon
appreciated that the contents or functions in the fleet data do
not affect the operations of the present invention. One of the
key features in the present invention is the secure delivery of
the fleet data to a desired fleet.

Also shown in FIG. 1 is a private network 120 including
a computer 124 and a server 122, private network 120 is
protected by a firewall 121 protecting resources of the
private network from users on other networks. Private

5

network **120** is typically used in a corporate configuration in which secure information is kept in server **122** and accessible only by computing devices, such as computer **124**, on private network **120**.

Serviced by airnet **102** are a number of two-way wireless interactive communication devices, referred to as mobile stations herein, though only one representation **106** is shown in FIG. 1. Mobile station **106** is one of those two-way interactive communication devices that include, but are not limited to, cellular phones, palm-sized personal assistant devices and Internet-capable appliance controllers and capable of communicating wirelessly with antenna **108** via airnet **102**. For simplicity, antenna **108** also represents a wireless carrier infrastructure that generally comprises a base station and an operations and maintenance center. The base station controls radio or telecommunication links with the mobile stations. The operations and maintenance center comprises a mobile switching center performing the switching of calls between the mobile stations and other fixed or mobile network users. Further the operations and maintenance center manages mobile account services, such as authentication and oversees the proper operation and setup of the wireless network. Each of the hardware components and processes in carrier infrastructure **108** are known to those skilled in the art and not to be described herein to avoid unnecessarily obscuring aspects of the present invention.

Between landnet **100** and airnet **102** there is a server device **114** functioning as a bridge between a landnet and an airnet and generally referring to as a proxy server which is, also referred to as link server or network gateway server or wireless data server. Proxy server **114** may be a workstation or a personal computer. Generally, the communication protocol in airnet **102** is different from that in landnet **100**. Hence, one of the functions proxy server **114** performs is to map or translate one communication protocol to another, thereby mobile station **106** coupled to airnet **102** can communicate with any of the devices coupled to landnet **100** via proxy server **114**.

According to one embodiment, the communication protocol in the Internet **104** is the well known HyperText Transfer Protocol (HTTP) or HTTPS, a secure version of HTTP, that runs on TCP (Transmission Control Protocol) and controls the connection of the HTML web browser in, for example, PC **110** to server **104**, and the exchange of information therebetween. The communication protocol between mobile station **106** and proxy server **114** via airnet **102** is Handheld Device Transport Protocol (HDTP) (formerly known as Secure Uplink Gateway Protocol (SUGP)), which preferably runs on User Datagram Protocol (UDP) and controls the connection of an HDML web browser in mobile station **106**, to proxy server **114**, where HDML stands for Handheld Device Markup Language and used to be called "TIL" (terminal interaction language). HDML, similar to HTML, is a tag based document markup language and comprises a set of commands or statements specified in a card that specifies how information displayed on a small screen **116** of the mobile station **106**. Normally a number of cards are grouped into a deck that is the smallest unit of HDML information that can be exchanged between the mobile station **106** and proxy server **114**. The specifications of HDTP, entitled "HDTP Specification" and HDML, entitled "HDML 2.0 Language Reference" are enclosed and incorporated herein by reference in their entirety.

It should be noted that HDTP is a session-level protocol that resembles HTTP but without incurring the overhead in HTTP and is highly optimized for use in thin devices, such

6

as the mobile stations, that have significantly less computing power and memory than that in a desktop personal computer. Further it is understood to those skilled in the art that UDP does not require a connection to be established between a client and a server before information can be exchanged, which eliminates the need of exchanging a large number of packets during session creation between a client and a server. Exchanging only a very small number of packets during a transaction to effectively interact with a landline device is one of the desired features for a mobile station with very limited computing power and memory.

FIGS. 2A and 2B illustrate block diagrams of the essential components in the present invention. Referring now to FIG. 2A, there is shown functional block diagrams of fleet server **200** and proxy server **230** in the present invention according to one embodiment thereof. Fleet server **200** and proxy server **230**, which represent servers **104** and **114** of FIG. 1, respectively, are typically a server computer and communicate directly or through a landnet. To be more specific, fleet server **200** and proxy server **230** function independently and can be physically, separately and remotely located or in one server computer depending on actual implementation preference without affecting the operations of the disclosed invention herein.

When fleet server **200** and proxy server **230** are physically and separately located, both, coupled to the landnet, can communicate using a mutually agreed communication protocol, e.g. HTTPS. When fleet server **200** and proxy server **230** are implemented in a single server computer, both are directly coupled. Hence, communication path **220** may represent the landnet or a direct communication path depending on the actual configurations of fleet server **200** and proxy server **230**. The following description is based on fleet server **200** and proxy server **230** being separate apparatus but implies no limitations to the particular configurations thereof.

Fleet server **200** may be viewed as a gatekeeper through which it is possible to make a change to a fleet database or assign a particular set of data and then push the appropriate changes or set of data to a fleet of mobile stations. Generally fleet server **200** comprises a provisioning interface **202**, a database **204**, memory **206** and fleet server module **208**.

Database **204** comprises typically a plurality of sets of fleet data information including information that provides additional or different utility to the mobile stations if the data is received therein. FIG. 3 depicts an exemplary list of fleet data **300** used to describe FIGS. 2A and 2B according to one embodiment. Index **302** shows a list of available request entries that are desirable for certain mobile stations. For example, entry **310** comprises a call list as fleet data **304**. When a fleet of mobile stations receive the call list, a group call is made possible within the fleet of mobile stations. Further entry **310** comprises a pointer **308** that may point to additional fleet data located at other place. Using a separate location for additional data is a practical implementation when the fleet data exceeds a certain size. Optionally, entry **310** may contain device info **306** that may indicate a list of possible networks or mobile stations that can receive the fleet data in entry **310**. As understood by those skilled in the art, certain fleet data, especially those affecting the operation of a mobile station, may not be pushed to a set of restrictive mobile stations. Other info **312** may include authorization or authentication information **314** including who, when or how a particular set of fleet data may be accessed or simply a list of authorized entities. To be more specific, a business has a product promotion that is only available to certain users at a specific time in a specific geographic area. To distribute the

promotion information, the business must be in the list of authorized entities so as to be able to access the fleet managing system. The promotion information may have been pre-edited and stored in fleet data **304** or created on demand. Device information **306** may provide a list of mobile stations that the promotion information should be distributed to. Additionally, pointers in **316** provide means to access additional information pertinent to a set of particular fleet data. It should be understood that fleet data table **300** is demonstrated as an example, there are many ways and varieties of data formats of actual fleet data, depending upon actual implementation preference in a specific configuration. In addition, the fleet data may be created on demand. That means the fleet data can be created and then edited when needed. As described above, the contents in actual fleet data or formats thereof do not affect the operations of the present invention. One of the key features in the present invention is that a set of fleet data can be securely obtained and pushed to a selective set of mobile stations such that the mobile stations upon receiving the fleet data will act accordingly.

Returning to FIG. 2A, compiled and linked version of a program of the present invention is loaded in and works as fleet server module **208**. Memory **206** provides necessary space for fleet server module **208** to function as designated. Provisioning interface **202** provides necessary security means for accepting a request from a provisioning entity **212** to push a set of fleet data to a fleet of mobile stations. In other words, a user sends the request, or fleet data request, from provisioning entity **212**, the request prompts a challenge response from provisioning interface **202**. To proceed the request, the user must answer the challenge response before provisioning entity **212** is integrated into the fleet managing system.

According to one embodiment, fleet server **200** is a part of a carrier infrastructure and may be conveniently accessed by a fleet manager terminal coupled directly to fleet server **200**. In this case, the provisioning entity is the fleet manager terminal. Provisioning interface **202** returns a challenge for the entry of a set of predefined credential information, such as a username or a corresponding password, when the fleet data request to a fleet of mobile stations is made from the fleet manager terminal. If the entered credential information matches the predefined credential information that are preferably stored in memory **206**, the request is permitted. An authorized user may thus use the fleet manager terminal to proceed with the request. The procedures may include determination of the desired mobile stations in the fleet, selection of desired fleet data and subsequently executions of the request by transferring or pushing the desired fleet data to the fleet of the desired mobile stations.

According to another embodiment, the fleet data request is made from a computing device coupled to a landnet **220**. The computing device may be a desktop computer **110** of FIG. 1. Given an IP address of fleet server **200**, a request to establish a communication session to fleet server **200** can be made by the computing device using HTTPS. Preferably, the computing device runs an HTML browser that permits a link to fleet server **200** with the IP address. Upon the communication session being established, provisioning interface **202** returns a challenge response for the entry of a set of predefined credential information, an authorized user then must enter a set of correct credential information so as to proceed with the request to make the appropriate changes to the fleet of mobile stations.

According to still another embodiment, the fleet data request to a fleet of mobile stations is made from a computing device in a private network. The computing device

may be desktop computer **124** of FIG. 1 and the private network may represent local network **120**. Further coupled to the private network is a database server, such as **122** of FIG. 1, which comprises fleet data preferred and controlled by the private network or a private enterprise that owns the private network. As described before, this configuration is typically for enterprise-level management of fleet of mobile stations and the fleet data, typically sensitive or proprietary, can be initiated and pushed to the fleet of mobile stations concerned by the private entity via the carrier infrastructure. In other words, the fleet data can be only accessed by the designated computing device or other computing devices in the private network. The fleet data is then transferred to fleet server **200** via provision interface **202** that must clear the authorization of such data transfer by verifying credential information supplied from the private network. To ensure that the fleet data is securely transferred, the communication protocol between the database server and fleet server **200** is typically HTTPS that encrypts all the data in transit.

As shown in the figure, both fleet server **200** and proxy server **230** comprise an HTTP interface **210** and **222**, respectively. It is understood that the HTTP interfaces are only needed when fleet server **200** and proxy server **230** communicate over a landnet using HTTP or HTTPS. When the communication protocol is other than HTTP or HTTPS, HTTP interface **210** and **222** can be readily replaced with other appropriate interfaces or simply vanished if fleet server **200** and proxy server **230** are in direct communication.

Server device **230** comprises a UDP interface **224** that couples to wireless network **240** via a carrier's infrastructure (not shown in the figure), a proxy server module **226** coupled between HTTP interface **222** and UDP interface **224**, an account manager **228** and a plurality of user accounts. It should be noted that Internet **220** and wireless network **240** correspond to, respectively, landnet **100** and airnet **102** of FIG. 1 according to one embodiment of the present invention. Further, it will be appreciated that the principles of the present invention can be used with a wide variety of wireless networks. Examples of the wireless networks include Cellular Digital Packet Data (CDPD), Global System for Mobile Communications (GSM), Code Division Multiple Access (CDMA) and Time Division Multiple Access (TDMA).

Server module **226** performs traditional server processing as well as protocol conversion processing from one communication protocol to another communication protocol. According to the present embodiment, the protocol conversion processing, sometimes implemented in a separate module referred to as a mapper herein, includes protocol conversion between UDP and HTTP, wherein the conversion is a data mapping relationship. It is understood to those skilled in the art that UDP interface **224** can be readily replaced by other interface module when the wireless network **240** uses another communication protocol.

Working with server module **226**, account manager **228** manages a plurality of user accounts **214** for all the mobile stations serviced by server device **240**. FIG. 4 shows an exemplary structure **400** of the user accounts **214**. Each of the mobile stations is assigned a device ID **402**. Device ID **402** can be a phone number of the device or a combination of an IP address and a port number, for example: 204.163.165.132:01905 where 204.163.165.132 is the IP address and 01905 is the port number. The device ID is further associated with a subscriber ID **404** that is typically initiated and authorized by a carrier in proxy server device **240** as part of the procedures to activate a subscriber account for a mobile station. the subscriber ID may take the form of,

for example, 861234567-0905_pn.mobile.att.net by AT&T Wireless Service, it is nevertheless a unique identification to the particular mobile station. In other words, each of mobile stations serviced by proxy server **250** has a unique device ID that corresponds to a respective user account therein. Preferably, each user account is also assigned a group ID **406** to facilitate the fleet management. For example, mobile stations belonging to a corporation subscriber are all assigned to a same group ID "C". When the corporation subscriber decides to update certain data to its mobile stations, the group ID "C" may be embedded in the data, thereby mobile stations with the same group ID are affected and the rest of mobile stations serviced by proxy server **230** are intact. However, it should be pointed out that the group ID is not necessary but may make the invention work more efficiently. There are many ways to push data to a selective group of mobile stations by using, for example, the device IDs or the subscriber IDs.

Each record in data structure **400** further comprises user info **408**. User info **408** may include the account configuration information, for example, device ID "6508171453" is a mobile phone that is pre-configured for a CDPD network and, probably, may be provided with an option to switch to a GSM network if necessary. Further user info **408** may include pointers or linkages **410** to other account related information, such as encryption schemes, call plan and customer service information. Using pointers or linkages **410** eliminates the need of having all the information in one place. Optionally, a special code may be placed in user info **408** of data structure **400** for a special mobile station. With the special code, the mobile station may become a mobile station manager terminal to cause fleet server **200** to push a set of fleet data to a fleet. The detailed operations with the mobile station manager terminal will be described below when appropriate.

Although it is presented herein that account structure **400** is located in proxy server **230**, it is generally understood that the user accounts may be actually stored in another network server linked to proxy server **230**. In other words, the user accounts can be kept in a database that is physically placed in any computing device coupled to proxy server **230** and can be collected or fetched therefrom. Hence the scope of the present invention is not limited to proxy server that must have user accounts physically therein.

Returning now to FIG. 2B, there is shown a mobile station **250** in communication with proxy server **230** via wireless data network **240**. The following description is focused on mobile station **250** and its associated account in proxy server **230**. However, it shall be appreciated by those skilled in the art that the description is equally applied to all mobile stations in communication with proxy server **230**.

Mobile station **250** includes a UDP interface **252** that couples to carrier network **240** via a Radio Frequency (RF) transceiver (not shown in the figure) to receive incoming and outgoing data signals. Device identifier (ID) storage **254** supplies a device ID to UDP interface **252**. The device ID identifies a specific code that is associated with mobile station **250** and directly corresponds to the device ID in the user account provided in proxy server **250**. In addition, mobile station **250** includes a client module **256** that performs many of the processing tasks performed by mobile station **250** including establishing a communication session with proxy server **230** via carrier network **240**, requesting and receiving data from carrier network **240**, displaying information on a display screen **260** thereof, and receiving user input from keypad **262** as well. The client module **256** is coupled to UDP interface **252** for the establishment of a

communication session and the requesting and receiving of data. Additionally, the client module **256** operates, among other things, a browser **264**, commonly referred to as micro-browser, requiring much less computing power and memory than the well-known HTML browser does. The micro-browser is, preferably, a Handheld Device Markup Language (HDML) micro-browser from phone.com, Inc. (formerly Unwired Planet, Inc.) located at 800 Chesapeake Drive, Redwood City, Calif. 94063. Additional details on accessing a (proxy) server device from a mobile station including a (micro) browser is described in commonly assigned U.S. patent application Ser. No. 08/570,210 now U.S. Pat. No. 5,809,415 entitled "METHOD AND ARCHITECTURE FOR AN INTERACTIVE TWO-WAY DATA COMMUNICATION NETWORK" by Alain Rossmann, which is hereby incorporated by reference in its entirety.

Referring now to FIG. 5A, there is shown an overview of the fleet managing system **500** according to one embodiment of the present invention. FIG. 5 shall be understood in conjunction with FIGS. 1, 2A and 2B. As indicated above, provisioning entity **502** can be a fleet management terminal, a computing device, a mobile station or an electronic device providing access means to fleet server **506**.

According to one embodiment, provisioning entity **502** is a fleet management terminal that is coupled directly to fleet server **506**. The communication **504** between the terminal and fleet server **506** is private and the security of the information exchange therebetween can be guaranteed. According to another embodiment, provisioning entity **502** is a computing device coupled to fleet server **506** via the Internet using a communication protocol, preferably a secure data transfer protocol, such as HTTPS. Further provisioning entity **502** can be remotely located with respect to fleet server **506** and still access fleet server **506** via the Internet. Using the computing device, an authorized user may send a request to push a set of fleet data, either located in a database communicating with fleet server **506** or edited on demand, to a fleet of mobile stations of interest. It is understood that the communication **504** between the computing device and fleet server **506** is secure over the Internet using HTTPS. It is a similar case, as described before, communication **504** is secure when provisioning entity **502** is a private server in a private network through which a computing device can transfer a set of private fleet data in the private server to fleet server **506** via the Internet.

Nevertheless, provisioning entity **502** may be a mobile station as well. As indicated above, a request to push fleet data may be made in a mobile station. To prevent from unauthorized executing such request from any mobile stations, a mobile station can be specially configured to have the commanding power. For example, a corresponding user account, in proxy server **512** of the commanding mobile station is assigned a special code that triggers an entry to access a command to cause a selective set of fleet data to be pushed to a fleet of mobile stations.

To be more specific, referring now to FIG. 5B, there is shown a request to push fleet data made from commanding mobile station **520** which represents provision entity **502** of FIG. 5A. Commanding mobile station **520** sends a request message to proxy server **510** to establish a communication session therewith. The request message typically comprises an IP address of proxy server **510**, for example, www.xyz.com. The request message further includes a device ID of commanding mobile station **520** and is verified by an account manager with a user account database (both shown in FIG. 2A) in proxy server **510** when the request message is received therein. If the device ID is matched with a

corresponding one in the user account, commanding mobile station **520** is thus authorized. The account manager further examines if commanding mobile station **520** has the special commanding power by looking up the set-up configuration information. Meanwhile commanding mobile station **520** and proxy server **510** exchange encrypt keys and authenticate each other to generate a session key according to a mutually acceptable encryption scheme such that the communication session established between commanding mobile station **520** and proxy server **510** is secure. Additional detailed description of establishing a secure communication session between a mobile station and a proxy server is described in commonly assigned U.S. patent application Ser. No. 08/966,988 now allowed entitled "Method and System for Secure Lightweight Transactions in Wireless Data Networks" by Hanqing Liao et al, which is hereby incorporated by reference in its entirety.

With the established secure communication session and the permission to access fleet data, commanding mobile station **520** allows a user to navigate to the fleet data in fleet server **506** using, for example, the micro-browser from Unwired Planet. Upon executing a predefined key in commanding mobile station **520**, the fleet data is fetched therefrom by the proxy server module and pushed to a fleet of mobile stations.

To be even more specific, FIGS. 6A-6E illustrate a sequence of exemplary displays from commanding mobile station. Display **602** shows a list of options that a user may access. It is assumed that the user decides to send a call list to a group of sales directors to have a group call at a specific time. By moving cursor **604** to "managing a fleet" and pressing a predefined key, such as a "#" key in a phone keypad existing in most of the cellular phones, a request to establish a secure communication session is made therefrom. As described above, the request may include an IP address to the proxy server that services the commanding mobile station. The commanding mobile station then is responded with a challenge response requiring a username or a password as a new display **606** in FIG. 6B. Upon entering the correct username and password, the authentication process between the commanding mobile station and the proxy server is initiated till a secure communication session is fully established or ensured. In other words, the commanding mobile station and the proxy server now trust each other. In FIG. 6C, display **608** shows a list of pre-prepared information. Generally the commanding mobile station is not equipped with a full functional keyboard and hence is not used for editing lengthy information. Of course, the commanding mobile station, just like any computing devices coupled to the Internet, can certainly create and edit a new message if desired or equipped with necessary convenient input/editing means. Nevertheless, among the pre-prepared information, the user chooses the first item "Call List" as indicated by the cursor **604**. After pressing the predefined key, a next display **610** in FIG. 6D shows a list of pre-prepared groups to which the selected pre-prepared data is to be disseminated. It has been described that there are many ways to identify a group of mobile stations including the use of the group ID, device ID and subscriber ID. The list of pre-prepared groups means that a certain number of mobile stations have been grouped into an identity, such as "a sales group". It is understood that there might be some overlapping, which means some mobile stations on one list may be on another list. It is preferable to have one list selected at one time. According to FIG. 6D, the user has selected "sales directors", that may mean the selected pre-prepared data "Call List" will be delivered to

the mobile stations used by each of the sales directors. FIG. 6E shows a display **612** for a confirmation from the user. Once the user executes the "Yes" choice, "Call List" will be pushed to "Sales Directors".

It is understood to those skilled in the art that FIGS. 6A-6E are only for illustrative purpose for the commanding mobile station that is practically no different from other mobile stations. In other words, each of the mobile stations may be configured to function as the commanding mobile station. Also it is understood that FIGS. 6A-6E may be applied to displays by the landline computing devices as well.

Returning now to FIG. 5A, it is now appreciated that communication path **504** between provisioning entity **502** and fleet server **506** can be always made secure. Once provisioning entity **502** is authorized by fleet server **506**, provisioning entity **502** can proceed to request to push a set of fleet data via the proxy server module to a fleet of mobile stations.

Similarly, communication path **508** between fleet server **506** and proxy server **510** is always secure. Typically, proxy server **510** is in a carrier infrastructure. If fleet server **506** is also in the carrier infrastructure, then communication path **508** is guaranteed secure. However, if fleet server **506** is remotely located with respect to but coupled to proxy server **510**, both proxy server **510** and fleet server **506** run a secure communication protocol, such as HTTPS, thus data transferred between proxy server **510** and fleet server **506**, are always secure.

As described indirectly above, communication between proxy server **510** and mobile station **514** can be always secure because a pair of encryption keys are exchanged therebetween to establish a secure session. In other words, each mobile station establishes a secure communication session respectively with proxy server **510** and all data transferred in the established sessions are respectively and independently encrypted according to each session encryption key created therefor. The detailed descriptions of pushing data from a proxy server (device) to a mobile station (device) are contained in commonly assigned U.S. patent application Ser. No. 09/071,329, now allowed, "Method and System for Integrating Narrowband and Wideband Data Transports" by Stephen S. Boyle, et al, which is hereby incorporated by reference in its entirety.

It can be appreciated by now that the fleet managing system operates a secure communication path from provisioning entity **502** to mobile station **514** by maintaining a series of transitive trusts. That means, if a trusts that a communication comes from b and b trusts that a communication comes from c, then a can trust that a communication come from c if b asserts that the communication does come from c. It is, consequently, only necessary to establish a trust between pairs of entities in the fleet managing system to create a series of transitive trusts across the system. Thus in this architecture, if a trust is respectively established between the mobile stations and the proxy server; between the proxy server and the fleet server; and between the fleet server and each provisioning entity, then the entire system can be trusted.

Referring now to FIGS. 7A and 7B, there are depicted a systematic data processing flowchart of the fleet managing system. The flowchart should be understood in conjunction with the previous figures. At **702**, the fleet managing system receives a fleet data request at the provisioning interface. As described before, the fleet data request may comprises an IP address or fleet data depending on the actual system con-

13

figuration and comes from a provisioning entity. The request generally causes an establishment of a secure communication path or session between the provisioning entity and the provisioning interface at 704. Under the secure communication environment, the provisioning interface responds with a challenge response that requires credential information from the provisioning entity at 706.

At 708, an answer, i.e. credential information, from the provisioning entity to the challenge response is expected before the provisioning interface acts further. At 710, the received credential information is verified by a comparison against corresponding predefined credential information. If there is a disagreement or mismatch between the supplied credential information and predefined credential information, the original request from the provisioning entity is discarded otherwise a trust is therefore established between the provisioning entity and the provisioning interface. At 712, the fleet data request from the provisioning entity is granted. In other words, the provisioning entity is now integrated into or a part of the fleet managing system.

At 714, a user of the provisioning entity can proceed to prepare the execution of pushing fleet data to a fleet of mobile stations by first determining the members in the fleet. For example, the user may use a predefined list or create a new list by using the device ID of each of the mobile stations of concern. At 716, the selected mobile stations are determined if all are authorized and serviced by the proxy server. Typically, the selected mobile stations are examined against their corresponding user accounts. If it is found that one of the selected mobile stations does not correspond to one of the user accounts, the user will be required to reenter the correct information to rectify the mobile stations in the fleet. At 718, the user is provided to prepare the fleet data As described before, the user may choose one from a list of pre-prepared messages or create/edit a new one. At 720, the request to push the fleet data to the fleet of mobile stations is executed by pressing a predefined key. The fleet data is pushed out, respectively and sequentially, to each of the mobile stations in the fleet at 722.

The present invention has been described in sufficient detail with a certain degree of particularity. It is understood to those skilled in the art that the present disclosure of embodiments has been made by way of examples only and that numerous changes in the arrangement and combination of parts may be resorted without departing from the spirit and scope of the invention as claimed. Accordingly, the scope of the present invention is defined by the appended claims rather than the forgoing description of embodiments.

What is claimed is:

1. An architecture for securely managing a plurality of mobile stations, said architecture comprising:

- a carrier infrastructure providing a radio link to the plurality of the mobile stations over a wireless data network using a first communication protocol;
 - a fleet managing system coupled to said carrier infrastructure, said fleet managing system comprising a proxy server, said proxy server further comprising an account manager managing a plurality of user accounts, each corresponding to one of the mobile stations; and
 - a proxy server module;
 - a memory receiving fleet data;
 - a provisioning interface providing secure access to said memory;
- wherein said fleet managing system further comprises a fleet server including said memory and said provision-

14

ing interface, said fleet server is grouped to said proxy server over a landnet using a second communication protocol;

wherein said provisioning interface receives a request to push said fleet data in said memory to the plurality of the mobile stations, and

wherein said proxy server module pushes said fleet data, via said carrier infrastructure, to the plurality of the mobile stations over said wireless data network after said request is authenticated by said provisioning interface and verified by said account manager.

2. The architecture as recited in claim 1, wherein said proxy server module comprises a mapper performing protocol mapping from said first communication protocol to said second communication protocol and from said second communication protocol to said first communication protocol.

3. The architecture as recited in claim 2, wherein said second communication protocol is a secure data transfer protocol.

4. The architecture as recited in claim 2, wherein said second communication protocol is Secure HyperText Transfer Protocol (HTTPS).

5. The architecture as recited in claim 2, said architecture further comprises a provisioning entity from which said request is originated.

6. The architecture as recited in claim 5, wherein said provisioning entity is a computing device coupled directly to said fleet server, said provisioning entity being prompted with a challenge response for credential information when said request is received at said provisioning interface.

7. The architecture as recited in claim 5, wherein said provisioning entity is a computing device coupled to said fleet server over said landnet using said second communication protocol, said provisioning entity being prompted with a challenge response for credential information when said request is received, through said landnet, at said provisioning interface.

8. The architecture as recited in claim 5, wherein said provisioning entity is a computing device coupled to a private server comprising private fleet data, said private server communicating said fleet server over said landnet using said second communication protocol, said computing device causing said private fleet data in said private server to be transferred, over said landnet, to said memory in said fleet server.

9. The architecture as recited in claim 8, wherein said proxy server module pushes said private fleet data from said fleet server to the plurality of the mobile stations upon said provisioning entity authenticating said private fleet data.

10. The architecture as recited in claim 5, wherein said provisioning entity is a commanding mobile station coupled to said proxy server over said wireless data network.

11. The architecture as recited in claim 10, wherein said commanding mobile station comprises a device identification.

12. The architecture as recited in claim 11, wherein said commanding mobile station is granted an access to said managing system when said device identification is verified by said account manager with said plurality of said user accounts, said commanding mobile station executing said request that causes said fleet data to be pushed to the plurality of the mobile stations.

13. The architecture as recited in claim 12, wherein said commanding mobile is one of the plurality of the mobile stations.

14. The architecture as recited in claim 5, wherein said provisioning entity provides access to said managing system

15

so that said fleet data and the plurality of the mobile stations can be determined therefrom.

15. The architecture as recited in claim 14, wherein said proxy server module verifies respectively each of the plurality of the mobile stations with said plurality of said user accounts.

16. A method for securely managing a plurality of mobile stations serviced by a carrier infrastructure, said method comprising:

10 sending a request from a provisioning entity to push fleet data to the plurality of the mobile stations;

receiving a challenge response from a fleet managing system in response to said request;

accessing said fleet managing system by supplying correct credential information to said challenge response; wherein said fleet managing system comprises:

an account manager managing a plurality of user accounts, each corresponding to one of the mobile stations;

a proxy server module;

a memory; and

a provisioning interface providing secure access to said memory;

25 preparing said fleet data to be received in said memory;

determining the plurality of the mobile stations verified by said account manager with said plurality of said user accounts; and

30 executing said request to cause said fleet data pushed by said proxy server module to the plurality of the mobile stations.

17. The method as recited in claim 16, wherein said fleet managing system is secure with a series of consecutive transitive trusts between said provisioning entity and said fleet server, said fleet server and said proxy server as well as said proxy server and each of the plurality of the mobile stations.

18. The method as recited in claim 16, wherein said fleet managing system comprises a proxy server and a fleet server, said proxy server and said fleet server securely coupled, wherein said proxy server comprises said account manager and said proxy server and wherein said fleet server comprises said memory and said provisioning interface.

19. The method as recited in claim 18, wherein said provisioning interface in said fleet server is securely coupled to said provisioning entity.

16

20. The method as recited in claim 19, wherein said proxy server is securely respectively coupled with each of the plurality of the mobile stations.

21. The method as recited in claim 16, wherein said request comprises a link request to establish a secure communication session with said provisioning interface and an IP address of said provisioning interface.

22. The method as recited in claim 21, wherein said provisioning entity operates a browser, said browser using a secure communication protocol, by said IP address of said provisioning interface, to establish said secure communication session with said provisioning interface.

23. The method as recited in claim 22, wherein said accessing said fleet managing system by supplying correct credential information to said challenge response comprises:

supplying said correct credential information upon receiving said challenge response;

verifying said correct credential information with pre-defined credential information in said provision interface; and

integrating said provisioning entity to said fleet managing system so that a user can access said fleet managing system through said provisioning entity.

24. The method as recited in claim 23, wherein said preparing said fleet data to be received in said memory comprises navigating to said fleet data using said browser.

25. The method as recited in claim 24, wherein said determining the plurality of the mobile stations verified by said account manager with said plurality of said user accounts comprising:

grouping the plurality of the mobile stations serviced by said proxy server by using an identification of each of the plurality of the mobile stations; and

associating said fleet data with each of the plurality of the mobile stations.

26. The method as recited in claim 25, wherein said executing said request to cause said fleet data pushed by said proxy server module to the plurality of the mobile stations comprises:

pushing said fleet data by said proxy server, respectively and individually, to each of the plurality of the mobile stations over a wireless data network using a wireless communication protocol.

* * * * *