
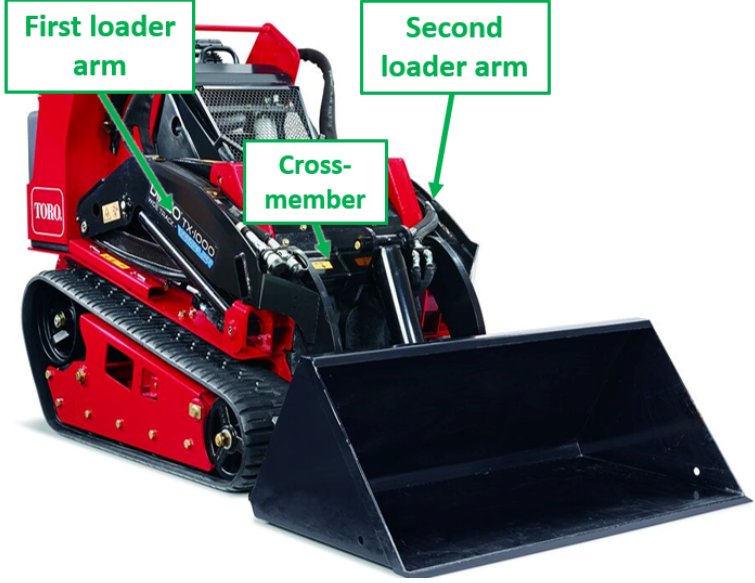


U.S. Patent No. 11,465,891
 Comparing the Toro TX1000 to Independent Claim 1


Claim 1	Toro TX1000
<p>1. A loader apparatus configured for standing operator control and comprising:</p>	
<p>a loader adapted to carry a tool, the loader being moveable between a down position and a vertically raised position,</p>	



<p>the loader comprising: a first loader arm; and second loader arm; and at least one cross-member that extends from the first loader arm to the second loader arm;</p>	 <p>First loader arm</p> <p>Second loader arm</p> <p>Cross-member</p>
<p>a loader support having a first side and a second side, the loader being free from direct attachment to the loader support;</p>	 <p>Loader</p> <p>Free from direct attachment</p> <p>Loader support first side</p> <p>Loader support second side</p>

a first actuator for tilting of a tool connected to the loader;

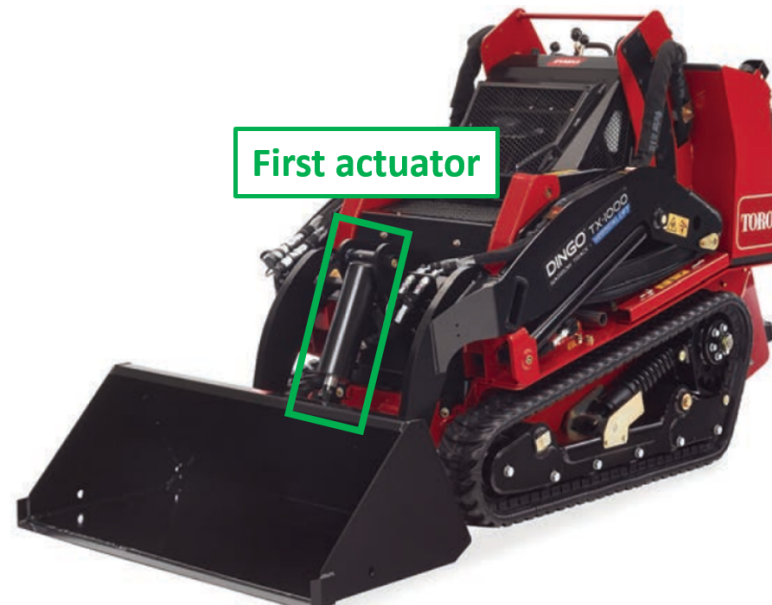


a first linkage connected to the first side of the loader support and connected to the loader, the first linkage being pivotal relative to the first side of the loader support;

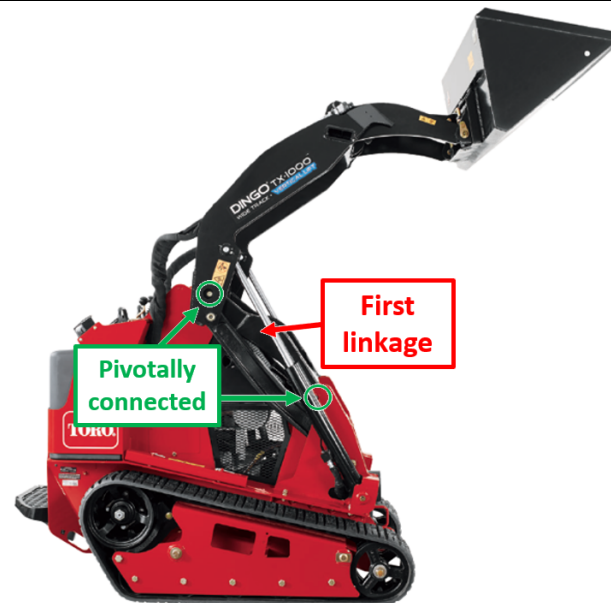
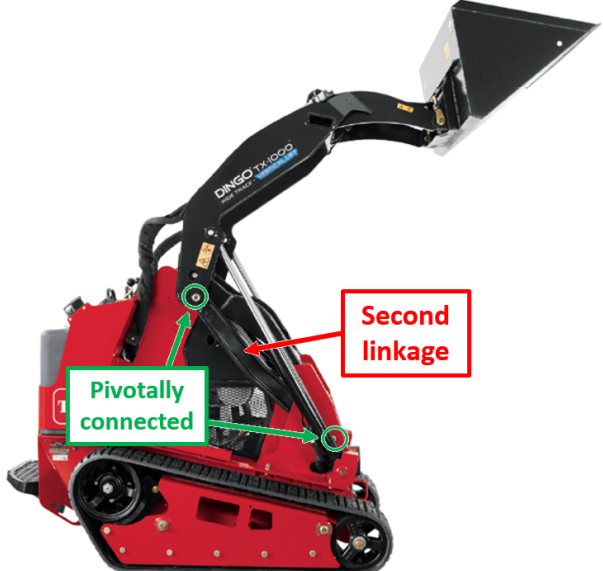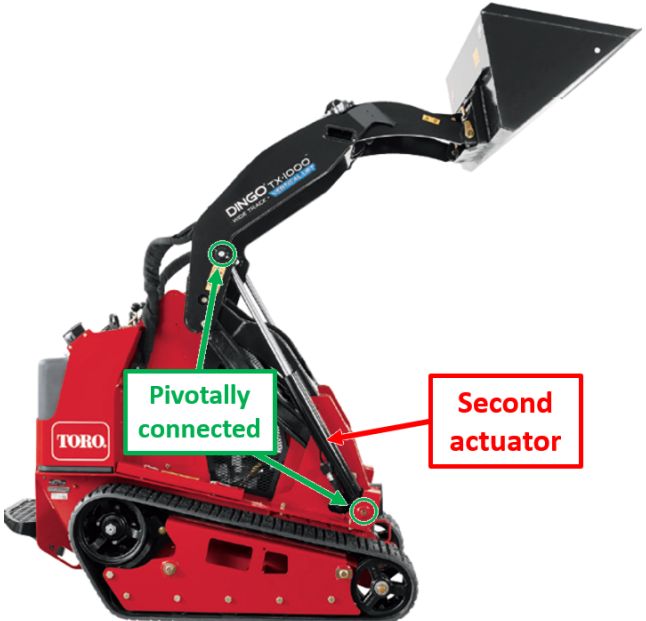
<p>a second linkage connected to the first side of the loader support and connected to the loader, the second linkage being pivotal relative to the first side of the loader support;</p>	 <p>The diagram shows a red tracked loader with a black boom and bucket. A red box labeled "Second linkage" points to a linkage arm connecting the boom to the loader's frame. A green box labeled "Pivotaly connected" points to the pivot points of this linkage.</p>
<p>a second actuator for raising the loader, the second actuator being connected to the loader support and connected to the loader, the second actuator being directly attached to the loader, the second actuator being pivotal relative to at least the first side of the loader support;</p>	 <p>The diagram shows the same red tracked loader. A red box labeled "Second actuator" points to a hydraulic cylinder connected between the boom and the loader's frame. A green box labeled "Pivotaly connected" points to the pivot points of the actuator.</p>

<p>a control station having operator controls for propelling the loader apparatus forward and for raising and lowering the loader; and</p>	
<p>an operator platform for standing operation of the operator controls of the control station;</p>	

a drive mechanism for propelling the loader apparatus over a supporting surface, at least a portion of the operator platform being disposed rearward of the drive mechanism relative to a longitudinal axis of the loader apparatus; and

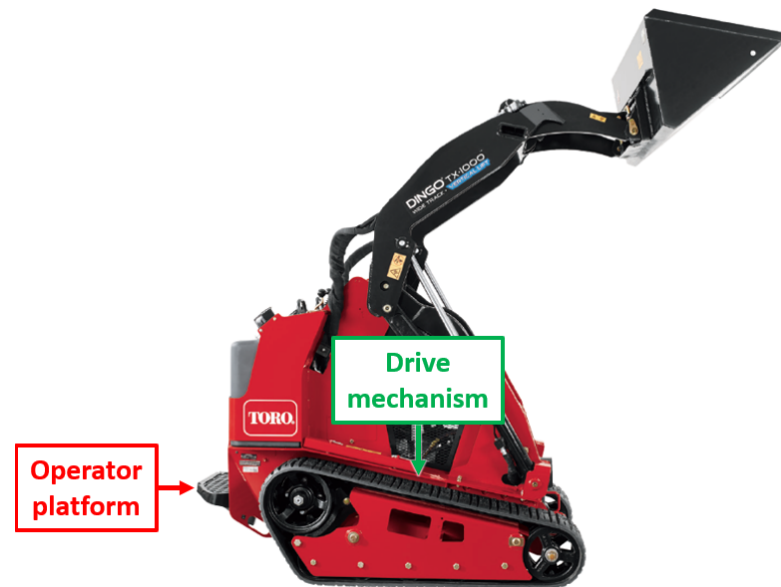

wherein the loader apparatus does not include an operator's seat.

