


U.S. Patent No. 11,465,891
 Comparing the Vermeer CTX50 to Independent Claim 1

Claim 1	Vermeer CTX50
<p>1. A loader apparatus configured for standing operator control and comprising:</p>	
<p>a loader adapted to carry a tool, the loader being moveable between a down position and a vertically raised position,</p>	<div style="display: flex; justify-content: space-around;">   </div>

the loader comprising:
a first loader arm; and
second loader arm; and at
least one cross-member that
extends from the first loader
arm to the second loader
arm;

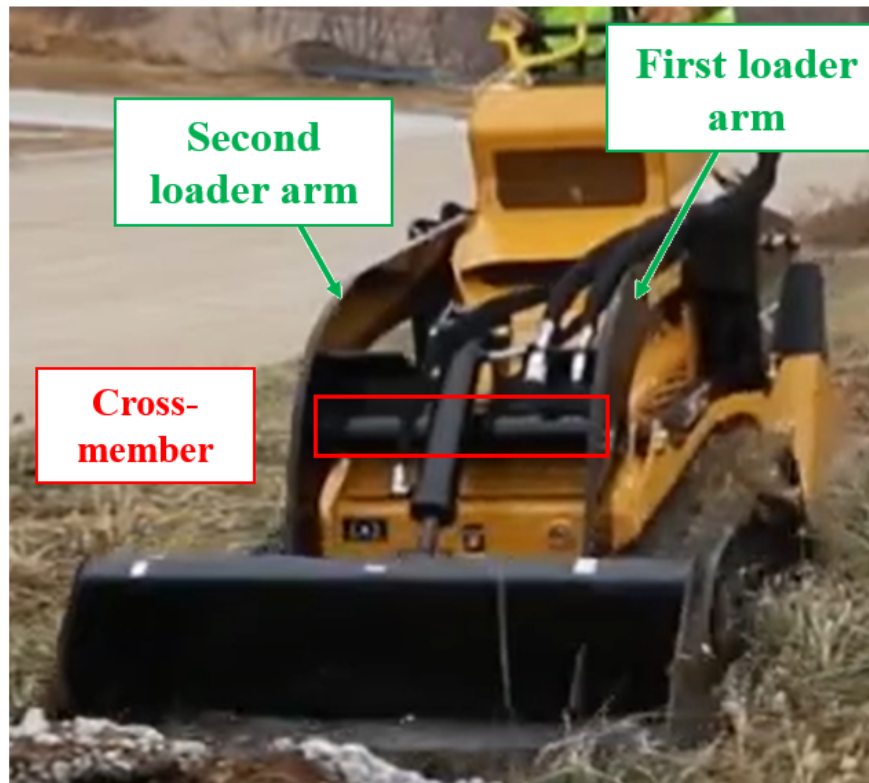

a loader support having a first side and a second side,




**Loader support
first side**



**Loader support
second side**

<p>the loader being free from direct attachment to the loader support;</p>	
<p>a first actuator for tilting of a tool connected to the loader;</p>	

a first linkage connected to the first side of the loader support and connected to the loader, the first linkage being pivotal relative to the first side of the loader support;

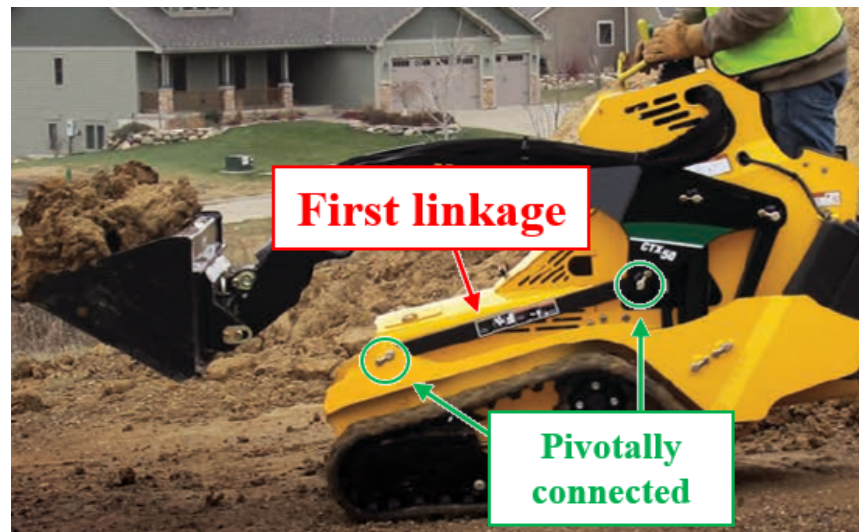

a second linkage connected to the first side of the loader support and connected to the loader, the second linkage being pivotal relative to the first side of the loader support;



a second actuator for raising the loader, the second actuator being connected to the loader support and connected to the loader, the second actuator being directly attached to the loader, the second actuator being pivotal relative to at least the first side of the loader support;



a control station having operator controls for propelling the loader apparatus forward and for raising and lowering the loader; and



an operator platform for standing operation of the operator controls of the control station;



a drive mechanism for propelling the loader apparatus over a supporting surface, at least a portion of the operator platform being disposed rearward of the drive mechanism relative to a longitudinal axis of the loader apparatus; and



wherein the loader apparatus does not include an operator's seat.

