



US010199072B2

(12) **United States Patent**
Yoshida et al.

(10) **Patent No.:** **US 10,199,072 B2**

(45) **Date of Patent:** **Feb. 5, 2019**

(54) **EDITING METHOD AND RECORDING AND REPRODUCING DEVICE**

(71) Applicant: **Maxell, Ltd.**, Kyoto (JP)

(72) Inventors: **Susumu Yoshida**, Kawasaki (JP); **Junji Shiokawa**, Chigasaki (JP); **Hiroo Okamoto**, Yokohama (JP)

(73) Assignee: **MAXELL, LTD.**, Kyoto (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/808,175**

(22) Filed: **Nov. 9, 2017**

(65) **Prior Publication Data**

US 2018/0075881 A1 Mar. 15, 2018

Related U.S. Application Data

(63) Continuation of application No. 15/176,435, filed on Jun. 8, 2016, now Pat. No. 9,818,449, which is a (Continued)

(30) **Foreign Application Priority Data**

Dec. 2, 2004 (JP) 2004-349264
Dec. 28, 2004 (JP) 2004-378767
Dec. 28, 2004 (JP) 2004-378768

(51) **Int. Cl.**
H04N 9/80 (2006.01)
G11B 27/00 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **G11B 27/102** (2013.01); **G06F 3/0482** (2013.01); **G11B 27/031** (2013.01);
(Continued)

(58) **Field of Classification Search**

USPC 386/239, 240, 278, 280, 281, 282, 326, 386/353

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,086,619 A 4/1978 Miyake et al.
4,970,663 A 11/1990 Bedell et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2 321 522 A1 9/1999
CN 1243596 A 2/2000

(Continued)

OTHER PUBLICATIONS

Japan Patent Office (JPO) office action for JPO patent application JP2008-268104 (dated Jun. 12, 2009).

(Continued)


Primary Examiner — Daquan Zhao

(74) *Attorney, Agent, or Firm* — Mattingly & Malur, PC

(57) **ABSTRACT**

In order to provide a recording and reproducing device that allows a user to select and manage arbitrary play lists, a unit of management for managing all registered play list information and an upper management hierarchical level are added. The unit of management is adapted to be handled on the same level with unified information that indicates a reproduction range of all AV data. User-defined unified information is adapted to be handled on the added management hierarchical level. The user-defined unified information is formed to allow arbitrary reproduction ranges contained on a lower hierarchical level to be registered.

19 Claims, 9 Drawing Sheets

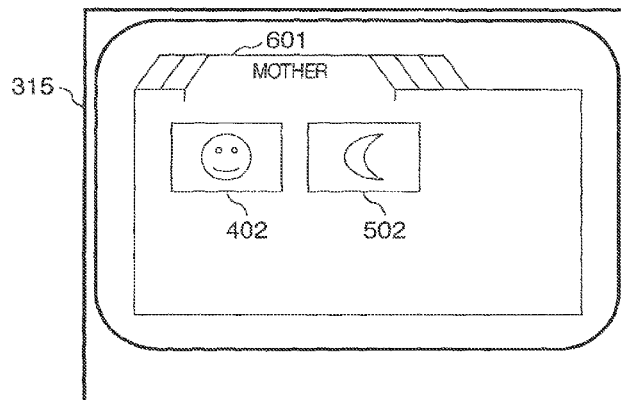

Related U.S. Application Data

continuation of application No. 14/141,417, filed on Dec. 26, 2013, now Pat. No. 9,384,783, which is a continuation of application No. 12/567,898, filed on Sep. 28, 2009, now Pat. No. 8,644,684, which is a continuation of application No. 11/203,457, filed on Aug. 11, 2005, now Pat. No. 7,613,383.

(51) **Int. Cl.**

G11B 27/10 (2006.01)
G11B 27/034 (2006.01)
G11B 27/34 (2006.01)
H04N 5/76 (2006.01)
H04N 9/87 (2006.01)
G06F 3/0482 (2013.01)
G11B 27/031 (2006.01)
H04N 5/93 (2006.01)
H04N 5/92 (2006.01)
H04N 9/82 (2006.01)

(52) **U.S. Cl.**

CPC **G11B 27/034** (2013.01); **G11B 27/34** (2013.01); **H04N 5/76** (2013.01); **H04N 9/87** (2013.01); **G11B 2220/2562** (2013.01); **H04N 9/8205** (2013.01)

(56)

References Cited**U.S. PATENT DOCUMENTS**

5,442,744 A 8/1995 Piech et al.
 5,616,876 A 4/1997 Cluts
 5,654,746 A 8/1997 McMullan, Jr. et al.
 5,704,051 A 12/1997 Lane et al.
 5,715,403 A 2/1998 Stefik
 5,734,823 A 3/1998 Saigh et al.
 5,751,282 A 5/1998 Girard et al.
 5,758,068 A 5/1998 Brandt et al.
 5,884,056 A 3/1999 Steele
 6,005,579 A 12/1999 Sugiyama et al.
 6,020,930 A 2/2000 Legrand
 6,166,735 A 12/2000 Dom
 6,175,362 B1 1/2001 Harms et al.
 6,181,870 B1 1/2001 Okada et al.
 6,219,837 B1 4/2001 Yeo et al.
 6,236,971 B1 5/2001 Stefik et al.
 6,243,725 B1 6/2001 Hempleman et al.
 6,400,378 B1 6/2002 Snook
 6,456,334 B1 9/2002 Duhault
 6,470,140 B1 10/2002 Sugimoto et al.
 6,480,669 B1 11/2002 Tsugumagari et al.
 6,611,813 B1 8/2003 Bratton
 6,646,655 B1 11/2003 Brandt et al.
 6,724,403 B1 4/2004 Santoro et al.
 6,734,909 B1 5/2004 Terane et al.
 6,754,548 B1 6/2004 Yoshii et al.
 6,882,793 B1 4/2005 Fu et al.
 6,934,964 B1 8/2005 Schaffer et al.
 7,257,774 B2 4/2007 Denoue et al.
 7,231,360 B2 6/2007 Sy
 7,249,106 B1 7/2007 Tanabe et al.
 7,443,418 B2 10/2008 Bryant et al.
 7,512,622 B2 3/2009 Volk et al.
 7,565,675 B2 7/2009 Sincaglia et al.
 8,291,444 B1 10/2012 Newell

2001/0009007 A1 7/2001 Miyamae et al.
 2001/0023436 A1 9/2001 Srinivasan et al.
 2001/0037379 A1 11/2001 Livnat
 2001/0052127 A1 12/2001 Seo et al.
 2001/0056434 A1 12/2001 Kaplan et al.
 2002/0049979 A1 4/2002 White et al.
 2002/0056098 A1 5/2002 White
 2002/0069418 A1 6/2002 Phillips
 2002/0166122 A1 11/2002 Kikinis et al.
 2003/0063897 A1 4/2003 Jung-Kwon
 2003/0088646 A1 5/2003 Yeo
 2003/0093790 A1 5/2003 Logan et al.
 2003/0122861 A1 7/2003 Jun et al.
 2003/0149988 A1 8/2003 Ellis
 2004/0068606 A1 4/2004 Kim et al.
 2004/0078383 A1 4/2004 Mercer et al.
 2005/0193416 A1 9/2005 Przybylek
 2006/0107289 A1 5/2006 Deyonker et al.
 2006/0168147 A1 7/2006 Inour et al.
 2007/0022382 A1* 1/2007 Honkaniemi G06F 17/30873
 715/733
 2007/0220580 A1 9/2007 Putterman et al.

FOREIGN PATENT DOCUMENTS

EP 1 058 257 A1 12/2000
 JP 11-32301 A 2/1999
 JP 2000-152180 A 5/2000
 JP 2002-150503 A 5/2002
 JP 2002-197806 A 7/2002
 JP 2003-36652 A 2/2003
 JP 2003-100055 A 4/2003
 JP 2003-123389 A 4/2003
 JP 2004-192779 A 7/2004
 WO 97/25798 A1 7/1997
 WO 99/48296 A1 9/1999

OTHER PUBLICATIONS

Japan Patent Office (JPO) office action for JPO patent application JP2004-349264 (dated Aug. 6, 2008).
 Chinese Intellectual Property Office (SIPO) office action for SIPO patent application CN2005-100935522 (dated May 26, 2008).
 Toshiba HDD & DVD Video Recorder Instruction Manual RD-X5 Operating Instructions, Toshiba Corporation, pp. 148-159 (2004).
 Office action for Japan Patent Office patent application JP2008-31843 (dated Dec. 21, 2010).
 Central District of California Case No. 2:17-cv-7534.
 Central District of California Case No. 2:17-cv-7538.
 Fandango Media, LLC's S.P.R. 2.5 Invalidity Contentions which were filed Mar. 26, 2018 in the following litigation: *Maxell, Ltd. v. Fandango Media, LLC*, Civil Action No. 2:17-cv-07534 AG-(SSx) (C.D. Cali.), filed Oct. 13, 2017.
 Ponceleon, D. et al., "Key to Effective Video Retrieval: Effective Cataloging and Browsing", 1998, pp. 99-107.
 Srinivasan, S. et al., "What is in that Video Anyway?", 1999, pp. 388-393.
 Pollack, W., "Tuning In: The Future of Copyright Protection for Online Music in the Digital Millennium", *Fordham Law Review*, 2000, pp. 2445-2488, vol. 68, Issue 6.
 LG Electronics U.S.A., Inc. et al., "Zenith Installation and Operating Guide | Warranty" for DVR413 DVD Recorder, May 13, 2004.
 Wactlar, H. D. et al., "Lessons Learned from Building a Terabyte Digital Video Library", *IEEE*, 1999, pp. 66-73.

* cited by examiner

FIG. 1

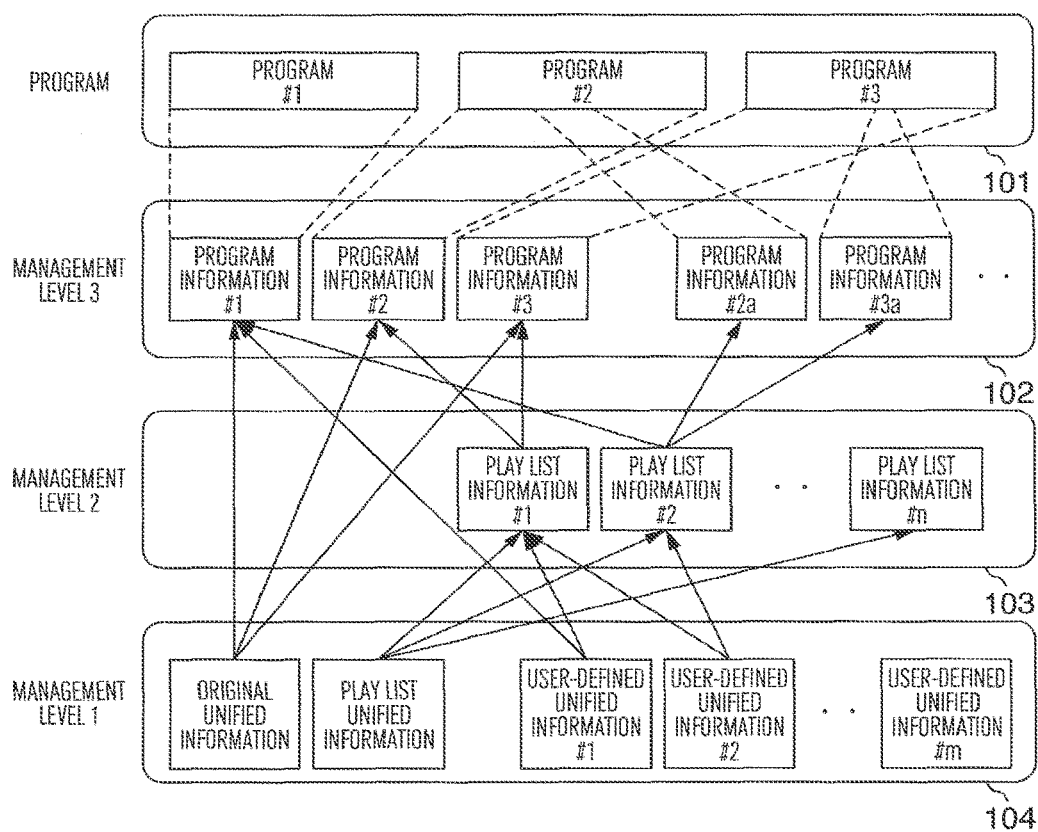


FIG. 2
PRIOR ART

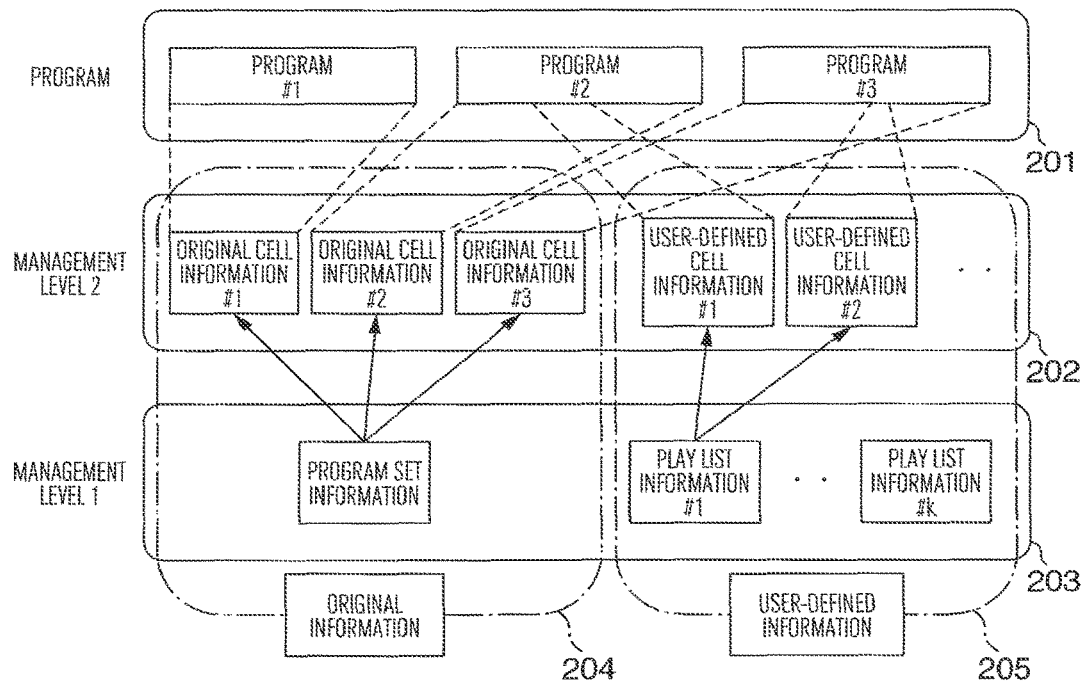


FIG.3

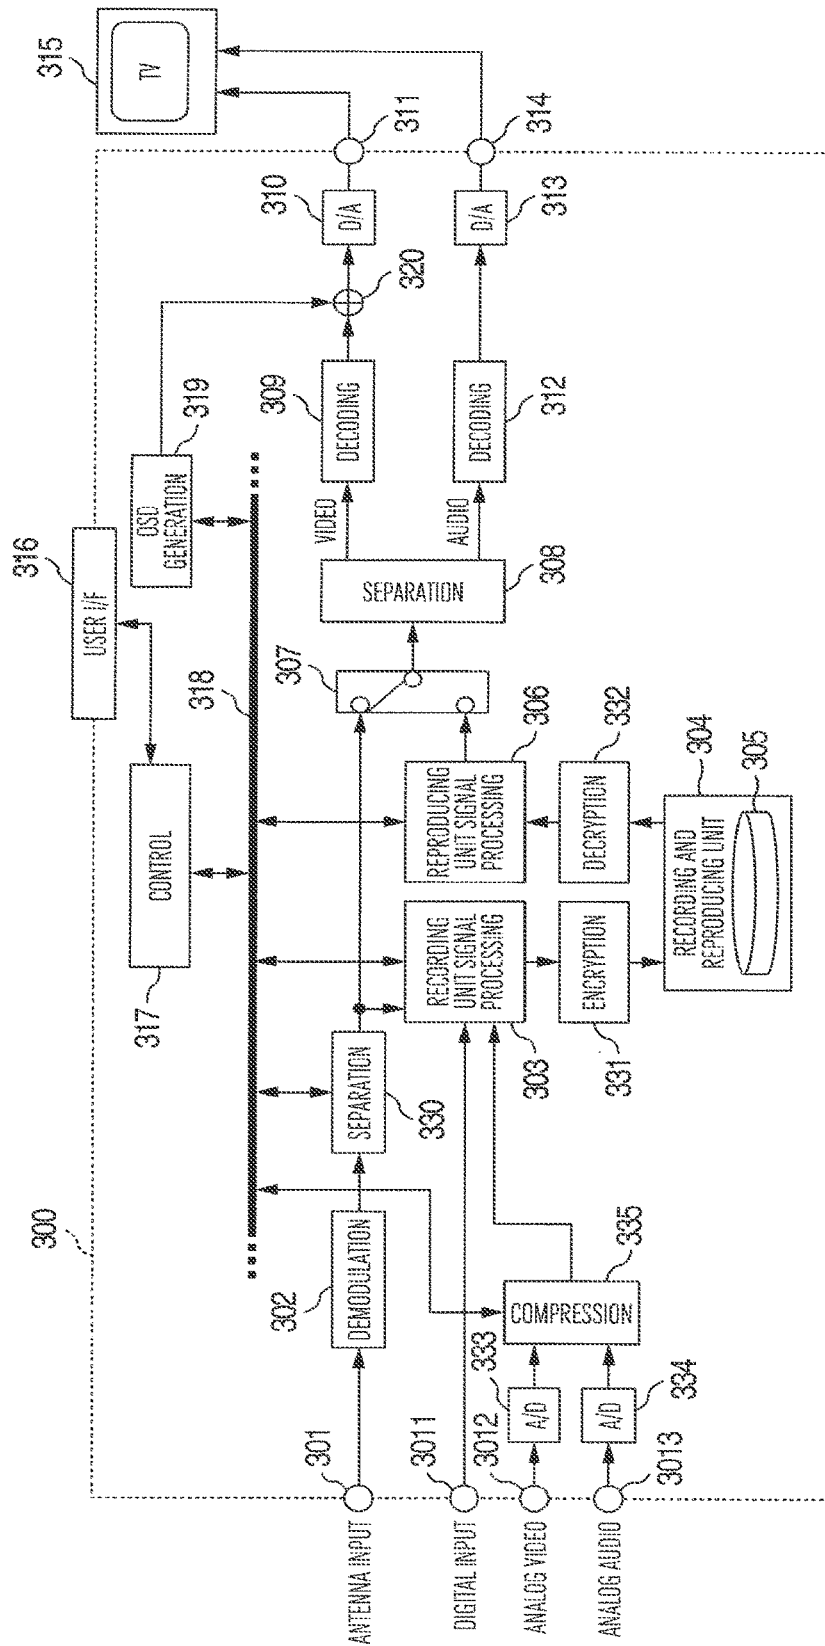


FIG.4

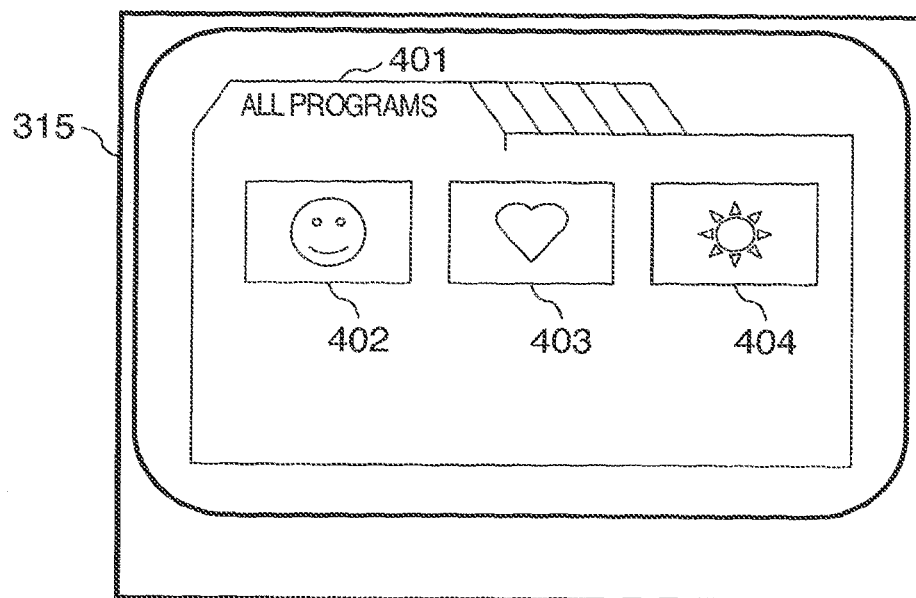


FIG.5

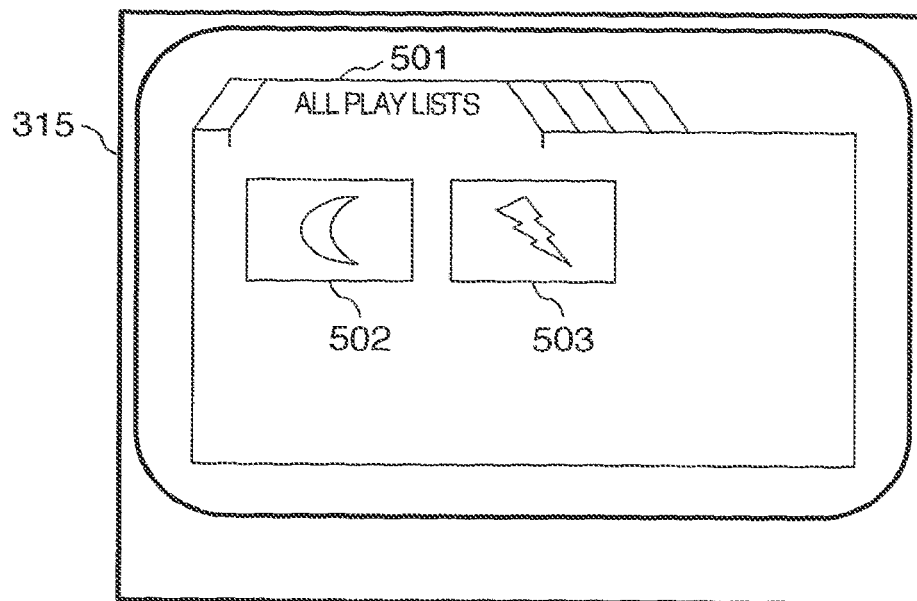


FIG. 6

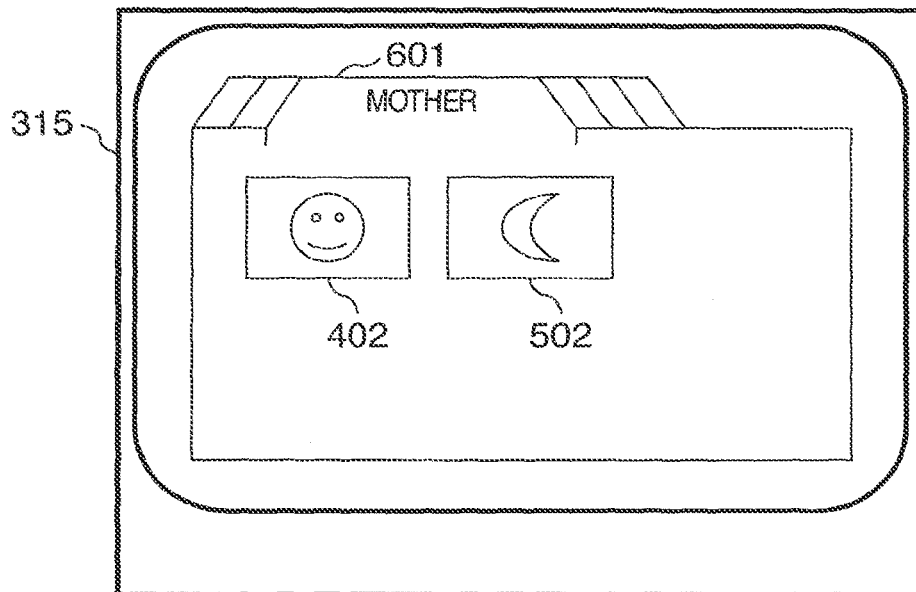


FIG. 7

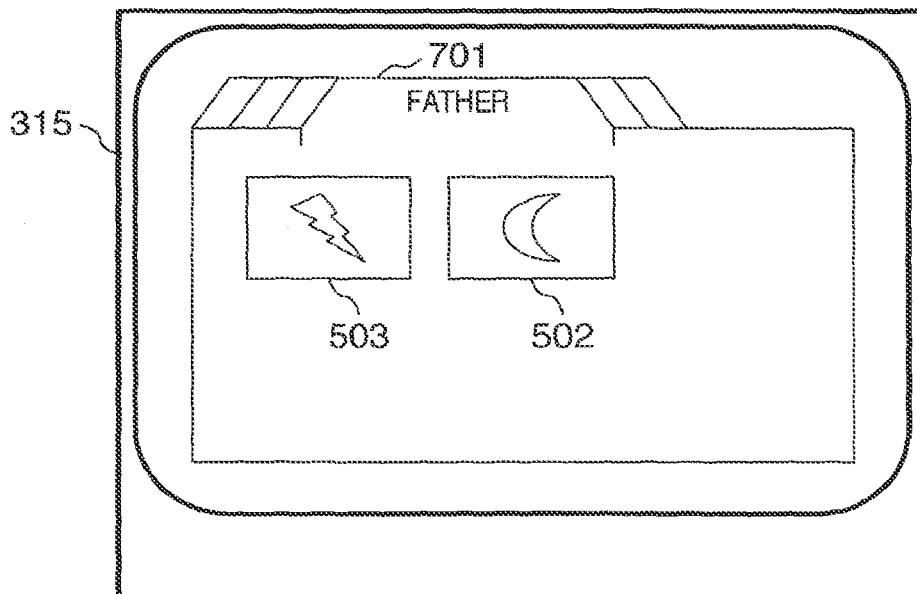


FIG. 8

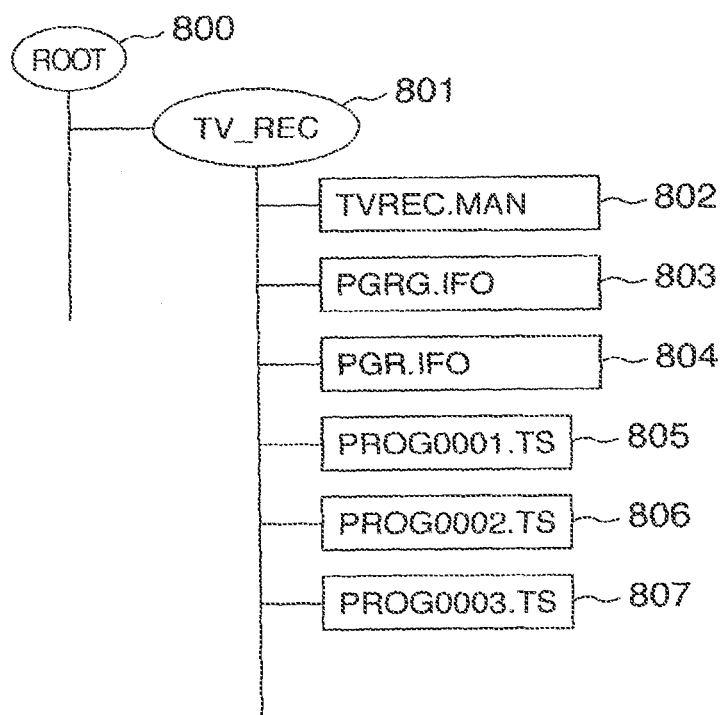


FIG. 9

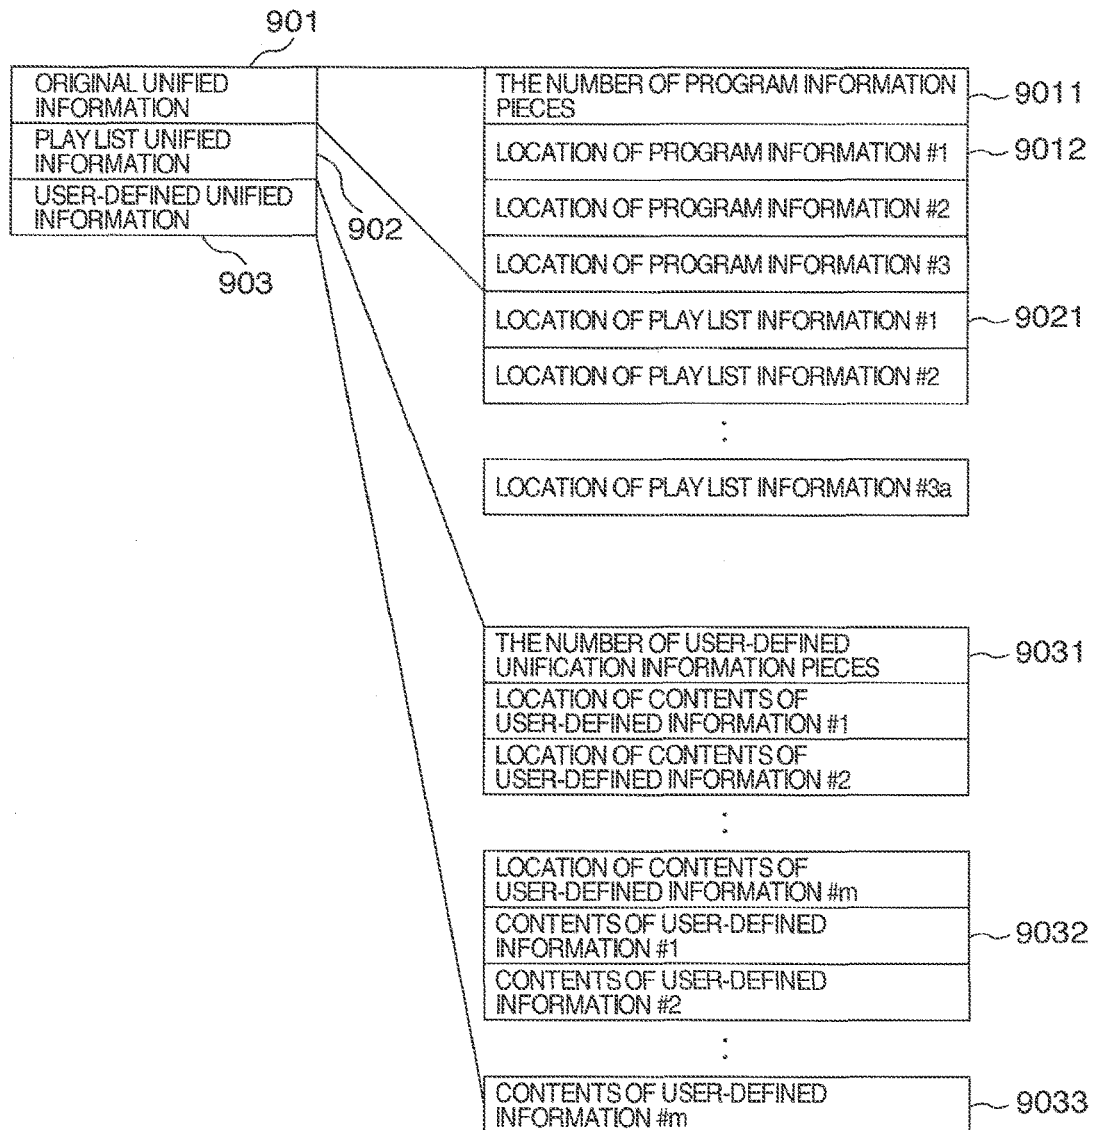


FIG. 10

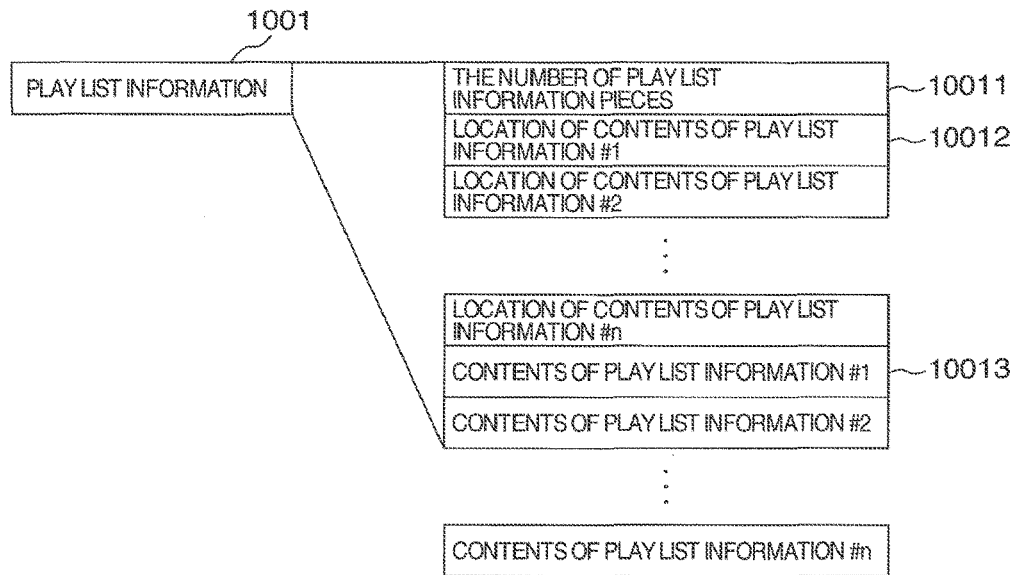


FIG. 11

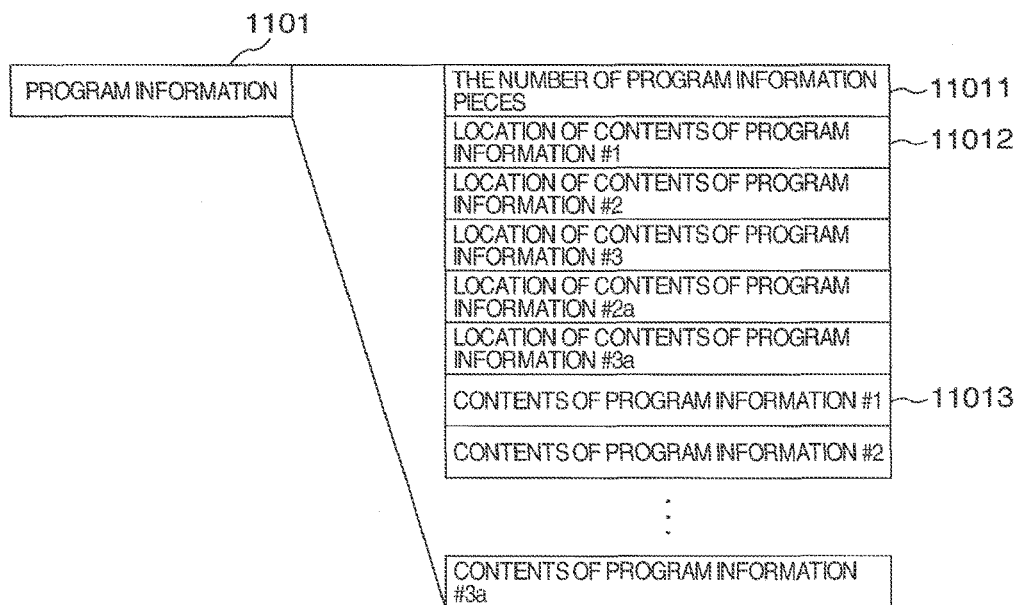


FIG.12


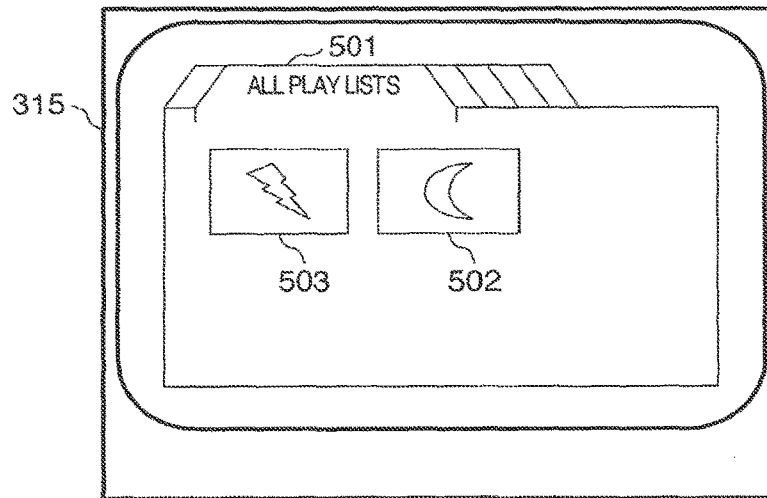


FIG.13

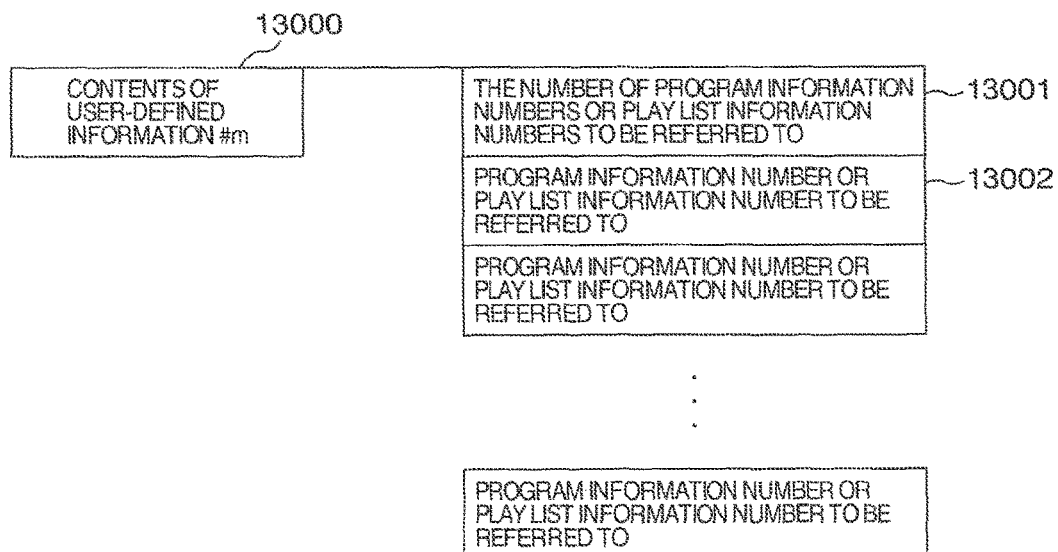

1

EDITING METHOD AND RECORDING AND REPRODUCING DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS(S)

This is a continuation application of U.S. patent application Ser. No. 15/176,435, filed Jun. 8, 2016, which is a continuation of U.S. patent application Ser. No. 14/141,417, filed Dec. 26, 2013, now U.S. Pat. No. 9,384,783 (the entire disclosure of which is incorporated herein by reference for all purposes), which is a continuation of U.S. patent application Ser. No. 12/567,898, filed Sep. 28, 2009, now U.S. Pat. No. 8,644,684 (the entire disclosure of which is incorporated herein by reference for all purposes), which is a continuation of U.S. patent application Ser. No. 11/203,457, filed on Aug. 11, 2005, now U.S. Pat. No. 7,613,383 (the entire disclosure of which is incorporated herein by reference for all purposes), which application claims priority from Japanese Patent Application Nos. JP2004-349264, filed Dec. 2, 2004, JP2004-378767, filed Dec. 28, 2004, and JP2004-378768, filed Dec. 28, 2004, the entire disclosures of which are incorporated herein by reference for all purposes.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a recording and reproducing device which records data onto a recording medium and reproduces data from the recording medium.

Description of the Related Art

As the high-efficiency coding technique advances, it has become possible to handle AV data such as video data and audio data as digital data, conduct code rate compression, and record resultant data on a large-capacity recording medium such as a hard disk or a recording type optical disk in real time. When digital data already compressed in code rate is inputted to a recording and reproducing device having such a recording medium from outside by broadcasting or communication, it is also possible to record the digital data on the recording medium intact.

In these recording and reproducing device, management information for managing digital data to be recorded is generated and recorded together onto the same recording medium. When a rewritable recording medium is used, the user can conduct editing work on the recording and reproducing device by rewriting the management information and generating and manipulating a list indicating the reproduction sequence (hereinafter referred to as play list) (see, for example, JP-A-2000-152180).

SUMMARY OF THE INVENTION

In the above-described conventional technique, it is mentioned that the play list indicates the reproduction sequence by linking portions of AV data together. As an example, a management state of AV data on a recording medium in the above-described conventional technique is shown in FIG. 2.

Reference numeral 201 designates AV data themselves on the recording medium. The case where a program #1 to a program #3 are present as recording units is shown. Reference numeral 202 designates a second management hierarchical level (management level 2) in management informa-

2

tion. Original cell information #1 to original cell information #3 indicate the whole reproduction range, of program units, i.e., a program #1 to a program #3, respectively. Each of user-defined cell information #1 to user-defined information #2 indicates a reproduction range of the whole or a part of a program arbitrarily specified by the user. The number of the user-defined cell information #1 to user-defined information #2 is increased or decreased by the user's editing manipulation. Reference numeral 203 designates a first management hierarchical level (management level 1). Program information contains all of the original cell information #1 to original cell information #3. By conducting reproduction on the basis of the program set information, the user can reproduce all AV data recorded on the recording medium. Play list information 111 to play list information #k indicate a reproduction sequence of the user-defined cell information arbitrarily specified by the user. It is possible to have a plurality of reproduction sequences. Inside of a frame 204 becomes original information for managing the whole AV data in the management information. Inside of a frame 205 becomes user-defined information for managing the play list obtained by the user's editing manipulation.

In FIG. 2, the play list information is placed on the same level with the program set information and managed as the management level 1. Therefore, the sequence of a plurality of play list information pieces themselves is determined uniquely. For example, as for a catalog of the play lists, it is impossible on the user's interface to alter the display sequence. In view of the problem, the present invention has been achieved. An object of the present invention is to provide a recording scheme and device in which the user can conduct manipulation of arbitrarily rearranging the display sequence of the play lists in the play list catalog on the user interface.

Furthermore, in the conventional technique example, attention is not paid to that a plurality of users generate, select and manage favorite play list information. For example, even when a plurality of users desire to generate, select and manage respective favorite play list information pieces, it cannot be implemented. Furthermore, attention is not especially paid to that a user select some arbitrary play lists from among a plurality of play lists and manage them.

In view of these problems, the present invention has been achieved. An object of the present invention is to provide a recording and reproducing device in which the user can select and manage arbitrary play lists.

In order to achieve the objects, in accordance with the present invention, a unit of management for managing all registered play list information and an upper management hierarchical level are added. The unit of management is adapted to be handled on the same level with unified information that indicates a reproduction range of all AV data. User-defined unified information is adapted to be handled on the added management hierarchical level. The user-defined unified information is formed to allow arbitrary reproduction ranges contained on a lower hierarchical level to be registered.

In a recording and reproducing device according to the present invention, it becomes possible for the user to select arbitrary play lists or reproduction ranges and conduct management. Even in the case where a plurality of users share a single recording medium, therefore, each user can manage favorite reproduction contents, resulting in improved usage. Since the play lists are subject to unified management, it becomes possible for the user to arbitrarily alter the display sequence of play lists.

3

According to the present invention, a recording and reproducing device improved in usage can be provided.

Other objects, features and advantages of the invention will become apparent from the following description of the embodiments of the invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a management state of AV data in a recording and reproducing device according to an embodiment of this invention;

FIG. 2 shows a management state of AV data in a conventional technique example;

FIG. 3 shows a block diagram of a recording and reproducing device according to an embodiment of this invention;

FIG. 4 shows a display output example of original unified information;

FIG. 5 shows a display output example of play list unified information;

FIG. 6 shows a first output example of user-defined unified information;

FIG. 7 shows a second output example of user-defined unified information;

FIG. 8 shows an example of a file structure of original unified information, play list unified information, user-defined unified information, play list information, program information, and AV data (program);

FIG. 9 shows an example of a management table structure of original unified information, play list unified information, and user-defined unified information;

FIG. 10 shows an example of a management table of play list information;

FIG. 11 shows an example of a management table of program list information;

FIG. 12 shows a display output example of play list unified information; and

FIG. 13 shows an example of a table indicating contents of user-defined information #m.

DESCRIPTION OF THE EMBODIMENTS

Hereafter, embodiments of the present invention will be described with reference to the drawings. FIG. 1 shows a management state of AV data on a recording medium in a recording and reproducing device according to the present invention. In the same way as the reference numeral 201 in FIG. 2, reference numeral 101 designates AV data themselves on the recording medium. The case where programs #1 to #3 are present as recording units is shown.

Reference numeral 102 corresponds to 202 in FIG. 2. However, reference numeral 102 designates a third management hierarchical level (management level 3) in management information. Program information #1 to program information #3 indicate the whole reproduction ranges of program units, i.e., program #1 to program #3, respectively. Each of program information #2a to program information #3a indicates a reproduction range of the whole or a part of a program arbitrarily specified by the user. The program information #2a to program information #3a indicate a part of the program #2 and a part of the program #3, respectively. In places corresponding to the program information #1 to program information #3, information is also added, as AV data is added, i.e., with an increase in programs. In places corresponding to the program information #2a to the pro-

4

gram information #3a, the number of information pieces increases or decreases due to the editing manipulation of the user.

Reference numeral 103 corresponds to the management level 1 in FIG. 2. However, numeral 103 designates a second management hierarchical level (management level 2), which includes only play list information #1 to play list information #n. Each play list information indicates a reproduction sequence of arbitrary program information pieces on the management level 3. It is possible to have a plurality of reproduction sequences.

Reference numeral 104 designates a newly added first management hierarchical level (management level 1) in the management information as a feature point of the present invention. The management level 1 includes a plurality of unified information pieces. Original unified information corresponds to the program set information shown in FIG. 2. The original unified information contains all of the program information #1 to program information #3 on the management level 3. By conducting reproduction on the basis of all of the program information #1 to program information #3, it becomes possible for the user to reproduce all AV data recorded on the recording medium. Play list unified information contains all of the play list information #1 to play list information #n on the management level 2. By conducting reproduction on the basis of all of the play list information #1 to play list information #n on the management level 2, it becomes possible for the user to successively reproduce all registered play lists. User-defined unified information #1 to user-defined unified information #m contain arbitrary one or more from among play list information pieces on the management level 2 and program information pieces on the management level 3. For example, when a plurality of users use a single recording medium, it becomes possible to manage reproduced contents that meet respective users' tastes by using one user-defined unified information every user.

An embodiment of a recording and reproducing device according to the present invention will be described more specifically by using another drawing.

FIG. 3 is a block diagram showing an example of a recording and reproducing device according to the present invention. A recording and reproducing device capable of receiving digital broadcast, recording the digital broadcast on a recording medium, reproducing recorded data, and obtaining a reproduced output is shown. Reference numeral 300 designates a recording and reproducing device, 301 an input terminal supplied with a received wave from an antenna, 3011 an input terminal supplied with compressed video and audio data from another device, 3012 an analog video input terminal supplied with an analog video signal, 3013 an analog audio input terminal supplied with an analog audio input terminal, 333 and 334 analog/digital (A/D) conversion circuits each of which converts an analog signal to a digital signal, 302 a demodulation circuit, 330 a separation circuit which separates the demodulated digital signal into audio, video and other data, 335 a compression circuit which compresses digitized video and audio signals, 303 a recording unit signal processing circuit, 331 an encryption circuit which encrypts data to be recorded, 304 a recording and reproducing unit including a drive function of a recording medium, 305 a recording medium, 332 a decryption circuit which decrypts data encrypted and recorded on the recording medium, 306 a reproducing unit signal processing circuit, 307 a switchover circuit, 308 a separation circuit, 309 a video decoding circuit, 310 a digital/analog (D/A) conversion circuit, 311 a video output terminal, 312 an audio

5

decoding circuit, **313** a D/A conversion circuit, **314** an audio output terminal, **315** a TV set, **316** a user I/F, **317** a control unit, **318** a system bus, **319** an OSD generation unit, and **320** an addition circuit.

At the time of recording, a signal transmitted by digital broadcast or the like and received is demodulated in the demodulation circuit **302** by using a predetermined scheme, subjected to necessary signal processing such as timing adjusting data addition and modulation in the recording unit signal processing circuit **303**, encrypted in the encryption circuit **331**, and then recorded on the recording medium **305** by the recording and reproducing unit **304**. A digital signal input from the digital input terminal **3011** is subjected to necessary signal processing such as timing adjusting data addition and modulation in the recording unit signal processing circuit **303**, encrypted in the encryption circuit **331**, and then recorded on the recording medium **305** by the recording and reproducing unit **304**. An analog video signal input from the analog video input terminal **3012** and an analog audio signal input from the analog audio input terminal **3013** are subjected to compression processing in the compression circuit **335**, encrypted in the encryption circuit **331** via the recording unit signal processing circuit **303**, and then recorded on the recording medium **305** by the recording and reproducing unit **304**.

At the time of reproducing, encrypted digital data read out from the recording medium **305** via the recording and reproducing unit **304** in accordance with the user's order is decrypted in the decryption circuit **332**, subjected to signal processing required for reproduction such as demodulation in a form based on a predetermined modulation scheme in the reproducing unit signal processing circuit **103**, and sent to the separation circuit **308** via the switchover circuit **307**. Resultant video digital data is subjected to predetermined video decoding processing in the video decoding circuit **309**, converted to an analog signal in the D/A conversion circuit **310**, and then displayed as a monitor output on the TV set **315** via the video output terminal **311**. Audio digital data obtained from the separation circuit **308** is subjected to predetermined audio decoding processing in the audio decoding circuit **312**, converted to an analog signal in the D/A conversion circuit **313**, and then outputted by an audio output mechanism in the TV set **315** via the audio output terminal **314**.

The control unit **317** controls various components in the recording and reproducing device **300** via the system bus **318**. Furthermore, the control unit **317** controls the whole device to cause operation based on the user's order input which is inputted via the user I/F **316** to be conducted. By the way, an order input request to the user or necessary OSD display for the user is implemented by preparing it in the OSD generation unit **319**, adding it to an output of the video decoding circuit **309** on a suitable level, and finally outputting it to a monitor screen on the TV set **315**.

The case where each unified information on the management level 1 is used for menu display of recording data will now be described as a specific use example of the management information configuration in FIG. 1.

FIG. 4 shows an example in which menu display is conducted by using the original unified information shown in FIG. 1. Reference numeral **315** designates the TV set shown in FIG. 3, **401** a tag for displaying all programs, **402** a thumbnail indicating program information #1, **403** a thumbnail indicating program information #2, and **404** a thumbnail indicating program information #3. The user moves a cursor position on the screen to a desired thumbnail and conducts selection and determination by using a remote

6

controller or the like. As a result, the user can reproduce arbitrary programs or all programs.

FIG. 5 shows an example in which menu display is conducted by using the play list unified information shown in FIG. 1. Reference numeral **501** designates a tag for displaying all play lists, **502** a thumbnail indicating play list information #1, and **503** a thumbnail indicating play list information #2. In the same way as the above-described case, the user moves a cursor position on the screen to a desired thumbnail and conducts selection and determination by using a remote controller or the like. As a result, the user can reproduce arbitrary play lists or all play lists. By the way, display switching from the all program display tag **401** to all play list display tag can be implemented by, for example; movement of the cursor in tag character positions conducted by the user,

FIG. 6 shows an example in which menu display is conducted by using the user-defined unified information #1 shown in FIG. 1. Reference numeral **601** designates a menu display tag for user #1 (who is supposed to be "mother" here). As appreciated from FIG. 1, reference numerals **402** and **502** designate thumbnails indicating the program information #1 and the play list information #1, respectively. The "mother" can use the menu display tag for mother **601** as a folder dedicated to herself, and freely register and delete data to be reproduced. In the same way, FIG. 7 shows an example in which menu display is conducted by using the user-defined unified information #2 shown in FIG. 1. Reference numeral **701** designates a menu display tag for user #2 (who is supposed to be "father" here). As appreciated from FIG. 1, reference numerals **503** and **502** designate thumbnails indicating the play list information #2 and the play list information #1, respectively. In this case, the "father" selects two play lists. However, the reproduction sequence of them can be altered. In the same way as the "mother," the "father" can use the menu display tag for father **701** as a folder dedicated to himself, and freely register and delete data to be reproduced.

As heretofore described, in the embodiment of the present invention, a unit of management for managing all registered play list information and an upper management hierarchical level are added. The unit of management is adapted to be handled on the same level with unified information that indicates a reproduction range of all AV data. User-defined unified information is adapted to be handled on the added management hierarchical level. The user-defined unified information is formed to allow arbitrary reproduction ranges contained on a lower hierarchical level to be registered therein. As a result, it becomes possible for the user to select arbitrary play lists or reproduction ranges and conduct management. Even in the case where a plurality of users share a single recording medium, therefore, each user can manage favorite reproduction contents, resulting in improved usage.

In the embodiment heretofore described, the case where digital broadcast is received and digital data is recorded intact has been described. However, this is not restrictive. A configuration having a network I/F to acquire AV data from an external network or having coding unit to conduct recording onto the recording medium while coding analog data may also be used. In other words, the present embodiment refers to data management on the recording medium, and its input route is not especially restricted.

FIG. 8 shows an example of file configurations used to actually record the program, program information, play list information, original unified information, play list unified information, and user-defined information on the recording

7

medium **305** (FIG. 3). The recording medium is a medium on which digital recording and reproducing are conducted. Files on the medium are managed by a file system similar to that used to manage a recording medium in the so-called personal computer or the like. In FIG. 8, "ROOT" **800** represents a highest hierarchical level of a file directory. "TV_REC" **801** is a directory under the highest hierarchical level. "TVREC.MAN" **802**, "PGRG.IFO" **803**, "PGR.IFO" **804**, "PROG0001.TS" **805**, . . . of files which implement the management structure shown in FIG. 1 according to the present invention are recorded in the "TV_REC" **801**. In the "TVREC.MAN" **802**, the original unified information, the play list unified information, and the user-defined unified information #1 to #m on the management level 1 shown in FIG. 1 are described as management tables. In the "PGRG.IFO" **803**, the play list information #1 to the play list information #n on the management level 2 shown in FIG. 1 are recorded as management tables. In the "PGR.IFO" **804**, the program information #1 to the program information #3a on the management level 3 shown in FIG. 1 are recorded as management tables. "PROG0001.TS" **805**, "PROG0002.TS" **806** and "PROG0003.TS" **807** are entity files of AV data in each program. For example, AV data between recording start and recording end of one time is recorded in the "PROG0001.TS." AV data between recording start and recording end of the next time is recorded in the "PROG0002.TS." In this way, the file name is updated and recording is conducted. Thereafter, the management files **802** to **804** are updated.

The file structure and the configuration of management tables themselves concerning the management structure "TVREC.MAN" **802**, "PGRG.IFO" **803**, "PGR.IFO" **804**, "PROG0001.TS" **805**, . . . of files may be formed by using any method. However, an example of how to implement the management configuration in the case of FIG. 1 using the files will now be described.

FIG. 9 shows a configuration of management tables of the "TVREC.MAN" **802** (FIG. 8). As original unified information **901**, the number of AV data recorded as the number of program information pieces **9011**, i.e., the total number (three in this case) of entity files ("PROG0001.TS" **805**, "PROG0002.TS" **806** and "PROG0003.TS" **807**) of the AV data is described. Under the original unified information **901**, location tables **9012** of respective original program information pieces are recorded. As play list unified information **902**, play list location information tables are recorded in **9021** and subsequent tables. In **9031**, the number of user-defined unified information pieces is recorded. After that, contents of #1 to #m of the user-defined information are recorded.

FIG. 13 shows contents of the user-defined information #m described above. The user-defines information #m has combinations of original program information and play list information as a table.

FIG. 10 shows a management table of the "PGRG.IFO" **803** (FIG. 8), which corresponds to the management level 2 shown in FIG. 1. As play list information **1001**, the total number of the play list information pieces is first described as designated by **10011**. (In this case, the total number of the play list information pieces is n.) Beginning with **10012** indicated under the reference numeral **10011**, locations in which contents of the play list information #1 to #n are described are recorded as tables. Beginning with **10013**, contents of the play list information #1 to #n (contents of the reproduction sequence, which are management tables having combinations of program information indicating the

8

reproduction start location and reproduction end location of AV data described later) are recorded.

FIG. 11 shows a management table of the "PGR.IFO" **804** (FIG. 8), which corresponds to the management level 3 shown in FIG. 1. As program information **1101**, the total number of the program information pieces including all of the program information pieces paired with the original information program #1, #2 and #3 (FIG. 1) and the user-defined program information #2a and #3a (FIG. 1) is recorded as designated by **11011**. Beginning with **11012** indicated under the reference numeral **11011**, tables indicating locations in which contents of the program information #1 to #3a are described are recorded. Beginning with **11013**, contents of the program information #1 to #3a (describing the reproduction start location and reproduction end location of the "PROG0001.TS" **805**, "PROG0002.TS" **806** and "PROG0003.TS" **807** (FIG. 8)) are recorded.

By conducting the management as heretofore described, it becomes possible to sort the location information, for example, in the play list location table **9021** and alter the sequence of displaying play lists on a GUI view from the state shown in FIG. 5 to the state shown in FIG. 12. In the case where the number of play lists has become very large, a play list that is high in user's use frequency can be displayed in the first place in the GUI view. As a result, it is possible to implement a usable recording and reproducing device, reproducing device, or recording method. For example, a plurality of users can set play lists that they want to view and recorded original contents freely and individually. Even when the number of recorded programs is very large, the user can rapidly find out a program that the user wants to view, because the user can refer to a folder defined by the user.

In the present embodiment, a clear distinction is made between the user-defined play list unified information and the user-defined unified information #1 to #m. The user-defined play list unified information may be defined as user-defined play list unified information having no link to the original program information of the user-defined unified information.

It should be further understood by those skilled in the art that although the foregoing description has been made on embodiments of the invention, the invention is not limited thereto and various changes and modifications may be made without departing from the spirit of the invention and the scope of the appended claims.

What is claimed is:

1. An information processing apparatus comprising:

a recording medium to store a plurality of video data;
an output unit configured to output a menu display for a user to select one group of video data among a plurality of groups of video data by a specifying position of a character corresponding to the one group of video data;
a reproducer configured to reproduce the selected video data read out from the recording medium; and
a controller;

wherein, when a first group of video data is selected in the menu display by specifying a position of a character corresponding to the first group of video data, the controller controls so that a first group of thumbnails corresponding to the first group of video data is displayed in a state that an order of the first group of thumbnails is editable,

wherein, when a second group of video data is selected in the menu display by specifying a position of a character corresponding to the second group of video data, the controller controls so that a second group of thumbnails

9

corresponding to the second group of video data is displayed in a state that an order of the second group of thumbnails is editable,

wherein, even if one video data stored on the recording medium included in both the first group of video data and the second group of video data is deleted from the first group of video data, the controller controls so that the one video data continues to be included in the second group of video data and a thumbnail corresponding to the one video data is displayed as one of the second group of thumbnails when the second group of thumbnails is displayed.

2. The information processing apparatus according to claim 1, further comprising an encoder configured to encode inputted video data, wherein the recording medium stores the plurality of video data encoded by the encoder.

3. The information processing apparatus according to claim 2,

wherein the controller controls the output unit to display a first character corresponding to the first group of video data in a first area when the first group of thumbnails is displayed, and

wherein the controller controls the output unit to display a second character corresponding to the second group of video data in the first area when the second group of thumbnails is displayed.

4. The information processing apparatus according to claim 3,

wherein the controller controls the output unit to display the first group of thumbnails in a second area when the first group of thumbnails is displayed, the second area being different from the first area, and

wherein the controller controls the output unit to display the second group of thumbnails in the second area when the second group of thumbnails is displayed.

5. The information processing apparatus according to claim 4,

wherein, when the one video data is deleted from the first group of video data, the controller removes the one video data from the first group of video data without deleting the one video data recorded on the recording medium.

6. An information processing system comprising:

a recording medium to record a plurality of video data;

a reproducer configured to reproduce selected video data read out from the recording medium; and

a display unit configured to output a menu display for a user to select one group of video data among a plurality of groups of video data by specifying a position of a character corresponding to the one group of video data;

wherein, when a first group of video data is selected in the menu display by specifying a position of a character corresponding to the first group of video data, a first group of thumbnails corresponding to the first group of video data is displayed on the display unit in a state that the order of the first group of thumbnails is editable,

wherein, when a second group of video data is selected in the menu display by specifying a position of a character corresponding to the second group of video data, a second group of thumbnails corresponding to the second group of video data is displayed on the display in a state that the order of the second group of thumbnails is editable, and

wherein, when one video data recorded on the recording medium included in both the first group of video data and the second group of video data is deleted from the first group of video data, the one video data continues

10

to be included in the second group of video data, and a thumbnail corresponding to the one video data is displayed as one of the thumbnails of the second group of thumbnails when the second group of thumbnails is displayed on the display.

7. The information processing system according to claim 6, further comprising an encoder configured to encode inputted video data, wherein the recording medium stores the plurality of video data encoded by the encoder.

8. The information processing system according to claim 7,

wherein a first character corresponding to the first group of video data in a first area when the first group of thumbnails is displayed on the display, and

wherein a second character corresponding to the second group of video data is displayed in the first area when the second group of thumbnails is displayed on the display.

9. The information processing system according to claim 8,

wherein the first group of thumbnails is displayed in a second area when the first group of thumbnails is displayed on the display, the second area being different from the first area, and

wherein the second group of thumbnails is displayed in the second area when the second group of thumbnails is displayed on the display.

10. The information processing system according to claim 9, further comprising:

a controller,

wherein, when the one video data is deleted from the first group of video data, the controller removes the one video data from the first group of video data without deleting the one video data recorded on the recording medium.

11. An information processing method comprising:

recording, by a recording unit, a plurality of video data on a recording medium;

outputting a menu display for a user to select one group of video data among a plurality of groups of video data by specifying a position of a character corresponding to the one group of video data;

reproducing selected video data read out from the recording medium;

controlling display, when a first group of video data is selected in the menu display by specifying a position of a character corresponding to the first group of video data, a first group of thumbnails corresponding to the first group of video data in a state that the order of the first group of thumbnails is editable,

controlling to display, when a second group of video data is selected in the menu display by specifying a position of a character corresponding to the second group of video data, a second group of thumbnails corresponding to the second group of video data in a state that the order of the second group of thumbnails is editable,

wherein, when one video data recorded on the recording medium that is included in both the first group of video data and the second group of video data is deleted from the first group of video data, the controller continues to include the one video data in the second group of video data, and a thumbnail corresponding to the one video data is displayed as one of the thumbnails of the second group of thumbnails when the controller controls to display the second group of thumbnails.

12. The information processing method according to claim 11, further comprising encoding inputted video data

11

with an encoder, and storing the plurality of video data encoded by the encoder on the recording medium.

13. The information processing method according to claim 12,

further comprising:

controlling, by the controller, to display a first character corresponding to the first group of video data in a first area when the first group of thumbnails is displayed; and

controlling, by the controller, to display a second character corresponding to the second group of video data in the first area when the second group of thumbnails is displayed.

14. The information processing method according to claim 13,

further comprising:

controlling, by the controller, to display the first group of thumbnails in a second area when the first group of thumbnails is displayed, the second area being different from the first area; and

controlling, by the controller, to display the second group of thumbnails in the second area when the second group of thumbnails is displayed.

15. The information processing method according to claim 14,

wherein, when the one video data is deleted from the first group of video data, the controller removes the one video data from the first group of video data without deleting the one video data recorded on the recording medium.

16. An information processing system comprising:

a recording medium configured to record a plurality of video data;

a reproducer configured to read video data from the recording medium;

a display; and

a controller, wherein the controller is configured to:

control the display to display a menu display that includes a plurality of selectable characters that respectively correspond to a plurality of groups of video data,

upon selection of a character corresponding to a first group of video data in the menu display by specifying a position of the character corresponding to the first group of video data, control the display to display a first

12

group of thumbnails corresponding to the first group of video data in a state that the order of the first group of thumbnails is editable, and

upon selection of a character corresponding to the second group of video data in the menu display by specifying a position of the character corresponding to the second group of video data, control the display to display a second group of thumbnails corresponding to the second group of video data in a state that the order of the second group of thumbnails is editable,

wherein when one video data recorded on the recording medium is included in both the first group of video data and the second group of video data, and upon deletion of the one video data from the first group of video data, the one video data continues to be included in the second group of video data, and the controller controls the display to display a thumbnail corresponding to the one video data as one of the thumbnails of the second group of thumbnails.

17. The information processing system according to claim

16, wherein upon display of the first group of thumbnails on the display, the controller controls to display a first character corresponding to the first group of video data in a first area, and

wherein upon display of the second group of thumbnails on the display, the controller controls to display a second character corresponding to the second group of video data in the first area.

18. The information processing system according to claim

17, wherein upon display of the first group of thumbnails on the display, the controller controls to display the first group of thumbnails in a second area, the second area being different from the first area, and

wherein upon display of the second group of thumbnails on the display unit, the controller controls to display the second group of thumbnails in the second area.

19. The information processing system according to claim

18, wherein, upon deletion of the one video data from the first group of video data, the controller removes the one video data from the first group of video data without instructing the deletion of the one video data recorded on the recording medium.

* * * * *