




US 20060135076A1

(19) **United States**(12) **Patent Application Publication****Honkanen et al.**(10) **Pub. No.: US 2006/0135076 A1**(43) **Pub. Date: Jun. 22, 2006**(54) **METHOD AND DEVICE FOR
CONTROLLING RADIO ACCESS**(30) **Foreign Application Priority Data**

Nov. 22, 2004 (FI)..... 20045450

(75) Inventors: **Mauri Honkanen**, Tampere (FI); **Mika Kasslin**, Espoo (FI); **Pasi Katajainen**, Tampere (FI); **Niko Kiukkonen**, Veikkola (FI)**Publication Classification**(51) **Int. Cl.**
H04B 17/00 (2006.01)(52) **U.S. Cl.** **455/67.13**Correspondence Address:
SQUIRE, SANDERS & DEMPSEY L.L.P.
14TH FLOOR
8000 TOWERS CRESCENT
TYSONS CORNER, VA 22182 (US)(57) **ABSTRACT**

A method for controlling a number of simultaneous radio connections in a communication device is presented. The control of a number of simultaneous radio connections is carried out in the communication device. Parameters of the radio connections are controlled such that interference between the radio connections is minimized.

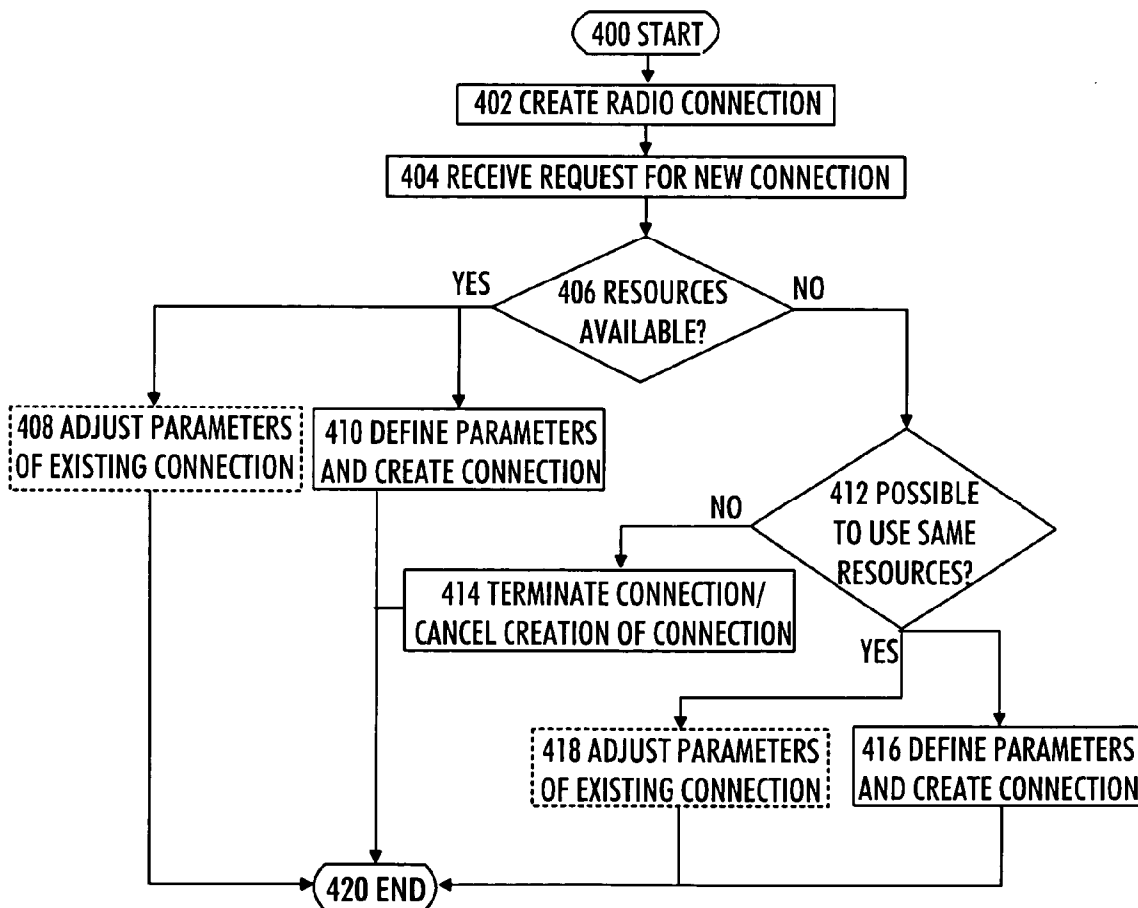(73) Assignee: **Nokia Corporation**(21) Appl. No.: **11/283,792**(22) Filed: **Nov. 22, 2005**

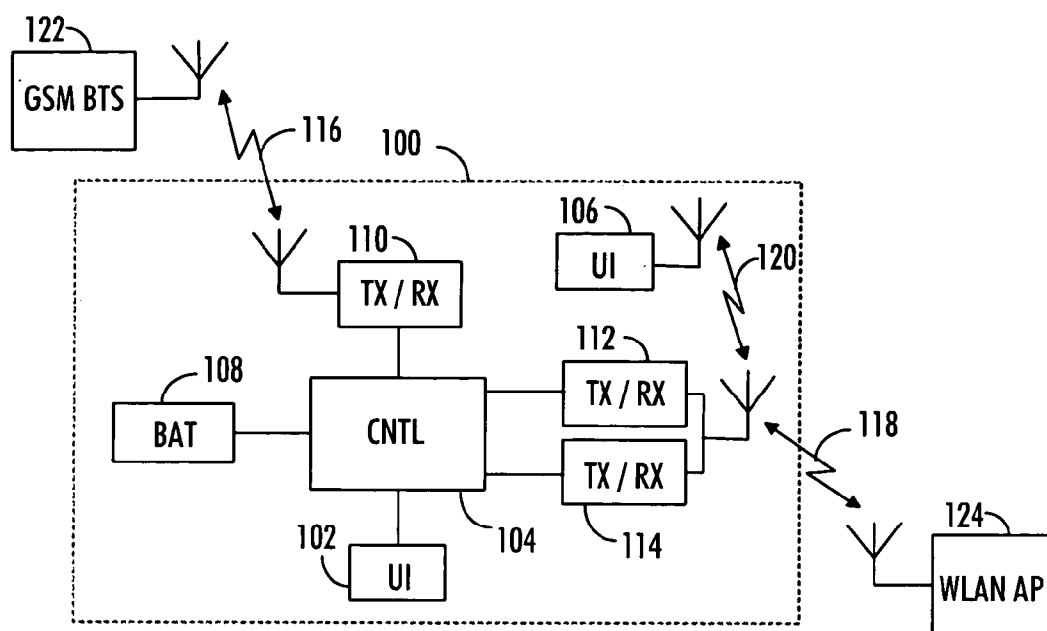


Fig. 1

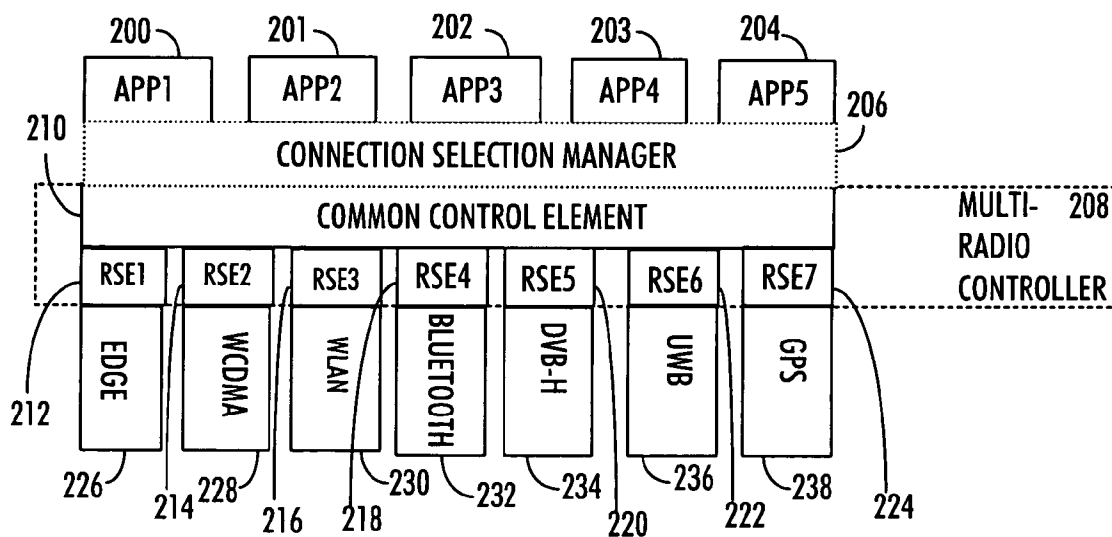


Fig. 2

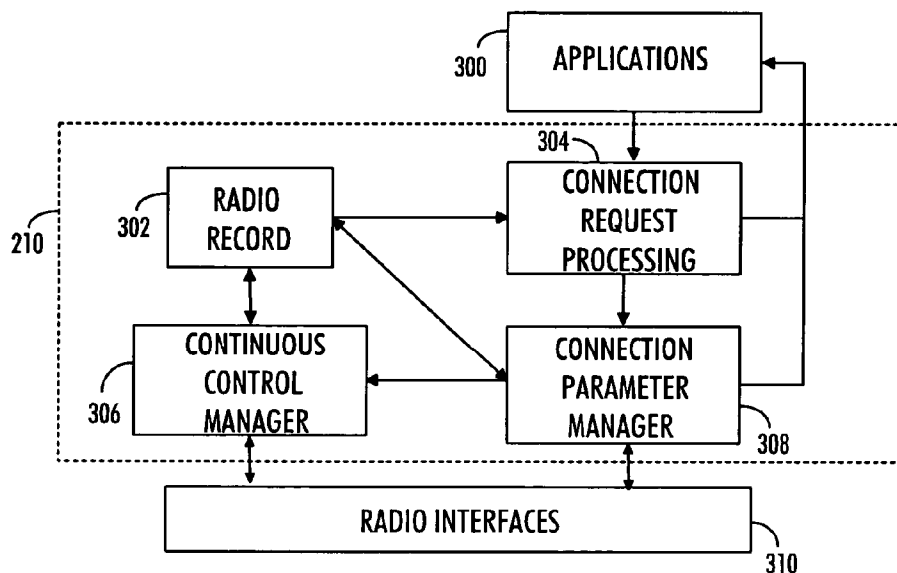


Fig. 3

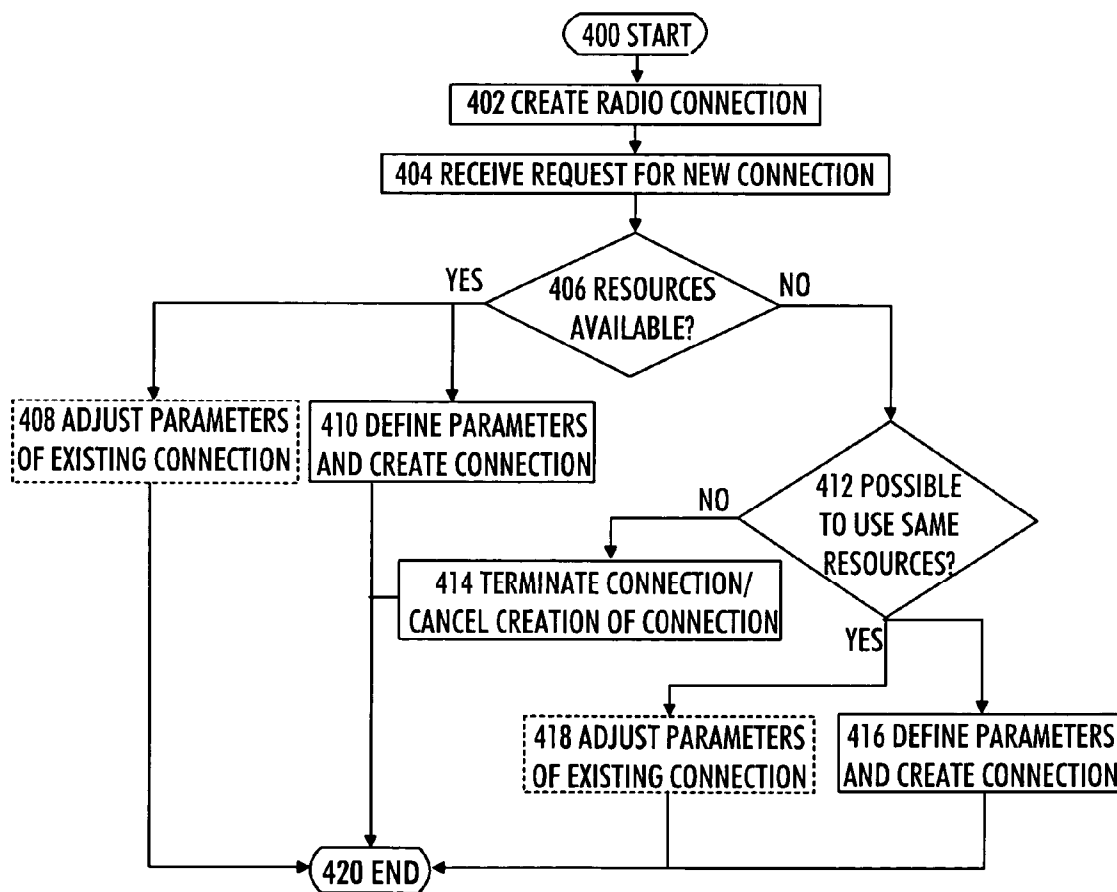


Fig. 4

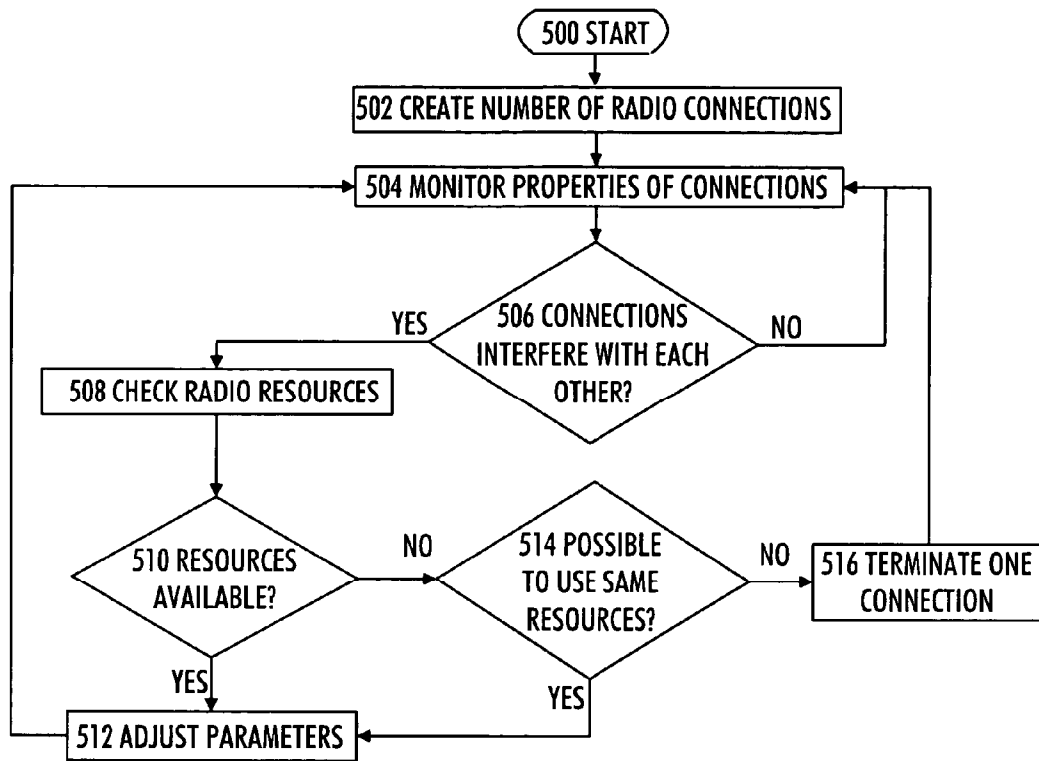


Fig. 5

METHOD AND DEVICE FOR CONTROLLING RADIO ACCESS

[0001] The invention relates to controlling a number of simultaneous radio connections in a communication device.

BACKGROUND

[0002] The number of different radios in mobile communication devices is steadily increasing to facilitate more flexible connectivity and a broader range of services. Cellular access alone is no longer sufficient, but new wireless technologies are integrated to communication devices now and especially in the future to enable novel connectivity solutions. Integration of multiple radios into a single terminal, however, introduces a serious integration challenge that is becoming more pronounced as the number of radios increases. One element of the integration challenge is the appropriate handling of simultaneous operation of radios. It is quite evident that users are willing to use different radios at the same time, like using a headset employing wireless Bluetooth® technology during a GSM phone call, and using a wireless local area network (WLAN) connection for Internet surfing, for example.

[0003] If there are two or more operational radio connections from one communication device, the connections may very well interfere with one another. Even if the connections are not operating on the same frequency band, they may still interfere with each other due to the non-idealities in the components of the communication device. The components may introduce spectral leakage, and the selectivity of receivers may not be ideal, meaning that they may also receive signal components belonging to a signal other than the desired one.

[0004] If there is a number of connections simultaneously operating on the same band, interference they cause to one another is much more severe than if they were operating on separate bands. Especially on the 2.4 GHz unlicensed Industrial, Scientific and Medical (ISM) band there may be several connections, for example Bluetooth® and wireless local area network (WLAN) connections, operating on the same band simultaneously. These connections cause inter-system interference to one another, which may result in a degraded quality of service. If there are two active connections on the same band operating from the same communication device, these two connections may very well interfere with each other severely, or the connections may even block each other's usage totally. This may happen because both of the connections operate from the same communication device, and thus the radio transceivers may be located within a few centimeters from each other. They may also be using the same radio components, like an antenna, for instance.

BRIEF DESCRIPTION OF THE INVENTION

[0005] An object of the invention is to provide a solution for controlling a number of simultaneous radio connections in a communication device.

[0006] According to an aspect of the invention, there is provided a method for creating a new radio connection in a communication device with at least one existing radio connection. The method comprises determining whether or not an existing radio connection and a new radio connection interfere with one another and creating the new radio

connection with parameters that minimize interference between the existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

[0007] According to another aspect of the invention, there is provided a method for controlling a number of simultaneously operating radio connections in a communication device. The method comprises monitoring properties of the radio connections in order to detect interference between at least two radio connections and adjusting parameters of at least one radio connection so that interference between the radio connections is minimized if interference between the at least two radio connections is detected.

[0008] According to another aspect of the invention, there is provided a communication device comprising at least one communication interface to provide at least one radio connection and a control unit which is configured to create at least one radio connection, process a request to create a new radio connection, determine whether or not an existing radio connection and the new radio connection interfere with one another and create the new radio connection with parameters that minimize interference between an existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

[0009] According to another aspect of the invention, there is provided a communication device comprising at least one communication interface to provide a radio connection and a control unit configured to monitor properties of the radio connections in order to detect interference between at least two radio connections and adjust parameters of at least one radio connection so that the interference between the radio connections is minimized, if interference between the at least two radio connections is detected.

[0010] According to yet another aspect of the invention, there is provided a computer program product embodied on a computer readable medium, the computer program product encoding a computer program of instructions for executing a computer process for creating a new radio connection in a communication device with at least one existing radio connection. The process comprises determining whether or not the existing radio connection and the new radio connection interfere with one another and creating the new radio connection with parameters that minimize interference between the existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

[0011] According to yet another aspect of the invention, there is provided a computer program distribution medium readable by a computer and encoding a computer program of instructions for executing a computer process for creating a new radio connection in a communication device with at least one existing radio connection. The process comprises determining whether or not the existing radio connection and the new radio connection interfere with one another and creating the new radio connection with parameters that minimize interference between the existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

[0012] According to yet another aspect of the invention, there is provided a computer program product embodied on

a computer readable medium, the computer program product encoding a computer program of instructions for executing a computer process for controlling a number of simultaneously operating radio connections in a communication device. The process comprises monitoring properties of the radio connections in order to detect interference between at least two radio connections and adjusting parameters of at least one radio connection so that the interference between the radio connections is minimized if interference between the at least two radio connections is detected.

[0013] According to yet another aspect of the invention, there is provided a computer program distribution medium readable by a computer and encoding a computer program of instructions for executing a computer process for controlling a number of simultaneously operating radio connections in a communication device. The process comprises monitoring properties of the radio connections in order to detect interference between at least two radio connections and adjusting parameters of at least one radio connection so that the interference between the radio connections is minimized if interference between the at least two radio connections is detected.

[0014] The invention provides several advantages. The invention enables simultaneous operation of several radio connections from one communication device, even though the connections used the same radio resources, such as a frequency band. The invention is also able to control different radio connections regardless of the radio access technologies.

LIST OF DRAWINGS

[0015] In the following, the invention will be described in greater detail with reference to the embodiments and the accompanying drawings, in which

[0016] **FIG. 1** shows a block diagram of a communication device employing a number of radio connections,

[0017] **FIG. 2** illustrates an example of an architecture of a communication device,

[0018] **FIG. 3** illustrates an example of a structure of a multiradio controller,

[0019] **FIG. 4** is a flow diagram illustrating a process of creating a new connection in a communication device while operational connections exist, and

[0020] **FIG. 5** is a flow diagram illustrating a process of controlling a number of simultaneous connections in a communication device.

DESCRIPTION OF EMBODIMENTS

[0021] Next, a structure of a communication device employing a number of simultaneous radio connections will be described with reference to **FIG. 1**. The communication device **100** may be for example a personal communication device such as a mobile communication device, a computer, a laptop, or a PDA (Personal Digital Assistant). The communication device **100** may also be a combination of two electronic devices, such as a computer with a mobile communication device connected to the computer. An example of a combination of a PDA and a mobile communication device is the Nokia Communicator®.

[0022] The communication device **100** comprises a number of communication interfaces **110** to **114** to provide a wireless radio connection. The communication interfaces **110** to **114** may be configured to provide connections employing different radio access technologies. In our example, the communication interface **110** provides a communication link **116** with a GSM (Global System for Mobile Communications)-system through a serving GSM base transceiver station **122**. The communication interface **114** provides a WLAN (Wireless Local Area Network) connection **118** with a serving WLAN access point **124**.

[0023] A communication interface **112** provides another wireless connection **120**, using Bluetooth®-technology, with a user interface component **106**. The user interface component **106** may be for example a headset of a mobile telephone, comprising a microphone, a loudspeaker, and a communication interface for a Bluetooth® connection with the mobile telephone. The user interface component **106** may also be a keyboard or a mouse operating with a computer through a Bluetooth® link.

[0024] The communication interfaces **110** to **114** described above may be using partially the same components of the communication device **100** during the operation of radio connections **116** to **120**. The communication interfaces **110** to **114** may be using for example the same antenna or antennas, radio frequency amplifier, and/or radio frequency filter. Each communication interface **110** to **114** may naturally have its own components or only some of the communication interfaces **110** to **114** may be using the same components.

[0025] In the example of **FIG. 1** three communication interfaces **110** to **114** are provided in the communication device, these interfaces **110** to **114** providing the Bluetooth® connection **122**, the GSM connection **116**, and the WLAN connection **118**, respectively. It should, however, be appreciated that the communication device according to the invention is limited neither to the number of communication interfaces in the communication device nor to the wireless communication technology the communication interfaces provide. Thus, the communication device may comprise several communication interfaces providing connections based on, for example, the following technologies: GSM, WLAN, Bluetooth®, WCDMA (Wideband Code Division Multiple Access), GPRS (General Packet Radio Service), EDGE (Enhanced Data Rates for GSM Evolution), DVB-H (Digital Video Broadcasting for Handheld devices), UWB (Ultra Wideband), GPS (Global Positioning System), CDMA2000. Other wireless communication technologies are also possible to be implemented in the communication device according to the invention.

[0026] The communication device **100** further comprises a control unit **104** to control functions of the device **100**. The control unit **104** comprises means for creating radio connections between the communication device **100** and other communication devices or networks. The control unit **104** also comprises means for controlling a number of simultaneous radio connections in the communication device **100**. The control unit **104** may be implemented with a digital signal processor with suitable software or with separate logic circuits, for example with ASIC (Application Specific Integrated Circuit). The control unit **104** may also be a combination of these two implementations, such as a processor with suitable software embedded within an ASIC.

[0027] The communication device **100** further comprises a user interface **102** connected to the controlling unit. The user interface **102** may comprise a keyboard, a microphone, a loudspeaker, a display, and/or a camera.

[0028] The communication device **100** usually comprises a voltage source **108** to provide current for the operation of the device **100**. The voltage source may be for example a rechargeable battery.

[0029] **FIG. 2** illustrates an example of an architecture of the communication device **100**. The architecture is depicted in a layered form, like an OSI (Open Systems Interconnection) model of ISO (International Organization for Standardization), with lower layers providing services to higher layers.

[0030] On the highest layer are provided applications **200** to **204** that may need a radio connection. The application **200** to **204** may be for example an application handling a voice call, a web or WAP (Wireless Application Protocol) browser, an e-mail client, a GPS navigation application, a gaming application, or a media player application. The communication device **100** may also comprise other applications. Whenever an application **200** to **204** needs a radio connection to another communication device or network, the application sends a request to a lower layer to establish the connection. During the operation of the connection, the application sends data related to the application to lower layers for transmission over the connection to the other communication device. Similarly, the application receives data related to the application from the other communication device via the connection through the lower layers. When a need no longer exists to maintain the connection, the application sends a request to a lower layer to terminate the connection.

[0031] On the lower layer, services may be provided to the applications **200** to **204** by a connection selection manager **206**. The connection selection manager **206** may select an appropriate connection for an application based on a set of connection profiles stored in its database. A user or an operator, for example, may define the connection profiles, and the profiles may be based on optimization of some criterion, for example throughput, bit error rate or cost-efficiency of the connection. The connection selection manager **206** is an optional layer in the architecture of the communication device **100**, since the applications **200** to **204** may be designed to define the suitable connections by themselves.

[0032] The next lower layer is a multiradio controller **208**. The multiradio controller **208** establishes, controls, and terminates radio connections according to the connection requirements from the higher layers. The multiradio controller **208** is also responsible for taking care of the simultaneous operation of multiple radio connections.

[0033] The multiradio controller **208** may be a two-fold entity. First of all, there is a common control element **210**, which communicates with the higher layers. It receives requests for creating and terminating a radio connection from the applications **200** to **204** or, if applied, the connection selection manager **206**. The common control element **210** may also check the availability of the radio connection requested from a higher layer, and either start a process for creating a radio connection or inform higher layers that the

requested radio connection is not currently available. The common control element **210** is also responsible for controlling the simultaneous operation of multiple radio connections by adjusting the parameters of an existing connection whenever a new radio connection which would interfere with an existing radio connection is created, or whenever the common control element **210** detects a sufficient change in the properties of an existing connection.

[0034] The multiradio controller **208** also comprises radio-specific entities **212** to **224**. Each radio-specific entity can be seen as an interface between the common control element **210** of the multiradio controller **208** and the specific radio interface. A radio-specific entity takes care of controlling one radio connection according to the parameters received from the common control element **210**. A radio-specific entity is close to the physical layer of the connection, which enables rapid adaptation to the changing environment and fast control of the connection. The functionality of each radio-specific entity is radio-system-specific, which means that the parameters from the common control element **210** are applied to the standard specifications of the radio system. A radio-specific entity may also supply the common control element **210** with the measured properties of the connection it controls. The measured properties of the connection may comprise the bit error rate (BER), block error rate, or the frame error rate (FER) of the connection. The measured properties may also comprise received energy per chip divided by the noise power density in the band (E_c/N_0), interference signal code power (ISCP), received signal code power (RSCP), received signal strength indicator (RSSI), signal-to-interference-power ratio (SIR).

[0035] In an embodiment of the multiradio controller radio-specific entities are not included in the multiradio controller. Instead, the multiradio controller may have an interface to an external entity providing the interface to each radio.

[0036] Below the radio-specific entities **212** to **224** in **FIG. 2** are provided the communication interfaces **226** to **238**. Each communication interface takes care of encoding and decoding data into suitable electrical waveforms for transmission and reception on the specific physical media used. This process is carried out according to each radio-access-specific standard. The architecture of **FIG. 2** employs physical layers of EDGE, WCDMA, WLAN, Bluetooth®, DVB-H, UWB and GPS radio access technologies, but the operation of the multiradio controller is not limited to these technologies as it can be configured to control also other wireless radio access technologies.

[0037] Next, the operation of the multiradio controller **208** in the communication device will be described in more detail with reference to **FIG. 3** comprising the structure of the common control element **210** of the multiradio controller **208**. In addition to the common control element **210**, **FIG. 3** comprises applications **300** and radio interfaces **310** to clarify the operation of the common control element **210**.

[0038] A block **300** comprises applications, which may need a radio connection. The operation of the applications **300** is the same as described above. The block **300** may also comprise a connection selection manager, if a connection selection manager is applied in the communication device.

[0039] A connection request processing block **304** processes requests for a radio connection coming from an

application or from the connection selection manager. The connection request processing block 304 checks at least the validity of a request and the availability of radio resources related to the request. Checking the validity of a request comprises checking, whether or not the requested radio connection is available in the communication device. Checking the availability of the radio resources comprises checking which and how many radio connections are in operation, and whether it is possible to establish another radio connection without deteriorating or even collapsing the operation of an existing connection. If the requested connection is available and if it is possible to establish it, the connection request processing block 304 sends a command message to create the connection to a connection parameter manager 308. If the creation of the connection is not possible, the connection request processing block 304 informs the application, or the connection selection manager, that requested the connection that the requested connection is not currently available.

[0040] A radio record block 302 comprises information on the status, parameters and properties of the radio connections applied to the communication device. The status of a connection describes whether the connection is in operation, available, or disabled. When a connection is in operation, a communication link has been established using the communication interface related to that specific connection, and data is being transported through that link. When a connection is available, no communication link related to that specific connection has been established but radio resources are available for the establishment of the connection. When a connection is disabled, the connection is not available due to lack of radio resources, for example. There may also be two descriptions for the status of a radio connection. For example, if it is possible to establish a number of connections using a single communication interface, the status of the connection in the radio record block 302 may be both 'in operation' and 'available'.

[0041] The parameters of the connections that are held in the radio record block 302 may comprise the center frequency of the connection as well as a spreading code, channel code, modulation technique, power level, timing parameters, data rate, packet type, link type, automatic repeat request (ARQ) scheme etc. The properties of the connections that are held in the radio record block 302 may comprise the BER or FER of the connection as well as other measured or detected properties of the connection.

[0042] The radio record block 302 may also comprise information on all possible parameters specific to each radio access technology employed in the communication device and not just the ones that are currently being used. This information may comprise all the possible frequency bands, modulation and coding schemes, waveforms, etc. of each radio access technology. The radio record block 302 may also comprise information on the measured or detected non-idealities of the connections, such as spectral leakage or spurious emissions of radio signals. This information may then be used when controlling a number of simultaneously operating radio connections.

[0043] The radio record block 302 provides information on the status, parameters, and properties of the connections to the connection request processing block 304, to the connection parameter manager 308, and to the continuous

control manager 306. The radio record block 302 receives updates to the status, parameters, and properties from the connection parameter manager and from the continuous control manager. The radio record block 302 is included in the common control element 210 of FIG. 2.

[0044] A connection parameter manager 308 determines the operational parameters of each connection. When receiving a command from the connection request processing block 304 to create a new connection, the connection parameter manager 308 checks which connections are operational, and the parameters of the operational connections. If the connection parameter manager 308 detects that there is an active connection which might interfere with the operation of the new connection (or vice versa), the connection parameter manager 308 defines the parameters of the new connection so that interference between the two connections is as minimal as possible.

[0045] The detection of possible interference between connections is based on the information on the used radio resources, available radio resources, and on the parameters of existing connections. This information is contained in the radio record block 302. The connection parameter manager 308 may first check, whether or not an existing, operational connection exists that uses the same radio resources as the newly requested connection would use. These radio resources comprise a frequency band, time domain, and space domain. The space domain is a possible radio resource in communication devices which comprise multiple antennas and an ability to control the direction of a radio beam from the antenna or antenna array. It is possible that two simultaneous radio connections are operating on the same frequency band and transmitting/receiving data at the same time, only in/from different directions.

[0046] If no radio connections using the same radio resources exist, the creation of a new connection is simple, since the connection parameter manager 308 does not have to arrange several connections to share the same radio resources. The connection parameter manager 308 simply defines the parameters for the connection and sends a command to the corresponding radio-specific entity to create the connection.

[0047] If an operational radio connection exists that uses the same radio resource(s) as the requested new connection, the connection parameter manager 308 may define the parameters for the new connection so that interference between the two connections is minimized. The connection parameter manager 308 may also adjust the parameters of the existing connection in order to minimize the interference between the two connections using the same radio resource(s).

[0048] Next, a number of examples of defining/adjusting the parameters of a radio connection in creation and/or the existing radio connection(s) will be described. The radio connection in creation may employ different radio access technology than an existing radio connection or radio connections use. Equivalently, the radio connection in creation may employ the same radio access technology than an existing radio connection or radio connections use. It should be appreciated that the operation of the connection parameter manager 308 and the multiradio controller 208 is not limited to the examples described below, but other procedures for defining/adjusting the parameters of the radio connections are also possible.

[0049] When creating a new radio connection, the connection parameter manager 308 may first check, whether existing connections exist that use the same frequency band as the requested new connection in creation would use. If an existing connection on the same frequency band exists, the connection manager may (if possible) define the frequency parameters of the connection in creation so that the frequency bands of two connections do not overlap. For example, a Bluetooth® connection and a WLAN connection operate partially on the same 2.4 Gigahertz ISM-band. Let us assume that the connection in creation is a Bluetooth® connection, and a WLAN connection in operation exists. The Bluetooth® connection is a frequency hopping spread spectrum connection. Thus, the connection parameter manager 308 may prevent the Bluetooth® connection from hopping to the frequencies the WLAN connection is using. The limitation of frequency hops of the Bluetooth® connection is naturally possible also when a Bluetooth® connection exists and the connection in creation is a WLAN connection. The frequency overlapping is naturally also possible between connections other than just Bluetooth® and WLAN ones, and the frequency parameters of these other connections may be adjusted accordingly.

[0050] In some cases the frequency bands of two connections may overlap too much to enable the connections to be enabled to operate on the same frequency band. If the connection parameter manager 308 detects that a new connection cannot be created without using the same band as that used by an existing connection, the connection parameter manager 308 may next check whether it is possible to schedule the two connections so that the connection will not be transporting data at the same time. If applicable, the scheduling of two connections may be carried out by the multiradio controller 208 in the communication device. In many communication systems, however, very strictly defined time slots exist for data transport allocated for a connection. In such a case the connection parameter manager 308 may delay the establishment of a new connection so that the time slots allocated for the connections using the same band do not overlap.

[0051] It is also possible in some communication systems for the communication device to control the transmission or reception timing, either directly or indirectly. For example, in a GPS system a GPS receiver may decide the timing of reception. In packet switched systems, a receiver may choose not to receive packet switched data when another connection is using the same radio resource. If the receiver misses the reception of a transmitted data packet during that time, the transmitter does not receive a 'packet received' indication from the receiver, and retransmits the packet. This is a standard feature in most packet switched systems.

[0052] Space as a radio resource can be divided between connections in the same way as the frequency band and time described above. If a connection exists that uses the same frequency band, and/or the allocated time slots are all in use, but there is no connection transporting data to the same direction as in which the connection in creation would be transporting, the new connection may be established to transport data on the same frequency band in the same time slots, only in a different direction. This, however, requires an ability to control the direction of the connections from the

communication device. The communication device should also comprise multiple directional antennas or an antenna array.

[0053] In some cases no alternative exists for two connections (an existing connection and the connection in creation) but to use at least partly but even totally the same radio resources. In this case, the connection parameter manager 308 may determine, whether the new connection may be allocated with at least partly the same radio resources as the existing connection with a tolerable level of interference between the new connection and the existing connection. The tolerable level of interference between the connections may be such interference level that the connections do not block each other even though the effective data rate of the connections would be reduced. The connection parameter manager 308 may check the radio record 302 for knowledge of which radio connections may share at least partly the same radio resources and check the parameters of the connections for such case. The two connections then interfere with one another and, in the worst case, may block each other's operation totally. In such a case, other parameters of the connections could be adjusted so that the connections would tolerate as much interference as possible. Such parameters include modulation, coding (spreading code and/or channel code), interleaving, transmission power, and data rate. Other parameters of the connection may also be adjusted. An existing radio connection may even be put on a standby state or even terminated in order to create a new connection if the new connection has a higher priority than the existing connection, and it is not possible for the two connections to operate simultaneously. An alternative is that the creation of the new connection is terminated. In such a case, the connection parameter manager 308 informs the application/connection manager which requested the creation of the connection that the requested connection is currently unavailable.

[0054] After the connection parameter manager 308 has decided the proper parameters for the connection in creation, and possibly the adjustable parameters for an existing connection, it sends command messages to respective radio-specific entities to create a connection with the defined parameters, or to adjust the parameters of an existing connection. It updates the status and stores the parameters of the new connection in the radio record 302. The connection parameter manager 308 also sends the parameter of the new connection as well as a command to the continuous control manager 306 to start the monitoring and control of the new connection. Functions of the continuous control manager 306 will be described below.

[0055] Above, the functionality of the connection parameter manager 308 was described in the scenario where one connection is in creation and parameters of one existing connection are checked and possibly adjusted. The procedure is similar in a case where several connections exist, whose parameters need to be checked and/or adjusted in order to create a new connection. The operation of the connection parameter manager 308 is not restricted to the number of existing connections.

[0056] The continuous control manager 306 monitors the properties of operational radio connections, and adjusts their parameters according to the performance of the connections or to the information on the connections. The function of the

continuous control manager **306** is to rapidly adapt the operating radio connections to the possibly changing radio environment. When a new connection is created, the continuous control manager **306** receives the parameters related to the connection and a command to start the monitoring and control of the new connection from the connection parameter manager **308**. The continuous control manager **306** then starts monitoring the properties of the connection. The properties of the connection may be measured in the communication device or by the serving network system and delivered to the continuous control manager **306** through the corresponding radio-specific entity.

[0057] The continuous control manager **306** may monitor for example performance measures of operational connections. Such performance measures may be BER or FER. If the continuous control manager **306** detects too poor performance measures related to a connection, it may check whether the poor performance is associated with the use of a certain radio resource. For example when related to a Bluetooth® connection, a momentarily high bit error rate may be associated with a certain frequency hop. This may occur when an operational WLAN connection exists partially on the same band as a Bluetooth® connection, and the frequency hops to the band where WLAN is operating may produce poorer performance. If the poor performance is related to a use of a certain radio resource (or a portion of the radio resource), the continuous control manager **306** may adjust the parameters of a connection or connections so that the radio resource is not used by several connections. For instance, the parameters of a Bluetooth® connection may be adjusted so that the frequency hopping of the connection is limited to a narrower band, where no other operating connection exists. Controlling the use of time (or space) domain radio resources is carried out in a similar way, of course taking into account restrictions given by for example the radio systems (such as the time slots allocated for each connection in a GSM system).

[0058] If no alternative exists but to use the same radio resources for two (or more) connections, the continuous control manager **306** may adjust the parameters of one or more connections whose performance is too poor. The adjusted parameters may comprise a spreading code, channel code, modulation technique, power level, and/or timing parameters. If the performance of a connection or connections is still unsatisfactory, the continuous control manager **306** may temporarily shut down a connection or even terminate either the connection performing poorly or the connection interfering with the poorly performing connection.

[0059] The continuous control manager **306** may also have a pre-information on the possible combinations of connections, which may interfere with one another. For example, if the continuous control manager detects a poor performance in a Bluetooth® connection, it may automatically check, whether an operational WLAN connection (or vice versa) exists, because it has information that these connections may interfere with one another. If the continuous control manager **306** detects an operational WLAN connection, it may adjust the parameters of one or both connections. The continuous control manager **306** may take care of scheduling the transmission of packets, and changing parameters of packets to be transmitted. Possible parameters that may be changed comprise packet length, amount of data in the packet,

modulation scheme, channel coding scheme, transmission frequency/rate of packets, and/or format of the packet (preamble, header, payload, etc.). The continuous control manager **306** may predict possible collisions of data packets of a number of connections and adapt the scheduling accordingly. Thus, the continuous control manager **306** may have information on the possible coincidences between connections, and also a defined set of rules as to how to rapidly adapt to these situations.

[0060] FIG. 4 illustrates a method for creating a radio connection in a communication device, and arranging simultaneous operation of several radio connections. The process starts in **400** with no operational connections in the communication device. In **402** a first radio connection is created according to a prior art procedure. A request to create a new radio connection is received in **404**. The request may come from an application in the communication device or from an external instance, for example from a radio network.

[0061] Available radio resources are checked in **406**. This comprises checking the radio resources specified for the connection in creation. Available radio resources mean that there is at least a portion of one radio resource (frequency band, time slots, space) available. Although the frequency band the new connection is specified to use were in use, it may be possible to arrange the two (or more) connections to operate so that they do not transport data at the same time (or in the same direction).

[0062] If radio resources are available so that a new connection can be created without using the same radio resources as used for an existing connection, the process proceeds to **408** (optional) and **410**. **408** is carried out, if the parameters of an existing radio connection have to be adjusted in order to create a new connection without the connections interfering with each other. A new connection with parameters that do not interfere with another connection is created in **410**.

[0063] If no radio resources are available in **406**, the process moves to **412**, where it is checked whether or not it is possible to create another connection using at least partially all the same radio resources as used for an existing connection or connections. This means that at least two connections would be operating at least partially at the same frequency, transporting data at least partially at the same time and at least partially in the same direction.

[0064] If it is impossible to create another connection (even with adjusting the parameters of existing connection or connections) without blocking the usage of another radio connection, the process moves to **414**, where one radio connection is either put on a standby state or even terminated. The radio connection put on a standby state or terminated may be an existing connection, but also the creation procedure of the new radio connection may be cancelled.

[0065] If it is possible in **412** to create another connection using the same radio resources as used for an existing connection or connections, the process proceeds to **416** and **418** (optional). The new connection with parameters that allow the connection to sustain interference to some degree is created in **416**. The parameters of an existing connection or connections are adjusted accordingly, when necessary.

[0066] The process ends in 420.

[0067] FIG. 5 illustrates a procedure for controlling a number of simultaneous radio connections in a communication device.

[0068] The process starts in 500. A number of radio connections is created according to the procedure of FIG. 4 in 502. Properties of the radio connections are monitored in 504. The properties being monitored may comprise properties describing the performance of the connection, such as BER or FER. It is checked in 506 whether two connections interfere with each other. Detection of two connections interfering with each other may be based on sudden degradation in performance of at least one connection combined to the information that there is another connection or connections using the same radio resources.

[0069] If two connections do not interfere with each other in 506, the process returns to 504 and continues the monitoring of the properties of the connections. If two connections are detected to interfere with each other in 506, the process moves to 508, where the radio resources are checked. This comprises checking the radio resources of both connections that interfere with each other. If there are radio resources available so that the two connections can operate without interfering with each other, the process moves from 510 to 512, where the parameters of at least one connection are adjusted so that the two connections do not interfere with one another. Adjusting the parameters of one connection may suffice in some cases, but a need may exist to adjust the parameters of both connections interfering with each other. Parameters of another connection or other connections that were not involved in the interference in 506 may also need to be adjusted in some cases. This may be the case in situations where the adjustment of parameters of one connection results in interference between the adjusted connection and another connection. A precaution would be to also adjust the parameters of that other connection at the same time so that interference between these two connections would be avoided.

[0070] The process returns from 512 to 504, and the monitoring of the properties of the operational radio connections in the communication device is continued.

[0071] If no other option exists for the two connections but to use the same radio resources, the process moves from 510 to 514, where it is checked whether or not it is possible for the two connections to operate using at least partially all the same radio resources. This means that at least two connections would be operating at least partially at the same frequency, transporting data at least partially at the same time and at least partially in the same direction.

[0072] If it is possible for the two connections to operate using the same radio resources in 514, the process proceeds to 512, where the parameters of one connection or both connections are adjusted so that they sustain interference to some degree, thus enabling the operation of two connections using the same radio resources. The process returns from 512 to 504, and the monitoring of the properties of the operational radio connections in the communication device is continued.

[0073] If it is impossible for the two connections to operate using the same radio resources in 514, the process moves to 516, and one of the connections is either put on a

standby state or even terminated. A decision about which connection is put on a standby state or terminated is based on some criterion, such as priority or performance of the connections. A connection with a lower priority or poorer performance is terminated. The process returns from 516 to 504, and the monitoring of the properties of the operational radio connections in the communication device is continued.

[0074] The communication device 100 of the type described above may be used for implementing the methods, but also other types of communication devices may be suitable for the implementation. In an embodiment, a computer program product encodes a computer program of instructions for executing a computer process of the above-described method for creating a new radio connection in a communication device with at least one existing radio connection. In another embodiment, a computer program product encodes a computer program of instructions for controlling a number of simultaneously operating radio connections in a communication device. The computer program product may be implemented on a computer program distribution medium. The computer program distribution medium includes all manners known in the art for distributing software, such as a computer readable medium, a program storage medium, a record medium, a computer readable memory, a computer readable software distribution package, a computer readable signal, a computer readable telecommunication signal, and a computer readable compressed software package.

[0075] Even though the invention has been described above with reference to an example according to the accompanying drawings, it is clear that the invention is not restricted thereto but it can be modified in several ways within the scope of the appended claims.

1. A method for creating a new radio connection in a communication device with at least one existing radio connection, the method comprising:

determining whether or not the existing radio connection and the new radio connection interfere with one another; and

creating the new radio connection with parameters that minimize interference between the existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

2. The method of claim 1, wherein the existing radio connection and the new radio connection employ at least two different radio access technologies.

3. The method of claim 1, further comprising:

defining the parameters of the new connection such that the new radio connection does not use the same radio resources as the existing radio connection.

4. The method of claim 3, wherein the parameters of the new connection are defined such that the new radio connection does not transmit or receive data at a same time as the existing radio connection.

5. The method of claim 3, wherein the parameters of the new connection are defined such that the new radio connection does not transmit or receive data at a same frequency band as the existing radio connection.

6. The method of claim 1, further comprising:

determining, whether the new connection may be allocated with at least partly the same radio resources as the existing connection with a tolerable level of interference between the new connection and the existing connection;

defining the parameters of the new connection such that the new radio connection uses at least partly the same radio resources as the existing radio connection, if it has been determined that the new connection and the existing connection may be allocated with at least partly the same radio resources.

7. The method of claim 1, wherein the existing radio connection and the new radio connection employ the same radio access technology.**8.** The method of claim 1, further comprising:

adjusting the parameters of the existing radio connection in order to minimize interference between the new radio connection and the existing radio connection.

9. The method of claim 1, wherein the determining of whether or not the existing radio connection and the new radio connection interfere with one another is based on pre-information on properties of the existing radio connection and the new radio connection.**10.** The method of claim 1, wherein the determining of whether or not the existing radio connection and the new radio connection interfere with one another is based on detected or measured properties of the existing radio connection.**11.** A method for controlling a number of simultaneously operating radio connections in a communication device, the method comprising:

monitoring properties of the radio connections in order to detect interference between at least two radio connections; and

adjusting parameters of at least one radio connection of the at least two radio connections so that interference between the at least two radio connections is minimized if interference between the at least two radio connections is detected.

12. The method of claim 11, further comprising:

monitoring the properties describing a performance of the radio connections in order to detect interference between the at least two radio connections.

13. The method of claim 11, further comprising:

adjusting the parameters of the at least one radio connection such that the at least two radio connections do not use the same radio resources.

14. The method of claim 11, further comprising:

adjusting parameters of the at least one radio connection such that the at least two radio connections interfering with one another use at least partially the same radio resources, if not enough radio resources are available for the at least two radio connections interfering with one another.

15. The method of claim 14, further comprising:

adjusting the parameters of the radio connections that use at least partially the same radio resources in order for the radio connections to sustain interference.

16. The method of claim 11, further comprising:

terminating or putting on a stand-by state the at least one radio connection if the at least two radio connections interfering with one another cannot be arranged to operate simultaneously.

17. A communication device, comprising:

at least one communication interface to provide at least one radio connection; and

a control unit configured to

create the at least one radio connection as an existing radio connection,

process a request to create a new radio connection,

determine whether or not the existing radio connection and the new radio connection interfere with one another, and

create the new radio connection with parameters that minimize interference between the existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

18. The communication device of claim 17, wherein the control unit is further configured to create radio connections which employ at least two different radio access technologies.**19.** The communication device of claim 17, wherein the control unit is further configured to define the parameters of the new radio connection such that the new radio connection does not use the same radio resources as the existing radio connection.**20.** The communication device of claim 19, wherein the control unit is further configured to define the parameters of the new radio connection such that the new radio connection is not transmitting or receiving data at a same time as the existing radio connection.**21.** The communication device of claim 19, wherein the control unit is further configured to define the parameters of the new radio connection such that the new radio connection does not transmit or receive data at a same frequency band as the existing radio connection.**22.** The communication device of claim 17, wherein the control unit is further configured to determine, whether the new connection may be allocated with at least partly the same radio resources as the existing connection with a tolerable level of interference between the new connection and the existing connection, and to define the parameters of the new connection such that the new radio connection uses at least partly the same radio resources as the existing radio connection, if it has been determined that the new connection and the existing connection may be allocated with at least partly the same radio resources.**23.** The communication device of claim 17, wherein the control unit is further configured to create radio connections which employ the same radio access technology.**24.** The communication device of claim 17, wherein the control unit is further configured to adjust the parameters of the existing radio connection in order to minimize interference between the new radio connection and the existing radio connection.**25.** The communication device of claim 17, wherein the control unit is further configured to determine, whether or not the existing radio connection and the new radio connection

tion interfere with one another, based on pre-information on properties of the existing radio connection and the new radio connection.

26. The communication device of claim 17, wherein the control unit is further configured to determine, whether or not the existing radio connection and the new radio connection interfere with one another, based on detected or measured properties of the existing radio connection.

27. A communication device, comprising:

communication interfaces to provide radio connections;
and

a control unit configured to

monitor properties of the radio connections in order to detect interference between at least two radio connections, and

adjust parameters of at least one radio connection so that the interference between the at least two radio connections is minimized, if interference between the at least two radio connections is detected.

28. The communication device of claim 27, wherein the control unit is further configured to monitor properties describing a performance of the radio connections in order to detect interference between the at least two radio connections.

29. The communication device of claim 27, wherein the control unit is further configured to adjust the parameters of at least one radio connection of the at least two radio connections in a way that the at least two radio connections do not use the same radio resources.

30. The communication device of claim 27, wherein the control unit is further configured to adjust the parameters of at least one radio connection of the at least two radio connections such that the at least two radio connections interfering with one another use at least partially the same radio resources, if there are not enough radio resources available for the at least two radio connections interfering one another.

31. The communication device of claim 30, wherein the control unit is further configured to adjust the parameters of the at least two radio connections using at least partially the same radio resources in order for the at least two radio connections to sustain interference.

32. The communication device of claim 27, wherein the control unit is further configured to terminate or put on a stand-by state at least one radio connection of the at least two radio connections if the at least two radio connections interfering with one another cannot be arranged to operate simultaneously.

33. A communication device, comprising:

communication means to provide a radio connection;

means for creating the radio connection as an existing radio connection;

means for processing a request to create a new radio connection;

means for determining whether or not the existing radio connection and the new radio connection interfere with one another; and

means for creating the new radio connection with parameters that minimize interference between the existing

radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

34. A communication device, comprising:

communication means to provide radio connections;

means for monitoring properties of the radio connections in order to detect interference between at least two radio connections; and

means for adjusting parameters of at least one radio connection of the at least two radio connections so that the interference between the at least two radio connections is minimized if interference between the at least two radio connections is detected.

35. A computer program product embodied on a computer readable medium, the computer program product encoding a computer program of instructions for executing a computer process for creating a new radio connection in a communication device with at least one existing radio connection, the process comprising:

determining whether or not the existing radio connection and the new radio connection interfere with one another; and

creating the new radio connection with parameters that minimize interference between the existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

36. A computer program distribution medium readable by a computer and encoding a computer program of instructions for executing a computer process for creating a new radio connection in a communication device with at least one existing radio connection, the process comprising:

determining whether or not the existing radio connection and the new radio connection interfere with one another; and

creating the new radio connection with parameters that minimize interference between the existing radio connection and the new radio connection if the existing radio connection and the new radio connection interfere with one another.

37. The computer program distribution medium of claim 36, the distribution medium comprising at least one of a computer readable medium, a program storage medium, a record medium, a computer readable memory, a computer readable software distribution package, a computer readable signal, a computer readable telecommunications signal, and a computer readable compressed software package.

38. A computer program product embodied on a computer readable medium, the computer program product encoding a computer program of instructions for executing a computer process for controlling a number of simultaneously operating radio connections in a communication device, the process comprising:

monitoring properties of the radio connections in order to detect interference between at least two radio connections; and

adjusting parameters of at least one radio connection of the at least two radio connections so that interference

between the at least two radio connections is minimized if interference between the at least two radio connections is detected.

39. A computer program distribution medium readable by a computer and encoding a computer program of instructions for executing a computer process for controlling a number of simultaneously operating radio connections in a communication device, the process comprising:

monitoring properties of the radio connections in order to detect interference between at least two radio connections; and

adjusting parameters of at least one radio connection of the at least two radio connections so that interference

between the at least two radio connections is minimized if interference between the at least two radio connections is detected.

40. The computer program distribution medium of claim 39, the distribution medium comprising at least one of a computer readable medium, a program storage medium, a record medium, a computer readable memory, a computer readable software distribution package, a computer readable signal, a computer readable telecommunications signal, and a computer readable compressed software package.

* * * * *