



US011856250B2

(12) **United States Patent**
Sheppard et al.

(10) **Patent No.:** **US 11,856,250 B2**
(45) **Date of Patent:** **Dec. 26, 2023**

(54) **METHODS AND APPARATUS TO DETERMINE A DURATION OF MEDIA PRESENTATION BASED ON TUNING SESSION DURATION**

(71) Applicant: **The Nielsen Company (US), LLC**,
New York, NY (US)

(72) Inventors: **Michael Sheppard**, Brooklyn, NY
(US); **Jonathan Sullivan**, Hurricane,
UT (US); **Peter Lipa**, Tucson, AZ
(US); **Alejandro Terrazas**, Santa Cruz,
CA (US)

(73) Assignee: **The Nielsen Company (US), LLC**,
New York, NY (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(h) by 0 days.

(21) Appl. No.: **17/967,832**

(22) Filed: **Oct. 17, 2022**

(65) **Prior Publication Data**

US 2023/0042182 A1 Feb. 9, 2023

Related U.S. Application Data

(63) Continuation of application No. 16/860,026, filed on
Apr. 27, 2020, now Pat. No. 11,432,026, which is a
(Continued)

(51) **Int. Cl.**
H04N 21/25 (2011.01)
H04N 21/466 (2011.01)
H04N 21/442 (2011.01)

(52) **U.S. Cl.**
CPC **H04N 21/252** (2013.01); **H04N 21/44222**
(2013.01); **H04N 21/4667** (2013.01)

(58) **Field of Classification Search**
CPC H04N 21/252; H04N 21/44222; H04N
21/4667
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,286,140 B1 9/2001 Ivanyi
6,363,380 B1 3/2002 Dimitrova
(Continued)

OTHER PUBLICATIONS

The Nielsen Company, "Average Minutes Viewed, NPOWER,"
[http://en-us-nielsen.com/sitelets/cls/], 2012, 2 pages.

Tuchman, "An Empirical Analysis of Complementarities Between
the Consumption of Goods and Advertisements," Nov. 20, 2014, 50
pages.

Econometric Analysis, "Appendix B, Probability and Distribution
Theory," 2002, 52 pages.

(Continued)


Primary Examiner — Nathan J Flynn

Assistant Examiner — Christine A Kurien

(57) **ABSTRACT**

Methods, apparatus, systems, and articles of manufacture
are disclosed to determine a duration of media presentation
based on tuning session duration. Example apparatus a
receiver to obtain a first tuning session duration indicative of
an amount of time between channel changes of a first media
presentation device at a first media presentation location, a
presentation session estimator to select a model from stor-
age, the model selected based on a match of the first tuning
session duration and a second tuning session duration, the
model including a relation between the second tuning ses-
sion duration and a first presentation session duration of
media presented on a second media presentation device at a
second media presentation location, and estimate a second
presentation session duration of media presented within the
first tuning session duration based on the model.

23 Claims, 11 Drawing Sheets

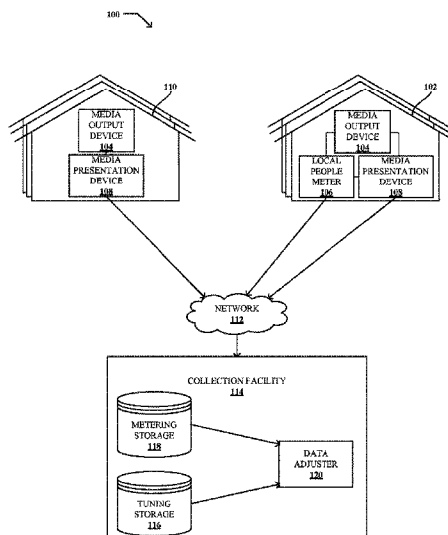

Related U.S. Application Data

continuation of application No. 15/990,729, filed on May 28, 2018, now Pat. No. 10,638,177, which is a continuation of application No. 15/011,455, filed on Jan. 29, 2016, now Pat. No. 9,986,272.

- (60) Provisional application No. 62/239,126, filed on Oct. 8, 2015.

References Cited**U.S. PATENT DOCUMENTS**

7,954,120 B2 *	5/2011	Roberts		H04H 60/33 725/12
8,701,134 B2 *	4/2014	Whinmill		H04N 21/44204 725/9
8,839,278 B2 *	9/2014	Wang		H04N 21/44224 725/16
8,863,166 B2 *	10/2014	Harsh		H04N 21/44224 725/9
8,904,419 B2 *	12/2014	Vinson		H04N 21/6582 725/14
9,986,272 B1	5/2018	Sheppard et al.		
11,432,026 B2	8/2022	Sheppard et al.		
2002/0129368 A1	9/2002	Schlack et al.		
2003/0101449 A1	5/2003	Bentolila et al.		
2007/0061831 A1	3/2007	Savoor et al.		
2008/0300965 A1	12/2008	Doe		
2012/0254911 A1	10/2012	Doe		
2014/0037942 A1	2/2014	Park et al.		
2014/0380350 A1	12/2014	Shankar et al.		
2020/0260133 A1	8/2020	Sheppard et al.		

OTHER PUBLICATIONS

United States Patent and Trademark Office, "Final Office Action," issued in connection with U.S. Appl. No. 15/011,455, dated Jul. 18, 2017, 12 pages.

United States Patent and Trademark Office, "Non-Final Office Action," issued in connection with U.S. Appl. No. 15/011,455, dated Feb. 15, 2017, 15 pages.

United States Patent and Trademark Office, "Notice of Allowance," issued in connection with U.S. Appl. No. 15/011,455, dated 8 pages.

United States Patent and Trademark Office, "Non-Final Office Action," issued in connection with U.S. Appl. No. 15/990,729, dated Feb. 1, 2019, 11 pages.

United States Patent and Trademark Office, "Notice of Allowance," issued in connection with U.S. Appl. No. 15/990,729, dated Jun. 17, 2019, 8 pages.

United States Patent and Trademark Office, "Notice of Allowance," issued in connection with U.S. Appl. No. 15/990,729, dated Jan. 2, 2020, 8 pages.

United States Patent and Trademark Office, "Non-Final Office Action," issued in connection with U.S. Appl. No. 16/860,026, dated Jan. 19, 2021, 18 pages.

United States Patent and Trademark Office, "Final Office Action," issued in connection with U.S. Appl. No. 16/860,026, dated Jul. 12, 2021, 18 pages.

United States Patent and Trademark Office, "Notice of Allowance and Fee(s) Due," issued in connection with U.S. Appl. No. 16/860,026, dated Apr. 20, 2022, 8 pages.

* cited by examiner

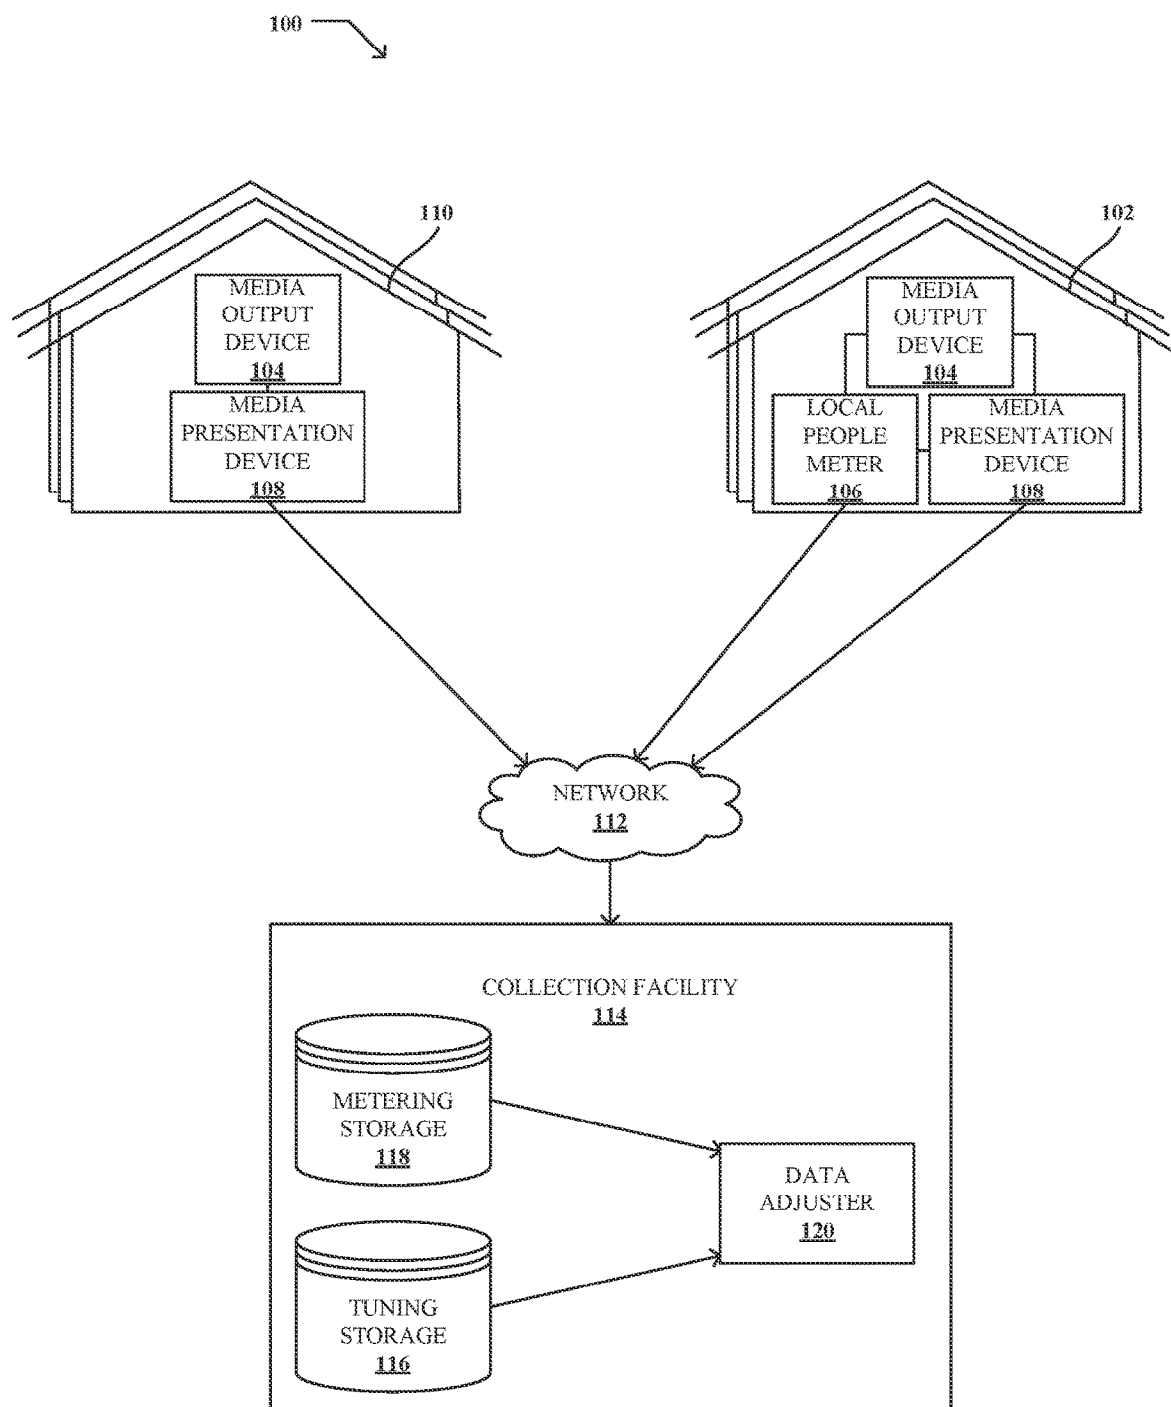


FIG. 1

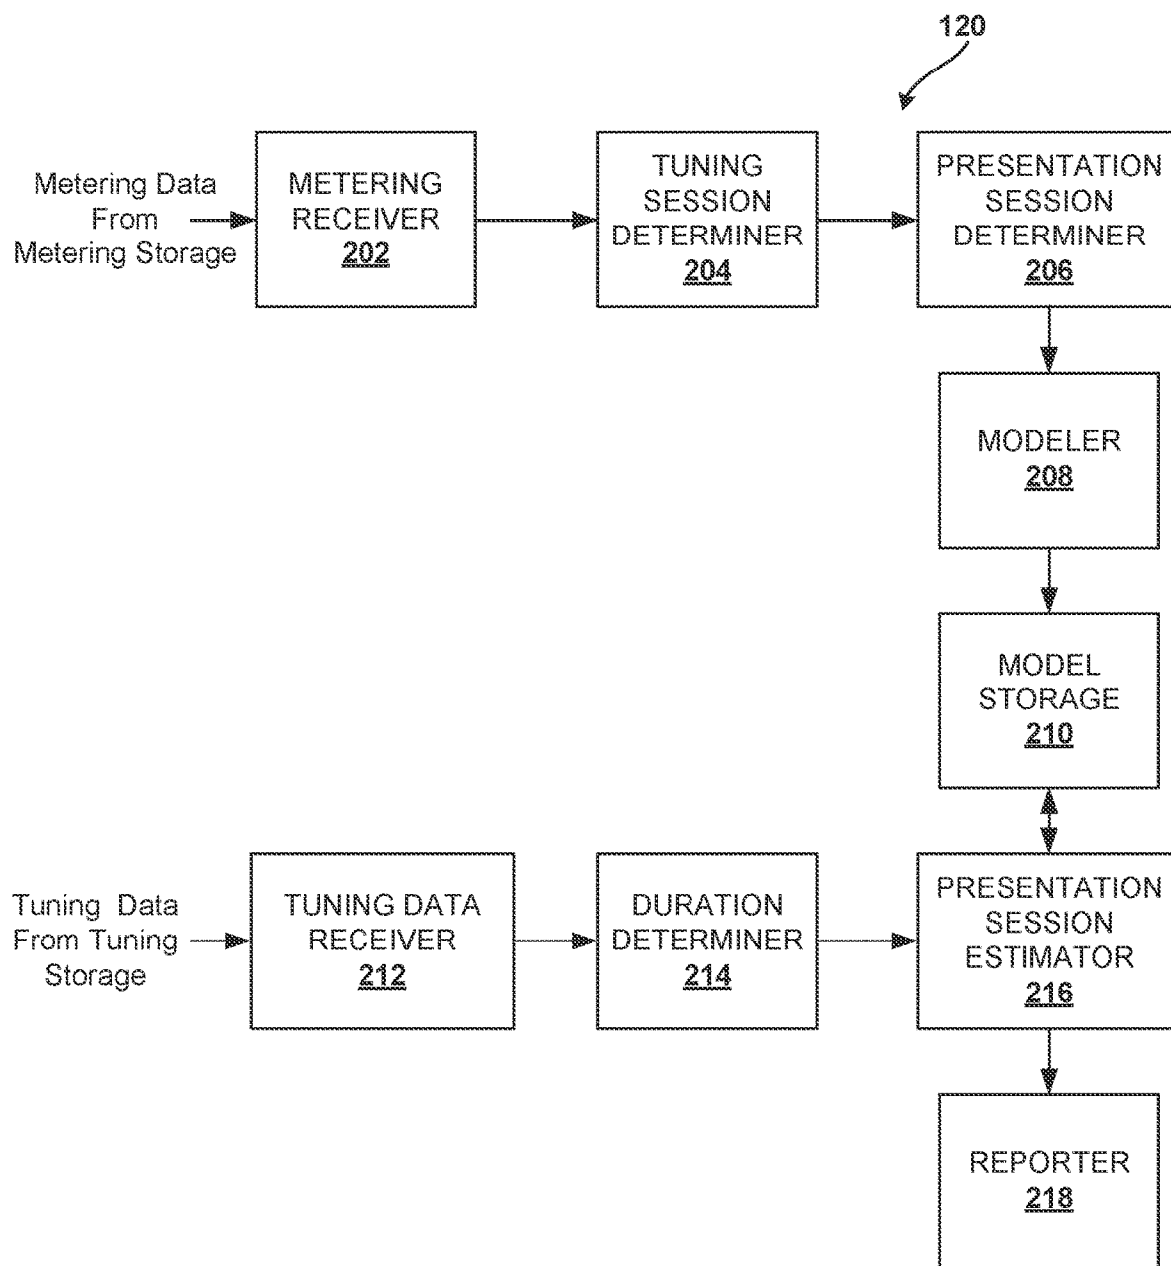
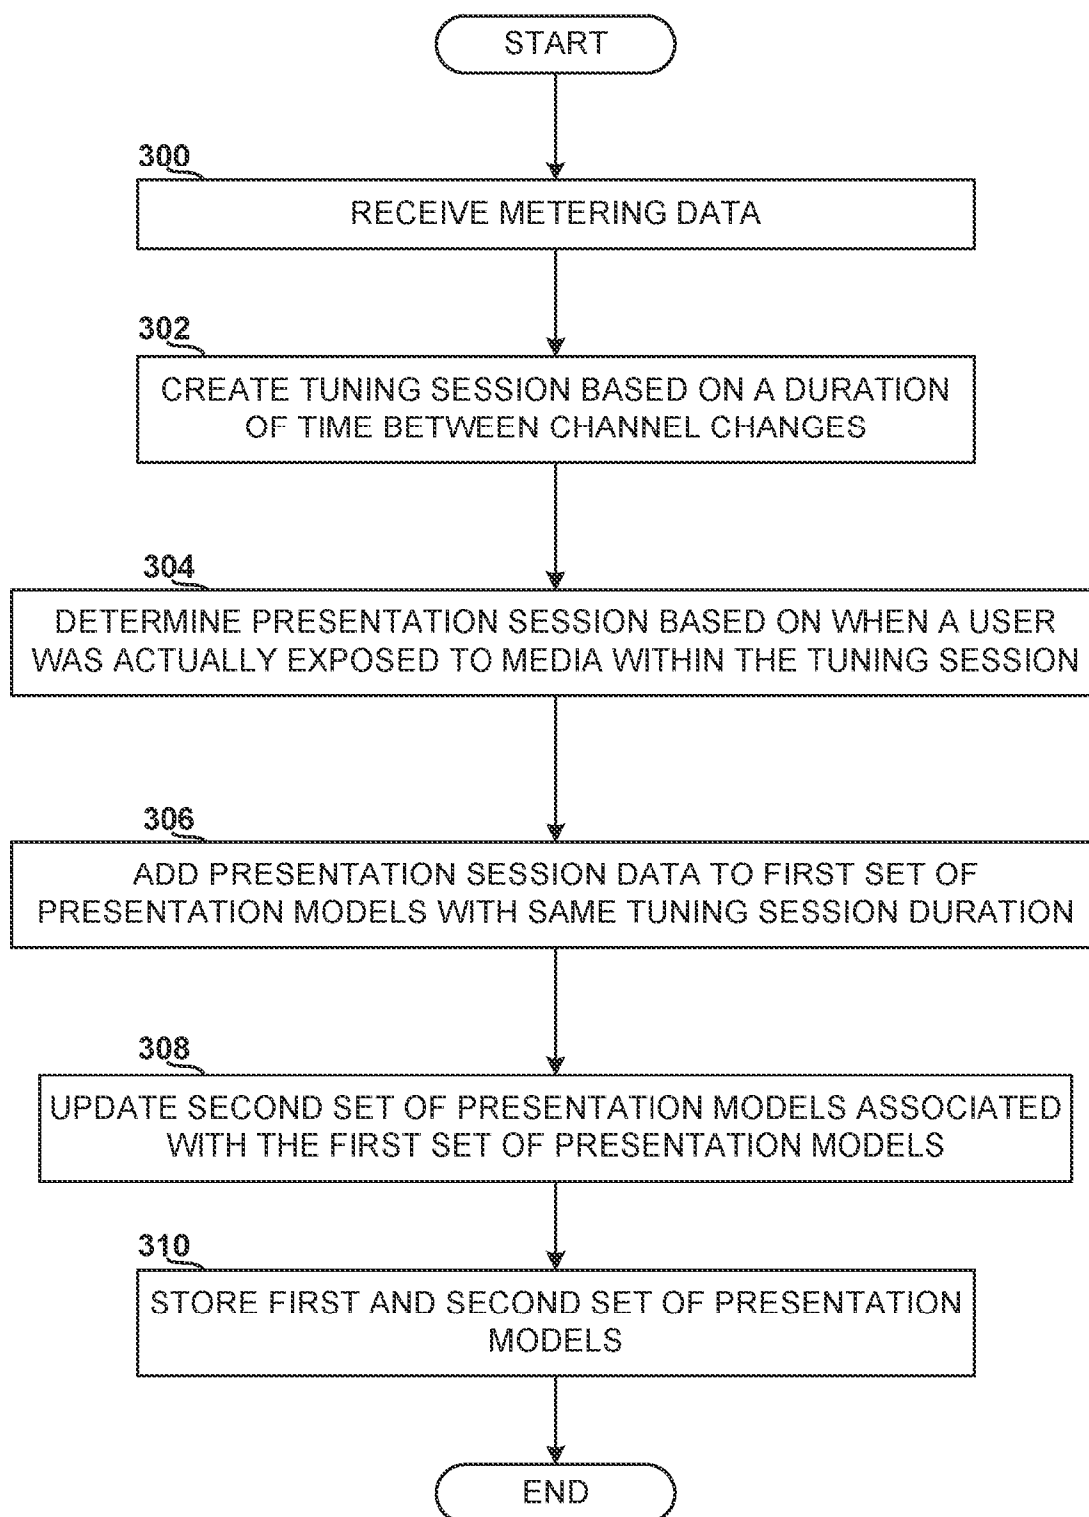


FIG. 2

**FIG. 3**

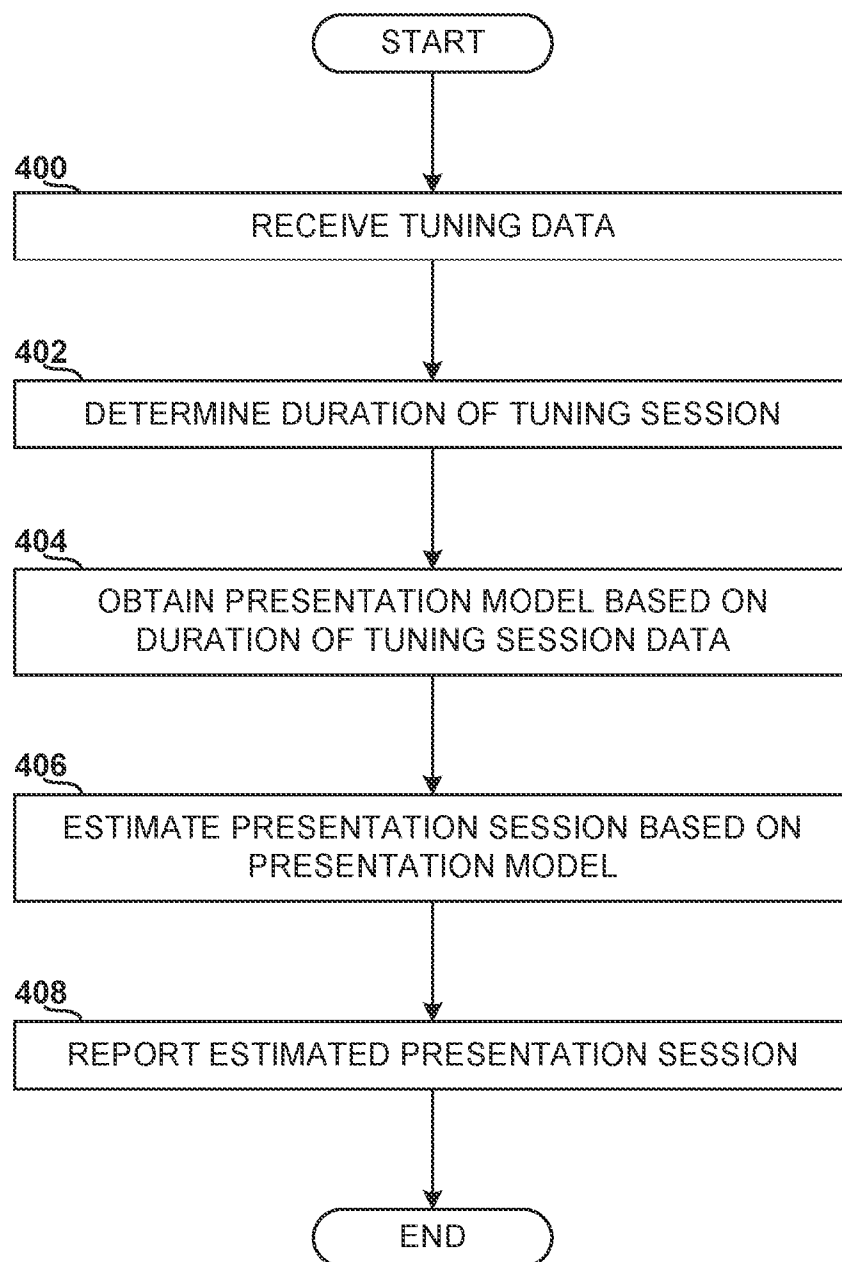


FIG. 4

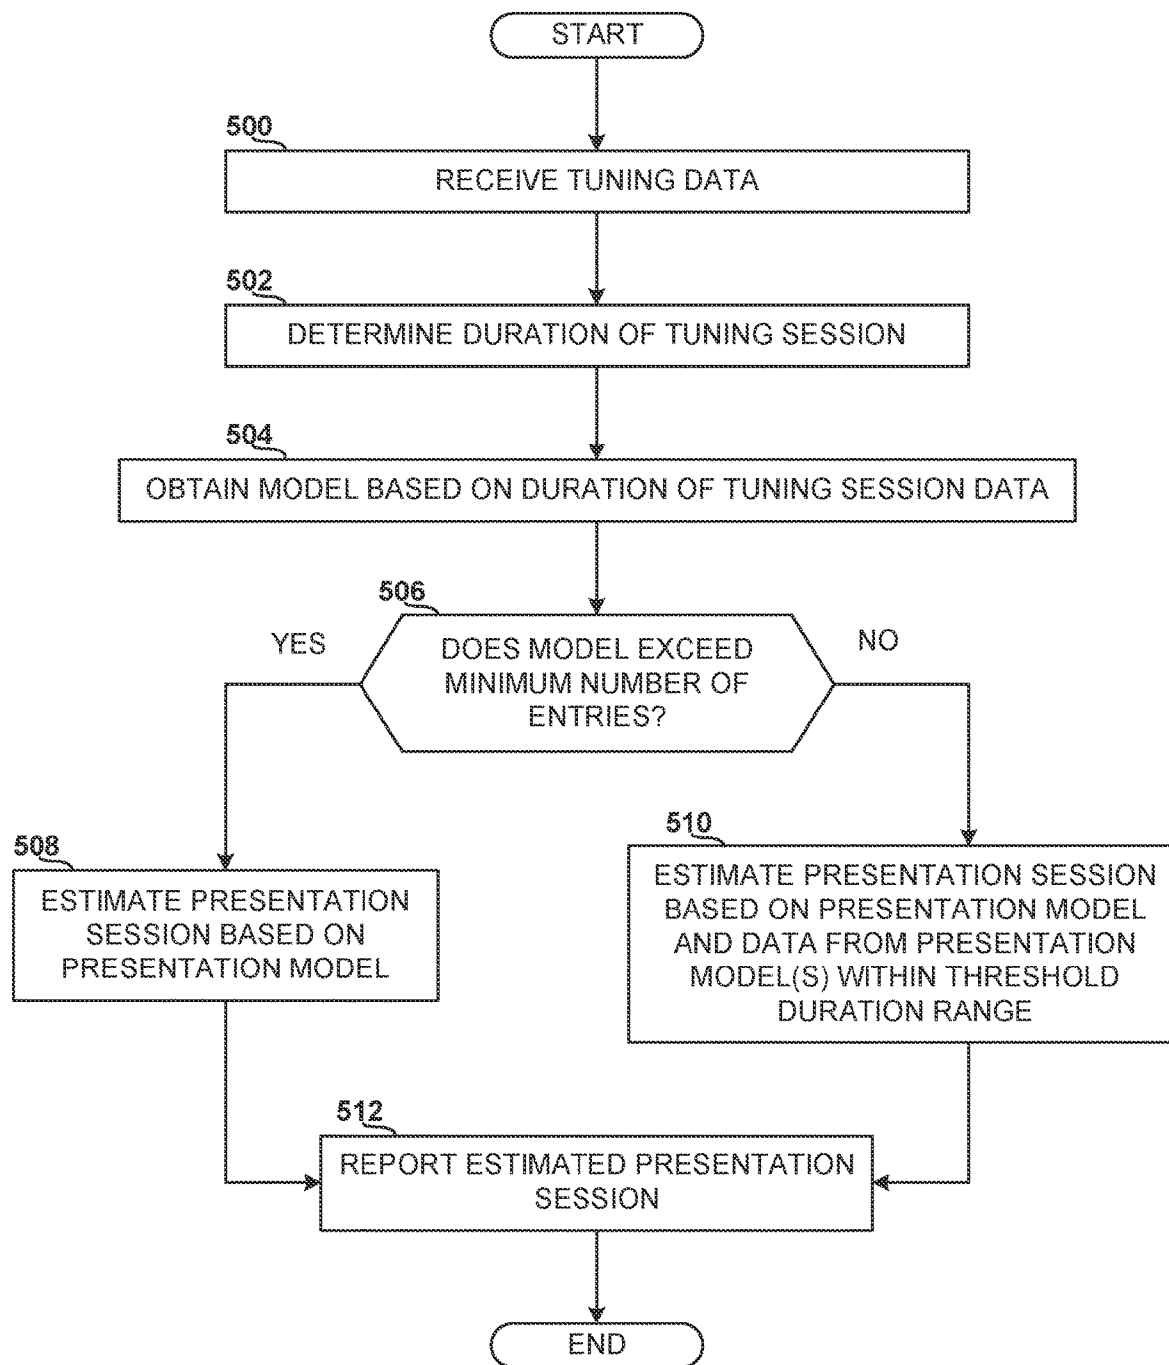


FIG. 5

600

602 Household

604 Tuner Key

606 Start Time

608 End Time

610 Station Key

612 Genre

614 Presentation Weight

616 Valid Data Flag

618 Source

620

ID	Tuner Key	Start Time	End Time	Station Key	Genre	Presentation Weight	Valid Data Flag	Source
50006	186242092	2014-12-01 00:00:00	2014-12-01 00:25:00	294984	N/A	17427	1	0
50006	186242092	2014-12-01 00:34:00	2014-12-01 02:56:00	287552	Non-Media	17427	1	0
50006	186242092	2014-12-01 04:52:00	2014-12-01 05:46:00	287552	Non-Media	17427	1	0
50006	186242092	2014-12-01 20:50:00	2014-12-01 21:35:00	287552	Non-Media	17427	1	0
50006	186242092	2014-12-01 22:41:00	2014-12-01 23:24:00	294984	N/A	17427	1	0
50006	186242092	2014-12-01 23:29:00	2014-12-01 23:59:00	294984	N/A	17427	1	0
50006	186242092	2014-12-02 15:20:00	2014-12-02 15:33:00	349855	Gen. Ent.	17428	1	0
50006	186242092	2014-12-03 14:49:00	2014-12-03 14:53:00	348488	Gen. Ent.	17429	1	0
50006	186242092	2014-12-03 22:21:00	2014-12-03 22:21:00	287552	Non-Media	17429	1	0
50006	186242092	2014-12-03 22:27:00	2014-12-03 22:30:00	288298	N/A	17429	1	0
50006	186242092	2014-12-03 23:37:00	2014-12-03 23:48:00	287552	Non-Media	17429	1	0
50006	186242092	2014-12-04 00:00:00	2014-12-04 00:23:00	287552	Non-Media	17430	1	0
50006	186242092	2014-12-04 23:00:00	2014-12-04 23:47:00	287552	Non-Media	17430	1	0
50006	186242092	2014-12-04 23:55:00	2014-12-05 01:40:00	287552	Non-Media	17431	1	0

FIG. 6

Household ID	Tuner Key	Start Time	End Time	Station Key	Genre	Presentation Valid Data		
						Weight	Flag	Source
50006	186242092	2014-12-01 00:00:00	2014-12-01 00:25:00	294984	N/A	17427	1	0
50006	186242092	2014-12-01 00:34:00	2014-12-01 02:56:00	287552	Non-Media	17427	1	0
50006	186242092	2014-12-01 04:52:00	2014-12-01 05:46:00	287552	Non-Media	17427	1	0
50006	186242092	2014-12-01 20:50:00	2014-12-01 21:35:00	287552	Non-Media	17427	1	0
50006	186242092	2014-12-01 22:41:00	2014-12-01 23:24:00	294984	N/A	17427	1	0

FIG. 7A

00:25:00	Turned the TV off after watching previous station
00:34:00	Turned TV back on and within the same minute changed channel
02:56:00	Turned TV off
04:52:00	Turned TV on (same channel)
05:46:00	Turned TV off
20:50:00	Turned TV on (same channel)
21:35:00	Turned TV off
22:41:00	Turned TV on and changed channel

FIG. 7B

Tuning Session:
00:34:00 to 22:41:00 (1,327 minutes)
Presentation Sessions:
00:34:00 - 2:56:00 (142 minutes)
04:52:00 - 5:46:00 (54 minutes)
20:50:00 - 21:35:00 (45 minutes)

FIG. 7C

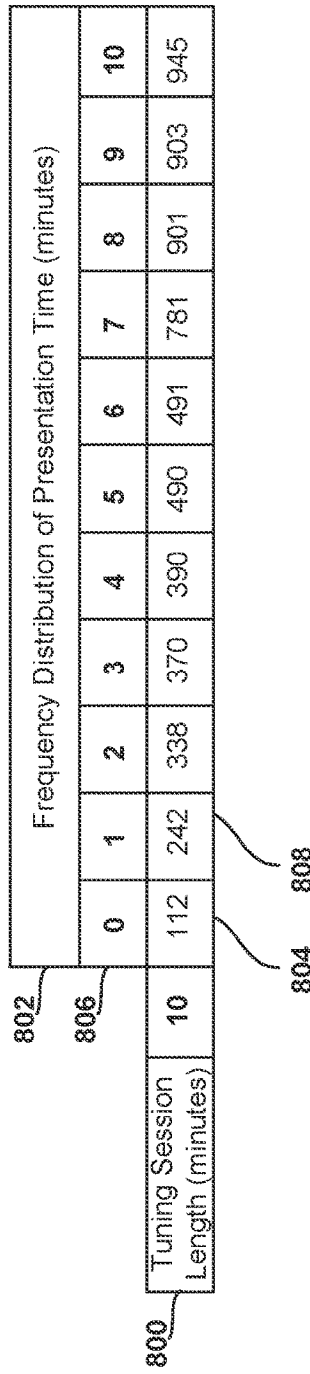


FIG. 8A

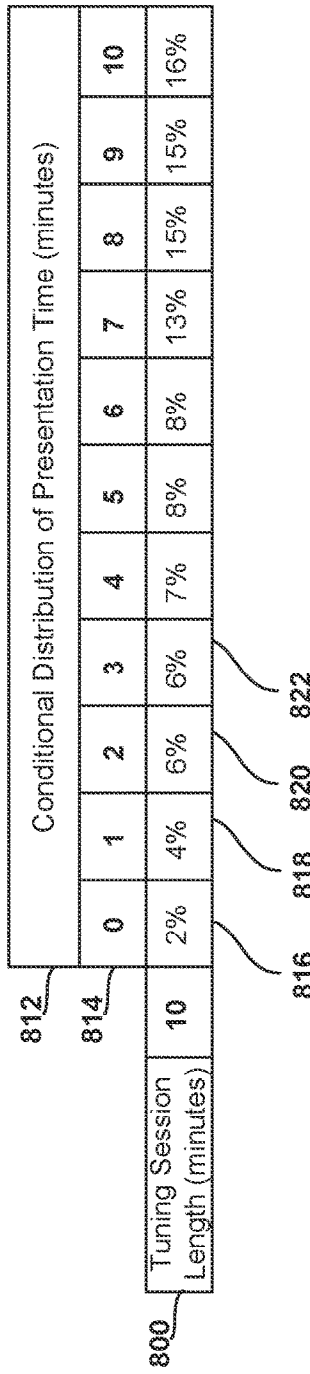


FIG. 8B

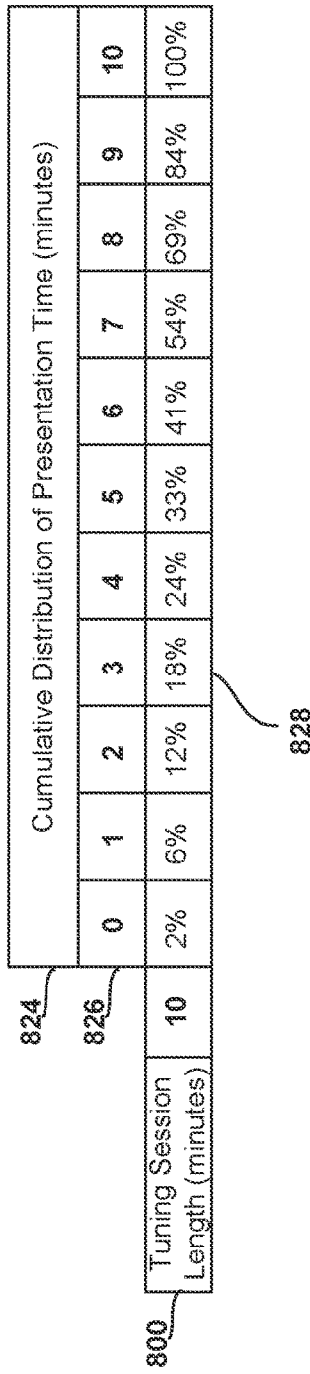


FIG. 8C

Frequency Distribution of Media Presented at Set Times (minutes)													
	at 0	at 1	at 2	at 3	at 4	at 5	at 6	at 7	at 8	at 9	at 10		
10	5851	5852	5619	5290	4500	4411	4521	4530	3749	2848	2945		

830

832

834

800


FIG. 8D

Conditional Distribution of Media Presented at Set Times (minutes)													
		at 0	at 1	at 2	at 3	at 4	at 5	at 6	at 7	at 8	at 9	at 10	
		100%	98%	94%	88%	75%	74%	76%	76%	63%	48%	49%	
800	Tuning Session Length (minutes)	10	840										

836

838

FIG. 8E

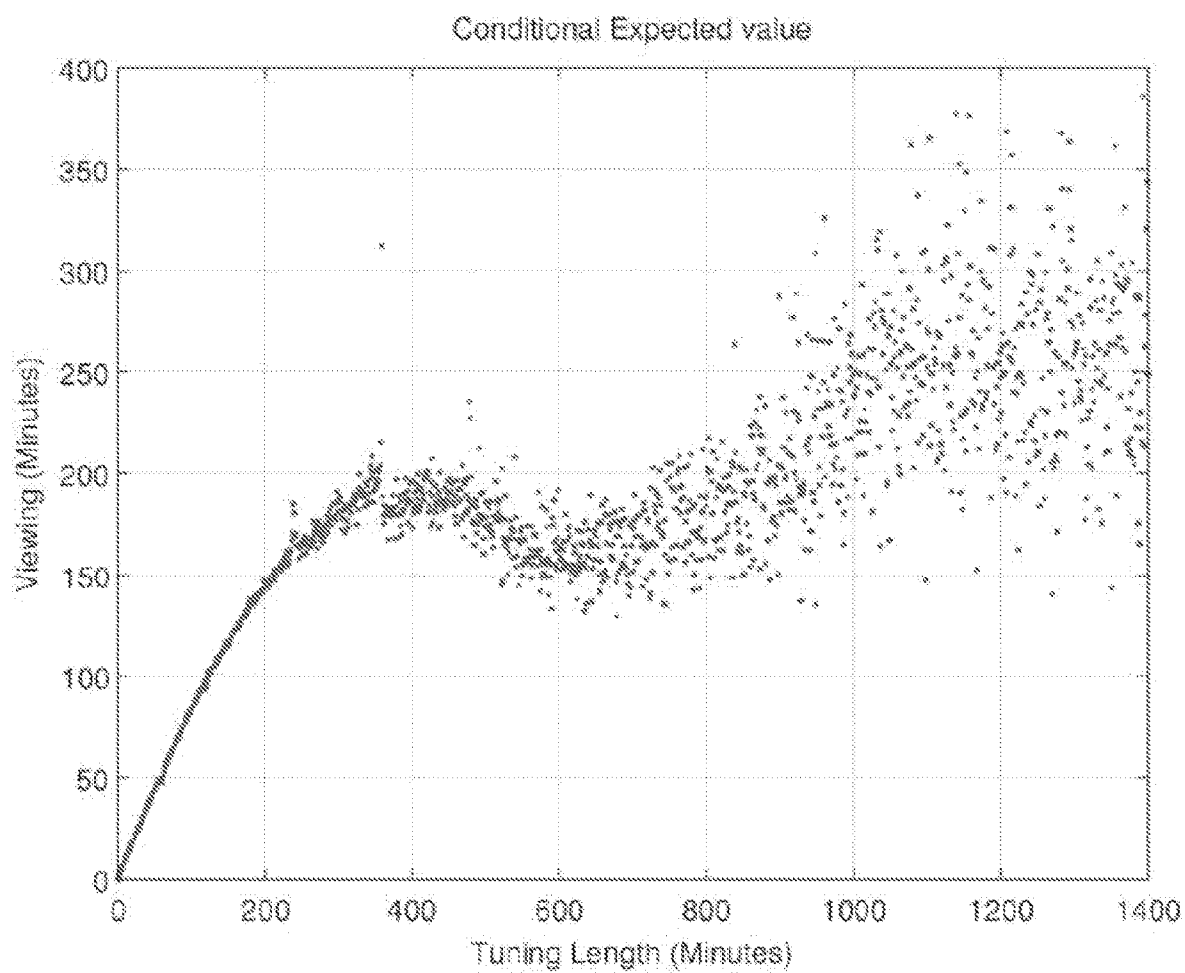**FIG. 9**

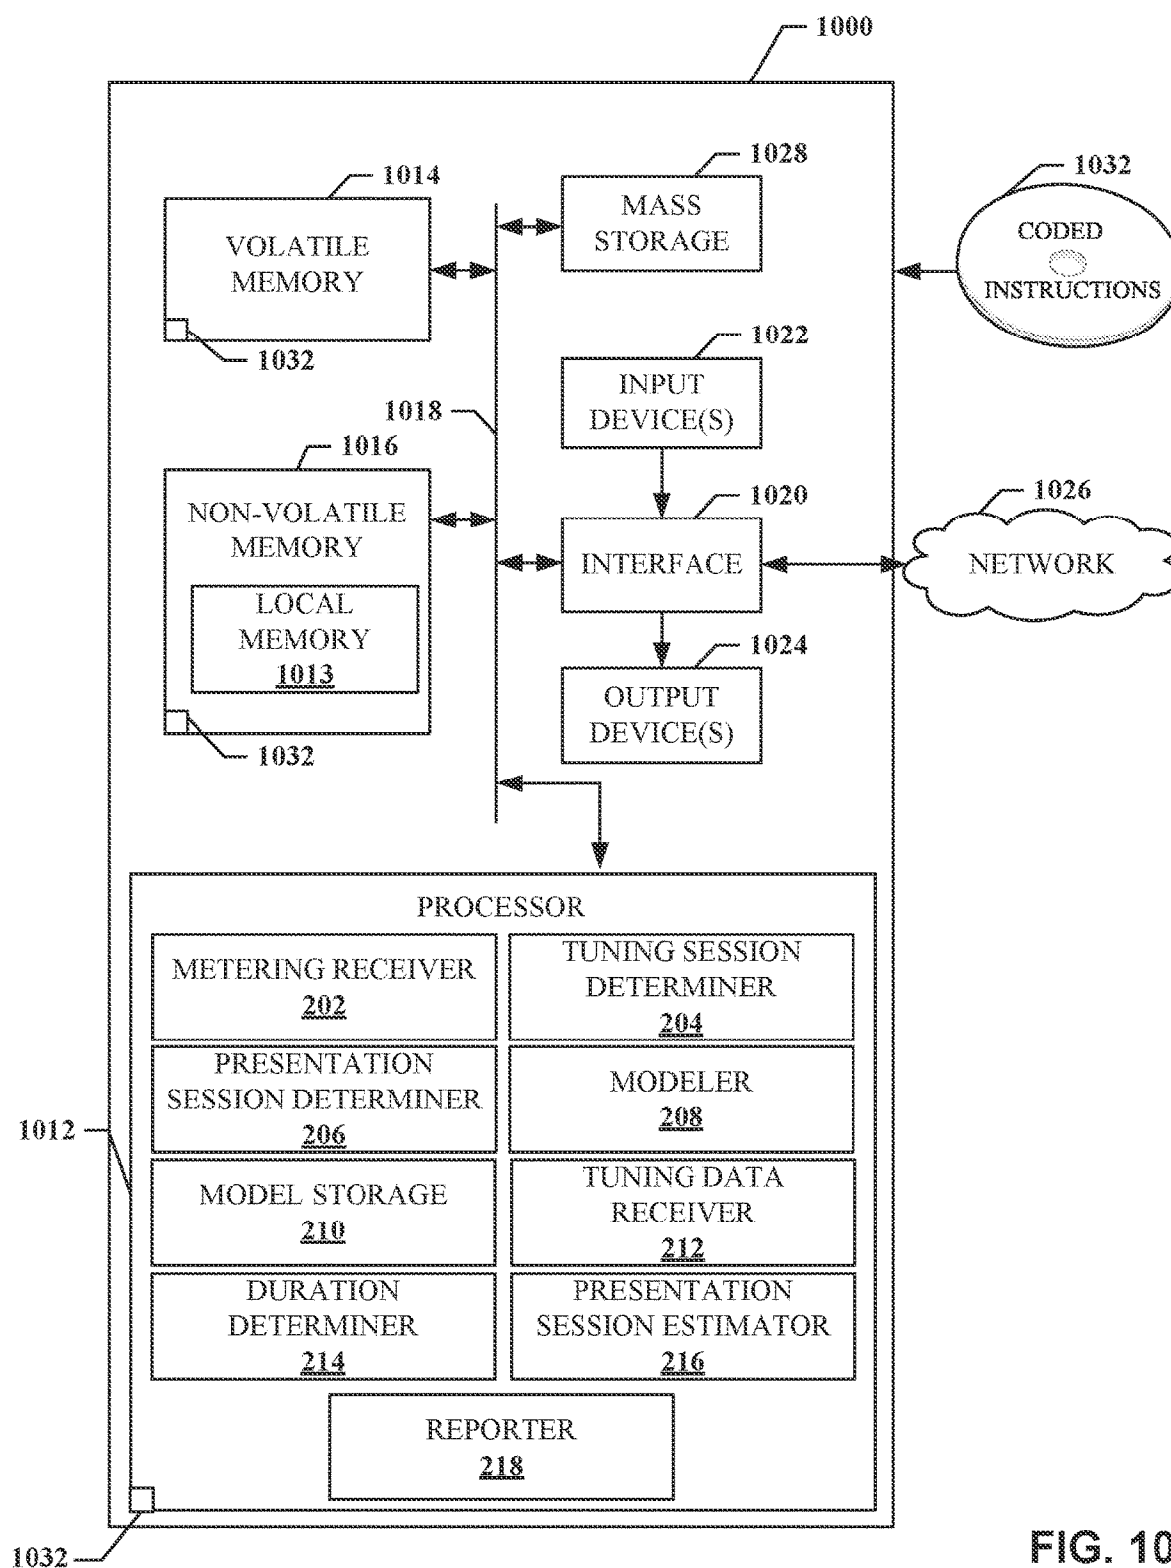


FIG. 10

1

METHODS AND APPARATUS TO DETERMINE A DURATION OF MEDIA PRESENTATION BASED ON TUNING SESSION DURATION

RELATED APPLICATIONS

This patent arises from a continuation of U.S. patent application Ser. No. 16/860,026, now U.S. Pat. No. 11,432,026, filed Apr. 27, 2020, which is a continuation of U.S. patent application Ser. No. 15/990,729, filed May 28, 2018, now U.S. Pat. No. 10,638,177, which is a continuation of U.S. patent application Ser. No. 15/011,455, filed Jan. 29, 2016, now U.S. Pat. No. 9,986,272, which claims the benefit of U.S. Provisional Patent Application No. 62/239,126, entitled "METHODS AND APPARATUS TO DETERMINE A DURATION OF MEDIA PRESENTATION BASED ON TUNING SESSION DURATION" filed Oct. 8, 2015. U.S. patent application Ser. No. 16/860,026, U.S. patent application Ser. No. 15/990,729, U.S. patent application Ser. No. 15/011,455, and U.S. Provisional Patent Application No. 62/239,126 are hereby incorporated herein by reference in their entirety.

FIELD OF THE DISCLOSURE

This disclosure relates generally to media audience measurement, and, more particularly, to methods and apparatus to determine a duration of media presentation based on tuning session duration.

BACKGROUND

Determining a size and demographics of an audience of a media presentation helps media providers and distributors schedule programming and determine a price for advertising presented during the programming. In addition, accurate estimates of audience demographics enable advertisers to target advertisements to certain types and sizes of audiences. To collect these demographics, an audience measurement entity enlists a plurality of media consumers (often called panelists) to cooperate in an audience measurement study (often called a panel) for a predefined length of time. The media consumption habits and demographic data associated with these enlisted media consumers are collected and used to statistically determine the size and demographics of the entire audience of the media presentation. In some examples, this collected data (e.g., data collected via measurement devices) may be supplemented with survey information, for example, recorded manually by the presentation audience members.

The process of enlisting and retaining participants for purposes of audience measurement is often a difficult and costly aspect of the audience measurement process. For example, participants are typically carefully selected and screened for particular characteristics so that the population of participants is representative of the overall presentation population. Additionally, the participants are required to perform specific tasks that enable the collection of the data, such as, for example, periodically self-identifying while consuming media programming.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of an example environment in which media presentation information is collected from media presentation locations and is analyzed by an example

2

collection facility to determine durations of media presentation in accordance with the teachings of this disclosure.

FIG. 2 is a block diagram of an example implementation of the data adjuster of FIG. 1.

FIGS. 3-5 are flowcharts illustrating example machine readable instructions that may be executed to implement the example data adjuster of FIGS. 1 and/or 2.

FIG. 6 is an example table of measurement data collected by the example local people meter of FIG. 1.

FIGS. 7A-7C are tables of example tuning session data and presentation session data collected by the example local people meter of FIG. 1 in accordance with the teachings of this disclosure.

FIGS. 8A-8E are tables of statistical models generated by the data adjuster of FIGS. 1 and/or 2 based on data from the local people meters of FIG. 1 in accordance with the teachings of this disclosure.

FIG. 9 is an example graph illustrating expected total presentation session durations generated by the generated by the data adjuster of FIGS. 1 and/or 2 based on received tuning session durations in accordance with the teachings of this disclosure.

FIG. 10 is a block diagram of an example processing system capable of executing the example machine readable instructions of FIGS. 3-5 to implement the example data adjuster of FIGS. 1 and/or 2.

DETAILED DESCRIPTION

Audience measurement entities seek to understand the composition and size of audiences of media, such as television programming. Such information allows audience measurement entity researchers to, for example, report advertising delivery and/or targeting statistics to advertisers that target their media (e.g., advertisements) to audiences. Additionally, such information helps to establish advertising prices commensurate with audience exposure and demographic makeup (referred to herein collectively as "audience configuration"). One way to gather media presentation information is to gather media presentation information from media output devices (e.g., gathering television presentation data from a set-top box (STB) connected to a television). As used herein media presentation includes media output regardless of whether or not an audience member is present (e.g., media output by a media output device at which no audience is present, media exposure to an audience member(s), etc.).

A media presentation device (e.g., STB) provided by a service provider (e.g., a cable television service provider, a satellite television service provider, an over the top service provider, a music service provider, a movie service provider, a streaming media provider, etc.) or purchased by a consumer may contain processing capabilities to monitor, store, and transmit tuning data (e.g., which television channels are tuned on the media presentation device at a particular time) to an audience measurement entity (e.g., The Nielsen Company (US), LLC.) to analyze media presentation activity. The tuning data is based on data received from the media presentation device while the media presentation device is on (e.g., powered on, switched on, and/or tuned to a media channel, streaming, etc.). However, tuning data may include extraneous data that may not accurately reflect media presentation when, for example, the media presentation device is configured to output media via a media output device (e.g., a television), but the media output device is turned off, not receiving the media from the media presentation device, etc. For example, tuning data may include data related to a

3

STB that outputs television media via a television while the television is off, disconnected, turned to input other than the STB, etc. In another example, the tuning data collected by the media presentation device may not accurately reflect media actually exposed to an audience when the media presentation device is attempting to present the media but no audience members are present (e.g., a STB and/or a television is on and/or presenting media while no person is present to consume the media). To develop a more accurate estimation of the actual media presentation by the media presentation device, methods and apparatus disclosed herein analyze measurement data (e.g., tuning data) collected from media presentation devices (that may inaccurately reflect the media actually presented to an audience).

To determine aspects of media presentation data (e.g., which household member is currently consuming a particular media and the demographics of that household member), market researchers may perform audience measurement by enlisting a subset media consumers as panelists. Panelists are audience members (e.g., household members, users, panelists, etc.) enlisted to be monitored, who divulge and/or otherwise share their media activity and/or demographic data to facilitate a market research study. An audience measurement entity typically monitors media presentation activity (e.g., viewing, listening, etc.) of the panelist members via audience measurement system(s), such as a metering device(s) and/or a local people meter (LPM). Audience measurement typically include determining the identity of the media being presented on a media output device (e.g., a television, a radio, a computer, etc.), determining data related to the media (e.g., presentation duration data, time-stamps, channel data, etc.), determining demographic information of an audience, and/or determining which members of a household are associated with (e.g., have been exposed to) a media presentation. For example, an LPM in communication with an audience measurement entity communicates audience measurement (e.g., metering) data to the audience measurement entity. As used herein, the phrase “in communication,” including variances thereof, encompasses direct communication and/or indirect communication through one or more intermediary components and does not require direct physical (e.g., wired) communication and/or constant communication, but rather additionally includes selective communication at periodic or aperiodic intervals, as well as one-time events.

In some examples, metering data (e.g., including media presentation data) collected by an LPM or other meter is stored in a memory and transmitted via network, such as the Internet, to a datastore managed by the audience measurement entity. Typically, such metering data is combined with additional metering data collected from a plurality of LPMs monitoring a plurality of panelist households. Example disclosed herein process the collected and/or aggregated metering data to determine model(s) based on a period of time between channel changes (referred to herein as tuning sessions). The metering data and/or the model(s) may include, but are not limited to, a number of minutes a household media presentation device was tuned to a particular channel, a number of minutes a household media presentation device was used (e.g., consumed) by a household panelist member and/or a visitor (e.g., a presentation session), demographics of the audience (which may be statistically projected based on the panelist data), information indicative of when the media presentation device is on or off, and/or information indicative of interactions with the media presentation device (e.g., channel changes, station changes, volume changes, etc.). As used herein a channel

4

may be a tuned frequency, selected stream, an address for media (e.g., a network address), and/or any other identifier for a source and/or carrier of media.

In an effort to transform collected tuning data from media presentation devices (e.g., STBs) into media presentation data (e.g., to account for data including when the media output device is off or not used and/or when an audience member is not present), examples disclosed herein estimate presentation data from collected tuning data based on models determined from the metering data received from LPMs. Examples disclosed herein include determining a first tuning session based on a period of time between channel changes of a first media presentation device. Such examples further include determining first presentation session data within the determined first tuning session. Such examples further include determining a model relating the first tuning session with the first presentation session data. Such examples further include determining a second tuning session for tuning data from a second media presentation device. Such examples further include selecting the model for the second tuning session, based on a match of a first duration of the second tuning session and a second duration associated with the model. Such examples further include estimating second presentation session data for the second tuning session based on the model.

FIG. 1 is a block diagram of an example environment 100 in which tuning data is collected from an example media presentation location 110 and is analyzed by an example collection facility 114 to estimate presentation session for tuning sessions within the tuning data. The example environment 100 includes a first example media presentation location 102, example media output devices 104, an example LPM 106, example media presentation devices 108, the second media presentation location 110, an example network 112, the example collection facility 114, an example data adjuster 120, an example tuning storage 116, and an example metering storage 118. According to the illustrated example, the collection facility 114 collects audience measurement (e.g., metering) data from the example LPM 106. The example data adjuster 120 creates model(s) based on the collected metering data. The example data adjuster 120 uses the models to estimate presentation sessions based on tuning data from the example media presentation device 108. For example, the data adjuster 120 of the illustrated example estimates media presentation session(s) for tuning sessions received from the example media presentation device 108 of the example media presentation location 110 that does not include a device to collect and/or send media presentation data (e.g., media presentation locations that do not include the example LPM 106 to the collection facility 104).

The example first media presentation location 102 is a location that has been statistically selected to develop media ratings data for a population/demographic of interest. According to the example of FIG. 1, person(s) of the household have registered with a metering device (e.g., the example local people meter 106) and provided the demographic information. Alternatively, the first example media presentation location 102 may be additional and/or alternative types of environments such as, for example, a room in a non-statistically selected household, a theater, a restaurant, a tavern, a retail location, an arena, etc. In some examples, the environment 100 may include a plurality of first media presentation locations 102 for which metering data is collected.

In the illustrated example of FIG. 1, the first media presentation location 102 includes the example media output device 104. The example media output device 104 of FIG.

5

1 is a television. Alternatively, the media output device **104** may be any other type of device for outputting media such as, for example, a radio, a computer monitor, a video game console, and/or any other device capable of presenting media to a user.

The example LPM **106** is in communication with the example media output device **104** to collect and/or capture signals emitted externally by the media output device **104**. The LPM **106** may be coupled with the media output device **104** via wired and/or wireless connection. The example LPM **106** may be implemented in connection with additional and/or alternative types of media presentation devices such as, for example, a radio, a computer monitor, a video game console, and/or any other device capable to present media to a user. The LPM **106** may be a portable people meter, a cell phone, a computing device, a sensor, and/or any other device capable of metering user exposure to media. The media presentation location **102** may include a plurality of LPMs **106**. In such examples, the plurality of the LPMs **106** may be used to monitor media exposure for multiple users and/or media output devices **104**.

In some examples, the example LPM **106** includes a set of buttons assigned to audience members to determine which of the audience members is watching the example media output device **104**. The LPM **106** may periodically prompt the audience members via a set of LEDs, a display screen, and/or an audible tone, to indicate that the audience member is present at the example first media presentation location **102** by pressing an assigned button. To decrease the number of prompts and, thus, the number of intrusions imposed upon the media consumption experience of the audience members, the LPM **106** prompts only when unidentified audience members are located in the first media presentation location **102** and/or only after the LPM **106** detects a channel change and/or a change in state of the media output device **104**. In other examples, the LPM **106** may include at least one sensor (e.g., a camera, 3-dimensional sensor, etc.) and/or be communicatively coupled to at least one sensor that detects a presence of the user in the first example media presentation location **102**. The example LPM **106** transmits metering data to a media researcher and/or a marketing entity. The example metering data includes the media presentation data (e.g., data related to media presented while the media output device **104** is on and a user is present). The metering data may further include a household identification, a tuner key, a presentation start time, a presentation end time, a channel key, etc., as further described in FIG. 6.

The media presentation device **108** of the illustrated example of FIG. 1 is installed by a service provider (e.g., cable media service provider, a radio frequency (RF) media provider, a satellite media service provider, etc.) to present media to an audience member through the example media output device **104**. In the illustrated example of FIG. 1, the example media presentation device **108** is a STB. Alternatively, the example media presentation device **108** may be an over the top device, a video game console, a digital video recorder (DVR), a digital versatile disc (DVD) player, a receiver, a router, a server, and/or any device that receives media from a service provider. In some examples, the media presentation device **108** may implement a DVR and/or DVD player. The example media presentation device **108** includes a unique serial number that, when associated with subscriber information, allows an audience measurement entity, a marketing entity, and/or any other entity to ascertain specific subscriber behavior information. Additionally, the example media presentation device **108** transmits tuning data (e.g.,

6

data related to tuned channels while the media presentation device **108** is on) to the example collection facility **114**. Although the example media output device **104**, the example LPM **106**, and the example media presentation device **108** in the first example media presentation location **102** are separate devices, one or more of the media output device **104**, the LPM **106**, and/or the media presentation device **108** may be combined.

The example second media presentation location **110** includes the example media output device **104** and the example media presentation device **108**, but does not include the example LPM **106**. Accordingly, media presentation data is not collected at the example second media presentation location **110**. However, tuning data is collected by the example media presentation device **108**. Such tuning data includes data collected by the media presentation device **108** (e.g., which channel the media presentation device **108** was tuned to) but may not include presentation session information from the example media presentation device **108** (e.g., information related to when the media output device **104** is powered on and/or an audience member is present). Therefore tuning data from the example LPM **106** may be misleading. In some examples, the second media presentation location **110** may include a second plurality of media presentation locations **110**.

Metering data from the example LPM **106** and/or tuning data from the example media presentation device **108** is transmitted to the example collection facility **114** via the example network **112**. The example network **112** may be implemented using any type of public or private network such as, but not limited to, the Internet, a telephone network, a local area network (LAN), a cable network, and/or a wireless network. To enable communication via the network **112**, the example media presentation device **108** includes a communication interface that enables a connection to an Ethernet, a digital subscriber line (DSL), a telephone line, a coaxial cable, or any wireless connection, etc.

The example collection facility **114** receives, processes, stores, and/or reports presentation data related to metering data received from the LPM **106** and/or tuning data from the media presentation device **108** periodically and/or upon a request by the collection facility **114**. In some examples, the collection facility **114** receives the tuning data from a service provider associated with the media presentation device **108** instead of and/or in addition to obtaining the example tuning data from the example media presentation device **108**.

According to the illustrated example, the collection facility **114** is hosted by an audience measurement entity. Alternatively the collector facility may be hosted by any other entity or may be co-hosted by an audience measurement entity and another entity(ies). For example, tuning data may be collected from the example media presentation devices **108** by a media provider (e.g., a cable television provider, a satellite television provider, etc.) and metering data may be collected from the example LPM(s) **106** by an audience measurement entity cooperating with the media provider to gain access to the tuning data. The example collection facility **114** includes the example tuning storage **116** and the example metering storage **118**.

The example tuning storage **116** is a database that stores tuning data received from the example media presentation device **108** and the example metering storage **118** is a database that stores metering data from the example LPM(s) **106**. The example tuning storage **116** and metering storage **118** may be implemented by any one of more of a database, a server, and/or any other data structure to store data. According to the illustrated example, the example tuning

storage 116 and the example metering storage 118 are communicatively coupled with the first example media presentation location(s) 102 and the second example media presentation location(s) 110 via the example network 112. Alternatively, the example tuning storage 116 and/or the example metering storage 118 may receive data in any other manner (e.g., tuning data and/or media presentation data may be collected by a third-party and transferred to the collection facility 114 via the network 112 or any other path).

The example data adjuster 120 processes metering data (e.g., metering data received from the metering storage 118) to create a tuning session(s) (e.g., based on a period of time between channel changes) and a presentation session(s) (e.g., based on when the media was presented by the media presentation device 108 on the media output device 104). The example data adjuster 120 integrates demographic data with the compiled presentation data to generate demographic statistical information. The data adjuster 120 of the illustrated example generates models to estimate presentation session data for a received tuning session received from the example media presentation devices 108. When the example collection facility 114 receives tuning data from the example media presentation devices 108 and/or from a service provider associated with the media presentation devices 108, the example data adjuster 120 estimates and reports presentation session data based on a comparison of the tuning data and the generated models, as further described in FIG. 2.

In operation, there are two steps to estimating presentation session(s) for tuning data received from the example media presentation device 108. The first step is a model generation step that includes generating models based on determined tuning session(s) and presentation session(s) from metering data. The second step is a media presentation estimation step that includes estimating presentation sessions for received tuning data.

During the model generation step, the example LPM 106 collects metering data at the media presentation location 102. As previously described, the metering data includes data related to media presented to and/or exposed to audience members of the media presentation device 108. In some examples, the metering data includes demographics for the users of the media output device 104, data related to the media presented by the media presentation device 108, timestamps for the media exposure, data related to channel changes, data related to media output device 104 on/off status, etc. The example LPM 106 transmits the metering data to the example collection facility 114 via the example network 112 to be stored in the example metering storage 118. As previously described, the metering data is received (e.g., from the LPM 106) periodically and/or upon a request by the collection facility 114. Typically, multiple of the LPMs 106 associated with respective ones of the media presentation locations 102 will send the metering data to the example metering storage 118.

The example data adjuster 120 analyzes the metering data from the example metering storage 118 to create tuning sessions and presentation sessions based on the metering data. The data adjuster 120 determines tuning session(s) based on a period of time between channel changes indicated in the metering data. The example data adjuster 120 also determines presentation session(s) for the determined tuning session(s) based on a time and/or date of when the media was actually viewed by a user (e.g., the media output device 104 was detected as being on and a user was determined to be present to view the media output device

104). After the tuning session(s) and the presentation session(s) are determined, the data adjuster 120 of the illustrated example creates and/or updates a model based on a duration(s) of the tuning session(s), as further described in conjunction with FIG. 2.

During the media presentation estimation step, the media presentation device 108 collects tuning data related to which channel a media presentation device 108 is tuned to while the media presentation device 108 is on. As previously described, the tuning data does not include presentation session data (e.g., data related to media presented while the media output device 104 is on and a user is present). The example media presentation device 108 transmits the tuning data to the example tuning storage 116 of the example collection facility 114 via the example network 112. As previously described, the tuning data is received (e.g., from the media presentation device 108) periodically and/or upon a request by the collection facility 114. In some examples, the tuning data may be collected by the service provider associated with the media presentation device 108. In such examples, the service provider may transmit the tuning data directly to the example collection facility 114 to be stored in the tuning storage 116.

The example data adjuster 120 determines a duration of a tuning session from the received tuning data. The example data adjuster 120 estimates presentation session data for the tuning session based on the created models. For example, the data adjuster 120 may estimate a 120-minute presentation session based on receiving a 180-minute tuning session. The example data adjuster 120 generates reports based on the estimated presentation session data. The reports may be generated at preset times (e.g., hourly, daily, monthly, etc.) and/or may be initiated by user request. Additionally, the reports may include data from one or more media presentation locations (e.g., such as the first and second media presentation locations 102, 110). In some examples, the reports may include demographic and/or other statistical information, as further described in FIGS. 8A-9.

FIG. 2 is block diagram of an example implementation of the example data adjuster 120 of FIG. 1 to estimate presentation sessions for tuning data based on models generated from metering data. The example data adjuster 120 includes an example metering receiver 202, an example tuning session determiner 204, an example presentation session determiner 206, an example modeler 208, an example model storage 210, an example tuning data receiver 212, an example duration determiner 214, an example presentation session estimator 216, and an example reporter 218.

The example metering receiver 202 of FIG. 2 receives metering data from the example LPM 106 and sends the received metering data to the example tuning session determiner 204 for further processing. In some examples, the metering receiver 202 receives metering data from the example metering storage 118. In some examples, the metering receiver 202 receives metering data from the example LPM(s) 106. In some examples, the metering receiver 202 receives metering data from both the example metering storage 118 and the example LPM(s) 106. The metering receiver 202 may include a network adapter and/or server for receiving metering data from the example metering storage 118 and/or the example LPM(s) 106 (e.g., via the example network 112) through a wired and/or wireless connection.

The example tuning session determiner 204 analyzes metering data received via the example metering receiver 202 to create a tuning session(s) based on a period of time between channel changes. Alternatively, the tuning session

determiner **204** may generate the created tuning session(s) based on a period of time between any interaction with the media output device **104**, the LPM **106**, and/or the media presentation device **108**. According to the illustrated example, the example tuning session determiner **204** determines a new tuning session for each channel change identified in the metering creates a new tuning session. In this manner, a tuning session is representative of the period of time between each channel change. For example, if the metering data includes a first channel change at 4:00 PM and a second subsequent channel change at 5:30 PM on the same day, the example tuning session determiner **204** creates a 90-minute tuning session representative of the period from 4:00 PM to 5:30 PM. Once a tuning session(s) has been determined from the metering data, the example tuning session determiner **204** sends data for the determined tuning session(s) to the example presentation session determiner **206**.

The example presentation session determiner **206** receives data for a tuning session(s) received from the example tuning session determiner **204** and further analyzes created tuning session(s) to determine a presentation session(s) within the tuning session(s). The presentation sessions are determined based on when the media presentation device **108** is actually presenting media to an audience member (e.g., the example media output device **104** is on and/or an audience member is present). In some examples, the metering data may include user identifiers identifying which user is located in the example media presentation location **102** while the example media output device **104** is on. In such examples, the presentation session determiner **206** may not credit a duration as a presentation session if an audience member is not present while the media output device **104** is on. Once the presentation session(s) is determined, the example presentation session determiner **206** transmits the created tuning session data and the determined presentation session data to the example modeler **208**.

The example modeler **208** creates and/or updates models based on tuning session data and presentation session data received from the example. The example modeler **208** integrates the presentation session data in a model with a corresponding tuning session length. For example, if the example tuning session determiner **204** determines presentation session data from a 500-minute tuning session, the example modeler **208** will store the corresponding presentation session data in a 500-minute tuning session model. In some examples, the example modeler **208** updates the model based on the total presentation session for the tuning session. For example, if the 500-minute tuning session includes a total presentation session of 320 minutes, the example modeler **208** will update the 500-minute tuning session model to include the 320 minute presentation session, as further described in FIG. 8A. In some examples, the example modeler **208** updates the model based on durations associated with the presentation session for the tuning session. For example, if during the 500 minute tuning session, there were two presentation sessions (e.g., from the 0 minute mark to the 200 minute mark and from the 380 minute mark to the 500 minute mark), the example modeler **208** will update the 500-minute tuning session model to include data from the periods of time (e.g., 0-200 minutes and 380-500 minutes) associated with the presentation sessions, as further described in FIG. 8D. Additionally, the example modeler **208** may update the model based on various conditional probabilities associated with the presentation session(s), as further described in FIGS. 8B, 8C, 8E, and 9. Once the example modeler **208** has created and/or

updated a model, the example modeler **208** stores the model in the example model storage **210**.

The example model storage **210** of FIG. 2 stores models created and/or updated by the example modeler **208**. In some examples, the model storage **210** includes hardware, software, or firmware to store data locally in the example data adjuster **120**. Alternatively, the model storage **210** is located outside the example data adjuster **120** (e.g., in a database and/or a cloud). The models stored in the example model storage **210** may be updated (e.g., based on additional metering data) and/or used to estimate presentation sessions (e.g., based on the tuning data).

The example tuning data receiver **212** of FIG. 2 receives tuning data from the example media presentation device **108** and/or a service provider and sends the received tuning data to the example duration determiner **214** for further processing. In some examples, the tuning data receiver **212** receives metering data from the example tuning storage **116**. Alternatively, the tuning data receiver **212** may receive metering data from the example media presentation device(s) **108**. In some examples, the tuning data receiver **212** receives metering data from both the example tuning storage **116** and the example media presentation device(s) **108**. The tuning data receiver **212** may include a network adapter and/or server for receiving metering data from the example tuning storage **116** and/or the example media presentation device(s) **108** (e.g., via the example network **112**) via a wired and/or wireless connection.

The example duration determiner **214** analyzes tuning data to determine a duration of a tuning session from the media presentation device **108**. As previously described, a tuning session is based on a period time between channel changes of the media presentation device **108**. The tuning data does not include presentation session data. To estimate accurate presentation session for the tuning data, the example duration determiner **214** determines the duration of the tuning session so that an appropriate model may be retrieved to determine the estimate. The example duration determiner **214** transmits tuning data including the tuning session duration to the example presentation session estimator **216** for further processing.

The example presentation session estimator **216** estimates presentation session for tuning data received from the example tuning data receiver **212** via the example duration determiner **214** based on presentation session data from a model stored in the example model storage **210**. The presentation session estimator **216** retrieves, from the example model storage **210**, a model with a tuning session length that matches determined tuning session duration determined by the example duration determiner **214**. For example, if the tuning data received from the example model storage **210** a 500 minute tuning session, the presentation session estimator **216** retrieves the 500-minute tuning session model from the example memory **210**. Since the tuning data does not differentiate between time when the media output device **104** is on and the media output device **104** is off and/or when an audience member is present, the example presentation session estimator **216** estimates presentation sessions to account for periods of time when the media presentation device is on but the media output device **104** is off and/or an audience member is not present. The example presentation session estimator **216** may estimate additional presentation session data based on, for example, an initial presentation session (e.g., the first presentation session in the tuning session), a final presentation session (e.g., the last presentation session in the tuning session, and/or a total presentation session (e.g., the total presentation minutes in the tuning

11

session) based on the data stored in the corresponding model. For example, the presentation session estimator **216** may receive a 200-minute model(s) while estimating a presentation session for a 200-minute tuning session. The presentation session estimator **216** may estimate, based on the 200-minute model, an initial tuning session of 60 minutes, an final presentation session of 30 minutes, and an total presentation session estimate of 90 minutes based on user and/or administrator settings. In some examples, the settings may be based on statistical analysis (e.g., expected value, weighted average, standard deviation, minimum and/or maximum percentages of presentation sessions from the model(s) etc.).

In some examples, the example presentation session estimator **216** bins (e.g., groups) data from multiple models within a threshold range when the number of entries in a particular model does not satisfy a minimum threshold number of entries. For example, if a 65-minute tuning duration is determined from tuning data and the 65-minute tuning session model does not meet a threshold number (e.g., minimum) of entries, the example presentation session estimator **216** may group data from models of similar tuning session length within a threshold range. For example, if the threshold range is 4 minutes, the data from the 63-minute tuning session model, the 64-minute tuning session model, the 66-minute tuning session model, and the 67-minute tuning session model may be combined with the data from the 65-minute tuning session model. In this manner, the number of entries may be increased until the threshold number of entries is satisfied. In some examples, the threshold number of entries for a model and the minimum threshold range may be set and/or adjusted by a user and/or an administrator.

The example reporter **218** of FIG. 2 generates reports of data received, determined, and/or generated by the example data adjuster **120**. The example reporter **218** generates reports including media presentation session data, the metering data from the example LPM **106**, tuning data from the media presentation device **108**, data relating models generated by the example modeler **208**, presentation session estimator **216** settings, and/or any other data relating to the LPM **106** and/or the media presentation device **108**. The reports may include statistical analysis including conditional distributions, cumulative distributions, expected values, etc. For example, the reports may illustrate that 15% of 200-minute tuning sessions from media presentation devices **108** include only 120 minutes of presentation time, that 35% of the 200-minute tuning session was being presented at the 158th minute, that the expected total presentation minutes for the 200-minute tuning session is 150 minutes, etc. The reports may be preset and/or customized by a user and/or administrator to include information relevant to the user and/or administrator.

While an example manner of implementing the example data adjuster **120** of FIG. 1 is illustrated in FIG. 2, one or more elements, processes and/or devices illustrated in FIG. 2 may be combined, divided, re-arranged, omitted, eliminated and/or implemented in any other way. Further, the example metering receiver **202**, the example tuning session determiner **204**, the example presentation session determiner **206**, the example modeler **208**, the example model storage **210**, the example tuning data receiver **212**, the example duration determiner **214**, the example presentation session estimator **216**, the example reporter **218**, and/or, more generally, the example the example data adjuster **120**, of FIG. 2 may be implemented by hardware, machine readable instructions, software, firmware and/or any combination of

12

hardware, machine readable instructions, software and/or firmware. Thus, for example, any of the example metering receiver **202**, the example tuning session determiner **204**, the example presentation session determiner **206**, the example modeler **208**, the example model storage **210**, the example tuning data receiver **212**, the example duration determiner **214**, the example presentation session estimator **216**, the example reporter **218**, and/or, more generally, the example the example data adjuster **120**, of FIG. 2 could be implemented by one or more analog or digital circuit(s), logic circuit(s), programmable processor(s), application specific integrated circuit(s) (ASIC(s)), programmable logic device(s) (PLD(s)) and/or field programmable logic device(s) (FPLD(s)). When reading any of the apparatus or system claims of this patent to cover a purely software and/or firmware implementation, at least one the example metering receiver **202**, the example tuning session determiner **204**, the example presentation session determiner **206**, the example modeler **208**, the example model storage **210**, the example tuning data receiver **212**, the example duration determiner **214**, the example presentation session estimator **216**, the example reporter **218**, and/or, more generally, the example the example data adjuster **120**, of FIG. 2 is/are hereby expressly defined to include a tangible computer readable storage device or storage disk such as a memory, a digital versatile disk (DVD), a compact disk (CD), a Blu-ray disk, etc. storing the software and/or firmware. Further still, the example data adjuster **120** of FIG. 2 may include one or more elements, processes and/or devices in addition to, or instead of, those illustrated in FIG. 2, and/or may include more than one of any or all of the illustrated elements, processes and devices.

Flowcharts representative of example machine readable instructions for implementing the example data adjuster **120** of FIG. 2 are shown in FIG. 3-5. In the examples, the machine readable instructions comprise a program for execution by a processor such as the processor **1012** shown in the example processor platform **1000** discussed below in connection with FIG. 10. The program may be embodied in software stored on a tangible computer readable storage medium such as a CD-ROM, a floppy disk, a hard drive, a digital versatile disk (DVD), a Blu-ray disk, or a memory associated with the processor **1012**, but the entire program and/or parts thereof could alternatively be executed by a device other than the processor **1012** and/or embodied in firmware or dedicated hardware. Further, although the example program is described with reference to the flowcharts illustrated in FIGS. 3-5, many other methods of implementing the example data adjuster **120** of FIG. 2 may alternatively be used. For example, the order of execution of the blocks may be changed, and/or some of the blocks described may be changed, eliminated, or combined.

As mentioned above, the example processes of FIGS. 3-5 may be implemented using coded instructions (e.g., computer and/or machine readable instructions) stored on a tangible computer readable storage medium such as a hard disk drive, a flash memory, a read-only memory (ROM), a compact disk (CD), a digital versatile disk (DVD), a cache, a random-access memory (RAM) and/or any other storage device or storage disk in which information is stored for any period (e.g., for extended time periods, permanently, for brief instances, for temporarily buffering, and/or for caching of the information). As used herein, the term tangible computer readable storage medium is expressly defined to include any type of computer readable storage device and/or storage disk and to exclude propagating signals and to exclude transmission media. As used herein, "tangible com-

13

puter readable storage medium” and “tangible machine readable storage medium” are used interchangeably. Additionally or alternatively, the example processes of FIGS. 3-5 may be implemented using coded instructions (e.g., computer and/or machine readable instructions) stored on a non-transitory computer and/or machine readable medium such as a hard disk drive, a flash memory, a read-only memory, a compact disk, a digital versatile disk, a cache, a random-access memory and/or any other storage device or storage disk in which information is stored for any period (e.g., for extended time periods, permanently, for brief instances, for temporarily buffering, and/or for caching of the information). As used herein, the term non-transitory computer readable medium is expressly defined to include any type of computer readable storage device and/or storage disk and to exclude propagating signals and to exclude transmission media. As used herein, when the phrase “at least” is used as the transition term in a preamble of a claim, it is open-ended in the same manner as the term “comprising” is open ended.

The example machine readable instructions illustrated in FIG. 3 may be executed to cause the example data adjuster 120 of FIG. 2 to create a model based on metering data and determine presentation session data from tuning data of the example media presentation device(s) 108 (e.g., the model generation step) in conjunction with FIGS. 7-9.

At block 300, the metering receiver 202 receives metering data from the example LPM 106. As previously described, the metering data contains detailed media exposure data for the example media presentation location 102 (e.g., for media from the example media presentation device 108 output by the example media output device 104. Example metering data is illustrated and further described in FIG. 6. At block 302, the tuning session determiner 204 creates a tuning session based on a period of time between channel changes. Alternatively, the example tuning session determiner 204 may create a tuning session based on any other events at the example media presentation location (e.g., a volume change, a detected user presence, etc.). Once the tuning session has been created, the example presentation session determiner 206 determines presentation sessions within the tuning session (block 304). Alternatively, presentation sessions may be determined prior to or in parallel with the creation of the tuning session. An example of presentation sessions within a tuning session is illustrated and further described in FIGS. 7A-7C.

At block 306, the example modeler 208 adds the presentation session data to a first set of models based on the tuning session length. For example, based on the determined tuning sessions, the example modeler 208 updates the example models by adding the presentation data to the first set of models (e.g., such as frequency distribution of total presentation time and frequency distribution of media presented at set times, as further described in FIGS. 8A and 8D). For example, if there are 50 minutes of total presentation session time for a 75-minute tuning session, the example modeler 208 adds a count for the total 50 minutes presentation session to a frequency distribution model for a 75-minute tuning session, as further described in FIG. 8A. Additionally, if the example modeler 208 determines that the 75-minute tuning session contains two presentation sessions (e.g., from 0-30 minutes and from 55-75 minutes), the example modeler 208 may update a 75-minute frequency distribution model based on every minute of the two presentation sessions (e.g., adds a count at 0 minute bucket, at a 1 minute bucket, at a 2 minute bucket, . . . , at a 30 minute bucket, at a 55 minute bucket, . . . , at a 75 minute bucket), as further described in

14

FIG. 8D. Once the example modeler 208 updates the first set of models, the example modeler 208 updates a second set of models associated with the first set of models (block 308). For example, there may be various models (e.g., such as models of conditional distribution of total presentation time, models of cumulative distribution of total presentation time, models of conditional distribution of media presented at set times, models of conditional expected value, etc., as further described in FIGS. 8B, 8C, 8E, and 9) that are calculated based on the first set of models. For example, a 75-minute conditional distribution model is based on a number of counts in one bucket divided by the total number of counts. In such examples, the conditional probability for a 20-minute tuning session may include 100 counts for a presentation session totaling 15 minutes and the 20-minute tuning session may have a total of 500 counts, therefore the conditional probability for a 15 minute total presentation session based on a 20-minute tuning session is 20% (e.g., 100/500). However if additional metering data is received, the conditional data is calculated based on updates to the first set of models. For example, if 500 more 20-minute tuning sessions are added to the first set of models and none of the 500 20-minute tuning sessions include 15-minute total presentation sessions, the conditional probability for a 15-minute total presentation session would lower to 10% (e.g., 100/1000). In such examples, the presentation session data is first added to the first set of models and then the second set of models may be updated (e.g., re-calculated) based on the updated first set. At block 310, once the models have been updated, the models are stored in the example model storage 210 to be used by the presentation session estimator 216, as further described in FIG. 4.

The example machine readable instructions illustrated in FIG. 4 may be executed to cause the example data adjuster 120 of FIG. 2 to estimate presentation sessions from tuning data from the example media presentation device 108 (e.g., the media presentation estimation step).

At block 400, the example tuning data receiver 212 receives tuning data from the example media presentation device 108. As previously described, the tuning data includes data relating to which channel the media presentation device 108 was tuned to while the media presentation device 108 is on. Tuning data may be inaccurate because tuning data assumes that the media output device 104 is on and a viewer is present whenever the media presentation device is on. Therefore, tuning data does not provide presentation session data (e.g., data related to when the media output device 104 is on and a user is present) within a tuning session.

At block 402, the example duration determiner 214 determines a duration of a tuning session based on the tuning data. Once the duration the tuning session has been determined, the example presentation session estimator 216 retrieves a corresponding model from the example model storage 210 (block 404). Since the example models are divided by tuning session durations, the presentation session estimator 216 retrieves a model that corresponds to (e.g., matches with) the duration the received tuning session. At block 406, the example presentation session estimator 216 estimates presentation session data (e.g., a total estimated presentation session, a period for a presentation session at the beginning and/or end of the tuning session, and/or any other data based on the stored models as further described in FIGS. 8A-E) based on user settings. For example, a user may create setting for an initial presentation session based a when the total percentage of users in a model drops below 80%. In such examples, if a 10 minute tuning session is

15

received from the example tuning data receiver **212**, the presentation session estimator **216** receives a 10-minute model (e.g., such as the conditional distribution of media presented at set times model of FIG. **8E**). Since the 4th minute of the model of FIG. **8E** is the first time that the conditional percentage drops below 80% (e.g., at the 4th minute it is 75%), the presentation session estimator **216** estimates an initial presentation session from the 0th minute to the 3rd minute. As previously described, the user settings may be preset of configured based on user and/or administrator preferences. At block **408**, the example reporter **218** generates a report including the estimated presentation session data. Additionally, the report may include the tuning data, the metering data, demographic data, any and/or all of the stored models, and/or any other data related to the LPM **106** and/or the media presentation device **108**. As previously described, the data reported on the reporter may be preset of customized.

The example machine readable instructions illustrated in FIG. **5** include alternative instructions to cause the example data adjuster **120** of FIG. **2** to estimate presentation sessions from tuning data from the example media presentation device **108**. The example machine readable instructions cause the example data adjuster **120** of FIG. **2** to bin (e.g., group) models based on tuning session durations.

At block **500**, the example tuning data receiver **212** receives tuning data from the example media presentation device **108**. As previously described, the tuning data includes data relating to which channel the media presentation device **108** was tuned to while the media presentation device **108** is powered on. Tuning data may be inaccurate because tuning data assumes that the media output device **104** is on and a viewer is present whenever the media presentation device is on. Therefore, tuning data does not provide presentation session data (e.g., data related to when the media output device **104** is on and a user is present) within a tuning session.

At block **502**, the example duration determiner **214** determines a duration of a tuning session based on the tuning data. Once the duration the tuning session has been determined, the example presentation session estimator **216** retrieves a corresponding model from the example model storage **210** (block **504**). Since example the models are divided by tuning session durations, the presentation session estimator **216** retrieves a model that corresponds to (e.g., matches with) the duration the received tuning session.

At block **506**, the presentation session estimator **216** determines if the obtained model exceeds a minimum number of entries. The minimum number of entries may be predetermined and/or based on user and/or administrator preferences. If a model has a limited number of entries (e.g., small sample size), the presentation session estimator **216** may inaccurately estimate presentation session data. As previously described, the example presentation session estimator **216** may bin (e.g., group) similar models together to increase the number of entries above the minimum number of entries. If the model does exceed the minimum number of entries, the example presentation session estimator **216** estimates presentation session data (e.g., a total estimated presentation session, a period for a presentation session at the beginning and/or end of the tuning session, and/or any other data based on the stored models as further described in FIGS. **8A-E**) (block **508**) based on user settings. For example, a user may create setting for an initial presentation session based a when the total percentage of users in a model drops below 80%. In such examples, if a 10 minute tuning session is received from the example tuning data receiver

16

212, the presentation session estimator **216** receives a 10-minute model (e.g., such as the conditional distribution of media presented at set times model of FIG. **8E**). Since the 4th minute of the model of FIG. **8E** is the first time that the conditional percentage drops below 80% (e.g., at the 4th minute it is 75%), the presentation session estimator **216** estimates an initial presentation session from the 0th minute to the 3rd minute. As previously described, the user settings may be preset of configured based on user and/or administrator preferences.

If the model does not exceed the minimum number of entries, the example presentation session estimator **216** estimates presentation session data based on the model and data from other models within a threshold duration range (block **510**). In this manner, the example presentation session estimator **216** can increase the number of entries by gathering data from models with similar tuning session durations. For example, if a threshold range is 5 minutes and a 30-minute tuning session model does not meet the minimum number of entries, the presentations session estimator **216** may combine entries from the 28-minute tuning session model, the 29-minute tuning session model, the 30-minute tuning session model, the 32-minute tuning session model, and the 33-minute tuning session model. In some examples, the presentation session estimator **216** may add entries from one model at a time until the minimum threshold is met. The threshold range and/or the minimum number of entries may be preset and/or based on user and/or administrator preferences. Once, the minimum threshold is met, the example presentation session estimator **216** estimates presentation session data based on the binned (e.g., grouped) models (e.g., a total estimated presentation session, an duration for a presentation session at the beginning and/or end of the tuning session, and/or any other data based on the stored models as further described in FIGS. **8A-E**). At block **512**, the example reporter **218** generates a report including the estimated presentation session data. Additionally, the report may include the tuning data, the metering data, demographic data, any and/or all of the stored models, presentation session data prior to binning, and/or any other data related to the LPM **106** and/or the media presentation device **108**.

FIG. **6** is an illustration of example metering data **600** from the example LPM **106**. The example metering data **600** includes a household identification (ID) **602**, a tuner key **604**, a start presentation time **606**, an end presentation time **608**, a channel key **610**, a genre **612**, a presentation weight date key **614**, a valid data flag **616**, and a source **618**.

The example household ID **602** of FIG. **6** identifies which example media presentation location **102** transmitted the metering data **600**. In this example, there is one household ID **602**, namely '30006.' However, there may be many household IDs from various media presentation locations **102** within the metering data **600**. The example tuner key **604** is an identification number for the media output device **104**. Since there may be the media presentation location **102** with multiple media presentation devices **102**, the tuner key **604** identifies which media output device **104** was being used. The example start time **606** is a timestamp based on a start of a presentation session (e.g., when the media presentation device **108** was actually presenting media on the media output device **104**). The example end time **608** is a timestamp based an end of a presentation session. The example channel key **610** identifies a channel tuned by the media presentation device **108**. The example genre **612** identifies the genre of the media tuned to on the media presentation device **108** during the presentation session. The example presentation weight date key **614** is a code repre-

17

sentative of a date of the end time **608**. The example valid data flag **616** is a Boolean value that identifies whether the metering data is valid. The metering data may not be valid if there is an error in the metering data (e.g., the metering data is corrupted, the metering data is missing information, etc.). The example source **618** identifies a source (e.g., a videocassette recorder (VCR), DVD, cable, antenna, video game console, etc.) of the media presentation device **618**. The source **618** may change if, for example, the user is watching a DVD. Additionally, the metering data **600** may contain additional columns for data related to other aspects of audience member data. For example, the metering data may contain data identifying whether or not a user(s) is present, demographics relating to the user(s), and/or an identifier for the user(s) present during a presentation session. Alternatively, the metering data may only display data while a user is present and omit any data while the user is not present. For example, the example LPM **106** may adjust the example metering data **600** so that the metering data **600** does not include data from time durations when a user is not present.

When the example metering data **600** of FIG. 6 is received by the example collection facility **114** from the example LPM **106**, the example tuning session determiner **204** tuning sessions based on a period time between channel changes by analyzing the metering data **600**. The example columns **620** represent data from a period time between channel changes. In this example, the tuning session determiner **204** identifies the example columns **620** as an example tuning session as further described in in FIGS. 7A-C.

FIGS. 7A-C illustrate an example of determining a tuning session and presentation sessions within the tuning session based on the example metering data **600** of FIG. 6. In the illustrated example, the tuning session determiner **204** determines tuning session based on a period of time between channel changes. FIG. 7A displays the columns **620** from the example metering data **600** of FIG. 6. FIG. 7B displays information that may be extracted from the example columns **620** to determine the tuning session and the presentation sessions. For example, based on the information from the example columns **620**, the presentation session determiner **206** determines that at time 00:25:00 media output device '186242092' from household '50006' was turned off after watching a channel associated with '294984.' At time 00:34:00, the media output device '186242092' was turned on and the channel was changed to a channel associated with a channel key '2875552.' At time 02:26:00, the media output device '186242092' was turned off. At time 04:52:00, the media output device '186242092' was turned back on while remaining on the channel associated with the channel key '2875552.' At time 05:46:00, the media output device '186242092' was turned off. At time 20:50:00, the media output device '186242092' was turned back on while remaining on the channel associated with the channel key '2875552.' At time 21:35:00, the media output device '186242092' was turned off. At time 22:41:00, the media output device '186242092' was turned back on and the channel was changed to a channel associated with the channel key '294984.'

FIG. 7C illustrates an example tuning session and example presentation sessions determined for the metering data from columns **620** of FIG. 7A. Since the channel was changed at 00:34:00 and then again at 22:41:00, the example tuning session determiner **204** generates an example tuning session of 1,327 minutes (e.g., the period of time between channel changes). Once the tuning session is created, the presentation session determiner **206** determines presentation

18

sessions based on the periods of time that media from the media output device '186242092' was actually presented within the tuning session (e.g., the media output device '186242092' was on and a user was viewing the media output device '186242092'). For example, the presentation session determiner **206** analysis the start and end times from the metering data from columns **620** to determine when the media output device **104** was on and when the media output device **104** was off. The presentation sessions only include periods of time while the media output device **104** is on. In some examples, the metering data in columns **620** may only include data when a user is present. In such examples, the presentation sessions are based on when the media output device **104** is on. In some examples, the metering data in columns **620** may include additional data such as data related to the presence of audience members. In such examples, the presentation session determiner **206** may need to determine if, and/or which, audience members are present while the media output device **104** is on. Based on the example columns **620**, the presentation session determiner **206** determines that the presentation session periods are 00:34:00-02:56:00 (e.g., 142 minutes), 04:52:00-05:46:00 (e.g., 54 minutes), and 20:50:00-21:35:00 (e.g., 45 minutes). The total presentation time for the 1,327 minute tuning session is 238 minutes (e.g., 142+54+42=238). In this example, once the example presentation session determiner **206** determines presentation session data based on the created tuning session, the example modeler **208** adds the presentation session data to a model corresponding to a tuning session duration 1,327 minutes, as further described in FIGS. 8A-8E.

FIGS. 8A-E display example models displaying various distributions based on presentation session data for an example 10-minute tuning session. The example models of 8A-E are based on a total of 5963 10-minute tuning sessions collected from metering data of the example LPM **106** in FIG. 2, as previously described in FIGS. 7A-C.

FIG. 8A displays an example model of an example frequency distribution of total presentation time based on the gathered 10-minute tuning session. Additionally, other models may be created for tuning sessions of varying lengths (e.g., 1-minute tuning session, 5-minute tuning session, 60-minute tuning session, 720-minute tuning session, etc.). Alternatively, one model may be generated with multiple rows representing multiple tuning session lengths.

The example model of FIG. 8A includes an example frequency distribution of presentation times **802** broken into one minute intervals for the example 10-minute tuning session **800**. In some examples, the presentation times **802** represent a range of times. For example, the example presentation time '0' labeled **806** may include all time from 00:00:00 to 00:00:59, 00:00:00 to 00:00:29, or any other range. The ranges may be predetermined and/or may be customized by a user and/or an administrator. Alternatively, the frequency distribution presentation times **802** may be broken into any duration of intervals (e.g., thirty second intervals, 2 minute intervals, 5 minute intervals, etc.).

To generate and/or update the example model of FIG. 8A, the example collection facility **114** of FIG. 1 collects metering data from the example LPM **106**. Once the example data adjuster **120** breaks the metering data into tuning sessions and presentation sessions, the example data adjuster **120** populates the model(s) based on the tuning session data and presentation session data. The example frequency distribution of FIG. 8A is populated based on presentation session data from tuning sessions of 10 minute length. Each of the 5,963 collected 10-minute tuning sessions are represented in

19

a presentation duration bucket based on the total presentation time of the tuning session (e.g., the amount time within the 10-minute tuning session **800** that media was presented). The example of FIG. **8A** includes 112 instances of a total presentation time of 0 minutes labeled **804** for a 10-minute tuning session **800**, 242 instances of a total presentation time of 1 minute labeled **808** for a 10-minute tuning session **800**, etc. As additional metering data is processed by the example data adjuster **120**, the example model is updated to represent the additional monitored data.

Various statistical calculations (e.g., weighted average, standard deviation, etc.) can additionally be determined by the example modeler **208** based on the data from the frequency distribution of FIG. **8A**. For example, an expected value (e.g., weighted average) may be calculated using the following formula:

$$\bar{x} = \frac{\sum_{i=1}^n w_i \cdot x_i}{\sum_{i=1}^n w_i}$$

Where $\bar{x}$ is the expected value, w_i is the number of instances in presentation bucket i , and x_i is the number of presentation minutes of presentation bucket i .

The example model of FIG. **8A** has an expected value of 6.58, as shown below:

$$\frac{0(112) + 1(242) + 2(338) + 3(370) + 4(390) + 5(490) + 6(491) + 7(781) + 8(901) + 9(903) + 10(945)}{5963} = 6.58$$

The example expected value is the number of expected total presentation minutes given a 10-minute tuning session. In other words, given a received 10-minute tuning session from a media presentation device, it is expected that a total of 6.58 minutes of the 10 minutes were actually presented to a user. The expected value for each tuning session length can be plotted on a graph, as further described in FIG. **9**.

FIG. **8B** displays an example model of an example conditional distribution of presentation time based on the example frequency distribution of FIG. **8A**. Additionally other models may be created for conditional distribution of presentation time for tuning sessions of varying lengths (e.g., 1-minute session, 5-minute tuning session, 60-minute tuning session, 720-minute tuning session, etc.) Alternatively, one model may be generated with multiple rows representing varying tuning session lengths.

The example model of FIG. **8B** includes an example conditional distribution of presentation times **812** broken into one minute intervals for an example 10-minute tuning session **800**. In some examples, the presentation times **812** represent a range of times. For example, the example presentation time '0' labeled **814** may include all time from 00:00:00 to 00:00:59, 00:00:00 to 00:00:29, or any other range. The ranges may be predetermined or may be customized by an administrator. Alternatively, the conditional distribution **812** may be broken into any duration of intervals (e.g., thirty second intervals, 2 minute intervals, 5 minute intervals, etc.).

Conditional distribution buckets contain conditional percentages based on the frequency distributions of FIG. **8A**. The conditional percentages in the example conditional distribution buckets are calculated by dividing each frequency distribution bucket by a total number of tuning

20

sessions modeled for a tuning session length. For example, the conditional distribution percentage for a 0-minute presentation session **814** within a 10-minute tuning session **800** is calculating by dividing the 112 instances of the 0-minute presentation session labeled **806** by the total number of 10-minute tuning sessions **800** (e.g., $112+242+338+370+390+490+491+781+901+903+945=5963$ total sessions) as shown below:

$$\frac{112}{5963} = 2\%$$

2% is placed in the conditional distribution bucket for the 0-minute presentation session **816** within a 10 minute tuning session **800**. Other example conditional distribution buckets are calculated in a similar manner. For example, FIG. **8B** illustrates that 4% of the 10-minute tuning sessions contain a total presentation time of 1 minute, 8% of the 10-minute tuning sessions contain a total presentation time of 5 minutes, 16% of the 10-minute tuning sessions contain a total presentation time of 10 minutes, etc.

FIG. **8C** is an example model of an example cumulative distribution of presentation time based on the example conditional distribution of FIG. **8B**. Additionally other models may be created for conditional distribution of presentation time for tuning sessions of varying lengths (e.g., 1-minute session, 5-minute tuning session, 60-minute tuning session, 720-minute tuning session, etc.) Alternatively, one model may be generated with multiple rows representing varying tuning session lengths.

The example model of FIG. **8C** includes an example cumulative distribution of presentation times **824** broken into one minute intervals for an example 10-minute tuning session **800**. In some examples, the presentation times **824** represent a range of times. For example, the example presentation time '0' labeled **826** may include all time from 00:00:00 to 00:00:59, 00:00:00 to 00:00:29, or any other range. The ranges may be predetermined or may be customized by an administrator. Alternatively, the example cumulative distribution **824** may be broken into any duration of intervals (e.g., thirty second intervals, 2 minute intervals, 5 minute intervals, etc.).

Cumulative distribution buckets contain cumulative percentages based on the conditional distribution of FIG. **8B**. The cumulative percentages in the example cumulative distribution buckets are calculated by adding the percentage in a selected conditional distribution bucket with the percentages in all the conditional distribution buckets prior to the selected conditional distribution bucket. For example, the cumulative distribution bucket for a 3-minute presentation session within a 10-minute tuning session **800** is calculated by adding the percentage in the 3 minute conditional distribution bucket **822** for a 10-minute tuning session **800** (e.g., 6%) with the percentage in the 2-minute (e.g., 6%) conditional distribution bucket **720**, 1-minute (e.g., 4%) conditional distribution bucket **818**, and 0-minute (e.g., 2%) conditional distribution bucket **816** and for a 10-minute tuning session **800** as shown below:

$$6\%+6\%+4\%+2\%=18\%$$

18% is placed in the 3-minute cumulative distribution bucket **828** and the other example cumulative distribution buckets are calculated in a similar manner. The percentages in each cumulative distribution buckets represent the total percentage of presentation times of up to a particular length of time. For example, 54% of the 10-minute tuning sessions

21

contained a total presentation sessions of 8 minutes or less. Alternatively, a cumulative distribution may be calculated based on the frequency distribution of FIG. 8A. In this manner, the cumulative distribution calculated using the frequency distribution of FIG. 8A as appose to the conditional distribution percentages of FIG. 8B. The distributions models of FIGS. 8A, 8B, and 8C may be used to adjust tuning data from a STB in order to determine a total presentation session for the tuning data from the STB, as further described in FIG. 9.

FIG. 8D displays an example model of an example frequency distribution of media output device presented at set times 830 during a 10-minute tuning session 800. Additionally, other models may be created for tuning sessions of varying lengths (e.g., 1-minute tuning session, 5-minute tuning session, 60-minute tuning session, 720-minute tuning session, etc.). Alternatively, one model may be generated with multiple rows representing the varying tuning session lengths.

The example model of FIG. 8D includes an example frequency distribution of media output devices presented at set times 830 broken into one minute intervals for an example 10-minute tuning session 800. Alternatively, the frequency distribution 830 may be broken into any duration of intervals (e.g., thirty second intervals, 2 minute intervals, 5 minute intervals, etc.). If a user of the media presentation device was presentation the media presentation device at the designated time, the instance is counted in a corresponding frequency distribution bucket. In some examples, the blocks can represent a range of times. For example, the blocks may be broken up so that if a user was exposed to media by the media presentation device 108 within the 00:00:00-00:00:29 window, the instance would be counted in the 'at 0' frequency distribution bucket 832.

To generate and/or update the example model of FIG. 8D, the example collection facility 114 of FIG. 1 collects metering data from the example LPM 106. Once the example data adjuster 120 breaks the metering data into tuning sessions and presentation sessions, the example data adjuster 120 populates the model(s) based on tuning session data and presentation session data. The example model of the example frequency distribution of media output devices presenting at set times of FIG. 8D is populated based on presentation session data from tuning sessions of 10 minute length. Each of the 5963 gathered 10-minute tuning sessions are analyzed to determine how many media presentation device 108 were actually presenting media on media output device 104 at set times of the 10-minute tuning session. For example, a 10-minute tuning session containing presentation sessions from 00:00-05:30 and from 08:45-10:00 would be entered as being watched in the at 0, at 1, at 2, at 3, at 4, at 5, at 9, and at 10 minute frequency distribution blocks.

FIG. 8E displays an example model of an example conditional distribution of media output devices presenting media at set times 836 during a 10-minute tuning session 800. Additionally, other models may be created for tuning sessions of varying lengths (e.g., 1-minute tuning session, 5-minute tuning session, 60-minute tuning session, 720-minute tuning session, etc.). Alternatively, one model may be generated with multiple rows representing rows representing the varying tuning session lengths.

The example model of FIG. 8E includes an example conditional distribution of media output devices presenting media at set times 836 broken into one minute intervals for an example 10-minute tuning session 800. Alternatively, the conditional distribution at set times 836 may be broken into any duration of intervals (e.g., thirty second intervals, 2

22

minute intervals, 5 minute intervals, etc.). If a user of the media presentation device was presentation the media presentation device at the designated time, the instance is counted in a corresponding conditional distribution bucket. In some examples, the blocks can represent a range of times. For example, the blocks may be broken up so that if a user was exposed to media by the media presentation device 108 within the 00:00:00-00:00:29 window, the instance would be counted in the 'at 0' conditional distribution bucket labeled 838.

Conditional distribution buckets contain conditional percentages based on the frequency distributions 830 of FIG. 8D. The conditional percentages in the example conditional distribution buckets are calculated based on dividing each frequency distribution bucket by a total number of tuning sessions modeled for a tuning session length. For example, the conditional distribution percentage at the fifth minute for the example 10 minute-tuning session 800 is calculating by dividing the 4411 presentation instances at the fifth minute 834 by the total number of 10-minute tuning sessions (e.g., 5963 total sessions) as shown below:

$$\frac{4411}{5963} = 74\%$$

74% is placed in the at 5 minute conditional bucket 840 for a 10 minute tuning session. Other example conditional distribution buckets 820 are calculated in a similar manner. The conditional distribution of FIG. 8B illustrates that 100% of the total 10-minute tuning sessions were presenting media at the zeroth minute, 88% of the total 10-minute tuning sessions were presenting media at the third minute, 49% of the total 10-minute tuning sessions were presenting media at the tenth minute, etc. Additionally, a report may be generated including any of the example models or combination of the example models. The distributions models of FIGS. 8D and 8E may be used to adjust tuning data from a STB based on an initial presentation session, an ending presentation session, and/or any other presentation session information for the tuning data of the STB, as previously described in FIG. 4.

FIG. 9 is an example graph of expected total presentation session values based on various tuning sessions generated from metering data of the LPM 106 of FIG. 1. The example data adjuster 120 determines an expected total presentation session by calculating a weighted average of the total presentation sessions of a selected tuning session length. For example, as previously described in FIG. 5A, the example expected value for the 10-minute tuning session of FIG. 5A was 6.58. Therefore, the example graph of FIG. 9 will have a coordinate (e.g., (10, 6.58)) to represent the expected value for the 10-minute tuning session. The example graph contains a point for every tracked tuning session (e.g., a 1 minute tuning session, 10 minute tuning session, 200 minute tuning session, etc.). A report may be generated including the example graph.

FIG. 10 is a block diagram of an example processor platform 1000 capable of executing the instructions of FIGS. 3-5 to implement the example data adjuster 120 of FIG. 1. The processor platform 1000 can be, for example, a server, a personal computer, a mobile device (e.g., a cell phone, a smart phone, a tablet such as an iPad™), a personal digital assistant (PDA), an Internet appliance, or any other type of computing device.

23

The processor platform **1000** of the illustrated example includes a processor **1012**. The processor **1012** of the illustrated example is hardware. For example, the processor **1012** can be implemented by integrated circuits, logic circuits, microprocessors or controllers from any desired family or manufacturer.

The processor **1012** of the illustrated example includes a local memory **1013** (e.g., a cache). The example processor **1012** of FIG. **10** executes the instructions of FIGS. **3-5** to the example metering receiver **202**, the example tuning session determiner **204**, the example presentation session determiner **206**, the example modeler **208**, the example model storage **210**, the example tuning data receiver **212**, the example duration determiner **214**, the example presentation session estimator **216**, the example reporter **218** of FIG. **2** to implement the example data adjuster **120**. The processor **1012** of the illustrated example is in communication with a main memory including a volatile memory **1014** and a non-volatile memory **1016** via a bus **1018**. The volatile memory **1014** may be implemented by Synchronous Dynamic Random Access Memory (SDRAM), Dynamic Random Access Memory (DRAM), RAMBUS Dynamic Random Access Memory (RDRAM) and/or any other type of random access memory device. The non-volatile memory **1016** may be implemented by flash memory and/or any other desired type of memory device. Access to the main memory **1014**, **1016** is controlled by a memory controller.

The processor platform **1000** of the illustrated example also includes an interface circuit **1012**. The interface circuit **1012** may be implemented by any type of interface standard, such as an Ethernet interface, a universal serial bus (USB), and/or a PCI express interface.

In the illustrated example, one or more input devices **1022** are connected to the interface circuit **1012**. The input device(s) **1022** permit(s) a user to enter data and commands into the processor **1012**. The input device(s) can be implemented by, for example, a sensor, a microphone, a camera (still or video), a keyboard, a button, a mouse, a touchscreen, a track-pad, a trackball, isopoint and/or a voice recognition system.

One or more output devices **1024** are also connected to the interface circuit **1012** of the illustrated example. The output devices **1024** can be implemented, for example, by display devices (e.g., a light emitting diode (LED), an organic light emitting diode (OLED), a liquid crystal display, a cathode ray tube display (CRT), a touchscreen, a tactile output device, and/or speakers). The interface circuit **1012** of the illustrated example, thus, typically includes a graphics driver card, a graphics driver circuit or a graphics driver processor.

The interface circuit **1012** of the illustrated example also includes a communication device such as a transmitter, a receiver, a transceiver, a modem and/or network interface card to facilitate exchange of data with external machines (e.g., computing devices of any kind) via a network **1026** (e.g., an Ethernet connection, a digital subscriber line (DSL), a telephone line, coaxial cable, a cellular telephone system, etc.).

The processor platform **1000** of the illustrated example also includes one or more mass storage devices **1028** for storing software and/or data. Examples of such mass storage devices **1028** include floppy disk drives, hard drive disks, compact disk drives, Blu-ray disk drives, RAID systems, and digital versatile disk (DVD) drives.

The coded instructions **1032** of FIGS. **3-5** may be stored in the mass storage device **1028**, in the volatile memory

24

1014, in the non-volatile memory **1016**, and/or on a removable tangible computer readable storage medium such as a CD or DVD.

From the foregoing, it should be appreciated that the above disclosed methods, apparatus, and articles of manufacture estimate presentation session from tuning data based on metering data. Media presentation device data may have extraneous information leading to inaccurate audience measurement data. For example, STB data does not account for when a television is off and the television is on, or when the television is on, but no one is watching the media presentation device. Methods and apparatus described herein estimate presentation sessions for tuning data to account for the extraneous information. Since LPMs can determine more accurate information including when a media presentation device is on and when a user is actually watching the media presentation device, metering data from the LPM are analyzed to create models used to accurately adjust media presentation device data.

Using the examples disclosed herein, media presentation device data may be more accurately analyzed based on data from a plurality of LPMs. In some examples, models are created from metering data of LPMs initial presentation session, a final presentation session, and a total presentation session within a tuning session. In such examples, presentation sessions for tuning data from media monitoring devices may be estimated based on data in corresponding models. In this manner, reports may be generated to include the estimated presentation session for a tuning session of a media presentation device.

From the foregoing, persons of ordinary skill in the art will appreciate that the above disclosed methods and apparatus may be realized within a single device or across two cooperating devices, and could be implemented by software, hardware, and/or firmware to implement the data adjuster disclosed herein.

Although certain example methods, apparatus and articles of manufacture have been described herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers all methods, apparatus and articles of manufacture fairly falling within the scope of the appended claims either literally or under the doctrine of equivalents.

What is claimed is:

1. A computing system comprising: machine readable instructions; and processor circuitry to execute the machine readable instructions to at least:
 - access respective tuning session data from a plurality of media presentation devices, corresponding ones of the plurality of media presentation devices in respective ones of media presentation environments, the respective ones of the media presentation environments including at least one media output device to present media from a corresponding one of the media presentation devices, the respective tuning session data from respective ones of the media presentation devices indicative of a tuning session having a tuning session duration, wherein the tuning session duration is indicative of an amount of time between interactions with a corresponding one of the plurality of media presentation devices, wherein presentation session data is available for a first subset of the media presentation environments, and wherein presentation session data is not available for a second subset of the media presentation environments;

25

access, for ones of the first subset of the media presentation environments, respective presentation session data indicative of a presentation session duration during which media corresponding to a respective tuning session was presented on the respective at least one media output device by the media presentation device within a respective tuning session duration;

generate a model relating the respective tuning session durations to corresponding presentation session durations from ones of the first subset of the media presentation environments;

based on the model, determine, for a given one of the media presentation environments in the second subset of the media presentation environments, an expected presentation session duration for a given tuning session having a given tuning session duration; and

output the expected presentation session duration for the given tuning session from the given one of the media presentation environments.

2. The computing system of claim 1, wherein the processor circuitry is to:

access, from the first subset of the media presentation environments, additional tuning session data and additional media presentation data indicative of additional tuning session durations and additional media presentation session durations, respectively; and

update the model with the additional tuning session durations and additional media presentation data.

3. The computing system of claim 2, wherein the processor circuitry is to:

subsequent to determining the expected presentation session duration, based on the model, for the given tuning session having the given tuning session duration, determine, for another given one of the media presentation environments in the second subset of the media presentation environments, another expected presentation session duration for another given tuning session having another given tuning session duration based on the updated model; and

output the other expected presentation session duration for the other given tuning session from the other given one of the media presentation environments.

4. The computing system of claim 1, wherein the processor circuitry is to determine the expected presentation session duration for the given tuning session based on the model by determining the expected presentation session duration based on multiple ones of the tuning session durations and corresponding ones of the presentation session durations of the ones of the first subset of the media presentation environments, the multiple ones of the tuning session durations being within a threshold extent of similarity of the given tuning session duration.

5. The computing system of claim 4, wherein the threshold extent of similarity is a threshold of time similarity in which each of the tuning session durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments are within a time threshold of the given tuning session duration.

6. The computing system of claim 5, wherein the expected presentation session duration for the given presentation session is a weighted average of the presentation session durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments.

26

7. The computing system of claim 5, wherein the time threshold is four minutes.

8. The computing system of claim 4, wherein the expected presentation session duration for the given presentation session is a conditional probability of the presentation session durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments, indicated by the model.

9. The computing system of claim 1, wherein the processor circuitry is to:

determine that a number of tuning session durations related by the model to corresponding presentation session durations from the first subset of the media presentation environments is at least a threshold number of tuning session durations, and

determine the expected presentation session duration for the given tuning session having the given tuning session duration based on the model in response to the determination that the number of tuning session durations related by the model to corresponding presentation session durations from the first subset of the media presentation environments is at least the threshold number of tuning session durations.

10. The computing system of claim 9, wherein the threshold number is five hundred tuning session durations.

11. A non-transitory computer-readable medium comprising instructions to cause processor circuitry to at least:

access respective tuning session data from each of a plurality of media presentation devices, corresponding ones of the media presentation devices in respective ones of media presentation environments, the respective media presentation environments including at least one media output device to present media from a corresponding one of the media presentation devices, the respective tuning session data from respective ones of the media presentation devices indicative of a tuning session having a tuning session duration, wherein the tuning session duration is indicative of an amount of time between interactions with a corresponding one of the media presentation devices, wherein presentation session data is available for a first subset of the media presentation environments, and wherein presentation session data is not available for a second subset of the media presentation environments;

access, for ones of the first subset of the media presentation environments, respective presentation session data indicative of a presentation session duration during which media corresponding to a respective tuning session was presented by the respective at least one media output device by the media presentation device within a respective tuning session duration;

generate a model relating the respective tuning session durations to corresponding presentation session durations from the ones of the first subset of the media presentation environments;

based on the model, determine, for a given one of the media presentation environments in the second subset of the media presentation environments, an expected presentation session duration for a given tuning session having a given tuning session duration; and

output the expected presentation session duration for the given tuning session from the given one of the media presentation environments.

12. The non-transitory computer-readable medium of claim 11, wherein the instructions cause the processor circuitry to determine the expected presentation session duration, based on the model, for the given tuning session by

27

determining the expected presentation session duration based on multiple ones of the tuning session durations and corresponding ones of the presentation session durations of the ones of the first subset of the media presentation environments, the multiple ones of the tuning session durations being within a threshold extent of similarity of the given tuning session duration,

wherein the threshold extent of similarity is a threshold of time similarity in which each of the tuning session durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments are within a time threshold of the given tuning session duration, and

wherein the expected presentation session duration for the given presentation session is a weighted average of the presentation session durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments.

13. The non-transitory computer-readable medium of claim 11, wherein the instructions cause the processor circuitry to determine the expected presentation session duration for the given tuning session based on the model by determining the expected presentation session duration based on multiple ones of the tuning session durations and corresponding ones of the presentation session durations of the ones of the first subset of the media presentation environments, the multiple ones of the tuning session durations being within a threshold extent of similarity of the given tuning session duration, and

wherein the expected presentation session duration for the given presentation session is a conditional probability of the presentation session durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments.

14. The non-transitory computer-readable medium of claim 11, the instructions cause the processor circuitry to: determine that a number of tuning session durations related by the model to corresponding presentation session durations from the first subset of the media presentation environments is at least a threshold number of tuning session durations, and

determine the expected presentation session duration for the given tuning session having the given tuning session duration based on the model in response to the determination that the number of tuning session durations related by the model to corresponding presentation session durations from the first subset of the media presentation environments is at least the threshold number of tuning session durations.

15. A system comprising:

processor circuitry; and

a computer-readable medium including instructions to cause the processor circuitry to at least:

access respective tuning session data from a plurality of set-top boxes, corresponding ones of the set-top boxes in respective ones of media presentation environments, the respective media presentation environments including at least one television to present media from a corresponding one of the set-top boxes, the respective tuning session data from respective ones of the set-top boxes indicative of a tuning session having a tuning session duration, the tuning session duration indicative of an amount of time between interactions with a corresponding one of the set-top boxes, wherein on/off durations are available for a first subset of the media presentation environ-

28

ments, and wherein on/off durations are not available for a second subset of the media presentation environments;

access, for ones of the first subset of the media presentation environments, respective on/off durations corresponding to respective tuning sessions, the on/off duration indicative of an amount of time that the respective television was turned on during the respective tuning session;

generate a model relating the respective tuning session durations to corresponding on/off durations from the ones of the first subset of the media presentation environments;

based on the model, determine, for a given one of the media presentation environments in the second subset of the media presentation environments, an expected on/off duration for a given tuning session having a given tuning session duration; and

cause presentation of the expected on/off duration for the given tuning session from the given one of the media presentation environments.

16. The system of claim 15, wherein the processor circuitry is to:

access, from additional ones of the first subset of the media presentation environments, additional tuning session data indicative of additional tuning session durations and additional on/off durations indicative of an amount of time that the respective television was turned on during the additional tuning session; and update the model with the additional tuning session durations and additional on/off durations.

17. The system of claim 16, wherein the processor circuitry is to:

subsequent to determining the expected on/off duration, based on the model, for the given tuning session having the given tuning session duration, determine, for another given one of the media presentation environments in the second subset of the media presentation environments, another expected on/off duration for another given tuning session having another given tuning session duration based on the updated model; and

output the other expected on/off duration for the other given tuning session from the other given one of the media presentation environments.

18. The system of claim 15, wherein the processor circuitry is to determine the expected on/off duration for the given tuning session based on the model by determining the expected on/off duration based on multiple ones of the tuning session durations and corresponding ones of the on/off durations of the ones of the first subset of the media presentation environments, the multiple ones of the tuning session durations being within a threshold extent of similarity of the given tuning session duration.

19. The system of claim 18, wherein the threshold extent of similarity is a threshold of time similarity in which each of the tuning session durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments are within a time threshold of the given tuning session duration.

20. The system of claim 19, wherein the expected on/off duration for the given tuning session is a weighted average of the on/off durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments.

21. The system of claim 18, wherein the expected on/off duration for the given tuning session is a conditional prob-

29

ability of the on/off durations of the multiple ones of the tuning session durations of the ones of the first subset of the media presentation environments, indicated by the model.

22. The system of claim **15**, wherein the processor circuitry is to:

determine that a number of tuning session durations related by the model to corresponding on/off durations from the first subset of the media presentation environments is at least a threshold number of tuning session durations, and

determine the expected on/off duration for the given tuning session having the given tuning session duration based on the model in response to the determination that the number of tuning session durations related by the model to corresponding on/off durations from the first subset of the media presentation environments is at least the threshold number of tuning session durations.

23. The system of claim **22**, wherein the threshold number is five hundred tuning session durations.

* * * * *

20

30