


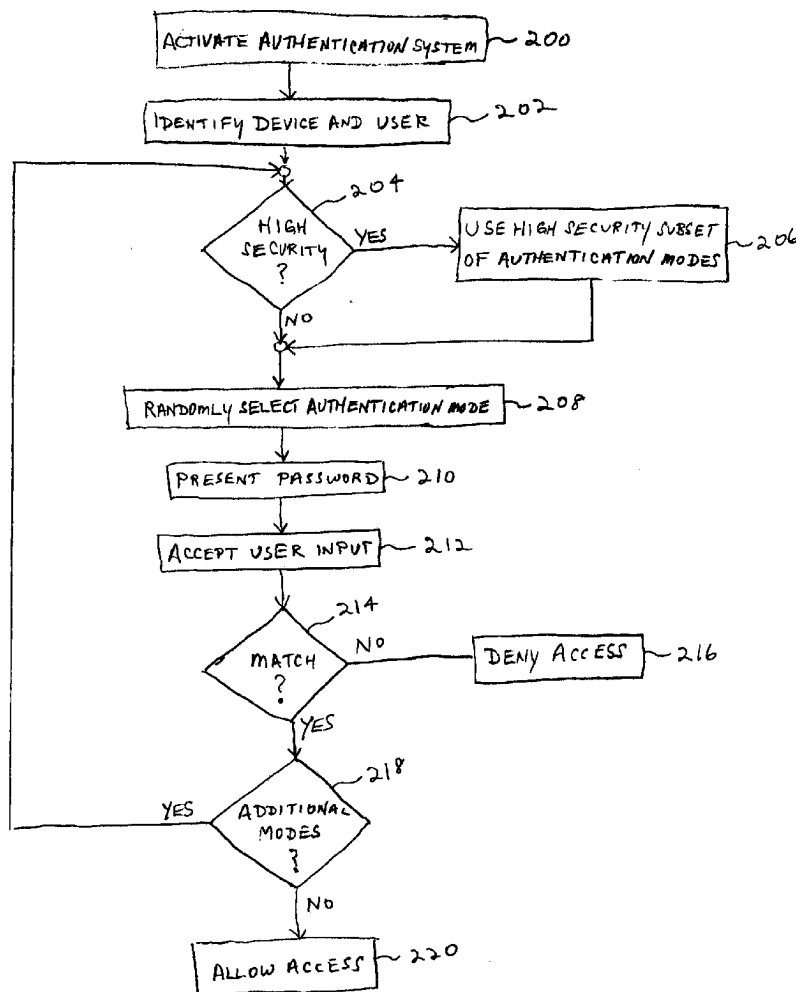

US 20100115607A1

(19) **United States**(12) **Patent Application Publication****Pratt et al.**(10) **Pub. No.: US 2010/0115607 A1**(43) **Pub. Date: May 6, 2010**(54) **SYSTEM AND METHOD FOR DEVICE SECURITY WITH A PLURALITY OF AUTHENTICATION MODES****Publication Classification**(51) **Int. Cl.**
H04L 9/32 (2006.01)(52) **U.S. Cl.** **726/18**(57) **ABSTRACT**(75) **Inventors:** **James Pratt**, Round Rock, TX (US); **Larry Pearson**, San Antonio, TX (US); **Marc Sullivan**, Austin, TX (US)**Correspondence Address:****AT&T Legal Department - Moazzam**
Attn: Patent Docketing
Room 2A-207, One AT&T Way
Bedminster, NJ 07921 (US)(73) **Assignee:** **AT&T INTELLECTUAL PROPERTY I, L.P.**, Reno, NV (US)(21) **Appl. No.:** **12/265,900**(22) **Filed:** **Nov. 6, 2008**

A security processing element stores authentication data corresponding to a plurality of possible authentication modes. At a time of activation, the security processing element randomly selects one of the authentication modes for presentation to the user. The user must successfully enter data corresponding to the randomly selected authentication mode. In an alternative embodiment, the security processing element can randomly select a plurality of authentication modes that are sequentially presented to the user. The user must successfully respond to each of the plurality of requested authentication modes. In another embodiment, for high security communications, the security processing element may select from a subset of authentication modes that are considered to be more robust. Conversely, the security processing element may select from a subset of randomly presented authentication modes that are considered less robust when used in a low security setting.

**EX-1022****U.S. Patent 8,401,875**

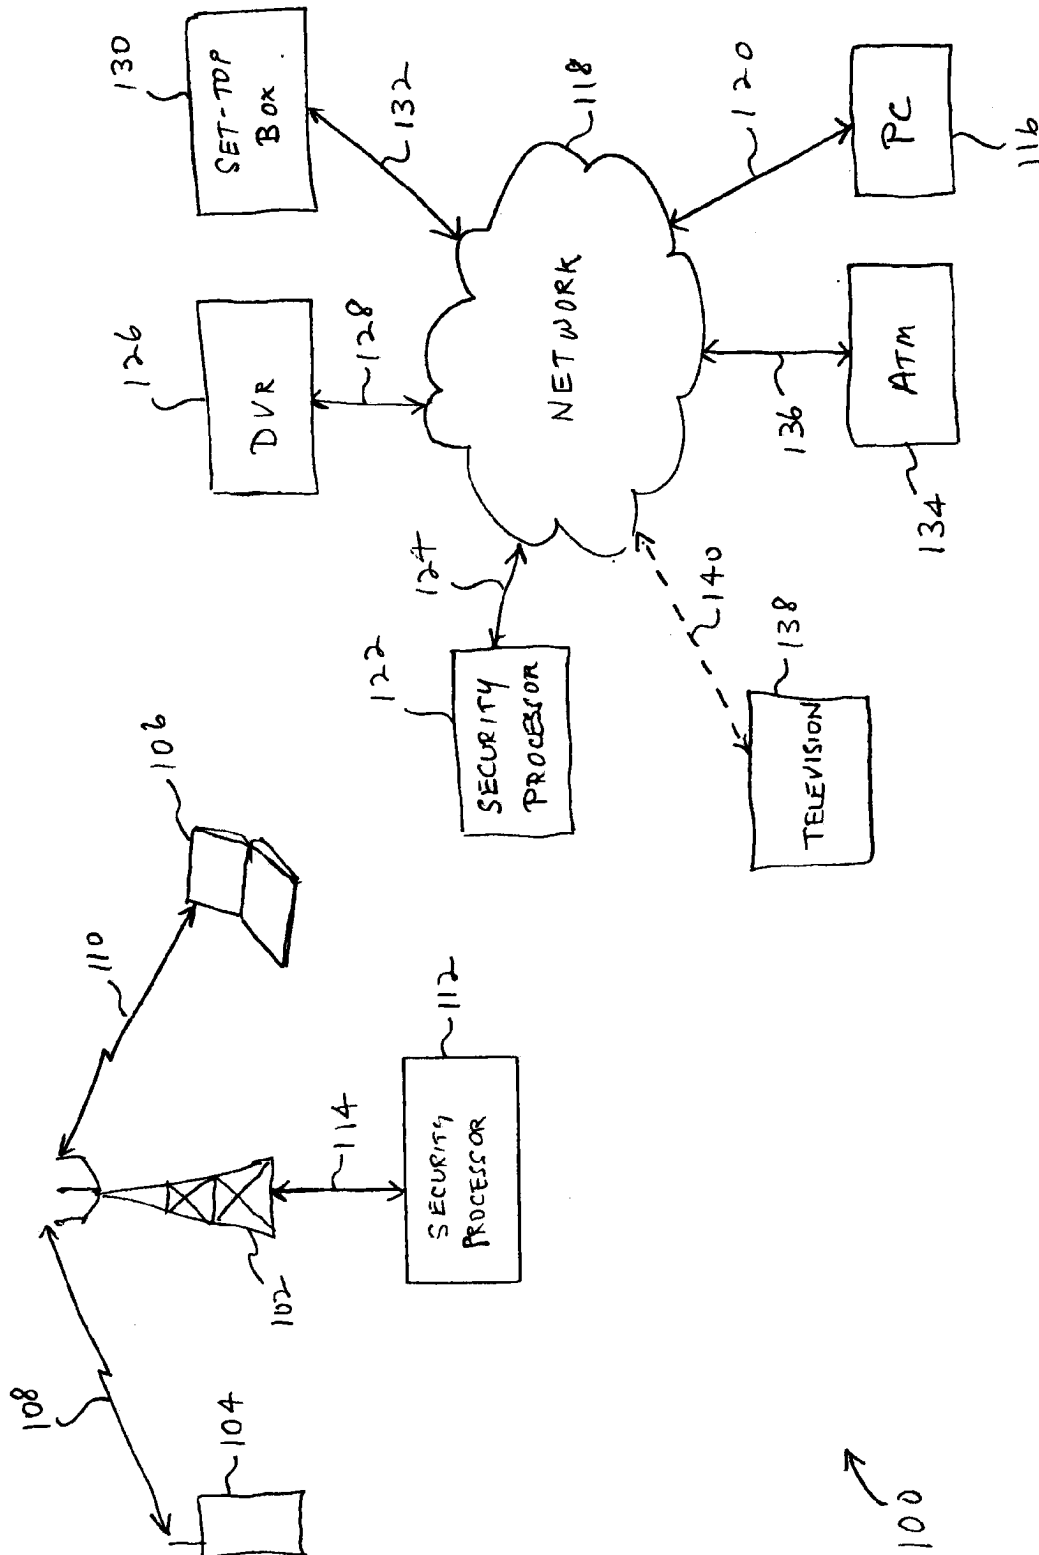


FIG. 1


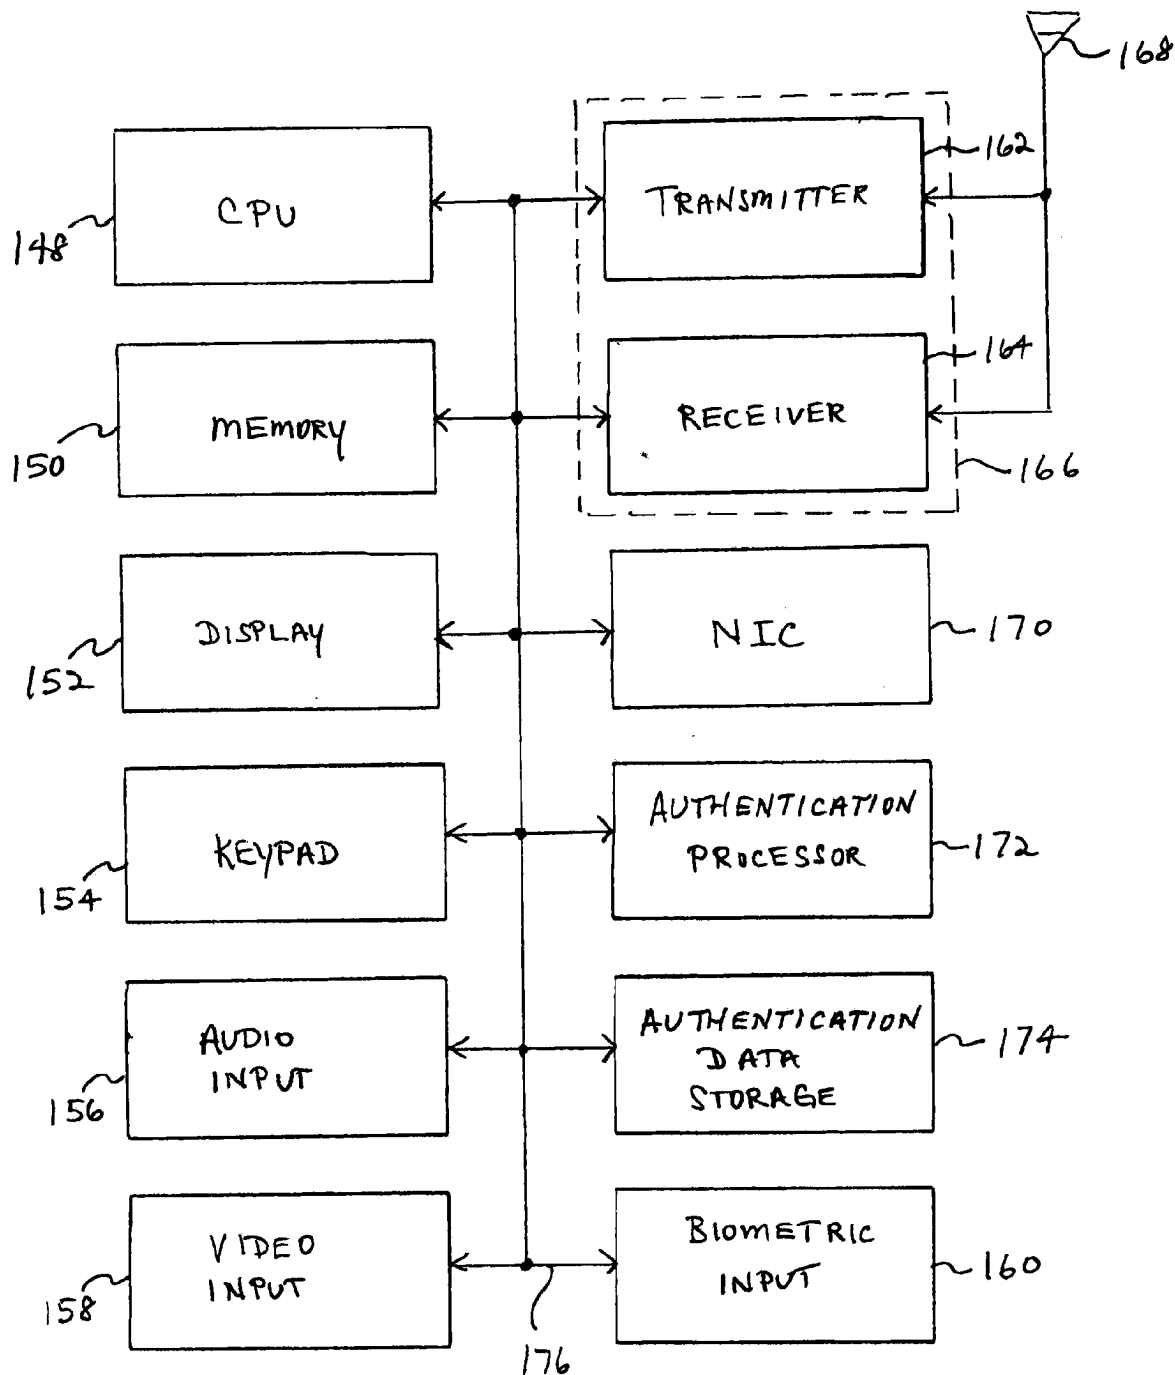


FIG. 2

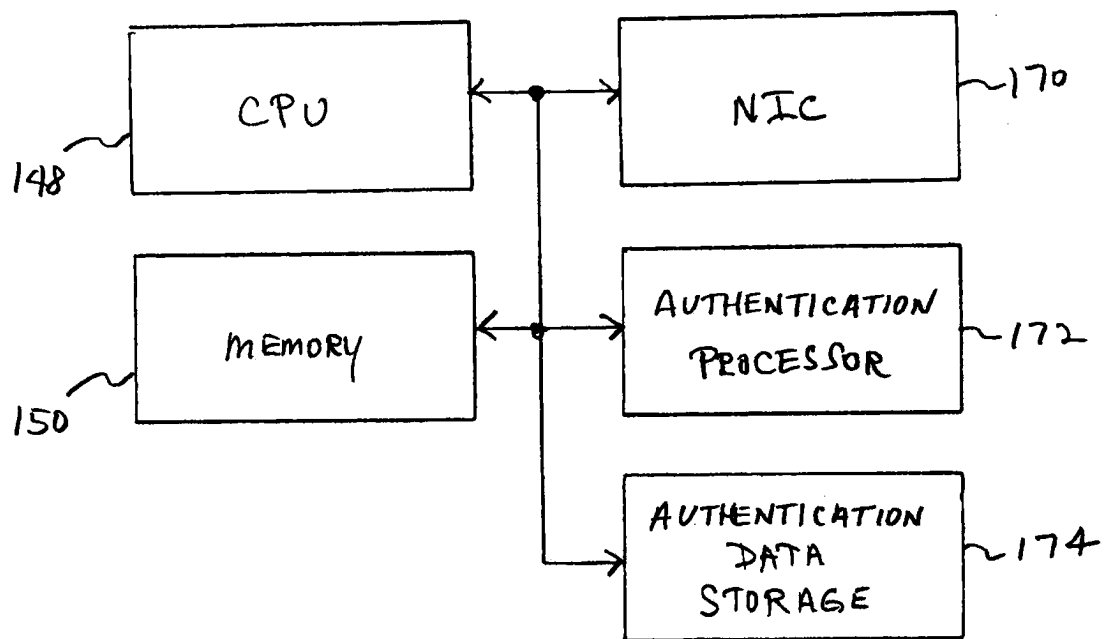

122 ↗

FIG. 3

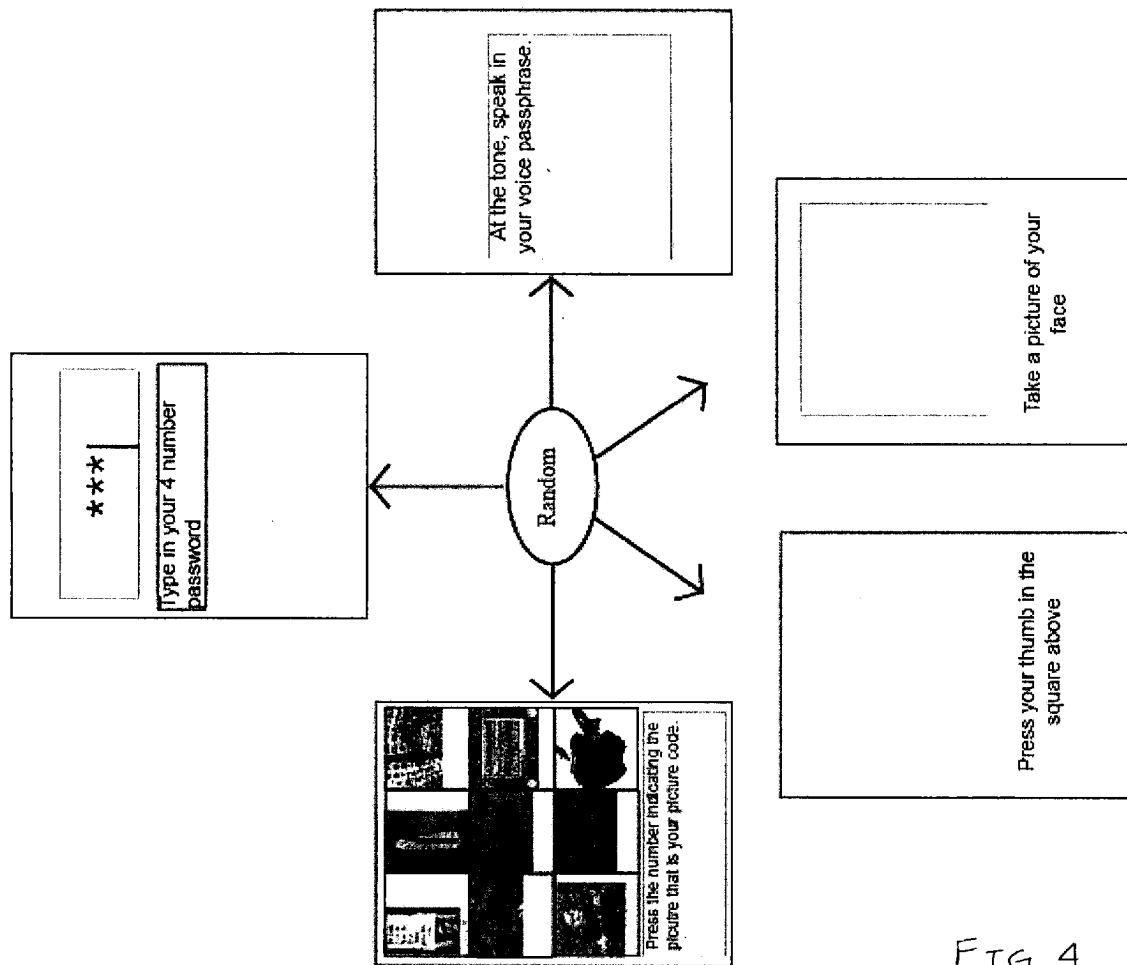


FIG. 4

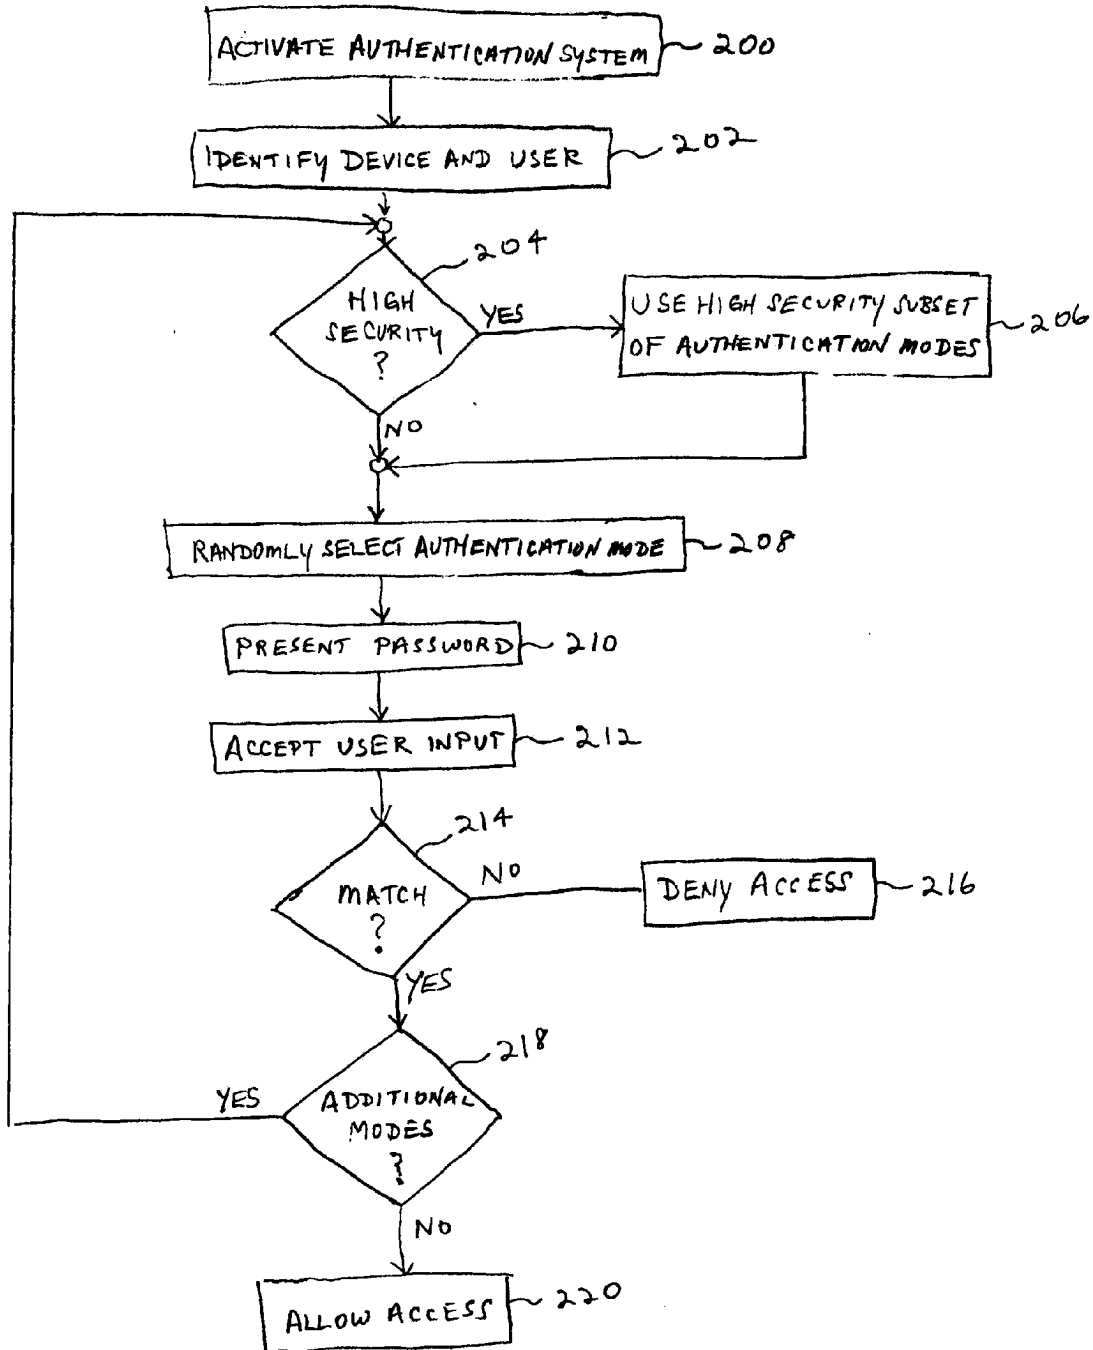


FIG. 5

SYSTEM AND METHOD FOR DEVICE SECURITY WITH A PLURALITY OF AUTHENTICATION MODES

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention is directed generally to device security, and, more particularly, to a system and method for device security using a plurality of authentication modes.

[0003] 2. Description of the Related Art

[0004] Electronic devices are pervasive in modern society. Electronic devices are used for everything from entertainment to communications. Personal communications and high security communications, such as financial transactions, are also widely conducted using modern electronic devices.

[0005] Authentication processes, such as passwords, are often used to provide security with electronic devices. Passwords may be used with a typical consumer device, such as a television, to permit parents to restrict access to selected television programming. In communication devices, it is desirable to prevent others from accessing personal information on a wireless communication device. Other communication devices, such as computers or web-enabled cell phones, can be used to conduct financial transactions. In addition to encryption of data, it is desirable to provide password security as a barrier to unauthorized access of the electronic devices.

[0006] Those skilled in the art will recognize that simple forms of password protection, such as a three or four digit Personal Identification Number (PIN) are easy to use, but provide a relatively low degree of security. It is known that unscrupulous individuals may view an individual's PIN entry by looking over the user's shoulder. Thus, easy to use forms of security often provide a lower degree of protection than is desired. Therefore, it can be appreciated that there is a significant need for a system and method for security in electronic devices. The present invention provides this, and other advantages, as will be apparent from the following detailed description and accompanying figures.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

[0007] FIG. 1 is a diagram illustrating sample system architectures constructed in accordance with the present teachings.

[0008] FIG. 2 is a functional block diagram of an electronic device having multi-modal authentication processes.

[0009] FIG. 3 is a functional block diagram of a security processor, such as illustrated in FIG. 1.

[0010] FIG. 4 illustrates the operation of an electronic device to select from among a plurality of authentication modes.

[0011] FIG. 5 is a flow chart illustrating the operation of the multi-modal authentication system constructed in accordance with the present teachings.

DETAILED DESCRIPTION OF THE INVENTION

[0012] Electronic devices constructed in accordance with the present teachings have a variety of authentication modes. As will be described in greater detail, the electronic device randomly presents a plurality of different authentication modes that the user must successfully enter. Even if some of the authentication modes are relatively simple, such as a Personal Identification Number (PIN), the random selection

of authentication modes makes it more difficult for an unscrupulous individual to successfully access the electronic device.

[0013] The multi-modal authentication system may be contained within an individual device or be network-based. FIG. 1 illustrates sample systems 100 used to implement the multi-modal authentication system. In one embodiment, a base station 102 communicates with a wireless communication device 104 and a wireless computer 106. Those skilled in the art will recognize that a typical base station 102 communicates with a large number of wireless communication devices 104 and/or wireless computers 106. For simplicity, FIG. 1 only shows the wireless communication device 104 and the wireless computer 106 coupled to the base station 102. In addition, FIG. 1 does not illustrate the other infrastructure associated with a wireless system, such as a mobile switching center, system control node, and the like. Those elements are known in the art and need not be described herein.

[0014] The wireless communication device 104 may be a cell phone, personal communications system, personal digital assistant (PDA), or the like. Those skilled in the art will appreciate that many wireless communication devices 104 are web-enabled, which allows the user access to many functions ranging from simple communication, e-mail, and the like, to secure communications, such as financial transactions. The wireless communication device 104 communicates with the base station 102 via a communication link 108.

[0015] The wireless computer 106 is representative of a family of wireless devices, such as a laptop computer, that communicates with the base station 102 via a communication link 110. It is well known that the wireless computer 106 may communicate with a wide-area network, such as the Internet, from a variety of locations. For example, the user may be in an "Internet café" on the Internet via a network access point within the retail establishment. In this embodiment, the network access point provides the functionality of the base station 102.

[0016] The base station 102 communicates with a security processor 112 via a communication link 114. As will be described in greater detail below, the security processor 112 may present multiple authentication modes to the user of the wireless communication device 104 and/or wireless computer 106.

[0017] The multi-modal authentication system is not limited to wireless communications. As illustrated as the sample systems 100, a personal computer (PC) 116 may be coupled to a network 118 via a communication link 120. The network 118 may be a wide-area network, such as the Internet, or may be a local area network (LAN), such as a cable television distribution system. The PC 116 communicates with the network 118 in a conventional manner. Even if the network 118 is a LAN, it is possible for the PC 116 to access the Internet via the LAN 118 by appropriate connection to a service provider. For example, a cable modem allows the user to have cable television as well as Internet access through the cable service provider. The actual communication protocol and data exchanges between the PC 116 and the network 118 are well known in the art and need not be described herein.

[0018] A security processor 122 is coupled to the network 118 via a communication link 124. FIG. 1 illustrates the security processor 112 and the security processor 122 as separate devices. However, the security processor 112 is functionally equivalent to the security processor 122. Indeed, in an alternative embodiment, the base station 102 may communicate directly with the network 118 via the communication link

114. In this embodiment, the base station **102** may communicate with the security processor **122** via the communication link **114**, network **118**, and communication link **124**. FIG. **1** illustrates the distributed nature of the security processors and also demonstrates that different communication service providers may each provide its own security processor, such as the security processor **112** in a wireless communications network and the security processor **122** for other network communications.

[0019] As illustrated in FIG. **1**, other electronic devices, such as a digital video recorder (DVR) **126** and a set-top box **130** may also have the multi-modal authentication system. The DVR **126** is coupled to the network **118** via a communication link **128**, while the set-top box **130** is coupled to the network **118** via a communication link **132**. As described above, the network **118** may be a wide-area network, such as the Internet, or a LAN. In the present example, the network **118** may be, by way of example, a cable service provider and the DVR **126** and set-top box **130** are coupled to the cable company via conventional means, such as a wired connection, fiber-optic, wireless connection, a combination of one or more of the above, or the like.

[0020] In another embodiment, the electronic device is an automated teller machine (ATM) **134**, which is coupled to the network **118** via a communication link **136**. In this example, the network **118** may typically be a LAN that is exclusively used by the banking institution that owns the ATM **134**. Alternatively, the ATM **134** may be coupled to the Internet and communicate with one or more financial institutions via the Internet. Those skilled in the art will appreciate that the actual data transmitted between the ATM **134** and the financial institution may be encrypted. The present invention is not related to encryption itself, but to authentication utilization that denies access to unauthorized individuals.

[0021] In yet another example, a television **138** may be coupled to the network **118** via a communication link **140**. As described above with respect to the DVR **126** and set-top box **130**, the television **138** may be coupled to, by way of example, a cable service provider. The communication link **140** is illustrated by a dashed line to illustrate that the connection to the network **118** is optional for authentication security protection. For example, the television **138** may be coupled to a cable service provider via the communication link **140** to permit communication between the television **138** and the security processor **122**. Alternatively, the authentication system described herein may be self-contained within the television **138**. In this alternative embodiment, the required elements of the security processor **122** are integrated into the television **138** itself, thus there is no need for the communication link **140** between the television **138** and the network **118** for purposes of accessing the security processor **122**. There may still be a communication link between the television **138** and the network **118** for purposes of providing the multi-media signals from the cable service provider. Similarly, other devices, such as the DVR **126** and set-top box **130** may also include self-contained authentication systems constructed in accordance with the present teachings. Thus, some embodiments of the authentication system can be self-contained and need not require access to the security processor **122** via a network connection.

[0022] FIG. **2** is a functional block diagram of an electronic device, such as the wireless communication device **104** in FIG. **1**. The functional block diagram of FIG. **2** is equally applicable to the wireless computer **106** or, with slight modi-

fication, to the other devices illustrated in FIG. **1** (e.g., the PC **116**, DVR **126**, set-top box **130**, ATM **134**, and television **138**). The device includes a central processing unit (CPU) **148**. Those skilled in the art will appreciate that the CPU **148** may be implemented as a conventional microprocessor, application specific integrated circuit (ASIC), digital signal processor (DSP), programmable gate array (PGA), or the like. The wireless communication device **104** is not limited by the specific form of the CPU **148**.

[0023] The electronic device in FIG. **2** also contains a memory **150**. The memory **150** may store instructions and data to control operation of the CPU **148**. The memory **150** may include random access memory, read-only memory, programmable memory, flash memory, and the like. The electronic device is not limited by any specific form of hardware used to implement the memory **150**. The memory **150** may also be integrally formed in whole or in part with the CPU **148**.

[0024] The electronic device of FIG. **2** also includes conventional components, such as a display **152**, keypad or keyboard **154** and audio input device **156**. The electronic device may also include a video input **158** and a biometric input device **160**. The video input **158** may be a conventional built-in camera that is common in many electronic devices. The biometric input device **160** may be a fingerprint scanning device, which is also a known device. These are conventional components that operate in a known manner and need not be described in greater detail.

[0025] The electronic device of FIG. **2** also includes a transmitter **162** such as may be used by the wireless communication device **104** and wireless computer **106** for normal wireless communication with the base station **102** (see FIG. **1**). FIG. **2** also illustrates a receiver **164** that operates in conjunction with the transmitter **162** to communicate with the base station **102**. In a typical embodiment, the transmitter **162** and receiver **164** are implemented as a transceiver **166**. The transceiver **166** is connected to an antenna **168**. Operation of the transceiver **166** and the antenna **168** is well-known in the art and need not be described in greater detail herein. Those skilled in the art will recognize that electronic devices such as the DVR **126**, set-top box **130**, and television **138** may not include the transceiver **166** since wireless communication is not a typical form of communication for such devices.

[0026] The electronic device of FIG. **2** also includes a network interface controller (NIC) **170**. The NIC **170**, such as an Ethernet controller, operates in a conventional manner to permit communication with the network **18**. It should be noted that the wireless communication device **104** may or may not include the NIC **170**. However, the wireless computer **106** typically includes the NIC **170** in addition to the transceiver **166**. The operation of the NIC **170** is well known in the art and need not be described in greater detail herein.

[0027] In a stand alone embodiment, the electronic device of FIG. **2** includes an authentication password processor **172** and an authentication data storage **174**. As will be described in greater detail below, the authentication processor **172** presents a plurality of authentication modes to the user prior to permitting user access to the device. Alternatively, the authentication processor **172** may present multiple authentication modes to the user prior to permitting user access to certain services available through the network service provider. For example, the user may wish to access a bank account via the wireless communication device **104** to transfer funds. Prior to permitting user access to the financial

institution, the authentication processor 172 presents multiple authentication modes, as will be described in greater detail below.

[0028] The authentication data storage 174 may store data used in association with the authentication processor 172 in one or more of the multiple authentication modes. The data stored within the authentication data storage 174 may be stored in any convenient data structure. For example, the data may be stored as a database, look-up table, or other known configuration for data storage.

[0029] The data stored in the authentication data storage 174 may be thought of as reference data that will be used for comparison with user-entered data during the authentication process. While not essential to proper operation of the present invention, it is typically desirable to encrypt the reference data to prevent unauthorized access or corruption of the reference data. There are a number of known encryption techniques that may be satisfactorily used to encrypt the reference data. For example, one widely used encryption method uses a one-way hash, such as MD5 or SHA-1 algorithms to transform the original reference user input into a hash value. When the system goes to store the reference data it is first captured from the user and is transformed via a one-way hash, like SHA-1. The stored hash value is placed into the authentication data storage 174. At a later time, when the user is attempting the authentication process using one of the randomly selected authentication modes, the stored hash value can be compared to the transformed user supplied value by running the same hash (e.g., the SHA-1 hash) against the actual values supplied by the user during the authentication process. In one embodiment, the authentication processor 172 (see FIG. 2) may calculate the hash values for the reference data and, at a later time, for the user-entered data. Other hash techniques or other encryption techniques may also be used to protect the reference data in the authentication data storage 174.

[0030] The present invention is not limited by the specific implementation of the data structure used for the authentication data storage 174.

[0031] Those skilled in the art will recognize that the authentication processor 172 may be implemented as a series of computer instructions stored in the memory 150 and executed by the CPU 148. However, the authentication processor 172 is shown as a separate block in the functional block diagram of FIG. 2 because it performs a separate function. Similarly, the authentication data storage 174 may typically be implemented as a part of the memory 150.

[0032] The various components illustrated in FIG. 2 are coupled together by a bus system 176. The bus system may include an address bus, data bus, power bus, control bus, and the like. For the sake of convenience, the various busses in FIG. 2 are illustrated as the bus system 176.

[0033] FIG. 2 illustrates the various elements of the electronic device, such as the wireless communication device 104 and/or wireless computer 106. Those skilled in the art will appreciate that the other components illustrated in FIG. 1, such as the PC 116, DVR 126, set-top box 130, ATM 134, and television 138 also contain most of the components illustrated in FIG. 2. While these other electronic devices may not include the transceiver 166, they would typically include the other elements illustrated in the functional block diagram of FIG. 2. Communication between the various other devices and the network 118 is conducted via the NIC 170. In addition, as previously stated, the authentication processor 172 and authentication data storage 174 are present in the elec-

tronic device for a stand alone version. In a network implemented version, these elements need not be present within the electronic device.

[0034] FIG. 3 is a functional block diagram of the security processor 122. As previously noted, the security processor 112 and security processor 122 are functionally equivalent. Therefore, the components described below with respect to the security processor 122 are equally applicable to the security processor 112. Similarly, the security processor 112 or the security processor 122 may be functionally integrated into standalone electronic circuits, such as the DVR 126, the set-top box 130, and the television 138. The security processor 122 includes the CPU 148 and memory 150, which function in a manner such as described above with respect to the electronic device in the functional block diagram of FIG. 2. Furthermore, the security processor 122 includes the authentication processor 172 and authentication data storage 174. These elements also operate in a manner functionally equivalent to the equivalent components illustrated in the functional block diagram of FIG. 2. The security processor 122 also includes the NIC 170 to communicate with various components via the network 118. The various elements in the functional block diagram of FIG. 3 are coupled together by the bus system 176.

[0035] The operation of the password system may now be described in greater detail. The example illustrated in FIG. 4 depicts five of the multiple authentication modes capable of use by the security processor 122. Once the individual user and specific electronic device has been identified, the security processor 122 randomly selects one or more of the authentication modes for presentation to the user. In FIG. 4, a first authentication mode 200 is a PIN mode that requests the user to enter a multi-digit PIN password via the keypad 154 (see FIG. 2). The PIN is previously selected by the user and stored in the password data storage 174 within the security processor 122. The user may operate a keypad on a remote control to enter a PIN in devices such as the DVR 126, set-top box 130, and television 138 that are commonly controlled by remote control devices.

[0036] In a second authentication mode 202, the security processor 122 instructs the user to use the audio input device 156 (see FIG. 2) to speak a passphrase at an indicated time. The particular passphrase is previously selected by the user and stored in the authentication data storage 174. The security processor 122 performs conventional voice signature analysis to determine the degree of similarity between the stored voice passphrase stored in the authentication data storage 174 and the spoken voice passphrase entered by the user at the present time.

[0037] In a third authentication mode 204, the security processor 122 instructs the user to take a picture of the user's face using the video input device 158. The user provides a facial photograph at a prior time and the initial image is stored in the authentication data storage 174. Upon entry of the new photograph of the user's face, the security processor 122 performs conventional image analysis to determine the degree of similarity between the stored photograph and the newly entered user photograph.

[0038] In a fourth authentication mode 206, the security processor 122 instructs the user to place the thumb (or other finger) in a predetermined location and performs a biometric scan using the biometric input device 160. At a prior time, the user enters the biometric image of the thumb (or other finger) and the biometric scan data is stored in the authentication data

storage 174. When the user is instructed to place their thumb in the designated area and the biometric input device 160 scans the fingerprint at the present time. The scanned fingerprint is compared by the authentication processor 122, using conventional analysis techniques, with the stored biometric scan data stored in the authentication data storage 174.

[0039] In a fifth authentication mode 208, the user is presented with multiple thumbnail images and instructed to select a number on the keypad 154 (see FIG. 2) that corresponds to a user-selected image. The user selects an image at an earlier time and the image is stored in the authentication data storage 174. For example, the user can activate the video input device 158 to generate an image of the user's choosing. Alternatively, the user can select an image from a large number of possible images presented to the user at a prior time. The authentication data storage 174 may also include a number of images not selected by the user that are presented in the authentication mode 208 as false images or "distracters." The user activates the keypad 154 to select the user-selected image. With some devices, such as the television 138, the user may operate a keypad on a remote control to select the user-selected image.

[0040] Other authentication modes, such as a query-directed mode (e.g., "what is your mother's maiden name?") can also be used by the authentication system. The authentication modes presented above are merely representative of the plurality of authentication modes useable by the system. The present invention is not limited by the specific form of any particular authentication mode or limited to any particular set of authentication modes.

[0041] One can appreciate that some of the password modes described in FIG. 4 produce definitive results (i.e., a YES or NO result). For example, user entry of a PIN number either produces an exact match access is denied. Other modes, such as speech analysis, image analysis, or biometric scan of a thumbprint, require analysis that determines a degree of similarity between the newly entered data and the data stored in the authentication data storage 174. The precise threshold at which a match is declared can be varied and is within the scope of knowledge of one skilled in the art. In addition, other authentication modes may be used in addition to or in place of those modes illustrated in FIG. 4. For example, high security authentication modes may use an iris scanning technology. The authentication system described herein is not limited to any specific authentication mode.

[0042] The operation of the password system is illustrated in the flowchart of FIG. 5 where, at step 200, the authentication system is activated. Activation of the authentication system can be triggered by numerous events. For example, the activation of standalone devices such as the television 138 occurs when the television is turned on. Other devices, such as the wireless communication device 104 may already be turned on, and the authentication system activated in step 200 when the user attempts to perform an action, such as placing a telephone call or activating a web browsing function. Alternatively, the authentication system can be activated in step 200 when the user logs onto a system, such as a computer system start-up or logging on to a service provider system. In yet another example, the ATM 134 (see FIG. 1) can activate the authentication system when a user inserts a credit card, debit card, or the like.

[0043] In step 202, the authentication system identifies the particular device and user. Again, standalone systems are inherently identified (i.e., a television knows that it is a tele-

vision). The user may still be required to select from among several authorized user of the device because the authentication system can utilize separate passwords and multiple authentication modes for each authorized user of the television 138. The user is identified by the ATM 134 when the debit card is inserted into the machine. Other devices, such as the wireless computer 106 or the PC 116 may require a log-on operation. In a log-on operation, which is well known in the art, the user may enter a user name and, instead of a conventional password, the authentication system is activated in step 200 and presents the user with randomly selected authentication modes as will be described in greater detail below.

[0044] In optional step 204, the authentication system determines whether the requested action involves a high security communication or operation. Although not essential to satisfactory operation of the authentication system, it is possible to have a plurality of authentication modes, some of which are more robust and provide a greater degree of security. In a high security operation, the authentication system may select authentication modes from among a subset of high security authentication modes.

[0045] In yet another alternative embodiment, the authentication system may have a subset of low security authentication modes for use in low security operations. For example, setting parental limits on the television 138 may not require the degree of security that is desired in a financial transaction over the network 118. Accordingly, in the low security embodiment, the authentication system may select authentication modes from among a subset of low security authentication modes.

[0046] Returning FIG. 5, if the communication is a high security communication, the result of decision 204 is YES, and in step 206, the authentication system will use the subset of high security authentication modes. Those skilled in the art will appreciate that this is an optional operation. The password security system can operate satisfactorily by simply selecting randomly from among the all of the authentication modes.

[0047] In step 208, the authentication security system randomly selects one of the plurality of authentication modes and, in step 210, presents the authentication challenge to the user.

[0048] In step 212, the authentication security system accepts the user input and, in decision 214, the authentication security system determines whether there is a match. As previously discussed, the authentication data storage 174 (see FIGS. 2-3) store answer data, such as PIN codes, sample voice or image data, or the like. As previously discussed, some authentication modes, such as a PIN mode, have a precise result while other systems, such as voice pattern matching, measure a degree of similarity. If it is determined that there is no match between the user data accepted in step 212 and the data stored in the authentication data storage 174 (see FIGS. 2-3), the result of decision 214 is NO and, in step 216, the authentication system denies access to the electronic device.

[0049] If the user input matches the data stored in the authentication data storage 174, the result of decision 214 is YES. In that event, the authentication system determines, in decision 218, whether additional authentication steps are required. As previously discussed, the authentication system can require a plurality of randomly selected authentication modes.

[0050] In one embodiment, the number of authentication modes required for final access to the electronic device may depend on the nature of the communication with low security operations requiring the successful completion of fewer authentication modes while higher security operations will require the successful completion of a larger number of authentication modes.

[0051] For example, in low security operation such as parental settings on the television **138** (see FIG. **1**), the authentication system may use only one randomly selected authentication mode. Alternatively, in a high security operation, the authentication system may select a plurality of authentication modes, each of which must successfully be completed by the user.

[0052] If additional authentication modes are required, the result of decision **218** is YES and, the authentication system returns to decision **204** to process additional authentication modes. If no additional authentication modes are required, the result of decision **218** is NO and, in step **220**, the authentication security system allows access to the electronic device.

[0053] If the authentication system requires a plurality of authentication modes, it is possible that the same authentication mode would randomly be selected a second time. However, the authentication security system may also be configured such that a particular authentication mode is used only once in a particular operation. Thus, the second randomly selected authentication mode will not include the authentication mode used the first time. Similarly, if the authentication security system requires three authentication modes, it will randomly select three authentication modes, none of which will be used more than once.

[0054] Thus, the authentication system utilizes a plurality of authentication modes that are randomly selected for presentation to the user. The random nature of the authentication mode selection prevents snooping by unscrupulous individuals that may seek to intercept passwords, such as a PIN. In addition, the individual authentication modes are easy for the user to understand and remember, which reduces overall complexity. That is, the authentication system provides a high degree of security without the user having to remember complex data, such as a 12 digit alphanumeric passcode.

[0055] The foregoing described embodiments depict different components contained within, or connected with, different other components. It is to be understood that such depicted architectures are merely exemplary, and that in fact many other architectures can be implemented which achieve the same functionality. In a conceptual sense, any arrangement of components to achieve the same functionality is effectively “associated” such that the desired functionality is achieved. Hence, any two components herein combined to achieve a particular functionality can be seen as “associated with” each other such that the desired functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two components so associated can also be viewed as being “operably connected”, or “operably coupled”, to each other to achieve the desired functionality.

[0056] While particular embodiments of the present invention have been shown and described, it will be obvious to those skilled in the art that, based upon the teachings herein, changes and modifications may be made without departing from this invention and its broader aspects and, therefore, the appended claims are to encompass within their scope all such changes and modifications as are within the true spirit and

scope of this invention. Furthermore, it is to be understood that the invention is solely defined by the appended claims. It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (e.g., bodies of the appended claims) are generally intended as “open” terms (e.g., the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” etc.). It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to inventions containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an” (e.g., “a” and/or “an” should typically be interpreted to mean “at least one” or “one or more”); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should typically be interpreted to mean at least the recited number (e.g., the bare recitation of “two recitations,” without other modifiers, typically means at least two recitations, or two or more recitations).

[0057] Accordingly, the invention is not limited except as by the appended claims.

The invention claimed is:

1. An authentication system for use in an electronic device comprising:

- a plurality of input devices operable by a user;
- a data storage structure to store reference data for authentication; and
- an authentication processor configured to:
 - randomly select a first of a plurality of authentication modes,
 - present the first selected authentication mode to a user,
 - accept user input data from one of the plurality of input devices,
 - compare the user input data with a portion of the stored reference data corresponding to the first selected authentication mode; and
 - if the comparison indicates a match between the user input data and the portion of the stored reference data corresponding to the first selected authentication mode, authenticating the user and authorizing use of the electronic device.

2. The system of claim **1** wherein the processor randomly selects a second authentication mode of the plurality of authentication modes if the comparison indicates a match between the user input data and the portion of the stored reference data corresponding to the first selected authentication mode, the processor being further configured to:

- present the second selected authentication mode to a user,
- accept user input data from one of the plurality of input devices,

- compare the user input data with a portion of the stored reference data corresponding to the second selected authentication mode; and
- if the comparison indicates a match between the user input data with the portion of the stored reference data corresponding to the second selected authentication mode, authenticating the user and permitting access to the electronic device wherein the authentication processor is configured to authenticate the user and permit access to the electronic device only if there is a match between the user input data and the portion of the stored reference data corresponding to the first selected authentication mode and a match between the user input data and the portion of the stored reference data corresponding to the second selected authentication mode.
3. The system of claim 2 wherein the second authentication mode is different from the first authentication mode.
4. The system of claim 1 wherein the plurality of authentication modes comprise a Personal Identification Number (PIN) mode, a voice recognition mode, an image recognition mode, a biometric identification mode and an image identification mode.
5. The system of claim 1 wherein the electronic device is used in a high security activity, and the authentication processor is configured to randomly select a first of a plurality of authentication modes from a set of high security authentication modes.
6. The system of claim 1 wherein the authentication processor is configured to randomly select multiple ones of the plurality of authentication modes wherein each of the multiple ones of the plurality of authentication modes are presented sequentially to the user.
7. The system of claim 1 wherein the authentication processor is configured to randomly select a number of the plurality of authentication modes for presentation to the user wherein the number of the plurality of authentication modes for presentation to the user is based on a security level of the activity associated with the electronic device.
8. The system of claim 1 wherein the authentication processor is located remote from the electronic device.
9. The system of claim 8 wherein the electronic device is a wireless communication device and communicates with the authentication processor via a wireless communication link.
10. The system of claim 1 wherein the authentication processor is located coupled to the electronic device via a Wide Area Network (WAN) and the communication interface comprises a network interface controller configured to communicate with the authentication processor via the WAN.
11. The system of claim 1 wherein the authentication processor is located coupled to the electronic device via a Local Area Network (LAN) and the communication interface comprises a network interface controller configured to communicate with the authentication processor via the LAN.
12. The system of claim 1 wherein the authentication processor is part of the electronic device, the system further comprising a communication interface configured to transmit user input data from one of the plurality of input devices.
13. The system of claim 1 wherein the data storage structure is configured to store the reference data in an encrypted form.
14. An electronic device authentication system comprising:
a plurality of input devices coupled to the electronic device and operable by a user;
- a data storage structure within the electronic device to store reference data for authentication; and
- an authentication processor within the electronic device configured to:
randomly select a first of a plurality of authentication modes,
present the first selected authentication mode to a user,
accept user input data from one of the plurality of input devices,
compare the user input data with a portion of the stored reference data corresponding to the first selected authentication mode; and
if the comparison indicates a match between the user input data and the portion of the stored reference data corresponding to the first selected authentication mode, authenticating the user and permitting access to the electronic device.
15. The system of claim 14 wherein the data storage structure is configured to store the reference data in an encrypted form.
16. The system of claim 14 wherein the authentication processor is configured to randomly select multiple ones of the plurality of authentication modes wherein each of the multiple ones of the plurality of authentication modes are presented sequentially to the user.
17. A system for user authentication in an electronic device comprising:
a plurality of input devices operable by the user;
an authentication storage structure to store reference data for user authentication; and
an authentication processor configured to:
randomly select a plurality of authentication challenges from among a plurality of authentication modes,
present each randomly selected authentication challenge to a user,
for each randomly selected authentication challenge, accept user input data from one of the plurality of input devices,
for each randomly selected authentication challenge, compare the user input data with a portion of the stored reference data corresponding to the respective randomly selected authentication challenge; and
authorizing use of the electronic device if the comparison for each randomly selected authentication challenge indicates a match between the user input data and the portion of the stored reference data corresponding to the respective randomly selected authentication challenge.
18. The system of claim 17 wherein the data storage structure is configured to store the reference data in an encrypted form.
19. The system of claim 17 wherein each of the randomly selected plurality of authentication challenges from among the plurality of authentication modes is used only a single time in a single user authentication process.
20. The system of claim 17 wherein the authentication processor is located remote from the electronic device.
21. The system of claim 20 wherein the electronic device is a wireless communication device and communicates with the authentication processor via a wireless communication link.
22. The system of claim 17 wherein the authentication processor is part of the electronic device, the system further comprising a communication interface configured to transmit user input data from one of the plurality of input devices.

23. A method to provide security to one or more services comprising:

storing a library of authentication methods;
receiving a request from a user to access one of the services;
randomly selecting a set of authentication methods from the library;
executing the set of authentication methods; and
allowing access to the requested service if the user is authenticated by each authentication method in the set.

24. The method of claim **23** wherein randomly selecting authentication methods further comprises randomly selecting authentication methods with replacement after each selection.

25. The method of claim **23** wherein randomly selecting authentication methods further comprises randomly selecting authentication methods without replacement after each selection.

26. The method of claim **23** wherein the library of authentication methods includes a biometric category, a query-directed password category, and an alpha-numeric password category.

27. The method of claim **23** wherein library of authentication methods includes a voice pattern recognition method.

28. The method of claim **23** wherein library of authentication methods includes a face recognition method.

29. The method of claim **23** wherein library of authentication methods includes a finger print recognition method.

30. The method of claim **23** wherein library of authentication methods includes an alphanumeric password entry method.

31. The method of claim **23** wherein selecting the set of authentication methods from the library further comprises selecting a number of authentication methods, the number based on a desired level of security for the requested service.

32. The method of claim **23** wherein selecting the set of authentication methods from the library further comprises selecting authentication methods by category of authentication method, the category of the methods selected based on a desired level of security for the requested service.

* * * * *