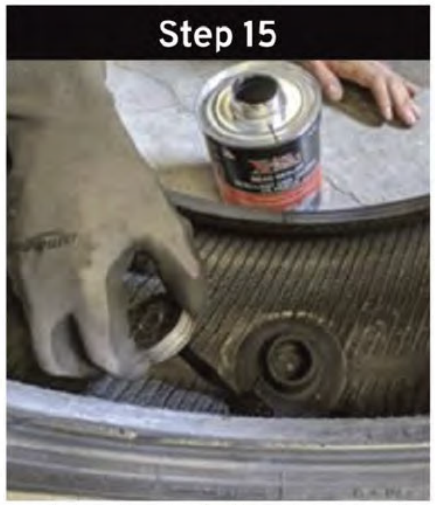
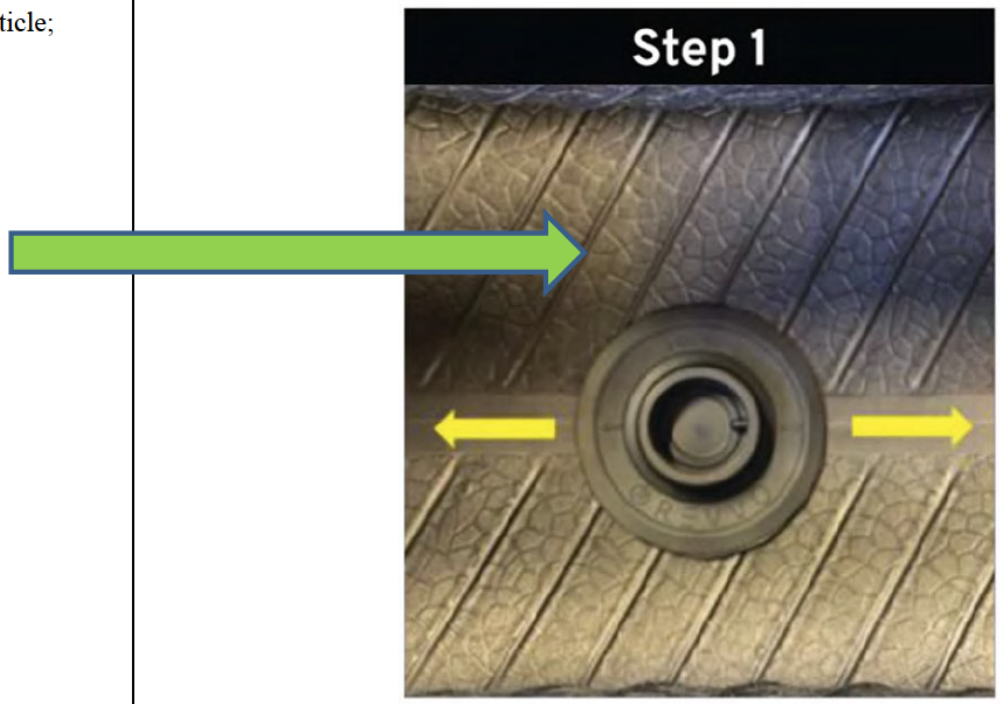
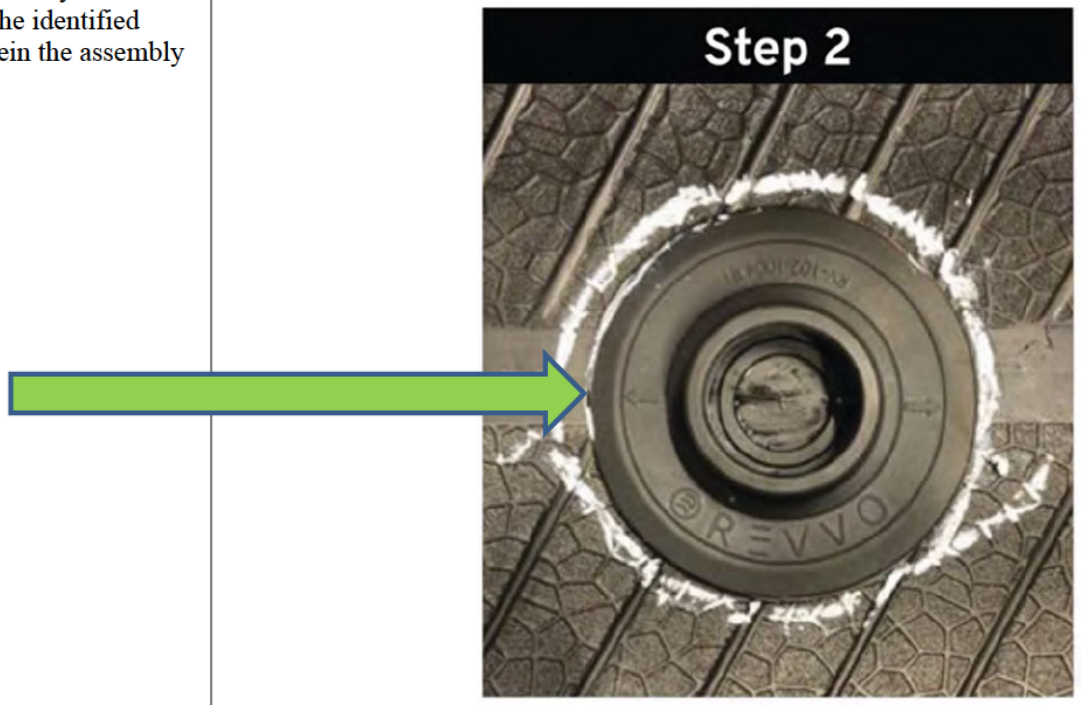
U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **Exhibit H (CER_001350-CER_001351)**

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 086


U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
identifying a surface of a vulcanized rubber article;	 **Exhibit H (CER_001350-CER_001351)**

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
placing an assembly into contact with the identified surface, wherein the assembly comprises:	 **Exhibit H (CER_001350-CER_001351)**
an outer layer of elastomeric material, wherein the outer	The dock is made of elastomeric material providing properties of elastomeric expansion and/or


U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
layer is in contact with an adhesive layer interposed between the identified surface and the assembly that bonds the assembly to the vulcanized rubber article, and	contraction properties compatible with the tire, as seen below.


Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 089

	 REVVO_00000008 HIGHLY CONFIDENTIAL

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **REVVO15881** The dock is made of elastomeric material providing properties of shock absorbance, as seen below.


4883-7214-8707	

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **REVVO15971** The adhesive layer is the cushion gum in the Accused Revvo Tire Sensor Products, which is adhered to an interface surface of the black dock of the Accused Revvo Tire Sensor Products.

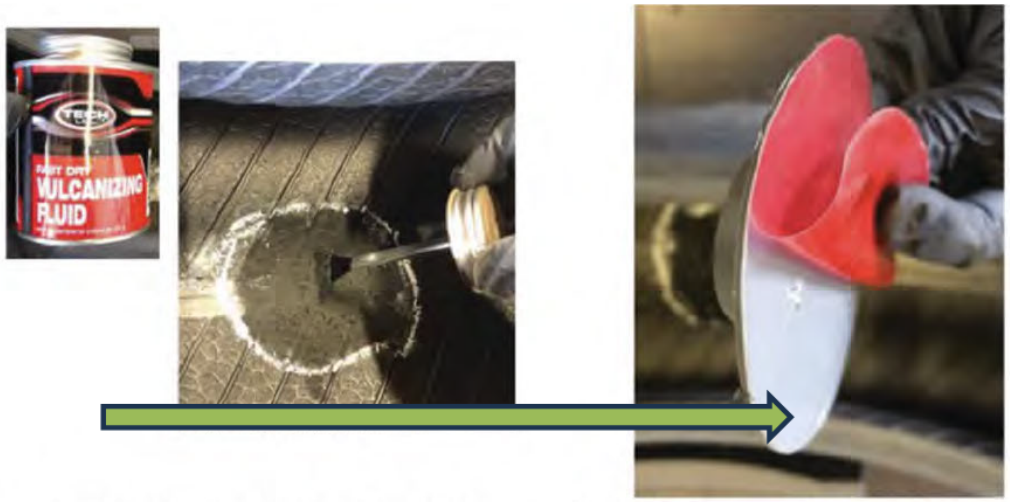U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	The cushion gum in the Accused Revvo Tire Sensor Products is white, black or gray, as shown below.  Apply 3-4 strokes of vulcanizing fluid. Wait until entire installation surface is 'tacky' to the touch* and there are no wet spots. Depending on the ambient temperature, it usually takes 1-3 minutes for chemical to activate. *Important for proper adhesion* Carefully remove plastic protector from the bottom of the Dock without contacting the adhesive surface (white surface in the picture) **Exhibit H (CER_001350-CER_001351)**


U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted]
	REVVO4 and REVVO5

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 095

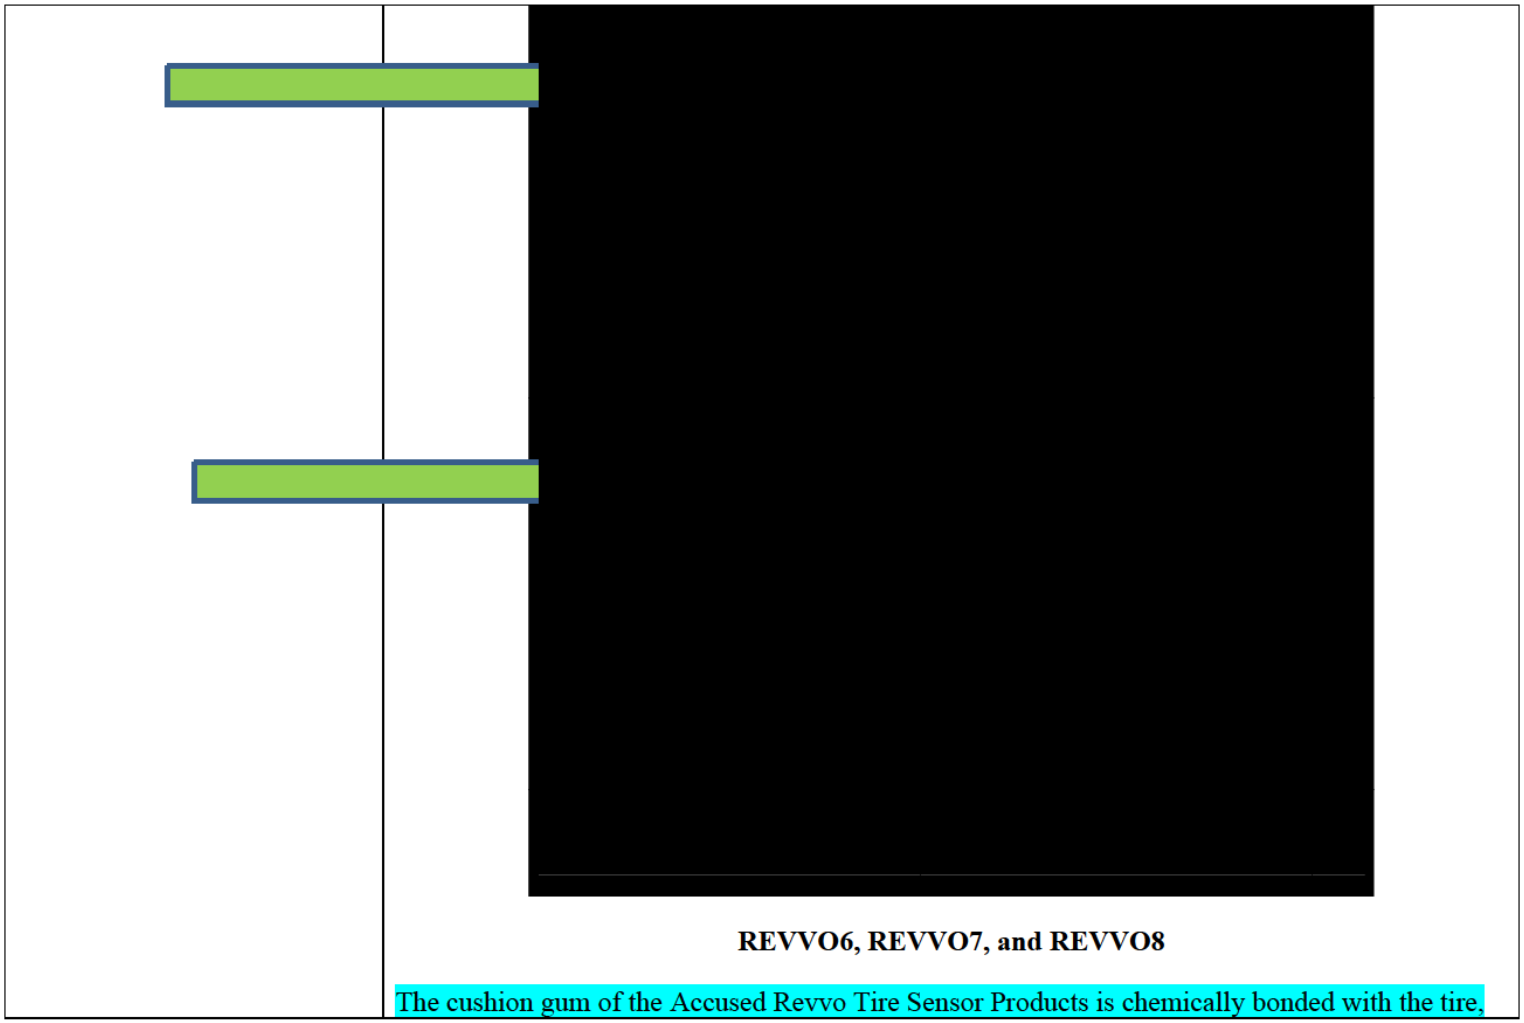

REVVO6, REVVO7, and REVVO8


The cushion gum of the Accused Revvo Tire Sensor Products is chemically bonded with the tire.

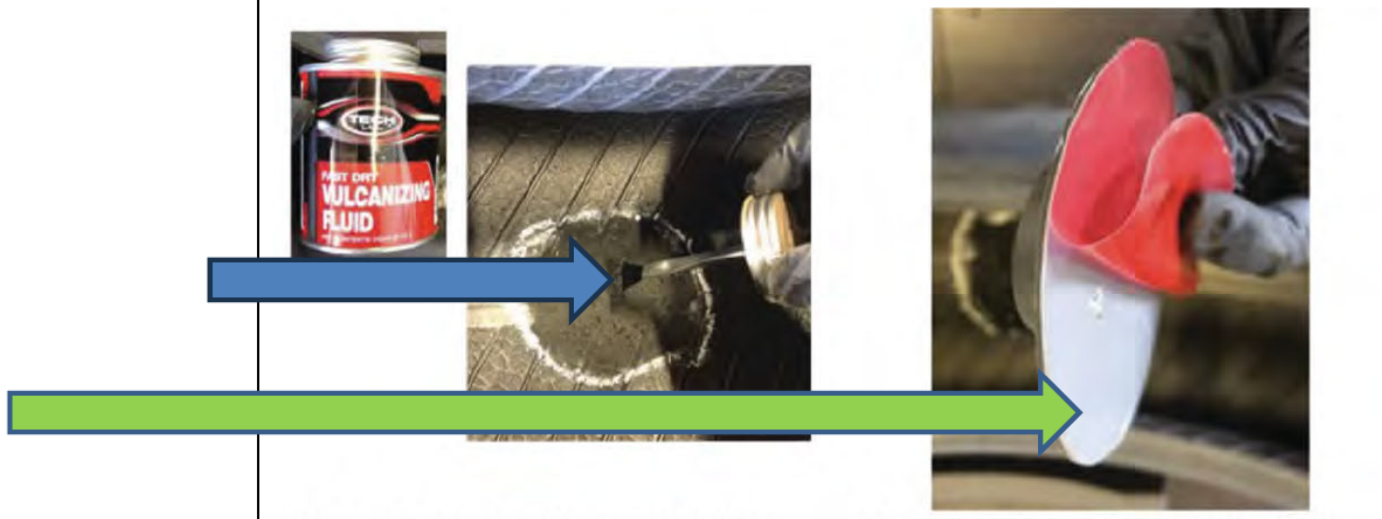U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	such as with vulcanizing fluid, as can be seen below.  Apply 3-4 strokes of vulcanizing fluid. Wait until entire installation surface is 'tacky' to the touch* and there are no wet spots. Depending on the ambient temperature, it usually takes 1-3 minutes for chemical to activate. *Important for proper adhesion* Carefully remove plastic protector from the bottom of the Dock without contacting the adhesive surface (white surface in the picture) **Exhibit H (CER_001350-CER_001351)**

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 097

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	[redacted]

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 098

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 099

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	[redacted]


Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 100

4883-7214-8707	[redacted]

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
wherein the outer layer comprises a barrier material composition to mitigate migration of material from the vulcanized rubber article.	The Revvo dock assembly of the Accused Revvo Tire Sensor Products is attached to the tire with vulcanizing fluid, as seen below.

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 102

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)

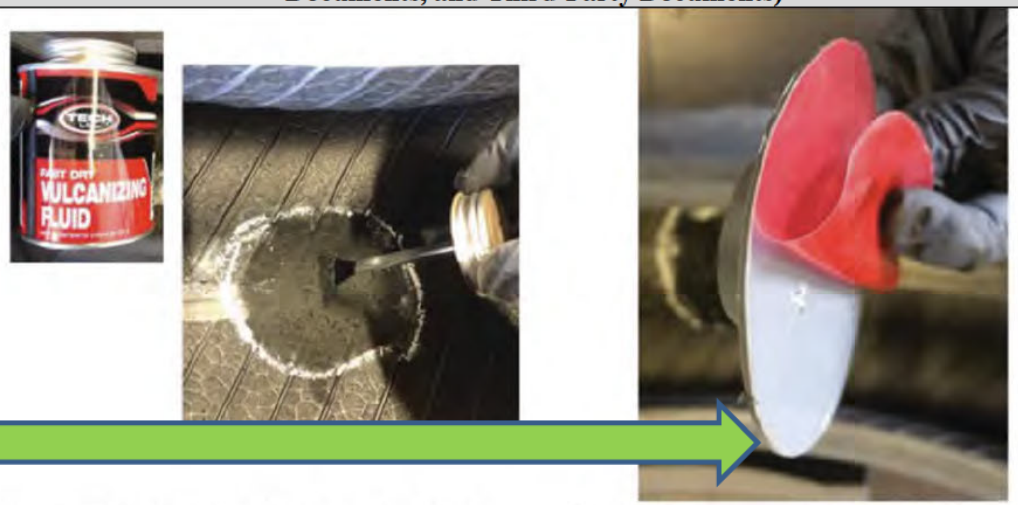

Apply 3-4 strokes of vulcanizing fluid. Wait until entire installation surface is 'tacky' to the touch* and there are no wet spots. Depending on the ambient temperature, it usually takes 1-3 minutes for chemical to activate. *Important for proper adhesion*


Carefully remove plastic protector from the bottom of the Dock without contacting the adhesive surface (white surface in the picture)

Exhibit H (CER_001350-CER_001351)

After the Revvo dock assembly of the Accused Revvo Tire Sensor Products is attached to the tire with vulcanizing fluid, the dock acts as a barrier to minimize or prevent or impair the migration of any unwanted constituents of the cushion gum and/or the tire that may otherwise operate to

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	damage or degrade the dock, as the dock and the cushion gum are made of different materials, as seen below.

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 104

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **REVVO15587**

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **REVVO15881**

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted] REVVO15971


Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 107

	 REVVO_00000007 HIGHLY CONFIDENTIAL REVVO_00000008 HIGHLY CONFIDENTIAL REVVO_00000006 HIGHLY CONFIDENTIAL

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted]
	REVVO4 and REVVO5

	 **Compare to Cushion Gum**

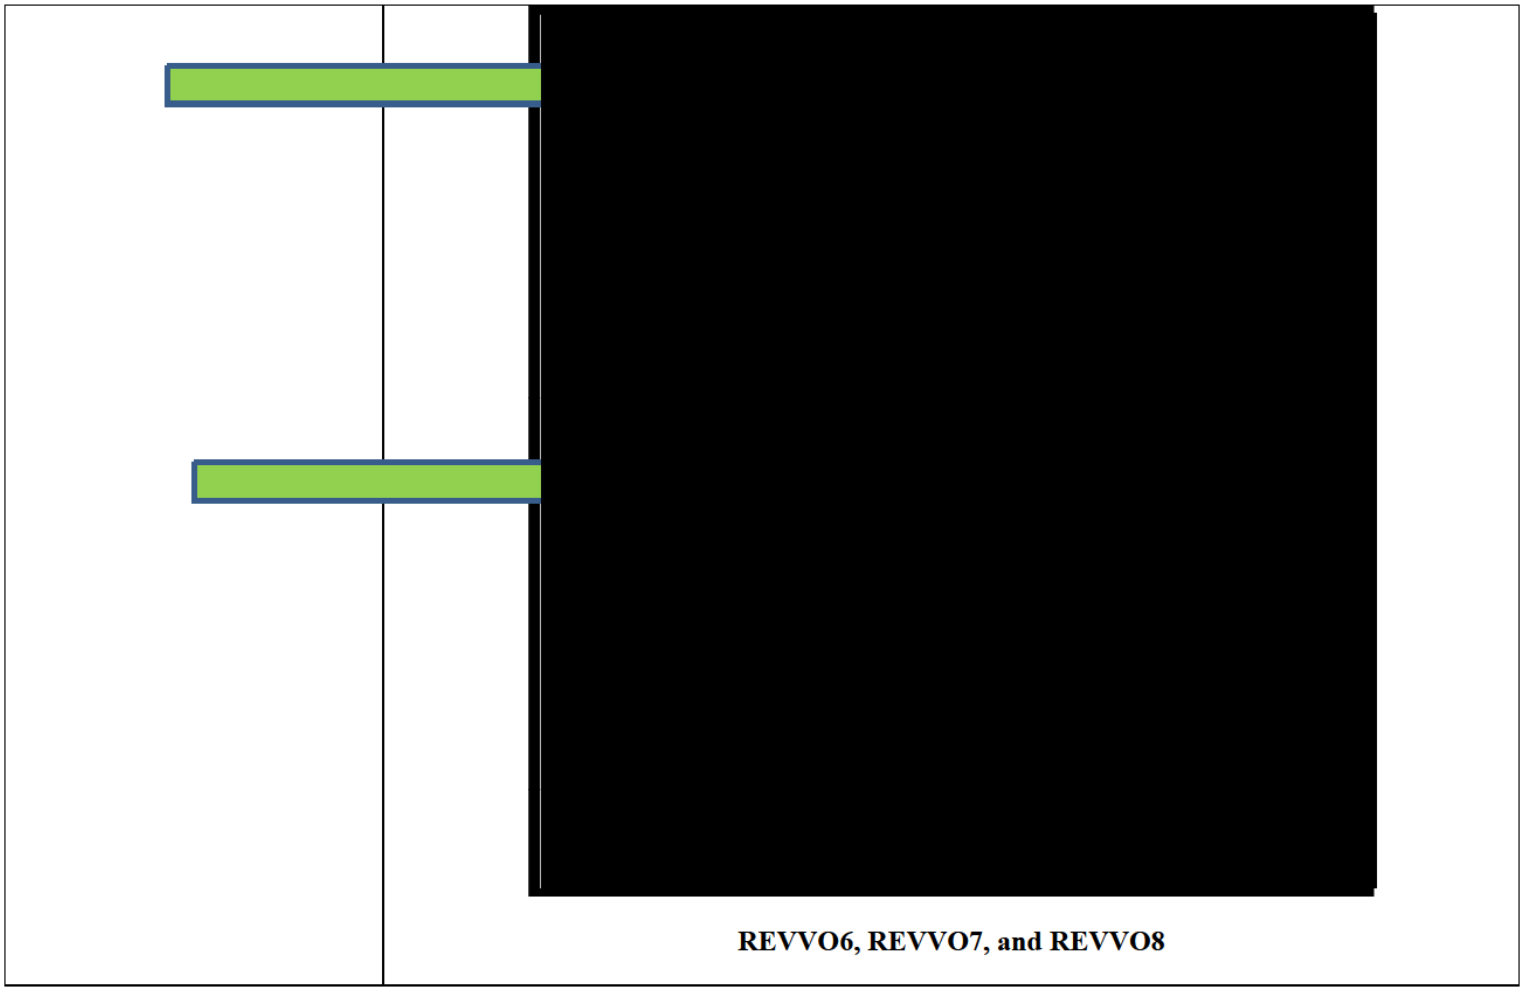

REVVO6, REVVO7, and REVVO8

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 112

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	 **REVVO15950**

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 113

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	[redacted] **REVVO15938**


U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted]
	REVVO15595
	[redacted]
	REVVO15595

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 115

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	[redacted]
	CER_001288



U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	CER_001289 
12. The method as recited in claim 11 further comprising preparing the identified surface before the step of placing.	Revvo describes multiple steps of preparing the tire surface.

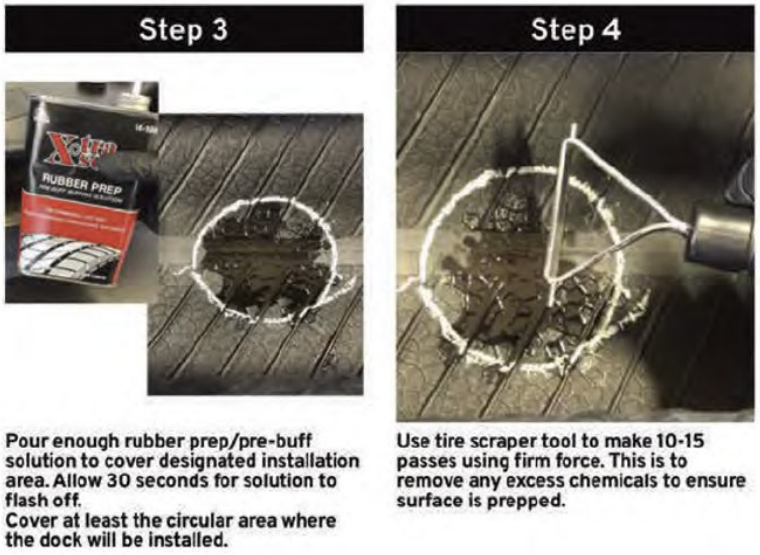U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 119

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)

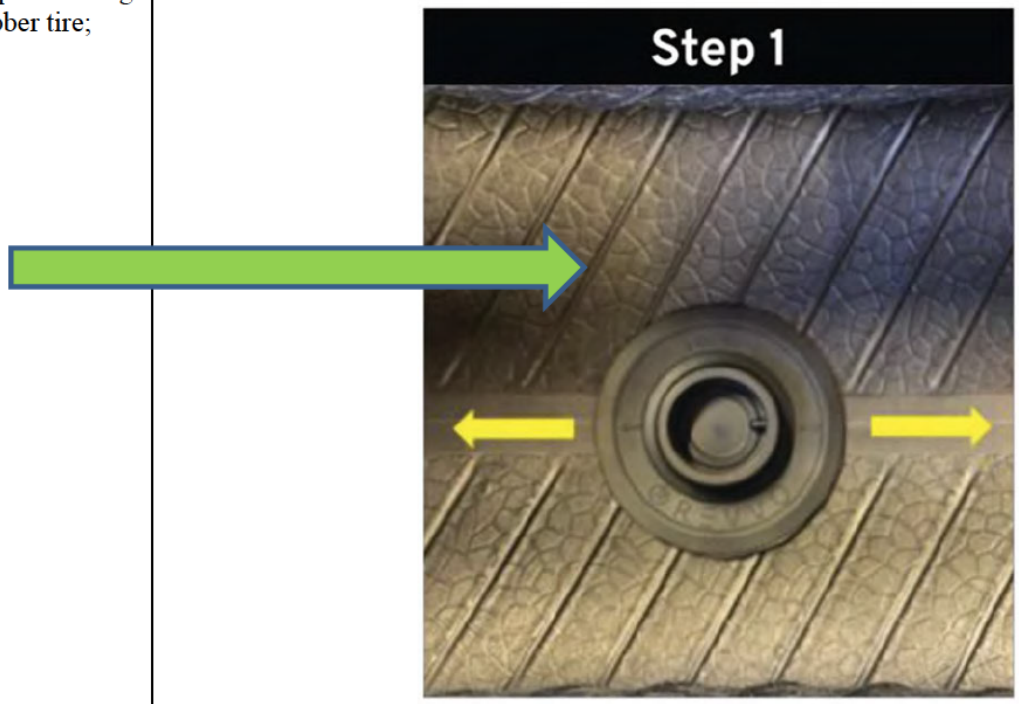



Exhibit H (CER_001350-CER_001351)

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
13. The method as recited in claim 11 further comprising applying pressure to the assembly after the step of placing.	 Apply Dock onto designated area with firm pressure, keeping arrows along the tire centerline. Use roller tool to apply even adhesion, starting from the center of the Dock and then moving to the outside in an outward fashion. Allow 1-2 minutes for Dock to bond. **Exhibit H (CER_001350-CER_001351)**

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
15. A vulcanized rubber tire comprising:	

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 122

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
a target surface disposed along a portion of the rubber tire;	

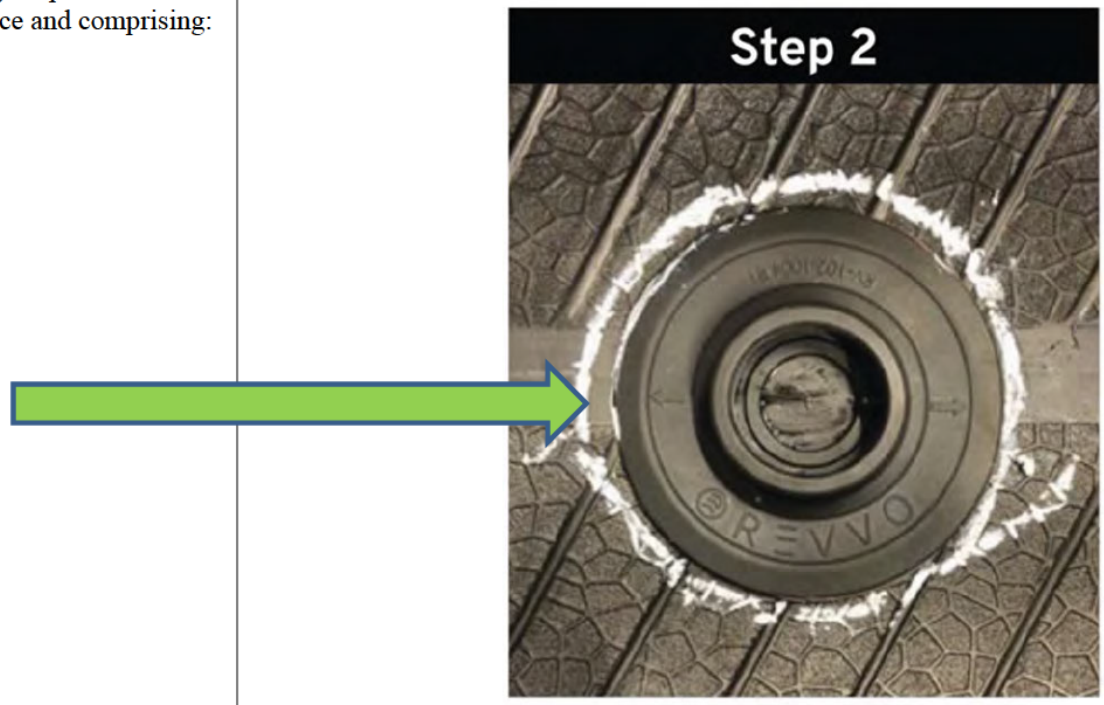U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
an assembly disposed onto the target surface and comprising:	
an outer layer of elastomeric material; and	Comprised of rubber, the dock in the Accused Revvo Tire Sensor Products is elastomeric and mitigates transmission of shock forces from the tire to the housing when the dock retaining


U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	member is attached to the tire and the housing is attached to the dock retaining member.


Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 125

	 REVVO_00000008 HIGHLY CONFIDENTIAL




4883-7214-8707

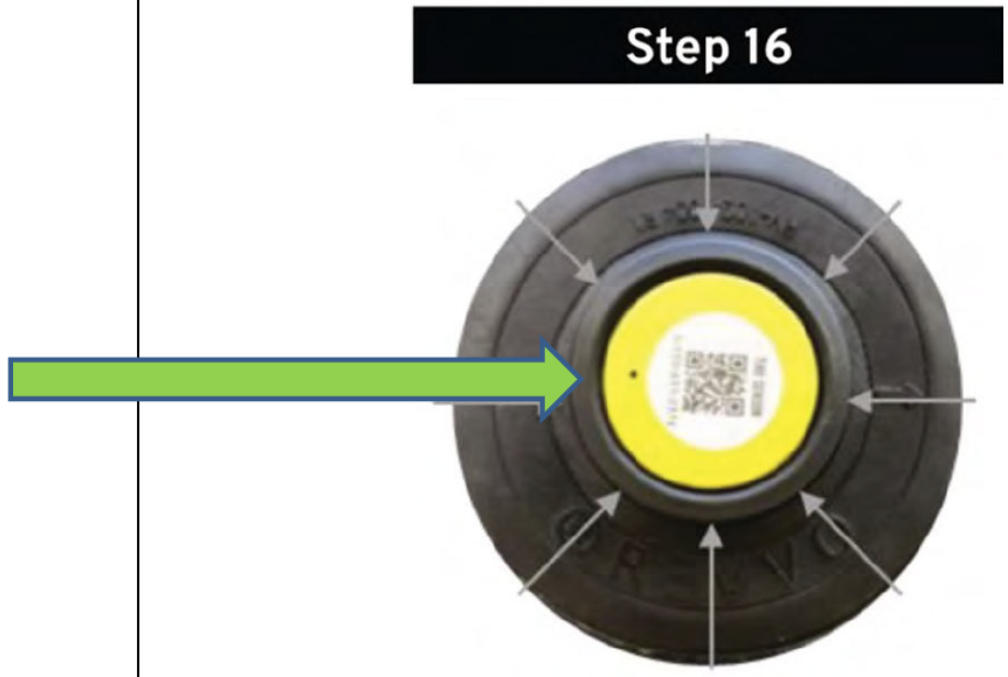U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **Exhibit H (CER_001350-CER_001351)**

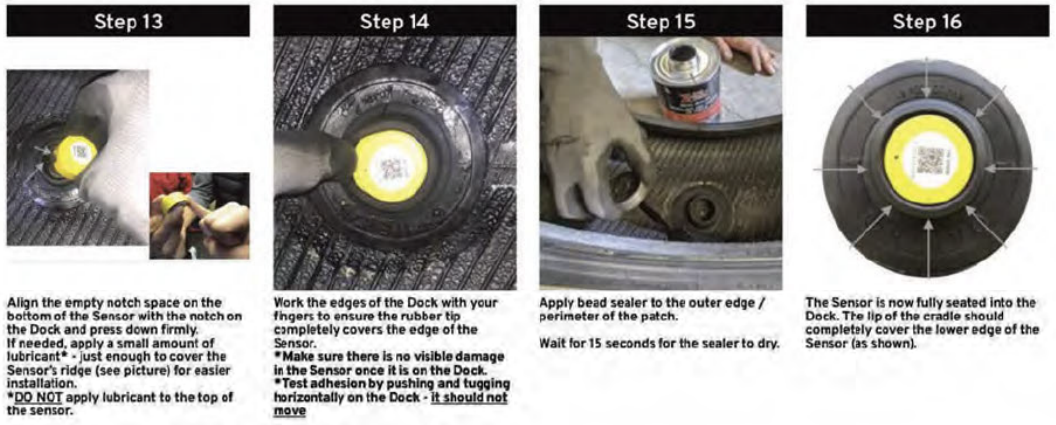U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **Exhibit H (CER_001350-CER_001351)**
an adhesive layer connected with the outer layer;	The adhesive layer is the cushion gum in the Accused Revvo Tire Sensor Products, which is adhered to an interface surface of the black dock of the Accused Revvo Tire Sensor Products. The cushion gum in the Accused Revvo Tire Sensor Products is white, black or gray, as shown below.

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 129

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)

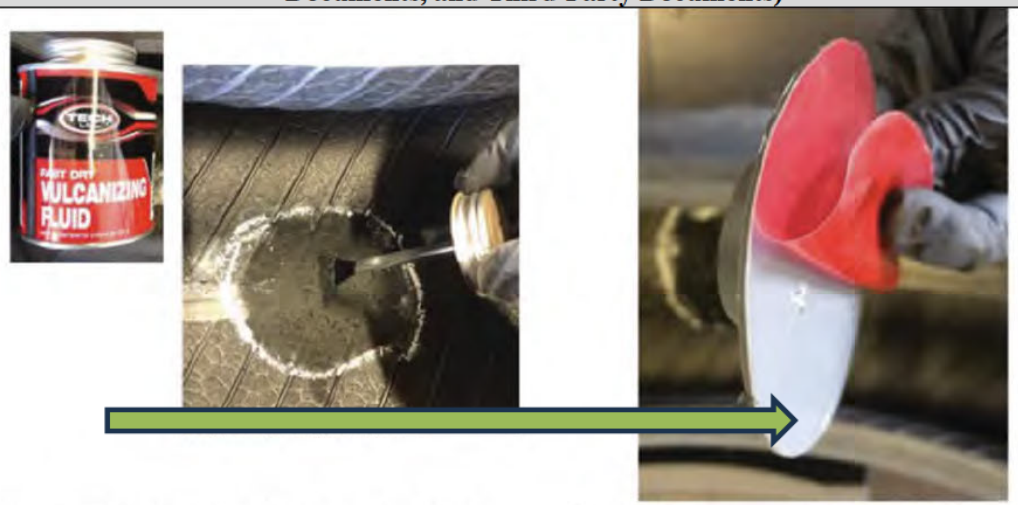


Apply 3-4 strokes of vulcanizing fluid. Wait until entire installation surface is 'tacky' to the touch* and there are no wet spots. Depending on the ambient temperature, it usually takes 1-3 minutes for chemical to activate. *Important for proper adhesion*

Carefully remove plastic protector from the bottom of the Dock without contacting the adhesive surface (white surface in the picture)

Exhibit H (CER_001350-CER_001351)

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted]
	REVVO4 and REVVO5

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 131

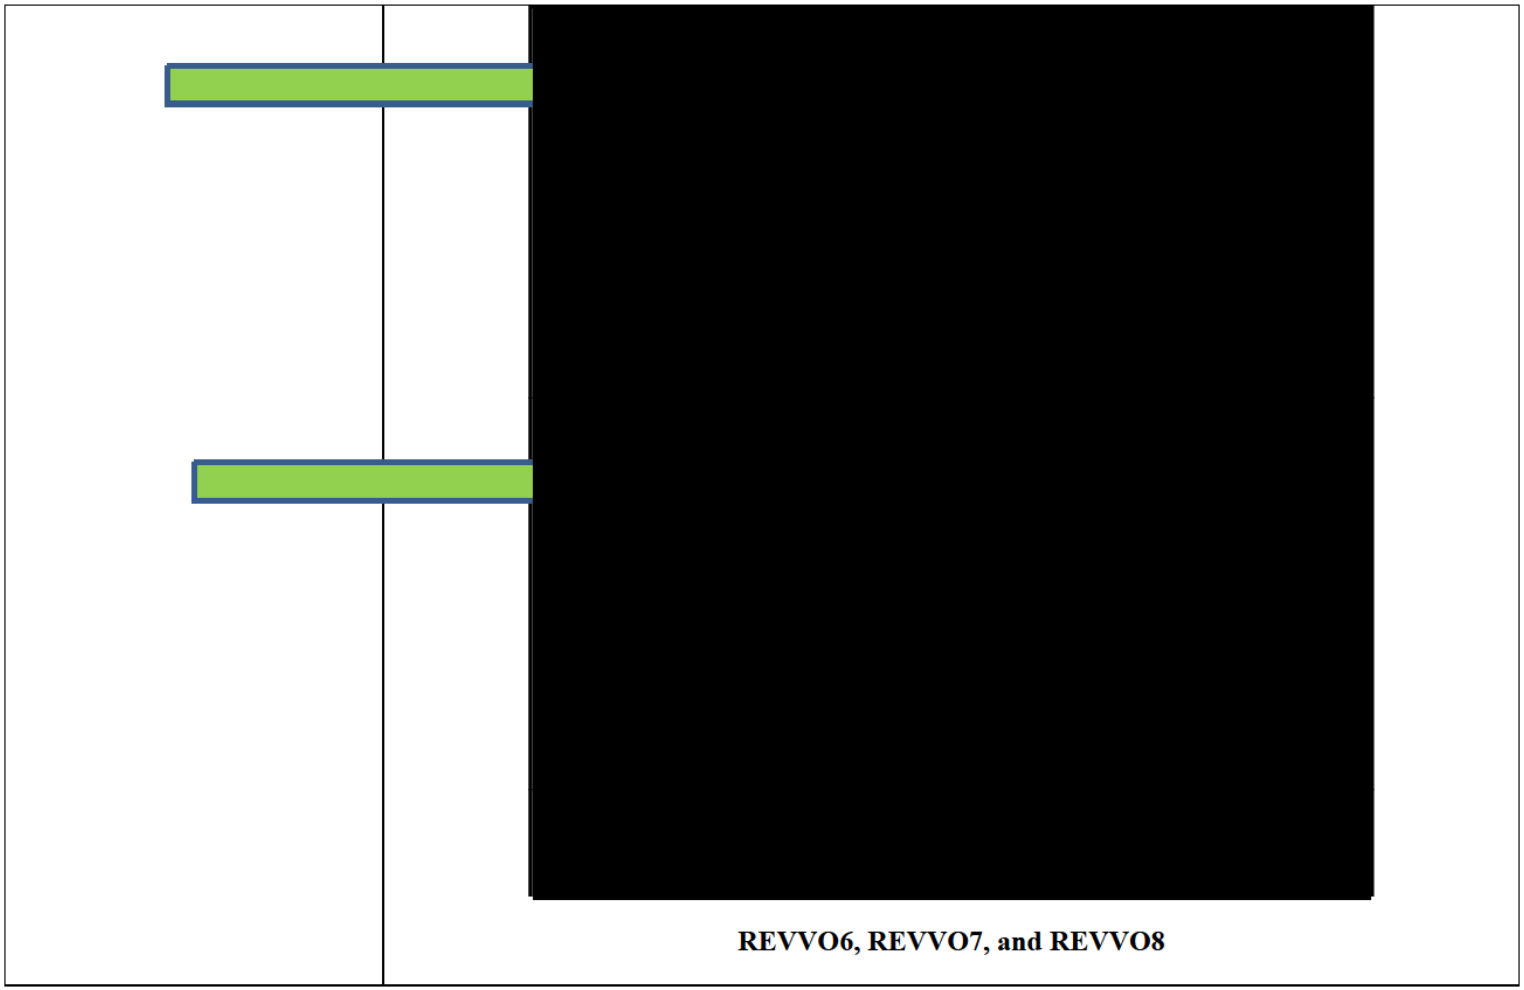


REVVO6, REVVO7, and REVVO8

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 132

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
wherein at least a portion of the outer layer comprises a barrier material composition to mitigate migration of material from the rubber tire.	The Revvo dock assembly of the Accused Revvo Tire Sensor Products is attached to the tire with vulcanizing fluid, as seen below.

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 133

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)

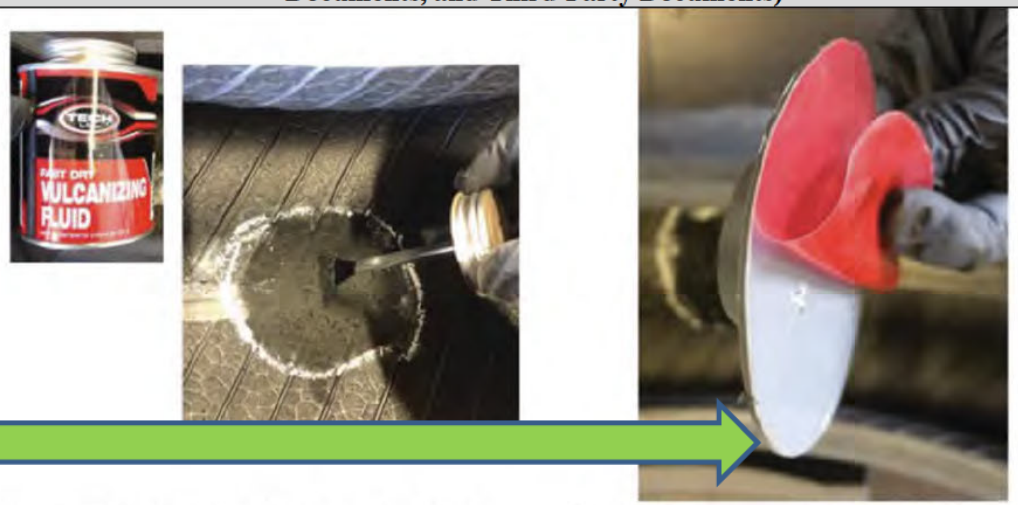

Apply 3-4 strokes of vulcanizing fluid. Wait until entire installation surface is 'tacky' to the touch* and there are no wet spots. Depending on the ambient temperature, it usually takes 1-3 minutes for chemical to activate. *Important for proper adhesion*

Carefully remove plastic protector from the bottom of the Dock without contacting the adhesive surface (white surface in the picture)

Exhibit H (CER_001350-CER_001351)

After the Revvo dock assembly of the Accused Revvo Tire Sensor Products is attached to the tire with vulcanizing fluid, the dock acts as a barrier to minimize or prevent or impair the migration of any unwanted constituents of the cushion gum and/or the tire that may otherwise operate to

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	damage or degrade the dock, as the dock and the cushion gum are made of different materials, as seen below.

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 135

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted]

REVVO15587

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **REVVO15881**

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted] REVVO15971


Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 138

	 REVVO_00000007 HIGHLY CONFIDENTIAL REVVO_00000008 HIGHLY CONFIDENTIAL REVVO_00000006 HIGHLY CONFIDENTIAL

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted]
	REVVO4 and REVVO5

	 **Compare to Cushion Gum**

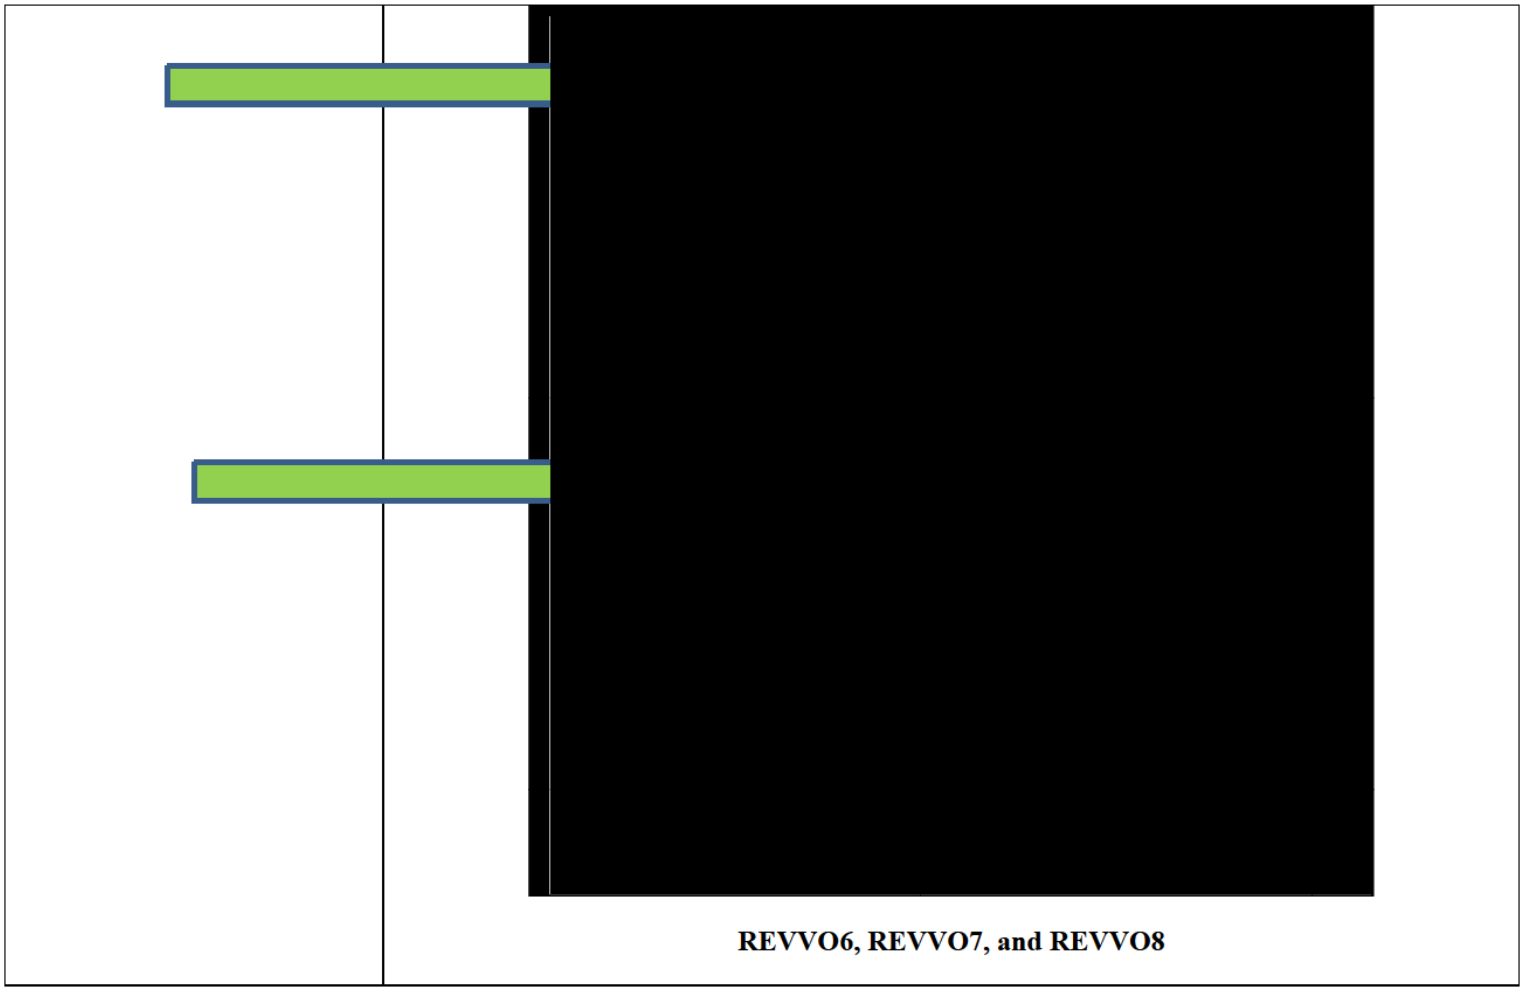

REVVO6, REVVO7, and REVVO8

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	 **REVVO15950**

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 144

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	[redacted] **REVVO15938**


Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 145

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	[redacted]
	REVVO15595
	[redacted]
	REVVO15595


Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 146

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	[redacted]
	CER_001288

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 147

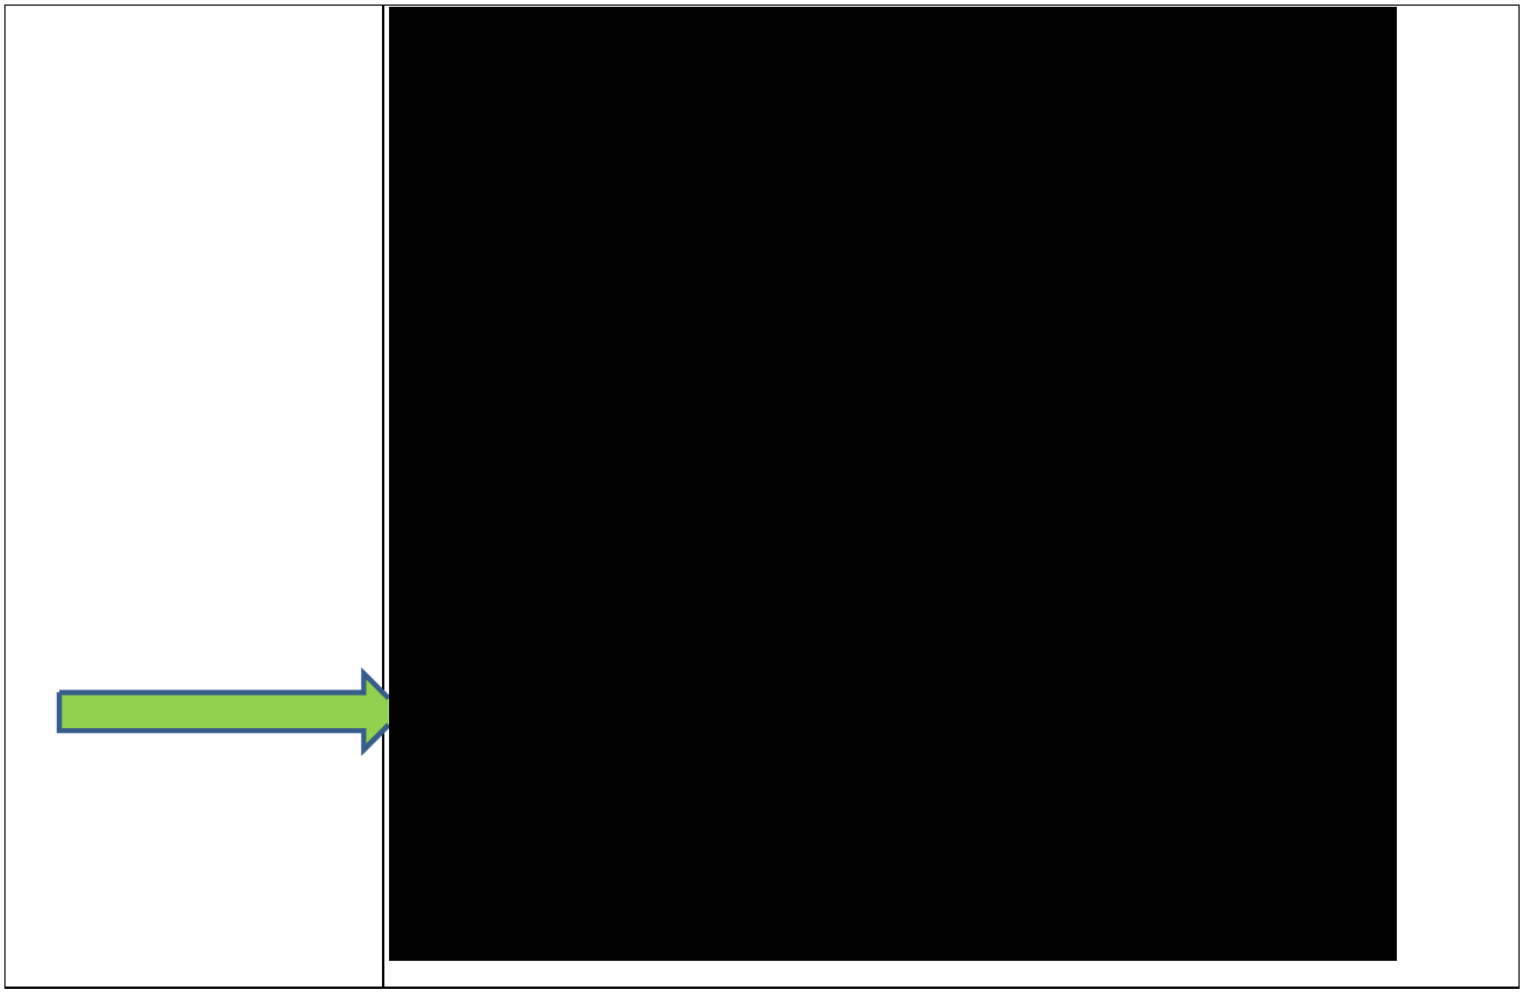

U.S. Patent No. 11,124,027 (Asserted Claims)	Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)
	CER_001289 

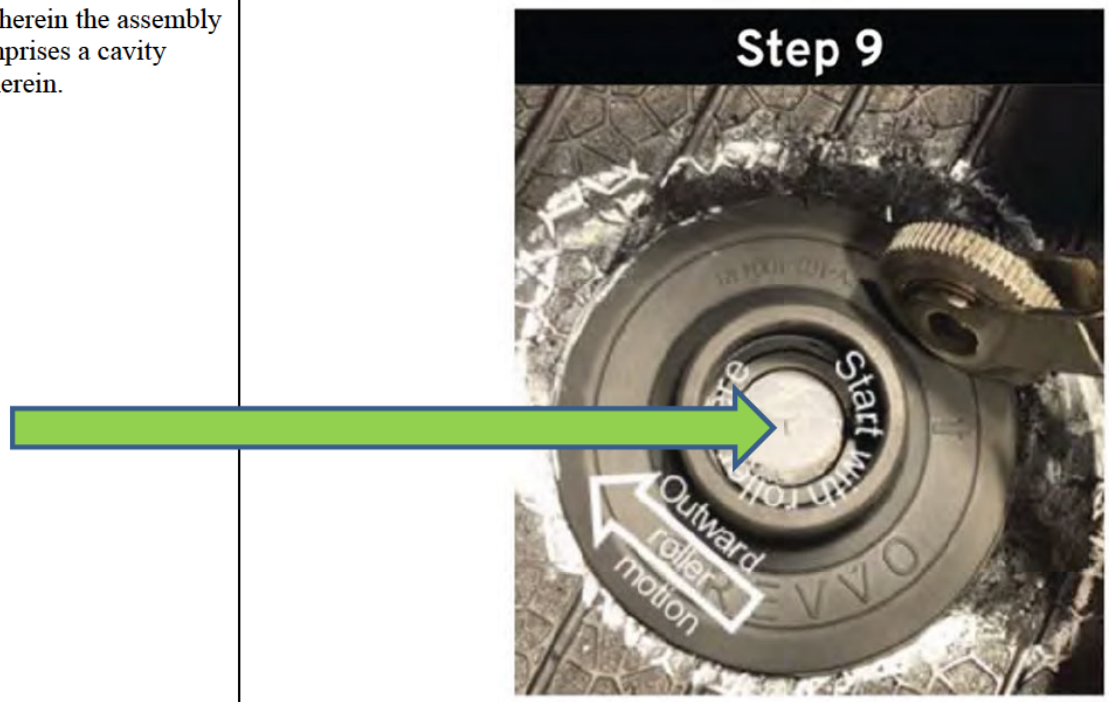16. The rubber tire as recited in claim 15 wherein the assembly further comprises a cavity disposed therein.	 **Apply Dock onto designated area with firm pressure, keeping arrows along the tire centerline. Use roller tool to apply even adhesion, starting from the center of the Dock and then moving to the outside in an outward fashion. Allow 1-2 minutes for Dock to bond.**

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	 **Exhibit H (CER_001350-CER_001351)**

Revvo's Exhibit 1025
Revvo v. Tire Stickers
IPR2025-00631 - Page 151

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
	 **Exhibit K (CER_001356-CER_001369)**

U.S. Patent No. 11,124,027 (Asserted Claims)	**Accused Revvo Tire Sensor Products (exemplary evidence – Exhibits G, H and K to the Complaint, Revvo's Core Technical Documents, and Third-Party Documents)**
17. The rubber tire as recited in claim 16 wherein an element is disposed within the cavity.	