REMA TIP TOP/North America Inc

Passenger and Light Truck Tire Nail Hole Repair Catalog

2011

Automotive











REMA TIP TOP


Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 001



Repair Units/Inserts



Minicombi inserts

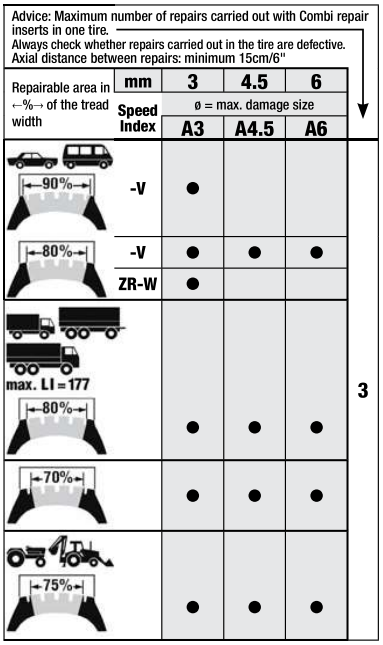

Minicombi tire repair inserts

REMA TIP TOP's most popular unit for crown repair of passenger/light truck tires. Our Minicombi's are available in a wide range of sizes and establish new standards in one-piece repair technology.

Part No	Description	Box/ Qty	Case/ Qty				
A-3	MINICOMBI A-3 Use for tread damage up to ⅛" (3mm)	50	100	•	•	•	•
A-3-R	MINICOMBI A-3-R Use for tread damage up to ⅛" (3mm)	10		•	•	•	•
A-4.5	MINICOMBI A-4.5 Use for tread damage up to 3/16" (4.5mm)	40	25	•	•	•	•
A-6	MINICOMBI A-6 Use for tread damage up to ¼" (6mm)	40	25	•	•	•	•
A-6-R	MINICOMBI A-6-R, kit Includes: • 8 A-6 repair inserts • 1 tube BL-5F Use for tread damage up to ¼" (6mm)	8		•	•	•	•
190	Awl for REMASTEM & MINICOMBI repairs	1					
199	Rasp for REMASTEM & MINICOMBI repairs	1					



Rema Stem Inserts

REMA TIP TOP Stem inserts

REMA TIP TOP's pre-cured, self-vulcanizing Inserts are specially contoured for easy installation.

- Compatible for use in hot or cold vulcanization processes.

Part No	Description	Injury (inch)	Box/Qty			
RS-6	REMA STEM 6 (193)	max ¼	60	•	•	•
193	REMA STEM 6 (RS-6)	max ¼	10	•	•	•

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 002



Radial Repair Units

REMA TIP TOP Radial tire repair units

REMA TIP TOP offers a variety of radial-ply repair units to meet the diverse demands of today's passenger and light truck tire applications. Due to our fully-integrated blue bonding layer and center over injury design, REMA TIP TOP Radial-Ply repair units are suitable for use with all current vulcanizing systems.

Part No	Description	Plies	Size (inch)	Box/Qty	Case/Qty		
RAD-0	Radial repair unit		Ø 1 9/16	10		•	•
RAD-1N	Radial repair unit		2 3/4 x 2	20	328	•	•
RAD-110	Radial repair unit	1	2 x 2 3/4	20	154	•	•
RAD-112	Radial repair unit	1	2 3/8 x 4 1/8	10	154	•	•
RAD-114	Radial repair unit	1	3 x 4 3/4	10	108	•	•
RAD-115	Radial repair unit	1	3 1/2 x 2 x 3/4	20	70	•	•



RAD-0



RAD 110, RAD 112, RAD 114



Bias Repair Units

REMA TIP TOP Bias-Ply tire repair units

REMA TIP TOP offers a wide selection of bias-ply (cross ply) repair units for applications on passenger, light truck and agricultural bias-ply tires. Due to our fully-integrated blue bonding layer, REMA TIP TOP bias-ply repair units are suitable for use with all current vulcanizing systems. For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter and Special Cement BL (non flammable) or Special Blue Cement (flammable) for a permanent, reliable repair.

Part No	Description	Tread, Shoulder	Size (inch)	Plies	Box/ Qty	Case/ Qty		
PN-0	BIAS repair unit PN 0	•	1 9/16	1	50	200	•	•
PN-1	BIAS repair unit PN 1	•	2 1/2	1	30	120	•	•
PN-2	BIAS repair unit PN 2	•	3 1/4	2	20	84	•	•
PN-3	BIAS repair unit PN 3	•	4	2	10	72	•	•
PN-4	BIAS repair unit PN 4	•	5 3/4	2	10	64	•	•



REMA TIP TOP bias-ply tire repair units

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 003



UNIVERSAL Repair Units (UP)



UP-3

UP-6

REMA TIP TOP Universal tire repair units

REMA TIP TOP's rubber-reinforced Universal repair units are specially formulated to provide maximum flexibility and strength. These non-directional, center over injury repair units perform flawlessly in both radial or bias-ply tire designs.

Part No	Description	Injury Size (inch)	Repair unit Size (inch)	Box/ Qty	Case/ Qty		
UP-3	Universal repair unit	Small Nailhole	1⅜	100	140	•	•
UP-4.5P	Universal repair unit, pail	3/16	1¾	300		•	•
UP-6	Universal repair unit	¼	2⅜	50	70	•	•
UP-6P	Universal repair unit, pail	¼	2⅜	200		•	•



REMA TIP TOP Tube Repair Vulcanizing Patches

REMA TIP TOP's feather edge patches are designed for repair of bicycle, garden, car, truck, and tractor tubes.
When installed with REMA TIP TOP Cold Vulcanizing Fluid, REMA TIP TOP tube patches will stretch evenly in all directions, resulting in a perfect bond and seamless repair.

- Available in a wide variety of sizes to meet all your Tube Repair needs.



Red edge, vulcanizing patches

Red edge, vulcanizing patches

Our distinctive red feather edge is often copied, but never duplicated.

Part No	Description	Size (inch)	Box/ Qty	Case/ Qty					
0	Tube patches, round	Ø 1¼	100	216	•	•	•		
1	Tube patches, round	Ø 1½	30	528	•	•	•		
2	Tube patches, round	Ø 1¾	30	324		•	•		
3	Tube patches, round	Ø 2	30	222			•	•	•
4	Tube patches, round	Ø 3	30	120			•	•	•



203

Cold Vulcanizing Fluid

Specifically designed for the vulcanization of tube patches, valve patches and rubber-based tube valve repair units.

Part No	Description	Size	Box/Qty	Case/Qty
203	Cold Vulcanizing Fluid, with brush top	8 oz. can	1	24
204	Cold Vulcanizing Fluid	32 oz. can	1	6

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 004



Emergency Repairs

REMA TIP TOP Sealastic & Emergency Repairs

Part No	Description	Box/Qty	Case/Qty		
520	**REMA SEAL for passenger and light truck tires, workshop kit** **Contents:** • 45 Sealastic repair units • 1 Special Blue Cement can • 1 insertion tool • 1 hand rasp	1		•	•
560	**REMA SEAL for passenger and light truck tires, workshop kit** **Contents:** • 50 Sealastic repair units • 1 Special Blue Cement can • 1 insertion tool	1		•	•
760	**ANCHOR SEAL Kit** **Contents:** • 50 Super Radial Anchor-Seal repair units • 1 Special Blue Cement can • 1 insertion tool	1		•	
561	**REMA SEAL for passenger and light truck tires, refill pack**	50	50	•	•
761	**ANCHOR SEAL, refill pack**	50		•	
	Accessories				
525	**REMA STEM inserting tool, pistol grip handle.**	1		•	•
565	**REMA STEM inserting tool, straight handle.**	1		•	•



560

Radial Anchor Seal Emergency Repair

The Radial Anchor Seal Emergency Repair kit is ideal for repair of radial passenger, ATV, lawn and garden tractor tires.

Part No	Description	Box/Qty	Case/Qty		
RAD-104	**Radial Anchor Seal Emergency Repair kit.** **Contents:** • 25 Super Radial Anchor-Seal Emergency Repair units • 1 Special Blue Cement, can • 1 insertion tool, • 1 hand rasp • 1 plastic handle knife • 1 marker	1		•	•



RAD-104

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 005



REMA TIP TOP Tire Service Cabinets and Kits

REMA TIP TOP offers a diverse selection of service kits for most types of tire and tube repairs. All REMA TIP TOP Repair Cabinets are designed with a locking door and include a Rubber Manufacturers Association wall chart and our step-by-step Nail Hole Repair training CD (English/Spanish.)



26A

New tire dealer tire repair service cabinet (26A)

Our most popular and comprehensive service cabinet contains everything required to perform proper one-piece and two-piece nail hole repairs. Complete with Repair Materials and Supplies to perform 90 one-piece repairs and 100 two-piece repairs.

Part No	Description	Qty		
26A	New tire dealer repair cabinet	1	•	•

Contents Include: 1 box Universal repair units UP-6 (¼"), 1 box RemaStems RS-6 (¼"), 1 box each of Minicombis A-3 (⅛"), A-6 (¼"), 2 cans Special Blue Cement BL-8F (8 fl. oz.), 2 cans Pre-Buff Cleaner 70F (16 fl. oz. aerosol), 1 can Innerliner Sealer 76F (16 fl. oz.), 1 Low Speed Air Buffer CP-873K, 1 Air Vacuum, w/bag 795, 1 each of carbide cutters CC-3 (⅛"), CC-6 (¼"), 1 buffing cone TCW-210-80 2" (⅜" x 24T) , 1 QR adapter 6068-125 (CC-3) , 1 QR adapter 6068 (CC-6) , 1 QR arbor 6067, sleeved (TCW-210-80) , 1 injury probe/awl 190, 1 ball bearing stitcher 30, 1 innerliner scraper 28, 1 brass bristle cleaning brush 6014, 10 pulling wires 626 (RS-6) , 1 Nailhole Repair Training CD TRM-CD, 1 R.M.A. Nailhole Repair Application Chart

Passenger/light truck tire repair service cabinet (26-R)

This versatile service cabinet contains a variety of products for tube and tire repairs. The 20" x 20" steel wall mount cabinet contains a generous amount of REMA TIP TOP supplies, capable of performing 60 tube repairs, 130 one-piece repairs, and 50 two-piece repairs.

Part No	Description	Qty		
26-R	Passenger/light truck tire repair wall cabinet kit	1	•	•

Contents include: 1 box each of tube patches #2, #3, 1 box Radial repair units RAD-110, 1 box Universal repair units UP-6 (¼"), 1 box each of Minicombis A-3 (⅛"), A-4.5 (3⁄16"), A-6 (¼"), 1 box RemaStems RS-6 (¼"), 1 can Vulcanizing Fluid 203 (8 fl. oz), 1 can Special Blue Cement BL-8F (8 fl. oz.), 1 Pre-Buff Cleaner 70F (16 fl. oz. aerosol), 1 can Innerliner Sealer 76F (16 fl. oz.), 1 can Tire Talc 63, 1 box pulling wires 626, 1 innerliner scraper 28, 1 each of carbide cutters CC-3 (⅛"), CC-4.5 (3⁄16"), CC-6 (¼"), 1 brass bristle cleaning brush 6014, 1 Nailhole Repair Training CD TRM-CD, 1 R.M.A. Nailhole Repair Application Chart



Leak Detector



Leak Detector

NEW PRODUCT

REMA TIP TOP Spray-On Leak Detector makes locating air leaks easier!
• Ready-To-Use formula • Ideal for locating air leaks • Quick/Easy application
• Can be used on all types of tires, tubes, valves and rims.

Part No	Description	Size	Box/Qty	Case/Qty
RLD-32	Leak Detector	32 oz. spray bottle.	1	6

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 006



Vulcanizing Cement

Special Cement BL (Non Flammable)

The key to REMA TIP TOP's exclusive Blue Bonding System, Special Cement BL creates a nearly indestructible bond between tire and repair unit. Specifically designed for the application of REMA TIP TOP Radial, Bias-Ply and Universal, Minicombi & RemaStem repair units. Use for chemical installation of REMA TIP TOP blue bonding layer repair units, Blue Floater Gum and chemical vulcanizing compounds.

Part No	Description	Size	Box/Qty	Case/Qty
BL-8	Special Cement BL, with brush top	8 oz. can	1	24
BL-32	Special Cement BL	32 oz. can	1	6



BL-32 BL-8

Special Blue Cement (Flammable)

The key to REMA TIP TOP's exclusive Blue Bonding System, Special Blue Cement (flammable) creates a nearly indestructible bond between tire and repair unit. REMA TIP TOP's newest Special Blue Cement (flammable) is free of CFC and aromatic compounds. Specifically designed for the application of REMA TIP TOP Radial, Bias-Ply and Universal, Minicombi & RemaStem repair units. Use for chemical installation of REMA TIP TOP blue bonding layer repair units, Blue Floater Gum and chemical vulcanizing compounds.

Part No	Description	Size	Box/Qty
BL-8F	Special Blue Cement (flammable), with brush top	8 oz. can	24
BL-32F	Special Blue Cement (flammable)	32 oz. can	6



BL-8F



Pre-Buff Cleaners

Liquid Pre-Buff Cleaners (non-flammable)

REMA TIP TOP Pre-Buff Cleaners are specially formulated to dissolve mold-release lubricants and other contaminants creating a clean surface prior to innerliner buffing. Available in spout-top liquid or spray-top aerosol dispensers.

- Same formula for tube or tire preparation.

Part No	Description	Size	Box/Qty
70	Pre-Buff Cleaner	16 fl. oz. spray can	12
71	Pre-Buff Cleaner	32 fl. oz. spout can	12



71 70

Liquid Pre-Buff Cleaners (flammable)

REMA TIP TOP Pre-Buff Cleaners are specially formulated to dissolve mold-release lubricants and other contaminants creating a clean surface prior to innerliner buffing. Available in spout-top liquid or spray-top aerosol dispensers.

- CFC-free formula requires shorter drying times.
- Same formula for tube or tire preparation.

Part No	Description	Size	Box/Qty
70-F	Pre-Buff Cleaner	16 fl. oz. spray can	12
71-F	Pre-Buff Cleaner	32 fl. oz. spout can	12



70-F 71-F

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 007



Tire Mounting Lubricants

Universal mounting paste

REMA TIP TOP's simple to use mounting paste is easily applied and will not corrode or discolor aluminum or alloy wheels. This fast drying formula will not freeze or harden and reduces wear and tear on tire changing equipment.

• Excellent Lubrication • Superior "Tack" • Reduces tire/rim slippage • TPMS compatible • Great for low profile and run flat tires

Part No	Description	Size	Box/Qty	Pallet/Qty						
75	Universal mounting paste	7.7 lbs.	4	120	•	•	•	•	•	•
75N	Universal mounting paste, Lo-profile	7.7 lbs.	4	120	•	•	•	•	•	•
74	Universal mounting paste	22 lbs.	1	48	•	•	•	•	•	•

Tire mounting compounds

REMA TIP TOP Tire Mounting Compounds contain rust inhibitors and will not separate or liquefy. These versatile compounds function as an excellent tire lubricant and for tire bead packing.

• Proper application provides damage-free removal of tires. • Concentrated; water soluble, can be diluted

Part No	Description	Size	Box/Qty	Pallet/Qty						
	HONEY COLOR									
2178	Mounting compound, concentrated	8 lbs. pail	4	120	•	•	•	•	•	•
2180X	Mounting compound, concentrated, with swab	25 lbs. pail	1	48	•	•	•	•	•	•
2183	Mounting compound, concentrated	40 lbs. pail	1	36	•	•	•	•	•	•
2012	Mounting compound, concentrated	125 lbs. drum	1	8	•	•	•	•	•	•
2014	Mounting compound, concentrated	55 US gal. drum	1	4	•	•	•	•	•	•
	BROWN COLOR									
2278	Mounting compound, concentrated	8 lbs. pail	4	120	•	•	•	•	•	•
2280	Mounting compound, concentrated	25 lbs. pail	1	48	•	•	•	•	•	•
2282	Mounting compound, concentrated	40 lbs. pail	1	36	•	•	•	•	•	•
2214	Mounting compound, concentrated	55 US gal. drum	1	4	•	•	•	•	•	•

Tire mounting lubricant (Black-Ice Stop Rust Rim Release)

• Lubricates rim and tire for easy mounting & demounting • Protects against rust & corrosion • Prevents rim and bead from bonding

Part No	Description	Size	Box/Qty	Pallet/Qty						
2480	Black-Ice Stop Rust Rim Release	25 lbs. pail	1	48	•	•	•	•	•	



75


75N


2180X


2280



2480

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 008

Tire mounting liquid lube

REMA TIP TOP's Liquid Tire Lubricants are non-toxic and contain no petroleum products. Lubricants can be applied by brush, swab, or spray bottle.

Part No	Description	Size	Box/Qty	Pallet/Qty						
	BEAD BUTTER BLUE									
2053B	Bead Butter Blue, concentrate	1 US gal./4-case	4	144	•	•	•	•	•	
2054B	Bead Butter Blue, concentrate	5 US gal.	1	36	•	•	•	•	•	
2055B	Bead Butter Blue, concentrate	55 US gal. drum	1	4	•	•	•	•	•	
	LIQUID LUBE BLUE									
81511	Liquid Lube Blue, concentrate	1 US gal./4-case	4	144	•	•	•	•	•	
81505	Liquid Lube Blue, concentrate, 5 gal. mixing bucket	2 US gal. concentrate	1	48	•	•	•	•	•	
81515	Liquid Lube Blue, concentrate	5 US gal.	1	36	•	•	•	•	•	
81555	Liquid Lube Blue, concentrate	55 US gal. drum	1	4	•	•	•	•	•	


81511


2053B


2054B



81505

Tire mounting lubricant brackets, brushes, swabs

REMA TIP TOP Mounting paste brackets are manufactured of heavy-duty steel, and fit a variety of tire changing machines. Heavy-duty mounting paste brushes and cotton swabs apply paste, compound or liquid products without waste or mess.

Part No	Description	Box/Qty	Case/Qty				
73	Mounting paste brush, 45° 1" brush head	1		•	•		
73W	Mounting paste brush, 45° 1" brush head	1		•	•		
73T	Mounting paste brush, 45° 2" brush head	1			•	•	•
75B	Mounting bracket for 75 paste, hardware included	1					
75NB	Mounting bracket for 75N paste, hardware included	1					
2990	Swab	1	12				


73


73W


73T


2990


75B 75NB

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 009

Sealer Products



960

Rim & Bead Sealer (non-flammable)

REMA TIP TOP offers two distinct Bead Sealer formulations designed to prevent leaks between the tire and rim.

- Designed to be applied to tire beads during the mounting process.
- Ideally suited for use with new or old tires.
- No drip formula is highly viscous with an extended shelf life.

Part No	Description	Size	Box/Qty	Case/Qty
960	Rim & Bead Sealer, with brush cap	32 fl. oz. can	1	6
960ND	Rim & Bead Sealer, with brush cap No drip formula	32 fl. oz. can	1	6



960-F

Rim & Bead Sealer (flammable)

REMA TIP TOP CFC-Free Bead Sealer is designed to prevent leaks between the tire and rim.

- Designed to be applied to tire beads during the mounting process.
- Ideally suited for use with new or old tires.
- CFC-free formula requires shorter drying times.

Part No	Description	Size	Box/Qty
960-F	Rim & Bead Sealer, with brush cap CFC-free formula Flammable	32 fl. oz. can	6



76

Innerliner Repair Sealant (non flammable)

REMA TIP TOP offers two distinct Repair Sealer formulations to accommodate unique customer preferences or requirements.

- Properly applied, Repair Sealer creates an airtight seal around a finished repair, over buffed areas or porous tire innerliners.
- Prudent use of Repair Sealer maintains the integrity of the repair.

Part No	Description	Size	Box/Qty	Case/Qty
76	Repair Sealant, with brush cap	16 fl. oz. can	1	12



76-F

Innerliner Repair Sealant (flammable)

REMA TIP TOP offers two distinct Repair Sealer formulations to accommodate unique customer preferences or requirements.

- Properly applied, Repair Sealer creates an airtight seal around a finished repair, over buffed areas or porous tire innerliners.
- Prudent use of Repair Sealer maintains the integrity of the repair.
- CFC-free formula requires shorter drying times.

Part No	Description	Size	Box/Qty
76-F	Repair Sealant, with brush cap CFC-Free formula Flammable	16 fl. oz. can	12

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 010



Tire Spreaders, Wheel Balancer

Rep-Boy tire repair spreader

The Rep Boy provides easy access for repairing passenger and light truck tires. The adjustable tire spreader can accommodate all tires from garden service through light truck. The Tire spreader has a foot-control swivel, tilts, and is equipped with a tool tray and a floor stand base-plate.


Part No	Description	Box/Qty		
3050-RB	Rep-Boy Deluxe Tire Repair Station **Specifications:** Weight: 74lbs.	1	•	•



Tire spreader

This portable tire spreader performs passenger and light truck tire inspections with ease. REMA TIP TOP's portable tire spreader fits over the center post of most tire changers (up to 1¾" post diameter). Hand-operated spreading device allows easy access to any portion of the tire.

Part No	Description	Box/Qty		
3050	Tire Spreader	1	•	•

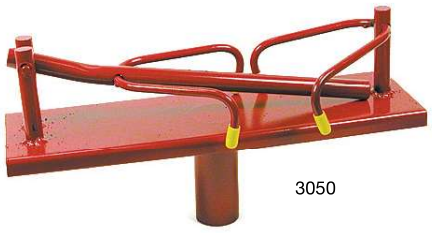




Valve Service Tools

Valve service tools

Part No	Description	Box/Qty	Case/Qty
41	Valve insertion tool (pull through style)	1	10
44	Valve insertion/removal tool (Big Yank)	1	10
836	Valve fishing tool, cable-type	1	10
449	Valve nut wrench	1	10

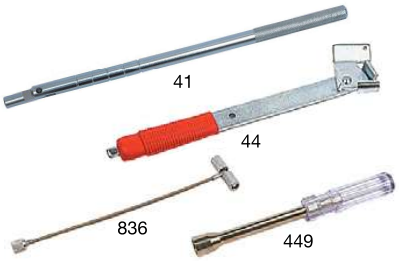

Valve core service tools

Part No	Description	Box/Qty	Case/Qty
186	Valve repair tool, 4-in-1	10	100
188	Cap & core remover tool		5
187	Screwdriver handle valve core tool	10	100
EX-685	Valve core removal and inserting tool, standard & large bore screwdriver-style	10	50
834	Valve core removal tool	10	100
TVCT	Torque valve core tool, TPMS service	1	10



Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 011



Valves


TR-412


TR-413


TR-413C


TR-414


TR-418C


TR-418


TR-423

Snap-in valves (passenger/light truck)

Ozone Tested and manufactured from EPDM rubber, all REMA TIP TOP passenger/light truck valves are equipped with high temperature valve cores.

- TR Valves packed 50 per bag/10 bags per box

Part No	Description	Rim Hole Dia. Inch	Max. psi	Valve Size Inch	Valve Size mm	Box/ Qty
TR-412	Snap-in valve	.453	65	⅞	25	500
TR-412C	Snap-in valve, chrome	.453	65	1	25	500
TR-413	Snap-in valve	.453	65	1¼	31	500
TR-413C	Snap-in valve, chrome	.453	65	1¼	31	500
TR-414	Snap-in valve	.453	65	1½	37	500
TR-414C	Snap-in valve, chrome	.453	65	1½	37	500
TR-415	Snap-in valve	.625	65	1¼	31	500
TR-418	Snap-in valve	.453	65	2	50	500
TR-418C	Snap-in valve, chrome	.453	65	2	50	500
TR-423	Snap-in valve	.453	65	2½	62	500
TR-425	Snap-in valve	.625	65	2½	62	500
TR-600HP	Snap-in valve, high pressure	.453	100	1¾	45	500
TR-602HP	Snap-in valve, high pressure	.453	100	2	50	500
TR-801HP	Snap-in valve, high pressure	.625	100	1¼	31	500
TR-802HP	Snap-in valve, high pressure	.625	100	2	50	500


TR-416


1-810


1-811

Clamp-in valves (passenger/light truck)

Produced with EPDM grommets, all REMA TIP TOP Clamp-In valves are equipped with high temperature valve cores.

Part No	Description	Rim Hole Dia. Inch	Valve Size Inch	Valve Size mm	Box/ Qty
TR-416	Clamp-In valve, custom wheel	.453	1 7⁄16	39	100
TR-417	Toronado/Eldorado clamp-in valve				5
1-810	Clamp-in valve, chrome	.453	1¼	31	100
1-811	Clamp-in valve, brass	.453	2	50	100


1-860


1-815


1-816

Clamp-in valves (specialty domestic/import)

Produced with EPDM grommets, all REMA TIP TOP Clamp-In valves are equipped with high temperature valve cores.

Part No	Description	Valve Size Inch	Valve Size mm	Box/Qty
1-860	ENKEI Style, mini	1 5⁄16	34	50
1-816	ENKEI Style, 45° bend	2 3⁄16	55	50
1-815	ENKEI Style, short	1 3⁄16	39	50

Always take the proper precautions and use the appropriate tools when installing tire valves into wheels.

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 012



Valve Cores

Valve cores

Part No	Description	TR No.	Box/Qty
TRC1 HT	Valve core, high-temp., std. bore	TRC1	100
TRC1-L	Valve core, high-temp., std. bore, long	TRC1-L	100





Valve Caps

Valve caps, plastic

Part No	Description	Box/Qty
39G	Valve cap, nitro-green	100
39	Valve cap, dome type, VC-8	1000



Valve caps, metal

Part No	Description	TR No.	Box/Qty	Case/Qty
37	Valve cap, fork-type, standard metal	TRVC2	100	1000
38	Valve cap, dome-type, standard metal		100	1000
40	Valve cap, hex-type, chrome		100	1000
42HT	Valve cap, dome type, high-temperature	TRVC3	100	1000





Valve Cross Reference

REMA #	Description	Length (inch)	Bending angle (°)	UOM	TR#	Hamaton	Dill	Haltec	Myers	31Inc	ETRTO	Tech
TR-412	Snap-in Valve	⅞		500	TR412	1-101	T-12R	TV-412	26118	17-412-500		TR412
TR-412C	Snap-in Valve, chrome	⅞		500	TR412C	1-101C				17-412-1		
TR-413	Snap-in Valve	1¼		500	TR413	1-102	T-13R	TV-413	21173	17-413-500	V2-03-1	TR413
TR-413C	Snap-in Valve, chrome	1¼		500	TR413C	1-102C	T-13S	TV-413-CH	22130	17-413-1		TR413CH
TR-414	Snap-in Valve	1½		500	TR414	1-103	T-14R	TV-414	21174	17-414-500	V2-03-02	TR414
TR-414C	Snap-in Valve, chrome	1½		500	TR414C							
TR-415	Snap-in Valve	1¼		500	TR415	1-107	T-15R	TV-415	21170	17-415-500	V2-03-3	TR415
TR-416	Clamp-In Truck Valves			100	TR416	1-801	VS-902	TV-416	21583	17-416		VH521MS
TR-417	Toronado/Eldorado clamp-in valve											
TR-418	Snap-In Valve	2		500	TR418	1-105	T-18R	TV-418	21175	17-418-500	V2-03-4	TR418
TR-418C	Snap-in Valve, chrome	2		500	TR418C		T-18S	TV-418-CH		17-418-1		TR418CH
TR-423	Snap-In Valve	2½		500	TR423	1-106	T-23R	TV-423	21177	TR-423-500		TR423
TR-425	Snap-In Valve	2½		500	TR425	1-108	T-25R	TV-425	22188	17-425		TR425
TR-600HP	Hi-Pressure Snap-in Valve	1¼		500	TR600HP	1-401		TV-600HP	24120	17-600HP		VH600HP
TR-602HP	Hi-Pressure Snap-in Valve	2		500	TR602HP	1-402		TV-602HP	24121	17-602HP		
TR-801HP	Hi-Pressure Snap-in Valve	1¼		500	TR801HP	1-403		TV-801-HP	23190	17-801HP		
TR-802HP	Hi-Pressure Snap-in Valve	2		500	TR802HP	1-404		TV-802-HP	23191	17-802HP		
1-810	Clamp-in Valve	1¼		100	TBD	1-810		N-1600		17-428		
1-811	Clamp-in Valve	2		100	TBD	1-811		TV-416MC		17-429		
1-860	ENKEI Style “Mini”	1¼		50	TBD	1-860		TV-6030	24117			
1-816	ENKEI Style		45	50	TBD	1-816		TV-6020	24118			
1-815	ENKEI Style “Short”	1½		50	TBD	1-815						

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 013



Pressure Gauges, Chucks and Accessories



Tire pressure gauges

Professional tire pressure gauges for a variety of applications.


- Permanently lubricated
- Easy-to-read indicator bar
- Chrome plated, brass body construction

Part No	Description	Calibration	Box/Qty			
180	Automotive gauge, angle-head	10-50 psi, 1 lb. increments	10	•		
181	Truck gauge, angle-head	20-120 psi, 2 lb. increments	10		•	
183	Truck gauge, dual-head	10-150 psi, 2 lb. increments	10		•	
184	Truck gauge, dual-head	20-120 psi, 2 lb. increments	10		•	
175	Truck gauge, dual-head	20-120 psi, 2 lb. increments	10		•	
176	Truck gauge, dual-head	10-150 psi, 2 lb. increments	10		•	
179	Truck gauge, straight-head	20-120 psi, 2 lb. increments	10		•	



Tread depth gauge

Part No	Description	Calibration	Box/Qty			
185	Tread depth gauge	0" to 1" 1/32" increments.	10	•	•	•

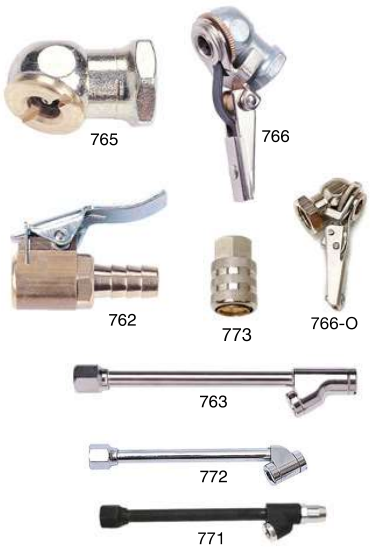

Air chucks

Part No	Description	Box/Qty
765	Ball chuck, ¼" NPT female fitting (CLOSED)	10
765-O	Ball chuck, ¼" NPT female fitting (OPEN)	10
766	Ball chuck, ¼" NPT female fitting (CLOSED), clip-on type	10
766-O	Ball chuck, ¼" NPT female fitting (OPEN), clip-on type	10
762	Air chuck, Euro-style clip-on	10
763	Air chuck, dual-foot, lock-on	10
771	Air chuck, dual-foot, press-on (CLOSED), black poly coating	5
772	Air chuck, dual-head, press-on	5
773	Air chuck, lock on	5

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 014



Air Inflation Gauges

MAX-WELL digital and analog inflation gauges

NEW PRODUCT

MAX-WELL digital and analog inflation gauges merge ease of use and readability with rapid, safe and cost effective tire pressure maintenance.

- Fast inflation and deflation
- Increased accuracy and safety
- Robust design
- 6 ft Hose

Part No	Description	Box/Qty			
H300532P	MAX-WELL Digital Inflation Gauge	1	•	•	•
H310532P	MAX-WELL Analog Inflation Gauge	1	•	•	•



H300532P

H310532P



Gloves

GREASE BULLY Nitrile gloves

NEW PRODUCT

GREASE BULLY Nitrile Gloves are formulated to have superior strength for the Professional Technician. The GREASE BULLY Glove has a strong black color and is resistant to most shop chemicals.

- New Nitrile Formula Offers Extra Comfort & Elasticity
- Delivers Unmatched Feel & Sensitivity
- Powder Free • Textured Fingers • 5.5-mil thick

Part No	Description	Size	Box/Qty
9943	GREASE BULLY Nitrile Gloves	Medium (M)	100
9944	GREASE BULLY Nitrile Gloves	Large (L)	100
9945	GREASE BULLY Nitrile Gloves	Extra Large (XL)	100



DURAGRIP Latex Gloves

NEW PRODUCT

The DURAGRIP Glove is a heavy favorite among Tire Repair Techs due to its durability and comfortable Latex fit.

- 60% thicker than traditional latex gloves
- Fully Textured surface • Powder Free • 8 mil thick, 9" long

Part No	Description	Size	Box/Qty
2243	DURAGRIP Latex Gloves	Medium (M)	100
2244	DURAGRIP Latex Gloves	Large (L)	100
2245	DURAGRIP Latex Gloves	Extra Large (XL)	100



StrongHold Gloves

NEW PRODUCT

The StrongHold is a low cost reusable glove with a Nitrile dipped palm and nylon knit backing. The nylon knit backing is breathable and machine washable.

- Chemical resistant palm • Excellent gripping power
- Breathable air flow comfort • Seamless comfort
- Dexterity & Durability

Part No	Description	Size	Box/Qty
8544	StrongHold Gloves	Large (L)	Pair
8545	StrongHold Gloves	Extra Large (XL)	Pair



Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 015



Hand Cleaners - Made in USA





1,440 applications per Tank.







Heavy-Duty Hand Cleaners - Made in USA

All three hand cleaners can be used with or without water. These products are made in the USA and are VOC Compliant and have No NPE. Each 4 liter hand **cleaner refill tank yields 1,440 applications.**

The DISPENSER BUDDY Reservoir Dispensing System with the Hand Cleaner refill tanks empty 100%, which means NO WASTE for the user. When compared to other hand cleaner products, these hand cleaner refill tanks yield a lot more applications per refill, which saves the user 30-40% over other systems.

Part No	Description	Size	Qty
RHC-PCH	**Pumice Cherry** NEW PRODUCT • Premium, Heavy-Duty Lotion Hand Cleaner • No Petroleum Odor • Deep Cleans with Fine-Ground, American Pumice Contains Ten Skin Care Ingredients including Glycerin, Almond Oil,Soy Oil, Lanolin, Aloe Vera, Jojoba, Wheat Germ Extract and Vitamin A, C and E	4 Liter (1 gal. 7.3 oz.)	4 tanks per case
RHC-PCI	**Pumice Citrus** NEW PRODUCT • With Natural Citrus Oils, Natural Fresh Citrus Fragrance • No Petroleum Solvents • Premium natural citrus oils safely and effectively dissolve the very toughest soils. Contains Nine Skin Conditioners including Glycerin, Aloe Vera, Jojoba, Wheat Germ Extract, Vitamins A, C and E, plus Almond and Soy oil for advanced conditioning.	4 Liter (1 gal. 7.3 oz.)	4 tanks per case
RHC-PHD	**Pumice HD** NEW PRODUCT • Ultra, Heavy-Duty Quality Hand Cleaner • Use with or without water • No Petroleum Odor • Deep Cleans with Fine-Ground, American Pumice Contains Pumice and Seven Moisturizers including Lanolin, Glycerin, Aloe Vera, Vitamin C & E, Jojoba and Wheat Germ Extract.	4 Liter (1 gal. 7.3 oz.)	4 tanks per case
RHC-WIPE	**Workshop Wipes** NEW PRODUCT • The Ultimate Multipurpose Hand Scrubber Towels • Quick Cleaning at the Work Site • No Solvents – VOC Free • Stays Moist for Hours • Clean After-Feel with No Residue • Clean Hands, Tools, Equipment and More Contains Glycerin, Jojoba, Wheat Germ Extract, Vitamin C & E and Aloe Vera.	90 Count 9" x 12" wipes	6 containers per case
RHC-DIS	**Dispenser Buddy** NEW PRODUCT • Easy, quick-changing, no-mess Refill Tank empties 100% - NO WASTE. • 1000ml reservoir back-up allows reloading at user's convenience. • 4000ml refill tank gives user a 5000ml system. • System SAVES user 30-40% over other systems. • Time-tested, heavy-duty pump mechanism is guaranteed for life. • See-through window lets user know when refill can be changed. • Foil seal on refill locks in freshness and eliminates tampering. • Snap-in/Snap-out features lock reservoir and refill tank in place. • Accommodates REMA TIP TOP's 4 liter refills tanks.		1

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 016

DISPENSER BUDDY (RHC-DIS)

RESERVOIR DISPENSING SYSTEM WITH 4 LITER REFILLS

USE LESS, SAVE NOW!

1,440 applications per Tank.

Made in USA



Unique design 1 liter reservoir plus 4 liter refill tank gives user a 5 liter system

SYSTEM BENEFITS

- **NO WASTE** - disposable tank empties 100%.
- **CONVENIENT, NO MESS** reloading with reservoir back-up.
- **SECURE** - reservoir and refill lock in place.

FEATURES AND BENEFITS:

- Easy, quick-changing, no-mess Refill Tank empties 100% - **NO WASTE.**
- 1000ml reservoir back-up allows reloading at user's convenience.
- 4000ml refill tank gives user a 5000ml system.
- System **SAVES user 30-40%** over other systems.
- Time-tested, heavy-duty pump mechanism is guaranteed for life.
- See-through window lets user know when refill can be changed.
- Foil seal on refill locks in freshness and eliminates tampering.
- Snap-in/Snap-out features lock reservoir and refill tank in place.
- Accommodates REMA TIP TOP's 4 liter refills tanks.
- Refill also fits Zep Manufacturing Co.'s D-4000 dispenser (all models).



Hand Cleaners - Made in Germany

Hand Cleaner SUPER

Removes even the toughest dirt such as soot, paint, printing ink, tar, bitumen, underseal etc. Hand Cleaner SUPER cleans down to the pores, is easy to rinse off, does not contain sand and therefore will not clog drains or outlets. With orange fragrance.

Part No	Description	Size	Box/Qty
5930443	Hand Cleaner SUPER	11 liter (2.91 gal.) bucket	1
5930467	Hand Cleaner dispenser	STANDARD	1

Hand Cleaner SOFT

Contains lanolin and vegetable oil without additional solvents. Therefore extremely mild and gentle to the skin. Does not clog drains or outlets. Alkali-free and adapted to the pH of the skin. With citric acid to preserve the skins natural resistance. Extremely economical (approx. ½ tsp is enough).

Part No	Description	Size	Box/Qty
5930498	Hand Cleaner SOFT	500 ml (16.91 fl. oz.) plastic can	12
5930450	Hand Cleaner SOFT	11 liter (2.91 gal.) bucket	1



5930467



5930443



5930450



5930498

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 017



Tire Repair Hand Tools



Cutting tools

Essential for preparation and finishing procedures of all types of tire repair.


Part No	Description	Blade Length (inch)	Blade Length (mm)	Box/Qty
929	Wooden handle skiving knife, flexible round tip	4	101	12
930	Wooden handle skiving knife, tapered point tip	4	101	12
6017	Rubber knife	5	127	1
6018	Skiving knife	6	152	1
6022	Sharpening stone	9		



Side cutters

Designed to cut through steel cords quickly and easily while minimizing damage to tire injury.


Part No	Description	Box/Qty
6010	Side cutter for steel cord, geared	1
6012	Steel nippers, 8"	1



Tire repair stitchers

Essential service tool or proper installation or tire repair units, tube repair units and repair plugs. Durable wooden handle and ball bearing construction provides optimal service life.

Part No	Description	Width (inch)	Dia. (inch)	Size (inch)	Box/Qty
30	Corrugated stitcher, ball bearing	⅛	1¼	1¼ x ⅛	10
6005	Corrugated stitcher, ball bearing	¼	2	2 x ¼	1
6006	Roller stitcher, ball bearing, heavy duty	2	2	2 x 2	1



Tire innerliner scrapers

Essential for preparation of proper tire repair and repair unit installation. (Use with liquid or aerosol Pre-Buff cleaning solutions.)

Part No	Description	Box/Qty	Case/Qty
932	Tire scraper, rubber	1	12
28	Tire scraper, innerliner tool	1	



Wheel weight pliers


Remove and add wheel weights easily with REMA TIP TOP's quality all-in -one Wheel weight tool.

Part No	Description	Box/Qty
924	Wheel weight tool	1

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 018

Miscellaneous buffing tools

Part No	Description	Box/Qty	Case/Qty
33	Arbor for mounting buffing wheels, ¼" drill	1	10
34	Buffing wheels, fine grit, 2½" dia.	1	10
TCW 210-80	Buffing Rasp 80 grit	10	10
6067	QR arbor, 2¼" threaded (w/sleeve), ⅜" x 24-T	1	10

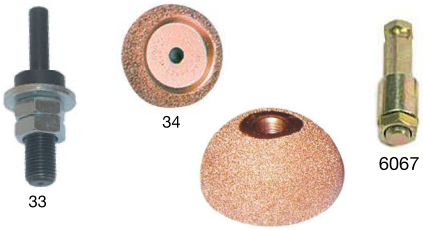

Markal paintsticks

Real lead-free paint in stick form combining the long-lasting durability of paint with ease-of-use of a crayon. Marks on smooth, rough, rusty or dirty surfaces and also marks through oil and water
Temperature range: -50°F to 150°F (-46°C to 66°C)

Part No	Description	Color	Box/Qty	Case/Qty
80220	Markal paintstick	white	12	144
80221	Markal paintstick	yellow	12	144
80222	Markal paintstick	red	12	144
80223	Markal paintstick	black	12	144
80224	Markal paintstick	orange	12	144
80225	Markal paintstick	blue	12	144
80226	Markal paintstick	green	12	144
80227	Markal paintstick	pink	12	144
80228	Markal paintstick	purple	12	144
80229	Markal paintstick	brown	12	144
80230	Markal paintstick	grey	12	144



80220 - 80230

Marking crayons


High quality, easy to see marking crayons write on almost anything.

Part No	Description	Color	Box/Qty	Case/Qty
62W	Marking crayon	white	12	144
62Y	Marking crayon	yellow	12	144


62W, 62Y

Accessories


Part No	Description	Box/Qty
626	Pull wires, for Rema Stems RS-6, RS-8, RS-10	10
190	Awl	1

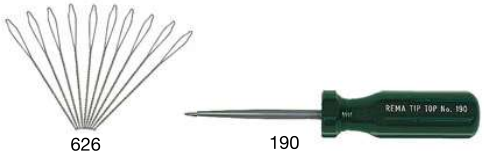

Brass bristle brush

For removal of rubber dust particles after buffing the repair area. REMA TIP TOP does not recommend the use of solvent or liquid cleaners for rubber dust removal after buff.

Part No	Description	Box/Qty	Case/Qty
6014	Brass cleaning brush	1	12


6014

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 019



Tire Repair Power Tools



Air buffers and high speed grinders

REMA TIP TOP's exceptional quality, durable slow speed (less than 5,000 rpm) Air buffer and high speed grinder (greater than 20,000 rpm) are the right choice for injury and surface preparation. The slow speed buffer is equipped with a quick release chuck and rear exhaust system. The high speed grinder is equipped with a 1/4" Jacob's Chuck.

Part No	Description	RPM	Box/Qty
CP-871	High Speed Grinder, Jacob's chuck	22,000	1
CP-873K	Low Speed Tire Buffer, QR chuck	2,800	1



Vacuum cleaner

REMA TIP TOP's air operated, wet/dry vacuum replaces standard shop vacuums at repair stations. Small, powerful and versatile, this vacuum quickly removes rubber dust particles or water from tires. (Ideally suited for use on mobile service trucks.)

Part No	Description	Box/Qty
795	Air Vacuum, includes bag	1
798	Air Vacuum, includes bag and water hose	1
796	Replacement vacuum bag	1
797	Replacement water hose	1





Quick release air buffer hardware (slow-speed)

Designed for use with REMA TIP TOP slow-speed air buffers; quick-release couplers, arbors and adapters provide optimal versatility when changing tools.

- Tested-tough and performance-proven.

Part No	Description	Box/Qty	Case/Qty
6053	Arbor, fixed For use with 6057 rotary brush, ¼"	10	
6060	QR chuck set, 2 QR arbors	1	10
6062	Jacobs chuck, ⅜"	1	
6065	Accessory kit • 1 6066 QR arbor • 1 6067 QR arbor • 1 6068 QR adapter • 1 6069 QR adapter	1	
6066	QR arbor, 2¼" threaded, ⅜" x 24-T	1	10
6067	QR arbor, 2¼" threaded (w/sleeve), ⅜" x 24-T	1	10
6068-125	QR adapter, ⅛" shank For use with CC-3	1	10
6068	QR adapter, ¼" shank For use with CC-4.5, CC-6	1	10
77	Pneumatic tool lubricant, 16 fl. oz. can	1	12

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 020



Rubberhog Tire Repair Tools

Rubberhog tire repair tools are designed for texturing and removing rubber rapidly with a highly efficient cutting action, leaving a rubber surface that is evenly textured and free of any gouging.
(Use with the appropriate safety and eye protection.)

Rubberhog flared contour wheels

Precision contoured wheels deliver efficient texturing results without gouging rubber surfaces.

Part No	Description	Diameter (inch)	Width (inch)	Bore (inch)	SSG	Grit	Box/ Qty
RH-100	Flared contour wheel	1¾	¾	⅜	170	60	1
RH-102	Flared contour wheel	1¾	¾	⅜	230	36	1
RH-104	Flared contour wheel	1¾	¾	⅜	390	16	1
RH-107	Flared contour wheel	2½	1 1⁄16	⅜	170	60	1
RH-109	Flared contour wheel	2½	1 1⁄16	⅜	230	36	1
RH-111	Flared contour wheel	2½	1 1⁄16	⅜	390	16	1
RH-130	Flared contour wheel mini-cup	2	¾	⅜	170	60	1



Rubberhog Polyplugs for flared contour wheels

When used with the corresponding contour wheel, Polyplugs provide a flywheel effect that results in better control when preparing repair surfaces.

Part No	Description	Diameter (inch)	Bore (inch)	Box/Qty
RH-150	Polyplug	1¾	⅜	1
RH-152	Polyplug	2½	⅜	1





Carbide Cutting Tools

Carbide cutting tools

REMA TIP TOP's high tensile carbide cutters are ideal for preparing nail hole through section repair injuries. These diamond cut, long-life cutters are manufactured from high quality, high carbide content steel.

Part No	Description	Dia. (inch)	Dia. (mm)	Box/Qty
CC-3	Carbide cutter, pointed	⅛	3	1
CC-4.5	Carbide cutter, pointed	3⁄16	4.5	1
CC-6	Carbide cutter, pointed	¼	6	1
6453	Carbide cutter, ball	½		1
6454	Router burr, flat top	¼		1
6455	Router burr, flat top	⅛		1
6457	Router burr, flat top	1⁄16		1
6458	Carbide cutter, pointed	1⁄16		1



Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 021



Air Hose and Accessories, Air Compressor Accessories



891



¼" NPT male end

Reinforced air hose (red)

Heavy duty, non-kink reinforced air hose performs flawlessly in all conditions. Toughness tested, performance proven. Especially designed to withstand the wide range of weather and abrasion conditions experienced by today's active repair facilities.


Part No	Description	Length (feet)	Hose ID (inch)	Box/Qty
890	Reinforced air hose with ¼" NPT male ends	25	⅜	1
891	Reinforced air hose with ¼" NPT male ends	50	⅜	1
892	Reinforced air hose	500	⅜	1
895	Reinforced air hose with ½" NPT male ends	50	½	1
896	Reinforced air hose	500	½	1



891-G

Reinforced air hose (green)

Part No	Description	Length (feet)	Hose ID (inch)	Box/Qty
890-G	Reinforced air hose with ¼" NPT male ends	25	⅜	1
893-G	Reinforced air hose with ¼" NPT male ends	35	⅜	1
891-G	Reinforced air hose with ¼" NPT male ends	50	⅜	1



841P

Polyurethane coil hose

These lightweight, durable hoses will withstand the rigors of rugged automotive environments while maintaining their resiliency over long periods of time.

- Outstanding coil memory • Highly kink and abrasion resistant
- Straight tails provide built-in whip hose. • Resistant to most oils and fuels.

Part No	Description	Length (feet)	Hose ID (inch)	Box/Qty
840P	Polyurethane coil hose, with ¼" male ends	12	¼	1
841P	Polyurethane coil hose, with ¼" male ends	25	¼	1
842P	Polyurethane coil hose, with ¼" male ends	50	¼	1
843P	Polyurethane coil hose, with ¼" male ends	25	⅜	1
844P	Polyurethane coil hose, with ¼" male ends	50	⅜	1



F25



R25

Air filters

- Heavy duty air filters include die cast aluminum bodies, extra large filter elements and polycarbonate bowl.
- 40 Micron, sintered bronze filter element.
- Bayonet locking ring allows easy bowl removal.
- Maximum operating temperature 120° F.

Part No	Description	Port (inch)	Box/ Qty
F25	Air line filter, heavy duty	¼	1
F38	Air line filter, heavy duty	⅜	1
F50	Air line filter, heavy duty	½	1
F75	Air line filter, heavy duty	¾	1
F100	Air line filter, heavy duty	1	1

Air regulators

- Heavy duty air regulators have a reputation for unsurpassed reliability.
- The balanced design maintains precise downstream pressure and a diaphragm stop prevents ruptures due to surges.
- High flow rates with accurate control.

Part No	Description	Port (inch)	Box/ Qty
R25	Air regulator, heavy duty	¼	1
R38	Air regulator, heavy duty	⅜	1
R50	Air regulator, heavy duty	½	1
R75	Air regulator, heavy duty	¾	1
R100	Air regulator, heavy duty	1	1

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 022

Passenger Tire Nail Hole Repair Guide

Tires must be removed from the wheel to perform permanent and proper repair.



Locate the injury.



Remove the penetrating object.



Inspect the damage using a 190 awl, determine if one-piece or two-piece repair is required.



Apply REMA TIP TOP Pre-Buff cleaner.



Use a scraper to remove contaminants.



Ream the tire injury (from the inside), using a carbide cutter with a low speed buffer.



Ream the tire injury (from the outside), using a carbide cutter with a low speed buffer.



Buff the repair area using a buffing or contour wheel with the low speed buffer.



Using the 6014 Brass Brush, remove the buffing dust from the buffed area.



Apply REMA TIP TOP Blue Cement into injury channel with a 626 pull-wire.



Apply REMA TIP TOP Blue Cement; allow to dry thoroughly.



Install the Minicombi or RemaStem.



Pull the Minicombi or RemaStem through the tire. Cut off protruding stem excess, flush with tread surface.



After the repair unit is applied, stitch thoroughly from the center outwards.



Apply REMA TIP TOP Repair Sealant over the repair unit and buffed area.

Refer to the REMA TIP TOP Repair CD for complete detailed repairing instructions. Always refer to the repair chart, safety advice and repair instructions packaged with the product.

Nail Hole Repair Training CD Eng/Esp

Part No	Description	Box/Qty
TRM-CD NAIL	Nail Hole Repair Training CD Eng/Esp	1



www.rematiptop.com

Visit our redesigned website for the latest product information, MSDS Sheets, Technical Data Sheets, Training information, Catalog and Brochure downloads, and Information about REMA TIP TOP Events.

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 023

REMA TIP TOP/North America Inc
Automotive Division
P.O. Box 76
Northvale, NJ 07647-0076
Phone 800.225.REMA (7362)
201.768.8100
Fax 800.338.REMA (7362)
Fax 201.768.0946
www.rematiptop.com

Copyright© 2011
REMA TIP TOP/North America Inc

All information is given to the best of our knowledge. All specifications are to be considered non-binding information. Any claim for damages of any kind is excluded. We reserve the right to change technical specifications without prior notice, provided that they ensure product improvement. The information presented is based on technical experience but does not guarantee a product's suitability for specific applications, and does not relieve the users of the responsibility to undertake their own testing, including where any third-party trademark rights are concerned. Pictures in the catalog may contain optional accessories which are not included in the standard shipment, and need to be ordered additionally.

All relevant product information can be found in the respective documents, including operating instructions, technical datasheets as well as conditions for storage and application. The specified qualities of our products are based on information from the accompanying inspections for approval. They represent statistical product data and are not to be considered as guaranteed properties of an individual product. In order to preserve product properties, the storage conditions indicated in DIN 7716 should be followed (including storing the product in the original package and in an area that is dry, cool and dark).



Tire Repair Materials



Chemical Products



Equipment



Tire Valves & Hardware and Tire Balancing Products



Service Items



Protective goggles should always be worn to protect eyes from damage.



Always use ear protection if high noise levels occur.



Always use both eye and ear protection.



Always use protective gloves when handling sharp tools.



Cold Storage required.

All charts in REMA TIP TOP catalogs reflect International Repair Standards, determined on the basis of practical experience, bench checks and tests. THEY NEITHER INCORPORATE NOR ARE INTENDED AS A REFERENCE TO LOCAL, STATE, OR NATIONAL STANDARDS THAT MAY EXIST IN YOUR COMMUNITY. When repairing a tire: make a general examination to ensure that the tire can be repaired. Examine the tire for hidden damages. Stay within the maximum limits for repairable injuries indicated by the chart. Make independent assessments based upon your own knowledge and experience, local, state, and national safety limits and regulations, local road and operating conditions, regarding the application of repair criteria and limits more stringent than shown on these charts. Follow all applicable fitting and processing instruction, as well as other directions for the use of your Tire Repair Equipment Materials. Always consult the Tire Manufacturer for the repair limits.

The full REMA TIP TOP 2011 Tire Repair Materials and Accessories Catalog is available online at www.rematiptop.com or can be ordered by calling Customer Service at 800-225-REMA.

Revvo's Exhibit 1049
Revvo v. Tire Stickers
IPR2025-00631 - Page 024