

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 9,196,708 B2**
(45) **Date of Patent:** **Nov. 24, 2015**

(54) **METHOD FOR FORMING A SEMICONDUCTOR DEVICE STRUCTURE**

(71) Applicant: **Taiwan Semiconductor Manufacturing Co., Ltd.**, Hsin-Chu (TW)

(72) Inventors: **Che-Cheng Chang**, New Taipei (TW);
Yi-Jen Chen, Hsinchu (TW);
Yung-Jung Chang, Hsinchu County (TW)

(73) Assignee: **TAIWAN SEMICONDUCTOR MANUFACTURING CO., LTD.**, Hsin-Chu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/143,789**

(22) Filed: **Dec. 30, 2013**

(65) **Prior Publication Data**

US 2015/0187904 A1 Jul. 2, 2015

(51) **Int. Cl.**
H01L 21/336 (2006.01)
H01L 29/66 (2006.01)
H01L 21/265 (2006.01)
H01L 29/78 (2006.01)

(52) **U.S. Cl.**
CPC **H01L 29/6659** (2013.01); **H01L 21/265** (2013.01); **H01L 29/6656** (2013.01); **H01L 29/7834** (2013.01)

(58) **Field of Classification Search**

CPC H01L 29/6659; H01L 29/7833; H01L 29/665; H01L 29/66636; H01L 21/823807
USPC 438/231, 305, 585; 257/288
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,045,486 A *	9/1991	Chittipeddi et al.	438/231
6,033,975 A *	3/2000	Kwok et al.	438/585
6,521,501 B1 *	2/2003	Erhardt et al.	438/305
2011/0117679 A1 *	5/2011	Lee et al.	438/5

* cited by examiner


Primary Examiner — Phuc Dang

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch & Birch, LLP

(57) **ABSTRACT**

Embodiments of a method for forming a semiconductor device structure are provided. The method includes forming a gate stack over a semiconductor substrate and forming a sealing structure over a sidewall of the gate stack. The method also includes forming a dummy shielding layer over the semiconductor substrate, the sealing structure, and the gate stack. The method further includes performing an ion implantation process on the dummy shielding layer to form source and drain regions in the semiconductor substrate. In addition, the method includes removing the dummy shielding layer after the source and drain regions are formed.

20 Claims, 5 Drawing Sheets

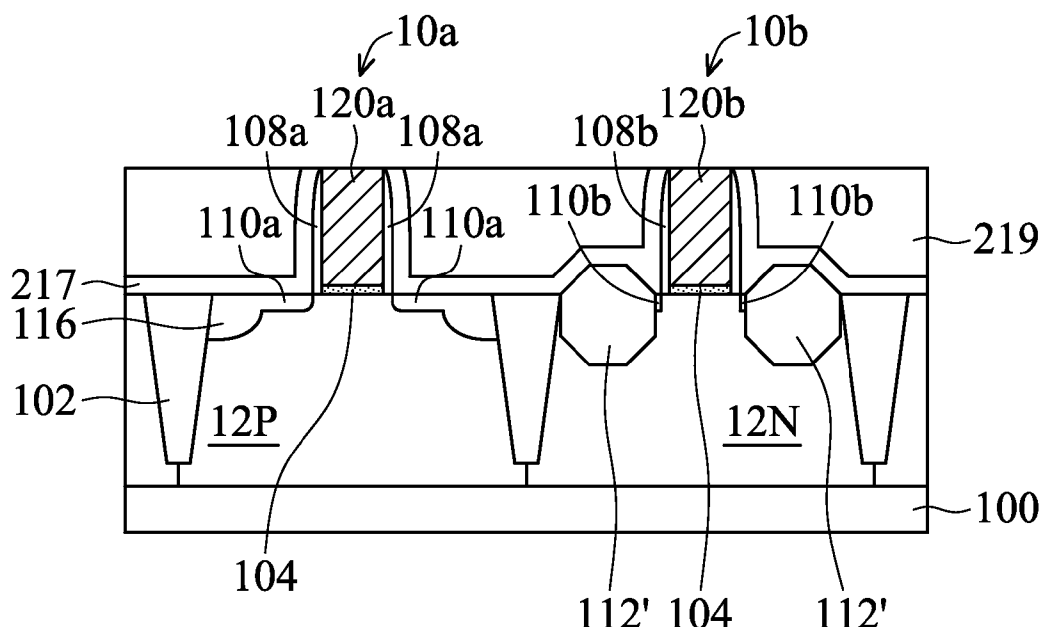

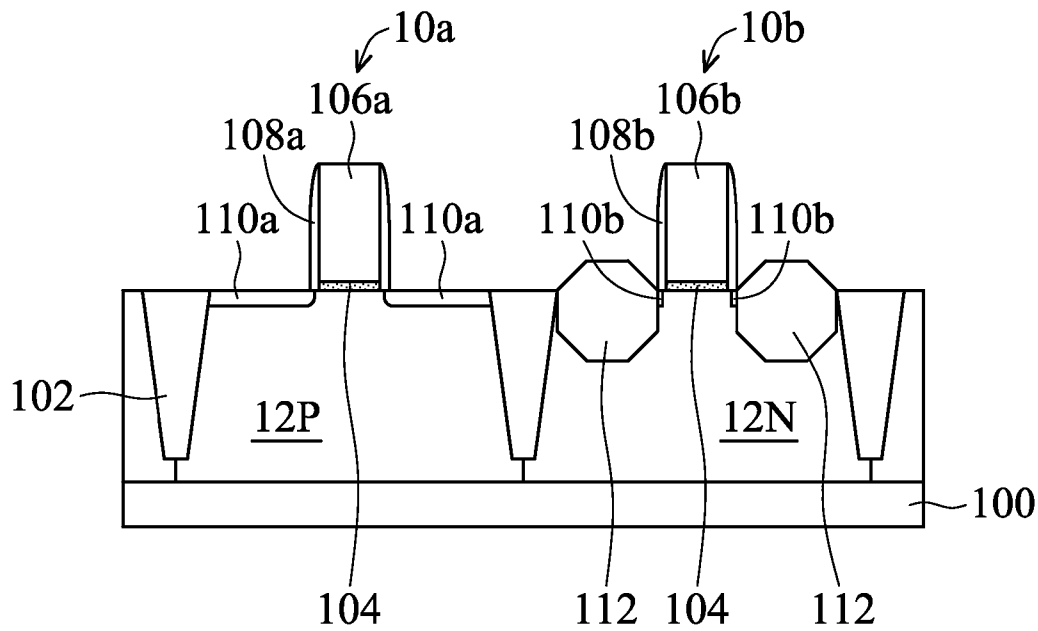


FIG. 1C

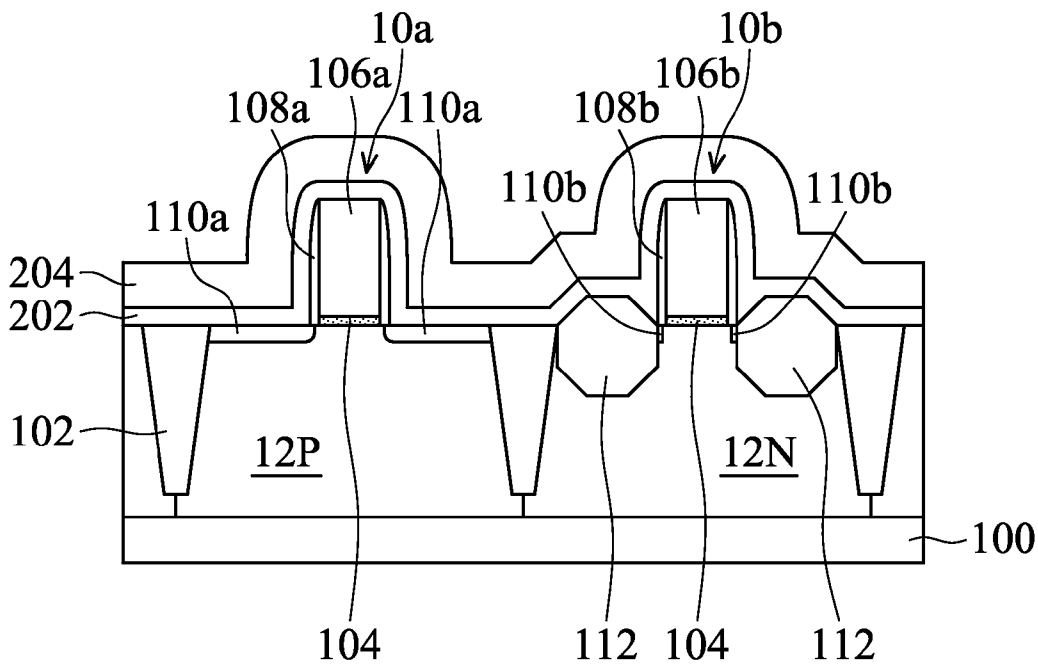


FIG. 1D

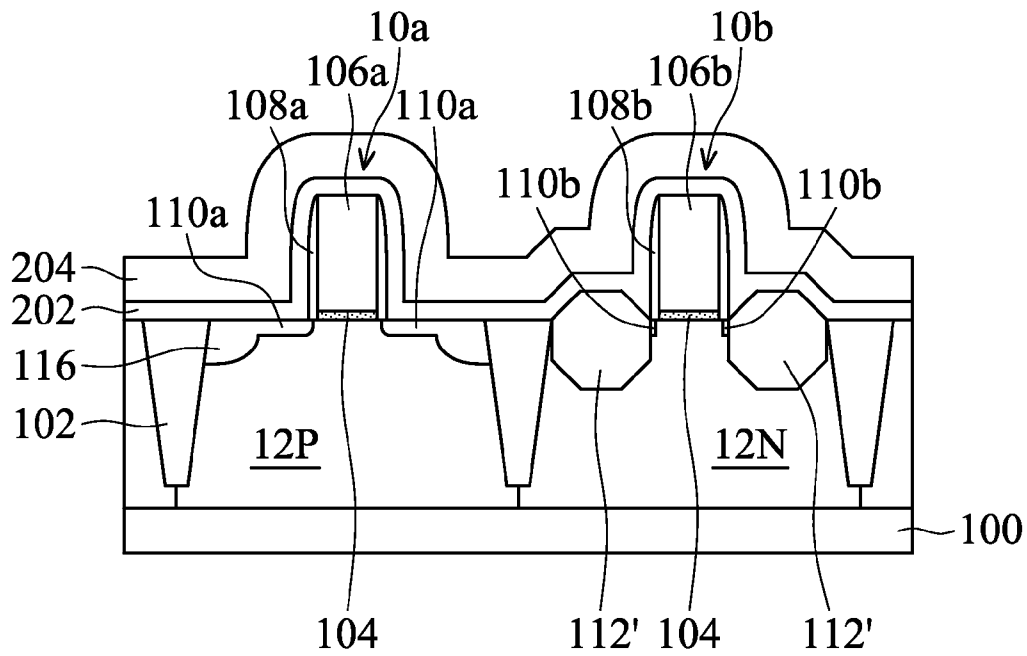


FIG. 1E

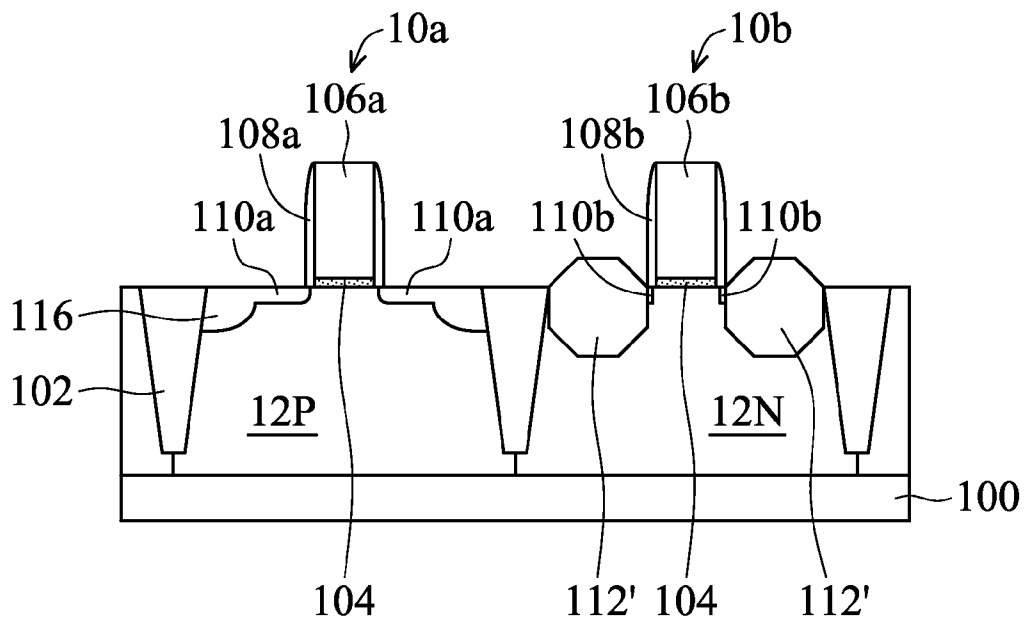


FIG. 1F

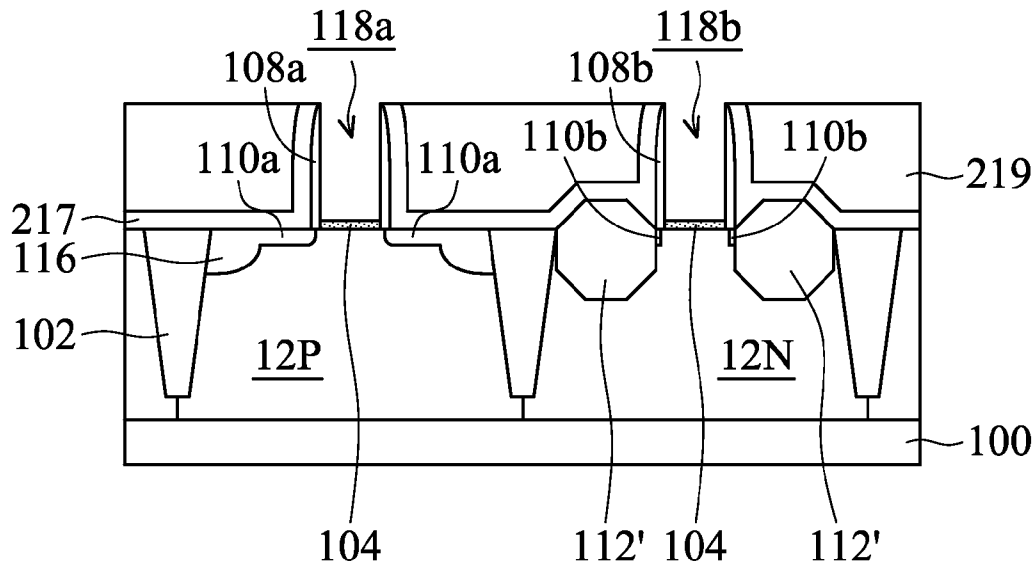


FIG. 1G

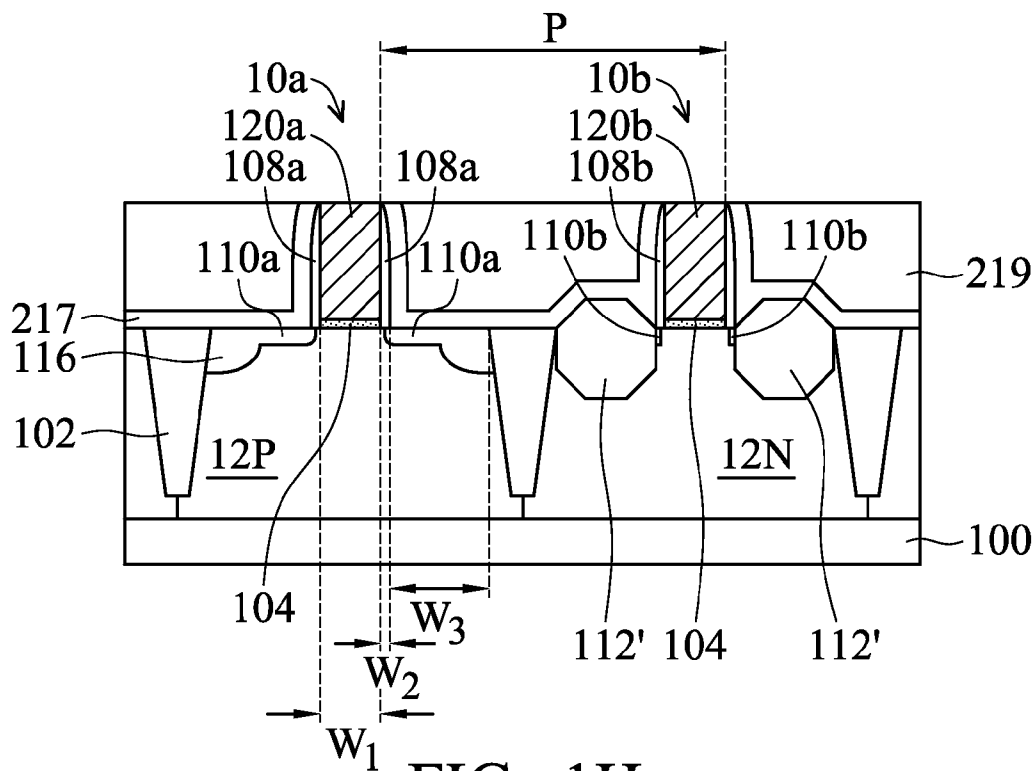


FIG. 1H

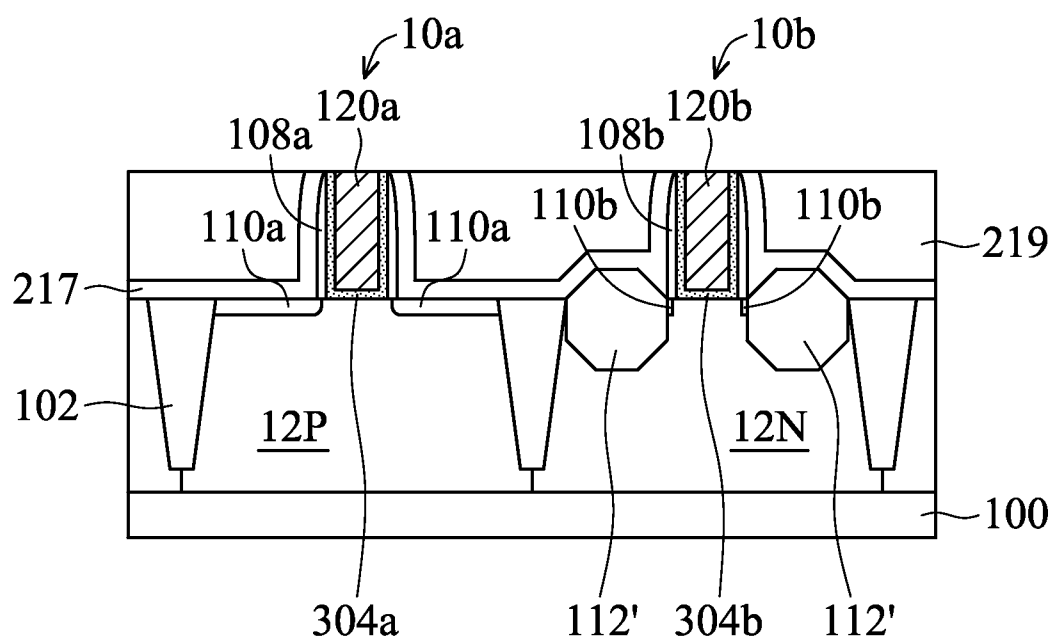


FIG. 2

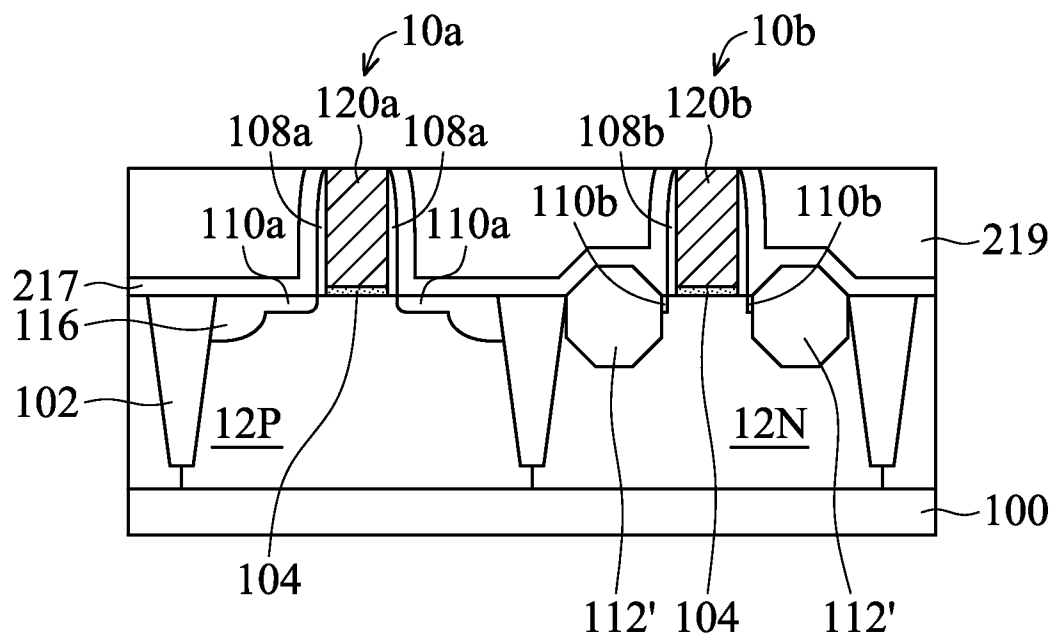


FIG. 3

1

METHOD FOR FORMING A SEMICONDUCTOR DEVICE STRUCTURE

BACKGROUND

The semiconductor integrated circuit (IC) industry has experienced rapid growth. Technological advances in IC materials and design have produced generations of ICs. Each generation has smaller and more complex circuits than the previous generation.

In the course of IC evolution, functional density (i.e., the number of interconnected devices per chip area) has generally increased while geometric size (i.e., the smallest component (or line) that can be created using a fabrication process) has decreased. This scaling-down process generally provides benefits by increasing production efficiency and lowering associated costs.

However, these advances have increased the complexity of processing and manufacturing ICs. Since the feature sizes continue to decrease, fabrication processes continue to become more difficult to perform. Therefore, it is a challenge to form reliable semiconductor devices with smaller and smaller sizes.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the illustrative embodiments and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings.

FIGS. 1A-1H are cross-sectional views of various stages of a process for forming a semiconductor device structure, in accordance with some embodiments.

FIG. 2 is a cross-sectional view of a semiconductor device structure, in accordance with some embodiments.

FIG. 3 is a cross-sectional view of a semiconductor device structure, in accordance with some embodiments.

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENTS

The making and using of various embodiments of the disclosure are discussed in detail below. It should be appreciated, however, that the various embodiments can be embodied in a wide variety of specific contexts. The specific embodiments discussed are merely illustrative, and do not limit the scope of the disclosure.

It is to be understood that the following disclosure provides many different embodiments, or examples, for implementing different features of the disclosure. Specific examples of components and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to be limiting. Moreover, the performance of a first process before a second process in the description that follows may include embodiments in which the second process is performed immediately after the first process, and may also include embodiments in which additional processes may be performed between the first and second processes. Various features may be arbitrarily drawn in different scales for the sake of simplicity and clarity. Furthermore, the formation of a first feature over or on a second feature in the description that follows include embodiments in which the first and second features are formed in direct contact, and may also include embodiments in which additional features may be formed between the first and second features, such that the first and second features may not be in direct contact.

2

Some variations of the embodiments are described. Throughout the various views and illustrative embodiments, like reference numbers are used to designate like elements. Additional operations may be provided before, during, and after the method, and some of the operations described may be replaced or eliminated for other embodiments of the method.

FIGS. 1A-1H are cross-sectional views of various stages of a process for forming a semiconductor device structure, in accordance with some embodiments. As shown in FIG. 1A, a semiconductor substrate **100** is provided. In some embodiments, the semiconductor substrate **100** is a semiconductor wafer (such as a silicon wafer) or a portion of a semiconductor wafer. In some embodiments, the semiconductor substrate **100** includes an elementary semiconductor material including silicon or germanium in a single crystal, polycrystal, or amorphous structure. In some other embodiments, the semiconductor substrate **100** includes a compound semiconductor, such as silicon carbide, gallium arsenide, gallium phosphide, indium phosphide, indium arsenide, an alloy semiconductor, such as SiGe, GaAsP, AlInAs, AlGaAs, GaInAs, GaInP, GaInAsP, or a combination thereof. In some embodiments, the semiconductor substrate **100** includes multi-layer semiconductors, a semiconductor on insulator (SOI) (such as silicon on insulator or germanium on insulator), or a combination thereof.

As shown in FIG. 1F, the dummy shielding layer **204** and the ARD layer **202** (if formed) are removed, in accordance with some embodiments. In some embodiments, the dummy shielding layer **204** is completely removed. In some embodiments, the dummy shielding layer **204** is made of a photoresist material. Therefore, the dummy shielding layer **204** may be easily removed by using an ashing process or stripping process. In some embodiments, the dummy shielding layer **204** acts as a temporary main spacer and is easily removed. In some embodiments, after the dummy shielding layer **204** is removed, no area is occupied by the dummy shielding layer **204** (the temporary main spacer). As a result, the contact landing area is increased. In some embodiments, it is not necessary to form a dielectric layer and carefully etch and tune the profile for forming a main spacer. Process time and cost are significantly reduced. When designing patterns of the gate stacks, it is not necessary to define areas for forming the main spacers, in accordance with some embodiments. More dense patterns may be designed. Pitches between gate stacks may be reduced.

In some embodiments, a P-well region **12P** and an N-well region **12N** are formed sequentially in the semiconductor substrate **100**, as shown in FIG. 1A. In some embodiments, separate ion implantation processes are performed to form the P-well region **12P** and the N-well region **12N**, respectively. By using two different implantation mask layers, the P-well region **12P** and the N-well region **12N** are sequentially formed in different ion implantation processes.

In some embodiments, a first implantation mask layer (not shown) is used to cover a first portion of the semiconductor substrate **100**. The first implantation mask layer has an opening which exposes another portion of the semiconductor substrate **100**. In some embodiments, the first implantation mask layer is a patterned photoresist layer. In some other embodiments, the first implantation mask layer is a patterned dielectric layer, such as a silicon nitride layer. Afterwards, a first ion implantation process is performed on the exposed portion of the semiconductor substrate **100** to form a well region such as the P-well region **12P**. For example, P-type dopants are implanted into the exposed portion of the semiconductor

substrate **100** to form the P-well region **12P**. The first implantation mask layer is then removed.

Afterwards, a second implantation mask layer (not shown) is used to cover the P-well region **12P** in some embodiments. The second implantation mask layer has an opening which exposes the portion of the semiconductor substrate **100** previously covered by the first implantation mask layer. In some embodiments, the second implantation mask layer is a patterned photoresist layer. In some other embodiments, the second implantation mask layer is a patterned dielectric layer, such as a silicon nitride layer. Afterwards, a second ion implantation process is performed to form a well region such as the N-well region **12N**. For example, N-type dopants are implanted into the exposed portion of the semiconductor substrate **100** to form the N-well region **12N**.

Afterwards, an annealing process is performed to drive in the implanted dopants in some embodiments. In some other embodiments, the N-well region **12N** is formed before the P-well region **12P**. In some other embodiments, the P-well region is not formed if the semiconductor substrate **100** is a P-type semiconductor substrate. In some other embodiments, the N-well region is not formed if the semiconductor substrate **100** is an N-type semiconductor substrate.

As shown in FIG. 1A, gate stacks are formed over the semiconductor substrate **100**, in accordance with some embodiments. To simplify the diagram, only two gate stacks **10a** and **10b** are depicted. The semiconductor device structure may include fewer or more gate stacks. Each of the gate stacks **10a** and **10b** includes a gate dielectric layer **104** and a gate electrode such as gate electrodes **106a** and **106b** shown in FIG. 1A. In some embodiments, the gate dielectric layer **104** is made of silicon oxide, silicon oxynitride, a high dielectric constant material (high-k material), or a combination thereof. The high dielectric constant material may include hafnium oxide (HfO₂), hafnium silicon oxide (HfSiO), hafnium silicon oxynitride (HfSiON), hafnium tantalum oxide (HfTaO), hafnium titanium oxide (HfTiO), hafnium zirconium oxide (HfZrO), other suitable high-k dielectric materials, or a combination thereof. The high-k material may further include metal oxides, metal nitrides, metal silicates, transition metal-oxides, transition metal-nitrides, transition metal-silicates, oxynitrides of metals, metal aluminates, zirconium silicate, zirconium aluminate, silicon oxide, silicon nitride, silicon oxynitride, zirconium oxide, titanium oxide, aluminum oxide, hafnium dioxide-alumina (HfO₂—Al₂O₃) alloy, other suitable materials, or a combination thereof.

In some embodiments, the gate dielectric layer **104** is deposited by a suitable process, such as atomic layer deposition (ALD), chemical vapor deposition (CVD), physical vapor deposition (PVD), remote plasma CVD (RPCVD), plasma enhanced CVD (PECVD), metal organic CVD (MOCVD), sputtering, plating, other applicable processes, or a combination thereof.

Afterwards, a gate electrode layer is deposited over the gate dielectric layer **104**. In some embodiments, the gate electrode layer is made of polysilicon and formed, for example, by using a CVD process or other suitable processes.

Afterwards, the gate dielectric layer **104** and the gate electrode layer are patterned, for example, by using a photolithography process and an etching process so as to form the gate stacks including the gate stacks **10a** and **10b**. The gate electrode layer is therefore patterned to be multiple gate electrodes including the gate electrodes **106a** and **106b**, as shown in FIG. 1A.

Afterwards, one or more sealing structures, such as sealing structures **108a** and **108b**, are formed over sidewalls of the gate stacks **10a** and **10b**, as shown in FIG. 1A in accordance

with some embodiments. The sealing structures **108a** and **108b** may be used to protect the gate stacks **10a** and **10b** from damage when subsequent process operations are performed. In some embodiments, the sealing structures **108a** and **108b** are made of a dielectric material. The dielectric material includes, for example, silicon nitride, silicon oxide, silicon oxynitride, other suitable materials, or a combination thereof. In some embodiments, a sealing layer is deposited over the gate stacks **10a** and **10b** and the semiconductor substrate **100** by using a suitable process, such as a CVD process. Afterwards, an etching process, such as a dry etching process, is performed to partially remove the sealing layer. The sealing layer remaining on the opposite sidewalls of the gate stacks **10a** and **10b** form the sealing structures **108a** and **108b**.

Afterwards, doped regions **110a** and **110b** are formed in the semiconductor substrate **100**, as shown in FIG. 1A in accordance with some embodiments. Separate ion implantation processes are performed to sequentially form the doped regions **110a** and **110b**. In some embodiments, an implantation mask layer (not shown) is used to cover the N-well region **12N**. Afterwards, an implantation process is performed, also with the gate stack **10a** as an implantation mask, to form the doped regions **110a**. In some embodiments, N-type dopants are implanted into the P-well **12P** to form the doped regions **110a**. Similarly, the doped regions **110b** are formed in the N-well region **12N** using another implantation process. Another implantation mask layer (not shown) is also used to assist in the formation of the doped regions **110b**. Therefore, P-type dopants are implanted into the N-well region **12N** to form the doped regions **110b**, without being implanted into the P-well region **12P**.

The doped regions **110a** and **110b** are respectively on opposite sides of the gate stacks **10a** and **10b** and in the semiconductor substrate **100**. In some embodiments, a portion of the doped region **110a** is near the gate stack **10a** and underneath the sealing structure **108a**. In some embodiments, the doped region **110a** serves as a lightly-doped source/drain region (LDS/D region). In some embodiments, a portion of the doped region **110b** is near the gate stack **10b** and underneath the sealing structure **108b**. In some embodiments, the doped region **110b** serves as an LDS/D region. In some embodiments, the implantation processes are performed at a tilt angle such that the formed doped regions **110a** and **110b** extend under the gate stacks **10a** and **10b**, respectively.

As shown in FIG. 1B, a portion of the semiconductor substrate **100** is removed to form recesses **111** in the semiconductor substrate **100**, in accordance with some embodiments. As shown in FIG. 1B, the recesses **111** extend into the N-well region **12N** from a surface of the semiconductor substrate **100**. As shown in FIG. 1B, the doped regions **110b** are partially removed. In some embodiments, the doped regions **110b** are between the recesses **111**. In some embodiments, a photolithography process and an etching process are performed to form the recesses **111**. Embodiments of the disclosure have many variations. In some embodiments, the recesses **111** are formed before the doped regions **110b** are formed.

As shown in FIG. 1C, source/drain stressors **112** are epitaxially grown or formed in the recesses **111**, in accordance with some embodiments. The source/drain stressors **112** include SiGe or other applicable materials, in accordance with some embodiments. In some embodiments, the source/drain stressors **112** are used to provide stress to the channel region under the gate stack **10b** so as to increase the carrier mobility. In some embodiments, the source/drain stressors **112** are simultaneously doped during their growth or formation. Alternatively, a subsequent implantation process is per-

formed to dope the source/drain stressors **112** following the growth or formation of the source/drain stressors **112**. In some embodiments, however, the source/drain stressors **112** are not formed. The recesses **111** are not formed.

As shown in FIG. 1D, a dummy shielding layer **204** is deposited over the semiconductor substrate **100**, the sealing structures **108a** and **108b**, and the gate stacks **10a** and **10b**, in accordance with some embodiments. In some embodiments, the dummy shielding layer **204** functions as a temporary main spacer for subsequent implantation processes.

In some embodiments, the dummy shielding layer **204** is made of a photoresist material. The photoresist material may include a mixture of carbon, hydrogen, and oxygen, other suitable materials, or a combination thereof. In some embodiments, the dummy shielding layer **204** includes a photosensitive polymer. The photosensitive polymer may include poly (methyl) methacrylate (PMMA), acrylic resin, methacrylate resin, hybrid type resin, other suitable photosensitive polymers, or a combination thereof. In some embodiments, the dummy shielding layer **204** includes a photo acid generator such as sulfonium salt, diazomethane, or other suitable photo acid generator. In some embodiments, the dummy shielding layer **204** includes cetyltrimethyl ammonium hydroxide.

In some embodiments, the dummy shielding layer **204** is deposited using a spin-on process, CVD process, other applicable processes, or a combination thereof. The thickness of the dummy shielding layer **204** may be adjusted according to requirements. In some embodiments, the thickness of the dummy shielding layer **204** is in a range from about 5 nm to about 20 nm. In some other embodiments, the thickness of the dummy shielding layer **204** is in a range from about 7 nm to about 15 nm.

In some embodiments, an anti-reflection dielectric (ARD) layer **202** is deposited before depositing the dummy shielding layer **204**. In some embodiments, the ARD layer **202** is made of silicon nitride, titanium nitride, other applicable materials, or a combination thereof. In some embodiments, the ARD layer **202** has a thickness ranging from about 10 Å to about 50 Å. However, in some other embodiments, the ARD layer **202** is not needed or formed.

As shown in FIG. 1E, an implantation process is performed to form doped regions **116** in the semiconductor substrate **100**, in accordance with some embodiments. The dummy shielding layer **204** functions as an implantation mask. Therefore, the doped regions **116** (e.g. S/D region) is formed adjacent to the doped region **110a** (e.g. LDS/D region). In some embodiments, N-type dopants are implanted to form the doped regions **116**. In some embodiments, an implantation mask layer (not shown) is used to ensure that the N-type dopants are not implanted into the source/drain stressors **112**. After the doped regions **116** are formed, the implantation mask layer is removed. In some embodiments, the doped region **116** is a heavily-doped source/drain region (S/D region). After the implantation process is performed on the S/D region, an annealing process, such as a rapid thermal process (RTP), may be performed to repair the crystal structure of the silicon in the S/D region and activate the dopant in the S/D region. As shown in FIG. 1E, the doped region **116** is not covered by the sealing structure **108a** in some embodiments.

In some embodiments, another implantation process is performed to dope the source/drain stressors **112** with suitable dopants. In some embodiments, P-type dopants are implanted into the source/drain stressors **112**. As a result, source and drain regions **112'** are formed on opposite sides of the gate stack **10b**, as shown in FIG. 1E. The implantation process for forming the source and drain regions **112'** may be performed

before or after the formation of the doped regions **116**. Similarly, an implantation mask layer (not shown) may be used to ensure that the dopants are implanted into suitable positions.

As shown in FIG. 1F, the dummy shielding layer **204** and the ARD layer **204** (if formed) are removed, in accordance with some embodiments. In some embodiments, the dummy shielding layer **204** is completely removed. In some embodiments, the dummy shielding layer **204** is made of a photoresist material. Therefore, the dummy shielding layer **204** may be easily removed by using an ashing process or stripping process. In some embodiments, the dummy shielding layer **204** acts as a temporary main spacer and is easily removed. In some embodiments, after the dummy shielding layer **204** is removed, no area is occupied by the dummy shielding layer **204** (the temporary main spacer). As a result, the contact landing area is increased. In some embodiments, it is not necessary to form a dielectric layer and carefully etch and tune the profile for forming a main spacer. Process time and cost are significantly reduced. When designing patterns of the gate stacks, it is not necessary to define areas for forming the main spacers, in accordance with some embodiments. More dense patterns may be designed. Pitches between gate stacks may be reduced.

Afterwards, an etch stop layer **217** is deposited over the semiconductor substrate **100**, the gate stacks **10a** and **10b**, and the sealing structures **108a** and **108b**, as shown in FIG. 1G in accordance with some embodiments. The etch stop layer **217** includes a silicon nitride layer in some embodiments. In some embodiments, the etch stop layer **217** is conformally deposited over the semiconductor substrate **100**. In some embodiments, the etch stop layer **217** is formed by using a suitable process, such as a CVD process. In some embodiments, the etch stop layer **217** also serves as a stressor layer, which increases the carrier mobility in the channel regions under the gate stacks, thus improving the operation of a semiconductor device formed thereby.

As shown in FIG. 1G, the etch stop layer **217** is in direct contact with the sealing structures **108a** and **108b**, in accordance with some embodiments. In some embodiments, there is no main spacer or intermediate layer between the sealing structure (**108a** or **108b**) and the etch stop layer **217**. In some embodiments, the entire outer surface of the sealing structure (**108a** or **108b**) is in direct contact with the etch stop layer **217**.

Afterwards, an insulating layer **219** is deposited over the etch stop layer **217**, as shown in FIG. 1G in accordance with some embodiments. In some embodiments, the insulating layer **219** is made of a suitable dielectric material. The suitable dielectric material may include silicon oxide, silicon oxynitride, borosilicate glass (BSG), phosphoric silicate glass (PSG), borophosphosilicate glass (BPSG), fluorinated silicate glass (FSG), low-k material, porous dielectric material, other applicable materials, or a combination thereof. A suitable process, such as a CVD process, HDPCVD process, spin-on process, sputtering process, or a combination thereof, is performed to form the insulating layer **219**, in accordance with some embodiments.

In some embodiments, a planarization process is performed to thin down the insulating layer **219**. After the planarization process, the insulating layer **219** has a substantially planar surface to facilitate subsequent process operations. The planarization process includes, for example, a chemical mechanical polishing (CMP) process. In some embodiments, one or more metal gate replacement processes is/are subsequently performed to replace the gate electrodes **106a** and/or **106b** with suitable metal materials. However, embodiments of the disclosure are not limited thereto. In some other embodiments, the gate electrodes **106a** and **106b** are not

replaced. In some other embodiments, one of the gate electrodes **106a** and **106b** is not replaced.

After the planarization of the insulating layer **219**, the gate electrodes **106a** and **106b**, which serve as dummy gate electrodes, are removed to form openings **118a** and **118b**, as shown in FIG. 1G in accordance with some embodiments. In some embodiments, an etching process is performed to remove the gate electrodes **106a** and **106b** simultaneously. In some other embodiments, the gate electrodes **106a** and **106b** are separately removed in different etching processes.

In some embodiments, the gate electrodes **106a** and **106b** are removed using a wet etching process. For example, an etching solution containing NH_4OH solution, dilute-HF, other suitable etching solution, or a combination thereof may be used. In some embodiments, the gate electrodes **106a** and **106b** are removed using a dry etching process. Example etchants includes fluorine and/or chlorine based etchants.

As shown in FIG. 1H, metal gate electrodes **120a** and **120b** are sequentially formed in the openings **118a** and **118b**, in accordance with some embodiments. Each of the metal gate electrodes **120a** and **120b** includes a work function layer(s) and a gate electrode layer in some embodiments. The gate electrode layer is used to provide electrical connection between the work function layer(s) and a subsequently formed contact coupled to the gate electrode layer. In some embodiments, the gate electrode layer is made of a suitable metal material. The suitable metal material may include aluminum, tungsten, gold, platinum, cobalt, other suitable metal materials, an alloy thereof, or a combination thereof.

The work function layer(s) provides the desired work function for transistors to enhance device performance, including improved threshold voltage. In the embodiments of forming an NMOS transistor, the work function layer(s) can be an N-type metal capable of providing a work function value suitable for the device. The work function value is, for example, equal to or less than about 4.5 eV. The n-type metal may include metal, metal carbide, metal nitride, or a combination thereof. For example, the N-type metal includes tantalum, tantalum nitride, or a combination thereof. In some embodiments, the metal gate electrode **120a** includes the N-type metal.

On the other hand, in the embodiments of forming a PMOS transistor, the work function layer(s) can be a P-type metal capable of providing a work function value suitable for the device. The work function value is, for example, equal to or greater than about 4.8 eV. The P-type metal may include metal, metal carbide, metal nitride, other suitable materials, or a combination thereof. For example, the P-type metal includes titanium, titanium nitride, other suitable materials, or a combination thereof. In some embodiments, the metal gate electrode **120b** includes the P-type metal.

The work function layer(s) may also be made of hafnium, zirconium, titanium, tantalum, aluminum, metal carbides (e.g., hafnium carbide, zirconium carbide, titanium carbide, aluminum carbide), aluminides, ruthenium, palladium, platinum, cobalt, nickel, conductive metal oxides, or a combination thereof.

In some embodiments, the metal gate electrode **120a** is formed before the metal gate electrode **120b**. In some embodiments, a mask layer (not shown) is formed to cover and/or fill the opening **118b** to ensure the metal gate electrode **120a** is formed in the opening **118a** and not formed in the opening **118b**. The mask layer may also be referred to as a blocking layer. In some embodiments, the mask layer is made of polysilicon, amorphous silicon, silicon nitride, silicon oxide, spin-on glass, other suitable materials, or a combination thereof.

In some embodiments, a hard mask material is deposited over the insulating layer **219** to overfill the openings **118a** and **118b**. Afterwards, a planarization process is performed to remove the hard mask material outside of the openings **118a** and **118b**. In some embodiments, a masking element (not shown) is formed to cover the hard mask material remaining in the opening **118b** such that the hard mask material remaining in the opening **118a** is exposed. The masking element is a patterned photoresist layer in some embodiments. Afterwards, the hard mask material in the opening **118a** is removed by using a suitable etchant, in accordance with some embodiments. The masking element is then removed. As a result, the hard mask material remaining in the opening **118b** forms the mask layer covering and/or filling the opening **118b** in some embodiments. In some embodiments, the mask layer is used to ensure the metal gate electrode **120a** is formed in the opening **118a** and not formed in the opening **118b**.

In some embodiments, the work function layer(s) (such as an N-type metal) is deposited over the insulating layer **219** and sidewalls and bottoms of the opening **118a** by using a suitable deposition process. The suitable deposition process may include a PVD process, plating process, CVD process, other applicable processes, or a combination thereof. Afterwards, the gate electrode layer is deposited over the work function layer(s) by using, for example, a PVD process, plating process, CVD process, or the like. The gate electrode layer and the work function layer(s) are then patterned to remove the portions outside of the opening **118a**. In some embodiments, a planarization process, such as a CMP process, is performed to remove the portions outside of the opening **118a**. As a result, the metal gate electrode **120a** is formed. Afterwards, the mask layer covering and/or filling the opening **118b** is removed.

Afterwards, the metal gate electrode **120b** is formed in the opening **118b**, as shown in FIG. 1H in accordance with some embodiments. The work function layer(s) (such as a P-type metal) and the gate electrode layer are subsequently formed to fill the opening **118b** and patterned to form the metal gate electrode **120b**. It should be appreciated, however, that embodiments of the disclosure are not limited thereto. In some other embodiments, the metal gate electrode **120b** is formed before the metal gate electrode **120a**.

Embodiments of the disclosure have many variations. As mentioned above, the gate electrodes **106a** and **106b** may be separately removed in different etching processes. In some embodiments, the gate electrode **106a** is removed in a first etching process, and the gate electrode **106b** is covered by a mask layer (not shown) and remains. Afterwards, the metal gate electrode **120a** is formed in the opening **118a**. The gate electrode **106b** is removed after the metal gate electrode **120a** is formed. Afterwards, the metal gate electrode **120b** is formed in the opening **118b**.

In some other embodiments, a first replacement process is performed to replace the gate electrode **106b** with the metal gate electrode **120b**. Afterwards, a second replacement process is performed to replace the gate electrode **106a** with the metal gate electrode **120a**.

As shown in FIG. 1H, the gate stack **10a** has a thickness or width W_1 . In some embodiments, the width W_1 is in a range from about 10 nm to about 40 nm. As shown in FIG. 1H, the sealing structure **108a** has a thickness or width W_2 in a range from about 5 nm to about 15 nm in some embodiments. In some other embodiments, the width W_2 is in a range from about 7 nm to about 10 nm. In some embodiments, the width W_2 is the width of the bottom portion of the sealing structure **108a**.

In some embodiments, the width W_1 of the gate stack **10a** is larger than the width W_2 of the sealing structure **108a**. In some embodiments, a width ratio of the sealing structure **108a** to the gate stack **10a** (W_2/W_1) is in a range from about 0.05 to about 0.7. In some other embodiments, the width ratio (W_2/W_1) is in a range from about 0.1 to about 0.5.

As mentioned above, the dummy shielding layer **204** is used as a temporary main spacer and is removed after S/D regions are formed. The area used for contact landing is not occupied by any main spacer. As a result, the contact landing area is increased. As shown in FIG. 1H, the contact landing area is substantially equal to a width W_3 . In some embodiments, the width W_3 is measured from a lower surface of the sealing structure **108a** to an outer edge of the isolation structure **102**. In some embodiments, the width W_3 is in a range from about 20 nm to about 50 nm. In some other embodiments, the width W_3 is in a range from about 30 nm to about 40 nm. Therefore, it is easier to form a contact above a larger contact landing area since no main spacer occupies the contact landing area. The performance and yield are improved accordingly.

As shown in FIG. 1H, the semiconductor device structure has a gate-to-gate pitch P . Since no space is occupied by a main spacer or the temporary main spacer (the dummy shielding layer **204** which have been removed), the gate-to-gate pitch P is reduced, compared with other semiconductor device structures with main spacers. In some embodiments, the gate-to-gate pitch P is in a range from about 30 nm to about 90 nm. In some other embodiments, the gate-to-gate pitch P is in a range from about 40 nm to about 70 nm.

The metal gate electrodes **120a** and **120b** are respectively in direct contact with the sealing structures **108a** and **108b**, as shown in FIG. 1H in accordance with some embodiments. For example, the sealing structures **108a** and **108b** are in direct contact with the work function layers of the metal gate electrodes **120a** and **120b**, respectively. However, in some other embodiments, there is another layer between the metal gate electrode and the sealing structure, which will be described in more detail below.

FIG. 2 is a cross-sectional view of a semiconductor device structure, in accordance with some embodiments. In some embodiments, the gate dielectric layer **104** is also replaced with other gate dielectric layer(s). As shown in FIG. 2, gate dielectric layers **304a** and **304b** are sequentially formed over the bottoms and the sidewalls of the openings **118a** and **118b** to replace the gate dielectric layer **104**, in accordance with some embodiments. In some other embodiments, the gate dielectric layers **304a** and **304b** are patterned from the same dielectric layer. In these cases, the materials of the gate dielectric layers **304a** and **304b** are the same. In some embodiments, after the gate dielectric layers **304a** and **304b** are formed, a mask layer (not shown) is formed to cover and/or fill one of the openings (**118a** or **118b**) to assist in subsequent formation of metal gate electrodes **120a** and **120b**. Similar to the embodiments shown in FIG. 1H, the metal gate electrodes **120a** and **120b** are sequentially formed.

The gate dielectric layers **304a** and **304b** may include a high dielectric constant material (high-k material). The high-k material may include hafnium oxide (HfO_2), hafnium silicon oxide (HfSiO), hafnium silicon oxynitride (HfSiON), hafnium tantalum oxide (HfTaO), hafnium titanium oxide (HfTiO), hafnium zirconium oxide (HfZrO), other suitable high-k dielectric materials, or a combination thereof. The high-k material may further include metal oxides, metal nitrides, metal silicates, transition metal-oxides, transition metal-nitrides, transition metal-silicates, oxynitrides of metals, metal aluminates, zirconium silicate, zirconium alumi-

nate, silicon oxide, silicon nitride, silicon oxynitride, zirconium oxide, titanium oxide, aluminum oxide, hafnium dioxide-alumina ($\text{HfO}_2\text{—Al}_2\text{O}_3$) alloy, other suitable materials, or a combination thereof.

As shown in FIG. 2, the metal gate electrode **120a** or **120b** is not in direct contact with the sealing structure **108a** or **108b**, in accordance with some embodiments. The gate dielectric layer **304a** (or **304b**) separates the metal gate electrode **120a** (or **120b**) from the sealing structure **108a** (or **108b**). In some embodiments, portions of the LDS/D regions (such as the doped regions **110a** and **110b**) are covered by the sealing structures **108a** and **108b**, respectively.

Embodiments of the disclosure have many variations. For example, the LDS/D region (such as the doped regions **110a** or **110b**) is not limited to being covered by the sealing structure. FIG. 3 is a cross-sectional view of a semiconductor device structure, in accordance with some embodiments. As shown in FIG. 3, a terminal portion of the LDS/D region (such as the doped region **110a** or **110b**) and an outer surface of the sealing structure (such as the sealing structure **108a** or **108b**) are aligned or substantially aligned with each other, in accordance with some embodiments. In some embodiments, the LDS/D region (such as the doped region **110a** or **110b**) is not covered by or do not extend under the sealing structure **108a** or **108b**.

Embodiments for forming a semiconductor device structure are provided. A dummy shielding layer, such as a photoresist layer, is used as a temporary main spacer to assist in the implantation process for forming the source and drain regions (e.g. heavily doped source and drain regions) of the semiconductor device structure. The dummy shielding layer can be easily removed afterwards such that there is no main spacer remaining over the gate stacks of the semiconductor device structure. Therefore, the gate to gate pitch is reduced, and the contact landing area is increased. Since it is not necessary to form a dielectric layer and carefully etch and tune the profile for forming a main spacer, process time and cost are significantly reduced. The yield and the reliability of the semiconductor device structure are therefore improved.

In accordance with some embodiments, a method for forming a semiconductor device structure is provided. The method includes forming a gate stack over a semiconductor substrate and forming a sealing structure over a sidewall of the gate stack. The method also includes forming a dummy shielding layer over the semiconductor substrate, the sealing structure, and the gate stack. The method further includes performing an ion implantation process on the dummy shielding layer to form source and drain regions in the semiconductor substrate. In addition, the method includes removing the dummy shielding layer after the source and drain regions are formed.

In accordance with some embodiments, a method for forming a semiconductor device structure is provided. The method includes forming a first gate stack and a second gate stack over a semiconductor substrate and forming sealing structures over sidewalls of the first gate stack and the second gate stack, respectively. The method also includes forming a dummy shielding layer over the sealing structures. The method further includes sequentially performing ion implantation processes on the dummy shielding layer to sequentially form first source and drain regions and second source and drain regions in the semiconductor substrate and on opposite sides of the first gate stack and the second gate stack, respectively. In addition, the method includes removing the dummy shielding layer after the first source and drain regions and the second source and drain regions are formed.

In accordance with some embodiments, a semiconductor device structure is provided. The semiconductor device struc-

11

ture includes a semiconductor substrate and a gate stack over the semiconductor substrate. The semiconductor device structure also includes a sealing structure over a sidewall of the gate stack, and a width ratio of the sealing structure to the gate stack is in a range from about 0.05 to about 0.7. The semiconductor device structure further includes an etch stop layer over the semiconductor substrate, the gate stack, and the sealing structure. The etch stop layer is in direct contact with the sealing structure.

Although the embodiments and their advantages have been described in detail, it should be understood that various changes, substitutions, and alterations can be made herein without departing from the spirit and scope of the embodiments as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods, and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed, that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the disclosure. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps. In addition, each claim constitutes a separate embodiment, and the combination of various claims and embodiments are within the scope of the disclosure.

What is claimed is:

1. A method for forming a semiconductor device structure, comprising:
 - forming a gate stack over a semiconductor substrate;
 - forming a sealing structure over a sidewall of the gate stack;
 - forming a dummy shielding layer over the semiconductor substrate, the sealing structure, and the gate stack;
 - performing an ion implantation process on the dummy shielding layer to form source and drain regions in the semiconductor substrate; and
 - removing the dummy shielding layer after the source and drain regions are formed such that substantially no dummy shielding layer remains on the source and drain regions.
2. The method for forming a semiconductor device structure as claimed in claim 1, further comprising forming a lightly doped source and drain (LDS/D) region in the semiconductor substrate after the sealing structure is formed and before the dummy shielding layer is formed.
3. The method for forming a semiconductor device structure as claimed in claim 1, further comprising forming an etch stop layer over the semiconductor substrate, the sealing structure, and the gate stack.
4. The method for forming a semiconductor device structure as claimed in claim 1, wherein a width of the sealing structure is in a range from about 5 nm to about 15 nm.
5. The method for forming a semiconductor device structure as claimed in claim 1, wherein a width ratio of the sealing structure to the gate stack is in a range from about 0.05 to about 0.7.
6. The method for forming a semiconductor device structure as claimed in claim 1, wherein the dummy shielding layer is completely removed.
7. The method for forming a semiconductor device structure as claimed in claim 1, further comprising replacing a gate electrode of the gate stack with a metal gate electrode.

12

8. A method for forming a semiconductor device structure, comprising:
 - forming a gate stack over a semiconductor substrate;
 - forming a sealing structure over a sidewall of the gate stack;
 - forming a dummy shielding layer over the semiconductor substrate, the sealing structure, and the gate stack, wherein the dummy shielding layer comprises a photoresist material;
 - performing an ion implantation process on the dummy shielding layer to form source and drain regions in the semiconductor substrate; and
 - removing the dummy shielding layer after the source and drain regions are formed.
9. The method for forming a semiconductor device structure as claimed in claim 8, further comprising forming an anti-reflection dielectric (ARD) layer over the semiconductor substrate, the sealing structure, and the gate stack before the dummy shielding layer is formed.
10. The method for forming a semiconductor device structure as claimed in claim 9, further comprising removing the ARD layer.
11. A method for forming a semiconductor device structure, comprising:
 - forming a first gate stack and a second gate stack over a semiconductor substrate;
 - forming sealing structures over sidewalls of the first gate stack and the second gate stack, respectively;
 - forming a dummy shielding layer over the sealing structures;
 - sequentially performing ion implantation processes on the dummy shielding layer to sequentially form first source and drain regions and second source and drain regions in the semiconductor substrate and on opposite sides of the first gate stack and the second gate stack, respectively; and
 - removing the dummy shielding layer after the first source and drain regions and the second source and drain regions are formed such that substantially no dummy shielding layer remains on the sealing structures.
12. The method for forming a semiconductor device structure as claimed in claim 11, wherein the first source and drain regions and the second source and drain regions are implanted with different dopants.
13. The method for forming a semiconductor device structure as claimed in claim 11, wherein the dummy shielding layer includes a photosensitive polymer.
14. The method for forming a semiconductor device structure as claimed in claim 11, wherein the dummy shielding layer is completely removed.
15. The method for forming a semiconductor device structure as claimed in claim 11, further comprising:
 - replacing a first gate electrode of the first gate stack with a first metal gate electrode; and
 - replacing a second gate electrode of the second gate stack with a second metal gate electrode.
16. The method for forming a semiconductor device structure as claimed in claim 15, wherein the first metal gate electrode is in direct contact with one of the sealing structures.
17. The method for forming a semiconductor device structure as claimed in claim 11, further comprising forming an etch stop layer directly on the sealing structures.
18. The method for forming a semiconductor device structure as claimed in claim 17, wherein width ratio of one of the sealing structures to one of the first gate stack and the second gate stack is in a range from about 0.05 to about 0.7.

13

19. The method for forming a semiconductor device structure as claimed in claim **11**, further comprising forming an anti-reflection dielectric (ARD) layer over the semiconductor substrate, the sealing structures, the first gate stack, and the second gate stack before the dummy shielding layer is formed. 5

20. The method for forming a semiconductor device structure as claimed in claim **19**, further comprising removing the ARD layer.

* * * * *

10

14