

LEON W. COUCH II

*Professor of Electrical Engineering
University of Florida, Gainesville*

DIGITAL AND ANALOG COMMUNICATION SYSTEMS

Second Edition

Macmillan Publishing Company

New York

Collier Macmillan Publishers

London

Copyright © 1987, Macmillan Publishing Company, a
division of Macmillan, Inc.

Printed in the United States of America

All rights reserved. No part of this book may be
reproduced or transmitted in any form or by any means,
electronic or mechanical, including photocopying,
recording, or any information storage and retrieval
system, without permission in writing from the publisher.

Earlier edition copyright © 1983 by Macmillan
Publishing Company

Macmillan Publishing Company
866 Third Avenue, New York, New York 10022
Collier Macmillan Canada, Inc.

Library of Congress Cataloging in Publication Data

Couch, Leon W.

Digital and analog communication systems.

Bibliography: p.

Includes index.

1. Telecommunication systems. 2. Digital
communications. I. Title.

TK5101.C69 1987 621.38'0413 86-8739
ISBN 0-02-325380-0

Printing: 1 2 3 4 5 6 7 8

Year: 7 8 9 0 1 2 3 4 5

ISBN 0-02-325380-0

*To my wife,
Margaret Wheland Couch,
and
To our children,
Leon III, Jonathan, and Rebecca*

PREFACE

This new edition provides the latest up-to-date treatment of digital and analog communication systems. It is written as a textbook for junior or senior engineering students and is appropriate also for an introductory graduate course or as a modern technical reference for practicing electrical engineers. It covers *practical aspects* of communications systems developed from a sound *theoretical basis*.

The Theoretical Basis

- Representation of digital signals
- Representation of analog signals
- Magnitude and phase spectra
- Fourier analysis
- Power spectral density
- Linear systems
- Nonlinear systems
- Modulation theory
- Random variables
- Probability density
- Random processes
- Calculation of (S/N)
- Calculation of BER
- Optimum systems

- Simulation of communication systems
- Intersymbol interference
- Block codes
- Convolutional codes

The Practical Applications

- PAM, PCM, DPCM, DM, PWM, and PPM baseband signaling
- OOK, BPSK, QPSK, MPSK, MSK, and QAM bandpass digital signaling
- AM, DSB-SC, SSB, VSB, PM, and FM bandpass analog signaling
- Time division multiplexing and the standards used
- Frequency division multiplexing and the standards used
- Common carrier systems
- Satellite communication systems
- Effective input-noise temperature and noise figure
- Link budget analysis
- Fiber optic systems
- Spread spectrum systems
- Television systems
- Technical standards for AM, FM, TV, and CATV
- Computer communication systems
- Protocols for computer communications
- Technical standards for computer communications
- Math tables
- Illustrative examples
- 383 homework problems with selected answers
- Extensive references

The practical aspects are exhibited by describing the circuitry that is used in communication systems and summarizing the technical standards that have been adopted for digital, analog, and computer communication systems. The theoretical aspects are presented by using a sound mathematical basis that is made clear by the use of a definition, theorem, proof format with worked examples.

This book is an outgrowth of my teaching of graduate as well as undergraduate communication courses at the University of Florida. I believe that the reader does not fully understand the technical material unless he or she has the oppor-

tunity to work problems. Consequently, over 380 problems have been included. Some of them are easy so that the beginning student will not become frustrated, and some are difficult enough to challenge the more advanced student. All the problems are designed to provoke thought about, and understanding of, communication systems.

The contents of this book may be divided into two main parts. Chapters 1 through 5 develop communication systems from a nonrandom signal viewpoint. This allows the reader to grasp some very important ideas without having to learn (or know) statistical concepts at the same time. In the second part of the book, Chapters 6 through 8 plus Appendix B, statistical concepts are developed and used. Statistical concepts are needed to analyze and design communication systems that are operating in the presence of noise. Some sections of Chapters 1 through 5 are marked with a star (★). This indicates that the mathematical developments of these sections are more difficult and generally use statistical concepts. On the first reading, the beginning student should be concerned with the results of the starred sections and should not labor over the mathematical details until he or she has gained more mathematical expertise, developed in later chapters. The starred sections are included because the results are significant, and it is hoped that these sections will motivate the beginning student to continue to study the exciting subject of communications.

The contents of the book are further subdivided as follows. Chapter 1 provides clear definitions of digital and analog signals as well as giving historical perspective and theoretical limits on the performance of communication systems. Chapter 2 develops the topics of spectra, orthogonal representations, and Fourier theory. Linear system concepts are reviewed. Chapter 3 covers baseband pulse and baseband digital signaling techniques, line codes and their spectra, and the prevention of intersymbol interference. Chapter 4 introduces bandpass communication circuits and develops the theory and practice of bandpass communication systems (amplitude modulation, frequency modulation, etc.). Chapter 5 provides examples of telephone, television, fiber optic, spread spectrum, digital, and satellite communication systems. Summaries of technical standards are given. Chapter 6 develops the mathematical topic of random processes that is needed for analyzing the effects of noise. Chapter 7 describes the performance of digital and analog communication systems that are corrupted by noise. Chapter 8 is concerned with the design of optimum digital receivers that combat the effects of noise. Coding theory is also developed. A summary of useful mathematical techniques and tables is given in Appendix A. Appendix B covers the topic of probability and random variables. (This appendix is a prerequisite for Chapter 6 if the reader does not already have such knowledge.) Appendix C gives standards and terminology that are used in computer communication systems.

This book is written to be applicable to many different course structures. These are summarized in the table.

I appreciate the help of the many persons who contributed to this book. In particular I appreciate the very helpful comments that have been provided by

Course Length ^a	Chapters Covered	Course Title and Comments
Undergraduate		
1 term	1, 2, 3, 4, 5 (partially)	Introduction to Digital and Analog Communication Systems (Student background in signals, networks, and statistics not required)
1 quarter	1, 2, 3, 4	
1 term	1, 2 (rapidly), 3, 4, 5	Introduction to Digital and Analog Communication Systems (Student background in statistics not required; knowledge of signals and networks required)
1 quarter	1, 2 (rapidly), 3, 4	
1 term	1, Appendix B, 6, 7	Digital and Analog Communication Systems in Noise (A course in probability, random variables, random processes, and applications to communication systems)
1 quarter	1, Appendix B, 6, Secs. 7-1 to 7-6	Digital Communication Systems in Noise
1 quarter	1, Appendix B, 6, Sec. 7-8	Analog Communication Systems in Noise
1 term	1, 2 (rapidly), 3, 4, 7	Digital and Analog Communication Systems (Prior course in random processes required)
Two terms		Communication I—Introduction to Communication Systems Communication II—Performance of Communication Systems in Noise
1st term	1, 2 (rapidly), 3, 4, 5	
2nd term	Appendix B, 6, 7	
Three quarters		Communication I—Introduction to Communication Systems Communication II—Communication Systems and Noise
1st quarter	1, 2 (rapidly), 3, 4	
2nd quarter	5, Appendix B, 6	Communication III—Performance of Communication Systems and Optimum Digital Receivers
3rd quarter	7, 8	
Graduate		
1 term	1, Appendix B, 6, 7, Secs. 8-1 to 8-4	Introduction to Communication Systems (Some undergraduate knowledge of communications required)
1 term	1, 6, 7, 8	Introduction to Communication Systems with Optimum Digital Receivers (Knowledge of probability required)

^aOne term is assumed to be equivalent to 3 class hours per week for a semester system or 4 class hours per week for a quarter system. One quarter is assumed to be 3 class hours per week.

the Macmillan reviewers. For the first edition they were Ray W. Nettleton (Litton Amecon), James A. Cadzow (Arizona State University), Dean T. Davis (The Ohio State University), Jerry D. Gibson (Texas A&M University), and Gerald Lachs (Pennsylvania State University). For the second edition they are

Jeff Burl (University of California, Irvine), Donald J. Healy (Georgia Institute of Technology), and Morris (Iowa State University).

One reviewer was especially helpful in providing marked manuscript pages with suggestions and corrections. I also appreciate the help of my colleagues at the University of Florida, including Dr. Peyton Z. Peebles. Special thanks to the many University of Florida students who have been most helpful in making suggestions for this second edition. I also thank Lawrence K. Thompson and Charles S. Prewitt for assistance in preparing the solution manual. I am also grateful to the late Dr. T. S. George who taught me a great deal about communications while I was a graduate student under his direction. I am also very appreciative of the help of my wife, Dr. Margaret Couch, who has typed the original and revised manuscripts and proofread the entire book.

Leon W. Couch II
Gainesville, Florida

CONTENTS

LIST OF SYMBOLS

xxv

1 INTRODUCTION

1

1-1	Classification of Information Sources	3
1-2	Classification of Communication Systems	3
1-3	Deterministic and Random Waveforms	4
1-4	Organization of This Book	5
1-5	The Block Diagram of a Communication System	6
1-6	Frequency Allocations	8
1-7	Propagation of Electromagnetic Waves	10
1-8	Information Measure	13
	<i>Example 1-1</i> Evaluation of Information and Entropy	14
1-9	Ideal Communication Systems	15
1-10	Preview	16
	Problems	17

xiii

2	SIGNALS AND NOISE	19
2-1	Properties of Signals and Noise	19
	PHYSICALLY REALIZABLE WAVEFORMS	20
	TIME AVERAGE OPERATOR	22
	DC VALUE	23
	POWER	23
	<i>Example 2-1</i> Evaluation of Power	24
	RMS VALUE AND NORMALIZED POWER	25
	ENERGY WAVEFORMS AND POWER WAVEFORMS	26
	DECIBEL	27
	PHASORS	29
2-2	Fourier Transform and Spectra	30
	DEFINITION	30
	<i>Example 2-2</i> Spectrum of an Exponential Pulse	32
	PROPERTIES OF FOURIER TRANSFORMS	33
	PARSEVAL'S THEOREM	34
	<i>Example 2-3</i> Spectrum of a Damped Sinusoid	37
	DIRAC DELTA FUNCTION AND UNIT STEP FUNCTION	37
	<i>Example 2-4</i> Spectrum of a Sinusoid	38
	RECTANGULAR AND TRIANGULAR PULSES	40
	<i>Example 2-5</i> Spectrum of a Rectangular Pulse	42
	<i>Example 2-6</i> Spectrum of a Triangular Pulse	43
	CONVOLUTION	44
	<i>Example 2-7</i> Convolution of a Rectangle with an Exponential	45
	<i>Example 2-8</i> Spectrum of a Triangular Pulse by Convolution	46
	<i>Example 2-9</i> Spectrum of a Switched Sinusoid	46
2-3	Power Spectral Density and Autocorrelation Function	47
	POWER SPECTRAL DENSITY (PSD)	47
	AUTOCORRELATION FUNCTION	49
	<i>Example 2-10</i> PSD of a Sinusoid	49
2-4	Orthogonal Series Representation of Signals and Noise	51
	ORTHOGONAL FUNCTIONS	51
	ORTHOGONAL SERIES	52
	VECTOR REPRESENTATIONS OF DIGITAL SIGNALS	54
	<i>Example 2-11</i> Representation of a Digital Signal	55
2-5	Fourier Series	57
	COMPLEX FOURIER SERIES	57
	QUADRATURE FOURIER SERIES	59
	POLAR FOURIER SERIES	60
	LINE SPECTRA FOR PERIODIC WAVEFORMS	61

Example 2-12 Fourier Coefficients for a Square Wave 63

POWER SPECTRAL DENSITY FOR PERIODIC
WAVEFORMS 66

2-6 Review of Linear Systems 66

LINEAR TIME-INVARIANT SYSTEMS 66

IMPULSE RESPONSE 67

TRANSFER FUNCTION 68

Example 2-13 RC Low-Pass Filter 69

DISTORTIONLESS TRANSMISSION 71

Example 2-14 Distortion Caused by a Filter 72

2-7 Bandlimited Signals and Noise 74

BANDLIMITED WAVEFORMS 74

SAMPLING THEOREM 75

DIMENSIONALITY THEOREM 80

DISCRETE FOURIER TRANSFORM 83

2-8 Bandwidth of Signals and Noise 86

Example 2-15 Bandwidths for a BPSK Signal 90

2-9 Summary 94

Problems 95

3 BASEBAND PULSE AND DIGITAL SIGNALING 105

3-1 Introduction 105

3-2 Pulse Amplitude Modulation 106

NATURAL SAMPLING (GATING) 108

INSTANTANEOUS SAMPLING (FLAT-TOP PAM) 111

3-3 Pulse Code Modulation 114

SAMPLING, QUANTIZING, AND ENCODING 115

EFFECTS OF NOISE AND EYE PATTERNS 119

Example 3-1 Design of a PCM system 121

NONUNIFORM QUANTIZING: μ -LAW AND A-LAW
COMPANDING 123

REGENERATIVE REPEATERS AND BIT
SYNCHRONIZERS 127

3-4 Digital Signaling Formats 130

BINARY LINE CODING 130

POWER SPECTRA OF LINE CODES 133

SPECTRAL EFFICIENCY 138

DIFFERENTIAL CODING 138

MULTILEVEL SIGNALING 140

3-5 Intersymbol Interference 142

NYQUIST'S FIRST METHOD (ZERO ISI) 145

RAISED COSINE-ROLLOFF FILTERING 146

Example 3-1 (continued) 148

ZERO-FORCING TRANSVERSAL FILTER EQUALIZERS 151

NYQUIST'S SECOND AND THIRD METHODS FOR CONTROL OF ISI 154

PARTIAL RESPONSE AND DUOBINARY SIGNALING 157

3-6 Differential Pulse Code Modulation 161

3-7 Delta Modulation 164

GRANULAR NOISE AND SLOPE OVERLOAD NOISE 167

Example 3-2 Design of a DM system 169

ADAPTIVE DELTA MODULATION AND CONTINUOUSLY VARIABLE SLOPE DELTA MODULATION 170

3-8 Time Division Multiplexing 173

SYNCHRONOUS AND ASYNCHRONOUS LINES 175

Example 3-3 Design of a Time-Division Multiplexer 176

TDM HIERARCHY 178

THE T1 PCM SYSTEM 180

3-9 Pulse Time Modulation: Pulse Duration Modulation and Pulse Position Modulation 186

3-10 Summary 191

Problems 192

4 BANDPASS SIGNALING TECHNIQUES AND COMPONENTS 202

4-1 Introduction 202

4-2 Representation of Bandpass Waveforms and Systems 203

DEFINITIONS—BASEBAND, BANDPASS, AND MODULATION 203

COMPLEX ENVELOPE REPRESENTATION 204

BANDPASS FILTERING 206

DISTORTIONLESS TRANSMISSION 207

BANDPASS DIMENSIONALITY THEOREM 209

REPRESENTATION OF MODULATED SIGNALS 211

SPECTRUM OF BANDPASS SIGNALS 211

EVALUATION OF POWER 214

Example 4-1 Amplitude-Modulated Signal 215

DIGITAL COMPUTER SIMULATION 216

4-3 Components of Communication Systems 220

FILTERS 220

AMPLIFIERS 224

LIMITERS 230

MIXERS, UP CONVERTERS, AND DOWN
CONVERTERS 231

FREQUENCY MULTIPLIERS 237

ENVELOPE DETECTOR 239

PRODUCT DETECTOR 240

FREQUENCY MODULATION DETECTOR 241

PHASE-LOCKED LOOPS 245

4-4 Transmitters and Receivers 254

GENERALIZED TRANSMITTERS 254

GENERALIZED RECEIVER: THE SUPERHETERODYNE
RECEIVER 256

Example 4-2 AM Broadcast Receiver 257

**4-5 Amplitude Modulation and Double-Sideband
Suppressed Carrier 259**

AMPLITUDE MODULATION 259

Example 4-3 Power of an AM Signal 262

AM BROADCAST TECHNICAL STANDARDS 265

DOUBLE-SIDEBAND SUPPRESSED CARRIER 267

COSTAS LOOP FOR DEMODULATING A DSC-SC SIGNAL OR
A BPSK SIGNAL 267

4-6 Single Sideband and Vestigial Sideband 268

**4-7 Angle Modulation: Phase Modulation and
Frequency Modulation 274**

REPRESENTATION OF PM AND FM SIGNALS 274

SPECTRA OF ANGLE MODULATED SIGNALS 279

Example 4-4 Spectrum of a PM or FM signal with
Sinusoidal Modulation 279

NARROWBAND ANGLE MODULATION 283

WIDEBAND FREQUENCY MODULATION 284

Example 4-5 Spectrum of WBFM with Triangular
Modulation 285

PREEMPHASIS AND DEEMPHASIS IN ANGLE MODULATED
SYSTEMS 287

FM BROADCAST TECHNICAL STANDARDS 289

DOLBY AND DBX NOISE REDUCTION SYSTEMS 289

4-8 Summary 292

Problems 292

5 BANDPASS COMMUNICATION SYSTEMS 305

5-1 Introduction 305

5-2 Digital Communication Systems 306

BINARY SIGNALING 306

	<i>On-Off Keying (OOK)</i>	308	
	<i>Binary-Phase Shift Keying (BPSK)</i>	309	
	<i>Frequency Shift Keying (FSK)</i>	311	
	<i>Example 5-1 Spectrum of the Bell 103 Type FSK Modem</i>	313	
	MULTILEVEL SIGNALING	319	
	<i>Quadrature Phase Shift Keying (QPSK) and M-ary Phase Shift Keying (MPSK)</i>	320	
	<i>Quadrature Amplitude Modulation (QAM)</i>	321	
	<i>PSD for MPSK and QAM</i>	323	
	<i>Minimum Shift Keying (MSK)</i>	326	
5-3	Common Carrier Systems		330
	TIME DIVISION MULTIPLEXING	332	
	FREQUENCY DIVISION MULTIPLEXING	332	
	<i>Example 5-2 FM Stereo</i>	332	
	FDM TELEPHONE HIERARCHY	335	
	TELEPHONE SYSTEMS	335	
	CAPACITIES OF COMMON CARRIER LINKS	337	
5-4	Satellite Communication Systems		340
	TELEVISION SIGNAL TRANSMISSION	343	
	DATA AND TELEPHONE SIGNAL MULTIPLE ACCESS	344	
	<i>Example 5-3 Fixed Assigned Multiple Access Mode Using an FDMA Format</i>	347	
	<i>Example 5-4 SPADE System</i>	347	
5-5	Received Signal-to-Noise Ratio		351
	SIGNAL POWER RECEIVED	351	
	THERMAL NOISE SOURCES	354	
	CHARACTERIZATION OF NOISE SOURCES	355	
	NOISE CHARACTERIZATION OF LINEAR DEVICES	356	
	NOISE CHARACTERIZATION OF CASCADED LINEAR DEVICES	361	
	LINK BUDGET FOR EVALUATION	363	
	E_b/N_o LINK BUDGET FOR DIGITAL SYSTEMS	365	
	<i>Example 5-5 Link Budget Evaluation for a TV Receive-Only Terminal for Satellite Signals</i>	366	
5-6	Fiber Optic Systems		371
	<i>Example 5-6 Link Budget for a Fiber Optic System</i>	371	
5-7	Spread Spectrum Systems		373
	DIRECT SEQUENCE	374	
	FREQUENCY HOPPING	378	
5-8	Television		380
	BLACK-AND-WHITE TELEVISION	380	
	STEREO SOUND	385	
	COLOR TELEVISION	386	
	STANDARDS FOR TV AND CATV SYSTEMS	393	

5-9	Summary	397
	Problems	398
6	RANDOM PROCESSES AND SPECTRAL ANALYSIS	408
6-1	Some Basic Definitions	408
	RANDOM PROCESSES	408
	STATIONARITY AND ERGODICITY	410
	Example 6-1 First-Order Stationarity	411
	Example 6-2 An Ergodic Random Process	413
	CORRELATION FUNCTIONS AND WIDE-SENSE	
	STATIONARITY	414
	COMPLEX RANDOM PROCESSES	417
6-2	Power Spectral Density	418
	DEFINITION	418
	WIENER-KHINTCHINE THEOREM	420
	PROPERTIES OF PSD	422
	Example 6-3 Evaluation of the PSD for a Polar Baseband	
	Signal	423
	A GENERAL FORMULA FOR THE PSD OF BASEBAND	
	DIGITAL SIGNALS	427
	WHITE NOISE PROCESSES	428
	MEASUREMENT OF PSD	429
	Analog Techniques	429
	Numerical Computation of PSD	429
6-3	Dc and Rms Values for Random Processes	430
6-4	Linear Systems	432
	INPUT-OUTPUT RELATIONSHIPS	432
	Example 6-4 Output Autocorrelation and PSD for an RC	
	Low-Pass Filter	435
	Example 6-5 Signal-to-Noise Ratio at the Output of an RC	
	LPF	436
6-5	Bandwidth Measures	437
	EQUIVALENT BANDWIDTH	437
	RMS BANDWIDTH	437
	Example 6-6 Equivalent Bandwidth and Rms Bandwidth for	
	an RC Low-Pass Filter	439
6-6	The Gaussian Random Process	440
	PROPERTIES OF GAUSSIAN PROCESSES	441
	Example 6-7 A White Gaussian Noise Process	444
6-7	Bandpass Processes	444
	BANDPASS REPRESENTATIONS	444
	PROPERTIES OF WIDE-SENSE STATIONARY BANDPASS	
	PROCESSES	448

	<i>Example 6-8</i> Spectra for the Quadrature Components of White Bandpass Noise	451
	<i>Example 6-9</i> PSD for a BPSK Signal	452
	PROOFS OF SOME PROPERTIES	452
	<i>Example 6-10</i> PDF for the Envelope and Phase Functions of a Gaussian Bandpass Process	455
6-8	Matched Filters	458
	GENERAL RESULTS	458
	RESULTS FOR WHITE NOISE	460
	<i>Example 6-11</i> Integrate-and-Dump (Matched) Filter	462
	CORRELATION PROCESSING	464
	<i>Example 6-12</i> Matched Filter for Detection of a BPSK Signal	465
	TRANSVERSAL MATCHED FILTER	467
6-9	Summary	469
	Problems	471

7	PERFORMANCE OF COMMUNICATION SYSTEMS CORRUPTED BY NOISE	481
7-1	Error Probabilities for Binary Signaling	482
	GENERAL RESULTS	482
	RESULTS FOR GAUSSIAN NOISE	485
	RESULTS FOR WHITE GAUSSIAN NOISE AND MATCHED FILTER RECEPTION	487
	RESULTS FOR COLORED GAUSSIAN NOISE AND MATCHED FILTER RECEPTION	488
7-2	Performance of Baseband Binary Systems	489
	UNIPOLAR SIGNALING	489
	POLAR SIGNALING	490
7-3	Coherent Detection of Bandpass Binary Signals	492
	ON-OFF KEYING	492
	BINARY PHASE SHIFT KEYING	494
	FREQUENCY SHIFT KEYING	495
7-4	Noncoherent Detection of Bandpass Binary Signals	499
	ON-OFF KEYING	499
	FREQUENCY SHIFT KEYING	503
	DIFFERENTIAL PHASE SHIFT KEYING	505
7-5	Quadrature Phase Shift Keying and Minimum Shift Keying	507
7-6	Comparison of Digital Signaling Systems	510
	BIT ERROR RATE AND BANDWIDTH	510
	SYNCHRONIZATION	511

7-7	Output Signal-to-Noise Ratio for PCM Systems	512
7-8	Output Signal-to-Noise Ratios for Analog Systems	518
	BASEBAND SYSTEMS	518
	AM SYSTEMS WITH PRODUCT DETECTION	519
	AM SYSTEMS WITH ENVELOPE DETECTION	520
	DSB-SC SYSTEMS	522
	SSB SYSTEMS	522
	PM SYSTEMS	523
	FM SYSTEMS	527
	FM SYSTEMS WITH THRESHOLD EXTENSION	529
	FM SYSTEMS WITH DEEMPHASIS	532
7-9	Comparison of Analog Signaling Systems	535
	IDEAL SYSTEM PERFORMANCE	536
7-10	Summary	537
	Problems	537

8	OPTIMUM DIGITAL RECEIVERS	547
8-1	Introduction	547
8-2	Optimization Criteria	548
	BAYES CRITERION	548
	<i>Example 8-1</i> Bayes Criterion for a Binary Source	549
	MINIMAX CRITERION	551
	NEYMAN-PEARSON CRITERION	551
	MAXIMUM A POSTERIORI CRITERION	551
8-3	N-Dimensional Vector Space	553
	SIGNAL REPRESENTATION	553
	GRAM-SCHMIDT ORTHOGONALIZATION	
	PROCEDURE	557
	<i>Example 8-2</i> Vectors for a Rectangular Waveform Set	559
	VECTOR CHANNELS AND RELEVANT NOISE	562
	PDF FOR THE NOISE VECTOR	564
8-4	MAP Receiver	566
	DECISION RULE FOR THE ADDITIVE WHITE GAUSSIAN NOISE CHANNEL	566
	RECEIVER STRUCTURES	568
8-5	Probability of Error for MAP Receivers	574
	<i>Example 8-3</i> Binary Signaling	574
	<i>Example 8-4</i> Quadrature Amplitude Modulation Signaling	576
	<i>Example 8-5</i> Pulse Code Modulation Signaling	578
	UNION BOUND	580

	<i>Example 8-6</i> Quantized Pulse Position Modulation Signaling	581
8-6	Random Phase and Fading Channels	583
	DOUBLE-SIDEBAND TRANSMISSION WITH RANDOM PHASE	583
	PROBABILITY OF ERROR FOR ORTHOGONAL BINARY RANDOM-PHASE SIGNALING	591
	<i>Example 8-7</i> FSK Orthogonal Signaling	593
	FADING CHANNELS	593
	<i>Example 8-8</i> Probability of Error for a Fading Channel with FSK Signaling	595
8-7	Bit Error Rate for DPSK Signaling	597
8-8	Coding	601
	BLOCK CODES	603
	<i>Example 8-9</i> Hamming Code	605
	CONVOLUTIONAL CODES	605
	CODE PERFORMANCE	609
8-9	Summary	611
	Problems	612

APPENDIX A MATHEMATICAL TECHNIQUES, IDENTITIES, AND TABLES

		618
A-1	Trigonometry	618
A-2	Differential Calculus	619
A-3	Indeterminate Forms	621
A-4	Integral Calculus	621
A-5	Integral Tables	622
A-6	Series Expansions	625
A-7	Hilbert Transform Pairs	627
A-8	The Dirac Delta Function	627
A-9	Tabulation of $Sa(x) = (\sin x)/x$	629
A-10	Tabulation of $Q(z)$	630

APPENDIX B PROBABILITY AND RANDOM VARIABLES

		632
B-1	Introduction	632
B-2	Sets	633
B-3	Probability and Relative Frequency	634
B-4	Random Variables	637
B-5	Cumulative Distribution Functions and Probability Density Functions	638
B-6	Ensemble Average and Moments	644

B-7	Examples of Important Distributions	647
B-8	Functional Transformations of Random Variables	656
B-9	Multivariate Statistics	661
	Problems	670

**APPENDIX C STANDARDS AND TERMINOLOGY
FOR COMPUTER COMMUNICATIONS** **676**

C-1	Codes	676
C-2	DTE/DCE Interface Standards	681
C-3	The ISO OSI Network Model	687
C-4	Data Link Control Protocols	689
C-5	Telephone Line Standards	691
C-6	Modem Standards	692
C-7	Brief Computer Communications Glossary	692

REFERENCES **697**

ANSWERS TO SELECTED PROBLEMS **704**

INDEX **713**

LIST OF SYMBOLS

There are not enough symbols in the English and Greek alphabets to allow the use of each letter only once. Consequently, some symbols may be used to denote more than one entity, but their use should be clear from the context. Furthermore, the symbols are chosen to be generally the same as those used in the associated mathematical discipline. For example, in the context of complex variables, x denotes the real part of a complex number (i.e., $c = x + jy$), whereas in the context of statistics x might denote a random variable.

Symbols

a_n	A constant
a_n	Quadrature Fourier series coefficient
A_c	Level of modulated signal of carrier frequency f_c
A_e	Effective area of an antenna
b_n	Quadrature Fourier series coefficient

B	Baseband bandwidth
B_p	Bandpass filter bandwidth
B_T	Transmission (bandpass) bandwidth
c	A complex number where $c = x + jy$
c	A constant
c_n	Complex Fourier series coefficient
C	Channel capacity
C	Capacitance
C	Cost matrix
$\bar{C}$	Average cost
$^{\circ}\text{C}$	Degrees Celsius
dB	Decibel
D	Dimensions/sec ($D = N/T_0$) or baud rate
D_f	Frequency modulation gain constant
D_n	Polar Fourier series coefficient
D_p	Phase modulation gain constant
e	Error
e	The natural number, 2.7183
E	Modulation efficiency
E	Energy
$\mathcal{E}(f)$	Energy spectral density (ESD)
E_b/N_o	Energy per bit/noise power spectral density ratio
f	Frequency (Hz)

$f(x)$	Probability density function (pdf)
f_c	Carrier frequency
f_i	Instantaneous frequency
f_o	A (frequency) constant; the fundamental frequency of a periodic waveform
f_s	Sampling frequency
F	Noise figure
$F(a)$	Cumulative distribution function (cdf)
$g(t)$	Complex envelope
$\tilde{g}(t)$	Corrupted complex envelope
G	Power gain
$G(f)$	Power transfer function
h	Planck's constant, 6.2×10^{-34} joule-sec
$h(t)$	Impulse response of a linear network
$h(x)$	Mapping function of x into $h(x)$
H	Entropy
$H(f)$	Transfer function of a linear network
i	An integer
I_j	Information in the j th message
j	The imaginary number $\sqrt{-1}$
k	Boltzmann's constant, 1.38×10^{-23} joule/K
k	An integer
$k(t)$	Complex impulse response of a bandpass network
K	Number of bits in a binary word that represents a digital message

K	Degrees Kelvin ($^{\circ}\text{C} + 273$)
l	An integer
ℓ	Number of bits per dimension
L	Inductance
L	Number of levels permitted
m	An integer
m	Mean value
$m(t)$	Message (modulation) waveform
$\tilde{m}(t)$	Corrupted (noisy received) message
M	An integer
M	Number of messages permitted
n	An integer
n	Number of bits in message
$n(t)$	Noise waveform
N	An integer
N	Number of dimensions used to represent a digital message
N	Noise power
N_o	Level of the power spectral density of white noise
$p(t)$	An absolutely time-limited pulse waveform
$p(t)$	Instantaneous power
$p(m)$	Probability density function of frequency modulation
P	Average power
P_e	Probability of bit error

$P(C)$	Probability of correct decision
$P(E)$	Probability of message error
$\mathcal{P}(f)$	Power spectral density (PSD)
$Q(z)$	Integral of a Gaussian function
$Q(x_k)$	Quantized value of the k th sample value, x_k
$r(t)$	Received signal plus noise
R	Data rate (bits/sec)
R	Resistance
$R(t)$	Real envelope
$R(\tau)$	Autocorrelation function
$s(t)$	Signal
$\tilde{s}(t)$	Corrupted signal
S/N	Signal power/noise power ratio
t	Time
T	A time interval
T	Absolute temperature (Kelvin)
T_b	Bit period
T_e	Effective input-noise temperature
T_o	Duration of a transmitted symbol or message
T_o	Period of a periodic waveform
T_o	Standard room temperature (290 K)
T_s	Sampling period
u_{11}	Covariance

$v(t)$	A voltage waveform
$v(t)$	A bandpass waveform or a bandpass random process
$w(t)$	A waveform
$W(f)$	Spectrum (Fourier transform) of $w(t)$
x	An input
x	A random variable
x	Real part of a complex function or a complex constant
$x(t)$	A random process
y	An output
y	An output random variable
y	Imaginary part of a complex function or a complex constant
$y(t)$	A random process
α	A constant
β	A constant
β_f	Frequency modulation index
β_p	Phase modulation index
δ	Step size of delta modulation
$\delta(t)$	Impulse (Dirac delta function)
ΔF	Peak frequency deviation
$\Delta\theta$	Peak phase deviation
ϵ	A constant
ϵ	Error
η	Spectral efficiency [(bits/sec)/Hz]

$\theta(t)$	Phase waveform
λ	Dummy variable of integration
λ	Wavelength
$\Lambda(r)$	Likelihood ratio
π	3.14159
ρ	Correlation coefficient
σ	Standard deviation
τ	Independent variable of autocorrelation function
τ	Pulse width
$\varphi_j(t)$	Orthogonal function
ϕ_n	Polar Fourier series coefficient
ω_c	Radian carrier frequency, $2\pi f_c$
$\equiv$	Mathematical equivalents
$\triangleq$	Mathematical definition of a symbol

Defined functions

$J_n(\cdot)$	Bessel function of the first kind n th order
$\ln(\cdot)$	Natural logarithm
$\log(\cdot)$	Base 10 logarithm
$\log_2(\cdot)$	Base 2 logarithm
$Q(z)$	Integral of a Gaussian probability density function
$\text{Sa}(z)$	$(\sin z)/z$
$u(\cdot)$	Unit step function

- $\Lambda(\cdot)$ Triangle function
- $\Pi(\cdot)$ Rectangle function

Operator notation

- $\text{Im}\{\cdot\}$ Imaginary part of
- $\text{Re}\{\cdot\}$ Real part of
- $\overline{[\cdot]}$ Ensemble average
- $\langle [\cdot] \rangle$ Time average
- $[\cdot] * [\cdot]$ Convolution
- $[\cdot]^*$ Conjugate
- $\angle [\cdot]$ Angle operator
- $|[\cdot]|$ Absolute value
- $[\hat{\cdot}]$ Hilbert transform
- $\mathcal{F}[\cdot]$ Fourier transform
- $\mathcal{L}[\cdot]$ Laplace transform
- $[\cdot] \cdot [\cdot]$ Dot product

Bandpass Signaling Techniques and Components

4-1

INTRODUCTION

This chapter is concerned with *bandpass* signaling techniques. These are applicable to both digital and analog communication systems. As indicated in Chapter 1, the bandpass communication signal is obtained by modulating the baseband signal onto a carrier. The baseband signal might be an analog signal, such as that obtained directly from a microphone, or it might be digital, such as a PCM signal as discussed in Chapter 3. Here the classical bandpass signaling techniques of amplitude modulation, single-sideband, and angle modulation will be studied in detail. Classical modulation theory is directly applicable to the understanding of digital bandpass signaling techniques that are studied in Chapter 5.

For a better understanding of the implementation of communication systems, a description of communication component blocks such as filters, amplifiers, up-and-down converters, and detectors is covered in Sec. 4-3. (This section may be skipped if this material has been covered in electronics courses.)

Block diagrams for the various types of transmitters and receivers will be

illustrated and analyzed. In addition to the theory, practical aspects of transmitter and receiver design will be emphasized.

First, we will study the mathematical basis of modulation theory.

4-2

REPRESENTATION OF BANDPASS WAVEFORMS AND SYSTEMS

What is a general representation for bandpass digital and analog signals? How do we represent a modulated signal? How do we represent bandpass noise? These are some of the questions that are answered in this section.

Definitions: Baseband, Bandpass, and Modulation

Definition. A *baseband* waveform has a spectral magnitude that is nonzero for frequencies in the vicinity of the origin (i.e., $f = 0$) and negligible elsewhere.

Definition. A *bandpass* waveform has a spectral magnitude that is nonzero for frequencies in some band concentrated about a frequency $f = \pm f_c$, where $f_c \gg 0$. The spectral magnitude is negligible elsewhere. f_c is called the *carrier frequency*.

For bandpass waveforms the value of f_c may be arbitrarily assigned for mathematical convenience in *some* problems. In others, namely, modulation problems, f_c is the frequency of an oscillatory signal in the transmitter circuit and is the assigned frequency of the transmitter, such as, for example, 850 kHz for an AM broadcasting station.

In communication problems, the information source signal is usually a baseband signal: for example, a transistor-transistor logic (TTL) waveform from a digital circuit, an audio signal from a microphone, or a video signal from a television camera. As described in Chapter 1, the communication engineer has the job of building a system that will transfer the information in this source signal $m(t)$ to the desired destination. As shown in Fig. 4-1, this usually requires the use of a bandpass signal, $s(t)$, which has a bandpass spectrum that is con-

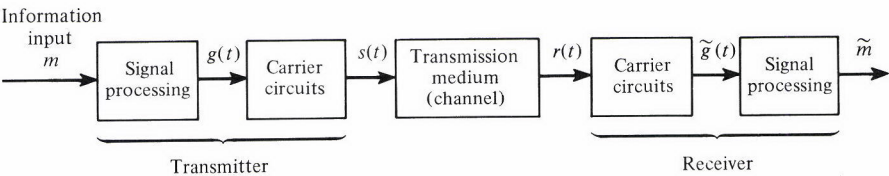


FIGURE 4-1 A communication system.

centrated at $\pm f_c$ so that it will propagate across the communication channel (either a software or a hardware channel).

Definition. *Modulation* is the process of encoding the source information onto a bandpass signal with a carrier frequency f_c . This bandpass signal is called the *modulated* signal $s(t)$, and the baseband source signal is called the *modulating* signal $m(t)$.

Examples of exactly how modulation is accomplished are given later in this chapter. The definition indicates that modulation may be visualized as a mapping operation that maps the source information onto the bandpass signal $s(t)$ that will be transmitted over the channel.

As the modulated signal passes through the channel, noise corrupts it. The result is a bandpass signal-plus-noise waveform that is available at the receiver input, $r(t)$ (see Fig. 4-1). The receiver has the job of trying to recover the information that was sent from the source. $\tilde{m}$ denotes the corrupted version of m .

Complex Envelope Representation

It is very interesting that *all* bandpass waveforms, whether they arise due to a modulated signal, interfering signals, or noise, may be represented in a convenient form given by the following theorem. $v(t)$ will be used to denote the bandpass waveform canonically; specifically, it can represent the signal when $s(t) \equiv v(t)$, the noise when $n(t) \equiv v(t)$, the filtered signal plus noise at the channel output when $r(t) \equiv v(t)$, or any other type of bandpass waveform.

Theorem. Any bandpass waveform may be represented by

$$v(t) = \text{Re}\{g(t)e^{j\omega_c t}\} \quad (4-1a)$$

where $\text{Re}\{\cdot\}$ denotes the real part of $\{\cdot\}$, $g(t)$ is called the *complex envelope* of $v(t)$, and f_c is the associated carrier frequency, $\omega_c = 2\pi f_c$. Furthermore, two other equivalent representations are[†]

$$v(t) = R(t) \cos[\omega_c t + \theta(t)] \quad (4-1b)$$

and

$$v(t) = x(t) \cos \omega_c t - y(t) \sin \omega_c t \quad (4-1c)$$

where

$$\begin{aligned} g(t) &= x(t) + jy(t) = |g(t)|e^{j\angle g(t)} \\ &\equiv R(t)e^{j\theta(t)} \end{aligned} \quad (4-2)$$

[†]The symbol $\equiv$ denotes an equivalence and the symbol $\triangleq$ denotes a definition.

and

$$x(t) = \operatorname{Re}\{g(t)\} \equiv R(t) \cos \theta(t) \quad (4-3a)$$

$$y(t) = \operatorname{Im}\{g(t)\} \equiv R(t) \sin \theta(t) \quad (4-3b)$$

$$R(t) \triangleq |g(t)| \equiv \sqrt{x^2(t) + y^2(t)} \quad (4-4a)$$

$$\theta(t) \triangleq \angle g(t) = \tan^{-1} \left(\frac{y(t)}{x(t)} \right) \quad (4-4b)$$

The waveforms $g(t)$, $x(t)$, $y(t)$, $R(t)$, and $\theta(t)$ are *all* baseband waveforms and, *except* for $g(t)$, they are all real waveforms. $R(t)$ is a nonnegative real waveform.

Proof. Any physical waveform (it does *not* have to be periodic) may be represented over all time, $T_o \rightarrow \infty$, by the complex Fourier series:

$$v(t) = \sum_{n=-\infty}^{n=\infty} c_n e^{jn\omega_o t}, \quad \omega_o = 2\pi/T_o \quad (4-5)$$

Furthermore, since the physical waveform is real $c_{-n} = c_n^*$ and using $\operatorname{Re}\{\cdot\} = \frac{1}{2}\{\cdot\} + \frac{1}{2}\{\cdot\}^*$,

$$v(t) = \operatorname{Re} \left\{ c_o + 2 \sum_{n=1}^{\infty} c_n e^{jn\omega_o t} \right\} \quad (4-6)$$

Introducing the arbitrary parameter f_c , this becomes[†]

$$v(t) = \operatorname{Re} \left\{ \left(c_o e^{-j\omega_c t} + 2 \sum_{n=1}^{\infty} c_n e^{j(n\omega_o - \omega_c)t} \right) e^{j\omega_c t} \right\} \quad (4-7)$$

so that (4-1a) follows where

$$g(t) \equiv c_o e^{-j\omega_c t} + 2 \sum_{n=1}^{\infty} c_n e^{j(n\omega_o - \omega_c)t} \quad (4-8)$$

Since $v(t)$ is a bandpass waveform with nonzero spectrum concentrated near $f = f_c$, the Fourier coefficients c_n are nonzero only for values of n in the range $\pm n f_o \approx f_c$. Therefore, from (4-8) $g(t)$ has a spectrum that is concentrated near $f = 0$. That is, $g(t)$ is a *baseband* waveform. It is also obvious from (4-8) that $g(t)$ may be a complex function of time. Representing the complex envelope in terms of two real functions in Cartesian coordinates, we have

$$g(t) \equiv x(t) + jy(t)$$

[†]Since the frequencies involved in the argument of $\operatorname{Re}\{\cdot\}$ are all positive, it can be shown that the complex function $c_o + 2 \sum_{n=1}^{\infty} c_n e^{jn\omega_o t}$ is analytic in the upper-half complex t plane. Many interesting properties result because this function is an analytic function of a complex variable.

where $x(t) = \text{Re}\{g(t)\}$ and $y(t) = \text{Im}\{g(t)\}$. $x(t)$ is said to be the *in phase modulation* associated with $v(t)$ and $y(t)$ is said to be the *quadrature modulation* associated with $v(t)$. Alternatively, the polar form of $g(t)$, represented by $R(t)$ and $\theta(t)$, is given by (4-2), where the identities between Cartesian and polar coordinates are given by (4-3) and (4-4). $R(t)$ and $\theta(t)$ are real waveforms and, in addition, $R(t)$ is always nonnegative. $R(t)$ is said to be the *amplitude modulation* (AM) on $v(t)$ and $\theta(t)$ is said to be the *phase modulation* (PM) on $v(t)$. It is also realized that if $v(t)$ is a deterministic waveform, $x(t)$, $y(t)$, $R(t)$, and $\theta(t)$ are also deterministic. If $v(t)$ is stochastic, for example representing bandpass noise, $x(t)$, $y(t)$, $R(t)$, and $\theta(t)$ are stochastic baseband processes. Thus, in general, bandpass noise includes both AM, $R(t)$, and PM, $\theta(t)$, noise components. This will be discussed further in Chapter 6. The usefulness of the complex envelope representation for bandpass waveforms cannot be overemphasized. In modern communication systems, the bandpass signal is often partitioned into two channels, one for $x(t)$ called the *I* (in-phase) channel and one for $y(t)$ called the *Q* (quadrature-phase) channel.

Bandpass Filtering

In Sec. 2-6 the general transfer function technique was described for the treatment of linear filter problems. Now a shortcut technique will be developed for bandpass filters. It is emphasized that this technique is applicable only for bandpass filters and waveforms. Here the complex envelope can also be used to describe bandpass filter characteristics. Since the impulse response of a bandpass filter $h(t)$ is a (deterministic) bandpass waveform, it may be represented by a complex envelope $k(t)$ as shown in Fig. 4-2.

Theorem. Referring to Fig. 4-2, the complex envelope out of a bandpass filter is given by

$$g_2(t) = \frac{1}{2}g_1(t)*k(t) \quad (4-9)$$

where $g_1(t)$ is the complex envelope of the input and $k(t)$ is the complex envelope of the impulse response. It also follows that

$$G_2(f) = \frac{1}{2}G_1(f)K(f) \quad (4-10)$$

This theorem may be proved by using the properties of linear systems (Sec. 2-6) and is given as a homework problem at the end of this chapter.

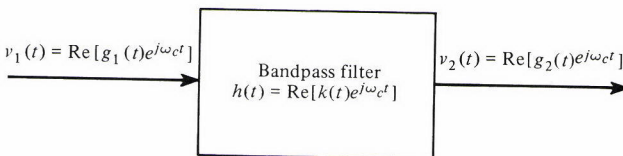


FIGURE 4-2 Filtering bandpass waveforms.

It is realized that the linear bandpass filter can produce variations in the phase modulation at the output, $\theta_2(t)$, where $\theta_2(t) = \angle g_2(t)$, as a function of the amplitude modulation on the input complex envelope, $R_1(t)$, where $R_1(t) = |g_1(t)|$. This is called *AM to PM conversion*. Similarly, the filter can also cause variations on the AM at the output, $R_2(t)$, due to the PM on the input, $\theta_1(t)$. This is called *PM to AM conversion*.

Distortionless Transmission

In Sec. 2-6 the general conditions were found for distortionless transmission. For linear *bandpass filters* (channels), a less restrictive set of conditions will now be shown to be satisfactory. For distortionless transmission of bandpass signals, the channel transfer function, $H(f) = |H(f)|e^{j\theta(f)}$, needs to satisfy the following requirements:

1. The amplitude response is constant. That is,

$$|H(f)| = A \quad (4-11a)$$

where A is a positive (real) constant.

2. The derivative of the phase response is a constant. That is,

$$-\frac{1}{2\pi} \frac{d\theta(f)}{df} = T_g \quad (4-11b)$$

where T_g is a constant called the *group delay* and $\theta(f) = \angle H(f)$.

This is illustrated in Fig. 4-3. Note that (4-11a) is identical to the general requirement of (2-150a), but (4-11b) is less restrictive than (2-105b). That is, if (2-150b) is satisfied, (4-11b) is satisfied where $T_d = T_g$; however, if (4-11b) is satisfied, (2-150b) is not necessarily satisfied because the integral of (4-11b) is

$$\theta(f) = -2\pi f T_g + \theta_o \quad (4-12)$$


where θ_o is a phase shift constant, as shown in Fig. 4-3b. If θ_o happens to be nonzero, (2-150b) is not satisfied.

Now it will be shown that (4-11a) and (4-11b) are sufficient requirements for distortionless transmission of bandpass signals. From (4-11a) and (4-12) the channel (or filter) transfer function is


$$H(f) = A e^{j(-2\pi f T_g + \theta_o)} = (A e^{j\theta_o}) e^{-j2\pi f T_g} \quad (4-13)$$

over the bandpass of the signal. If the input to the bandpass channel is represented by

$$v_1(t) = x(t) \cos \omega_c t - y(t) \sin \omega_c t$$

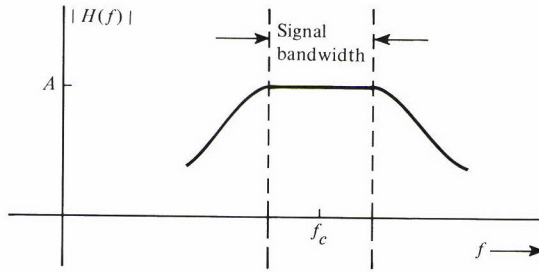

(a) Magnitude Response

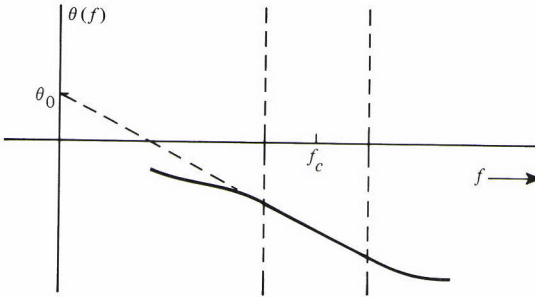

(b) Phase Response

FIGURE 4-3 Transfer characteristics of a distortionless bandpass channel.

then, using (4-13) and realizing that $e^{-j2\pi f T_g}$ causes a delay of T_g , the output of the channel is

$$v_2(t) = Ax(t - T_g) \cos[\omega_c(t - T_g) + \theta_o] - Ay(t - T_g) \sin[\omega_c(t - T_g) + \theta_o]$$

Using (4-12), this becomes

$$v_2(t) = Ax(t - T_g) \cos[\omega_c t + \theta(f_c)] - Ay(t - T_g) \sin[\omega_c t + \theta(f_c)]$$

Furthermore, using (2-150b), the phase shift at $f = f_c$ can be expressed in terms of the phase delay, T_d , since $\theta(f_c) = -2\pi f_o T_d$. (Actually, this is why T_d is called the *phase delay*.) Thus the output bandpass signal reduces to

$$v_2(t) = Ax(t - T_g) \cos[\omega_c(t - T_d)] - Ay(t - T_g) \sin[\omega_c(t - T_d)] \quad (4-14)$$

where T_g is the group delay and T_d is the phase delay.

Equation (4-14) shows that the x and y components of the input complex envelope have been delayed by T_g , the group (or information) delay; and the quadrature sinusoidal carriers have been delayed by T_d , the phase delay. This gives an undistorted received transmission since the input complex envelope, $g(t) = x(t) + jy(t)$, has just been multiplied by the gain factor A and delayed

by the group delay, T_g . Note that in this application the carrier (phase) delay, T_d , is not equal to the envelope (group) delay, T_g , unless θ_o happens to be zero. This is also verified by looking at Fig. 4-3b.

In summary, the general requirement for distortionless transmission of either baseband or bandpass signals is given by (2-150). However, the linear phase requirement of (2-150b) is overly restrictive for the case of bandpass signaling. From (4-11) for the bandpass case, it is only necessary to have a transfer function with *constant amplitude* and a *constant phase derivative* over the bandwidth of the signal.

Bandpass Dimensionality Theorem

Computer simulation is often used to analyze the performance of complicated communication systems. This is especially true when coding schemes are used. This requires that the RF signal and noise for the system under test be sampled so that the data can be obtained for processing by digital computer simulation. If the sampling is carried out at the Nyquist rate or larger ($f_s \geq 2B$, where B is the highest frequency involved in the spectrum of the RF signal), the sampling rate would be ridiculous. For example, consider a satellite communication system with a carrier frequency of $f_c = 6$ GHz. The sampling rate required would be at least 12 GHz. Fortunately, for the signals of this type (bandpass signals), it can be shown that the sampling rate depends only on the *bandwidth* of the signal, not on the absolute frequencies involved. This is equivalent to saying that we can reproduce the signal from samples of the complex envelope.

Bandpass Sampling Theorem. If a (real) bandpass waveform has a non-zero spectrum only over the frequency interval $f_1 < |f| < f_2$ where the transmission bandwidth B_T is taken to be the absolute bandwidth given by $B_T = f_2 - f_1$, then the waveform may be reproduced from sample values, if the sampling rate is

$$f_s \geq 2B_T \quad (4-15)$$

This theorem may be demonstrated by using the quadrature bandpass representation

$$v(t) = x(t) \cos(\omega_c t) - y(t) \sin(\omega_c t) \quad (4-16)$$

Let f_c be the center of the bandpass so that $f_c = (f_2 + f_1)/2$. Then, from (4-8) it is seen that $x(t)$ and $y(t)$ are both baseband signals and absolutely band-limited to $B = B_T/2$. From the baseband sampling theorem the sampling rate required to represent these baseband signals is $f_b \geq 2B = B_T$. Equation (4-16) becomes

$$v(t) = \sum_{n=-\infty}^{n=\infty} \left[x\left(\frac{n}{f_b}\right) \cos \omega_c t - y\left(\frac{n}{f_b}\right) \sin \omega_c t \right] \cdot \frac{\sin\{\pi f_b[t - (n/f_b)]\}}{\pi f_b[t - (n/f_b)]} \quad (4-17)$$

For the general case, where the $x(n/f_b)$ and $y(n/f_b)$ samples are independent, two samples are obtained for each value of n so that the overall sampling rate for $v(t)$ is $f_s = 2f_b \geq 2B_T$. This is the bandpass sampling frequency requirement of (4-15). In most engineering applications, $f_c \gg B_T$. Thus the x and y samples can be obtained by sampling $v(t)$ at $t \approx (n/f_b)$, but adjusting t slightly, so that $\cos \omega_c t = 1$ and $\sin \omega_c t = 1$ at the *exact* sampling time for x and y , respectively. That is, for $t \approx n/f_s$, $v(n/f_b) = x(n/f_b)$ when $\cos \omega_c t = 1$ (i.e., $\sin \omega_c t = 0$) and $v(n/f_b) = y(n/f_b) = y(n/f_b)$ when $\sin \omega_c t = 1$ (i.e., $\cos \omega_c t = 0$). If f_c is not large enough for the x and y samples to be obtained directly from $v(t)$, then $x(t)$ and $y(t)$ can first be obtained by the use of two quadrature product detectors as described by (4-71). The $x(t)$ and $y(t)$ baseband signals can then be individually sampled at a rate of f_b , and it is seen that the overall equivalent sampling rate is still $f_s = 2f_b \geq 2B_T$.

In the application of this theorem it is assumed that the bandpass signal $v(t)$ is reconstructed by use of (4-17). This implies that *nonuniformly* spaced time samples of $v(t)$ are used since the samples are taken in pairs (for the x and y components) instead of being uniformly spaced T_s sec apart. *Uniformly* spaced samples of $v(t)$ itself can be used with a minimum sampling frequency of $2B_T$, provided that either f_1 or f_2 is a harmonic of f_s [Taub and Schilling, 1971 or 1986]. Otherwise, a minimum sampling frequency larger than $2B_T$ but not larger than $4B_T$ is required [Haykin, 1983; Peebles, 1976; Taub and Schilling, 1986]. Referring to (2-173), this phenomenon occurs with impulse sampling because f_s needs to be selected so that there is no spectral overlap in the $f_1 < f < f_2$ band when the bandpass spectrum is translated to harmonics of f_s .

Bandpass Dimensionality Theorem. Assume that a bandpass waveform has a nonzero spectrum only over the frequency interval $f_1 < |f| < f_2$ where the transmission bandwidth B_T is taken to be the absolute bandwidth given by $B_T = f_2 - f_1$ and $B_T \ll f_1$. The waveform may be completely specified over a T_o -sec interval by

$$N = 2B_T T_o \quad (4-18)$$

independent pieces of information. N is said to be the number of dimensions required to specify the waveform.

The bandpass dimensionality theorem is similar to the dimensionality theorem discussed earlier, (2-174), and may be demonstrated by the use of the complex Fourier series to represent the bandpass waveform over a T_o -sec interval. The number of nonzero Fourier coefficients required to produce a line spectrum over the B_T hertz frequency interval is B_T/f_o since f_o is the frequency spacing between adjacent lines. Since $c_n = |c_n|e^{j\phi_n}$ and $c_{-n} = c_n^*$, the number of independent (real value) samples is $2B_T/f_o = 2B_T T_o$.

As mentioned earlier, computer simulation is often used to analyze communication systems. The bandpass dimensionality theorem tells us that a bandpass signal B_T hertz wide can be represented over a T_o -sec interval provided that at least $N = 2B_T T_o$ samples are used.

Representation of Modulated Signals

As defined earlier, modulation is the process of encoding the source information (modulation) $m(t)$ into a bandpass signal (modulated signal) $s(t)$. Consequently, the modulated signal is just a special application of the bandpass representation. The *modulated signal* is given by

$$s(t) = \operatorname{Re}\{g(t)e^{j\omega_c t}\} \quad (4-19)$$

where $\omega_c = 2\pi f_c$ and f_c is the carrier frequency. The complex envelope $g(t)$ is a function of the modulating signal $m(t)$. That is,

$$g(t) = g[m(t)] \quad (4-20)$$

Thus $g[\cdot]$ performs a mapping operation on $m(t)$. This was illustrated in Fig. 4-1.

In Table 4-1, examples of the mapping function $g[m]$ are given for various types of modulation: amplitude modulation (AM), double-sideband suppressed carrier (DSB-SC), phase modulation (PM), frequency modulation (FM), single-sideband AM suppressed carrier (SSB-AM-SC), single-sideband PM (SSB-PM), single-sideband FM (SSB-FM), single-sideband envelope detectable (SSB-EV), single-sideband square law detectable (SSB-SQ), and quadrature modulation (QM). The parameter f_c is the assigned carrier frequency. These modulated signals are discussed in more detail in Secs. 4-5, 4-6, and 4-7. Obviously, it is possible to use other $g[m]$ functions that are not listed in Table 4-1. The question is: Are they useful? $g[m]$ functions are desired that are easy to implement and that will give desirable spectral and noise (reduction) properties. Furthermore, in the receiver the inverse function $m[g]$ is required. This needs to exist, to be easily implemented, and to suppress as much noise as possible so that $m(t)$ can be recovered with as little corruption as possible.

Spectrum of Bandpass Signals

The spectrum of a bandpass signal is directly related to the spectrum of its complex envelope.

Theorem. If a bandpass waveform is represented by

$$v(t) = \operatorname{Re}\{g(t)e^{j\omega_c t}\} \quad (4-21)$$

then the spectrum of the bandpass waveform is

$$V(f) = \frac{1}{2}[G(f - f_c) + G^*(-f - f_c)] \quad (4-22)$$

and the PSD of the waveform is

$$\mathcal{P}_v(f) = \frac{1}{4}[\mathcal{P}_g(f - f_c) + \mathcal{P}_g(-f - f_c)] \quad (4-23)$$

where $G(f) = \mathcal{F}[g(t)]$ and $\mathcal{P}_g(f)$ is the PSD of $g(t)$.

Table 4-1 Complex Envelope Functions for Various Types of Modulation

Type of Modulation	Mapping Functions $g[m]$	Corresponding Quadrature Modulation	
		$x(t)$	$y(t)$
AM	$1 + m(t)$	$1 + m(t)$	0
DSB-SC	$m(t)$	$m(t)$	0
PM	$e^{jD_p m(t)}$	$\cos[D_p m(t)]$	$\sin[D_p m(t)]$
FM	$e^{jD_f \int_{-\infty}^t m(\sigma) d\sigma}$	$\cos\left[D_f \int_{-\infty}^t m(\sigma) d\sigma\right]$	$\sin\left[D_f \int_{-\infty}^t m(\sigma) d\sigma\right]$
SSB-AM-SC ^a	$m(t) \pm j\hat{m}(t)$	$m(t)$	$\pm \hat{m}(t)$
SSB-PM ^a	$e^{jD_p[m(t) \pm j\hat{m}(t)]}$	$e^{\mp D_p \hat{m}(t)} \cos[D_p m(t)]$	$e^{\mp D_p \hat{m}(t)} \sin[D_p m(t)]$
SSB-FM ^a	$e^{jD_f \int_{-\infty}^t [m(\sigma) \pm j\hat{m}(\sigma)] d\sigma}$	$e^{\mp D_f \int_{-\infty}^t \hat{m}(\sigma) d\sigma} \cos\left[D_f \int_{-\infty}^t m(\sigma) d\sigma\right]$	$e^{\mp D_f \int_{-\infty}^t \hat{m}(\sigma) d\sigma} \sin\left[D_f \int_{-\infty}^t m(\sigma) d\sigma\right]$
SSB-EV ^a	$e^{\{ \ln[1 + m(t)] \pm j\hat{\ln}[1 + m(t)] \}}$	$[1 + m(t)] \cos\{\hat{\ln}[1 + m(t)]\}$	$\pm [1 + m(t)] \sin\{\hat{\ln}[1 + m(t)]\}$
SSB-SQ ^a	$e^{(1/2)\{\ln[1 + m(t) \pm j\hat{\ln}[1 + m(t)]\}}$	$\sqrt{1 + m(t)} \cos\{\frac{1}{2} \hat{\ln}[1 + m(t)]\}$	$\pm \sqrt{1 + m(t)} \sin\{\frac{1}{2} \hat{\ln}[1 + m(t)]\}$
QM	$m_1(t) + jm_2(t)$	$m_1(t)$	$m_2(t)$

L = linear; NL = nonlinear; $\hat{[\cdot]}$ is the Hilbert transform (i.e., -90° phase-shifted version) of $[\cdot]$ (see Sec. 4-6 and Sec. A-7, Appendix A).

^aUse upper signs for upper sideband signals and lower signs for lower sideband signals.

^bIn the strict sense, AM signals are not linear because the carrier term does not satisfy the linearity (superposition) condition.

Proof

$$v(t) = \text{Re}\{g(t)e^{j\omega_c t}\} = \frac{1}{2}g(t)e^{j\omega_c t} + \frac{1}{2}g^*(t)e^{-j\omega_c t}$$

Thus

$$V(f) = \mathcal{F}[v(t)] = \frac{1}{2}\mathcal{F}[g(t)e^{j\omega_c t}] + \frac{1}{2}\mathcal{F}[g^*(t)e^{-j\omega_c t}] \tag{4-24}$$

Using $\mathcal{F}[g^*(t)] = G^*(-f)$ from Table 2-1 and the frequency translation property of Fourier transforms from Table 2-1, this equation becomes

$$V(f) = \frac{1}{2}[G(f - f_c) + G^*(-(f + f_c))] \tag{4-25}$$

which reduces to (4-22).

Corresponding Amplitude and Phase Modulation		Linearity	Remarks
$R(t)$	$\theta(t)$		
$ 1 + m(t) $	$\begin{cases} 0, & m(t) > -1 \\ 180^\circ, & m(t) < -1 \end{cases}$	L ^b	$m(t) > -1$ required for envelope detection.
$ m(t) $	$\begin{cases} 0, & m(t) > 0 \\ 180^\circ, & m(t) < 0 \end{cases}$	L	Coherent detection required.
1	$D_p m(t)$	NL	D_p is the phase deviation constant (radian/volts).
1	$D_f \int_{-\infty}^t m(\sigma) d\sigma$	NL	D_f is the frequency deviation constant (radian/volt-sec).
$\sqrt{[m(t)]^2 + [\hat{m}(t)]^2}$	$\tan^{-1}[\pm \hat{m}(t)/m(t)]$	L	Coherent detection required.
$e^{\pm D_p \hat{m}(t)}$	$D_p m(t)$	NL	
$e^{\pm D_f \int_{-\infty}^t \hat{m}(\sigma) d\sigma}$	$D_f \int_{-\infty}^t m(\sigma) d\sigma$	NL	
$1 + m(t)$	$\pm \hat{\ln}[1 + m(t)]$	NL	$m(t) > -1$ is required so that the $\ln(\cdot)$ will have a real value.
$\sqrt{1 + m(t)}$	$\pm \frac{1}{2} \hat{\ln}[1 + m(t)]$	NL	$m(t) > -1$ is required so that the $\ln(\cdot)$ will have a real value.
$\sqrt{m_1^2(t) + m_2^2(t)}$	$\tan^{-1}[m_2(t)/m_1(t)]$	L	Used in NTSC color TV; requires coherent detection.

The PSD for $v(t)$ is obtained by first evaluating the autocorrelation for $v(t)$.

$$R_v(\tau) = \langle v(t)v(t + \tau) \rangle = \langle \text{Re}\{g(t)e^{j\omega_c t}\} \text{Re}\{g(t + \tau)e^{j\omega_c(t + \tau)}\} \rangle.$$

Using the identity (see Problem 2-42),

$$\text{Re}(c_2) \text{Re}(c_1) = \frac{1}{2} \text{Re}(c_2^* c_1) + \frac{1}{2} \text{Re}(c_2 c_1)$$

where $c_2 = g(t)e^{j\omega_c t}$ and $c_1 = g(t + \tau)e^{j\omega_c(t + \tau)}$, we get

$$R_v(\tau) = \langle \frac{1}{2} \text{Re}\{g^*(t)g(t + \tau)e^{-j\omega_c t}e^{j\omega_c(t + \tau)}\} + \langle \frac{1}{2} \text{Re}\{g(t)g(t + \tau)e^{j\omega_c t}e^{j\omega_c(t + \tau)}\} \rangle$$

Realizing that $\langle \rangle$ and $\text{Re}\{\}$ are both linear operators, the order of the operators may be exchanged without affecting the result, and the autocorrelation becomes

$$R_v(\tau) = \frac{1}{2} \text{Re}\{\langle g^*(t)g(t + \tau)e^{j\omega_c\tau} \rangle\} + \frac{1}{2} \text{Re}\{\langle g(t)g(t + \tau)e^{j2\omega_c t}e^{j\omega_c\tau} \rangle\}$$

or

$$R_v(\tau) = \frac{1}{2} \text{Re}\{\langle g^*(t)g(t + \tau) \rangle e^{j\omega_c\tau}\} + \frac{1}{2} \text{Re}\{\langle g(t)g(t + \tau) \rangle e^{j2\omega_c t}e^{j\omega_c\tau}\}$$

But $\langle g^*(t)g(t + \tau) \rangle = R_g(\tau)$. The second term on the right is negligible because $e^{j2\omega_c t} = \cos 2\omega_c t + j \sin 2\omega_c t$ oscillates much faster than variations in $g(t)g(t + \tau)$. In other words, f_c is much larger than the frequencies in $g(t)$, so the integral is negligible. This is an application of the Riemann-Lebesgue lemma from integral calculus [Olmsted, 1961]. Thus, the autocorrelation reduces to

$$R_v(\tau) = \frac{1}{2} \text{Re}\{R_g(\tau)e^{j\omega_c\tau}\} \quad (4-26)$$

The PSD is obtained by taking the Fourier transform of (4-26) (i.e., applying the Wiener-Khintchine theorem). Note that (4-26) has the same mathematical form as (4-21) when t is replaced by τ , so the Fourier transform has the same form as (4-22). Thus,

$$\mathcal{P}_v(f) = \mathcal{F}[R_v(\tau)] = \frac{1}{4}[\mathcal{P}_g(f - f_c) + \mathcal{P}_g^*(-f - f_c)]$$

But $\mathcal{P}_g^*(f) = \mathcal{P}_g(f)$ since the PSD is a real function. Thus, the PSD is given by (4-23).

Evaluation of Power

Theorem. The total average normalized power of a bandpass waveform, $v(t)$, is

$$P_v = \int_{-\infty}^{\infty} \mathcal{P}_v(f)df = R_v(0) = \frac{1}{2}\langle |g(t)|^2 \rangle \quad (4-27)$$

where “normalized” implies that the load is equivalent to one ohm.

Proof. Substituting $v(t)$ into (2-67), we get

$$P_v = \langle v^2(t) \rangle = \int_{-\infty}^{\infty} \mathcal{P}_v(f) df$$

But $R_v(\tau) = \mathcal{F}^{-1}[\mathcal{P}_v(f)] = \int_{-\infty}^{\infty} \mathcal{P}_v(f)e^{j2\pi f\tau} df$, so

$$R_v(0) = \int_{-\infty}^{\infty} \mathcal{P}_v(f) df$$

Also, from (4-26)

$$R_v(0) = \frac{1}{2} \text{Re}\{R_g(0)\} = \frac{1}{2} \text{Re}\{\langle g^*(t)g(t + 0) \rangle\}$$

or

$$R_v(0) = \frac{1}{2} \text{Re}\{\langle |g(t)|^2 \rangle\}$$

But $|g(t)|$ is always real, so

$$R_e(0) = \frac{1}{2} \langle |g(t)|^2 \rangle$$

Another type of power rating called the *peak envelope power* (PEP), is useful for transmitter specifications.

Definition. The *peak envelope power* (PEP) is the average power that would be obtained if $|g(t)|$ were to be held constant at its peak value.

This is equivalent to evaluating the average power in an unmodulated RF sinusoid that has a peak value of $A_p = \max[v(t)]$, as is readily seen from Fig. 4-32.)

Theorem. The *normalized PEP* is given by

$$P_{\text{PEP}} = \frac{1}{2} [\max |g(t)|]^2 \quad (4-28)$$

A proof of this theorem follows by applying the definition to (4-27). As described later in this chapter and in Chapter 5, the PEP is useful for specifying the power capability of AM, SSB, and television transmitters.

EXAMPLE 4-1 Amplitude-Modulated Signal

Evaluate the magnitude spectrum for an amplitude-modulated (AM) signal. From Table 4-1, the complex envelope of an AM signal is

$$g(t) = 1 + m(t)$$

so that the spectrum of the complex envelope is

$$G(f) = \delta(f) + M(f) \quad (4-29)$$

Using (4-19), the AM signal waveform is

$$s(t) = [1 + m(t)] \cos \omega_c t \quad (4-30)$$

and, using (4-22), the AM spectrum is

$$S(f) = \frac{1}{2} [\delta(f - f_c) + M(f - f_c) + \delta(f + f_c) + M(f + f_c)] \quad (4-31)$$

where, since $m(t)$ is real, $M^*(f) = M(-f)$, and $\delta(f) = \delta(-f)$ (the delta function was defined to be even) were used. Suppose that the magnitude spectrum of the modulation happens to be a triangular function, as shown in Fig. 4-4a. This spectrum might arise from an analog audio source where the bass frequencies are emphasized. The resulting AM spectrum, using (4-31), is shown in Fig. 4-4b. Note that since $G(f - f_c)$ and $G^*(-f - f_c)$ do not overlap, the magnitude spectrum is

$$|S(f)| = \begin{cases} \frac{1}{2}\delta(f - f_c) + \frac{1}{2}|M(f - f_c)|, & f > 0 \\ \frac{1}{2}\delta(f + f_c) + \frac{1}{2}|M(-f - f_c)|, & f < 0 \end{cases} \quad (4-32)$$

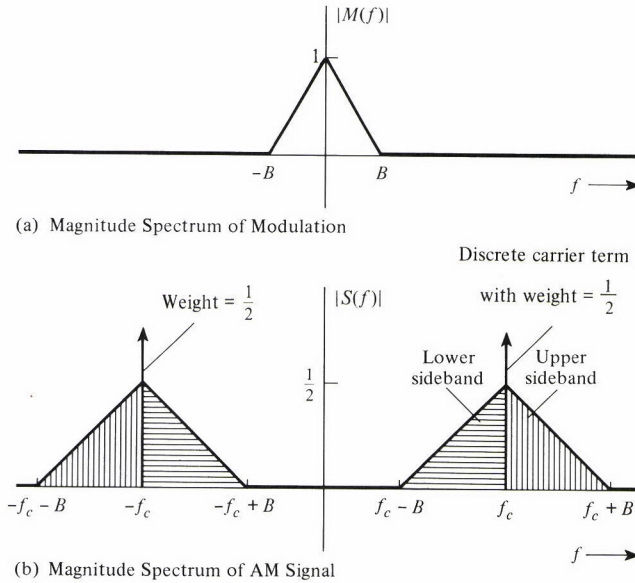


FIGURE 4-4 Spectrum of an AM signal.

The “1” in $g(t) = 1 + m(t)$ causes delta functions to occur in the spectrum at $f = \pm f_c$, where f_c is the assigned carrier frequency. Using (4-27), the total average signal power is

$$\begin{aligned} P_s &= \frac{1}{2} \langle |1 + m(t)|^2 \rangle = \frac{1}{2} \langle 1 + 2m(t) + m^2(t) \rangle \\ &= \frac{1}{2} [1 + 2\langle m(t) \rangle + \langle m^2(t) \rangle] \end{aligned}$$

Assuming that the dc value of the modulation is zero, as shown in Fig. 4-2, the average signal power becomes

$$P_s = \frac{1}{2} [1 + P_m] \quad (4-33)$$

where $P_m = \langle m^2(t) \rangle$ is the power in the modulation. ■

Digital Computer Simulation

Often communication systems are too complicated to analyze completely by using only analytical techniques, or a complete analytical approach would be too costly in terms of personnel and time. In these cases, *digital computer simulation* is used to provide a practical approach to system design and analysis. The complex envelope technique and sampling techniques are usually the basis of the computer algorithms. Using the complex envelope:

- Modulated signals can be represented (see Table 4-1).
- Noise can be represented (see Sec. 6-7).

- Filters can be simulated [see (4-9), (4-10), and Sec. 4-3].
- Detectors can be simulated (see Sec. 4-3).

Nonlinearities can be represented using time domain algorithms (see Sec. 4-3). The discrete Fourier transform (DFT) can be used for spectral analysis. Signal-to-noise ratios can be evaluated. Monte Carlo techniques can be used to estimate the probability of bit error for digital systems.

Several large-scale computer programs have been developed that simulate communication systems. Some of these programs are described in a special issue of the *IEEE Journal on Selected Areas in Communications*, vol. SAC-2, January 1984. One of these simulation programs, SYSTID, (system time domain) will now be studied in some detail [Fashano and Strodbeck, 1984]. SYSTID has been in a continuous state of development and improvement by the Hughes Aircraft Company since 1967. Its development was supported under a National Aeronautics and Space Administration (NASA) contract during the early 1970s.

SYSTID uses the following techniques:

- Partitioning the communication system into basic functional blocks and processing the signal sequentially from the input to the output.
- Using complex envelope representation for modulated signals, noise, and filters.
- Using discrete time representation (sampling) of continuous time signals and systems.

The block diagram approach allows complicated communication systems to be built up from a set of interconnected functional blocks. The blocks are available from the SYSTID model library (see Table 4-2) or by calling user-defined models that are easy to program. The SYSTID package is written in FORTRAN code, and consists of a precompiler that takes SYSTID statements and generates the FORTRAN source code that simulates a particular communication system. For example, the SYSTID syntax for implementing a block in the simulation is

INPUT > MODEL NAME (PAR1, . . . PARn, . . .) > OUTPUT

where MODEL NAME is the name of the model selected from the SYSTID library (or one defined by the user), PARn are pass parameters for the model, INPUT is the name assigned to the input node of the block that is being simulated, and OUTPUT is the output node name. Blocks are connected together by using a common node name for the output of a block that connects to the input of another block.

The communication system is simulated by executing the machine code that results from the compiled FORTRAN source code after it has been linked to the SYSTID library routines. The program output consists of data that are samples of the waveform (as a function of time) at each node of interest. A companion analysis program called RIP is used to look at the SYSTID output data and present a graphic output of the user-requested waveform properties. For example, the user may request plots of the waveform at any node, the PSD, the

TABLE 4-2 SYSTID Model Library

Signal Generators	Filters	Miscellaneous	Estimators
White Gaussian noise	Butterworth	Limiters	Power spectra
Arbitrary PDF sources	Chebyshev	TWT	Probability of bit error (MPSK, QASK)
Pulse gen.	Bessel	Arbitrary nonlinearities	Noise power ratio
Transcendental functions	Butterworth–Thompson	TDA	Signal distortion
Square wave	Elliptic	Up/down converters	Signal to noise
Arbitrary tables	Quasi-elliptic	Differentiator	Noise bandwidth
PN seq. gen.	Lead lag	Integration	Delay
Random bit stream gen.	Integrate and dump	Time delays	Correlation
PN bit stream gen.	Quadratic	Phase shifters	Statistics
MSK PN signal gen.	Arbitrary poles and zeros	Latches and gates	Eye pattern analyzer
Raised cos PN signal gen.	Transversal	Threshold detectors	Intelligible crosstalk
QPSK PN signal gen.	Zonal (ideal)	Power meter	Source Encoders
FM noise loaded baseband signal gen.	Measured response	Average meter	Analog-to-digital
Biphase L PN gen.	Functional form	Rotary joint multipath	Digital-to-analog
ENB signal gen.	Adaptive transversal equalizer	Recall file	Multilevel PCM
Impulse noise	Mods and demods	Saver/loader	Orthogonal
Continuous wave	Amplitude		Fourier
	Frequency		Haar
	Phase		Hadamard
	Delta modulator		Ordered
	FSK		Hadamard
	PSK		Digital
	QASK, MPSK		interleaving and deinterleaving
	Digital echo modulation		Convolutional
	Zero crossing detector		

Source: Michael Fashano and Andrew L. Strodtbeck, "Communication System Simulation and Analysis with SYSTID," *IEEE Journal on Selected Areas in Communications*, vol. SAC-2, Janaury 1984, p. 11. © 1984 IEEE.

autocorrelation function, the eye pattern, etc. An example of a SYSTID simulation for a simple communication system and the associated RIP graphic output is shown in Fig. 4-5.

The SYSTID package can be used to simulate very complicated communication systems. Some typical applications include bit error rate sensitivity, adjacent and cochannel interference, multicarrier frequency division multiple access (FDMA) frequency planning (see Chapter 5 for a description of FDMA), modulation and coding system performance, analog system performance (S/N and distortion), signal detection, adaptive signal processing, device modeling and verification of channel specifications.

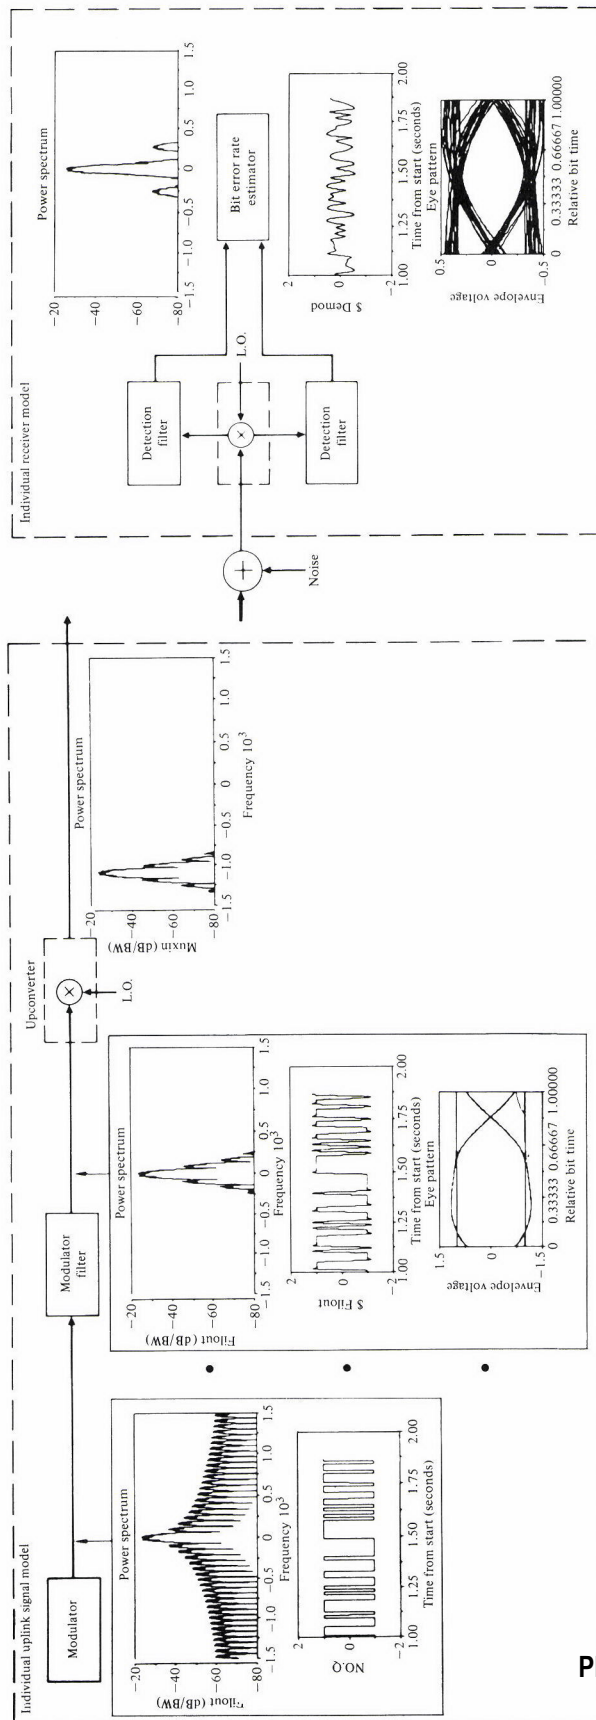


FIGURE 4-5 Transmitter and receiver simulation using SYSTID. (From Michael Fashano and Andrew L. Stradtbeck, "Communication System Simulation and Analysis with SYSTID," IEEE Journal on Selected Areas in Communications, vol. SAC-2, Jan. 1984, p. 17. © 1984 IEEE.)

From the preceding discussion, it is realized that a study of communication system component blocks is needed before an overall study of communication systems (as presented in Chapter 5) is attempted. This study of the basic building block components is presented in the next section.

4-3

COMPONENTS OF COMMUNICATION SYSTEMS

Communication systems consist of component blocks such as amplifiers, filters, limiters, oscillators, mixers, frequency multipliers, phase-locked loops, detectors, and other analog and digital circuits. In most circuit and electronic courses, a great deal of time is spent on circuits that are linear and time invariant since they are relatively easy to analyze and form the basis for understanding other types of circuits. However, it is realized that all practical circuits are nonlinear, and we need to examine the distortion products that are produced by nonlinear effects. Also, as we shall see, nonlinear and time-varying circuits are often needed in communication systems to produce signals with new frequency components.

Filters

As we know, filters are devices that take an input waveshape and modify the frequency spectrum to produce the output waveshape. Filters may be classified in several ways. One is by the type of construction used, such as *LC* elements or quartz crystal elements. Another is by the type of transfer function that is realized, such as the Butterworth or Chebyshev response (defined subsequently). These two topics of construction types and transfer function characteristics are discussed in this section.

Filters use energy storage elements to obtain frequency discrimination. In any physical filter the energy storage elements are imperfect. For example, a physical inductor has some series resistance as well as inductance, and a physical capacitor has some shunt (leakage) resistance as well as capacitance. A measure of the goodness of a circuit element, or, moreover, a measure of goodness for the whole circuit is given by the quality factor Q .

$$Q = \frac{2\pi(\text{maximum energy stored during one cycle})}{(\text{energy dissipated per cycle})} \quad (4-34)$$

Of course, a larger value for Q corresponds to a more perfect storage element. That is, a perfect L or C element would have infinite Q . For an RLC series or parallel resonant circuit, the Q is

$$Q = \frac{f_o}{B} \quad (4-35)$$