US007016417B1

(12) **United States Patent**
Román et al.

(10) **Patent No.: US 7,016,417 B1**
(45) **Date of Patent: Mar. 21, 2006**

(54) **GENERAL PURPOSE COMPRESSION FOR VIDEO IMAGES (RHN)**

(75) Inventors: **Kendyl A. Román**, 730 Bantry Ct., Sunnyvale, CA (US) 94087-3402; **Cyrus J. Hoomani**, San Francisco, CA (US); **Richard S. Neale**, Sunnyvale, CA (US)

(73) Assignee: **Kendyl A. Roman**, Sunnyvale, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/470,566**

(22) Filed: **Dec. 22, 1999**

Related U.S. Application Data

(60) Provisional application No. 60/113,276, filed on Dec. 23, 1998.

(51) **Int. Cl.**
H04N 7/12 (2006.01)

(52) **U.S. Cl.** **375/240.23**

(58) **Field of Classification Search** 348/207, 348/143, 211, 212, 400, 407, 384, 413, 385, 348/415; 382/245, 232, 246, 250, 239, 242; 375/240.01, 240.16, 240, 240.23
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,301,469	A	11/1981	Modeen et al.	358/75
4,302,775	A	11/1981	Widergren et al.	358/136
4,385,363	A	5/1983	Widergren et al.	364/725
4,394,774	A	7/1983	Widergren et al.	382/56
4,410,916	A	10/1983	Pratt et al.	358/263
4,546,385	A	10/1985	Anastassiou	
4,550,437	A	10/1985	Kobayashi et al.	345/536
4,646,356	A	2/1987	Anderson et al.	382/56
4,698,672	A	10/1987	Chen et al.	358/136
4,704,628	A	11/1987	Chen et al.	358/136
4,743,959	A	5/1988	Frederiksen	
5,014,710	A	5/1991	Maslak et al.	
5,047,853	A *	9/1991	Hoffert et al.	375/240.01
5,287,452	A	2/1994	Newman	345/520
5,309,232	A	5/1994	Hartung et al.	
5,416,602	A	5/1995	Inga et al.	
5,471,989	A	12/1995	Roundhill et al.	128/660.04
5,552,832	A	9/1996	Astle	
5,581,613	A *	12/1996	Nagashima et al.	380/201
5,583,561	A	12/1996	Baker et al.	725/93
5,621,660	A	4/1997	Chaddha et al.	
5,646,618	A	7/1997	Walsh	
5,715,823	A	2/1998	Wood et al.	
5,721,815	A	2/1998	Ottesen et al.	345/721
5,754,820	A	5/1998	Yamagami	711/133
5,812,119	A	9/1998	Tateyama	
5,812,788	A	9/1998	Agarwal	
5,897,498	A	4/1999	Canfield, II et al.	600/437
5,959,639	A	9/1999	Wada	345/542

(Continued)

FOREIGN PATENT DOCUMENTS

WO	WO 99/59472	11/1999

Primary Examiner—Vu Le
Assistant Examiner—Behrooz Senfi

(57) **ABSTRACT**

Methods, medium, and machines which compress, encode, enhance, transmit, decompress and display digital video images in real time. Real time compression is achieved by sub-sampling each frame of a video signal, encoding and filtering the pixel values to codes, and run-length encoding the codes. Real time transmission is achieved due to high levels of effective compression. Real time decompression is achieved by decoding and decompressing the encoded data to display high quality images. High levels of effective compression also reduce the storage space requirement for recorded video.

22 Claims, 19 Drawing Sheets

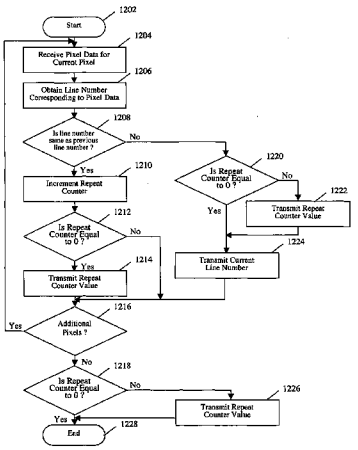

Instacart, Ex. 1034

U.S. PATENT DOCUMENTS

5,999,655	A	12/1999	Kalker et al.	382/234
6,018,713	A	1/2000	Coli et al.	705/2
6,025,854	A	2/2000	Hinz et al.	345/538
6,054,990	A	4/2000	Tran	
6,063,032	A	5/2000	Grundwald	
6,064,324	A	5/2000	Shimizu et al.	
6,078,691	A *	6/2000	Luttmer	382/235
6,091,777	A *	7/2000	Guetz et al.	375/240.11
6,115,485	A	9/2000	Dumoulin et al.	
6,144,392	A	11/2000	Rogers	345/537
6,181,711	B1	1/2001	Zhang et al.	370/468
6,219,358	B1	4/2001	Pinder et al.	
6,324,599	B1	11/2001	Zhou et al.	710/26
6,335,990	B1	1/2002	Chen et al.	382/261
6,338,119	B1	1/2002	Anderson et al.	710/22
6,339,616	B1 *	1/2002	Kovalev	375/240.16
6,384,862	B1 *	5/2002	Brusewitz et al.	348/212
6,571,392	B1	5/2003	Zigmond et al.	725/110
6,592,629	B1	7/2003	Cullen et al.	709/232
6,651,113	B1	11/2003	Grimsrud	710/22
2001/0021260	A1 *	9/2001	Chung et al.	382/100

* cited by examiner

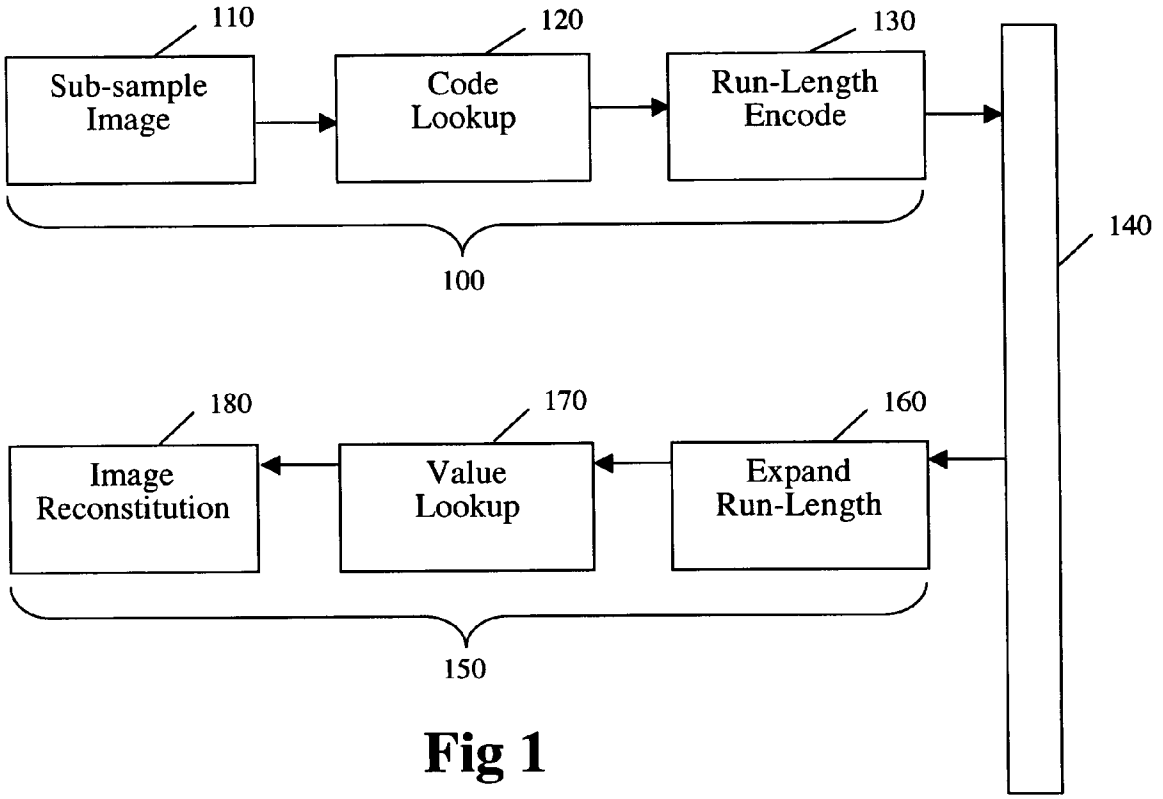
110
Sub-sample Image
120
Code Lookup
130
Run-Length Encode
100
140
180
Image Reconstitution
170
Value Lookup
160
Expand Run-Length
150

Fig 1

Fig 2A



Fig 2B



Fig 2C

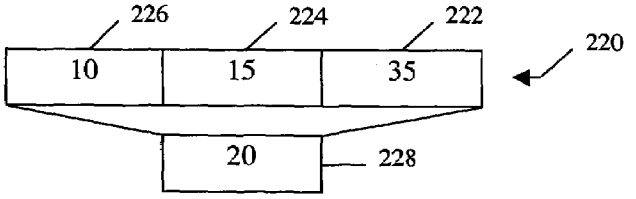

Fig 2D

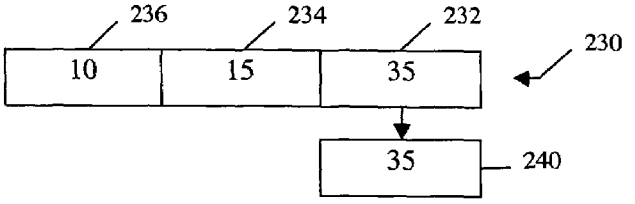

Fig 2E

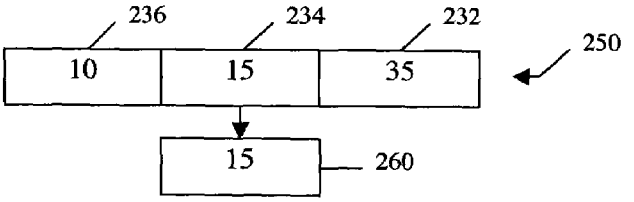

Fig 2F

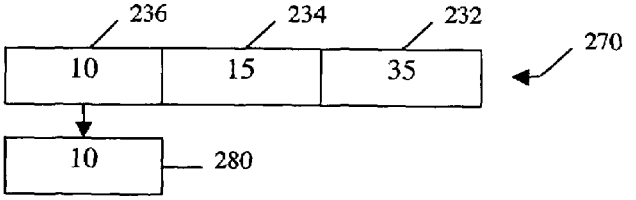

Fig 2G

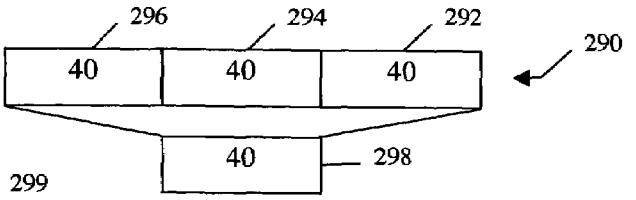

Fig 2H

300

```
unsigned char encodeTable[ ] = {
```

370 330 340 360

```
     0,  0,  0,  0,  0,                          //   0 -   4 ->   0
     1,  1,  1,  1,  1,  1,  1,  1,              //   5 -  12 ->   8
     2,  2,  2,  2,  2,  2,  2,  2,              //  13 -  20 ->  16
     3,  3,  3,  3,  3,  3,  3,  3,  3,          //  21 -  29 ->  24
     4,  4,  4,  4,  4,  4,  4,  4,              //  30 -  37 ->  33
     5,  5,  5,  5,  5,  5,  5,  5,              //  38 -  45 ->  41
     6,  6,  6,  6,  6,  6,  6,  6,              //  46 -  53 ->  49
     7,  7,  7,  7,  7,  7,  7,  7,  7,          //  54 -  62 ->  57
     8,  8,  8,  8,  8,  8,  8,  8,              //  63 -  70 ->  66
     9,  9,  9,  9,  9,  9,  9,  9,              //  71 -  78 ->  74
    10, 10, 10, 10, 10, 10, 10, 10,              //  79 -  86 ->  82
    11, 11, 11, 11, 11, 11, 11, 11, 11,          //  87 -  95 ->  90
    12, 12, 12, 12, 12, 12, 12, 12,              //  96 - 103 ->  99
    13, 13, 13, 13, 13, 13, 13, 13,              // 104 - 111 -> 107
    14, 14, 14, 14, 14, 14, 14, 14,              // 112 - 119 -> 115
    15, 15, 15, 15, 15, 15, 15, 15, 15,          // 120 - 128 -> 123
    16, 16, 16, 16, 16, 16, 16, 16,              // 129 - 136 -> 132
    17, 17, 17, 17, 17, 17, 17, 17,              // 137 - 144 -> 140
    18, 18, 18, 18, 18, 18, 18, 18,              // 145 - 152 -> 148
    19, 19, 19, 19, 19, 19, 19, 19, 19,          // 153 - 161 -> 156
    20, 20, 20, 20, 20, 20, 20, 20,              // 162 - 169 -> 165
    21, 21, 21, 21, 21, 21, 21, 21,              // 170 - 177 -> 173
    22, 22, 22, 22, 22, 22, 22, 22,              // 178 - 185 -> 181
    23, 23, 23, 23, 23, 23, 23, 23, 23,          // 186 - 194 -> 189
    24, 24, 24, 24, 24, 24, 24, 24,              // 195 - 202 -> 198
    25, 25, 25, 25, 25, 25, 25, 25,              // 203 - 210 -> 206
    26, 26, 26, 26, 26, 26, 26, 26,              // 211 - 218 -> 214
    27, 27, 27, 27, 27, 27, 27, 27, 27,          // 219 - 227 -> 222
    28, 28, 28, 28, 28, 28, 28, 28,              // 228 - 235 -> 231
    29, 29, 29, 29, 29, 29, 29, 29,              // 236 - 243 -> 239
    30, 30, 30, 30, 30, 30, 30, 30,              // 244 - 251 -> 247
};  31, 31, 31, 31                               // 252 - 255 -> 255
```

310 320

Fig 3A

370	330				350					360
0	0	1	2	3	4					0
1	5	6	7	8	9	10	11	12		8
2	13	14	15	16	17	18	19	20		16
3	21	22	23	24	25	26	27	28	29	24
4	30	31	32	33	34	35	36	37		33
5	38	39	40	41	42	43	44	45		41
6	46	47	48	49	50	51	52	53		49
7	54	55	56	57	58	59	60	61	62	57
8	63	64	65	66	67	68	69	70		66
9	71	72	73	74	75	76	77	78		74
10	79	80	81	82	83	84	85	86		82
11	87	88	89	90	91	92	93	94	95	90
12	96	97	98	99	100	101	102	103		99
13	104	105	106	107	108	109	110	111		107
14	112	113	114	115	116	117	118	119		115
15	120	121	122	123	124	125	126	127	128	123
16	129	130	131	132	133	134	135	136		132
17	137	138	139	140	141	142	143	144		140
18	145	146	147	148	149	150	151	152		148
19	153	154	155	156	157	158	159	160	161	156
20	162	163	164	165	166	167	168	169		165
21	170	171	172	173	174	175	176	177		173
22	178	179	180	181	182	183	184	185		181
23	186	187	188	189	190	191	192	193	194	189
24	195	196	197	198	199	200	201	202		198
25	203	204	205	206	207	208	209	210		206
26	211	212	213	214	215	216	217	218		214
27	219	220	221	222	223	224	225	226	227	222
28	228	229	230	231	232	233	234	235		231
29	236	237	238	239	240	241	242	243		239
30	244	245	246	247	248	249	250	251		247
31	252	253	254	255						255

Fig 3B

Fig 4A

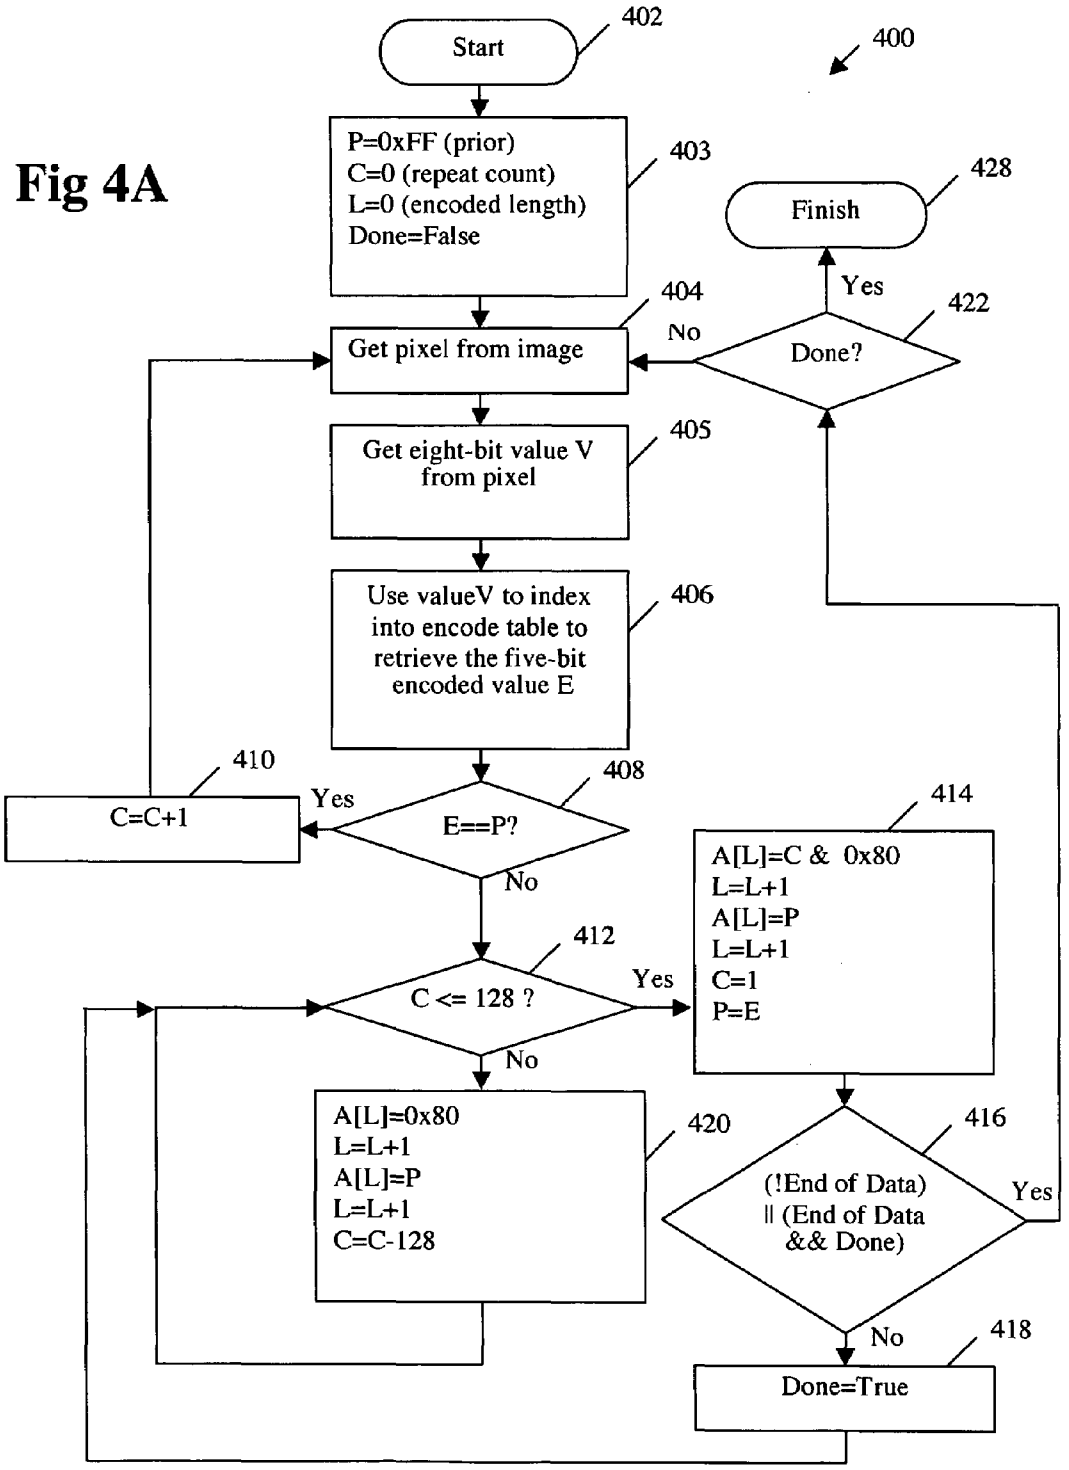
400
Start
402
P=0xFF (prior)
C=0 (repeat count)
L=0 (encoded length)
Done=False
403
Finish
428
Yes
Done?
422
No
Get pixel from image
404
Get eight-bit value V from pixel
405
Use valueV to index into encode table to retrieve the five-bit encoded value E
406
C=C+1
410
Yes
E==P?
408
No
C <= 128 ?
412
Yes
No
A[L]=C & 0x80
L=L+1
A[L]=P
L=L+1
C=1
P=E
414
A[L]=0x80
L=L+1
A[L]=P
L=L+1
C=C-128
420
(!End of Data)
|| (End of Data
&& Done)
416
Yes
No
Done=True
418

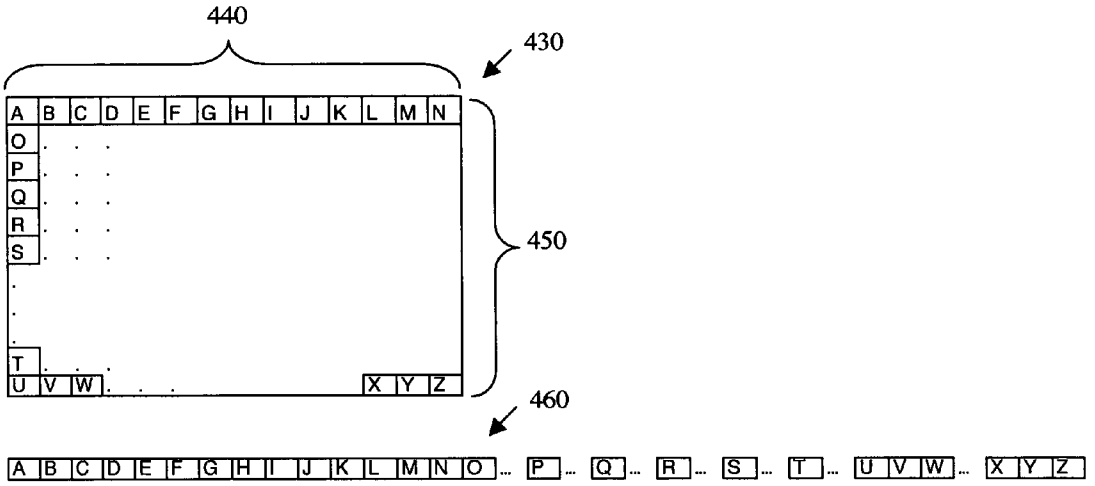
440
430
A B C D E F G H I J K L M N
O
P
Q
R
S
T
U V W
X Y Z
450
460
A B C D E F G H I J K L M N O ... P ... Q ... R ... S ... T ... U V W ... X Y Z

Fig 4B

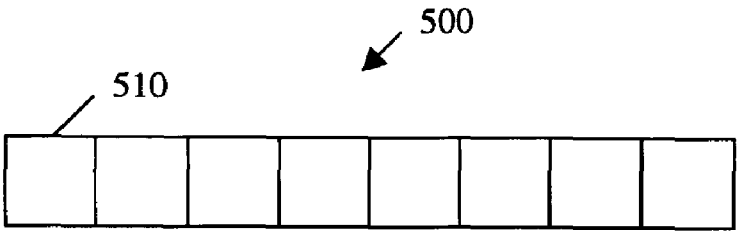

Fig 5A

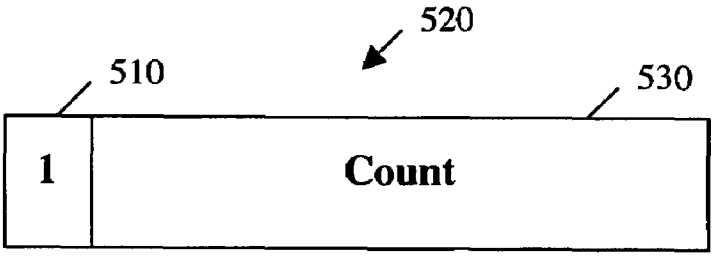

Fig 5B

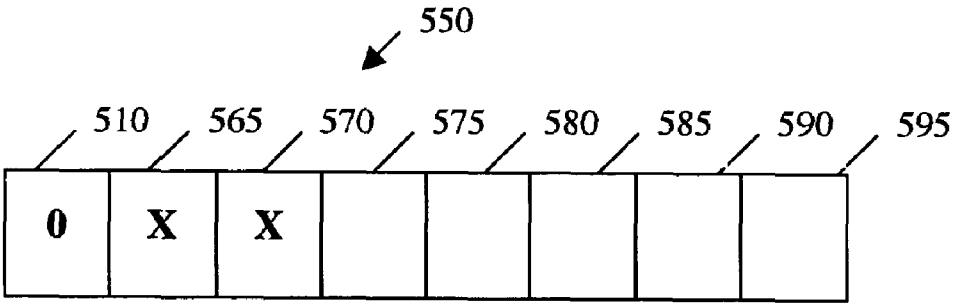

Fig 5C

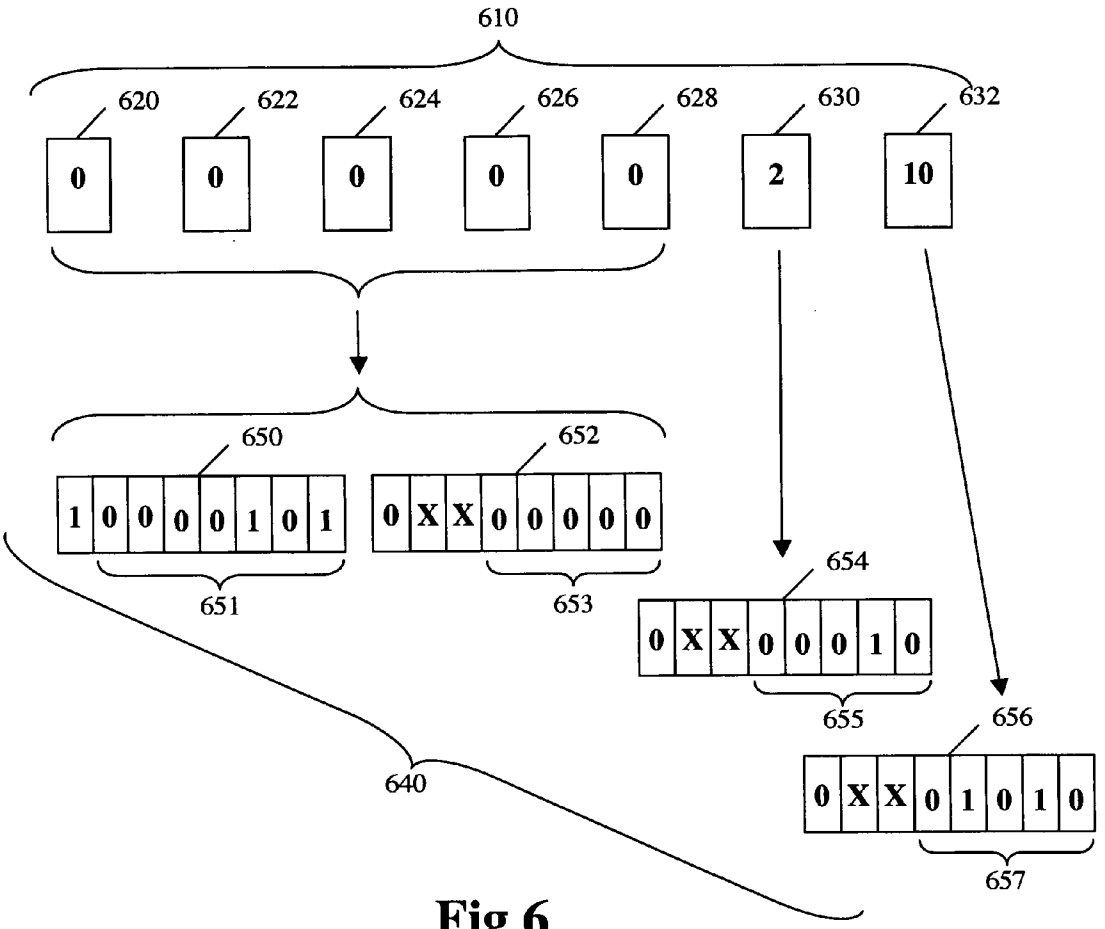
610
620
622
624
626
628
630
632
0
0
0
0
0
2
10
650
652
1 0 0 0 0 1 0 1
0 X X 0 0 0 0 0
651
653
654
0 X X 0 0 0 1 0
655
656
0 X X 0 1 0 1 0
657
640

Fig 6

700

```
int decodeTable[ ] = {
```

710 720 730 740

```
        0xff << 24 |   0 << 16 |   0 << 8 |   0,
        0xff << 24 |   8 << 16 |   8 << 8 |   8,
        0xff << 24 |  16 << 16 |  16 << 8 |  16,
        0xff << 24 |  24 << 16 |  24 << 8 |  24,
        0xff << 24 |  33 << 16 |  33 << 8 |  33,
        0xff << 24 |  41 << 16 |  41 << 8 |  41,
        0xff << 24 |  49 << 16 |  49 << 8 |  49,
        0xff << 24 |  57 << 16 |  57 << 8 |  57,
        0xff << 24 |  66 << 16 |  66 << 8 |  66,
        0xff << 24 |  74 << 16 |  74 << 8 |  74,
        0xff << 24 |  82 << 16 |  82 << 8 |  82,
        0xff << 24 |  90 << 16 |  90 << 8 |  90,
        0xff << 24 |  99 << 16 |  99 << 8 |  99,
        0xff << 24 | 107 << 16 | 107 << 8 | 107,
        0xff << 24 | 115 << 16 | 115 << 8 | 115,
        0xff << 24 | 123 << 16 | 123 << 8 | 123,
        0xff << 24 | 132 << 16 | 132 << 8 | 132,
        0xff << 24 | 140 << 16 | 140 << 8 | 140,
        0xff << 24 | 148 << 16 | 148 << 8 | 148,
        0xff << 24 | 156 << 16 | 156 << 8 | 156,
        0xff << 24 | 165 << 16 | 165 << 8 | 165,
        0xff << 24 | 173 << 16 | 173 << 8 | 173,
        0xff << 24 | 181 << 16 | 181 << 8 | 181,
        0xff << 24 | 189 << 16 | 189 << 8 | 189,
        0xff << 24 | 198 << 16 | 198 << 8 | 198,
        0xff << 24 | 206 << 16 | 206 << 8 | 206,
        0xff << 24 | 214 << 16 | 214 << 8 | 214,
        0xff << 24 | 222 << 16 | 222 << 8 | 222,
        0xff << 24 | 231 << 16 | 231 << 8 | 231,
        0xff << 24 | 239 << 16 | 239 << 8 | 239,
        0xff << 24 | 247 << 16 | 247 << 8 | 247,
        0xff << 24 | 255 << 16 | 255 << 8 | 255
};
```

Fig 7

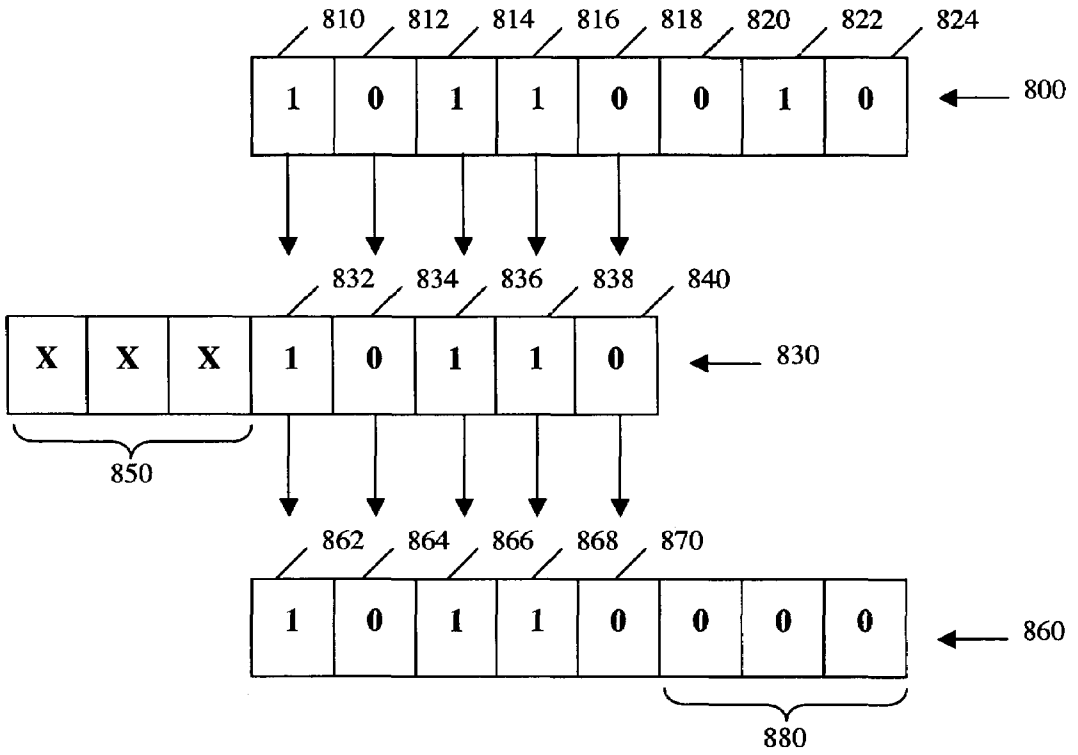
810
812
814
816
818
820
822
824
1 0 1 1 0 0 1 0
800
832
834
836
838
840
X X X 1 0 1 1 0
830
850
862
864
866
868
870
1 0 1 1 0 0 0 0
860
880

Fig 8

Fig 9

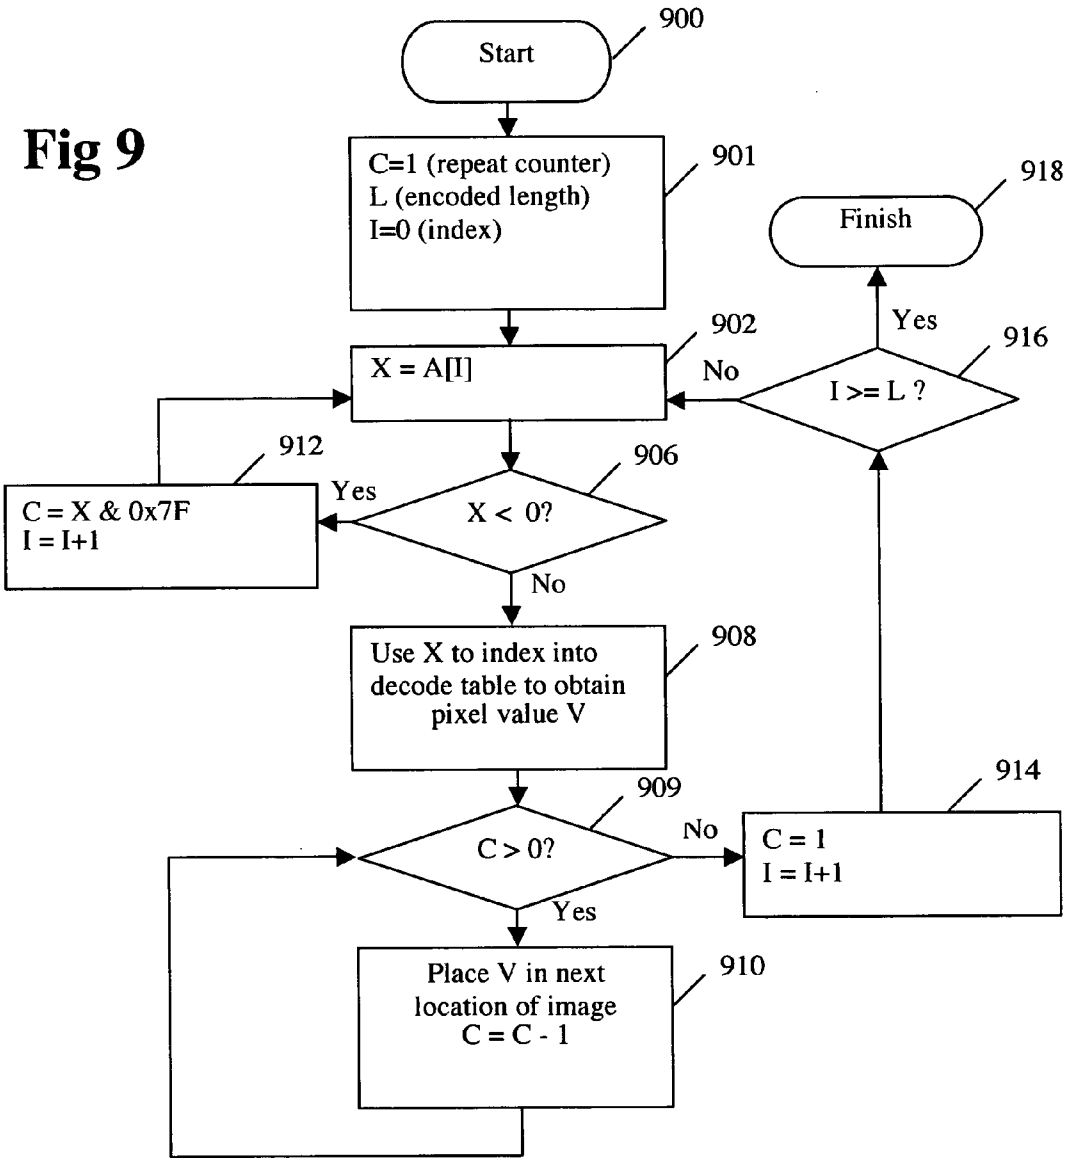
Start
900
C=1 (repeat counter)
L (encoded length)
I=0 (index)
901
X = A[I]
902
C = X & 0x7F
I = I+1
912
Yes
X < 0?
906
No
Use X to index into
decode table to obtain
pixel value V
908
C > 0?
909
No
Yes
Place V in next
location of image
C = C - 1
910
C = 1
I = I+1
914
I >= L ?
916
Yes
No
Finish
918

1000

0	24
1	18
2	25
3	5
4	3
5	6
6	12
7	30
8	21
9	27
10	1
11	16
12	31
13	4
14	14
15	20
16	10
17	28
18	23
19	9
20	15
21	22
22	29
23	13
24	19
25	26
26	2
27	17
28	0
29	8
30	11
31	7

Fig 10A

1010

```
unsigned char encodeTable[ ] =
{
        24, 24, 24, 24, 24,                                     //   0 -   4 ->   0
        18, 18, 18, 18, 18, 18, 18, 18,                         //   5 -  12 ->   8
        25, 25, 25, 25, 25, 25, 25, 25,                         //  13 -  20 ->  16
        5,  5,  5,  5,  5,  5,  5,  5,  5,                      //  21 -  29 ->  24
        3,  3,  3,  3,  3,  3,  3,  3,                          //  30 -  37 ->  33
        6,  6,  6,  6,  6,  6,  6,  6,                          //  38 -  45 ->  41
        12, 12, 12, 12, 12, 12, 12, 12,                         //  46 -  53 ->  49
        30, 30, 30, 30, 30, 30, 30, 30, 30,                     //  54 -  62 ->  57
        21, 21, 21, 21, 21, 21, 21, 21,                         //  63 -  70 ->  66
        27, 27, 27, 27, 27, 27, 27, 27,                         //  71 -  78 ->  74
        1,  1,  1,  1,  1,  1,  1,  1,                          //  79 -  86 ->  82
        16, 16, 16, 16, 16, 16, 16, 16, 16,                     //  87 -  95 ->  90
        31, 31, 31, 31, 31, 31, 31, 31,                         //  96 - 103 ->  99
        4,  4,  4,  4,  4,  4,  4,  4,                          // 104 - 111 -> 107
        14, 14, 14, 14, 14, 14, 14, 14,                         // 112 - 119 -> 115
        20, 20, 20, 20, 20, 20, 20, 20, 20,                     // 120 - 128 -> 123
        10, 10, 10, 10, 10, 10, 10, 10,                         // 129 - 136 -> 132
        28, 28, 28, 28, 28, 28, 28, 28,                         // 137 - 144 -> 140
        23, 23, 23, 23, 23, 23, 23, 23,                         // 145 - 152 -> 148
        9,  9,  9,  9,  9,  9,  9,  9,  9,                      // 153 - 161 -> 156
        15, 15, 15, 15, 15, 15, 15, 15,                         // 162 - 169 -> 165
        22, 22, 22, 22, 22, 22, 22, 22,                         // 170 - 177 -> 173
        29, 29, 29, 29, 29, 29, 29, 29,                         // 178 - 185 -> 181
        13, 13, 13, 13, 13, 13, 13, 13, 13,                     // 186 - 194 -> 189
        19, 19, 19, 19, 19, 19, 19, 19,                         // 195 - 202 -> 198
        26, 26, 26, 26, 26, 26, 26, 26,                         // 203 - 210 -> 206
        2,  2,  2,  2,  2,  2,  2,  2,                          // 211 - 218 -> 214
        17, 17, 17, 17, 17, 17, 17, 17, 17,                     // 219 - 227 -> 222
        0,  0,  0,  0,  0,  0,  0,  0,                          // 228 - 235 -> 231
        8,  8,  8,  8,  8,  8,  8,  8,                          // 236 - 243 -> 239
        11, 11, 11, 11, 11, 11, 11, 11,                         // 244 - 251 -> 247
        7,  7,  7,  7                                           // 252 - 255 -> 255
};
```

Fig 10B

1020

```
int decodeTable[ ] =
{
      0xff << 24 | 231 << 16 | 231 << 8 | 231,
      0xff << 24 |  82 << 16 |  82 << 8 |  82,
      0xff << 24 | 214 << 16 | 214 << 8 | 214,
      0xff << 24 |  33 << 16 |  33 << 8 |  33,
      0xff << 24 | 107 << 16 | 107 << 8 | 107,
      0xff << 24 |  24 << 16 |  24 << 8 |  24,
      0xff << 24 |  41 << 16 |  41 << 8 |  41,
      0xff << 24 | 255 << 16 | 255 << 8 | 255,
      0xff << 24 | 239 << 16 | 239 << 8 | 239,
      0xff << 24 | 156 << 16 | 156 << 8 | 156,
      0xff << 24 | 132 << 16 | 132 << 8 | 132,
      0xff << 24 | 247 << 16 | 247 << 8 | 247,
      0xff << 24 |  49 << 16 |  49 << 8 |  49,
      0xff << 24 | 189 << 16 | 189 << 8 | 189,
      0xff << 24 | 115 << 16 | 115 << 8 | 115,
      0xff << 24 | 165 << 16 | 165 << 8 | 165,
      0xff << 24 |  90 << 16 |  90 << 8 |  90,
      0xff << 24 | 222 << 16 | 222 << 8 | 222,
      0xff << 24 |   8 << 16 |   8 << 8 |   8,
      0xff << 24 | 198 << 16 | 198 << 8 | 198,
      0xff << 24 | 123 << 16 | 123 << 8 | 123,
      0xff << 24 |  66 << 16 |  66 << 8 |  66,
      0xff << 24 | 173 << 16 | 173 << 8 | 173,
      0xff << 24 | 148 << 16 | 148 << 8 | 148,
      0xff << 24 |   0 << 16 |   0 << 8 |   0,
      0xff << 24 |  16 << 16 |  16 << 8 |  16,
      0xff << 24 | 206 << 16 | 206 << 8 | 206,
      0xff << 24 |  74 << 16 |  74 << 8 |  74,
      0xff << 24 | 140 << 16 | 140 << 8 | 140,
      0xff << 24 | 181 << 16 | 181 << 8 | 181,
      0xff << 24 |  57 << 16 |  57 << 8 |  57,
      0xff << 24 |  99 << 16 |  99 << 8 |  99
};
```

Fig 10C

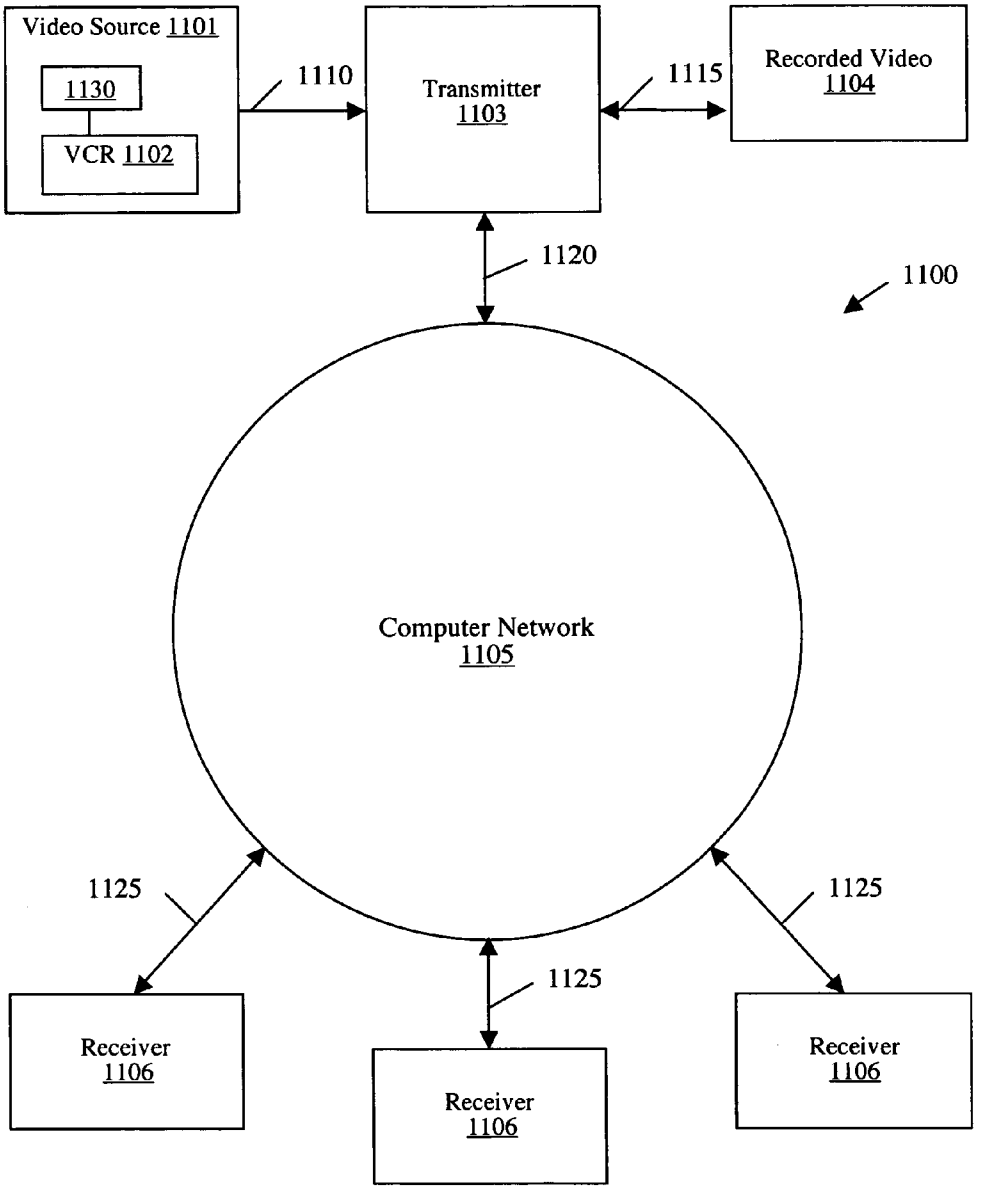
Video Source 1101
1130
VCR 1102
1110
Transmitter
1103
1115
Recorded Video
1104
1120
1100
Computer Network
1105
1125
1125
1125
Receiver
1106
Receiver
1106
Receiver
1106

Fig 11

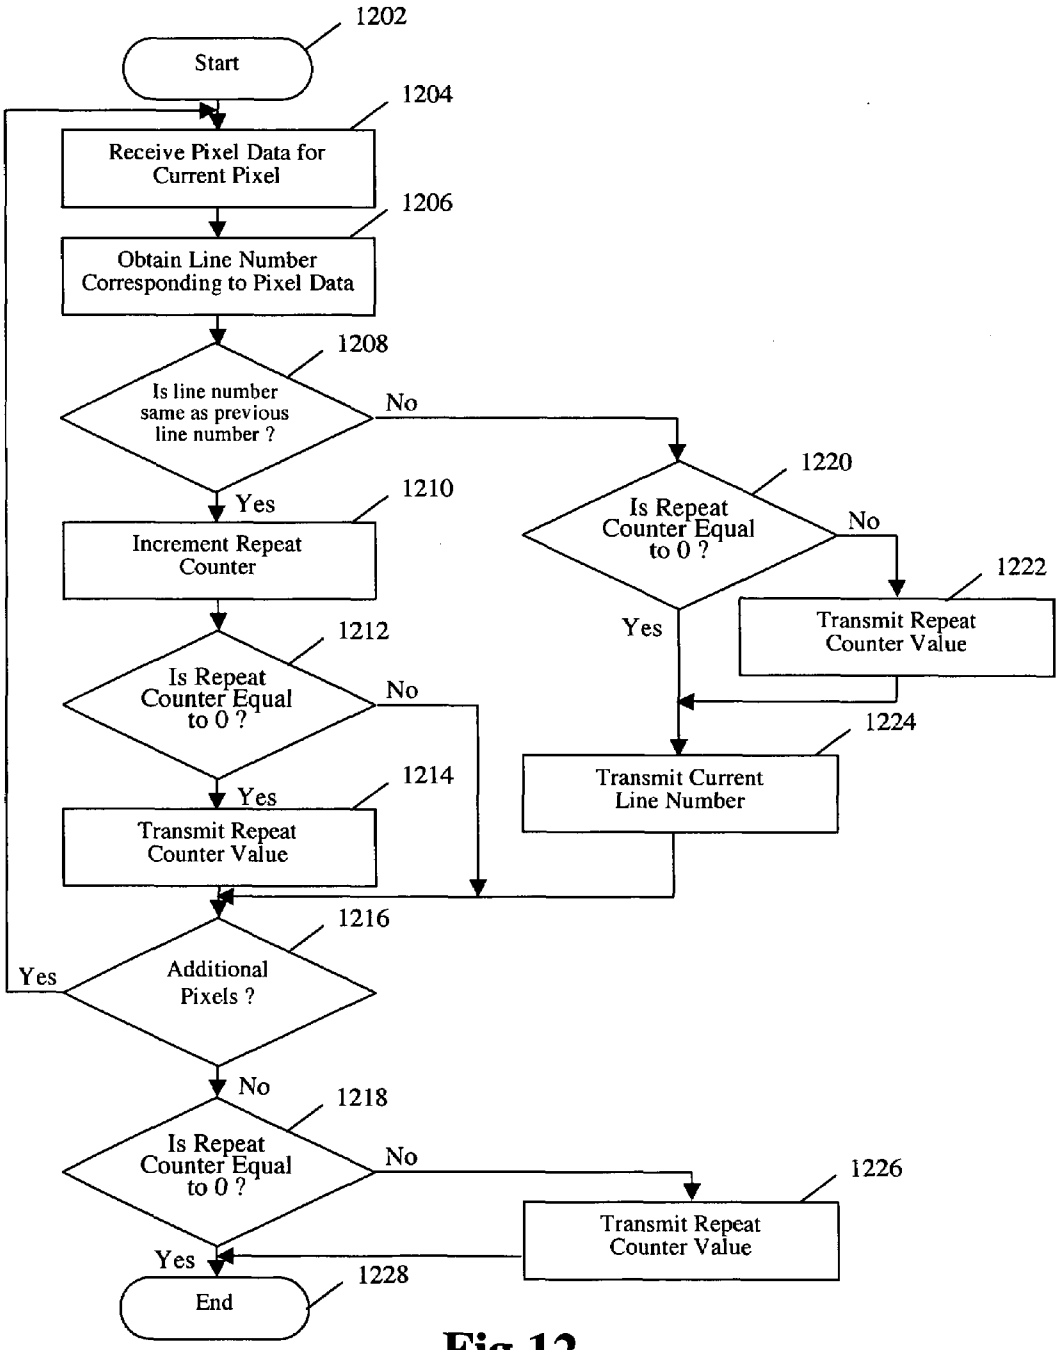
1202
Start
1204
Receive Pixel Data for Current Pixel
1206
Obtain Line Number Corresponding to Pixel Data
1208
Is line number same as previous line number ?
No
Yes
1210
Increment Repeat Counter
1212
Is Repeat Counter Equal to 0 ?
No
Yes
1214
Transmit Repeat Counter Value
1220
Is Repeat Counter Equal to 0 ?
No
Yes
1222
Transmit Repeat Counter Value
1224
Transmit Current Line Number
1216
Additional Pixels ?
Yes
No
1218
Is Repeat Counter Equal to 0 ?
No
Yes
1226
Transmit Repeat Counter Value
1228
End

Fig 12

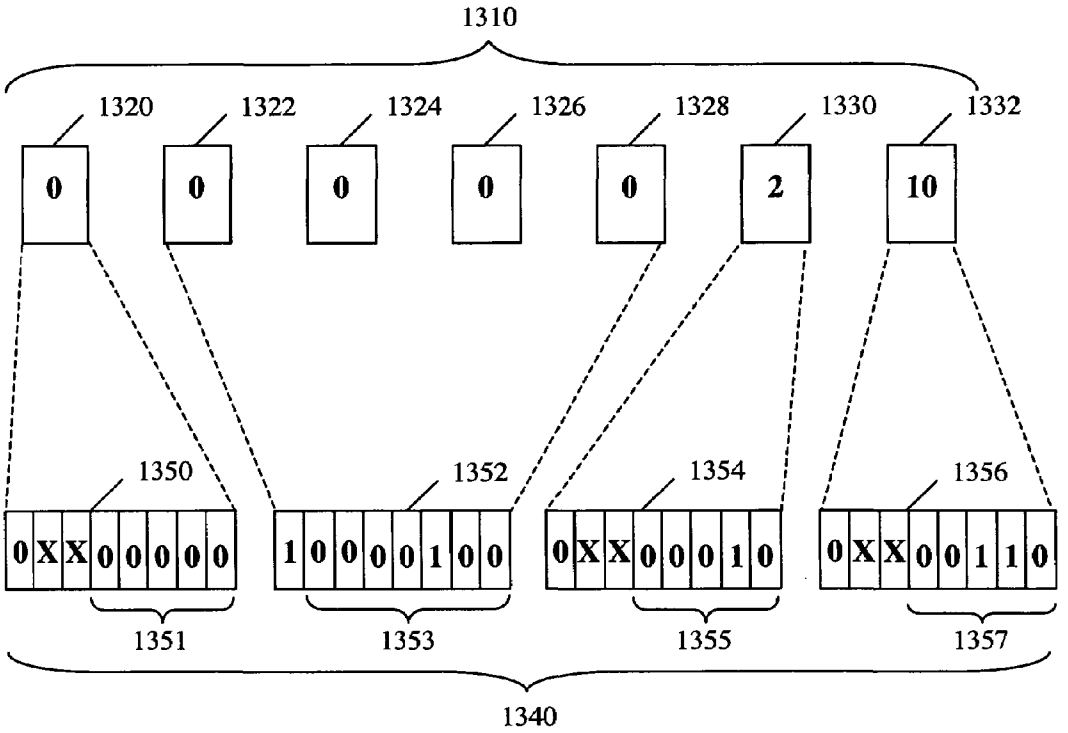
1310
1320
1322
1324
1326
1328
1330
1332
0
0
0
0
0
2
10
1350
1352
1354
1356
0XX00000
10000100
0XX00010
0XX00110
1351
1353
1355
1357
1340

Fig 13

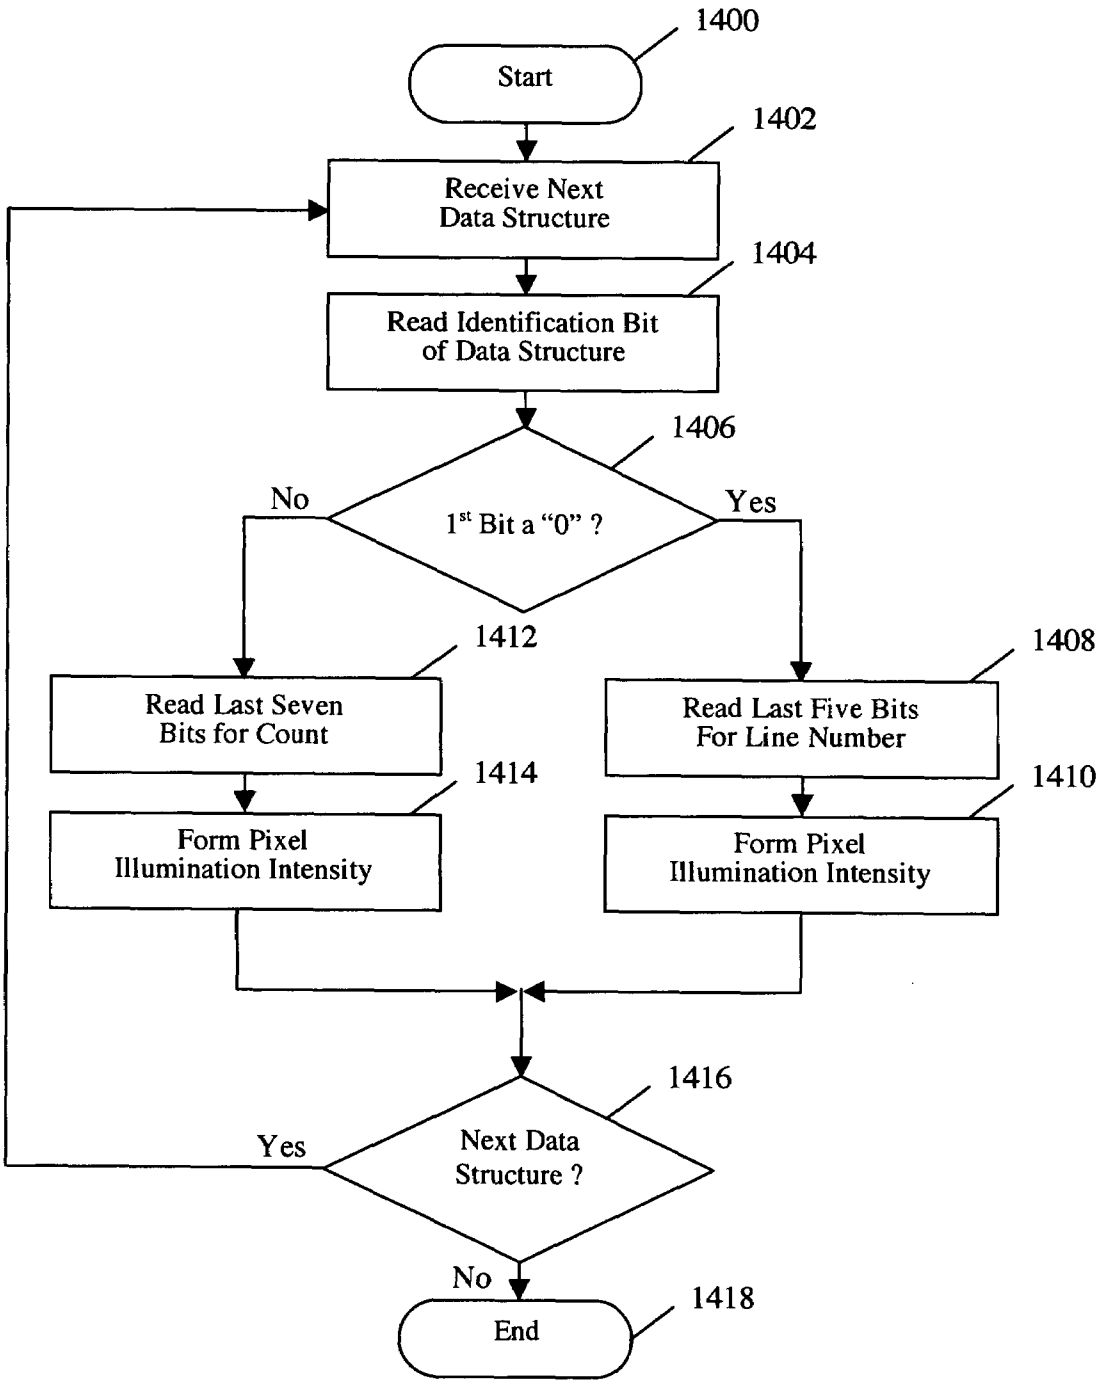
1400
Start
1402
Receive Next Data Structure
1404
Read Identification Bit of Data Structure
1406
1st Bit a "0" ?
No
Yes
1412
Read Last Seven Bits for Count
1408
Read Last Five Bits For Line Number
1414
Form Pixel Illumination Intensity
1410
Form Pixel Illumination Intensity
1416
Next Data Structure ?
Yes
No
1418
End

Fig 14

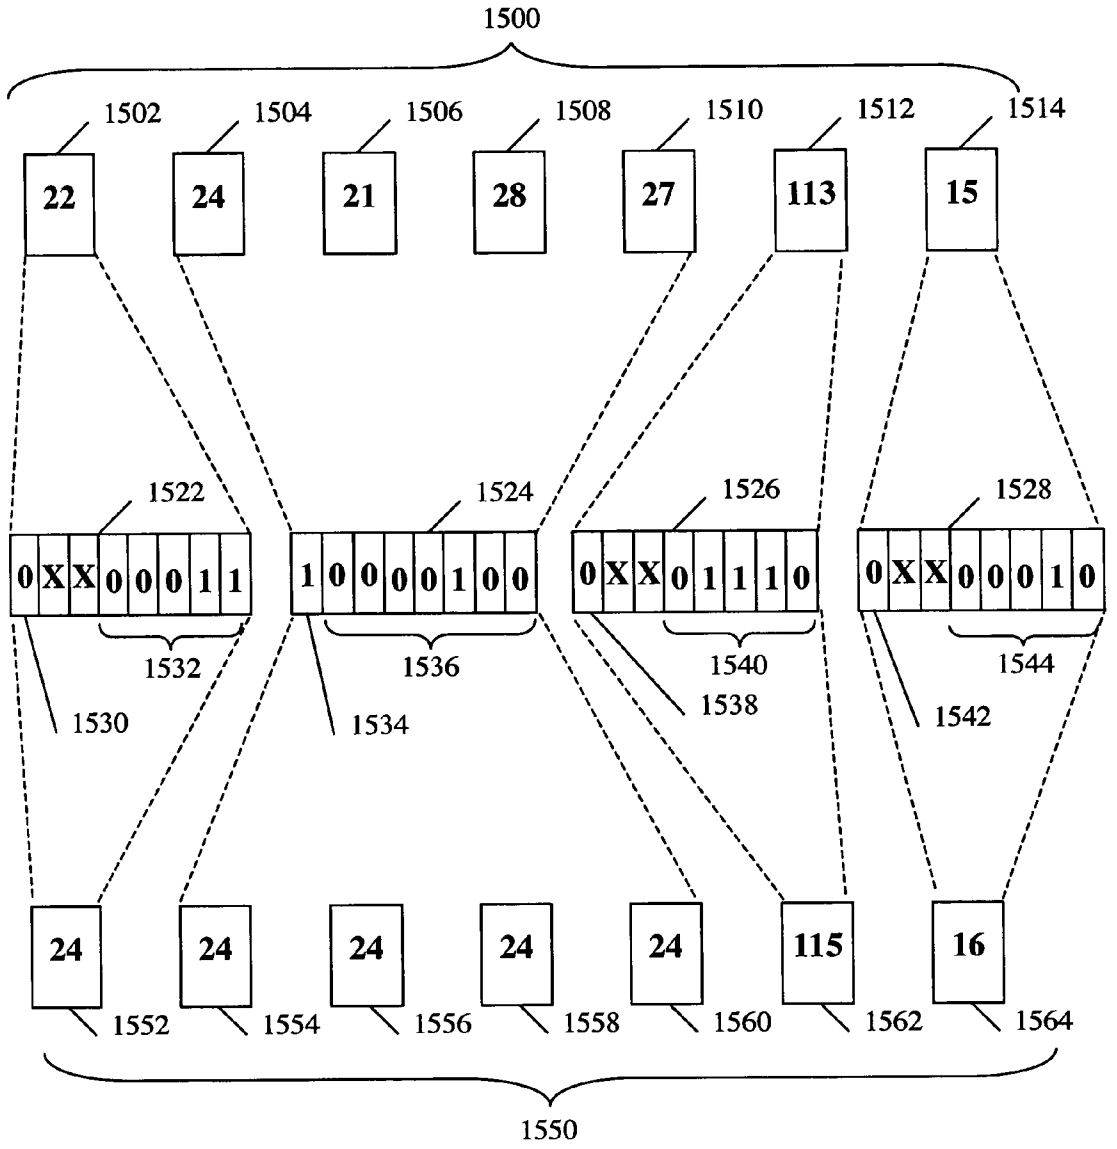
1500
1502
1504
1506
1508
1510
1512
1514
22
24
21
28
27
113
15
1522
1524
1526
1528
0XX00011
10000100
0XX01110
0XX00010
1532
1536
1540
1544
1530
1534
1538
1542
24
24
24
24
24
115
16
1552
1554
1556
1558
1560
1562
1564
1550

Fig 15

GENERAL PURPOSE COMPRESSION FOR VIDEO IMAGES (RHN)

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority under 35 U.S.C. §119(e) of the now abandoned U.S. provisional application Ser. No. 60/113,276 filed on 1998 Dec. 23, and entitled "METHOD OF IMAGES ENHANCEMENT, COMPRESSION, AND ENCODING of GRAYSCALE IMAGES (ECHOCODEC) ." The provisional application Ser. No. 60/113,276 filed on 1998 Dec. 23 and entitled "METHOD OF IMAGE ENHANCEMENT, COMPRESSION, AND ENCODING of GRAYSCALE IMAGES (ECHOCODEC)" is also hereby incorporated by reference.

This application also claims priority under 35 U.S.C. §119(e) of our co-pending U.S. patent application Ser. No. 09/312,922 filed on 1999 May 17, and entitled "SYSTEM FOR TRANSMITTING VIDEO IMAGES OVER A COMPUTER NETWORK TO A REMOTE RECEIVER," which describes an embodiment of the invention of this application in combination with our now abandoned U.S. provisional application Ser. No. 60/085,818 filed on 1998 May 18, and entitled "APPARATUS FOR TRANSMITTING LIVE VIDEO IMAGES OVER A COMPUTER NETWORK TO MULTIPLE REMOTE RECEIVERS." U.S. patent application Ser. No. 09/312,922 filed on 1999 May 17, and entitled "SYSTEM FOR TRANSMITTING VIDEO IMAGES OVER A COMPUTER NETWORK TO A REMOTE RECEIVER" is also hereby incorporated by reference.

BACKGROUND

1. Field of the Invention

This invention relates to data compression, specifically to the compression and decompression of video images.

2. Description of Prior Art

In the last few years, there have been tremendous advances in the speed of computer processors and in the availability of bandwidth of worldwide computer networks such as the Internet. These advances have led to a point where businesses and households now commonly have both the computing power and network connectivity necessary to have point-to-point digital communications of audio, rich graphical images, and video. However the transmission of video signals with the full resolution and quality of television is still out of reach. In order to achieve an acceptable level of video quality, the video signal must be compressed significantly without losing either spatial or temporal quality.

A number of different approaches have been taken but each has resulted in less than acceptable results. These approaches and their disadvantages are disclosed by Mark Nelson in a book entitled *The Data Compression Book*, Second Edition, published by M & T Book in 1996. Mark Morrision also discusses the state of the art in a book entitled *The Magic of Image Processing*, published by Sams Publishing in 1993.

VIDEO SIGNALS

Standard video signals are analog in nature. In the United States, television signals contain 525 scan lines of which 480 lines are visible on most televisions. The video signal represents a continuous stream of still images, also known as frames, that are fully scanned, transmitted and displayed at

a rate of 30 frames per second. This frame rate is considered full motion. A television screen has a 4:3 aspect ratio.

When an analog video signal is digitized, each of the 480 lines is sampled 640 times and each sample is represented by a number. Each sample point is called a picture element, or pixel. A two dimensional array is created that is 640 pixels wide and 480 pixels high. This 640×480 pixel array is a still graphical image that is considered to be full frame. The human eye can perceive 16.7 thousand colors. A pixel value comprised of 24 bits can represent each perceivable color. A graphical image made up of 24-bit pixels is considered to be full color. A single second-long full frame, full color video requires over 220 millions bits of data.

The transmission of 640×480 pixels×24 bits per pixel times 30 frames requires the transmission of 221,184,000 millions bits per second. A T1 Internet connection can transfer up to 1.54 millions bits per second. A high speed (56 Kb) modem can transfer data at a maximum rate of 56 thousand bits per second. The transfer of full motion, full frame, full color digital video over a T1 Internet connection, or 56 Kb modem, will require an effective data compression of over 144:1, or 3949:1, respectively.

BASIC RUN-LENGTH ENCODING

An early technique for data compression is run-length encoding where a repeated series of items are replaced with one sample item and a count for the number of times the sample repeats. Prior art shows run-length encoding of both individual bits and bytes. These simple approaches by themselves have failed to achieve the necessary compression ratios.

VARIABLE LENGTH ENCODING

In the late 1940s, Claude Shannon at Bell Labs and R. M. Fano at MIT pioneered the field of data compression. Their work resulted in a technique of using variable length codes where codes with low probabilities have more bits, and codes with higher probabilities have fewer bits. This approach requires multiple passes through the data to determine code probability and then to encode the data. This approach also has failed to achieve the necessary compression ratios.

D. A. Huffman disclosed a more efficient approach of variable length encoding known as Huffman coding in a paper entitled "A Method for Construction of Minimum Redundancy Codes," published in 1952. This approach also has failed to achieve the necessary compression ratios.

ARITHMETIC, FINITE CONTEXT, AND ADAPTIVE CODING

In the 1980s, arithmetic, finite coding, and adaptive coding have provided a slight improvement over the earlier methods. These approaches require extensive computer processing and have failed to achieve the necessary compression ratios.

DICTIONARY-BASED COMPRESSION

Dictionary-based compression uses a completely different method to compress data. Variable length strings of symbols are encoded as single tokens. The tokens form an index to a dictionary. In 1977, Abraham Lempel and Jacob Ziv published a paper entitled. "A Universal Algorithm for Sequential Data Compression" in IEEE Transactions on Informa-

tion Theory, which disclosed a compression technique commonly known as LZ77. The same authors published a 1978 sequel entitled, "Compression of Individual Sequences via Variable-Rate Coding," which disclosed a compression technique commonly known as LZ78 (see U.S. Pat. No. 4,464,650). Terry Welch published an article entitled, "A Technique for High-Performance Data Compression," in the June 1984 issue of IEEE Computer, which disclosed an algorithm commonly known as LZW, which is the basis for the GIF algorithm (see U.S. Pat. Nos. 4,558,302, 4,814,746, and 4,876,541). In 1989, Stack Electronics implemented a LZ77 based method called QIC-122 (see U.S. Pat. No. 5,532,694, U.S. Pat. No. 5,506,580, and U.S. Pat. No. 5,463,390). The output of a QIC-122 encoder consists of a stream of data, which, in turn consists of tokens and symbols freely intermixed. Each token or symbol is prefixed by a single bit flag that indicates whether the following is a dictionary reference or a plain symbol. The definitions for these two sequences are:

(a) plaintext <1><eight-bit-symbol>

(b) dictionary reference: <0><window-offset><phrase-length>

Windows offsets are encoded as seven bits or eleven bits. These lossless (method where no data is lost) compression methods can achieve up to 10:1 compression ratios on graphic images typical of a video image. While these dictionary-based algorithms are popular, these approaches require extensive computer processing and have failed to achieve the necessary compression ratios.

JPEG AND MPEG

Graphical images have an advantage over conventional computer data files: they can be slightly modified during the compression/decompression cycle without affecting the perceived quality on the part of the viewer. By allowing some loss of data, compression ratios of 25:1 have been achieved without major degradation of the perceived image. The Joint Photographic Experts Group (JPEG) has developed a standard for graphical image compression. The JPEG lossy (method where some data is lost) compression algorithm first divides the color image into three color planes and divides each plane into 8 by 8 blocks, and then the algorithm operates in three successive stages:

(a) A mathematical transformation known as Discrete Cosine Transform (DCT) takes a set of points from the spatial domain and transforms them into an identical representation in the frequency domain.

(b) A lossy quantization is performed using a quantization matrix to reduce the precision of the coefficients.

(c) The zero values are encoded in a zig-zag sequence (see Nelson, pp. 341–342).

JPEG can be scaled to perform higher compression ratio by allowing more loss in the quantization stage of the compression. However this loss results in certain blocks of the image being compressed such that areas of the image have a blocky appearance and the edges of the 8 by 8 blocks become apparent because they no longer match the colors of their adjacent blocks. Another disadvantage of JPEG is smearing. The true edges in an image get blurred due to the lossy compression method.

The Moving Pictures Expert Group (MPEG) uses a combination of JPEG based techniques combined with forward and reverse temporal differencing. MPEG compares adjacent frames and for those blocks that are identical to those in a previous or subsequent frame and only a description of the previous or subsequent identical block is encoded. MPEG suffers from the same blocking and smearing problems as JPEG.

These approaches require extensive computer processing and have failed to achieve the necessary compression ratios without unacceptable loss of image quality and artificially induced distortion.

QUICKTIME: CINEPAK, SORENSEN, H.263

Apple Computer, Inc. released a component architecture for digital video compression and decompression, named QuickTime. Any number of methods can be encoded into a QuickTime compressor/decompressor (codec). Some popular codes are CinePak, Sorensen, and H.263. CinePak and Sorensen both require extensive computer processing to prepare a digital video sequence for playback in real time; neither can be used for live compression. H.263 compresses in real time but does so by sacrificing image quality resulting in severe blocking and smearing.

FRACTAL AND WAVELET COMPRESSION

Extremely high compression ratios are achievable with fractal and wavelet compression algorithms. These approaches require extensive computer processing and generally cannot be completed in real time.

SUMMARY OF THE INVENTION

In accordance with the present invention a method of compression of a video stream comprises steps of subsampling a video frame, determining a code for each pixel, run-length encoding the codes whereby the method can be executed in real time and the compressed representation of codes saves substantial space on a storage medium and require substantially less time and bandwidth to be transported over a communication link. The present invention includes a corresponding method for decompressing the encoded data.

OBJECTS AND ADVANTAGES

Accordingly, beside the objects and advantages of the method described in our patent above, some additional objects and advantages of the present invention are:

(a) to provide a method of compressing and decompressing video signals so that the video information can be transported across a digital communications channel in real time.

(b) to provide a method of compressing and decompressing video signals such that compression can be accomplished with software on commercially available computers without the need for additional hardware for either compression or decompression.

(c) to provide a high quality video image without the blocking and smearing defects associated with prior art lossy methods.

(d) to provide a high quality video image that suitable for use in medical applications.

(e) to provide some level of encryption so that images are not directly viewable from the data as contained in the transmission.

(f) to provide a method of compression of video signals such that the compressed representation of the video signals is substantially reduced in size for storage on a storage medium.

(g) to enhance electronically generated images by filtering highs and lows.

DRAWING FIGURES

In the drawings, closely related figures have the same number but different alphabetic suffixes.

FIG. **1** shows the high level steps of compression and decompression of an image.

FIGS. **2**A to **2**H show alternatives for selecting a pixel value for encoding.

FIG. **3**A shows the encode table of the preferred embodiment.

FIG. **3**B shows a chart of values corresponding to the sample encode table

FIG. **4**A shows a flowchart for the preferred embodiment of the compression method.

FIG. **4**B shows an image and a corresponding stream of pixels.

FIGS. **5**A to **5**C shows the formats for the run-length encoding.

FIG. **6** shows a series of codes and the resulting encoded stream.

FIG. **7** shows a sample decode table.

FIG. **8** shows an alternate method of selecting a five bit code.

FIG. **9** shows the flow chart for the preferred embodiment of the decompression method.

FIGS. **10**A to **10**C show an encryption key, an encryption table and a decryption table.

FIG. **11** illustrates a block diagram of a network for video transmission.

FIG. **12** illustrates a flow chart showing the steps involved in the compression process within a compressor of an alternate embodiment.

FIG. **13** illustrates a sample data stream representing video pixels and a corresponding compressed data stream.

FIG. **14** illustrates a flow chart showing the steps involved during the decompression process of an alternate embodiment.

FIG. **15** illustrates an uncompressed data stream, a corresponding compressed data stream, and a corresponding converted data stream of an alternate embodiment.

Reference Numerals in Drawings

100	compression steps	110	sub-sampling step
120	code lookup step	130	run-length encoding step
140	encoded data	150	decompression steps
160	run-length expansion step	170	value lookup step
180	image reconstitution step	200	32 bit pixel value
202	blue channel	204	green channel
206	red channel	208	alpha channel
210	24 bit pixel value	212	blue component
214	green component	216	red component
220	RGB averaging diagram	222	blue value
224	green value	226	red value
228	averaged value	230	blue selection diagram
232	blue instance	234	green instance
236	red instance	240	selected blue value
250	green selection diagram	260	selected green value
270	red selection diagram	280	selected red value
290	grayscale pixel	292	grayscale blue
294	grayscale green	296	grayscale red
298	selected grayscale value	299	8 bit pixel value
300	encode table		
310	codes	320	line comments
330	minimum values	340	maximum values
360	stepped values	350	chart of values

-continued

Reference Numerals in Drawings

370	line numbers	400	encode flowchart
402	encode entry	403	encode initialization step
404	get pixel step	405	get value step
406	lookup encoded value step	408	compare previous
410	increment counter step	412	check count overflow
414	new code step	416	check end of data
418	set done	420	counter overflow step
422	check done	428	encode exit
430	image	440	image width
450	image height	460	pixel stream
500	code byte	510	flag bit
520	repeat code	530	count
550	data code	565	data bit 6
570	data bit 5	575	data bit 4
580	data bit 3	585	data bit 2
590	data bit 1	595	data bit 0
610	decimal values	620	first value
622	second value	624	third value
626	fourth value	628	fifth value
630	sixth value	632	seventh value
640	binary code	650	first byte
651	repeat count	652	second byte
653	first code	654	third byte
655	second code	656	fourth byte
657	third code	700	decode table
710	alpha values	720	red values
730	green values	740	blue values
800	8 bit pixel	810	pixel bit 7
812	pixel bit 6	814	pixel bit 5
816	pixel bit 4	818	pixel bit 3
820	pixel bit 2	822	pixel bit 1
824	pixel bit 0	830	5 bit sample
832	sample bit 4	834	sample bit 3
836	sample bit 2	838	sample bit 1
840	sample bit 0	850	ignored bits
860	decompressed pixel	880	3 low order bits
900	decode entry	901	decode initialize step
902	get code step	906	determine type
908	decode lookup step	909	check zero count
910	place pixel step	912	assign counter step
914	reset counter step	916	check length
918	decode exit	1000	encryption key
1010	encryption table	1020	decryption table

TERMINOLOGY CORRELATION

Different terminology was used in the specification of application Ser. No. 09/312,922, portions of which are now included in this specification. The two specifications were written by two different authors who described distinct embodiments of the subject invention with two distinct sets of terminology. The following table provides a partial correlation between the two sets of terminology. Note that this correlation of terms does not necessarily mean the term are equivalent. This high level correlation is provided to aid in understanding similarities and differences between the two specifications. Also note that the same term used in this specification in the field of "compression and decompression of video images" is likely to have different meaning in the Ser. No. 09/312,922 specification which was written in the field of "video communications systems" and "medical devices". For example in the field of compression the term "image" generally refers to a still image or a single frame of a video, but in the medical device field the term "image" often refers to the collection of all the frames in a video. Thus the terms themselves should be understood based on the respective original specification. The legal presumption that terms in related applications by the same inventors have the same meaning does not apply in this case.

Terms Used In This Application	Terms Used in Application 09/312,922
140 encoded data	stream of compressed data
212 blue component	blue scale value
214 green component	green scale value
216 red component	red scale value
300 encode table, encodeTable decodeTable	encodePallet decodePallet
310 codes	compression lookup table 310
code	line number
320 line comments	documentation 320
350 chart of values	lookup table 350
370 line numbers	line number (column)
430 image	video image 400
460 pixel stream	stream of pixel data 405
500 code byte	data structure 500
510 flag bit	identification bit 510
520 repeat code	repeat data structure 525
530 count	repeat value
530 count	repeat counter value
530 count	remaining bits 510
550 data code	line number data structure 550
610 decimal values	uncompressed data stream 1000
640 binary code	compressed data stream 1020
700 decode table	decompression lookup table 700
720 red values	red scale illumination intensity value 710
730 green values	green scale illumination intensity value 720
740 blue values	blue scale illumination intensity value 730

DESCRIPTION OF THE INVENTION

FIG. 1—Compression and Decompression Steps

FIG. **1** illustrates a sequence of compression steps **100** and a sequence of decompression steps **150** of the present invention. The compression steps **100** comprise a sub-sampling step **110**, a code lookup step **120** and a run-length encoding step **130**. After completion of the compression steps **100**, a stream of encoded data **140** is output to either a storage medium or a transmission channel. The decompression steps **150** comprise a run-length expansion step **160** wherein the stream of encoded data **140** is processed, a value lookup step **170** and an image reconstitution step **180**.

FIGS. 2A to 2H Selecting Pixel Values for Encoding

FIGS. **2**A to **2**G illustrate alternatives for selecting a pixel value for encoding. The sub-sampling step **110** (FIG. **1**) includes sub-sampling of an 8 bit pixel value to obtain a value for use in the subsequent code lookup step **120** (FIG. **1**).

Video digitizing hardware typical has the options of storing the pixel values as a 32 bit pixel value **200** or a 24 bit pixel value **210**, shown in FIG. **2**A and FIG. **2**B, respectively. The 32 bit pixel value **200** is composed of a blue channel **202**, a green channel **204**, a red channel **206**, and an alpha channel **208**. Each channel contains of 8 bits and can represent 256 saturation levels for the particular color channel. For each channel the saturation intensity value of zero represents the fully off state, and the saturation intensity value of "255" represents the fully on state. The 24 bit pixel value **210** is composed of a blue component **212**, a green component **214**, and a red component **216**. There is no component for the alpha channel in the 24 bit pixel value **210**. Regardless of the structure, the blue channel **202** is equivalent to the blue component **212**, the green channel **204** is equivalent to the green component **214**, and the red channel **206** is equivalent to the red component **216**.

In the present invention, the 32 bit pixel value **200** alternative is preferred due to the consistent alignment of 32 bit values in most computer memories; however for simplicity of illustration the alpha channel **208** will be omitted in FIGS. **2**C to **2**G.

If the video signal is digitized in color, the three color components may have different values. For example in FIG. **2**C, a RGB averaging diagram **220** illustrates a blue value **222** of 35 decimal, a green value **224** of 15, and a red value **226** of 10. One alternative is to sub sample from 24 bits to 8 bits by averaging the three color values to obtain an averaged value **228** that, in this example, has the value of 20. (10+15+35)/3=20

FIG. **2**D illustrates another alternative for selecting an 8 bit value in a blue selection diagram **230**. In this example, a blue instance **232** has the value of 35, a green instance **234** has the value of 15, and a red instance **236** has the value of 10. In this alternative the blue instance **232** is always selected as a selected blue value **240**.

FIG. **2**E illustrates another alternative for selecting an 8 bit value in a green selection diagram **250**. In this alternative the green instance **234** is always selected as a selected green value **260**.

FIG. **2**F illustrates another alternative for selecting an 8 bit value in a red selection diagram **270**. In this alternative the red instance **236** is always selected as a selected red value **280**.

If the video signal being digitized is grayscale, the three color components will have the same values. For example, in FIG. **2**G, a grayscale pixel **290** comprises a grayscale blue **292** with a value of decimal **40**, a grayscale green **294** with a value of 40, and a grayscale red with a value of 40. Because the values are all the same, it makes no difference which grayscale color component is selected, a selected grayscale value **298** will have the value of 40 in this example.

The preferred embodiment of this invention uses the low order byte of the pixel value, which is typically the blue component as shown in FIG. **2**D.

FIG. **2**H illustrates an 8 bit pixel value **299** which is selected by one of the alternatives described above. The 8 bit pixel value **299** is equivalent to items referenced by numerals 228, 240, 260, 280, or 298. This reduction of the 32 bit pixel value **200** or the 24 bit pixel value **210** contributes a reduction in data size of 4:1 to 3:1, respectively. This reduction recognizes that for some images, such as medical images or grayscale images, no relevant information is lost.

FIG. 3A—Encode Table

FIG. **3**A illustrates an encode table **300** of the preferred embodiment of the present invention. The encode table **300** may be implemented in the C programming language, as shown, and is an array of 256 bytes. These bytes are the codes **310**. Each line of the array elements is documented with one of a series of line comments **320**. The line comments **320** contain a column of minimum values **330**, a column of maximum values **340**, and a column of stepped values **360**. The first column of encode table **300** is a column of line numbers **370**. The encode table is arranged such that each line contains codes **310** that have a value equal to its line number.

The encode table **300** reduces the 8 bit value **299** to a 5 bit code. This reduction recognizes that for some images, such as medical images, no relevant information was lost.

This reduction also eliminates noise from the video signal and thereby increases the efficiency of the run-length encoding step **130** (FIG. **1**).

Using alternate terminology, FIG. **3**A illustrates software code which is preferably utilized to perform compression of a stream of video data within the compressor (not shown) within the transmitter (FIG. **11**). This software code includes a lookup table **310** with storage locations representing illumination intensity values from 0 to 255. Each representative storage location includes a line number from 0 to 31, which is indexed to a decompression lookup table. The compression lookup table **310** allows an eight-bit entry representing values from 0 to 255 to be compressed into a five-bit value. When provided with an illumination intensity value, the line number stored in the corresponding location within the compression lookup table **310** is read and provided as the compressed five bit illumination intensity value.

Documentation **320** is utilized to more clearly illustrate the function of each line contained within the compression lookup table **310**. If the illumination intensity value is two (on a scale of 0 to 255), the line number zero stored at the storage location corresponding to this illumination intensity value is read from the compression lookup table **310**. As can be seen from the compression lookup table **310**, any illumination intensity value between zero to four has a corresponding five-bit line number of zero (on a scale of 0 to 31). In a further example, if the illumination intensity value is eighty, the line number ten scored at the storage location corresponding to this illumination intensity value is read from the compression lookup table **310**. Instead of transmitting an eight-bit value of 0 to 255, which corresponds to an illumination intensity value of a pixel, the compression lookup table **310** is utilized to compress the eight-bit illumination intensity value into a corresponding five-bit line number value between 0 and 31.

This compression process is preferably optimized to compress data representing a stream of video images which originates from the video source **1101** (FIG. **11**) and is received by the transmitter **1201** (FIG. **11**). In practice, this data representing the stream of video images is transmitted in terms of a stream of pixel data. A predetermined number of pixels represent each video image. For each pixel, the illumination intensity value of zero represents a fully off state, and the illumination intensity value of "255" represents a fully on state.

FIG. **3**B—Chart of Values

FIG. **3**B, a chart of values **350**, enumerates the range that the 8 bit pixel value **299** can have and the respective placement of each value in the encode table **300**. The first column of the chart enumerates the line numbers **370**. Column A contains the minimum values **330** for each line. Each row of the chart has from four to nine sequential entries. The last column of the chart, column J, contains the stepped values (**360**) that are used in the value lookup step **170** (FIG. **1**).

Using alternate terminology, FIG. **3**B illustrates a lookup table **350**. This look-up table **350** shows a logical representation of the compression process according to the compression lookup table **310** shown in FIG. **3**A, for illustrative purposes only. The lookup table **350** classifies an eight-bit illumination intensity value for a pixel into an appropriate level within a reduced level index representing the five-bit line number. There are preferably 32 levels within this reduced level index, from 0 to 31, which are represented by the rows 0 to 31 on the left of the table **350**. Each line number corresponds with one of the levels within the reduced level index. The lookup table **350** also includes 10 columns, which are represented by **330** and **360**. The entries within columns **330** represent the illumination intensity value for the pixel and corresponds to the storage locations within the lookup table **350**. Each of the illumination intensity values is compressed into the line number of the row on which the illumination intensity value is found within the table **350**.

The entries within column **360** are an average illumination intensity level associated with each line number, which will be discussed below in relation to the decompression lookup table. This average illumination intensity level falls within a range of a lowest and highest illumination intensity value within the particular row.

As a further example of the pixel data compression technique of the present invention utilizing the lookup table **350** when provided with pixel data having an illumination intensity value of 167, the line number **20** is provided as the compressed value from the compression lookup table. Any pixel having an illumination intensity value between 162 and 169 corresponds to the line number **20** in the lookup table **350**.

Accordingly, for pixels having illumination intensity values between and including 162 and 169, the five bit line number **20** is provided as the compressed value, which is either stored by the recorded video device **1104** (FIG. **11**) or transmitted by the transmitter **1103** to one or more of the receivers **1106**.

FIG. **4**A—Encode Flowchart

FIG. **4**A illustrates the encode flowchart **400** which represents the details of the preferred embodiment of the code lookup step **120** (FIG. **1**) and the run-length encoding step **130** (FIG. **1**) for the present invention.

The encoding begins at an encode entry **402**. In a encode initialization step **403**, a prior value P is set to a known value, preferably decimal "255" or hexadecimal 0×FF, a repeat count C is set to zero, an encoded length L is set to 0, and a completion flag "Done" is set to a logical value of false. Next, a get pixel step **404** obtains a pixel from the image being encoded. At a get value step **405**, a value V is set to the 8 it pixel **299** as derived from the pixel using one of the methods shown in FIGS. **2**C to **2**G, preferably the fastest as explained above. At a lookup encoded value step **406**, an encoded value E is set to the value of one of the codes **310** (FIG. **3**) of the encode table **300** as indexed by V. Next, a compare previous **408** decision is made by comparing the values of E and P. If the values are the same, a increment counter step **410** is executed and flow continues to the get pixel step **404** that obtains the next pixel from the image.

If the encode value E does not match the prior value P, then a check count overflow **412** decision is made. If the counter C is less than or equal to 128, then a new code step **414** is executed, otherwise a counter overflow step **420** is executed.

At step **414**, the counter C is bit-wise AND-ed with hexadecimal 0×8 which sets the high order bit to a binary value of 1 and is placed in the encoded data **140** buffer A at the next available location as indexed by the encoded length L. Then, continuing inside flowchart steps **414**, L is incremented, the prior value P is placed in the encoded data **140** buffer A, L is incremented, the repeat count C is set to 1 and the prior value P is set to the encode value E. After step **414**, a check end of data decision is made by checking to see if

there are any more pixels in the image and if not if the last value is has been processed. Because this method utilizes a read ahead technique, step **414** must be execute one more time after the end of data is reached to process the last run-length. If there is more data in the image, flow continues to a check of the completion flag "Done" at step **422**. If the check indicates that the process is not completed, flow continues to step **404**.

If the end of data is reached but the completion flag "Done" is still false, flow continues to a set done step **418**. At step **418**, the completion flag "Done" is set to logical true, and flow continues to decision **412** where the last run-length will be output and flow will eventually exit through step **414**, decision **416**, decision **422**, and then terminate at encode exit **428**.

It is possible for the repeat count C to become larger than 128 requiring more bits than allocated by this method. This situation is handled by making the check count overflow **412** decision and executing the counter overflow step **420**. At step **420**, the value hexadecimal 0×80 is placed in the encoded data **140** buffer A at the next available location as indexed by the encoded length L. Then, continuing inside flowchart step **420**, L is incremented, the prior value P is placed in the encoded data **140** buffer A, L is incremented, the repeat count C is decrement by 128. After step **420**, flows continues to the check count overflow **412** decision. Thus when the encode value E repeats more that 128 times, multiple sets of repeat counts and encoded values are output to the encoded data **140** buffer.

This entire process is repeated for each image or video frame and the encoded length L is transmitted with the encoded data associated with each frame. The encoded length varies from frame to frame depending on the content of the image being encoded.

FIG. 4B—Image and Pixel Stream

FIG. **4**B illustrates an image and its corresponding stream of pixels. A rectangular image **430** is composed of rows and columns of pixels. The image **430** has a width 440 and a height 450, both measured in pixels. Pixels in a row are accessed from left to right. Rows are accessed from top to bottom. Some pixels in the image are labeled from A to Z. Pixel A is the first pixel and pixel Z is the last pixel. Scanning left to right and top to bottom will produce a pixel stream **460**. In the pixel stream **460**, pixels A and B are adjacent. Also pixels N and O are adjacent even though they appear on different rows in the image. If adjacent pixels have the same code the process in FIG. **4**A will consider them in the same run.

Because the video signal being digitized is analog there will be some loss of information in the analog to digital conversion. The video digitizing hardware can be configured to sample the analog data into the image **430** with almost any width 440 and any height 450. The present invention achieves most of its effective compression by sub-sampling the data image with the width 440 value less than the conventional **640** and the height 450 value less than the convention **480**. The preferred embodiment of the invention for use in a medical application with T1 Internet transmission bandwidth is to sample at **320** by **240**. However, a sampling resolution of 80 by 60 may be suitable for some video application.

Using alternative terminology, FIG. **4**B illustrates a representative video image **430** and a corresponding stream of pixel data **460** representing the video image **430**. The pixel data is transmitted in an order representing pixel from left to right on each horizontal line, successively, from top to bottom of the video image. As an example, pixels "C" and "D" are considered consecutive pixels within the stream of pixels **460**.

FIGS. **5**A to **5**C—Run-Length Encoding Formats

FIGS. **5**A to **5**C show the formats for the run-length encoding. FIG. **5**A shows a code byte **500**, with its high order bit designated as a flag bit **510**. Using alternate terminology, FIG. **5**A illustrates a data structure **500** having 8 bits of storage. An identification bit **510** is preferably a leading bit within the data structure **500**. This identification bit **510** signals whether the particular data structure contains a line number representing the illumination intensity level or a repeat value representing a number of times to repeat an illumination intensity value of a prior pixel. The data structure **500** is used to carry both compressed line number values and the repeat value for compressed strings of similar pixels.

FIG. **5**B shows a repeat code **520** comprising a Boolean value one in its flag bit **510** and a 7 bit count **530** in the remaining 7 low order bits. The seven bits count **530** can represent **128** values with a zero representing "128" and 1 through 127 being their own value.

Using alternate terminology for an alternate embodiment, FIG. **5**B illustrates a data structure **520** used to transmit the repeat value, which has a specific configuration of the data structure **500** (FIG. **5**A). To signal that this data structure **520** is transmitting a repeat value, the identification bit **510** includes a value corresponding to a logical one. The number of times to repeat is preferably stored in the seven remaining bits **530**. By storing a logical one in the identification bit **510**, the decompressor within the receiver **1106** (FIG. **11**) is instructed in an alternate embodiment while decoding to repeat the line number of the previous pixel a number of times corresponding to the seven bit repeat value. In this embodiment, the repeat counter value is limited to a value of 127 which is the maximum number capable of being expressed by seven bits. Alternatively, the repeat counter value can be represented by any appropriate number of bits.

FIG. **5**B shows a data code **550** comprising:

1. a Boolean value zero in its flag bit **510**
2. two unused data bits: data bit **6** reference by **565** and data bit **5** reference by **570**, and
3. five bits, data bits **4** to **0**, referenced by **575**, **580**, **585**, **590**, and **595**, respectively.

The five bits hold a 5 bit code selected from the codes **310** (FIG. **3**A) in the encode table **300** (FIG. **3**A).

Using alternative terminology, FIG. **5**C illustrates a data structure **550** used to transmit a line number, which has a specific configuration of the data structure **500** (FIG. **5**A). To signal that this data structure **550** is transmitting a compressed line number, representing an illumination intensity value of a pixel, the identification bit **510** includes a value corresponding to a logical zero. The data structure **550** is configured to transmit the line number that represents the illumination intensity level of the pixel. Preferably the bits **565** and **570** are unused. The bits **575–595** represent the five-bit line number corresponding to the illumination intensity value from the compression lookup table **310** (FIG. **3**A). By setting the identification bit **510** to a logical zero, the decompressor within the receiver **1106** (FIG. **11**) recognizes that information held in the five bits **575–595** represents the line number corresponding to the illumination intensity value of a pixel in the data stream.

The preferred embodiment of this invention uses the high order bit of the code byte **500** as the flag bit (or identification bit) **510**, because it results in the faster execution of the process. However, any bit could have been designated as the flag bit **510** with the same logical result.

FIG. **6**—Encoded Data Stream

FIG. **6** shows a series of decimal values **610** comprising a first value **620** equal to decimal 0, a second value **622** equal to 0, a third value **624** equal to 0, a fourth value **626** equal to 0, a fifth value **628** equal to 0, a sixth value **630** equal to 2, and a seventh value **632** equal to 10. After the run-length encoding step **130** (FIG. **1**), the corresponding encoded data **140** (FIG. **1**) would be compressed down to four bytes of binary code **640** comprising a first byte **650** containing a repeat count **651**, a second byte **652** containing a first code **653**, a third byte **654** containing a second code **655**, and a fourth byte **656** containing a third code **657**. The repeat count **651** has a binary value of "0000101" which equals decimal five representing the run-length of the repeating value in the first five of the decimal values **610**. The first code **652** has a binary value of "00000" which equals the repeated decimal value zero. The second code **655** has a binary value of "00010" which equals the non-repeated decimal value two. The third code **657** has a binary value of "01010" which equals the non-repeated decimal value ten.

FIG. **7**—Decode Table

FIG. **7** illustrates a decode table **700** of the preferred embodiment of the present invention. The decode table **700** may be implemented in the C programming language, as shown, or any programming language, and is an array of 32 element with each element being a 32 bit pixel value **200** (FIG. **2**A). The decode table is comprised of a column of alpha values **710**, a column of red values **720**, and a column of green values **730**, and a column of blue values **740**, where the alpha values **710** are shifted by 24 bits, the red values **720** are shifted by 16 bits, and the green values **730** are shifted by 8 bits leaving the blue values **740** in place. The line in the decode table **700** contains one element. Each element comprising:

1. the alpha channel **208** (FIG. **2**A) with full intensity represented by hexadecimal 0×FF
2. the red channel **206** (FIG. **2**A)
3. the green channel **204** (FIG. **2**A)
4. the blue channel **202** (FIG. **2**A)

where the values of the three color channels are equal to the corresponding stepped values **360** (FIGS. **3**A and **3**B) associated with each line of the encode table **300** (FIG. **3**A).

Although each element is documented as an expression composed of various bit shift and bit-wise OR operations, the expression is evaluated by the compiler when the program is compiled so that each element of the decode table **700** is a 32 bit pixel value **200** (FIG. **3**A) ready for direct placement in the decompressed image.

In the preferred embodiment of this invention the 32 bit pixel value **200** (FIG. **2**A) is used; however other embodiments use the 24 bit pixel value **210** (FIG. **2**B) or other pixel sizes known in the art. Embodiments of other common pixel depths of 16 bit, 15 bit, 8 bit, 4 bit, 3 bit or 1 bit could be used without limiting the scope of this invention. Of course any source resolution less than or equal to five bits would benefit from a modified and shortened encode and encode table or could be encoded by shifting bits as explained below.

Using alternate terminology, FIG. **7** illustrates software code utilized to decompress a compressed stream of data. This software code includes a decompression lookup table **700** which is utilized within the decompressor within the receiver **1106** (FIG. **11**). The decompression lookup table **700** is indexed to provide an output average illumination intensity value corresponding to the received line number from the compression lookup table **310**. In an alternate embodiment, this decompression lookup table **700** transforms the line number representing the illumination intensity for the stream of pixels which was previously processed by the compressor within the transmitter **1103** (FIG. **11**) back into a converted illumination intensity data stream having thirty-two levels of illumination intensity.

Similar to the compression lookup table **310** (FIG. **3**A), the decompression lookup table **700** utilizes thirty-two levels wherein each level represents the particular line number. For each received line number, the decompression lookup table **700** provides an output average illumination intensity value for a red scale illumination intensity value **720**, a green scale illumination intensity value **703**, and a blue scale illumination intensity value **740**.

Preferably, these output average illumination intensity values are all equal, thereby providing a gray scale image.

FIG. **8**—Alternate Code Selection

FIG. **8** illustrates an alternate embodiment of this invention where tables are not used for encoding and decoding. Instead, the high order 5 bits **810**–**818** of an 8 bit pixel **800** are shifted to the right by 3 bit positions to form a five bit sample **830**. The upper 3 bits of **830** are ignored bits **850**. This shifting to obtain a five bit code replaces steps **405** and **406** of the flowchart in FIG. **4**A. The same run-length encoding method is used. During decompression the five bit sample **830** is shifted to the left by 3 bit positions to form a decompressed pixel **860**, where the 3 low order bits **880** are filled with zero binary values.

FIG. **9**—Decode Flowchart

FIG. **9** illustrates the decode flowchart which presents the details of the preferred embodiment of the value lookup step **170** (FIG. **1**) and the image reconstitution step **180** (FIG. **1**).

The decoding begins at a decode entry **900**. In a decode initialization step **901**, a repeat counter C is set to one, an encoded length L is set to the value obtained with the encoded data **140** (FIG. **1**), and an index I is set to 0. Next, a get code step **902** obtains a signed byte X from the encoded data **140** (FIG. **1**) array A. A determine type **906** decision checks to see if the signed byte X is less than 0.

If the signed byte X is less than zero, it is because the high order bit, the flag bit **510** (FIG. **5**A) is set to binary value 1, as in FIG. **5**B, indicating that the byte X is a repeat code **520**. Flow goes to assign counter step **912** where the count **530** (FIG. **5**B) is extracted from X and placed in the repeat counter C and the next code is accessed by incrementing the index I and returning to the get code step **902**.

If the signed byte X is greater than or equal to zero, it is because the flag bit **510** (FIG. **5**A) is set to binary 0, as in FIG. **5**C, indicating that the byte X is a data code **550**. Flow goes to a decode lookup step **908** where the value of byte X is used to index into the decode table **700** (FIG. **7**) to obtain a pixel value V. Flow continues to a check zero count **909** decision.

The **909** decision always fails the first time ensuring that a place pixel step **910** is executed. The place pixel step **910**

places the pixel value V in the next location of the decompressed image and decrements the repeat counter C and returns to the **909** decision. The pixel value V is placed repeatedly until C decrements to zero. Then the **909** decision branches flow to a reset counter step **914**. At step **914** the repeat counter is reset to 1 and the index is incremented to select the next code.

Flow continues to the check length **916** decision where the index I is compared to the encoded length L to determine if there are more codes to be processed. If I is less than L flow returns to step **902**, otherwise the decode process terminates at a decode exit **918**.

The entire decode process is repeated for each frame image.

FIGS. **10**A to **10**C—Encrytpion Key, Encryption Table, and Decryption Table

FIG. **10**A shows an encryption key **1000**. The first column shows the original code. The second column shows the corresponding cipher code.

FIG. **10**B shows an encryption table **1010**, and FIG. **10**C shows a decryption table **1020**. The encryption table **1010** has the same format as the standard encode table **300** (FIG. **3**A), and the decryption table **1020** has the same format as the decode table **700** (FIG. **7**). However the entries in both tables are rearranged such that the direct correlation between the intensity level and the position in the table is broken. When these versions of the tables are used, the encode and decode processes and their speed of execution are substantially the same but the encoded data **140** (FIG. **1**) becomes a cipher and has a higher level of security. It should be recognized by one with ordinarily skill in the art that there are other embodiments of the present invention with different encryption/decryption table rearrangements.

FIG. **11**—Video Transmission System

FIG. **11** illustrates a video system **1100** according to the present invention for transmitting video images from one location to another. The video system **1100** preferably includes a video source **1101**, a video cassette recorder **1102**, a transmitter **1103**, a recorded video device **1104**, a computer network **1105**, a plurality of receivers **1106**, and data links **1110**, **1115**, **1120**, and **1125**. Preferably, the video source **1101** includes the video cassette recorder **1102** and is coupled to the transmitter **1103** via the data link **1110**. The transmitter **1103** is also preferably coupled to the recorded video device **1104** and the computer network **1105** via the data links **1115** and **1120**, respectively.

Preferably, the plurality of receivers **1106** are coupled to the computer network **1105** via the data links **1125**. Each of the plurality of receivers **1106** is preferably a computer system having a display, central processing unit, and input device. The data links **1125** preferably link each of the plurality of receivers **1106** to the computer network **1105**. The data links **1125** include any appropriate connection to the computer network **1105** including T1 communication lines, DSL links, cellular links, microwave transmission, land lines, twisted pair cable, and the like. The video system **1100** shown in FIG. **11** is merely illustrative and is only meant to show a preferred embodiment of the present invention.

In alternate embodiments, additional transmitters, video sources, and receivers could be included without departing from the spirit and scope of the video system **1100**.

Additionally, in an alternate embodiment, the transmitter **1103** is included within the computer network **1105** and functions as a server within the computer network **1105**.

The recorded video device **1104** is preferably coupled to the transmitter **1103** via the data link **1115**. Preferably, the recorded video device **1104** stores video images received by the transmitter **1103** for playback at a later time.

The transmitter **1103** preferably controls the flow of video from both the video source **1101** and the recorded video component **1104** over the computer network **1105** to any number of the plurality of receivers **1106**. Preferably, the transmitter **1103** compresses the video images prior to transmission to one of the plurality of receivers **1106**, using an embodiment of the compression method described herein.

In the video system **1100**, the computer network **1105** is preferably an Internet Protocol network. In alternate embodiments, the computer network **1105** is any appropriate data network. The computer network **1105** is configured to transmit information between the plurality of receivers **1106** and the transmitter **1103** via the data links **1125** and **1120**, respectively.

The plurality of receivers **1106** are preferably configured to selectively receive a stream of video images from the transmitter **1103** via the data link **1120**, the computer network **1105**, and the appropriate data link **1125**. For example, at least one of the plurality of receivers **1106** is programmed to receive the stream of video images from the transmitter **1103**. Accordingly, only the selected ones of the plurality of receivers **1106** are capable of receiving the stream of video images from the transmitter **1103**. In addition to receiving the stream of video images, the selected ones of the plurality of receivers **1106** are also capable of transmitting instructions to the transmitter **1103** via the data link **1125**, the computer network **1105**, and the data link **1120**.

Preferably, one of the receivers **1106** decompresses the video images upon receipt using an embodiment of the decompression method of described herein.

FIG. **12**—Alternate Compression Flow Chart

FIG. **12** shows a flow chart that illustrates an alternate embodiment of the compression process utilized by the transmitter when compressing a stream of video data. Using alternate terminology, this compression process begins at the start step **1202**, clearing the buffer (not shown) and resetting the repeat counter value to zero. At the step **1204**, an illumination intensity value representing a current pixel is received. Next, at the step **1206**, a current line from the lookup table **310** (FIG. **3**A) is obtained for the pixel data corresponding to the current illumination intensity value for the pixel. At the step **1208**, it is determined whether the current line number for the pixel data is the same as the previous line number. The previous line number is preferably stored in the buffer. If the previous line number is not stored in the buffer, then the current line number and the previous line number cannot be the same. If the line number is the same as the previous line number, the repeat counter value is incremented by one, at the step **1210**. It is then determined whether the repeat counter value is equal to a value of 127, at the step **1212**. If the repeat counter value is equal to a value of 127, then, at the step **1214**, the repeat counter value is transmitted out of the transmitter within a data structure that is similar to the data structure **520** (FIG. **5**B). Additionally in the step **1214**, the repeat counter value is reset to a value of zero after being transmitted in the data

structure. If the repeat counter is not equal to the value of 127, the process then proceeds directly to the step **1216**.

Returning back to the step **1208**, if the current line number is not the same as the previous line number, then it is determined whether the repeat counter value is equal to a value of zero, in the step **1220**. If it is determined at the step **1220**, that the repeat counter value is not equal to the value of zero, then at the step **1222**, the repeat counter value is transmitted out of the compressor and into the buffer within a data structure that is similar to the data structure **520** (FIG. **5**B). Additionally, at the step **1222**, the repeat counter value is reset to a value of zero after being transmitted in the data structure. If it is determined at the step **1220**, that the repeat counter value is equal to the value of zero, or after the step **1222** is completed, then the line number representing the current illumination intensity value is transmitted out of the compressor and into the buffer, at the step **1224**, within a data structure that is similar to the data structure **550** (FIG. **5**C). Additionally, after the current line number is transmitted, the current line number is stored in the buffer as the previous line number, at the step **1224**. After the step **1224** is completed, the process proceeds to the step **1216**.

At the step **1216**, it is determined whether there is any additional pixel data corresponding to additional pixels. If there is additional pixel data, then the compression process loops back to the step **1204** to receive and process the data representing the next pixel. If there is no additional pixel data, then the process proceeds to the step **1218**. At the step **1218**, it is determined whether the repeat counter value is equal to a value of zero.

If the repeat counter value is equal to the value of zero, then the process proceeds to the ending step **1228**. If the repeat counter value is not equal to the value of zero, then, at the step **1226**, the repeat counter value is transmitted out of the compressor and into the buffer within a data structure that is similar to the data structure **520** (FIG. **5**B). Additionally in the step **1226**, the repeat counter value is reset to a value of zero after being transmitted in the data structure. After the step **1226**, then the process proceeds to the ending step **1228**.

FIG. **13**—Alternate Encoded Data Stream

FIG. **13** illustrates a sample uncompressed illumination intensity data stream **1310** including data blocks **1320**, **1322**, **1324**, **1326**, **1328**, **1330**, and **1332**. This example uses the same data as shown in FIG. **6**. A comparison with FIG. **6** while highlight the differences between the flow chart in FIG. **4**A and FIG. **12**.

Using alternate terminology, each block includes pixel data representing an illumination intensity value of a corresponding pixel in this uncompressed data stream **1310** (same as **610**). Preferably, this illumination intensity level is the blue scale value for the particualr represented pixel. For example, after the step **1206** (FIG. **12**) of obtaining a line number for each of the data blocks, the blocks **1320**–**1328** have a line number value of zero; the block **1330** has a line number value of two; and the block **1332** has a line number value of ten. A compressed illumination intensity data stream **1340** includes data structures **1350**, **1352**, **1354**, and **1356**. The compressed data stream **1340** represents the uncompressed data stream **1310** with four data structures. Similar to the illumination intensity data structure **550** (FIG. **5**C), the data structures **1350**, **1354**, and **1356** represent the illumination intensity value of the pixels associated with the data blocks **1320**, **1330**, and **1332**, respectively. A segment **1351** of the data structure **1350** contains a five-bit line number having a value of zero. Similarly, the segments **1355** and **1357** contain five-bit line numbers having values of two and ten, respectively. Similar to the repeat data structure **520** (FIG. **5**B), the data structure **1352** represents the illumination intensities of the pixels associated with the data blocks **1322**, **1324**, **1326**, and **1328**. A segment **1353** stores the seven bit repeat counter value of four which is the number of times the line number of the prior pixel **1320** is repeated.

FIG. **14**—Alternate Decompression Flow Chart

FIG. **14** illustrates a flow chart which shows an alternate decompression process utilized by the decompressor within the receiver **1106** to decompress a compressed stream of data.

Using alternate terminology, this decompression process begins at a start step **1400** and proceeds to the step **1402**. At the step **1402**, a stream of compressed data that was compressed by the compressor and includes data representing the illumination intensity of a plurality of pixels waits to be received. The stream of compressed data contains a plurality of data structures which resemble the data structure **500** (FIG. **5**A). At the step **1402**, the next data structure in the stream of compressed data is received as a present data structure. Next, at the step **1404**, the identification bit within the present data structure received by the step **1402** is detected. At the step **1406**, it is determined if the identification bit which was detected at the step **1404** has a value of logical zero or logical one. If the identification bit has a value of logical one, then the present data structure contains a repeat counter value and is decoded at the step **1412**. If the identification bit has a value of logical zero, then the present data structure contains a line number and is decoded at the step **1408**.

At the step **1412**, the repeat counter value is read from the present data structure.

Recall that the repeat counter values stores the number of times to repeat the line number associated with the illumination intensity values of the prior pixel. Next, at the step **1414**, a particular number of pixels corresponding to a number stored as the repeat counter value, is generated with the illumination intensity values of the prior pixel. The illumination intensity value of the prior pixel is stored in the buffer within the decompressor. For example, if the repeat counter value if five, then five pixels are generated with the illumination intensity values of the prior pixel at the step **1414**.

At the step **1408**, the line number is read from the present data structure. The line number corresponds to a row within the decompression lookup table **700** (FIG. **7**) which includes the illumination intensity values for the pixel. Next, at the step **1410**, a pixel is generated having illumination intensity value which correspond to the line number read from the step **1408**. Additionally, the illumination intensity values are also stored in the buffer within the decompressor. For example, if the line number within the present data structure has a value of two, then according to the decompression lookup table **700** (FIG. **7**), the illumination intensity values for the red, green, and blue values of the pixel are sixteen.

After the illumination intensity values are determined at the step **1410** or the step **1414**, it is determined, at the step **1416**, if there are additional data structures within the compressed stream of data currently being received. If there are additional data structures, then this process loops back to the step **1402** where the next data structure is received, and the process begins again. If there are no additional data structures, then this process ends at the step **1418**.

FIG. **15**—Example of Compression and Decompression Using the Alternate Methods

In FIG. **15**, sample data stream illustrating the compression and the decompression process of the alternate embodiment are shown. The sample data include an uncompressed data steam **1500**, a compressed data stream **1520**, and a decompressed data stream **1550**. The uncompressed data stream **1500** includes seven pixel data blocks **1502** through **1514** wherein each of these pixel data blocks represent the illumination intensity of the particular pixel. The compressed data stream **1520** include four data blocks **1522–1528** which are generated by the compressor and represent the uncompressed data stream **1500**. The decompressed data stream **1550** is generated from the decompressor and includes seven pixel data blocks **1552–1564** each representing the average illumination intensity value of the particular pixel.

ADVANTAGES

Filtering and Image Enhancement

The stepped values **360** (FIG. **3**A) are a significant discovery of the present invention. The use of these specific values results in high quality decompressed images when the original image is generated by an electronic sensing device such as an ultrasound machine. The encode table **300** is arranged such that the spikes in the video signal are filtered in the high and low end, line numbers **31** and **0**, respectively. The remaining values are distributed more evenly with larger ranges at line **3**, **7**, **15**, **19**, **23**, and **27**.

By altering the contents of the encode table **300** and the decode table **700** various filters can be implemented to enhance the image quality. A high or low noise filter can be beneficial when the image is generated by an imaging technology such as radar, ultrasound, x-ray, magnetic resonance, or similar technology. Variations in the encode and decode table can be made to enhance the perceived quality of the decompressed image. Therefore, altering the contents, shape, or size of the encode table **300** and the decode table **700** is anticipated by this invention and specific values in the tables should not be construed as limiting the scope of this invention.

Execution Speed

The preferred embodiment of this invention use a number of techniques to reduce the time required to compress and decompress the data.

The methods require only a single sequential pass through the data. Both the compression steps **100** and the decompression steps **150** access a pixel once and perform all calculations.

When selecting the 8 bit pixel value **299**, the preferred embodiment selects the low order bits from the 32 bit pixel value **200** or the 24 bit pixel value **210** so that an additional shift operation is avoided.

The encoded table **300** is a fast and efficient way to convert the 8 bit pixel value **299** into one of the 5 bit codes **310**.

The decode table **700** contains 32 entries each comprised of the 32 bit pixel value **200** that are ready for placement in the decompressed image. Although each element is documented as an expression composed of various bit shift and bit-wise OR operations, the expression may also be evaluated by a compiler when the program is compiled so that each element of the decode table **700** becomes a 32 bit pixel value **200**.

General Purpose

Although the preferred embodiment of the present invention is tuned to the characteristics of a medical image, its lossless compression of the sampled data results in high quality video streams that have general purpose application in a number of areas including, without limitation, video conferencing, surveillance, manufacturing, and rich media advertising.

Lossless Nature/No Artifacts

Once the analog signal is sub-sampled and filtered to select a five bit code value which eliminates some of the real world defects, the methods of the present invention compress and decompress the data with no irreversible data loss. Unlike JPEG and MPEG, the decompressed image never suffers from artificially induced blocking or smearing or other artifacts that are result of the lossy compression algorithm itself. As a result even a small sub-sample of the image remains clear and true to the perceive quality of the original image.

CONCLUSION, RAMIFICATION, AND SCOPE

Accordingly, the reader will see that the compression and decompression steps of the present invention provides a means of digitally compressing a video signal in real time, communicating the encoded data stream over a transmission channel, and decoding each frame and displaying the decompressed video frames in real time.

Furthermore, the present invention has additional advantages in that:

1. it provides a means of filtering real world defects from the video image and enhancing the image quality;
2. it allows for executing of both the compression and decompression steps using software running on commonly available computers without special compression or decompression hardware;
3. it provides decompressed images that have high spatial quality that are not distorted by artifacts of the compression algorithms being used;
4. is provides a scalable means of video compression; and
5. it provides a means for reducing the space required in a storage medium.

Although the descriptions above contain many specifics, these should not be construed as limiting the scope of the invention but as merely providing illustrations of some of the preferred embodiments of this invention. For example, stepped values in the encode and decode tables can be altered and the same relative operation, relative performance, and relative perceived image quality will result. Also, the processes can each be implemented as a hardware apparatus that will improve the performance significantly.

Thus the scope of the invention should be determined by the appended claims and their legal equivalents, and not solely by the examples given.

We claim:

1. A method of compression of graphic images which make up a video stream, comprising the steps of:

(a) selecting an image from said graphic images;

(b) processing each pixel in a set of pixels from said image comprising the steps of:

(i) selecting a first number of bits from each said pixel wherein each pixel comprises a second number of bits and where in said first number of bits is less than said second number of bits

(ii) selecting a code value based on the value of said first number of bits wherein said code value is directly related to said value of said first number of bits, and wherein the code value is a third number of bits;

(iii) determining if said code value is the same as a previous code value of an immediately prior pixel;

(iv) if the code value is the same as a said previous code value, incrementing a run-length counter which counts the number of matching code values;

(v) if the code value is not the same as said previous code value, placing said previous code value and a current value of said run-length counter in an array of encoded data, wherein said previous code value and said current counter value comprise an encoded code, and resetting the value of the run-length counter;

(c) upon processing the last pixel in said set of pixels from said image, placing the last previous code value and the last current value of said run-length counter in said array of encoded data, whereby said array of encoded data represents said image;

(d) outputting said array of encoded data;

(e) selecting a subsequent image from said graphic images;

(f) repeating steps (b) through (e) for a series of said subsequent images.

2. The method of claim **1** wherein said image and said subsequent image are from of a set of images that are separated temporally by a predetermined period of time.

3. The method of claim **2** wherein said the predetermined period of time is less than or equal to 1/15th of a second.

4. The method of claim **1** wherein said set of pixels is a subset of all the pixels in said image.

5. The method of claim **4** wherein said subset of all the pixels in said image is selected by selecting every other pixel in every other row of pixels.

6. The method of claim **1** wherein said code value is the same value as said first number of bits wherein said code value directly related to said value of said first number of bits by equivalence.

7. The method of claim **1** wherein said first number of bits is eight, said second number of bits is greater than eight, and a third number bits is five.

8. The method of claim **1** wherein said code value is obtained from an encode table.

9. The method of claim **8** wherein said code value is an encrypted value which is not equal to any of the group of:

(a) the value of the first number of bits selected from of said pixel,

(b) the value of the second number of bits of said pixel,

(c) the value of any third number of bits selected from of said pixel, whereby the original value of said pixel is not readily discernable from said code value.

10. A storage medium comprising an encoded video signal comprising a series of said array of encoded data as claimed in claim **1**, wherein at least a portion of said video stream is stored in an encoded format.

11. The method of claim **1** further comprising the decompression steps of:

(g) inputting said array of encoded data;

(h) processing each said encoded code in said array, comprising the steps of:

i. extracting said code value as a decode value,

ii. extracting said run-length counter value as a decode count,

iii. determining a decoded pixel value based on the decode value,

iv. placing the decoded pixel value in a decoded image decode count number of times;

(i) displaying said decoded image;

(j) inputting a subsequent array of encoded data representing said subsequent image;

(k) repeating steps (h) through (j) for at least a subset of said subsequent images.

12. The method of claim **11** wherein said decode pixel value comprises the decode value.

13. The method of claim **11** wherein said decode pixel value is obtained from a decode table.

14. The method of claim **4**, the subset of all the pixels having dimensions less than or equal to 320 by 240.

15. The method of claim **8**, wherein the lines of said encode table are randomly ordered forming an encryption table so that the direct correlation between the original values and their representative codes are encrypted.

16. The method of claim **13** wherein the lines of the decode table are ordered in a sequence matching a corresponding encryption table so that the correct final pixel values are displayed.

17. A machine for compressing a plurality of video frames which make up a video signal, comprising:

(a) video digitizer configured to digitizing a frame from said video frames;

(b) a video memory which is able to receive a plurality of pixels from said video digitizer;

(c) an encoding circuit for compressing, according to the method of claim **1**, said plurality of pixels;

(d) a memory which is able to store said encoded data; and

(e) an input/output device.

18. The machine of claim **17** wherein said input/output device is a storage medium.

19. The machine of claim **17** wherein said input/output device is a communication transmission channel.

20. A machine for compressing a plurality of video frames which make up a video signal, comprising:

(a) video digitizer configured to digitizing a frame from said video frames;

(b) a video memory which is able to receive a plurality of pixels from said video digitizer;

(c) an encoding circuit for compressing, according to the method of claim **9**, said plurality of pixels;

(d) a memory which is able to store said encoded data; and

(e) an input/output device.

21. A machine for decompressing a stream of encoded data that represents a video signal, comprising:

(a) an input/output device for reading said stream of encoded data;

(b) a decoding circuit for decompressing said stream of encoded data according to the method of claim **11**; and

(c) a memory that is able to store an image comprising said stream of pixel values that can be displayed as frames of a video sequence.

22. A machine for decompressing a stream of encoded data that represents a video signal, comprising:

(a) an input/output device for reading said stream of encoded data;

(b) a decoding circuit for decompressing said stream of encoded data according to the method of claim **13**; and

(c) a memory that is able to store an image comprising said stream of pixel values that can be displayed as frames of a video sequence.

* * * * *