



US011744686B2

(12) **United States Patent**
Nguyen et al.

(10) **Patent No.:** **US 11,744,686 B2**
(45) **Date of Patent:** ***Sep. 5, 2023**

(54) **INTRAORAL DEVICE**

(56) **References Cited**

(71) Applicant: **SOLMETEX, LLC**, Northborough,
MA (US)

U.S. PATENT DOCUMENTS

(72) Inventors: **Thien Nguyen**, Santa Ana, CA (US);
Tam Thanh Pham, San Francisco, CA
(US)

50,461 A 10/1865 Dibble
1,471,207 A 10/1923 Napoleon
(Continued)

(73) Assignee: **Solmetex, LLC**, Northborough, MA
(US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

CA 2851861 2/2016
CA 3139689 11/2020
(Continued)

This patent is subject to a terminal dis-
claimer.

OTHER PUBLICATIONS

U.S. Appl. No. 14/100,323; Office Action dated May 6, 2014.
(Continued)

(21) Appl. No.: **14/228,057**

(22) Filed: **Mar. 27, 2014**

Primary Examiner — Ralph A Lewis
Assistant Examiner — Mirayda A Aponte

(65) **Prior Publication Data**

US 2014/0212840 A1 Jul. 31, 2014

(74) *Attorney, Agent, or Firm* — POLSINELLI LLP

Related U.S. Application Data

(63) Continuation of application No. 14/100,323, filed on
Dec. 9, 2013, now Pat. No. 8,911,232.
(Continued)

(57) **ABSTRACT**

(51) **Int. Cl.**

A61C 17/02 (2006.01)

A61C 17/08 (2006.01)

(52) **U.S. Cl.**

CPC **A61C 17/0208** (2013.01); **A61C 17/08**
(2019.05)


(58) **Field of Classification Search**

CPC A61C 17/043; A61C 17/046; A61C 17/08;
A61C 17/0208; A61C 17/06; A61C
17/00; A61C 17/02; A61C 5/90; A61B
1/24

A dental mouthpiece is provided that may be attached to a high-suction dental adapter for the purpose of assisting the dental staff during dental procedures through chair-side, hands-free suction, and isolation. Such mouthpiece may include a main body portion, a cheek retractor portion, and a suction connector portion. In some embodiments, the main body portion, cheek retractor portion, and suction connector portion (and sub-portions thereof) may be molded in one piece, preferably by injection molding. In an exemplary embodiment, the mouthpiece may be made of a material that is flexible, translucent, conducive to injection molding, high heat-resistant, and autoclavable. Such a material may include silicone. Because the mouthpiece may be made of high heat-resistant and autoclavable material, such a mouthpiece may be reusable.

(Continued)

21 Claims, 11 Drawing Sheets

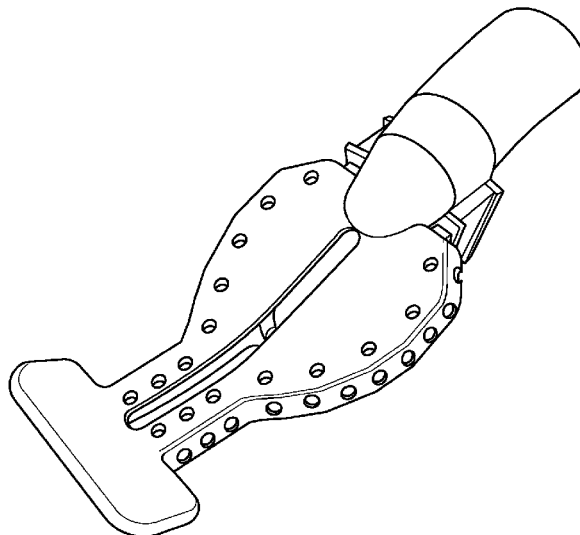

Related U.S. Application Data					
(60)	Provisional application No. 61/734,939, filed on Dec. 7, 2012.		9,089,389 B2	7/2015	Hirsch et al.
			D735,858 S	8/2015	Hirsch et al.
			D737,964 S	9/2015	Jessop et al.
(58)	Field of Classification Search		9,358,086 B2	6/2016	Hirsch
	USPC 433/91–92, 140		D782,047 S	3/2017	Ritter
	See application file for complete search history.		D782,048 S	3/2017	Ritter
			D787,069 S	5/2017	Ritter
			D787,070 S	5/2017	Ritter
			9,788,924 B2	10/2017	Nguyen
(56)	References Cited		D809,660 S	2/2018	Nguyen
	U.S. PATENT DOCUMENTS		9,968,341 B2	5/2018	Ritter
	1,731,322 A 10/1929 Riddle		10,390,734 B2	8/2019	Johnson et al.
	2,019,612 A 11/1935 Langhans et al.		10,390,916 B1	8/2019	Rassibi
	2,937,445 A 5/1960 Erickson		D868,958 S	12/2019	Reyes
	3,090,122 A 5/1963 Erickson		D876,627 S	2/2020	Nguyen
	3,453,735 A 7/1969 Burt et al.		10,939,979 B2	3/2021	Lombardi
	3,516,160 A 6/1970 Leffler et al.		D962,438 S	8/2022	Nguyen
	3,758,950 A 9/1973 Krouzian		D962,439 S	8/2022	Nguyen
	3,768,477 A 10/1973 Anders et al.		11,576,764 B2	2/2023	Nguyen
	3,802,081 A 4/1974 Rogers		11,589,969 B2	2/2023	Nguyen
	3,857,181 A 12/1974 Rappaport		11,589,970 B2	2/2023	Nguyen
	3,877,691 A 4/1975 Foster		2001/0008752 A1	7/2001	Hirsch et al.
	3,924,333 A 12/1975 Erickson		2003/0134253 A1	7/2003	Hirsch et al.
	4,017,975 A 4/1977 Johnson		2004/0033468 A1	2/2004	Fischer et al.
	4,024,642 A 5/1977 Zorovich		2006/0063126 A1	3/2006	Aloise et al.
	4,083,115 A 4/1978 McKelvey		2006/0063129 A1	3/2006	Hirsch
	4,167,814 A 9/1979 Schubert		2006/0084031 A1	4/2006	Hirsch et al.
	4,192,071 A 3/1980 Erickson		2008/0166684 A1	7/2008	Kanas
	D267,586 S 1/1983 Hatlen		2008/0318183 A1	12/2008	Suzman
	4,511,329 A 4/1985 Diamond		2009/0123886 A1	5/2009	Vaska
	4,718,662 A 1/1988 North		2009/0274991 A1	11/2009	Black et al.
	4,802,851 A 2/1989 Rhoades		2011/0207076 A1	8/2011	Hirsch et al.
	4,822,278 A 4/1989 Oliva et al.		2011/0311942 A1	12/2011	Black et al.
	4,975,057 A 12/1990 Dyfvermark		2012/0015317 A1	1/2012	Milo
	5,009,595 A 4/1991 Osborn		2012/0015320 A1	1/2012	Koo
	5,037,298 A 8/1991 Hickham		2012/0237894 A1	9/2012	Maycher et al.
	5,078,602 A 1/1992 Honoshofsky		2013/0095450 A1*	4/2013	Ames A61C 17/043 433/93
	5,460,524 A 10/1995 Anderson		2013/0252193 A1	9/2013	Bowman et al.
	D364,456 S 11/1995 Solnit et al.		2014/0004478 A1	1/2014	Hirsch et al.
	5,516,286 A 5/1996 Kushner		2014/0162209 A1	6/2014	Nguyen
	5,588,836 A 12/1996 Landis et al.		2014/0212837 A1	7/2014	Nguyen
	5,720,275 A 2/1998 Patil et al.		2014/0212838 A1	7/2014	Nguyen
	5,730,599 A 3/1998 Pak		2014/0212839 A1	7/2014	Nguyen
	5,762,496 A 6/1998 Albertsson et al.		2014/0212841 A1	7/2014	Nguyen
	5,890,899 A 4/1999 Sciafani		2014/0349249 A1	11/2014	Reyes
	6,022,214 A 2/2000 Hirsch et al.		2015/0305842 A1	10/2015	Hirsch et al.
	6,213,772 B1 4/2001 Costello		2015/0335409 A1	11/2015	Hirsch
	6,241,521 B1 6/2001 Garrison		2017/0156831 A1	6/2017	Reyes
	6,267,591 B1 7/2001 Barstow		2017/0156832 A1	6/2017	Reyes
	6,338,627 B2 1/2002 Hirsch et al.		2017/0156833 A1	6/2017	Reyes
	6,575,746 B2 6/2003 Hirsch et al.		2018/0153637 A1	6/2018	Al-Shawi et al.
	6,652,276 B2 11/2003 Fischer et al.		2020/0155284 A1	5/2020	Baker
	6,655,960 B2 12/2003 Fischer		2020/0352680 A1	11/2020	Nguyen
	6,672,305 B2 1/2004 Parker		2020/0383560 A1	12/2020	Day
	6,716,029 B2 4/2004 Fischer et al.		2022/0378563 A1	12/2022	Cao et al.
	D495,799 S 9/2004 Hirsch et al.				
	D497,426 S 10/2004 Hirsch et al.				
	6,908,308 B2 6/2005 Hirsch et al.				
	6,974,321 B2 12/2005 Hirsch et al.				
	7,287,981 B2 10/2007 Hirsch				
	7,293,990 B2 11/2007 Hirsch et al.				
	7,611,354 B2 11/2009 Hirsch et al.				
	D615,203 S 5/2010 Hirsch et al.				
	7,748,981 B2 7/2010 Hirsch et al.				
	8,029,280 B2 10/2011 Black et al.				
	8,057,227 B2 11/2011 Hirsch et al.				
	8,057,228 B2 11/2011 Hirsch et al.				
	8,075,310 B2 12/2011 Hirsch et al.				
	D663,831 S 7/2012 Sidhu et al.				
	D666,726 S 9/2012 Davis et al.				
	8,297,973 B2 10/2012 Hirsch et al.				
	8,529,256 B2 9/2013 Hirsch et al.				
	8,535,056 B2 9/2013 Dragan et al.				
	D696,779 S 12/2013 Hirsch et al.				
	8,911,232 B2 12/2014 Nguyen				
	D734,851 S 7/2015 Nguyen				
	9,084,656 B2 7/2015 Hirsch				
			FOREIGN PATENT DOCUMENTS		
			CN	102026587	4/2011
			CN	102247140	11/2011
			CN	104490483	4/2015
			CN	105578986 A	5/2016
			EP	2903557	8/2015
			EP	3184076	6/2017
			EP	3965637	3/2022
			FR	2992161 A1	12/2013
			GB	2 170 106	7/1986
			JP	2022-533276	7/2022
			KR	100654392 B1	12/2006
			TW	202108088	3/2021
			WO	WO 1999/037238	7/1999
			WO	0042939 A1	7/2000
			WO	0061031 A1	10/2000
			WO	WO 2011/014952	2/2011
			WO	WO 2015/088577	6/2015

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO 2018126150 A1 7/2018
 WO WO 2020/231864 11/2020

OTHER PUBLICATIONS

U.S. Appl. No. 14/100,323; Final Office Action dated Oct. 24, 2014.
 U.S. Appl. No. 14/100,323, Thien Nguyen, Intraoral Dental Suction and Isolation System, filed Dec. 9, 2013.
 U.S. Appl. No. 14/228,046, Thien Nguyen, Intraoral Device With Mesh, filed Mar. 27, 2014.
 U.S. Appl. No. 14/228,050, Thien Nguyen, Intraoral Device With Bridge, filed Mar. 27, 2014.
 U.S. Appl. No. 14/228,054, Thien Nguyen, Intraoral Device With Stability Start, filed Mar. 27, 2014.
 U.S. Appl. No. 14/228,061, Thien Nguyen, Intraoral Device With Detachable Mouth Prop, filed Mar. 27, 2014.
 U.S. Appl. No. 29/491,367, Thien Nguyen, Dental Mouthpiece, filed May 20, 2014.
 U.S. Appl. No. 29/477,887, Thien Nguyen, Bridge Structure for Dental Mouthpiece, filed Dec. 27, 2013.
 U.S. Appl. No. 29/477,888, Thien Nguyen, Cheek Retractor for Dental Mouthpiece, filed Dec. 27, 2013.
 U.S. Appl. No. 29/491,367 Final Office Action dated Mar. 4, 2015.
 U.S. Appl. No. 29/491,367 Office Action dated Nov. 14, 2014.
 U.S. Appl. No. 29/477,887 Final Office Action dated May 1, 2015.
 U.S. Appl. No. 29/477,887 Office Action dated Nov. 14, 2014.
 U.S. Appl. No. 29/477,888 Final Office Action dated May 1, 2015.
 U.S. Appl. No. 29/477,888 Office Action dated Nov. 14, 2014.
 PCT Application No. PCT/US2014/032892 International Search Report and Written Opinion dated Sep. 4, 2014.
 Australian Patent Application No. 2014202637; AU Examination Report dated Jan. 23, 2015.
 U.S. Appl. No. 14/228,046; Final Office Action dated Jun. 6, 2016.
 U.S. Appl. No. 14/228,050; Final Office Action dated May 20, 2016.
 U.S. Appl. No. 14/228,061; Final Office Action dated Jun. 30, 2016.
 U.S. Appl. No. 29/477,887 Final Office Action dated Jun. 1, 2016.
 U.S. Appl. No. 29/477,888 Final Office Action dated Jun. 1, 2016.
 Canadian Patent Application No. 2,919,142; CA Examination Report dated May 31, 2016.
 U.S. Appl. No. 14/228,046; Office Action dated Nov. 7, 2016.
 U.S. Appl. No. 14/228,050; Office Action dated Nov. 4, 2016.
 European Patent Application No. 14721736.8; Extended European Search Report dated Oct. 20, 2015.
 U.S. Appl. No. 14/228,054; Final Office Action dated Apr. 24, 2017.
 U.S. Appl. No. 14/228,061; Office Action dated Apr. 12, 2017.
 Chinese Patent Application No. 201480039991.2 First Office Action dated Dec. 29, 2016.
 U.S. Appl. No. 14/228,046; Office Action dated Jun. 5, 2017.
 European Patent Application No. 17150671.0; Extended European Search Report dated May 19, 2017.
 U.S. Appl. No. 14/228,046; Office Action dated Nov. 6, 2015.
 U.S. Appl. No. 14/228,050; Office Action dated Nov. 6, 2015.
 U.S. Appl. No. 14/228,054; Office Action dated Dec. 3, 2015.
 U.S. Appl. No. 14/228,061; Office Action dated Dec. 4, 2015.
 U.S. Appl. No. 29/477,887 Office Action dated Nov. 127, 2015.
 U.S. Appl. No. 29/477,888 Office Action dated Dec. 2, 2015.
 U.S. Appl. No. 14/228,054; Final Office Action dated Nov. 2, 2017.
 U.S. Appl. No. 14/228,061; Final Office Action dated Oct. 20, 2017.
 U.S. Appl. No. 14/228,046; Final Office Action dated Jan. 16, 2018.

U.S. Appl. No. 14/228,054; Office Action dated Nov. 29, 2018.
 U.S. Appl. No. 14/228,046; Final Office Action dated Jul. 15, 2019.
 U.S. Appl. No. 14/228,054; Final Office Action dated Aug. 8, 2019.
 U.S. Appl. No. 14/228,061; Final Office Action dated Jul. 11, 2019.
 U.S. Appl. No. 14/228,046; Office Action dated Oct. 5, 2018.
 U.S. Appl. No. 14/228,061; Office Action dated Oct. 4, 2018.
 Brazilian Patent Application No. BR1120140116377 Preliminary Office Action dated Jan. 7, 2020.
 PCT Application No. PCT/US2014/032892 International Preliminary Report on Patentability dated Jun. 14, 6.
 PCT Application No. PCT/US2020/032228 International Search Report and Written Opinion dated Aug. 12, 2020.
 U.S. Appl. No. 14/228,046; Office Action dated Jan. 10, 2020.
 U.S. Appl. No. 14/228,054; Office Action dated Jan. 13, 2020.
 U.S. Appl. No. 14/228,061; Final Office Action dated Jan. 10, 2020.
 U.S. Appl. No. 14/228,046; Final Office Action dated Nov. 27, 2020.
 U.S. Appl. No. 14/228,054; Final Office Action dated Dec. 22, 2020.
 U.S. Appl. No. 14/228,061; Final Office Action dated Apr. 29, 2021.
 U.S. Appl. No. 14/228,061; Office Action dated Nov. 27, 2020.
 U.S. Appl. No. 29/477,888 Office Action dated Mar. 21, 2017.
 PCT Application No. PCT/US2020/032228 International Preliminary Report on Patentability dated Nov. 16, 2021.
 U.S. Appl. No. 16/870,745 Final Office Action dated May 12, 2022.
 U.S. Appl. No. 29/782,644 Final Office Action dated May 11, 2022.
 U.S. Appl. No. 29/782,643 Final Office Action dated May 11, 2022.
 U.S. Appl. No. 14/228,054; Office Action dated Jun. 25, 2021.
 U.S. Appl. No. 14/228,046; Non-Final Office Action dated Oct. 6, 2021.
 U.S. Appl. No. 29/782,645; Non-Final Office Action dated Oct. 4, 2021.
 U.S. Appl. No. 29/782,638; Non-Final Office Action dated Oct. 4, 2021.
 U.S. Appl. No. 29/782,644; Non-Final Office Action dated Oct. 4, 2021.
 U.S. Appl. No. 29/782,643; Non-Final Office Action dated Oct. 4, 2021.
 Dryshield brochure. Dryshield.com. Publish date: May 2019. Retrieval date: Sep. 15, 2021. Retrieved from internet: https://dryshield.com/ds/Brochure_May2019.pdf (Year: 2019).
 “Dryshield Presentation (Learn all about Dryshield)” posted by Dryshield Isolation System. Youtube. Posting date: Oct. 27, 2014. Retrieval date: Sep. 15, 2021. Retrieved from internet: <https://www.youtube.com/watch?v=fcbpz3ixvis> (Year: 2014).
 “Dryshield (single-use) vs Zryis/Isolite (single-use) mouthpieces” posted by Mark Frias, RDH. Youtube. Posting date: Jan. 18, 2020. Retrieval date: Sep. 15, 2021. Retrieved from internet: <https://www.youtube.com/watch?v=uKX9XahO6EY> (Year: 2020).
 “Dryshield Tutorial—Maximize Your Dryshield Experience” posted by Dryshield Isolation System. Youtube. Posting date: Apr. 15, 2015. Retrieval date: Sep. 15, 2021. Retrieved from internet: <https://www.youtube.com/watch?v=L2OSYPSS8Rc4> (Year: 2015).
 U.S. Appl. No. 14/228,054; Final Office Action dated Jan. 3, 2022.
 U.S. Appl. No. 14/228,061; Non-Final Office Action dated Dec. 8, 2021.
 U.S. Appl. No. 16/870,745 Non-Final Office Action dated Dec. 3, 2021.
 U.S. Appl. No. 16/870,745 Office Action dated Feb. 17, 2023.
 European Patent Application No. 20804801.7; Extended European Search Report dated Apr. 20, 2023.
 European Patent Application No. 20804801.7; Supplementary European Search Report dated May 10, 2023.

* cited by examiner

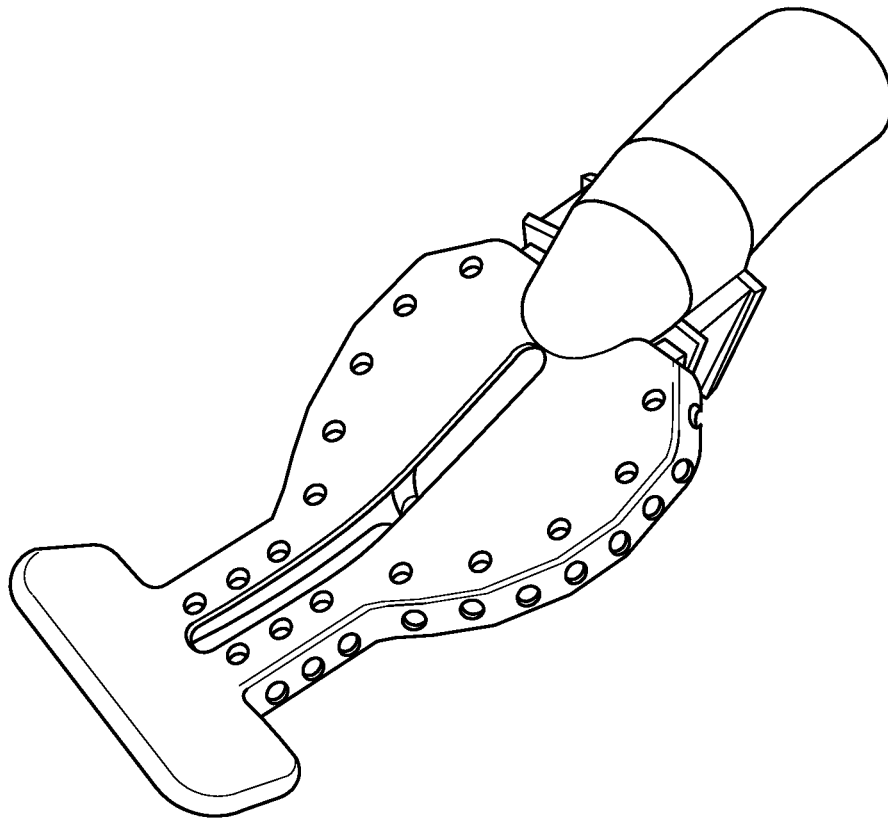


FIG. 1A

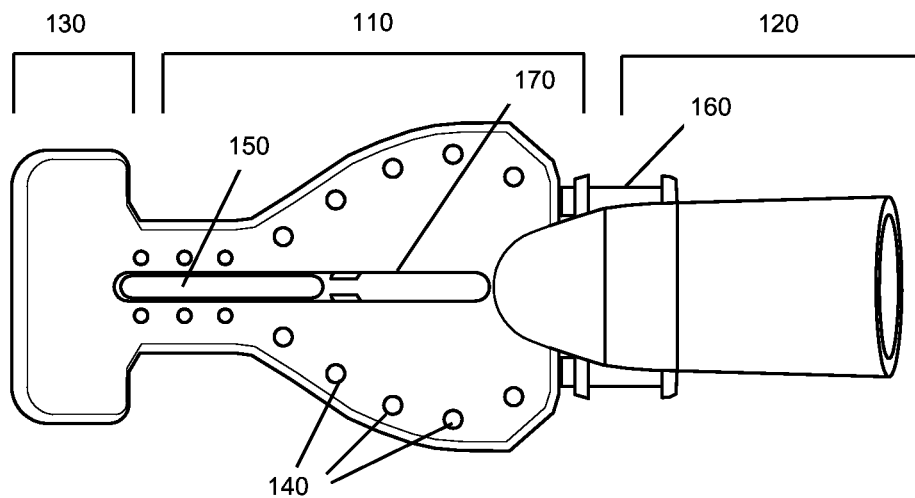


FIG. 1B

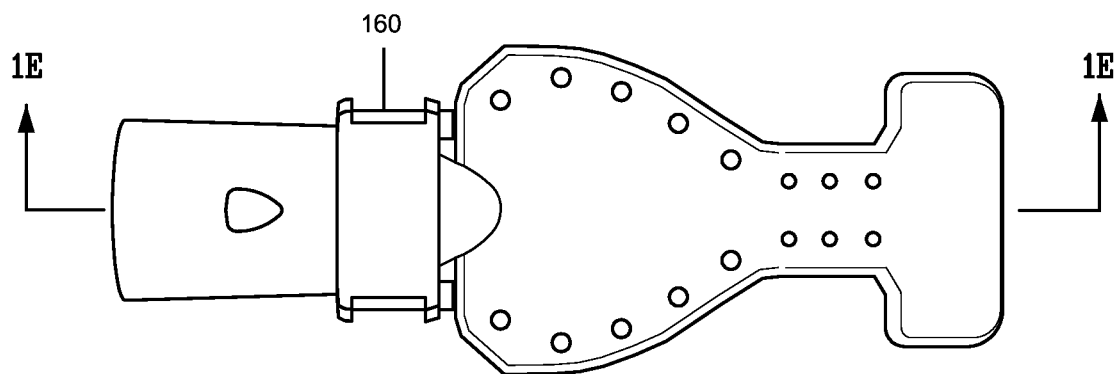
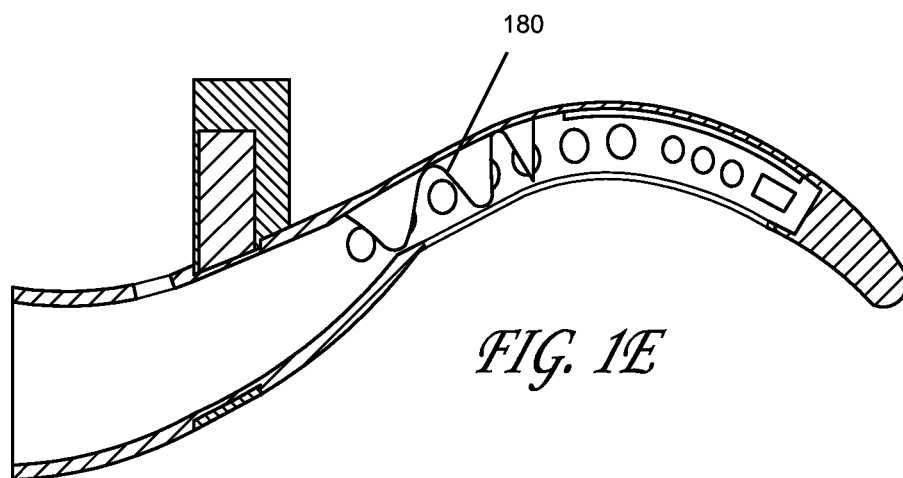
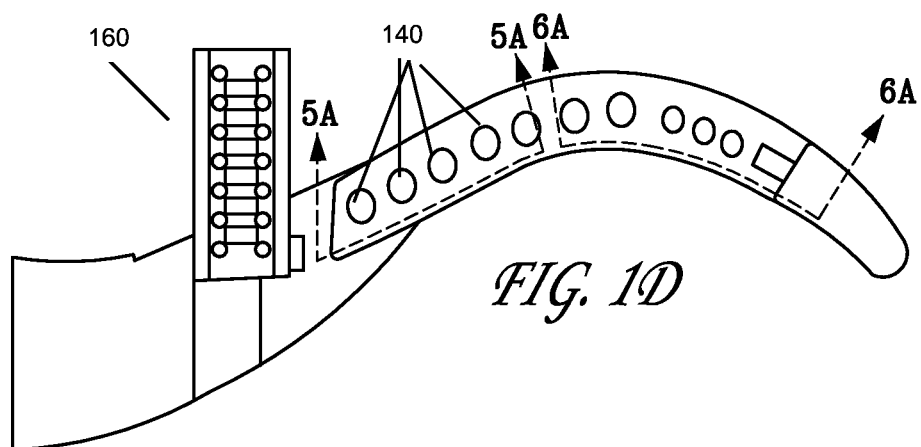


FIG. 1C



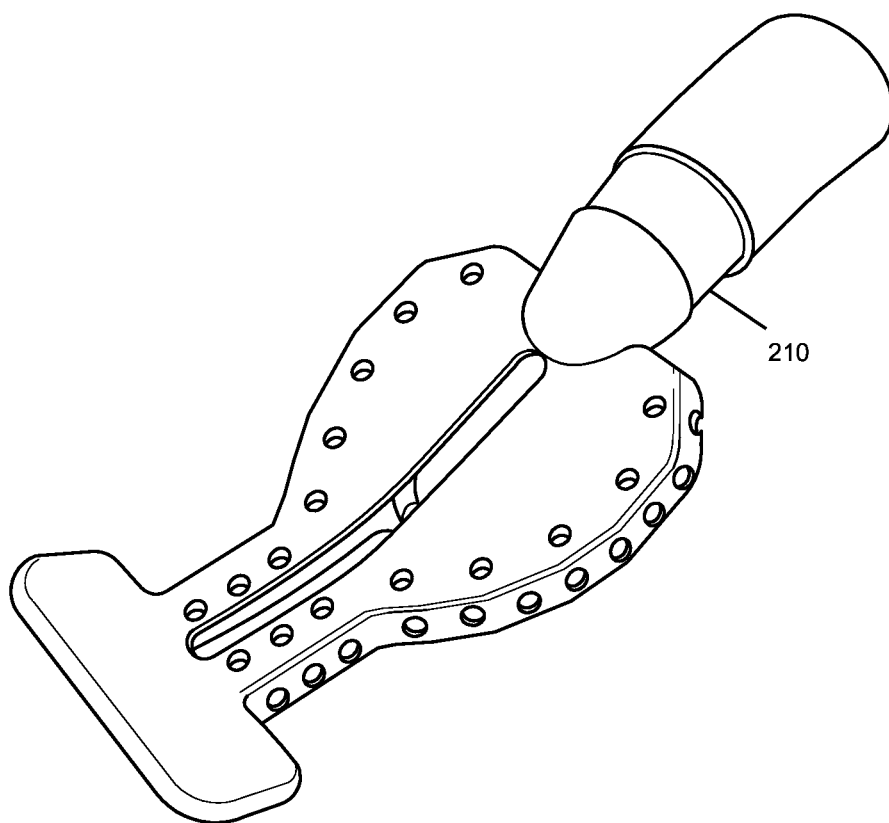


FIG. 2A

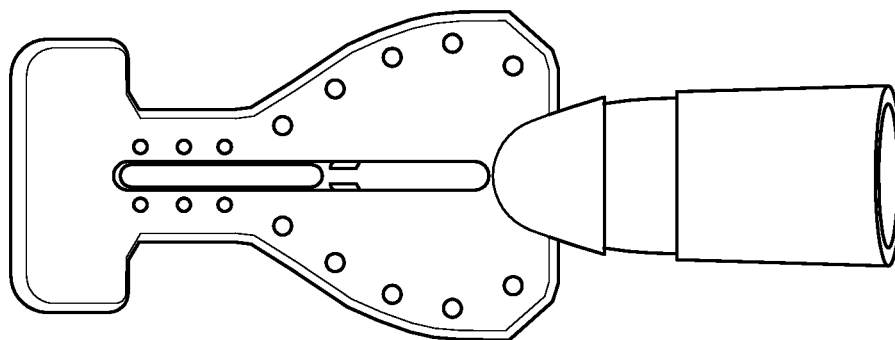


FIG. 2B

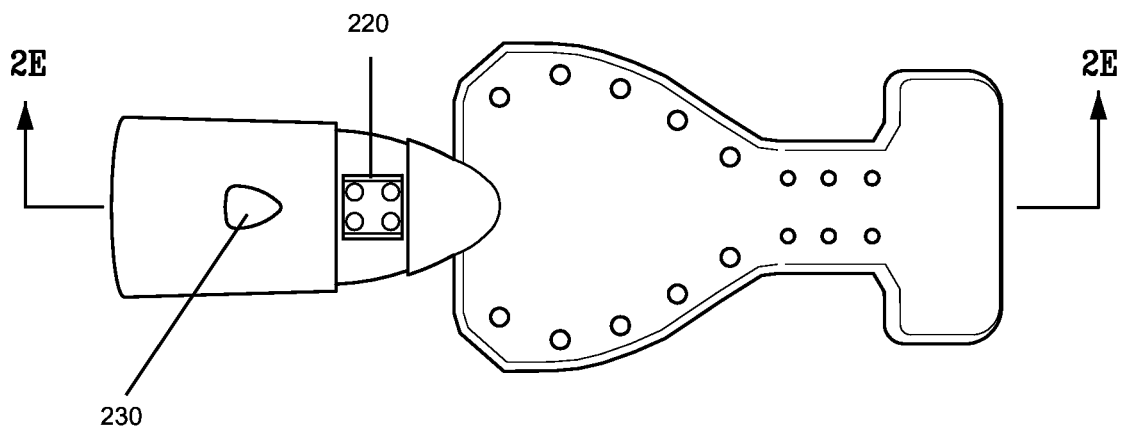


FIG. 2C

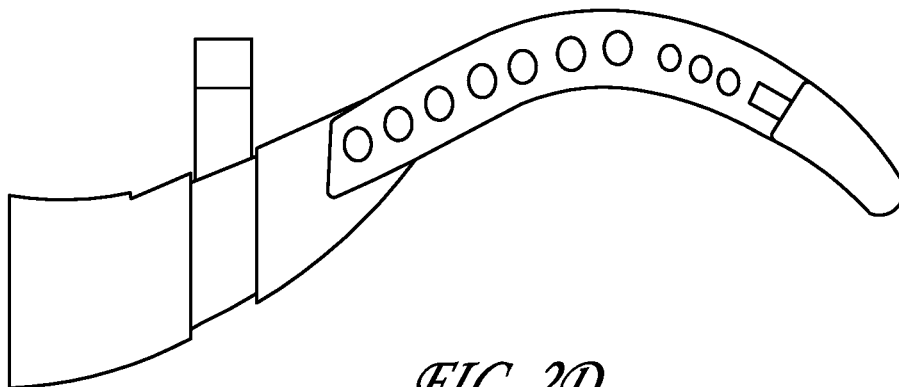


FIG. 2D

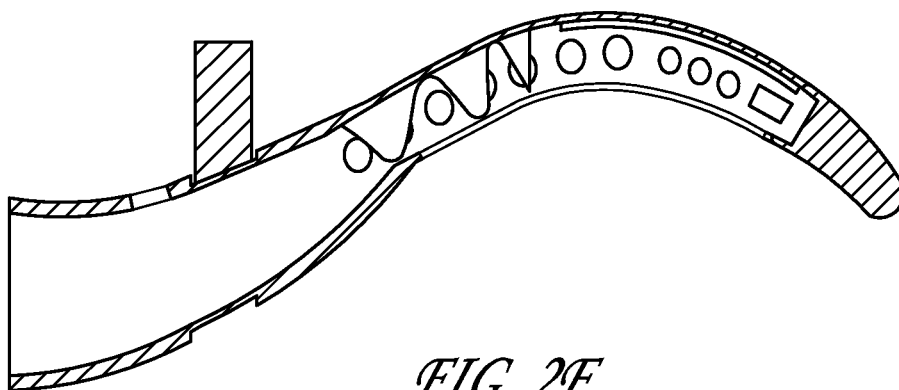


FIG. 2E

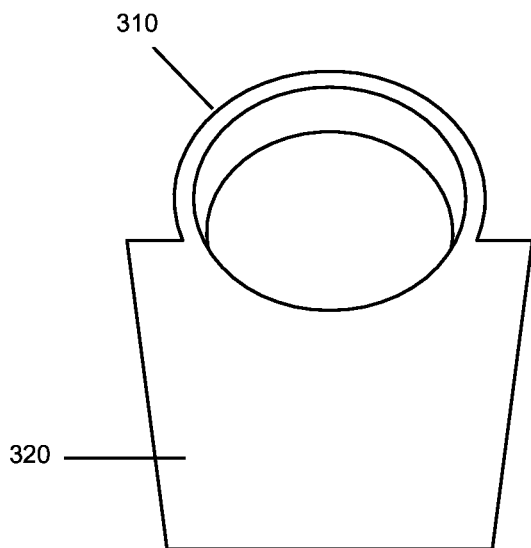


FIG. 3A

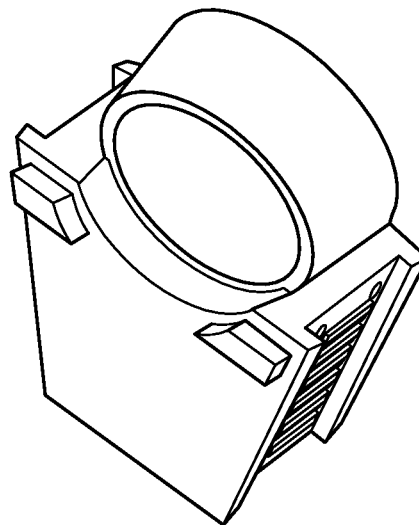


FIG. 3D

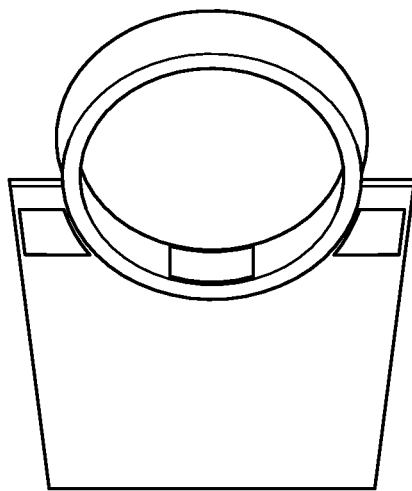


FIG. 3B

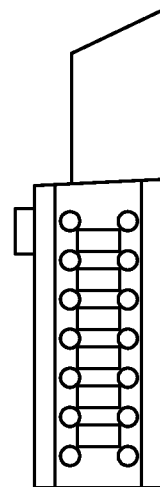


FIG. 3E

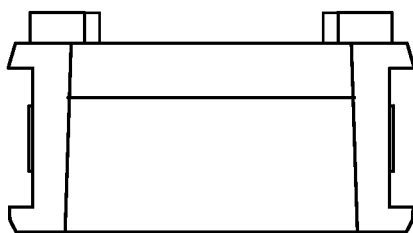


FIG. 3C

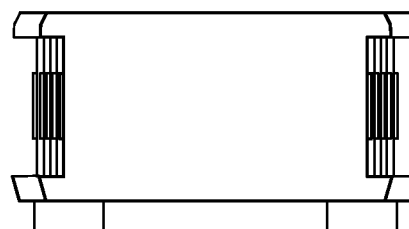
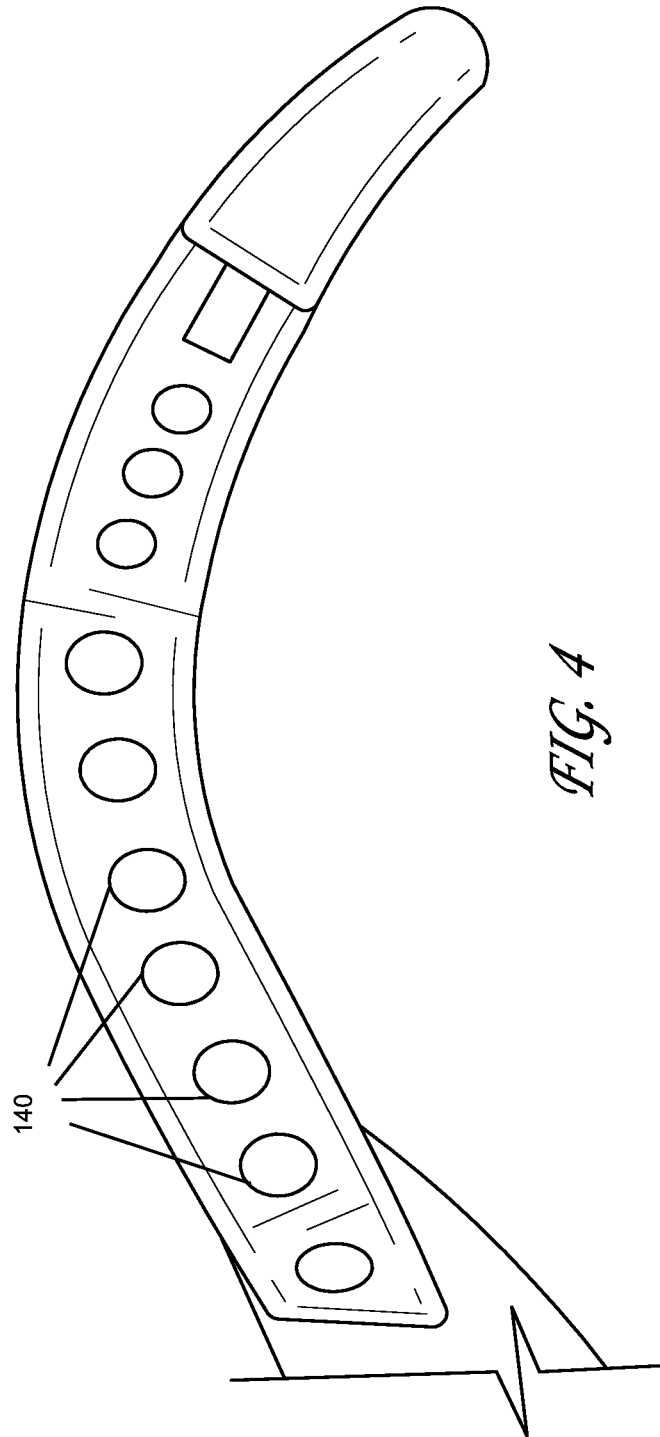


FIG. 3F



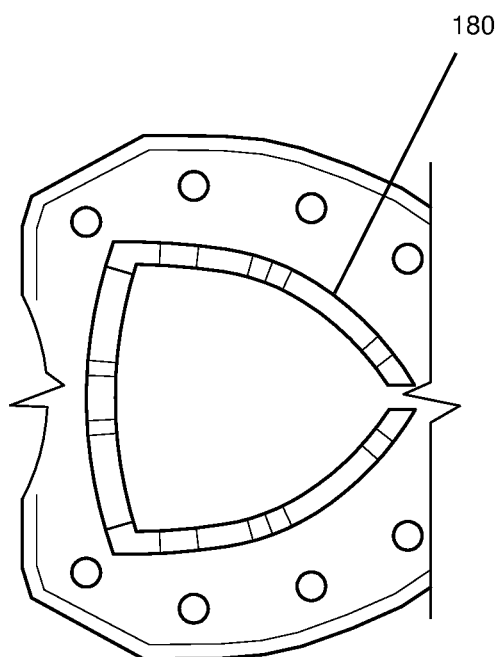


FIG. 5

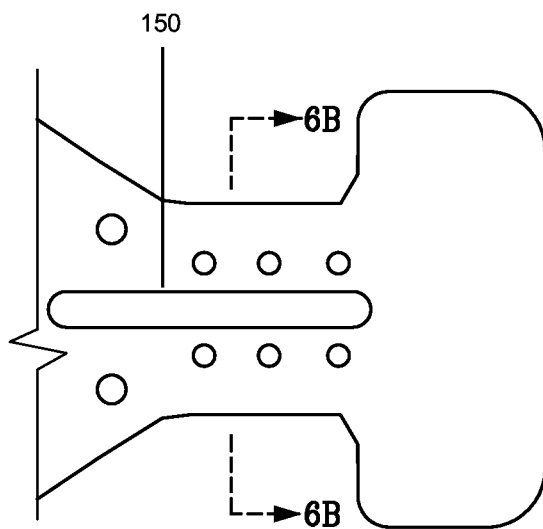


FIG. 6A

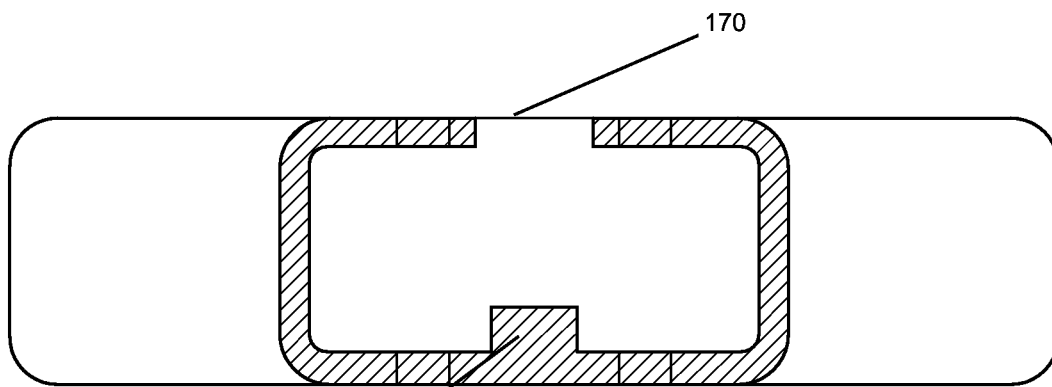


FIG. 6B

150

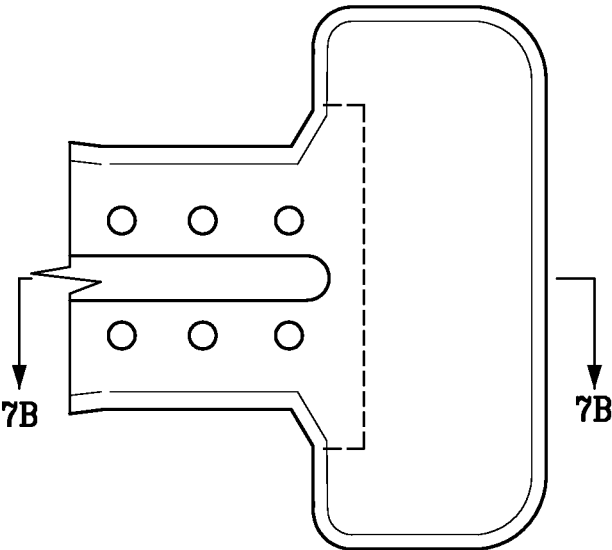


FIG. 7A




FIG. 7B

1

INTRAORAL DEVICE**CROSS-REFERENCE TO RELATED APPLICATIONS**

The present application is a continuation and claims the priority benefit of U.S. patent application Ser. No. 14/100,323 filed Dec. 9, 2013, which claims the priority benefit of U.S. provisional patent application No. 61/734,939 filed Dec. 7, 2012, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION**1. Field of the Invention**

The present invention generally relates to the field of dental mouthpieces. More specifically, the present invention relates to intraoral dental suction and isolation mouthpieces.

2. Description of Related Art

Various mouthpieces are currently used by dental health professionals, dental hygienists, and dental assistants in the field of dentistry. In the past, a dental patient has been treated by a traditional two-person team that comprises a dental professional and a dental assistant. Further, dental treatment may be provided by the team using many different types of dental equipment and materials. Such dental equipment and materials may include such items as an intraoral mirror, a bite block, a slow speed suction ejector, a high speed suction ejector, gauzes, cotton rolls, and dry angles. Each item of dental equipment may be used for different purposes, though some may be used in combination for some types of dental services. As such, a dental professional seeking to provide such dental services may need to use multiple items of such dental equipment. An important role of the dental assistant is therefore to assist the dental professional in coordinating the use of these multiple items of different equipment and materials.

There is, therefore, a need in the art for improved systems and methods of providing dental services in a more efficient, comfortable, and safe manner to the dental patient.

SUMMARY OF THE CLAIMED INVENTION

Embodiments of the present invention may include a mouthpiece that may be attached to a high-suction dental adapter for the purpose of assisting the dental staff during dental procedures through chair-side, hands-free suction, and isolation. Such a mouthpiece may comprise a main body portion, a cheek retractor portion, and a suction connector portion. In some embodiments, the main body portion, cheek retractor portion, and suction connector portion (and sub-portions thereof) may be molded in one piece, preferably by injection molding. In an exemplary embodiment, the mouthpiece may be made of a material that is flexible, translucent, conducive to injection molding, high heat-resistant, and autoclavable. Such a material may include silicone. Because the mouthpiece may be made of a high heat-resistant and autoclavable material, such a mouthpiece may be reusable.

The main body portion may comprise an enclosed pocket made up of an anterior wall, a posterior wall, and a side wall in between the anterior and posterior walls. The side wall may be perforated with a plurality of perforations. Such perforations may constitute a mesh. Additional perforations

2

may be located on the anterior and posterior walls. The main body portion may further include a slit along a longitudinal, central axis on the anterior wall. Such openings (e.g., perforations and slit) allow for suction of air, fluids, and small debris from the patient's mouth, through the openings into the interior portion, and into the suction connector portion towards a suction source. Because the mouthpiece is made of a flexible and resilient material (e.g., silicone), the mouthpiece may be bent when placed in a patient's mouth to conform to the shape of the mouth. When properly positioned, the suction connector portion may protrude from one side of the patient's mouth, while the main body lies against the back of the patient's mouth, and the cheek retractor presses against the patient's cheek on the opposite side of the patient's mouth.

The main body may further include an protruding bridge structure on the interior surface of the posterior wall. Such a bridge structure may protrude from the interior surface in a wave shape with crests and troughs. The crests provide a plurality of contact points with the anterior wall to keep the anterior wall separated from the posterior wall during suction. Meanwhile, the troughs provide gaps that allow for suction of air, fluids, and small debris through the bridge structure.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1A is a perspective view of an exemplary mouthpiece with a detachable mouth prop.

FIG. 1B is a top view of the exemplary mouthpiece and detachable mouth prop of FIG. 1A.

FIG. 1C is a bottom view of the exemplary mouthpiece and detachable mouth prop of FIG. 1A.

FIG. 1D is a side view of the exemplary mouthpiece and detachable mouth prop of FIG. 1A.

FIG. 1E is a cross-sectional view of the exemplary mouthpiece and detachable mouth prop of FIG. 1A.

FIG. 2A is a perspective view of the exemplary mouthpiece of FIG. 1A where the detachable mouth prop has been detached.

FIG. 2B is a top view of the exemplary mouthpiece of FIG. 2A.

FIG. 2C is a bottom view of the exemplary mouthpiece of FIG. 2A.

FIG. 2D is a side view of the exemplary mouthpiece of FIG. 2A.

FIG. 2E is a cross-sectional view of the exemplary mouthpiece of FIG. 2A.

FIG. 3A is a front view of an exemplary mouth prop.

FIG. 3B is a back view of the exemplary mouth prop of FIG. 3A.

FIG. 3C is a bottom view of the exemplary mouth prop of FIG. 3A.

FIG. 3D is a perspective view of the exemplary mouth prop of FIG. 3A.

FIG. 3E is a side view of the exemplary mouth prop of FIG. 3A.

FIG. 3F is a top view of the exemplary mouth prop of FIG. 3A.

FIG. 4 is a close-up view of exemplary mesh sides in an exemplary mouthpiece.

FIG. 5 is a close-up view of an internal bridge in an exemplary mouthpiece.

FIG. 6A is a close-up view of an exemplary reinforcing bar in an exemplary mouthpiece.

FIG. 6B is a cross-sectional view of the exemplary reinforcing bar of FIG. 6A.

3

FIG. 7A is a close-up view of an exemplary cheek retractor portion in an exemplary mouthpiece.

FIG. 7B is a cross-sectional view of the exemplary cheek retractor portion of FIG. 7A.

DETAILED DESCRIPTION

Embodiments of the present invention provide for a mouthpiece comprising a main body portion, a cheek retractor portion, and a suction connector portion. In some embodiments, the main body portion, cheek retractor portion, and suction connector portion (and sub-portions thereof) may be molded as one-piece, preferably by injection molding. In an exemplary embodiment, the mouthpiece may be made of a material that is flexible, translucent, conducive to injection molding, high heat-resistant, and autoclavable. Such a material may include silicone. Because the mouthpiece may be made of a high heat-resistant and autoclavable material, such a mouthpiece may be reusable.

FIGS. 1A-E are different views of an exemplary mouthpiece with an attachable mouth prop 160, while FIGS. 2A-E are different views of the exemplary mouthpiece of FIG. 1A where the attachable mouth prop 160 has been detached. Such a mouthpiece may include a main body portion 110, a suction connector portion 120, and a cheek retractor portion 130.

The main body portion 110 may include mesh or perforations 140, a stability bar 150, an open slit 170, and an internal bridge 180. The main body portion 110 may connect to a suction connector portion 120 on one end and a cheek retractor portion 130 at the other end. Such a cheek retractor portion 130 may be configured to press against and retract a patient's cheek away from the patient's teeth. When placed in a patient's mouth, the suction connector portion 120 may protrude from one side of the patient's mouth, while the main body portion 110 lies against the back of the patient's mouth, and the cheek retractor portion 130 retracts the patient's cheek on the opposite side of the patient's mouth. The flexibility of the material used to form the mouthpiece allows for some bending when placed in the patient's mouth. The material is, however, resilient enough that the cheek retractor portion presses against the inside of the patient's cheek with such pressure being sufficient to move the cheek away from the patient's teeth.

An exemplary main body portion 110, when placed in a mouth, may include an anterior wall facing the front of the mouth (e.g., the side with slit 170) and a posterior wall facing the back of the mouth. The two walls may connect at a superior wall and an inferior wall forming a body that is at least partially enclosed.

Superior may be used herein to refer to the side that rests against a roof of a patient's mouth when placed therein, and inferior may be used to refer to the side that rests against the floor of the patient's mouth. The superior and inferior sides may be formed identically, which may allow for the mouthpiece to change orientation such that the superior side may appear as the inferior side and vice versa, in the new orientation. When in use, the respective sides of the main body portion 110 may serve to protect and separate the top of the mouth and the bottom of the mouth/tongue. In addition, the main body portion 110 may also serve to protect the back of the mouth (e.g., throat and airway) from falling debris.

Much of the main body portion 110 of the mouthpiece may be shaped as a straight-line arrowhead or shield whose base generally conforms to the intraoral shape of a patient's mouth. Differently-sized mouthpieces may be provided for

4

differently-sized mouths of adults and children. Part of the base side of the arrowhead may be formed with thicker walls than the rest of the main body. Such thickening may provide additional stability.

In addition, the main body portion 110 of the mouthpiece may include a plurality of holes 140 distributed along the superior and inferior sides of the anterior and posterior walls to assist in suctioning of water, saliva and debris from the oral cavity. In some embodiments, a set of holes may also form a mesh along the walls of the superior and inferior edges. FIG. 4 is a close-up view of an exemplary mesh wall in an exemplary mouthpiece.

At the narrow end of the arrowhead that connects to the cheek retractor portion 130, the main body portion 110 may include a rectangular portion. Narrower than the base of the arrowhead, the rectangle may additionally include a reinforcing bar (or stability bar) 150 (described in further detail below) and may be at least partially crossed by a slit 170 (described in further detail below) into the interior of the pocket of the main body portion 110.

Stability bar 150 may be a protrusion or otherwise a thickened area that reinforces the stability of the rectangular portion and assist in shaping this region to the intraoral posterior shape of a patient's mouth. FIG. 6A is a close-up view of an exemplary stability bar 150 of an exemplary mouthpiece. FIG. 6B is a cross-sectional view of the exemplary reinforcing bar in the cheek retractor connector portion of FIG. 6A.

In some embodiments, the internal, rectangular-shaped reinforcing or stability bar 150 may be located distally to the internal wavelike bridge structure 180 and attached to both the interior side of the posterior surface of the main body and the rectangular portion. Such a stability bar 150 may be located in the area where a positioned mouthpiece begins to wrap from the lingual side of the most posterior mandibular tooth, around the distal side of the most posterior tooth, and to anterior side of the most posterior mandibular tooth, thereby assisting in shaping the mouthpiece to the general intraoral shape of a patient's mouth.

Various embodiments of the mouthpiece may further include a longitudinal, open slit 170 extending over approximately two-thirds of the main body on the anterior surface. Running along the center of the main body across the rectangle and most of the arrowhead, such a slit 170 may assist in capture and suction of water, saliva and debris, as well as assisting in cleaning and maintenance.

Additionally, the main body of the mouthpiece may include a bridge structure 180 on an interior surface to ensure that the anterior and posterior surfaces remain separated during suction. FIG. 1E is a cross-sectional view of the mouthpiece in which the bridge structure 180 is illustrated. FIG. 5 is a close-up view of the bridge structure 180 without the surrounding walls of the main body portion. Such a bridge structure 180 may be formed as an wave-like protrusion that generally corresponds to the distance between the anterior and posterior walls extending substantially (e.g., within 1 mm) the full distance at its crest and substantially flush to the surface at its trough. In some embodiments, the bridge structure 180 may be centrally-located in the main body portion 110 of the mouthpiece. The gaps (or troughs) between the waves of the bridge structure 180 assist in the suction-driven transfer of water and saliva to the suction connector portion 120 and ultimately, into a central suction vacuum. In some embodiments, the bridge structure 180 may follow the shape of a logo (e.g., an arrowhead or shield).

5

The suction connector portion **120** may be oval-shaped and also attached to the main body portion **110**. The suction connector portion **120** may be formed with thicker walls than the main body portion **110** and configured to attach to a high-suction vacuum adapter and to assist in transferring water, saliva, and debris from the oral cavity to the external adapter for removal. The suction connector portion **120** may also include an internal stop to assist in sliding the mouthpiece onto the adapter to a desired depth. The suction connector portion **120** may additionally have an external, concave, notched region **210** that corresponds to a removable strap such that when the strap is in place, the external walls of the strap and the rest of the connector portion may be flush.

The cheek retractor portion **130** is illustrated as a hammerhead distal region, which may be attached to the main body portion **110**. FIG. 7A is a close-up view of an exemplary cheek retractor portion **130** in an exemplary mouthpiece. FIG. 7B is a cross-sectional view of the exemplary cheek retractor portion **130** of FIG. 7A.

The mouthpiece may be used with a mouth prop **160**, as illustrated in FIG. 1 (with a mouth prop **160**) and FIG. 2 (illustrated without the mouth prop **160**). FIGS. 3A-E provide different close-up views of an exemplary mouth prop **160**. The removable strap **310** may be attached to mouth prop **160**, which may be used to prop open a patient's mouth and teeth. In this regard, the suction connector portion **120** may additionally have an external plug **220** (FIG. 2C) protruding from the posterior side of the suction connector portion **120**. Such a plug **220** may correspond to and serve to connect with an opening in the mouth prop **160**. The mouth prop **160** may be reinforced by the presence of the bite block portion **320** in the opening, thereby resulting in a more crush-resistant, nearly incompressible, and stable mouth prop **160**. In some embodiments, the suction connector portion **120** may further have a cutout **230** (e.g., which may be shaped as a logo) providing extra interlocking with a corresponding protrusion (e.g., which may also be shaped as a logo) on an external high-suction vacuum adapter.

The mouth prop **160** may be made of thickened silicone material injection molded in a single piece with an elastic strap corresponding to the circumference of the suction connector portion. The mouth prop **160** has an internal, rectangular-shaped female slot designed to fit snugly with the external, rectangular-shaped male plug **220** of the suction connector portion **120** of the mouthpiece. Mouth props may be made in different sizes for differently sized mouths. Because the mouth prop and mouthpiece are detachable from each other, different sizes of each may be mixed and matched as needed for a particular patient's mouth.

The mouthpiece as described herein may be used with a one-piece, autoclavable, high-suction vacuum adapter. Such a high-suction vacuum body adapter may be made of a single homogenous material. Having a single lever design, such a vacuum adapter may function in the same manner as all the current high-suction vacuum evacuators and saliva ejectors in controlling the removal of water, saliva, and debris from the oral cavity to the outside vacuum source. The single lever may be designed to control the removal of water, saliva, and debris from the at least partially enclosed so main body through a single, large evacuation conduit within the suction connector portion.

While various embodiments have been described above, it should be understood that they have been presented by way of example only, and not limitation. The descriptions are not intended to limit the scope of the invention to the particular forms set forth herein. Thus, the breadth and scope

6

of a preferred embodiment should not be limited by any of the above-described exemplary embodiments. It should be understood that the above description is illustrative and not restrictive. To the contrary, the present descriptions are intended to cover such alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims and otherwise appreciated by one of ordinary skill in the art. The scope of the invention should, therefore, be determined not with reference to the above description, but instead should be determined with reference to the appended claims along with their full scope of equivalents.

What is claimed is:

1. A mouthpiece comprising:

a main body having a first end opposite a second end, the main body having an interior space, wherein the main body is configured in a shape wider at the first end and narrower at the second end, and wherein the main body comprises:

a first wall defined by a plurality of first edges, the first wall comprising a slit opening extending a longitudinal length parallel to a longitudinal and central axis of the main body, the longitudinal length extending from a middle location of the first wall away from the first end and toward the second end of the main body, the slit opening allowing fluids exterior to the interior space to enter along the longitudinal length into the interior space,

a second wall defined by a plurality of second edges that correspond to the first edges of the first wall, the second wall located at a distance from the first wall, the distance corresponding to a span of the interior space,

a connecting wall that connects one of the first edges of the first wall to one of the corresponding second edges of the second wall across the span of the interior space between the first wall and the second wall, and

a bridge structure that includes a plurality of protrusions integral with and protruding from an interior surface of the second wall, the bridge structure extending through the interior space towards the first wall, wherein the bridge structure is not attached to the first wall, and wherein the plurality of protrusions of the bridge structure protrude in a wave shape comprising one or more crests and one or more troughs.

2. The mouthpiece of claim 1, wherein the second wall further includes a stability bar protruding from the interior surface of the second wall and along the longitudinal and central axis of the main body, the stability bar aligned with the slit opening.

3. The mouthpiece of claim 1, wherein the main body is formed by injection-molding as one piece.

4. The mouthpiece of claim 1, wherein a material used to form the main body is a flexible, translucent, high heat-resistant, autoclavable silicone-based material.

5. The mouthpiece of claim 1, wherein the first wall and the second wall have different thicknesses.

6. The mouthpiece of claim 1, wherein flexibility of material of the first wall allows portions of the first wall to be pulled open at the slit opening to expose the interior space.

7. The mouthpiece of claim 1, further comprising a cheek retractor portion connected to the second end of the main body, the cheek retractor portion having a surface that

7

applies pressure when bent, wherein the pressure is based on resilience of the cheek retractor portion.

8. The mouthpiece of claim 1, wherein the plurality of protrusions of the bridge structure comprise a plurality of spaced contact points, and wherein spaces between the contact points are at troughs of the wave shape.

9. The mouthpiece of claim 1, further comprising a suction connector portion configured to connect the interior space to a vacuum source.

10. The mouthpiece of claim 1, further comprising a mouth prop injection-molded in one piece.

11. The mouthpiece of claim 10, wherein the mouth prop is detachable and comprises a bite block portion and a strap portion.

12. A mouthpiece comprising:

a main body having a first end opposite a second end, the first end wider than the second end, the main body comprising:

a first wall having a plurality of first edges and extending from the first end to the second end,

a second wall having a plurality of second edges and located at a distance from the first wall, the distance corresponding to a space between the first wall and the second wall, wherein the second wall also extends from the first end to the second end,

a connecting wall that connects one of the first edges of the first wall to one of the second edges of the second wall across the distance between the first wall and the second wall; and

a bridge structure that includes a plurality of protrusions integral with and protruding from an interior surface of the second wall, the bridge structure extending through the interior space towards the first wall, wherein the bridge structure is not attached to the first wall, and wherein the plurality of protrusions of the bridge structure protrude in a wave shape comprising one or more crests and one or more troughs;

a suction connector extending from the first end of the main body, wherein an evacuation conduit of the suc-

8

tion connector is in communication with the space between the first wall and the second wall, and wherein the suction connector includes a cutout shape configured to interlock with a corresponding protrusion shape of a vacuum adapter; and

a cheek retractor at the second end of the main body.

13. The mouthpiece of claim 12, wherein the plurality of protrusions of the bridge structure comprise a plurality of contact points corresponding to the crests of the wave shape, and wherein the troughs correspond to spaces between the contact points.

14. The mouthpiece of claim 12, wherein the first wall and the second wall are bendable, and wherein the bridge structure keeps the first wall separated from the second wall during suction.

15. The mouthpiece of claim 12, wherein at least one of the first wall and the second wall includes one or more perforations distributed along one or more of the first edges or along one or more of the second edges.

16. The mouthpiece of claim 12, further comprising a stability bar extending along a longitudinal axis of the main body between the first end and the second end, wherein a thickness of the stability bar reinforces a resilience of the main body.

17. The mouthpiece of claim 12, wherein the main body is formed by injection-molding as one piece.

18. The mouthpiece of claim 17, wherein at least one of the cheek retractor and suction connector is formed by injection-molding and integral with the main body.

19. The mouthpiece of claim 17, further comprising a stability bar extending along a longitudinal axis of the main body between the first end and the second end, wherein the stability bar is formed by injection-molding and integral with the main body.

20. The mouthpiece of claim 12, further comprising a mouth prop connected to the suction connector.

21. The mouthpiece of claim 12, wherein the suction connector includes a cutout configured to interlock with a corresponding protrusion of a vacuum adapter.

* * * * *