



US 20040022518A1

(19) **United States**(12) **Patent Application Publication****Taga et al.**(10) **Pub. No.: US 2004/0022518 A1**(43) **Pub. Date: Feb. 5, 2004**

(54) **PICTURE DATA RECORDING METHOD,
PICTURE DATA STORAGE MEDIUM,
PICTURE DATA PLAYBACK APPARATUS,
AND PICTURE DATA PLAYBACK METHOD**

(30) **Foreign Application Priority Data**

Jul. 30, 2002 (JP) 2002-221831

Publication Classification(51) **Int. Cl.⁷** **H04N 5/781**(52) **U.S. Cl.** **386/46; 386/125; 386/126**


(75) Inventors: **Yumiko Taga**, Kawasaki-shi (JP);
Teiichi Ichikawa, Yokohama-shi (JP)

Correspondence Address:
PILLSBURY WINTHROP, LLP
P.O. BOX 10500
MCLEAN, VA 22102 (US)

(73) Assignee: **KABUSHIKI KAISHA TOSHIBA**,
Tokyo (JP)

(21) Appl. No.: **10/611,160**(22) Filed: **Jul. 2, 2003**(57) **ABSTRACT**

In a picture data recording method of an aspect of this invention, main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution are compressed, packets are formed from the compressed data in accordance with predetermined units and multiplexed, and the multiplexed data is recorded on a recording medium.

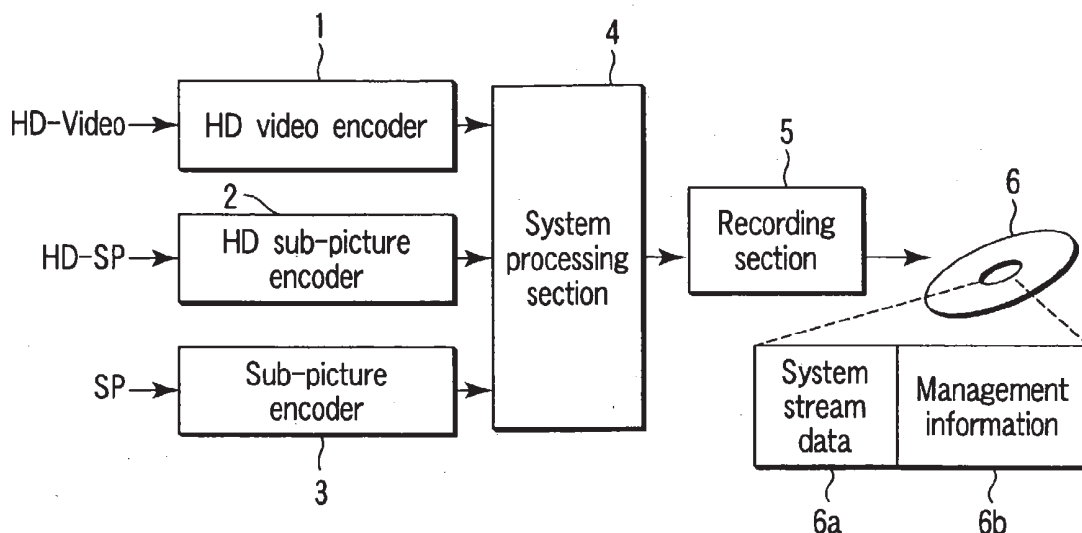

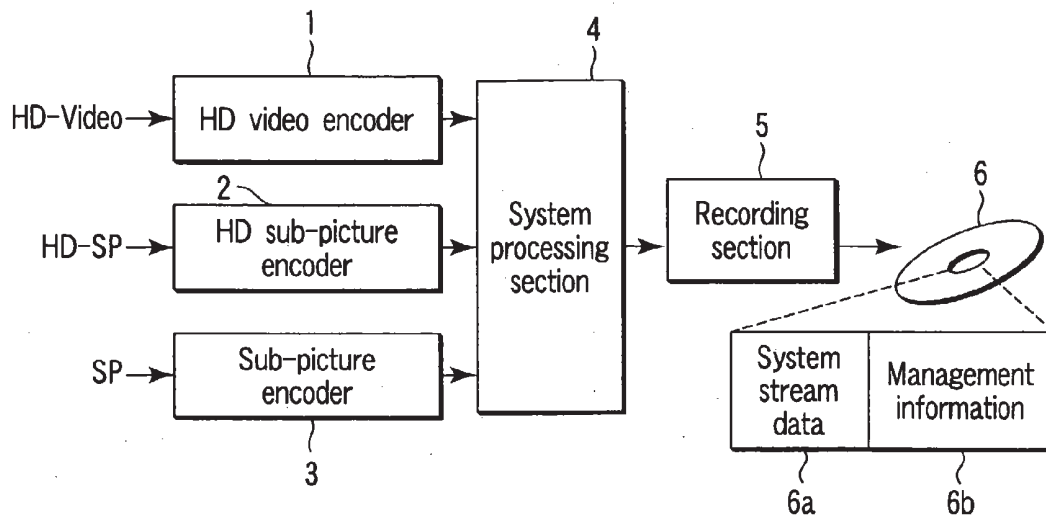


FIG. 1

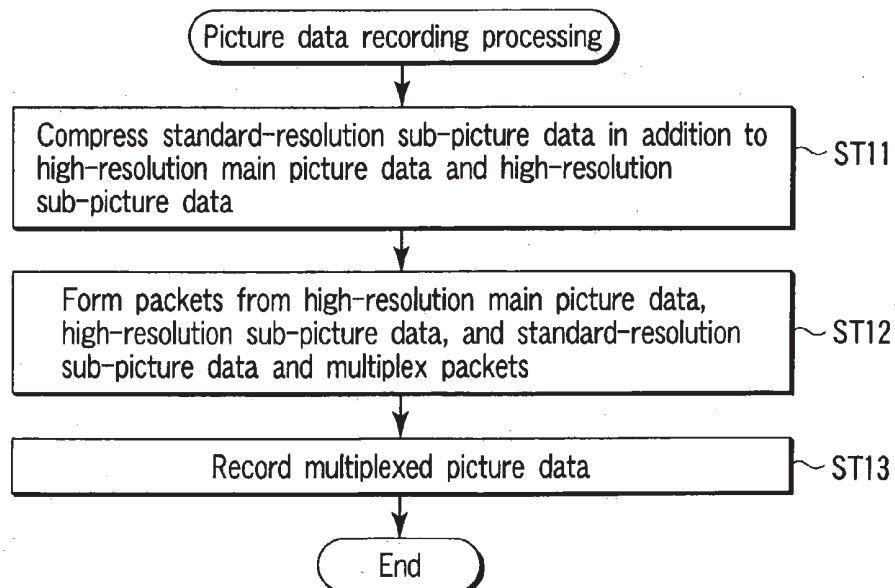
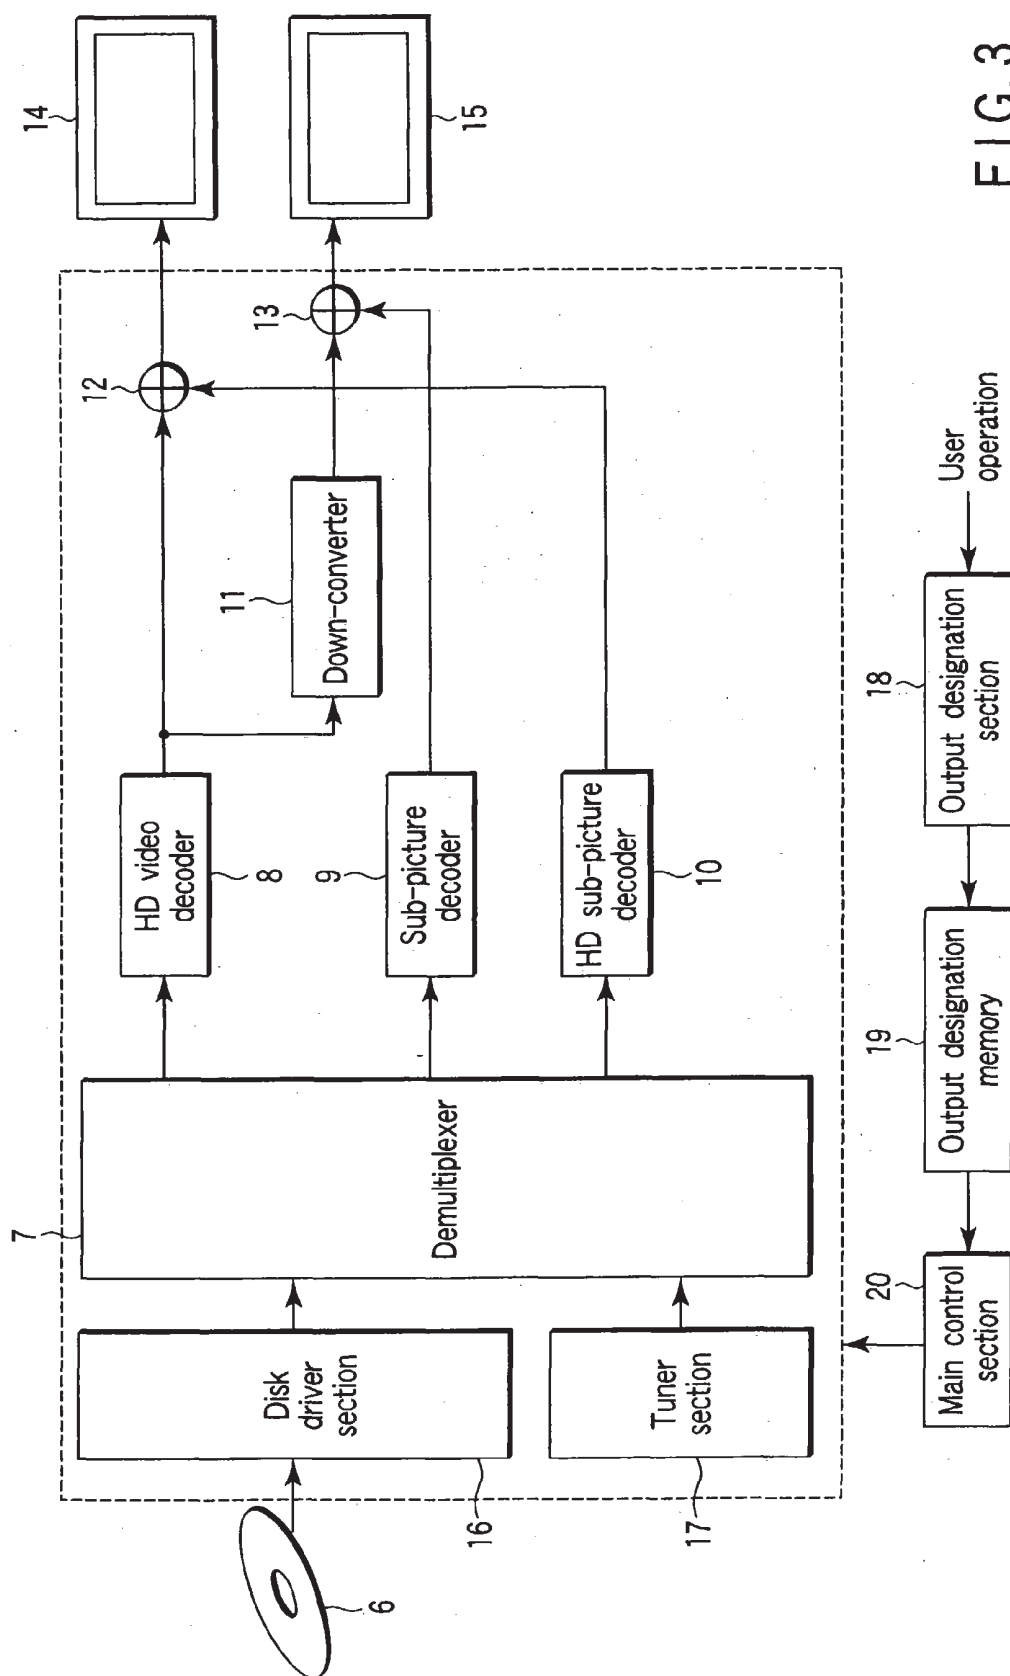


FIG. 2



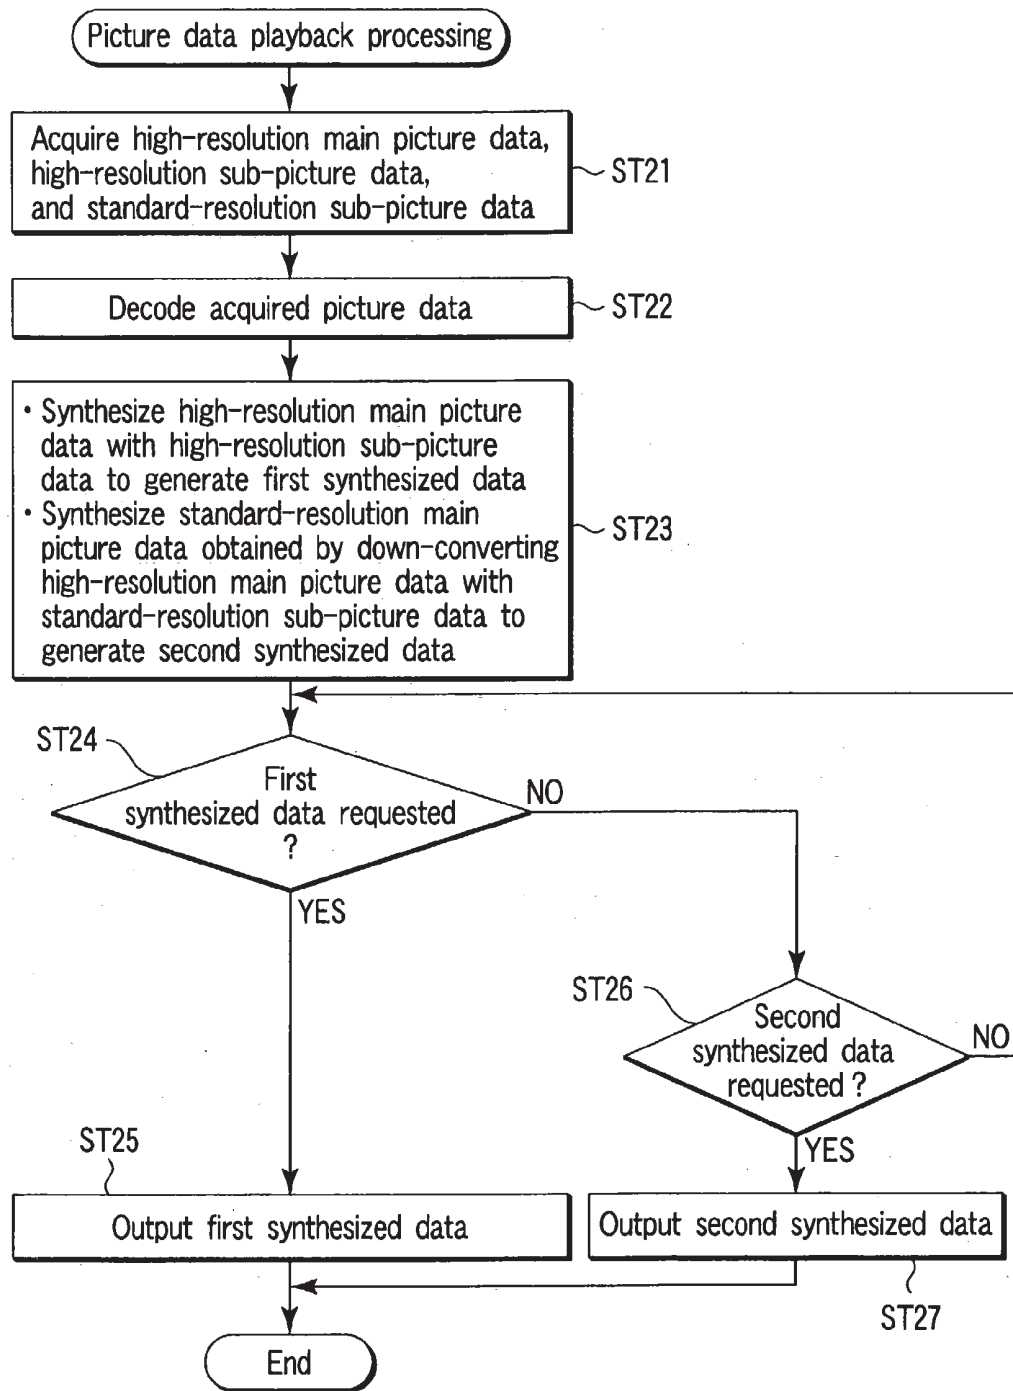


FIG. 4

PICTURE DATA RECORDING METHOD, PICTURE DATA STORAGE MEDIUM, PICTURE DATA PLAYBACK APPARATUS, AND PICTURE DATA PLAYBACK METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is based upon and claims the benefit of priority from the prior Japanese Patent Application No. 2002-221831, filed Jul. 30, 2002, the entire contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a picture data recording method of recording picture data. The present invention also relates to a picture data storage medium which stores picture data. The present invention also relates to a picture data playback apparatus and method of playing back picture data.

[0004] 2. Description of the Related Art

[0005] In recent years, a DVD (Digital Versatile Disk) has been developed as a high-density recording medium. A DVD video scheme is defined as a scheme of recording, on this medium, sub-picture data such as audio and subtitle data as well as main picture data.

[0006] Currently, a scheme of recording high-resolution main picture data and sub-picture data on a recording medium such as an optical disk has been examined as extension of the current DVD video standard.

[0007] The high-resolution main picture data and sub-picture data are synthesized and output to a high-resolution monitor that can cope with a high resolution. However, since standard monitors (NTSC monitors) are popular currently, the synthesized data of high-resolution main picture data and sub-picture data is converted to a standard resolution, i.e., down-converted and then output to the standard monitor.

[0008] Since sub-picture data contains steep edges, the image quality readily degrades upon down-conversion. That is, the above-described method of outputting high-resolution data to a standard monitor may degrade the image quality of sub-picture data displayed on the standard monitor.

BRIEF SUMMARY OF THE INVENTION

[0009] A picture data recording method according to an aspect of the present invention comprises compressing main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution, forming packets from the compressed data in accordance with predetermined units and multiplexing the packets, and recording the multiplexed data on a recording medium.

[0010] A picture data storage medium according to an aspect of the present invention comprises a first area which stores multiplexed data obtained by compressing main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution, forming packets from the compressed data in accordance with predetermined

units, and multiplexing the packets, and a second area which stores management information which manages the multiplexed data.

[0011] A picture data playback apparatus according to an aspect of the present invention comprises acquisition unit for acquiring main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution, decoding unit for decoding the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution, which are acquired by the acquisition unit, first synthesis unit for synthesizing the main picture data having the first resolution and decoded by the decoding unit with the sub-picture data having the first resolution and decoded by the decoding unit, conversion unit for converting the main picture data having the first resolution and decoded by the decoding unit into main picture data having the second resolution, and second synthesis unit for synthesizing the main picture data having the second resolution converted by the conversion unit with the sub-picture data having the second resolution and decoded by the decoding unit.

[0012] A picture data playback method according to an aspect of the present invention comprises acquiring main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution, decoding the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution, which are acquired, and executing first synthesis processing of synthesizing the decoded main picture data having the first resolution with the decoded sub-picture data having the first resolution, converting the decoded main picture data having the first resolution into main picture data having the second resolution, and executing second synthesis processing of synthesizing the converted main picture data having the second resolution with the decoded sub-picture data having the second resolution.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0013] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

[0014] **FIG. 1** is a block diagram showing the schematic arrangement of a picture data recording apparatus according to an embodiment of the present invention;

[0015] **FIG. 2** is a flow chart showing picture data recording processing according to the embodiment of the present invention;

[0016] **FIG. 3** is a block diagram showing the schematic arrangement of a picture data playback apparatus according to the embodiment of the present invention; and

[0017] **FIG. 4** is a flow chart showing picture data playback processing according to the embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] The embodiment of the present invention will be described below with reference to the accompanying drawing.

[0019] FIG. 1 is a block diagram showing the schematic arrangement of a picture data recording apparatus according to an embodiment of the present invention. In recording high-resolution main picture data and high-resolution sub-picture data as an extension of the current DVD video standard, this picture data recording apparatus records standard-resolution sub-picture data together.

[0020] As shown in FIG. 1, the picture data recording apparatus comprises an HD (High Definition) video encoder 1, HD sub-picture encoder 2, sub-picture encoder 3, system processing section 4, and recording section 5.

[0021] The HD video encoder 1 compresses high-resolution main picture data, i.e., main picture data having a first resolution by a predetermined compression method and supplies the compressed main picture data having the first resolution to the system processing section 4. The HD sub-picture encoder 2 compresses high-resolution sub-picture data, i.e., sub-picture data having the first resolution by a predetermined compression method and supplies the compressed sub-picture data having the first resolution to the system processing section 4. The sub-picture encoder 3 compresses standard-resolution sub-picture data, i.e., sub-picture data having a second resolution lower than the first resolution by a predetermined compression method and supplies the compressed sub-picture data having the second resolution to the system processing section 4. The system processing section 4 forms packets from the picture data supplied from the HD video encoder 1, HD sub-picture encoder 2, and sub-picture encoder 3 in accordance with predetermined units defined for the respective data and multiplexes the packets to generate system stream data. The recording section 5 records the system stream data generated by the system processing section 4 on a disk (information storage medium) 6.

[0022] FIG. 2 is a flow chart showing picture data recording processing by the picture data recording apparatus. That is, this flow chart explains recording processing of high-resolution main picture data and high-resolution sub-picture data as an extension of the current DVD video standard.

[0023] As shown in FIG. 2, in addition to main picture data having the first resolution and sub-picture data having the first resolution, sub-picture data having the second resolution lower than the first resolution is compressed (ST11). Packets are formed from the compressed data in accordance with predetermined units and multiplexed (ST12). The multiplexed data is compressed (ST13).

[0024] In the above-described picture data recording processing, when high-resolution main picture data and high-resolution sub-picture data are to be recorded as an extension of the current DVD video standard, standard-resolution sub-picture data is recorded together. When the picture data recorded by this picture data recording processing is played back by playback processing (to be described later), the main picture data and sub-picture data having the high resolution can be displayed on a high-resolution (HD) TV monitor. In addition, the main picture data and sub-picture

data having the standard resolution can be displayed on a standard monitor without any problem. Especially, a degradation in sub-picture data, which is a problem in the prior art, can be prevented.

[0025] The disk 6 shown in FIG. 1 has, e.g., a first area 6a and second area 6b. The first area 6a stores system stream data generated from main picture data having the first resolution, sub-picture data having the first resolution, and sub-picture data having the second resolution lower than the first resolution. On the other hand, the second area 6b stores management information necessary for playback of the system stream data.

[0026] On the disk 6, when high-resolution main picture data and high-resolution sub-picture data are to be recorded as an extension of the current DVD video standard, standard-resolution sub-picture data is recorded together. When the picture data recorded by this picture data recording processing is played back by playback processing (to be described later), the main picture data and sub-picture data having the high resolution can be displayed on a high-resolution (HD) TV monitor. In addition, the main picture data and sub-picture data having the standard resolution can be displayed on a standard monitor without any problem. Especially, a degradation in sub-picture data, which is a problem in the prior art, can be prevented.

[0027] FIG. 3 is a block diagram showing the schematic arrangement of a picture data playback apparatus according to the embodiment of the present invention. This picture data playback apparatus plays back, e.g., picture data recorded by picture data recording processing by the picture data recording apparatus described above.

[0028] As shown in FIG. 3, the picture data playback apparatus comprises a demultiplexer 7, HD video decoder 8, sub-picture decoder 9, HD sub-picture decoder 10, down-converter 11, first synthesis processing section 12, second synthesis processing section 13, high-resolution (HD) TV monitor 14, standard monitor 15, disk driver section 16, tuner section 17, output designation section 18, output designation memory 19, and main control section 20.

[0029] The disk driver section 16 functioning as a picture data acquisition unit reads out system stream data and management information stored in the disk 6 and supplies the system stream data to the demultiplexer 7. That is, the disk driver section 16 supplies main picture data having the first resolution, sub-picture data having the first resolution, and sub-picture data having the second resolution lower than the first resolution to the demultiplexer 7. The tuner section 17 functioning as picture data acquisition unit also reads out system stream data from a broadcast signal and supplies the data to the demultiplexer 7. That is, the tuner section 17 supplies main picture data having the first resolution, sub-picture data having the first resolution, and sub-picture data having the second resolution lower than the first resolution to the demultiplexer 7.

[0030] The demultiplexer 7 demultiplexes the main picture stream data having the first resolution, sub-picture stream data having the first resolution, and sub-picture stream data having the second resolution lower than the first resolution from the system stream data supplied from the disk driver section 16 or tuner section 17. The demultiplexer 7 also supplies the main picture stream data having the first

resolution to the HD video decoder **8**, the sub-picture stream data having the second resolution to the sub-picture decoder **9**, and the sub-picture stream data having the first resolution to the HD sub-picture decoder **10**.

[0031] The HD video decoder **8** decodes the main picture stream data having the first resolution to generate main picture data having the first resolution. The sub-picture decoder **9** decodes the sub-picture stream data having the second resolution to generate sub-picture data having the second resolution. The HD sub-picture decoder **10** decodes the sub-picture stream data having the first resolution to generate sub-picture data having the first resolution.

[0032] The down-converter **11** converts the main picture data having the first resolution, which is generated by the HD video decoder **8**, into main picture data having the second resolution. That is, the down-converter **11** reduces the resolution of the picture data.

[0033] The first synthesis processing section **12** synthesizes the main picture data having the first resolution, which is generated by the HD video decoder **8**, with the sub-picture data having the first resolution, which is generated by the HD sub-picture decoder **10**, to generate first synthesized picture data. The second synthesis processing section **13** synthesizes the main picture data having the second resolution, which is generated by the down-converter **11**, and the sub-picture data having the second resolution, which is generated by the sub-picture decoder **9**, to generate second synthesized picture data.

[0034] The first synthesis processing section **12** is designed so its output is input to the high-resolution (HD) TV monitor **14**. The second synthesis processing section **13** is designed so its output is input to the standard monitor **15**. That is, the first synthesized picture data obtained by synthesizing the main picture data having the first resolution and the sub-picture data having the first resolution is displayed on the high-resolution (HD) TV monitor **14**. The second synthesized picture data obtained by synthesizing the main picture data having the second resolution and the sub-picture data having the second resolution is displayed on the standard monitor **15**.

[0035] The output designation section **18** designates output of one of the first synthesized picture data and second synthesized picture data. More specifically, when the user selects the high-resolution (HD) TV monitor **14**, the output designation section **18** designates output of the first synthesized picture data (high-resolution picture data). When the user selects the standard monitor **15**, the output designation section **18** designates output of the second synthesized picture data (standard-resolution picture data). The output designation memory **19** stores information designated by the output designation section **18**.

[0036] The main control section **20** controls the respective blocks of the picture data playback apparatus. For example, the main control section **20** causes only one of the first synthesis processing section and second synthesis processing section to output synthesized data on the basis of information stored in the output designation memory **19**. The power consumption can be reduced as compared to simultaneous output of synthesized data from both sections. If only the first synthesized picture data is to be output, the power consumption can further be reduced by stopping

operating the sub-picture decoder **9** and down-converter **11**. Similarly, if only the second synthesized picture data is to be output, the power consumption can further be reduced by stopping operating the HD sub-picture decoder **10**.

[0037] FIG. 4 is a flow chart showing picture data playback processing by the picture data playback apparatus. As shown in FIG. 4, main picture data having the first resolution, sub-picture data having the first resolution, and sub-picture data having the second resolution lower than the first resolution are acquired from a disk or broadcast signal (ST21). These acquired picture data are decoded (ST22). First synthesis processing of synthesizing the decoded main picture data having the first resolution with the decoded sub-picture data having the first resolution is executed, the decoded main picture data having the first resolution is converted into main picture data having the second resolution, and second synthesis processing of synthesizing the converted main picture data having the second resolution with the decoded sub-picture data having the second resolution is executed (ST23).

[0038] If first synthesized data obtained by synthesizing the main picture data having the first resolution with the sub-picture data having the first resolution is requested (YES in ST24), the first synthesized data is output (ST25). Accordingly, the high-resolution picture data is displayed on the high-resolution (HD) TV monitor **14**. On the other hand, if second synthesized data obtained by synthesizing the main picture data having the second resolution with the sub-picture data having the second resolution is requested (YES in ST26), the second synthesized data is output (ST27). Accordingly, the standard-resolution picture data is displayed on the standard monitor **15**.

[0039] In the above-described picture data recording apparatus and picture data recording processing, to display picture data of a high-resolution DVD disk on a high-resolution TV monitor as an extension of the current DVD video standard, high-resolution picture data and high-resolution sub-picture data are synthesized and output. To display picture data on a standard monitor, standard picture data obtained by converting the resolution of high-resolution picture data and standard sub-picture data are synthesized and output, thereby preventing any degradation in image quality of the sub-picture data.

[0040] Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various modifications may be made without departing from the spirit or scope of the general inventive concept as defined by the appended claims and their equivalents.

What is claimed is:

1. A picture data recording method comprising:

compressing main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution;

forming packets from the compressed data in accordance with predetermined units and multiplexing the packets; and

recording the multiplexed data on a recording medium.

2. A picture data storage medium comprising:

a first area which stores multiplexed data obtained by compressing main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution, forming packets from the compressed data in accordance with predetermined units, and multiplexing the packets; and

a second area which stores management information which manages the multiplexed data.

3. A picture data playback apparatus comprising:

acquisition section to acquire main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution;

decoding section to decode the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution, which are acquired by the acquisition section;

first synthesis section to synthesize the main picture data having the first resolution and decoded by the decoding section with the sub-picture data having the first resolution and decoded by the decoding section;

conversion section to convert the main picture data having the first resolution and decoded by the decoding section into main picture data having the second resolution; and

second synthesis section to synthesize the main picture data having the second resolution converted by the conversion section with the sub-picture data having the second resolution and decoded by the decoding section.

4. An apparatus according to claim 3, wherein the acquisition section reads out the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution lower than the first resolution from a picture data storage medium and acquires the data.

5. An apparatus according to claim 4, further comprising

designation section to designate output of one of first synthesized data synthesized by the first synthesis section and second synthesized data synthesized by the second synthesis section, and

output control section to cause one of the first synthesis section and the second synthesis section to output the synthesized data on the basis of designation by the designation section.

6. An apparatus according to claim 3, wherein the acquisition section reads out the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution lower than the first resolution from a broadcast signal and acquires the data.

7. An apparatus according to claim 6, further comprising

designation section to designate output of one of first synthesized data synthesized by the first synthesis section and second synthesized data synthesized by the second synthesis section, and

output control section to cause one of the first synthesis section and the second synthesis section to output the synthesized data on the basis of designation by the designation section.

8. A picture data playback method comprising:

acquiring main picture data having a first resolution, sub-picture data having the first resolution, and sub-picture data having a second resolution lower than the first resolution;

decoding the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution, which are acquired; and

executing first synthesis processing of synthesizing the decoded main picture data having the first resolution with the decoded sub-picture data having the first resolution, converting the decoded main picture data having the first resolution into main picture data having the second resolution, and executing second synthesis processing of synthesizing the converted main picture data having the second resolution with the decoded sub-picture data having the second resolution.

9. A method according to claim 8, wherein the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution lower than the first resolution are read out and acquired from a picture data storage medium.

10. A method according to claim 9, wherein

output of one of first synthesized data synthesized by the first synthesis processing and second synthesized data synthesized by the second synthesis processing is designated, and

the synthesis data synthesized by one of the first synthesis processing and the second synthesis processing is output the basis of the designation.

11. A method according to claim 8, wherein the main picture data having the first resolution, the sub-picture data having the first resolution, and the sub-picture data having the second resolution lower than the first resolution are read out and acquired from a broadcast signal.

12. A method according to claim 11, wherein

output of one of first synthesized data synthesized by the first synthesis processing and second synthesized data synthesized by the second synthesis processing is designated, and

the synthesis data synthesized by one of the first synthesis processing and the second synthesis processing is output the basis of the designation.

* * * * *