
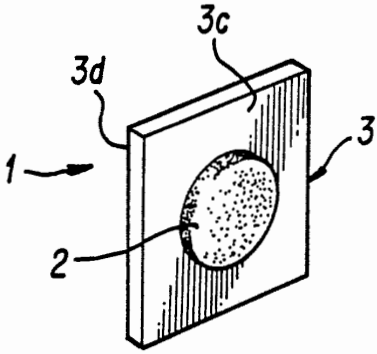


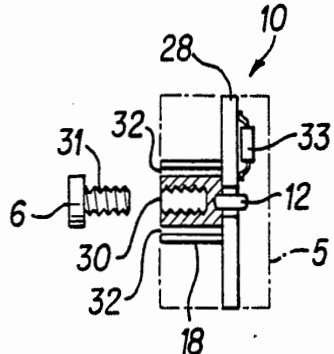

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁴ : A61B 5/04, H03F 3/00	A1	(11) International Publication Number: WO 87/ 01024 (43) International Publication Date: 26 February 1987 (26.02.87)
(21) International Application Number: PCT/US86/01707 (22) International Filing Date: 21 August 1986 (21.08.86) (31) Priority Application Numbers: 767,963 unknown (32) Priority Dates: 21 August 1985 (21.08.85) 20 August 1986 (20.08.86) (33) Priority Country: US (71) Applicant: SPRING CREEK INSTITUTE, INC. [US/ US]; 3500 Westgate Drive, Suite 704, Durham, NC 27707 (US). (72) Inventor: DUNSEATH, W., J., Ross, Jr. ; 1110 Trailend Road, Durham, NC 27712 (US). (74) Agents: KUESTERS, Eckhard, H. et al.; Oblon, Fisher, Spivak, McClelland & Maier, Crystal Square Five, Suite 400, 1755 S. Jefferson Davis Highway, Arling- ton, VA 22202 (US).		(81) Designated States: AT (European patent), AU, BE (Eu- ropean patent), BR, CH (European patent), DE (Eu- ropean patent), DK, FI, FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), MC, NL (European patent), NO, SE (European patent), SU. Published <i>With international search report.</i>
(54) Title: DRY ELECTRODE SYSTEM, DISPOSABLE ELECTRODE PAD, AND AMPLIFIER CIRCUIT FOR DE- TECTION OF BIOPOTENTIALS  		
(57) Abstract A dry electrode system for the detection of biopotentials existing on the surface of the skin of a living body, including a dry electrode pad (1) with a resilient conductive pad (2) adhering to at least one adhesive pad (3) or otherwise having opposed adhesive surfaces, (3c, 3d) one of which is adapted to engage the skin of the living body. The dry electrode pad makes electrical connection to an amplifying circuit (10) which transmits a biopotential derived from the conductive pad to a monitor. The amplifying circuit includes a conductive input contact (6) for making electrical contact to the conductive pad, a lead amplifier (11) having an input coupled to the input contact, and a voltage driven shield (18) coupled to the output of the lead amplifier and surrounding portions of the input contact not in engagement with the dry electrode pad. In a preferred embodiment, conductive adhesive layers are applied to opposed sides of a conductive foam pad to construct the dry electrode pad.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GA	Gabon	MR	Mauritania
AU	Australia	GB	United Kingdom	MW	Malawi
BB	Barbados	HU	Hungary	NL	Netherlands
BE	Belgium	IT	Italy	NO	Norway
BG	Bulgaria	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali		
FR	France				

DescriptionDry Electrode System, Disposable
Electrode Pad, and Amplifier Circuit
for Detection of Biopotentials5 Technical Field

The invention described herein pertains to the detection of potentials existing on the surface of the skin of the living body, which potentials are generated by various sources such as muscle or nervous system
10 activity within the body.

Background Art

Present biopotential detection techniques typically involve the use of wet conductive pastes or gels in combination with a metallic contact surface to
15 form an electrode capable of transforming ionic current flow in the body into electronic current flow in the measuring apparatus. There are several realizations of this basic type of electrode, and all of them suffer from the various disadvantages of wet systems, such as
20 skin irritation, loss of electrical contact due to drying paste or lead wires falling off, poor shelf life, etc. Attempts have been made to eliminate the pastes and gels in two separate ways: the introduction of new electrode materials, and the incorporation of
25 amplifier electronics into the electrode itself.

The materials introduced in the prior art as dry

SUBSTITUTE SHEET

-2-

electrodes generally have not been accepted in the medical field due to poor performance. For example, most of the metals and conductive composite materials such as those disclosed in U.S. Patents 3,56,860 and 5 3,606,881, generate excessive low frequency electrical noise voltages when in contact with a saline solution such as the human sweat which invariably collects on the surface of the skin beneath the electrode, but there is little or no attention given to this problem 10 in the prior art. Furthermore, many of these materials are too stiff to conform to irregularities in skin surface, thus resulting in an unstable dry skin contact subject to excessive movement artifact.

Another group of efforts to obtain disposable 15 electrodes has sought to modify conventional non-conductive, pressure-sensitive adhesives by loading them with fine conductive particles such as carbon powder (U.S. Patent 3,911,906) or metal-coated plastic microspheres (U.S. Patent 3,566,059). However, the 20 conductive filler materials have tended to degrade the adhesives, requiring the electrode pad to be undesirably large if it is to adhere adequately to skin. In U.S. Patent 3,911,906, for example, the preferred diameter of the adhesive pad is two inches, 25 not to be greatly reduced, but such a large area electrode detects signals from a large volume of tissue, which is not always desirable especially if the signal of interest is from a source distant from the electrode site. In this case, the increased level of 30 electrical activity from the muscles directly below the electrode would result in excessive interference or artifact in the recording. Second and more fundamental, conductive adhesives of this type in contact with unprepared dry skin generally do not

SUBSTITUTE SHEET

-3-

establish sufficient electrical conduction to the body to be of particular use with present monitoring technology.

Another group of "dry" electrode materials includes a variety of conductive gums or gels which are sufficiently viscous to form the main body of a disposable electrode while simultaneously providing both its adhesion and its electrical connection to the skin. Hydrogels such as those disclosed in U.S. Patents 3,998,215; 4,391,278; and 4,515,162 cannot truly be regarded as "dry" materials since by definition their water and/or alcohol content is typically high (for example, 30-75% by weight for U.S. Patent 4,391,278). This leads to problems of electrode dryout, special packaging, and poor shelf life. A group of materials more satisfactory in this respect has been derived from polysaccharides such as gum karaya. For example, U.S. Patents 4,125,110 and 4,229,231 describe karaya-based conductive-adhesive gels of relatively low water content for use in disposable ECG electrodes. As pointed out in U.S. Patent 4,273,135, however, the variable conditions of growth and processing of these naturally occurring polymers can lead to corresponding inconsistency in the physical and chemical properties of the resulting gels. Furthermore, steps must be taken to control problems of microbial growth and skin irritation that these organic materials could otherwise engender. Consequently, synthetic polymer gels have been developed that can more consistently provide the necessary physical properties. Examples of such materials are described in U.S. Patents 4,273,135 and 4,554,924.

SUBSTITUTE SHEET

-4-

Both the natural and the synthetic gels are now being used as "essentially dry" disposable electrodes (cf. U.S. Patent 4,554,924 for an example). Although such electrodes represent an improvement over earlier

5 "dry" disposables, they still suffer from limitations similar to those of the modified pressure sensitive adhesives, namely, poor skin adhesion, especially in hair and sweat, and low conductivity on unprepared dry skin. In addition, the junction between the alligator-

10 clip lead and the foil backing of the electrode is susceptible to mechanical instability, making it a significant source of electrical interference, particularly if the lead wires are subject to movement. Finally, these gel-foil disposable

15 electrodes remain far more costly than the reusable wet electrode technology that is still most widely used for resting or diagnostic ECG procedures. All these limitations are sharply reduced by the novel dry-electrode technology according to the present invention

20 to be described subsequently.

Another approach to realizing a dry electrode, placing an electronic amplifier on the electrode, is based on the idea that a high impedance amplifier is able to detect a signal from a high impedance source

25 with a minimum of signal distortion, and then drive the signal through a long cable with a minimum of interference by virtue of the low output impedance of the amplifier. One problem is that many previously disclosed designs, including DC biased transistor

30 amplifiers, differential amplifiers, and amplifiers with gains above unity are not compatible with commonly used monitoring equipment unless some adjustment or modification is made to the monitor. Even unity-gain, DC-biased transistor amplifiers that are capacitively

SUBSTITUTE SHEET

-5-

coupled at the output cannot conveniently be used with different types of monitors without the risk of frequency distortion caused by impedance mismatching to the different monitor inputs, and without large
5 transient DC offsets arising when switching leads.

Another problem has been questionable reliability, as demonstrated by a group of devices utilizing a capacitively coupled input to an amplifier constructed on a metallic electrode coated with a dielectric. This
10 type of electrode is prone to failure from dielectric breakdown due to scratches or high voltages, and exhibits undue sensitivity to external electrostatic fields.

A group of amplifiers using bipolar integrated
15 circuit operational amplifiers with unity gain has been disclosed, but a means for adequately protecting the electronic circuitry from repeated exposure to high voltages, without compromising the essential electrical characteristics of the amplifier input, has not been
20 demonstrated. Defibrillation voltages, static charge accumulation on the skin and clothes, and other medical equipment may cause potentials greater than 25,000 volts to contact the input to the electrode amplifier on a repeated basis, resulting in permanent failure of
25 the device if not protected. The prior art shows the use of input resistors or unspecified current limiters for device and patient protection, but fails to show a means for compensating for the degradation of input impedance to the device as a result of parasitic
30 capacitance coupling to ground through the resistor or current limiter. Furthermore, a single input resistor or current limiter may not provide adequate protection for some types of integrated circuit amplifiers such as

SUBSTITUTE SHEET

-6-

CMOS devices which are sensitive to large input voltages rather than currents. Additionally, there previously has been no disclosure of a means for incorporating very small batteries into the amplifier or lead wire in order to continuously power the amplifier for a period of more than a year without prematurely exhausting the batteries. Due to excessive current demand by the amplifier, especially when the input is unconnected and the output has drifted to saturation as a result, it has previously been necessary to disconnect the batteries from the amplifier when not in use, either by physical removal or by means of a power switch, thus adding undesirable complexity to the operation of the electrode lead wire.

15 Disclosure of the Invention

Accordingly, it is an object of the present invention to provide a new and improved dry electrode system for detecting potentials on the skin of a living body without the use of conductive pastes or gels under conditions ranging from dry to sweat-soaked skin.

A further object of this invention to provide a novel dry electrode system which is immune from destruction or instability caused by repeated exposure to high voltages over long time periods.

25 Yet another object of this invention is to provide a novel dry electrode system capable of providing a signal to conventional monitoring devices without the need for adjustment or modification to the monitor.

30 These and other objects are achieved according to the invention by providing a novel dry electrode system

SUBSTITUTE SHEET

-7-

for the detection of biopotentials existing on the skin of a living body, which biopotentials arise from generators within the body such as heart, muscle or nervous system activity, including a dry electrode pad
5 formed of a resilient conductive pad having a dry conductive center and adhesive means for adhering the dry electrode pad to the skin and to a conductive contact. The conductive contact is coupled to the input of a lead amplifier having an output which is
10 connected to a shield surrounding portions of the contact such that the shield is voltage driven by the output of the lead amplifier. The lead amplifier is attached to one end of a shielded multi-conductor lead cable which provides bipolar power supply voltages,
15 common potential, and an output conductor to the lead amplifier. At the other end of the lead cable is provided a battery pack which in turn is connected to a lead wire connector suitable for interfacing with a monitor.

20 Through suitable enhancements of the electrical properties of the reusable components of the system--i.e., the leads--substantial improvements in the cost/performance characteristics of the disposable portion--i.e., the electrode pads--can be obtained. In
25 particular, incorporation of active amplifiers in the leads allows for an increase in the impedance of the skin-to-electrode contact, and thus permits use of a wider range of materials for the disposable pads than would be suitable for use with conventional passive
30 leads.

According to one embodiment of the invention, the conductive pad is mounted on an apertured insulative adhesive pad which has one adhesive surface adapted to

SUBSTITUTE SHEET

-8-

adhere to the skin and an opposite adhesive surface adhering to the lead amplifier housing (or case). Alternatively, the conductive pad is sandwiched between opposed apertured non-conductive adhesive pads.

- 5 In another embodiment, the opposed sides of the conductive pad are coated, except for central portions of the opposed sides, with respective adhesive coatings, the central portions being uncoated in order so as not to impede signal transmission.
- 10 In another embodiment, one side of the conductive pad is coated with a conductive adhesive adapted to adhere to the skin, and the opposite side of the conductive pad is coated, except for the central portion, with a non-conductive adhesive for adhering to
- 15 the lead amplifier case. In a preferred embodiment, both sides of the conductive pad are coated with suitable conductive adhesives.

- The conductive pad is made of a resilient conductive material and with the adhesive makes
- 20 electrical contact with the skin, yet prohibits direct physical contact to the skin by the lead amplifier and contact. This inhibits disease transmission, since the pad is disposable, and enables reuse of the lead amplifier and associated lead wire.

- 25 In a preferred embodiment, the lead amplifier is mounted in a small plastic case with the shielded electrical contact extending from the case.
- Additionally, the multi-conductor lead cable also is
- 30 driven by a voltage follower amplifier connected to the output of the lead amplifier, or otherwise connected to

SUBSTITUTE SHEET

-9-

common potential. Additionally, the lead amplifier has its input protected by a diode circuit which shunts bipolar currents to power supply common thereby to protect the high input impedance lead amplifier from high amplitude voltage sources. This diode circuit also provides a means for minimizing electrical power required by the lead amplifier, which enables the use of a miniature battery pack at the opposite end of the lead wire cable to power the lead amplifier continuously for long time periods.

The voltage-driven shield surrounds the input contact and an input resistor connecting the contact to the lead amplifier, and serves to maintain a high input impedance into the lead amplifier while shielding the input from external electric interference.

Dry ground contact for referencing the lead amplifier common potential to the body is implemented through a passive lead wire termination in combination with a disposable conductive pad on the skin. The pad may be held in contact with the skin by means of an elastic strap or adhesive.

Brief Description of the Drawings

A more complete appreciation of the invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

FIGURES 1a and 1b are perspective views of opposite sides of one embodiment of the dry electrode

SUBSTITUTE SHEET

-10-

pad with a conductive pad center according to the invention;

FIGURES 1c and 1d are perspective views of opposite sides of a second embodiment of the dry electrode pad of the invention;

FIGURES 1e and 1f are perspective views of opposite sides of a third embodiment of the dry electrode pad according to the invention;

FIGURE 1g is a perspective view of the preferred embodiment of the dry electrode pad of the invention;

FIGURE 2 is a perspective view of the inventive lead wire with lead amplifier housing and one embodiment of the battery housing and lead wire connector;

FIGURE 3 is a circuit schematic of the lead wire amplifier according to the invention;

FIGURE 4 is a circuit schematic of a minimum power lead amplifier according to the invention;

FIGURES 5a and 5b are schematic side and plan views, respectively, illustrating details of the physical geometry of an embodiment of the lead amplifier circuit board and driven shield, using a dual-in-line integrated circuit package;

FIGURES 5c and 5d are respectively schematic side and plan views illustrating another embodiment of the lead amplifier circuit board and driven shield using a surface mount integrated circuit package and

SUBSTITUTE SHEET

-11-

components;

FIGURES 5e and 5f are respectively schematic side and plan views illustrating another embodiment of the lead amplifier and driven shield of the invention; and

5 FIGURES 6a, 6b and 6c are perspective views of respective embodiments of the dry ground electrode, an elastic conductive strap and conductive foam pad, an adhesive pad and a small contact passive lead wire connector, and a conductive adhesive electrode pad and
10 large-contact passive lead wire connector according to the invention.

Best Mode for Carrying Out the Invention

Referring now to the drawings, wherein like reference numerals designate identical or corresponding
15 parts throughout the several views, and more particularly to Figures 1a-1g thereof, an embodiment of the dry electrode pad 1 of the present invention is shown. As shown in FIGURES 1a and 1b, the dry electrode pad 1 of the invention includes a resilient
20 conductive pad 2 and an insulative adhesive pad 3. The conductive pad 2 is mounted over an aperture 3' formed in the center of the adhesive pad 3. The conductive pad 2 is a material with three essential traits: resiliency, electrical conductivity, and electrical
25 stability. The material must be flexible in order to conform to a body surface contour yet possess a sufficient resiliency to maintain intimate contact with the skin despite dynamic variations in contour, for example due to breathing or similar bodily movement. Thus, the
30 resiliency of the material forming the conductive pad 2 as measured by the Ball Rebound test (ASTM Designation

SUBSTITUTE SHEET

-12-

D 3574 - 81) must exceed 5% and preferably be as high as 20%. If the conductive pad 2 itself contacts the skin, it is furthermore essential that the material establish an AC electrical impedance to dry skin of not more than 1.5 million ohms at a frequency of 10 Hz. (If conductive pad 2 is part of a composite dry electrode pad and does not itself contact the skin, then it is only essential that the composite dry electrode pad establish the stated A.C. impedance to dry skin.) Finally, the material of the conductive pad 2 must maintain an electrical stability in terms of self-generated AC noise voltages over a bandwidth of .15 Hz to 100 Hz (which is the COMBINED OFFSET INSTABILITY and INTERNAL NOISE requirement of the AAMI standard for ECG disposable electrodes), under conditions ranging from dry to saturation with a .9% saline solution. The maximum acceptable AC noise voltage is 150 microvolts peak value, although it is preferable to maintain noise voltages well below this value. Additionally the material must maintain a stable DC voltage of less than 100 mV under dry to .9% saline saturation conditions.

One material capable of meeting the above restrictions is low density, carbon loaded polyurethane foam, but it is understood that any material meeting the above specifications falls within the scope of the invention. If the material is a flexible open-cell foam, such as conductive polyurethane (Type 1 foam manufactured by Conductive Materials, Inc., San Jose, CA., for example), an enhancement in electrode performance may be realized by coating or forming on the skin-side surface of the foam a thin, flexible, smooth coating or layer of curable conductive material meeting the conductivity and electrical stability

SUBSTITUTE SHEET

-13-

restrictions outlined above, with the intent of maximizing the dry conductive contact area to the skin while maintaining the mechanical properties of the conductive pad as previously outlined. One example of such a surface is realized by mixing one and one half parts by volume graphite powder (-300 mesh, 99.5% pure) with five parts by volume distilled water and ten parts by volume liquid latex. A thin layer of this mixture is spread on a smooth glass surface and the conductive foam of 400 ohm-cm resistivity is held in contact with the mixture until it cures, resulting in a smooth conductive skin adhering to the surface of the foam. According to the invention, a conductive layer can also be formed on the opposite side of the conductive pad to achieve a further enhancement in electrode performance and to simplify use in the field.

Alternatively, a closed-cell conductive foam such as a crosslinked, vinyl-nitrile polymer is acceptable if it meets the above restrictions for the conductive pad. This material has an additional advantage in that a sealed-surface skin may be formed on the surface of the foam, thus increasing the area of contact to the body. The sealed-surface skin is an integral part of the foam as opposed to the open-celled foams, which must have a separate surface added later in the manufacturing process. An example of an acceptable closed-cell foam is Type CIC foam manufactured by Uniroyal, Inc., Mishawaka, Indiana.

The dry electrode pad 1 as shown in Figures 1a-1d includes a compliant adhesive pad 3 made of a material such as cross-linked polyethylene foam. Adhesive pad 3 serves to hold the conductive pad 2 in contact with the skin while holding conductive pad 2 in contact with a

SUBSTITUTE SHEET

-14-

conductive contact 6 discussed hereinafter. To this end, the skin-side 3c of the adhesive pad 3 is coated with a pressure sensitive hypoallergenic medical adhesive providing a tacky skin-engaging surface, while
5 the lead-side 3d of the adhesive pad 3 is coated with a pressure sensitive removable adhesive of reduced tackiness to engage the lead. It is important that the lead-side adhesive is fully removable, i.e., it leaves no residue on the lead after removal in order to avoid
10 contamination and disease transmission. One example of a suitable medical adhesive is Type MA-23 adhesive manufactured by Adhesives Research Inc., Glen Rock, PA. An example of a suitable removable adhesive is Type AS-23 acrylic based adhesive, also manufactured by
15 Adhesives Research, Inc.

In the embodiment shown in Figures 1a and 1b, the dry electrode pad 1 includes a single insulative adhesive pad 3 with a central aperture of slightly smaller diameter than the diameter of the conductive
20 pad 2 while holding it firmly in place against the skin. Another embodiment of the adhesive pad, illustrated in Figures 1c and 1d, is a single conductive pad 2 with thin insulative adhesive pads 3a and 3b mounted on both sides with central apertures to
25 allow electrical contact to skin and a lead contact. As in Figure 1a, the adhesives are of medical quality on the skin-side 3c and removable quality on the lead-side 3d.

In another embodiment of the electrode pad, the
30 skin-side adhesive 3c in Figure 1e is a conductive adhesive covering most, if not all of the surface of conductive pad 2. The conductive adhesive must fulfill both the electrical and adhesive requirements stated

SUBSTITUTE SHEET

-15-

above for skin-side components of the adhesive pad. That is, it must be a hypoallergenic medical adhesive providing a tacky, conductive and skin-engaging surface. In addition, the combination of the

5 conductive adhesive and foam pad substrate must meet the impedance and noise baseline restrictions outlined above for conductive pads. If the characteristics of the conductive adhesive and foam pad 2 preclude direct lamination of adhesive to foam, a tissue substrate 3

10 coated on both sides 3a and 3c may be used as a manufacturing aid. Several combinations of foam and adhesive allow for the lamination of the conductive adhesive directly to foam, and may be used within the restrictions given above for this embodiment of the

15 electrode pad. In such cases, the tissue substrate 3 is eliminated, and 3a and 3c become the surfaces of a single layer of conductive adhesive. The lead-side shown in Figure 1f remains the same regardless of the type of foam used, and has the same configuration as

20 described for the embodiment of Figure 1d.

A preferred embodiment of the adhesive pad is shown in Figure 1g. In this example, conductive pad 2 is coated on most, if not all of the surface of each of its sides with a conductive adhesive meeting the

25 requirements listed above for conductive adhesives. In addition, the lead-side adhesive must remove from the lead connector and lead amplifier housing without leaving a residue. The resulting foam/conductive adhesive electrode pad must meet the impedance and

30 noise baseline requirements given previously for conductive pads. If the surface characteristics of foam pad 2 preclude direct lamination of conductive adhesive to foam, than 3c and 3d represent tissue substrates coated with conductive adhesive for use as

SUBSTITUTE SHEET

-16-

manufacturing aids. The preferred thickness of the foam substrate for this embodiment is .125 inches, although a range of from .06 to .5 inches is acceptable. It is desirable to have the conductive adhesive meet all the restrictions for both skin-side and lead-side adhesives in order to eliminate the distinction between the sides of the pad, thus simplifying its use. In order to protect the adhesives during storage, release liners 3g and 3h in Figure 1g cover the electrode pad. Various methods of quick release of the liners are contemplated, including tabs extending from the edge of the liner, or corners cut from the edge of the electrode pad without a corresponding cut on the liner, etc.

With the extended range of contact impedance to the body (1.5 million ohms @ 10 Hz) now allowed through the use of the high impedance lead amplifier of the invention several adhesives with satisfactory combinations of adhesive and electrical characteristics are readily obtained. For example, several generic medical-grade pressure-sensitive adhesives have been modified to provide adequate conductivity without seriously degrading their adhesive properties. In determining the acceptability of the following adhesive/foam constructions, several parameters are observed. These include contact impedance to the body at 10 Hz (measured with a 100 pA RMS test current), and DC voltage offset and AC (.15 to 100 Hz) noise baseline of two pads mated face-to-face with an intervening tissue soaked in .9% saline solution. The preferred embodiment of the electrode pad is used in all cases, with a conductive silicon rubber material of less than 100 ohm-cm resistivity used as the electrical contact to the lead-side of the pads. The adhesive

SUBSTITUTE SHEET

-17-

characteristics examined include adhesive strength to the conductive rubber contacts and adhesive residue remaining on the rubber surface after release. The test was also applied to representative insulative lead housing materials such as polypropylene. Testing adhesive characteristics vs. skin proved to be more difficult since the various standards proposed by agencies such as the ASTM and Pressure-Sensitive Tape Council have been shown in tests by UBTL/FDA to be extremely poor predictors of actual performance on skin. In practice, therefore, the only pertinent test of adhesion is the empirically determined ability to remain attached to human skin under an adequate variety of test conditions and skin types. The following examples of conductive adhesives all exhibit acceptable adhesive characteristics, including sufficient adhesive strength to skin, conductive rubber and insulative plastic, with little or no residue left on these surfaces after release. The electrical properties meet the requirements listed previously and are summarized in Table 1.

In Example 1, a water-soluble, non-toxic liquid pressure-sensitive adhesive (#1-52G, Dyna-Tech Adhesives, Inc., Grafton, W.Va.) is directly coated onto .125 inch conductive polyurethane foam (Type 1, Conductance Materials, Inc., San Jose, CA.) with a stainless steel spatula. The adhesive may also be applied to the foam by transfer-coating: a release paper (78# Clay Coated Kraft Silicone Coated One Side #8503, H. P. Smith, Div. of James River Corp., Bedford Park, IL), firmly anchored to a styrofoam base, has a small quantity of 1-52G adhesive applied to one end. The adhesive is allowed to become slightly tacky before using a glass rod to spread in one motion with uniform

SUBSTITUTE SHEET

-18-

pressure. The results shown in Table 1 for Example 1 are from a direct-coated sample.

In Example 2, 1 part by weight of Shawinigan acetylene black (Chevron Chemical Co., Houston, Tx) is added to 40 parts by weight of Dyna-Tech #1-52G. Acetylene back lumps must be removed before adding to adhesive, and shear during mixing is avoided by stirring with multiple thin rods. As soon as a uniform suspension is obtained, the foam (Type 1, Conductance Materials, Inc.) is direct-coated as in [1]. As shown in Table 1, this results in an improvement in contact impedance and initial DC offset voltage.

For Example 3, an emulsion of Gantrez S-95 (a vinyl ether polymer, from GAF Corp, Wayne, NJ) and ethyl acetate (Fisher Scientific, Pittsburgh, PA) is made by mixing together equal parts by weight. Polymerization occurs when 2 parts by weight of Emulphogene BC-610 (a non-ionic surfactant, also from GAF Corp.) is added. One part acetylene black is blended in and the mixture is then blown partially dry to viscous consistency which allows either direct or transfer coating as in [1]. In Example 3, the composition is transfer-coated to .125 inch conductive polyurethane foam (LS-50, Keene Corp., Amesbury MA).

Example 4 is a sample manufactured using Adhesives Research, Inc. (Glen Rock, PA) Type 80-228-1 adhesive (formulation of which is a trade secret), laminated to .125 inch Conductance Materials Type 1 conductive polyurethane foam with the aid of a tissue substrate as depicted in Figures 1e and 1f.

The electrode pads described in the preceding

SUBSTITUTE SHEET

-19-

examples were all subjected to actual ECG procedures and all demonstrated excellent signal detection when used in conjunction with the inventive lead amplifiers. When used with conventional passive lead wires, however, very poor to non-existent signal detection was evident.

TABLE 1

Example	Impedance, ohms	DC Offset, mV		AC Noise Baseline	
		1 min.	5 min.		
10	1	713,000	-6	0	< 10 μ V p-p
	2	490,000	0	0	< 10 μ V p-p
	3	233,000	30	19	< 10 μ V p-p
	4	258,000	-13	-5	< 10 μ V p-p

Further, the present invention also contemplates use of a conductive adhesive layer or substrate for skin-side contacting and an apertured insulative adhesive layer or substrate for contact-side contacting by the dry electrode pad, i.e., a hybrid of the adhesion teachings above presented. These adhesive layers can be discrete layers or coatings applied directly to the conductive foam pad or via tissue substrates as above described provided electrical continuity is maintained.

Further, the present invention contemplates use of both conductive and insulative (ie., non-conductive) adhesive on the same side of the pad in order to take advantage of the different adhesion characteristics

SUBSTITUTE SHEET

-20-

which such adhesives may have. For example, one may apply an appropriate conductive adhesive layer directly to the skin-side of the conductive foam pad, and then apply further insulative adhesive exhibiting greater adhesiveness to selected portions of the skin-side of the pad and/or selected portions of the conductive adhesive. Once again, hybrid variations of the invention are possible.

Figure 2 shows an embodiment of the connective lead wire 4 which electrically engages the conductive pad 2 and is adhesively contacted by the adhesive pad 3. Lead wire 4 includes a lead amplifier housing 5 which has a lead amplifier input contact 6. The lead amplifier input contact 6 is a solid conductive material that meets the same electrical stability requirements as the conductive pad and in combination with the pad maintains a total AC impedance to dry skin of not more than 1.5 million ohms at 10 Hz. An appropriate material is press-molded titanium hydride but it is understood that other materials meeting the above requirements are acceptable as well. Alternatively, any solid conductive material may be used for input contact 6 if the dry electrode pad 1 in use is resistant to fluids, and the total AC impedance of the pad and contact to dry skin is less than 1.5 million ohms (only pad in contact with skin). Part of input contact 6 may be a threaded section 31 (shown in Figure 5) for mating with input connector 30. Alternatively, threaded section 31 may be deleted and input contact 6 affixed directly to input connector 30 by means of a conductive bonding agent such as silver cement. The amplifier housing 5 houses a lead amplifier circuit 10 discussed hereinafter and is made of an insulating material such as plastic or epoxy

SUBSTITUTE SHEET

-21-

resin which is also impervious to fluids. A shielded cable 7 with four separate, insulated, internal conductors connects the output, ground, and power supply leads of the lead amplifier circuit 10 to a battery pack 8 and lead wire connector 9, which are shown in Figure 2. In lieu of the battery pack 8 and connector 9, the lead amplifier circuit 10 may be connected directly to a monitor or other devices by means of a lead wire connector or permanently wired connection for providing supply current, ground and signal connections. The battery pack 8 supplies bipolar voltages of usually 1 to 3 volts and is encased in an insulating material such as plastic or epoxy. As shown in Figure 2, the lead wire connector 9 is a miniature phone plug with the output signal and battery common (ground) connected to the plug. Other types of plugs may be used such as the standard pin plug, in which case there are two plugs at 9.

A circuit schematic of one embodiment of the lead amplifier circuit 10 is shown in Figure 3. The insulating case 5 is represented by outer dotted-line and the conductive input contact 6 is shown at the edge of a voltage-driven shield 18 which is connected to the output of an operational amplifier 11 with noninverting unity gain. The input signal is conducted through resistor 12 which serves as a current limiter to prohibit fault currents above allowable limits from reaching the body. The inputs of amplifier 11 are protected from large amplitude voltages by signal diodes 13a, 13b, 14a and 14b, such as type 1N914, which shunt bipolar currents to battery common or ground 16 while preventing the voltage at the non-inverting input of amplifier 11 from rising to more than positive or negative 2 volts with respect to ground. Resistor 17,

SUBSTITUTE SHEET

-22-

which may be 10,000 ohms, completes the feedback loop for amplifier 11 yet isolates its output from large currents that may flow in diodes 13a, 13b and 14a, 14b. A high input impedance into amplifier 11 of more than 10,000 megohms is maintained since diodes 13a and 13b have the same potential on both sides under normal operating conditions by virtue of the operational amplifier characteristics of amplifier 11. Furthermore, since the shield 18 is driven at the same potential as the input signal, any parasitic capacitance to ground through resistor 12 or connective input leads is minimized thus maintaining a measurably high input impedance and superior noise rejection characteristics of the lead wire amplifier circuit. Operational amplifier 19 is implemented in a unity gain, noninverting configuration in order to drive a lead wire shield 22 shielding the conductors of cable 7 at the same potential as that appearing on the output conductor 23, which results in improved shielding and lowered noise voltages generated by cable motion. It is understood that the outputs of amplifiers 11 and 19 may be nulled to zero offset by means of resistive connections (not shown) standard to the type of operational amplifiers used in the circuit, thereby maximizing the effects described above. Capacitors 20 and 21 are used in a common circuit technique to decouple the leads to the power supply batteries 26 and 27 from noise voltage sources, and resistor 24 isolates the output of 11 from the effects of capacitive loads.

Another embodiment of the lead amplifier, shown in Figure 4, dispenses with the shield driving amplifier 19 in order to minimize power supply requirements. The lead wire shield 22 in this example is connected to battery common 16 at the battery pack only, while the

SUBSTITUTE SHEET

-23-

input contact shield is still voltage-driven by amplifier 11. Further reduction in power consumption can be realized by choosing low power integrated circuit amplifiers (such as CMOS types) exhibiting
5 input offset voltages within a range of -3mV to +3mV and input bias currents of less than 50 pA.

An important feature in the circuit design of Figure 4 resides in the input protection diodes 13a, 13b, 14a and 14b providing a pathway for sufficiently
10 small bias currents from amplifier 11 when the input 6 is unconnected. Thus the output of amplifier 11 does not drift to one of the supply rails due to bias current charging the open input, and power consumption is limited to such a degree that it is no longer
15 necessary to disconnect the batteries when the lead wire is not in use. Input impedance and open-input power consumption are directly related to the input offset voltage of operational amplifier 11; an input offset voltage range of -3mV to +3mV maintained without
20 the aid of resistive nulling circuits has been shown to result in maximum input impedance while holding power consumption to a minimum. In low-power applications some CMOS operational amplifiers are not able to drive a signal into the capacitive load resulting from the
25 grounded-shield cable configuration of FIG. 4. Therefore resistor 24 is important to the operation of the circuit in order to isolate the output of amplifier 11, and may be a 1% tolerance resistor of greater than 4000 ohms.

30 Alternative to the embodiments shown in Figures 3 and 4, the protective signal diode pairs 13a, 13b and 14a, 14b can be replaced with respective single Zener diode, i.e., each diode pair being replaced by a Zener

SUBSTITUTE SHEET

-24-

diode. Any polarity orientation of the Zener diodes may be used. In order to obtain maximum protection for the operational amplifier 11 the Zener voltage should be less than 10 volts and preferably as small as possible. The use of the Zener diodes imposes a restraint on the value of input resistor 12; a resistance of not less than 1.5 megohms must be used in order to preserve the desired characteristics of the lead amplifier 11.

10 Since the Zener diodes serve the same function as the signal diode pairs in providing protection to the lead amplifier from large voltage transients, the advantage gained by their use is a reduction in the number of components of the lead amplifier. On the other hand, a disadvantage is apparent in the additional restraint imposed on the input resistor, whereas the signal diode pairs present no such restraint.

Details of the shielding and physical construction of an embodiment of the lead amplifier are shown in Figures 5a and 5b. A circuit board 28 with a circular guard ring 29 surrounding input resistor 12 is depicted in Figures 5a and 5b. Resistor 12 fits into a hole in circuit board 28, with one end soldered directly to the amplifier input trace on the component side of circuit board 28 and the opposite end soldered to input connector 30 which is threaded to accept the threaded section 31 of input contact 6. Alternatively, input connector 30 may be a solid conductive material with a protruding surface incorporating input contact 6 into a single piece. A metal tube 18 soldered to guard ring 29 and isolated from input connector 30 by insulative material 32 provides shielding for the extent of input

SUBSTITUTE SHEET

-25-

connector 30. Guard ring 29 and hence shield 18 are connected to the output of amplifier 11 thus providing a voltage-driven input shield. The dual-in-line integrated circuit package 33 of amplifier 11 is positioned directly above resistor 12 in order to minimize the length of the input trace, and is soldered to traces on only the component side of circuit board 28 without inserting the metal leads through holes in 28 so as to avoid accidental contact to the shielding.

Alternatively, as shown in Figures 5c and 5d, a surface mount integrated circuit package 33 containing amplifier 11 is positioned directly next to resistor 12 and diodes 13a and 13b in order to minimize the length of input trace 34. The input contact shield and circuit side guard ring remain the same as in Figure 5b. By using surface mount components for most or all of the circuit elements of the lead wire amplifier as illustrated in Figures 5c and 5b, it is possible to greatly reduce the physical size of the lead wire amplifier while realizing an economical manufacturing process.

A further simplification in the manufacturing process is realized by replacing input resistor 12 with a small, flat surface mount resistor soldered to input trace 34 on top of circuit board 28, as shown in Figures 5e and 5f. The small size of the surface mount resistor 12 in combination with the guard ring construction 18 and 29 is sufficient to maintain the high input impedance of the lead amplifier. The attachment of the input contact is also considerably simplified, with screw 30a holding input contact 30 in place within guard ring or shield 18. Input contact 30

SUBSTITUTE SHEET

-26-

in this case does not need to be amenable to soldering, and can be any conductive material within the input contact restrictions. In particular, conductive silicone rubber of less than 100 ohm-cm resistivity is acceptable as an input contact for use with electrode pads coated with conductive adhesives, as long as the pads are resistant to fluids.

Furthermore, the shielding configuration of the invention as described above achieves superior shielding while eliminating the need for the bulky and potentially dangerous conductive shielding amplifier cases described in the prior art.

A ground or reference contact to the body is necessary to maintain a quiet stable signal and to provide a path for DC leakage currents. The ground or reference contact is a direct connection to the skin and is passive, i.e., it is made without the use of lead wire amplifiers. For patient safety the ground contact is usually connected to an isolated circuit common in the monitor amplifier instead of actual earth ground. For each dry electrode lead in contact with the body, lead common 16 is connected to both the body ground electrode and the isolated ground input of the monitor.

Two approaches as illustrated in Figures 6a and 6b are used according to the present invention to realize a stable dry ground electrode connection. In Figure 6a, an adjustable elastic strap 35 is used to hold in contact with the skin of the arm or leg a strip of conductive pad 36 meeting the same specifications as described above for conductive electrode pads 2. Pad 36 makes electrical connection to the ground lead wire

SUBSTITUTE SHEET

-27-

41 via the conductive inside surface 37 of the elastic strap 35; the adjustable size of strap 35 is further extended through a connective system such as velcro hooks 39 and pads 38 in order to hold a snug but comfortable fit on any size arm or leg. The conductive surface 37 may be an elastic material interwoven with conductive metallic strands similar to devices used for the control of static charge accumulation on the body. However, surface 37 must remain isolated by pad 36 from direct contact to the skin in order to avoid noise voltages generated by sweat contamination. Lead wire 41 is held in contact to conductive material 37 by a conductive plate 40, screw 46 and nut 44, and connective eyelet 45. In the embodiment shown in Figure 6a, a pin plug 42 and pin jacks 43 provide a connective means to the ground electrode input of a monitor and the lead wire common connectors from the common conductors 16 of lead wire cable 7, although it is understood that other types of connectors may be used.

An alternative ground electrode connection utilizing the dry electrode pad 1 is illustrated in Figure 6b and employs the passive elements shown in the FIGURES 3 and 4, i.e., amplifiers and associated electrical components are deleted. The ground lead wire 41 connects to the body through the electrode pad 1 by means of an input contact 6 composed of conductive material as described above, with screw threads 31 mating to the threaded input connector 30. Alternatively, input connector 30 is a single conductive component incorporating contact 6, or else contact 6 without screw threads 31 may be attached to input connector 30 by a bonding agent such as silver cement. In both cases, lead wire 41 is connected

SUBSTITUTE SHEET

-28-

directly to input connector 30, and the connective plug 42 and jacks 43 are the same as in the embodiment of Figure 6a. In both embodiments of Figures 6a and 6b, ground lead wire 41 may be a shielded cable with the shield connected to ground at the monitor input.

A preferred embodiment of the ground electrode connector is shown in Figure 6c. In this case, the input contact 6 covers the entire face of the insulative housing 47, and is comprised of a conductive material meeting the requirements for input contacts. This embodiment of the ground electrode is most appropriate for use with electrode pads of the type shown in Fig. 1g covered on both sides with a conductive adhesive, and therefore the preferred material for contact 6 is conductive silicone rubber of less than 100 ohm-cm resistivity. This material exhibits the best release without sticky residue from pressure-sensitive conductive adhesives while maintaining sufficient electrical contact. It is not acceptable for long-term monitoring unless the electrode pads are resistant to fluids. As shown in Figure 6c, input contact 6 may be a thin layer of material laminated to insulative block 47, but it may also be as much as 95% or more of the total thickness of the entire ground connector, with the input connector 30 and ground lead wire 41 embedded within. Furthermore, input connector 30 may be expanded from the single rod shown in Figure 6c to a sheet of conductive metallic material such as copper screening or aluminum foil, in order to increase the conductivity of the contact to 6. If the thickness of the input contact 6 exceeds 25% of the total thickness of the ground connector, an insulative extension of case 47 should cover the conductive areas for patient safety.

SUBSTITUTE SHEET

-29-

As in Figures 6a and 6b, ground lead wire 41 may be a shielded cable with the shield and center conductor connected to (isolated) ground at the monitor input with plugs, jacks and hardwiring as appropriate.

5 Obviously, numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention
10 may be practiced otherwise than as specifically described herein.

SUBSTITUTE SHEET

-30-

Claims

1. A dry electrode system for the detection of biopotentials existing on the surface of the skin of a living body, comprising:

5 a conductive dry electrode pad comprising a resilient conductive pad and having opposed sides, one of which is adapted to contact the skin of said living body, and adhesive means, having first and second adhesive surfaces, at least said first adhesive surface
10 being conductive and adapted to adhere said conductive pad to said skin; and

an amplifying circuit adapted to be connected to the other side of said dry electrode pad for amplifying a biopotential transmitted via said dry electrode pad
15 to said amplifying circuit.

2. A dry electrode system according to Claim 1, wherein said conductive pad comprises a resilient material having not less than 5% rebound value, and wherein said dry electrode pad has an electrical
20 impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and an AC noise base line not greater than 150 μ V peak (.15 to 100 Hz) under conditions of dry to saturation within a .9% saline solution.

3. A dry electrode system according to Claim 2,
25 wherein said conductive pad comprises:

an open-cell foam.

4. The dry electrode system as defined in Claim 3, wherein said conductive foam pad comprises:

SUBSTITUTE SHEET

-31-

carbon loaded polyurethane foam.

5. A dry electrode system according to Claim 2, wherein said conductive pad comprises:

a closed-cell foam.

5 6. A dry electrode system according to Claim 5, wherein said conductive foam pad comprises:

a cross-linked vinyl-nitrite polymer.

7. A dry electrode system according to Claims 1, 2, 3 or 5, wherein said amplifying circuit comprises:

10 an insulating housing having a conductive input contact mounted thereon and adapted to engage the dry electrode pad,

a lead amplifier having an input coupled to said input contact and an output, and

15 a voltage driven first shield connected to said output of said lead amplifier and surrounding portions of said input contact not in engagement with said dry electrode pad.

20 8. The dry electrode system as defined in Claim 7, wherein said conductive input contact comprises a material that maintains an AC noise voltage baseline of not more than 150 μ V peak (.15 to 100 Hz) under conditions ranging from dry to saturation with a .9% saline solution.

25 9. A dry electrode system according to Claim 8, wherein said conductive input contact comprises:

SUBSTITUTE SHEET

-32-

titanium hydride.

10. A dry electrode system according to Claim 7,
wherein said conductive input contact comprises:

conductive silicone rubber.

5 11. A dry electrode system according to Claim 7,
wherein said amplifying circuit comprises:

said lead amplifier comprising an operational
amplifier having inverting and non-inverting inputs,

10 first and second diodes connected in parallel
inverse polarity across the inputs of said operational
amplifier,

third and fourth diodes connected in parallel
inverse polarity from the inverting input of said
operational amplifier to a circuit common potential,

15 an output resistor connected from the inverting
input to the output of said operational amplifier,

an input resistor connected between the non-
inverting input of said operational amplifier and said
conductive input contact, said input resistor at least
20 partially contained within said voltage-driven first
shield,

a lead wire cable having plural conductors
connected to said lead amplifier and supplying power
and common potential to said lead amplifier and taking
25 out an output from said lead amplifier, and

SUBSTITUTE SHEET

-33-

a decoupling resistor connected from the output of said operational amplifier to an output conductor of the lead wire cable.

12. A dry electrode system according to Claim 11,
5 further comprising:

a circuit board having opposed sides, wherein on one of said sides of said circuit board said operational amplifier, said first through fourth diodes, and said output and decoupling resistors are
10 mounted, said circuit board having an aperture through which said input resistor extends from the one side to the other side on which said conductive input contact is mounted.

13. A dry electrode system according to Claim 12,
15 wherein said lead wire cable comprises:

a flexible insulated multi-conductor cable including a pair of insulated conductors to carry bipolar supply currents to said lead amplifier, an insulated conductor to carry said circuit potential
20 common current to and from said lead amplifier, said output conductor comprising an insulated conductor to carry an output signal from said lead amplifier, and a second shield shielding said insulated conductors.

14. A dry electrode system according to Claim 13,
25 wherein said amplifying circuit further comprises:

a voltage follower operational amplifier having a non-inverting input connected to the first shield, an inverting input connected to an output of said voltage follower operational amplifier and to said second

SUBSTITUTE SHEET

-34-

shield.

15. A dry electrode system according to Claim 13,
wherein said second shield is connected to said
insulated conductor carrying said circuit common
5 potential.

16. A dry electrode system according to Claim 13,
comprising:

means for providing said circuit common potential,
including,

10 an elastic ground strap having conductive portions
and adapted to be mounted on a portion of the body,

a second resilient conductive pad contacting said
conductive portions of said strap, and

15 a ground lead wire electrically conductively
coupled between said second conductive pad and said
insulated conductor carrying said circuit common
potential.

17. A dry electrode system according to Claim 13,
comprising:

20 means for providing said circuit common potential,
including,

a second dry electrode pad also comprising a
resilient conductive pad having opposed sides one of
which is adapted to engage the skin of the living body,
25 and adhesive means having first and second adhesive
surfaces, said first adhesive surface adapted to adhere

SUBSTITUTE SHEET

-35-

to said second conductive pad to the skin of said living body,

5 a second electrical contact mounted on a second housing adapted to adhere to said second surface of said adhesive means, said second contact adapted to electrically contact said second conductive pad, and

passive lead wire means for electrically conductively coupling said second electrical contact to said conductor carrying said circuit common potential.

10 18. A dry electrode system according to Claim 17, comprising:

a conductive shield at least partially surrounding said second electrical contact.

15 19. A dry electrode system according to Claims 1, 2, 3 or 5, wherein said amplifying circuit comprises:

an insulating housing having a conductive input contact mounted on said housing and adapted to engage the dry electrode pad;

20 a lead amplifier having inverting and non-inverting inputs, one of which is coupled to said input contact, and an output;

first and second diodes connected in parallel inverse polarity across the inputs of said lead amplifier; and

25 third and fourth diodes connected in parallel inverse polarity from the inverting input of said lead

SUBSTITUTE SHEET

-36-

amplifier to a circuit common potential.

20. A dry electrode system according to Claim 19, comprising:

5 a voltage driven first shield connected to said output of said lead amplifier and surrounding portions of said input contact not in engagement with said pad.

21. The dry electrode system as defined in Claim 19, wherein said conductive input contact comprises a material that maintains an AC noise voltage baseline of
10 not more than 150 μ V peak (.15 to 100 Hz) under conditions ranging from dry to saturation with .9% saline solution.

22. A dry electrode system according to Claim 21, wherein said conductive input contact comprises
15 titanium hydride.

23. A dry electrode system according to Claim 19, wherein said conductive input contact comprises:

conductive silicone rubber.

24. A dry electrode system according to Claims 1,
20 2, 3 or 5, wherein said adhesive means comprises:

first and second conductive adhesive layers applied to respective opposed sides of said conductive foam pad.

25 25. A dry electrode system according to Claim 7, wherein said adhesive means comprises:

SUBSTITUTE SHEET

-37-

first and second conductive adhesive layers
applied to respective opposed sides of said conductive
foam pad.

26. A dry electrode system according to Claim 19,
5 wherein said adhesive means comprises:

first and second conductive adhesive layers
applied to respective opposed sides of said conductive
foam pad.

27. A dry electrode system according to Claim 20,
10 wherein said adhesive means comprises:

first and second conductive adhesive layers
applied to respective opposed sides of said conductive
foam pad.

28. A dry electrode system according to Claims 1,
15 2, 3 or 5, wherein said adhesive means comprises:

a pair of tissue substrates each having opposed
sides covered with a conductive adhesive layer, said
pair of substrates sandwiching said conductive foam pad
therebetween.

29. A dry electrode system according to Claim 7,
20 wherein said adhesive means comprises:

a pair of tissue substrates each having opposed
sides covered with a conductive adhesive layer, said
pair of substrates sandwiching said conductive foam pad
25 therebetween.

30. A dry electrode system according to Claim 19,

SUBSTITUTE SHEET

-38-

wherein said adhesive means comprises:

5 a pair of tissue substrates each having opposed sides covered with a conductive adhesive layer, said pair of substrates sandwiching said conductive foam pad therebetween.

31. A dry electrode system according to Claim 20, wherein said adhesive means comprises:

10 a pair of tissue substrates each having opposed sides covered with a conductive adhesive layer, said pair of substrates sandwiching said conductive foam pad therebetween.

32. A dry electrode system according to Claims 1, 2, 3 or 5, wherein said adhesive means comprises:

15 a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative adhesive applied to selected portions of the other side of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said insulative adhesive layer adapted to adhesively engage
20 the amplifier circuit with said conductive foam pad in contact with said amplifying circuit.

33. A dry electrode system according to Claim 7, wherein said adhesive means comprises:

25 a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative adhesive applied to selected portions of the other side of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said

SUBSTITUTE SHEET

-39-

insulative adhesive layer adapted to adhesively engage the amplifier circuit with said conductive foam pad in contact with said amplifying circuit.

5 34. A dry electrode system according to Claim 19, wherein said adhesive means comprises:

10 a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative adhesive applied to selected portions of the other side of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said insulative adhesive layer adapted to adhesively engage the amplifier circuit with said conductive foam pad in contact with said amplifying circuit.

15 35. A dry electrode system according to Claim 20, wherein said adhesive means comprises:

20 a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative adhesive applied to selected portions of the other side of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said insulative adhesive layer adapted to adhesively engage the amplifier circuit with said conductive foam pad in contact with said amplifying circuit.

25 36. A dry electrode system according to Claims 1, 2, 3 or 5 wherein:

said first adhesive surface comprises a hypoallergenic adhesive material, and

said second adhesive surface comprises an adhesive

SUBSTITUTE SHEET

-40-

material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

37. A dry electrode system according to Claim 7, wherein:

5 said first adhesive surface comprises a hypoallergenic adhesive material, and

 said second adhesive surface comprises an adhesive material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

10 38. A dry electrode system according to Claim 19, wherein:

 said first adhesive surface comprises a hypoallergenic adhesive material, and

15 said second adhesive surface comprises an adhesive material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

 39. A dry electrode system according to Claim 20, wherein:

20 said first adhesive surface comprises a hypoallergenic adhesive material, and

 said second adhesive surface comprises an adhesive material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

25 40. A dry electrode system according to Claim 24, wherein:

SUBSTITUTE SHEET

-41-

said first adhesive surface comprises a
hypoallergenic adhesive material, and

said second adhesive surface comprises an adhesive
material which leaves no adhesive residue on said
5 amplifying circuit after removal therefrom.

41. A dry electrode system according to Claim 28,
wherein:

said first adhesive surface comprises a
hypoallergenic adhesive material, and

10 said second adhesive surface comprises an adhesive
material which leaves no adhesive residue on said
amplifying circuit after removal therefrom.

42. A dry electrode system according to Claim 32,
wherein:

15 said first adhesive surface comprises a
hypoallergenic adhesive material, and

said second adhesive surface comprises an adhesive
material which leaves no adhesive residue on said
amplifying circuit after removal therefrom.

20 43. A dry electrode system according to Claims 1,
2, 3 5, wherein said conductive pad comprises:

a flexible conductive film provided on at least
one side of said resilient conductive pad, said
conductive film having an electrical impedance to dry
25 skin of not greater than 1.5 million ohms at 10 Hz and
maintaining an AC noise voltage (.15 to 100 Hz) of not

SUBSTITUTE SHEET

-42-

more than 150 μ V peak under conditions ranging from dry to saturation with a .9% saline solution.

44. A dry electrode system according to Claim 43, wherein said conductive film is provided on both
5 opposed sides of said resilient conductive pad.

45. A dry electrode system according to Claim 44, wherein said conductive film comprising:

a cured mixture of one and one half parts by volume graphite powder, five parts by volume distilled
10 water and ten parts by volume of liquid latex.

46. A dry electrode system according to Claim 7, wherein said conductive pad comprises:

a flexible conductive film provided on at least one side of said resilient conductive pad, said
15 conductive film having an electrical impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and maintaining an AC noise voltage (.15 to 100 Hz) of not more than 150 μ V peak under conditions ranging from dry to saturation with a .9% saline solution.

20 47. A dry electrode system according to Claim 19, wherein said conductive pad comprises:

a flexible conductive film provided on at least one side of said resilient conductive pad, said
25 conductive film having an electrical impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and maintaining an AC noise voltage (.15 to 100 Hz) of not more than 150 μ V peak under conditions ranging from dry to saturation with a .9% saline solution.

SUBSTITUTE SHEET

-43-

48. A dry electrode system according to Claim 20,
wherein said conductive pad comprises:

a flexible conductive film provided on at least
one side of said resilient conductive pad, said
5 conductive film having an electrical impedance to dry
skin of not greater than 1.5 million ohms at 10 Hz and
maintaining an AC noise voltage (.15 to 100 Hz) of not
more than 150 μ V peak under conditions ranging from dry
to saturation with a .9% saline solution.

10 49. A dry electrode system according to Claim 24,
wherein said conductive pad comprises:

a flexible conductive film provided on at least
one side of said resilient conductive pad, said
conductive film having an electrical impedance to dry
15 skin of not greater than 1.5 million ohms at 10 Hz and
maintaining an AC noise voltage (.15 to 100 Hz) of not
more than 150 μ V peak under conditions ranging from dry
to saturation with a .9% saline solution.

20 50. A dry electrode system according to Claim 28,
wherein said conductive pad comprises:

a flexible conductive film provided on at least
one side of said resilient conductive pad, said
conductive film having an electrical impedance to dry
skin of not greater than 1.5 million ohms at 10 Hz and
25 maintaining an AC noise voltage (.15 to 100 Hz) of not
more than 150 μ V peak under conditions ranging from dry
to saturation with a .9% saline solution.

51. A dry electrode system according to Claim 32,
wherein said conductive pad comprises:

SUBSTITUTE SHEET

-44-

a flexible conductive film provided on at least one side of said resilient conductive pad, said conductive film having an electrical impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and
5 maintaining an AC noise voltage (.15 to 100 Hz) of not more than 150 μ V peak under conditions ranging from dry to saturation with a .9% saline solution.

52. A dry electrode system according to Claims 1, 2, 3 or 5, wherein said adhesive means comprises:

10 a conductive adhesive layer applied to at least a portion of said resilient conductive pad; and

an insulative adhesive layer applied to a selected portion of at least one of the resilient conductive pad and the adhesive conductive layer.

15 53. A dry electrode system according to Claim 7, wherein said adhesive means comprises:

a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative adhesive applied to selected portions of the other side
20 of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said insulative adhesive layer adapted to adhesively engage the amplifier circuit with said conductive foam pad in electrical connection with said amplifying circuit.

25 54. A dry electrode system according to Claim 19, wherein said adhesive means comprises:

a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative

SUBSTITUTE SHEET

-45-

adhesive applied to selected portions of the other side of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said insulative adhesive layer adapted to adhesively engage the amplifier circuit with said conductive foam pad in electrical connection with said amplifying circuit.

55. A dry electrode system according to Claim 20, wherein said adhesive means comprises:

a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative adhesive applied to selected portions of the other side of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said insulative adhesive layer adapted to adhesively engage the amplifier circuit with said conductive foam pad in electrical connection with said amplifying circuit.

56. A dry electrode system according to Claim 46, wherein said adhesive means comprises:

a conductive adhesive layer applied to said one side of said conductive foam pad and an insulative adhesive applied to selected portions of the other side of said conductive foam pad, said conductive adhesive adapted to adhesively engage the skin and said insulative adhesive layer adapted to adhesively engage the amplifier circuit with said conductive foam pad in electrical connection with said amplifying circuit.

57. A dry electrode pad for enabling electrical and mechanical connection between the skin of a living body and an amplifying circuit electrically coupled to a monitor, comprising:

SUBSTITUTE SHEET

-46-

a resilient conductive pad having first and second opposed sides, one of which is adapted to contact the skin of said living body; and

5 adhesive means having opposed first and second adhesive surfaces respectively provided on the opposed sides of said conductive pad, said first adhesive surface being conductive and adapted to adhere to the skin such that one opposed side of said conductive pad is in electrical connection with the skin, said second
10 adhesive surface adapted to adhesively engage said amplifying circuit with the other opposed side of said conductive pad in electrical connection with said amplifying circuit.

58. A dry electrode pad according to Claim 57,
15 wherein said conductive pad comprises a resilient material having not less than 5% rebound value, and wherein said dry electrode pad has an electrical impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and an AC noise base line not greater
20 than 150 μ V peak (.15 to 100 Hz) under conditions of dry to saturation within a .9% saline solution.

59. A dry electrode pad according to Claim 58, wherein said conductive pad comprises:

an open-cell foam.

25 60. The dry electrode pad as defined in Claim 59, wherein said conductive foam pad comprises:

carbon loaded polyurethane foam.

61. A dry electrode pad according to Claim 58,

SUBSTITUTE SHEET

-47-

wherein said conductive pad comprises:

a closed-cell foam.

62. A dry electrode pad according to Claim 61,
wherein said conductive foam pad comprises:

5 a cross-linked vinyl-nitrite polymer.

63. A dry electrode pad according to Claims 57,
58, 59 or 61, wherein said adhesive means comprises:

first and second conductive adhesive layers
applied to respective opposed sides of said resilient
10 conductive foam pad.

64. A dry electrode pad according to Claims 57,
58, 59 or 61, wherein said adhesive means comprises:

a pair of tissue substrates each having opposed
sides covered with a conductive adhesive layer, said
15 pair of substrates sandwiching said resilient
conductive pad therebetween.

65. A dry electrode pad according to Claims 57,
58, 59 or 61, wherein said adhesive means comprises:

a conductive adhesive layer applied to said one
20 side of said resilient conductive pad and an insulative
adhesive applied to selected portions of the other side
of said resilient conductive pad, said conductive
adhesive adapted to adhesively engage the skin, and
said insulative adhesive layer adapted to adhesively
25 engage the amplifier circuit with said conductive foam
pad in electrical connection with said amplifying

SUBSTITUTE SHEET

-48-

circuit.

66. A dry electrode pad according to Claims 57, 58, 59 or 61, wherein:

5 said first adhesive surface comprises a hypoallergenic adhesive material, and

said second adhesive surface comprises an adhesive material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

67. A dry electrode pad according to Claims 57, 10 58, 59 or 61, wherein said conductive pad comprises:

a flexible conductive film provided on at least one side of said conductive foam pad, said conductive, film having an electrical impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and maintaining 15 an AC noise voltage (.15 to 100 Hz) of not more than 150 μ V peak under conditions ranging from dry to saturation with a .9% saline solution.

68. A dry electrode pad according to Claim 67, wherein said conductive film is provided on both 20 opposed sides of said conductive pad.

69. A dry electrode pad according to Claim 68, wherein said conductive film comprising:

a cured mixture of one and one half parts by volume graphite powder, five parts by volume distilled 25 water and ten parts by volume of liquid latex.

70. A dry electrode pad according to Claims 57,

SUBSTITUTE SHEET

-49-

58, 59 or 61, wherein said adhesive means comprises:

a conductive adhesive layer applied to at least a portion of said resilient conductive pad; and

5 an insulative adhesive layer applied to a selected portion of at least one of the resilient conductive pad and the conductive adhesive layer.

71. A dry electrode pad according to Claims 67, 58, 59 or 61, wherein said adhesive means comprises:

10 a conductive adhesive layer applied to at least a portion of said resilient conductive pad; and

an insulative adhesive layer applied to a selected portion of at least one of the resilient conductive pad and the conductive adhesive layer.

15 72. A dry electrode system for the detection of bipotentials existing on the surface of the skin of a living body, comprising:

20 a dry electrode pad comprising a resilient conductive pad and having opposed sides, one of which is adapted to contact the skin of said living body, and adhesive means, having first and second adhesive surfaces, respectively applied to selected portions of the opposed sides of said conductive pad, said first adhesive surface being insulative and adapted to adhere said conductive pad to said skin;

25 an amplifying circuit adapted to adhere to said second adhesive surface and to be electrically connected to the other side of said dry electrode pad

SUBSTITUTE SHEET

-50-

for amplifying a biopotential transmitted via said
conductive pad to said amplifying circuit.

5 73. A dry electrode system according to Claim 72,
wherein said conductive pad comprises a resilient
material having not less than 5% rebound value, and
wherein said dry electrode pad has an electrical
impedance to dry skin of not greater than 1.5 million
ohms at 10 Hz and an AC noise base line not greater
than 150 μ V peak (.15 to 100 Hz) under conditions of
10 dry to saturation within a .9% saline solution.

74. A dry electrode system according to Claim 73,
wherein said conductive pad comprises:

an open-cell foam.

15 75. The dry electrode system as defined in
Claim 74, wherein said conductive foam pad comprises:

carbon loaded polyurethane foam.

76. A dry electrode system according to Claim 73,
wherein said conductive pad comprises:

a closed-cell foam.

20 77. A dry electrode system according to Claim 76,
wherein said conductive foam pad comprises:

a cross-linked vinyl-nitrite polymer.

25 78. A dry electrode system according to Claims
72, 73, 74 or 76, wherein said amplifying circuit
comprises:

SUBSTITUTE SHEET

-51-

an insulating housing having a conductive input contact mounted thereon and adapted to engage the dry electrode pad,

5 a lead amplifier having an input coupled to said input contact and an output, and

a voltage driven first shield connected to said output of said lead amplifier and surrounding portions of said input contact not in engagement with said dry electrode pad.

10 79. The dry electrode system as defined in Claim 78, wherein said conductive input contact comprises a material that maintains an AC noise voltage baseline of not more than 150 μ V peak (.15 to 100 Hz) under
15 conditions ranging from dry to saturation with a .9% saline solution.

80. A dry electrode system according to Claim 79, wherein said conductive input contact comprises:

titanium hydride.

20 81. A dry electrode system according to Claim 78, wherein said conductive input contact comprises:

conductive silicone rubber.

82. A dry electrode system according to Claim 78, wherein said amplifying circuit comprises:

25 said lead amplifier comprising an operational amplifier having inverting and non-inverting inputs,

SUBSTITUTE SHEET

-52-

first and second diodes connected in parallel
inverse polarity across the inputs of said operational
amplifier,

third and fourth diodes connected in parallel
5 inverse polarity from the inverting input of said
operational amplifier to a circuit common potential,

an output resistor connected from the inverting
input to the output of said operational amplifier,

an input resistor connected between the
10 noninverting input of said operational amplifier and
said conductive input contact, said input resistor at
least partially contained within said voltage-driven
first shield,

a lead wire cable having plural conductors
15 connected to said lead amplifier and supplying power
and common potential to said lead amplifier and taking
out an output from said lead amplifier, and

a decoupling resistor connected from the output of
said operational amplifier to an output conductor of
20 the lead wire cable.

83. A dry electrode system according to Claim 82,
further comprising:

a circuit board having opposed sides, wherein on
one of said sides of said circuit board said
25 operational amplifier, said first through fourth
diodes, and said output and decoupling resistors are
mounted, said circuit board having an aperture through
which said input resistor extends from the one side to

SUBSTITUTE SHEET

-53-

the other side on which said conductive input contact is mounted.

84. A dry electrode system according to Claim 83, wherein said lead wire cable comprises:

5 a flexible insulated multi-conductor cable including a pair of insulated conductors to carry bipolar supply currents to said lead amplifier, an insulated conductor to carry said circuit potential common current to and from said lead amplifier, said
10 output conductor comprising an insulated conductor to carry an output signal from said lead amplifier, and a second shield shielding said insulated conductors.

85. A dry electrode system according to Claim 84, wherein said amplifying circuit further comprises:

15 a voltage follower operational amplifier having a non-inverting input connected to the first shield, an inverting input connected to an output of said voltage follower operational amplifier and to said second shield.

20 86. A dry electrode system according to Claim 84, wherein said second shield is connected to said insulated conductor carrying said circuit common potential.

25 87. A dry electrode system according to Claim 84, comprising:

means for providing said circuit common potential, including,

SUBSTITUTE SHEET

-54-

an elastic ground strap having conductive portions and adapted to be mounted on a portion of the body,

a second resilient conductive pad contacting said conductive portions of said strap, and

5 a ground lead wire electrically conductively coupled between said second conductive pad and said insulated conductor carrying said circuit common potential.

10 88. A dry electrode system according to Claim 84, comprising:

means for providing said circuit common potential, including,

15 a second dry electrode pad also comprising a resilient conductive pad having opposed sides one of which is adapted to engage the skin of the living body, and adhesive means having first and second adhesive surfaces, said first adhesive surface adapted to adhere to said second conductive pad to the skin of said living body,

20 a second electrical contact mounted on a second housing adapted to adhere to said second surface of said adhesive means, said second contact adapted to be in electrical connector with said second conductive pad, and

25 passive lead wire means for electrically conductively coupling said second electrical contact to said conductor carrying said circuit common potential.

SUBSTITUTE SHEET

-55-

89. A dry electrode system according to Claim 84, comprising:

a conductive shield at least partially surrounding said second electrical contact.

5 90. A dry electrode system according to Claims 72, 73, 74 or 76, wherein said amplifying circuit comprises:

10 an insulating housing having a conductive input contact mounted on said housing and adapted to engage the dry electrode pad;

a lead amplifier having inverting and non-inverting inputs, one of which is coupled to said input contact, and an output;

15 first and second diodes connected in parallel inverse polarity across the inputs of said lead amplifier; and

third and fourth diodes connected in parallel inverse polarity from the inverting input of said lead amplifier to a circuit common potential.

20 91. A dry electrode system according to Claim 90, comprising:

a voltage driven first shield connected to said output of said lead amplifier and surrounding portions of said input contact not in engagement with said pad.

25 92. The dry electrode system as defined in Claim 91, wherein said conductive input contact comprises a

SUBSTITUTE SHEET

-56-

material that maintains an AC noise voltage baseline of not more than 150 μ V peak (.15 to 100 Hz) under conditions ranging from dry to saturation with a .9% saline solution.

5 93. A dry electrode system according to Claim 92, wherein said conductive input contact comprises:

titanium hydride.

94. A dry electrode system according to Claim 91, wherein said conductive input contact comprises:

10 conductive silicone rubber.

95. A dry electrode system according to Claim 73, wherein said dry electrode pad comprises:

15 a flexible conductive film provided at least on the side of said conductive pad adapted to contact said skin, said flexible conductive film having an electrical impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and maintaining an AC noise voltage (.15 to 100 Hz) of not more than 150 μ V peak under conditions ranging from dry to saturation with a
20 .9% saline solution.

96. A dry electrode system according to Claim 95, wherein said flexible conductive film comprises:

25 a cured mixture of one and one half parts by volume graphite powder, five parts by volume distilled water and ten parts by volume of liquid latex.

97. A dry electrode pad for enabling electrical

SUBSTITUTE SHEET

-57-

and mechanical connection between the skin of a living body and an amplifying circuit electrically coupled to a monitor, comprising:

5 a resilient conductive pad having first and second opposed sides, one of which is adapted to contact the skin of said living body; and

10 adhesive means having opposed first and second adhesive surfaces provided on selected portions of the opposed sides of said conductive pad, said conductive pad adhering to said adhesive means, said first adhesive surface being insulative and adapted to adhere to the skin such that one opposed side of said conductive pad is in electrical connection with the skin, said second adhesive surface adapted to
15 adhesively engage said amplifying circuit with the other opposed side of said conductive pad in electrical connection with said amplifying circuit.

98. A dry electrode pad according to Claim 97, wherein said conductive pad comprises a resilient
20 material having not less than 5% rebound value, and wherein said dry electrode pad has an electrical impedance to dry skin of not greater than 1.5 million ohms at 10 Hz and an AC noise base line not greater than 150 μ V peak (.15 to 100 Hz) under conditions of
25 dry to saturation within a .9% saline solution.

99. A dry electrode pad according to Claim 98, wherein said conductive pad comprises:

an open-cell foam.

100. The dry electrode pad as defined in

SUBSTITUTE SHEET

-58-

Claim 99, wherein said conductive foam pad comprises:

carbon loaded polyurethane foam.

101. A dry electrode pad according to Claim 98,
wherein said conductive pad comprises:

5 a closed-cell foam.

102. A dry electrode pad according to Claim 101,
wherein said conductive foam pad comprises:

a cross-linked vinyl-nitrite polymer.

10 103. A dry electrode pad according to Claims 97,
98, 99 or 101, wherein:

said first adhesive surface comprises a
hypoallergenic adhesive material, and

15 said second adhesive surface comprises an adhesive
material which leaves no adhesive residue on said
amplifying circuit after removal therefrom.

104. A dry electrode pad according to Claims 97,
98, 99 or 101, wherein said conductive pad comprises:

20 a flexible conductive film provided on at least
one side of said conductive foam pad, said conductive
film having an electrical impedance to dry skin of not
greater than 1.5 million ohms at 10 Hz and maintaining
an AC noise voltage (.15 to 100 Hz) of not more than
150 μ V peak under conditions ranging from dry to
saturation with a .9% saline solution.

SUBSTITUTE SHEET

-59-

105. A dry electrode according to Claim 104,
wherein said flexible conductive film comprises:

5 a cured mixture of one and one half parts by
volume graphite powder, five parts by volume distilled
water and ten parts by volume of liquid latex.

106. A dry electrode pad according to Claim 105,
wherein said conductive pad comprises said conductive
film applied to both the opposed sides of said
conductive pad.

10 107. A dry electrode pad according to Claims 97,
98, 99 or 101, wherein said adhesive means comprises:

15 an adhesive pad a first surface of which has said
conductive pad mounted thereon and a second surface of
which is adapted to adhesively engage said amplifying
circuit.

108. A dry electrode pad according to Claims 97,
98, 99 or 101, wherein said adhesive means comprises:

a pair of apertured adhesive pads sandwiching said
conductive pad.

20 109. A dry electrode pad according to Claims 97,
98, 99 or 101, wherein said adhesive means comprises:

insulative adhesive coatings applied to selected
portions of the opposed sides of said conductive pad.

25 110. A dry electrode pad according to Claim 104,
wherein said adhesive means comprises:

SUBSTITUTE SHEET

-60-

an insulative adhesive coating provided on selected portions of said conductive film.

111. A dry electrode pad according to Claim 107, wherein:

5 said first adhesive surface comprises a hypoallergenic adhesive material, and

 said second adhesive surface comprises an adhesive material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

10 112. A dry electrode pad according to Claim 108, wherein:

 said first adhesive surface comprises a hypoallergenic adhesive material, and

15 said second adhesive surface comprises an adhesive material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

 113. A dry electrode pad according to Claim 109, wherein:

20 said first adhesive surface comprises a hypoallergenic adhesive material, and

 said second adhesive surface comprises an adhesive material which leaves no adhesive residue on said amplifying circuit after removal therefrom.

25 114. An amplifying circuit for amplifying an input signal from a source, comprising:

SUBSTITUTE SHEET

-61-

an insulating housing having a conductive input contact mounted thereon and adapted to engage said source with said input signal applied to said contact;

5 a lead amplifier having an input coupled to said input contact and an output; and

a voltage driven first shield connected to said output of said lead amplifier and surrounding portions of said input contact not in engagement with said source.

10 115. An amplifying circuit according to Claim 114, wherein said lead amplifier circuit comprises:

an operational amplifier having inverting and non-inverting inputs,

15 first and second diodes connected in parallel inverse polarity across the inputs of said operational amplifier,

third and fourth diodes connected in parallel inverse polarity from the inverting input of said operational amplifier to a circuit common potential,

20 an output resistor connected from the inverting input to the output of said operational amplifier,

an input resistor connected between the non-inverting input of said operational amplifier and said conductive input contact,

25 a lead wire cable having plural conductors connected to said operational amplifier and supplying

SUBSTITUTE SHEET

-62-

power and common potential to said operational amplifier and taking out an output from said operational amplifier, and

5 a decoupling resistor connected from the output of said operational amplifier to an output conductor of the lead wire cable.

116. An amplifying circuit according to Claim 115, wherein said input resistor is at least partially contained within said voltage-driven first shield.

10 117. An amplifying circuit according to Claim 116, further comprising:

15 a circuit board having opposed sides, wherein on one of said sides of said circuit board said operational amplifier, said first through fourth diodes, and said output and decoupling resistors are mounted, said circuit board having an aperture through which said input resistor extends from the one side to the other side on which said conductive input contact is mounted.

20 118. An amplifying circuit according to Claim 117, wherein said lead wire cable comprises:

25 a flexible insulated multi-conductor cable including a pair of insulated conductors to carry bipolar supply currents to said lead amplifier, an insulated conductor to carry said circuit potential common current to and from said lead amplifier, said output conductor comprising an insulated conductor to carry an output signal from said lead amplifier, and a second shield shielding said insulated conductors.

SUBSTITUTE SHEET

-63-

119. A amplifying circuit according to Claim 118, further comprising:

5 a voltage follower operational amplifier having a non-inverting input connected to the first shield, an inverting input connected to an output of said voltage follower operational amplifier and to said second shield.

10 120. An amplifying circuit according to Claim 118, wherein said second shield is connected to said insulated conductor carrying said circuit common potential.

121. An amplifying circuit for amplifying an input signal from a source, comprising:

15 an insulating housing having a conductive input contact mounted on said housing and adapted to engage said source with said input signal applied to said contact;

20 a lead amplifier having inverting and non-inverting inputs, one of which is coupled to said input contact, and an output;

first and second diodes connected in parallel inverse polarity across the inputs of said lead amplifier; and

25 third and fourth diodes connected in parallel inverse polarity from the inverting input of said lead amplifier to a circuit common potential.

122. An amplifying circuit according to Claim 121,

SUBSTITUTE SHEET

-64-

comprising:

a voltage driven first shield connected to said output of said lead amplifier and surrounding portions of said input contact not in engagement with said pad.

5 123. An amplifying circuit as defined in Claims 114, 115, 119, 121 or 122, wherein said conductive input contact comprises a material that maintains an AC noise voltage baseline of not more than 150 μ V peak (.15 to 100 Hz) under conditions ranging from dry to
10 saturation with .9% saline solution.

124. An amplifying circuit according to Claim 123, wherein said conductive input contact comprises titanium hydride.

15 125. An amplifying circuit according to Claims 114, 115, 119, 121 or 122, wherein said conductive input contact comprises:

conductive silicone rubber.

SUBSTITUTE SHEET

1/7

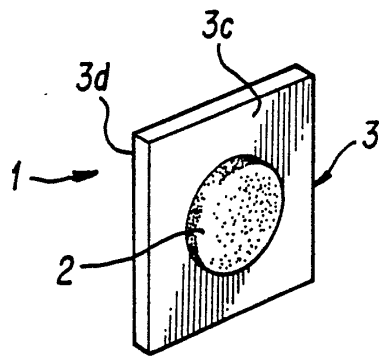


FIG. 1a

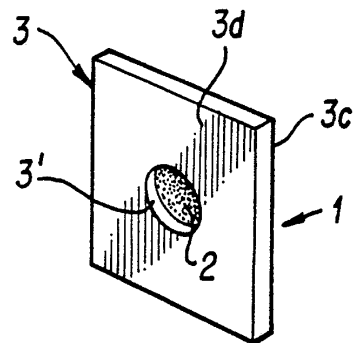


FIG. 1b

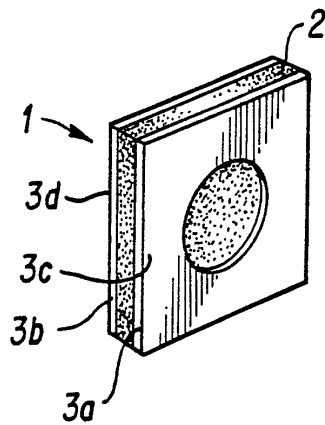


FIG. 1c

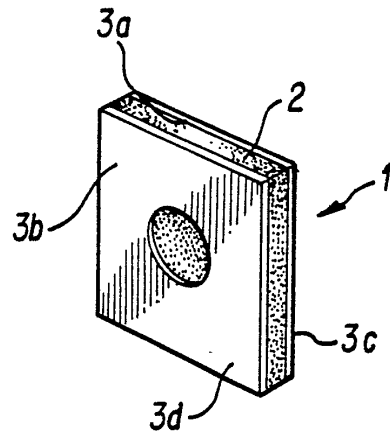


FIG. 1d

SUBSTITUTE SHEET

2/7








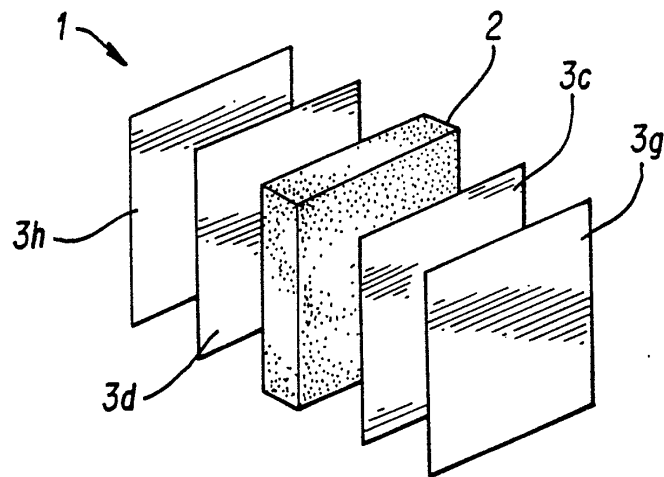


FIG. 1g

SUBSTITUTE SHEET

3/7

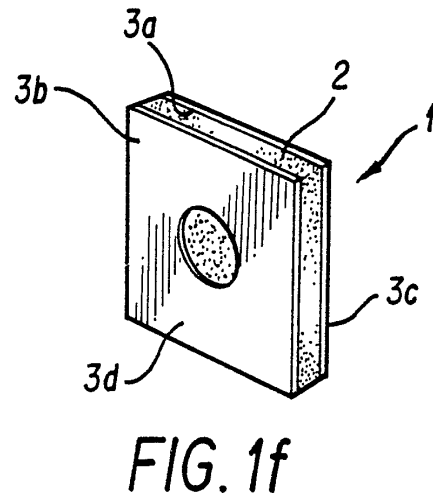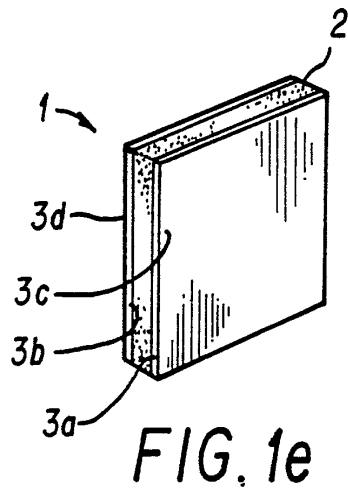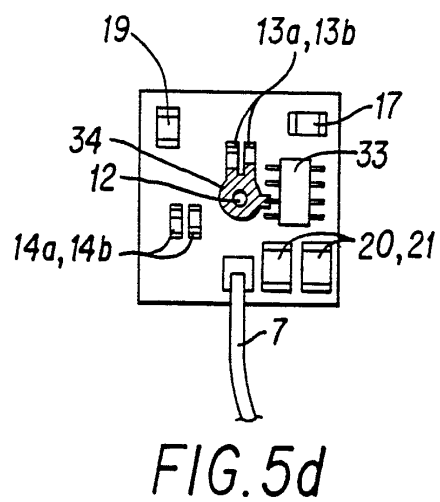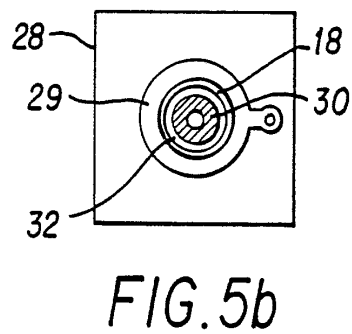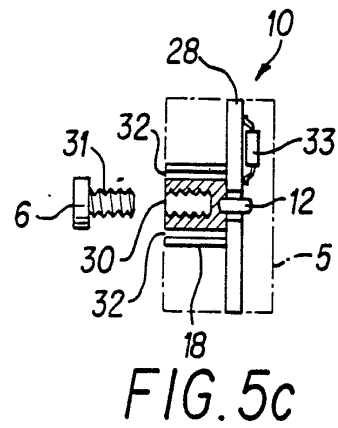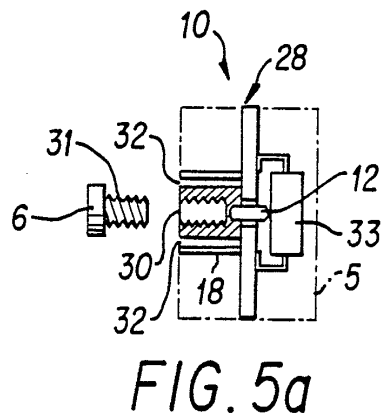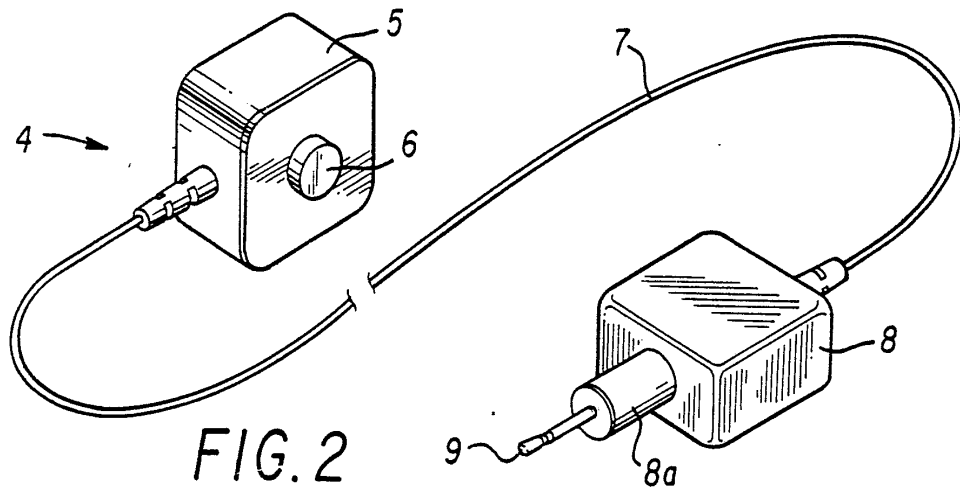

SUBSTITUTE SHEET

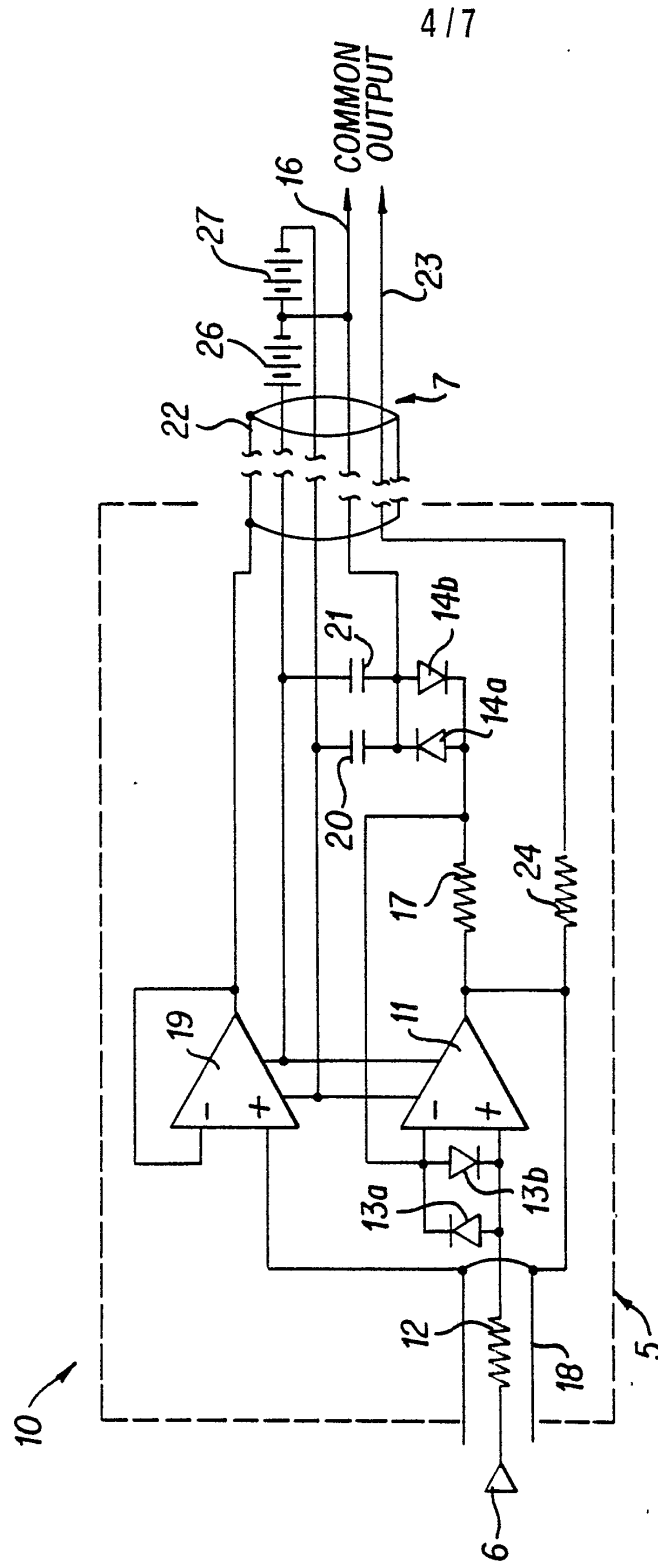


FIG. 3

SUBSTITUTE SHEET

5/7

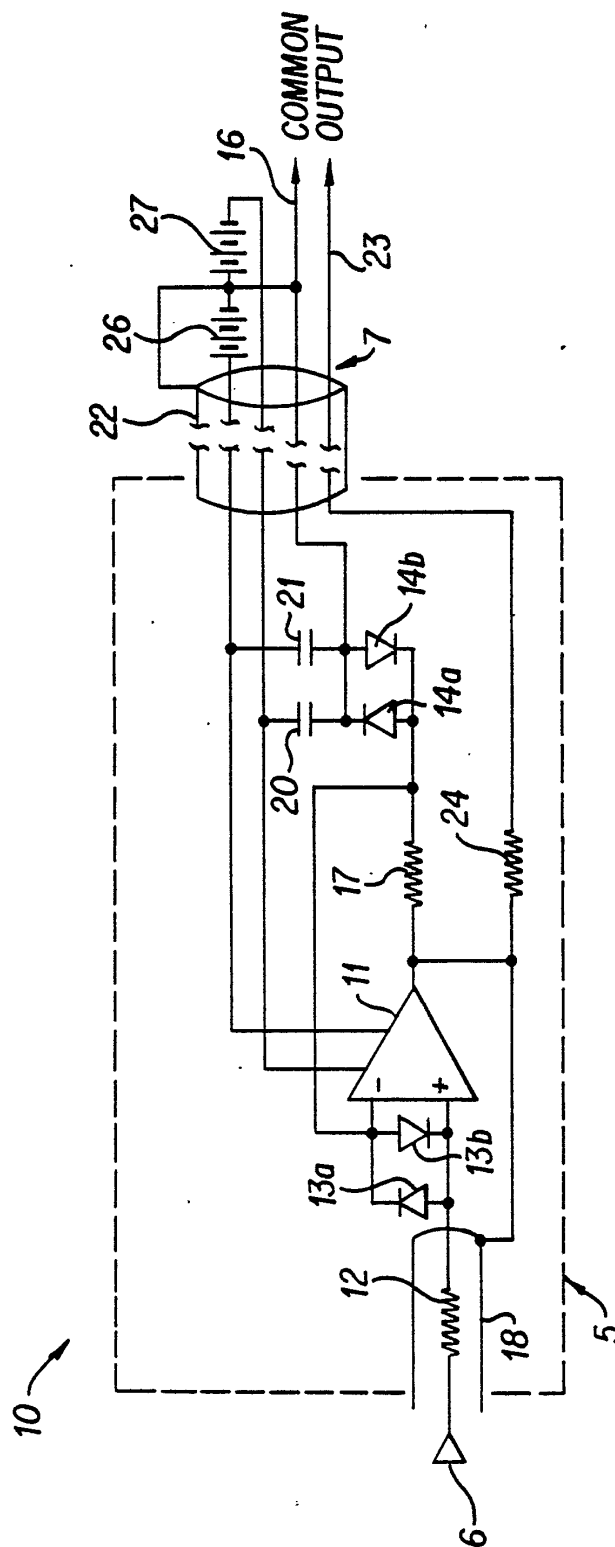


FIG. 4

SUBSTITUTE SHEET

6 / 7

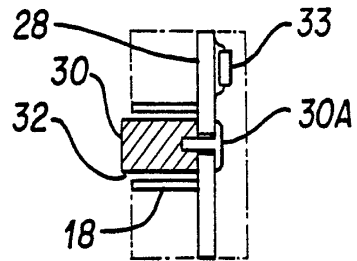


FIG. 5e

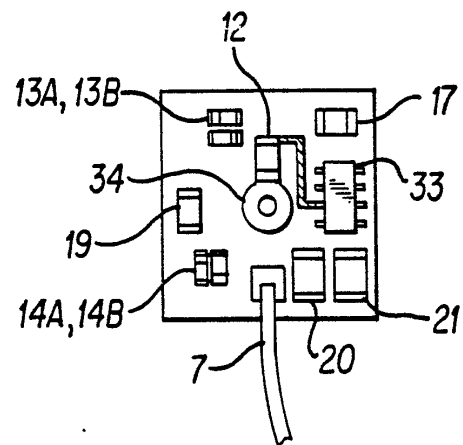


FIG. 5f

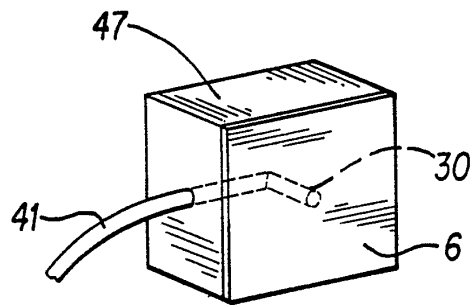


FIG. 6c

SUBSTITUTE SHEET

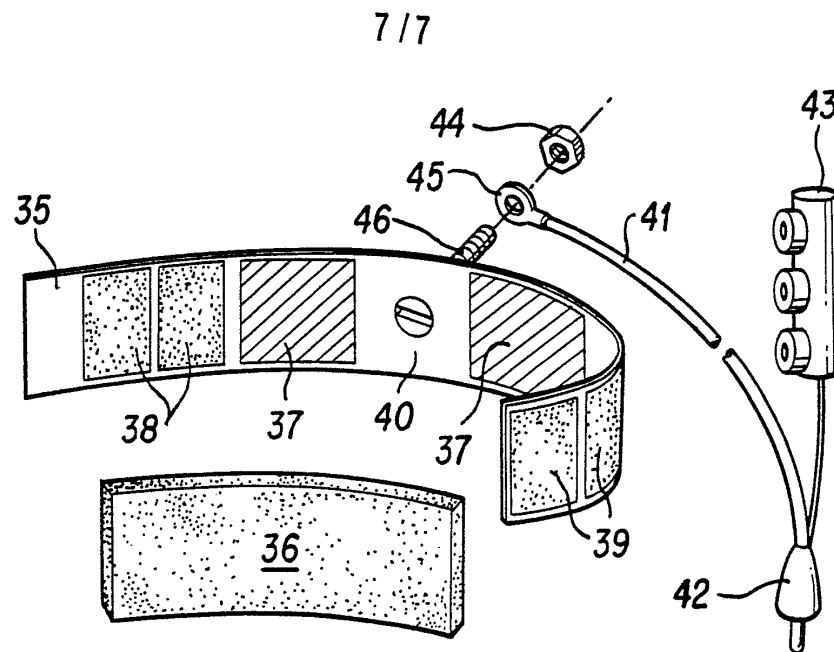


FIG. 6a

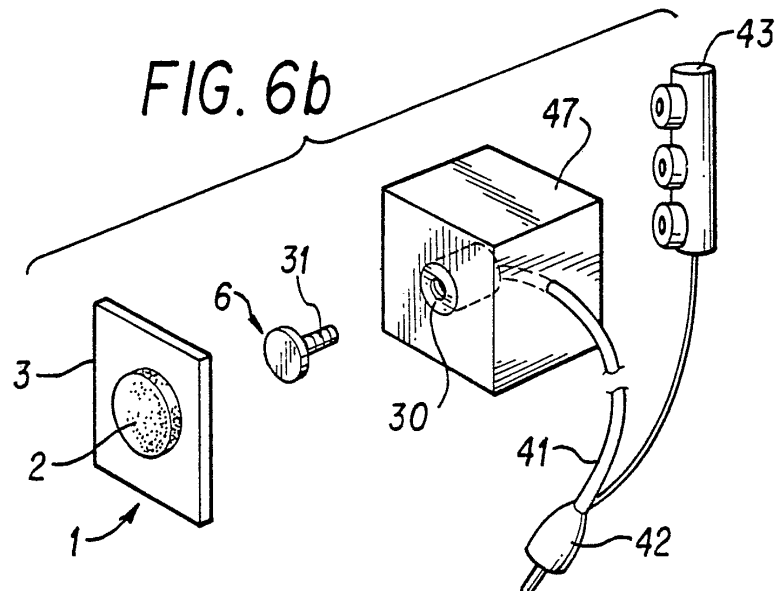


FIG. 6b

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US86/01707**

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ¹		
According to International Patent Classification (IPC) or to both National Classification and IPC IPC(4): A61B 5/04; H03F 3/00 U.S. Cl.: 128/640; 128/696; 128/902; 330/68; 330/207P; 330/298		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
U.S.	128/639-641, 643, 644, 696, 798, 802, 803, 902 330/68, 76, 207P, 292, 298	
Documentation Searched other than Minimum Documentation to the extent that such documents are included in the fields searched ⁴		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁵	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
Y	US, A, 3,605,728 (OGLE) 20 SEPTEMBER 1971 See entire document	1,72,97,107 114,121
A	US, A, 3,679,989 (THIBODEAU) 25 JULY 1972 See entire document	114,121
Y	US, A, 4,051,842 (HAZEL) 04 OCTOBER 1977 See Figure 3 and Column 4, line 32 - Column 5, line 17	72,97,103, 107,111
A	US, A, 4,088,133 (TWENTIER) 09 MAY 1978 See Column 3, lines 46-64.	1-4,57-60, 72-75, 97-100
A	US, A, 4,217,908 (STAVEL) 19 AUGUST 1980 See Column 3, lines 26-42	1,57,72,97
Y	US, A, 4,300,575 (WILSON) 17 NOVEMBER 1981 See entire document	1,2,36,52, 57,58,66, 70, 71
A	US, A, 4,353,372 (AYER) 12 OCTOBER 1982 See Figure 3 and Column 4, lines 7-56	72,97,103, 107,111
¹⁴ Special categories of cited documents: ¹⁵ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "d" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ¹	Date of Mailing of this International Search Report ²	
24 OCTOBER 1986	04 NOV 1986	
International Searching Authority ³	Signature of Authorized Officer ¹⁰	
ISA/US	Lee S. Cohen	

Form PCT/ISA/210 (second sheet) (May 1986)

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, ¹⁴ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
A	DE, A, 2,735,050 (SZEHI) 08 FEBRUARY 1979 See entire document	1-6, 57-62, 72-77, 97-102
A	Medical and Biological Engineering and Computing, Volume 17, issued January 1979, C.F. Darby, "A patient virtual earth and electrical interference monitor", see pages 107-109	114-121
A	Medical Instrumentation, Volume 7, Number 1, issued January-February 1973, S. Rositano, "Ultra-soft dry electrodes for electrocardio- graphy", see page 76	1, 57, 72, 97
A	Medical and Biological Engineering, Volume 14, Number 3, issued May 1976, R. Betts, "Method for recording electro- cardiograms with dry electrodes applied to unprepared skin", see pages 313-315	1, 57, 72, 97

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

Y	US,A, 4,365,634 (BARE) 28 DECEMBER 1982 See Figures 10 and 11 and Column 9, line 27 - Column 10, line 4	72,97,103, 107-109, 111-113
Y	GB,A, 2,045,088 (LARIMORE) 29 OCTOBER 1980 See entire document	1,2,36,52, 57,58,66, 70,71
Y	EP,A, 0,000,759 (SZEHI) 21 FEBRUARY 1979 See entire document	1-6,57-62, 72-77, 97-102

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE ¹⁰

This International search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers , because they relate to subject matter ¹² not required to be searched by this Authority, namely:

2. ☐ Claim numbers , because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out ¹³, specifically:

VI. ☒ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING ¹¹

This International Searching Authority found multiple inventions in this international application as follows:

I. Combination; Claims 1-82 and 87-113

II. Subcombination: Claims 114-125

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.

2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

☐ The additional search fees were accompanied by applicant's protest.

☒ No protest accompanied the payment of additional search fees.