



US006702316B2

(12) **United States Patent**
Hsia

(10) **Patent No.:** **US 6,702,316 B2**
(45) **Date of Patent:** **Mar. 9, 2004**

(54) **STROLLER WITH CAR SEAT FASTENING ARRANGEMENT**

(76) Inventor: **Ben M. Hsia**, 19401 Business Center Dr., Northridge, CA (US) 91324

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 84 days.

(21) Appl. No.: **10/038,201**

(22) Filed: **Oct. 18, 2001**

(65) **Prior Publication Data**

US 2003/0075903 A1 Apr. 24, 2003

(51) **Int. Cl.**⁷ **B62B 7/04**

(52) **U.S. Cl.** **280/648; 280/30; 280/643; 280/650; 280/647**

(58) **Field of Search** 280/648, 642, 280/647, 650, 30, 47.38, 87.051, 643, 644, 657, 658, 47.41, 33.993, 801.1, 801.2; 297/256.15, 256.16, 256.17

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,852,894 A * 8/1989 Dyer 280/30
4,921,261 A * 5/1990 Sadler et al. 280/30
4,989,888 A * 2/1991 Qureshi et al. 280/30
5,490,685 A * 2/1996 Kitayama et al. 280/47.38
5,641,200 A * 6/1997 Howell 297/256.17
5,676,386 A * 10/1997 Huang 280/30
5,794,951 A * 8/1998 Corley et al. 280/30
5,947,555 A * 9/1999 Welsh et al. 297/130

6,189,914 B1 * 2/2001 Worth et al. 280/642
6,209,892 B1 * 4/2001 Schaaf et al. 280/33.993
6,241,274 B1 * 6/2001 Huang 280/642
6,286,844 B1 * 9/2001 Cone et al. 280/47.41
6,302,412 B1 * 10/2001 Worth et al. 280/30
6,331,032 B1 * 12/2001 Haut et al. 297/130
6,398,233 B1 * 6/2002 Liang et al. 280/30
6,409,205 B1 * 6/2002 Bapst et al. 280/642
2001/0040357 A1 * 11/2001 Barrett et al. 280/648
2002/0060444 A1 * 5/2002 Cote 280/648
2002/0093177 A1 * 7/2002 Chen 280/647

FOREIGN PATENT DOCUMENTS

DE 0422812 A1 * 4/1991 B62B/7/14

* cited by examiner

Primary Examiner—Brian L. Johnson


Assistant Examiner—J. Allen Shriver

(74) *Attorney, Agent, or Firm*—Raymond Y. Chan; David and Raymond Patent Group

(57) **ABSTRACT**

A stroller, which incorporates with a car seat fastening arrangement, includes a stroller frame for substantially supporting a car seat thereon. The car seat fastening arrangement includes a holding belt extended from the stroller frame and a connecting unit securely locked up the two ends of the holding belt to form a holding loop, having a predetermined length, for encirclingly holding the car seat on the stroller frame through the fastening slot. Therefore, the car seat is securely supported on the stroller frame and firmly fastened by the two ends of the holding belt connecting with each other through the fastening slot of the car seat.

17 Claims, 6 Drawing Sheets

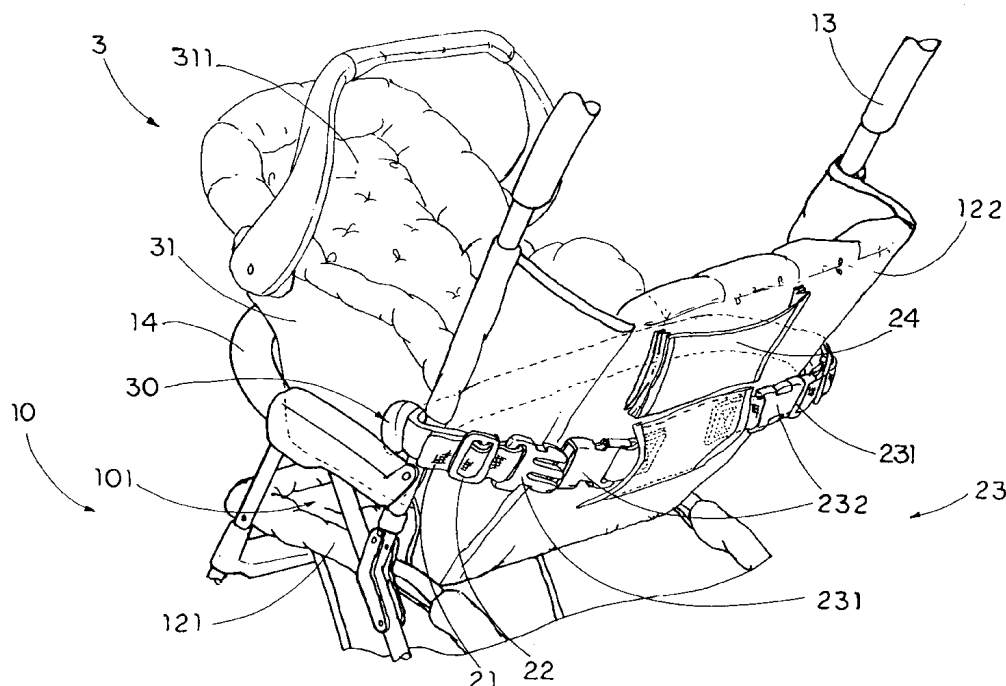

EVENFLO ET AL. EX1050

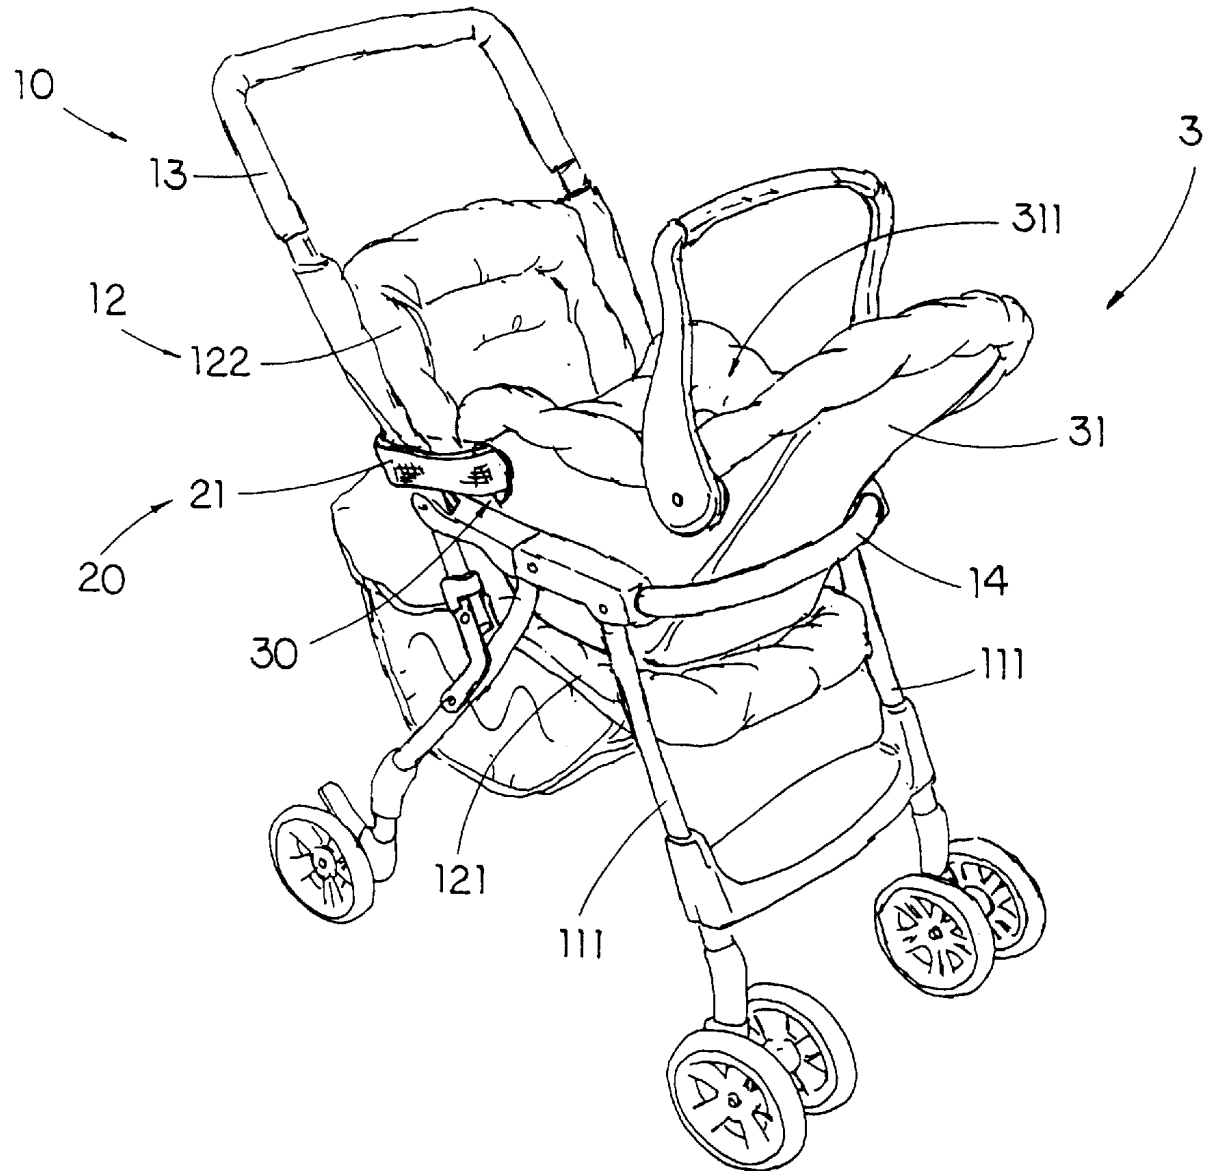


FIG. 1


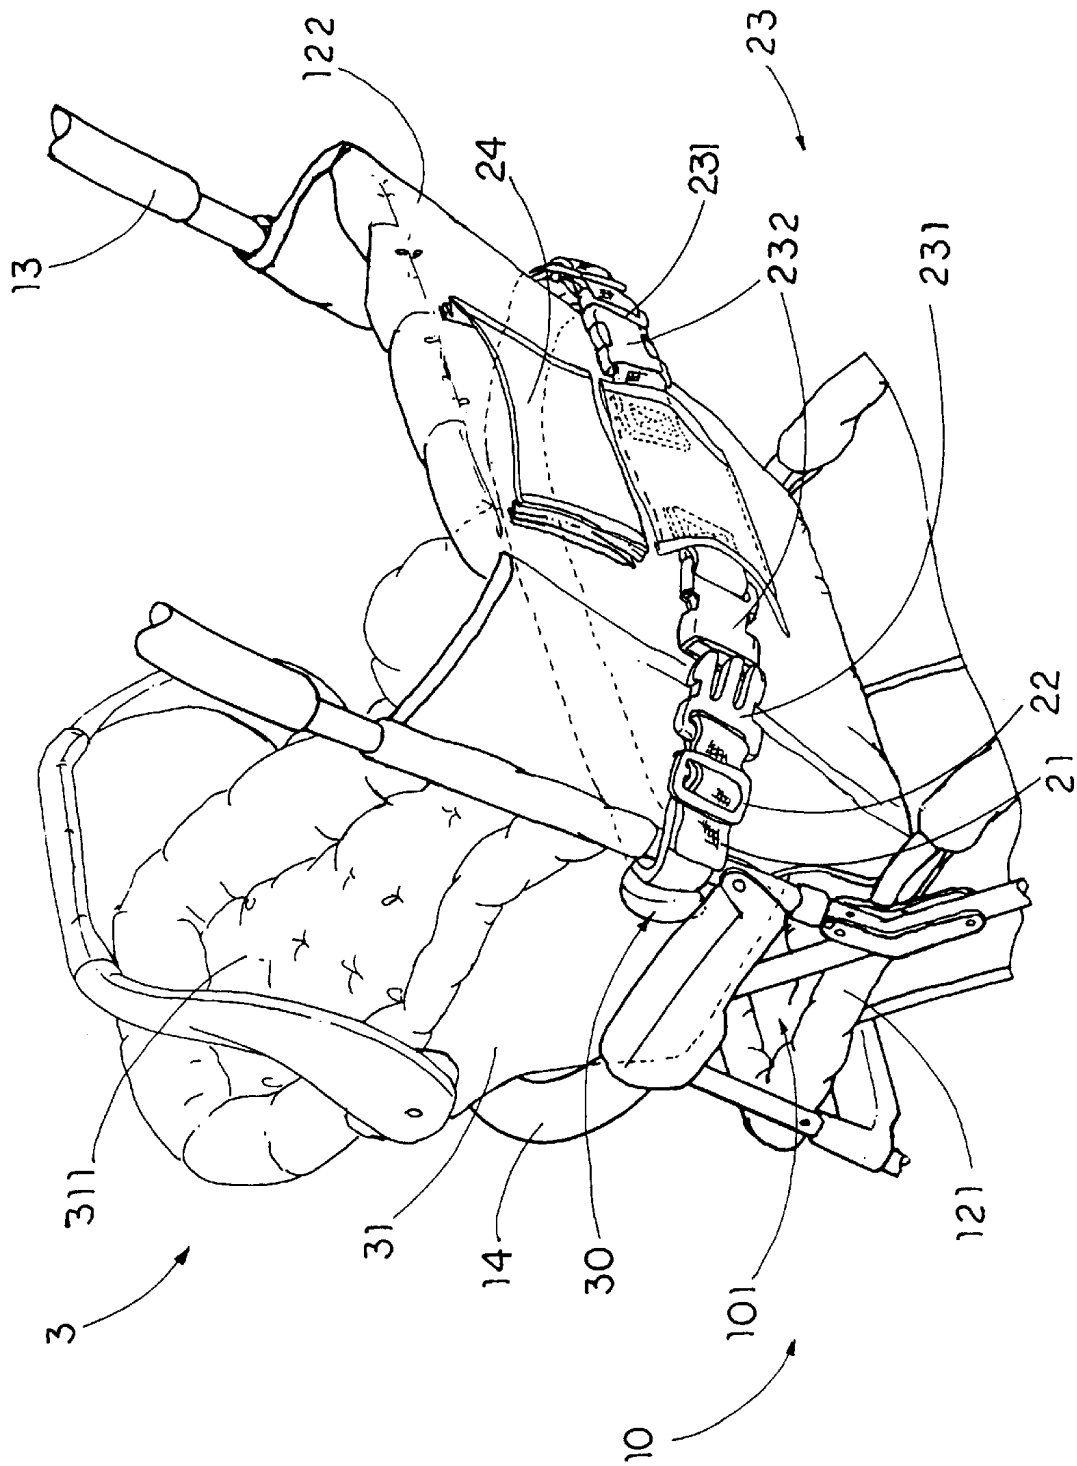


FIG. 2

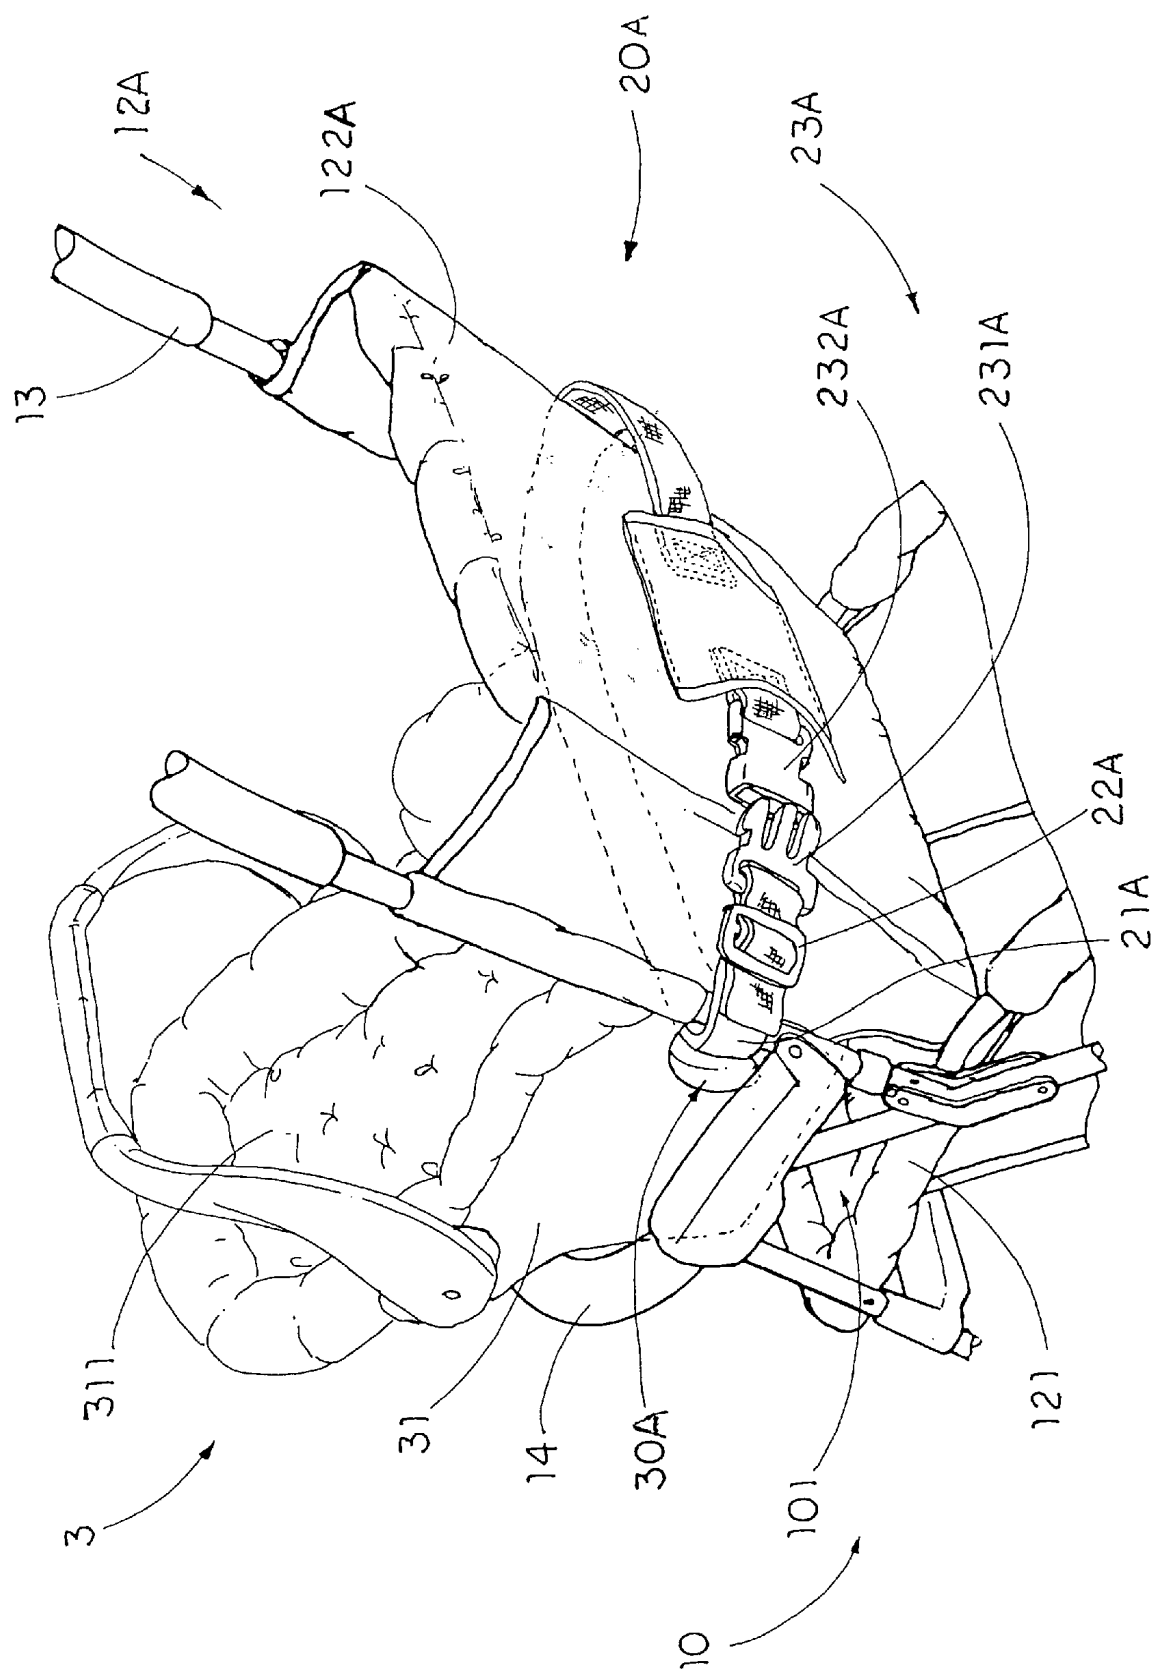

316

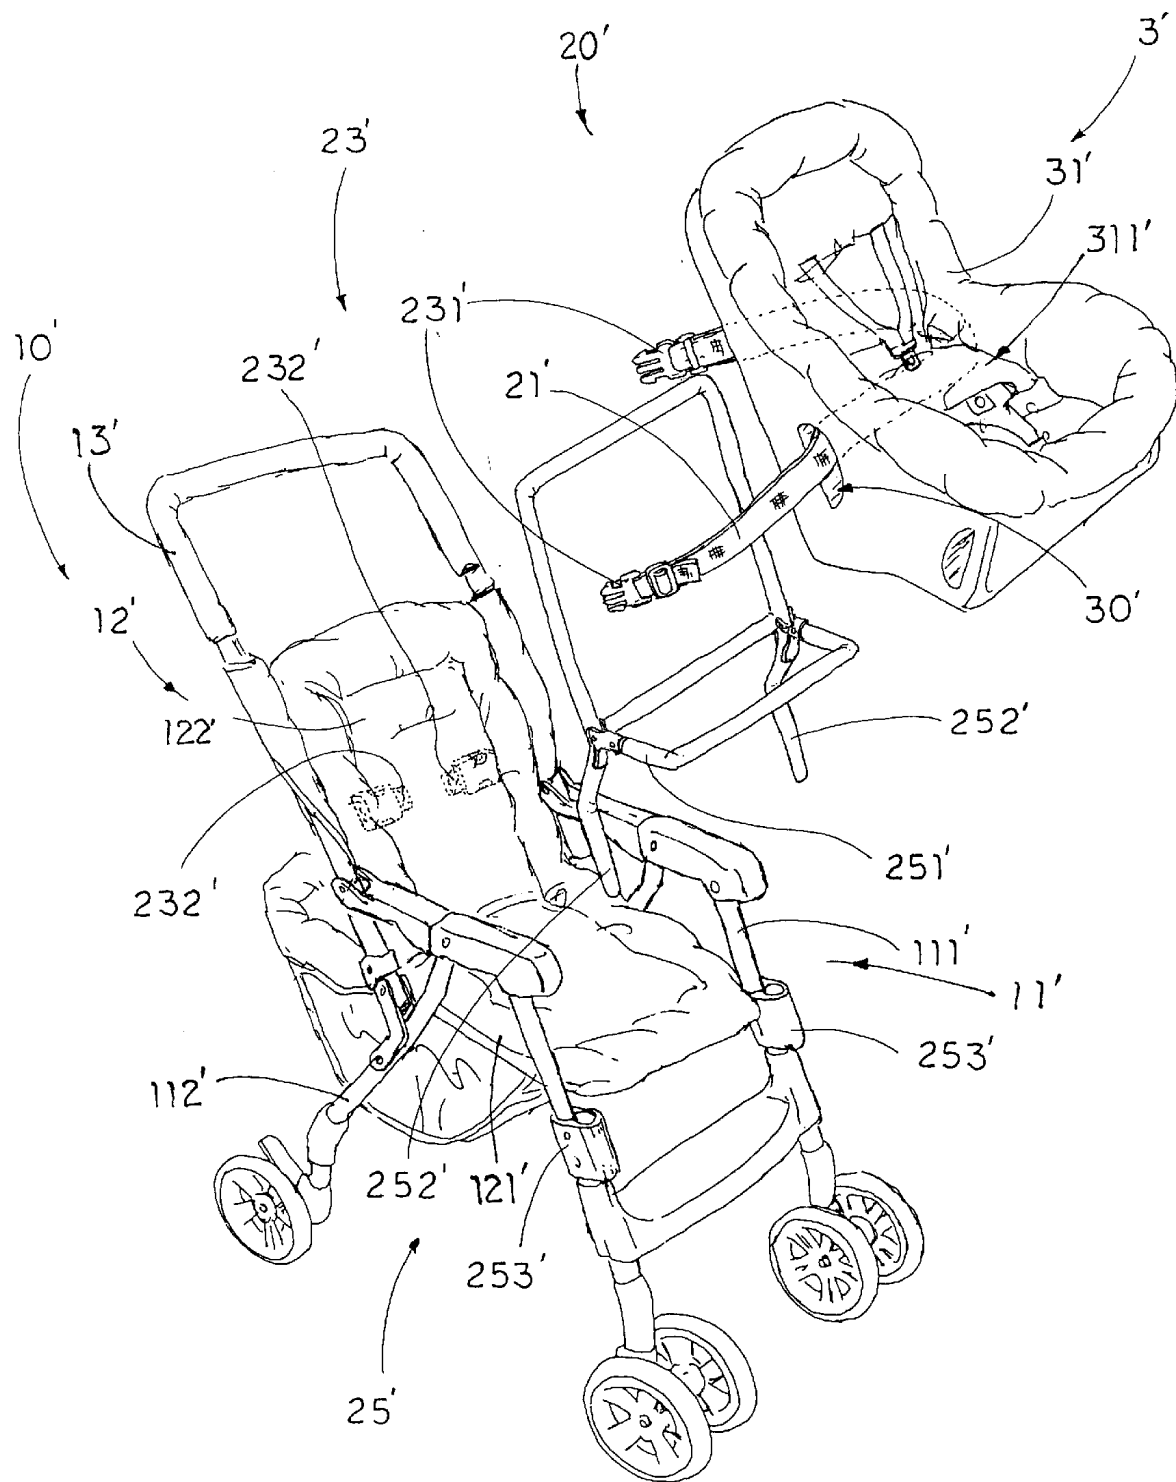


FIG. 4

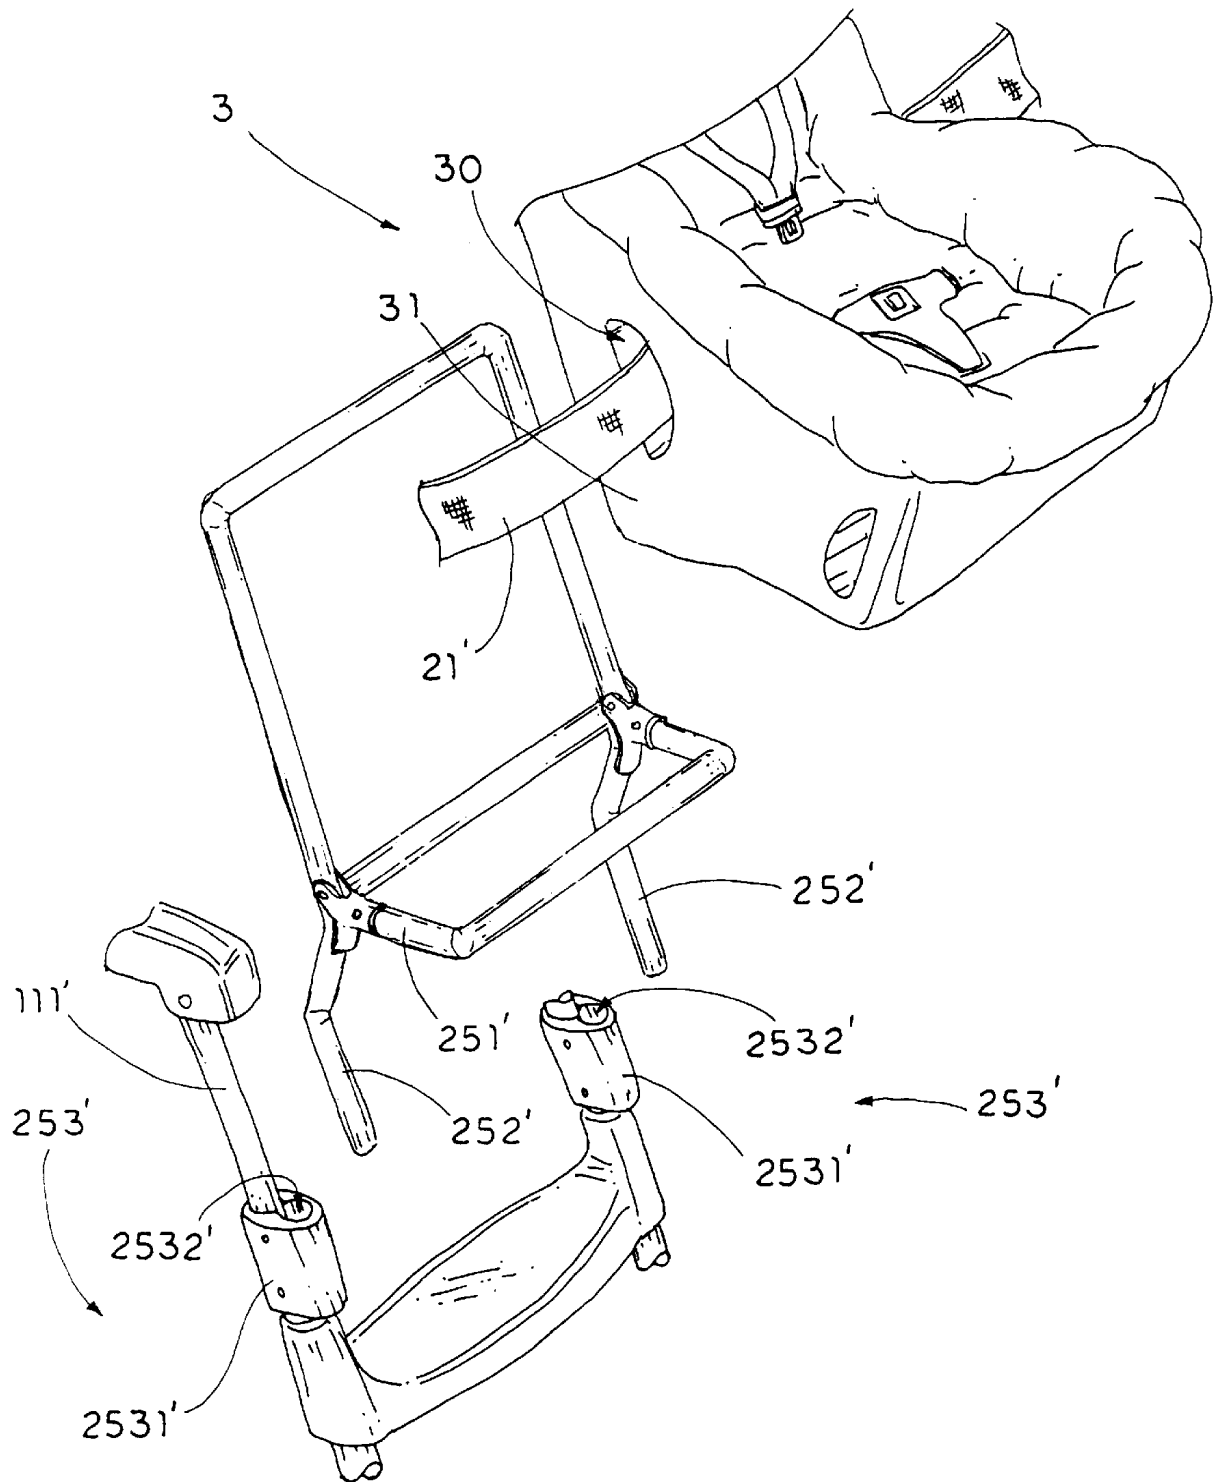


FIG. 5

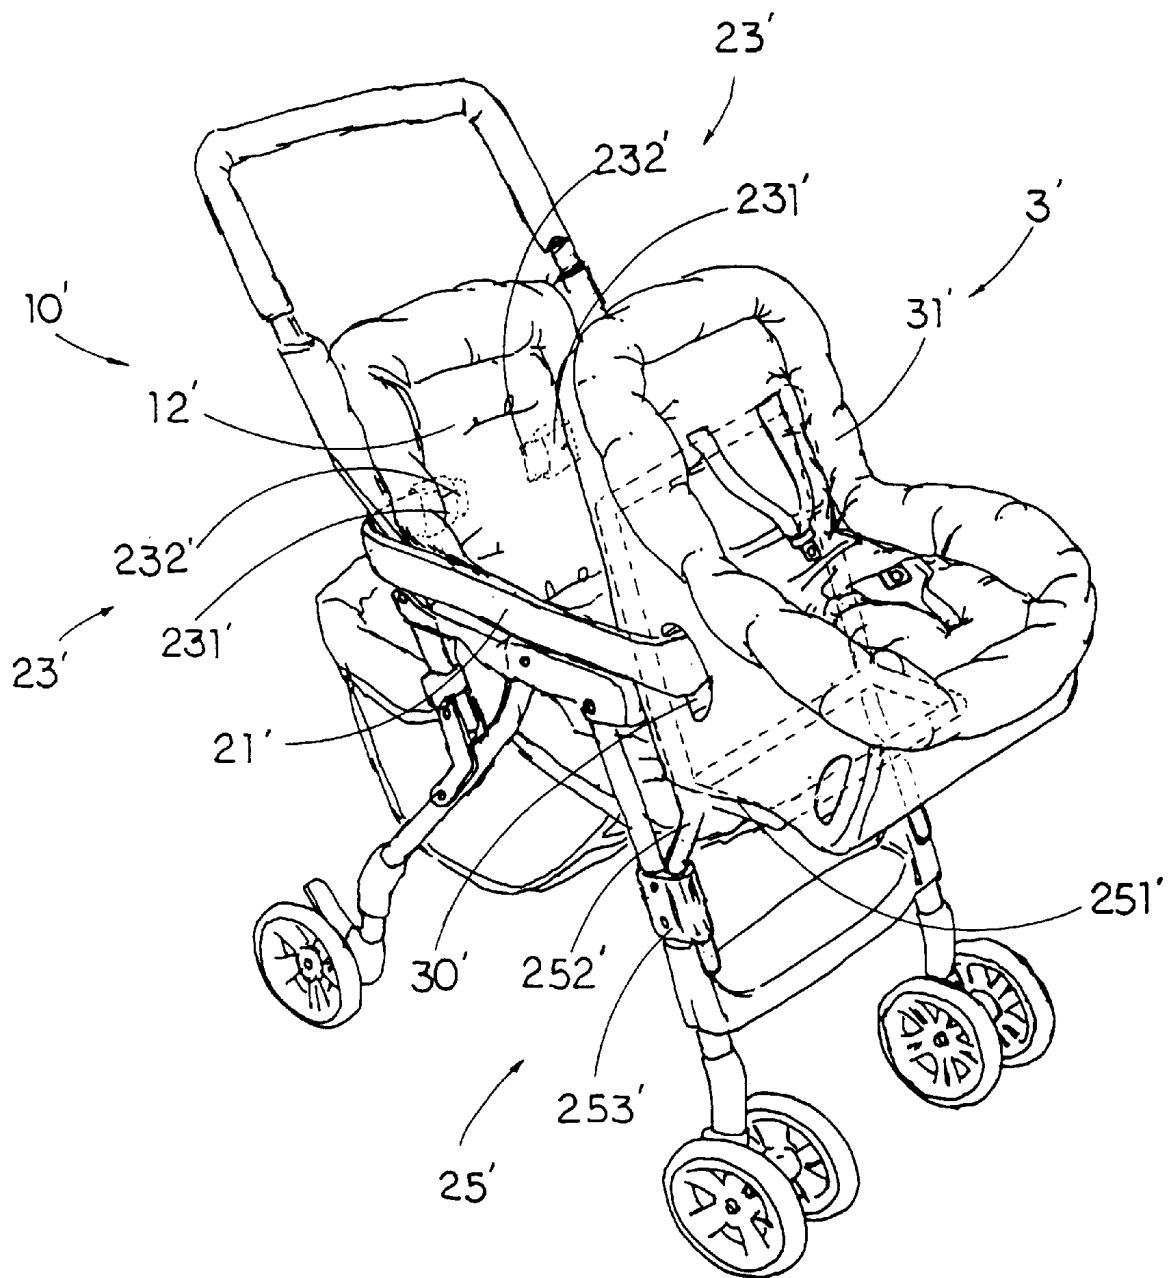


FIG. 6

1

STROLLER WITH CAR SEAT FASTENING ARRANGEMENT

BACKGROUND OF THE INVENTION

1. Field of Invention

The present invention relates to baby's accessories, and particularly to a stroller equipped with a car seat fastening arrangement, wherein a car seat is adapted to be securely mounted on the stroller. Therefore, the parents do not have to move the baby or young child back and forth from the car seat to the stroller and thus individually carry the car seat and the stroller at the same time.

2. Description of Related Arts

When babies grow up, their parents must purchase thousands of baby's accessories, such as childbed or playpen. Among of all the baby's accessories, a stroller and a car seat become the two necessities to every family having a young child or baby. According to rules and regulations, the car seat must be employed in every vehicle for transporting the baby or young child. Besides, the stroller is considered as a convenient tool to carry the baby or young child during outdoor activities such as foot traveling and shopping. Therefore, the stroller and the car seat play the main role for the parents to carry their babies.

However, it is a hassle for the parent to move the baby back and forth from the car seat to the stroller. Especially when the baby falls asleep, the parent may merely wake him or her up while moving him or her from/to the car seat to/from the stroller. Once the baby wakes up, the parent may take longer time to soothe him or her back to sleep. So, most parents may merely take the baby with the car seat from the vehicle in order to carry the baby everywhere. It is unreasonable for the parent to carry the car seat as a bassinet at one hand while another hand to control the stroller. Therefore, the parent may put the car seat on the stroller so as to carry the car seat and the stroller at the same time. However, the car seat may easily flip over from the stroller and cause an unwanted injury to the soft and weak baby.

Moreover, when the parent has more than one baby, they may immediately purchase one more stroller, but it is impossible for a single parent to handle two strollers at the same time. Even an improved stroller comprising two regular seats can solve the above problem, such stroller must have a relatively large size in order to fit the two regular seats constructed therewith. The problem is that the parents may merely have difficulty to handle both the car seat and the stroller at the same time.

SUMMARY OF THE PRESENT INVENTION

A main object of the present invention is to provide a stroller with car seat fastening arrangement, wherein a car seat is capable of securely mounting on the stroller such that the parents can put the car seat in the vehicle or mount on the stroller anytime especially while the baby is sleeping.

Another object of the present invention is to provide a stroller with car seat fastening arrangement which comprises a holding belt extended from the stroller to substantially encircle the car seat, so as to prevent the car seat from flipping over from the stroller accidentally.

Another object of the present invention is to provide a stroller with car seat fastening arrangement which does not require to change the original structural design of the stroller, so as to minimize the manufacturing cost of the stroller incorporating with the car seat fastening arrangement.

2

Another object of the present invention is to provide a stroller with car seat fastening arrangement, wherein the fastening operation of the car seat with the is easy and fast that an individual is able to attach/detach the car seat to/from the stroller.

Another object of the present invention is to provide a stroller with car seat fastening arrangement wherein the holding belt can be adjusted its length for fittedly holding any size of the ordinary car seat. Therefore, the parent does not need to purchase a particular car seat in order to incorporate with the present invention.

Another object of the present invention is to provide a stroller with car seat fastening arrangement, wherein when the car seat is mounted on the stroller, the stroller can be formed as a double-seated stroller so as to provide an extra seat for a second baby.

Another object of the present invention is to provide a stroller with car seat fastening arrangement, wherein no expensive or mechanical structure is required to employ in the present invention in order to achieve the above mentioned objects. Therefore, the present invention successfully provides an economic and efficient solution for providing reinforced fastening configuration for the car seat supported on the stroller.

Accordingly, in order to accomplish the above objects, the present invention provides a stroller with a car seat fastening arrangement, wherein the stroller comprises a stroller frame for substantially supporting a car seat having a fastening slot.

The car seat fastening arrangement comprises a holding belt, having a predetermined length, extended from the stroller frame and a connecting unit securely locked up the two ends of the holding belt to form a holding loop for encirclingly holding the car seat on the stroller frame through the fastening slot.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a stroller with car seat fastening arrangement according to a first preferred embodiment of the present invention, illustrating a car seat being mounted on the stroller.

FIG. 2 is a perspective view of the car seat fastening arrangement of the stroller according to the first preferred embodiment of the present invention.

FIG. 3 illustrates an alternative mode of the car seat fastening arrangement of the stroller according to the first preferred embodiment of the present invention.

FIG. 4 is a perspective view of a stroller with car seat fastening arrangement according to the second preferred embodiment of the present invention.

FIG. 5 is a perspective view of a tubular holder of the stroller with car fastening arrangement according to the second preferred embodiment of the present invention.

FIG. 6 is a perspective view of the stroller with car seat fastening arrangement according to the second preferred embodiment of the present invention, illustrating the car seat being mounted on the stroller.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to FIG. 1 of the drawings, a stroller incorporated with a car seat fastening arrangement 20 according to a first preferred embodiment of the present invention is illustrated, wherein the stroller comprises a stroller frame 10 for substantially supporting a car seat 3 having a fastening slot 30.

3

The car seat fastening arrangement **20** comprises a holding belt **21**, each having a predetermined length, extended from the stroller frame **10** and a connecting unit **23** securely locked up two ends of the holding belt **21** to form a holding loop for encirclingly holding the car seat **3** on the stroller frame **10** through the fastening slot **30**.

According to the preferred embodiment, the stroller frame **10**, such as an ordinary stroller frame, comprises a supporting frame **11** having two front frame legs **111**, a regular seat **12** comprising a seat support **121** horizontally supported by the supporting frame **11** and a back support **122** upwardly extended from the seat support **121**, and a handle frame **13** upwardly extended from the supporting frame **11**. The stroller frame **10** further comprises a boundary frame **14** frontwardly extended from the supporting frame **11** so as to limit a frontward movement of the baby or a young child sat on the regular seat **12** wherein a receiving cavity **101**, having a size adapted for substantially disposing the car seat **3** therein, is defined between the boundary frame **14** and the regular seat **12**.

The car seat **3** comprises a car regular seat **31** having a supporting chamber **311** for substantially supporting a baby therein wherein a bottom portion of the bassinet frame **31** is adapted to be disposed in the receiving cavity **101** of the stroller frame **10**. The fastening slot **30** is transversely provided on the car regular seat **31** for a seat belt of a car extended therethrough. It is worth to mention that every conventional car seat **3** must have the fastening slot **30** such that when the car seat **3** is placed in the car, the seat belt can be passed through the fastening slot **30** in order to fasten the car seat **3** on the seat of the car.

As shown in FIG. 2, the holding belt **21** has a length adapted to extend from one side portion of the back support **122** of the regular seat **12** to another opposed side portion of the back support **122** of the regular seat **12** through the fastening slot **30** of the car seat **3** when the car seat **3** is supported on the stroller frame **10**.

In order to adjust the length of the holding loop of the holding belt **21**, the car seat fastening arrangement **20** further comprises at least an adjusting member **22** having two slots for a free end portion of the holding belt **21** slidably entangled therethrough respectively so as to adjust a position of the adjusting member **22** along the holding belt **21**. In other words, the length of the holding loop of the holding belt **21** can be selectively adjusted to fit any size of the car seat **3** on the vehicle frame **10**.

The connecting unit **23** comprises two first connectors **231** provided at two free end portions of the holding belt **21** and two second connectors **232** provided at two side portions of a rear surface of the back support **122** of the regular seat **12** respectively wherein the first connectors **231** are adapted to securely engage with the second connectors **232** respectively so as to form the holding loop of the holding belt **21**. Accordingly, the first and second connectors **231**, **232** are a pair of buckle sockets and buckle plugs adjustably affixed to the free end portions of the holding belt **21** and firmly attached to the rear surface of the back support **122** of the regular seat **12** respectively.

As shown in FIG. 2, the car seat fastening arrangement **20** further comprises a belt pocket **24** provided at the rear side of the back support **122** of the regular seat **12** for storing the holding belt **21** when the holding belt **21** is detached. The belt pocket **24** is formed by a fabric flap having a three edges firmly affixed by stitching on the rear surface of the back support **122** while a top edge is remained open to form a top opening such that the holding belt **21** can be stored in the belt pocket **24** through the top opening.

4

It is worth to mention that the movement of the car seat **3** is restricted by the regular seat **12** and the boundary frame **14** within the receiving cavity **101**, so as to prevent a lateral movement of the car seat **3** with respect to the stroller frame **10**. Moreover, the holding belt **21** is extended to pass through the fastening slot **30** of the car seat **3** and then connected to the first connectors **231** with the second connectors **232** respectively, so as to lock up the upward movement of the car seat **3** with respect to the stroller frame **10**. Besides, by selectively adjusting the length of the holding loop, any size of the ordinary car seat can be fittedly mounted on the stroller frame **10** in a secure manner.

FIG. 3 illustrates an alternative mode of the car seat fastening arrangement **20A** wherein the holding belt **21A** has an affixing end extended from the rear side of the back support **122A** of the regular seat **12A** wherein the belt connector **231A** of the connecting unit **23A** is adjustably connected to a free end portion of the holding belt **21A** in such a manner that the holding belt **21A** is arranged for passing through the fastening slot **30A** of the car seat **3A** on the stroller and connected the belt connector **231A** with the unit connector **232A** of the connecting unit **23A** provided at the rear side of the back support **122A**. Thus, the length of the holding loop of the holding belt **21A** can be selectively adjusted by the adjusting member **22A**.

Referring to FIG. 4, a second embodiment of the car seat fastening arrangement **20'** illustrates an alternative mode of the first embodiment of the present invention, wherein the stroller' is capable of providing two seats for supporting an extra baby.

As shown in FIG. 4, the stroller comprises a supporting frame **11'** having two front frame legs **111'** and two back frame legs **112'**, a regular seat **12'** comprising a seat support **121'** horizontally supported by the supporting frame **11'** and a back support **122'** upwardly extended from the seat support **121'**, and a handle frame **13'** upwardly extended from the supporting frame **11'**.

The car seat **3'** comprises a car regular seat **31'** having a supporting chamber **311'** for substantially supporting a baby therein, and a fastening slot **30'** transversely extended from the car regular seat **31'** for the seat belt of the car passing through.

The holding belt **21'** has a length adapted to extend from one side portion of the back support **122'** of the regular seat **12'** to another opposed side portion of the back support **122'** of the regular seat **12'** through the fastening slot **30'** of the car seat **3'** when the car seat **3'** is supported on the stroller frame **10'**. The car seat fastening arrangement **20'** further comprises at least an adjusting member **22'** having two slots for a free end portion of the holding belt **21'** slidably entangled therethrough respectively so as to adjust a position of the adjusting member **22'** along the holding belt **21'**.

The connecting unit **23'** comprises two first connectors **231'** provided at two free end portions of the holding belt **21'** and two second connectors **232'** provided at two side portions of a rear surface of the back support **122'** of the regular seat **12'** respectively wherein the first connectors **231'** are adapted to securely engage with the second connectors **232'** respectively so as to connect the holding belt **21'** to form the holding loop of the holding belt **21'**. Accordingly, the first and second connectors **231'**, **232'** are a pair of buckle sockets and buckle plugs adjustably affixed to the free end portions of the holding belt **21'** and firmly attached to the rear surface of the back support **122'** of the regular seat **12'** respectively.

As shown in FIG. 5, the car seat fastening arrangement **20'** further comprises a car seat adaptor frame **25'** detachably

5

mounted in front of the vehicle frame **10'** and adapted for substantially supporting the car seat **3'** thereon. The car seat adaptor frame **25'** comprises a support frame **251'** for substantially supporting the car seat **3'** thereon, a pair of supporting frame legs **252'** downwardly extended from the support frame **251'**, and a pair of tubular holders **253'** provided on the two front frame legs **111'** respectively such that the tubular holders **253'** is adapted to detachably hold the two supporting frame legs **252'** respectively so as to substantially mount the support frame **251'** in front of the stroller frame **10'**.

Each of the tubular holders **253'** comprises a holder body **2531'** affixed to the respective front frame leg **111'** and having a holder socket **2532'** which has a diameter slightly larger than the supporting frame leg **252'** and vertically extended to the holder body **2531'** for an end portion of the supporting frame leg **252'** slidably inserting therein, as shown in FIG. 5.

In other words, the stroller can provide two seats when the car seat **3'** is mounted in front of the stroller. Thus, the car seat **3'** can be securely mounted on the stroller by inserting the supporting frame legs **252'** into the tubular holders **253'** respectively and fastening by the holding belt **21'** with the connecting unit **23'**, as shown in FIG. 6.

What is claimed is:

1. A stroller adapted for securely supporting a car seat which has a securing arrangement for a seat belt of a vehicle to fasten in position, comprising:

at least a regular seat comprising a seat support and a back support extended from a rear portion of said seat support;

a movable stroller frame supporting said regular seat;

a car seat fastening arrangement comprising:

a connecting unit provided at a rear side of said back support of said regular seat, wherein said connecting unit comprises at least a unit connector and an additional unit connector affixed on said rear side of said back support of said regular seat; and

a holding belt having a first end connected to said connecting unit and a second end affixed with a belt connector which is capable of detachably fastening to said unit connector of said connecting unit so as to define a holding loop having a predetermined size large enough for encirclingly holding said car seat on said stroller while fastening with said securing arrangement of said car seat, wherein said holding belt further comprises an additional belt connector affixed to said first end thereof, wherein said first end is connected with said connecting unit by detachably fastening said additional belt connector to said additional unit connector, thereby said entire holding belt is able to be detached from said connecting unit when said holding belt is not being used.

2. The stroller, as recited in claim 1, wherein said two pairs of unit and belt connectors each comprises a buckle socket and a buckle plug affixed to said connecting unit and said respective end of said end of said holding belt respectively, wherein said holding belt is capable of securely connecting to said connecting unit by fastening said buckle socket with said buckle plug.

3. The stroller, as recited in claim 1, wherein said car seat fastening arrangement further comprises means for adjusting a length of said holding loop of said holding belt for tightly holding said car seat with said stroller frame.

4. The stroller, as recited in claim 2, wherein said car seat fastening arrangement further comprises means for adjust-

6

ing a length of said holding loop of said holding belt for tightly holding said car seat with said stroller frame.

5. The stroller, as recited in claim 4, wherein said adjustment means comprises at least an adjusting member coupled on said holding belt to selectively lock up said respective belt connector at a predetermined position along said holding belt, so that said size of said holding loop is able to be adjusted by controlling a length between said two belt connectors of said holding belt.

6. The stroller, as recited in claim 5, wherein said car seat fastening arrangement further comprises a belt pocket provided at said rear side of said back support of said regular seat for storing said holding belt when said holding belt is detached.

7. The stroller, as recited in claim 1, wherein said car fastening arrangement further comprises a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and a pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.

8. The stroller, as recited in claim 2, wherein said car fastening arrangement further comprises a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and a pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.

9. The stroller, as recited in claim 5, wherein said car fastening arrangement further comprises a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and a pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.

10. The stroller, as recited in claim 6, wherein said car fastening arrangement further comprises a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and

7

pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.

11. The stroller, as recited in claim 1, wherein said car seat fastening arrangement further comprises a belt pocket provided at said rear side of said back support of said regular seat for storing said holding belt when said holding belt is detached.

12. A stroller adapted for securely supporting a car seat which has a securing arrangement for a seat belt of a vehicle to fasten in position, comprising:

- at least a regular seat comprising a seat support and a back support extended from a rear portion of said seat support;
- a movable stroller frame supporting said regular seat;
- a car seat fastening arrangement comprising:
 - a connecting unit provided at a rear side of said back support of said regular seat, wherein said connecting unit comprises at least a unit connector;
 - a holding belt having a first end connected to said connecting unit and a second end affixed with a belt connector which is capable of detachably fastening to said unit connector of said connecting unit so as to define a holding loop having a predetermined size large enough for encirclingly holding said car seat on said stroller while fastening with said securing arrangement of said car seat; and
 - a belt pocket provided at said rear side of said back support of said regular seat for storing said holding belt when said holding belt is detached.

13. A stroller adapted for securely supporting a car seat which has a securing arrangement for a seat belt of a vehicle to fasten in position, comprising:

- at least a regular seat comprising a seat support and a back support extended from a rear portion of said seat support;
- a movable stroller frame supporting said regular seat;
- a car seat fastening arrangement comprising:
 - a connecting unit provided at a rear side of said back support of said regular seat, wherein said connecting unit comprises at least a unit connector;
 - a holding belt having a first end connected to said connecting unit and a second end affixed with a belt connector which is capable of detachably fastening to said unit connector of said connecting unit so as to define a holding loop having a predetermined size large enough for encirclingly holding said car seat on said stroller while fastening with said securing arrangement of said car seat, wherein said unit and belt connectors are a buckle socket and a buckle plug affixed to said connecting unit and said end of said second end of said holding belt respectively, wherein said holding belt is securely connected to said connecting unit by fastening said buckle socket with said buckle plug;
 - a belt pocket provided at said rear side of said back support of said regular seat for storing said holding belt when said holding belt is detached; and

8

means for adjusting a length of said holding loop of said holding belt for tightly holding said car seat with said stroller frame, wherein said adjustment means comprises at least an adjusting member coupled on said holding belt to selectively lock up said belt connector at a predetermined position along said holding belt, so that said size of said holding loop is able to be adjusted by controlling a length between said belt connector and said first end of said holding belt.

14. The stroller, as recited in claim 13, wherein said car fastening arrangement further comprises a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and a pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.

15. A stroller adapted for securely supporting a car seat which has a securing arrangement for a seat belt of a vehicle to fasten in position, comprising:

- at least a regular seat comprising a seat support and a back support extended from a rear portion of said seat support;
- a movable stroller frame supporting said regular seat;
- a car seat fastening arrangement comprising:
 - a connecting unit provided at a rear side of said back support of said regular seat, wherein said connecting unit comprises at least a unit connector;
 - a holding belt having a first end connected to said connecting unit and a second end affixed with a belt connector which is capable of detachably fastening to said unit connector of said connecting unit so as to define a holding loop having a predetermined size large enough for encirclingly holding said car seat on said stroller while fastening with said securing arrangement of said car seat; and
 - a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and a pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.

16. A stroller adapted for securely supporting a car seat which has a securing arrangement for a seat belt of a vehicle to fasten in position, comprising:

- at least a regular seat comprising a seat support and a back support extended from a rear portion of said seat support;

9

- a movable stroller frame supporting said regular seat;
 - a car seat fastening arrangement comprising:
 - a connecting unit provided at a rear side of said back support of said regular seat, wherein said connecting unit comprises at least a unit connector;
 - a holding belt having a first end connected to said connecting unit and a second end affixed with a belt connector which is capable of detachably fastening to said unit connector of said connecting unit so as to define a holding loop having a predetermined size large enough for encirclingly holding said car seat on said stroller while fastening with said securing arrangement of said car seat, wherein said unit and belt connectors are a buckle socket and a buckle plug affixed to said connecting unit and said end of said second end of said holding belt respectively, wherein said holding belt is securely connected to said connecting unit by fastening said buckle socket with said buckle plug; and
 - a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and a pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.
17. A stroller adapted for securely supporting a car seat which has a securing arrangement for a seat belt of a vehicle to fasten in position, comprising:
- at least a regular seat comprising a seat support and a back support extended from a rear portion of said seat support;
 - a movable stroller frame supporting said regular seat;
 - a car seat fastening arrangement comprising:

10

- a connecting unit provided at a rear side of said back support of said regular seat, wherein said connecting unit comprises at least a unit connector;
- a holding belt having a first end connected to said connecting unit and a second end affixed with a belt connector which is capable of detachably fastening to said unit connector of said connecting unit so as to define a holding loop having a predetermined size large enough for encirclingly holding said car seat on said stroller while fastening with said securing arrangement of said car seat, wherein said unit and belt connectors are a buckle socket and a buckle plug affixed to said connecting unit and said end of said second end of said holding belt respectively, wherein said holding belt is securely connected to said connecting unit by fastening said buckle socket with said buckle plug;
- means for adjusting a length of said holding loop of said holding belt for tightly holding said car seat with said stroller frame, wherein said adjustment means comprises at least an adjusting member coupled on said holding belt to selectively lock up said belt connector at a predetermined position along said holding belt, so that said size of said holding loop is able to be adjusted by controlling a length between said belt connector and said first end of said holding belt; and
- a car seat adaptor frame which comprises a support frame for substantially supporting said car seat thereon, a pair of supporting frame legs downwardly extended from said support frame, and a pair of tubular holders, which are provided on a pair of front frame legs of said stroller frame respectively, each having a longitudinal holder socket provided at a front portion thereof, wherein said support frame is capable of detachably mounted in front of said stroller frame by inserting said two supporting frame legs into said two holder sockets of said two holders respectively so that a car seat is able to be sat on said support frame and be securely fastened by fastening said holding belt with said securing arrangement of said car seat in order to prevent occupying said regular seat and provide an additional seat for said stroller.

* * * * *