US006582442B2

(12) **United States Patent**
Simon et al.

(10) **Patent No.: US 6,582,442 B2**
(45) **Date of Patent: *Jun. 24, 2003**

(54) **METHOD AND SYSTEM FOR PERFORMING MICROABRASION**

(75) Inventors: **Eric M. Simon**, Salt Lake City, UT (US); **Randall D. Block**, Salt Lake City, UT (US)

(73) Assignee: **Dynatronics Corporation**, Salt Lake City, UT (US)

(*) Notice: This patent issued on a continued prosecution application filed under 37 CFR 1.53(d), and is subject to the twenty year patent term provisions of 35 U.S.C. 154(a)(2).

Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/514,531**

(22) Filed: **Feb. 28, 2000**

(65) **Prior Publication Data**

US 2002/0169461 A1 Nov. 14, 2002

(51) **Int. Cl.**[7] **A61B 17/50**

(52) **U.S. Cl.** **606/131**; 606/167

(58) **Field of Search** 606/131, 133, 606/167; 604/289, 290, 310; 451/53, 87

(56) **References Cited**

U.S. PATENT DOCUMENTS

554,299	A	2/1896	Parker	
2,238,541	A	4/1941	Spagnolo	15/14
2,608,032	A	8/1952	Garver	51/11
2,921,585	A	1/1960	Schumann	128/355
3,085,573	A	4/1963	Meyer et al.	128/240
3,297,024	A	1/1967	Robinson	128/38
3,543,444	A	* 12/1970	Mehta	451/53
3,574,239	A	4/1971	Sollerud	4/1
3,715,838	A	2/1973	Young et al.	51/12

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

DE	532 086	8/1931
DE	201229	12/1958
DE	2 218 370	9/1973

(List continued on next page.)

OTHER PUBLICATIONS

BHC Group web page, "Dermabraze," Jun. 1999, http://www.bhc–group.demon.co.uk/dermabra,html.
Dynatronics Corporation product brochure, "Synergie Lifestyle System" Salt Lake City, Utah 1998.
Dynatronics Corporation product brochure, "Synergie The Ultimate Cellulite Solution" Salt Lake City, Utah 1999.

(List continued on next page.)

Primary Examiner—Pedro Philogene
(74) *Attorney, Agent, or Firm*—Kirton & McConkie; Berne S. Broadbent

(57) **ABSTRACT**

A method and system for performing abrasion on a surface, such as on the skin of a patient, is disclosed. The dermabrasion apparatus includes apparatus for delivering and retrieving material to and from a selected site to be abraded, a delivery and retrieval hand piece, an abrasive handling device, and a waste retrieval holding device. The hand piece is coupled to the abrasive handling device as well as the waste retrieval holding device, which is further coupled to the delivery and retrieval apparatus. The abrasive handling device further includes an abrasive supply device, a receiving channel, a feeding chamber, and a delivery channel. The abrasive supply device typically is a canister fitted with a funnel-shaped spout that is inverted into the receiving channel. The receiving channel feeds abrasive to the feeding chamber. The delivery and retrieval apparatus, typically a vacuum source that generates a pneumatic air supply within the abrasion apparatus, causes the abrasive within the feeding chamber to loft in an arc such that it reaches the delivery channel. The delivery channel then leads to the hand piece, which is utilized to apply the abrasive to the surface and then retrieve the waste debris during the procedure.

21 Claims, 6 Drawing Sheets

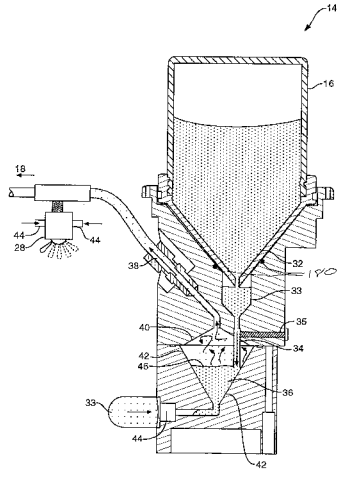

Aesthetic Management Partners, LLC et al v. HydraFacial
IPR2025-01169
HydraFacial Ex. 2014

Sinclair et al vv. HydraFacial
IPR2025-00145
HydraFacial Ex. 2000

U.S. PATENT DOCUMENTS

3,760,800	A		9/1973	Staffin et al. 128/24.1
3,841,322	A		10/1974	Spelio 128/40
3,841,323	A		10/1974	Stoughton 128/40
4,090,334	A		5/1978	Kurowski et al. 51/427
4,214,576	A		7/1980	Henley 128/24.1
4,333,277	A	*	6/1982	Tasedan 451/101
4,375,740	A		3/1983	Brown D4/422
4,445,517	A		5/1984	Feild 128/752
4,498,462	A		2/1985	Henley 128/24.1
4,516,398	A		5/1985	Wuchinich 604/22
4,531,934	A		7/1985	Kossovsky et al. 604/22
4,560,373	A		12/1985	Sugino et al. 604/30
4,578,058	A		3/1986	Grandon 604/27
4,583,530	A		4/1986	Henley 128/65
4,646,480	A		3/1987	Williams 51/424
4,674,239	A		6/1987	Jodoin 51/424
4,676,749	A		6/1987	Mabille 433/88
4,729,368	A		3/1988	Guitay 128/57
4,757,814	A		7/1988	Wang et al. 128/318
4,883,047	A		11/1989	Guitay 128/38
4,966,609	A		10/1990	Callinan et al. 51/295
5,037,431	A		8/1991	Summers et al. 606/131
5,037,432	A	*	8/1991	Molinari 606/131
5,080,656	A		1/1992	Martz et al. 604/289
5,100,412	A	*	3/1992	Rosso 451/53
5,152,281	A		10/1992	Koll 128/57
5,207,234	A		5/1993	Rosso 128/898
5,215,078	A		6/1993	Fulop 128/52
5,322,504	A		6/1994	Doherty et al. 606/167
5,330,354	A	*	7/1994	Gallant 451/87
5,334,016	A		8/1994	Goldsmith et al. 433/29
5,334,019	A		8/1994	Goldsmith et al. 433/88
5,350,299	A		9/1994	Gallant 433/88
5,423,803	A		6/1995	Tankovich et al. 606/9
5,484,283	A		1/1996	Franetzki 433/116
5,489,291	A		2/1996	Wiley 606/170
5,525,058	A		6/1996	Gallant et al. 433/88
5,562,643	A		10/1996	Johnson 604/290
5,665,053	A		9/1997	Jacobs 601/2
5,681,026	A		10/1997	Durand 251/129.16
5,752,829	A	*	5/1998	Goldsmith et al. 451/87
5,765,759	A		6/1998	Bruns et al. 239/398
5,795,626	A		8/1998	Gabel et al. 427/458
5,800,446	A		9/1998	Banuchi 606/131
5,810,842	A	*	9/1998	Di Fiore et al. 606/131
5,885,211	A		3/1999	Eppstein et al. 600/309
5,971,999	A		10/1999	Naldoni 606/131
6,012,975	A	*	1/2000	Jager 451/87
6,139,554	A		10/2000	Karkar et al. 606/131
D441,863	S		5/2001	Khalaj et al. D24/133
6,235,039	B1	*	5/2001	Parkin et al. 606/131
6,241,739	B1		6/2001	Waldron 606/131

FOREIGN PATENT DOCUMENTS

DE	2742058	A1	3/1979
DE	3421390	A1	12/1985
DE	234608	A1	4/1986
DE	3535 571	A1	5/1987
DE	4102684	A1	8/1992
DE	9215436		3/1994
EP	0035040	A1	9/1981
EP	0143617	A2	6/1985
EP	0258901	A2	3/1988
EP	0564392	A2	10/1993
EP	0806184	A1	11/1997
FR	638 309		5/1928
FR	1.109.131		1/1956
FR	1109131	*	1/1956 ..... 601/6
FR	1.136.127		5/1957
FR	1.501.054		11/1967
FR	2.057.514		5/1971
IT	553076		12/1956
IT	1184922		10/1987
NO	50247		2/1932
RU	1556676	A1	4/1990
SE	168 279		6/1934
SE	152 189		11/1955
WO	WO 96/03959		2/1996
WO	WO 97/11650		4/1997
WO	WO 99/07439		2/1999
WO	WO 99/20336		4/1999
WO	WO 99/23951		5/1999
WO	WO 00/67692		11/2000

OTHER PUBLICATIONS

Optical Technology, Inc. web page, "Derma Genesis," Jul. 1999, http://www.dermagenesis.com/main.html.

Pneumadyne web page, "Introducing the New Bleed Valve," Dec. 1998, http://www.pneumadyne.com/c–products/bleed.html.

Soundskin Corporation product brochure, "Smart Peel Skin Exfoliation System," 1998.

English language translation for German Patent No. 2 218 370, attached to the back of the patent.

English language abstract for German Patent No. 3535 571 A1, attached to the front of the patent.

English language translation for Swiss Patent No. 168 279, attached to the back of the patent.

English language abstract for Russian Patent No. 1556676 A1, attached to the front of the patent.

English language abstract for PCT Patent No. WO96/03959, attached to the front of the patent.

English language abstract for German Patent No. DE 4102684 A1, listed above.

English language abstract for German Patent No. DD 234608 A1, listed above.

English language abstract for German Patent No. DE 3421390 A1, listed above.

SoundSkin Corporation, "Smart Peel Skin Exfoliation System" (1998, U.S.A.).

* cited by examiner

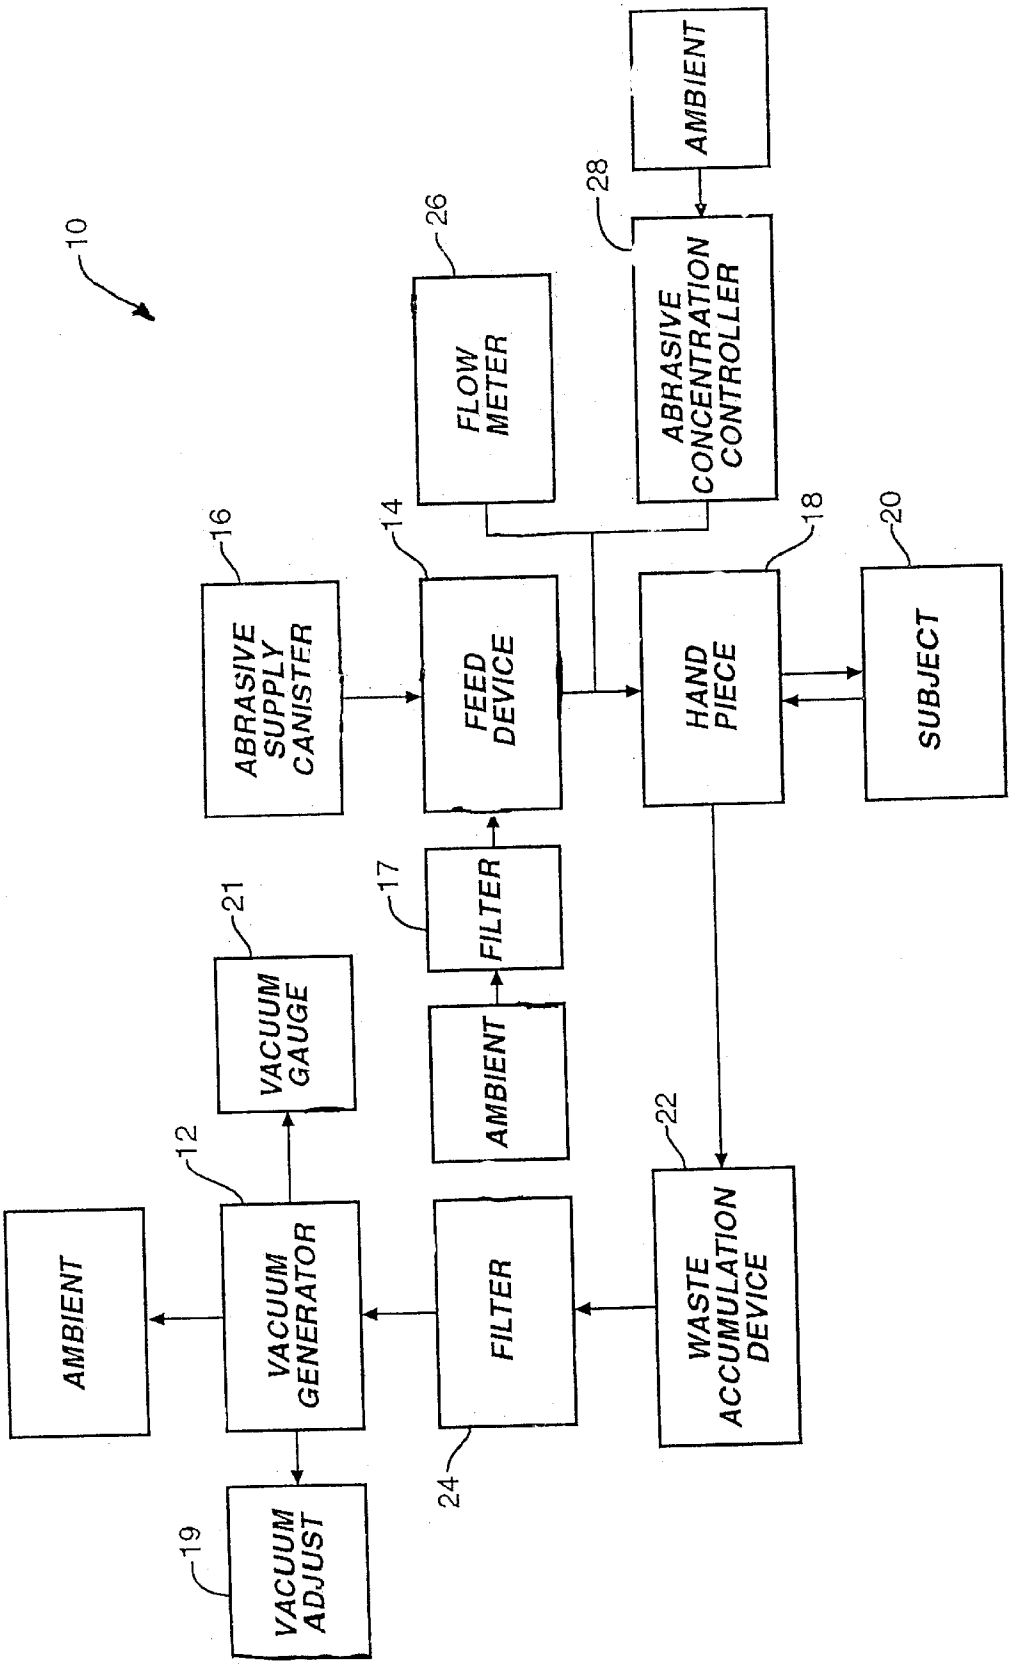
10
AMBIENT
28
ABRASIVE CONCENTRATION CONTROLLER
26
FLOW METER
16
ABRASIVE SUPPLY CANISTER
14
FEED DEVICE
18
HAND PIECE
20
SUBJECT
21
VACUUM GAUGE
17
FILTER
AMBIENT
12
VACUUM GENERATOR
FILTER
22
WASTE ACCUMULATION DEVICE
AMBIENT
19
VACUUM ADJUST
24

FIG. 1

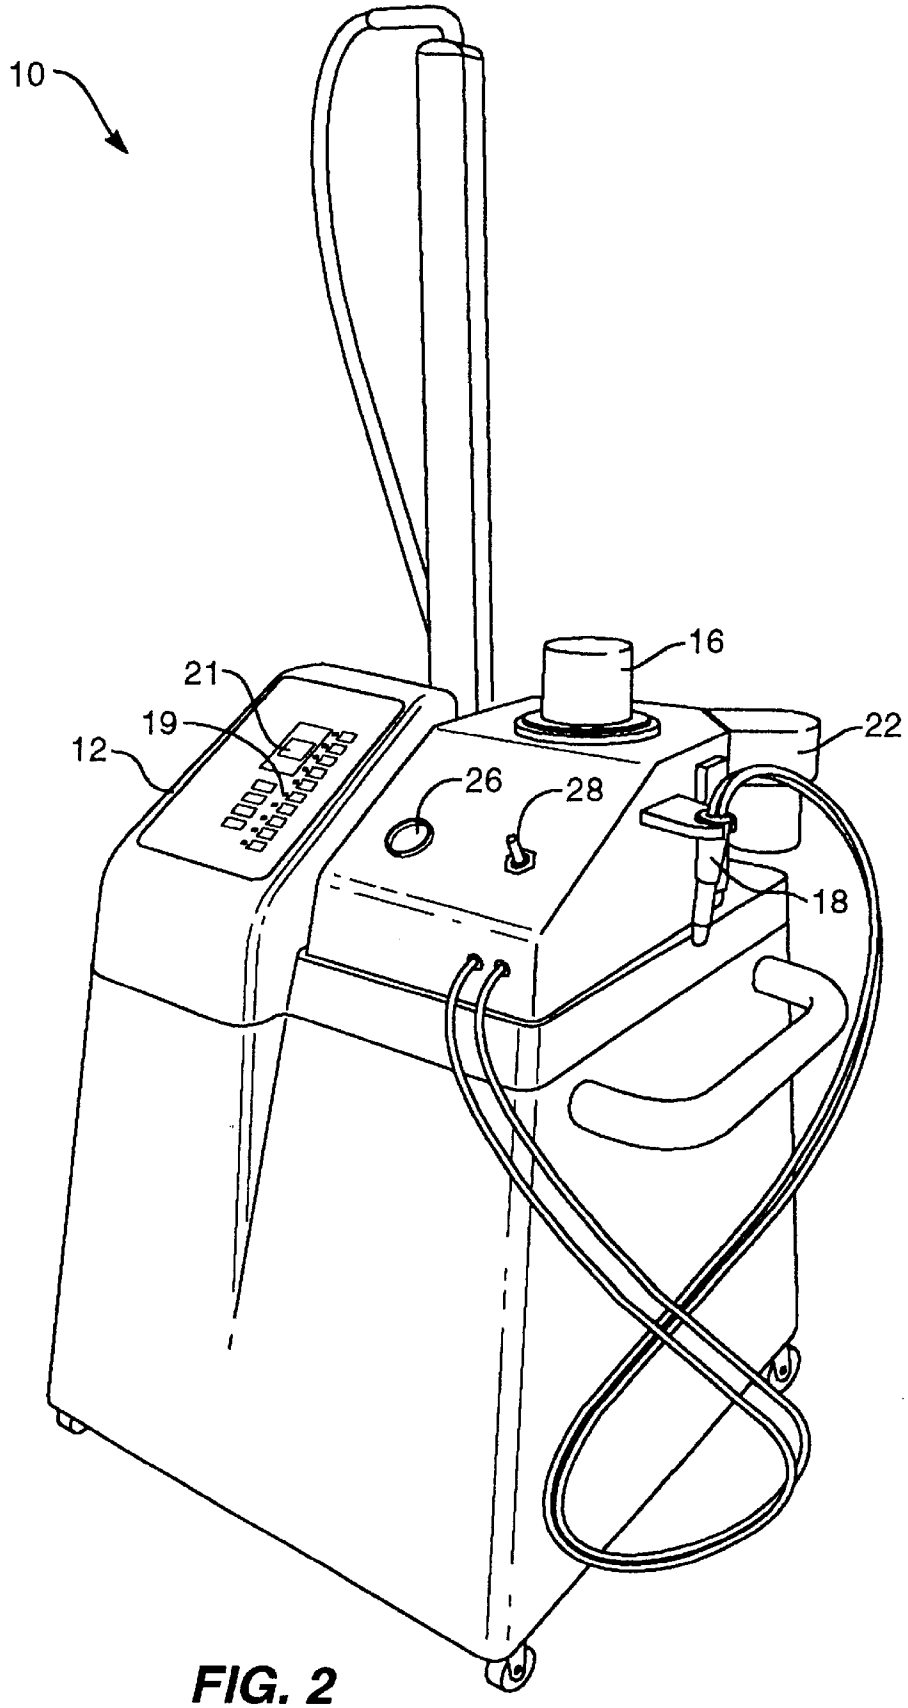

FIG. 2

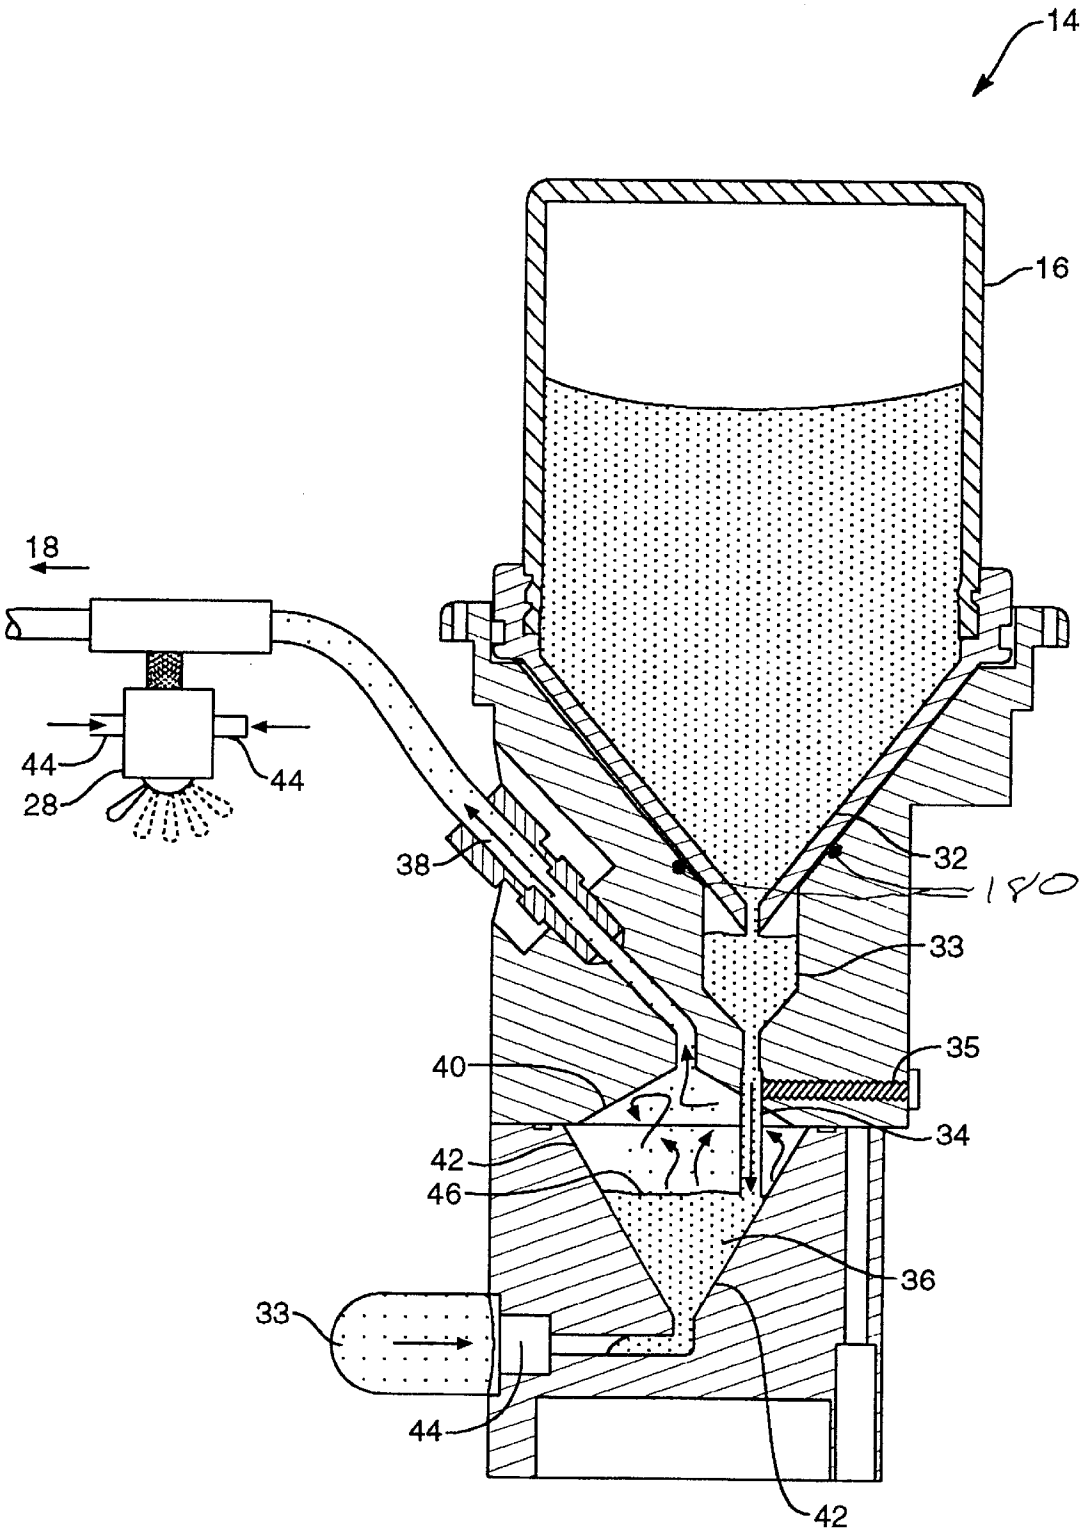

FIG. 3

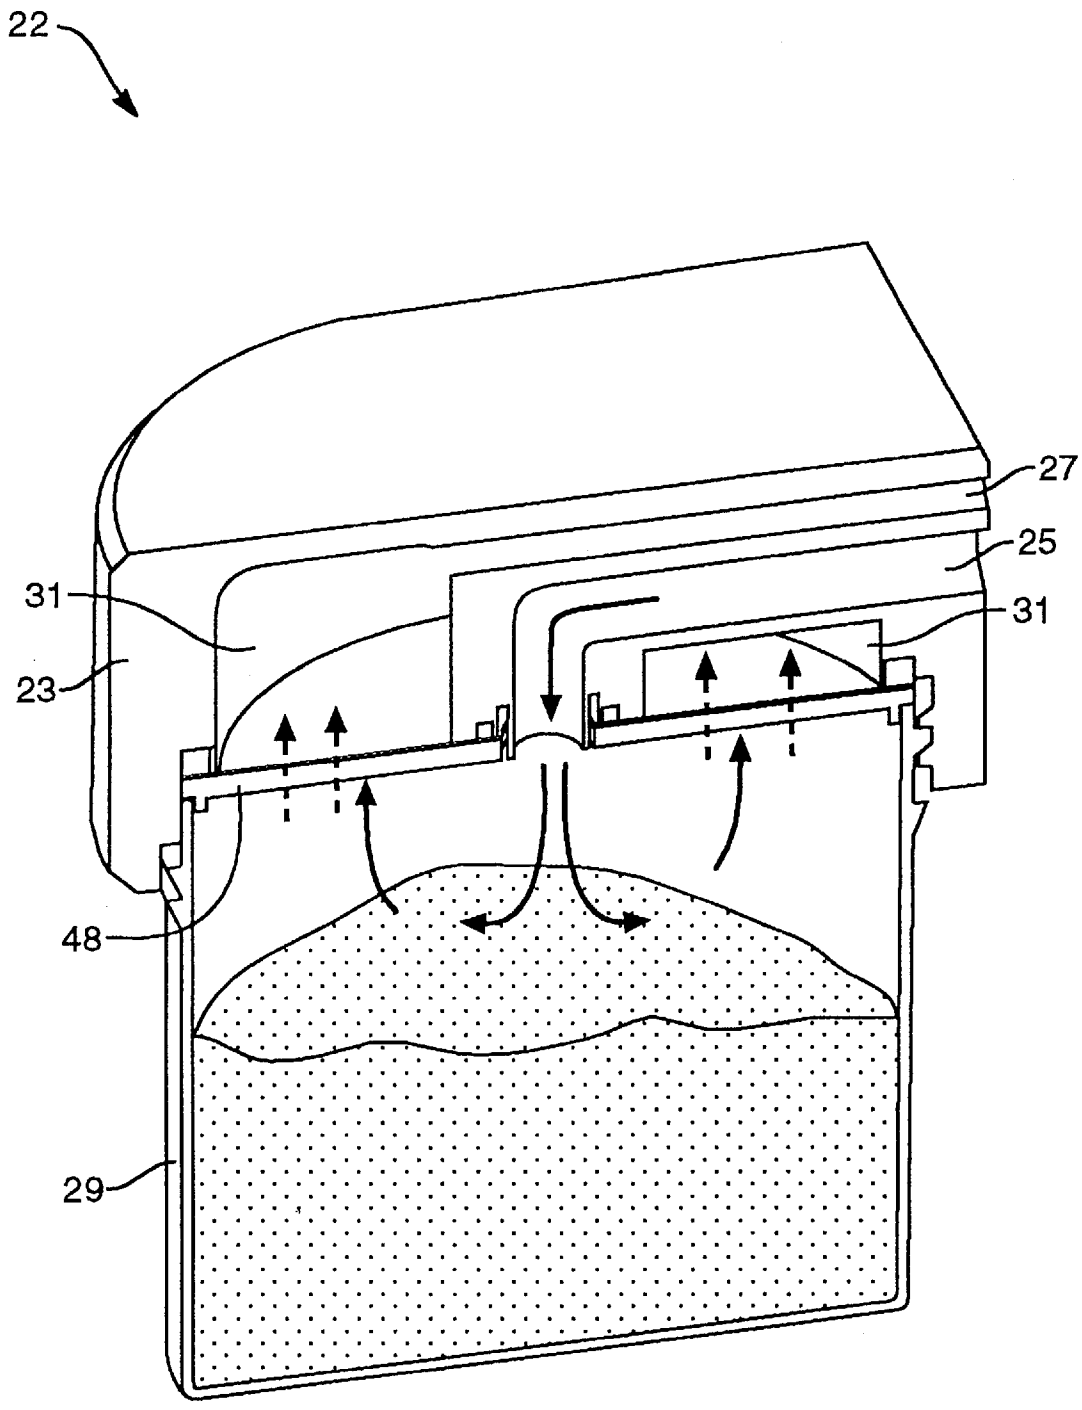

FIG. 4A

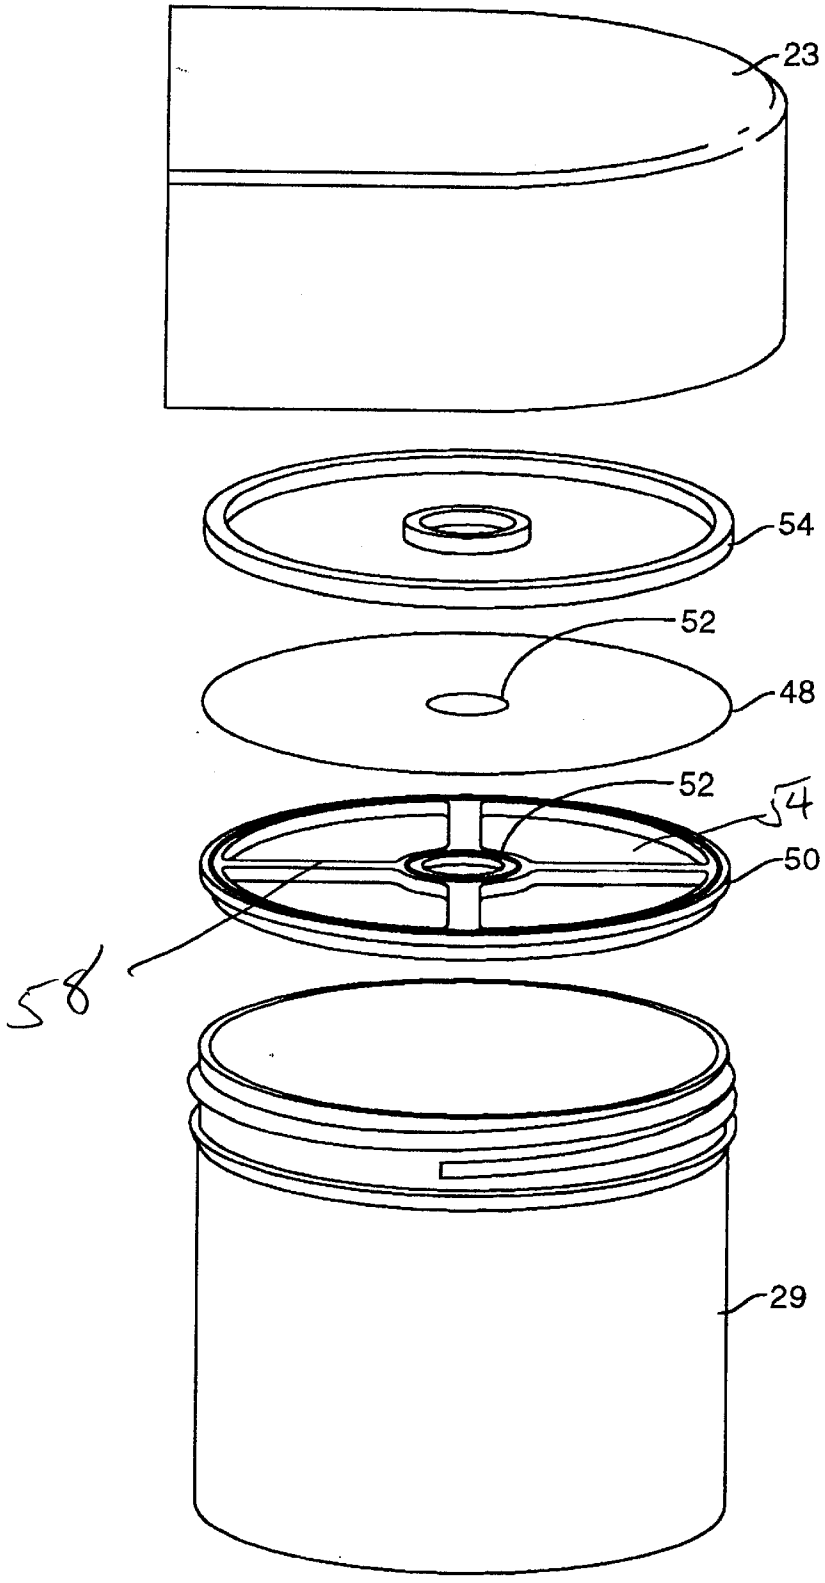

FIG. 4B

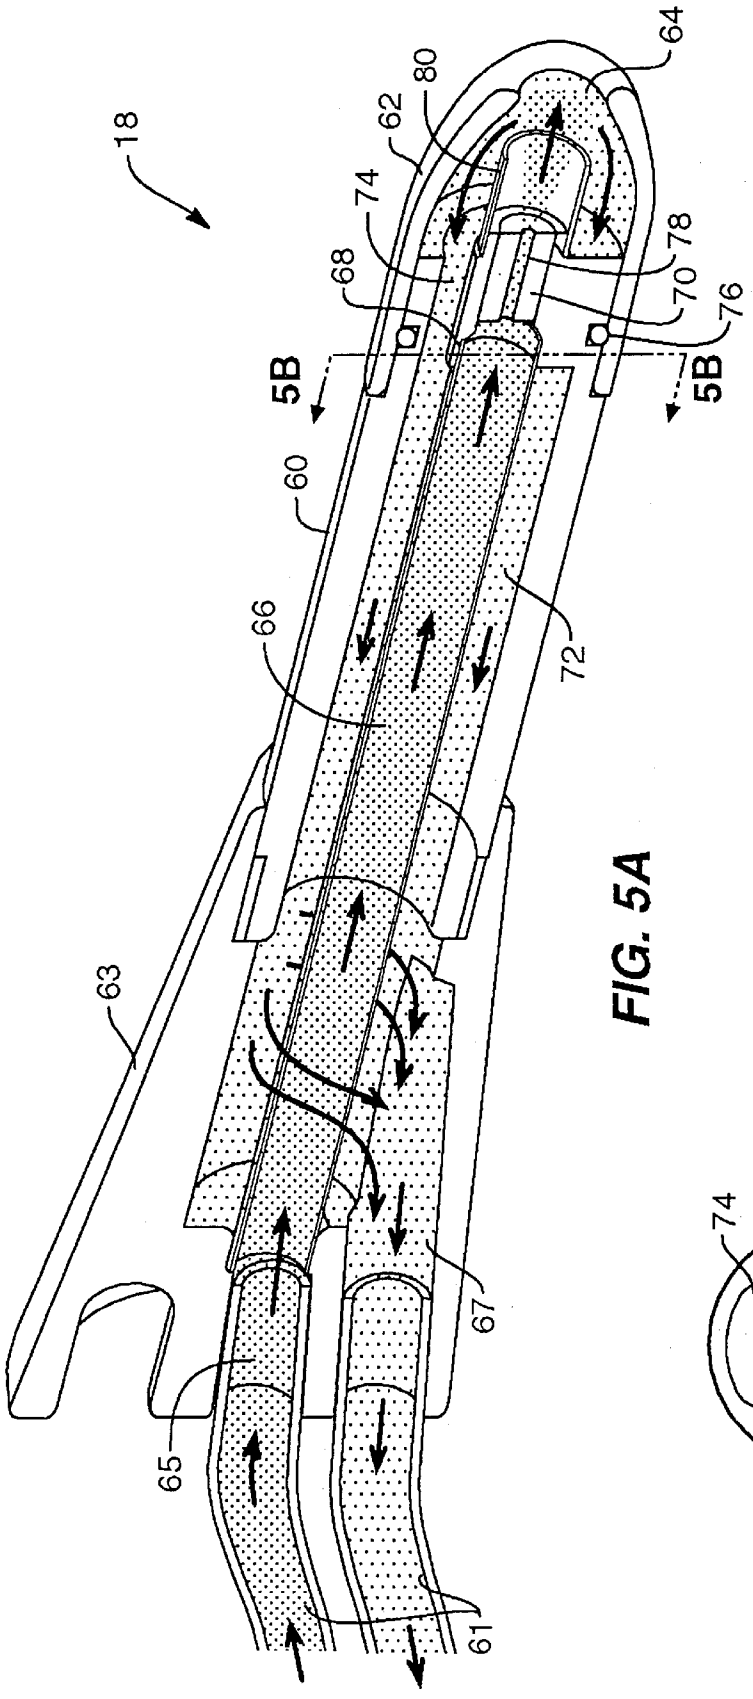

FIG. 5A

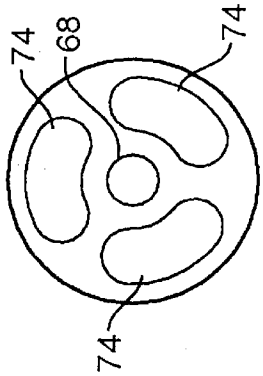

FIG. 5B

METHOD AND SYSTEM FOR PERFORMING MICROABRASION

RELATED APPLICATIONS

This patent application is related to commonly assigned U.S. Design patent application Ser. No. 29/119,496, entitled DERMABRASION SYSTEM, and to U.S. Design patent application Ser. No. 29/119,377, entitled DERMABRASION HAND PIECE, both filed even date herewith and incorporated by reference for all purposes.

THE BACKGROUND OF THE INVENTION

The present invention relates generally to abrasion systems and methods for abrading a surface in a controlled manner and, more particularly, to a portable or adaptable microabrasion system that operates to perform dermabrasion in a controlled manner with improved efficiency, hygiene, and finish.

Microdermabrasion techniques and systems are well known to those skilled in the art. A typical dermabrasion system includes a pneumatic drive such as either a negative pressure system or a positive pressure system, that delivers an ablative material from a supply point to a hand piece, also known as a wand, which has a small aperture to be placed upon a patient's skin during the abrasion process. In the negative pressure system, such as one utilizing a vacuum for pneumatic drive, the closing of the aperture by the skin completes the pneumatic circuit drawing the abrasive material to the skin to perform dermabrasion. The refuse and debris after the abrasive procedure is vacuumed away into a waste storage container for disposal.

Each stage of operation within current dermabrasion systems suffer problems that prevent optimal and efficient operation on a subject or patient. One problem is the handling of the abrasive material at the supply point. Typical supply points utilize abrasive supply containers that are permanently mounted and must be refilled when empty. These containers are usually difficult to access and lead to waste and unnecessary exposure to the abrasive material during filling. Further, due to the dynamics of the content level changing, the systems fail to deliver consistent amounts of abrasive material from the supply containers to the hand piece. As such, the results of the abrasive operation are inconsistent and vary in the length of time normally needed to perform an typically procedure/session. As the container goes from full to empty, performance can suffer severely, with as much as a 75% reduction in abrasive concentration in the air stream. Additionally, few, if any, systems are able to utilize all the contents of the supply container before needing refilling.

An additional problem with current supply containers is that they draw upon ambient air. Ambient air is often humid and the moisture therein causes the moisture-sensitive abrasive to agglomerate and subsequently clog the system. This is especially a problem in that most systems utilize a small output aperture that clogs easily, particularly when the abrasive material becomes damp with humidity, leading to clumping and clogging and generally inconsistent delivery of abrasive. Often, the existing systems are induced to employ mechanical or pneumatic means, such as spring-loaded rods or compressed air, to periodically clear the restricted output aperture.

Another part of the abrasive delivery system is an abrasive/concentration control system. Most systems lack such a control system. The control system's purpose is to control the amount of abrasive delivered to the hand piece during operation. Some systems utilize an electronic control that causes pulses resulting in pressure surges and non-uniform delivery of the abrasive. Other systems utilize control systems that are difficult to adjust, hard to reset and fail to provide repeatable consistent results for subsequent treatments.

The hand piece is a critical component of any dermabrasion system. Hand pieces suffer several problems. One problem is that the apertures tend to restrict the flow of the abrasive material to the skin as well as hinder removal of the abraded material and the abrasive during the abrasion procedure. Further, the dermabrasion procedure involves removal of skin and sometimes blood, so there is concern that the use of the same wand from patient to patient is unsanitary and unhealthy. Attempts to make the hand piece more hygienic by having disposable and replaceable wand tips has been unsuccessful as the tips merely prevent contamination at the aperture level without addressing a problem known as back contamination, which occurs when refuse debris within the wand from a previous procedure contaminates the wand tip in spite of the replacement of a fresh tip.

Further, some hand pieces are designed without thought about how the hand piece is to be cleaned. As such, these pieces are difficult to clean and therefore, undesirable for long term use. Also, most hand pieces are expensive to manufacture. They can be heavy and awkward to use, such that the technician suffers discomfort and fatigue during long sessions or over several sessions during the same day. Since the piece needs to be small enough to handle, they often have restricted flow paths that detrimentally affect flow rate and delivery of the abrasive for optimal results and for quick pick up of the waste debris.

Another element of the dermabrasion system includes a waste recovery or accumulation container system. Most systems are permanently mounted and are difficult to access, empty, and clean. The containers collect abrasive dust along with skin cells, and bodily fluids, which may contain microbes or other undesirable elements. As such, the containers must be emptied and cleaned periodically. Failure to clean the container can result in unwanted growths and other hazardous health risks that should be avoided at all times.

The waste accumulation systems often have small exhaust apertures that can easily clog with waste products resulting in restricted air flow within the overall system. Moreover, filter elements are also employed to prevent abrasive and debris out flow into the vacuum source. Such filters are a major source of clogging and reduction of optimal air flow within the entire system, thereby leading to poor dermabrasion results since less abrasive material is being carried within the system at a reduced speed. Similar to the supply system, one solution has been to use back pressure to clear and clean the filters or unplug the clogs in the waste accumulation system, but this adds cost and complexity to the overall design, which can result in mechanical failure, decreased abrasion performance, and increased costs of production and operation.

Accordingly, what is needed is a dermabrasion system and method that overcomes the problems of the prior art. Specifically, what is needed is a dermabrasion system that controls the dispersion of the abrasive material over the entire range of operation uniformly and consistently over the prior art methods. Further, what is needed is a method and system for handling the abrasive material prior to the ablative operation and afterwards during the collection of the contaminated materials. Further still what is needed is a

hand piece that is lightweight and easily cleaned to meet high health safety standards, yet allows for high air flow.

SUMMARY OF THE INVENTION

According to the present invention, a method and system for performing abrasion on a surface, such as on the skin of a patient, is disclosed. The dermabrasion apparatus includes means for delivering and retrieving material to and from a selected site to be abraded, a delivery and retrieval hand piece, an abrasive handling device, and a waste retrieval holding device. The hand piece is coupled to the abrasive handling device as well as the waste retrieval holding device, which is further coupled to the delivery and retrieval means. The abrasive handling device further includes an abrasive supply device, a receiving channel, a feeding chamber, and a delivery channel. The abrasive supply device typically is a canister fitted with a funnel-shaped spout that is inverted into the receiving channel. The receiving channel feeds abrasive to the feeding chamber. The delivery and retrieval means, typically a vacuum source that generates a pneumatic air supply within the abrasion apparatus, causes the abrasive within the feeding-chamber to loft in an arc such that it reaches the delivery channel. The abrasive travels through the delivery channel under pressure to the hand piece, which is utilized to apply the abrasive to the surface and then retrieve the waste debris from the procedure. The abrasion apparatus may also include a massage or body contouring system, which also utilizes the vacuum source.

Further, the receiving channel extends within the feeding chamber and serves to limit or control the amount of abrasive filling the feeding chamber. The receiving chamber's height, relative to its location within the feeding chamber, can be adjusted by way of an height adjustment means. The feeding chamber typically comprises top and bottom portions as well as generally sloped side walls that slope inwardly from the top to the bottom. Such geometries lend themselves to the shapes including funnels, inverted pyramids, bowl shapes, and other geometries where the walls are sloped in such a fashion so that the abrasives accumulate in a concentrated point at the bottom. Placed between the supply device and the feeding channel is an additional chamber that provides for the abrasive to feed within the receiving channel without blocking the insertion of the funnel within the supply device. The feeding chamber is further coupled to an ambient air supply with a filter interspersed between ambient and the feeding chamber to prevent unwanted matter from being drawn within the apparatus as well as to prevent abrasive from spilling out an open aperture where the ambient port is located.

The dermabrasion hand piece comprises a body having a first end, a second end, a delivery channel, and a retrieval channel. The delivery channel extends the length of the body and the retrieval channel is concentric with the delivery channel, but has a larger diameter. A delivery aperture is located at the first end of the body. A retrieval aperture is placed adjacent and generally concentric with the delivery aperture. The delivery aperture is coupled to the delivery channel while the retrieval aperture is coupled to the retrieval channel. The dermabrasion hand piece further includes a dermabrasion tip that has a first end, which is removably mounted to the first end of the body, a second end, and a delivery aperture in the second end. The delivery aperture is generally concentric with the delivery channel and the delivery aperture. The tip is generally dome shaped and is made from a high density plastic or metal to withstand the abrading effects of the abrasive during operation. At the second end of the body are located an intake aperture and an outlet aperture. The intake aperture is concentric with the delivery channel while the outlet aperture is connected to the retrieval channel and is offset from the intake aperture.

The body may be further comprised of two portions, a body section and an end portion. Inserted between the end portion and the body portion is a hollow tube, which serves as the delivery channel. Further included in the hand piece is a nozzle that is placed at the first end of the body adjacent the delivery aperture. The nozzle has an opening for concentrating the abrasive as it passes through the nozzle. Further included is an optional nose tube, which is concentric with the delivery channel and the nozzle, and is placed adjacent the nozzle at the first end of the body. The tip mounts to the first end of the body and an anti-bleed seal is provided by an O-ring mounted on the first end of the body and engages with an inner-perimeter of the first end of the tip.

The waste debris collection device includes a waste can receiver, a waste canister, and a filter. The waste canister includes an intake port and return port. The intake port is coupled to the hand piece and the return port exits to ambient and includes a filter to prevent waste debris from being discharged to ambient. The waste canister typically is the same type of canister that is used initially to feed the abrasive to the feed chamber. The waste canister removably couples to the waste can receiver and a filter is fitted between the waste can receiver and the waste canister. The filter has a center intake port aperture in which the intake port passes, but the return path of the air drawn by vacuum passes through the filter, thus trapping the waste debris within the waste canister. A filter frame is used to support and retain the filter in position between the waste can receiver and the waste canister where the filter has substantially the same area as the opening of the waste canister. Pliable retention rings are used to secure the filter in place between the waste canister and the filter frame support.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects and features of the present invention will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that these drawings depict only typical embodiments of the invention and are, therefore, not to be considered limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

FIG. **1** depicts a schematic diagram of a dermabrasion system in accordance with the present invention;

FIG. **2** illustrates a perspective view of the dermabrasion system in accordance with the present invention;

FIG. **3** illustrates the feeding device in accordance with principles of the present invention;

FIG. **4**A illustrates a collection device utilized to hold waste debris after the abrading procedure in accordance with the present invention;

FIG. **4**B depicts an exploded view of the collection device of FIG. **4**A accordance with the present invention;

FIG. **5**A illustrates a cross-sectional perspective view the hand piece utilized with the dermabrasion apparatus of FIG. **2** in accordance with the present invention; and

FIG. **5**B illustrates a cross-sectional view along the **5**B direction in FIG. **5**A.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS

It will be readily understood that the components of the present invention, as generally described and illustrated in

the figures herein, could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of the embodiments of the system and method of the present invention, and represented in FIGS. **1** through **6**, is not intended to limit the scope of the invention, as claimed, but is merely representative of the presently preferred embodiments of the invention.

The presently preferred embodiments of the invention will be best understood by reference to the drawings, wherein like parts are designated by like numerals throughout.

An abrasion system **10**, which is optionally portable, is depicted in the block diagram of FIG. **1** as well as in FIG. **2**. Dermabrasion apparatus **10** is a pneumatically driven apparatus that includes a vacuum generator **12**. The pneumatic source may also be provided by a forced air system well known to those skilled in the art. Other pneumatic delivery systems will be readily apparent to those skilled in the art and should not be limited to solely a vacuum generator system or other forced air or compressed air delivery type arrangements. An airless pump may also be substituted as long as it provides adequate abrasive delivery and pick up though out the abrasion system.

Vacuum generator **12** also may be optionally coupled or decoupled from the remaining elements of the dermabrasion apparatus **10** and is not intended to be limited to only those dermabrasion systems that include self-contained pneumatic delivery systems. It is contemplated in one embodiment that apparatus **10** utilizes a vacuum generator such as that disclosed in commonly assigned U.S. patent application Ser. No. 09/309,958, filed May 11, 1999, incorporated by reference for all purposes. Further, since the dermabrasion apparatus **10** can utilize the vacuum generator **12** as disclosed in the cited patent application, it is possible to have both a dermabrasion apparatus and a massage or body contouring system.

Vacuum generator **12** couples to other elements within the system **10** via standard connection means. Vacuum generator **12** also vents to ambient during operation. A vacuum adjustment control **19** is provided with the generator to control the level of vacuum pressure generated thereby. The connection means can include metal or plastic tubing typically found in systems that are pneumatically operated.

The system **10** further includes an abrasive feed device **14** that couples to an abrasive supply canister **16** as well as to ambient. The ambient connection provides the needed air to deliver the abrasive from device **14** to the patient **20**. A filter **17** is placed between the ambient source and feed device **14** to filter the incoming air supply as well as to prevent any abrasive within device **14** from exiting out the intake port from which ambient air is drawn. Both abrasive feed device **14** and abrasive supply canister **16** are shown in greater detail in FIG. **3**. Filter **17** can be a sintered plastic, ceramic, or metallic filter that allows air to pass through, but not the abrasive. Other filters that can be utilized will be apparent to those skilled in the art such as membrane, fiber, and mesh filters, but are not limited solely to those named.

Abrasive feed device **14** further couples to a hand piece or wand **18**, which is utilized to perform the dermabrasion on a patient or subject **20**. The hand piece **18** provides both delivery of the abrasive material to the subject as well as retrieval of waste debris and abrasive during operation. This excess debris and material is deposited in waste collection device **22**, which is also coupled to hand piece **18**. A filter **24**, such as another sintered or other suitable filter, serves to prevent any previously untrapped waste debris and abrasive from contaminating vacuum generator **12** or being vented to ambient, and is coupled between the waste collection canister **22** and vacuum generator **12**. Waste collection or accumulation device **22** includes a filter (shown in FIG. **4B**) that is used to prevent the vast majority of waste debris and abrasive from reaching filter **24** or vacuum generator **12**.

Apparatus **10** includes a flow meter **26** and an abrasive concentration controller **28**. Flow meter **26** displays the airflow generated within apparatus **10** so that the technician operating apparatus **10** can determine whether the airflow is sufficient for the procedure. Furthermore, flow meter **26** can also be used as a diagnostic device to determine if air flow within the system has fallen below acceptable levels due to clogging or fouling of filters. Should the technician need to adjust the airflow, the technician utilizes the vacuum level controller **19**, which in this case is shown mounted on the control face of external vacuum generator **12**.

Additionally, it may be desirable to vary the amount of abrasive in the air stream depending upon the nature of the procedure being performed. Toward this, the operator utilizes abrasive concentration controller **28** to mix ambient air into the abrasive-laden air coming from feed device **14** and leading toward hand piece **18**. Flow meter **26** is well known to those skilled in the art and may be placed anywhere within the system where clean air flow occurs, i.e. before feed device **14** or after filter **24**. In this example, the flow meter and concentration controller are both located proximate the hand piece.

Abrasive concentration controller **28** can be selected from a variety of controllers. For example, in one embodiment, the controller **28** is an infinitely adjustable rotary type that goes from full open to full close. It is the level of openess that determines the abrasive concentration in the system. Full open, which couples the hand piece to ambient and bleeds air into the system effectively reduces abrasive concentration to zero such that no abrasive is being delivered but that air flow and vacuum pressure remains unchanged.

Such a situation is advantageous for removing used abrasive and debris from the patient's skin, as is often desired at the end of a treatment. Conversely, full close maximizes abrasive concentration. A multi-position toggle switch may also be utilized that selects between full open, full close, or one or more levels in between.

Further still, both flow meter **26** and abrasive concentration controller **28** can be either manually adjustable or electrically or electronically adjustable, depending upon the types of gauge sensor and pressure adjustment means selected and implemented. Electronic control provides for greater precision in abrasive delivery and treatment consistency between treatment sessions.

A vacuum gauge **21** and vacuum pressure adjustment means **19** are found on vacuum generator **12** within apparatus **10**. Gauge **21** and adjustment means **19** are well known in the art.

FIG. **3** illustrates the interaction of abrasive supply canister **16** with abrasive feeding device **14**. Abrasive supply canister **16** further includes a funnel **30**, which includes an aperture at the bottom tip to allow the abrasive stored therein to feed into abrasive feeding device **14**. Abrasive supply canister **16** is typically a plastic or glass container having a threaded opening to which funnel **30** threads. A threaded cap (not shown) seals the canister **16** when it is does not have funnel **30** secured to it cr when it is not mated to feed device **14**, such as during transportation or storage. Abrasive supply canister **16** holds approximately one pound of abrasive material, but can hold more or less material in alternative

embodiments. The abrasive material is selected from known particulate abrasives, such as aluminum oxide or other organic or inorganic micro-abrasive known to those skilled in the art.

Once the funnel **30** is placed on abrasive canister device **16**, it is inverted so that the abrasive material is gravity fed within a holding chamber **32**, which has a shape conforming to that of funnel **30**. A transition chamber **33** is positioned between holding chamber **32** and feed tube **34**. An arrow pointing downward shows the gravity feed direction of the abrasive material found in canister **16**. The abrasive continues its gravity fall through feed tube **34**, which has a defined length that extends within a feeding chamber **36**. Further, feed tube **34** can be varied in length by control device **35** that raises or lowers tube **34** within chamber **36**. This allows the operator to refine the abrasive flow within the system **10** by controlling the amount of abrasive that is allowed into chamber **36** during operation. Alternately, feed tube **34** can be of a predefined length which is fixed to the bottom of transition chamber **33** should adjustability not be required. Feed tube **34** can be substantially vertical or even angled to some degree so as not to interfere with the walls of feeding chamber **36**. Optionally, the end of tube **34** is cut so as to be substantially horizontal in either configuration.

In alternative embodiments, feeding device **16** can include a vibrating motor that gently sifts the abrasive into feeding chamber **36**. Further still, canister **16** can be mated to a feed tube that connects to tube **34** with the canister being suspended allowing the abrasive to gravity feed to chamber **36**. The funnel **30** might then be mounted to a gimble mechanism or other rotational mechanism which would allow the canister to be mated to it in a substantially upright position and then rotated to an inverted position to thereupon allow gravity-feed of the abrasive via the connecting feed tube.

Feeding chamber **36** is illustrated to have a cone shape having an arc ranging from 40 degrees to 90 degrees, with 60 degrees being preferred. This is but one embodiment and other configurations are possible. For example, chamber **36** can have an inverted pyramid shape, a bowl shape, a cylindrical shape, or a combination of these geometries so long as the abrasive lofts sufficiently to provide uniform and consistent abrasive flow out of feeding chamber **36**. Likewise, the shape of holding chamber **32** can be any of these types of geometries so long as the abrasive feeds to feeding chamber **36** uniformly and consistently without waste or clogging.

One end of feed tube **34** extends into lofting chamber **36**. The bottom end of feed tube **34** limits the amount of abrasive that can be held within chamber **36**. This limit is shown by line **46**. It is by controlling of the amount of abrasive material within feeding chamber **36** that improves the delivery of a uniform and consistent supply of abrasive to hand wand **18** during operation. The abrasive material is lofted in the chamber during operation before exiting through transport tube **38**. Transport tube **38** further couples to hand wand **18** for delivery of the abrasive material to the subject **20**. In this embodiment, a vacuum is drawn on transport tube **38** with an ambient air source coming in through port **44**. The ambient air passes through filter **33** into the bottom of feeding chamber **36**. As the vacuum forms within feeding chamber **36**, air is effectively bubbled through the abrasive pile and the abrasive particles are thereupon lofted and directed towards tube **38** via a feed funnel **40** formed in the top of feeding chamber **36**. Feed funnel **40** has an arc of greater than 90 degrees with an aperture into tube **38**. Funnel **40** serves to feed the lofted abrasive material through tube **38** to hand piece **18** during operation. The sloped side walls **42** of feeding chamber **36** serve to enhance the uniform delivery of abrasive material even while the contents of abrasive supply canister **16** empty completely into feeding chamber **36**. The remaining arrows within feeding chamber **36** illustrate the physical action of the abrasive material during the operation of apparatus **10** as well as the final direction through tube **38** as the abrasive material is carried to hand piece **18**.

An ambient port **44** is coupled between tube **38** and hand piece **18** and includes a variable open/close device that functions as controller **28** to control the amount of air bled into the abrasive stream during operation, thereby controlling the concentration of abrasive delivered to hand piece **18**. In an alternative embodiment, the height of funnel **40** relative to feeding chamber **36** can be increased or decreased to change the abrasive feed characteristics according to the technician's preference.

Abrasive feeding device **14** is typically made from a durable material, such as aluminum, stainless steel, or high durability plastic material. Device **14** can also be made from other materials as long as they are inert to the abrasive and durable for operation.

The abrasive within feeding chamber **36** then is directed through hand piece **18** to perform the desired abrasive operation on subject **20**. During the actual abrading procedure, the abrasive abrades the skin causing waste debris and refuse that must be removed so as not to interfere with or contaminate the abraded surface. The pneumatic air supply, in this case vacuum generator **12**, provides a vacuum in hand piece **18** that draws the waste refuse and debris away from the subject while at the same time performing surface abrasion. The waste refuse collects in abrasive collection device **22**. Abrasive collection device **22** is shown in FIG. **4**A, which is a cut-away perspective view of the abrasive collection device **22**.

Collection device **22** includes a waste can receiver **23**, which has an intake port **25** and a return port **27**, a waste canister **29**, and a filter **48**. Waste can receiver **23** has a threaded seal in which to receive canister **29**. Canister **29** collects the waste refuse during an abrasion procedure for later disposal. In the preferred embodiment, Canister **29** is identical to canister **16** used to feed the abrasive; however, this might not be the case in other embodiments. Once canister **16** is empty, it is removed and used to replace canister **29** once it is f full, which is usually by the time canister **16** is empty. A cap threads onto canister **29** once it is full to seal the contents for proper disposal and to minimize any unnecessary contact with the refuse by the technician.

The waste refuse travels through intake port **25** to be deposited into canister **29**. The air flows through filter **48** before exiting through return port **27**, which couples to second filter **24** before being dispersed to ambient air. Although not mandatory for operation, use of second filter **24** is recommended to both remove any material untrapped by filter **48** and to act as a fail-safe particulate trap in the event filter **48** is either inadvertently left out of the system or is improperly installed. A return cavity **31** is disposed between filter **48** and return port **27** to keep the airflow from being unduly restricted during the filtering procedure.

Referring to FIG. **4**B, Filter **48** includes a support element **50**, an intake aperture **52**, through which the waste refuse material passes into canister **29**, and filter apertures **54**. The waste refuse material passes through aperture **52** into canister **29**. The vacuum within device **22** then passes through

filter **48** and underlying filter apertures **54**, filter **48** preventing the refuse material from passing to chamber **31** to the vacuum generator **12**.

Ring seals **54** are positioned within receiver **23** and superior to filter **48** about both its outer perimeter and its inner perimeter about aperture **52** to provide compliant sealing surfaces. Additionally, inner and outer crimping features **58** are provided upon the top surface of support element **50** and are positioned beneath ring seals **54**. The crimping features **58** can be a one or a series of adjacent concentric ridges that press into filter **48** to hold it in place against compliant ring seals **54** and to provide an anti-bleed seal.

Filter **48** provides a larger surface area than filters utilized in the collection of the waste debris of the prior art. Further, the surface area is also such that the airflow is not inhibited since air flow return port **27** is removed from being immediately adjacent the filter **48**. Also, in one embodiment filter **48** is disposable and inexpensive so it can be replaced between treatments, thus eliminating the progressive clogging experienced with durable-use filters or cleaning steps typically required in the prior art.

It is also intended that the discharge tube between hand piece **18** and waste collection or accumulation device **22** be easily removable so that it can be cleaned between sessions to prevent contamination and unsanitary build up of the waste debris residue that remains in the tube. Each end of the discharge tube can be pressure fitted or coupled via connectors that provide a suitable vacuum seal to prevent air bleeding into the system and lowering airflow inadvertently.

Hand piece **18** is shown in cross-sectional detail in FIG. **5**A, which is a cross-sectional perspective view along the longitudinal center axis. Hand piece **18** is assembled in a plurality of parts. There are three main portions assembled from these parts, which include hand piece body **60**, tip **62**, and end portion **63**. Tip **62** friction mates with one end of hand piece body **60**, while the other end of hand piece body **60** couples to end portion **63**. End portion **63** is flared shaped for operator comfort during an abrasion session and so it will be retained in a retaining member on the vacuum apparatus **12** of FIG. **2**. End portion **63** has two apertures, a supply aperture **65** and a return aperture **67**. The supply aperture **65** couples to feeding device **14** to receive the abrasive for the treatment. The return aperture **67** couples to the waste collection device **22**. Plastic flexible tubes **61** are used in one embodiment where the tubes have a slightly greater diameter than the apertures so that they friction fit there in and extend at least ½" to provide an adequate barrier from air bleed at these connection points.

A center channel **66** is positioned within a recess of end portion **65** to connect with the supply aperture **65**. Center channel **66** fits within body **62** until it engages an output aperture **68**. Within the output aperture **68** is fitted a nozzle **70** that concentrates the abrasive just prior to abrading a selected surface and causes the abrasive to stream in a fan cone pattern, but with a tight radius for control. Surrounding center channel **66** is a return channel **72**, which is larger than and concentric with channel **66**. The larger diameter of channel **68** allows for a sufficient air flow that the waste debris is readily transported to the refuse accumulation device **22** without clogging or hindering the air flow of the supply abrasive. Surrounding aperture **68** are a plurality of intake apertures **74**. The intake apertures open to channel **68** and allow the waste debris to be removed from within tip **62** during treatment.

Tip **62** is generally bell-shaped and includes an abrasive aperture **64**. Abrasive aperture **64** contacts the surface to be treated arid closes the pneumatic circuit to draw abrasive through the system and abrade the surface. Abrasive aperture **64** is approximately one-quarter inch in diameter and is applied to the subject, such as a patient's skin, during the abrasive procedure. An O-ring **76** is fitted within a groove **74** about the end of body **60** to which tip **62** fits. O-ring **76** serves to proved a tight seal against air-bleed within the airflow. The O-ring **76** is flexible and pliant, typically made from rubber, neoprene, silicone, plastic, or any like and compatible substance.

Nozzle **70** is generally cylindrical in shape with an aperture **78** along its center axis. Nozzle **70** is made of a hard, durable substance that withstands the abrading process of the abrasive as the abrasive hits the nozzle with full force. These materials can comprise, but are not limited to, stainless steel, ceramic, aluminum, tungsten carbide, and other comparable substances. A nose tube **80** is optionally mounted to the operational end of body **60** and is concentric with nozzle **70**. Nose tube **80** is generally cylindrical and helps divert the waste debris away from the abrasive during an abrading procedure while protecting the incoming abrasive steam from flow aberrations.

Since the hand piece **18** can be readily disassembled, it can be taken apart and thoroughly cleaned to avoid contamination and other health risks possible in performing dermabrasion and removing the waste debris. Further, the parts to hand piece **18** can be made of inexpensive, yet durable materials that allow for the hand piece, in part or in total, to be disposable.

The jet path of the abrasive may fans out enough to strike the inner wall of tip **62** at the margins of aperture **69**. Since the abrasive is traveling at a high rate of speed, it causes the inner wall of tip **62** to wear away. Additionally, the act of scanning tip **62** across abrasive-covered skin will serve to abrade the outer surface of tip **62** near aperture **69**. Accordingly, tip **62** is made compact and inexpensive so that it can be easily replaced and disposed of, preferably after each treatment. Suitable materials used to make tip **62** include polycarbonate, other plastics and resins, and other suitable substances with similar properties, specifically high-speed/low-cost moldability.

The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. For example, the abrasion system can be scaled to other commercial and industrial uses such as sand blasting. deposition delivery to a surface, and is not intended to be limited to just dermabrasion systems as disclosed. The scope of the invention is, therefore, indicated by the appended claims, rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1. An abrasive handling device for use in an abrasion apparatus, comprising:

a feeding chamber that has generally funnel-shaped portion that receives an abrasive;

a receiving channel that limits the amount of abrasive supplied to the feeding chamber;

an intake aperture, connected to a base of the feeding chamber to receive means for displacing the abrasive in a substantially vertical direction; and

a delivery channel, placed above the feeding chamber to receive the displaced abrasive.

2. The device according to claim **1** further comprising a generally funnel-shaped supply device, positioned above the feeding chamber and connected to the receiving channel.

3. The device according to claim 2 further comprising an abrading material holding container removably fitted with a funnel that fits within the supply device.

4. The device according to claim 1 wherein the device is pneumatically driven.

5. The device according to claim 1 wherein the funnel-shape of the lofting chamber forms an arc ranging approximately 40 degrees to 90 degrees.

6. The device according to claim 1 wherein the funnel-shape of the feeding chamber forms an arc of generally 60 degrees.

7. The device according to claim 4 further comprising an airflow regulator, coupled to the delivery channel, to regulate the flow abrasive during operation.

8. The device according to claim 1 wherein the delivery channel comprises an inverted funnel-shaped opening within the feeding chamber.

9. The device according to claim 1 further comprising a transition chamber disposed between the supply device and the feeding chamber.

10. The device according to claim 1, wherein the receiving channel extends within the feeding chamber a sufficient distance to control the amount of abrasive filling the feeding chamber.

11. The device according to claim 1, further comprising:

a hand piece coupled to the abrasive handling device; and

a waste retrieval holding device, coupled to the hand piece, to collect and store the abrasive and waste debris after treatment.

12. The device according to claim 11, wherein the waste retrieval holding device comprises a filter.

13. The device according to claim 12, wherein the filter comprises a fabric having pores sufficiently small to prevent the abrasive and collected waste from passing therethrough.

14. The device according to claim 12, wherein the filter is removable.

15. The device according to claim 12, wherein the waste retrieval holding device further comprises:

a waste can receiver having an intake port and a return port; and

a waste canister removably coupled to the waste can receiver at an open end of the waste canister.

16. The device according to claim 11, wherein the hand piece comprises a supply aperture and a return aperture.

17. The device according to claim 11, wherein the hand piece comprises a removable tip that has an aperture that contacts the surface to be abraded.

18. The device according to claim 2, wherein the supply device utilizes gravity to feed the abrasive to the feeding chamber.

19. The device according to claim 4, wherein a motor coupled to the abrasive handling device pneumatically drives the device.

20. The device according to claim 19, wherein the motor generates a vacuum for drawing the abrasive through the device.

21. The abrasive handling device according to claim 20, further comprising:

a delivery and retrieval hand piece coupled to the abrasive handing device;

a waste debris receiving device, coupled to the hand piece, to collect and store waste debris and the derm-abrasive after treatment; and

a massage device coupled to and operable by the motor, comprising:

a head having a concave inner wall and a rim, the concave wall defining an orifice communicating with a vacuum source and the rim having a substantially flat contact surface, the concave wall and rim defining a cavity and an opening to the cavity, the cavity being substantially semi-spherical;

a post extending from the concave inner wall toward the opening, the post being slightly recessed within the cavity and having a substantially flat contact surface, the post being substantially vertically cylindrical; and

a handle defining an internal conduit, the conduit having a first open end and a second open end, the conduit communicating with the orifice at the first open end and communicating with the vacuum source at the second open end.

* * * * *