



US006673082B2

(12) **United States Patent**
Mallett et al.

(10) **Patent No.:** **US 6,673,082 B2**
(45) **Date of Patent:** **Jan. 6, 2004**

(54) **MICRODERMABRASION HANDPIECE
WITH SUPPLY AND RETURN LUMENS**

(75) Inventors: **Scott R. Mallett**, Coto de Caza, CA
(US); **William Cohen**, Long Beach, CA
(US); **Roger G. Ignon**, Redondo Beach,
CA (US)

(73) Assignee: **Edge Systems Corporation**, Signal
Hill, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/177,173**

(22) Filed: **Jun. 20, 2002**

(65) **Prior Publication Data**

US 2002/0151908 A1 Oct. 17, 2002

Related U.S. Application Data

(62) Division of application No. 09/540,945, filed on Mar. 31,
2000.

(51) **Int. Cl.**⁷ **A61B 17/50**; A61S 35/00;
B24C 5/04

(52) **U.S. Cl.** **606/131**; 604/289; 604/290;
451/102; 451/90

(58) **Field of Search** 606/131, 132;
604/289, 290; 451/75, 89, 90, 87, 88, 102,
38, 39; 433/88, 89

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,037,432 A 8/1991 Molinari 606/131

5,100,412 A	3/1992	Rosso	606/131
5,207,034 A	5/1993	Lynn	51/425
5,207,234 A	5/1993	Rosso	128/898
5,620,414 A	4/1997	Campbell et al.	604/22
5,810,842 A	9/1998	Di Fiore et al.	606/131
5,954,730 A	9/1999	Bernabei	606/131
5,971,999 A	10/1999	Naldoni	606/131
6,019,749 A	2/2000	Fields et al.	604/313
6,039,745 A	3/2000	Di Fiore et al.	606/131
6,080,165 A	6/2000	DeJacma	606/131
6,120,512 A	9/2000	Bernabei	606/131
6,139,554 A *	10/2000	Karkar et al.	606/131
6,196,982 B1	3/2001	Ball	601/6
6,235,039 B1	5/2001	Parkin et al.	606/131
6,238,275 B1	5/2001	Metcalf et al.	451/87
6,241,739 B1	6/2001	Waldron	606/131
6,250,996 B1	6/2001	Metcalf et al.	451/87
6,277,003 B1 *	8/2001	Fernwood et al.	451/91
6,306,119 B1	10/2001	Weber et al.	604/290
6,390,899 B1 *	5/2002	Loubeyre	451/90
2001/0023351 A1	9/2001	Eilers et al.	606/131

* cited by examiner

Primary Examiner—Weilun Lo


Assistant Examiner—Linh Truong


(74) *Attorney, Agent, or Firm*—Richard L. Myers; Myers
Dawes Andras & Sherman, LLP


(57) **ABSTRACT**

A microdermabrasion handpiece includes a supply lumen and a return lumen in fluid communication with an abrasion chamber. A window formed at a distal end of the handpiece is off-centered from the supply lumen. The supply lumen directs a flow of abrasive particulate in a first direction. A supply nozzle adjacent to the distal end of the handpiece directs the flow of abrasive particulate at the window in a second direction different from the first direction. Methods for performing microdermabrasion are also provided.

18 Claims, 5 Drawing Sheets

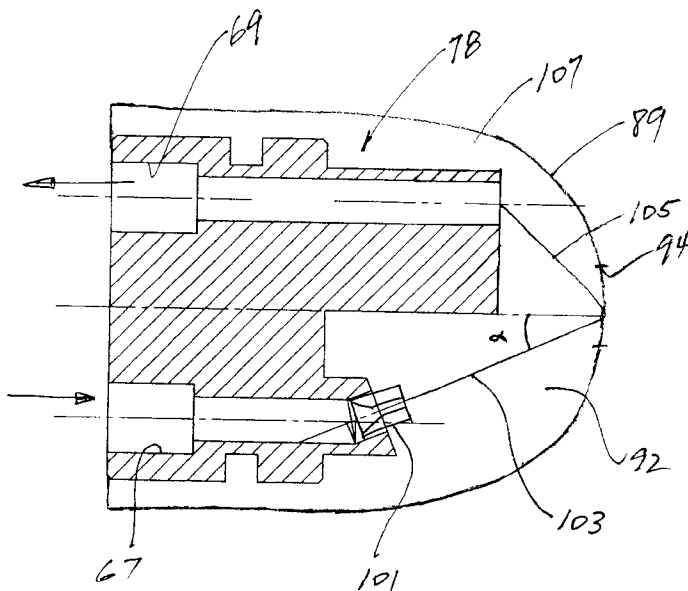

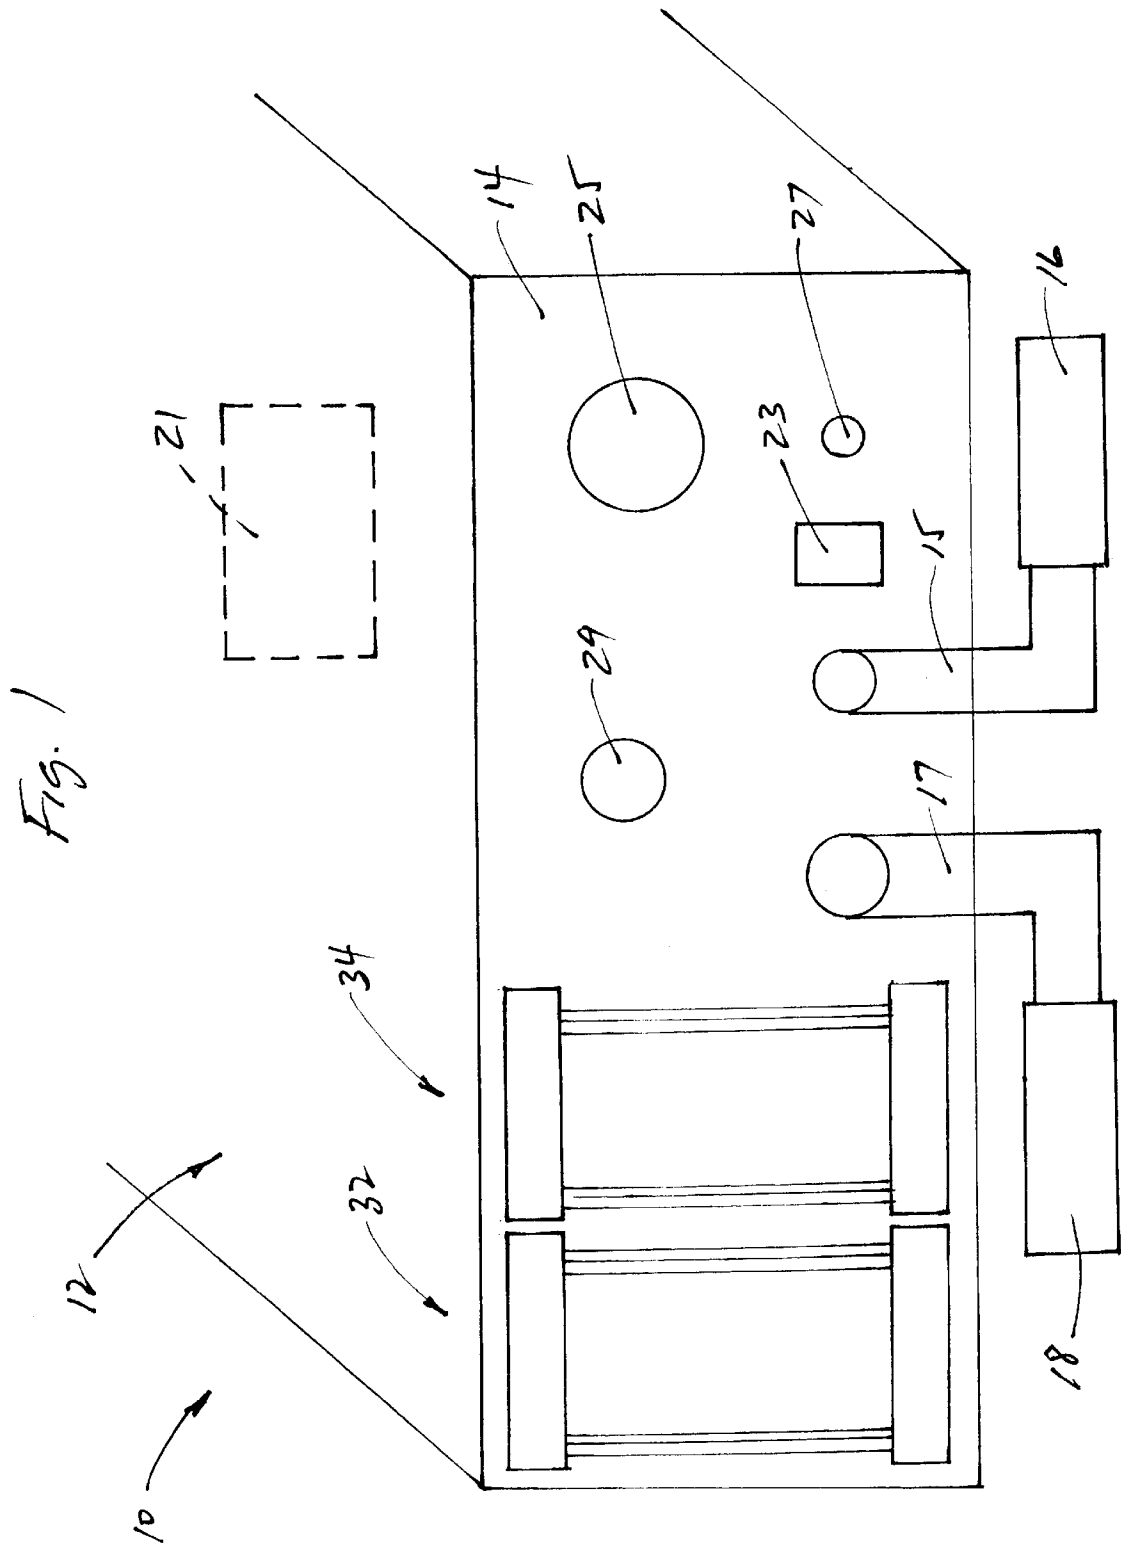

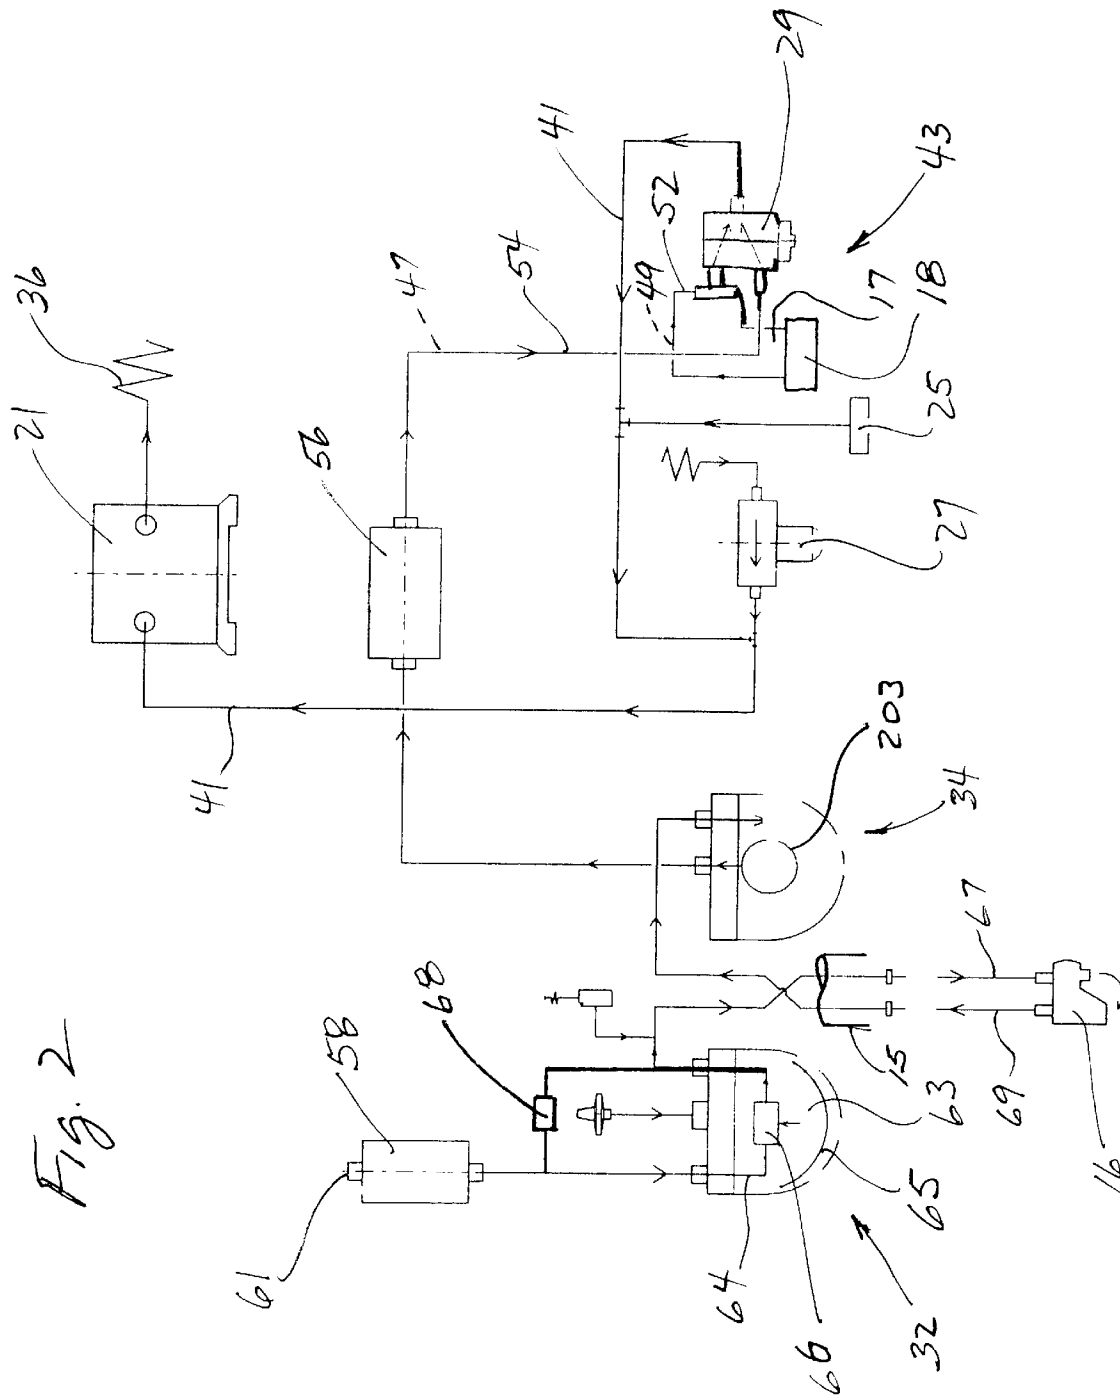

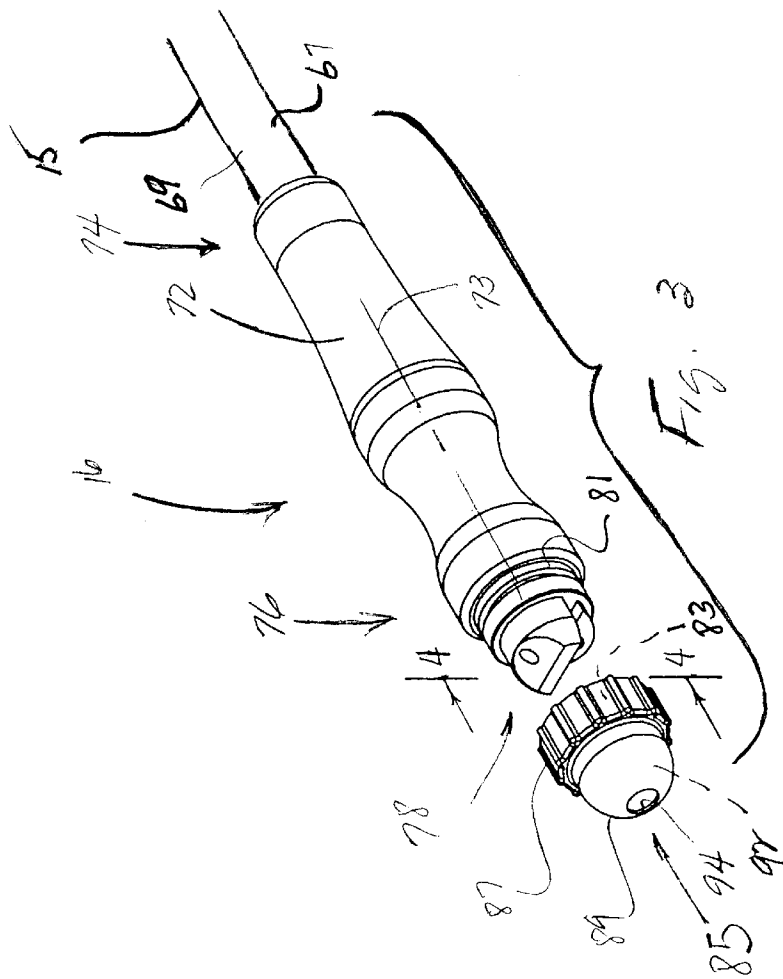


Fig. 3

Fig. 6a

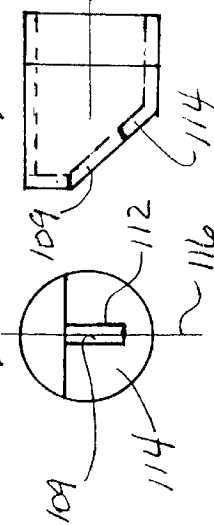


Fig. 6b




Fig. 7a






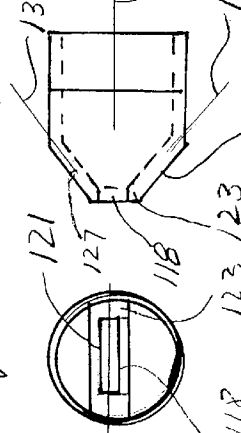


Fig. 7b

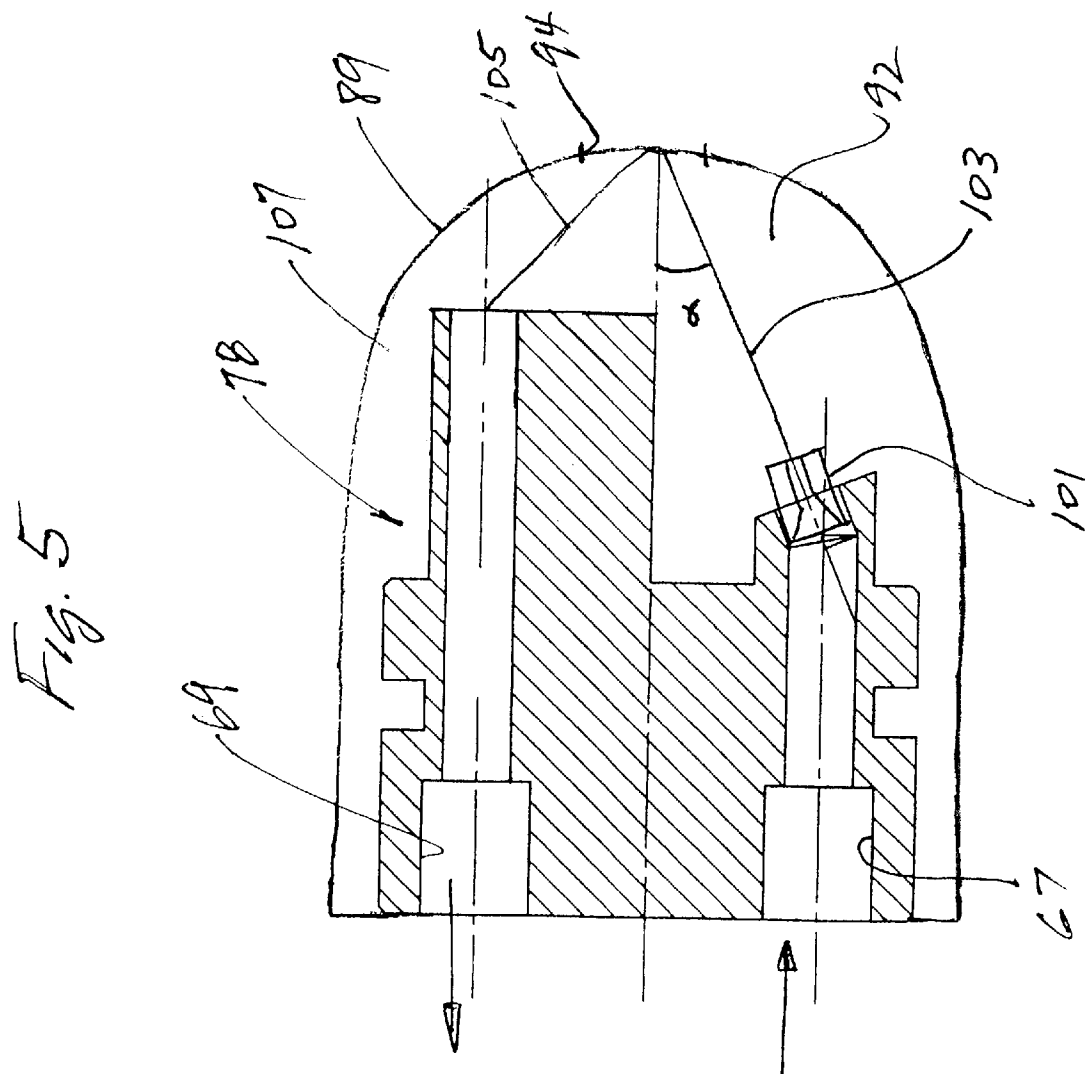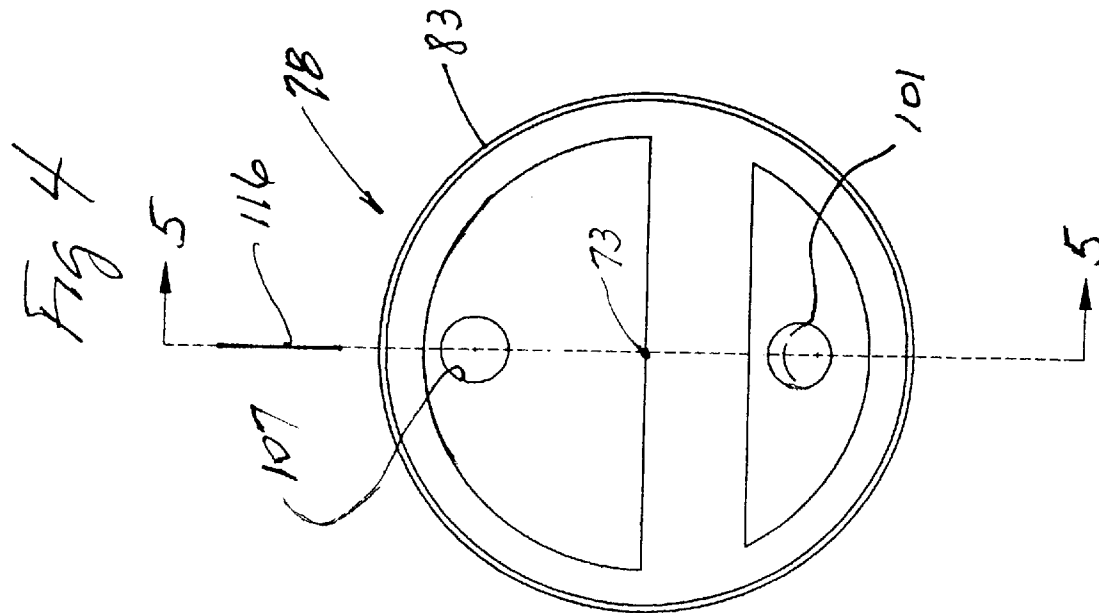

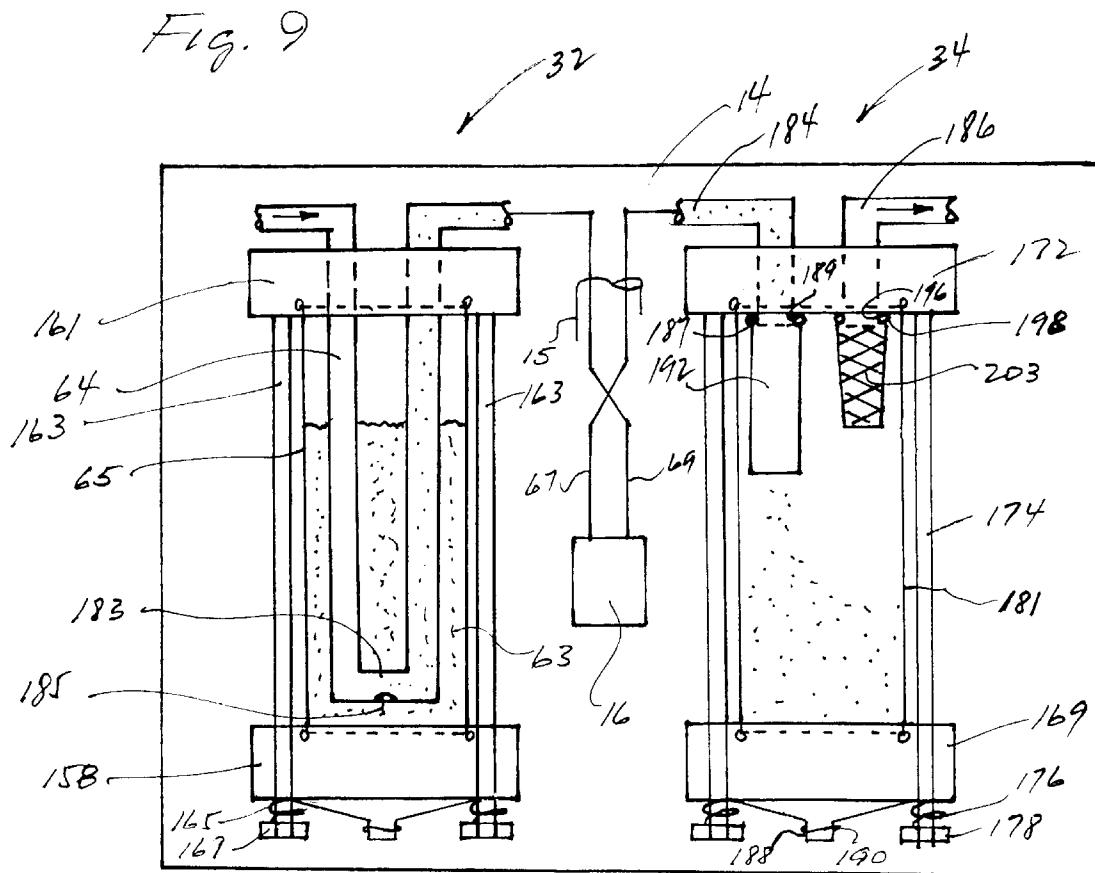

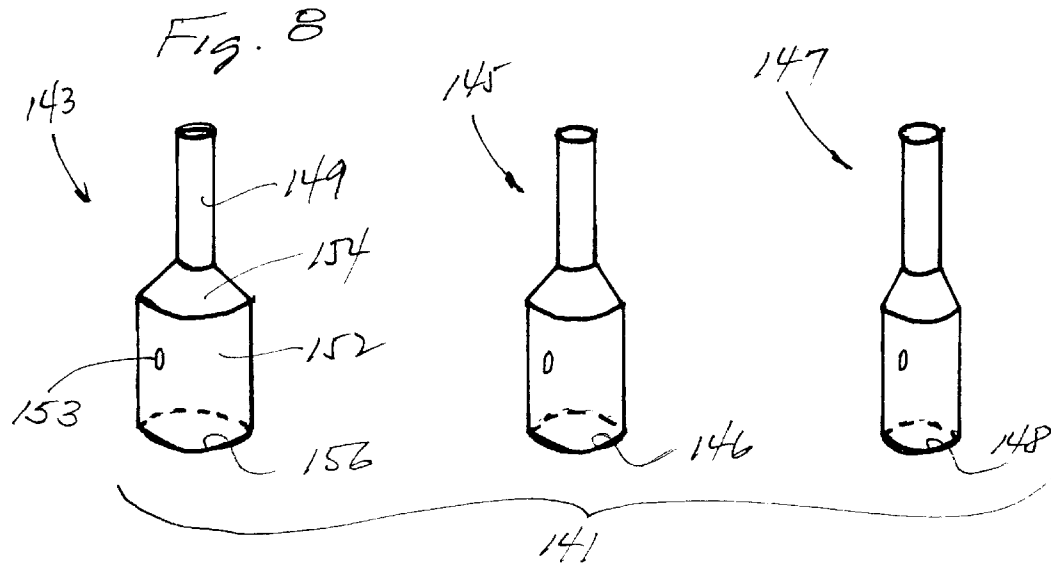

1

MICRODERMABRASION HANDPIECE WITH SUPPLY AND RETURN LUMENS

This is a divisional application of U.S. patent application
Ser. No. 09/540,945 filed on Mar. 31, 2000 and entitled the
same.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to cosmetic apparatus and
method used by a plastic surgeon, and more specifically to
skin abrasion apparatus and cellulite massage apparatus.

2. Discussion of the Prior Art

Traditional dermabrasion has been used successfully to
treat various types of scarring, for example scarring caused
by acne. Wire brush and diamond fraise techniques have
been used both, requiring local anesthesia and highly skilled
surgical techniques. Bleeding has typically occurred requir-
ing the surgeons and technicians to protect themselves from
blood spray while performing the procedure. Postoperative
complications have also been encountered.

In a new technique referred to as crystal
microdermabrasion, aluminum oxide crystals flowing in an
air stream have been applied to the skin. In this technique,
there is less bleeding, fewer complications, better
compliance, and no need for local anesthesia or high surgical
skills. In the microdermabrasion technique, the velocity and
density of crystals within the stream of air is related to the
degree of abrasion which can occur over a fixed period of
time. In the past, the crystal velocity has been controlled
primarily by providing a bleed valve for the introduction of
additional air into the stream of air. In a suction system this
tends to slow the velocity of the operative air stream and
thereby reduce the degree of abrasion. Although the velocity
is decreased, the crystal density tends to stay the same with
this approach.

Microdermabrasion handpieces have typically been
formed with handles and caps which define an abrasion
chamber. The flow of crystals and the stream of air has been
introduced into the abrasion chamber through a nozzle and
along a supply path having a distal component. A return
orifice communicating with the abrasion chamber has drawn
the flow of crystals along a return path having a proximal
component. In the past, an abrasion window has been
formed in the cap of the handpiece with the window being
disposed only in the supply path of the crystal flow. In the
past the window has been provided only with a circular
configuration. These structural limitations have not tended
to maximize the abrasive qualities of the stream.

A system for cellulite massage has been used by the same
surgeons and technicians in an apparatus heretofore separate
from the microdermabrasion apparatus. This procedure is,
commonly referred to as endermologie massage, has had as
its primary purpose the reformation of collagen fibers par-
ticularly in cellulite. Cellulite occurs as a combination of
several factors which may be hormonal, circulatory, and
nutritional. Inherent genetics also contribute to this condi-
tion where the skin tends to take an orange-peel texture.
Nippling of the skin is relieved during this treatment by the
applied suction massage. Congestion is alleviated by
increasing oxygenation in the blood circulation to the tissue
altered by cellulite. The procedure also increases exchanges
with the connective tissue and boosts the metabolism rate
allowing the body to dispose of toxins naturally. Stretching
the collagen fibers and strengthening the elastic fibers make
the surface of the skin smoother and firmer. This procedure,

2

requiring a source of vacuuming has been of particular
advantage not only in the treatment of cellulite, but also in
post-operative liposuction care. In the latter instance, post-
operative endermologie treatments have maximized results
and offered the additional advantage of keeping patients in
communication with the practice and focusing on long-term
goals. Particularly when combined with a dietary program
and exercise, repeated small-volume liposuction with ender-
mologie following each procedure, has shown significant
results.

In the endermologie procedure, a source of vacuum is
applied to a conduit terminating at an endermologie hand-
piece. The handpiece has typically been provided in the
configuration of a cylinder having a single fixed diameter.

While these two apparatus, the microdermabrasion
apparatus, and the endermologie apparatus, have commonly
been provided as separate instruments, they nevertheless
have been used by the same surgeons and technicians. More
recently, it has been found that the microdermabrasion
procedure can be facilitated by the use of an aspiration
system to promote tissue blood supply and thereby facilitate
fast healing and scar tissue repair. Under these
circumstances, the aspiration or suction system associated
with the endermologie apparatus has been found of value in
the microdermabrasion procedure. Notwithstanding this
advantageous combination, the two instruments have not
heretofore been combined in a single unit.

SUMMARY OF THE INVENTION

In accordance with the present invention, a single unit as
adapted for use with a microdermabrasion handpiece as well
as an endermologie handpiece. A stream of air is controlled
by a 3-way valve which alternatively directs the air along a
first air stream to the microdermabrasion handpiece or a
second air stream to the endermologie handpiece. The first
air stream is directed through a source of crystals which are
introduced into the first air stream to provide a flow of
crystals which is then sent to the microdermabrasion hand-
piece. With the advent of a single unit, the mere selection of
the 3-way valve permits the unit to be used for both
microdermabrasion techniques and endermologie tech-
niques. This advantage is of particular interest because the
microdermabrasion technique can be facilitated by the suc-
tion and massage associated with the endermologie tech-
nique.

Further control over the degree of abrasion can be pro-
vided by a valve which bypasses the source of crystals. A
reduction in the amount of air flowing through the source of
crystals reduces the crystal density without necessarily
affecting the crystal velocity at the handpiece.

At the source of crystals, the first air stream is directed
through a tube which is provided with a hole in communi-
cation with the crystals. This hole is sized and configured to
limit the amount of crystals which can flow into the first air
stream. Accordingly, the hole can be sized to control the
crystal density by limiting the amount of crystals which can
be introduced into a given volume of air. A larger hole results
in a higher crystal density. Using this structure in combina-
tion with a bypass valve is of significant advantage in
maximizing control over the crystal velocity density, and
hence the degree of skin abrasion.

In the microdermabrasion handpiece, the abrasion win-
dow is positioned along the cap so that it is disposed
between the supply path and the return path of the crystals.
In a particular environment, the nozzle is positioned to direct
the flow of crystals directly into the abrasion window of the

3

cap. This seems to provide the greatest control over the skin abrasion process. It has been found that rectangular holes can offer certain advantages over the circular holes of the past. In these embodiments, the long dimension of the rectangle is typically oriented generally parallel to a plane including the nozzle and the return orifice.

These and other features and advantages of the invention will become more apparent with a description of preferred embodiments and reference to the associated drawings.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a microdermabrasion and endermologie apparatus of the present invention;

FIG. 2 is the schematic view of the apparatus illustrated in FIG. 1.

FIG. 3 is an exploded view of a microdermabrasion handpiece adapted for the apparatus of FIG. 1;

FIG. 4 is a front elevation view of an air control device associated with the handpiece of FIG. 3;

FIG. 5 is a cross-section view of the air control device (taken along lines 5—5 of FIG. 4.) and the associated cap;

FIG. 6a is front elevation view of an additional embodiment of the microdermabrasion handpiece cap;

FIG. 6b is a side view and axial cross-section of the cap illustrated in FIG. 6a;

FIG. 7a is a front elevation view of a further embodiment of the microdermabrasion handpiece cap;

FIG. 7b is a side view and axial cross-section of the cap illustrated in FIG. 7a;

FIG. 8 is a side elevation view of a set of endermologie massage handpieces each offering a different size in order to permit control over the magnitude of suction and the area of application; and

FIG. 9 is a front elevation view of a crystal supply station and crystal return station associated with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS AND BEST MODE OF THE INVENTION

A preferred embodiment of the present invention is illustrated in FIG. 1 where a microdermabrasion and endermologie massage apparatus is designated by the reference numeral 10. The apparatus 10 includes a single housing 12 having a face plate 14 which is adapted for coupling through a flexible hose 15 to a microdermabrasion handpiece 16 and/or an endermologie handpiece 18. Enclosed within the single housing 12 is a single source of vacuum such as a vacuum pump 21. This pump 21 is activated by a power switch 23 and coupled through a vacuum gauge 25 and bleed valve 27 to a 3-way mode switch 29. The switch 29 is in turn coupled to the microdermabrasion handpiece 16 and endermologie handpiece 18. These coupling arrangements in a preferred embodiment are discussed in greater detail with reference to FIG. 2. A crystal supply station 32 and crystal return station 34 are disposed on the faceplate 14 of this embodiment.

The vacuum pump 21 is illustrated schematically in FIG. 2 and provides motive power for the apparatus 10. The pump 21 has an exhaust 36 and power sufficient to pull a stream of air 38 through a primary conduit 41. The magnitude of air pressure within the conduit 41 can be controlled by the bleed valve 27 which in the preferred embodiment is a needle valve.

4

As illustrated, the primary conduit 41 can be coupled to the 3-way valve or mode switch 29. By operation of this switch 29, suction can be applied alternatively to an endermologie suction 43 or a microdermabrasion section 45 of the apparatus 10. Thus the switch 29 can be used to divert the stream of air 38 alternatively to form a first air stream 49 in a secondary conduit 52 in the endermologie section 43, or alternatively to form a first stream of air 47 in a secondary conduit 54 in the microdermabrasion section 45, or alternatively a second stream of air 49 in a secondary conduit 52 in the endermologie section 43.

In the endermologie section 43 a second air stream 49 in a secondary conduit 52 provides suction at the handpiece 18. The first air stream 49 then passes back through the flexible hose 17 and into the mode switch 29 where the stream of air 38 is drawn through the primary conduit 41 by the vacuum pump 21.

Alternatively, the mode switch 29 can be set to draw the first air stream 47 through the conduit 54 in the microdermabrasion section 45. The conduit 54 is in turn coupled through HEPA filters 56, the crystal return station 34, the crystal supply station 32 and a second HEPA filter 58. The filter 58 in this case provides an air inlet 61 to the microdermabrasion section 45.

A supply of crystals 63 is disposed at the crystal supply station 32 where the secondary conduit 54 is connected to a pick-up tube 64 in a canister 65. In a manner discussed in greater detail below, the pick-up tube 64 can be provided with a crystal pick-up 66 which extends into the crystals 63 within the canister 65. In this manner a flow of the crystal 63 can be provided in the first air stream 47 as it is introduced through a supply lumen 67 in the flexible hose 15. The supply lumen 67 in turn introduces the flow of crystals 63 to the microdermabrasion handpiece 16 which is adapted to be held by the surgeon or technician and applied to the skin of the patient.

Of particular interest in the crystal supply station 32 is a bypass valve 68 which extends between the HEPA filter 58 and the supply lumen 67 of the handpiece 16. Thus the bypass valve 68 effectively extends across the inlet and the outlet of the crystal supply station 32. When the bypass valve 68 is open, suction is applied directly to the filter 68 and a portion of the air which would otherwise be input to the crystal supply station 32 is diverted to the output of the crystal supply station 32. As a result, the flow of air in the pickup tube 64 is decreased and the volume of crystals introduced into the crystal pickup 67 is commensurately reduced. At the output of the crystal supply station 32, the bypass air is recombined with the air in the pickup tube 64 so that the velocity of air introduced to the handpiece 16 is substantially constant. However, with a decrease in the volume of crystals introduced into the pickup tube 64, the density of the crystals is reduced. Thus the bypass valve 68 provides a mechanism for varying the crystal density without significantly adjusting the crystal velocity.

The used crystals 63 can be removed from the handpiece 16 through a return lumen 69 in the flexible hose 15. This flow of crystals 63 from the handpiece 16 is directed into the crystal return station 34, which is discussed in greater detail below. The debris and used crystals are removed from the first air stream 47 at the return station 34, as the first air stream 47 is directed through the filters 56 and the conduit 54 to the 3-way valve or mode switch 29. This completes the microdermabrasion section 45 of the embodiment.

In operation, the microdermabrasion section 45 would be activated through the 3-way mode selection switch 29 to

5

facilitate skin abrasion by way of the handpiece 16. At the completion of this procedure, or in a totally different procedure, the mode switch 29 could be moved to its alternate position thereby activating the endermologie section 43.

Given this operation of a preferred embodiment of the apparatus 10, details of the microdermabrasion handpiece 16 will now be discussed with reference to FIGS. 3-5. FIG. 3 is an exploded view showing a handle 72 having an axis 73 extending longitudinally between a proximal end 74 and a distal end 76. An air stream control device 78 is disposed at the distal end 76 of the handle 72 in fluid communication with the lumens 67 and 69 and the flexible hose 15. The device 78 can be provided with external threads 81 which register with internal threads 83 on a cap 85. Alternatively the cap 85 can be friction fit onto the device 78 to facilitate a proper orientation of these two structures. The cap 85 can be provided with a knurled circumference 87 and an end wall 89 which forms with the device 78 and abrasion chamber 92. An abrasion window 94 in the end wall 89 provides access to the abrasion chamber 92.

A preferred embodiment 86 of the air stream control device 78 is illustrated in greater detail in the front elevation view of FIG. 4 and the cross-section view of FIG. 5. From these views it can be seen that the device 78 can include a supply nozzle 101 which is disposed in fluid communication with the lumen 67 of the hose 15. The nozzle 101 receives the flow of crystals 63 from the supply lumen 67 and introduces that flow into the abrasion chamber 92. Importantly in this case, the nozzle 101 is positioned to direct the flow of crystals from the lumen 67 into the window 94. In an embodiment wherein the window 94 is disposed along the axis 73, and the lumen 67 is positioned in a parallel spaced relationship with the axis 73, the nozzle 101 is disposed at an angle α relative to the axis 73. Thus the flow of crystals 63 can be directed along a supply path 103 which has a distal component and an angle α relative to the axis 73. With the window 94 disposed at the distal most point of the end wall 89, the supply path 103 of this embodiment will always have a component in the distal direction.

After the flow of crystals 63 has abraded the patient's skin through the window 94, the used crystals are then drawn along a return path 105 to an orifice 107 in the device 78. This orifice 107 is in fluid communication with the return lumen 69 of the hose 15 which sucks the crystals 63 into the hose 15 and from the hose 15 into the return station 34.

It will be noted that in the embodiment of FIG. 5, the window 94 has the configuration of a circle having its center disposed along the axis 73. Other shapes for the window 94 have been found particularly advantageous. In one such embodiment illustrated in FIGS. 6a and 6b, the window 94 has the configuration of a rectangle 109 having a long side 112. This window 109 is formed in an end wall 114 which has a generally planer configuration and is positioned at an angle to the axis 73. The window 109 is formed in the end wall 114 with its long side 112 disposed generally parallel to a plane 116 (FIG. 4) passing through the nozzle 101 and orifice 107.

In another embodiment illustrated in FIGS. 7a and 7b, a rectangular window 118 similar to the window 109 and having a long side 121 is disposed in an end wall 123. This end wall 123 has a generally planer configuration and is disposed generally perpendicular to the axis 73. Extending from the window 118, are opposing sidewalls 127 and 129 which extend proximally outwardly from the associated long sides of the window 118. For example, the sidewall 127

6

extends generally parallel to the long side 121 of the window 118. Both of the side walls 127 and 129 are disposed in respective planes 132 and 134 which are generally parallel to the long side 121 and have an angular relationship with the axis 73. In a preferred embodiment, the planes 132 and 134 of the sidewalls 27 and 29, respectfully, are generally perpendicular to each other.

FIG. 8 illustrates a set 141 of three endermologie handpieces 143, 145 and 147. Each of these handpieces is similar to the handpiece 18 illustrated in FIG. 1. Thus, the handpiece 143 includes a handle section 149 which typically has a cylindrical configuration and a diameter which is comfortable for the surgeon or technician to hold in his hand. An operative section 152 is disposed distally of the handle section 149 and provided with a finger hole 153. This operative section 152 may also have a cylindrical configuration but will typically have a diameter greater than that of the handle section 149. A conical transition section 154 can be disposed between the handle section 149 and the operative section 152. A suction window 156 at the distal end of the handpiece 143 will typically have a diameter equivalent to that of the operative section 152.

The handpieces 145 and 147 can be similar to the handpiece 143 in that they will typically include a handle section, such as the section 149, and an operative section, such as the section 152. In the case of these handpieces 145 and 147, the diameter of the handle sections may be equivalent to the diameter of the handle section 149. However, the operative sections of the handpieces 145 and 147 will typically have windows 146 and 148, respectively, with diameters different than that of the window 156 in operative section 152. Thus, the set 141 will offer the surgeon or technician a choice of handpieces 143, 145 and 147 each having a suction window, such as the window 156, of different diameters. By selecting a particular one of the handpieces 143-147, a different suction pressure and size of operative area can be chosen.

Another feature of the present invention is associated with the crystal supply station 32 and crystal return station 34. In an embodiment illustrated in FIG. 9, these stations 32 and 34 each include a bottom support 158 typically fixed to the face plate 14, and a top support 161 which is attached to posts 163 that extend through holes in the bottom support 158. Beneath the bottom support 158, the posts 163 are threaded, passed through associated springs 165, and terminated in associated nuts 167. Since the top support 161 is typically not fixed to the faceplate 14, it can be biased by the springs 165 from an extended relationship to a closely spaced relationship with the bottom support 158. This structure enables the top support 161 to be moved upwardly to the extended relationship thereby permitting insertion of the canister 65 of crystals 63. Once the canister 65 is installed, the top support 161 can be released permitting the springs 165 to bias the top support 161 into the closely spaced relationship with the bottom support 158, thereby capturing the canister 65.

The crystal return station 34 can be similarly constructed with a bottom support 169, top support 172, post 174, springs 176 and nuts 178. Operation of this structure at the crystal return station 34 can similarly permit the removable installation of a disposable canister 181.

As previously discussed with referenced FIG. 2, the first air stream can be introduced through the pick-up tube 64 which extends into the crystals 63 within the canister 65. This tube 64 will typically have a U-shaped configuration thereby permitting accommodating both ends of the tubes 64 to extend through the top support 161 while allowing an

intermediate section of the tube **64** to be deeply embedded the crystal **63**. The crystal pick-up **66** is preferably disposed in this intermediate section **183** near the bottom of the canister **65**. In a preferred embodiment, the pick up **66** is formed as a hole in the wall of the tube **64** thereby providing access for the crystals **63** into the first air stream **47** in the tube **64**. The hole **66** can be carefully sized to control the amount of crystals introduced into the tube **64** per unit volume of the first air stream **47**. The larger the hole **66**, the greater the amount of crystal introduced into the stream and therefore the higher the crystal density within the first air stream. The smaller the hole the less the crystal density in the first air stream. Variations in the size of the hole **66** can be provided by removable plugs or adhesive patches associated with the intermediate section **183**.

The crystal return station **34** can be constructed in a manner similar to that of the crystal supply station **32** except that the input to the station **34** is provided by an inlet tube **184** in communication with the return lumen **69** from the tube **15**, and an exit tube **186** in communication with secondary conduit **54** the first air stream **47**. Otherwise, the bottom support **169**, top support **172**, post **174**, springs **176** and nuts **178** can function in the manner previously discussed to permit the removable insertion of the canister **181**.

The canister **181** can be provided with an O-ring **187** which defines an inlet hole **189** into the canister **181**. This O-ring **187** forms a seal with the inlet tube **184**, which is in fluid communication with the return lumen **69** of the handpiece **16**. A downspout **192** extends from the O-ring **187** into proximity with the opposite end of the canister **181**.

As the debris and used crystals **63** exit the handpiece **16**, they travel along the return lumen **69** and the inlet tube **184** to the return station **32**, where they pass through the downspout **192** and are collected in the canister **181**. In an exit passage, clean air is provided to the secondary conduit **54** which extends through a hole **196** defined by an O-ring **198** disposed in the top of the canister **181**. Attached to the O-ring **198** is a filter **203** which is preferably pleated and may be formed of paper or fabric.

The filter **203** provides filtration of the air exiting the crystal return station **34** into the conduit **54**. Since this exit air forms the first air stream which in turn must pass through the 3-way mode selector valve **29** and the vacuum pump **21**, it is important that the crystals **63**, and any fragments thereof, be removed by this exit filter **203**.

When the canister **181** is full, it can be removed by elevating the top support **172** against the bias of the springs **176** and withdrawing the canister **181** and its O-rings **187** and **196** from the associated tubes **184** and **186**. The full canister **181** can then be discarded and replaced with an empty canister **181**. Alternatively, the canister **181** can be made non-disposable and provided with a drain tube **188** and removable hemostat **190**. This configuration will enable the contents of the canister **181** to be removed through the drain **188** and collected in a biologically hazardous bag. A similar drain and hemostat can be used with a non-disposable canister **65** in the crystal supply station **32**. This configuration will enable various grit sizes to be changed through the associated drain.

Another feature of the present invention accommodates the need for back flushing all or various components of the system under certain circumstances. For example, if one of the crystals **63** becomes lodged in the hole **66** of the pickup tube **64**, it may be desirable to blow air in a reverse direction through the crystal supply station **32**. Realizing that the vacuum pump **21** will typically have an output of pressur-

ized fluid, these and similar circumstances can be accommodated by connecting various components of the system to the output of the vacuum pump **21**. The pressurized air available at this location would then be introduced into the system in a reverse direction to back flush various components. In the example noted, the output of the crystal supply station **32** could be connected to the output of the vacuum pump **21** to back flush the hole **66** and dislodge any crystals. Other components of the system which might be connected to the output of the vacuum pump **21** might include for example the conduit **41** as well as the conduits **52** and **54**, the return lumen **69** of the handpiece **16**, or the exit tube **186**.

It is of particular advantage that the microdermabrasion section **45** and endermologie section **43** can be combined in a single unit and operated from a single vacuum source and mode selector switch. Only a single unit need be purchased by the surgeon or technician in order to perform both functions. This will be particularly appreciated in those procedures where the microdermabrasion process is facilitated by suction massage.

Providing for pick up of the crystals **63** through the hole **66** directly into the tube **64** is of particular advantage and permits control over the crystal density with an appropriate choice of diameter for the crystal pick-up hole **185**. In addition, the provision of separate valves **27** and **68** in the microdermabrasion section **45**, greatly increases the control over crystal density and velocity. Where the bleed valve **27** controls crystal velocity but not crystal density, the bypass valve **68** controls crystal density but not crystal velocity.

Given these wide variations, which are all within the scope of this concept, one is cautioned not to restrict the invention to the embodiments which have been specifically disclosed and illustrated, but rather encouraged to determine the scope of the invention only with reference to the following claims.

What is claimed is:

1. A handpiece adapted for use with a microdermabrasion apparatus providing a flow of abrasive particulate to the handpiece, comprising:

a handle to be held by a user, the handle extending longitudinally between a proximal end and a distal end, the handle having a supply lumen for directing the flow of abrasive particulate in a first direction;

a cap defining with the distal end of the handle an abrasion chamber;

an outlet nozzle disposed at the distal end of the handle in communication with the microdermabrasion apparatus and the abrasion chamber of the cap, for directing the flow of abrasive particulate in a second direction different from the first direction and for introducing the flow of abrasive particulate into the abrasion chamber along a supply path having a direction with a distal component;

a return orifice defined at the distal end of the handle in communication with the abrasion chamber for receiving the flow of used abrasive particulate from the abrasion chamber along a return path having a proximal component; and

the cap having portions defining a window in communication with the abrasion chamber and regions exterior of the handpiece, the window extending along portions of both the supply path and the return path.

2. The handpiece recited in claim 1, further comprising: the nozzle being disposed to direct the flow of the abrasive particulate at the window so that the supply path extends into the window.

9

3. The handpiece recited in claim 1 wherein the window is generally circular.

4. The handpiece recited in claim 1 wherein the window is generally rectangular.

5. The handpiece recited in claim 4 wherein the nozzle and the orifice are disposed in a common plane.

6. The handpiece recited in claim 5 wherein the window has a long side disposed generally parallel to the common plane.

7. The handpiece recited in claim 5 wherein the rectangle has a long side oriented generally perpendicular to the common plane.

8. A handpiece adapted for use with a microdermabrasion apparatus providing a flow of abrasive particulate to the handpiece, comprising:

a handle to be held by a user, the handle extending longitudinally between a proximal end and a distal end, the handle comprising a supply lumen for directing the flow of abrasive particulate in a first direction;

a cap defining with the distal end of the handle an abrasion chamber, the cap defining a window in communication with the abrasion chamber;

means for directing the flow of abrasive particulate in a second direction at the window, the second direction being different from the first direction; and

a return orifice defined at the distal end of the handle in communication with the abrasion chamber for receiving the flow of used abrasive particulate from the abrasion chamber.

9. The handpiece recited in claim 8 wherein:

the handle defines an axis; and

the directing means is positioned at an angle relative to the axis.

10. The handpiece recited in claim 9 wherein the window is generally circular.

11. The handpiece recited in claim 9 wherein the window is generally rectangular.

10

12. The handpiece recited in claim 11 wherein the directing means and the orifice are disposed in a common plane.

13. The handpiece recited in claim 12 wherein the window has a long side disposed generally parallel to the common plane.

14. The handpiece recited in claim 12 wherein the window has a long side oriented generally perpendicular to the common plane.

15. A method for performing microdermabrasion on a patient's skin, comprising the steps of:

providing a microdermabrasion apparatus with a supply lumen, a return lumen, and a window

introducing a flow of crystals in a first direction through the supply lumen;

directing the flow of crystals from the supply lumen at the window in a second direction different from the first direction;

abrading the patient's skin with the crystals; and

drawing the crystals in a proximal direction through the return lumen.

16. The method recited in claim 15, wherein the directing step comprises the steps of:

disposing a nozzle at a distal end of the supply lumen; and positioning the nozzle to direct the flow crystals at the window.

17. The method recited in claim 15, wherein the abrading step further comprises the step of:

abrading the patient's skin with the crystals through a circular window.

18. The method recited in claim 15, wherein the abrading step further comprises the step of:

abrading the patient's skin with the crystals through a rectangular window.

* * * * *