



US 20060234778A1

(19) **United States**(12) **Patent Application Publication**
Matsushita et al.(10) **Pub. No.: US 2006/0234778 A1**(43) **Pub. Date: Oct. 19, 2006**(54) **WIRELESS COMMUNICATIONS TERMINAL,
COMMUNICATIONS PROTOCOL
SWITCHING METHOD, COMMUNICATIONS
PROTOCOL SWITCHING PROGRAM, AND
INTEGRATED CIRCUIT OF WIRELESS
COMMUNICATIONS TERMINAL****Publication Classification**(51) **Int. Cl.**
H04B 1/38 (2006.01)
H04M 1/00 (2006.01)
(52) **U.S. Cl.** **455/565**(76) Inventors: **Yuka Matsushita**, Higashihiroshima
(JP); **Tadakatsu Masaki**, Urasoe (JP);
Eiji Ueda, Kure-shi (JP)

Correspondence Address:

WENDEROTH, LIND & PONACK L.L.P.
2033 K. STREET, NW
SUITE 800
WASHINGTON, DC 20006 (US)(21) Appl. No.: **10/553,008**(22) PCT Filed: **May 2, 2005**(86) PCT No.: **PCT/JP05/08660**(30) **Foreign Application Priority Data**

May 21, 2004 (JP) 2004-151271

(57) **ABSTRACT**

The present invention provides a wireless communications terminal capable of preventing radio interferences from being caused by other wireless communications concurrent with a contactless communications. A wireless communications terminal (101) receives, in a contactless communications, a command from a reader/writer (105) via a second wireless communications section (209), and analyzes the received command. The wireless communications terminal (101) controls a wireless communications control section (210) to deactivate or temporarily deactivate the function of a first wireless communications section (208) depending on the analysis of the command. After the function of the first wireless communications section (208) is deactivated or temporarily deactivated, the wireless communications terminal (101) accesses a memory area of an IC card micro-computer system (300) as specified by the command to perform a contactless communications.

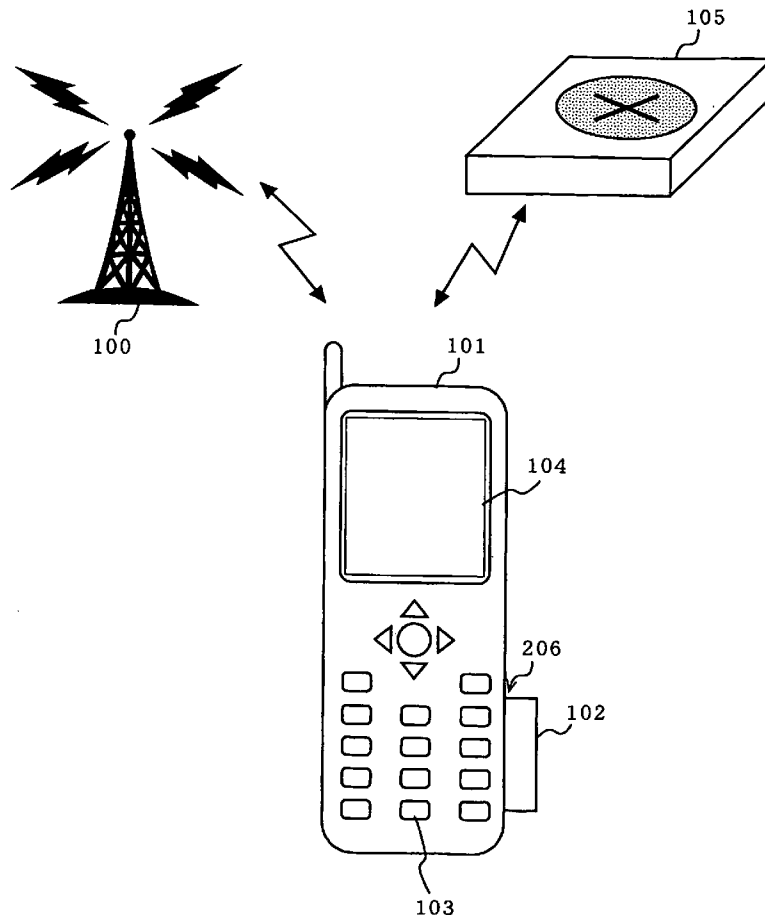


FIG. 1

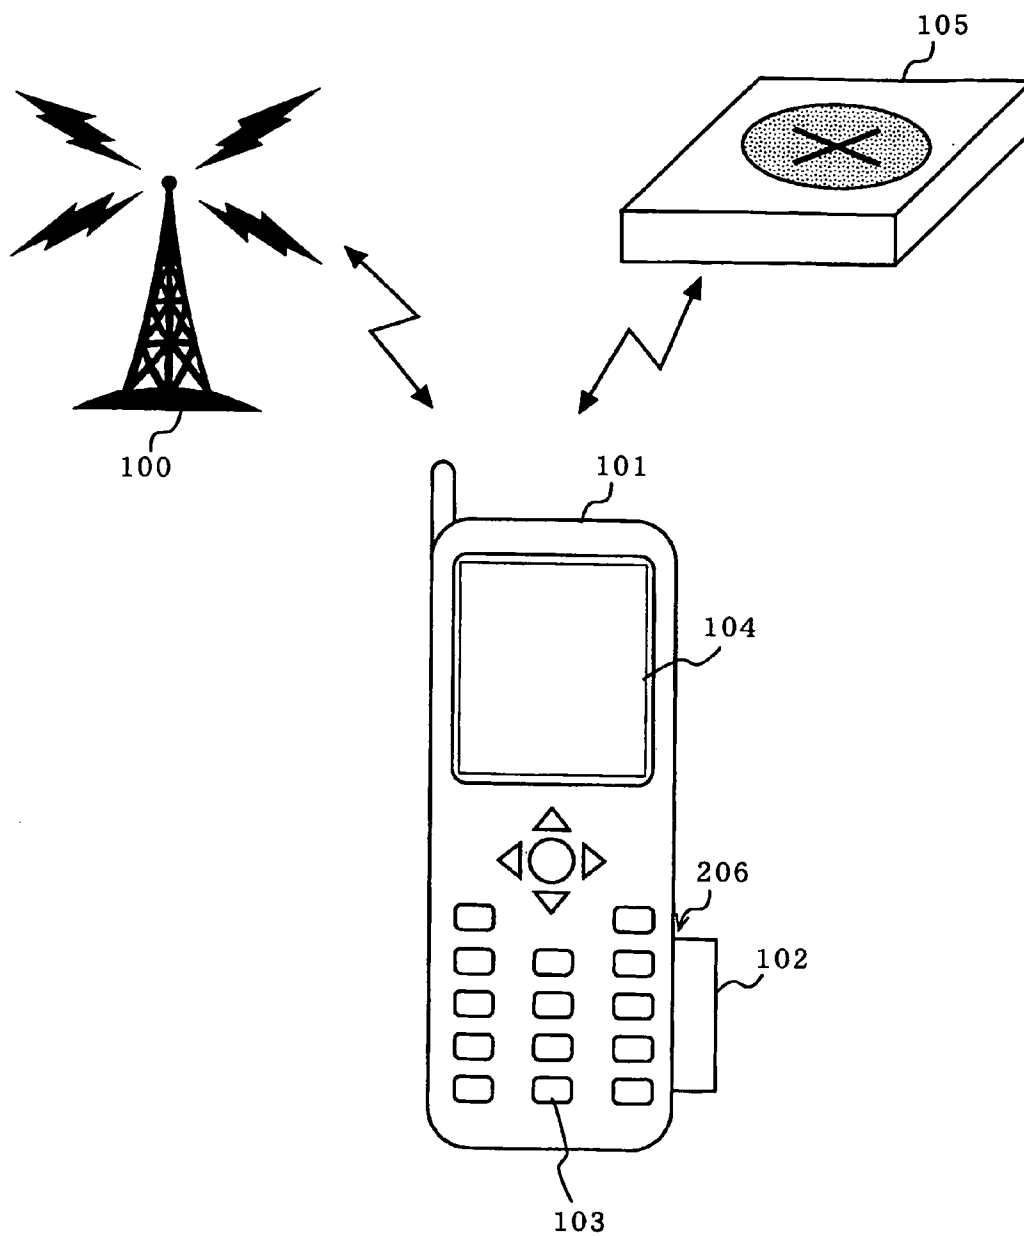


FIG. 2

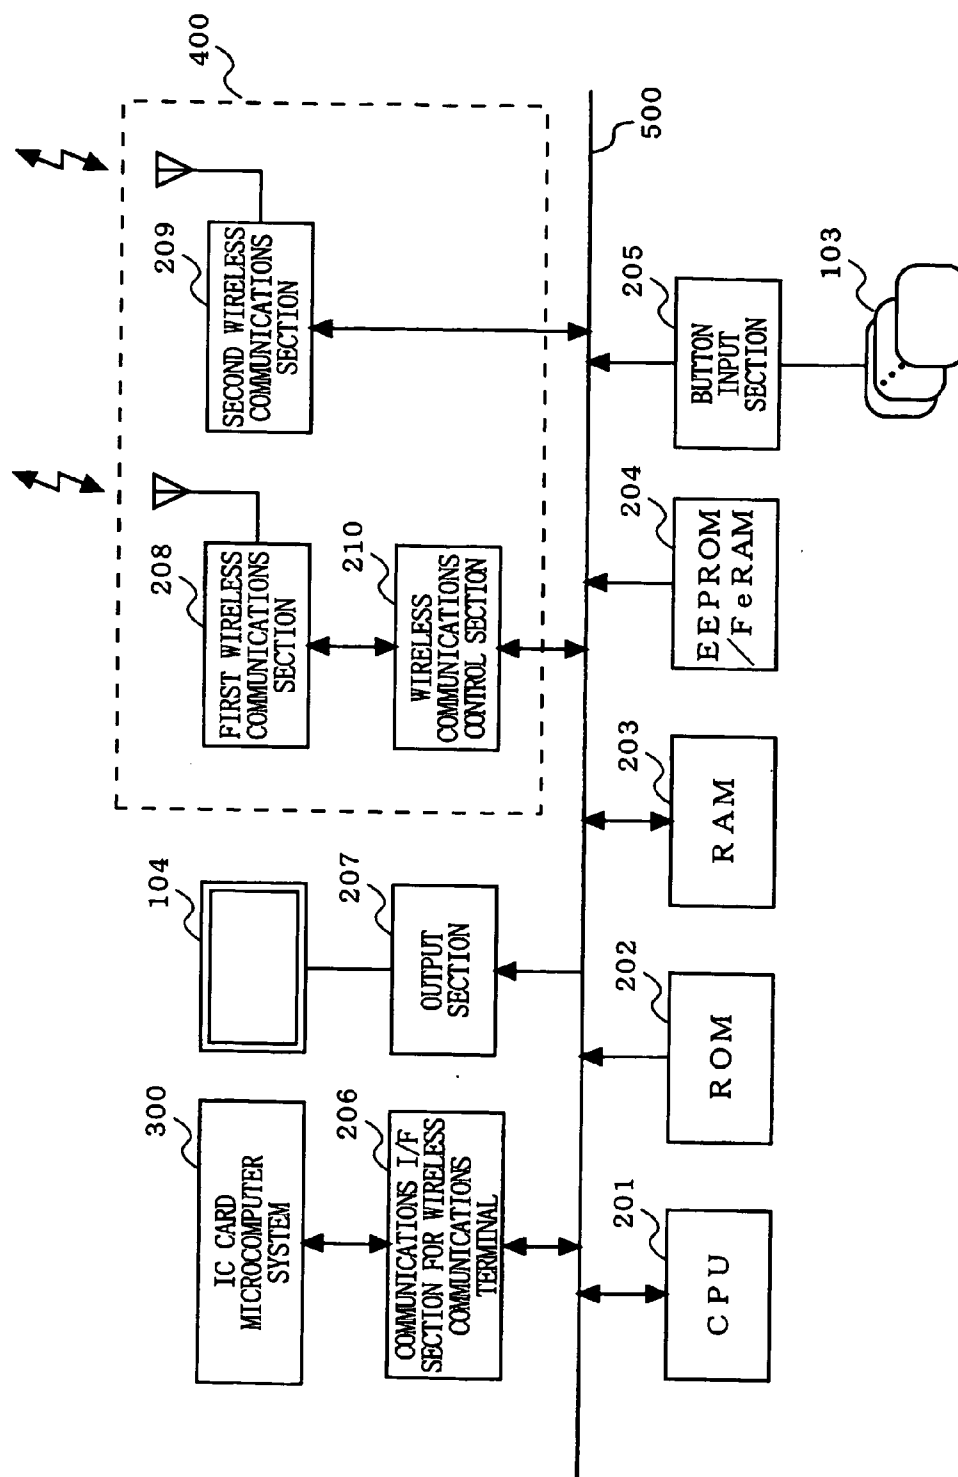


FIG. 3

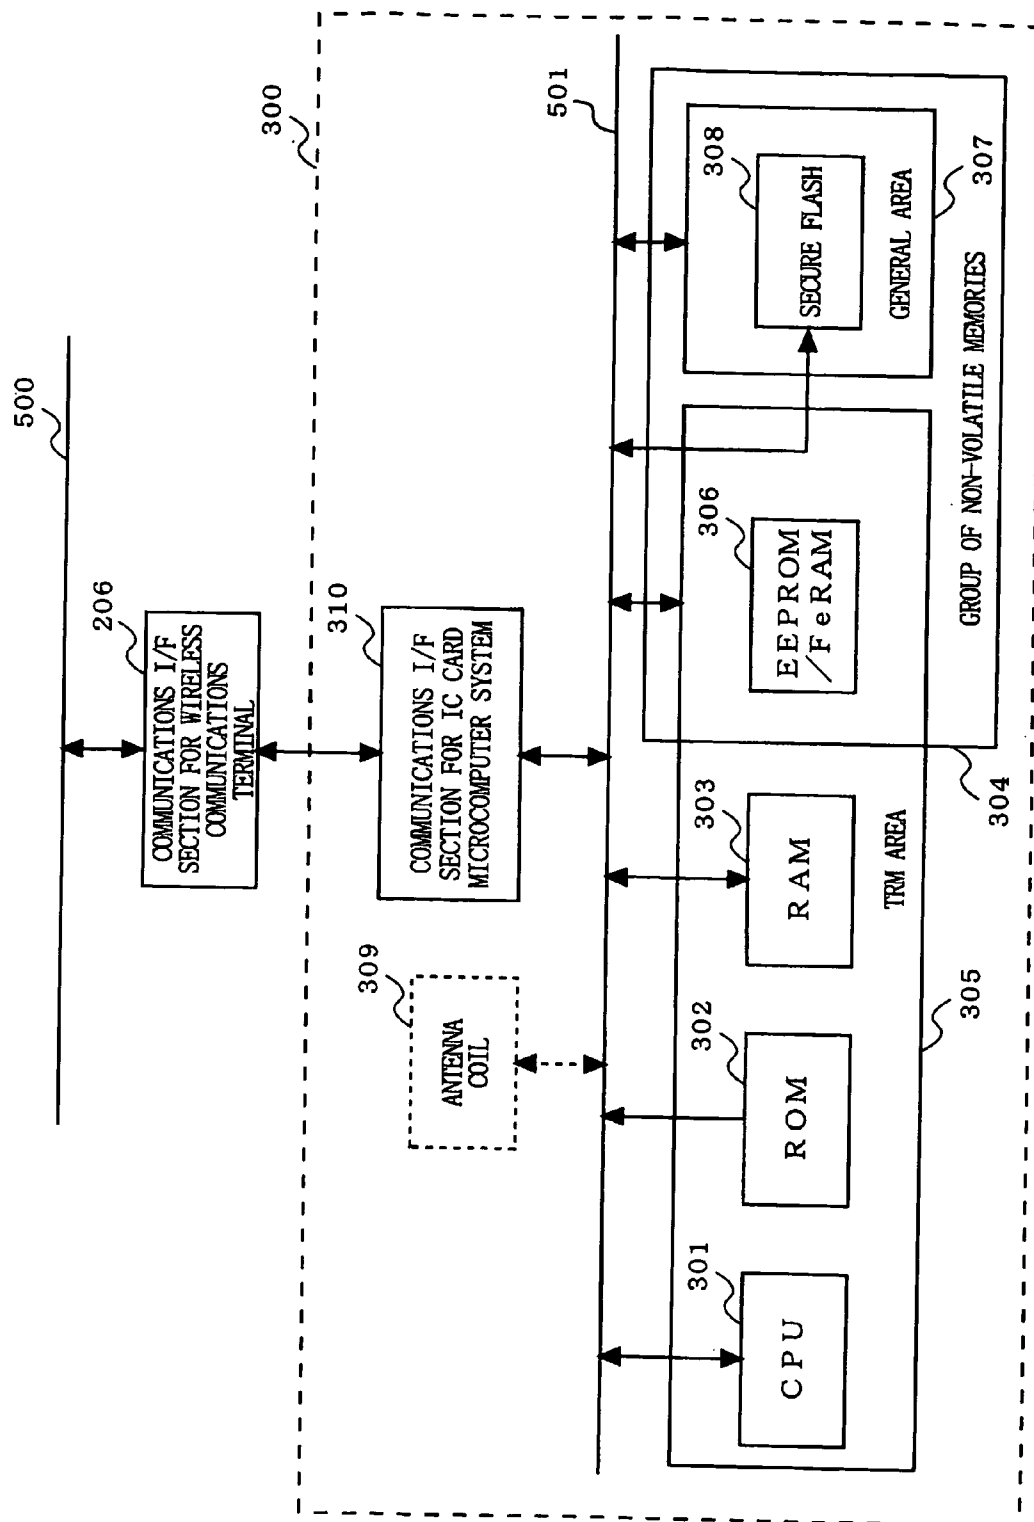


FIG. 4

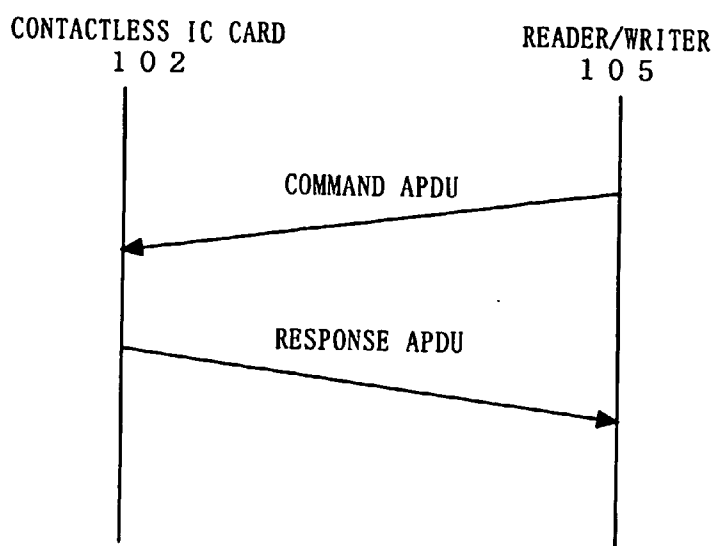


FIG. 5

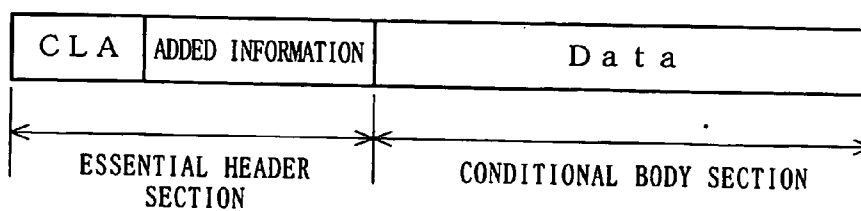


FIG. 6

CLA								
b8	b7	b6	b5	b4	b3	b2	b1	MEANING
0	0	0	0					COMMON COMMAND
1	0	0	0					UNIQUE COMMAND

FIG. 7

SECURITY LEVEL	GROUP OF NON-VOLATILE MEMORIES	VALUE	C L A		
			b3	b2	b1
HIGH	TRM AREA	03h	0	1	1
MEDIUM	SECURE FLASH	02h	0	1	0
LOW	GENERAL AREA	01h	0	0	1

FIG. 8

C L A b 4	
READ	0
WRITE	1

FIG. 9

COMMAND	C L A								VALUE
	b8	b7	b6	b5	b4	b3	b2	b1	
TRM AREA	1	0	0	0	0	0	1	1	83h
SECURE FLASH	1	0	0	0	1	0	1	0	8ah
GENERAL AREA	1	0	0	0	0	0	0	1	81h

FIG. 10A

COMMAND	CLA VALUE	ADDED INFORMATION	Data			
			Len	Offset	Size	ACTUAL DATA
TRM AREA	83h	XXh	04h	4000h	0fh	00h
SECURE FLASH	8ah	XXh	23h	1200h	20h	XXh
GENERAL AREA	81h	XXh	04h	8030h	30h	00h

FIG. 10B

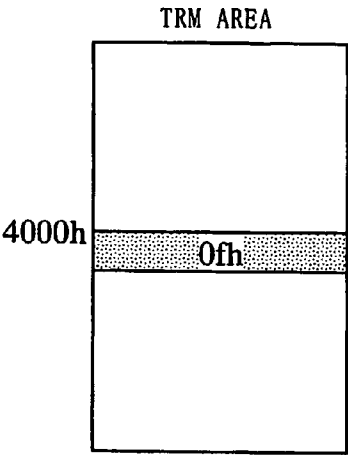


FIG. 10C

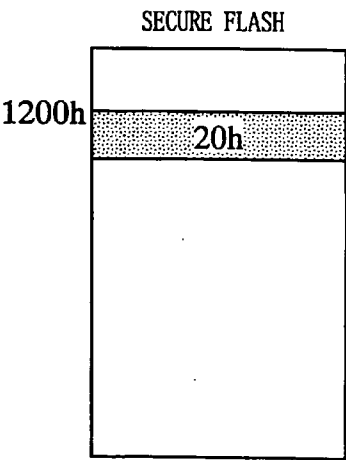


FIG. 10D GENERAL AREA

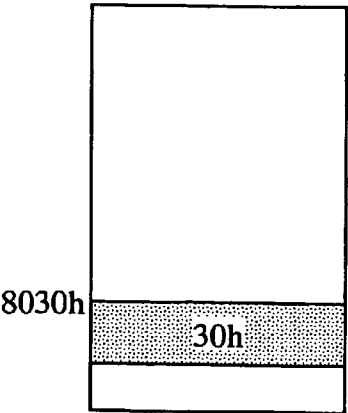


FIG. 11

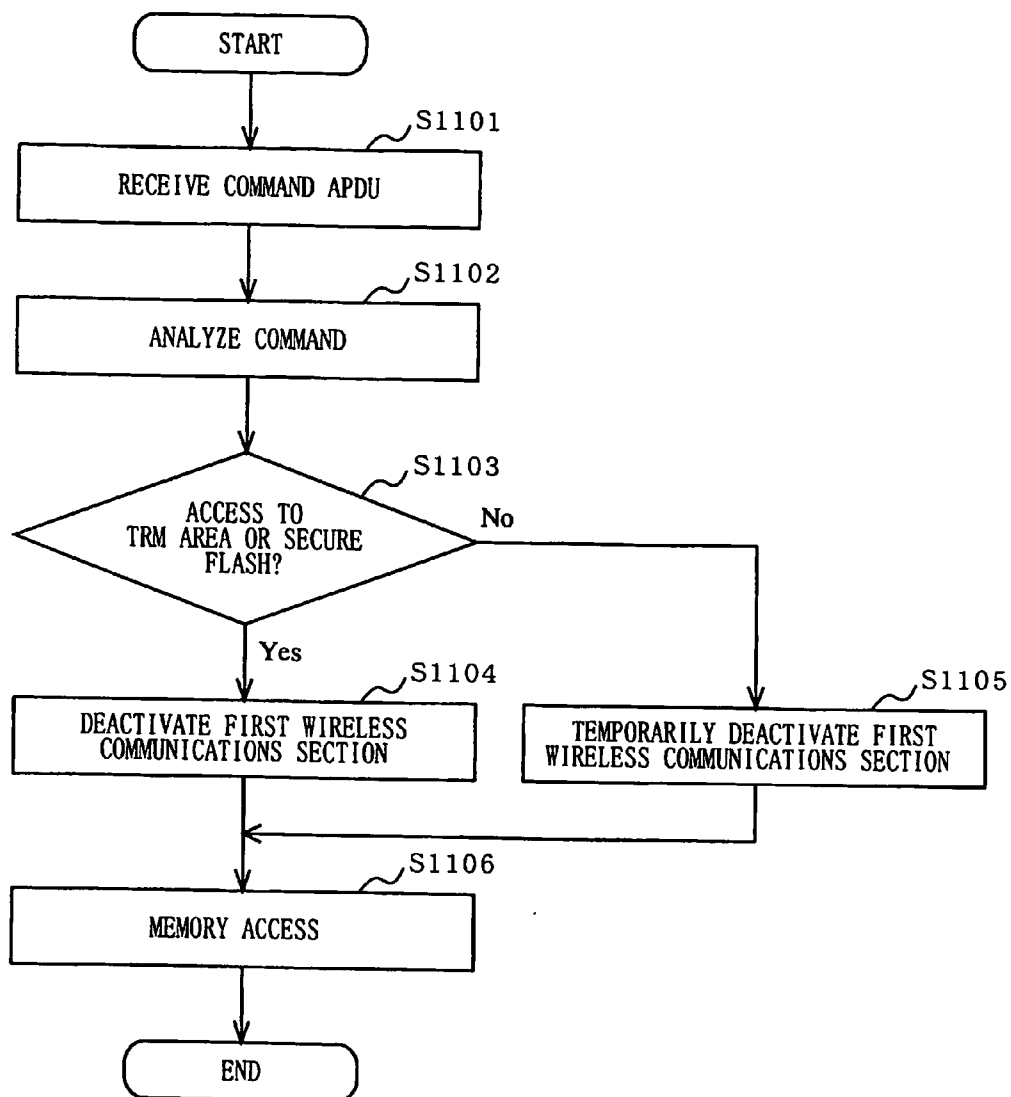


FIG. 12

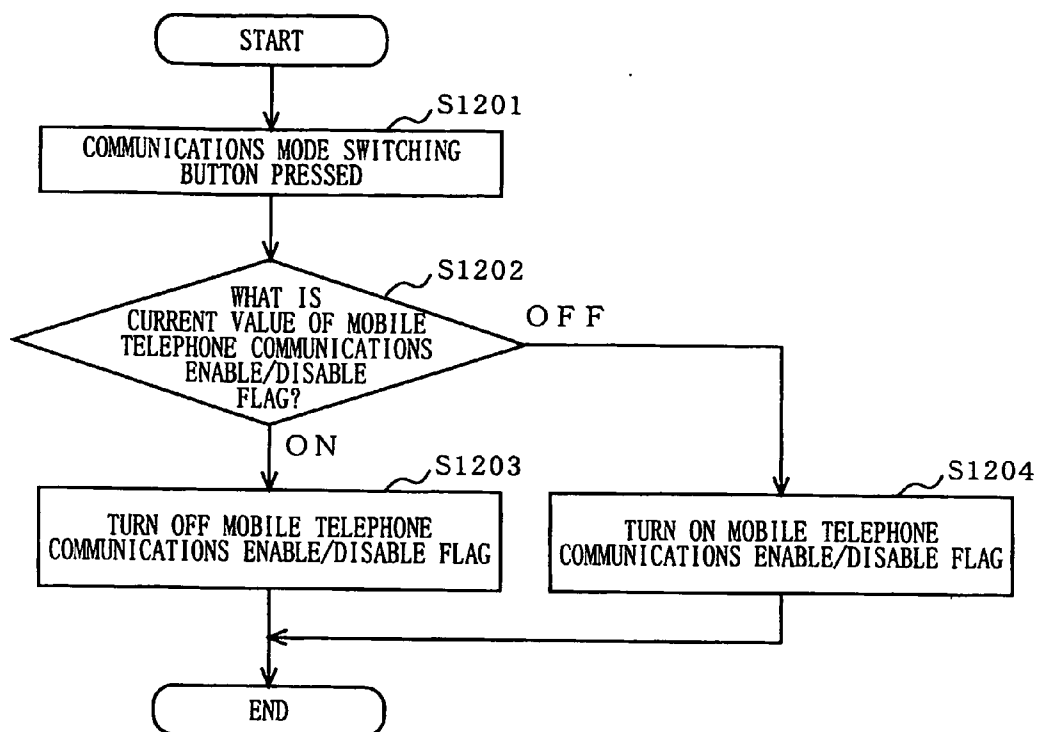


FIG. 13




FIG. 14

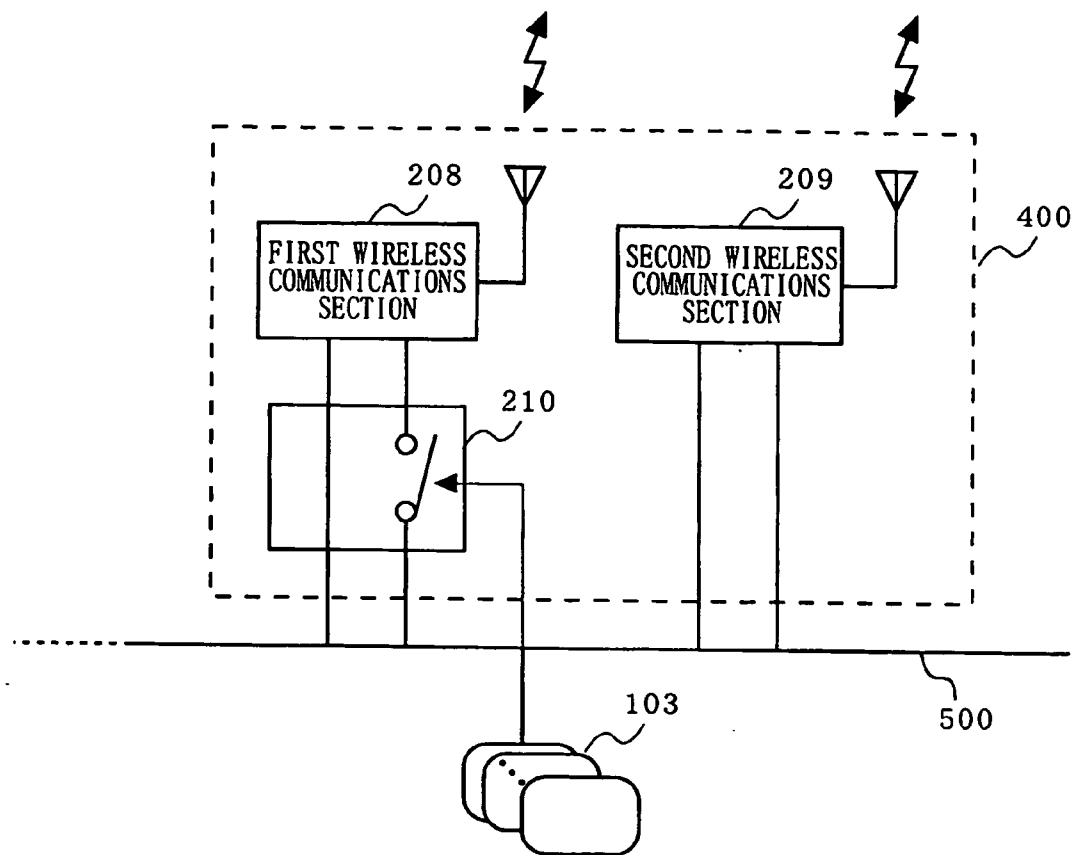


FIG. 15

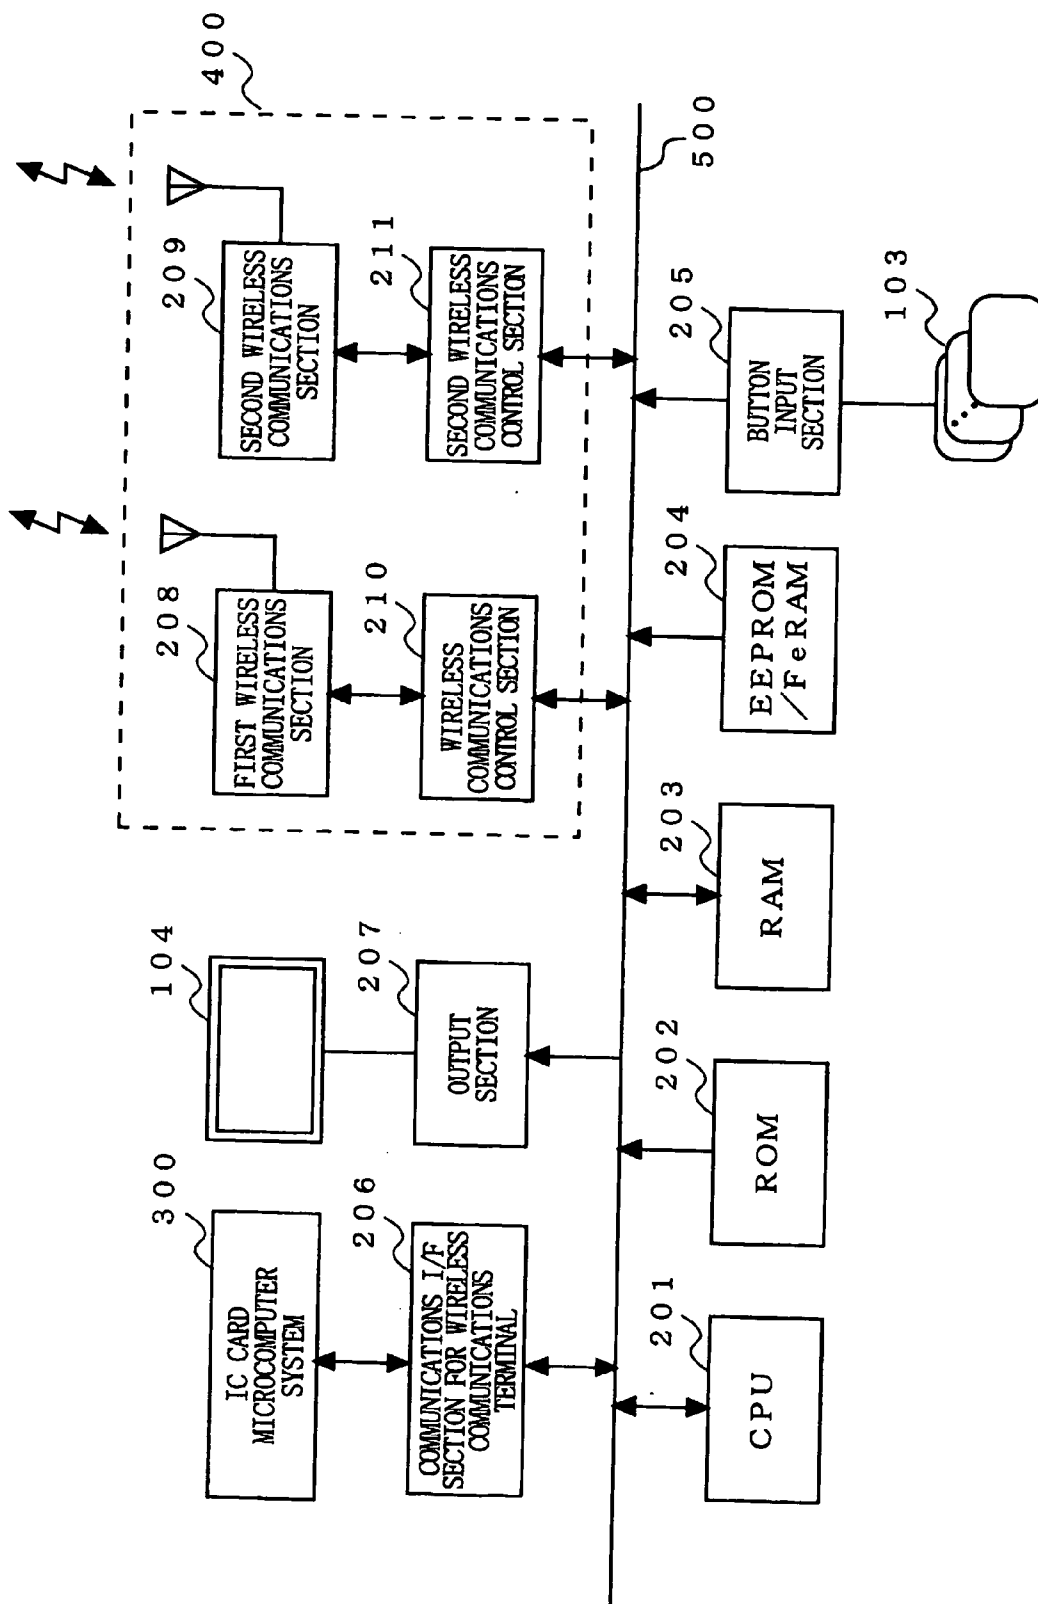


FIG. 16

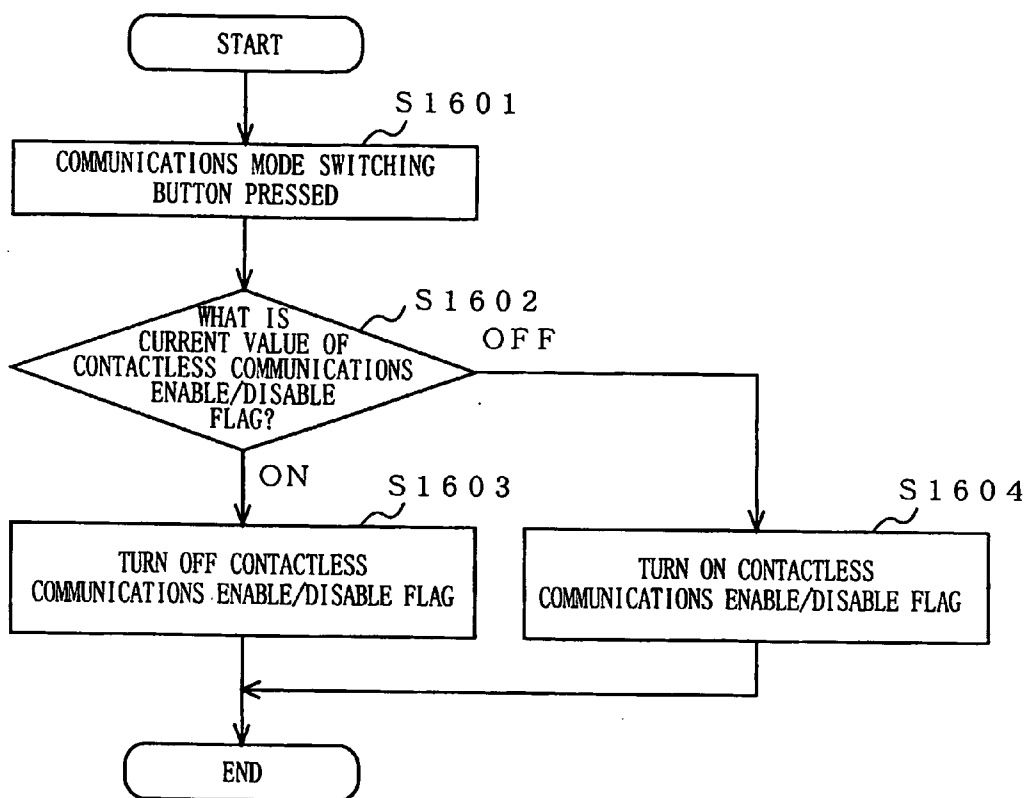


FIG. 17




FIG. 18

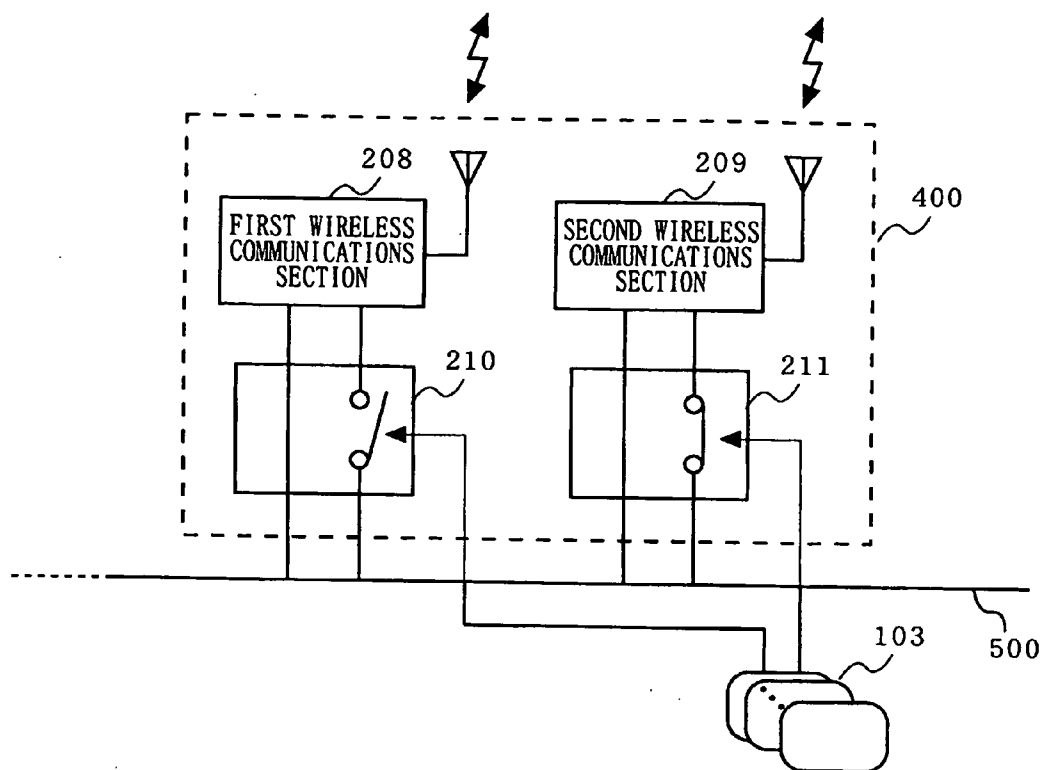


FIG. 19

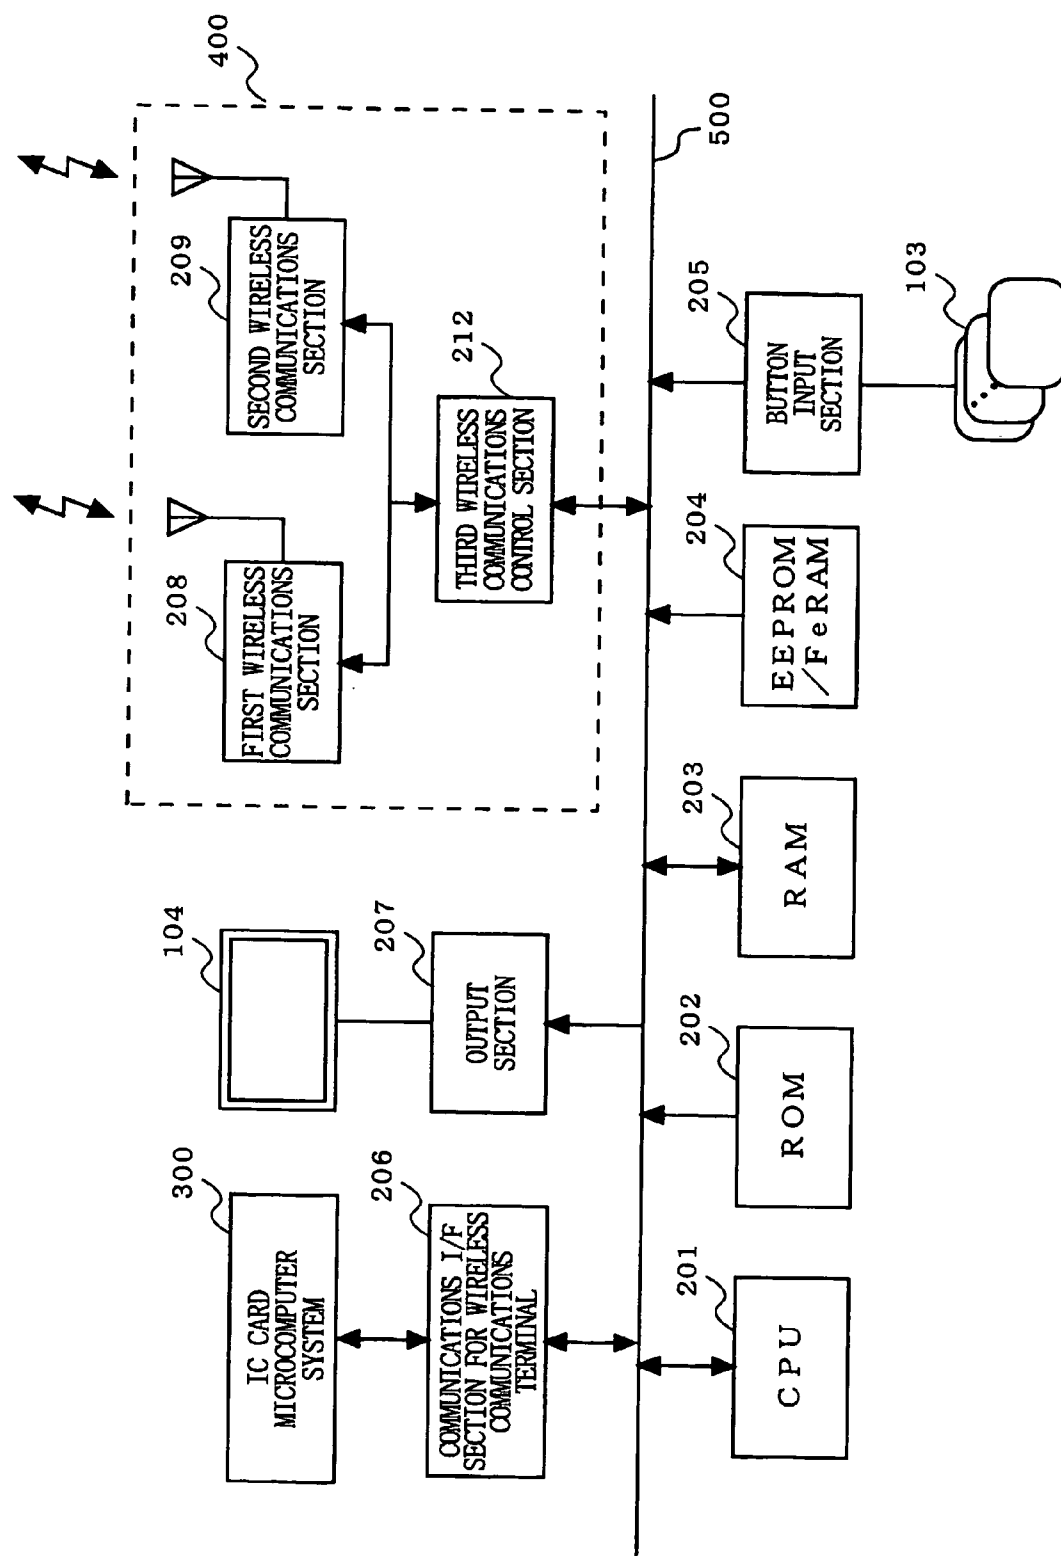


FIG. 20

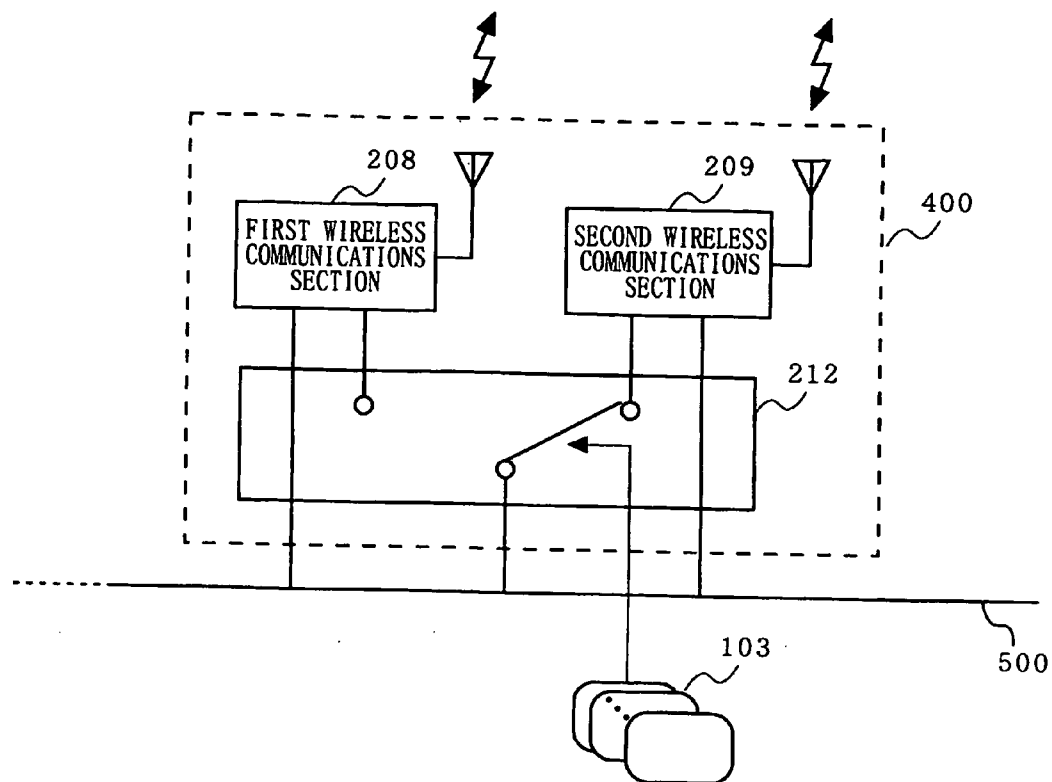


FIG. 21

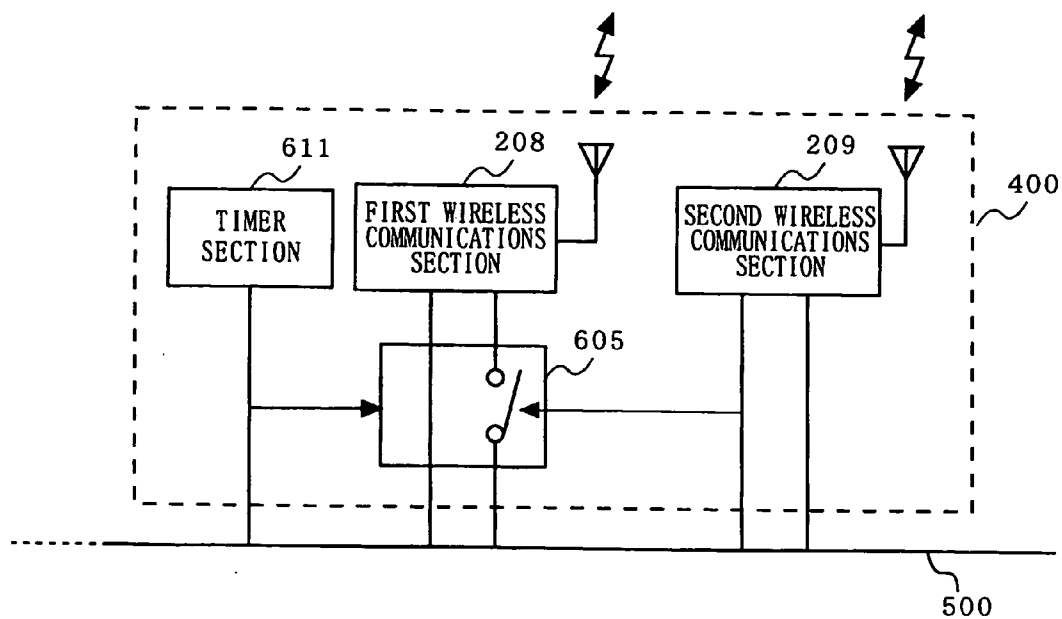


FIG. 22

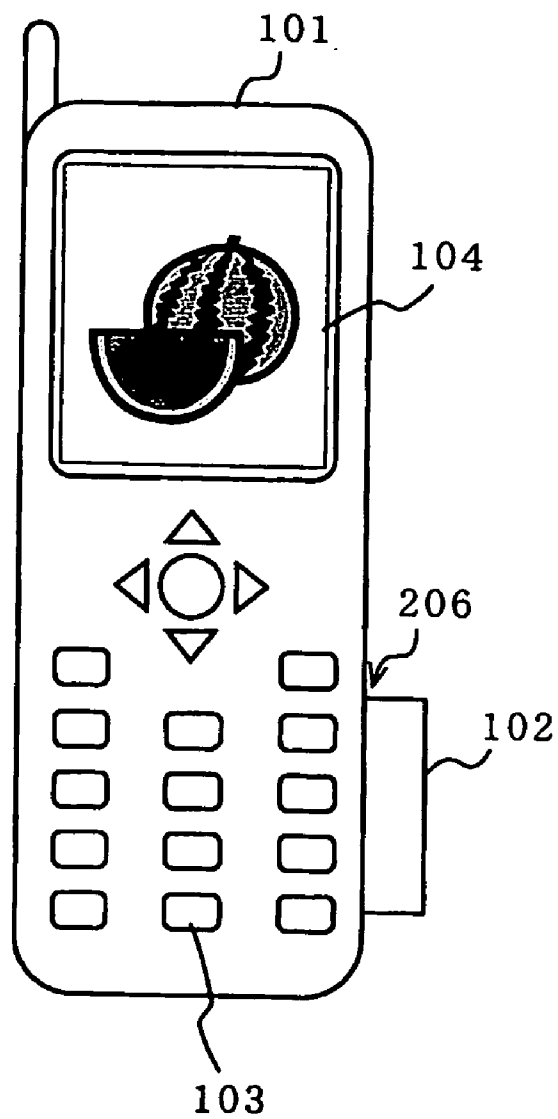


FIG. 23


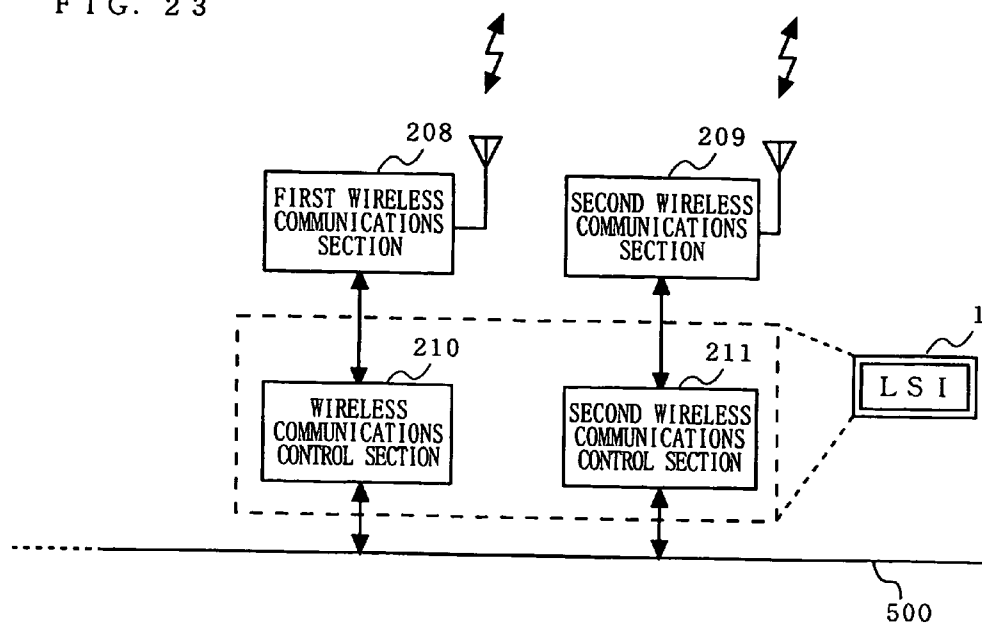


FIG. 24

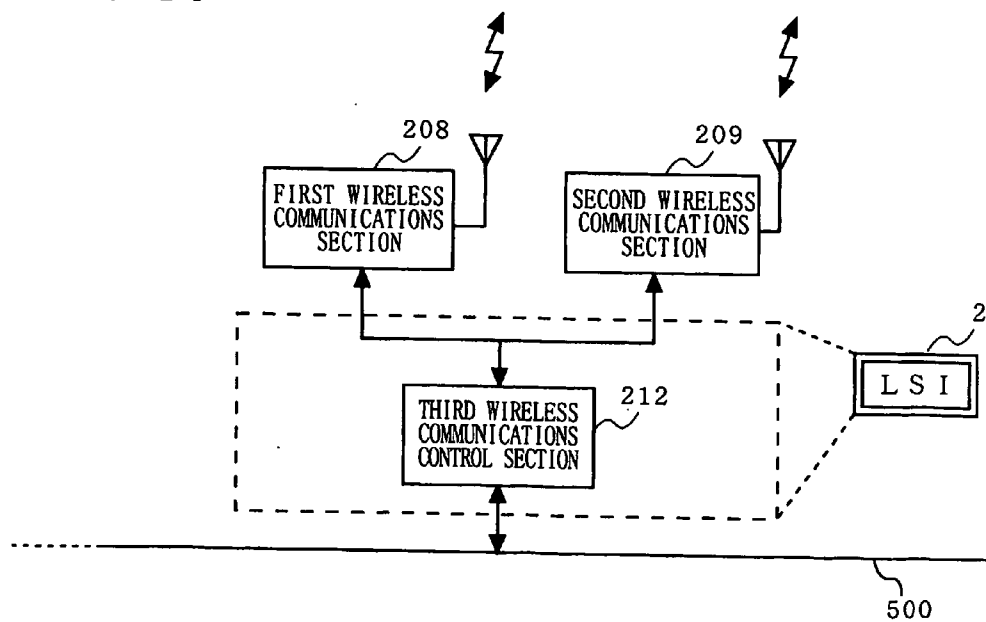

**WIRELESS COMMUNICATIONS TERMINAL,
COMMUNICATIONS PROTOCOL SWITCHING
METHOD, COMMUNICATIONS PROTOCOL
SWITCHING PROGRAM, AND INTEGRATED
CIRCUIT OF WIRELESS COMMUNICATIONS
TERMINAL**

TECHNICAL FIELD

[0001] The present invention relates to a wireless communications terminal capable of performing a contactless communications and a wireless communications. More particularly, the present invention relates to a wireless communications terminal capable of restricting a particular wireless communications function that may cause radio interferences with a contactless communications, and a communications protocol switching method used by such a wireless communications terminal.

BACKGROUND ART

[0002] Recently, there is a system where an IC chip storing information therein is provided in a wireless communications terminal such as a mobile telephone, so that the holder of the mobile telephone can pass through an automatic ticket gate while establishing a contactless communications between the IC chip and a reader/writer in the automatic ticket gate via the mobile telephone.

[0003] It is expected that a wireless communications terminal will be provided with a plurality of wireless communications functions in the future. Examples of wireless communications functions include PDC, W-CDMA, Bluetooth, GPS (Global Positioning System), wireless LAN, UWB (Ultra Wide Band), wireless tag, radio, TV, etc. These wireless communications functions use frequency bands as follows: PDC uses 800 MHz/1.5 MHz/1.9 MHz, W-CDMA 2 GHz, Bluetooth 2.4 GHz, GPS 1.57 GHz, wireless LAN 2.4 GHz/5 GHz, UWB 1.5 GHz or higher, wireless tag 135 kHz/13.56 MHz/860 to 960 MHz/2.45 GHz, radio 0.531 to 1.602 MHz/76.0 to 90.0 MHz, and TV 95.75 to 107.75 MHz/175.75 to 221.75 MHz/475.75 to 769.75 MHz.

[0004] If these wireless communications functions are provided in a single wireless communications terminal, it is likely that there will be radio interferences between different communications sections. For example, if a mobile telephone receives a call when the holder of the mobile telephone is passing through an automatic ticket gate and a contactless communications has been established, a radio interference may occur, whereby the ticket data may not be exchanged properly.

[0005] In order to avoid radio interferences, a conventional technique employs a structure in a mobile telephone in which a wireless communications section and a contactless communications section are spaced apart from each other as much as possible. With such a structure, there will less likely be radio interferences caused by other wireless communications concurrent with a contactless communications.

DISCLOSURE OF THE INVENTION

[0006] With this conventional structure, however, it is not possible to completely eliminate radio interferences caused by other wireless communications concurrent with a con-

tactless communications. Therefore, this structure cannot be employed for highly secure communications systems. For example, it cannot be employed for a communications system where electronic money is exchanged between a mobile telephone and an automatic ticket gate. Moreover, with this conventional structure, the likelihood of radio interferences is reduced to the same degree, irrespective of the type of information to be exchanged in a contactless communications. Therefore, it is not suitable for cases where the degree to which the likelihood of radio interferences is reduced should be variable depending on the type of information to be exchanged in a contactless communications.

[0007] Therefore, an object of the present invention is to provide a wireless communications terminal capable of restricting other wireless communications depending on the information to be exchanged in a contactless communications so as to prevent radio interferences from being caused by other wireless communications concurrent with the contactless communications.

[0008] The present invention is directed to a wireless communications terminal capable of performing a contactless communications and at least one wireless communications. In order to attain the object mentioned above, the wireless communications terminal of the present invention includes: a first wireless communications section operable to perform a wireless communications other than a contactless communications; a second wireless communications section operable to perform a contactless communications; and a wireless communications control section operable to restrict a wireless communications performed by the first wireless communications section based on a status of a contactless communications performed by the second wireless communications section.

[0009] Typically, the wireless communications control section starts restricting a wireless communications performed by the first wireless communications section in response to an initiation of a contactless communications by the second wireless communications section. It is preferred that the wireless communications control section deactivates or temporarily deactivates a wireless communications function of the first wireless communications section based on a security level of information exchanged in a contactless communications performed by the second wireless communications section. In one embodiment of the present invention, the wireless communications control section may vary stepwise an output radio wave intensity in a wireless communications performed by the first wireless communications section according to a security level of information exchanged in a contactless communications performed by the second wireless communications section.

[0010] Where the second wireless communications section performs a contactless communications between a semiconductor memory card inserted in the wireless communications terminal and a predetermined reader/writer, the wireless communications control section can determine the security level of information based on a security level of a memory management area, in the semiconductor memory card, storing the information exchanged in a contactless communications performed by the second wireless communications section. The memory management area in the semiconductor memory card may include at least one of a TRM area, a secure flash and a general area. If the wireless

communications terminal further includes a timer section operable to detect an elapse of a predetermined amount of time since an initiation of a contactless communications, the wireless communications control section can lift the restriction on the first wireless communications section based on the detection of an elapse of the predetermined time by the timer section.

[0011] In one embodiment of the present invention, the wireless communications control section starts restricting a wireless communications performed by the first wireless communications section based on an instruction from a user. It is preferred that the wireless communications control section deactivates or temporarily deactivates a wireless communications function of the first wireless communications section based on an instruction from a user. The wireless communications terminal may further include a second wireless communications control section operable to restrict a contactless communications performed by the second wireless communications section based on an instruction from the user. Based on an instruction from the user, the wireless communications control section may also restrict a contactless communications performed by the second wireless communications section in such a manner that either one of the contactless communications and the wireless communications is restricted at a time. If the wireless communications terminal further includes a timer section operable to detect an elapse of a predetermined amount of time since an initiation of a contactless communications, the wireless communications control section can lift the restriction on the first wireless communications section based on the detection of an elapse of the predetermined time by the timer section.

[0012] The process performed by the wireless communications control section of the wireless communications terminal set forth above may be regarded as a communications protocol switching method. The method may be provided in the form of a program for instructing a computer to perform various steps involved in the process. The program may be introduced into a computer in the form of a computer-readable recording medium storing the program. The functional block of the wireless communications control section of the wireless communications terminal set forth above may be implemented in the form of an LSI being an integrated circuit.

[0013] According to the present invention as described above, when a contactless communications is performed, other wireless communications are restricted based on the type of information to be exchanged in the contactless communications. Thus, it is possible to prevent radio interferences from being caused by other wireless communications concurrent with a contactless communications. The user can manually disable a communications function via the button input section of the wireless communications terminal so as to disable wireless communications other than the contactless communications while enabling the contactless communications. Therefore, it is possible to selectively establish only a contactless communications, thus preventing radio interferences.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] **FIG. 1** is a conceptual diagram showing a wireless communications system using a wireless communications terminal according to a first embodiment of the present invention;

[0015] **FIG. 2** shows a hardware configuration of the wireless communications terminal of the first embodiment;

[0016] **FIG. 3** shows a detailed hardware configuration of an IC card microcomputer system shown in **FIG. 2**;

[0017] **FIG. 4** shows an example of a contactless communications established between a contactless IC card and a reader/writer;

[0018] **FIG. 5** shows a data structure of a command APDU;

[0019] **FIG. 6** shows an example of how a class byte (CLA) is used;

[0020] **FIG. 7** shows an example of security level assignment;

[0021] **FIG. 8** shows an example of how a class byte (CLA) is used;

[0022] **FIG. 9** shows an example of how a class byte (CLA) is used;

[0023] **FIG. 10A** shows an example of how a command APDU is used;

[0024] **FIG. 10B** shows in detail a command shown in **FIG. 10A**;

[0025] **FIG. 10C** shows in detail a command shown in **FIG. 10A**;

[0026] **FIG. 10D** shows in detail a command shown in **FIG. 10A**;

[0027] **FIG. 11** is a flow chart showing a process performed by the wireless communications terminal of the first embodiment based on a received command APDU;

[0028] **FIG. 12** is a flow chart showing a process performed by a wireless communications terminal according to a second embodiment of the present invention based on pressing of a button by a user;

[0029] **FIG. 13** shows an example of a mobile telephone communications enable/disable flag;

[0030] **FIG. 14** shows a part of a hardware configuration of the wireless communications terminal of the second embodiment;

[0031] **FIG. 15** shows a hardware configuration of a wireless communications terminal according to a third embodiment of the present invention;

[0032] **FIG. 16** is a flow chart showing a process performed by the wireless communications terminal of the third embodiment based on pressing of a button by a user;

[0033] **FIG. 17** shows an example of a contactless communications enable/disable flag;

[0034] **FIG. 18** shows a part of a hardware configuration of the wireless communications terminal of the third embodiment;

[0035] **FIG. 19** shows a hardware configuration of a wireless communications terminal according to a fourth embodiment of the present invention;

[0036] **FIG. 20** shows a part of a hardware configuration of the wireless communications terminal of the fourth embodiment;

[0037] **FIG. 21** shows apart of a hardware configuration of a wireless communications terminal according to a fifth embodiment of the present invention;

[0038] **FIG. 22** shows an example of an image displayed on the wireless communications terminal of the fifth embodiment;

[0039] **FIG. 23** shows an example of how the wireless communications terminal according to the first to third embodiments is made into an integrated circuit; and

[0040] **FIG. 24** shows an example of how the wireless communications terminal according to the fourth embodiment is made into an integrated circuit.

BEST MODE FOR CARRYING OUT THE INVENTION

[0041] The present invention is applicable to any wireless communications terminal capable of performing a contactless communications and at least one other wireless communications. The present invention is particularly advantageous in cases where a plurality of types of information of different security levels are exchanged in contactless communications.

[0042] Embodiments of the present invention will now be described where security information is exchanged in a contactless communications established between a reader/writer and a mobile telephone capable of accommodating therein a contactless semiconductor memory card, e.g., an IC card, storing security information as a wireless communications terminal.

First Embodiment

[0043] **FIG. 1** is a conceptual diagram showing a wireless communications system using a wireless communications terminal **101** according to a first embodiment of the present invention. The wireless communications system shown in **FIG. 1** includes the wireless communications terminal **101**, a relay station **100** and a reader/writer **105**. The wireless communications terminal **101** has both a contactless communications function and a mobile telephone communications function. The relay station **100** establishes a mobile telephone communications with the wireless communications terminal **101**. The reader/writer **105** establishes a contactless communications with the wireless communications terminal **101**. The reader/writer **105** is provided in, for example, an automatic ticket gate at a train station or a cash register in a convenience store.

[0044] The wireless communications terminal **101** includes a plurality of buttons **103**, a display section **104** and a card slot **206**. The wireless communications terminal **101** can accommodate a contactless IC card **102** in the card slot **206**. With the contactless IC card **102** inserted in card slot **206**, the wireless communications terminal **101** can establish a contactless communications with the reader/writer **105**.

[0045] **FIG. 2** shows a hardware configuration of the wireless communications terminal **101** of the first embodiment. The wireless communications terminal **101** includes a CPU **201**, a ROM **202**, a RAM **203**, an EEPROM/FeRAM **204**, a button input section **205**, a communications I/F section **206** for a wireless communications terminal, an output section **207**, an IC card microcomputer system **300**

and a communications function section **400**, which are connected to one another via a bus **500**.

[0046] The communications function section **400** includes a first wireless communications section **208** for performing a mobile telephone communications, a second wireless communications section **209** for performing a contactless communications, and a wireless communications control section **210** for controlling the communications status of the first wireless communications section **208**. The CPU **201** performs arithmetic operations, etc. The ROM **202** stores programs. The RAM **203** stores temporary data. The EEPROM/FeRAM **204** stores data. The button input section **205** detects pressing of the buttons **103** by the user. The communications I/F section **206** for a wireless communications terminal corresponds to the card slot **206**. The IC card microcomputer system **300** corresponds to the contactless IC card **102**. The output section **207** gives a video output to the display section **104**.

[0047] **FIG. 3** shows a detailed hardware configuration of the IC card microcomputer system **300** shown in **FIG. 2**. The IC card microcomputer system **300** includes a CPU **301**, a ROM **302**, a RAM **303**, a group of non-volatile memories **304** and a communications I/F section **310** for an IC card microcomputer system, which are connected to one another via a bus **501**. The IC card microcomputer system **300** may optionally include an antenna coil **309** in a case where the IC card microcomputer system **300** directly performs a contactless communications.

[0048] The CPU **301** performs arithmetic operations, etc. The ROM **302** stores programs. The RAM **303** stores temporary data. The group of non-volatile memories **304** includes an FeRAM **306** present in a TRM area **305** and a secure flash **308** present in a general area **307**. The TRM area **305**, the secure flash **308** and the general area **307** are memory management areas each having an independent security level. The TRM area **305** is tamper-resistant and has a highest security level. In the IC card microcomputer system **300**, the CPU **301**, the ROM **302** and the RAM **303** also belong to the TRM area **305**. The secure flash **308** is a flash memory using a TRM function.

[0049] A wireless communications protocol used in a wireless communications system using the above-described wireless communications terminal **101** will now be described.

[0050] A contactless communications between the contactless IC card **102** and the reader/writer **105** is performed by transmitting a command application protocol data unit (command APDU) from the reader/writer **105** to the contactless IC card **102** and returning a response APDU from the contactless IC card **102** to the reader/writer **105**, as shown in **FIG. 4**.

[0051] **FIG. 5** shows a data structure of a command APDU. A command APDU includes an essential header section storing a class byte (CLA) and additional information, and a conditional body section. A CLA stored in the essential header section includes eight bits, wherein the bits b5 to b8 all being "0" indicates that the command APDU is a common command and the bits b5 to b7 being "0" with the bit b8 being "1" indicates that the command APDU is a unique command, as shown in **FIG. 6**. A common command as used herein refers to a basic command defined in an IC

card protocol specified in the ISO7816-4 standard. A unique command as used herein refers to an undefined extended command.

[0052] In the present invention, a unique command is newly defined as will be described below so that other wireless communications can be controlled based on the type of information to be exchanged in a contactless communications.

[0053] Different security levels are assigned to different areas of the IC card microcomputer system 300 where various information are stored. FIG. 7 shows an example of security level assignment. In the example shown in FIG. 7, the TRM area 305 is assigned a highest security level, the secure flash 308a lower security level, and the general area 307 a lowest security level. These areas can be identified from one another by using the lower bits b3 to b1 of the CLA of the command APDU as shown in FIG. 7. An instruction to read information from an identified area and an instruction to write information therein can be differentiated from each other by using the bit b4 of the CLA of the command APDU as shown in FIG. 8.

[0054] FIG. 9 shows an example of a CLA as described above, and FIG. 10A to FIG. 10D each show an example of a unique command using the CLA. The first record in FIG. 10A is a command APDU instructing to read data of a size "0fh" starting from a position at an offset "4000h" in the TRM area 305 (see FIG. 10B). The second record is a command APDU instructing to write data of a size "20h" starting from a position at an offset "1200h" in the secure flash 308 (see FIG. 10C). The third record is a command APDU instructing to read data of a size "30h" starting from a position at an offset "8030h" in the general area 307 (see FIG. 10D).

[0055] FIG. 11 is a flow chart showing a process performed by the wireless communications terminal 101 of the first embodiment based on a received command APDU.

[0056] The wireless communications terminal 101 receives a command APDU from the reader/writer 105 via the second wireless communications section 209 (step S1101), and analyzes the received command APDU to determine which area the command is requesting to access by referring to the CLA of the command (step S1102). If the analysis indicates that the command is requesting to access the TRM area 305 or the secure flash 308 (Yes in step S1103), the wireless communications terminal 101 controls the wireless communications control section 210 to deactivate the first wireless communications section 208 (step S1104). Deactivation as used herein means deactivating a function in such a manner that the function will not later be reactivated automatically, i.e., blocking or prohibiting the wireless communications function. Deactivation is used in order to ensure normal completion of a contactless communications that involves highly confidential information stored in the TRM area 305 or the secure flash 308. If the command is requesting to access the general area 307 (No in step S1103), the wireless communications terminal 101 controls the wireless communications control section 210 to temporarily deactivate the first wireless communications section 208 (step S1105). Temporary deactivation as used here in means deactivating a function in such a manner that the function will later be reactivated automatically. Temporary deactivation is used in order to place an increased

priority on the completion of a contactless communications that involves information stored in the general area 307, or the like. The reactivation can be realized by using a timer, for example. After the deactivation or temporary deactivation of the first wireless communications section 208, the wireless communications terminal 101 accesses a memory area of the IC card microcomputer system 300 as specified by the command to perform a contactless communications (step S1106).

[0057] Note that how the function of the first wireless communications section 208 is restricted is not limited to that described above. For example, the function of the first wireless communications section 208 may be temporarily deactivated even if the received command APDU is requesting to access the secure flash 308. The number of security levels to be used is also not limited to three. The function of the first wireless communications section 208 may alternatively be restricted by decreasing the power supply level to reduce the output radio wave intensity. In such a case, it is more preferable that the output radio wave intensity is reduced stepwise according to the security level.

[0058] As described above, when the wireless communications terminal of the first embodiment performs a contactless communications, other wireless communications are restricted based on the type of information to be exchanged in the contactless communications. Thus, it is possible to prevent radio interferences from being caused by other wireless communications concurrent with a contactless communications.

Second Embodiment

[0059] Second to fifth embodiments are each directed to an alternative example of the communications function section 400 of the wireless communications terminal 101 shown in FIG. 2. In the second to fifth embodiments, the wireless communications terminal 101 uses the same components as those of the first embodiment, except for the communications function section 400, and those components will be denoted by the same reference numerals and will not be further described below.

[0060] The basic configuration of the communications function section 400 of the wireless communications terminal 101 according to the second embodiment of the present invention is as shown in FIG. 2. The second embodiment is different from the first embodiment in that the operation of the wireless communications control section 210 can be turned ON/OFF by the user operating a button 103.

[0061] Referring to FIG. 12 and FIG. 13, the process performed by the wireless communications terminal 101 of the second embodiment will now be described.

[0062] Before the user establishes a contactless communications by, for example, placing the wireless communications terminal 101 over the reader/writer 105, the user checks the mobile telephone communications status of the wireless communications terminal 101. If the wireless communications terminal 101 is in a mode where the mobile telephone communications function is enabled, the user presses a designated button 103 to place the wireless communications terminal 101 in a mode where the mobile telephone communications function is disabled (step S1201). When the button input section 205 detects mode

switching through the pressing of the button 103, the wireless communications terminal 101 checks a mobile telephone communications enable/disable flag 800 having a data structure as shown in FIG. 13 (step S1202). If the mobile telephone communications enable/disable flag 800 is ON (1), the wireless communications terminal 101 changes the value of the flag to OFF (0) (step S1203), and vice versa (step S1204). Through this operation, the mobile telephone communications enable/disable flag 800 is updated. The wireless communications control section 210 refers to the mobile telephone communications enable/disable flag 800, and controls the mobile telephone communications function so that the mobile telephone communications function is enabled when the flag is ON (1) and disabled when it is OFF (0).

[0063] After the contactless communications is terminated, the mobile telephone communications function is brought back to the enabled state by the user pressing the button 103 (step S1201) to change the value of the mobile telephone communications enable/disable flag 800 (steps S1202 to S1204).

[0064] As described above, with the wireless communications terminal according to the second embodiment of the present invention, the user can manually disable a communications function via the button input section of the wireless communications terminal so as to disable wireless communications other than the contactless communications. Therefore, it is possible to selectively establish only a contactless communications, thus preventing radio interferences.

[0065] While the operation of the wireless communications control section 210 can be turned ON/OFF by means of software as described above, it may alternatively be done by hardware using, for example, a toggle switch (see FIG. 14).

Third Embodiment

[0066] FIG. 15 shows a configuration of the communications function section 400 of the wireless communications terminal 101 according to a third embodiment of the present invention. Referring to FIG. 15, the communications function section 400 of the wireless communications terminal 101 of the third embodiment includes the first wireless communications section 208 for performing a mobile telephone communications, the second wireless communications section 209 for performing a contactless communications, a first wireless communications control section 210 for controlling the communications status of the first wireless communications section 208, and a second wireless communications control section 211 for controlling the communications status of the second wireless communications section 209.

[0067] Referring to FIG. 16 and FIG. 17, the process performed by the wireless communications terminal 101 of the third embodiment will now be described.

[0068] Before the user establishes a contactless communications by, for example, placing the wireless communications terminal 101 over the reader/writer 105, the user checks the mobile telephone communications status and the contactless communications status of the wireless communications terminal 101. How the wireless communications terminal 101 handles the mobile telephone communications status is as described above in the second embodiment.

[0069] If the wireless communications terminal 101 is in a mode where the contactless communications function is disabled, the user presses a designated button 103 to place the wireless communications terminal 101 in a mode where the contactless communications function is enabled (step S1601). When the button input section 205 detects mode switching through the pressing of the button 103, the wireless communications terminal 101 checks a contactless communications enable/disable flag 900 having a data structure as shown in FIG. 17 (step S1602). If the contactless communications enable/disable flag 900 is ON (1), the wireless communications terminal 101 changes the value of the flag to OFF (0) (step S1603), and vice versa (step S1604). Through this operation, the contactless communications enable/disable flag 900 is updated. The second wireless communications control section 211 refers to the contactless communications enable/disable flag 900, and controls the contactless communications function so that the contactless communications function is enabled when the flag is ON (1) and disabled when it is OFF (0).

[0070] After the contactless communications is terminated, the contactless communications function is brought back to the disabled state by the user pressing the button 103 (step S1601) to change the value of the contactless communications enable/disable flag 900 (steps S1602 to S1604).

[0071] As described above, with the wireless communications terminal according to the third embodiment of the present invention, the user can manually disable a communications function via the button input section of the wireless communications terminal so as to enable a contactless communications while disabling wireless communications other than the contactless communications. Therefore, it is possible to selectively establish only a contactless communications, thus preventing radio interferences.

[0072] While the operation of the first wireless communications control section 210 and the second wireless communications control section 211 can be turned ON/OFF by means of software as described above, it may alternatively be done by hardware using, for example, a toggle switch (see FIG. 18).

Fourth Embodiment

[0073] FIG. 19 shows a configuration of the communications function section 400 of the wireless communications terminal 101 according to a fourth embodiment of the present invention. Referring to FIG. 19, the communications function section 400 of the wireless communications terminal 101 of the fourth embodiment includes the first wireless communications section 208 for performing a mobile telephone communications, the second wireless communications section 209 for performing a contactless communications, and a third wireless communications control section 212 for controlling both the communications status of the first wireless communications section 208 and that of the second wireless communications section 209.

[0074] In the fourth embodiment, the mobile telephone communications function and the contactless communications function are controlled together so that either one of the functions is enabled at a time, instead of being controlled separately as in the third embodiment. Therefore, based on the button 103 pressed by the user, the third wireless communications control section 212 enables the operation of

either the first wireless communications section **208** or the second wireless communications section **209** while disabling the operation of the other. **FIG. 20** shows an example where the operation of the third wireless communications control section **212** is turned ON/OFF by hardware using, for example, a toggle switch.

Fifth Embodiment

[0075] **FIG. 21** shows a configuration of the communications function section **400** of the wireless communications terminal **101** according to a fifth embodiment of the present invention. Referring to **FIG. 21**, the communications function section **400** of the wireless communications terminal **101** of the fifth embodiment includes the first wireless communications section **208** for performing a mobile telephone communications, the second wireless communications section **209** for performing a contactless communications, a wireless communications control section **605** for controlling the communications status of the first wireless communications section **208** based on the communications status of the second wireless communications section **209**, and a timer section **611** for providing a timer-based control of the wireless communications control section **605**.

[0076] The wireless communications control section **605** automatically restricts the communications function of the first wireless communications section **208** in response to the occurrence of an event in the second wireless communications section **209**. This event indicates the initiation of a contactless communications, and can easily be detected by, for example, detecting a power supply or an initial response from the reader/writer **105**. How the wireless communications control section **605** restricts the communications function of the first wireless communications section **208** is as described above in other embodiments.

[0077] The timer section **611** is used for automatically bringing the communications status of the first wireless communications section **208** back to a previous, uncontrolled communications status after controlling the communications status of the first wireless communications section **208** for a period of time. The timer-based operation can be realized by keeping the amount of time for which the communications status is controlled, and automatically bringing the communications status back to a previous, uncontrolled communications status after a predetermined amount of time is elapsed.

[0078] An indicator indicating that the wireless communications terminal **101** is in a contactless communications mode may be displayed on the display section **104** so that the user can visually check the current mode of the wireless communications terminal **101** (**FIG. 22**).

[0079] In other embodiments described above, the first wireless communications control section **210**, the second wireless communications control section **211**, the third wireless communications control section **212**, etc., of the wireless communications terminal **101** are implemented in the form of a computer program. The program may be stored in a ROM of the wireless communications terminal **101** or may be downloaded from outside to a non-volatile memory.

[0080] The functional blocks described above may each be implemented in the form of an LSI being an integrated circuit by combining together hardware resources such as a

CPU, a RAM, a ROM and a non-volatile memory. These functional blocks may be individually formed into a separate chip or some or all of them may be formed together into a single chip.

[0081] **FIG. 23** and **FIG. 24** each show an example of how the functional blocks are made into an integrated circuit in the first to fifth embodiments. An LSI **1** and an LSI **2** are exemplary integrated circuits, representing a functional block or functional blocks to be made into an integrated circuit. While the term “LSI” is used herein as the type of integrated circuit used in the present invention, integrated circuits are also called “ICs”, “system LSIs”, “super LSIs” or “ultra LSIs” depending on the degree of integration.

[0082] Moreover, the form of an integrated circuit that can be used with the present invention is not limited to an LSI, but may alternatively be a dedicated circuit or a general-purpose processor. It may alternatively be an FPGA (Field Programmable Gate Array) being programmable after the LSI is manufactured, or a reconfigurable processor in which the interconnections and settings of circuit cells in the LSI can be reconfigured.

[0083] Furthermore, if advancements in the semiconductor technology or derivative technologies bring forth a new form of circuit integration replacing LSIs, the new form of circuit integration can of course be used for the integration of the various functional blocks. Such a derivative technology may possibly be an application of biotechnology or organic chemistry, for example.

INDUSTRIAL APPLICABILITY

[0084] The present invention is applicable to a wireless communications terminal, or the like, being capable of performing a contactless communications and another wireless communications, and being capable of accommodating therein a contactless IC card. The present invention is particularly advantageous when, for example, it is desirable to prevent radio interferences from being caused by other wireless communications concurrent with a contactless communications.

1. A wireless communications terminal capable of performing a contactless communications and at least one wireless communications, comprising:

- a first wireless communications section operable to perform a wireless communications other than a contactless communications;
- a second wireless communications section operable to perform a contactless communications; and
- a wireless communications control section operable to restrict a wireless communications performed by the first wireless communications section based on a status of a contactless communications performed by the second wireless communications section.

2. The wireless communications terminal according to claim 1, wherein the wireless communications control section starts restricting a wireless communications performed by the first wireless communications section in response to an initiation of a contactless communications by the second wireless communications section.

3. The wireless communications terminal according to claim 2, wherein the wireless communications control sec-

tion deactivates or temporarily deactivates a wireless communications function of the first wireless communications section based on a security level of information exchanged in a contactless communications performed by the second wireless communications section.

4. The wireless communications terminal according to claim 2, wherein the wireless communications control section varies stepwise an output radio wave intensity in a wireless communications performed by the first wireless communications section according to a security level of information exchanged in a contactless communications performed by the second wireless communications section.

5. The wireless communications terminal according to claim 3, wherein:

the second wireless communications section performs a contactless communications between a semiconductor memory card inserted in the wireless communications terminal and a predetermined reader/writer; and

the wireless communications control section determines the security level of information based on a security level of a memory management area, in the semiconductor memory card, storing the information exchanged in a contactless communications performed by the second wireless communications section.

6. The wireless communications terminal according to claim 5, wherein the memory management area in the semiconductor memory card includes at least one of a TRM area, a secure flash and a general area.

7. The wireless communications terminal according to claim 1, further comprising a timer section operable to detect an elapse of a predetermined amount of time since an initiation of a contactless communications,

wherein the wireless communications control section lifts the restriction on the first wireless communications section based on the detection of an elapse of the predetermined time by the timer section.

8. The wireless communications terminal according to claim 1, wherein the wireless communications control section starts restricting a wireless communications performed by the first wireless communications section based on an instruction from a user.

9. The wireless communications terminal according to claim 8, wherein the wireless communications control section deactivates or temporarily deactivates a wireless communications function of the first wireless communications section based on an instruction from a user.

10. The wireless communications terminal according to claim 8, further comprising a second wireless communications control section operable to restrict a contactless communications performed by the second wireless communications section based on an instruction from the user.

11. The wireless communications terminal according to claim 8, wherein based on an instruction from the user, the wireless communications control section also restricts a contactless communications performed by the second wireless communications section in such a manner that either

one of the contactless communications and the wireless communications is restricted at a time.

12. The wireless communications terminal according to claim 8, further comprising a timer section operable to detect an elapse of a predetermined amount of time since an initiation of a contactless communications,

wherein the wireless communications control section lifts the restriction on the first wireless communications section based on the detection of an elapse of the predetermined time by the timer section.

13. A communications protocol switching method used by a wireless communications terminal comprising a first wireless communications section for performing at least one wireless communications other than a contactless communications, and a second wireless communications section for performing a contactless communications, the method comprising the steps of:

determining a status of the contactless communications performed by the second wireless communications section; and

restricting the wireless communications performed by the first wireless communications section based on the status of the contactless communications.

14. A communications protocol switching program executed by a wireless communications terminal comprising a first wireless communications section for performing at least one wireless communications other than a contactless communications, and a second wireless communications section for performing a contactless communications, the program comprising the steps of:

determining a status of the contactless communications performed by the second wireless communications section; and

restricting the wireless communications performed by the first wireless communications section based on the status of the contactless communications.

15. An integrated circuit used in a wireless communications terminal capable of performing a contactless communications and at least one wireless communications, wherein:

the wireless communications terminal comprising a first wireless communications section for performing a wireless communications other than a contactless communications, and a second wireless communications section for performing a contactless communications; and

the integrated circuit includes a circuit functioning as a wireless communications control section operable to restrict a wireless communications performed by the first wireless communications section based on a status of a contactless communications performed by the second wireless communications section.

* * * * *