



US010145098B2

(12) **United States Patent**  
**Brown et al.**

(10) **Patent No.:** **US 10,145,098 B2**  
(45) **Date of Patent:** **Dec. 4, 2018**

(54) **URINAL SCREENS**

(71) Applicant: **Fresh Products, Inc.**, Toledo, OH (US)

(72) Inventors: **Douglas S. Brown**, Toledo, OH (US);  
**Jeffrey A. Smith**, Perrysburg, OH (US)

(73) Assignee: **FRESH PRODUCTS, INC.**, Toledo,  
OH (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/925,369**

(22) Filed: **Oct. 28, 2015**

(65) **Prior Publication Data**

US 2016/0122992 A1 May 5, 2016

**Related U.S. Application Data**

(60) Provisional application No. 62/075,827, filed on Nov.  
5, 2014.

(51) **Int. Cl.**  
**E03D 9/00** (2006.01)  
**E03D 13/00** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **E03D 13/005** (2013.01); **E03D 9/00**  
(2013.01); **E03D 9/007** (2013.01)

(58) **Field of Classification Search**  
USPC ..... 4/256.1, 300.3  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

333,935 A 1/1886 Duncan  
555,888 A 3/1896 Roberts

810,973 A 1/1906 Pattenden et al.  
927,026 A \* 7/1909 Clayton ..... E03D 13/00  
210/499

950,574 A 3/1910 Morgan  
1,109,904 A 9/1914 Dahlgren  
1,208,675 A 12/1916 Sleight  
1,260,082 A 3/1918 Sleight  
1,292,856 A 1/1919 Niblo  
1,731,431 A 10/1929 Meyer  
1,880,962 A 10/1932 Koppelman  
1,886,676 A 11/1932 Heuacker

(Continued)

**FOREIGN PATENT DOCUMENTS**

DE 1915249 A1 10/1970  
DE 19541911 A1 5/1997

(Continued)

**OTHER PUBLICATIONS**

Dugdale, David C., "Uroflometry" MedlinePlus Medical Encyclo-  
pedia, 2008. [http://www.nlm.nih.gov/medlineplus/ency/article/003325.](http://www.nlm.nih.gov/medlineplus/ency/article/003325.htm)  
htm, retrieved on Oct. 28, 2014, 2 pages.

(Continued)


*Primary Examiner* — Lauren Crane

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson  
& Bear LLP

(57) **ABSTRACT**

A urinal assembly having a frame and a plurality of posts or  
posts extending from the frame. The frame can include a  
plurality of openings. The openings can be defined by a  
plurality of sides and corners. The posts can extend from the  
corners and/or from the sides of the openings. In some  
embodiments, posts extend from a first face and a second  
face of the frame.

**55 Claims, 6 Drawing Sheets**

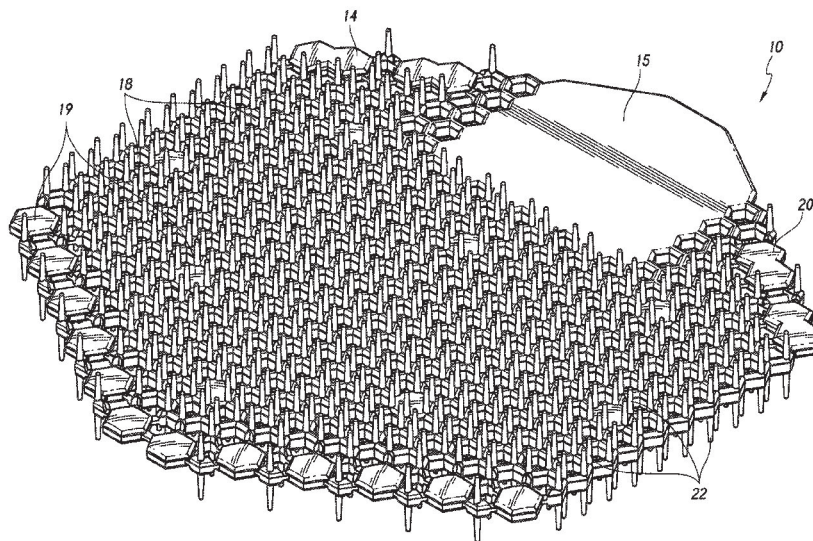

(56)

## References Cited

## U.S. PATENT DOCUMENTS

|           |     |         |                                |           |    |         |                     |
|-----------|-----|---------|--------------------------------|-----------|----|---------|---------------------|
| 1,935,128 | A   | 11/1933 | Pullman                        | 5,139,864 | A  | 8/1992  | Lindauer            |
| 2,011,732 | A   | 8/1935  | Saeks                          | D329,893  | S  | 9/1992  | Luedtke et al.      |
| 2,020,864 | A   | 11/1935 | Aronson et al.                 | 5,150,481 | A  | 9/1992  | Pang                |
| 2,087,592 | A   | 7/1937  | Chesnut                        | 5,150,722 | A  | 9/1992  | Rutherford          |
| 2,211,970 | A   | 8/1940  | Fischer                        | 5,165,119 | A  | 11/1992 | Yamato              |
| 2,233,234 | A   | 2/1941  | Wilson                         | 5,188,755 | A  | 2/1993  | Chang               |
| 2,447,178 | A   | 8/1948  | Hatchette                      | D341,414  | S  | 11/1993 | Baker               |
| 2,506,669 | A   | 5/1950  | Heuacker                       | 5,309,578 | A  | 5/1994  | Temple, Sr.         |
| 2,508,808 | A   | 5/1950  | Warman                         | 5,313,672 | A  | 5/1994  | Luedtke et al.      |
| 2,679,054 | A   | 5/1954  | Singleton                      | 5,336,424 | A  | 8/1994  | Van Vlahakis et al. |
| 2,690,569 | A   | 10/1954 | Kozerski                       | 5,364,132 | A  | 11/1994 | Haas et al.         |
| 2,931,047 | A   | 4/1960  | Stebbins                       | 5,365,616 | A  | 11/1994 | Morad               |
| 2,984,841 | A   | 5/1961  | Wilson                         | 5,377,362 | A  | 1/1995  | Jackson             |
| 3,170,169 | A   | 2/1965  | Clark                          | 5,398,347 | A  | 3/1995  | Luedtke et al.      |
| 3,237,330 | A   | 3/1966  | Dinstbir                       | 5,472,712 | A  | 12/1995 | Oshlack et al.      |
| 3,248,740 | A   | 5/1966  | Wisnom                         | 5,479,735 | A  | 1/1996  | Martin, Jr.         |
| 3,268,920 | A   | 8/1966  | Beer                           | 5,482,007 | A  | 1/1996  | Kumlin              |
| 3,329,998 | A   | 7/1967  | Stohr                          | 5,489,415 | A  | 2/1996  | Van Vlahakis et al. |
| 3,387,069 | A   | 6/1968  | Stohr                          | 5,496,300 | A  | 3/1996  | Hirsch et al.       |
| 3,422,558 | A   | 1/1969  | Fee                            | D370,938  | S  | 6/1996  | Roach               |
| 3,540,433 | A   | 11/1970 | Brockman                       | 5,556,685 | A  | 9/1996  | Swicegood, Jr.      |
| 3,597,772 | A   | 8/1971  | Leavitt et al.                 | 5,580,578 | A  | 12/1996 | Oshlack et al.      |
| 3,614,790 | A   | 10/1971 | Billingsly et al.              | 5,604,937 | A  | 2/1997  | Davenport           |
| 3,631,560 | A   | 1/1972  | Atkins                         | 5,639,476 | A  | 6/1997  | Oshlack et al.      |
| 3,723,998 | A   | 4/1973  | Wehr                           | 5,660,138 | A  | 8/1997  | Hirsch              |
| 3,752,121 | A   | 8/1973  | Brazzell                       | 5,719,828 | A  | 2/1998  | Haas et al.         |
| 3,760,429 | A   | 9/1973  | Brownstein                     | D393,896  | S  | 4/1998  | Wagner et al.       |
| 3,788,485 | A   | 1/1974  | Bruning                        | 5,774,905 | A  | 7/1998  | Wager et al.        |
| 3,804,796 | A   | 4/1974  | Alexandre                      | 5,809,590 | A  | 9/1998  | Williams et al.     |
| 3,824,633 | A   | 7/1974  | Van Vlahakis                   | 5,813,058 | A  | 9/1998  | Quigley et al.      |
| 3,837,988 | A   | 9/1974  | Hennen et al.                  | 5,867,848 | A  | 2/1999  | Ort                 |
| 3,867,953 | A   | 2/1975  | Stohr                          | 5,885,701 | A  | 3/1999  | Berman et al.       |
| 3,899,192 | A   | 8/1975  | Reddaway                       | 5,958,334 | A  | 9/1999  | Haddon              |
| 3,923,442 | A   | 12/1975 | Stohr                          | 5,961,148 | A  | 10/1999 | Cheng               |
| 3,935,602 | A   | 2/1976  | Kale                           | D422,061  | S  | 3/2000  | Lee                 |
| 4,010,497 | A   | 3/1977  | Menter et al.                  | 6,055,681 | A  | 5/2000  | Lyons               |
| 4,095,031 | A   | 7/1978  | Engle                          | D427,295  | S  | 6/2000  | Wagner              |
| 4,103,367 | A   | 8/1978  | Kaufer                         | 6,079,975 | A  | 6/2000  | Conover             |
| D255,744  | S   | 7/1980  | Dekko                          | 6,081,937 | A  | 7/2000  | Whitacre            |
| 4,212,153 | A   | 7/1980  | Kydonieus et al.               | 6,103,201 | A  | 8/2000  | Green               |
| 4,215,443 | A   | 8/1980  | Babik                          | 6,103,351 | A  | 8/2000  | Ram et al.          |
| D258,181  | S   | 2/1981  | Adam                           | 6,113,148 | A  | 9/2000  | Koranda et al.      |
| D258,472  | S   | 3/1981  | Adam                           | D438,710  | S  | 3/2001  | Chen                |
| 4,305,216 | A   | 12/1981 | Skelton                        | 6,207,236 | B1 | 3/2001  | Araki et al.        |
| 4,361,606 | A   | 11/1982 | Butler et al.                  | 6,213,409 | B1 | 4/2001  | Warren et al.       |
| 4,389,963 | A   | 6/1983  | Pearson                        | D442,246  | S  | 5/2001  | McCabe et al.       |
| 4,405,509 | A   | 9/1983  | Rogers et al.                  | 6,244,208 | B1 | 6/2001  | Qui et al.          |
| 4,408,557 | A   | 10/1983 | Bradley et al.                 | 6,265,084 | B1 | 7/2001  | Stickler            |
| 4,418,432 | A   | 12/1983 | Vidal                          | 6,279,759 | B1 | 8/2001  | Weisback            |
| 4,440,542 | A   | 4/1984  | Foley                          | D456,492  | S  | 4/2002  | Lourens             |
| 4,490,862 | A   | 1/1985  | Vidal                          | 6,370,705 | B1 | 4/2002  | Levinson            |
| 4,515,909 | A   | 5/1985  | Sarwano et al.                 | D464,122  | S  | 10/2002 | Mangan              |
| D280,267  | S   | 8/1985  | Bryant et al.                  | 6,517,759 | B1 | 2/2003  | Ferenc et al.       |
| 4,549,693 | A   | 10/1985 | Barlics                        | 6,640,350 | B1 | 11/2003 | Deutsch             |
| 4,557,863 | A   | 12/1985 | Callewaert et al.              | 6,698,035 | B1 | 3/2004  | Grueser             |
| 4,574,400 | A   | 3/1986  | Annowsky                       | 6,703,012 | B1 | 3/2004  | White               |
| 4,574,403 | A   | 3/1986  | Dintemann et al.               | 6,730,311 | B2 | 5/2004  | Maleeny et al.      |
| 4,604,357 | A   | 8/1986  | Callenwaert et al.             | 6,787,210 | B2 | 9/2004  | Stickler            |
| 4,612,676 | A   | 9/1986  | Whitman                        | 6,823,533 | B2 | 11/2004 | Casari              |
| 4,671,976 | A * | 6/1987  | Vidal ..... A47K 1/14<br>4/286 | 6,862,754 | B1 | 3/2005  | DeMarco             |
| 4,750,219 | A   | 6/1988  | Williams                       | 6,920,648 | B1 | 7/2005  | Suski et al.        |
| 4,761,437 | A   | 8/1988  | Christie                       | 6,927,199 | B2 | 8/2005  | Takemura et al.     |
| 4,815,767 | A   | 3/1989  | Lambert                        | 6,988,462 | B1 | 1/2006  | Zhu                 |
| 4,830,407 | A   | 5/1989  | Sadler, Jr. et al.             | D520,610  | S  | 5/2006  | Wrate               |
| 4,866,793 | A   | 9/1989  | Luedtke et al.                 | 7,061,831 | B2 | 6/2006  | De La Huerga        |
| 4,941,688 | A   | 7/1990  | Jones                          | D528,193  | S  | 9/2006  | Lee                 |
| 4,985,940 | A   | 1/1991  | Jones                          | 7,127,844 | B2 | 10/2006 | Collins             |
| 5,010,599 | A   | 4/1991  | Nilsson                        | 7,202,201 | B1 | 4/2007  | Williams            |
| 5,019,434 | A   | 5/1991  | Matsumoto                      | D561,327  | S  | 2/2008  | DeJonge et al.      |
| 5,058,088 | A   | 10/1991 | Haas et al.                    | 7,413,082 | B2 | 8/2008  | Adler et al.        |
| 5,058,523 | A   | 10/1991 | Mikkonen et al.                | 7,419,588 | B2 | 9/2008  | Lawson              |
| 5,087,273 | A   | 2/1992  | Ward                           | 7,434,535 | B2 | 10/2008 | Adamy               |
| 5,117,515 | A   | 6/1992  | White, Jr. et al.              | D598,075  | S  | 8/2009  | Uhl                 |
| 5,130,016 | A   | 7/1992  | Gavin                          | 7,742,367 | B2 | 6/2010  | Haas                |
|           |     |         |                                | 7,808,861 | B2 | 10/2010 | Wien                |
|           |     |         |                                | 7,904,972 | B2 | 3/2011  | Anderson            |
|           |     |         |                                | 7,921,479 | B2 | 4/2011  | Hunter              |
|           |     |         |                                | 7,921,583 | B2 | 4/2011  | Londino             |
|           |     |         |                                | D639,410  | S  | 6/2011  | Ramirez             |

(56)

**References Cited****U.S. PATENT DOCUMENTS**

8,043,498 B2 10/2011 Rueda  
 D678,482 S 3/2013 Williams  
 D678,483 S 3/2013 Barker  
 D682,398 S 5/2013 Lee  
 D687,524 S 8/2013 Heiser  
 D687,525 S 8/2013 Heiser  
 8,856,977 B2 10/2014 Ramirez  
 9,243,394 B2 1/2016 Brown et al.  
 D778,411 S 2/2017 Brown et al.  
 D778,412 S 2/2017 Brown et al.  
 2003/0044326 A1 3/2003 Yamasaki et al.  
 2005/0022298 A1 2/2005 De Leon et al.  
 2005/0067106 A1 3/2005 Melges  
 2005/0112339 A1 5/2005 Sandel et al.  
 2005/0144711 A1 7/2005 Valadez et al.  
 2005/0169793 A1 8/2005 Wheatley et al.  
 2005/0245671 A1 11/2005 Moon et al.  
 2005/0283892 A1 12/2005 Simeone et al.  
 2006/0232059 A1 10/2006 Fortune et al.  
 2007/0023539 A1 2/2007 Brown et al.  
 2007/0039089 A1 2/2007 Worrel  
 2007/0161927 A1 7/2007 Daugirdas  
 2007/0186337 A1 8/2007 Emr  
 2008/0098505 A1 5/2008 Casari  
 2008/0100057 A1 5/2008 MacPhee  
 2008/0292509 A1 11/2008 D'Amico  
 2009/0070923 A1 3/2009 Ruedas  
 2009/0229511 A1 9/2009 Campbell et al.  
 2009/0255053 A1 10/2009 Cutrone, III  
 2010/0183694 A1 7/2010 Burke et al.  
 2013/0067651 A1 3/2013 Brown et al.  
 2014/0007336 A1 1/2014 Mills et al.

2014/0157501 A1\* 6/2014 D'Amico ..... E03D 13/005  
 4/256.1  
 2014/0259344 A1\* 9/2014 Muderlak ..... E03D 13/005  
 4/256.1

2016/0102451 A1 4/2016 Brown et al.  
 2018/0023278 A1 1/2018 Brown et al.

**FOREIGN PATENT DOCUMENTS**

FR 2681232 A1 3/1993  
 GB 189518394 A 8/1896  
 GB 2431101 A 4/2007  
 JP 57-17599 1/1982  
 JP 60-178497 11/1985  
 JP 60-190865 12/1985  
 JP 63-116585 7/1988  
 JP 1990-102625 A 4/1990  
 JP 1992-119880 U 10/1992  
 JP 2001-303642 10/2001  
 KR 0368846 U 11/2004  
 WO WO 2016/060998 A1 4/2016

**OTHER PUBLICATIONS**

Gray, Henry. "The Male Urethra". Anatomy of the Human Body, 3b. 4, 1918. <http://www.bartleby.com/107/256.html>, retrieved on Oct. 27, 2014. 5 pages.  
 Ritter, R. C. et al., "Analysis of Drop Intervals in Jets Modelling Obstruction of the Urinary Tract," Physics in Medicine and Biology, 1974, vol. 19, No. 2, 161-170, 11 pages.  
 Ritter, R. C. et al., "Physical Information in the External Urinary Stream of the Normal and Obstructed Adult Male," British Journal of Urology, 1977, vol. 49, 293-302, 10 pages.

\* cited by examiner

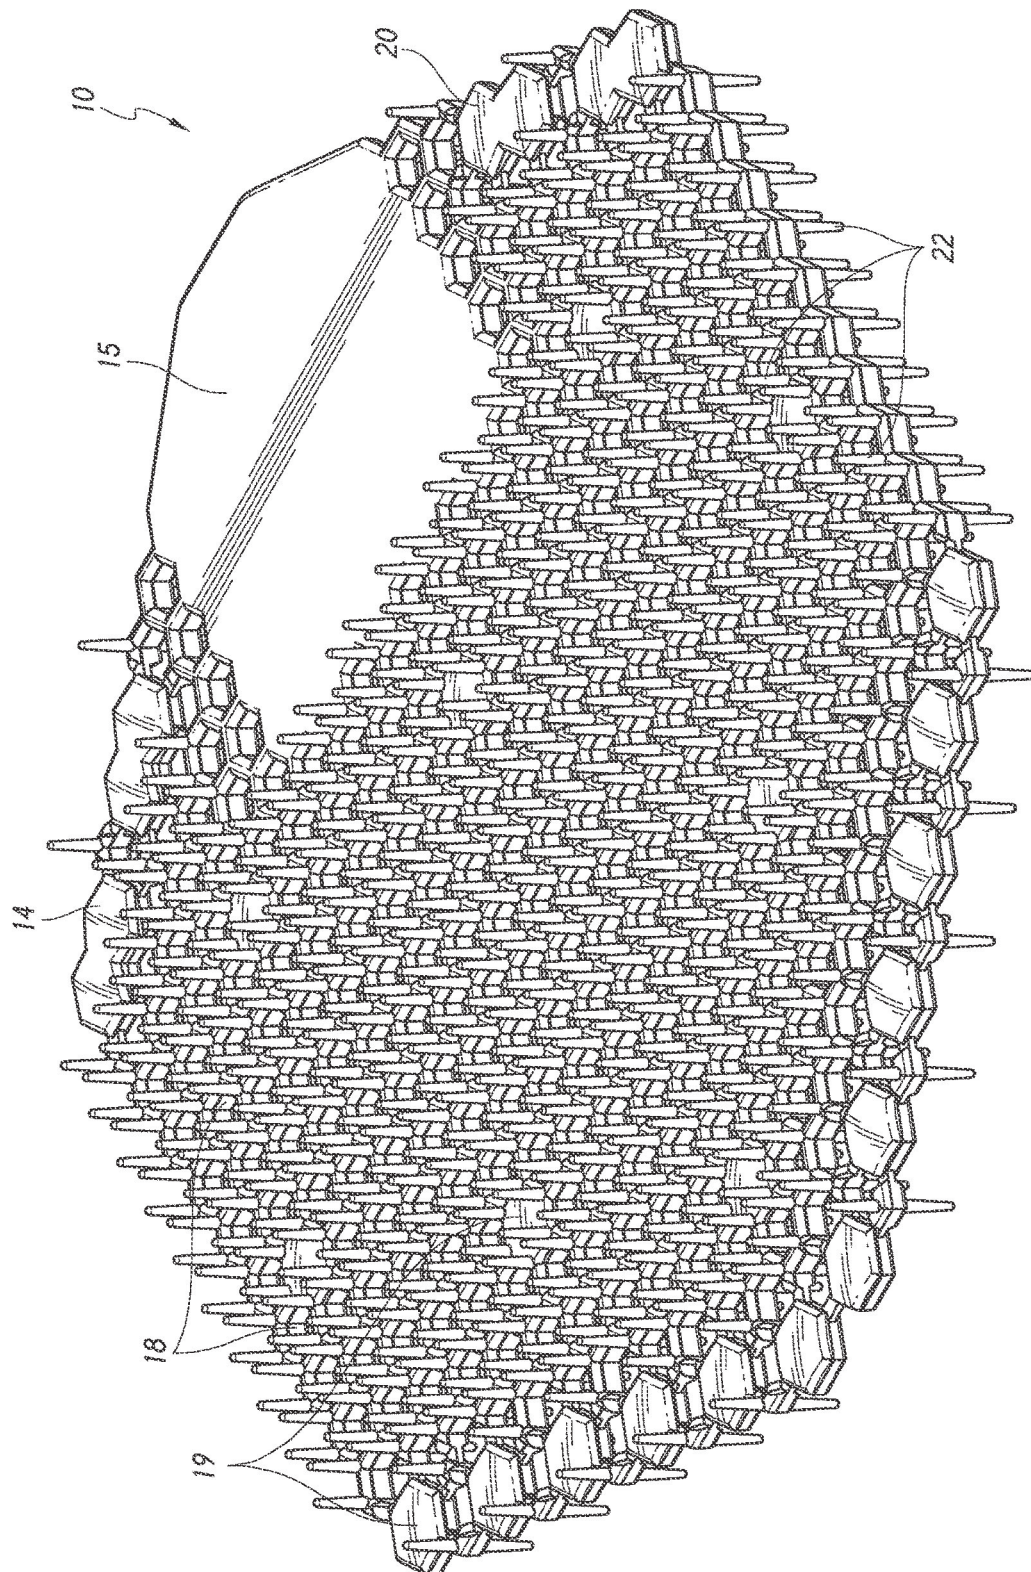


FIG. 1

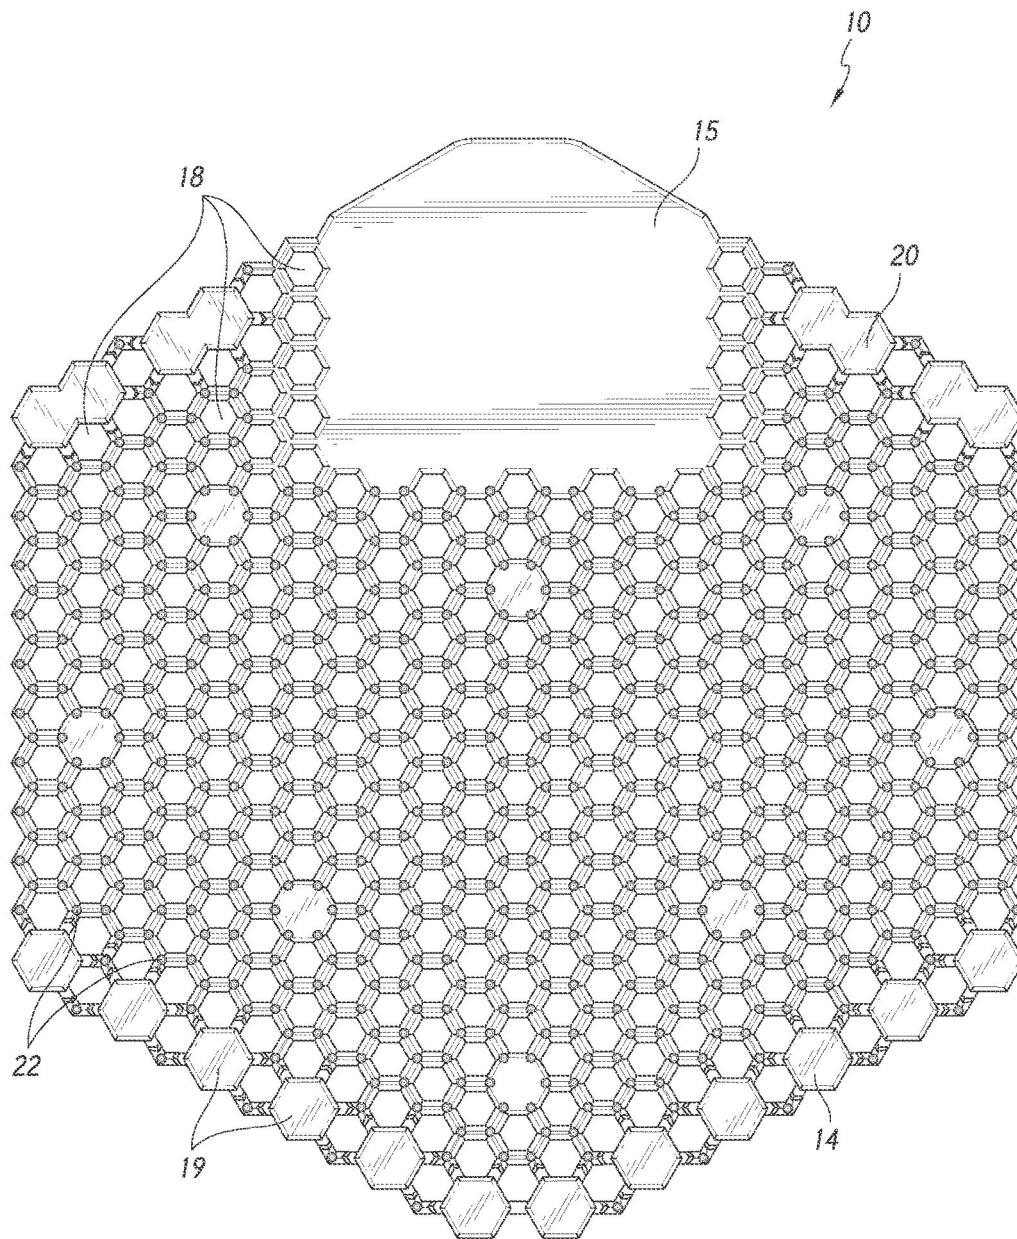


FIG. 2

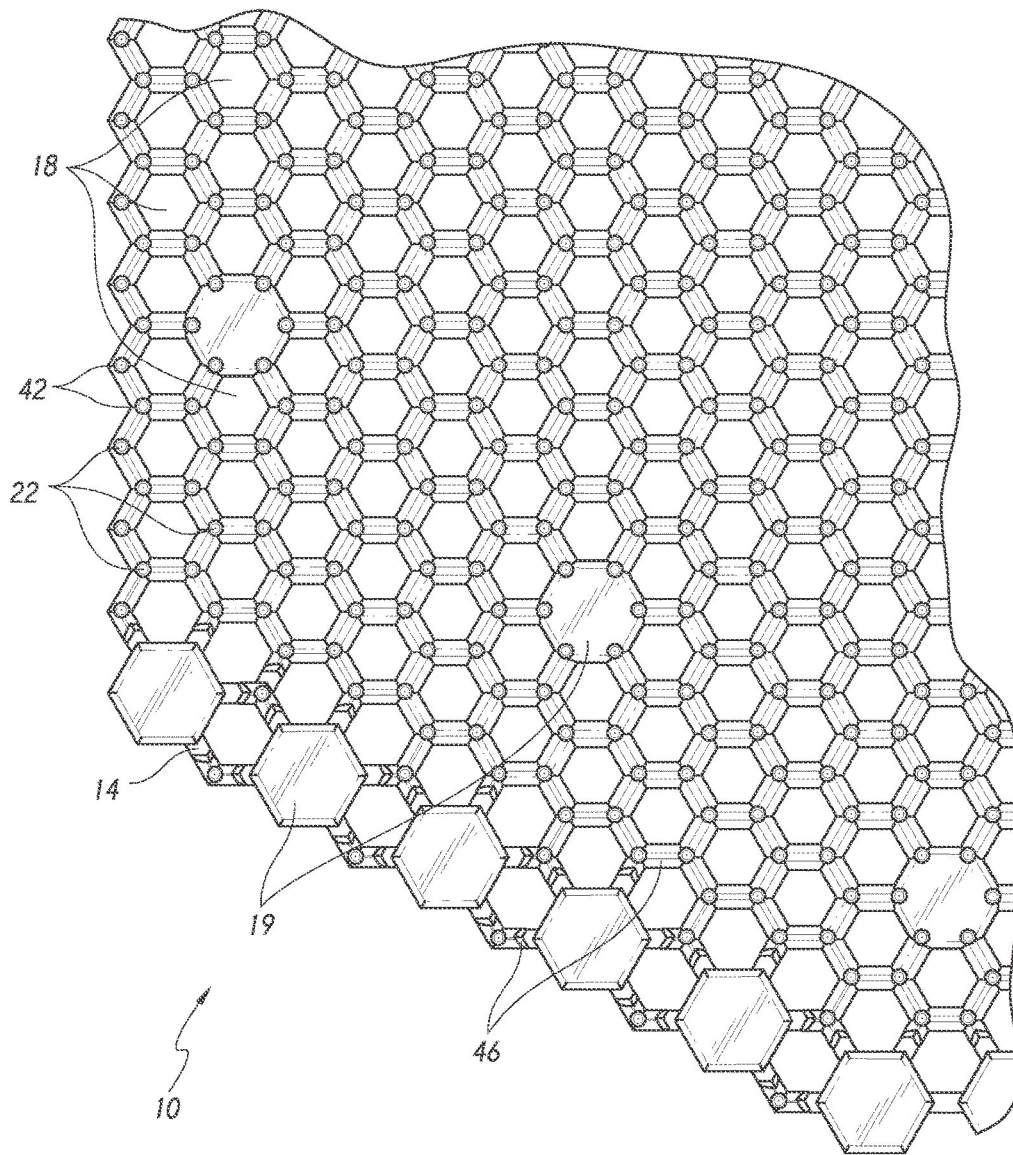


FIG. 3


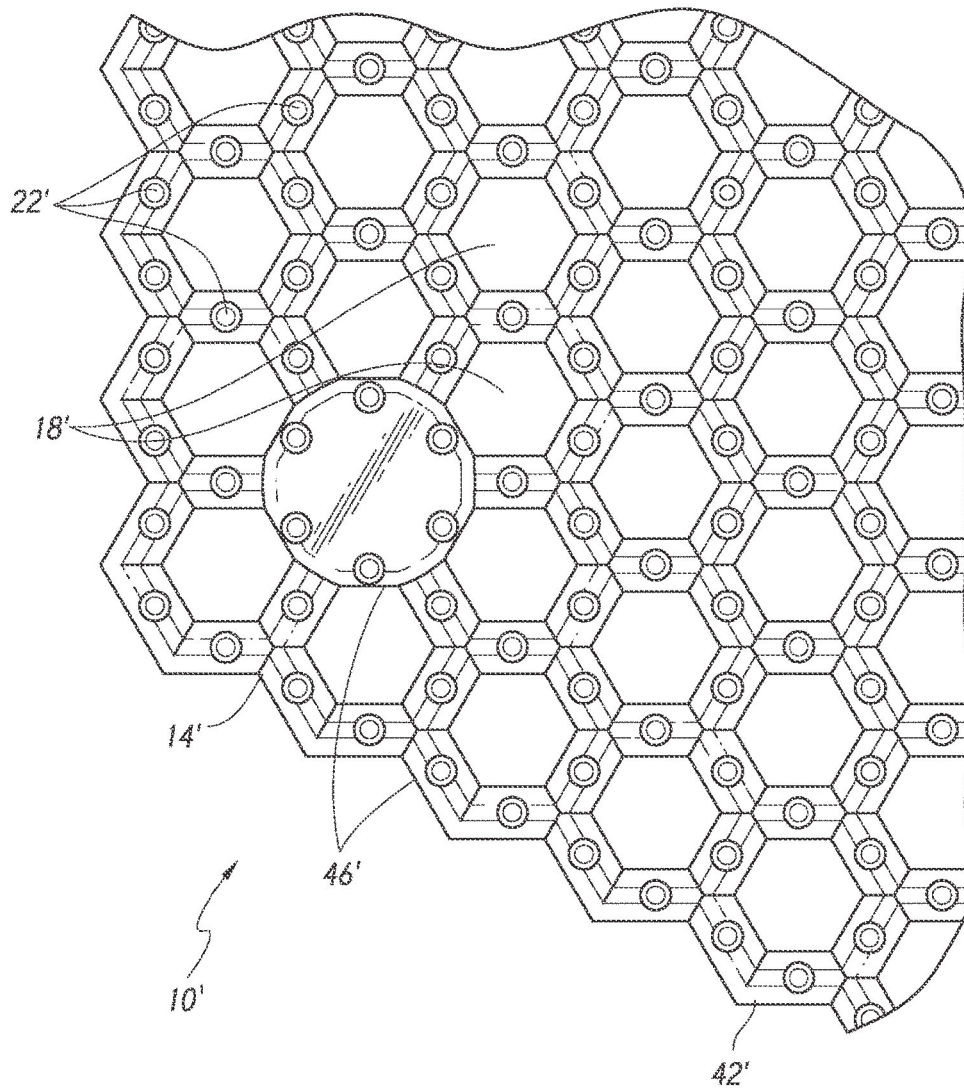


FIG. 4

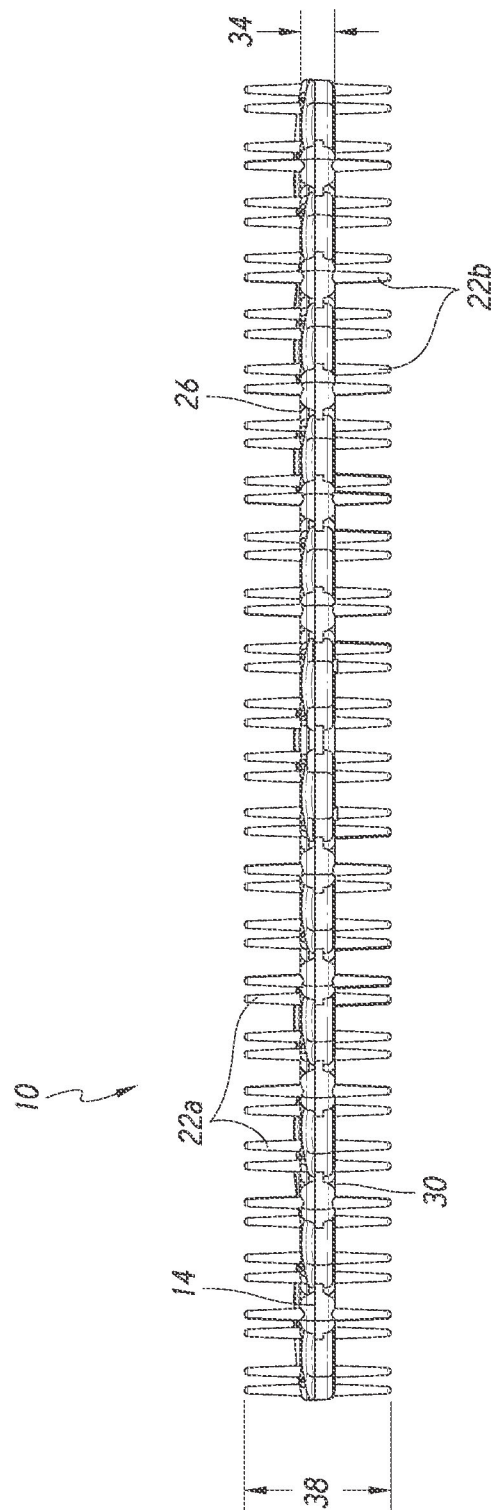

547




FIG. 6

1

**URINAL SCREENS****CROSS REFERENCE TO RELATED APPLICATIONS**

Any and all applications for which a foreign or domestic priority claims is identified in the Application Data Sheet as filed with the present application are hereby incorporated by reference under 37 CFR 1.57.

**TECHNICAL FIELD**

Certain embodiments discussed herein relate to restroom screens and mats, and, more particularly, the present inventions relate to restroom urinal screens and mats.

**DISCUSSION OF THE RELATED ART**

Urinal screens are widely used as air fresheners and to prevent debris from being flushed down a urinal drain. In some cases, a fragrance is provided with the screens to help sanitize and freshen the air in and around the urinal.

**SUMMARY OF THE INVENTIONS**

A urinal screen can include a frame. In some embodiments, the frame has a first face and a second face opposite the first face. The frame can include a plurality of openings extending through the first face and the second face. In some cases, the screen includes a plurality of first posts extending from the first face of the frame. The screen can include a plurality of second posts extending from the second face of the frame.

According to some variants, the portion of the frame defining each of the openings has a polygonal perimeter structure. In some embodiments, each perimeter structure defining an opening has a plurality of braces and corners. In some cases, a plurality of the braces and corners are shared between two or more openings. In some embodiments, the braces and corners form a tessellation. According to some variants, each of plurality of first posts extends from the portion of the frame defining a corner of a perimeter structure forming one or more of the plurality of openings. In some cases, each of plurality of second posts extends from a midpoint of a brace of a portion of the frame defining a perimeter structure forming one or more of the plurality of openings. In some embodiments, at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings. In some cases, at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings. In some embodiments, at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings and at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings. According to some variants, at least one of the plurality of second posts extends from a brace or corner of the portion of the perimeter structure defining each opening. In some embodiments, at least one of the plurality of first posts extends from a brace of the perimeter structure defining each opening or corner of the perimeter structure defining each opening. In some cases, each of the plurality of first posts is substantially identical to one or more of the plurality of second posts.

According to some variants, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one fourth of an overall thickness of the urinal screen

2

in the direction perpendicular to the first face of the frame. In some cases, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one eighth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame. In some embodiments, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface, the frame is positioned away from the surface by at least one third of a thickness of the urinal screen as measured perpendicular to the first face of the frame. In some cases, the plurality of openings occupy at least three fourths of a surface area of the frame as measured parallel to the first face (e.g., the first plane) of the frame. In some embodiments, the perimeter structures defining the plurality of openings occupy less than one fifth of a surface area of the frame as measured parallel to the first face (e.g., the first plane) of the frame.

According to some variants, a urinal screen includes a frame. The frame can have: a first face; a second face opposite the first face; and a plurality of openings extending through the frame between the first face and the second face. The urinal screen can include a plurality of first posts extending from the first face of the frame. In some embodiments, the urinal screen includes a plurality of second posts extending from the second face of the frame. In some embodiments, a plurality of ends of the plurality of second posts form a base upon which the urinal screen rests when the plurality of first posts point away from a surface upon which the urinal screen is set. In some embodiments, at least half of the plurality of first posts are a same size and shape as at least half of the plurality of second posts.

In some configurations, each of the openings is defined by a polygonal perimeter structure.

In some configurations, each opening is defined by a perimeter structure having plurality of braces and corners.

In some configurations, each of plurality of first posts extends from a corner of a perimeter structure of one or more of the plurality of openings.

In some configurations, each of plurality of second posts extends from a midpoint of a brace of a perimeter structure of one or more of the plurality of openings.

In some configurations, at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings.

In some configurations, at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

In some configurations, at least one of the plurality of second posts extends from each of the braces of the openings. In some configurations, at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

In some configurations, at least one of the plurality of second posts extends from a brace or corner of the perimeter structure defining each opening.

In some configurations, at least one of the plurality of first posts extends from a brace or corner of the perimeter structure defining each opening.

In some configurations, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one eighth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

In some configurations, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface, the frame is positioned away

3

from the surface by at least one third of a thickness of the urinal screen as measured perpendicular to the first face of the frame.

According to some variants, a urinal screen includes a frame. The frame can have: a first face; a second face opposite the first face; and a plurality of openings extending through the frame between the first face and the second face. In some embodiments, the urinal screen includes a plurality of first posts extending from the first face of the frame. The urinal screen can include a plurality of second posts extending from the second face of the frame. In some embodiments, the plurality of openings occupy at least half of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface. In some case, the plurality of openings occupy at least 75% of the surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

In some configurations, each of the plurality of first posts is substantially identical to one or more of the plurality of second posts.

In some configurations, the perimeter structures of the plurality of openings occupy less than one fifth of a surface area of the frame as measured parallel to a first plane face of the frame, wherein the first plane face of the frame is a plane passing through the frame when the frame is set on a flat horizontal surface.

According to some variants, a urinal screen includes a frame. The frame can include: a first face; a second face opposite the first face; and a plurality of interconnected cells, each cell having a polygonal shape with a plurality of sides and corners. In some embodiments, the urinal screen includes a plurality of first posts extending from away from the first face, each of the plurality of first posts connected to a side or corner of the plurality of interconnected cells. In some embodiments, the urinal screen include a plurality of second posts extending away from the second face of the frame, each of the plurality of second posts connected to a side or corner of the plurality of interconnected cells. In some cases each of the interconnected cells shares at least one side and at least one corner with another interconnected cell.

In some configurations, the plurality of interconnected cells form a tessellation.

In some configurations, a thickness of the frame in a direction perpendicular to the first face of the frame is less than one fourth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

### BRIEF DESCRIPTION OF THE DRAWINGS

The present inventions are described with reference to the accompanying drawings, in which like reference characters reference like elements, and wherein:

FIG. 1 is a perspective view of an embodiment of a urinal screen;

FIG. 2 is a top view of the urinal screen of FIG. 1;

FIG. 3 is a front view of the urinal screen of FIG. 1;

FIG. 4 is a close up top view of the urinal screen of FIG. 1;

FIG. 5 is a close up top view of another embodiment of a urinal screen.

FIG. 6 is a schematic view of a post extending from a frame of a urinal screen at a non-perpendicular angle.

### DETAILED DESCRIPTION OF THE INVENTIONS

An embodiment of a urinal screen 10 is illustrated in FIGS. 1-2. The urinal screen 10 can be sized and shaped to

4

fit into a urinal, toilet, or other bathroom appliance. As illustrated, the urinal screen 10 can include a frame 14. The frame 14 can be sized and shaped to fit over all or a portion of a drain of a toilet or urinal. The frame 14 can define a plurality of openings 18 through a thickness of the frame 14. In some embodiments, the urinal screen 10 includes a plurality of posts or structural supports 22 extending from one or more surfaces of the frame 14.

In some embodiments, the screen 10 has a polygonal, elliptical, circular, or other overall shape. For example, as illustrated in FIG. 2, the screen 10 can have a generally hexagonal shape, though many other shapes are contemplated (e.g., rectangles, pentagons, triangles, circles, or some combination thereof). In some embodiments, the screen 10 is shaped to fit a particular urinal or toilet.

The frame 14 and/or posts 22 can be constructed from a polymeric or solid material. For example, the frame 14 and/or posts 22 can be constructed using a 3D printer. In some cases, additives are added to the material of the frame 14 and/or posts 22. Additives can include, for example, bacteria and/or odor neutralizers, silver ions, and other additives or combinations of additives. One method of manufacturing an embodiment of the urinal screen 10 can include providing plastic or EVA material, which may have a melting point of not greater than 250° F., loading the plastic or EVA with at least 15% to about 75% by weight of fragrance material to produce a fragranced plastic or EVA, loading the fragrance at a stage conducted at temperatures such that the fragranced plastic or EVA is from at least 15% by weight fragrance upon completion of the loading stage, and molding the fragranced plastic or EVA into a urinal screen, sized and shaped to be disposed in a urinal, forming openings 18 in the frame 14, and forming posts 22 extending from the frame 14.

The openings 18 can have various shapes, including, but not limited to, polygons (e.g., triangles, rectangles, pentagons, hexagons, etc.), ellipses, and/or some combination thereof. In some embodiments, each of the openings 18 has a substantially identical shape. In some embodiments, one or more of the openings 18 has a different shape from one or more of the other openings.

The openings 18 can occupy a large percentage of the overall surface area of the frame 14 as viewed in FIG. 2. For example, the openings 18 can occupy more than 1/8, more than 1/4, more than 1/3, more than 1/2, more than 2/3, and/or more than 3/4 of the overall surface area of the frame 14 as viewed in FIG. 2. Utilizing a large number of openings 18 can reduce the overall weight of the urinal screen 10.

A top surface (e.g., the first surface 26) of the frame 14 can lie on a first plane when the urinal screen 10 is set on a flat surface. In some cases, a bottom surface (e.g., the second surface 30) of the frame 14 can lie on a second plane when the urinal screen is set on a flat surface. In some embodiments, a maximum cross-sectional area of the frame 14 (e.g., the area not occupied by openings 18), as measured on a frame plane through the frame and parallel to the first and/or second planes is less than 1/2, less than 1/4, less than 1/3, less than 1/6, less than 1/7, less than 1/8, less than 1/9, less than 1/10, less than 1/12, less than 1/15, and/or less than 1/20 of the area defined by the outer perimeter of the frame as measured in the plane. Many variations are possible.

As illustrated in FIGS. 2 and 3, one or more of the openings 18 (e.g., cells) can have a perimeter which includes a plurality of sides (e.g., braces) 42 and corners 46. In some cases, all or a portion of the frame 14 forms a tessellation of openings 18 wherein a plurality of the sides 42 of the

5

openings 18 are shared between two or more openings 18. In some embodiments, each of the openings 18 shares at least one side and at least one corner with another opening.

In some cases, the sides 42 and/or corners 46 of the openings 18 have contoured (e.g., convex) upper and/or lower surfaces. The contoured surfaces of the sides 42 and corners 46 can deflect fluid (e.g., urine) to reduce splash in the urinal, toilet, or other environment in which the urinal screen 10 is installed.

In some embodiments, as illustrated in FIGS. 1 and 2, portions of the frame 14 include one or more solid or closed portions between or surrounding the openings 18. For example, the frame 14 can include one or more solid cells 19 positioned between and/or adjacent the openings 18 of the frame 14. The solid cells 19 can provide a surface area on which various letters, numbers, symbols, trademarks, and/or other visual features may be placed. For example, advertisements, installation instructions, date features, expiration dates, and/or other features may be included on the solid cells 19. In some embodiments, the frame 14 includes one or more intermediate solid cells 20 and/or large solid cells 15 for placement of larger/more complex visual features. For example, the intermediate solid cells 20 can occupy an area greater than or equal to 2, 3, 4, 5, and/or 6 openings 18. In some embodiments, the large solid cell 15 can occupy an area greater than or equal to 10 openings 18. Many variations are possible. In some embodiments, the one or more solid or closed portions facilitate easier removal of the screen 10 from a mold. In some cases, utilizing solid portions increases an amount of fragrance that can be embedded, coated, injected, or otherwise associated with the screen 10.

In some embodiments, the posts 22 extend from the corners 46 of the frame forming openings 18. FIG. 4 illustrates an embodiment of a screen 10' wherein the posts 22' extend from the sides 42' (e.g., the midpoints of the sides 42') of the portions of the frame forming the openings 18' of the frame 14'. In some embodiments, posts 22 extend from both the portions of the frame forming the corners 46 and the portions of the frame forming the sides 42 or from some combination thereof. In some embodiments, posts 22 extend from the portions of the frame forming the corners 46 of the openings 18 on one side of the frame 14 (e.g., the first side 26, as shown in FIG. 5) and from the portions of the frame forming the sides 42 of the openings 18 on the other side of the frame 14 (e.g., the second side 30).

As illustrated in FIG. 5, the posts 22 can extend from a first surface 26 of the frame 14. In some embodiments, posts 22 extend from both the first surface 26 of the frame 14 and a second surface 30 of the frame 14. For example, a first plurality of posts 22a can extend from the first surface 26 of the frame 14 and a second plurality of posts 22b can extend from the second surface 30 of the frame 14. Each of the posts in the first plurality of posts 22a can be substantially identical to the each of the posts in the second plurality of posts 22b. For example, each of the posts can have the same height, width and/or overall shape.

In some embodiments, at least half, at least  $\frac{3}{4}$ , at least  $\frac{1}{2}$ , at least  $\frac{2}{3}$ , at least  $\frac{1}{3}$ , at least  $\frac{9}{10}$ , at least  $\frac{4}{5}$  and/or at least  $\frac{1}{10}$  of the first plurality of posts 22a have a same size and shape as at least half, at least  $\frac{3}{4}$ , at least  $\frac{1}{2}$ , at least  $\frac{2}{3}$ , at least  $\frac{1}{3}$ , at least  $\frac{9}{10}$ , at least  $\frac{4}{5}$  and/or at least  $\frac{1}{10}$  of the second plurality of posts 22b. In some embodiments, one or more of the posts in the first plurality of posts 22a has a different shape and/or height than one or more of the posts in the second plurality of posts 22b. In some embodiments, the first plurality of posts 22a and/or the second plurality of

6

posts 22b have a plurality of heights. For example, a percentage (e.g., 25%, 50%, 75% or some other percentage) of the posts 22 can be shorter than the remaining posts as measured from the first or second surfaces 26, 30 of the frame 14. In some embodiments, at least  $\frac{4}{5}$ , at least  $\frac{3}{5}$ , at least  $\frac{1}{2}$ , and/or at least  $\frac{1}{4}$  of the posts 22 have a height differing from the remaining posts 22. In some embodiments, one or more of the posts 22 is at least  $\frac{1}{5}$ , at least  $\frac{1}{10}$ , at least  $\frac{1}{8}$ , at least  $\frac{1}{4}$ , and/or at least  $\frac{1}{3}$  shorter than one or more of the other posts 22. In some cases, each post is at least  $\frac{1}{5}$  shorter, at least  $\frac{1}{10}$  shorter, at least  $\frac{1}{8}$  shorter, at least  $\frac{1}{4}$  shorter, at least  $\frac{1}{3}$  shorter, at least  $\frac{1}{2}$  taller, at least  $\frac{1}{4}$  taller, at least  $\frac{1}{8}$  taller, at least  $\frac{1}{10}$  taller, and/or at least  $\frac{1}{16}$  taller than at least one of the 3 closest posts 22, at least one of the 5 closest posts 22, at least one of the 7 closest posts 22, at least one of the 9 closest posts 22, at least one of the 10 closest posts 22, at least one of the 12 closest posts 22, and/or at least one of the 15 closest posts 22. In some embodiments, shortening a percentage of the posts 22 can reduce the likelihood that debris is caught in the urinal screen 10. The posts 22 can extend perpendicularly from the frame 14 (e.g., from the first or second surfaces 26, 30 of the frame 14). In some embodiments, one or more of the posts 22 extends from the frame 14 at a non-perpendicular angle (for example, non-perpendicular angle A of FIG. 6).

The frame 14 can have a generally planar or flat shape. In some embodiments, the frame 14 is curved or otherwise shaped in non-planar fashion. For example, the frame 14 can be molded in a non-planar shape to match the contours of a urinal or toilet.

The frame 14 can have a frame thickness 34 (e.g., a distance between the first and second surfaces 26, 30 of the frame 14). The frame thickness 34 can be uniform across the entire frame 14 or can vary in certain portions of the frame 14. An overall thickness 38 of the urinal screen 10 can be measured from a tip of the tallest post 22 extending from the first surface 26 of the frame 14 to a tip of the tallest post 22 extending from the second surface 30 of the frame 14 as measured perpendicularly from the first and second surfaces 26, 30. In some cases, wherein the frame 14 is not planar/flat, the overall thickness 38 of the urinal screen 10 can be determined via the tips of the posts 22 as measured perpendicularly to a tangent plane of the first surface 26 of the frame 14 at a point on the frame 14 where the thicknesses 34, 38 are being measured.

In some embodiments, the frame thickness 34 at a given position on the frame 14 is less than or equal to approximately  $\frac{1}{2}$  of the overall screen thickness 38 as measured perpendicularly to the first surface 26 of the frame 14 at the given position. In some embodiments, the frame thickness 34 is less than or equal to  $\frac{2}{3}$ , less than or equal to  $\frac{5}{8}$ , less than or equal to  $\frac{3}{8}$ , less than or equal to  $\frac{1}{3}$ , less than or equal to  $\frac{1}{4}$ , less than or equal to  $\frac{2}{5}$ , less than or equal to  $\frac{1}{8}$ , less than or equal to  $\frac{1}{10}$ , less than or equal to  $\frac{1}{16}$ , and/or less than or equal to  $\frac{1}{32}$  of the overall screen thickness 38. Use of a thin frame 14 can reduce the overall weight of the urinal screen 10.

In some embodiments, the urinal screen 10 is configured such that a plurality of posts 22 space the frame 14 from the installation surface of a urinal or other fixture onto which the urinal screen 10 is installed. The posts 22 space the frame 14 from the installation surface independent from the orientation of the urinal screen 10. For example, the second plurality of posts 22b can form a base of the urinal screen 10 and can space the frame 14 from the installation surface when the screen 10 is installed with the second surface 30 of the frame 14 facing the installation surface. On the other

hand, the first plurality of posts **22a** can form a base of the urinal screen **10** and can space the frame **14** from the installation surface when the screen **10** is installed with the first surface **26** of the frame facing the installation surface. In some embodiments, the posts **22** space the frame **14** from the installation surface by at least  $\frac{1}{3}$  of the overall thickness **38** of the urinal screen **10**. In some embodiments, the posts **22** space the frame **14** from the installation surface by at least  $\frac{1}{8}$ , at least  $\frac{1}{7}$ , at least  $\frac{1}{6}$ , at least  $\frac{1}{5}$ , at least  $\frac{1}{4}$ , at least  $\frac{3}{8}$ , and/or by at least  $\frac{1}{2}$  of the overall thickness **38** of the urinal screen **10**.

Spacing the frame **14** from the installation surface can reduce the likelihood that the openings **18** are clogged by debris. In some embodiments, the posts **22** positioned between the frame **14** and the installation surface can reduce splashing in the urinal by deflecting urine or other fluids which pass between the frame **14** and the installation surface (e.g., fluid that passes through the openings **18** or around the perimeter of the frame **14**).

For expository purposes, the term “horizontal” as used herein is defined as a plane parallel to the plane or surface of the floor of the area in which the system being described is used or the method being described is performed, regardless of its orientation. The term “floor” floor can be interchanged with the term “ground.” The term “vertical” refers to a direction perpendicular to the horizontal as just defined. Terms such as “above,” “below,” “bottom,” “top,” “side,” “higher,” “lower,” “upper,” “over,” and “under,” are defined with respect to the horizontal plane.

As used herein, the terms “attached,” “connected,” “mated,” and other such relational terms should be construed, unless otherwise noted, to include removable, moveable, fixed, adjustable, and/or releasable connections or attachments. The connections/attachments can include direct connections and/or connections having intermediate structure between the two components discussed.

The terms “approximately,” “about,” “generally” and “substantially” as used herein represent an amount close to the stated amount that still performs a desired function or achieves a desired result. For example, the terms “approximately,” “about,” “generally,” and “substantially” may refer to an amount that is within less than 10% of the stated amount.

While the preferred embodiments of the present inventions have been described above, it should be understood that they have been presented by way of example only, and not of limitation. It will be apparent to persons skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the inventions. Thus the present inventions should not be limited by the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents. Furthermore, while certain advantages of the inventions have been described herein, it is to be understood that not necessarily all such advantages may be achieved in accordance with any particular embodiment of the inventions. Thus, for example, those skilled in the art will recognize that the inventions may be embodied or carried out in a manner that achieves or optimizes one advantage or group of advantages as taught herein without necessarily achieving other advantages as may be taught or suggested herein.

What is claimed is:

1. A urinal screen comprising:

a frame having:

a first face;

a second face opposite the first face; and

a plurality of openings extending through the frame between the first face and the second face;

a plurality of first posts extending from the first face of the frame; and

a plurality of second posts extending from the second face of the frame;

wherein the plurality of openings occupy at least half of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface;

wherein a plurality of ends of the plurality of first posts form a base upon which the urinal screen rests when the plurality of second posts point away from a surface upon which the urinal screen is set;

wherein a plurality of ends of the plurality of second posts form a base upon which the urinal screen rests when the plurality of first posts point away from a surface upon which the urinal screen is set;

wherein, when the urinal screen is set upon a surface in a urinal such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface upon which the urinal screen is set by at least  $\frac{1}{3}$  of a thickness of the urinal screen as measured perpendicular to the first face of the frame;

wherein at least one of the plurality of first posts extends from a perimeter around each of said plurality of openings; and

wherein at least one of the plurality of second posts extends from a perimeter around each of said plurality of openings.

2. The urinal screen of claim 1, wherein each of the plurality of openings is defined by a polygonal perimeter structure.

3. The urinal screen of claim 1, wherein each of the plurality of openings is defined by a perimeter structure having a plurality of braces and corners.

4. The urinal screen of claim 3, wherein each of the plurality of first posts extends from a corner of a perimeter structure defining one or more of the plurality of openings.

5. The urinal screen of claim 3, wherein each of the plurality of second posts extends from a midpoint of a brace of a perimeter structure defining one or more of the plurality of openings.

6. The urinal screen of claim 3, wherein at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings.

7. The urinal screen of claim 3, wherein at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

8. The urinal screen of claim 3, wherein at least one of the plurality of second posts extends from each of the braces of the perimeter structure defining the openings and wherein at least one of the plurality of first posts extends from each of the corners of the perimeter structure defining the openings.

9. The urinal screen of claim 3, wherein at least one of the plurality of second posts extends from a brace or corner of the perimeter structure defining each opening.

10. The urinal screen of claim 3, wherein at least one of the plurality of first posts extends from a brace or corner of the perimeter structure defining each opening.

11. The urinal screen of claim 1, wherein a thickness of the frame in a direction perpendicular to the first face of the frame is less than one eighth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

12. The urinal screen of claim 1, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface upon which the urinal screen is set by at least  $\frac{3}{8}$  of the thickness of the urinal screen.

13. The urinal screen of claim 1, wherein the plurality of openings occupy at least 75% of the surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

14. The urinal screen of claim 1, wherein each of the plurality of first posts is substantially identical to one or more of the plurality of second posts.

15. The urinal screen of claim 1, wherein perimeter structures that define the plurality of openings occupy less than one fifth of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

16. A urinal system comprising:

the screen of claim 1; and

a urinal having a bottom surface and a drain extending through a portion of the bottom surface;

wherein the urinal screen is configured to be positioned on the bottom surface of the urinal.

17. The urinal screen of claim 1, wherein one or more of the first posts extend from the first face of the frame at a non-perpendicular angle.

18. The urinal screen of claim 17, wherein one or more of the second posts extend from the second face of the frame at a non-perpendicular angle.

19. A urinal screen comprising:

a frame having:

a first face;

a second face opposite the first face; and

a plurality of interconnected cells at least partially defined by a plurality of braces that intersect at corners, the plurality of interconnected cells comprising at least a plurality of perimeter cells and a plurality of interior cells;

wherein the plurality of interior cells comprises a first cell,

a second cell, and a third cell, said first cell and said

second cell each partially defined by a first brace

positioned between said first cell and said second cell,

said second cell and said third cell each partially

defined by a second brace positioned between said

second cell and said third cell, and said first cell and

said third cell each partially defined by a third brace

positioned between said first cell and said third cell;

wherein each of the first brace, the second brace, and the

third brace comprises a first end and a second end, and

wherein:

the first end of the first brace intersects at a corner with the two other braces;

the first end of the second brace intersects at a corner with the two other braces; and

the first end of the third brace intersects at a corner with the two other braces;

a plurality of first posts each connected to a brace or corner of the frame and extending from away from the first face of the frame, and

a plurality of second posts each connected to a brace or corner of the frame and extending away from the second face of the frame.

20. The urinal screen of claim 19, wherein the plurality of interconnected cells form a tessellation.

21. The urinal screen of claim 19, wherein a thickness of the frame in a direction perpendicular to the first face of the

frame is less than one fourth of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

22. A urinal system comprising:

the screen of claim 19; and

a urinal having a bottom surface and a drain extending through a portion of the bottom surface;

wherein the urinal screen is configured to be positioned on the bottom surface of the urinal.

23. The urinal screen of claim 19, wherein one or more of the first posts extend from the first face of the frame at a non-perpendicular angle.

24. The urinal screen of claim 23, wherein one or more of the second posts extend from the second face of the frame at a non-perpendicular angle.

25. The urinal screen of claim 19, wherein the first cell, second cell, and third cell each comprise a polygonal shape.

26. The urinal screen of claim 19, wherein the first cell, second cell, and third cell each comprise a hexagonal shape.

27. The urinal screen of claim 19, wherein at least some of the plurality of interconnected cells comprise a polygonal shape.

28. The urinal screen of claim 19, wherein each of the plurality of interconnected cells comprises a polygonal shape.

29. The urinal screen of claim 19, wherein each of the first brace, the second brace, and the third brace has at least one of the plurality of first posts connected thereto and at least one of the plurality of second posts connected thereto.

30. The urinal screen of claim 19, further comprising one or more additional posts connected to the frame at an area other than a brace or corner.

31. The urinal screen of claim 19, wherein each of the plurality of first posts is connected to a brace of the frame, and each of the plurality of second posts is connected to a brace of the frame.

32. The urinal screen of claim 19, wherein each of the plurality of first posts is connected to a corner of the frame, and each of the plurality of second posts is connected to a corner of the frame.

33. The urinal screen of claim 19, wherein at least some of the plurality of first posts and plurality of second posts are connected to braces of the frame, and at least some of the plurality of first posts and plurality of second posts are connected to corners of the frame.

34. The urinal screen of claim 19, wherein a majority of the plurality of interconnected cells have identical shapes.

35. The urinal screen of claim 19, wherein a thickness of the frame in a direction perpendicular to the first face of the frame is less than  $\frac{1}{3}$  of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

36. The urinal screen of claim 19, wherein a thickness of the frame in a direction perpendicular to the first face of the frame is less than  $\frac{1}{8}$  of an overall thickness of the urinal screen in the direction perpendicular to the first face of the frame.

37. The urinal screen of claim 19, wherein the second end of the first brace intersects at a corner with no more than two other braces, the second end of the second brace intersects at a corner with no more than two other braces, and the second end of the third brace intersects at a corner with no more than two other braces.

38. A urinal screen comprising:

a frame having:

a first face;

a second face opposite the first face; and

## 11

a plurality of openings extending through the frame between the first face and the second face;  
 a plurality of first posts extending from the first face of the frame; and  
 a plurality of second posts extending from the second face of the frame;  
 wherein a plurality of ends of the plurality of first posts form a base upon which the urinal screen rests when the plurality of second posts point away from a surface upon which the urinal screen is set;  
 wherein a plurality of ends of the plurality of second posts form a base upon which the urinal screen rests when the plurality of first posts point away from a surface upon which the urinal screen is set;  
 wherein a number of said plurality of first posts and a number of said plurality of second posts are positioned along a perimeter of at least some of the plurality of openings, so as to surround the at least some of the plurality of openings; and  
 wherein, when the urinal screen is set upon a surface in a urinal such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface by at least  $\frac{1}{4}$  of a thickness of the urinal screen as measured perpendicular to the first face of the frame, such that posts positioned between the frame and the surface upon which the urinal screen is set can reduce splashing on a user of the urinal by deflecting a flow of urine which passes through said plurality of openings.

39. A urinal system comprising:  
 the screen of claim 38; and  
 a urinal having a bottom surface and a drain extending through a portion of the bottom surface;  
 wherein the urinal screen is configured to be positioned on the bottom surface of the urinal.

40. The urinal screen of claim 38, wherein one or more of the first posts extend from the first face of the frame at a non-perpendicular angle.

41. The urinal screen of claim 38, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface by at least  $\frac{1}{3}$  of the thickness of the urinal screen as measured perpendicular to the first face of the frame.

42. The urinal screen of claim 38, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away from the surface by at least  $\frac{3}{8}$  of the thickness of the urinal screen as measured perpendicular to the first face of the frame.

43. The urinal screen of claim 38, wherein, when the urinal screen is set upon a surface such that the first or second face of the frame is oriented toward the surface upon which the urinal screen is set, the frame is positioned away

## 12

from the surface by at least  $\frac{4}{5}$  of the thickness of the urinal screen as measured perpendicular to the first face of the frame.

44. The urinal screen of claim 38, wherein a thickness of the frame as measured perpendicular to the first face of the frame is less than or equal to  $\frac{1}{3}$  of the thickness of the urinal screen.

45. The urinal screen of claim 38, wherein a thickness of the frame as measured perpendicular to the first face of the frame is less than or equal to  $\frac{1}{4}$  of the thickness of the urinal screen.

46. The urinal screen of claim 38, wherein a thickness of the frame as measured perpendicular to the first face of the frame is less than or equal to  $\frac{1}{8}$  of the thickness of the urinal screen.

47. The urinal screen of claim 38, wherein at least half of the plurality of first posts are a same size and shape as at least half of the plurality of second posts.

48. The urinal screen of claim 38, wherein the plurality of openings occupy at least half of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

49. The urinal screen of claim 38, wherein the plurality of openings occupy more than  $\frac{2}{3}$  of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

50. The urinal screen of claim 38, wherein the plurality of openings occupy at least  $\frac{3}{4}$  of a surface area of the frame as observed perpendicular to the first face of the frame when the frame is set on a flat surface.

51. The urinal screen of claim 38, wherein the perimeter of the at least some of the plurality of openings comprises a polygonal shape defined by a plurality of braces and corners, and at least some of the number of said plurality of first posts and at least some of the number of said plurality of second posts extend from the corners.

52. The urinal screen of claim 38, wherein the perimeter of the at least some of the plurality of openings comprises a polygonal shape defined by a plurality of braces and corners, and at least some of the number of said plurality of first posts and at least some of the number of said plurality of second posts extend from the braces.

53. The urinal screen of claim 38, wherein six of said plurality of first posts and six of said plurality of second posts are positioned along the perimeter of the at least some of the plurality of openings, so as to surround the at least some of the plurality of openings.

54. The urinal screen of claim 38, wherein the plurality of openings comprise a contoured side surface to further reduce splashing on the user of the urinal by deflecting a flow of urine.

55. The urinal screen of claim 40, wherein one or more of the second posts extend from the second face of the frame at a non-perpendicular angle.

\* \* \* \* \*