



US007593000B1

(12) **United States Patent**
Chin

(10) **Patent No.:** **US 7,593,000 B1**
(45) **Date of Patent:** ***Sep. 22, 2009**

(54) **TOUCH-BASED AUTHENTICATION OF A
MOBILE DEVICE THROUGH USER
GENERATED PATTERN CREATION**

(75) Inventor: **David H. Chin**, 760 Oak Grove Ave.,
Menlo Park, CA (US) 94025

(73) Assignee: **David H. Chin**, Menlo Park, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **12/343,516**

(22) Filed: **Dec. 24, 2008**

Related U.S. Application Data

(63) Continuation of application No. 12/122,667, filed on
May 17, 2008.

(51) **Int. Cl.**
G09G 5/00 (2006.01)
G06F 3/041 (2006.01)

(52) **U.S. Cl.** **345/156**; 345/169; 345/173;
379/142.05; 382/181

(58) **Field of Classification Search** 345/156,
345/169, 171-173
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,193,668 A	3/1993	Fukuchi et al.
5,406,307 A	4/1995	Hirayama et al.
5,483,261 A	1/1996	Yasutake
5,543,897 A	8/1996	Altrieth, III
5,559,961 A	9/1996	Blonder
5,596,656 A	1/1997	Goldberg
5,610,380 A	3/1997	Nicolaisen
5,796,183 A	8/1998	Hourmand
5,821,933 A	10/1998	Keller et al.

5,907,327 A	5/1999	Ogura et al.
5,923,908 A	7/1999	Schrock et al.
6,160,540 A	12/2000	Fishkin et al.
6,181,328 B1	1/2001	Shieh et al.
6,209,104 B1	3/2001	Jalili
6,243,080 B1	6/2001	Molne
6,249,606 B1	6/2001	Kiraly et al.

(Continued)

FOREIGN PATENT DOCUMENTS

AU 2007902517 5/2007

(Continued)

OTHER PUBLICATIONS

Appleinsider Staff, New Apple filing details virtual input touch-
screen interface, Feb. 21, 2006, [http://www.appleinsider.com/ar-
ticles/06/02/21/new_apple_filing_details_virtual_input_
touch_screen_interface.html](http://www.appleinsider.com/articles/06/02/21/new_apple_filing_details_virtual_input_touch_screen_interface.html) (last visited Dec. 6, 2008).


(Continued)

Primary Examiner—Duc Q Dinh
(74) *Attorney, Agent, or Firm*—Raj Abbyanker LLP

(57) **ABSTRACT**

A method, system, and apparatus of a touch-based authenti-
cation of a mobile device through user generated pattern
creation are disclosed. In one embodiment, a method of a
mobile device includes recognizing a tactile pattern on a
touch screen without a visual aid as an unlocking gesture,
storing the unlocking gesture to a memory of the mobile
device, associating another tactile pattern on the touch screen
with the unlocking gesture, and transforming the mobile
device from an initial state to an unlocked state based on the
association between the another tactile pattern and the
unlocking gesture. The method may include transforming the
mobile device to operate as a telephonic communication
device in the unlocked state.

10 Claims, 12 Drawing Sheets

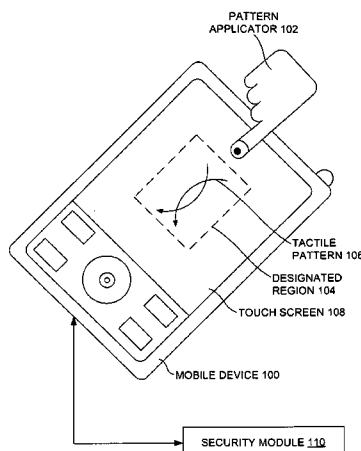

US 7,593,000 B1

Page 2

U.S. PATENT DOCUMENTS							
6,298,146 B1 *	10/2001	Ilan et al.	382/115	2007/0150842 A1	6/2007	Chaudhri et al.	
6,323,846 B1	11/2001	Westerman et al.		2007/0177803 A1	8/2007	Elias et al.	
6,405,060 B1	6/2002	Schroeder et al.		2007/0177804 A1	8/2007	Elias et al.	
6,411,285 B1	6/2002	Miyazawa		2007/0205988 A1	9/2007	Gloyd et al.	
6,476,797 B1	11/2002	Kurihara et al.		2007/0205992 A1	9/2007	Gloyd et al.	
6,570,557 B1	5/2003	Westerman et al.		2007/0236466 A1	10/2007	Hotelling	
6,633,310 B1	10/2003	Andrew et al.		2007/0236470 A1	10/2007	Abanami et al.	
6,668,081 B1 *	12/2003	Ilan et al.	382/187	2007/0268267 A1	11/2007	Chang	
6,677,932 B1	1/2004	Westerman		2007/0290628 A1	12/2007	Altonen et al.	
6,720,860 B1	4/2004	Narayanaswami		2008/0006454 A1	1/2008	Hotelling	
6,788,809 B1	9/2004	Grzeszczuk et al.		2008/0007532 A1	1/2008	Chen	
6,862,687 B1	3/2005	Suzuki		2008/0007533 A1	1/2008	Hotelling	
7,004,394 B2 *	2/2006	Kim	235/472.01	2008/0007539 A1	1/2008	Hotelling	
7,006,077 B1	2/2006	Uusimaki		2008/0018617 A1	1/2008	Ng et al.	
7,030,861 B1	4/2006	Westerman et al.		2008/0036743 A1	2/2008	Westerman et al.	
7,053,887 B2	5/2006	Kraus et al.		2008/0055257 A1	3/2008	Peng	
7,095,401 B2	8/2006	Liu et al.		2008/0082934 A1	4/2008	Kocienda et al.	
7,096,454 B2	8/2006	Damm et al.		2008/0094356 A1	4/2008	Ording et al.	
7,157,649 B2	1/2007	Hill		2008/0094368 A1	4/2008	Ording et al.	
7,231,231 B2	6/2007	Kokko et al.		2008/0094369 A1	4/2008	Ganatra et al.	
7,292,230 B2	11/2007	Tokkonen		2008/0094370 A1	4/2008	Ording et al.	
7,295,191 B2	11/2007	Kraus et al.		2008/0094371 A1	4/2008	Forstall et al.	
7,313,120 B2	12/2007	Ekberg et al.		2008/0098331 A1	4/2008	Novick et al.	
7,315,793 B2	1/2008	Jean		2008/0122796 A1	5/2008	Jobs et al.	
RE40,153 E	3/2008	Westerman et al.		2008/0158170 A1	7/2008	Herz et al.	
7,339,580 B2	3/2008	Westerman et al.		2008/0163130 A1	7/2008	Westerman	
7,403,837 B2	7/2008	Graiger et al.		2008/0165136 A1	7/2008	Christie et al.	
7,411,575 B2	8/2008	Hill et al.		2008/0165141 A1	7/2008	Christie	
2001/0011308 A1	8/2001	Clark et al.		2008/0165142 A1	7/2008	Kocienda et al.	
2001/0012022 A1	8/2001	Smith		2008/0165143 A1	7/2008	Tolmasky et al.	
2002/0015024 A1	2/2002	Westerman et al.		2008/0165144 A1	7/2008	Forstall et al.	
2002/0029341 A1	3/2002	Juels et al.		2008/0165145 A1	7/2008	Herz et al.	
2002/0132634 A1	9/2002	Hiltunen		2008/0165147 A1	7/2008	Christie et al.	
2003/0117376 A1	6/2003	Ghulam		2008/0165148 A1	7/2008	Williamson et al.	
2003/0142138 A1	7/2003	Brown et al.		2008/0165149 A1	7/2008	Platzer et al.	
2004/0034801 A1	2/2004	Jaeger		2008/0165151 A1	7/2008	Lemay et al.	
2004/0085351 A1	5/2004	Tokkonen		2008/0165152 A1	7/2008	Forstall et al.	
2004/0204129 A1	10/2004	Payne et al.		2008/0165153 A1	7/2008	Platzer et al.	
2004/0252727 A1	12/2004	Mousseau et al.		2008/0165157 A1	7/2008	Fu et al.	
2004/0268267 A1	12/2004	Moravcsik		2008/0165160 A1	7/2008	Kocienda et al.	
2005/0052427 A1	3/2005	Wu et al.		2008/0165255 A1	7/2008	Christie et al.	
2005/0057522 A1	3/2005	Godler		2008/0168290 A1	7/2008	Jobs et al.	
2005/0079896 A1	4/2005	Kokko et al.		2008/0168349 A1	7/2008	Lamiroux et al.	
2005/0210417 A1	9/2005	Marvit et al.		2008/0168353 A1	7/2008	Anzures et al.	
2005/0212756 A1	9/2005	Marvit et al.		2008/0168361 A1	7/2008	Forstall et al.	
2005/0212911 A1	9/2005	Marvit et al.		2008/0168365 A1	7/2008	Chaudhri	
2005/0237308 A1	10/2005	Autio et al.		2008/0168395 A1	7/2008	Ording et al.	
2005/0253817 A1	11/2005	Rytivaara et al.		2008/0168396 A1	7/2008	Matas et al.	
2005/0264833 A1	12/2005	Hiraoka et al.		2008/0168404 A1	7/2008	Ording	
2006/0012577 A1	1/2006	Kyrola		2008/0168405 A1	7/2008	Tolmasky et al.	
2006/0022956 A1	2/2006	Lengeling et al.		2008/0174570 A1	7/2008	Jobs et al.	
2006/0097991 A1	5/2006	Hotelling et al.		2008/0180408 A1	7/2008	Forstall et al.	
2006/0109252 A1	5/2006	Kolmykov-Zotov et al.		2008/0191898 A1	8/2008	Janik	
2006/0117197 A1	6/2006	Nurmi		2008/0198141 A1	8/2008	Lee et al.	
2006/0232567 A1	10/2006	Westerman et al.		2008/0211778 A1	9/2008	Ording et al.	
2006/0238518 A1	10/2006	Westerman et al.		2008/0220752 A1	9/2008	Forstall et al.	
2006/0238519 A1	10/2006	Westerman et al.		2008/0229255 A1	9/2008	Linjama et al.	
2006/0238520 A1	10/2006	Westerman et al.		2008/0259042 A1 *	10/2008	Thorn	345/173
2006/0238521 A1	10/2006	Westerman et al.		2008/0278455 A1 *	11/2008	Atkins et al.	345/173
2006/0238522 A1	10/2006	Westerman et al.		2009/0085877 A1 *	4/2009	Chang et al.	345/173
2006/0286966 A1	12/2006	Musto		FOREIGN PATENT DOCUMENTS			
2007/0020601 A1	1/2007	Wang et al.		DE	197 24 278 A1	1/1998	
2007/0061126 A1	3/2007	Russo et al.		DE	198 48 501 A1	5/2000	
2007/0070050 A1	3/2007	Westerman et al.		DE	102 28 568 A1	1/2004	
2007/0070051 A1	3/2007	Westerman et al.		EP	0 668 657 A1	8/1995	
2007/0070052 A1	3/2007	Westerman et al.		EP	1 284 450 A2	2/2003	
2007/0078919 A1	4/2007	Westerman et al.		EP	1 037 136 A3	11/2003	
2007/0081726 A1	4/2007	Westerman et al.		EP	1 076 281 B1	3/2005	
2007/0139395 A1	6/2007	Westerman et al.		EP	0 996 228 B1	4/2005	
2007/0146335 A1	6/2007	Hsieh et al.		EP	1 037 136 B1	4/2005	
2007/0150826 A1	6/2007	Anzures et al.		GB	2 353 184 A	2/2001	

GB	2 358 777 A	8/2001
JP	08171442 A2	7/1996
JP	11203045	7/1999
JP	2002082734 A	3/2002
JP	2003058302 A	2/2003
JP	2005100391 A	4/2005
WO PCT/JP-1998/004745		4/1999
WO PCT/US-1999/001146		7/1999
WOPCT/DK-2001/000204		10/2001
WO PCT/IB-2002/00623		9/2003
WO PCT/FI-2003/000485		12/2003
WO PCT/US-2005/030968		4/2006
WO PCT/EP-2006/060211		9/2006
WO PCT/EP-2006/006594		1/2007
WO PCT/US-2006/028317		2/2007
WO PCT/IB-2006/003727		6/2007
WO PCT/US-2006/061370		7/2007
WO PCT/US-2006/062759		7/2007
WO PCT/US-2007/001611		8/2007
WO PCT/US-2007/010870		11/2007
WO PCT/US-2007/077776		3/2008
WO PCT/US-2007/077777		3/2008
WO PCT/US-2007/026182		7/2008
WO PCT/US-2007/089161		7/2008
WO PCT/US-2007/089162		7/2008
WO PCT/US-2007/089172		7/2008

OTHER PUBLICATIONS

A. G. Hauptmann; Speech and gestures for graphic image manipulation, 1989, <http://portal.acm.org/citation.cfm?id=67496> (last visited Dec. 6, 2008).

Anastasios A. Economides and Nick Nikolaou, Evaluation of Handheld Devices for Mobile Learning, <http://www.conta.uom.gr/conta/publications/PDF/Evaluation%20of%20Handheld%20Devices%20for%20Mobile%20Learning.pdf> (last visited Dec. 6, 2008).

Andrew D. Wilson, TouchLight: an imaging touch screen and display for gesture-based interaction, <http://portal.acm.org/citation.cfm?id=1027933.1027946> (last visited Dec. 6, 2008).

Antti Pirhonen; Stephen Brewster, Christopher Holguin, Gestural and audio metaphors as a means of control for mobile devices, 2002, p. 291-298, Conference on Human Factors in Computing Systems, ACM, New York, <http://portal.acm.org/citation.cfm?doi=503376.503428> (last visited Dec. 6, 2008).

Appleinsider Staff, Handwriting recognition interface appears in iPhone Software 2.0, May 5, 2008, http://www.appleinsider.com/articles/08/05/05/handwriting_recognition_interface_appears_in_iphone_software_2.0.html (last visited Dec. 6, 2008).

Appleinsider Staff, Mega Apple filing details next-gen 'multi-touch input surface', Feb. 21, 2008, http://www.appleinsider.com/articles/08/02/21/mega_apple_filing_next_gen_multi_touch_input_surface.html (last visited Dec. 6, 2008).

Arnold Kim, Apple Exploring MultiTouch Interface Gestures, Aug. 2, 2007, <http://www.macrumors.com/2007/08/02/apple-exploring-multitouch-interface-gestures/> (last visited Dec. 6, 2008).

Arnold Kim, Synaptics ClearPad Technology, Fingerworks, iPhone?, Jan. 15, 2007, <http://www.macrumors.com/2007/01/15/synaptics-clearpad-technology-fingerworks-iphone/> (last Dec. 6, 2008).

Graffiti (Palm-OS), [http://en.wikipedia.org/wiki/Graffiti_\(Palm_OS\)](http://en.wikipedia.org/wiki/Graffiti_(Palm_OS)) (last visited Dec. 6, 2008).

Gridlock 1.32, <http://www.pdabusiness.com/gridlock/manual/manual.html> (last visited Dec. 6, 2008).

Gustaf Erikson, Application of inertial sensing to handheld terminals, Dec. 19, 2001, <http://storeby.net/gustaf/thesis/ger-thesis-final.pdf> (last visited Dec. 6, 2008).

Ivan Poupyrev et al., Ambient touch: designing tactile interfaces for handheld devices, 2002, <http://portal.acm.org/citation.cfm?id=571985.571993> (last visited Dec. 6, 2008).

Ivan Poupyrev, Shigeaki Maruyama, Tactile Interfaces for Small Touch Screens, http://www.sonycsll.co.jp/person/poup/e-library/2003/uist2003_tactilesmalldisplay.pdf (last Dec. 6, 2008).

J.E. Bardram, The trouble with login: on usability and computer security in ubiquitous computing, <http://www.springerlink.com/content/h1744q1332032788/> (last visited Dec. 6, 2008).

JGUI Professional, Touch Password protection, <http://www.jgui.net/touch/index.html> (last visited Dec. 6, 2008).

Jukka Linjama, Jonna-Hakkila, Sami Ronkainen, Gesture Interfaces for Mobile Devices—Minimalist Approach for Haptic Interaction, http://www.dcs.gla.ac.uk/haptic/haptics%20web%20pages_files/Linjama%20et%20al.pdf (last visited Dec. 6, 2008).

Jun Rekimoto, Takaaki Ishizawa, Carsten Schwesig, Haruo Oba, PreSense: Interaction Techniques for Finger Sensing Input Devices, <http://ftp.csl.sony.co.jp/person/rekimoto/papers/rekimoto-uist03.pdf> (last visited Dec. 6, 2008).

Ken Hinckley, Jeff Pierce, Mike Sinclair, Eric Horvitz, Sensing techniques for mobile interaction, 2000, <http://portal.acm.org/citation.cfm?id=354401.354417> (last visited Dec. 6, 2008).

Lux Products Corp, Smart Temp Electronic Thermostat Installation and Operating Instructions, http://www.blueridgecompany.com/documents/PSP711TS_Install.pdf (last visited Dec. 6, 2008).

M.R. Minsky, Manipulating simulated objects with real-world gestures using a force and position sensitive screen, 1984, <http://portal.acm.org/citation.cfm?id=800031.808598> (last visited Dec. 6, 2008).

Mark Nicholson et al., Pen-Based Gestures: An Approach to Reducing Screen Clutter in Mobile Computing, 2004, <http://www.springerlink.com/content/6frruv84f712e0h4/> (last visited Dec. 6, 2008).

Markus F. Peschl and Chris Stary, The Role of Cognitive Modeling for User Interface Design Representations: An Epistemological Analysis of Knowledge Engineering in the Context of Human-Computer Interaction, <http://www.springerlink.com/content/mum06835u6685168/> (last visited Dec. 6, 2008).

Michael Thoernlund, Gesture Analyzing for Multi-Touch Screen Interfaces, 2007, <http://epubl.ltu.se/1404-5494/2007/30/LTU-HIP-EX-0730-SE.pdf> (last visited Dec. 6, 2008).

New Apple Patents tablet: iPod-like UI elements, Feb. 2, 2006, <http://hrmpf.com/wordpress/48/new-apple-patents/> (last visited Dec. 6, 2008).

Paul Keir, John Payne, Jocelyn Elgoyhen, Martyn Horner, Martin Naef, Paul Anderson, Gesture recognition with Non referenced Tracking, <http://www2.computer.org/portal/web/csd/doi/10.1109/VR.2006.64> (last visited Dec. 6, 2008).

R. Ricci, G. Chollet, M.V. Crispino, S. Jassim, J. Koremane, M. Olivar-Dimas, S. Garcia-Salicetti, P. Soria-Rodriguez, SecurePhone: a mobile phone with biometric authentication and e-signature support for dealing secure transactions on the fly, May 2, 2006, <http://spiedl.aip.org/getabs/servlet/GetabsServlet?prog=normal&id=PSISDG006250000001625009000001&idtype=-cvips&gifs=yes> (last visited Dec. 6, 2008).

S O'Modhrain, Touch and Go—Designing Haptic Feedback for a Hand-Held Mobile Device, Jan. 3, 2005, <http://www.springerlink.com/content/p543770h580m7884/> (last visited Dec. 6, 2008).

Sam Oliver, Apple details next-gen multi-touch techniques for tablet Macs, Aug. 28, 2008 http://www.appleinsider.com/articles/08/08/28/apple_details_next_gen_multi_touch_techniques_for_tablet_macs.html (last visited Dec. 6, 2008).

Sami Ronkainen, Jonna Hakkila, Saana Kaleva, Ashley Colley, Jukka Linjama, Tap input as an embedded interaction method for mobile devices, 2007, <http://portal.acm.org/citation.cfm?id=1226969.1227023> (last visited Dec. 6, 2008).

Shiguang Shan, Wen Gao, Xilin Chen; Bo Cao, Wenbin Zeng, A Face-Unlock Screen Saver by Using Face Verification Based on Identity-Specific Subspaces, <http://www.jdl.ac.cn/user/sgshan/pub/Shan-PCM01.PDF> (last visited Dec. 6, 2008).

Slash Lane, Apple filing spills details of advanced multi-touch pads for Macs, Feb. 19, 2008, http://www.appleinsider.com/articles/08/02/19/apple_filing_spills_details_of_advanced_multi_touch_pads_for_macs.html (last visited Dec. 6, 2008).


Stephen Brewster, Joanna Lumsden, Marek Bell, Malcolm Hall, Stuart Tasker, Multimodal 'eyes-free' interaction techniques for wearable devices, 2003, <http://portal.acm.org/citation.cfm?id=642611.642694&type=series> (last visited Dec. 6, 2008).
Susanna Pirttikangas, Ivan Sanchez, Mikko Kauppila, Jukka Riekkii, Comparison of Touch, Mobile Phone, and Gesture Based Controlling of Browser Applications on a Large Screen, <http://www.pervasive2008.org/Papers/LBR/Ibr2.pdf> (last visited Dec. 6, 2008).
Topi Kaaresoja, Lorna M. Brown, Jukka Linjama, Snap-Crackle-Pop: Tactile Feedback for Mobile Touch Screens, http://research.microsoft.com/~lornab/publications/kaaresoja_EH06.pdf (last visited Dec. 6, 2008).
Trenton Schulz, Using the Keystroke-Level Model to Evaluate Mobile Phones, <http://apachepersonal.miun.se/~vivasp/IRIS31/IRIS31-019.pdf> (last visited Dec. 6, 2008).

William R. Hamburg, Deborah A. Wallach, Marc A. Viredaz, Lawrence S. Brakmo, Carl A. Waldspruger, Joel F. Bartlett, Timothy Mann, Keith I. Farkas. Itsy: Stretching the Bounds of Mobile Computing, <http://www2.computer.org/portal/web/csd/doi/10.1109/2.917534> (last visited Dec. 6, 2008).

Sean Fallon, Google Shows Off Dream-Like Android Handset, Sep. 16, 2008, <http://gizmodo.com/5050594/google-shows-off-dream-like-android-handset> (last visited Dec. 6, 2008).

Elise Ackerman, as Google Continues to Work Out the Bugs in Android, Its Free Must-Have Operating System for Mobile Devices, Many Developers Are Asking: Where's the Code?, Jan. 19, 2008, San Jose Mercury News, 1C.

* cited by examiner

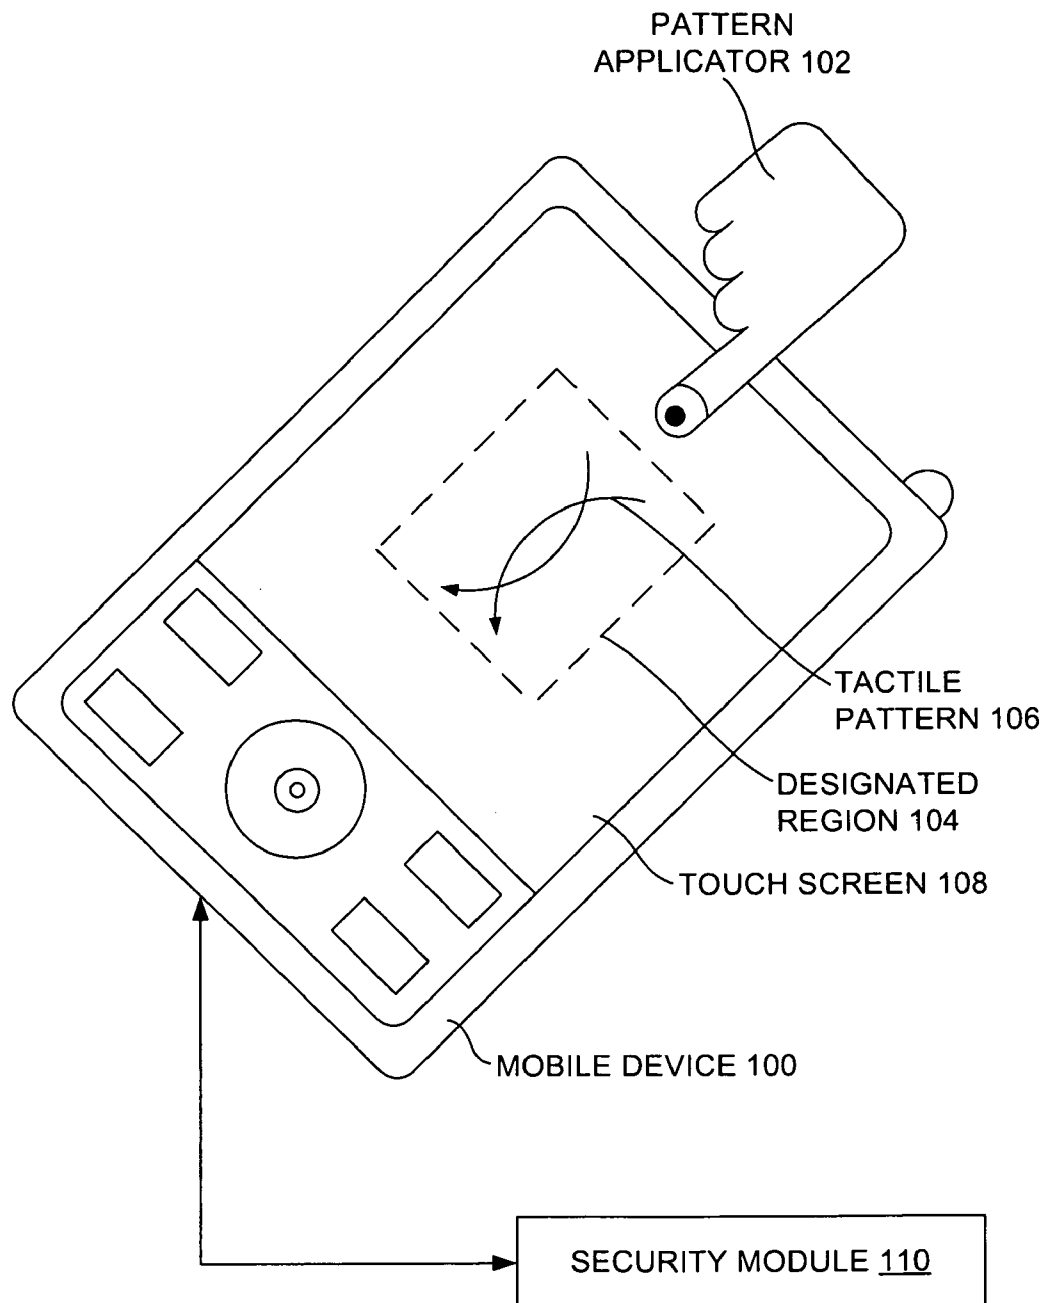**FIGURE 1A**

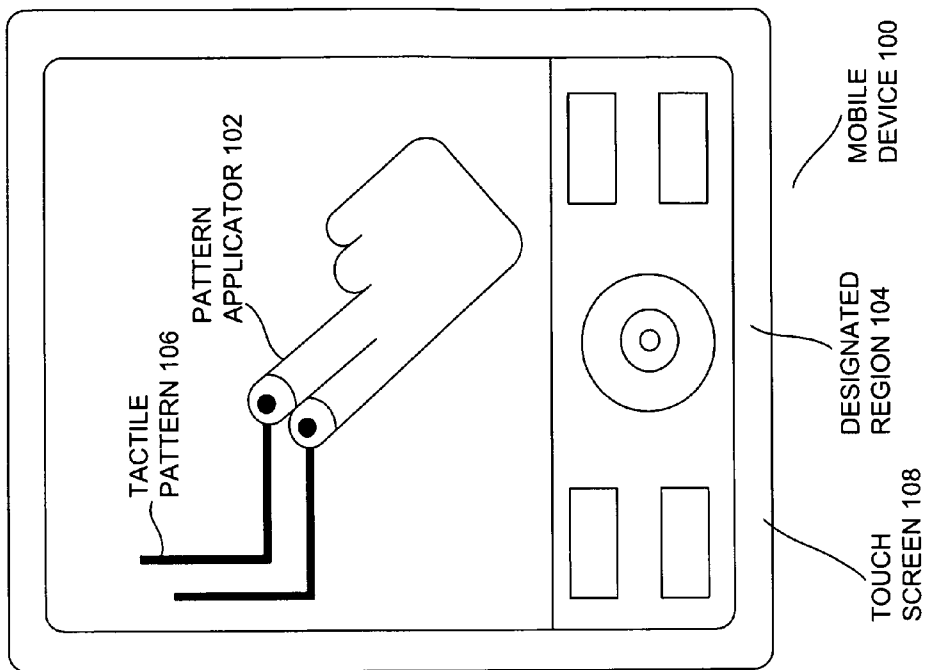


FIGURE 1D

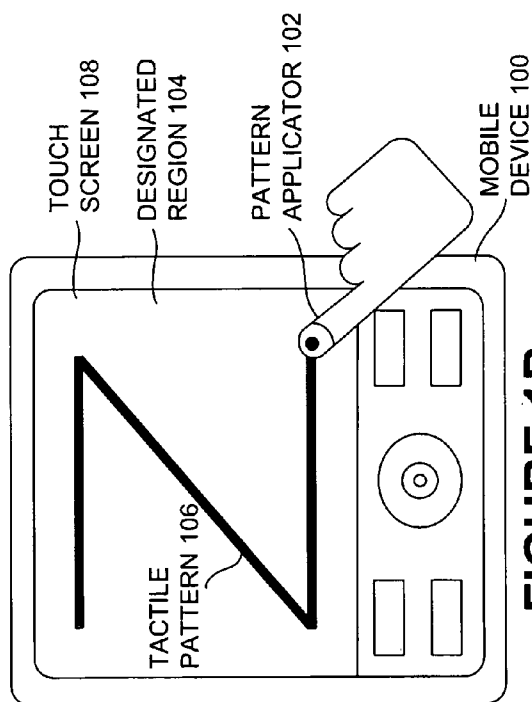


FIGURE 1B

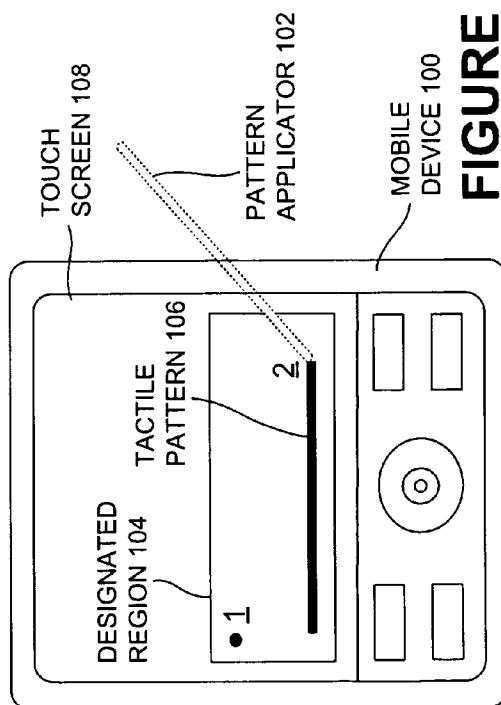
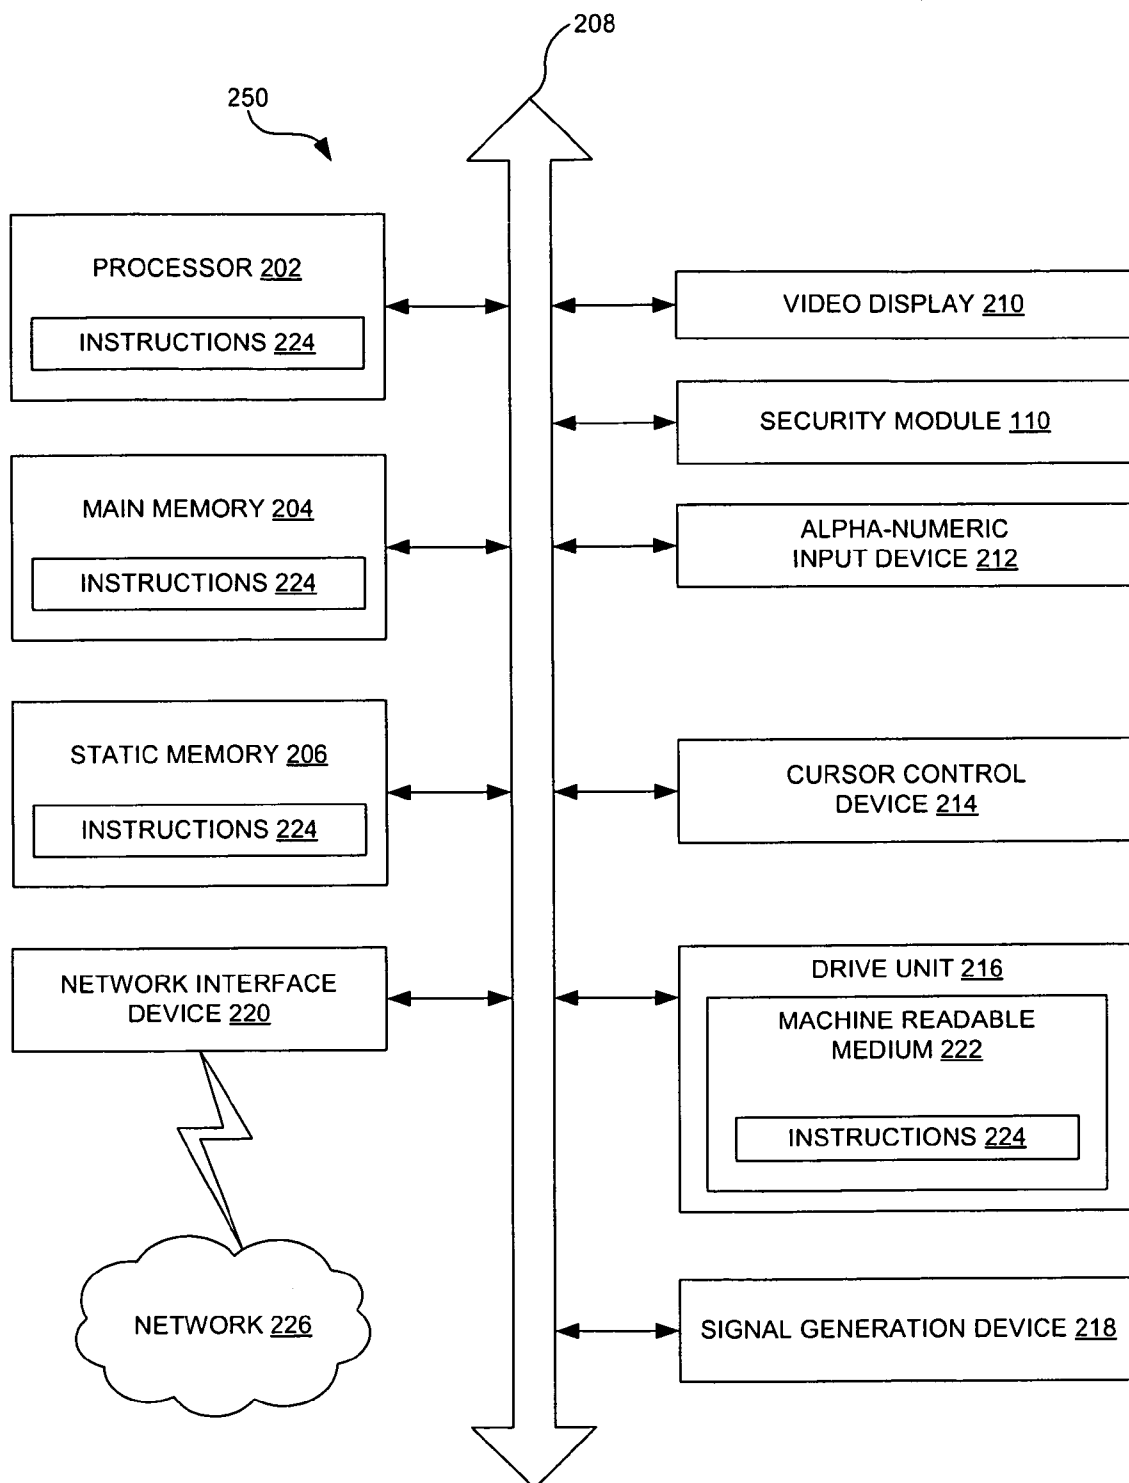


FIGURE 1C

**FIGURE 2**

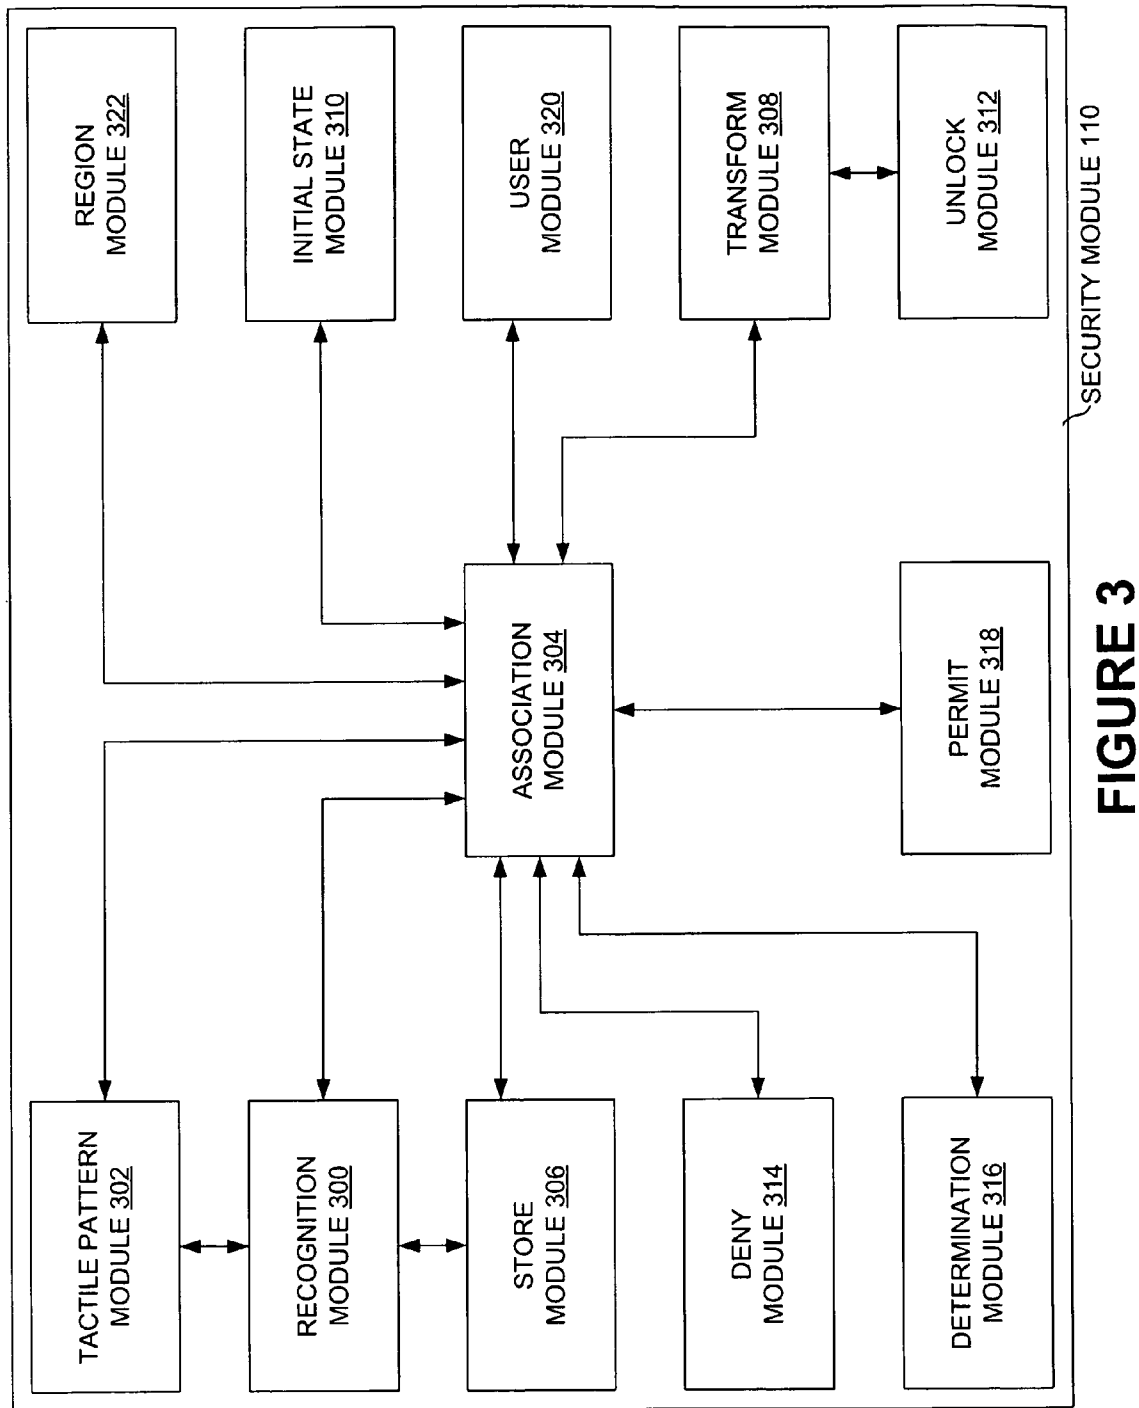


FIGURE 3




USER 400	INITIAL STATE 436	SECURITY GESTURE 402	RULES 406	TOLERANCE 430	USER PROFILE PERMISSIONS 404	UNLOCKED STATE 432	USER PROFILE PERSONALIZED SETTINGS 408
JOHN	BATTERY CONSERVATION MODE 440		FIVE SECONDS TOTAL TIME 418		ALL ACCESS 410	TELEPHONIC COMMUNICATION DEVICE 412	CONTACT LIST 414 GREETING MESSAGE 416
JOHN	BATTERY CONSERVATION MODE 440		DESIGNATED REGION ON TOUCH SCREEN 104		ALL ACCESS 410	BROWSER APPLICATION 422	CONTACT LIST 414 GREETING MESSAGE 416
JANE	BATTERY CONSERVATION MODE 440		SIMULTANEOUS AND SERIAL 424		TELEPHONIC COMMUNICATION DEVICE 412	TELEPHONIC COMMUNICATION DEVICE 412	CONTACT LIST 414 AND GREETING MESSAGE 416
JOSE	CERTAIN FUNCTIONS DISABLED		SIMULTANEOUS AND SERIAL 424 MULTIPLE DISTINCT LOCATIONS 426	NONE	BROWSER APPLICATION 414	MEDIA PLAYER 434	MEDIA PLAYLIST 416 CUSTOMIZED BROWSER SETTINGS 420
RAJ	BATTERY CONSERVATION MODE 440		HOLD ONE SECOND DURATION AT BOTTOM OF GESTURE 428		ALL ACCESS 410	MEDIA PLAYER 434	NONE
RAY	CERTAIN FUNCTION DISABLED	FAILED TO ENTER CORRECT UNLOCKING GESTURE 402	CORRECT UNLOCKING GESTURE REQUIRED 412	NONE	EMERGENCY CALLS	EMERGENCY CALLS ONLY STATE 438	NONE
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.

FIGURE 4

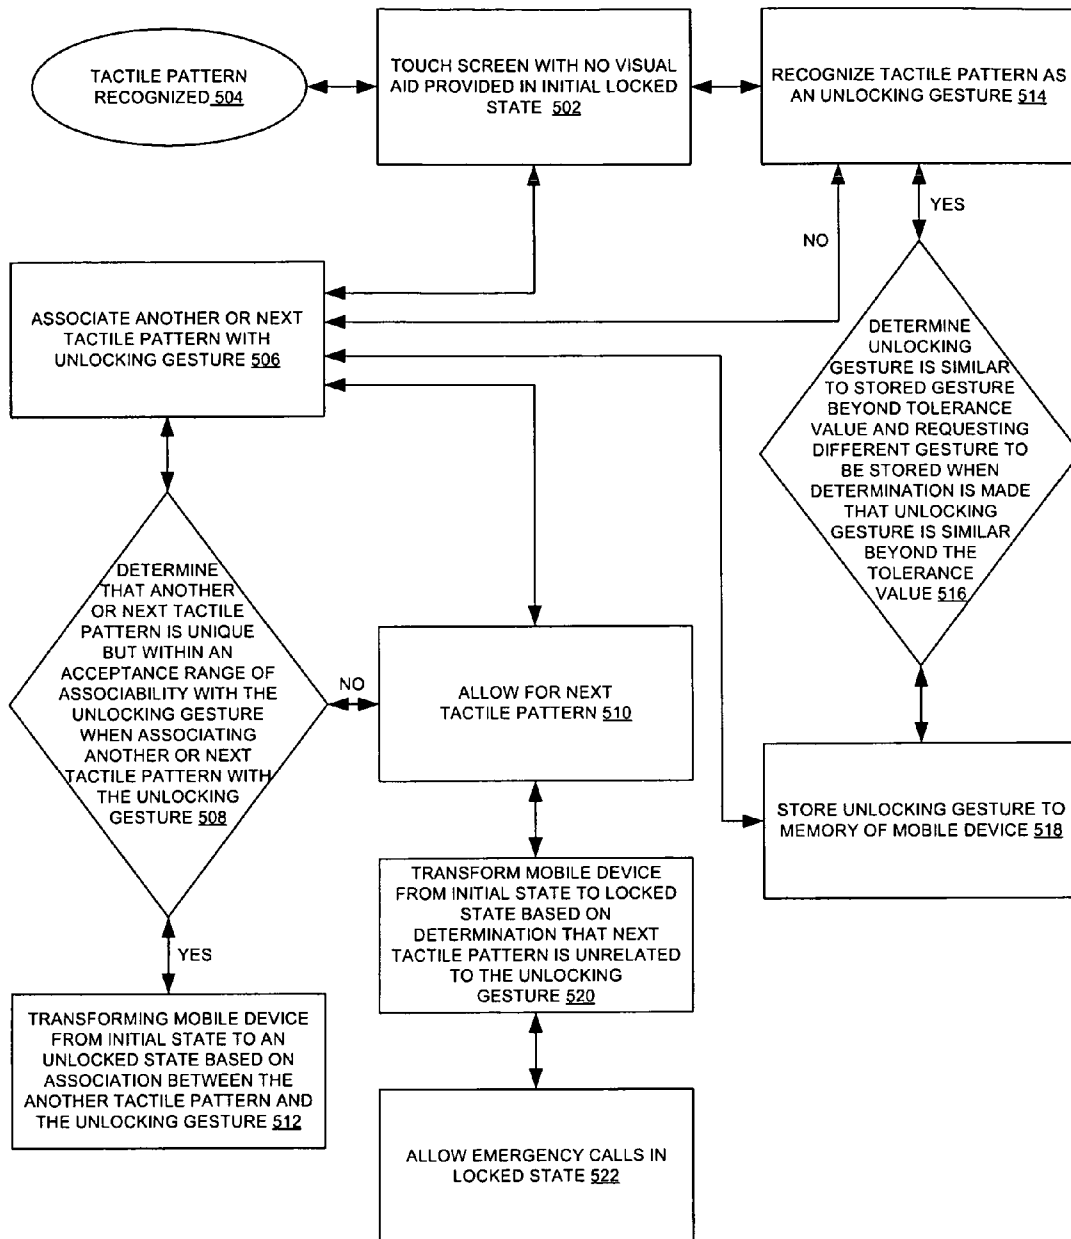
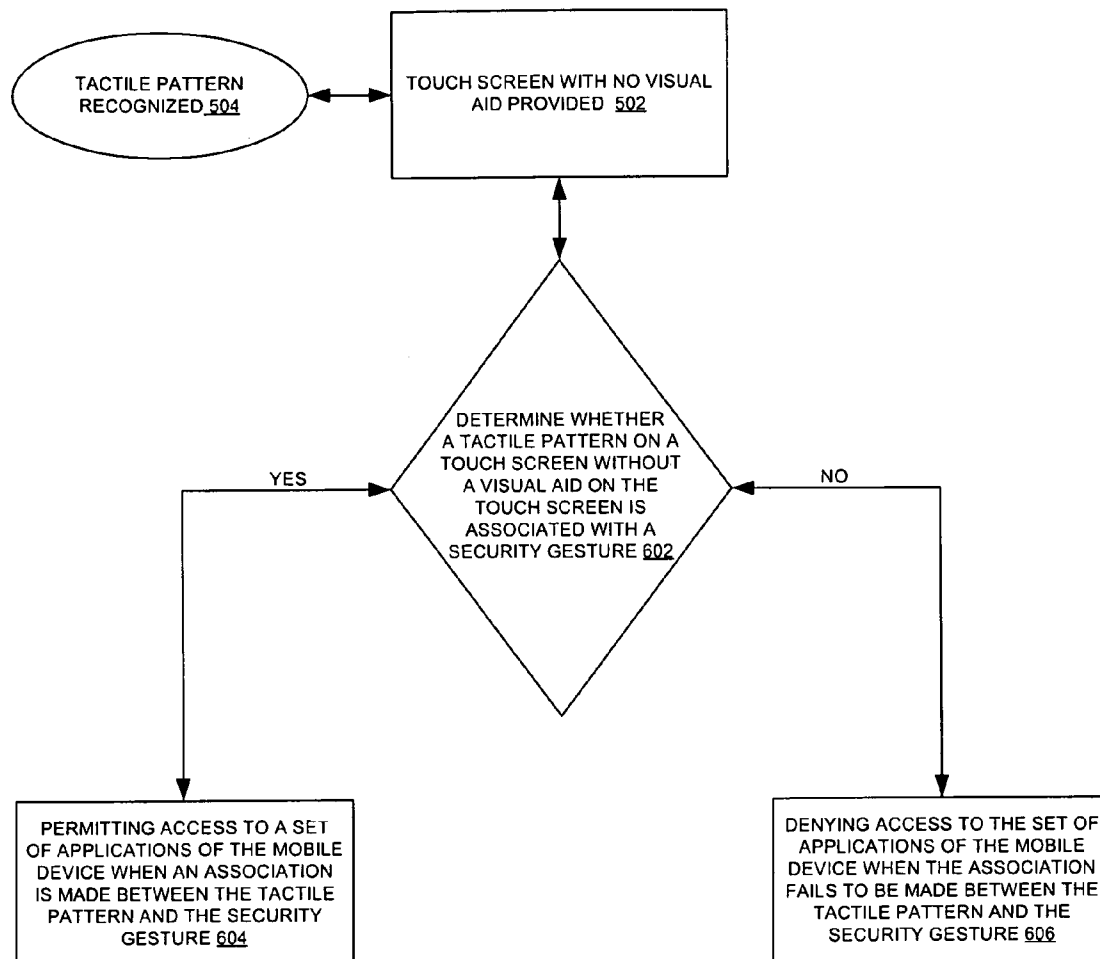
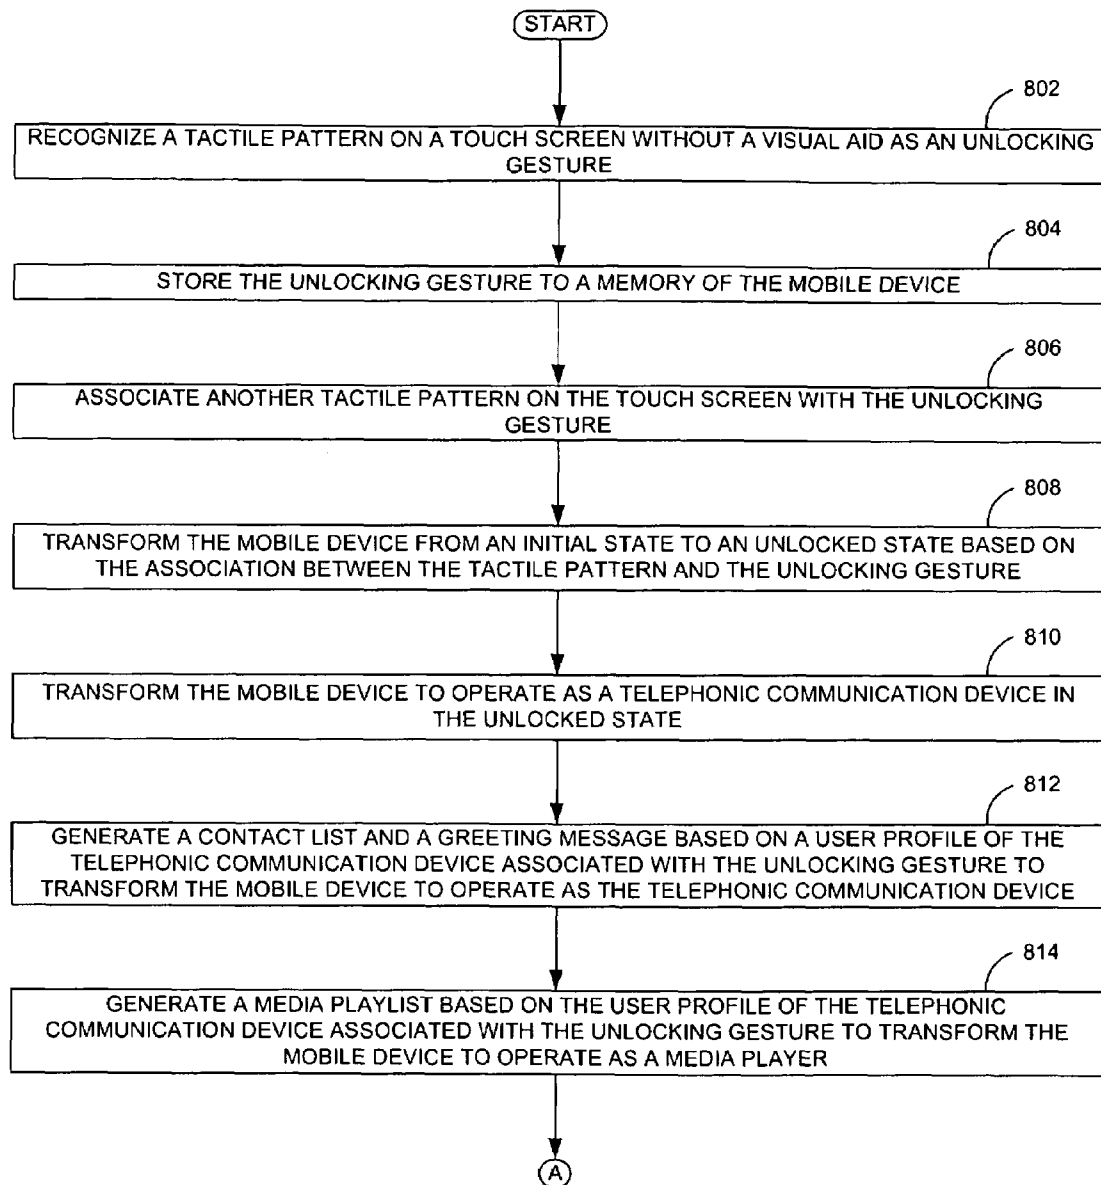



FIGURE 5


**FIGURE 6**


RULE/REFERENCE GESTURE 702	ACCEPTED GESTURES 704	REJECTED GESTURES 706
UNLOCKING GESTURE MUST BE LOCATED COMPLETELY WITHIN DESIGNATED REGION		
ANOTHER TACTILE PATTERN MUST MATCH SHAPE OF UNLOCKING GESTURE, BUT NOT SIZE OR POSITION WITHIN DESIGNATED AREA 104		
ANOTHER TACTILE PATTERN MUST MATCH SHAPE OF UNLOCKING GESTURE, BUT NOT SCALE OR POSITION WITHIN DESIGNATED AREA 104		
ANOTHER TACTILE PATTERN MUST SATISFY A THRESHOLD PARAMETER		
ANOTHER TACTILE PATTERN MUST BE COMPLETED WITHIN ONE SECOND		
ANOTHER TACTILE PATTERN MUST BE IN THE PROPER SEQUENCE		
⋮	⋮	⋮

FIGURE 7

**FIGURE 8A**

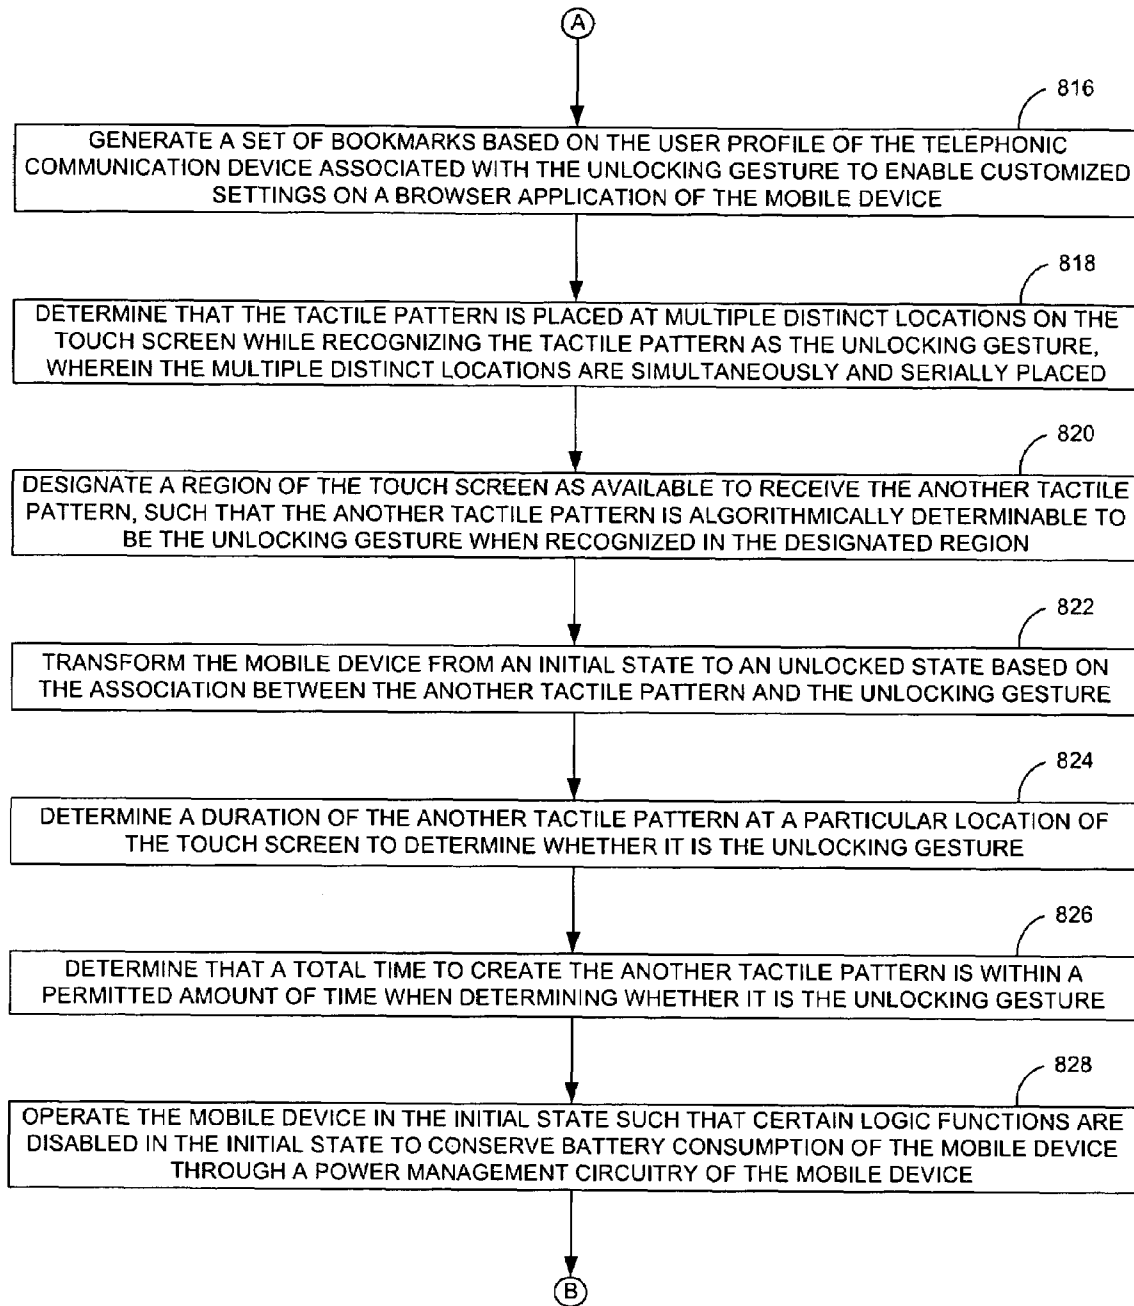**FIGURE 8B**

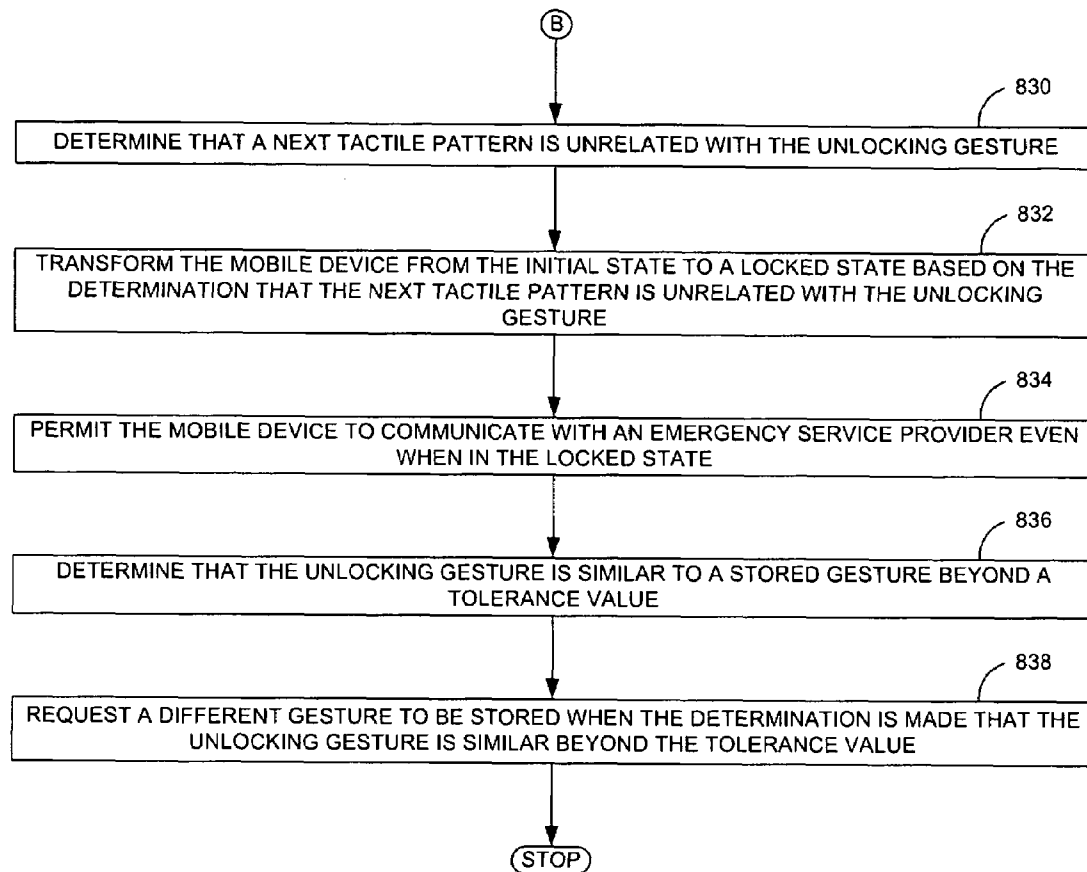**FIGURE 8C**

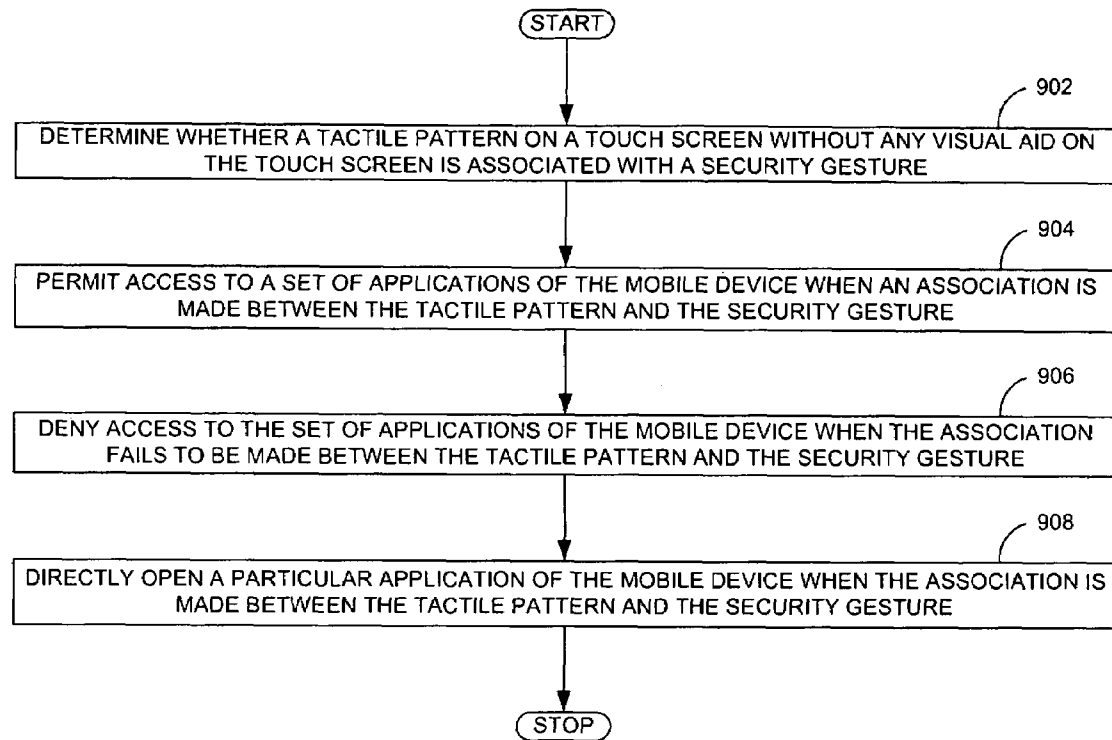**FIGURE 9**

1

TOUCH-BASED AUTHENTICATION OF A MOBILE DEVICE THROUGH USER GENERATED PATTERN CREATION

CLAIM OF PRIORITY

This application is a continuation of U.S. patent application Ser. No. 12/122,667 entitled 'Touch-Based Authentication of a Mobile Device through User Generated Pattern Creation' filed on May 17, 2008.

FIELD OF TECHNOLOGY

This disclosure relates generally to an mobile device, in one example embodiment, to touch-based authentication of a mobile device through user generated pattern creation.

BACKGROUND

Security of a mobile device (e.g., a mobile phone, a mobile player, an Apple® iPhone®, etc.) may be of concern to a user. Furthermore, the user may utilize the mobile device in manner similar to a personal computer (e.g., browse the Internet, access email, etc.). Consequently, the mobile device may include confidential information (e.g., a web browser history, an email account, a past call history, a text message, a voice message, etc.). Due to the nature of this type of information, a security breach may be costly to the user or his/her organization (e.g., a difficulty in recreating lost information).

A design of the mobile device may make it problematic to implement an additional security protocol. For example, the mobile device may utilize a touchscreen (e.g., a display which can detect a location of patterns in a display area) for user input rather than a physical keypad. The user may be able to access the mobile device utilizing the touchscreen simply by tapping a surface of the touchscreen in an arbitrary manner and/or performing a templated gesture (e.g., a pattern such as movement from left to right) on a surface of the touch screen. As a result, confidential information may be accessed by anyone merely in physical possession of the mobile device.

The touchscreen mobile device may include a virtual keypad (e.g., a form of a template to guide the user, an alpha-numeric virtual key pad, etc.). The user may use the virtual keypad to enter a pass code to access information. This process may be slow and/or cumbersome (e.g., a fingertip of the user may be of comparatively same size as an area of a virtual keypad symbol, the virtual keypad may not have the same tactile feel as the physical keypad, etc.). Use of a virtual keypad may also be inconvenient and/or dangerous when an attention of the user is diverted (e.g., walking, working, eating, etc.). A handicapped user (e.g., a sight-impaired person, a person with out fingers or hands, a person with impaired dexterity, etc.) may have difficulty inputting information with the virtual keypad. Furthermore, the alpha-numeric pass code may be difficult to remember for a primary user and/or secondary users of the mobile device. Thus, security of the mobile device may be breached resulting in theft and/or misappropriation of the confidential information that may be stored in the mobile device.

SUMMARY

A method, system, and/or apparatus of a touch-based authentication of a mobile device through user generated pattern creation are disclosed. In one aspect, a method of a mobile device includes recognizing a tactile pattern on a touch screen without a visual aid as an unlocking gesture,

2

storing the unlocking gesture to a memory (e.g., may be a local memory of the mobile device that may be internal to the mobile device) of the mobile device, associating another tactile pattern on the touch screen with the unlocking gesture, and transforming the mobile device from an initial state to an unlocked state based on the association between the another tactile pattern and the unlocking gesture.

The method may include transforming the mobile device to operate as a telephonic communication device in the unlocked state. The method may also include accessing a contact list and/or a greeting message based on a user profile of the telephonic communication device associated with the unlocking gesture to transform the mobile device to operate as the telephonic communication device. In addition, the method may include accessing a media playlist based on the user profile of the telephonic communication device associated with the unlocking gesture to transform the mobile device to operate as a media player.

The method may include accessing a set of bookmarks based on the user profile of the telephonic communication device associated with the unlocking gesture to enable customized settings on a browser application of the mobile device. The method may also include determining that the tactile pattern may be placed at multiple distinct locations on the touch screen while recognizing the tactile pattern as the unlocking gesture. The multiple distinct locations may be simultaneously and/or serially placed.

The method may include designating a region of the touch screen as available to receive another tactile pattern, such that the other tactile pattern may be algorithmically determinable to be the unlocking gesture when recognized in the designated region. The method may also include determining a duration of another tactile pattern at a particular location of the touch screen to determine whether it may be the unlocking gesture. In addition, the method may include determining that a total time to create the another tactile pattern may be within a permitted amount of time when determining whether it is the unlocking gesture.

The method may include operating the mobile device in the initial state such that certain functions may be disabled in the initial state to conserve battery consumption of the mobile device through a power management circuitry of the mobile device. The method may also include determining that a next tactile pattern is unrelated with the unlocking gesture. In addition, the method may transform the mobile device from the initial state to a locked state based on the determination that the next tactile pattern may be unrelated with the unlocking gesture.

The method may include permitting the mobile device to communicate with an emergency service provider even when in the locked state. The method may also include determining that the unlocking gesture may be similar to a stored gesture beyond a tolerance value. The method may request a different gesture to be stored when the determination may be made that the unlocking gesture may be similar beyond the tolerance value. In addition, the method may include determining that the another tactile pattern may be unique but within an acceptance range of associability with the unlocking gesture when associating the another tactile pattern with the unlocking gesture.

In another aspect, a method of a mobile device includes determining whether a tactile pattern on a touch screen without any visual aid on the touch screen is associated with a security gesture (e.g., may be a user-generated gesture that may be stored in a memory that is internal to the mobile device), permitting access to a set of applications of the mobile device when an association is made between the tac-

tile pattern and the security gesture, and denying access to the set of applications of the mobile device when the association fails to be made between the tactile pattern and the security gesture.

The method may also include directly opening a particular application of the mobile device when the association may be made between the tactile pattern and the security gesture.

In yet another aspect, a mobile device includes a touchscreen to recognize a tactile pattern using a processor of the mobile device, a security module interfaced with the processor to associate the tactile pattern with a security gesture, and to determine access to a set of features on the mobile device based on the association, and a user module of the security module to create security gestures based on a user input.

The methods, systems, and apparatuses disclosed herein may be implemented in any means for achieving various aspects, and may be executed in a form of a machine-readable medium embodying a set of instructions that, when executed by a machine, cause the machine to perform any of the operations disclosed herein. Other features will be apparent from the accompanying drawings and from the detailed description that follows.

BRIEF DESCRIPTION OF THE DRAWINGS

Example embodiments are illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements and in which:

FIGS. 1A, 1B, 1C and 1D is a system view of a mobile device recognizing an application of a pattern in a designated region through a tactile pattern on a touch screen, according to one embodiment.

FIG. 2 is a diagrammatic system view of a data processing system in which any of the embodiments disclosed herein may be performed, according to one embodiment.

FIG. 3 is an exploded view of a security module, according to one embodiment.

FIG. 4 is a table view illustrating various fields such as user, an initial state, security gesture, rules, etc., according to one embodiment.

FIG. 5 is a flow chart of a process of a cell phone touch screen unlocking using a tactile pattern/gesture, according to one embodiment.

FIG. 6 is a flow chart of a process of a cell phone touch screen unlocking, according to one embodiment.

FIG. 7 is a table view illustrating example rules/reference gestures, accepted, and rejected gestures, according to one embodiment.

FIG. 8A is a process of recognizing a tactile pattern on a touch screen without a visual aid as an unlocking gesture, according to one embodiment.

FIG. 8B is a continuation of process flow of FIG. 7A, illustrating additional operations, according to one embodiment.

FIG. 8C is a continuation of process flow of FIG. 7B, illustrating additional operations, according to one embodiment.

FIG. 9 is a process flow of an opening a particular application of the mobile device when the association is made between the tactile pattern and the security gesture, according to one embodiment.

Other features of the present embodiments will be apparent from the accompanying drawings and from the detailed description that follows.

DETAILED DESCRIPTION

A method, system, and apparatus of a touch-based authentication of a mobile device through user generated pattern creation are disclosed. Although the present embodiments have been described with reference to specific example embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader spirit and scope of the various embodiments.

In one embodiment, a method of a mobile device (e.g., the mobile device **100** of FIG. 1) includes recognizing a tactile pattern (e.g., the tactile pattern **106** of FIG. 1) on a touch screen (e.g., the touchscreen **108** of FIG. 1) without a visual aid as an unlocking gesture, storing the unlocking gesture to a memory (e.g., may be a local memory of the mobile device that may be internal to the mobile device) of the mobile device **100**, associating another tactile pattern on the touchscreen **108** with the unlocking gesture, and transforming the mobile device **100** from an initial state to an unlocked state based on the association between the another tactile pattern and the unlocking gesture.

In another embodiment, a method of a mobile device (e.g., the mobile device **100** of FIG. 1) includes determining whether a tactile pattern (e.g., the tactile pattern **106** of FIG. 1) on a touch screen (e.g., the touchscreen **108** of FIG. 1) without any visual aid on the touchscreen **108** is associated with a security gesture (e.g., may be a user-generated gesture that may be stored in a memory that is internal to the mobile device), permitting access to a set of applications of the mobile device **100** when an association is made between the tactile pattern **106** and the security gesture, and denying access to the set of applications of the mobile device **100** when the association fails to be made between the tactile pattern **106** and the security gesture.

In yet another embodiment, a mobile device (e.g., the mobile device **100** of FIG. 1) includes a touchscreen (e.g., the touchscreen **108** of FIG. 1) to recognize a tactile pattern using a processor (e.g., the processor **202** of FIG. 2) of the mobile device **100**, a security module (e.g., the security module **110** of FIG. 2) interfaced with the processor **202** to associate the tactile pattern **106** with a security gesture, and to determine access to a set of features on the mobile device **100** based on the association, and a user module (e.g., the user module **320** of FIG. 3) of the security module **110** to create security gestures based on a user input.

FIGS. 1A, 1B, 1C and 1D is a system view of a mobile device recognizing an application of a pattern in a designated region through a tactile pattern on a touchscreen, according to one embodiment. The tactile pattern **106** may be independent of a scale value and a position value on the touchscreen **108**. The tactile pattern **106** may not depend on sequential activation of fixed areas on the touchscreen **108**. The tactile pattern **106** may be performed on any location within an input region (e.g. the designated region **104**) of the touchscreen **108**. Particularly, FIG. 1 illustrates a mobile device **100**, a pattern applicator **102**, a designated region **104**, a tactile pattern **106**, a touchscreen **108**, and a security module **110**, according to one embodiment.

The mobile device **100** may be a device used for communication and/or for processing information (e.g., browsing, forums, mail, chat, etc.) through the network (e.g., internet network). The designated region **104** may be the region on the touch screen which may receive tactile pattern. The tactile pattern **106** may be a force applied physically by the user (e.g., by touching, by using a stylus, etc.). The touchscreen **108** may be an input/output interface which may detect a

5

location of touch within the display area. The security module **110** may provide security to the mobile device **100** based on the tactile pattern **106** (e.g., the security gesture).

In example embodiment, the mobile device **100** may recognize the pattern applicator **102** (e.g., may be in the form of touch, etc.) in the designated region **104** of the touchscreen **108**. The pattern may be an unlocking gesture/tactile pattern **106** that may be used for unlocking the mobile device **100**.

FIG. 2 is a diagrammatic system view **200** of a data processing system in which any of the embodiments disclosed herein may be performed, according to one embodiment. Particularly, the diagrammatic system view **200** of FIG. 2 illustrates a security module **110**, a processor **202**, a main memory **204**, a static memory **206**, a bus **208**, a video display **210**, an alpha-numeric input device **212**, a cursor control device **214**, a drive unit **216**, a signal generation device **218**, a network interface device **220**, a machine readable medium **222**, instructions **224**, and a network **226**, according to one embodiment.

The diagrammatic system view **200** may indicate a personal computer and/or the data processing system in which one or more operations disclosed herein are performed. The security module **110** may provide security to the device from unauthorized access (e.g., may be mishandled, misused, stolen, etc.). The processor **202** may be a microprocessor, a state machine, an application specific integrated circuit, a field programmable gate array, etc. (e.g., Intel® Pentium® processor, 620 MHz ARM 1176, etc.). The main memory **204** may be a dynamic random access memory and/or a primary memory of a computer system.

The static memory **206** may be a hard drive, a flash drive, and/or other memory information associated with the data processing system. The bus **208** may be an interconnection between various circuits and/or structures of the data processing system. The video display **210** may provide graphical representation of information on the data processing system. The alpha-numeric input device **212** may be a keypad, a keyboard, a virtual keypad of a touchscreen and/or any other input device of text (e.g., a special device to aid the physically handicapped).

The cursor control device **214** may be a pointing device such as a mouse. The drive unit **216** may be the hard drive, a storage system, and/or other longer term storage subsystem. The signal generation device **218** may be a bios and/or a functional operating system of the data processing system. The network interface device **220** may be a device that performs interface functions such as code conversion, protocol conversion and/or buffering required for communication to and from the network **226**. The machine readable medium **222** may provide instructions on which any of the methods disclosed herein may be performed. The instructions **224** may provide source code and/or data code to the processor **202** to enable any one or more operations disclosed herein.

FIG. 3 is an exploded view of a security module **110**, according to one embodiment. Particularly, FIG. 3 illustrates a recognition module **300**, a tactile pattern module **302**, an association module **304**, a store module **306**, a transform module **308**, an initial state module **310**, an unlock module **312**, a deny module **314**, a determination module **316**, a permit module **318**, a user module **320**, and a region module **322**, according to one embodiment.

The recognition module **300** may enable the mobile device **100** to recognize the application of pattern (e.g., tactile pattern **106**) as the unlocking gesture. The tactile pattern module **302** may detect tactile pattern as an unlocking gesture on the touchscreen **108**. The association module **304** may associate another tactile pattern (e.g., may be different kind of pattern,

6

etc.) on the touchscreen along with the unlocking gesture (e.g., unlocking command, mechanism, etc.). The store module **306** may enable storing the unlocking gesture to the memory of the mobile device **100**. The transform module **308** may transform the mobile device **100** to function as the telephonic communication device when unlocked through recognition and validating unlocking gesture. The initial state module **310** may conserve the battery consumption of the mobile device **100** through a power management circuitry of the mobile device **100** (e.g., by putting the mobile device into a low power state, etc.). The unlock module **312** may unlock the mobile device **100** after recognizing and validating the unlocking gesture.

The deny module **314** may deny access to the set of applications of the mobile device **100** when the association module **304** fails to associate between the tactile pattern **106** and the security gesture. The determination module **316** may determine the accuracy of the association and may determine the total time to create the another tactile pattern within the permitted amount of time. The permit module **318** may permit the mobile device **100** to communicate with the emergency service provider in the locked state. The user module **320** may create security gestures based on the user input. The region module **322** may recognize the region of the touchscreen **108** on which the application of the pattern (e.g., may be the tactile pattern) has taken place.

In an example embodiment, the recognition module **300** may communicate with the association module **304** to recognize the tactile pattern **106** (e.g., using the tactile pattern module **302**) matching with the security gesture. The association module **304** may communicate with the store module **306**, the transform module **308**, the deny module **314**, the determination module **316**, the permit module **318**, the user module **320**, and the region module **322**. The unlock module **312** may communicate with the transform module **308** for changing the state (e.g., locked to unlocked, unlocked to locked, etc.) of the mobile device **100**.

In one embodiment, the touchscreen **108** may recognize the tactile pattern **106** (e.g., using the recognition module **300** of FIG. 3) using the processor **202** of the mobile device **100**. The security module **110** interfaced with the processor **202** to associate the tactile pattern **106** with a security gesture, and may determine access to a set of features on the mobile device **100** based on the association. The user module **320** of the security module **110** may create security gestures based on a user input (e.g., using the user module **320** of FIG. 3). The mobile device **100** may be transformed to operate as a telephonic communication device in the unlocked state.

The contact list and/or a greeting message based on the user profile of the telephonic communication device (e.g., using the user module **320** of FIG. 3) associated with the unlocking gesture may be accessed to transform the mobile device **100** (e.g., using the transform module **308** of FIG. 3) to operate as the telephonic communication device. The media playlist based on the user profile (e.g., using the user module **320** of FIG. 3) of the telephonic communication device associated with the unlocking gesture (e.g., using the unlock module **312** of FIG. 3) may be generated to transform the mobile device **100** to operate as a media player. The region of the touchscreen **108** as available (e.g., using the region module **322** of FIG. 3) may be designated to receive the another tactile pattern, such that the another tactile pattern may be algorithmically determinable to be the unlocking gesture when recognized in the designated region (e.g., using the recognition module **300** of FIG. 3).

The duration of another tactile pattern may be determined (e.g., using the determination module **316** of FIG. 3) at a

7

particular location of the touchscreen **108** to determine whether it may be the unlocking gesture. The total time may be determined (e.g., using the determination module **316** of FIG. **3**) to create the another tactile pattern may be within a permitted amount of time when determining whether it may be the unlocking gesture. The mobile device **100** in the initial state may be operated such that certain functions may be disabled in the initial state (e.g., using the initial state module **310** of FIG. **3**) to conserve battery consumption of the mobile device **100** through a power management circuitry of the mobile device **100**.

The memory may be a local memory of the mobile device **100** that may be internal to the mobile device **100**. It may be determined that the next tactile pattern may be unrelated with the unlocking gesture. The mobile device **100** may be transformed (e.g., using the transform module **308** of FIG. **3**) from the initial state to a locked state based on the determination that the next tactile pattern may be unrelated with the unlocking gesture (e.g., using the unlock module **312** of FIG. **3**). The mobile device **100** may be permitted (e.g., using the permit module **318** of FIG. **3**) to communicate with an emergency service provider even when in the locked state.

It may be determined (e.g., using the determination module **316** of FIG. **3**) that the unlocking gesture may be similar to a stored gesture beyond a tolerance value. The different gesture may be requested to be stored (e.g., using the store module **306** of FIG. **3**) when the determination may be made that the unlocking gesture may be similar beyond the tolerance value. It may be determined (e.g., using the determination module **316** of FIG. **3**) that the another tactile pattern may be unique but within an acceptance range of associability with the unlocking gesture when associating the another tactile pattern with the unlocking gesture. The security gesture may be the user-generated gesture that may be stored (e.g., using the store module **306** of FIG. **3**) in a memory that may be internal to the mobile device **100**.

FIG. **4** is a table view illustrating various fields such as user, security gesture, user profile permissions, rules, etc., according to one embodiment. Particularly, FIG. **4** illustrates a user field **400**, a security gesture field **402**, an user profile permissions field **404**, a rules field **406**, an user profile personalized settings field **408**, all access **410**, telephonic communication device **412**, browser application **414**, media playlist **416**, five seconds total time **418**, customized browser settings **420**, bookmarks **422**, simultaneous and serial **424**, multiple distinct **426**, hold at bottom of gesture one second duration **428**, tolerance field **430**, unlocked state field **432**, media player **434**, initial state **436**, emergency calls only state **438**, and battery conservation mode **440**, according with one embodiment.

The user field **400** may illustrate the user (e.g., John, Jane, Jose, etc. as illustrated in FIG. **4**) who may have security gestures to unlock the mobile device **100**. The security gesture field **402** may illustrate various unlocking gesture associated to the particular users. The user profile permissions field **404** may display various types of the access in the mobile device **100** to the user. The rules field **406** may be a rules set by the user for unlocking procedure. The user profile personalized settings field **408** may illustrate various personalized settings associated with the user in the mobile device **100**. The all access **410** may be a permission to access all the applications (e.g., telephone book, message, email, etc.) in the mobile device **100**.

The telephonic communication device **412** may be a permission of the user to use the mobile device **100** to use as a telephonic device. The browser application **414** may be a permission to access created by the user to use the mobile

8

device **100** for browsing. The media playlist **416** may be a personalized setting of the user for playlist. The five seconds total time **418** may be a rule created by the user for locking the mobile device **100** when idle. The customized browser settings **420** may be personalized setting for the browser in the mobile device **100**. The bookmarks **422** may be a setting of the user in the mobile device **100** to manage bookmarks.

The simultaneous and serial **424** may be a rule that may be created by the user for input of tactile gestures simultaneously and/or serially in order to unlock the mobile device **100**. The multiple distinct **426** may be a rule that may enable the user to see distinct multiple communication data (e.g., missed calls, messages, received calls, etc.) simultaneously. The hold at bottom of gesture one second duration **428** may be a rule created by the user for unlocking the mobile device **100**. The tolerance field **430** may illustrate capability of the mobile device **100** to recognize slight variations in the security gesture.

The unlocked state field **432** may be a state in the mobile device **100** that may enable the user to use applications that may be customized by the user itself. The media player **434** may be an application that may enable the user to play the media data (e.g., video, audio, etc.) in the mobile device **100**. The initial state **436** may be the state that the mobile device would be before unlocking (e.g., power saving mode, etc.). The emergency calls only state **438** may be a state in which the mobile device **100** can only make emergency calls. The battery conservation mode **440** may be the state in which the mobile device **100** may not be used by the user and power consumption in the mobile device **100** may be reduced by internal logic (e.g., by shutting down light, display, etc.).

In example embodiment, FIG. **4** illustrates users and their settings (e.g., may be personalized settings, rules, etc.) in the in the mobile devices **100**. The user field **400** may illustrate John, John, Jane, Jose, Raj, and Ray. The security gesture field **402** may illustrate various gestures (e.g., **106**, **104** as illustrated in FIG. **4**) associated with the particular users. The user profile permissions field **404** may illustrate permissions assigned like, all access **410** associated to the user John, John, telephonic communication device **412** associated to the user Jane, browser application **414** associated to the user Jose, emergency calls associated with the user Ray.

The rules field **406** may illustrate five seconds total time **418** associated to the user John, designated region on touchscreen **108** rule associated to the user John, simultaneous and serial **424** rules associated to the user Jane and Jose, multiple distinct **426** rules associated to the user Jose, the hold at bottom of gesture one second duration **428** rules associated to the user Raj, correct unlocking gesture associated with the user Ray. The user profile personalized settings field **408** may illustrate the contact list **414**, and greeting message **416** associated to the user John, contact list **414** and greeting message associated to the user Jane, media playlist **416**, bookmarks, customized browser settings **420** associated to the user Jose, no setting associated to the user Raj, bookmarks associated to the user John, no setting associated to the user Ray.

The tolerance field **430** may illustrate possible variations and tolerance associated with security gesture field **402**. The unlocked state field **432** may illustrate running applications like, telephonic communication device **412** associated to the user John and Jane, media player **434** application associated to the user Jose and Raj, browser application **414** associated to the user John. Emergency calls only **438** application associated to the user Ray. The initial state **436** may illustrate the battery conservation mode **440** associated with the user John, Jane, and Raj, certain functions disabled associated with the users Jose, John and Ray, according to one embodiment.

9

FIG. 5 is a flow chart of a process of a cell phone touch screen unlocking using a tactile pattern/gesture, according to one embodiment. In operation 502, the touchscreen 108 with no visual aid may be provided. In operation 504, the tactile pattern 106 may be recognized. In operation 506, another or next tactile pattern may be associated (e.g., using the association module 304 of FIG. 3) with unlocking gesture. In operation 508, a condition may be determined (e.g., using the determination module 316 of FIG. 3) that another or next tactile pattern may be unique but within an acceptance range of associability with the unlocking gesture when associating the another or next tactile pattern with the unlocking gesture. If operation 508 outcome is true then operation 512 may be performed, else operation 510 may be performed.

In operation 510, the next tactile pattern may be allowed. In operation 512, the mobile device 100 from initial state to an unlocked state based on the association between the another tactile pattern and the unlocking gesture may be transformed (e.g., using the transform module 308 of FIG. 3). In operation 514, the tactile pattern may be recognized as an unlocking gesture. In operation 516, a condition may be determined (e.g., using the determination module 316 of FIG. 3) that the unlocking gesture may be similar to the stored gesture beyond tolerable value and/or requesting different gesture to be stored when determination may be made that the unlocking gesture may be similarly beyond the tolerance value.

If operation 516 outcome is true then operation 514 may be performed, else operation 518 may be performed. In operation 518, the unlocking gesture may be stored (e.g., using the store module 306 of FIG. 3) to the memory of the mobile device 100. In operation 520, the mobile device 100 may be transformed (e.g., using the transform module 308 of FIG. 3) from the initial state to locked state based on determination that the next tactile pattern may be unrelated with the unlocking gesture. In operation 522, the emergency calls may be allowed in the locked state.

In one embodiment, the tactile pattern 106 may be recognized on the touch screen (e.g., the touchscreen 108 of FIG. 1) without a visual aid as an unlocking gesture. The unlocking gesture may be stored (e.g., using the store module 306 of FIG. 3) to a memory of the mobile device 100. Another tactile pattern on the touchscreen 108 (e.g., using the association module 304 of FIG. 3) may be associated with the unlocking gesture. The mobile device 100 may be transformed (e.g., using the transform module 308 of FIG. 3) from an initial state to an unlocked state based on the association between the another tactile pattern and the unlocking gesture.

The set of bookmarks may be generated based on the user profile of the telephonic communication device associated with the unlocking gesture (e.g., using the unlock module 312 of FIG. 3) to enable customized settings on a browser application of the mobile device 100. The tactile pattern 106 may be placed at multiple distinct locations on the touchscreen 108 and may be determined (e.g., using the determination module 316 of FIG. 3) while recognizing the tactile pattern 106 as the unlocking gesture.

FIG. 6 is a flow chart of a process of a cell phone touch screen unlocking, according to one embodiment. In operation 502, the touchscreen 108 may be provided with no visual aid. In operation 504, the tactile gesture may be recognized. In operation 602, a condition may be determined whether the tactile pattern 106 on the touchscreen 108 without a visual aid on the touchscreen 108 may be associated with a security gesture. If the outcome of operation 602 is true then operation 604 may be performed, else operation 606 may be performed. In operation 604, access to a set of applications of the mobile device 100 may be permitted when an association may be

10

made between the tactile pattern 106 and the security gesture. In operation 606, access to the set of applications of the mobile device 100 may be defined when the association fails to be made between the tactile pattern 106 and the security gesture.

In one embodiment, the tactile pattern 106 may be determined (e.g., using the determination module 316 of FIG. 3) on the touchscreen 108 without any visual aid on the touchscreen 108 may be associated with a security gesture. The access may be permitted (e.g., using the permit module 318 of FIG. 3) to a set of applications of the mobile device 100 when an association may be made between the tactile pattern 106 and the security gesture. The access may be denied (e.g., using the deny module 314 of FIG. 3) to the set of applications of the mobile device 100 when the association fails to be made between the tactile pattern 106 and the security gesture.

FIG. 7 is a table view illustrating example rules/reference gestures, accepted gestures, and rejected gestures, according to one embodiment. Particularly, FIG. 7 illustrates a rule/reference gesture 702, accepted gestures 704, and rejected gestures 706, according to one embodiment.

The rule/reference gesture 702 may be various rules/references that may enable the user to unlock the mobile device 100 through use of tactile pattern/security gestures. The accepted gestures 704 may be the gestures that may be accepted after determining the match between another tactile pattern and unlocking gesture may be under matching conditions (e.g., may be approximately). The rejected gestures 706 may be the gestures that may be rejected after determining the match between another tactile pattern and the unlocking gesture may not be within the matching conditions.

In example embodiment of FIG. 7 the rule/reference gesture 702 column may illustrate that the "unlocking gesture must be located completely within the designated region" in first row, "another tactile pattern must match shape of unlocking gesture, but not size or position within designated area 104" in second row, "another tactile pattern must match shape but not size of unlocking gesture, but not size or position within designated area 104" in third row, "another tactile must satisfy a threshold parameter (e.g., may be curves, bends, etc. as illustrated in FIG. 7) in fourth row, "another tactile pattern must be completed within one second" in fifth row, and "another tactile pattern must be in the proper sequence" in the sixth row.

The accepted gestures 704 column may illustrate possible gestures (e.g., may be approximately similar, or similar itself) that may be accepted which are associated to the rule/reference gesture 702. The rejected gestures 706 may be the gestures (e.g., may vary drastically compared to rule/reference gesture) that may be rejected with reference to the rule/reference gesture 702.

In an example embodiment, the tactile pattern 106 may consist of an application within a designated input region 104 of a touch screen 108 of an arbitrarily complex spatial or temporal pattern of tactile forces. The tactile pattern 106 may consist of one or more simultaneous or sequential point or vector tactile forces. A vector tactile force may consist of directional linear or complex curvilinear components. The gesture may include a temporal element. For example, the tactile pattern 106 may include linear applications of force by the object across the touch screen 108, taps against the touch screen 108, static applications of the object in contact with the touch screen 108 for a specified period of time, or any combination thereof. The tactile pattern 106 may be composed by the authorized user of the mobile device 100.

The tactile pattern 106 may be applied without the aid of a visual template. The designated input region 104 may repre-

11

sent a fixed or variable subset of the touch screen **108** or may coincide with the entire touch screen **108**. The tactile pattern **106** applied or path traced by one's finger or force applicator may or may not be visually indicated on the screen, and successful or unsuccessful application of the gesture may or may not be acknowledged by specific visual, audible, or haptic feedback.

The tactile pattern **106** may be applied independent of its relative scale or position within the input region **104** on the touch screen **108**. The length and width of a two-dimensional spatial pattern performed on the surface of the touch screen **108** may vary in magnitude between different applications by a user or different users. The location of the touch screen **108** on which the two-dimensional spatial pattern is performed by the user may also vary. Nevertheless, the two-dimensional spatial pattern may unlock the mobile device **100** if the ratio of the dimensions of the length and width of the two-dimensional spatial pattern are substantially similar to the ratio of the length and width of the tactile pattern **106**.

According to one example, the security gesture may consist of a "backwards double-L," applied by simultaneously moving two adjacent fingers vertically down on a touch screen **108** a distance x and then contiguously moving both fingers ninety degrees to left a distance of $0.5x$. The tactile pattern **106** may be scale and position independent with respect to the input region **104** or the touch screen **108**. The size of the applied gesture may be small, medium, or large relative to the size of the designated input region **104**. The tactile pattern **106** may be applied anywhere (for example, in the top left quadrant or anywhere on the right side) within the designated input region **104**.

According to another example, the user may compose a tactile pattern **106** consisting of the approximately simultaneous application on a touch screen **108** of three equally-spaced point contacts arrayed linearly in a horizontal orientation. These three point touches may be applied near the top or anywhere else within the input region **104** and may be relatively small or large compared to the size of the input region **104**.

According to another example, the tactile pattern **106** may include a counterclockwise circle drawn with force applicator (e.g., a stylus) on the touch screen **108** followed by holding the object in contact with the touch screen **108** at substantially the center of the circle for two seconds. The counterclockwise circle may be drawn at any location of the input region **104**. The scale of the counterclockwise circle may be of any size relative to the input region **104** of the touch screen **108**.

FIG. **8A** is a process of recognizing a tactile pattern (e.g., the tactile pattern **106** of FIG. **1**) on the touchscreen **108** without a visual aid as an unlocking gesture, according to one embodiment. In operation **802**, the tactile pattern **106** may be recognized (e.g., using the recognition module **300** of FIG. **3**) on a touch screen (e.g., the touchscreen **108** of FIG. **1**) without a visual aid as an unlocking gesture. In operation **804**, the unlocking gesture may be stored (e.g., using the store module **306** of FIG. **3**) to a memory (e.g., memory card, etc.) of the mobile device **100**.

In operation **806**, another tactile pattern on the touchscreen **108** may be associated (e.g., using the association module **304** of FIG. **3**) with the unlocking gesture. In operation **808**, the mobile device **100** may be transformed (e.g., using the transform module **308** of FIG. **3**) from an initial state to an unlocked state based on the association between the another tactile pattern and the unlocking gesture. In operation **810**, the mobile device **100** may be transformed (e.g., using the transform module **308** of FIG. **3**) to operate as a telephonic communication device in the unlocked state (e.g., using the

12

unlock module **312** of FIG. **3**). In operation **812**, a contact list and a greeting message based on a user profile of the telephonic communication device associated (e.g., using the association module **304** of FIG. **3**) with the unlocking gesture may be generated (e.g., may be because of user settings, etc.) to transform the mobile device **100** (e.g., using the transform module **308** of FIG. **3**) to operate as the telephonic communication device.

In operation **814**, a media playlist based on the user profile of the telephonic communication device (e.g., using the user module **320** of FIG. **3**) associated with the unlocking gesture may be generated (e.g., may be using the user settings, etc.) to transform the mobile device **100** to operate as a media player.

FIG. **8B** is a continuation of process flow of FIG. **8A**, illustrating additional operations, according to one embodiment. In operation **816**, a set of bookmarks based on the user profile of the telephonic communication device associated (e.g., using the association module **304** of FIG. **3**) with the unlocking gesture may be generated (e.g., using the unlock module **312** of FIG. **3**) to enable customized settings on a browser application of the mobile device **100**. In operation **818**, the tactile pattern **106** may be placed at multiple distinct locations on the touchscreen **108** and may be determined (e.g., using the transform module **308** of FIG. **3**) while recognizing the tactile pattern **106** (e.g., using the recognition module **300** of FIG. **3**) as the unlocking gesture.

In operation **820**, a region of the touchscreen **108** as available (e.g., using the region module **322** of FIG. **3**) may be designated to receive the another tactile pattern, such that the another tactile pattern may be algorithmically determinable to be the unlocking gesture when recognized (e.g., using the recognition module **300** of FIG. **3**) in the designated region **104**. In operation **822**, a duration (e.g., five seconds, one second as assigned in rules, etc.) of the another tactile pattern may be determined (e.g., using the determination module **316** of FIG. **3**) at a particular location of the touchscreen **108** to determine whether it may be the unlocking gesture. In operation **824**, a total time may be determined (e.g., using the determination module **316** of FIG. **3**) to create the another tactile pattern and may be within a permitted amount of time when determining whether it may be the unlocking gesture.

In operation **826**, the mobile device **100** in the initial state may be operated such that certain functions may be disabled in the initial state to conserve battery consumption of the mobile device **100** (e.g., using the initial state module **310** of FIG. **3**) through a power management circuitry of the mobile device **100**. The memory may be a local memory of the mobile device **100** that may be internal to the mobile device **100**. In operation **828**, it may be determined (e.g., using the determination module **316** of FIG. **3**) that a next tactile pattern may be unrelated with the unlocking gesture.

FIG. **8C** is a continuation of process flow of FIG. **8B**, illustrating additional operations, according to one embodiment. In operation **830**, the mobile device **100** may be transformed from the initial state to a locked state (e.g., using the transform module **308** of FIG. **3**) based on the determination that the next tactile pattern may be unrelated with the unlocking gesture. In operation **832**, the mobile device **100** may be permitted to communicate with an emergency service provider (e.g., using the permit module **318** of FIG. **3**) even when in the locked state. In operation **834**, it may be determined (e.g., using the determination module **316** of FIG. **3**) that the unlocking gesture may be similar to a stored gesture beyond a tolerance value.

In operation **836**, a different gesture may be requested to be stored (e.g., using the store module **306** of FIG. **3**) when the determination may be made that the unlocking gesture may

13

be similar beyond the tolerance value. In operation **838**, it may be determined (e.g., using the determination module **316** of FIG. **3**) that the another tactile pattern may be unique but within an acceptance range of associability with the unlocking gesture when associating the another tactile pattern with the unlocking gesture (e.g., using the unlock module **312** of FIG. **3**).

FIG. **9** is a process flow of an opening a particular application of the mobile device **100** when the association is made between the tactile pattern **106** and the security gesture, according to one embodiment. In operation **902**, a tactile pattern (e.g., the tactile pattern **106** of FIG. **1**) may be determined (e.g., using the determination module **316** of FIG. **3**) on a touch screen (e.g., the touchscreen **108** of FIG. **1**) without any visual aid on the touchscreen **108** and may be associated with a security gesture. In operation **904**, access may be permitted (e.g., using the permit module **318** of FIG. **3**) to a set of applications of the mobile device **100** when an association may be made between the tactile pattern **106** and the security gesture. In operation **906**, access may be denied (e.g., using the deny module **314** of FIG. **3**) to the set of applications of the mobile device **100** when the association fails to be made between the tactile pattern **106** and the security gesture. In operation **908**, a particular application of the mobile device **100** may be directly opened when the association is made between the tactile pattern **106** and the security gesture.

Although the present embodiments have been described with reference to specific example embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader spirit and scope of the various embodiments. For example, the various devices, modules, analyzers, generators, etc. described herein may be enabled and operated using hardware circuitry (e.g., CMOS based logic circuitry), firmware, software and/or any combination of hardware, firmware, and/or software (e.g., embodied in a machine readable medium). For example, the various electrical structure and methods may be embodied using transistors, logic gates, and electrical circuits (e.g., application specific integrated (ASIC) circuitry and/or in Digital Signal Processor (DSP) circuitry).

Particularly, the security module **110**, the recognition module **300**, the tactile pattern module **302**, the association module **304**, the store module **306**, the transform module **308**, the initial state module **310**, the unlock module **312**, the deny module **314**, the determination module **316**, the permit module **318**, the user module **320**, and the region module **322**, and other modules of FIGS. **1-9** may be enabled using software and/or using transistors, logic gates, and electrical circuits (e.g., application specific integrated ASIC circuitry) such as a security circuit, a recognition circuit, a tactile pattern circuit, an association circuit, a store circuit, a transform circuit, an initial state circuit, an unlock circuit, a deny circuit, a determination circuit, a permit circuit, an user circuit, a region circuit, and other circuits.

In addition, it will be appreciated that the various operations, processes, and methods disclosed herein may be embodied in a machine-readable medium and/or a machine accessible medium compatible with a data processing system (e.g., a computer system), and may be performed in any order (e.g., including using means for achieving the various operations). Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense.

14

What is claimed is:

1. A touch-based authentication method of a mobile device comprising:

recognizing a tactile pattern on a touch screen without a visual aid as an unlocking gesture and wherein the tactile pattern is independent of a scale value and a position value on the touch screen;

storing the unlocking gesture to a memory of the mobile device;

associating another tactile pattern on the touch screen with the stored unlocking gesture;

transforming the mobile device from an initial state to an unlocked state to operate as a the telephonic communication device based on the association between the another tactile pattern and the stored unlocking gesture and accessing a contact list and a greeting message based on a user profile;

associating a set of bookmarks based on the user profile of the telephonic communication device associated with the unlocking gesture to enable customized settings on a browser application of the mobile device;

determining that the tactile pattern is placed at multiple distinct locations on the touch screen while recognizing the tactile pattern as the unlocking gesture, wherein the multiple distinct locations are simultaneously and serially placed;

designating a region of the touch screen as available to receive the another tactile pattern, such that the another tactile pattern is algorithmically determined to be the unlocking gesture when recognized in the designated region;

determining a duration of the another tactile pattern at a particular location of the touch screen to determine whether it is the unlocking gesture; and

determining that a total time to create the another tactile pattern is within a permitted amount of time when determining whether it is the unlocking gesture.

2. The method of claim **1** further comprising accessing a media playlist based on the user profile of the telephonic communication device associated with the unlocking gesture to transform the mobile device to operate as a media player.

3. The method of claim **1** further comprising operating the mobile device in the initial state such that certain functions are disabled in the initial state to conserve battery consumption of the mobile device through a power management circuitry of the mobile device.

4. The method claim **3** wherein the memory is a local memory of the mobile device that is internal to the mobile device.

5. The method of claim **1** further comprising:

determining that a next tactile pattern is unrelated with the unlocking gesture; and

transforming the mobile device from the initial state to a locked state based on the determination that the next tactile pattern is unrelated with the unlocking gesture.

6. The method of claim **5** further comprising permitting the mobile device to communicate with an emergency service provider even when in the locked state.

7. The method of claim **1** further comprising:

determining that the unlocking gesture is similar to a stored gesture beyond a tolerance value; and

requesting a different gesture to be stored when the determination is made that the unlocking gesture is similar beyond the tolerance value.

8. The method of claim **1** further comprising determining that the another tactile pattern is within an acceptance range

15

of associability with the unlocking gesture when associating the another tactile pattern with the unlocking gesture.

9. The method of claim 1 in a form of a computer-readable medium embodying a set of instructions that, when executed by a computer, caused the computer to perform the method of claim 1. 5

10. A touch-based authentication method of a mobile device comprising:

recognizing a tactile pattern on a touch screen without a visual aid as a security unlocking gesture and wherein the tactile pattern is independent of a scale value and a position value on the touch screen; 10

storing the security unlocking gesture to a memory of the mobile device;

associating another tactile pattern on the touch screen with the stored security unlocking gesture; 15

transforming the mobile device from an initial state to an unlocked state to operate as a the telephonic communication device based on the association between the another tactile pattern and the stored security unlocking gesture and accessing a contact list and a greeting message based on a user profile; 20

permitting access to a set of applications of the mobile device when an association is made between the another tactile pattern and the stored security unlocking gesture; 25

denying access to the set of applications of the mobile device when the association fails to be made between the another tactile pattern and the stored security unlocking gesture;

16

directly opening a particular application of the mobile device when the association is made between the another tactile pattern and the stored security unlocking gesture; wherein the security unlocking gesture is a user-generated gesture that is stored in a memory that is internal to the mobile device,

associating a set of bookmarks based on the a user profile of the telephonic communication device associated with the security unlocking gesture to enable customized settings on a browser application of the mobile device;

determining that the tactile pattern is placed at multiple distinct locations on the touch screen while recognizing the tactile pattern as the unlocking gesture; wherein the a multiple distinct locations are simultaneously and serially placed;

designating a region of the touch screen as available to receive the another tactile pattern, such that the another tactile pattern is algorithmically determined to be the security unlocking gesture when recognized in the designated region;

determining a duration of the another tactile pattern at a particular location of the touch screen to determine whether it is the security unlocking gesture; and

determining that a total time to create the another tactile pattern is within a permitted amount of time when determining whether it is the security unlocking gesture.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,593,000 B1
APPLICATION NO. : 12/343516
DATED : September 22, 2009
INVENTOR(S) : David H. Chin

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the title page, item [54]: Inventor.

The address should be: -- 706 Oak Grove Avenue, Menlo Park, CA 94025, US. --.

Signed and Sealed this

Twenty-fourth Day of November, 2009

A handwritten signature in black ink that reads "David J. Kappos". The signature is written in a cursive, flowing style.

David J. Kappos
Director of the United States Patent and Trademark Office

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,593,000 B1
APPLICATION NO. : 12/343516
DATED : September 22, 2009
INVENTOR(S) : David H. Chin

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the title page, item [75]: Inventor.

The address should be: -- 706 Oak Grove Avenue, Menlo Park, CA 94025, US. --.

This certificate supersedes the Certificate of Correction issued November 24, 2009.

Signed and Sealed this
Fifteenth Day of December, 2009

A handwritten signature in black ink that reads "David J. Kappos". The signature is written in a cursive, flowing style.

David J. Kappos
Director of the United States Patent and Trademark Office