

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	NETL.071PR
		Application Number	
Title of Invention	ARCHITECTURE FOR MEMORY MODULE WITH PACKAGES OF THREE-DIMENSIONAL STACKED (3DS) MEMORY CHIPS		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2

☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Applicant Information:

Applicant 1				
Applicant Authority		☒ Inventor		☐ Legal Representative under 35 U.S.C. 117 ☐ Party of Interest under 35 U.S.C. 118
Prefix	Given Name	Middle Name	Family Name	Suffix
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service				
City		State/Province	Country of Residence	
Citizenship under 37 CFR 1.41(b)				
Mailing Address of Applicant:				
Address 1				
Address 2				
City		State/Province		
Postal Code		Country		
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button. Add				

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).	
☐ An Address is being provided for the correspondence information of this application.	
Customer Number	20995
Email Address	efiling@kmob.com Add Email Remove Email

Application Information:

Title of the Invention	ARCHITECTURE FOR MEMORY MODULE WITH PACKAGES OF THREE-DIMENSIONAL STACKED (3DS) MEMORY CHIPS		
Attorney Docket Number	NETL.071PR	Small Entity Status Claimed ☐	
Application Type	Provisional		
Subject Matter	Utility		
Suggested Class (if any)		Sub Class (if any)	
Suggested Technology Center (if any)			
Total Number of Drawing Sheets (if any)		Suggested Figure for Publication (if any)	

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	NETL.071PR
		Application Number	
Title of Invention	ARCHITECTURE FOR MEMORY MODULE WITH PACKAGES OF THREE-DIMENSIONAL STACKED (3DS) MEMORY CHIPS		

Publication Information:

☐	Request Early Publication (Fee required at time of Request 37 CFR 1.219)
☐	Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Enter either Customer Number or complete the Representative Name section below. If both sections are completed the Customer Number will be used for the Representative Information during processing.			
Please Select One:	☒ Customer Number	☐ US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)
Customer Number	20995		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78(a)(2) or CFR 1.78(a)(4), and need not otherwise be made part of the specification.			
Prior Application Status		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.			

Foreign Priority Information:

This section allows for the applicant to claim benefit of foreign priority and to identify any prior foreign application for which priority is not claimed. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(a).			
Remove			
Application Number	Country ¹	Parent Filing Date (YYYY-MM-DD)	Priority Claimed
			☐ Yes ☐ No
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			


Assignee Information:

Providing this information in the application data sheet does not substitute for compliance with any requirement of part 3 of Title 37 of the CFR to have an assignment recorded in the Office.
Assignee 1

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	NETL.071PR
		Application Number	
Title of Invention	ARCHITECTURE FOR MEMORY MODULE WITH PACKAGES OF THREE-DIMENSIONAL STACKED (3DS) MEMORY CHIPS		

If the Assignee is an Organization check here. ☐				
Prefix	Given Name	Middle Name	Family Name	Suffix
Mailing Address Information:				
Address 1				
Address 2				
City		State/Province		
Country		Postal Code		
Phone Number		Fax Number		
Email Address				
Additional Assignee Data may be generated within this form by selecting the Add button.				

Signature:

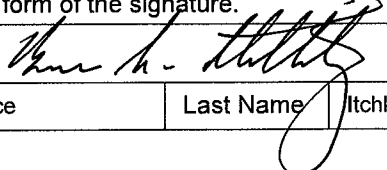A signature of the applicant or representative is required in accordance with 37 CFR 1.33 and 10.18. Please see 37 CFR 1.4(d) for the form of the signature.					
Signature				Date (YYYY-MM-DD)	2010-11-03
First Name	Bruce	Last Name	Itchkawitz	Registration Number	47677

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

ARCHITECTURE FOR MEMORY MODULE WITH PACKAGES OF THREE-DIMENSIONAL STACKED (3DS) MEMORY CHIPS

BRIEF DESCRIPTION OF THE DRAWINGS

[0001] Figure 1 schematically illustrates the architecture of a load reduced DIMM (LRDIMM) and the distributed architecture of a HyperCloud DIMM (HCDIMM).

[0002] Figure 2 schematically illustrates the architecture of a 3DS-DIMM.

[0003] Figure 3 schematically illustrates a memory module architecture in accordance with certain embodiments described herein.

DETAILED DESCRIPTION

[0004] The proposed three-dimensional stacking (3DS) standard for dual in-line memory modules (DIMMs) being considered by the Joint Electron Devices Engineering Council (JEDEC) addresses the three major shortcomings in the current JEDEC registered DIMM (RDIMM) and JEDEC load reduced DIMM (LRDIMM) standards. These shortcomings are:

- a) The DIMM density limitation due to the fixed number of chip-select signals received by the DIMM from the system memory controller.
- b) The performance loss due to the increased load on the data bus as the DIMM density (e.g., the number of DRAM devices and number of ranks) increases.
- c) The upper bound of the DIMM density due to the physical DIMM form factor.

[0005] The proposed 3DS-DIMM standard (see, e.g., Figure 2) includes two new components. One component of the 3DS-DIMM is a 3DS register (also known as an enhanced DDR3 register). This component contains a DDR3 JEDEC standard register with a “rank multiplication” circuit, which increases the number of the output chip-select signals by decoding the higher-order row or column address bits with the incoming chip-select signals from the system controller. The 3DS Register includes a command/address buffer, a register operational code buffer (RC word buffer), and rank multiplication logic (which supports rank multiplication of 1-to-2, 1-to-4, and/or 1-to-8). The 3DS register addresses shortcoming (a) of the JEDEC RDIMM and LRDIMM listed above.

[0006] Another component of the 3DS-DIMM is a 3DS dynamic random-access memory (DRAM) package. The 3DS DRAM package includes a plurality of stacked DDR

DRAM chips or dies with a data I/O load that is equivalent to the data I/O load of a single-die DRAM package, regardless of the actual number of DRAM dies in the 3DS DRAM package. The 3DS DRAM package comprises 2, 4 or 8 DDR DRAM dies and a controller die. The controller die includes data buffers, a data path timing controller, a secondary command/address buffer, a programmable secondary 1-to-2 rank decoder, and a data path signal (e.g., ODT, ODT, RTT) controller. The 3DS DRAM package addresses the shortcomings (b) and (c) of the JEDEC RDIMM and LRDIMM listed above.

[0007] However, there are deficiencies in the proposed 3DS-DIMM standard. The JEDEC DDR3 RDIMM standard contains two major components: a DDR3 register and a plurality of DRAM packages each comprising one or more DRAM chips or dies. The DDR3 register serves as a command/address signal buffer and as a command/control decoder. This DDR3 register holds a set of register control (RC) words, which the computer system configures to ensure the proper operation of the RDIMM. The DDR3 register contains a phase-lock-loop (PLL), which functions as a clock synchronizer for each RDIMM. The DDR3 register outputs a set of buffered command/address signals to all the DRAM packages on the RDIMM, but the data signals are directly fed to the DRAM packages from the system memory controller.

[0008] In contrast to the JEDEC DDR3 RDIMM standard, the 3DS-DIMM proposal requires the DRAM package to contain a controller die that controls all data paths timing and operations (see, e.g., Figure 2). This arrangement of the DRAM package reduces the load on the data bus, however, it presents three significant shortcomings:

- 1) The command/address buffer in the 3DS DRAM package introduces clock cycle latency since it needs to provide clock synchronous operation to the DRAM dies in the package.
- 2) The data path control circuit (e.g., ODT, read/write data direction) in the control die becomes very complicated to support semi-synchronous (fly-by) data path control among all 3DS DRAM packages that are on a DIMM.
- 3) The variations in the DRAM die timing characteristics within each 3DS DRAM package would be likely to require resynchronization of the data signals during the read/write operations, which increases the read/write latency and the read-to-write and write-to-read turn around time.

[0009] The 3DS-DIMM proposal can also be compared to the HyperCloud (HC) DIMM architecture of Netlist, Inc. (see, e.g., Figure 1 and U.S. Pat. Nos. 7,289,386,

7,532,537, 7,619,912, and 7,636,274, each of which is incorporated in its entirety by reference herein). The 3DS-DIMM architecture is very similar with the HCDIMM architecture. The main topological difference is that while 3DS-DIMM architecture requires a control die to buffer the data signals and to provide interface with command/address signals from the 3DS register, the HCDIMM architecture includes a plurality of isolation devices (ID), each of which only contains data buffers. Unlike the HCDIMM architecture, since the command/address signal needs to pass through the control die in the 3DS DRAM package, the 3DS-DIMM proposal presents the same shortcoming (b) of the controller die described above. The data path control signals are generated by the register device (RD) in the HCDIMM architecture, while these data path control signals are generated by the control die in the 3DS DRAM. This creates unneeded timing critical control paths in 3DS-DIMM architecture.

[0010] In certain embodiments described herein, a memory module architecture is proposed that includes a set of device components that supports JEDEC 3DS operation with the benefit of RDIMM and HCDIMM (see, e.g., Figure 3). This set of device components comprises two components: a register device (RD) (e.g., the same RD component as in HCDIMM), and a DDR DRAM Stack Package (DDSP) that comprises a DRAM control die that serves as command/address buffers and a data path control circuit. Certain embodiments of the architecture described herein differs from the 3DS-DIMM architecture in that instead of the controller die of the 3DS-DIMM (which provides selective isolation, a secondary address buffer, and a second rank multiplication decoder), certain embodiments described herein use an “ID+” die that provides both selective isolation and address pass-through (e.g., compare Figures 2 and 3).

[0011] The data path control circuit of certain embodiments has two operational modes: mode-C (HCDIMM/RDIMM Compatible mode) and mode-3DS (3DS DIMM compatible mode). In mode-C, the DDR DRAM Stack Package (DDSP) receives all the data path control signals from the RD, and the RD manages the data path by controlling the command/address time slot and the data bus time slot. In mode-3DS, the “ID+” die in the DDSP internally generates the data path control signals to ensure the proper operation of the data path.

[0012] The DDSP of certain embodiments allows the DDSP-DIMM to work as either a 3DS-DIMM, a RDIMM, or a HCDIMM. However, in mode-C, the DDSP comprises a set of optional control input pins (in addition to the package pins that are included in 3DS-DRAM) to receive the data path control signals from the RD.

[0013] The following U.S. patents are incorporated in their entirety by reference herein: U.S. Pat. Nos. 7,289,386, 7,286,436, 7,442,050, 7,375,970, 7,254,036, 7,532,537, 7,636,274, 7,630,202, 7,619,893, 7,619,912, 7,811,097. The following U.S. patent applications are incorporated in their entirety by reference herein: U.S. Pat. Appl. Nos. 12/422,912, 12/422,853, 12/577,682, 12/629,827, 12/606,136, 12/874,900, 12/422,925, 12/504,131, 12/761,179, and 12/815,339.

[0014] Various embodiments have been described above. Although this invention has been described with reference to these specific embodiments, the descriptions are intended to be illustrative of the invention and are not intended to be limiting. Various modifications and applications may occur to those skilled in the art without departing from the true spirit and scope of the invention.

9951168
110310

HCDIMM vs LRDIMM

- All signals go through single memory buffer (MB) in LRDIMM (causes timing issues)
- LRDIMM has longer data path (more latency and SI issues)


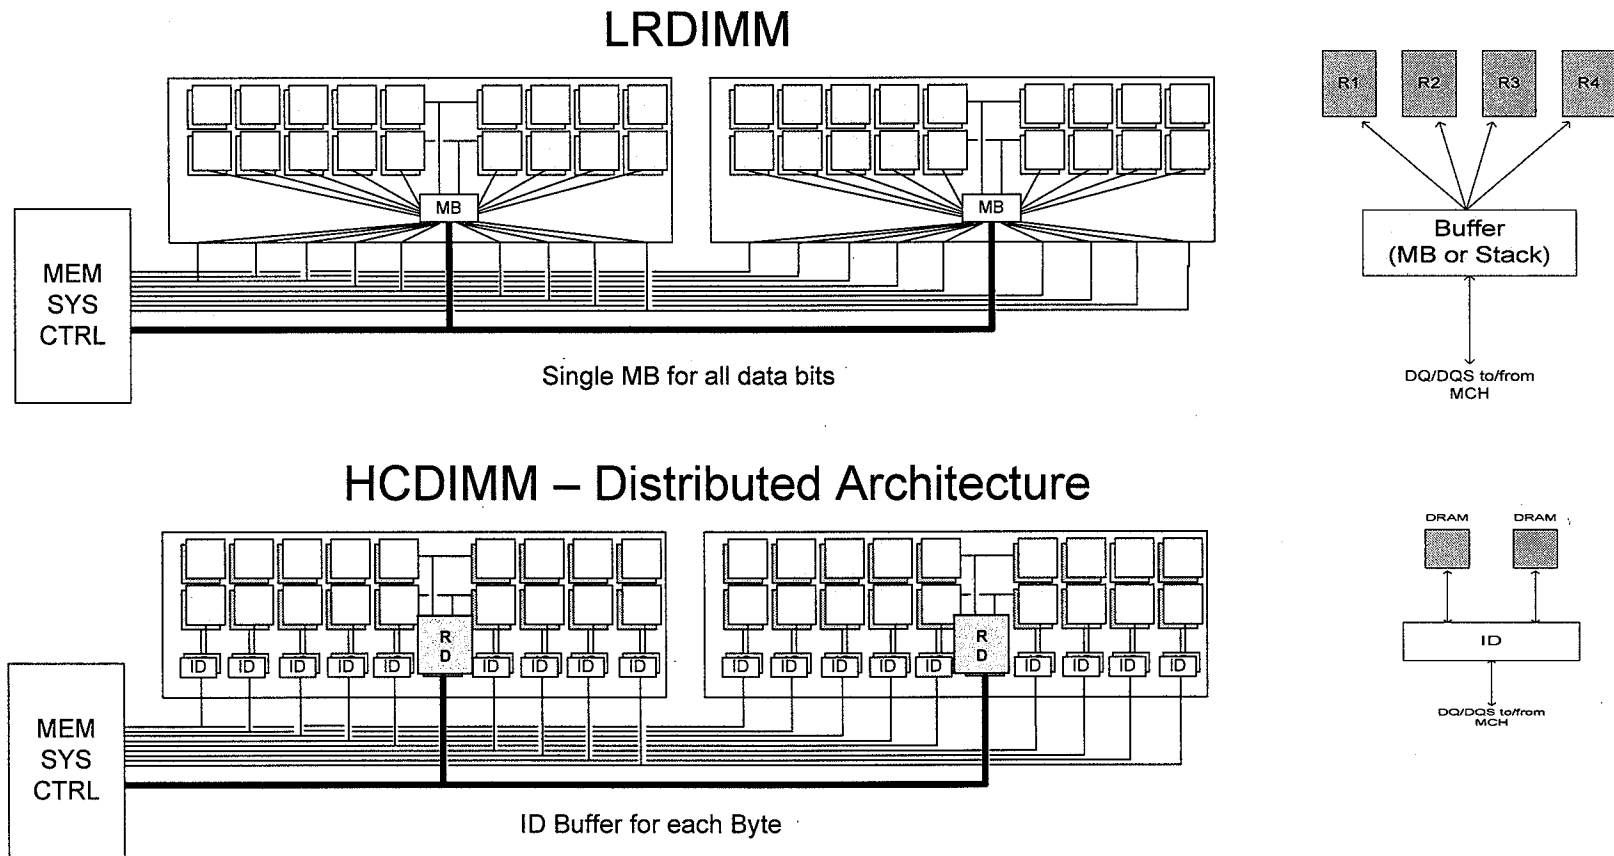


Figure 1

3DS-DIMM (Distributed Topology)

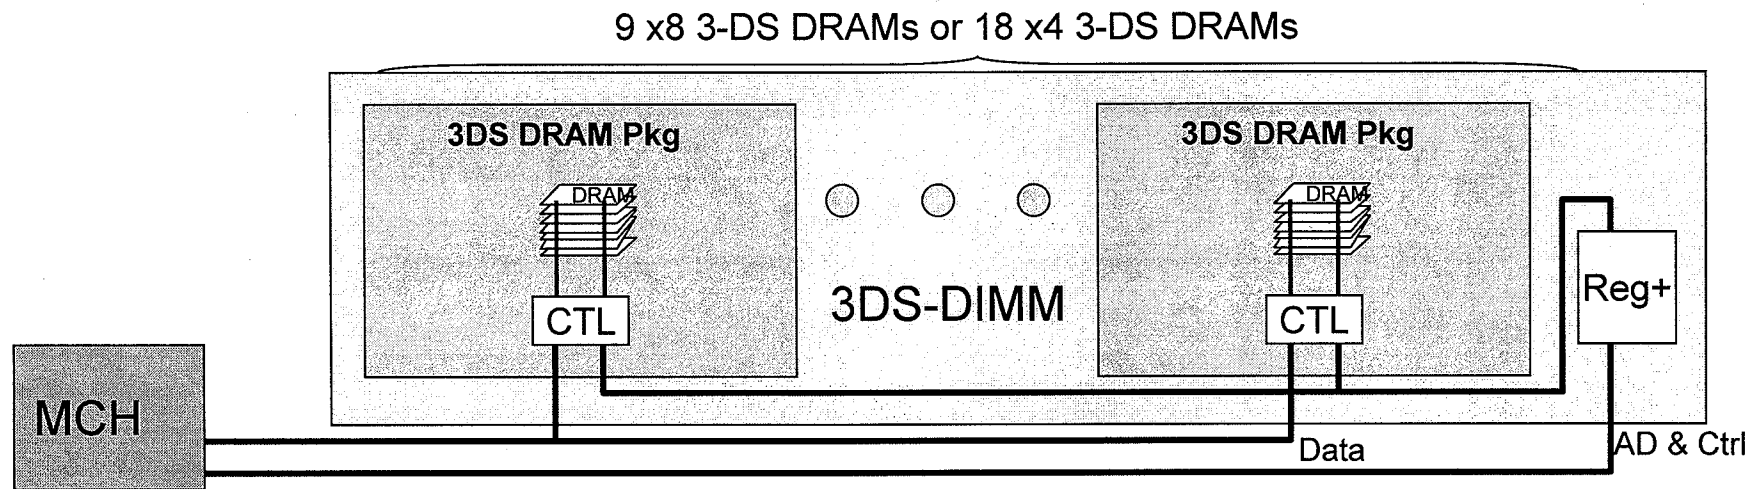

3DS-DIMM – Based on Distributed Architecture:
New Components

Reg+ = DDR3_Register + RM decoder


CTL = ID + Secondary address buffer + 2nd_RM decoder

More Complexity in Design and Performance Degradation and Added Latency

Figure 2

3DS-DIMM+ (Distributed Topology based HCDIMM)

9 x8 3-DS DRAMs or 18 x4 3-DS DRAMs

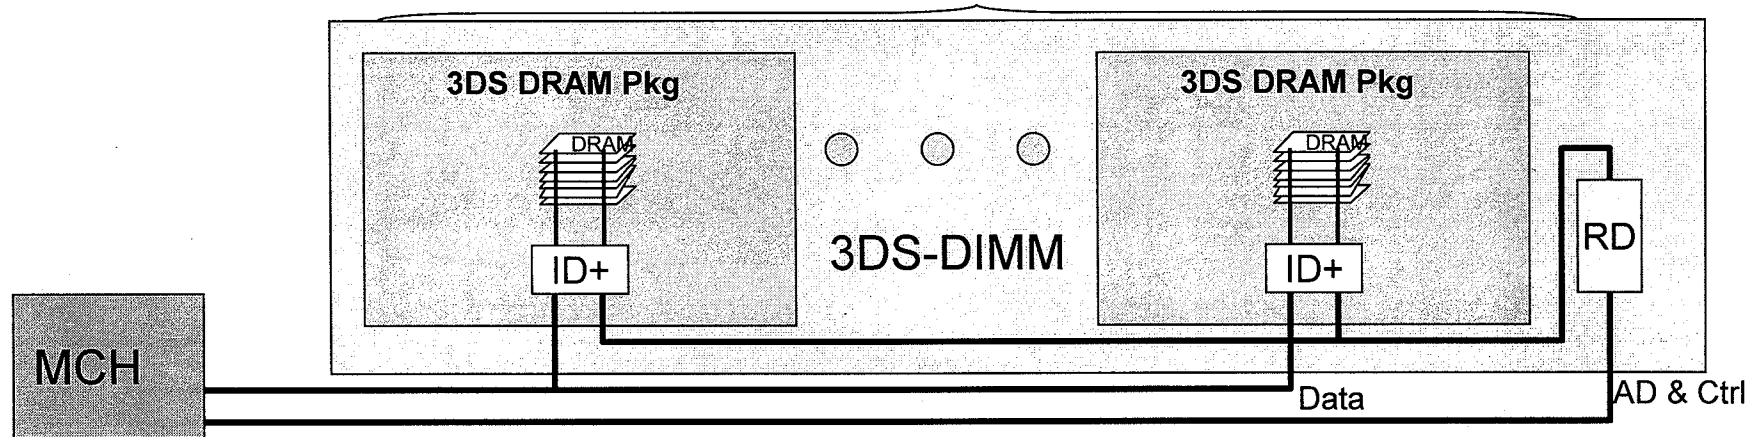

3DS-DIMM – Based on Distributed Architecture
ID+ = ID + Address Pass-through.

Simple Design without Performance Loss or Added Latency

Figure 3

Electronic Patent Application Fee Transmittal

Application Number:				
Filing Date:				
Title of Invention:	ARCHITECTURE FOR MEMORY MODULE WITH PACKAGES OF THREE-DIMENSIONAL STACKED (3DS) MEMORY CHIPS			
First Named Inventor/Applicant Name:	TBD TBD			
Filer:	Bruce S. Itchkawitz/Jessica Noda			
Attorney Docket Number:	NETL.071PR			
Filed as Large Entity				
Provisional Filing Fees				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Provisional application filing	1005	1	220	220
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:	Samsung Electronics Co., Ltd.			

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Total in USD (\$)				220

Electronic Acknowledgement Receipt

EFS ID:	8764737
Application Number:	61409893
International Application Number:	
Confirmation Number:	4751
Title of Invention:	ARCHITECTURE FOR MEMORY MODULE WITH PACKAGES OF THREE-DIMENSIONAL STACKED (3DS) MEMORY CHIPS
First Named Inventor/Applicant Name:	TBD TBD
Customer Number:	20995
Filer:	Bruce S. Itchkawitz/Quyen Lieu
Filer Authorized By:	Bruce S. Itchkawitz
Attorney Docket Number:	NETL.071PR
Receipt Date:	03-NOV-2010
Filing Date:	
Time Stamp:	20:05:21
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$ 220
RAM confirmation Number	5554
Deposit Account	
Authorized User	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Bytes	Multi Part (if appl.)	Pages (if appl.)
			SamSung Electronics Co., Ltd.		

1	Application Data Sheet	ads.pdf	244873 872a26b0cfe0214692e066aab189e30993b5db4c	no	4
Warnings:					
Information:					
This is not an USPTO supplied ADS fillable form					
2	Specification	specification.pdf	211153 b4bde2988d9c3623ddff69a516f00c697db0601a	no	4
Warnings:					
Information:					
3	Drawings-only black and white line drawings	drawings.pdf	361675 d64883c91456f34dc933dce8cb6c1e81b7c3d3a3	no	3
Warnings:					
Information:					
4	Fee Worksheet (PTO-875)	fee-info.pdf	29986 42440a9c5f0ca7dc06fee1d1edd6464bc3239b4e	no	2
Warnings:					
Information:					
Total Files Size (in bytes):			847687		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					