

- (51) **Int. Cl.**
H01L 23/31 (2006.01)
H01L 25/065 (2006.01)
- (52) **U.S. Cl.**
 CPC *H01L 2225/06541* (2013.01); *H01L*
2225/06565 (2013.01); *H01L 2225/06568*
 (2013.01); *H01L 2225/06596* (2013.01); *H01L*
2225/1023 (2013.01); *H01L 2225/1058*
 (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,637,350	B2 *	1/2014	Ahn		H01L 21/76898 257/E21.511
8,828,798	B2	9/2014	England et al.		
8,901,727	B2 *	12/2014	Kang		H01L 21/563 257/686
9,123,552	B2	9/2015	Keeth et al.		
9,165,916	B2 *	10/2015	Chung		H01L 25/50
9,601,465	B2 *	3/2017	Kang		H01L 24/97
9,853,012	B2 *	12/2017	Chung		H01L 25/0657
2011/0033980	A1	2/2011	Chung		
2012/0217654	A1	8/2012	Shin et al.		
2015/0001685	A1 *	1/2015	Chung		H01L 21/486 257/621
2015/0102468	A1	4/2015	Kang et al.		
2015/0115982	A1	4/2015	Chen et al.		
2015/0279881	A1	10/2015	Shizukuishi		

* cited by examiner

FIG. 1

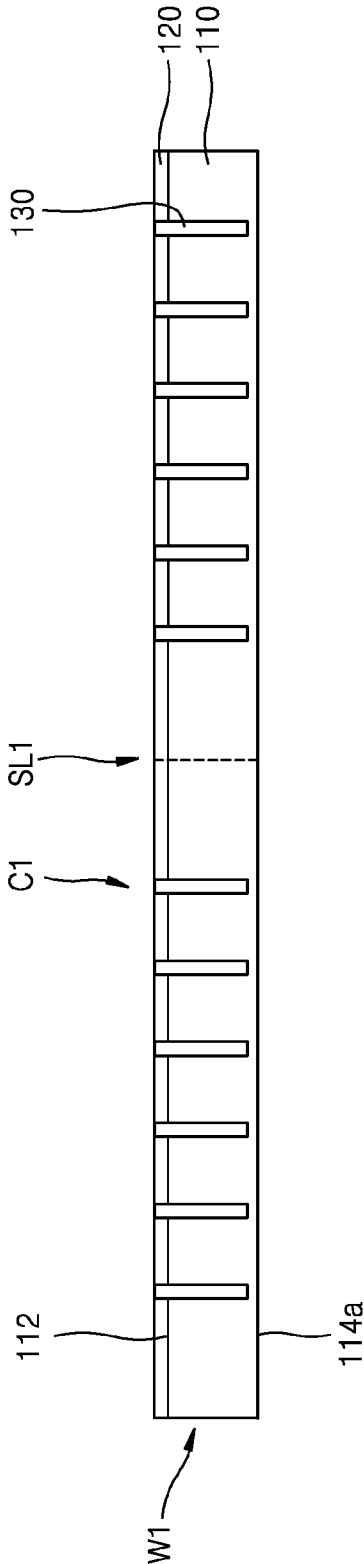


FIG. 2

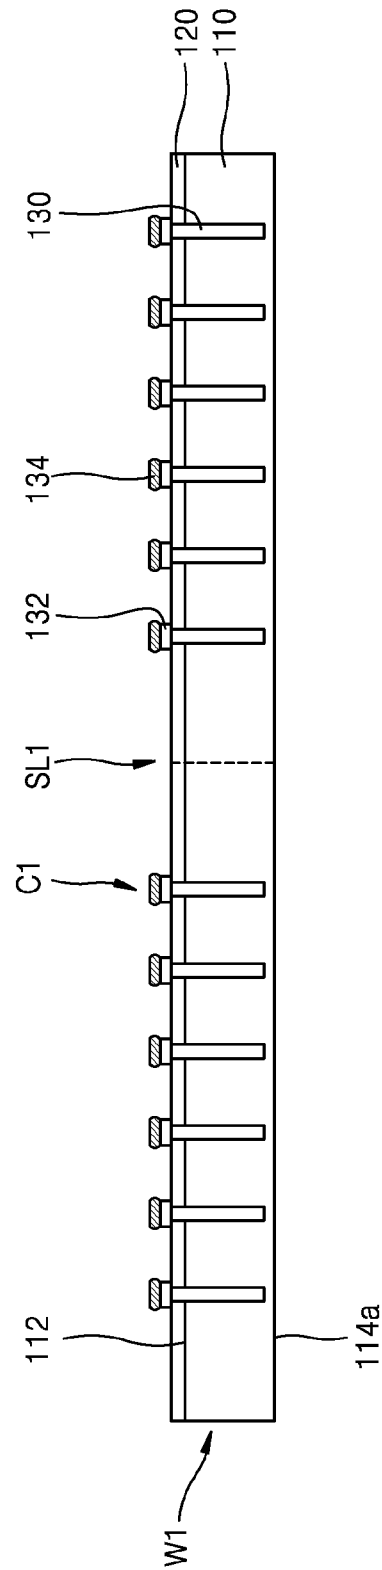


FIG. 4

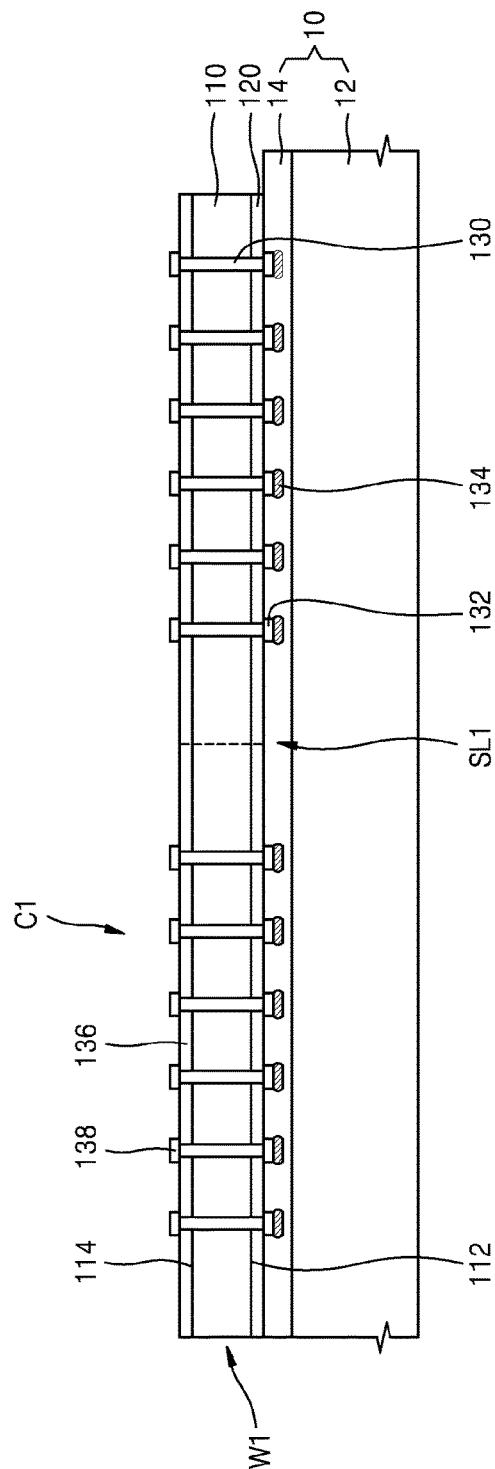


FIG. 5

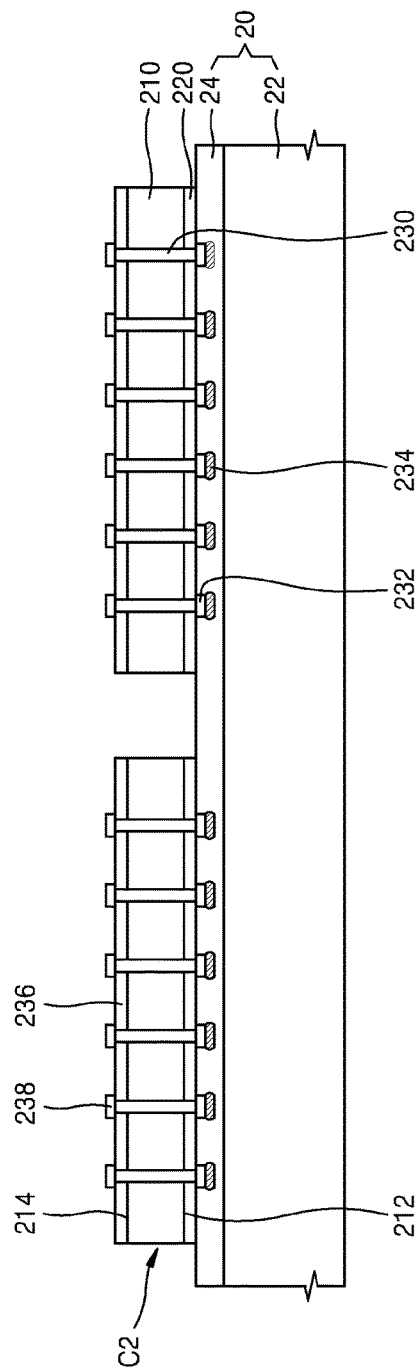


FIG. 6

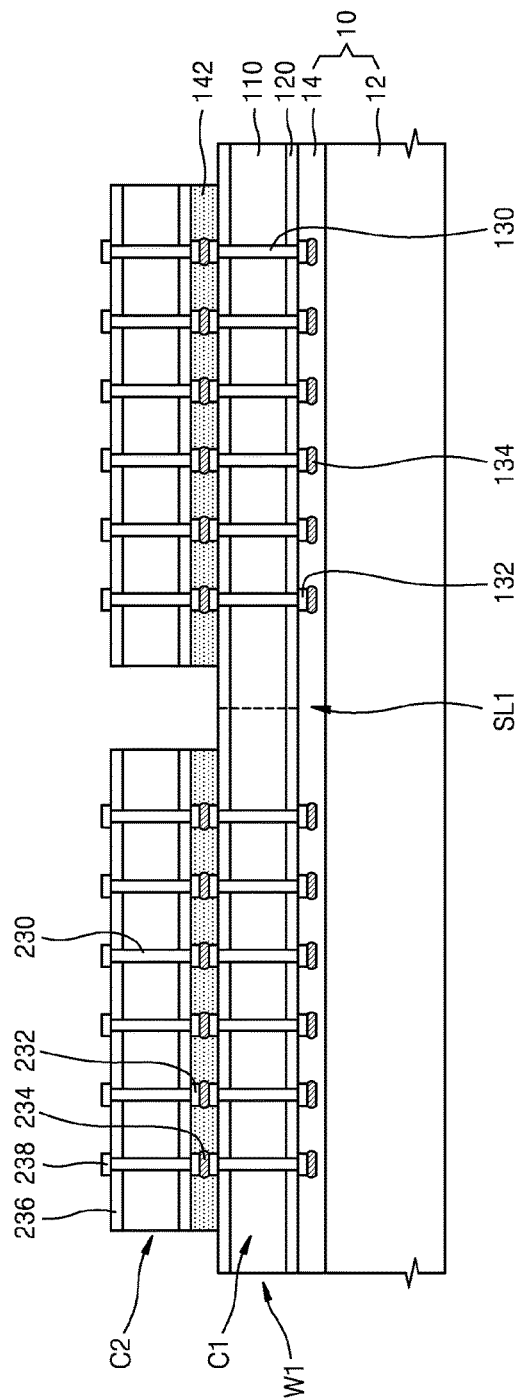


FIG. 7

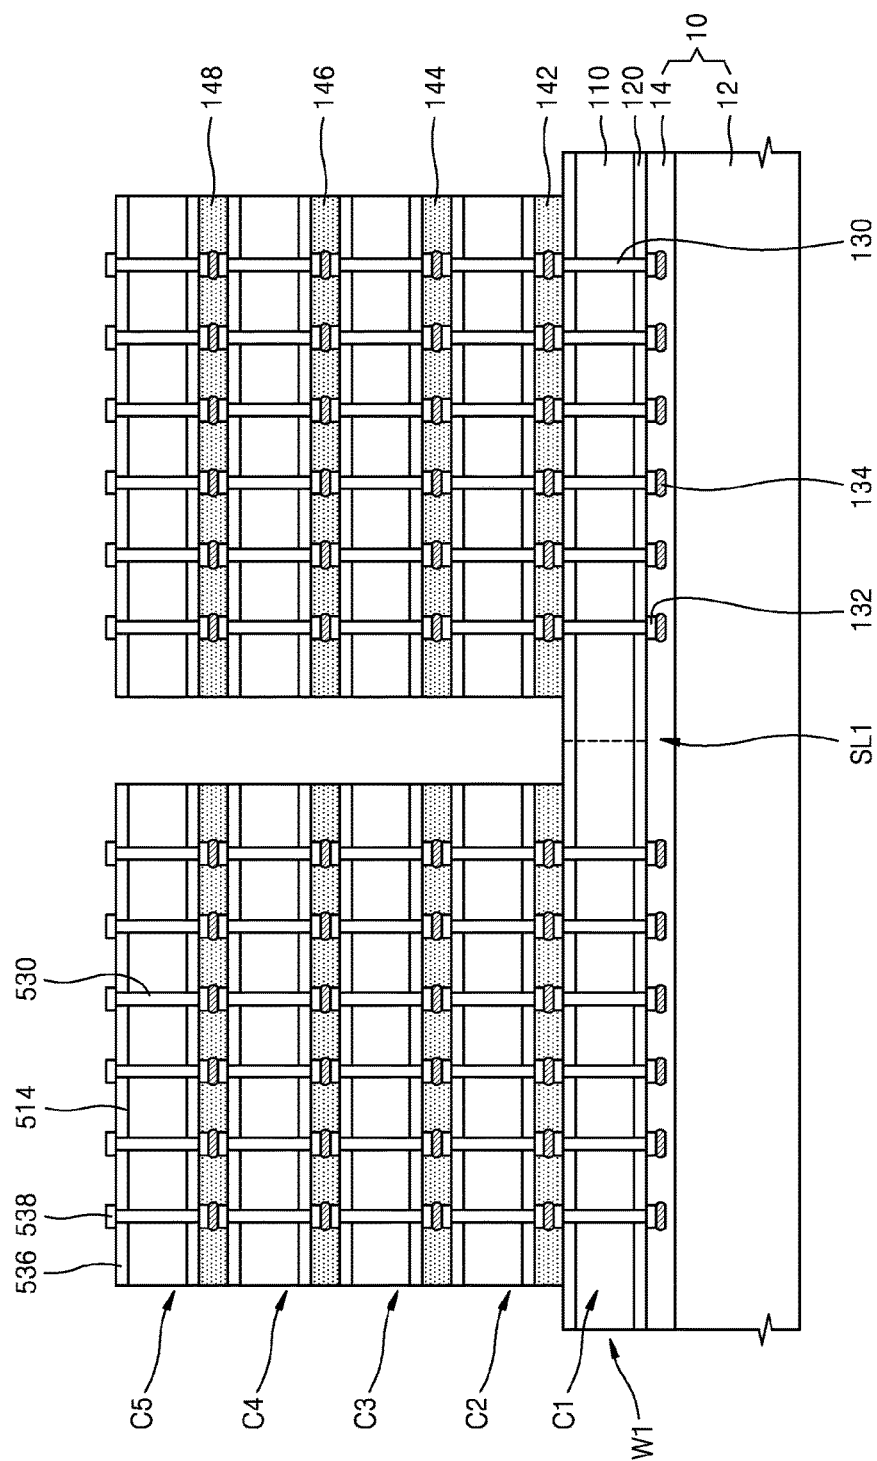


FIG. 9

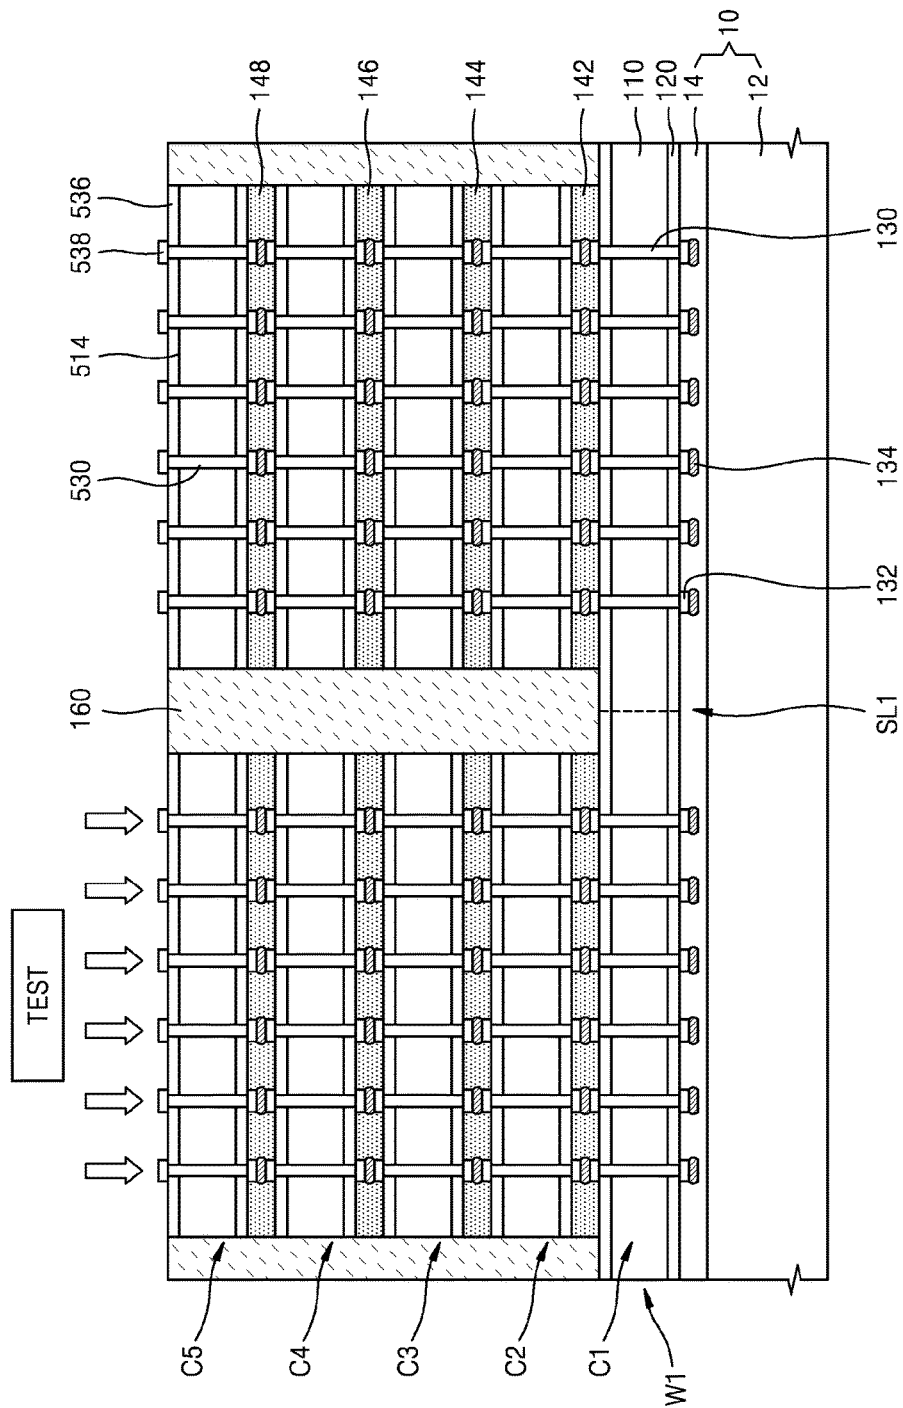


FIG. 10

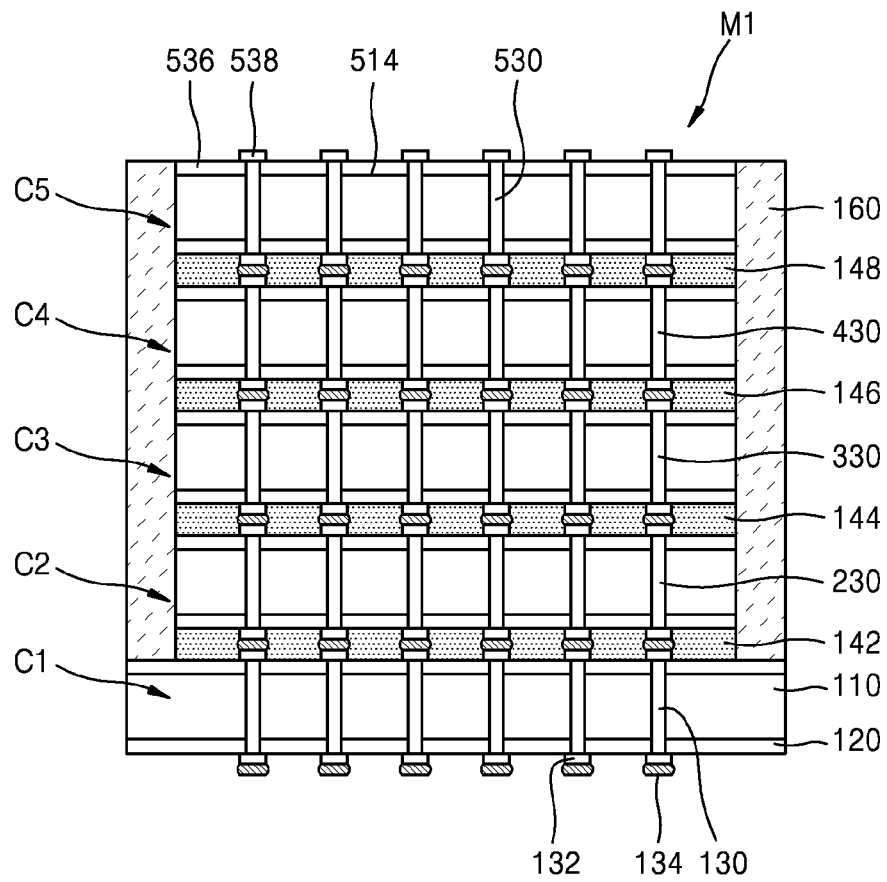


FIG. 11

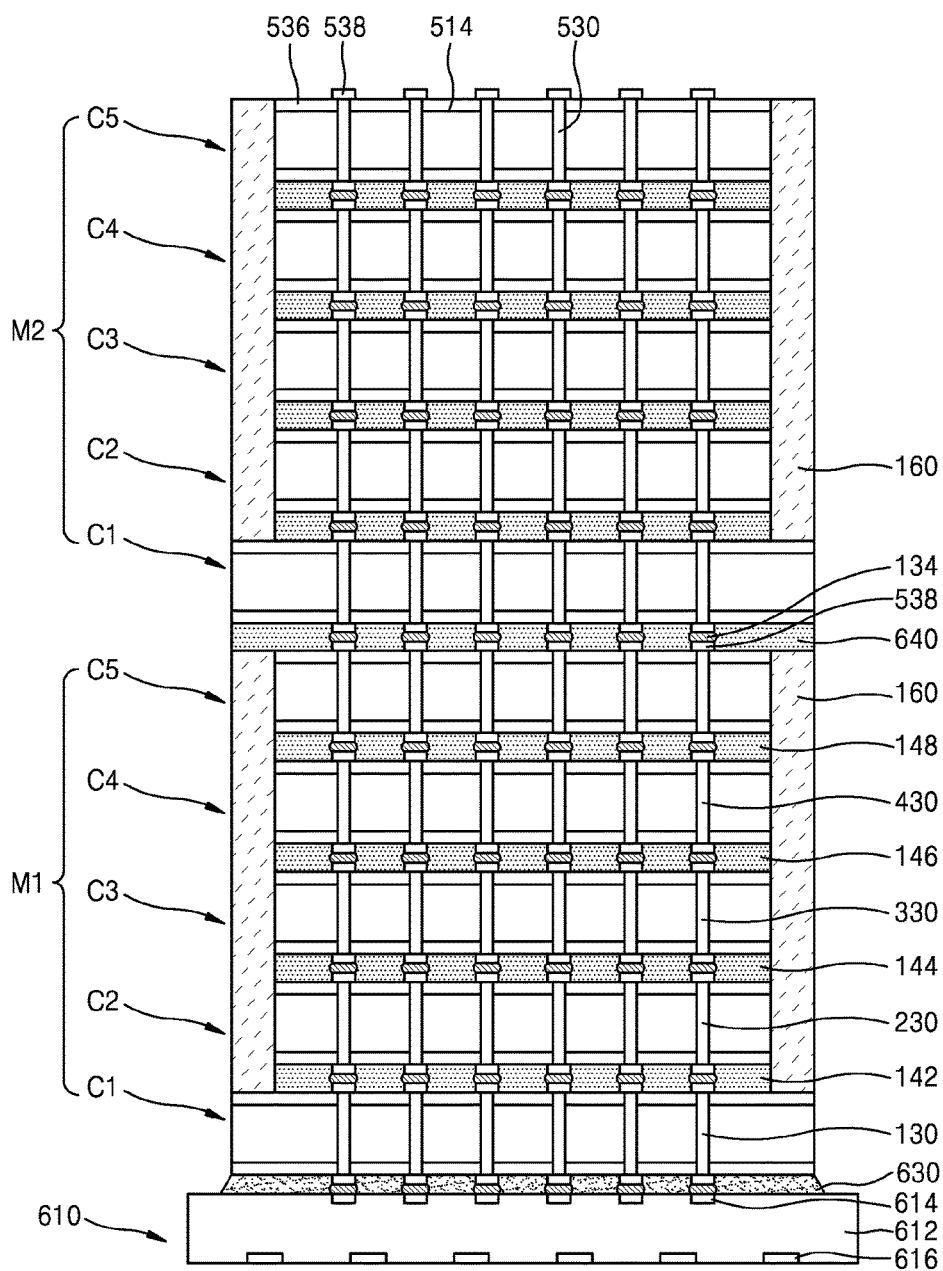


FIG. 12

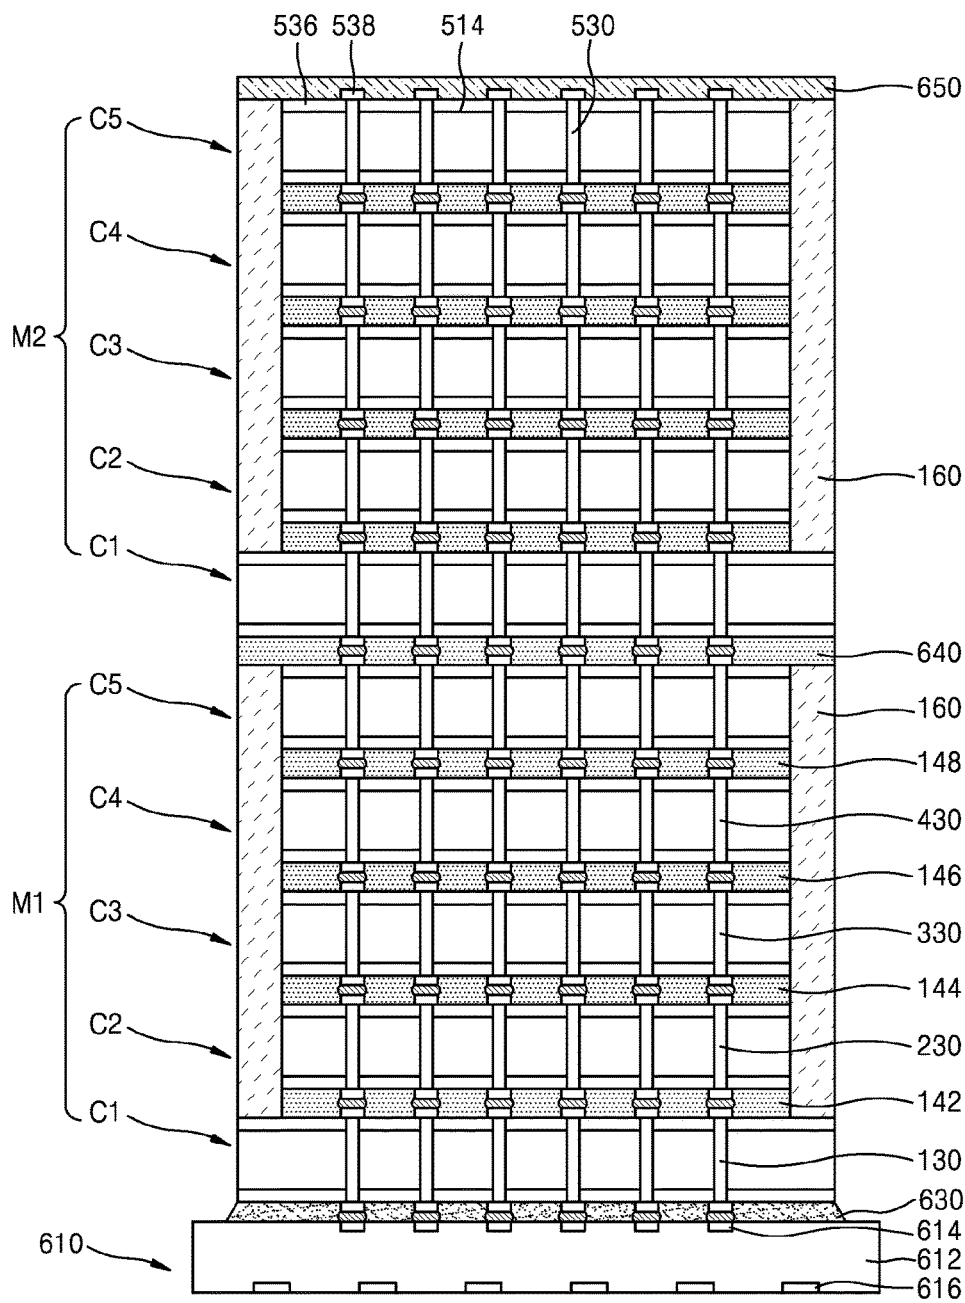


FIG. 13

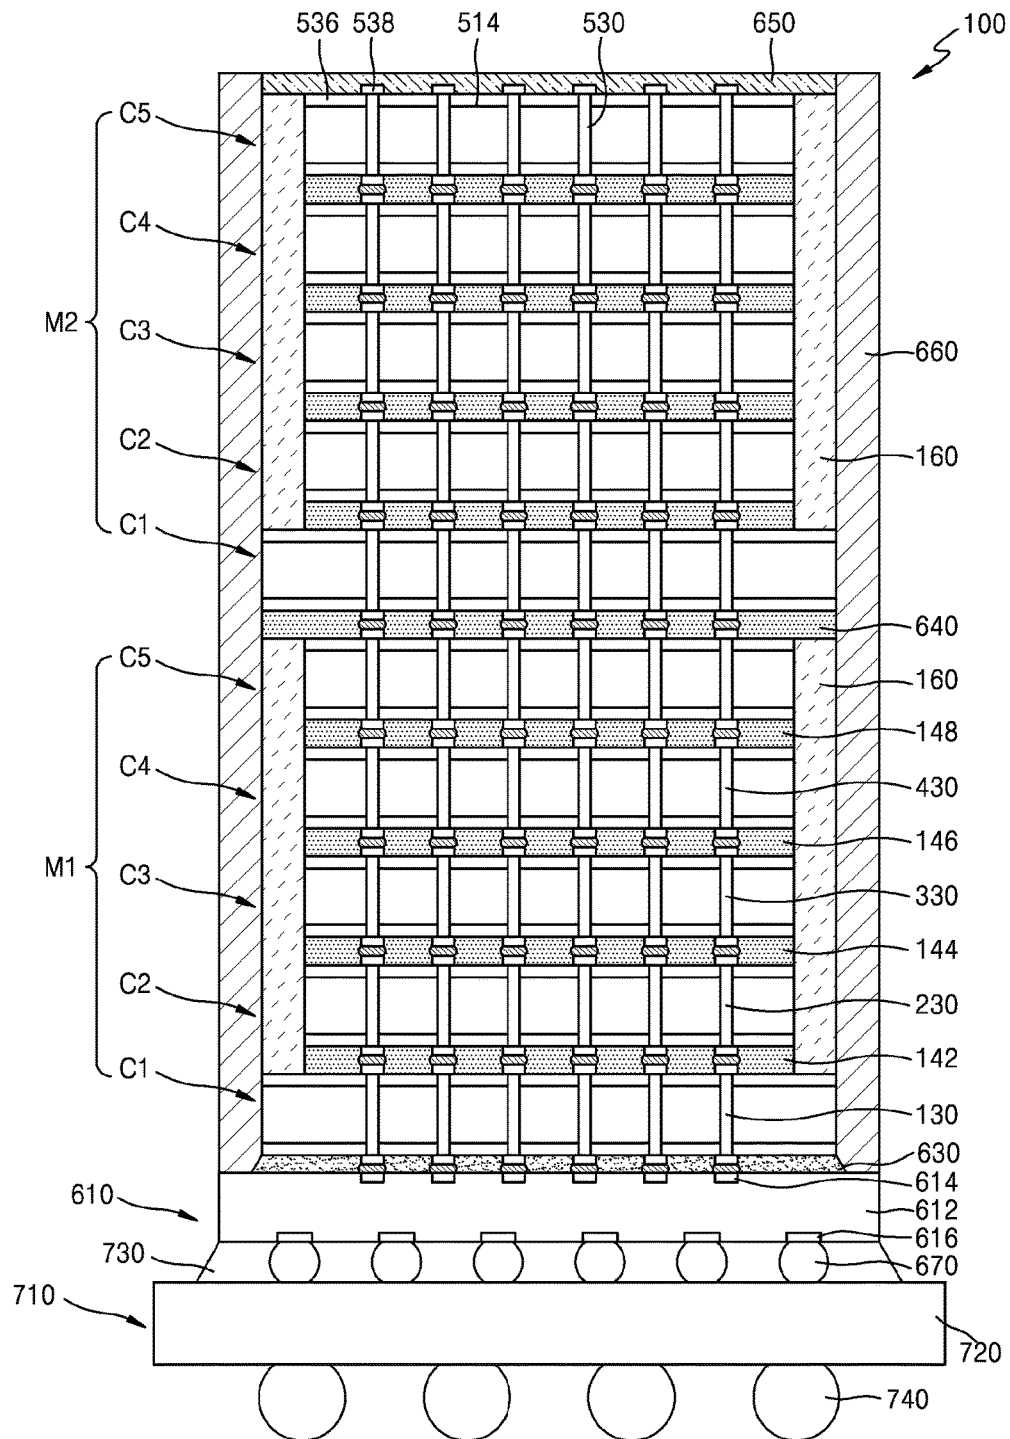


FIG. 14

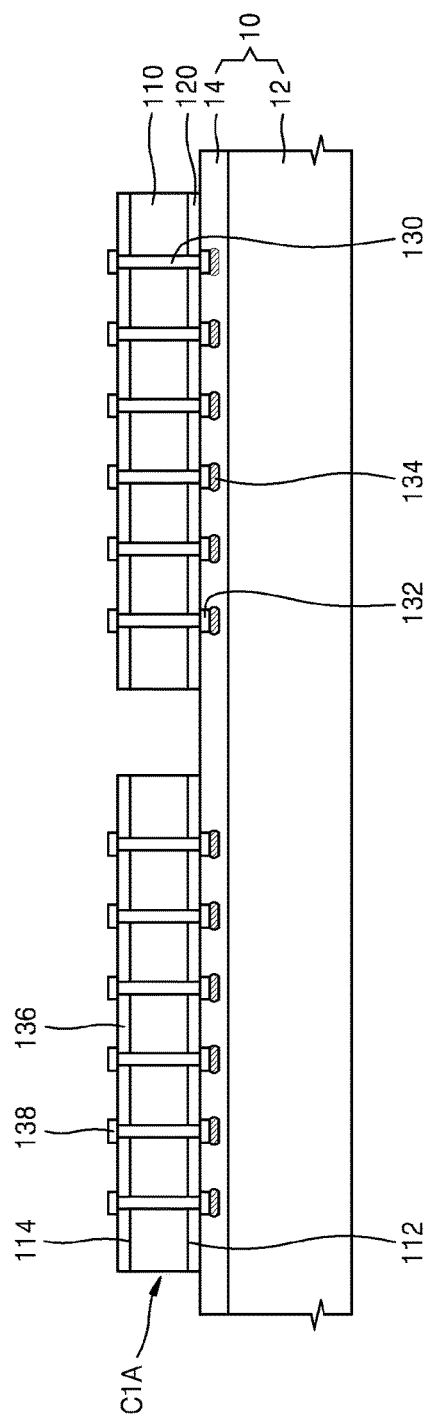


FIG. 15

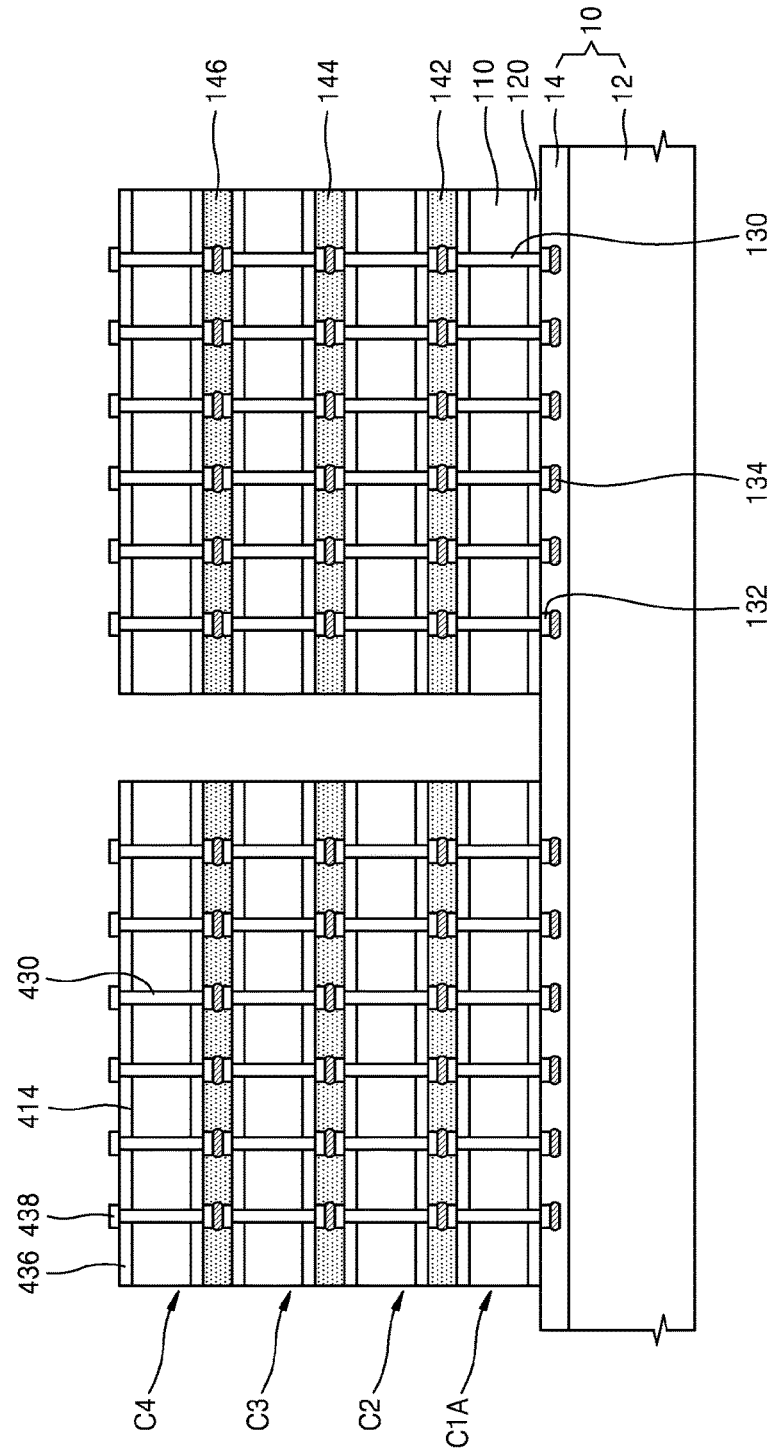


FIG. 16

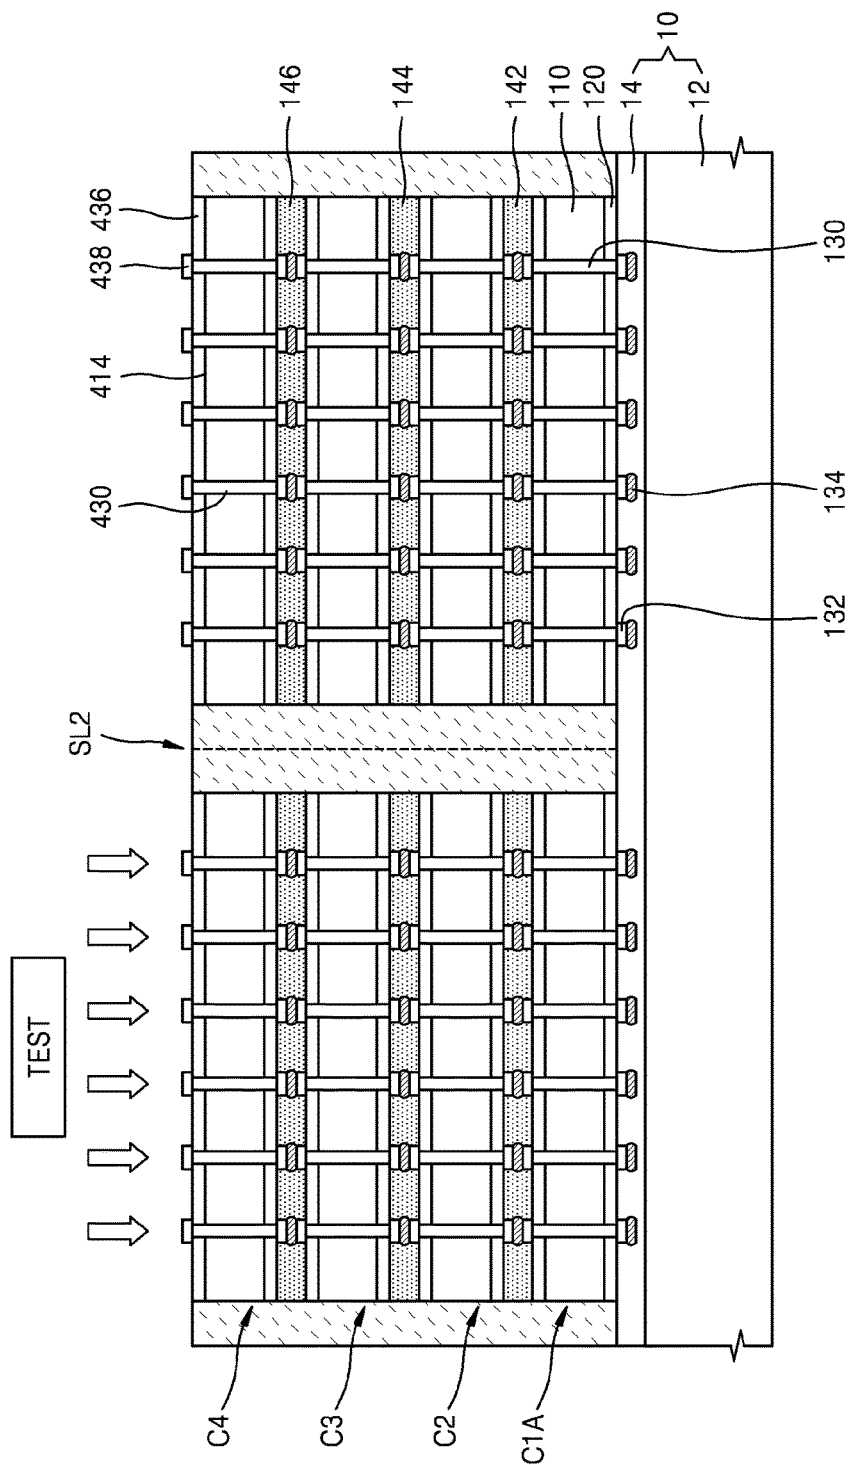


FIG. 17

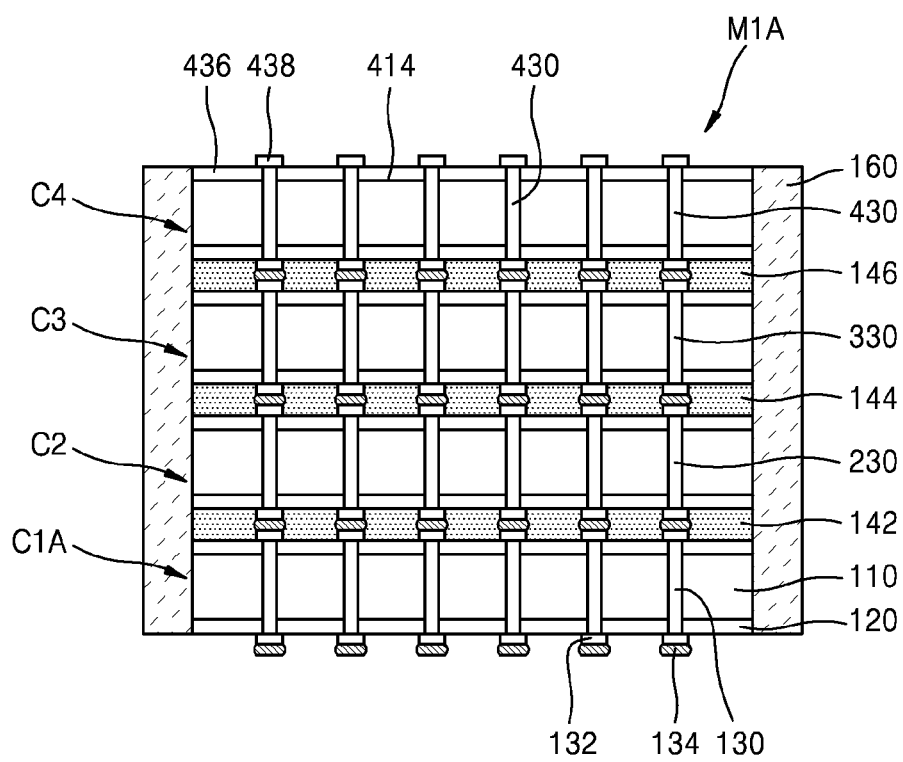


FIG. 18

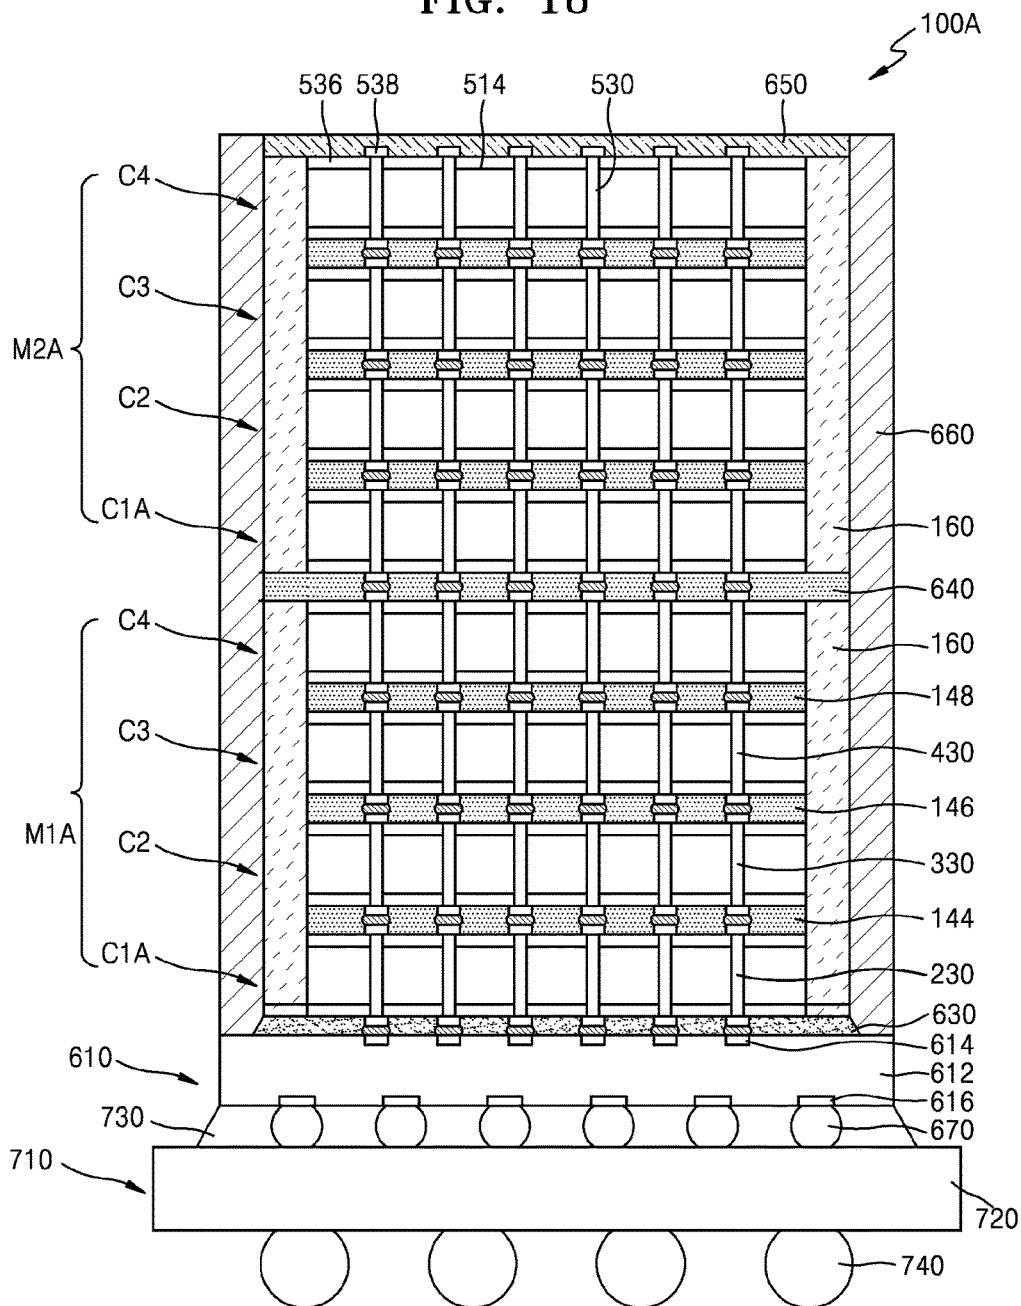


FIG. 20


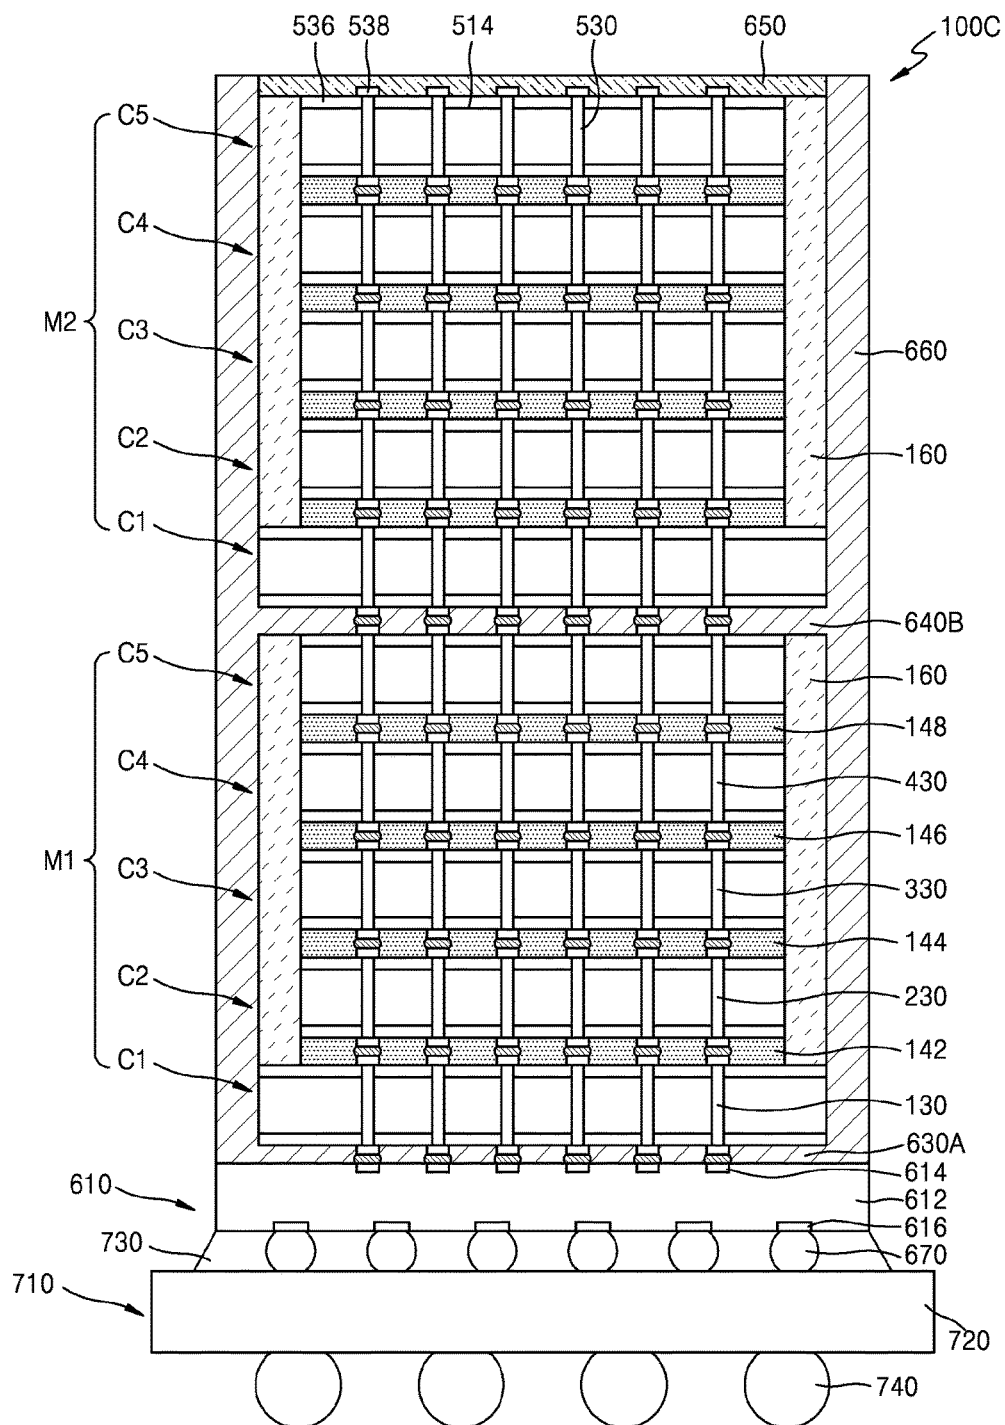


FIG. 21

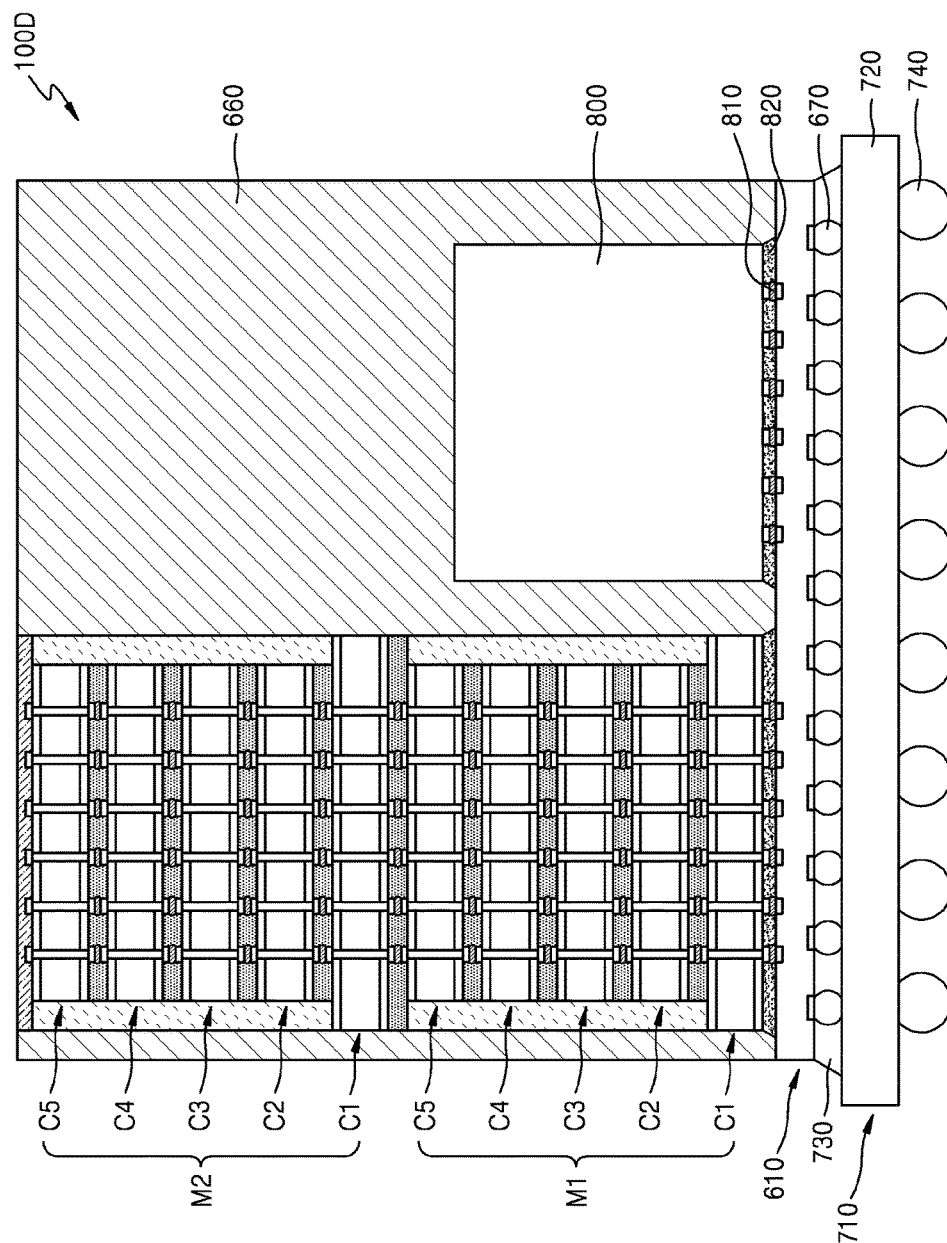

1

SEMICONDUCTOR PACKAGE AND METHOD OF MANUFACTURING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of priority under 35 U.S.C. 119 to Korean Patent Application No. 10-2016-0082973, filed on Jun. 30, 2016, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein in its entirety by reference.

BACKGROUND

The present disclosure relates to a semiconductor package and a method of manufacturing the same, and more particularly, to a semiconductor package including a through substrate via (TSV) and a method of manufacturing the same.

As the electronic industry rapidly advances and the requirements of users increase, electronic devices are becoming more and more miniaturized and multi-functionalized. Accordingly, semiconductor packages where a plurality of semiconductor chips each including a TSV are stacked in a vertical direction have been proposed.

SUMMARY

Various disclosed embodiments provide a semiconductor package with improved reliability.

Certain disclosed embodiments also provide a method of manufacturing a semiconductor package, which decreases defects occurring in a process of stacking semiconductor chips.

In certain embodiments, a method includes providing a first sub-package unit including at least two first semiconductor chips, which are vertically stacked, and a first mold layer surrounding side surfaces of the at least two first semiconductor chips; and providing a second sub-package unit including at least two second semiconductor chips, which are vertically stacked, and a second mold layer that surrounds side surfaces of the at least two second semiconductor chips and is vertically spaced apart from the first mold layer. The second sub-package unit is disposed on the first sub-package unit. The at least two first semiconductor chips and the at least two second semiconductor chips each include a through substrate via (TSV). In addition, a top-most semiconductor chip of the at least two first semiconductor chips is electrically connected to the bottom-most semiconductor chip of the at least two second semiconductor chips, without a package substrate therebetween. A package substrate is provided, on which the at least two first semiconductor chips and the at least two second semiconductor chips are vertically stacked to form a semiconductor package.

In certain embodiments, a method of manufacturing a semiconductor package includes providing a package substrate, and stacking a plurality of sub-package units on the package substrate along a direction vertical to a top surface of the package substrate by first stacking a first sub-package unit on the package substrate and subsequently stacking a second sub-package unit on the first sub-package unit. Each of the plurality of sub-package units comprises a first buffer chip or logic chip, a first memory chip disposed on the first buffer chip or logic chip, a second memory chip disposed on the first memory chip, and for each sub-package unit, a first mold layer surrounding a side surface of each of the first and second memory chips, wherein each of the first buffer chip,

2

the first memory chip, and the second memory chip includes a through substrate via (TSV). The method further includes performing a reflow process to directly electrically connect the first sub-package unit to the second sub-package unit.

In certain embodiments, a method of manufacturing a semiconductor package includes forming at least two partial package chip stacks, each partial package chip stack including at least two semiconductor chips each including a plurality of through substrate vias (TSVs), and including a first mold layer surrounding sides of the at least two semiconductor chips, and sequentially mounting the at least two partial package chip stacks on a package substrate in a direction vertical to a top of the package substrate, such that the at least two partial package chip stacks include a first partial package chip stack and a second partial package chip stack directly connected to the first partial package chip stack.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the inventive concept will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings in which:

FIGS. 1 to 13 are cross-sectional views illustrating a method of manufacturing a semiconductor package according to exemplary embodiments;

FIGS. 14 to 18 are cross-sectional views illustrating a method of manufacturing a semiconductor package according to exemplary embodiments;

FIG. 19 is a cross-sectional view illustrating a semiconductor package according to exemplary embodiments;

FIG. 20 is a cross-sectional view illustrating a semiconductor package according to exemplary embodiments; and

FIG. 21 is a cross-sectional view illustrating a semiconductor package according to exemplary embodiments.

DETAILED DESCRIPTION

Hereinafter, embodiments will be described in detail with reference to the accompanying drawings. In the drawings, the size and relative sizes of layers and regions may be exaggerated for clarity. Like numbers refer to like elements throughout. Though the different figures show variations of exemplary embodiments, these figures are not necessarily intended to be mutually exclusive from each other. Rather, as will be seen from the context of the detailed description below, certain features depicted and described in different figures can be combined with other features from other figures to result in various embodiments, when taking the figures and their description as a whole into consideration.

Although the figures described herein may be referred to using language such as “one embodiment,” or “certain embodiments,” these figures, and their corresponding descriptions are not intended to be mutually exclusive from other figures or descriptions, unless the context so indicates. Therefore, certain aspects from certain figures may be the same as certain features in other figures, and/or certain figures may be different representations or different portions of a particular exemplary embodiment.

It will be understood that, although the terms first, second, third etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. Unless the context indicates otherwise, these terms are only used to distinguish one element, component, region, layer or section from another element,

component, region, layer or section, for example as a naming convention. Thus, a first element, component, region, layer or section discussed below in one section of the specification could be termed a second element, component, region, layer or section in another section of the specification or in the claims without departing from the teachings of the present invention. In addition, in certain cases, even if a term is not described using “first,” “second,” etc., in the specification, it may still be referred to as “first” or “second” in a claim in order to distinguish different claimed elements from each other.

It will be understood that when an element is referred to as being “connected” or “coupled” to or “on” another element, it can be directly connected or coupled to or on the other element or intervening elements may be present. In contrast, when an element is referred to as being “directly connected” or “directly coupled” to another element, or as “contacting” or “in contact with” another element, there are no intervening elements present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., “between” versus “directly between,” “adjacent” versus “directly adjacent,” etc.).

Spatially relative terms, such as “beneath,” “below,” “lower,” “above,” “upper” and the like, may be used herein for ease of description to describe one element’s or feature’s relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as “below” or “beneath” other elements or features would then be oriented “above” the other elements or features. Thus, the term “below” can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

Terms such as “same,” “equal,” “planar,” or “coplanar,” as used herein when referring to orientation, layout, location, shapes, sizes, amounts, or other measures do not necessarily mean an exactly identical orientation, layout, location, shape, size, amount, or other measure, but are intended to encompass nearly identical orientation, layout, location, shapes, sizes, amounts, or other measures within acceptable variations that may occur, for example, due to manufacturing processes. The term “substantially” may be used herein to emphasize this meaning, unless the context or other statements indicate otherwise. For example, items described as “substantially the same,” “substantially equal,” or “substantially planar,” may be exactly the same, equal, or planar, or may be the same, equal, or planar within acceptable variations that may occur, for example, due to manufacturing processes.

Terms such as “about” or “approximately” may reflect amounts, sizes, orientations, or layouts that vary only in a small relative manner, and/or in a way that does not significantly alter the operation, functionality, or structure of certain elements. For example, a range from “about 0.1 to about 1” may encompass a range such as a 0%-5% deviation around 0.1 and a 0% to 5% deviation around 1, especially if such deviation maintains the same effect as the listed range.

As used herein, items described as being “electrically connected” are configured such that an electrical signal can be passed from one item to the other. Therefore, a passive electrically conductive component (e.g., a wire, pad, internal electrical line, etc.) physically connected to a passive electrically insulative component (e.g., a prepreg layer of a

printed circuit board, an electrically insulative adhesive connecting two device, an electrically insulative underfill or mold layer, etc.) is not electrically connected to that component. Moreover, items that are “directly electrically connected,” to each other are electrically connected through one or more passive elements, such as, for example, wires, pads, internal electrical lines, through vias, etc. As such, directly electrically connected components do not include components electrically connected through active elements, such as transistors or diodes. Directly electrically connected elements may be directly physically connected and directly electrically connected.

FIGS. 1 to 13 are cross-sectional views illustrating a method of manufacturing a semiconductor package 100, according to exemplary embodiments.

Referring to FIG. 1, a first semiconductor wafer W1 may be prepared. The first semiconductor wafer W1 may include a plurality of first semiconductor chips C1 which are distinguished from each other by a first scribe lane SL1. The plurality of first semiconductor chips C1 may each include a first semiconductor substrate 110, a first semiconductor device layer 120, and a first through substrate via (TSV) 130. The first semiconductor substrate 110 may include a first surface 112 and a second surface 114a which are opposite to each other. The first semiconductor device layer 120 may be formed on the first surface 112 of the first semiconductor substrate 110. The TSV 130 may be formed to extend through the first semiconductor device layer 120 from the first surface 112 of the first semiconductor substrate 110 to the inside of the first semiconductor substrate 110.

The first semiconductor device layer 120 may include various kinds of a plurality of individual devices, and may be, for example, an integrated circuit device. The plurality of individual devices may include various microelectronic devices, for example, a metal-oxide-semiconductor field effect transistor (MOSFET) such as a complementary metal-insulator-semiconductor (CMOS) transistor, system large scale integration (LSI), an image sensor such as a CMOS imaging sensor (CIS), a micro-electro-mechanical system (MEMS), an active device, a passive device, etc. The first semiconductor device layer 120 may include a plurality of wiring structures for connecting the plurality of individual devices to other wirings formed on the first semiconductor substrate 110. However, the kinds of the plurality of individual devices included in the first semiconductor device layer 120 are not limited to the above-described ones.

The first TSV 130 may extend from the first surface 112 of the first semiconductor substrate 110 to the inside of the first semiconductor substrate 110. At least a portion of the first TSV 130 may have a pillar shape. The first TSV 130 may include a buried conductive layer having a pillar shape, and a barrier layer formed to surround a side surface of the buried conductive layer. A via insulation layer (not shown) may be disposed between the first semiconductor substrate 110 and the first TSV 130. The TSV 130 may include oxide, nitride, carbide, a polymer, or a combination thereof.

In a subsequent process, a portion of the first semiconductor substrate 110 may be removed, and the first TSV 130 may include a conductive material passing through the first semiconductor substrate 110 from which the portion was removed. For example, the first TSV 130 may include the barrier layer and the buried conductive layer which fills the inside of the barrier layer. Alternatively, for example, the first TSV 130 may include the barrier layer, the buried conductive layer filling the inside of the barrier layer, and portions of a metal wiring layer and/or a via plug. The TSV may also pass through the semiconductor device layer 120,

and may connect to circuitry within the semiconductor device layer **120** (e.g., to connect to an integrated circuit of the semiconductor device layer **120**).

Referring to FIG. 2, a first connection pad **132** electrically connected to the first TSV **130** may be formed on the first semiconductor substrate **110**, and a first connection bump **134** may be formed on the first connection pad **132**.

Although not shown, the first connection bump **134** may include a pillar layer (not shown) and a solder layer (not shown) disposed on the pillar layer. For example, a mask pattern (not shown) including an opening (not shown) exposing a portion of the first connection pad **132** may be formed on the first semiconductor device layer **120**. Subsequently, the pillar layer and the solder layer may be sequentially stacked on the portion of the first connection pad **132** exposed by the mask pattern. For example, the pillar layer and the solder layer may be formed by performing an electroplating process. Subsequently, the mask pattern may be removed, and the solder layer having a convex shape may be formed by reflowing the solder layer through thermal treatment. Although in FIG. 2 the first connection bump **134** is schematically illustrated as having a convex shape, a shape of the first connection bump **134** is not limited to the above-described ones. For example, the first connection bump **134** may be formed so that the pillar layer has a cylindrical shape including a side wall vertical to a top of the first semiconductor device layer **120**, and the solder layer substantially has a hemispherical shape on the pillar layer. Also, the pillar layer may be formed in a structure where a plurality of metal layers including different metal materials are stacked.

In exemplary embodiments, the first connection bump **134** may have a horizontal width (for example, a width in a direction parallel to a top of the first semiconductor wafer **W1**) of about 20 μm to about 100 μm , but is not limited thereto. In some embodiments, the first connection bump **134** may have a horizontal width of about 20 μm to about 60 μm .

Referring to FIG. 3, the first semiconductor wafer **W1**, on which the first connection bump **134** is formed, may be attached on a first carrier substrate **10**. The first carrier substrate **10** may include a first supporting substrate **12** and a first glue layer **14**. The first semiconductor wafer **W1** may be attached on the first carrier substrate **10** with the first connection bump **134** facing the first carrier substrate **10**. The first connection bump **134** may be surrounded by the first glue layer **14**. A portion, which is exposed by not being covered by the first connection bump **134**, of the first surface **112** of the first semiconductor substrate **110** may contact the first glue layer **14**.

Referring to FIG. 4, the first TSV **130** may be exposed by removing a portion of the first semiconductor substrate **110**. The first TSV **130** may be exposed to the second surface **114** of the first semiconductor substrate **110**. Since the first TSV **130** is exposed to the second surface **114** of the first semiconductor substrate **110**, the first TSV **130** may have a shape passing through the first semiconductor substrate **110**. In addition, in some embodiments, a portion of the first semiconductor substrate **110** may be removed so that the first TSV **130** further protrudes with respect to the second surface **114**, and therefore extends beyond the second surface **114**.

For example, in order to expose the TSV **130**, a portion of the first semiconductor substrate **110** may be removed through a chemical mechanical polishing (CMP) process, an etch-back process, or a combination thereof.

Subsequently, a first rear protection layer **136** covering an exposed surface (e.g., the second surface **114** of the first semiconductor substrate **110**) of the first semiconductor wafer **W1** may be formed. The first rear protection layer **136** may be formed by, for example, a spin coating process or a spray process. The first rear protection layer **136** may include, for example, an insulating polymer. In order to form the first rear protection layer **136**, an insulating polymer layer covering the second surface **114** of the first semiconductor substrate **110** and the first TSV **130** exposed may be formed, and then, the first TSV **130** may be exposed by removing a portion of the insulating polymer layer through an etch-back process.

A first upper connection pad **138** electrically connected to a portion of the first TSV **130** exposed by the first rear protection layer **136** may be formed. Optionally, the first upper connection pad **138** may be omitted.

Referring to FIG. 5, a second semiconductor chip **C2** may be prepared. In order to prepare the second semiconductor chip **C2**, a second semiconductor wafer (not shown) may be processed similarly to the first semiconductor wafer **W1** illustrated in FIGS. 1 to 4, and then, the second semiconductor chip **C2** may be prepared by singulating or dicing the second semiconductor wafer.

The second semiconductor chip **C2** may include a second semiconductor substrate **210** and a second semiconductor device layer **220** formed on the second semiconductor substrate **210**. The second semiconductor device layer **220** may form an integrated circuit, and may include a plurality of individual devices including system LSI, flash memory, dynamic random access memory (DRAM), static random access memory (SRAM), electrical erasable programmable read only memory (EEPROM), phase-change random access memory (PRAM), magnetoresistive random access memory (MRAM), or resistive random access memory (RRAM).

In exemplary embodiments, the second semiconductor wafer may be a semiconductor wafer including a different kind of individual device formed by a process different from a process of forming the first semiconductor wafer **W1**. Therefore, the second semiconductor chip **C2** may be a different kind of semiconductor chip including an individual device different from the individual devices included in the first semiconductor chip **C1**. For example, the first semiconductor wafer **W1** may include a first semiconductor chip **C1** including system LSI, and the second semiconductor chip **C2** may include DRAM. The first semiconductor chip **C1** may be a logic chip, and the second semiconductor chip **C2** may be a memory chip.

In other embodiments, the second semiconductor wafer may be a semiconductor wafer including a same kind of individual device formed by a process which is the same as a process of forming the first semiconductor wafer **W1**. The second semiconductor chip **C2** may be a same kind of semiconductor chip including an individual device which is the same as the individual devices included in the first semiconductor chip **C1**. For example, the first semiconductor wafer **W1** may include a first semiconductor chip **C1** including a DRAM chip, and the second semiconductor chip **C2** may include DRAM.

The second semiconductor chip **C2** may be provided in plurality. The plurality of second semiconductor chips **C2** may be attached on a second carrier substrate **20** in the form of the second semiconductor wafer **W2** where the plurality of second semiconductor chips **C2** are connected to each other, and then, the second semiconductor wafer may be diced into the plurality of second semiconductor chips **C2**.

The plurality of second semiconductor chips C2 may each include a second semiconductor substrate 210, a second semiconductor device layer 220, and a second through electrode 230. The second semiconductor substrate 210 may include a first surface 212 and a second surface 214 which are opposite to each other. The second through electrode 230 may pass through the second semiconductor substrate 210.

The plurality of second semiconductor chips C2 may each include a second connection pad 232, a second connection bump 234, a second rear protection layer 236, and a second upper connection pad 238. Detailed descriptions on the second connection pad 232, the second connection bump 234, the second rear protection layer 236, and the second upper connection pad 238 are similar to the first connection pad 132, the first connection bump 134, the first rear protection layer 136, and the first upper connection pad 138 described above with reference to FIG. 2.

Referring to FIG. 6, the plurality of second semiconductor chips C2 may be separated from the second carrier substrate 20 illustrated in FIG. 5 and may be stacked on the first semiconductor wafer W1 illustrated in FIG. 6. The plurality of second semiconductor chips C2 may be stacked on the first semiconductor wafer W1 to respectively correspond to the plurality of first semiconductor chips C1 included in the first semiconductor wafer W1. For example, the plurality of second semiconductor chips C2 may be stacked on the plurality of first semiconductor chips C1 to respectively correspond to the first semiconductor chips C1.

In exemplary embodiments, each of the second semiconductor chips C2 may be attached on a corresponding first semiconductor chip C1 with a first insulating material layer 142 therebetween. For example, before the plurality of second semiconductor chips C2 are attached on the second carrier substrate 20 in the form of the second semiconductor wafer W2 where the plurality of second semiconductor chips C2 are connected to each other, the first insulating material layer 142 may be disposed between the second semiconductor wafer W2 and the second carrier substrate 20. Subsequently, the second semiconductor wafer W2 may be diced into the plurality of second semiconductor chips C2, and the first insulating material layer 142 may be located on each of the second semiconductor chips C2.

Each of the second semiconductor chips C2 may be stacked on a corresponding first semiconductor chip C1 in order for the first through electrode 130 to be electrically connected to the second through electrode 230. In order for the first through electrode 130 to be electrically connected to the second through electrode 230, each of the second semiconductor chips C2 may be stacked on a corresponding first semiconductor chip C1 in order for the second connection bump 234 of a corresponding second semiconductor chip C2 to contact the first upper connection pad 134. If the first upper connection pad 134 is not formed, the second connection bump 234 may contact the first through electrode 130.

After the second semiconductor chips C2 are respectively stacked on the first semiconductor chips C1, an adhesive force between the second connection bump 234 and the first upper connection pad 134 or between the second connection bump 234 and the first through electrode 130 may increase by performing a reflow process or a thermal compression process, thereby decreasing contact resistance.

As exemplarily illustrated in FIG. 6, the first insulating material layer 142 may be disposed between the first semiconductor chip C1 and the second semiconductor chip C2 to surround the first upper connection pad 138 and the second

connection bump 234, and to surround a plurality of first upper connection pads 138 and second connection bumps 234. For example, the first insulating material layer 142 may surround and cover all of the first upper connection pads 138 and second connection bumps 234 disposed between and connecting the first semiconductor chip C1 to the second semiconductor chip C2. In exemplary embodiments, the first insulating material layer 142 may be an insulating polymer. For example, the first insulating material layer 142 may be formed by attaching a nonconductive film (NCF). The first insulating material layer 142 may be an under-fill member that seals a connection portion between the first semiconductor chip C1 and the second semiconductor chip C2 and fills a space between the first semiconductor chip C1 and the second semiconductor chip C2.

Here, the term "under-fill member" may not necessarily denote an element formed by a specific manufacturing method or formed of a specific material but may denote a material layer that fills a space between semiconductor chips, a space between a semiconductor chip and an interposer, or a space between the interposer and a printed circuit board (PCB). For example, it should be understood that the under-fill member denotes an insulating material layer described herein, or an under-fill layer or an under-fill material layer to be described below.

Referring to FIG. 7, by repeating the processes described above with reference to FIGS. 5 and 6, a plurality of third semiconductor chips C3 may be stacked on the first semiconductor wafer W1 with a second insulating material layer 144 therebetween on the plurality of second semiconductor chips C2 to respectively correspond to the plurality of second semiconductor chips C2. Subsequently, by performing a reflow process or a thermal compression process, each of the third semiconductor chips C3 may be electrically connected to a corresponding second semiconductor chip C2. Similarly, a plurality of fourth semiconductor chips C4 may be stacked on the first semiconductor wafer W1 with a third insulating material layer 146 therebetween on the plurality of third semiconductor chips C3 to respectively correspond to the plurality of third semiconductor chips C3. Subsequently, by performing a reflow process or a thermal compression process, each of the fourth semiconductor chips C4 may be electrically connected to a corresponding third semiconductor chip C3. Also, a plurality of fifth semiconductor chips C5 may be stacked on the first semiconductor wafer W1 with a fourth insulating material layer 148 therebetween on the plurality of fourth semiconductor chips C4 to respectively correspond to the plurality of fourth semiconductor chips C4. Subsequently, by performing a reflow process or a thermal compression process, each of the fifth semiconductor chips C5 may be electrically connected to a corresponding fourth semiconductor chip C4.

The second to fifth semiconductor chips C2 to C5 may be a same kind of semiconductor chips each including the same individual device. Alternatively, the second to fifth semiconductor chips C2 to C5 may be different kinds of semiconductor chips including different individual devices. Although in FIG. 7 a five-semiconductor chip stacked structure where the second to fifth semiconductor chips C2 to C5 are vertically stacked on the first semiconductor wafer W1 is exemplarily illustrated, the number of semiconductor chips stacked on the first semiconductor wafer W1 may be changed.

Moreover, in forming the first insulating material layer 142 between the first semiconductor chip C1 and the second semiconductor chip C2, a first under-fill layer, for example, may be formed of an epoxy resin by a capillary under-fill

process. The first under-fill layer may be mixed with a filler, and the filler may include, for example, silica. Similarly, instead of the second to fourth insulating material layers **144**, **146** and **148**, second to fourth under-fill layers may be formed.

Referring to FIG. 8, a first mold layer **160** covering the second to fifth semiconductor chips **C2** to **C5** may be formed on the first semiconductor wafer **W1**. The first mold layer **160**, also described as an encapsulation layer, may surround sides (e.g., side surfaces) of the second to fifth semiconductor chips **C2** to **C5**. The first mold layer **160** may contact a portion of a top of the first semiconductor chip **C1**. Since the first to fourth insulating material layers **142**, **144**, **146** and **148** are disposed between the first to fifth semiconductor chips **C1** to **C5**, the first mold layer **160** may surround sides (e.g., side surfaces) of the first to fourth insulating material layers **142**, **144**, **146** and **148**. In exemplary embodiments, the first mold layer **160** may include an epoxy mold compound (EMC).

As exemplarily illustrated in FIG. 8, in one embodiment, the first mold layer **160** does not cover a top **512** of the fifth semiconductor chip **C5**. Therefore, a rear protection layer **536** and a fifth upper connection pad **538** included in the fifth semiconductor chip **C5** may be exposed to the outside of the first mold layer **160**.

Referring to FIG. 9, an electrical characteristic test for evaluating a normal operation or a defect of each of the first to fifth semiconductor chips **C1** to **C5** may be performed by using the fifth upper connection pad **538** of the fifth semiconductor chip **C5** exposed by the first mold layer **160**. The electrical characteristic test can be one of many known test procedures for testing chip stacks.

As exemplarily illustrated in FIG. 9, the fifth semiconductor chip **C5** may include a fifth TSV **530**, and the fifth upper connection pad **538** may be provided on a second surface **514** of the fifth semiconductor chip **C5**. Therefore, the electrical characteristic test may be easily performed in a state where the first to fifth semiconductor chips **C1** to **C5** are stacked on the first carrier substrate **10**, namely, a state where the first to fifth semiconductor chips **C1** to **C5** are not separated from the first carrier substrate **10**.

Generally, since a semiconductor chip disposed on an uppermost portion of a chip stack (e.g., a top chip in the stack) does not include a TSV (and/or an upper connection pad), in order to perform the electrical characteristic test, it is required that a stacked structure of a semiconductor chip is separated from a carrier substrate, and the stacked structure of the semiconductor chip is vertically reversed so that a stacked structure of a semiconductor chip disposed in a lowermost portion (e.g., a bottom chip in the stack) faces upward. However, according to disclosed embodiments, since the fifth semiconductor chip **C5** includes the fifth TSV **530** and the fifth upper connection pad **538**, in order to perform the electrical characteristic test, it is not required that a stacked structure of the first to fifth semiconductor chips **C1** to **C5** is separated from the first carrier substrate **10**, or is vertically reversed. Accordingly, the electrical characteristic test may be easily performed on the first to fifth semiconductor chips **C1** to **C5**.

Referring to FIG. 10, by dicing the first semiconductor wafer **W1** (see FIG. 9) along the first scribe lane **SL1** (see FIG. 2), the first semiconductor wafer **W1** may be diced into a plurality of sub-package units **M1** including the first to fifth semiconductor chips **C1** to **C5** corresponding to each other. Each sub-package unit **M1** (or **M2**) may also be described herein as a partial package chip stack.

The sub-package unit **M1** may have a structure in which the second semiconductor chip **C2** including the second TSV **230**, the third semiconductor chip **C3** including the third TSV **330**, the fourth semiconductor chip **C4** including the fourth TSV **430**, and the fifth semiconductor chip **C5** including the fifth TSV **530** are sequentially stacked on the first semiconductor chip **C1** including the first TSV **130**. The first through fifth semiconductor chips **C1** to **C5** may be a chip stack partially covered with a mold layer. For example, the chip stack may include a mold layer covering an edge portion of a top surface of a first semiconductor chip **C1**, and covering side surfaces of the remaining semiconductor chips **C2-C5**.

In exemplary embodiments, the first to fifth semiconductor chips **C1** to **C5** may be a same kind of semiconductor chips. For example, the first to fifth semiconductor chips **C1** to **C5** may each be a memory chip. In other embodiments, the first semiconductor chip **C1** may be different from the second to fifth semiconductor chips **C2** to **C5**. For example, the first semiconductor chip **C1** may be a logic chip, and the second to fifth semiconductor chips **C2** to **C5** may each be a memory chip. In other embodiments, the first semiconductor chip **C1** may be a buffer chip, and the second to fifth semiconductor chips **C2** to **C5** may each be a memory chip. However, the technical spirit of the inventive concept is not limited thereto. According to various embodiments described herein, each semiconductor chip **C1** to **C5** in the sub-package unit **M1** (and **M2**) includes an integrated circuit. For example, the integrated circuit can be formed on a semiconductor die formed from a wafer.

In exemplary embodiments, the second to fifth semiconductor chips **C2** to **C5** may substantially have the same horizontal cross-sectional area, and a horizontal cross-sectional area of the first semiconductor chip **C1** may be larger than those of the second to fifth semiconductor chips **C2** to **C5**.

The first insulating material layer **142** may be disposed between the first semiconductor chip **C1** and the second semiconductor chip **C2**, the second insulating material layer **144** may be disposed between the second semiconductor chip **C2** and the third semiconductor chip **C3**. Also, the third insulating material layer **146** may be disposed between the third semiconductor chip **C3** and the fourth semiconductor chip **C4**, and the fourth insulating material layer **148** may be disposed between the fourth semiconductor chip **C4** and the fifth semiconductor chip **C5**.

The first mold layer **160** may be formed on a portion on the first semiconductor chip **C1** to surround the sides of the second to fifth semiconductor chips **C2** to **C5**. The first semiconductor chip **C1** may have a horizontal cross-sectional area that is larger than those of the second to fifth semiconductor chips **C2** to **C5**, and thus, the side of the first semiconductor chip **C1** may not be surrounded by the first mold layer **160**. A side of the first mold layer **160** may be aligned with the side of the first semiconductor chip **C1**. For example, side surfaces of the first mold layer **160** and the first semiconductor chip **C1** may be coplanar. The first mold layer **160** may contact the first to fourth insulating material layers **142**, **144**, **146** and **148**.

The second to fourth semiconductor chips **C2** to **C4** may be electrically connected to the first semiconductor chip **C1** and the fifth semiconductor chip **C5** through the second to fourth TSVs **230**, **330**, and **430**. Since the sides of the second to fourth semiconductor chips **C2** to **C4** are surrounded by the first mold layer **160**, the second to fourth semiconductor chips **C2** to **C4** may not be exposed to the outside of the sub-package unit **M1**, and the first connection bump **134** of

11

the first semiconductor chip **C1** and the fifth upper connection pad **538** of the fifth semiconductor chip **C5** may be exposed to the outside of the sub-package unit **M1**. In other embodiments, the fifth upper connection pad **538** may not be provided, and in this case, the fifth TSV **530** may be exposed to the outside of the sub-package unit **M1**.

The first semiconductor chip **C1** may not include a redistribution wiring layer. Therefore, a pitch (or an interval between adjacent first TSVs **130**) of the first TSV **130** may be substantially the same as a pitch (or an interval between adjacent first connection bumps **134**) of the first connection bump **134**. Also, the first TSV **130** may be aligned with the first connection bump **134** along a direction vertical to a top of the first semiconductor chip **C1** and may be aligned with the second to fifth TSVs **230**, **330**, **430**, and **530** along a direction vertical to the top of the first semiconductor chip **C1**. Here, the first TSV **130** being aligned with the first connection bump **134** along a vertical direction may denote that the first TSV **130** overlaps the first connection bump **134** when viewed from an uppermost surface of the sub-package unit **M1** (e.g., when viewed in a plan view). Since the first TSV **130** is aligned with the second to fifth TSVs **230**, **330**, **430**, and **530** along a vertical direction, the first connection bump **134** and the fifth upper connection pad **538** may be aligned with each other along a vertical direction. Accordingly, the sub-package unit **M1** may be vertically stacked on another sub-package unit **M1** (e.g., without the use of a redistribution layer, package substrate, or interposer substrate therebetween).

Hereinabove, an example where the sub-package unit **M1** includes the vertically stacked first to fifth semiconductor chips **C1** to **C5** has been exemplarily described, but the technical spirit of the inventive concept is not limited thereto. For example, the number of stacked semiconductor chips in the sub-package unit **M1** may be changed. For example, the sub-package unit **M1** may include two to four semiconductor chips, or may include six or more semiconductor chips.

Referring to FIG. **11**, an interposer **610** may be optionally prepared and provided.

The interposer **610** may include a substrate base **612**, a top pad **614** provided on a top of the substrate base **612**, and a bottom pad **616** provided on a bottom of the substrate base **612**. In exemplary embodiments, the substrate base **612** may include a semiconductor material, and for example, may be formed from a silicon wafer. An inner wiring (not shown) may be formed on the top, the bottom, or the inside of the substrate base **612**. Also, a TSV (not shown) and a redistribution wiring layer (not shown) that electrically connect the top pad **614** to the bottom pad **616** may be formed in the substrate base **612**.

For example, the interposer **610** may be attached on a carrier substrate (not shown), and the sub-package unit **M1** may be disposed on the interposer **610**. In this case, the sub-package unit **M1** may be disposed such that the first semiconductor chip **C1** of the sub-package unit **M1** faces the top pad **614** of the interposer **610**. Subsequently, by performing a reflow process, or a thermal compression process, the first connection bump **134** of the first semiconductor chip **C1** may be attached on the top pad **614**.

In one embodiment, subsequently, an under-fill layer **630** may be formed between the sub-package unit **M1** and the interposer **610**. The under-fill layer **630**, for example, may be formed of an epoxy resin by a capillary under-fill process. The under-fill layer **630** may be mixed with a filler, and the filler may include, for example, silica. In other embodiments, instead of forming the under-fill layer **630** between

12

the sub-package unit **M1** and the interposer **610**, an insulating material layer (not shown) may be formed by using an insulating polymer or a nonconductive film.

In one embodiment, subsequently, a sub-package unit **M2** may be disposed on the sub-package unit **M1**. The sub-package unit **M2** may have the same technical feature as that of the sub-package unit **M1** described above with reference to FIG. **10**.

As exemplarily illustrated in FIG. **11**, a first semiconductor chip **C1** of the sub-package unit **M2** may be disposed on the fifth semiconductor chip **C5** of the sub-package unit **M1**, and a first connection bump **134** of the first semiconductor chip **C1** of the sub-package unit **M2** may be disposed on the fifth upper connection pad **538** of the fifth semiconductor chip **C5** of the sub-package unit **M1**.

A fifth insulating material layer **640** may be disposed between the sub-package unit **M1** and the sub-package unit **M2**. The fifth insulating material layer **640** may include an insulating polymer or a nonconductive film. In one embodiment, the fifth insulating material layer **640** may have a horizontal cross-sectional area that is larger than those of the first to fourth insulating material layers **142**, **144**, **146** and **148**. Therefore, an edge of the fifth insulating material layer **640** may be disposed between the first mold layer **160** of the sub-package unit **M1** and the first mold layer **160** of the sub-package unit **M2**, and may have a side surface coplanar with side surfaces of the first mold layer **160** of the sub-package unit **M1** and the first mold layer **160** of the sub-package unit **M2**.

Subsequently, by performing a reflow process or a thermal compression process, the first connection bump **134** of the first semiconductor chip **C1** of the sub-package unit **M2** may be attached on the fifth upper connection pad **538** of the fifth semiconductor chip **C5** of the sub-package unit **M1**, and the fifth insulating material layer **640** may be disposed between the first semiconductor chip **C1** of the sub-package unit **M2** and the fifth upper connection pad **538** of the fifth semiconductor chip **C5** of the sub-package unit **M1** to surround the first connection bump **134** and the fifth upper connection pad **538**. In this manner, FIG. **11** illustrates a method of attaching a first sub-package unit, or partial package chip stack (e.g., **M1**) to a second sub-package unit, or partial package chip stack (e.g., **M2**) after each of the first sub-package unit and second sub-package unit have been formed, by connecting top connection terminals of the first sub-package unit (e.g., pads **538** or in other embodiments a protruding TSV) to bottom connection terminals of the second sub-package unit (e.g., pads **132** or in other embodiments a protruding TSV) by solder bumps (e.g., bumps **134**) directly connected to respective ones of each of the top terminals and bottom terminals. In this manner, one sub-package unit (e.g., **M2**) can be directly connected to another sub-package unit (e.g., **M1**) using the solder bumps.

In FIG. **11**, an example where the sub-package units **M1** and **M2** are stacked is exemplarily illustrated. Alternatively, other sub-package units **M1** and **M2** may be further stacked on the sub-package unit **M2**. For example, the number of sub-package units **M1** and **M2** which may be stacked may be changed based on a desired capacity of a memory chip.

Each of the sub-package unit **M1** and **M2** stacked on the interposer **610** may be a sub-package unit (e.g., a known good package (KGP) unit) of which a normal operation has been verified in the electrical characteristic test described above with reference to FIG. **9**. For example, semiconductor chips which are defective in electrical connection may be screened in a process of forming the sub-package units **M1** and **M2**, prior to forming a completely connected stack of

13

chips for a package, and only the sub-package units M1 and M2 which normally operate may be stacked on the interposer 610.

Referring to FIG. 12, an insulating member 650 may be attached on the sub-package unit M2. The insulating member 650 may cover the fifth upper connection pad 538 (a fifth TSV 530 when the fifth upper connection pad 538 is not provided) exposed to the outside of the sub-package unit M2. The insulating member 650 may be, for example, a layer of insulative material.

Referring to FIG. 13, a second mold layer 660 surrounding sides of the sub-package units M1 and M2 may be formed on the interposer 610. The second mold layer 660 may surround a side of the first mold layer 160 and a side of the first semiconductor chip C1 and may be disposed in a portion of a top of the interposer 610. The fifth insulating material layer 640 disposed between the sub-package units M1 and M2 may also contact the second mold layer 660. In one embodiment, the second mold layer 660 has outer side surfaces that are coplanar with respective side surfaces of the interposer 610. However, the embodiments are not necessarily limited to that configuration.

As exemplarily illustrated in FIG. 13, an interface between the second mold layer 660 and the first mold layer 160 may be aligned with an interface between the second mold layer 660 and the fifth insulating material layer 640. For example, the second mold layer 660 may include a side surface which is substantially flat and continuous near a boundary between the first mold layer 160 and the fifth insulating material layer 640. An inner side surface of the second mold layer 660 may be planar.

An interposer connection terminal 670 may be attached on a bottom of the interposer 610. The interposer connection terminal 670 may be attached on, for example, the bottom pad 616. The interposer connection terminal 670 may be, for example, a solder ball or a bump.

In exemplary embodiments, the interposer connection terminal 670 may include an under bump metal (UBM) (not shown) disposed on the bottom pad 616 and a solder ball (not shown) disposed on the UBM, at the bottom of the interposer 610. The interposer connection terminal 670 may further include an external connection pillar (not shown) disposed between the UBM and the solder ball, and the external connection pillar may include, for example, copper. Subsequently, a PCB 710 may be provided.

The PCB 710 may include a substrate base 720, a top pad (not shown) provided on a top of the substrate base 720, and a bottom pad (not shown) provided on a bottom of the substrate base 720. The top pad and the bottom pad may be exposed by a solder resist layer (not shown) that covers the top and bottom of the substrate base 720. The substrate base 720 may be formed of at least one of phenol resin, epoxy resin, and polyimide. For example, the substrate base 720 may include at least one material selected from among FR4, tetrafunctional epoxy, polyphenylene ether, epoxy/polyphenylene oxide, bismaleimide triazine (BT), Thermount®, cyanate ester, polyimide, and liquid crystal polymer. The top pad and the bottom pad may each be formed of Cu, Ni, stainless steel, beryllium copper, and/or the like. An internal wiring (not shown) electrically connected to the top pad and the bottom pad may be provided in the substrate base 720. The top pad and the bottom pad may be portions of circuit wirings, which are formed by patterning Cu foils coated on the top and bottom of the substrate base 720, exposed by the solder resist layer.

The interposer 610 may be disposed on the PCB 710 such that the interposer connection terminal 670 is located on the

14

top pad of the PCB 710, and an under-fill layer 730 may be formed between the interposer 610 and the PCB 710. An external connection terminal 740 may be attached on the bottom pad of the PCB 710. For example, the external connection terminal 740 may be a solder ball or a bump.

Though various steps relating to FIGS. 11 to 13 are described above in a particular order and in one embodiment occur in that order, the order in which the different components are combined need not follow that order. Regardless of the order, the different elements of a completed package discussed hereinabove and hereinbelow may be provided in the form of a semiconductor device, such as a semiconductor package, which may be, for example, a memory device, a logic device, or a combined memory and logic device.

In one embodiment, as a result of the above steps, outer side surfaces of a first sub-package unit M1 may be coplanar with outer side surfaces of a second sub-package unit M2 stacked thereon. However, the outer side surfaces of the complete package unit M1+M2 may not vertically align with the outer side surfaces of the interposer 610. The interposer 610 may be a package substrate (e.g., on which semiconductor chips are stacked). The interposer 610 may be a redistribution substrate. The PCB 710 may also be a package substrate, and may be described as a redistribution substrate. For example, the interposer 610 and/or PCB 710 may have a primary function and primary elements for transferring signals between outside of the package and the various chips C1-C5 in the complete package unit M1+M2. For example, in some embodiments, neither the interposer 610 nor the PCB 710 include integrated circuitry that performs logic or storage operations. On the other hand, each of the semiconductor chips C1 to C5 may include an integrated circuit and may have a primary purpose of performing logic operations or storing data.

Also, in the above description, a structure where the interposer 610 is mounted on the PCB 710 and the sub-package units M1 and M2 are mounted on the interposer 610 has been exemplarily described, but the technical spirit of the inventive concept is not limited thereto. In other embodiments, an different number of sub-package units M1 and M2 may be stacked on a package substrate. Here, the term "package substrate" may denote an arbitrary substrate on which the sub-package units M1 and M2 according to the inventive concept are capable of being stacked, and thus, it should be understood that the package substrate includes various substrates such as the interposer 610, the PCB 710, a combination thereof, a ceramic substrate, a semiconductor substrate, etc. Unlike the illustrated in FIG. 13, the sub-package units M1 and M2 may be mounted on the interposer 610, and the PCB 710 may be omitted. Alternatively, the sub-package units M1 and M2 may be directly mounted on the PCB 710, and the interposer 610 may be omitted.

A semiconductor package 100 may be completely formed by the above-described process.

According to a method of manufacturing the semiconductor package 100, the sub-package units M1 and M2 including the first to fifth semiconductor chips C1 to C5 may be first manufactured, and may be tested to ensure they are not defective. Then, by stacking a plurality of sub-package units M1 and M2 depending on a desired capacity of a semiconductor package, the semiconductor package 100 may be completely formed.

Generally, in a case of vertically stacking a plurality of semiconductor chips each including a TSV, the semiconductor chips are sequentially stacked on a package substrate one by one. However, as the number of stacked semiconductor chips increases and/or a size and a pitch of a TSV of a

15

semiconductor chip is reduced, a junction defect (or an interconnection defect) easily occurs in a process of stacking semiconductor chips, and for this reason, it is difficult to provide a high-reliability electrical connection between semiconductor chips. For example, in a case of stacking semiconductor chips on a package substrate one by one, it is often required that a high temperature reflow process or a thermal compression process for an electrical connection between a TSV and a connection bump is performed a plurality of times equal to the number of stacked semiconductor chips. Therefore, thermal/physical damage is applied to a connection portion between the connection bump and the TSV due to a repetitive high temperature process. In addition, in a case of stacking semiconductor chips on a package substrate one by one, after a package where a desired number of semiconductor chips are all stacked is manufactured, a defect of the package is tested. For example, when the package is determined as a package where an electrical connection is defective (for example, even though there may be only one defective semiconductor chip), the entire package may be discarded, such that all of the semiconductor chips included in the package cannot be used. For this reason, the loss of semiconductor chips increases in the semiconductor package process (or the yield rate of semiconductor chips is reduced).

However, according to the above-described method of manufacturing the semiconductor package **100**, sub-package units **M1** and **M2** where a certain number of semiconductor chips **C1** to **C5** are stacked may be first manufactured, and then, the plurality of sub-package units **M1** and **M2** may be stacked on a package substrate, thereby obtaining the semiconductor package **100** where the semiconductor chips **C1** to **C5** are connected to each other through the TSVs **130**, **230**, **330**, **430**, and **530**. Therefore, the semiconductor chips **C1** to **C5** included in the sub-package units **M1** and **M2** are exposed to a high temperature process performed less times, thereby preventing thermal/physical damage which is applied to the connection bump or to a connection portion between the connection bump and the TSV due to the high temperature process. Accordingly, the semiconductor package **100** has high reliability.

Moreover, a defect of each of the sub-package units **M1** and **M2** may be tested before the sub-package units **M1** and **M2** are stacked on a package substrate. Therefore, since semiconductor chips which are defective in electrical connection are previously screened in a process of manufacturing the sub-package units **M1** and **M2**, a defect rate of the semiconductor package **100** is reduced. The two sub-package units **M1** and **M2** may share the same package substrate, for example, such that a top sub-package unit or partial package chip stack **M2** is stacked on a bottom sub-package unit or partial package chip stack **M1** without any package substrate therebetween. As such, the two sub-package units **M1** and **M2** may be combined in one or more of the manners described above to form a single package (e.g., semiconductor package **100** may be considered a single package having a single package substrate rather than a package-on-package device including a plurality of package substrates).

FIGS. **14** to **18** are cross-sectional views illustrating a method of manufacturing a semiconductor package **100A** according to exemplary embodiments. In FIGS. **14** to **18**, like reference numerals illustrated in FIGS. **1** to **13** refer to like elements.

First, by performing the process described above with reference to FIGS. **1** to **4**, a first semiconductor wafer **W1** (see FIG. **4**) connected to a first semiconductor chip **C1A** may be prepared.

16

Referring to FIG. **14**, the first semiconductor chip **C1A** may be prepared by dicing the first semiconductor wafer **W1**. For example, the first semiconductor wafer **W1** may be diced into the first semiconductor chip **C1A** (e.g., a plurality of first semiconductor chips **C1A**) in a state of being attached on a first carrier substrate **10**.

Referring to FIG. **15**, in a state where the first semiconductor chip **C1A** separated from the first semiconductor wafer **W1** is attached on the first carrier substrate **10**, a second semiconductor chip **C2** may be disposed on the first semiconductor chip **C1A**. A detailed description on the second semiconductor chip **C2** is similar to the description made with reference to FIG. **5**.

The first semiconductor chip **C1A** and the second semiconductor chip **C2** may be a same kind of semiconductor chips including a same kind of individual devices. For example, the first semiconductor chip **C1A** and the second semiconductor chip **C2** may each be a memory chip. Also, the first semiconductor chip **C1A** and the second semiconductor chip **C2** may substantially have the same horizontal cross-sectional area. However, the technical spirit of the inventive concept is not limited thereto, and the second semiconductor chip **C2** may be a different kind of semiconductor chip including an individual device different from an individual device of the first semiconductor chip **C1A**.

Through a process similar to the process described above with reference to FIGS. **5** to **7**, a third semiconductor chip **C3** may be stacked on the second semiconductor chip **C2**, and a fourth semiconductor chip **C4** may be stacked on the third semiconductor chip **C3**.

Referring to FIG. **16**, a first mold layer **160** covering sides of the first to fourth semiconductor chips **C1A** and **C2** to **C4** may be formed on a carrier substrate **10**. The first mold layer **160** may surround sides of first to third insulating material layers **142**, **144** and **146** disposed between the first to fourth semiconductor chips **C1A** and **C2** to **C4**. Also, the first mold layer **160** may not cover a second surface (or a top of the fourth semiconductor chip **C4**) of the fourth semiconductor chip **C4**.

Subsequently, an electrical characteristic test for evaluating a defect of each of the first to fourth semiconductor chips **C1A** and **C2** to **C4** may be performed by a fourth upper connection pad **438** of the fourth semiconductor chip **C4** which is not covered by the first mold layer **160**.

Referring to FIG. **17**, a stacked structure of the first to fourth semiconductor chips **C1A** and **C2** to **C4** connected to each other by the first mold layer **160** may be diced along a second scribe lane **SL2** (see FIG. **16**), and thus, the stacked structure may be diced into a sub-package unit **M1A** including the first to fourth semiconductor chips **C1A** and **C2** to **C4** corresponding to each other. In addition, the carrier substrate **10** may be removed.

The sub-package unit **M1A** may include the first to fourth semiconductor chips **C1A** and **C2** to **C4** having the same horizontal cross-sectional area. The first mold layer **160** may surround the sides of the first to fourth semiconductor chips **C1A** and **C2** to **C4**. A first connection bump **134** of the first semiconductor chip **C1** may be exposed to the outside of the sub-package unit **M1A** without being covered by the first mold layer **160**, and without being directly covered by any mold layer. If a fourth upper connection pad **438** of the fourth semiconductor chip **C4** is omitted, a fourth TSV **430** may be exposed to the outside of the sub-package unit **M1A** without being covered by the first mold layer **160**, and without being directly covered by any mold layer.

17

Subsequently, the semiconductor package 100A illustrated in FIG. 18 may be completely formed by the processes described above with reference to FIGS. 11 to 13.

The semiconductor package 100A may include sub-package units M1A and M2A which are vertically stacked, a fifth insulating material layer 640 disposed between the sub-package units M1A and M2A, and a second mold layer 660 surrounding sides of the sub-package units M1A and M2A and the fifth insulating material layer 640. A portion (for example, an edge of the fifth insulating material layer 640) of the fifth insulating material layer 640 may be disposed between a first mold layer 160 of the sub-package unit M1A and a first mold layer 160 of the sub-package unit M2A. The fifth insulating material layer 640 may have a horizontal cross-sectional area that is larger than those of the first to third insulating material layers 142, 144 and 146.

Since the first to fourth semiconductor chips C1A and C2 to C4 have the substantially same horizontal cross-sectional area and the sides of the first to fourth semiconductor chips C1A and C2 to C4 are surrounded by the first mold layer 160, the first to fourth semiconductor chips C1A and C2 to C4 may not contact the second mold layer 640.

According to the above-described method of manufacturing the semiconductor package 100A, the first to fourth semiconductor chips C1A and C2 to C4 included in the sub-package units M1A and M2A may be exposed to a high temperature process performed less times, and thus, thermal/physical damage which is applied to a connection bump or a connection portion between the connection bump and a TSV due to the high temperature process is reduced or prevented. Accordingly, the semiconductor package 100A has high reliability. Since semiconductor chips which are defective in electrical connection can be previously screened in a process of manufacturing the sub-package units M1A and M2A, a defect rate of the semiconductor package 100A is reduced.

FIG. 19 is a cross-sectional view illustrating a semiconductor package 100B according to exemplary embodiments. In FIG. 19, like reference numerals illustrated in FIGS. 1 to 18 refer to like elements. Except for first to fifth insulating material layers 142A, 144A, 146A, 148A and 640A, the semiconductor package 100B may be substantially the same as the semiconductor package 100 described above with reference to FIGS. 1 to 13.

Referring to FIG. 19, the first to fourth insulating material layers 142A, 144A, 146A and 148A may have a shape which convexly protrudes with respect to the second to fifth semiconductor chips C2 to C5. In exemplary embodiments, the first to fourth insulating material layers 142A, 144A, 146A and 148A may be formed by attaching an NCF. For example, in a process of manufacturing the sub-package units M1 and M2, pressure is applied while the second semiconductor chip C2 is being attached to be connected to the first TSV 130 of the first semiconductor chip C1, and thus, the first insulating material layer 142A may have a shape which convexly protrudes.

The fifth insulating material layer 640A may have a shape which convexly protrudes with respect to a side of the first semiconductor chip C1 or a side of the first mold layer 160. The fifth insulating material layer 640A may be formed by attaching an NCF. For example, the fifth insulating material layer 640A may be attached on the sub-package unit M1 in order for the first TSV 130 of the sub-package unit M2 to be electrically connected to the fifth TSV 530 of the sub-package unit M1, and the sub-package unit M2 may be attached on the fifth insulating material layer 640A (or the fifth insulating material layer 640A may be first attached on

18

a bottom of the sub-package unit M2, and then, the sub-package unit M2 may be attached on the sub-package unit M1 in order for the fifth insulating material layer 640A to contact the sub-package unit M1). In this case, in the attach process, pressure may be applied to the fifth insulating material layer 640A, and thus, the fifth insulating material layer 640A may have a shape which convexly protrudes with respect to the side of the first semiconductor chip C1 or the side of the first mold layer 160.

In FIG. 19, an example where the fifth insulating material layer 640A has a convexly protruding shape is exemplarily illustrated, but the fifth insulating material layer 640A may be formed of an epoxy resin through a capillary under-fill process instead of attaching an NCF. In this case, the fifth insulating material layer 640A may have a shape which expands in a down direction in order for a lower width thereof to be wider than an upper width thereof.

FIG. 20 is a cross-sectional view illustrating a semiconductor package 100C according to exemplary embodiments. In FIG. 20, like reference numerals illustrated in FIGS. 1 to 19 refer to like elements. Except for a process of forming a fifth insulating material layer 640 and an under-fill material layer 630, the semiconductor package 100C may be substantially the same as the semiconductor package 100 described above with reference to FIGS. 1 to 13.

Referring to FIG. 20, a sub-package unit M1 may be attached on an interposer 610, and a sub-package unit M2 may be attached on the sub-package unit M1. Subsequently, the under-fill material layer 630A may be formed in a space between the interposer 610 and the sub-package unit M1 in a process of forming a second mold layer 660, and an under-fill material layer 640B may be formed in a space between the sub-package unit M1 and the sub-package unit M2. In exemplary embodiments, the under-fill material layers 630A and 640B may be a portion of the second mold layer 660 formed by a molded under-fill (MUF) process.

FIG. 21 is a cross-sectional view illustrating a semiconductor package 100D according to exemplary embodiments. In FIG. 21, like reference numerals illustrated in FIGS. 1 to 20 refer to like elements.

Referring to FIG. 21, sub-package units M1 and M2 may be stacked on a portion of an interposer 610, and a main semiconductor chip 800 may be disposed on another portion of the interposer 610.

The main semiconductor chip 800 may be, for example, a processor unit. The main semiconductor chip 800 may be, for example, a micro process unit (MPU) or a graphic processor unit (GPU). In some embodiments, the main semiconductor chip 800 may be a package (e.g., a KGP) of which a normal operation has been verified.

Main connection terminals 810 may be attached on a bottom of the main semiconductor chip 800. The main semiconductor chip 800 may be electrically connected to the interposer 610 through the main connection terminals 810. An under-fill material layer 820 surrounding the main connection terminals 810 may be further formed between the main semiconductor chip 800 and the interposer 610. The under-fill material layer 820 may include, for example, an epoxy resin. In some embodiments, the under-fill material layer 820 may be a portion of a second mold layer 660 formed by an MUF process.

In FIG. 21, a structure where two sub-package units M1 and M2 are stacked on a portion of the interposer 610 is disclosed, but the number of vertically stacked sub-package units M1 and M2 is not limited thereto. For example, three or four sub-package units M1 and M2 may be vertically stacked. Also, a stacked structure of vertically stacked

19

sub-package units M1 and M2 may be additionally disposed on another portion of the interposer 610. For example, unlike the exemplarily illustrated in FIG. 21, the main semiconductor chip 800 may be disposed in a center of the interposer 610, and a structure where the sub-package units M1 and M2 are stacked may be provided in plurality near the main semiconductor chip 800 and may be spaced apart from each other (for example, may be disposed at a certain angle of 90 degrees or the like).

Moreover, in FIG. 21, the second mold layer 660 is exemplarily illustrated as being formed to a whole height or more of the main semiconductor chip 800 to cover a whole top and side of the main semiconductor chip 800, but the technical spirit of the inventive concept is not limited thereto. Unlike the exemplarily illustrated in FIG. 21, the second mold layer 660 may be formed to cover only a portion (for example, to a certain height from a bottom of the main semiconductor chip 800) of the side of the main semiconductor chip 800, or may be formed to entirely cover a top of both of the main semiconductor chip 800 (as shown) and the completed package unit that includes sub-package units M1 and M2.

In other embodiments, the main semiconductor chip 800 may include a TSV (not shown), and a stacked structure of the sub-package units M1 and M2 may be disposed on the main semiconductor chip 800. In this case, TSVs 130, 230, 330, 430, and 530 of first to fifth semiconductor chips C1 to C5 (see FIG. 10) may be electrically connected to the TSV of the main semiconductor chip 800 corresponding thereto, and the first to fifth semiconductor chips C1 to C5 may be electrically connected to an interposer 610 and/or a PCB 710 through the main connection terminals 810.

While various aspects of the inventive concept has been particularly shown and described with reference to embodiments thereof, it will be understood that various changes in form and details may be made therein without departing from the spirit and scope of the following claims.

What is claimed is:

1. A method of manufacturing a semiconductor package, comprising:
 - providing a first sub-package unit including at least two first semiconductor chips, which are vertically stacked and include a top-most semiconductor chip of the first sub-package unit, and including a third semiconductor chip disposed under the at least two first semiconductor chips;
 - providing a first mold layer surrounding side surfaces of the at least two first semiconductor chips; and
 - providing a second sub-package unit including at least two second semiconductor chips, which are vertically stacked and include a top-most semiconductor chip of the second sub-package unit, and including a fourth semiconductor chip disposed under the at least two second semiconductor chips;
 - providing a second mold layer that surrounds side surfaces of the at least two second semiconductor chips and is vertically spaced apart from the first mold layer; stacking the second sub-package unit on the first sub-package unit,
 - wherein the at least two first semiconductor chips and the at least two second semiconductor chips each include a through substrate via (TSV), and
 - wherein after the stacking, the top-most semiconductor chip of the first sub-package unit is electrically connected to a bottom-most semiconductor chip of the second sub-package unit, without a package substrate therebetween;

20

providing a package substrate on which the at least two first semiconductor chips, the at least two second semiconductor chips, the third semiconductor chip, and the fourth semiconductor chip are vertically stacked to form a semiconductor package; and

prior to the stacking, testing each of the first sub-package unit and the second sub-package unit.

2. The method claim 1, further comprising:

providing an upper connection pad on a top surface of the top-most semiconductor chip of the second sub-package unit, the upper connection pad electrically connected to the TSV of the top-most semiconductor chip of the second sub-package unit.

3. The method of claim 1, further comprising:

providing an insulating member on a top surface of the top-most semiconductor chip of the second sub-package unit.

4. The method of claim 1, further comprising:

providing a first under-fill member between at least two of the first semiconductor chips of the first sub-package unit, and

providing a second under-fill member between the at least two of the second semiconductor chips of the second sub-package unit.

5. The method of claim 4, further comprising:

providing a third under-fill member between the first sub-package unit and the second sub-package unit, the third under-fill member contacting a top surface of the first mold layer and/or a bottom surface of the second mold layer.

6. The method of claim 5, wherein a portion of the third under-fill member is disposed between the first mold layer and the second mold layer.

7. The method of claim 5, wherein the third under-fill member has a horizontal cross-sectional area that is larger than a horizontal cross-sectional area of the first under-fill member or the second under-fill member.

8. The method of claim 1, wherein the at least two first semiconductor chips have the same horizontal cross-sectional area, and/or the at least two second semiconductor chips have the same horizontal cross-sectional area.

9. The method of claim 1,

wherein the third semiconductor chip has a horizontal cross-sectional area that is larger than a horizontal cross-sectional area of each of the at least two first semiconductor chips, and the first mold layer is disposed on a portion of a top surface of the third semiconductor chip; and

wherein the fourth semiconductor chip has a horizontal cross-sectional area that is larger than a horizontal cross-sectional area of each of the at least two second semiconductor chips, and the second mold layer is disposed on a portion of a top surface of the fourth semiconductor chip.

10. The method of claim 1, further comprising:

providing a third mold layer surrounding a side surface of the first sub-package unit and a side surface of the second sub-package unit,

wherein the third mold layer surrounds a side surface of the first mold layer and a side surface of the second mold layer.

11. The method of claim 10, further comprising:

providing a first under-fill member between the first sub-package unit and the second sub-package unit, wherein the third mold layer surrounds a side surface of the first under-fill member.

21

12. The method of claim 1, further comprising:
 testing the first sub-package unit using the TSV of the
 top-most semiconductor chip of the first sub-package
 unit, and testing- the second sub-package unit using the
 TSV of the top-most semiconductor chip of the second
 sub-package unit, prior to stacking the second sub-
 package unit on the first sub-package unit.
13. The method of claim 1, further comprising:
 attaching the first sub-package unit to the second sub-
 package unit after each of the first sub-package unit and
 second sub-package unit have been formed by connect-
 ing top connection terminals of the first sub-package
 unit to bottom connection terminals of the second
 sub-package unit by solder bumps directly connected to
 respective ones of each of the top connection terminals
 and bottom connection terminals.
14. A method of manufacturing a semiconductor package,
 the method comprising:
 providing a package substrate;
 stacking a plurality of sub-package units on the package
 substrate along a direction vertical to a top surface of
 the package substrate by first stacking a first sub-
 package unit on the package substrate and subsequently
 stacking a second sub-package unit on the first sub-
 package unit,
 wherein each of the plurality of sub-package units com-
 prises:
 a first buffer chip or logic chip, which is a bottom-most
 semiconductor chip of the sub-package unit;
 a first memory chip disposed on the first buffer chip or
 logic chip;
 a second memory chip disposed on the first memory chip
 and which is a top-most semiconductor chip of the
 sub-package unit; and
 for each sub-package unit, a first mold layer surrounding
 a side surface of each of the first and second memory
 chips, wherein each of the first buffer chip, the first
 memory chip, and the second memory chip includes a
 through substrate via (TSV); and
 performing a reflow process to directly electrically con-
 nect the first sub-package unit to the second sub-
 package unit.
15. The method of claim 14, wherein for each of the
 plurality of sub-package units, the first mold layer contacts
 a top surface of the first buffer chip and is not disposed on
 a side surface of the first buffer chip.

22

16. The method of claim 14, further comprising:
 forming a second mold layer surrounding side surfaces of
 the plurality of sub-package units and contacting side
 surfaces of each first buffer chip.
17. A method of manufacturing a semiconductor package,
 the method comprising:
 forming at least two partial package chip stacks, each
 partial package chip stack including at least two semi-
 conductor chips each including a plurality of through
 substrate vias (TSVs), wherein for each partial package
 chip stack, one of the at least two semiconductor chips
 is a top-most semiconductor chip in the partial package
 chip stack, and including a first mold layer surrounding
 side surfaces of the at least two semiconductor chips;
 sequentially mounting the at least two partial package
 chip stacks on a package substrate in a direction
 vertical to a top surface of the package substrate, such
 that the at least two partial package chip stacks include
 a first partial package chip stack and a second partial
 package chip stack directly connected to the first partial
 package chip stack, and wherein one of the at least two
 partial package chip stacks includes the top-most semi-
 conductor chip of the semiconductor package; and
 prior to the sequential mounting, testing at least the partial
 package chip stack that includes the top-most semicon-
 ductor chip of the semiconductor package, through the
 plurality of TSVs of that top-most semiconductor chip.
18. The method of claim 17, wherein
 the forming of the at least two partial package chip stacks
 comprises, for each partial package chip stack, stacking
 one of the at least two semiconductor chips on another
 one of the at least two semiconductor chips with a first
 under-fill member therebetween,
 the mounting of the at least two partial package chip
 stacks comprises stacking one of the at least two partial
 package chip stacks on another one of the at least two
 partial package chip stacks with a second under-fill
 member therebetween, and
 a horizontal cross-sectional area of the second under-fill
 member is larger than a horizontal cross-sectional area
 of the first under-fill member.
19. The method of claim 18, wherein a portion of the
 second under-fill member is disposed between the first mold
 layers of the at least two partial package chip stacks.
20. The method of claim 17, wherein the testing is
 performed while the at least two partial package chip stacks
 are mounted on a carrier substrate and are horizontally
 disposed with respect to each other.

* * * * *