

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET – Page 1 of 1

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. _____

INVENTOR(S)			
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)	
Eliezer Osnat	POLAK POLAK	Atzmon, IL Atzmon, IL	
<i>Additional inventors are being named on the _____ separately numbered sheets attached hereto.</i>			
TITLE OF THE INVENTION (500 characters max):			
A METHOD AND SYSTEM FOR SAFE MASSAGING WHILE DRIVING			
CORRESPONDENCE ADDRESS Direct all correspondence to: ☒ The address corresponding to Customer Number: 49443			
OR ☒ Firm or Individual Name Pearl Cohen Zedek Latzer Baratz LLP			
Address 1500 Broadway, 12th Floor			
City New York	State New York	Zip 10036	
Country USA	Telephone (646) 878-0800	Email USPTO@pearlcohen.com	
ENCLOSED APPLICATION PARTS (check all that apply)			
☐ Application Data Sheet. See 37 CFR 1.76 ☐ CD(s), Number of CDs _____			
☒ Drawing(s) Number of Sheets <u>7</u> ☐ Other (specify) _____			
☒ Specification (e.g. description of the invention) Number of Pages <u>12</u>			
Fees Due: Filing Fee of 260 (130 for small entity). If the specification and drawings exceed 100 sheets of paper, an application size fee is also due, which is 400 (200 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).			
METHOD OF PAYMENT OF THE FILING FEE AND APPLICATION SIZE FEE FOR THIS PROVISIONAL APPLICATION FOR PATENT			
☒ Applicant claims small entity status. See 37 CFR 1.27. ☐ A check or money order made payable to the <i>Director of the United States Patent and Trademark Office</i> is enclosed to cover the filing fee and application size fee (if applicable). ☐ Payment by credit card. Form PTO-2038 is attached.			
☒ The Director is hereby authorized to charge the filing fee and application size fee (if applicable) or credit any overpayment to Deposit Account Number: 50-3355			130 TOTAL FEE AMOUNT (\$)
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government. ☒ No. ☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____			

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

SIGNATURE /Devorah Livneh/Date 20 February 2014TYPED or PRINTED NAME Devorah N. LivneREGISTRATION NO. (if appropriate) 71,347TELEPHONE 646-878-0800Docket Number: P-77692-USP**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

METHOD AND SYSTEM FOR SAFE MASSAGING WHILE DRIVING

BACKGROUND OF THE INVENTION

[001] Known text-messaging applications for mobile devices may be dangerous for use while driving. Drivers may be tempted to lift their eyes from the road to the devices display, in order to review and/or respond to received text messages.

[002] Software applications which may translate text to voice may not be suitable for translation of messages, and/or may not be suitable for use while driving. Particularly, some software applications which may translate text to voice may not be suitable for translation of messages in languages in which pronunciation of a word may depend on the gender of the sender and/or receiver of the message.

BRIEF DESCRIPTION OF THE DRAWINGS

[003] The subject matter regarded as the invention is particularly pointed out and distinctly claimed in the concluding portion of the specification. The invention, however, both as to organization and method of operation, together with objects, features, and advantages thereof, may best be understood by reference to the following detailed description when read with the accompanying drawings in which:

[004] Fig. 1 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention;

[005] Fig. 2 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention;

[006] Fig. 3 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention;

[007] Fig. 4 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention;

[008] Fig. 5 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention;

[009] Figs. 6A and 6B are a schematic flowcharts illustrating exemplary methods according to embodiments of the present invention;

[0010] Fig. 7 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention;

[0011] Fig. 8 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention; and

[0012] Fig. 9 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention.

[0013] Fig. 10 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention.

[0014] Fig. 11 is a schematic illustration of an exemplary application screen displayed on a display of mobile device, according to embodiments of the present invention.

[0015] Fig. 12 is an exemplary flowchart illustrating operation of the system, according to embodiments of the present invention.

[0016] It will be appreciated that for simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements may be exaggerated relative to other elements for clarity. Further, where considered appropriate, reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

[0017] In the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known methods, procedures, and components have not been described in detail so as not to obscure the present invention.

[0018] Embodiments of the present invention may provide a method and system that may improve the safety of driving. The method and system may enable drivers to hear text messages vocally, while driving, and/or to respond to messages in various manners without touching the phone.

[0019] The method and system according to embodiments of the present invention may enable drivers to drive safely while paying attention to the road, without taking their eyes

off the road, and to hear and respond to received text messages in various manners such as, for example, sending a predefined text and/or voice message, calling the sender of the message, etc. Thus, for example, drivers may continue to be available to messages while not being tempted to look at their phone and/or to text-message while driving.

[0020] The system according to embodiments of the present invention may include an application installed in a mobile device such as, for example, any mobile cellular communications device. The application according to embodiments of the present invention may include some predefined/default definitions. The application according to embodiments of the present invention may include several definition screens. Some parameters of operation of the system may be defined in the definition screens by a user, for example by the user interface of the mobile device. For example, in each definition screen, a user may determine and/or select the preferred definitions or default definitions may be used. When done, the system may operate according to the determined definitions and/or default definitions according to the user selections.

[0021] According to embodiments of the present invention, the operation of the mobile application may be initiated manually by a user. Upon initiation of the application, for example, the application may provide a vocal and/or visual indication that it is in operative mode.

[0022] Fig. 1 is a schematic illustration of an exemplary application screen 110 displayed on a display of mobile device 100, according to embodiments of the present invention. In some embodiments, the user may have the option to define the desired duration of time for the application to operate. At the end of the duration, the application may automatically turn off. In application screen 110, it is indicated that the application is on and the determined duration of operation is indicated. Also, buttons for turning the application on or off manually are included in screen 110. Additionally, in some embodiments, a user can choose between manual and automatic operation and/or initiation of the application, for example by a button in screen 110. For example, if manual operation is chosen, the user may initiate the application manually and/or set the duration of operation as described herein. In case automatic operation and/or initiation is chosen, the application may operate based on default definitions and/or predetermined definitions set by a user, for example as described in detail herein.

[0023] In some embodiments of the present invention, a user may define in one of the applications' screen settings for automatic initiation of the application. Fig. 2 is a schematic illustration of an exemplary application screen 120 displayed on a display of mobile device 100, according to embodiments of the present invention. In screen 120, a user may define settings for automatic initiation of the application. For example, the settings may include initiation of the application when detecting a high velocity movement of the device, which may imply, for example, that the device is within a moving vehicle. For example, the velocity for initiation of the application may be defined to be above human running velocity, e.g. about 15 km/s. Other settings for automatic initiation of the application, may be defining that the application will be initiated when, for example, the mobile device is connected to a vehicle's Bluetooth, the mobile device is connected to a vehicle's mobile device charger, a navigation application is activated, the mobile device is connected to earphone, or any other predefined event occurs.

[0024] In some embodiments, the user may pre-define, in the application screen, times, e.g. days and hours in which he wants the application to operate. Fig. 3 is a schematic illustration of an exemplary application screen 130 displayed on a display of mobile device 100, according to embodiments of the present invention. In screen 130, the user may pre-define times, e.g. days and hours in which he wants the application to operate. Upon such definition, the application may automatically initiate and/or operate in the defined times.

[0025] Fig. 4 is a schematic illustration of an exemplary application screen 140 displayed on a display of mobile device 100, according to embodiments of the present invention. As shown in Fig. 4, when the application initiates automatically, the application may provide a vocal and/or visual indication via the mobile device, for example on screen 140, that it is in operative mode. The application may then be shut manually by the user if desired via screen 140. In some embodiments, the user may choose how the application will be next initiated, for example manually, automatically or in a predetermined time.

[0026] Fig. 5 is a schematic illustration of an exemplary application screen 150 displayed on a display of mobile device 100, according to embodiments of the present invention. As shown in Fig. 5, when a text message is received to the mobile device, the application may provide a vocal and/or visual indication via the mobile device. The system and method

according to embodiments of the present invention may enable conversion of text messages to voice messages. According to embodiments of the present invention, the mobile application may convert the received text message to voice message and may sound the message and/or the message details based on predefined settings that were determined, for example, by a user in the definitions/settings screen(s) of the application.

[0027] In some embodiments of the present invention, the message content may be sounded, for example, continuously followed by or following the name and/or phone number of the sender. Then, the application may wait a few seconds or as may be defined by a user to receive the user's instructions. The application may receive vocal instructions from a user and translate them to events.

[0028] Fig. 6A is a schematic flowchart illustrating an exemplary method according to embodiments of the present invention. As shown in Fig. 6A, for example, the user may instruct to repeat the message by, for example, saying the word "repeat", as indicated in block 540. The application may analyze the vocal instruction and translate it to a "repeat" command and repeat the message according to the instruction, as indicated in block 550.

[0029] In some embodiments, the application may receive an instruction vocally, or by another user interface method such as, for example, by a touch screen or by a shake/movement of the mobile device. For example, a user may instruct to stop the sounding of the message by saying "stop" or by touching the screen of the mobile device or by any other suitable method.

[0030] Fig. 6B is a schematic flowchart illustrating an exemplary method according to embodiments of the present invention. In other configurations, the sender details such as, for example, name and/or phone number may be sounded to the user first, and then the user may decide whether he wants to continue to hear the message content. When a text message is received to the device, the application may sound the sender details, as indicated in block 610. After sounding the sender details, the application may wait a predetermined period of time, for example a few seconds, for the user instructions. The user may instruct to repeat the details by, for example, saying the word "repeat" and after repeating the details the application may wait the predetermined period of time for the user instructions. In some embodiments, in case the application receives no instructions, the message content will not be sounded by the application. In case the user instructs, for

example by a vocal instruction, to sound the message, as indicated in block 620, the application may go on to sounding the message, as indicated in block 630. The user may instruct to repeat the message by, for example, saying the word “repeat”, as indicated in block 640. The application may analyze the vocal instruction and translate it to a “repeat” command and repeat the message according to the instruction, as indicated in block 650.

[0031] After sounding the sender details and/or the message contents, the application may wait a predetermined period of time, for example a few seconds, for the user instructions. The application may receive within this period of time several possible reactions from the user. One possible reaction may include, for example, no reaction. In this case, after the period of time passes, the application may close the session for this particular message. Another possible reaction may include, for example, an instruction, for example a vocal instruction, to send a predefined response message, such as, for example, a default message of the application or a prewritten response by the user. In some embodiments, a user may pay the application/cellular service provider according to the number of messages being sent. Such user may define the application to not send a written message in response to the sounded message.

[0032] Another possible reaction may include, for example, an instruction, for example a vocal instruction, to record a message in response to the received message. The application may then record the user speaking his message. The application may then receive an additional instruction, for example vocally, to send the recorder message to the sender of the received message. Another possible reaction may include, for example, an instruction, for example a vocal instruction, to call the sender of the message. Upon such instruction, the application may initiate a call to the sender by the mobile device.

[0033] Fig. 7 is a schematic illustration of an exemplary application screen 160 displayed on a display of mobile device 100, according to embodiments of the present invention. As shown in Fig. 7, in some embodiments of the present invention, the application may be shut and/or activated manually. In some embodiments, after shutting the application manually, the application, for example according to the user settings/definitions, may be automatically initiated within a pre-determined period of time and/or upon an occurrence of an event that may trigger automatic initiation of the application as discussed above.

[0034] In some embodiments of the present invention, the application may automatically shut, for example upon occurrence of a predetermined event, as an application default and/or as may be defined by a user. Fig. 8 is a schematic illustration of an exemplary application screen 180 displayed on a display of mobile device 100, according to embodiments of the present invention. As shown in Fig. 8, in some embodiments of the present invention, a user may define in one of the applications' screen such as, for example, screen 180, settings for automatic shutdown of the application. For example, the settings may include shutting of the application when detecting for several minutes, as may be predefined, for example by a user, a slow velocity movement of the device, which may imply, for example, that the device is not within a moving vehicle. For example, the velocity for shutting of the application may be defined to be below human running velocity, e.g. about 15 km/s. Other settings for automatic shutting of the application, may be defining that the application will be shut when, for example, the mobile device is disconnected from a vehicle's Bluetooth, the mobile device is disconnected from a vehicle's mobile device charger, a navigation application is deactivated, or any other predefined event occurs. In some embodiments, the user may pre-define, in the application screen, times, e.g. days and hours in which he wants the application to be shut. Upon such definition, the application may automatically shut in the defined times.

[0035] In some embodiments, upon occurrence of one of the predetermined events that may trigger shutdown of the application, the application may announce for example vocally, that the application is shutting down. Fig. 9 is a schematic illustration of an exemplary application screen 190 displayed on a display of mobile device 100, according to embodiments of the present invention. As shown in Fig. 9, the user may then shut the application manually by screen 190. In case the user does not respond or act within a predetermined period, the application may shut down. In some embodiments, for example if the application keeps detecting the event for a certain predefined period of time, for example predefined by a user, it may shut automatically.

[0036] The application provided by a system and method according to embodiments of the present invention may have a few pre-recorded application announcements that may be sounded to the user in predefined events. For example, all announcements may be pre-recorded in a certain desired language. In addition, the desired language words may be

separately recorded in order to form the translation of a message from text to voice. For example, when a new text message is received, the application may announce that a message was received from a certain sender and the sender's details may be included in the announcement. For example, when the user instructs to proceed and sound the message or automatically after announcing the sender details, the application may sound the pre-recorded words that form the translated voice message. For example, when the application does not understand a user's instruction, the application may sound a pre-recorder announcement that requests to repeat the instruction. For example, after the application sends a message in response to a received message, the application may sound a pre-recorder announcement that states that the message was sent. For example, after the application receives instructions to make a call, the application may sound a pre-recorder announcement that states that the call is being made. For example, after the application is being initiated automatically and/or manually, the application may sound a pre-recorder announcement that states that the application initiates. For example, when the application is being shut automatically and/or manually, the application may sound a pre-recorder announcement that states that the application is being shut. For example, when the application detects an event that triggers automatic shut of the application, the application may sound a pre-recorder announcement that asks the user if he wants to shut the application. For example, when the application is being shut automatically and/or manually, the application may sound a pre-recorder announcement that asks the user when he want the application to operate again. For example, when the application can't form a connection with a server and/or when there is a network problem, the application may sound a pre-recorder announcement about the failure. The above are only examples of pre-recorded announcements that may be included in the application and the application is not limited to these examples.

[0037] In some embodiments of the present invention, the screen of the mobile devices may be shut during most of the operation. The screen may turn on and display the application screen, for example, when a message is received or when the application is automatically or manually being initiated or shut down. When the application announces an announcement, the screen may remain turned on.

[0038] Fig. 10 is a schematic illustration of an exemplary application screen 200 displayed on a display of mobile device 100, according to embodiments of the present invention. Application screen 200 may include a main menu, which may enable, for example, selection of the kind of settings or operations the user wants to perform. For example, in screen 200 the user may select one of a list comprising: returning to manual on/off screen, settings of automatic and/or manual initiation and/or operation, settings of automatic reply messages, settings of voice playback recorded commands, settings of the application's language, language and/or audio settings, help options, sharing options, gender settings 205, and/or any other application option described herein and/or any other suitable application option. It should be understood that the use of a mobile device 100 is described herein by way of a non-limiting example and embodiments of the present invention may be implemented as software on any suitable processor, for any type of application and is not limited to safe driving purposes.

[0039] Embodiments of the present invention may provide a method for translation of messages from text to voice and/or for voice announcements that may be conformed to the user's defined gender, in languages in which pronunciation of a word may depend on the gender of the sender and/or receiver of the message. In some embodiments, the user may set his/her gender in the application settings, for example by selection of gender settings 205 in the main menu screen 200. Thus, for example, in relevant languages, the translation of messages from text to voice and/or the application announcements may be conformed to the user's defined gender. Additionally, the application may identify the gender of a sender of a received message, for example by pre-definition of gender of the contact people stored in the mobile device, for example by the user of the mobile device. In some embodiments, the application may identify words in the message that may imply on the user's and/or sender's gender, and the application may set the gender of the sender and/or user based on these words. In some embodiments, for example when a sender of the message also has the application installed in his device, the message may be received together with an indication on the sender's gender. Thus, for example, in relevant languages, the translation of messages from text to voice and/or the application announcements may be conformed to the sender's defined gender. Additionally, for example, in languages in which some words is written the same but have different

pronunciation for different genders, the application according to embodiments of the present invention may provide the pronunciation of the words in the sounded message according to the user's and/or sender's gender.

[0040] In some embodiments, once the application identifies or receives the gender of the sender and/or user as described above, the application may scan the message and search for predefined words, which may be predefined as words that are pronounced differently when the sender and/or user are male or female. For example, a predefined word found in a message by the application may be pronounced according to the user's and/or sender's gender, according to predefined settings related to this word. In some languages, the application may identify when the sender refers to himself or to the user, for example based on pronouns or any other indications included in that language. Based on the identification, the application may pronounce the word according to the user's or the sender's gender.

[0041] Additionally, the application may be able to identify which word should be pronounced in case two or more different words are written the same, for example based on the context, for example based on other words in the sentence or other linguistic/syntactic rules.

[0042] In some embodiments of the present invention, a user may train and/or predefine the application to understand his vocal instructions. The application may also distinguish the user's voice from environmental sounds. Additionally, in some embodiments, the developer of the application may add new words to the application and/or train the application to understand these words and/or to translate these words from text to sound or use them as new commands.

[0043] In some embodiments of the present invention the user and/or a developer of the application may add new words to the application, for example, any word, slang or abbreviation may be added, and/or voice files with these additions may be added to the application. Fig. 11 is a schematic illustration of an exemplary application screen 210 displayed on a display of mobile device 100, according to embodiments of the present invention. As shown in Fig. 11, a user may add to the application via screen 200 any word, slang or abbreviation of a word and/or the meaning of this word, slang or abbreviation.

[0044] In some embodiment, the application may be able to translate voice messages to text.

[0045] In some embodiments of the present invention, the application may enable a user to set the language being used and the languages in which the messages may be voiced.

[0046] The sounding of messages according to embodiments of the present invention may be by a loudspeaker of the mobile device, by personal or car Bluetooth, by a earphone and/or by any other suitable method, for example according to the user's selection, which may be enabled by the application.

[0047] According to embodiments of the present invention, a user may choose the voice announcing the message, for example between male or female voice. Additionally, the speed of pronouncing of the message may be set by the user. Additionally, as described in detail above, the period of time in which the user may respond and/or act in response to the message may be set by the user, for example in a definitions screen of the application as described above.

[0048] All user settings/definitions enabled by embodiment of the present application may be set by a user, for example, in a definitions screen of the application according to embodiments of the present invention. Some additional user settings may be enabled according to various embodiments of the present invention. For example, a user may set the application to ignore silent or vibration mode of the phone, e.g. to sound messages even when the mobile device is at silent or vibration mode. For example, the user may set the application to avoid automatic initiation and/or operation of the application when transferring between cellular networks, for example when travelling abroad. This way, for example, the user may avoid paying for the service abroad without intention to do so.

[0049] Fig. 12 is an exemplary flowchart illustrating operation of the system, according to embodiments of the present invention.

[0050] While certain features of the invention have been illustrated and described herein, many modifications, substitutions, changes, and equivalents will now occur to those of ordinary skill in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

CLAIMS

1. A method for safe messaging while driving as described in the specification and as illustrated in the drawings.
2. A system for safe messaging while driving as described in the specification and as illustrated in the drawings.
3. An application for safe messaging while driving as described in the specification and as illustrated in the drawings.
4. A method for translation of messages from text to voice and/or for voice announcements as described in the specification and as illustrated in the drawings.

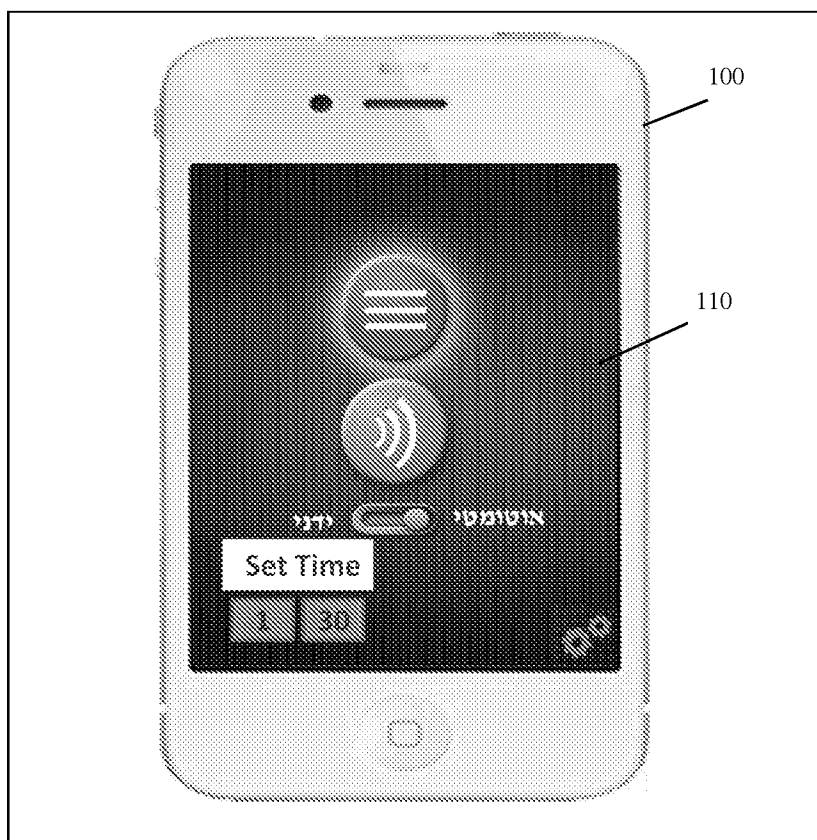


Fig. 1

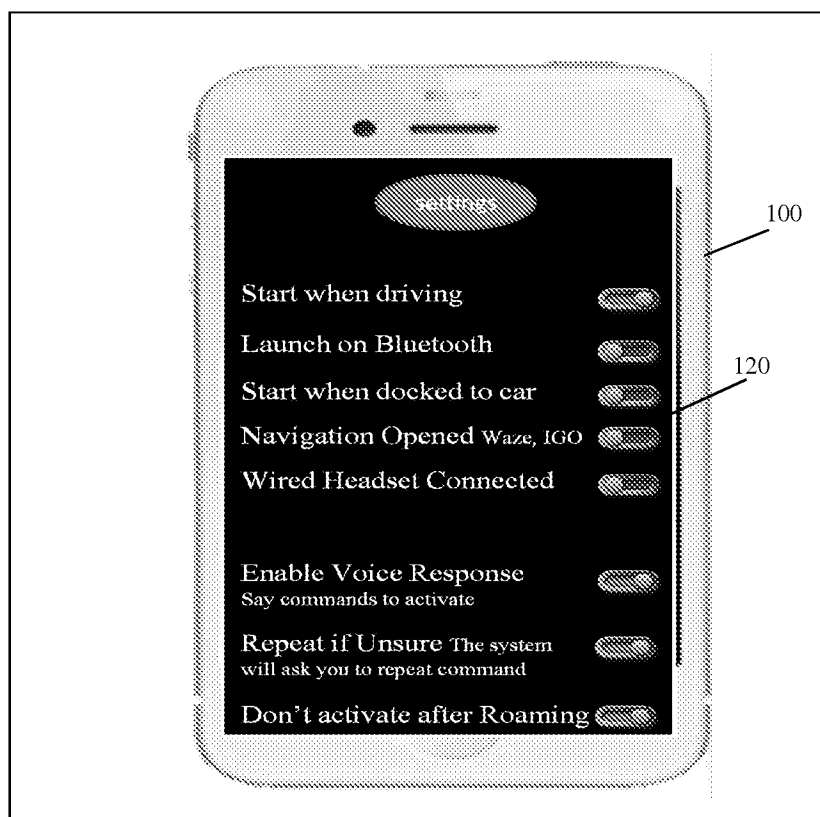


Fig. 2

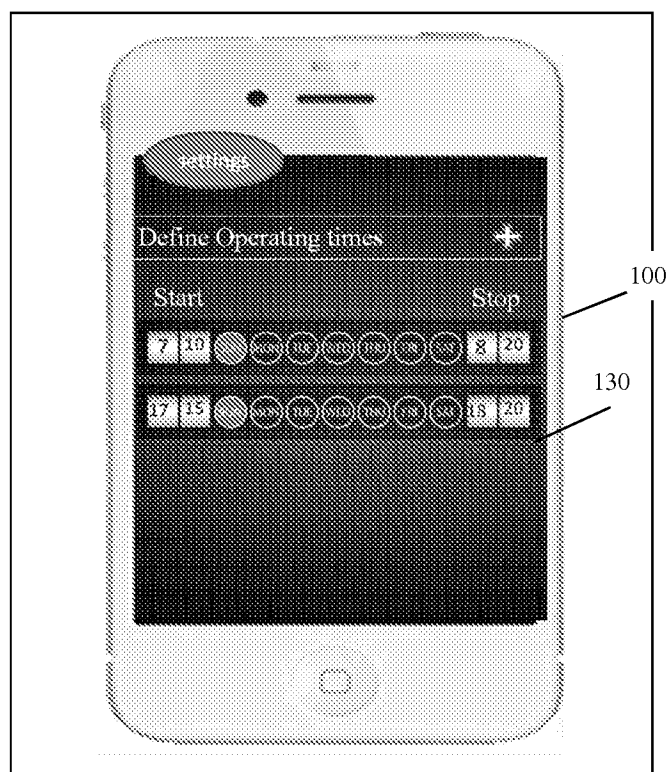


Fig. 3

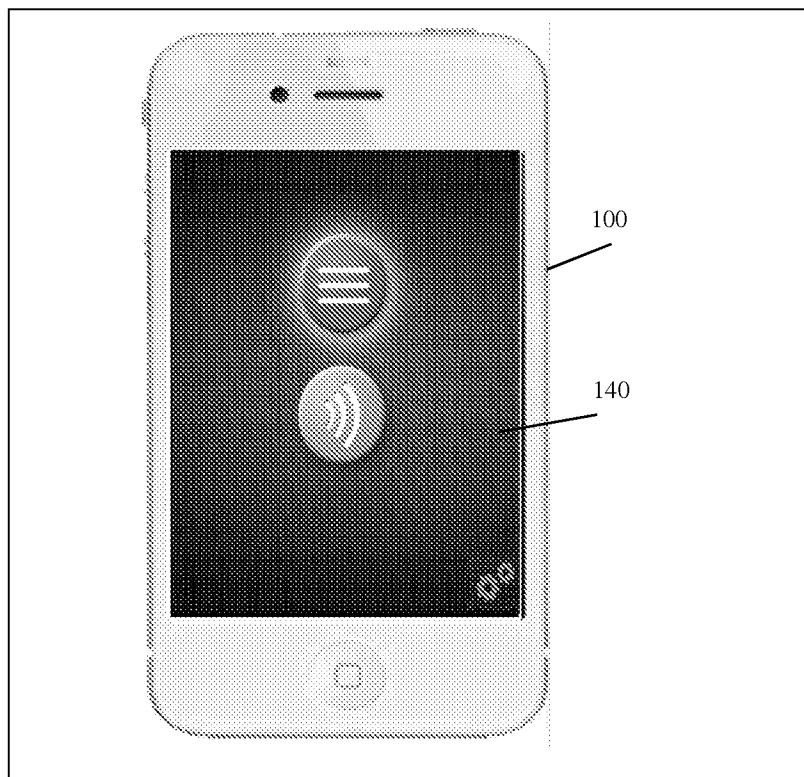


Fig. 4

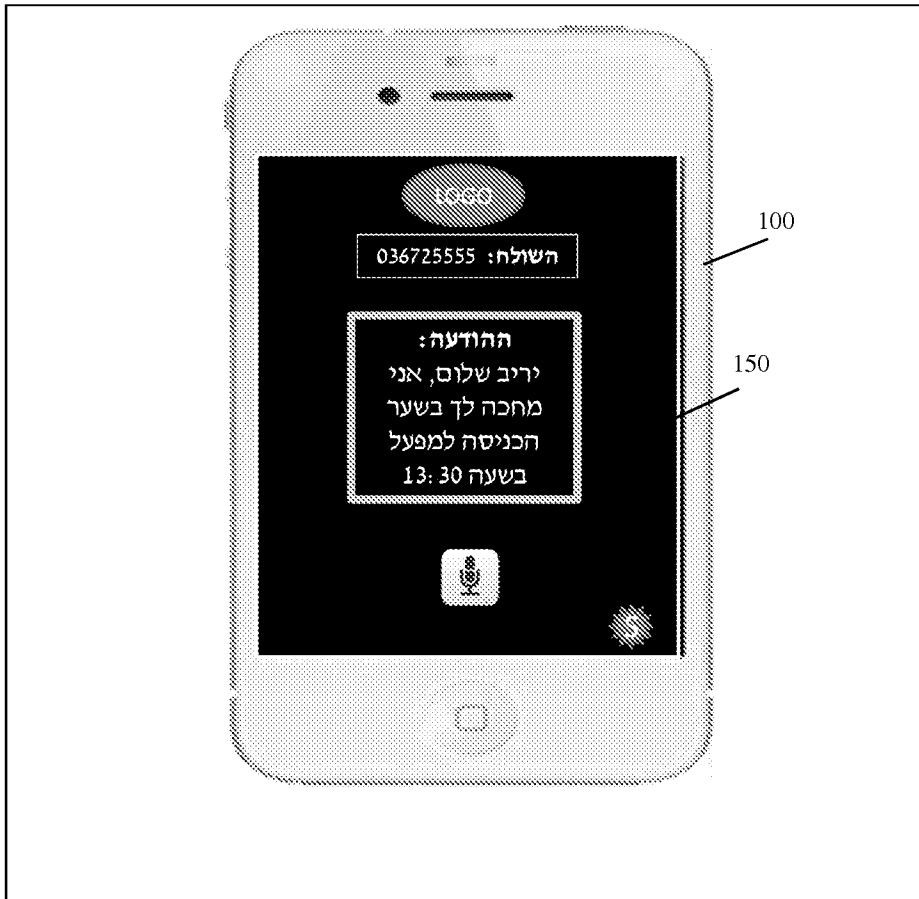


Fig. 5




Fig. 6A

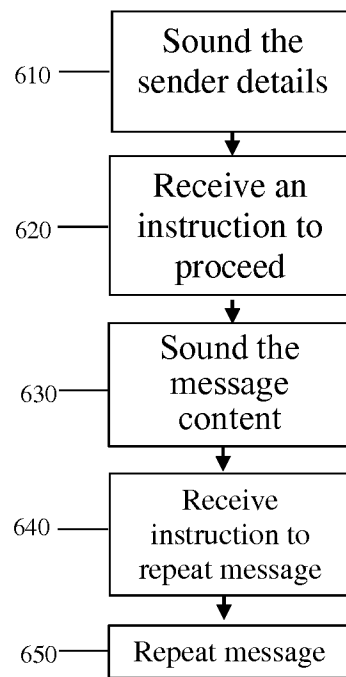


Fig. 6B

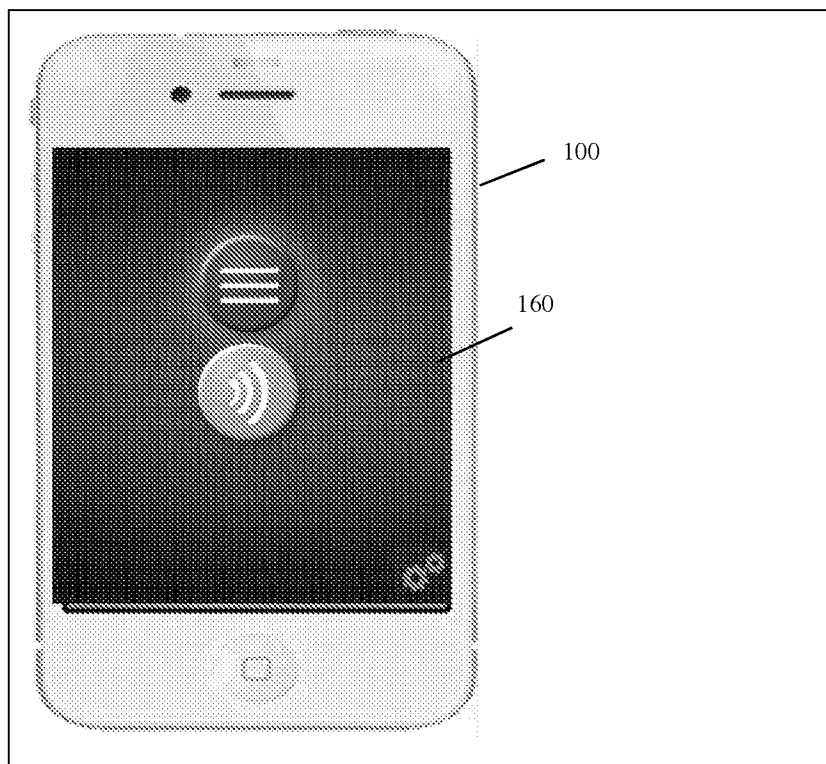


Fig. 7

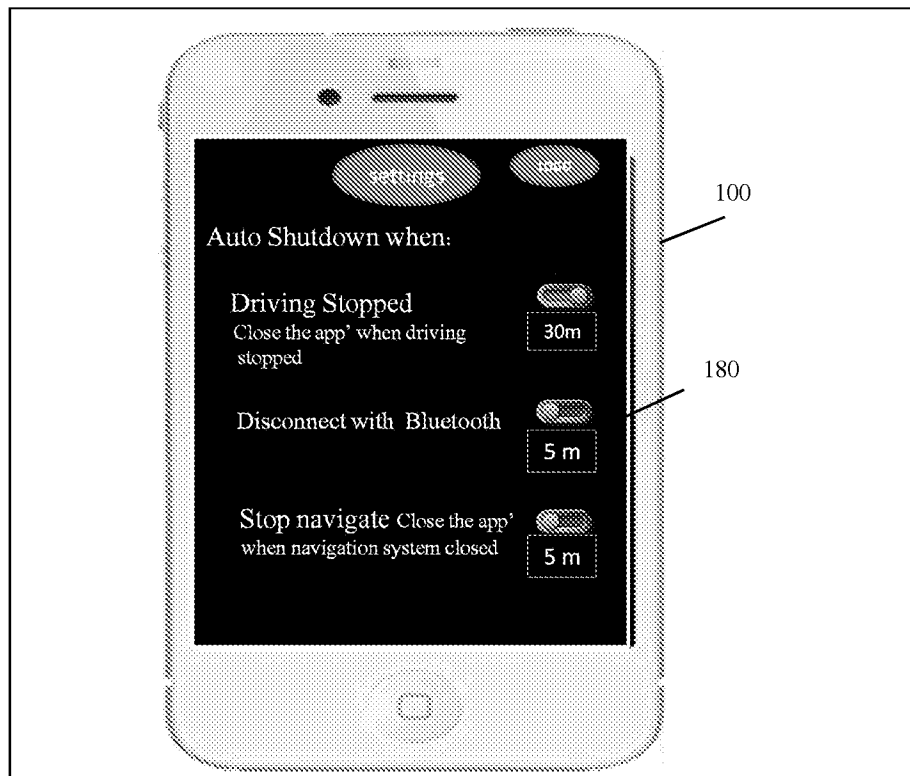


Fig. 8

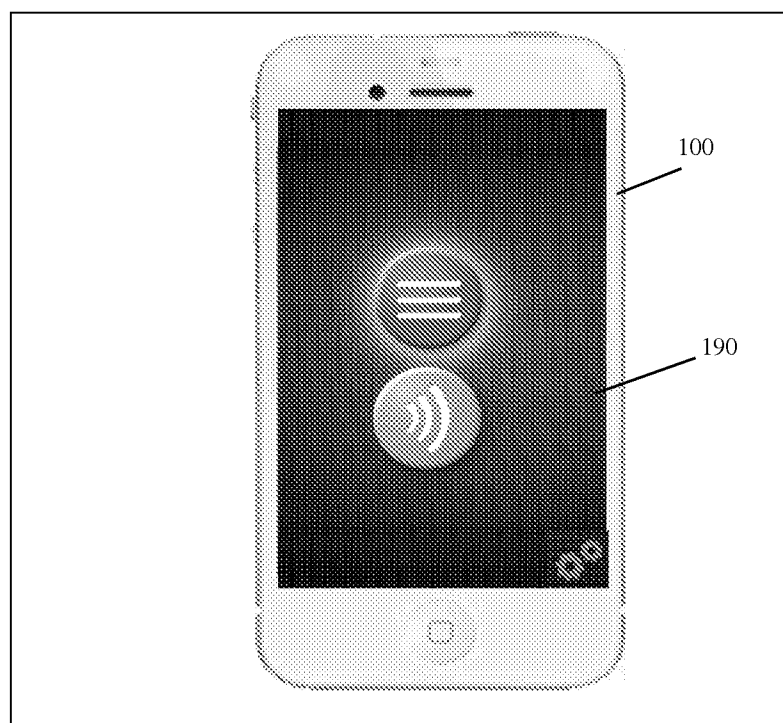


Fig. 9

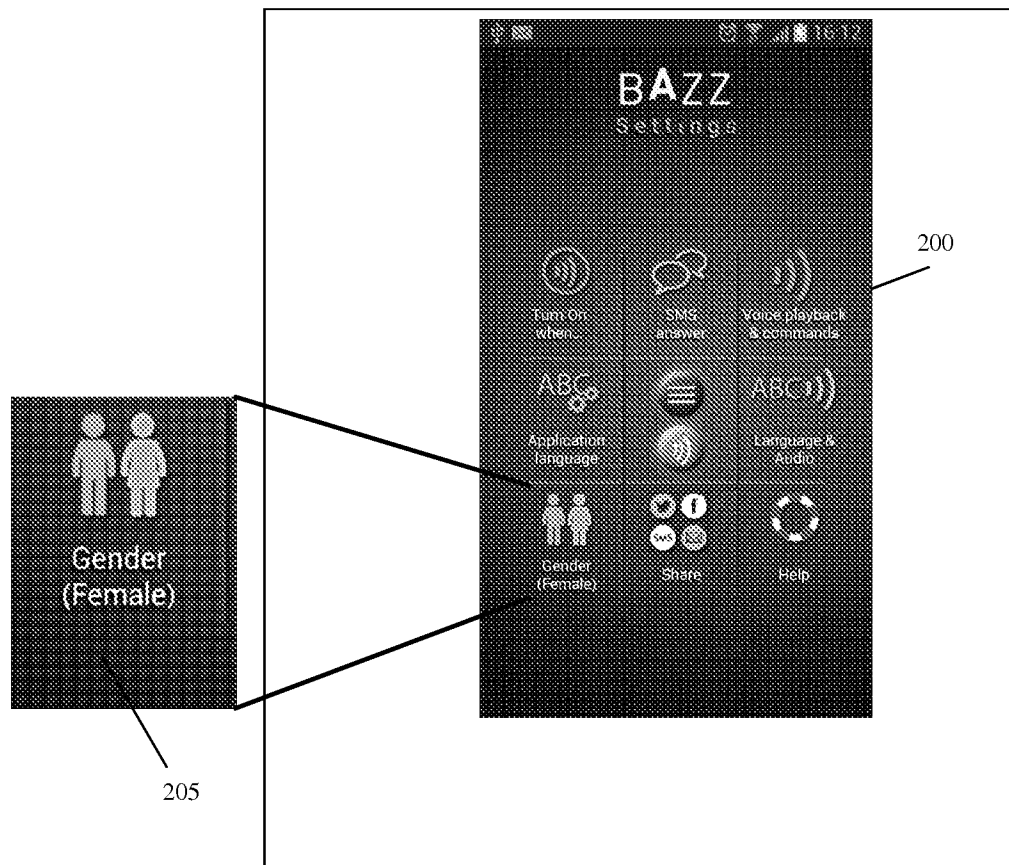


Fig. 10


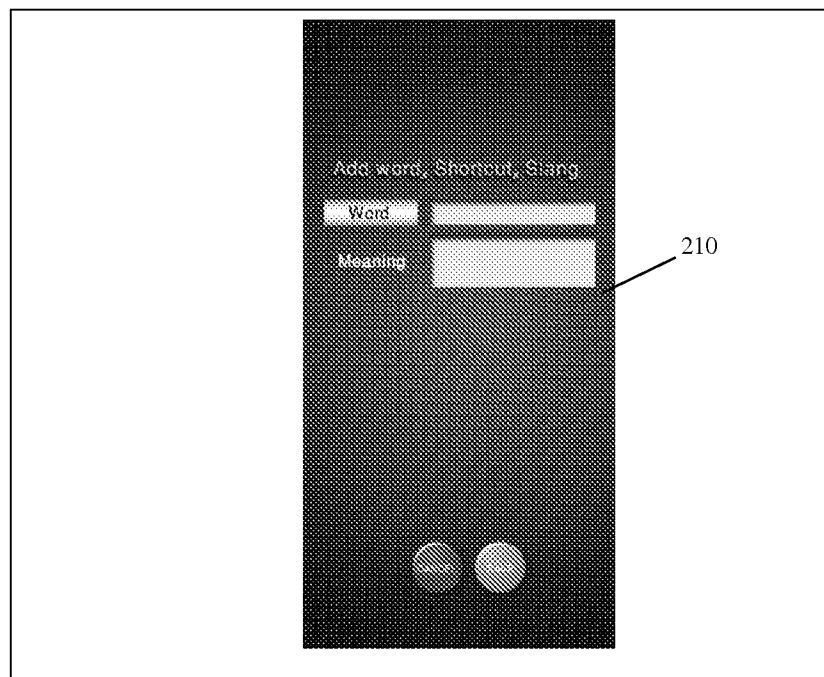


Fig. 11

Possible Flowchart

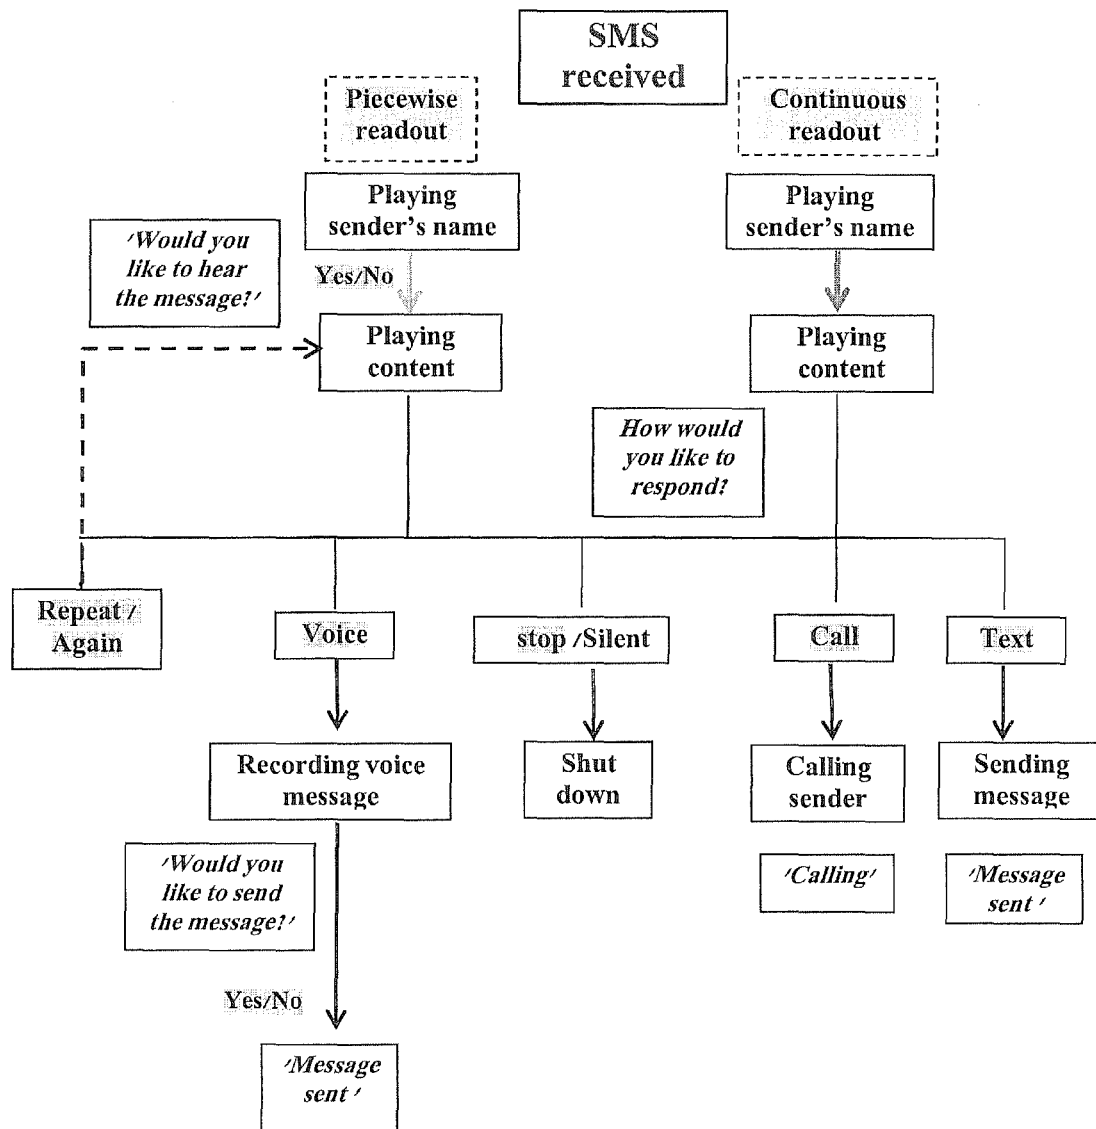

Legend

Yes/No. Voice command

message sent - Voice indication

FIGURE 12