



US 20140273975A1

(19) **United States**

(12) **Patent Application Publication**  
**Barat et al.**

(10) **Pub. No.: US 2014/0273975 A1**

(43) **Pub. Date: Sep. 18, 2014**

(54) **NOTIFICATION HANDLING SYSTEM AND METHOD**

**Publication Classification**

(71) Applicant: **Motorola Mobility LLC**, Libertyville, IL (US)

(51) **Int. Cl.**  
**H04W 4/12** (2006.01)

(72) Inventors: **Nirmalya Barat**, Milpitas, CA (US);  
**Francois M. Dermu**, San Mateo, CA (US); **Parikshit Dharawat**, Sunnyvale, CA (US); **Su-Yin Gan**, Sunnyvale, CA (US); **Ansuman Tapan Satpathy**, Sunnyvale, CA (US)

(52) **U.S. Cl.**  
CPC ..... **H04W 4/12** (2013.01)  
USPC ..... **455/412.2**

(21) Appl. No.: **13/926,046**


(22) Filed: **Jun. 25, 2013**

**Related U.S. Application Data**

(60) Provisional application No. 61/781,295, filed on Mar. 14, 2013.

(57) **ABSTRACT**

A notification handling system determines a notification type for a notification received at a first device of a group of associated devices. The system determines at least a second device from the group that has a capability related to the notification type and accordingly routes the notification to the second device. The second device may be paired to the first device via a wireless link. The notification handling system also augments the notification with additional information for the second device based on the capability of the second device. The augmented information is obtained by extracting data from the notification and augmenting the notification based on the extracted data. The notification handling system may also send or receive a global notification dismissal that dismisses the notification from all associated devices that may have received the notification.

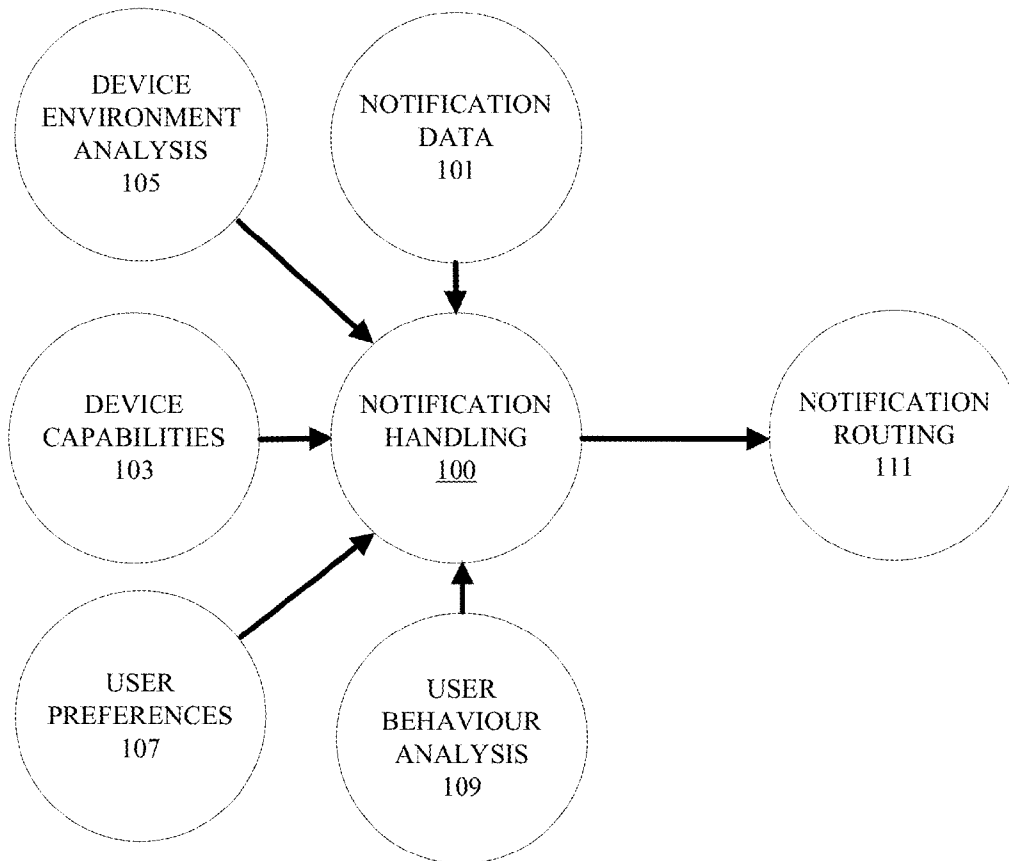

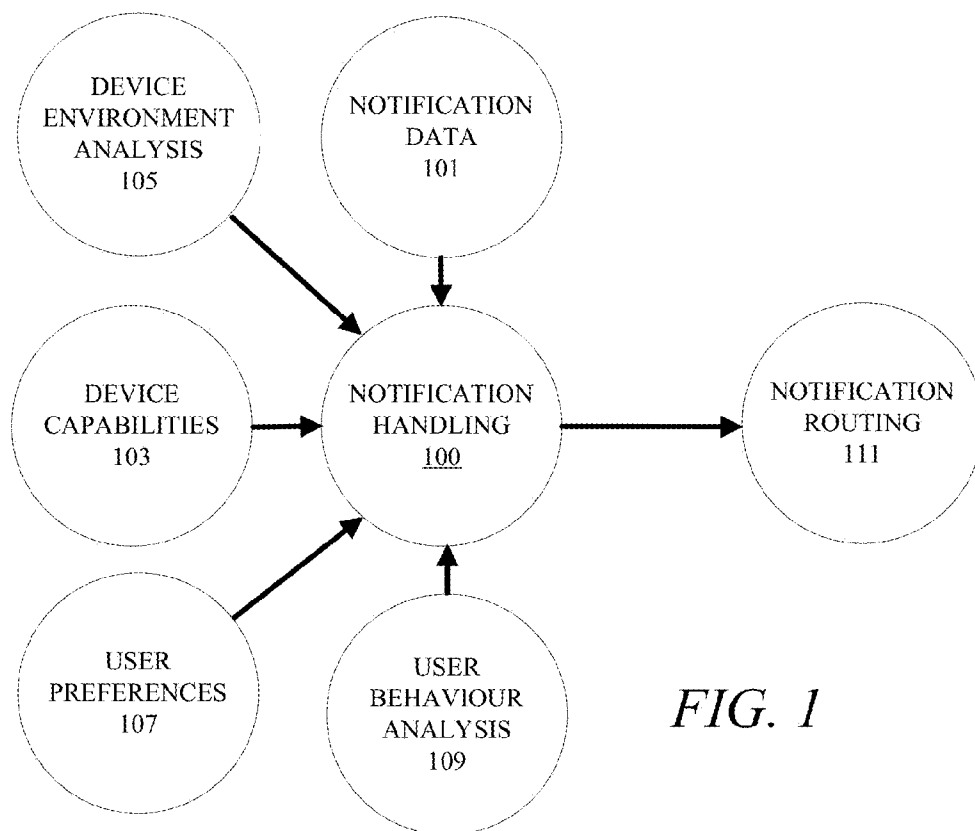


FIG. 1

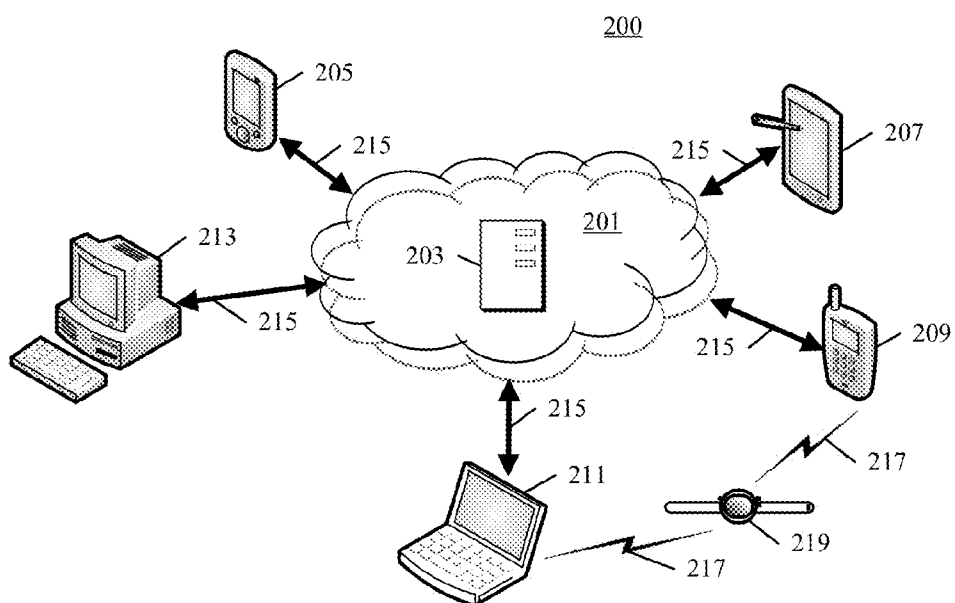


FIG. 2

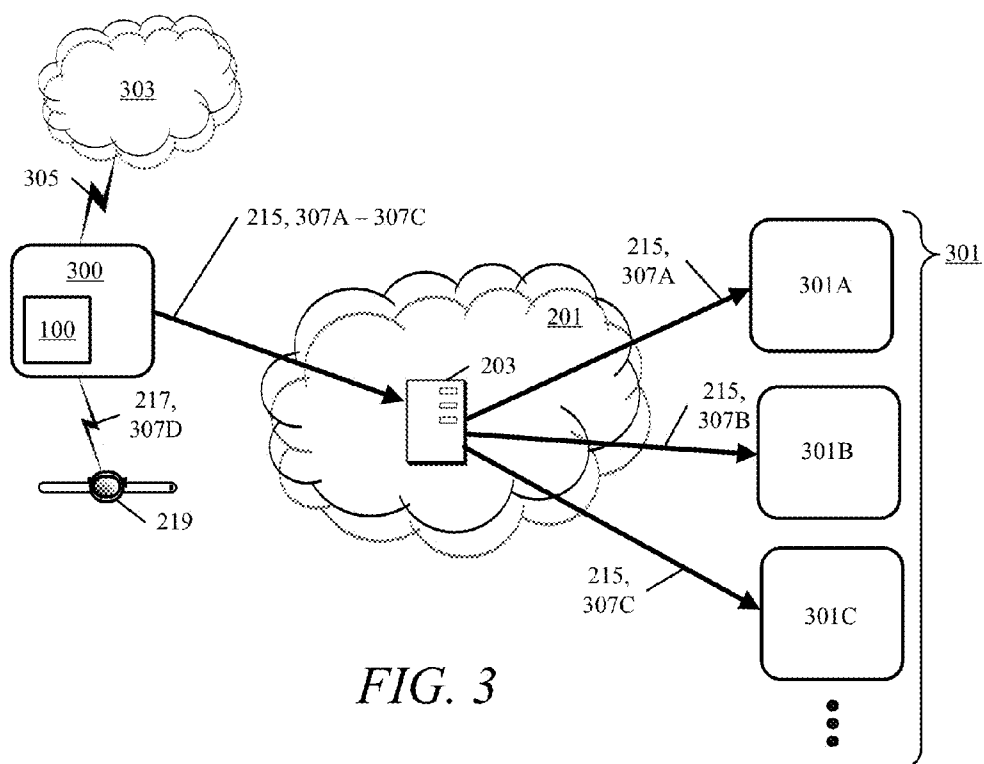


FIG. 3

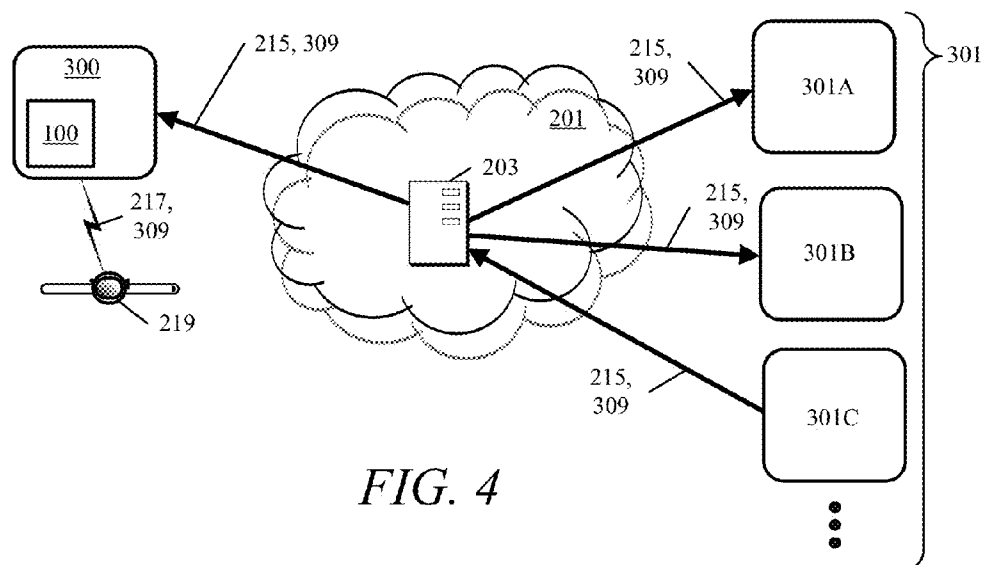


FIG. 4

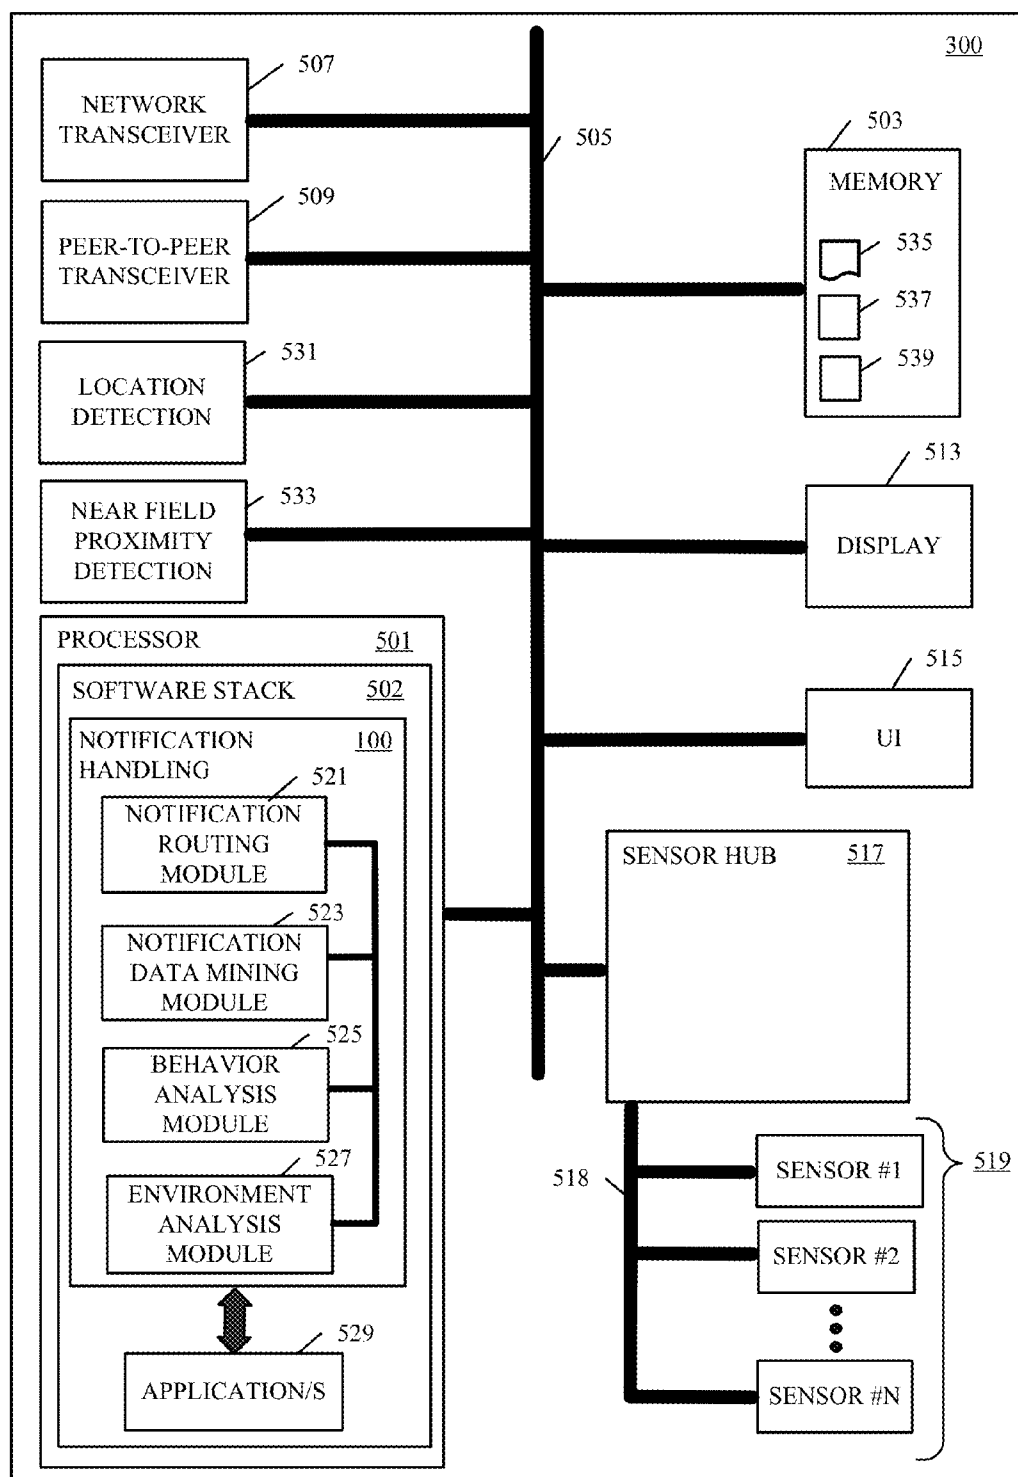


FIG. 5

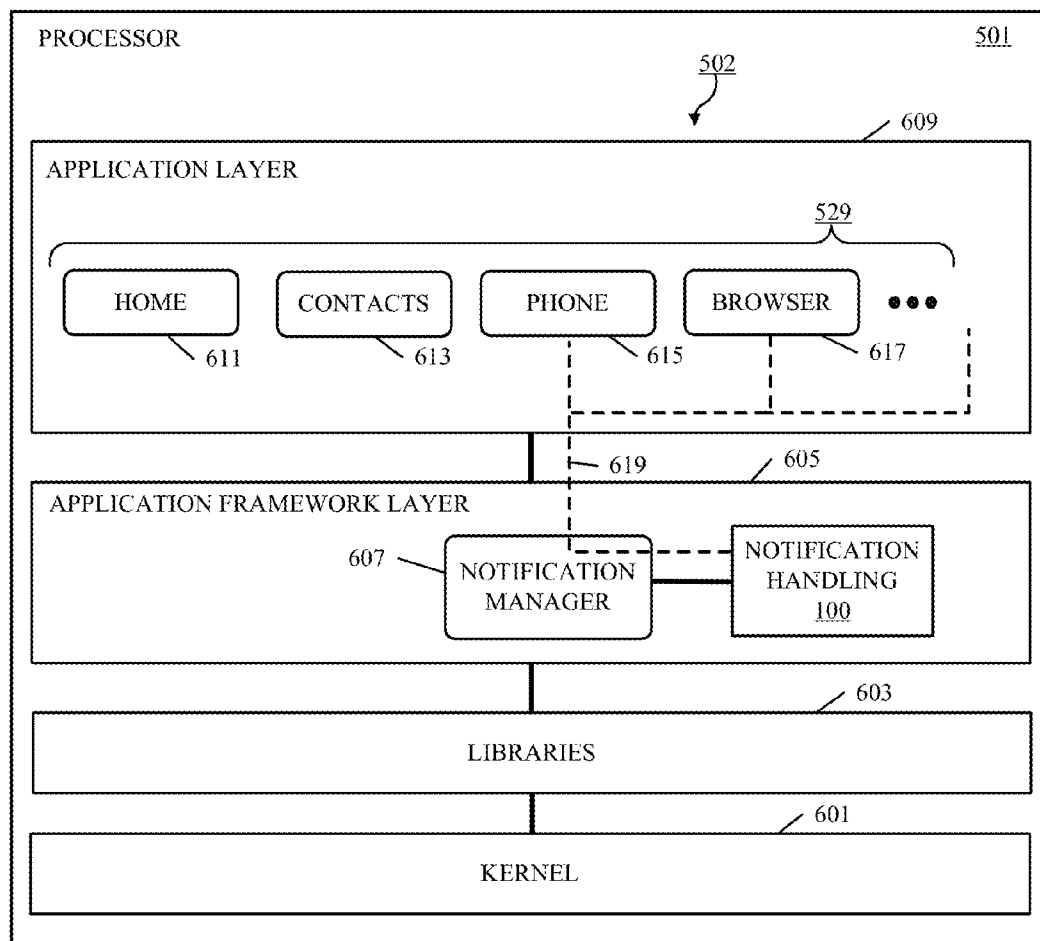


FIG. 6

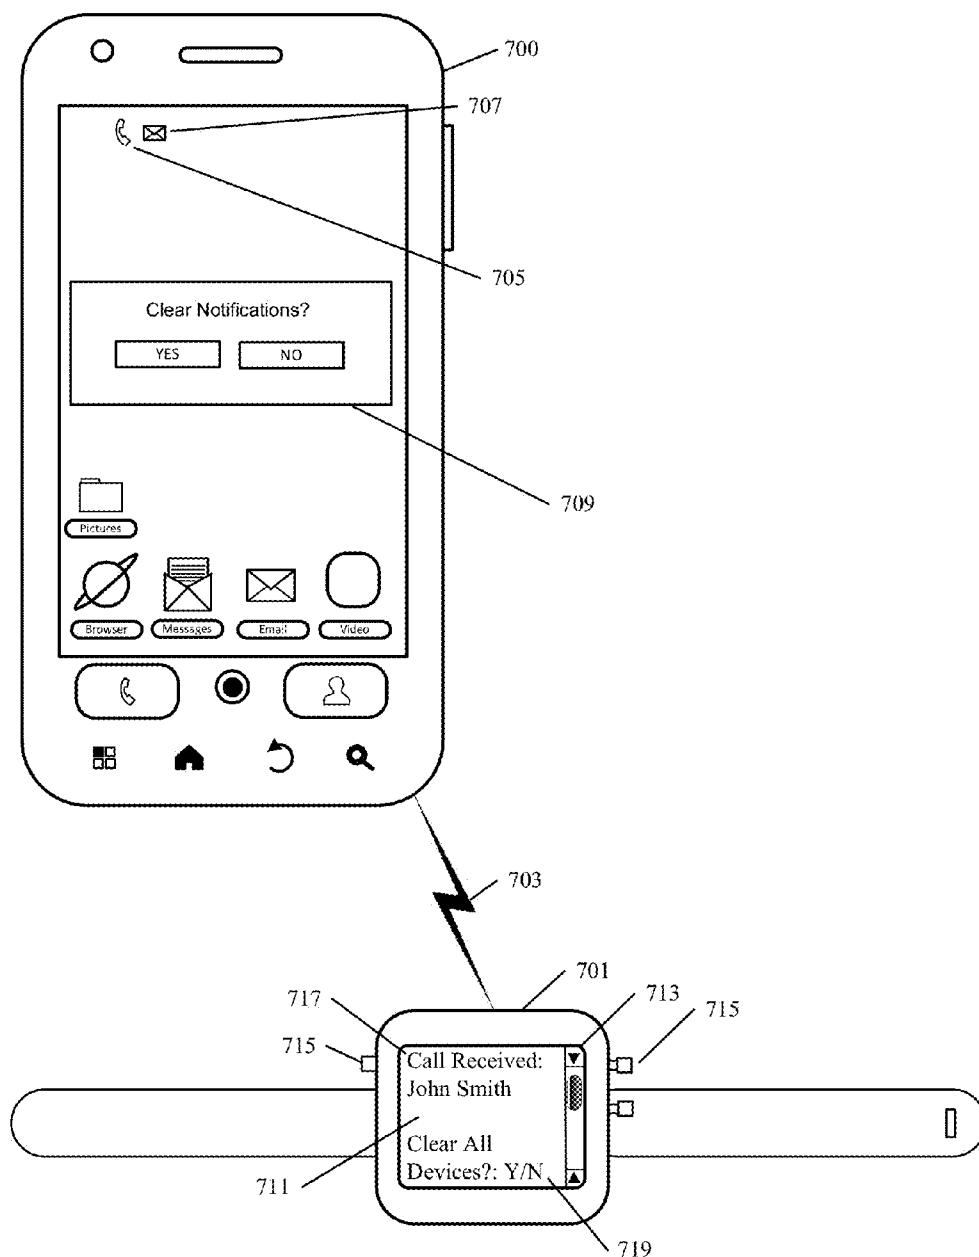


FIG. 7

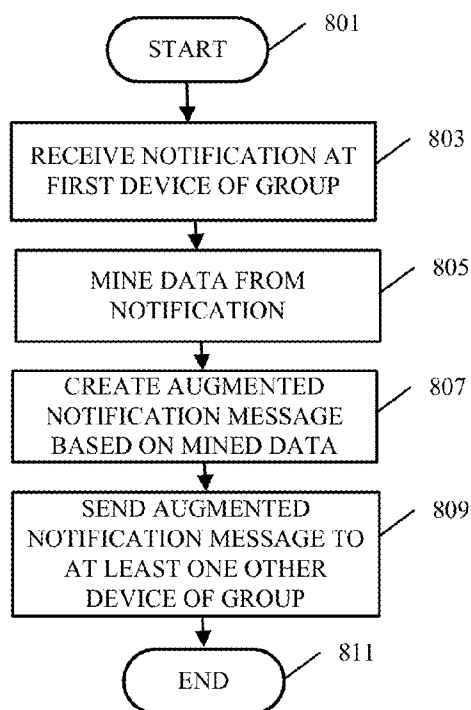


FIG. 8

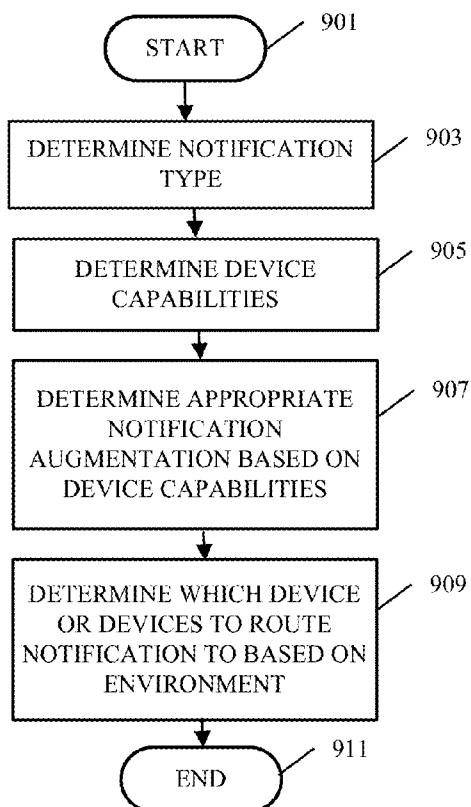


FIG. 9

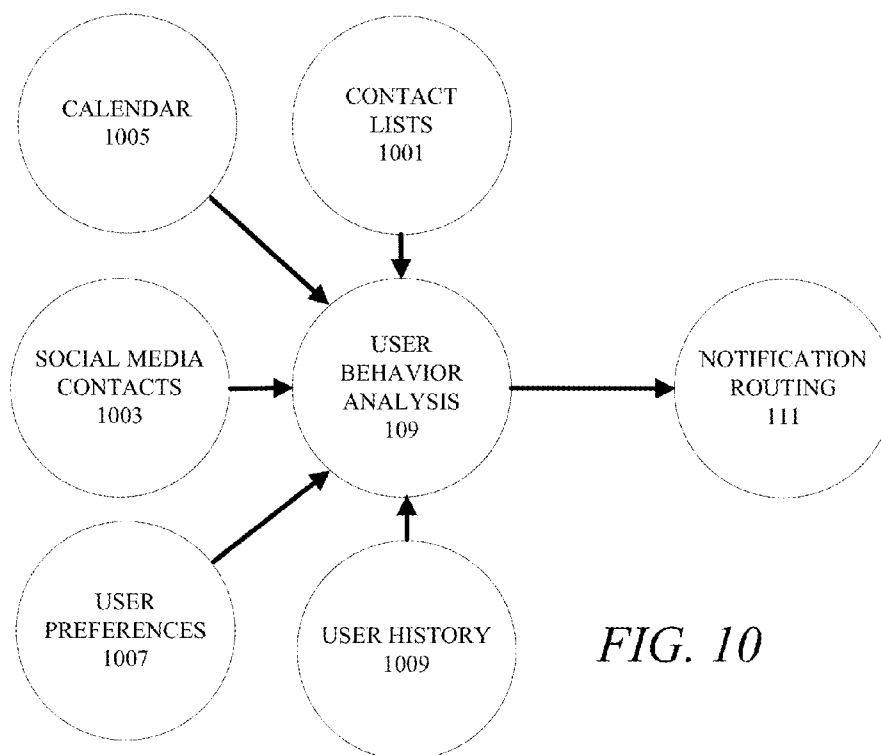


FIG. 10

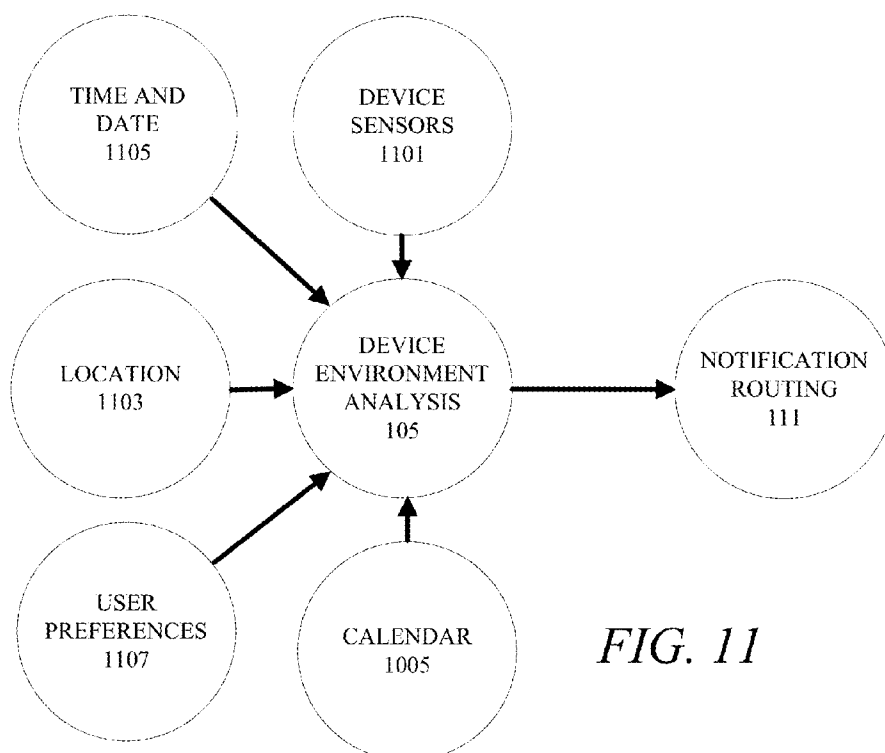


FIG. 11

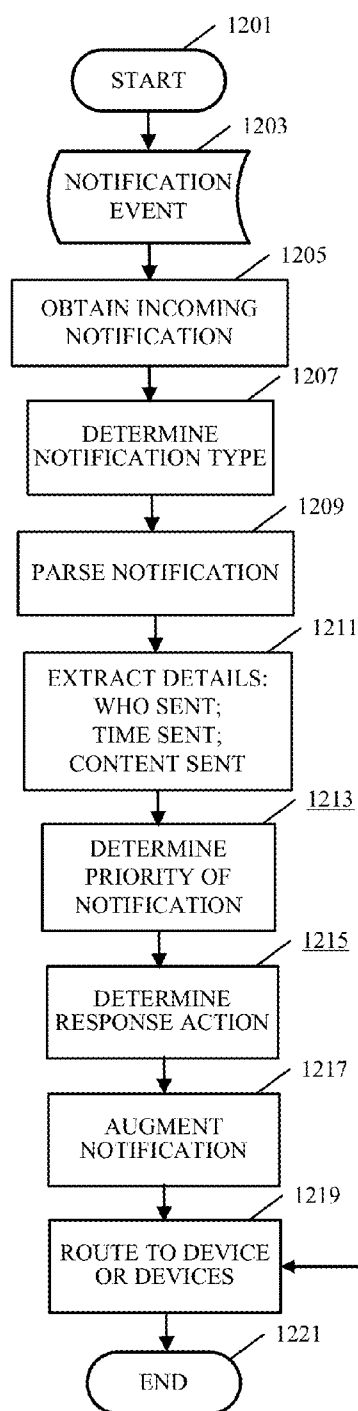


FIG. 12

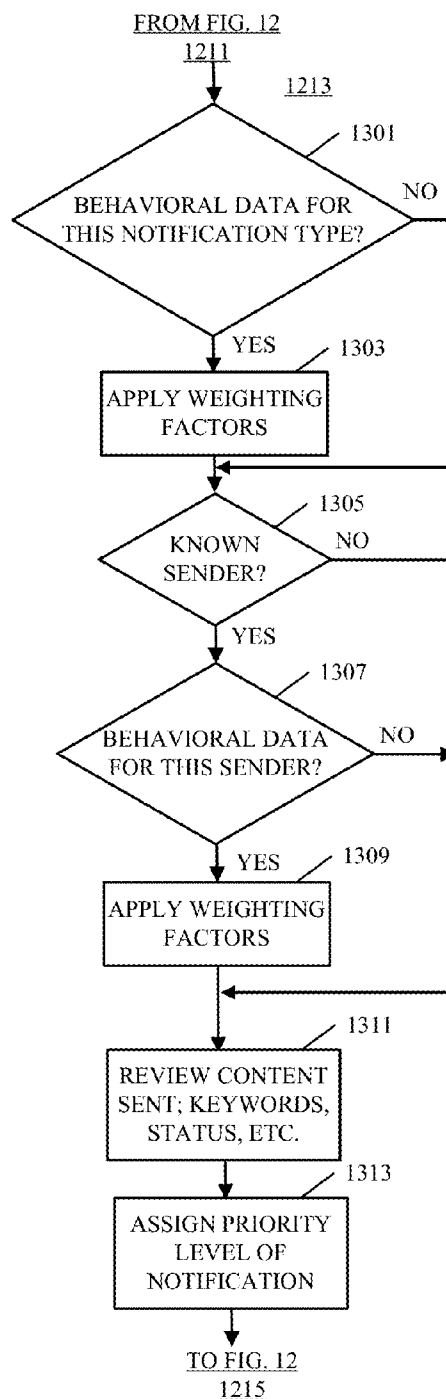


FIG. 13

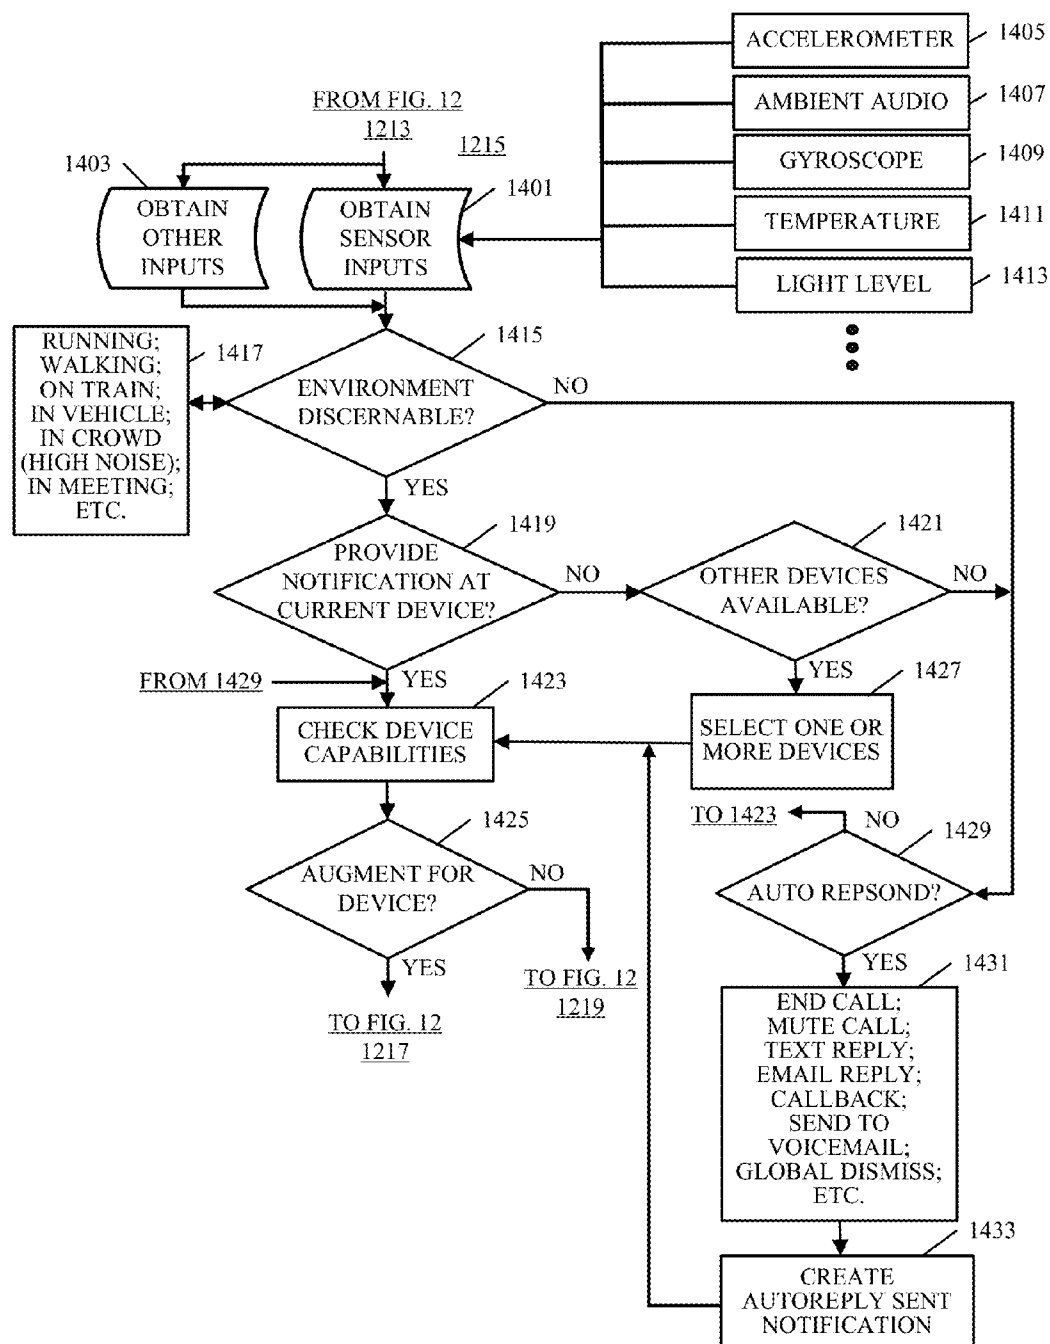


FIG. 14

## NOTIFICATION HANDLING SYSTEM AND METHOD

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of co-pending and commonly assigned U.S. Provisional Application No. 61/781,295, filed on 14 Mar. 2013, from which benefits under 35 USC 120 are hereby claimed and the contents of which are incorporated herein by reference.

### FIELD OF THE DISCLOSURE

[0002] The present disclosure relates generally to wireless communication systems and mobile devices and more particularly to methods and apparatuses for handling notifications.

### BACKGROUND

[0003] Notifications provide information to a communication device user that a message has arrived or that some event has occurred, is occurring or is about to occur. For example, notifications may be displayed on a communication device to indicate calendar events, various alarms, waiting messages, etc. Such notifications may be displayed to the user in various ways. For example, some notifications may be displayed as an icon positioned on some section of the communication device display or by displaying a pop-up message that covers a portion of the display screen and that must be closed by the user by taking some specific action. Notification messages may be generated by various applications resident on a communication device, or may be sent by a network or from the communication device operating system.

[0004] Many users employ multiple communication devices; however a user typically can only use a single device at any one period of time. A notification message received on a particular device may not be particularly useful in that the particular device may not have capability to respond to the notification and a useful way.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a diagram of inputs and output for a notification handling system in accordance with an embodiment.

[0006] FIG. 2 is block diagram of plurality of user devices in communication with each other and with a network server in accordance with the embodiments.

[0007] FIG. 3 is diagram showing communication of notifications between various mobile devices and a server in accordance with the embodiments.

[0008] FIG. 4 is a modified version of the FIG. 3 diagram showing one example use case of communication of notifications between various mobile devices and a server in accordance with the embodiments.

[0009] FIG. 5 is a partial schematic block diagram of a mobile device in accordance with an embodiment.

[0010] FIG. 6 is a diagram of a software stack executing on a processor in accordance an embodiment.

[0011] FIG. 7 is a diagram illustrating an example communication between a wearable device and a mobile device in accordance with an embodiment.

[0012] FIG. 8 is a flow chart showing operation of a notification handling system in accordance with various embodiments.

[0013] FIG. 9 is a flow chart showing operation of a notification handling system in accordance with various embodiments.

[0014] FIG. 10 is a diagram of inputs and output for user behavior analysis in accordance with an embodiment.

[0015] FIG. 11 is a diagram of inputs and output for device environment analysis in accordance with an embodiment.

[0016] FIG. 12 is a flow chart showing operation of a notification handling system in accordance with various embodiments.

[0017] FIG. 13 is a flow chart showing further details of operation related to the flow chart of FIG. 12.

[0018] FIG. 14 is a flow chart showing further details of operation related to the flow chart of FIG. 12.

### DETAILED DESCRIPTION

[0019] The disclosed embodiments provide a notification handling system and various methods of operations. One method of operation of the notification handling system determines a notification type, for a notification received at a first device of a group of associated devices, and determines at least a second device that is capable of responding to the notification. The notification handling system then routes the notification to the second device. The notification handling system may also augment the notification with additional information for the second device based on the capability of the second device.

[0020] The augmented information is obtained by extracting data from the notification and augmenting the notification based on the extracted data. The notification handling system may also send or receive a global notification dismissal that dismisses the notification from all associated devices that may have received the notification.

[0021] The notification handling system parses the received notification and extracts data such as time sent, related content that is related to the notification, identity of a sender or identity of an application that generated the notification. The notification handling system then augments the notification using at least a portion of the extracted data as additional information.

[0022] In some embodiments, the notification handling system obtains sensor data from a set of sensors of the second device, and analyzes the sensor data to determine the environment in which the second device is present. The notification handling system then routes the notification to the second device if the determined environment is suitable for the user to receive the notification. For example, if the notification type is related to audio data, that notification may not be routed to a device if the device is found to be in a high noise level environment. The sensor data could be an accelerometer, a gyroscope, a light level sensor, a temperature sensor, or an audio sensor or some other type of sensor. Other types of environments may include being in motion due to the user running or walking, being in motion in a vehicle, being in motion on a train, or being in a high-noise level environment, etc.

[0023] The notification handling system may also obtain location information from the second device, and may determine whether the second device is in the proximity to the first device prior to routing the notification to the second device. The notification may be routed according to a notification priority and a determined response action based on the related content of the notification.

**[0024]** In another method of operation of a notification handling system, the system may receive a notification at a first device of a group of associated devices, route the notification from the first device to each device of the group of associated devices, receive a notification dismissal from one device of the group of associated devices in response to the one device having received the notification, and route the notification dismissal to the first device and each other device of the group of associated devices.

**[0025]** The notification may be dismissed on the first device, and each device of the group of devices, in response to the notification dismissal received by the first device and by each device of the group of associated devices. In other words, the dismissal from one device is a global notification dismissal that dismisses the like notification from any devices in a group of devices that received the particular notification.

**[0026]** The present disclosure also provides a device the has at least one wireless transceiver, a memory, and a notification handling system, operatively coupled to the at least one transceiver and to the memory. The notification handling system is operative to perform the methods of operations described herein.

**[0027]** A disclosed system includes a communication device and a wearable device such as a wristwatch. The wearable device can receive the notification over a wireless link with the communication device and can send a global notification dismissal to the communication device using the wireless link. The global notification dismissal dismisses the notification from the communication device and any other device of a group of associated devices that received the notification.

**[0028]** One disclosed embodiments includes a device that has at least one programmable processor and memory operatively coupled to the programmable processor. The memory contains executable instructions for execution by the programmable processor, where upon executing the executable instructions the programmable processor is operative to provide a notification handling system in an application framework layer of a software stack. The notification handling system is operatively coupled to a notification manager of the application framework layer, and to various applications in an application layer of the software stack.

**[0029]** The notification handling system operative to intercept received notifications obtained by the plurality of applications by communicating with the various applications through the notification manager. The notification handling system may parse the received notifications to determine notification content, origin and priority, and generate new notifications containing augmented information related to the received notifications. The notification handling system selects one or more associated devices capable of receiving and responding to the new notifications, and routes the new notifications to the one or more associated devices using a network.

**[0030]** The notification handling system may select one or more associated devices capable of receiving and responding to the new notifications by assessing user behavior based on a user history. The user behavior provides information about how a user has responded to notifications of a given type and having a given notification content, origin and priority in the past. The notification handling system selects one or more associated devices capable of enabling the user to respond to the new notifications accordingly to past assessed user behavior.

**[0031]** The notification handling system may also assess a device environment for each of the one or more associated devices based on sensor data obtained from each of the one or more associated devices, and by using device environment along with the user behavior to determine when to send the new notifications.

**[0032]** Turning now to the drawings, FIG. 1 illustrates an example of the inputs and output for a notification handling system 100 in accordance with an embodiment. A notification handling system 100 receives various inputs from each communication device of a group of communication devices including notification data 101, device capabilities 103, device environment analysis 105, user preferences 107 and user behavior analysis 109. Based on one or more of these various inputs, the notification handling system 100 makes decisions and may create an augmented notification useful for a particular communication device or for a group of communication devices that may have limited capabilities for responding to the notification. The notification handling system 100 appropriately sends the augmented message to one or more communication device using a notification routing module 111.

**[0033]** FIG. 2 is diagram of group of user communication devices 200 in communication with each other and with a network server 203 in accordance with the embodiments. A single user may own and employ the group of communication devices 200 which may include, but is not limited to, personal computer 213, personal digital assistant (PDA) 205, a tablet or e-book reader 207, a mobile telephone 209, a laptop computer 211 and a smart watch 219. Each one of these devices is referred to herein as a communication device and has a corresponding network connection 215 to a network 201 which may be, for example, the Internet. A server 203 may be a cloud-based server and resides within the network 201. The server 203 includes a notification routing and push mechanism and is operative to communicate with any of the group of communication devices 200 over the corresponding appropriate network connection 215.

**[0034]** The smart watch 219 may communicate with one or more of the other communication devices, such as the mobile telephone 209 or the laptop computer 211, using a wireless link technology that facilitates the wireless link 217 between the smart watch and the respective communication devices as shown. Any one communication device of the group of communication devices 200 may receive notifications from the network 201 or may generate notifications based on applications or operating systems operating on the respective communication device.

**[0035]** FIG. 3 is diagram showing communication of notifications between various communication devices 301 and 300 and the server 203 in accordance with the embodiments. Communication device 300 can be any communication device of the group of communication devices 200 shown in FIG. 2. In accordance with embodiments, the communication device 300 includes the notification handling system 100 discussed briefly with respect to FIG. 1. The communication device 300 may communicate with a wide area network (WAN) 303 over wireless link 305. For example, if communication device 300 is a mobile telephone, the WAN 303 may be a wireless telephone network. The communication device 300 is operative to communicate with the server 203 residing in the network 201. Communication between the communication device 300 and network 201 may be facilitated by the WAN 303 in some embodiments; however the communica-

tion device **300** may have other wireless transceivers to communicate with other networks other than WAN **303** to achieve connectivity with the network **201**.

[0036] In one example illustrated by FIG. 3, the communication device **300** may receive a notification from the WAN **303** over the wireless link **305**. In accordance with one embodiment, the communication device **300** may route the notification to one or more communication devices of a group of communication devices **301**. In the example shown in FIG. 3, the group of other communication devices **301** includes communication device **301A**, **301B** and **301C** and possibly other communication devices not shown. Each communication device of the group of communication devices **301** is operative to communicate with server **203** using the network **201**. The communication device **300** forms connection **215** to the server **203** by, for example, logging into the server **203**. The user of the communication device **300** will also be the user of the group of communication devices **301**, and each device will be associated with the user's account with server **203**. The user will also have associated the communication device **300** and each one of the group of communication devices **301** with the user's account. In one example, the user may associate each of the communication devices with the user's account login ID.

[0037] The notification handling system **100**, which is present on at least communication device **300**, may automatically establish the connection **215** between the communication device **300** and server **203** without any intervention from the user. Likewise, each one of the communication devices of the group of communication devices **301** may receive information, or send information, over a connection **215** to the server **203**. Returning to the example under discussion, the communication device **300** may receive a notification from the WAN **303** over the wireless link **305**, or alternatively a notification may be generated by an application resident on the communication device **300**. The notification handling system **100** will analyze the notification and take appropriate action. For example, the notification handling system **100** may create an augmented notification that has information additional to the initial notification displayed and communication device **300**. The notification handling system **100** may send the augmented notification to the entire group of communication devices **301** or to a specific communication device. In the example illustrated in FIG. 3, augmented notifications **307A** through **307C** are sent to the respective communication devices by utilizing a routing push mechanism of the server **203**. The server **203** receives the augmented notifications **307A**, **307B** and **307C**, and appropriately pushes them to the corresponding communication device. Therefore, augmented notification **307A** is sent to communication device **301A**, augmented notification **307B** is sent to communication device **301B**, augmented notification **307C** is sent to communication device **301C** and so forth. The smart watch **219** may also receive an augmented notification **307D** over the wireless link **217** between the smart watch **219** and the communication device **300**.

[0038] Therefore, in one example illustrated in FIG. 3, a notification received by communication device **300** is handled by the notification handling system **100** and is augmented for each communication device associated with the user communication device **300**, and is routed to that specific communication device using a routing push mechanism of the server **203** or some other appropriate routing mechanism.

[0039] FIG. 4 modifies the FIG. 3 diagram to show one example use case of routing of notifications and responses between the various communication devices and the server **203** in accordance with the embodiments. In the example of FIG. 4, the communication device **301C** responds to the augmented notification received in the example of FIG. 3. The notification response **309** is sent by communication device **301C** to the server **203** which is then routed to each of the other communication devices including communication device **301A**, communication device **301B** and communication device **300**. The communication device **300** subsequently routes the response **309** to the smart watch **219** over the wireless link **217**.

[0040] In some embodiments, the notification response **309** may be a dismissal of the notification. Furthermore, the notification response **309** may be a global dismissal in that it appropriately dismisses the notification from being displayed on each of the communication devices to which the notification response **309** is sent. That is, the notification response **309** may be considered a control or command signal that controls or commands the receiving communication devices to dismiss the notification from the respective communication device display.

[0041] Further details of the notification handling system **100** are illustrated in FIG. 5 which is a partial schematic block diagram of the communication device **300**. The notification handling system **100** may consist of several components including notification routing module **521**, notification data mining module **523**, behavior analysis module **525**, and environment analysis module **527**. Each of these modules are operatively coupled to one another and are operative to send information including command and control signals from one module to another. The various methods of operation of the notification handling system **100** and its various components are best understood with respect to the flowcharts and various other diagrams provided herein which are described in detail below.

[0042] The partial schematic block diagram of a communication device **300** provides an example of one kind of apparatus in accordance with the embodiments. The FIG. 5 diagram is for the purpose of describing to those of ordinary skill how to make and use the disclosed subject matter by way of an example embodiment. It is to be understood that FIG. 5 is a partial schematic block diagrams in that, although the diagram shows at least those components necessary to describe the features and advantages of the various embodiments to those of ordinary skill, various other components, circuitry, and devices may be necessary in order to implement a complete functional apparatus such as the example communication device **300** and that those various other components, circuitry, devices, etc., are understood to be present in the embodiments by those of ordinary skill.

[0043] Likewise it is to be understood that FIG. 5 illustrates examples of components that may be present in the communication device **300** and that one or more of the various components shown in FIG. 5, other than the notification handling module **100**, may be omitted from the mobile device **300** without detracting from enjoyment of the benefits, features and advantages of the present disclosure. That is, different communication devices may or may not include some of the example components shown in FIG. 5 and therefore none of these example components are to be construed as being required for any particular embodiment.

[0044] The notification handling system **100** or any of its components (i.e. “modules”) shown in FIG. **5** may be implemented independently as software and/or firmware executing on one or more programmable processors, and may also include, or may be implemented independently, using ASICs, DSPs, hardwired circuitry (logic circuitry), or combinations thereof. That is, the notification handling module **100** may be implemented using an ASIC, DSP, executable code executing on a processor, logic circuitry, or combinations thereof.

[0045] The various sensors **519** may require hardwired circuitry and any such, or other, required hardwired circuitry in the communication device **300** may include any of various components such as, but not limited to, oscillators, comparators, clocking circuits, operational amplifiers, other active components such as transistors, and passive components, etc., all of which are understood to be present in the embodiments by those of ordinary skill as necessary for implementing the mobile device **300**.

[0046] An internal connection bus **505** provides operative coupling between the various communication device **300** components. That is, between any two or more operatively coupled components, there may be one or more intermediate or intervening components between, or along the connection path. Such components are understood herein to be operatively coupled.

[0047] Operative coupling may also exist between modules or components implemented as software or firmware executing on a processor and such “software coupling” may be implemented using libraries or application programming interfaces (APIs) or other software interfacing techniques as appropriate.

[0048] The display **513**, if present, may provide a touchscreen user interface and, in some embodiments, may also provide a graphical user interface (GUI). The network transceiver **507**, if present, may provide wireless communication capabilities for one or more wide area network communications systems such as, but not limited to, Wi-Fi cellular, 2G, 3G or 4G wireless communications systems. The peer-to-peer transceiver **509**, if present, may provide wireless connectivity capabilities such as, but not limited to, Bluetooth™, Wireless USB, ZigBee, or other technologies, etc. such as near field communication (NFC). The user interfaces (UI) **515** may include a track ball mouse, touch sensitive elements, physical switches, gyroscopic position sensors, etc. The display **513**, if present, may include touchscreen functionality as noted above, and may be operative to receive command and control signals from the UI **515** directly, or via the processor **501**, for functions such as, but not limited to, mouse cursor control click to provide selection input and or drag and drop features or other functionality in some embodiments.

[0049] The memory **503** is a non-volatile, non-transitory memory, and stores the executable code **539** corresponding to the notification handling module **100** including any components such as notification routing module **521**, notification data mining module **523**, behavior analysis module **525** or environment analysis module **527**. The processor **501** is operative to execute the executable code **539**, which may be stored in memory **503**, to perform the methods of operation disclosed herein. The memory **503** may also store a user history **535** which is accessed and used by the behavior analysis module **525**. User settings **537** may also be stored in memory **503** and may be accessed by the notification han-

dling system **100** or any of its component modules to determine how to handle and route notifications in accordance with user preferences.

[0050] The various embodiments also include non-volatile, non-transitory computer readable memory, other than memory **503**, that may contain executable instructions or executable code, for execution by at least one processor, that when executed, cause the at least one processor to operate in accordance with the functionality and methods of operation herein described. The computer readable memory may be any suitable non-volatile, non-transitory, memory such as, but not limited to, programmable chips such as EEPROMs, flash ROM (thumb drives), compact discs (CDs) digital video disks (DVDs), etc., that may be used to load executable instructions or program code to other processing devices such as communication devices or other devices such as those that may benefit from the features of the herein described embodiments.

[0051] FIG. **6** is a diagram showing further details of the software stack **502** executing on processor **501** in accordance with an embodiment. The notification handling system **100** may reside within an application framework layer **605** and is operatively coupled to a notification manager **607**. The operative coupling may be achieved by software coupling that allows information flow and command and control signals between the notification handling system **100** and the notification manager **607** which further interacts with applications **529** executed within an application layer **609**. The software coupling between the notification handling system **100** and the notification manager **607** may, in some embodiments, utilize libraries or APIs contained within the libraries **603** layer of software stack **502**. The software stack **502** also includes kernel **601** which provides interfaces between the operating system functionality and lower-level systems such as device drivers and other hardware access etc. as understood by those of ordinary skill.

[0052] That is, the kernel **601** provides fundamental interaction at the hardware level of communication device **300**. For example, the kernel **601** may provide required operating system tasks such as program loading, system resource allocation, handling device input and output, and some memory management functions. The kernel **601** may be created as an object-oriented design that can interface, and enable communication with, programming objects within the software stack **502** and an operating system overall used by communication device **300**.

[0053] The applications **529** residing within the application layer **609** may include a home screen **611**, contact lists **613**, a mobile phone application **615**, a browser **617** and various other applications not shown. The notification handling system **100** is operatively coupled to at least the mobile phone application **615**, and possibly also the browser **617**, by operative coupling **619** through the notification manager **607**. The operative coupling is software coupling utilizing any necessary library or API from the libraries **603** layer.

[0054] That is, notifications meant for the mobile phone application **615** or the browser **617**, or any other operatively coupled application of applications **529**, may be intercepted by the notification handling system **100** and parsed, analyzed, and augmented in order to achieve the features and functions of the embodiments herein described. Likewise the notification handling system **100** may send command or control signals to perform various functions related to the notifications of the applications such as, but not limited to, dismissing

the notifications from display on the particular communication device, or responding to the notifications in any of various ways.

[0055] FIG. 7 is a diagram illustrating an example of communication between a wearable device, i.e. smart watch 701, and a mobile device, i.e. communication device 700, in accordance with an embodiment. In FIG. 7, the communication device 700 is a mobile telephone which receives a notification. In one example, the notification may be related to an incoming call. The communication device 700 may forward this notification to a paired device, such as the smart watch 701, over the wireless link 703. The smart watch 701 includes a display 711 and user interfaces such as a scrollbar 713 on a graphical user interface and various buttons 715. Smart watch 701 may display a notification 717 on the display 711 such as the message “Call received: John Smith”. The notification 717 may be an augmented notification in that the communication device 700, upon receiving the incoming call, would only display the “call received” indicator icon 705 but would not display any information regarding the identity of the caller. Likewise, the communication device 700 may display the “e-mail received” indicator icon 707 which also provides little information other than the information that a message has been received. Therefore, a notification handling system in accordance with the embodiments residing in communication device 700 may augment the notification 705 and send the augmented notification to the smart phone 701 over the wireless link 703. Therefore the notification 717 displayed on the smart watch 701 display 711, is an example of an augmented notification.

[0056] Another notification 709 (or an input query) may be displayed by communication device 700 that enables the user to perform a global dismissal of the notification and clear all devices of the notification. The notification 709 may also be forwarded to the smart watch 701 and displayed as notification 719. By pressing one of the buttons 715 for example, the user may clear the prior notification 717. In the example of FIG. 7, if the user pressed the appropriate one of the buttons 715, the smart watch 701 would send a global dismissal command signal to the communication device 700 over the wireless link 703. The communication device 700 would then route the global dismissal through the appropriate server to any other communication devices associated with that user so that the notification would be appropriately dismissed from each communication device.

[0057] Alternatively the user may use the respond to notification 709 using the communication device 700 and clear the notifications from the communication device 700 which would likewise send a global dismissal signal to all other associated communication devices including the smart watch 701.

[0058] In another example the user may take some action other than dismissal such as responding to a notification on an appropriate device. For example, if the notification is related to a received text message, the user may wish to respond by sending a like text message in reply to the text message sender. However the smart watch 701 may be incapable of sending a responding text message due to its lack of a keypad. In this case, the notification handling system would determine which device or devices to route the notification to, based on the known capability of each device. That is, the smart watch 701 would not receive the notification in some instances when the smart watch 701 was not the appropriate device to respond to the notification.

[0059] In accordance with the embodiments, other criteria may also be used for deciding when to send given notifications to particular devices based on the environment of the particular device and other factors as will be described in further detail below.

[0060] FIG. 8 is a flow chart showing a method of operation of a notification handling system in accordance with various embodiments. The method of operation begins in block 801 as shown and a notification is received by a first device of a group of devices as shown in block 803. In block 805, a notification handling system, resident on the first device, mines data from the notification. In block 807, the notification handling system creates an augmented notification message based on the mined data and sends the augmented notification message to at least one other device of the group as shown in block 809. The method of operation ends in block 811.

[0061] FIG. 9 is a flow chart showing a method of operation of a notification handling system in accordance with various embodiments. The method of operation begins in block 901 and the notification handling system determines the notification type for the received notification in block 903. The notification handling system determines the device capabilities for every other device in the group of devices as shown in block 905. The device capabilities may be determined when each device is initially associated with the user’s login ID. The capability information may be stored in the server 203 and pushed to each of the communication devices in the group. In this way, the notification handling system on a communication device is aware of the capabilities of each other communication device owned or used by the user. In block 907, the notification handling system determines the appropriate notification augmentation for each device based on the device’s capabilities. In block 909 the notification handling system determines which device or devices to route the notification to based on the environment sensed and analyzed for the particular device. The method of operation ends in block 911 as shown.

[0062] FIG. 10 is a diagram of inputs and output for the user behavior analysis in accordance with an embodiment. The user behavior analysis module 109 obtains information from contact lists 1001, at least one calendar application 1005, various social media contacts 1003, user preferences 1007, and a user history 1009. The user history 1009 informs the user behavior analysis module 109 of past interactions with various notification types, contacts in contact lists 1001 or social media contacts 1003, certain events, etc., such that the user behavior analysis module 109 can create and follow a user specific protocol for handling specific notifications. The user behavior analysis module 109 then provides the user behavior analysis information to the notification routing module 111 for appropriate routing. For example, a given type of notification may be historically responded to by sending a text message. The notification routing 111 may then accordingly, provided other criteria are satisfied, route the notification to a communication device that has a keypad so that a text message reply can be sent by the user.

[0063] FIG. 11 is a diagram of inputs and output for device environment analysis in accordance with an embodiment. The device environment analysis module 105 receives inputs from device sensors 1101, the time and date 1105 of the particular notification, the location 1103 of the particular communication device, any user preferences 1107, and other information such as what may be contained in calendar 1005. For example, the user may have an appointment in the calen-

dar **1005** that indicates that the user will be in a certain environment such as traveling in a car, on a train or in an airplane such that sending a notification to a particular device with the user at that particular place and event would not be useful. The device environment analysis module **105** then sends its analysis as information to the notification routing module **111** for taking appropriate action.

[0064] FIG. 12 is a flow chart showing further details of operation of a notification handling system in accordance with various embodiments. The method of operation begins in block **1201** as shown and the notification event is received in block **1203**. The notification handling system obtains the incoming notification in block **1205** and determines the notification type in block **1207**. This may include parsing the notification as shown in block **1209**, and extracting details from the notification as shown in block **1211**. The details extracted may include the identity of the person or application that sent or generated the notification, the time the notification was sent, and may summarize any particular content contained within the notification or that the notification is related to. For example, if the notification is related to an incoming text message or e-mail message, the notification handling system may perform some analysis of the content in order to provide a summary in the augmented notification. In block **1213** the notification handling system determines the priority of the notification and further details of this operation is illustrated in FIG. 13.

[0065] Turning to FIG. 13, in decision block **1301** the notification handling system determines if any behavioral data exists for the particular notification type received. If yes, then the notification handling system may apply weighting factors based on the behavioral data as shown in block **1303**. If no behavioral data is found to exist in decision block **1301**, then the method of operation proceeds to decision block **1305** and determines whether the sender of the notification is known entity or not. The entity may be a person when the notification is related to a telephone call, text message, an e-mail message etc., or may be a specific application such as a calendar application informing the user of an upcoming appointment. If the sender is not identifiable in decision block **1305**, then the method of operation proceeds to block **1311**. However if the sender of the notification is identified in decision block **1301**, then the notification handling system checks to see if any behavioral data exists related to the particular sender as shown in decision block **1307**. If not, the method of operation again proceeds to block **1311**. If behavioral data does exist then weighting factors are applied as shown in block **1309**.

[0066] Proceeding with the operation related to block **1311**, the notification handling system reviews any content including searching for keywords, message status, or other information. Then, as shown in block **1313**, the notification handling system assigns a priority level for the notification. The assigned priority level may be different than the priority level the notification inherently had assigned and which may have been assigned by an application or by a person sending a message related to the notification. Put another way, a notification may be re-prioritized by the notification handling system.

[0067] The method of operation then returns to block **1215** and the process flow shown in FIG. 12 continues. In block **1215**, the notification handling systems determines the appropriate response action. Further details of operation related to the operations of block **1215** are shown in FIG. 14. Thus the method of operation proceeds to input blocks **1401** and **1403**.

At input block **1401**, the notification handling system obtains sensor inputs from a set of sensors operative in one or more of the communication devices that are candidates for receiving and augmented notification. The sensors may include, but are not limited to, accelerometer **1405**, an ambient audio sensor **1407**, a gyroscopic sensor **1409**, a temperature sensor **1411**, or light level sensor **1413**, etc. The notification handling system may also obtain other inputs as shown in input block **1403** such as some of the inputs that were discussed with respect to the various component modules in FIG. 1, FIG. 10 or FIG. 11.

[0068] Based on the sensor data or other data received, the notification handling system determines if the environment is discernible as shown in decision block **1415**. For example, the notification handling system may determine one of the environments **1417** such as that the user is running, walking, on a train, in a vehicle, in a crowd or other high noise environment, in a meeting, etc. For example, ambient audio information may be an indicator that the user is in a high noise environment while calendar information obtained as other inputs at input block **1403** may indicate that the user is at an outdoor concert. In that case, sending a certain type of notification to the user's mobile telephone at the concert would not be useful. Thus, if the environment is discernible in decision block **1415**, then the notification handling system will decide whether to provide the notification at the current device only as shown in decision block **1419**, that is, to display the notification and not route the notification any further. If yes and the notification should remain at the local device, then the notification handling system may check for device capabilities as shown in block **1423** and may further decide whether to augment the notification for the particular device as shown in decision block **1425**.

[0069] If the notification handling system decides that the notification should be routed to another device in decision block **1419**, then the notification handling system may check with the appropriate server to determine what other devices are available as shown in decision block **1421**. If other devices are not available in decision block **1421**, then the notification handling system may make a decision as to whether to automatically respond as shown in decision block **1429**. If auto respond is not desirable in decision block **1409**, then the method of operation may return to operation block **1423** and check for device capabilities of the current device. However, if auto respond is desirable in decision block **1429**, then the notification handling system may take appropriate action as shown in operations block **1431**.

[0070] The appropriate action for auto responding may be ending a call, muting a call, sending an automatic text reply, sending an automatic e-mail reply, automatically calling back, sending the call to voicemail, performing a global dismissal of the notification or some other action etc. The notification handling system then creates a new notification in operation block **1433** to inform the user that the auto reply was sent in response to the received notification.

[0071] The notification handling system may then check for device capabilities in block **1423** and may augment the notification in decision block **1425** based on the device capabilities. Returning to decision block **1421**, if other devices are available, the notification handling system may select one or more of the available devices as shown in operation block **1427**. For each device, the notification handling system will check the device capabilities as shown in operation block **1423** and will, for each device, determine whether the notification should be augmented as shown in decision block **1425**.

Depending upon whether the notification should be augmented or not, the method of operation will return to the process flow FIG. 12 in either of operation block 1217, which augments the notification, or operation block 1219, which immediately precedes to route the notification to the selected device or devices. The method of operation then ends in block 1221 as shown.

[0072] Therefore, in light of the above description, various use case scenarios may be envisioned by those of ordinary skill. In one example use case scenario, a communication device may receive an incoming notification that an e-mail message has been received. However, based on the user history, the notification handling system may determine that the user rarely if ever responds to e-mail messages from a particular sender and either files the e-mail message or immediately deletes it. The notification handling system may automatically respond by taking the appropriate action, such as deleting the e-mail, and performing a global dismissal of the notification from the receiving device and any other device to which the notification was routed.

[0073] In another use case scenario, a user may receive the e-mail message, and the user history may show that the user has a history of responding immediately by sending a responsive e-mail. The notification handling system may determine that the notification should be sent to the user's personal computer which has a keyboard and at which environment analysis shows the user is most likely present and using at the time of the incoming notification. The user may then receive the notification at the personal computer, and type a responsive e-mail and subsequently clear the notification message from all communication devices.

[0074] The user may receive a notification of an incoming telephone call at a mobile telephone communication device and the notification handling system may determine that the user is in an important meeting based on calendar data and location information obtained from the user's mobile telephone. Assuming that the behavior analysis indicates the call is not particularly urgent based on its content, the sender, and other information collected as was described above, the notification may not be routed to the user's mobile telephone. Instead, the notification may be routed to the user's smart watch. At that point the user may be able to see the caller's name and press a button, or utilize some other user interface of the smart watch, to perform a global dismissal of the call.

[0075] As will be understood by those of ordinary skill in view of the detailed description of various embodiments provided herein, many other various use case scenarios may be realized using the features of the embodiments described above. Therefore the features and functions described above for the notification handling system provide many advantages over prior systems such that the wide variety of use case scenarios may be realized and a more intelligent system for providing notifications to a user can likewise be achieved.

[0076] While various embodiments have been illustrated and described, it is to be understood that the invention is not so limited. Numerous modifications, changes, variations, substitutions and equivalents will occur to those skilled in the art without departing from the scope of the present invention as defined by the appended claims.

What is claimed is:

1. A method comprising:

determining a notification type for a notification received at a first device of a group of associated devices;

determining at least a second device, selected from the group of associated devices, having a capability related to the notification type, wherein the at least the second device is capable of pairing to the first device via a wireless link; and

routing the notification to at least the second device of the group of associated devices.

2. The method of claim 1, further comprising: augmenting the notification with additional information for the second device based on the capability of the second device.

3. The method of claim 2, further comprising: extracting data from the notification and augmenting the notification based on the extracted data.

4. The method of claim 3, further comprising: parsing the notification and extracting the data comprising time sent, related content that is related to the notification, identity of a sender or identity of an application that generated the notification; and

augmenting the notification using at least a portion of the extracted data as the additional information.

5. The method of claim 1, further comprising: obtaining sensor data from a plurality of sensors of the second device;

analyzing the sensor data to determine an environment of the second device; and

routing the notification to the second device if the determined environment is suitable for the user to receive the notification.

6. The method of claim 5, wherein obtaining sensor data from a plurality of sensors of the second device comprises: obtaining the sensor data from an accelerometer, a gyroscope, a light level sensor, a temperature sensor, or an audio sensor.

7. The method of claim 5, wherein analyzing the sensor data to determine the environment of the second device comprises:

determining that the second device is in at least one environment including: being in motion due to the user running or walking, being in motion in a vehicle, being in motion on a train, or being in a high-noise level environment.

8. The method of claim 5, further comprising: obtaining location information from the second device.

9. The method of claim 8, further comprising: determining that the second device is in the proximity to the first device prior to routing the notification to the second device.

10. The method of claim 4, further comprising: routing the notification according to a notification priority and a determined response action based on the related content of the notification.

11. A method comprising: receiving a notification at a first device of a group of associated devices;

routing the notification from the first device to each device of the group of associated devices, wherein each other device of the group of associated devices is capable of pairing to the first device via a wireless link;

receiving a notification dismissal from one device of the group of associated devices in response to the one device having received the notification; and

routing the notification dismissal to the first device and each other device of the group of associated devices.

- 12.** The method of claim **11**, further comprising:  
 dismissing the notification on the first device and each device of the group of devices in response to the notification dismissal received by the first device and by each device of the group of associated devices.
- 13.** A communication device, comprising:  
 at least one wireless transceiver;  
 a memory; and  
 a notification handling system, operatively coupled to the at least one transceiver and to the memory, the notification handling system operative to:  
 determine a notification type for a notification received by the communication device;  
 determine a second device, selected from a group of associated devices that are associated with the communication device, having a capability related to the notification type, wherein the second device is capable of pairing to the communication device via a wireless link; and  
 route the notification to the second device of the group of associated devices.
- 14.** The device of claim **13**, the notification handling system further comprising:  
 a notification routing module, operative to route the notification to the second device; and  
 a notification data mining module, operatively coupled to the notification routing module, the notification data mining module operative to  
 parse the notification and extract data comprising time sent, content sent, identity of a sender or identity of an application that generated the notification; and  
 augment the notification using at least a portion of the extracted data to add additional information to the notification prior to routing the notification to the second device.
- 15.** The device of claim **14**, the notification handling system further comprising:  
 a behavior analysis module, operatively coupled to the notification routing module, the behavior analysis module operative to access a user history and to determine, based on the user history, how the user has handled notifications having a same notification type as the notification received by the communication device.
- 16.** The device of claim **14**, further comprising:  
 a plurality of sensors, operatively coupled to the notification handling system; and  
 the notification handling system further comprising: an environment analysis module, operatively coupled to the notification routing module, the environment analysis module operative to obtain data from the plurality of sensors and to determine when the device is in motion or in a high noise level environment.
- 17.** A system comprising the device of claim **13**, and a wearable device, the wearable device comprising a transceiver for pairing and communicating with the device using the wireless link, the wearable device operative to:  
 receive a notification from the device; and  
 send a global notification dismissal to the device using the wireless link, the global notification dismissal operative to dismiss the notification from the device and any other device of the group of associated devices that received the notification.
- 18.** A device, comprising:  
 at least one programmable processor; and  
 memory operatively coupled to the programmable processor, the memory containing executable instructions for execution by the programmable processor, where upon executing the executable instructions the programmable processor is operative to:  
 provide a notification handling system in an application framework layer of a software stack, the notification handling system operatively coupled to a notification manager of the application framework layer, and to a plurality of applications in an application layer of the software stack, the notification handling system operative to:  
 intercept received notifications obtained by the plurality of applications by communicating with the plurality of applications through the notification manager;  
 parse the received notifications to determine notification content, origin and priority, and generate new notifications containing augmented information related to the received notifications;  
 select one or more associated devices capable of receiving and responding to the new notifications, wherein the one or more associated devices are capable of pairing to the device via a wireless link; and  
 route the new notifications to the one or more associated devices using a network.
- 19.** The device of claim **18**, wherein the notification handling system is further operative to:  
 select one or more associated devices capable of receiving and responding to the new notifications by assessing user behavior based on a user history, the user behavior providing information about how a user has responded to notifications of a given type and having a given notification content, origin and priority, and;  
 select one or more associated devices capable of enabling the user to respond to the new notifications accordingly to past assessed user behavior.
- 20.** The device of claim **19**, wherein the notification handling system is further operative to:  
 assess a device environment for each of the one or more associated devices based on sensor data obtained from each of the one or more associated devices and using device environment along with the user behavior to determine when to send the new notifications.
- \* \* \* \* \*