US009952012B2

(12) **United States Patent**
Fellows et al.

(10) **Patent No.: US 9,952,012 B2**
(45) **Date of Patent: *Apr. 24, 2018**

(54) **TRIGGER GROUP FOR SEMI-AUTOMATIC FIREARMS**

(71) Applicant: **Franklin Armory Holdings, Inc.**, Minden, NV (US)

(72) Inventors: **Ryan Paul Fellows**, San Jose, CA (US); **Jay Leonard Jacobson**, Minden, NV (US)

(73) Assignee: **FRANKLIN ARMORY HOLDINGS, INC.**, Minden, NV (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 390 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/724,548**

(22) Filed: **May 28, 2015**

(65) **Prior Publication Data**

US 2016/0018176 A1 Jan. 21, 2016

Related U.S. Application Data

(60) Provisional application No. 62/026,621, filed on Jul. 19, 2014.

(51) **Int. Cl.**
F41A 19/14 (2006.01)
F41A 19/10 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC ***F41A 19/14*** (2013.01); ***F41A 19/02*** (2013.01); ***F41A 19/10*** (2013.01); ***F41A 19/12*** (2013.01); *F41A 19/24* (2013.01)

(58) **Field of Classification Search**
CPC F41A 19/24; F41A 19/06; F41A 19/10; F41A 19/12; F41A 19/45; F41A 19/44;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,136,511 A * 11/1938 Jones F41A 19/24 42/69.01
4,004,496 A † 1/1977 Snodgrass
(Continued)

FOREIGN PATENT DOCUMENTS

TW 409847 † 10/2000

OTHER PUBLICATIONS

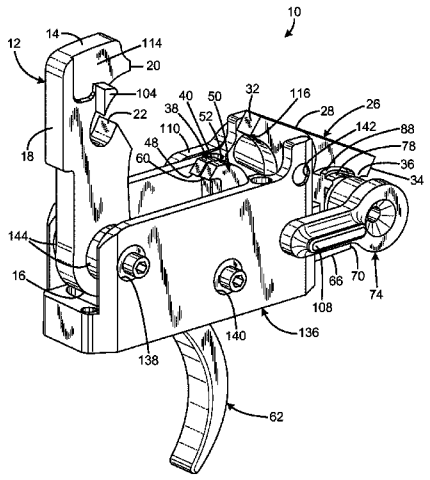
The AK Files Forums; Authors Anonymous; thread No. 15755, posts 1 through 80 submitted, posts 18, 19, and 21 in particular are relied upon; published online Sep. 29, 2006 and Sep. 30, 2006; http://www.akfiles.com/forums/showthread.php?t=15755.†
(Continued)

Primary Examiner — John Cooper
(74) *Attorney, Agent, or Firm* — Bennet K. Langlotz; Langlotz Patent & Trademark Works, Inc.

(57) **ABSTRACT**

Trigger groups for semi-automatic firearms have a hammer, a trigger element, a sear, a selector, and a disconnector assembly, the disconnector assembly operable when the selector is in a first position to retain the hammer in the cocked position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element, and the disconnector assembly operable when the selector is in a second position to release the hammer to the striking position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element, such that the firearm discharges once per cycle of the trigger element when the selector is in the first position, and fires once for each forward or rearward motion of the trigger element when the selector is in the second position.

32 Claims, 24 Drawing Sheets



(51) **Int. Cl.**

F41A 19/12	(2006.01)
F41A 19/02	(2006.01)
F41A 19/24	(2006.01)

(58) **Field of Classification Search**

CPC F41A 19/46; F41A 17/74; F41A 19/14; F41A 19/02

USPC 89/139, 129.01, 129.02, 132, 136, 140; 42/69.03

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,251,533	A †	10/1993	Layton	
5,623,114	A †	4/1997	Soper	
5,881,485	A †	3/1999	Milazzo	
6,125,735	A *	10/2000	Guhring	F41A 19/02 42/69.03
6,966,138	B1 *	11/2005	Deckard	F41A 19/24 42/69.01
7,293,385	B2 †	11/2007	McCormick	
8,667,881	B1 *	3/2014	Hawbaker	F41A 19/46 42/69.01
8,820,211	B1 *	9/2014	Hawbaker	F41A 19/46 42/69.01
9,146,066	B1 *	9/2015	Cason	F41A 19/09
2008/0302235	A1 †	12/2008	Lauck	
2016/0018176	A1 *	1/2016	Fellows	F41A 19/02 42/69.03
2017/0122686	A1 *	5/2017	Fellows	F41A 19/24

OTHER PUBLICATIONS

Major Rob Robinette; M16 4-Way Selector Install; pp. 1-22; published at least as early as Apr. 7, 2012 according to the WayBackMachine website; published online at https://robrobinette.com/M16_4-Way_Selector.htm.†

* cited by examiner
† cited by third party

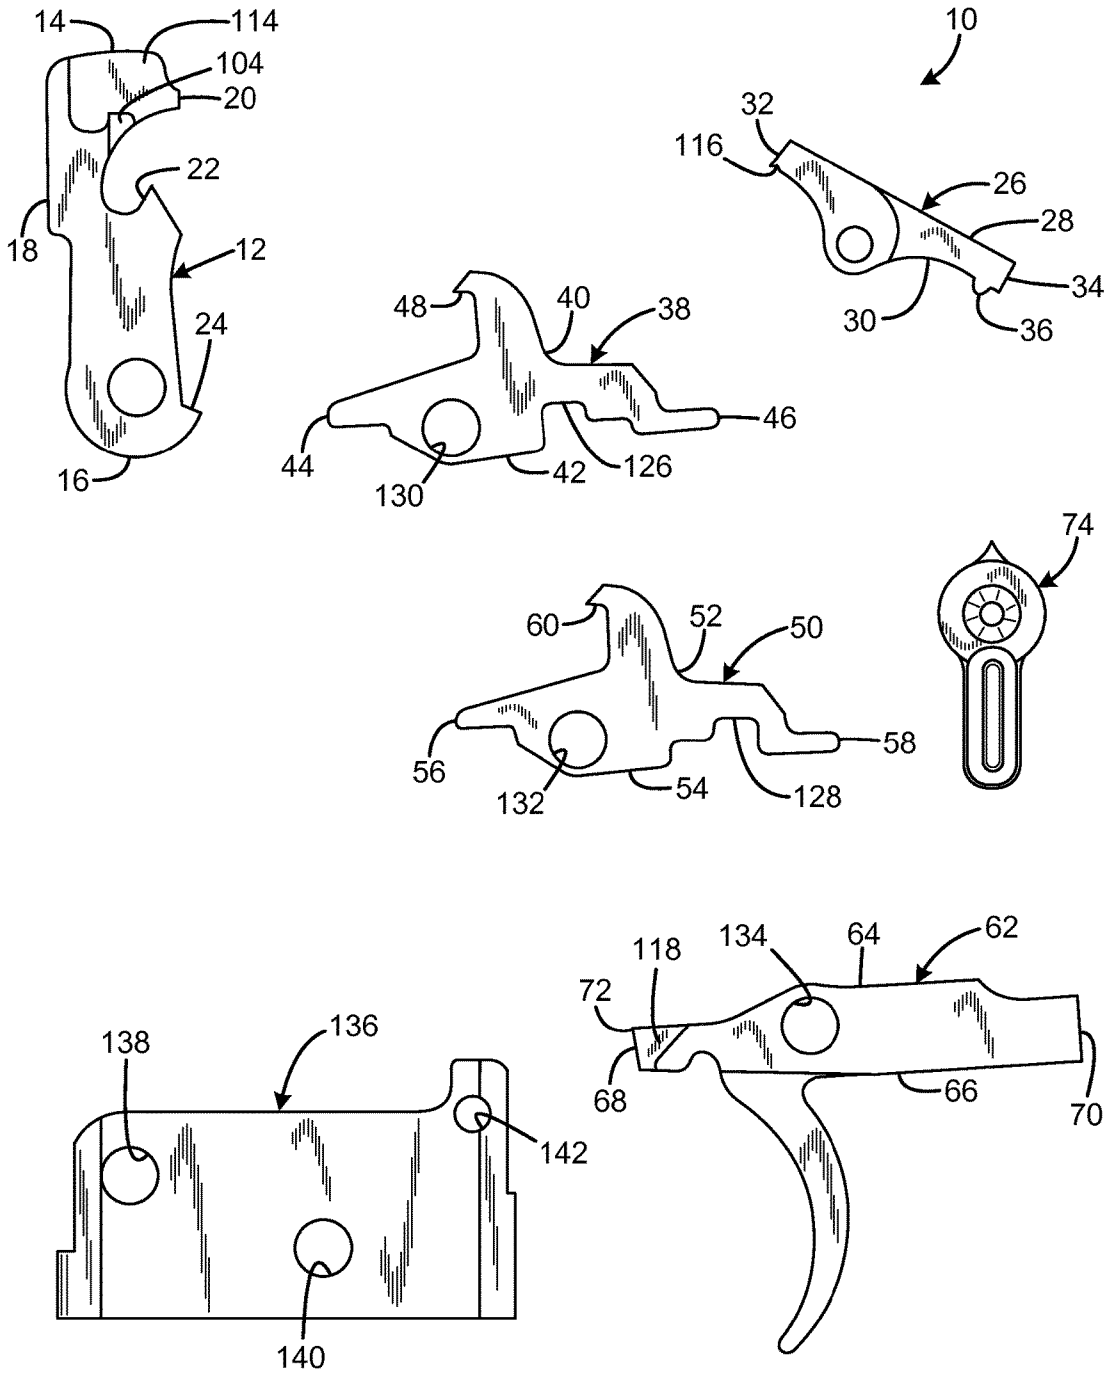

14
114
104
20
22
18
12
24
16
10
32
116
26
28
34
30
36
48
40
38
46
44
130
42
126
74
60
52
50
58
56
132
54
128
118
134
64
62
72
68
66
70
138
136
142
140

FIG. 1

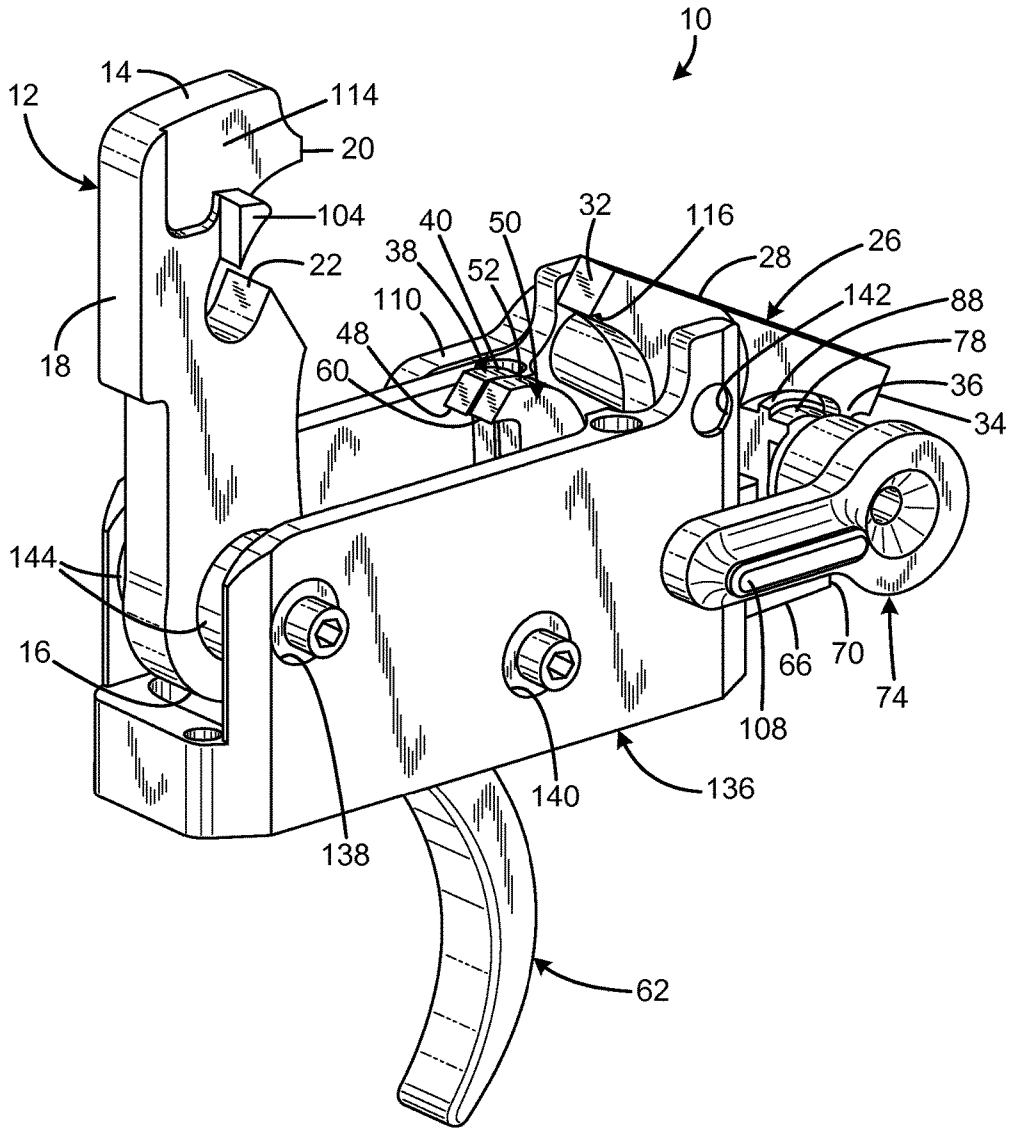

10
12
14
114
20
104
22
18
40
50
32
116
38
52
110
48
60
28
26
142
88
78
36
34
144
16
66
70
74
108
136
140
138
62

FIG. 2

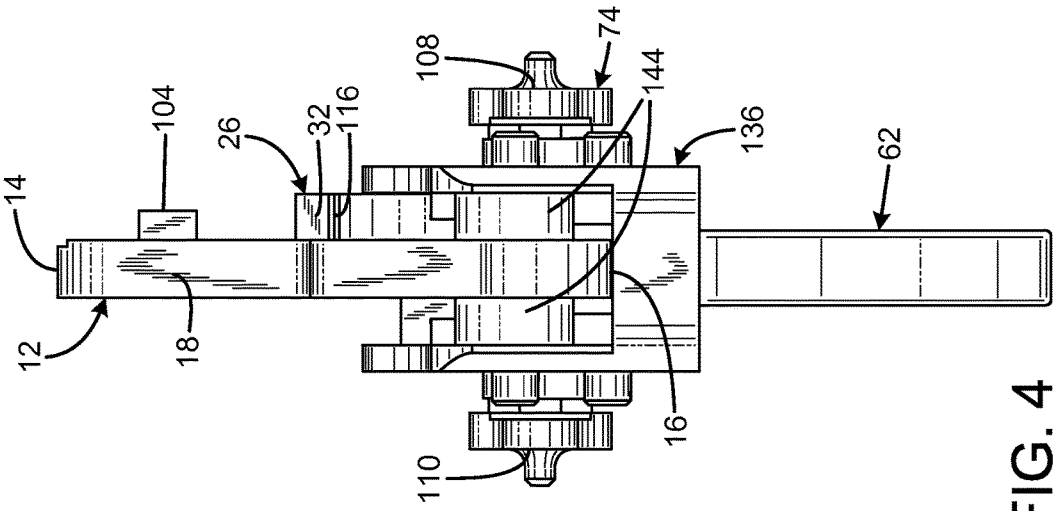

14
104
26
32
116
108
74
144
136
62
12
18
16
110

FIG. 4

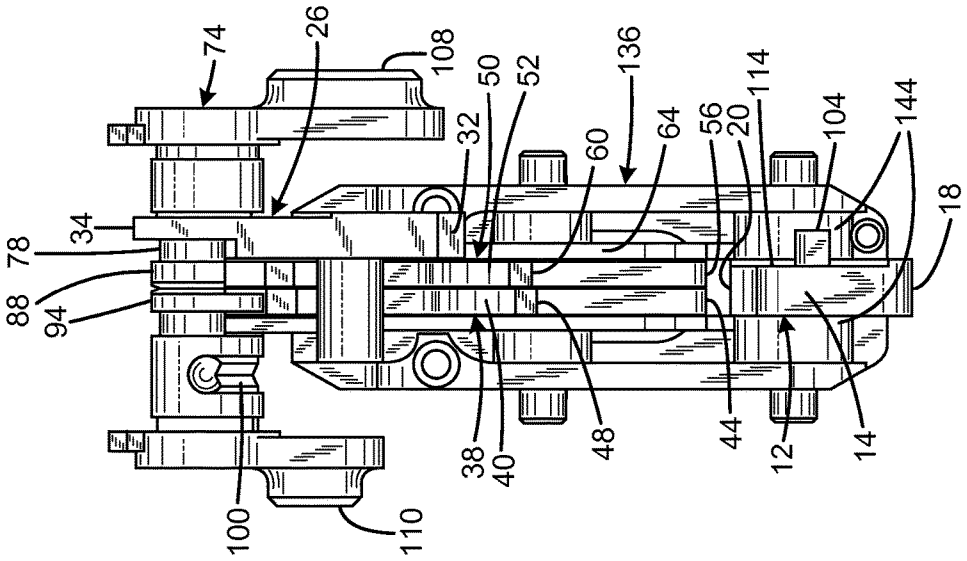

74
26
108
50
52
136
32
60
64
56
20
114
104
144
18
78
34
88
94
38
40
48
44
12
14
100
110

FIG. 3

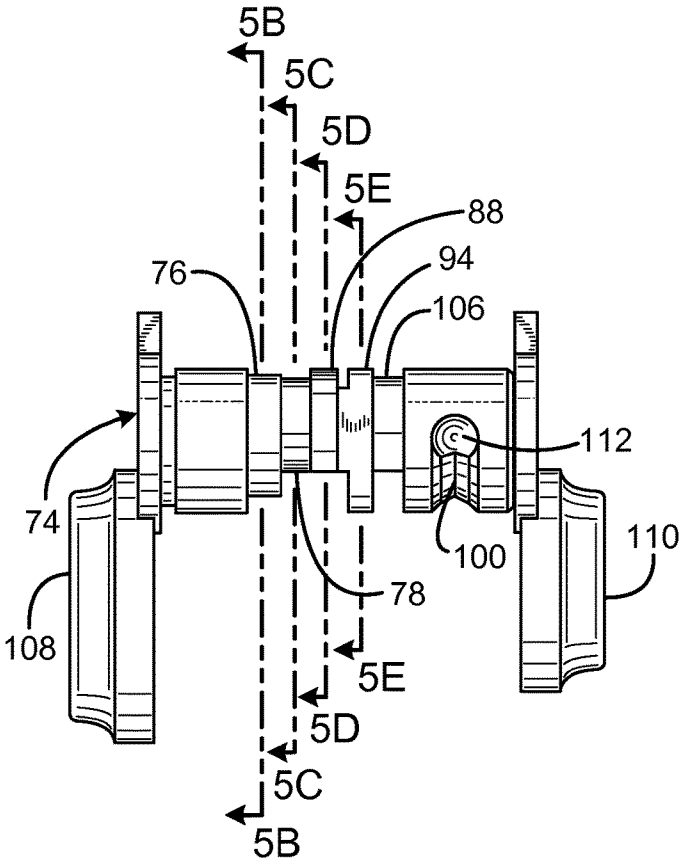


FIG. 5A




FIG. 5B




FIG. 5C




FIG. 5D




FIG. 5E

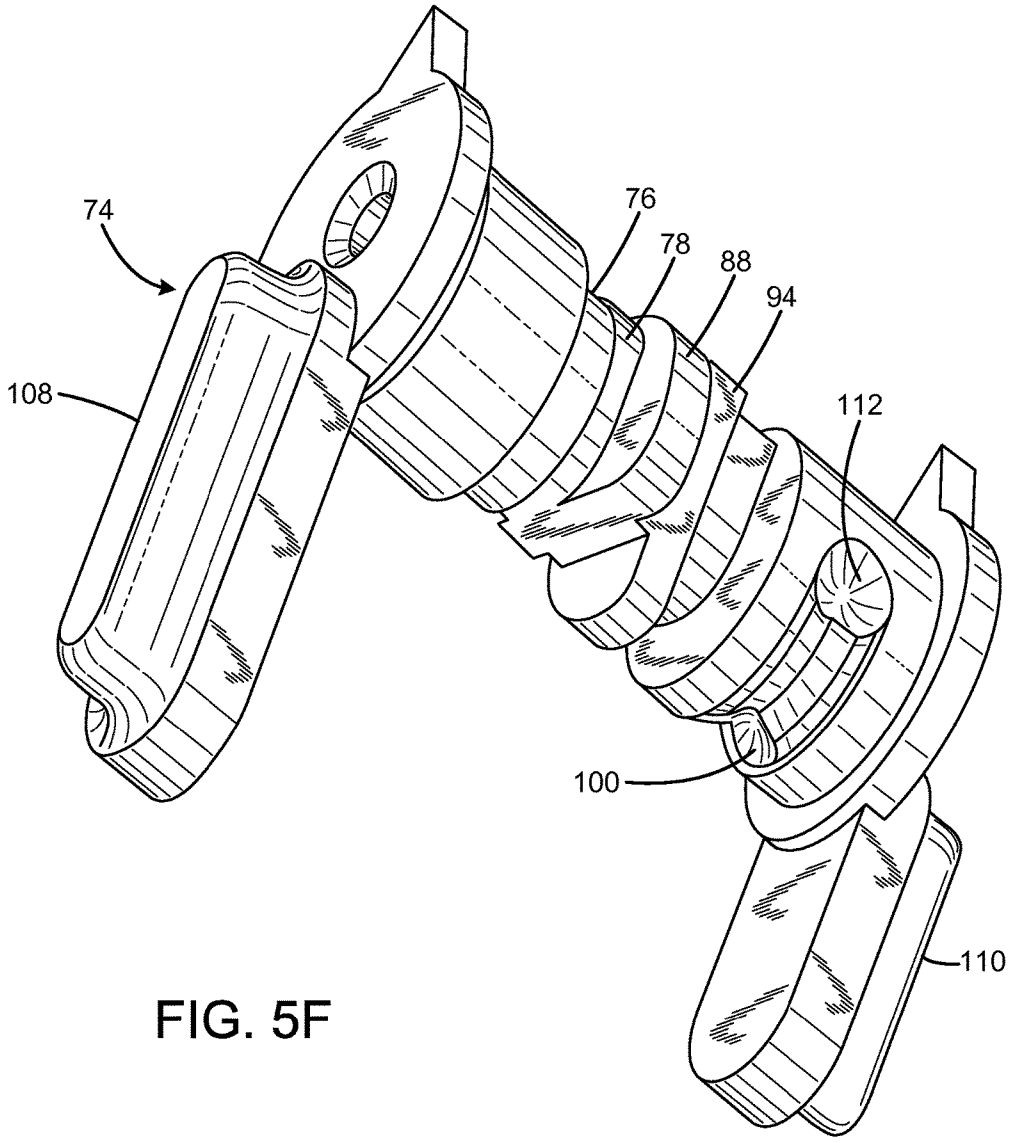


FIG. 5F

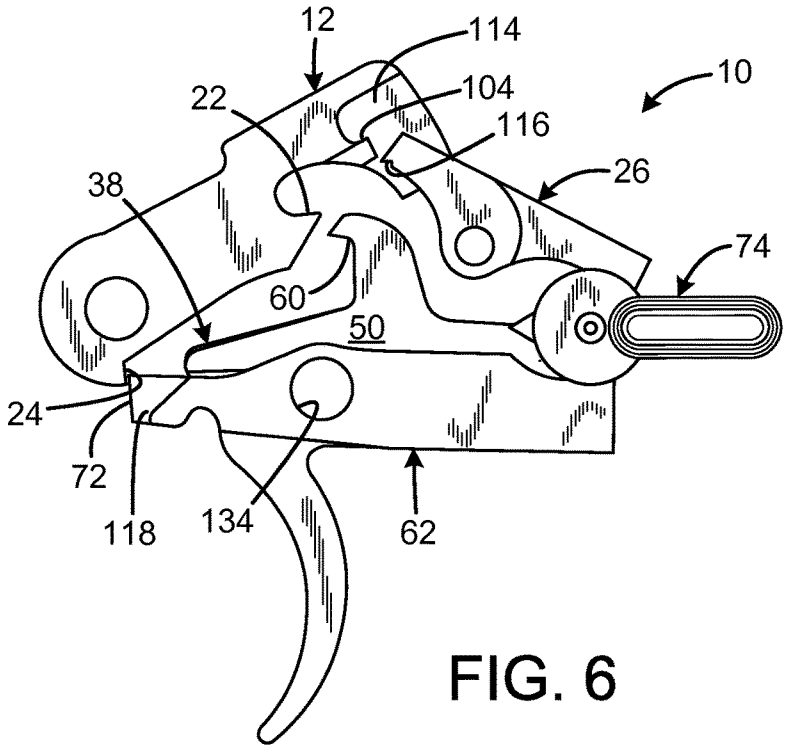

12
114
10
22
104
116
26
38
74
60
50
24
72
118
134
62

FIG. 6

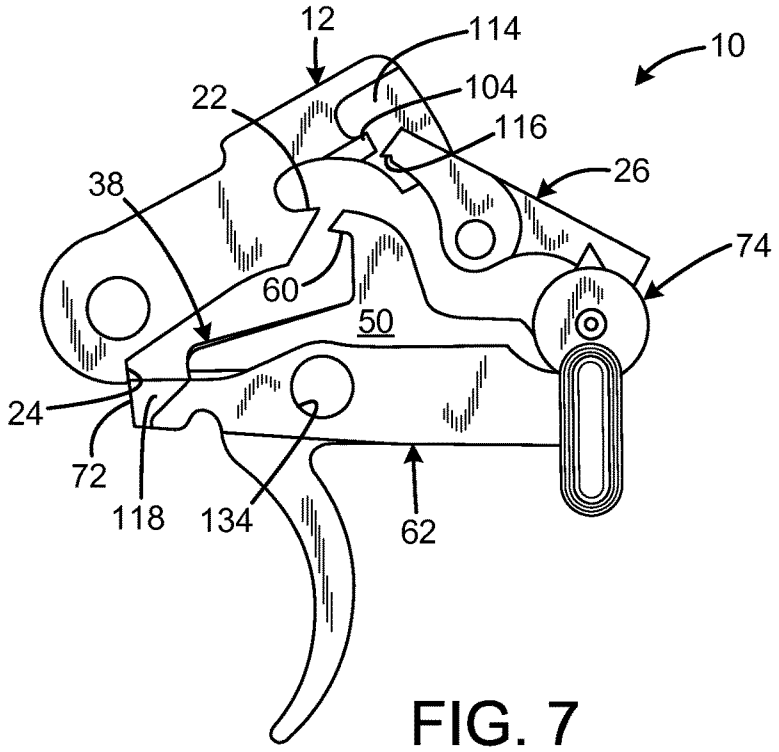

12
114
10
22
104
116
26
38
74
60
50
24
72
118
134
62

FIG. 7

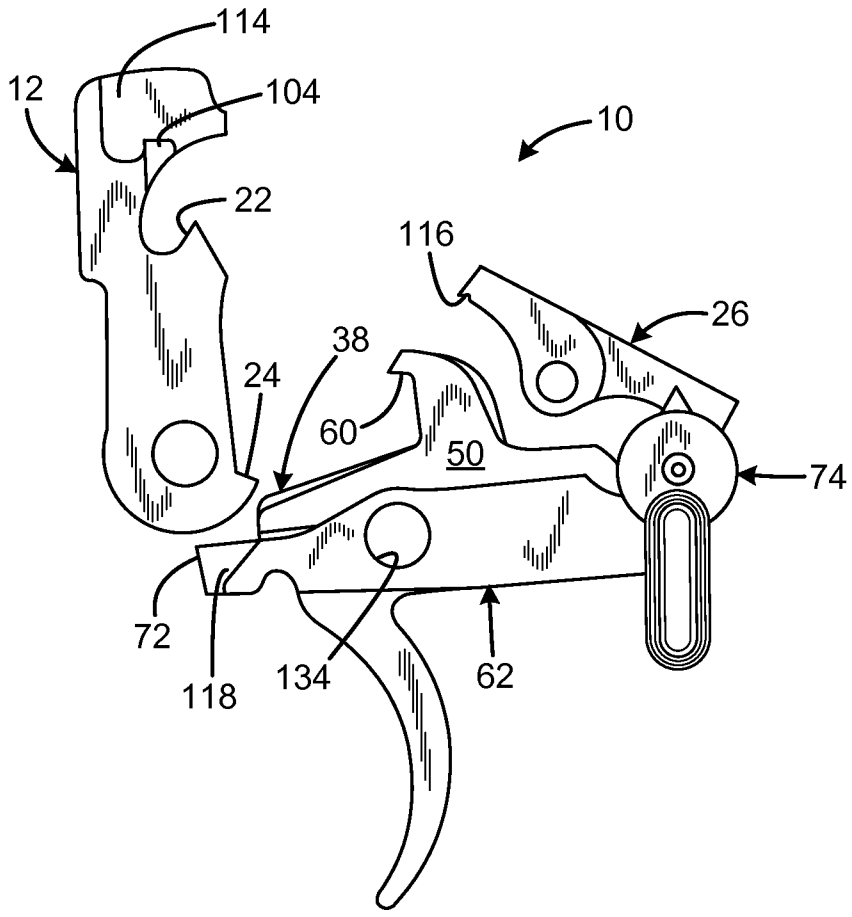


FIG. 8

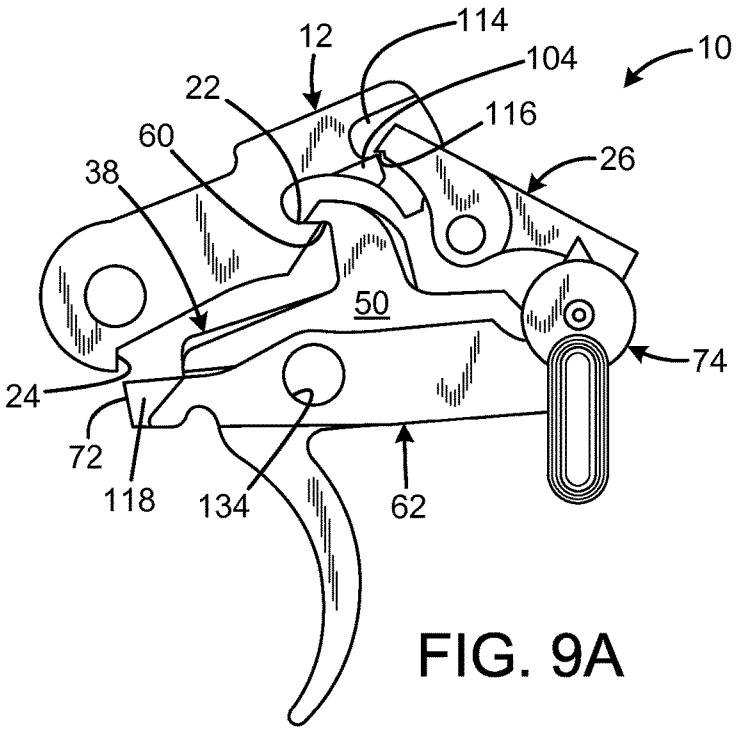

12
114
104
10
22
116
60
26
38
50
74
24
72
118
134
62

FIG. 9A

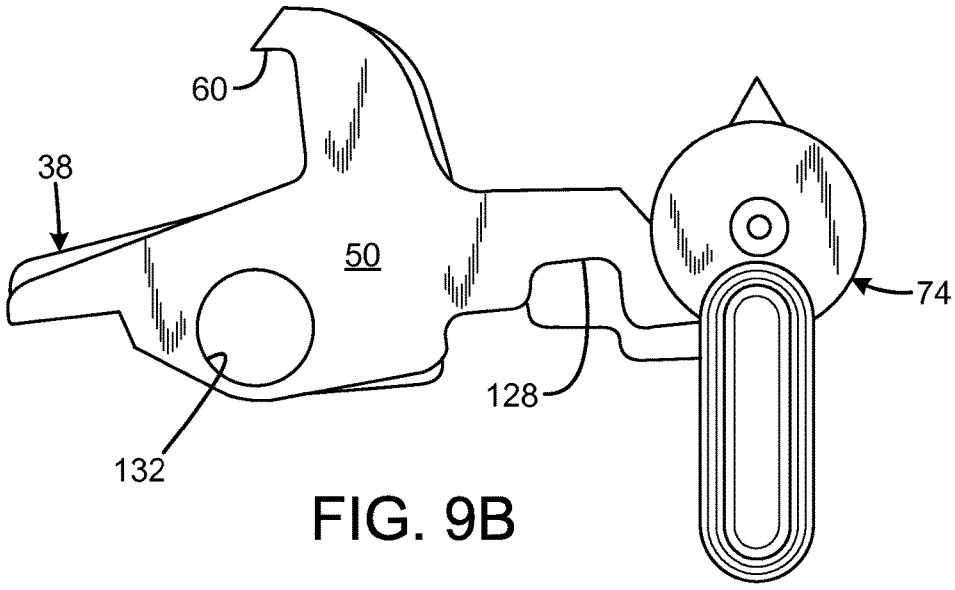

60
38
50
74
128
132

FIG. 9B

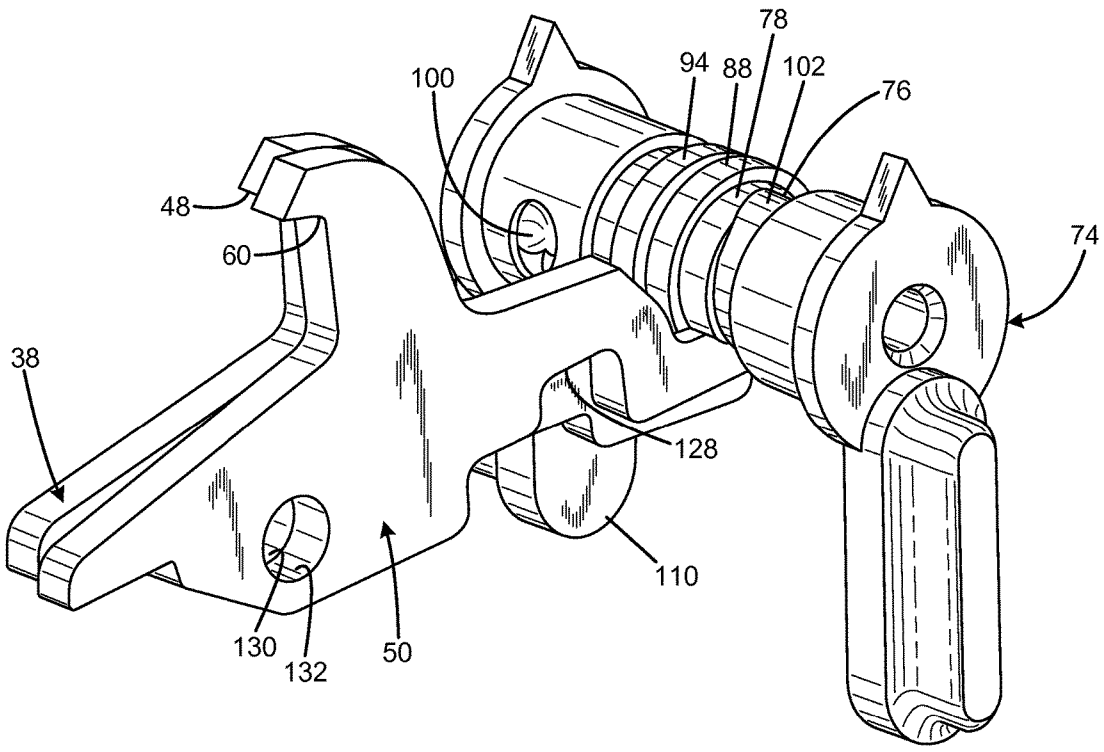
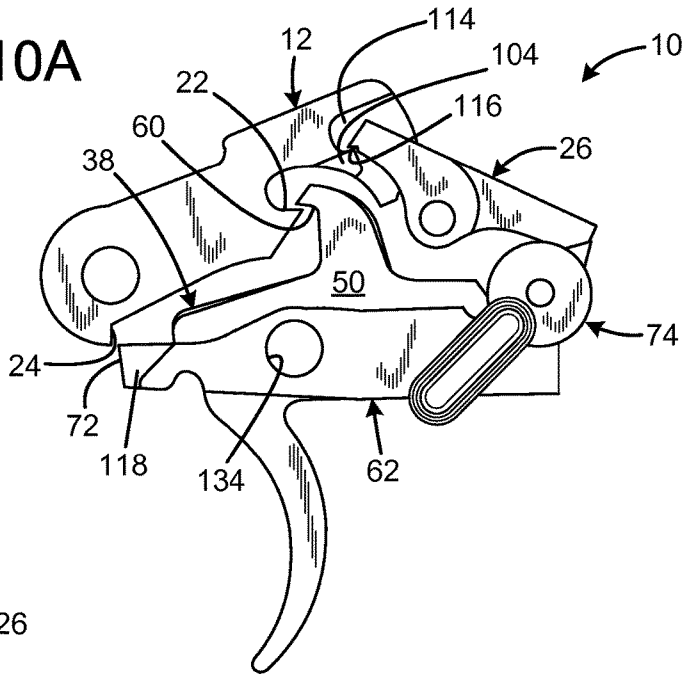


FIG. 9C

FIG. 10A



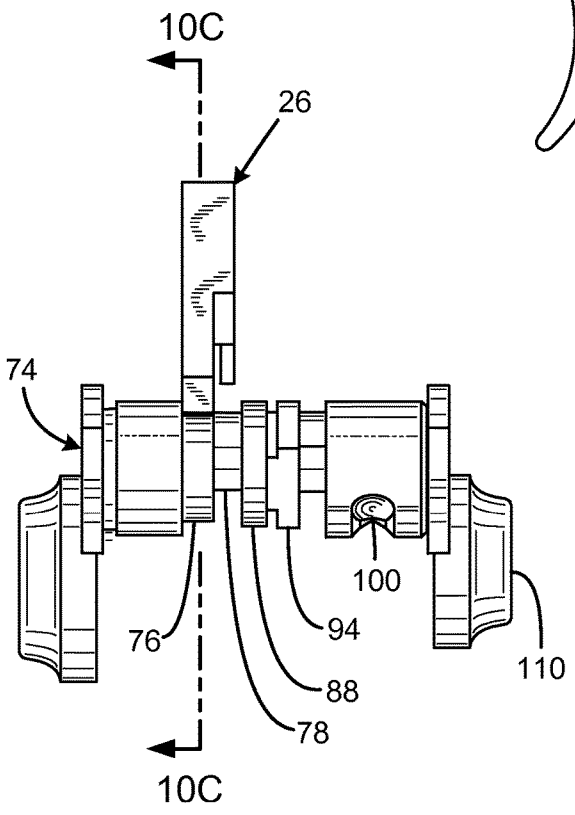


FIG. 10B

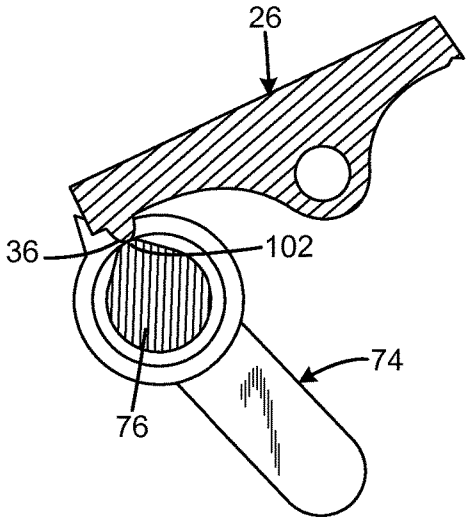


FIG. 10C

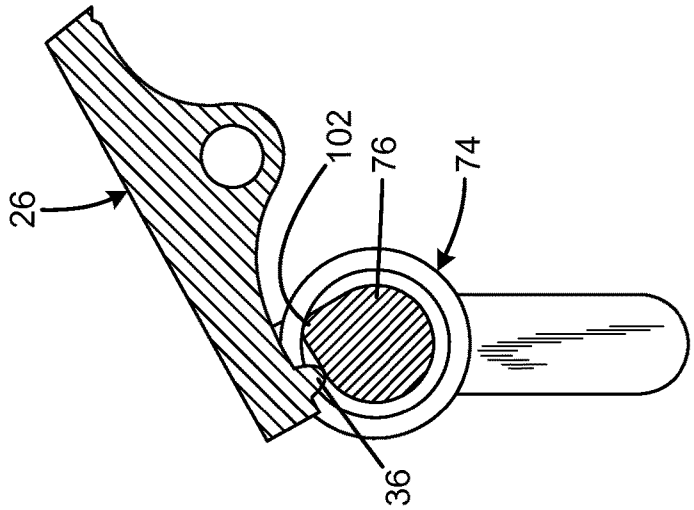


FIG. 10E

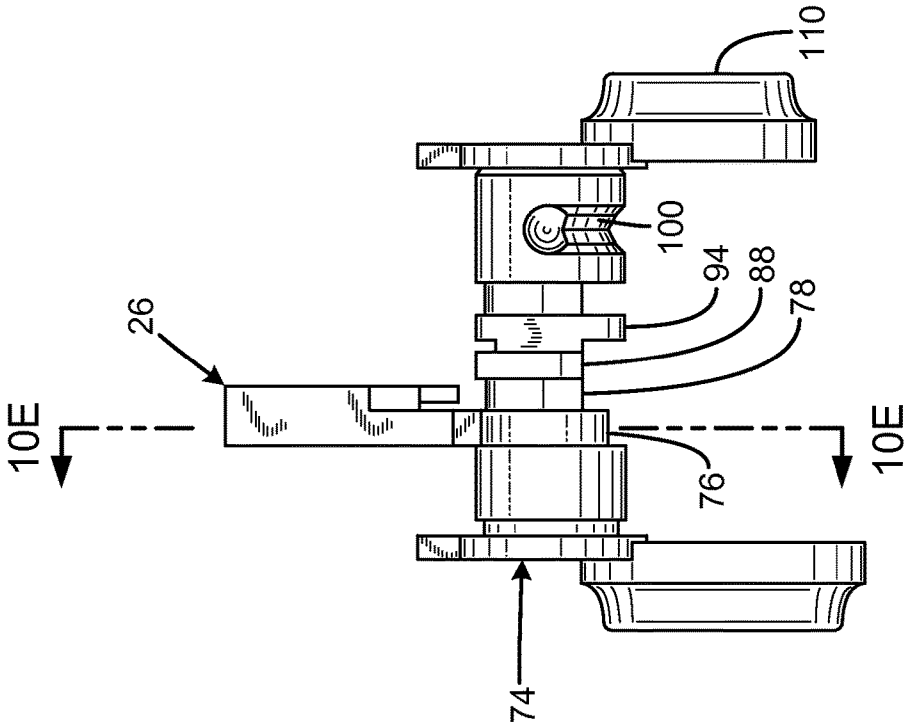


FIG. 10D

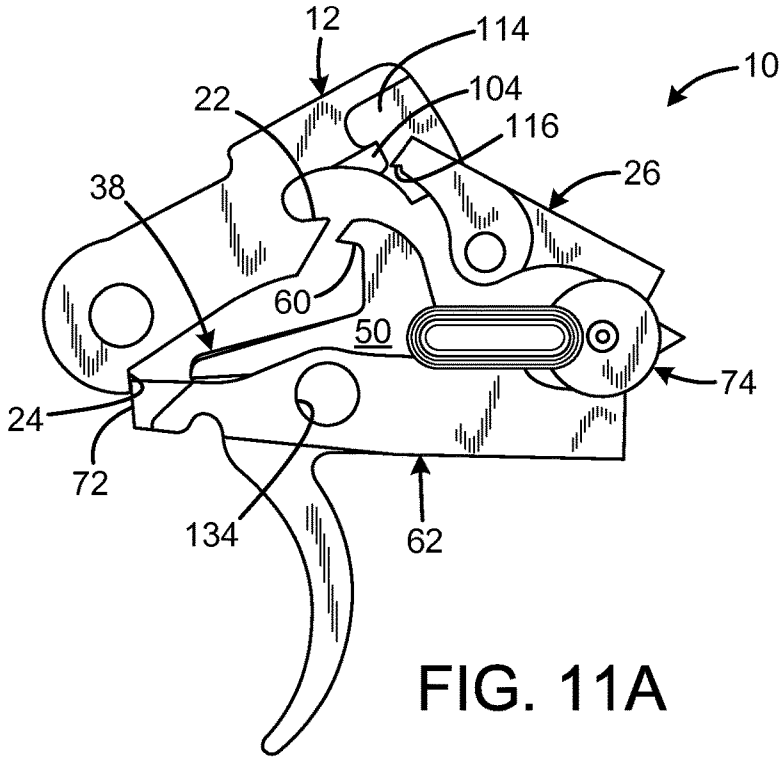


FIG. 11A

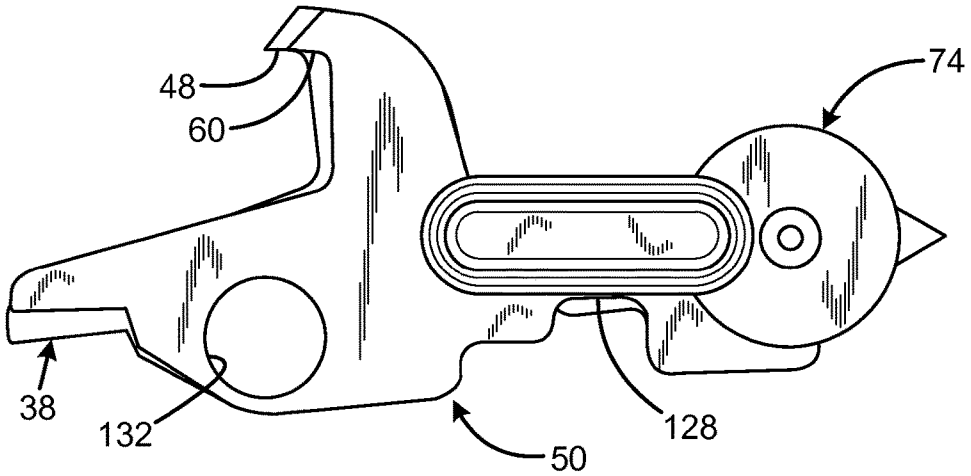


FIG. 11B

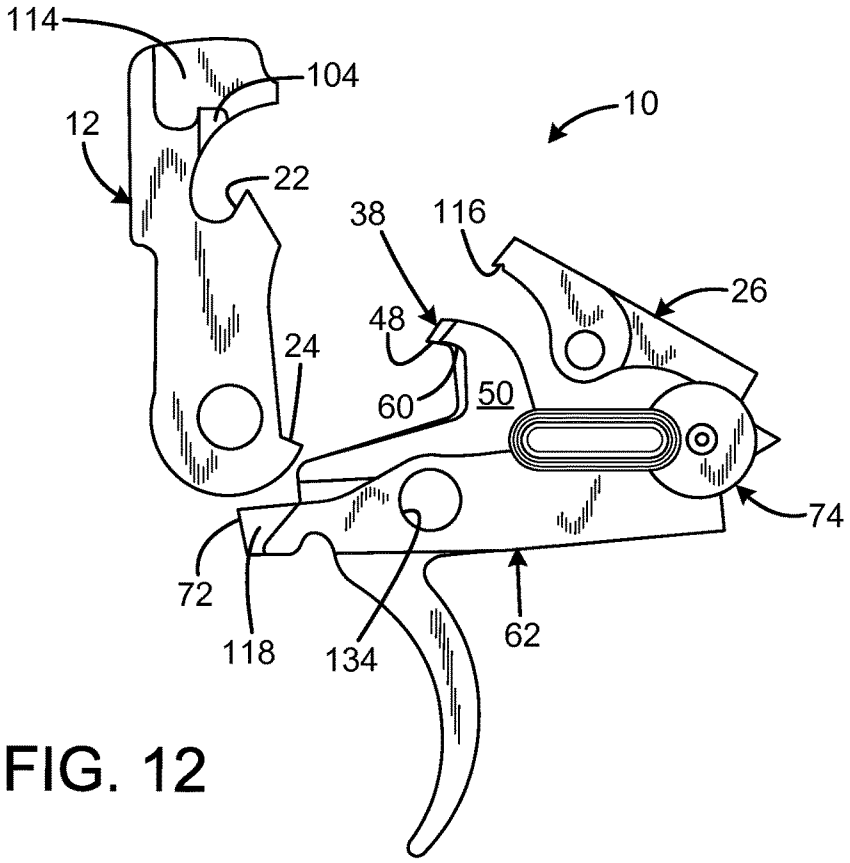

114
104
10
12
22
38
116
26
48
24
60
50
74
72
118
134
62

FIG. 12

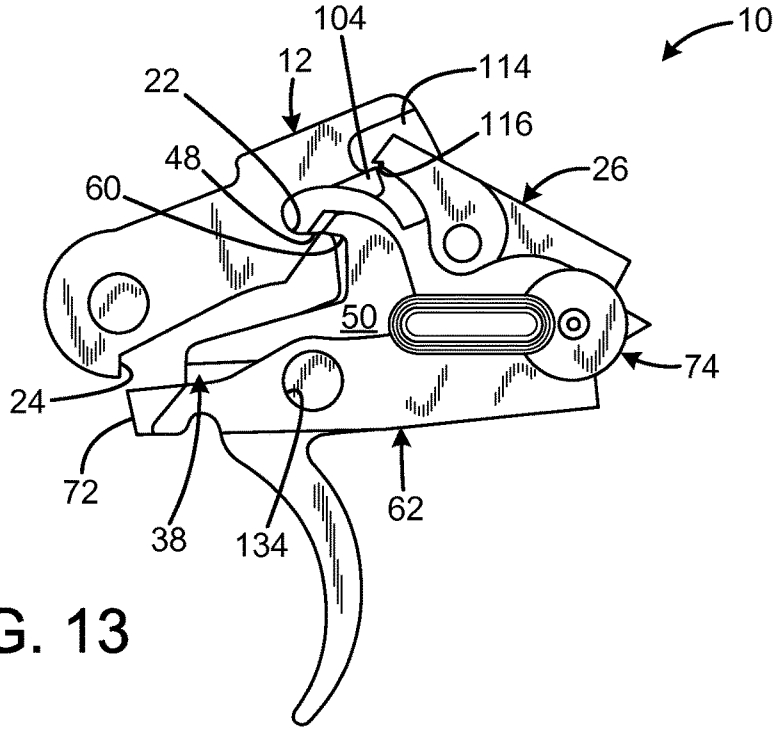

104
10
12
114
22
116
48
26
60
50
74
24
72
38
134
62

FIG. 13

FIG. 14

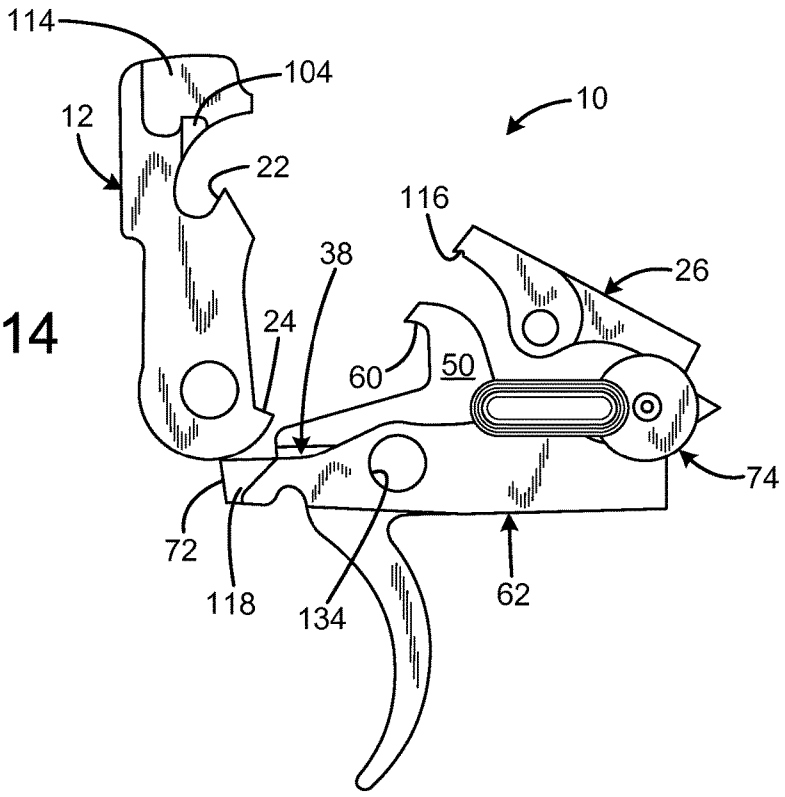
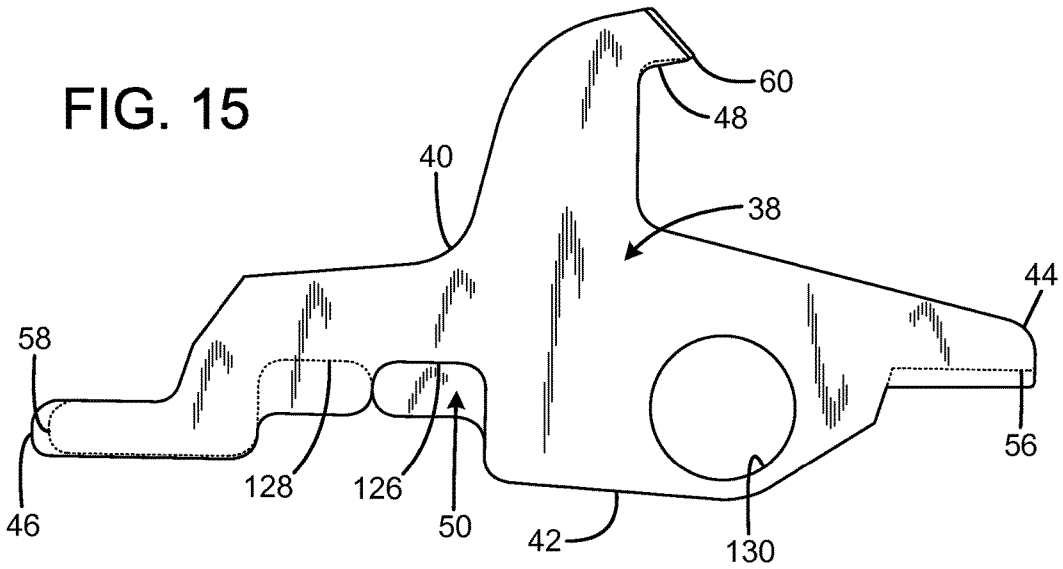

114
104
12
10
22
116
38
26
24
60
50
74
72
118
134
62

FIG. 15


60
48
40
38
44
58
56
128
126
50
42
130
46

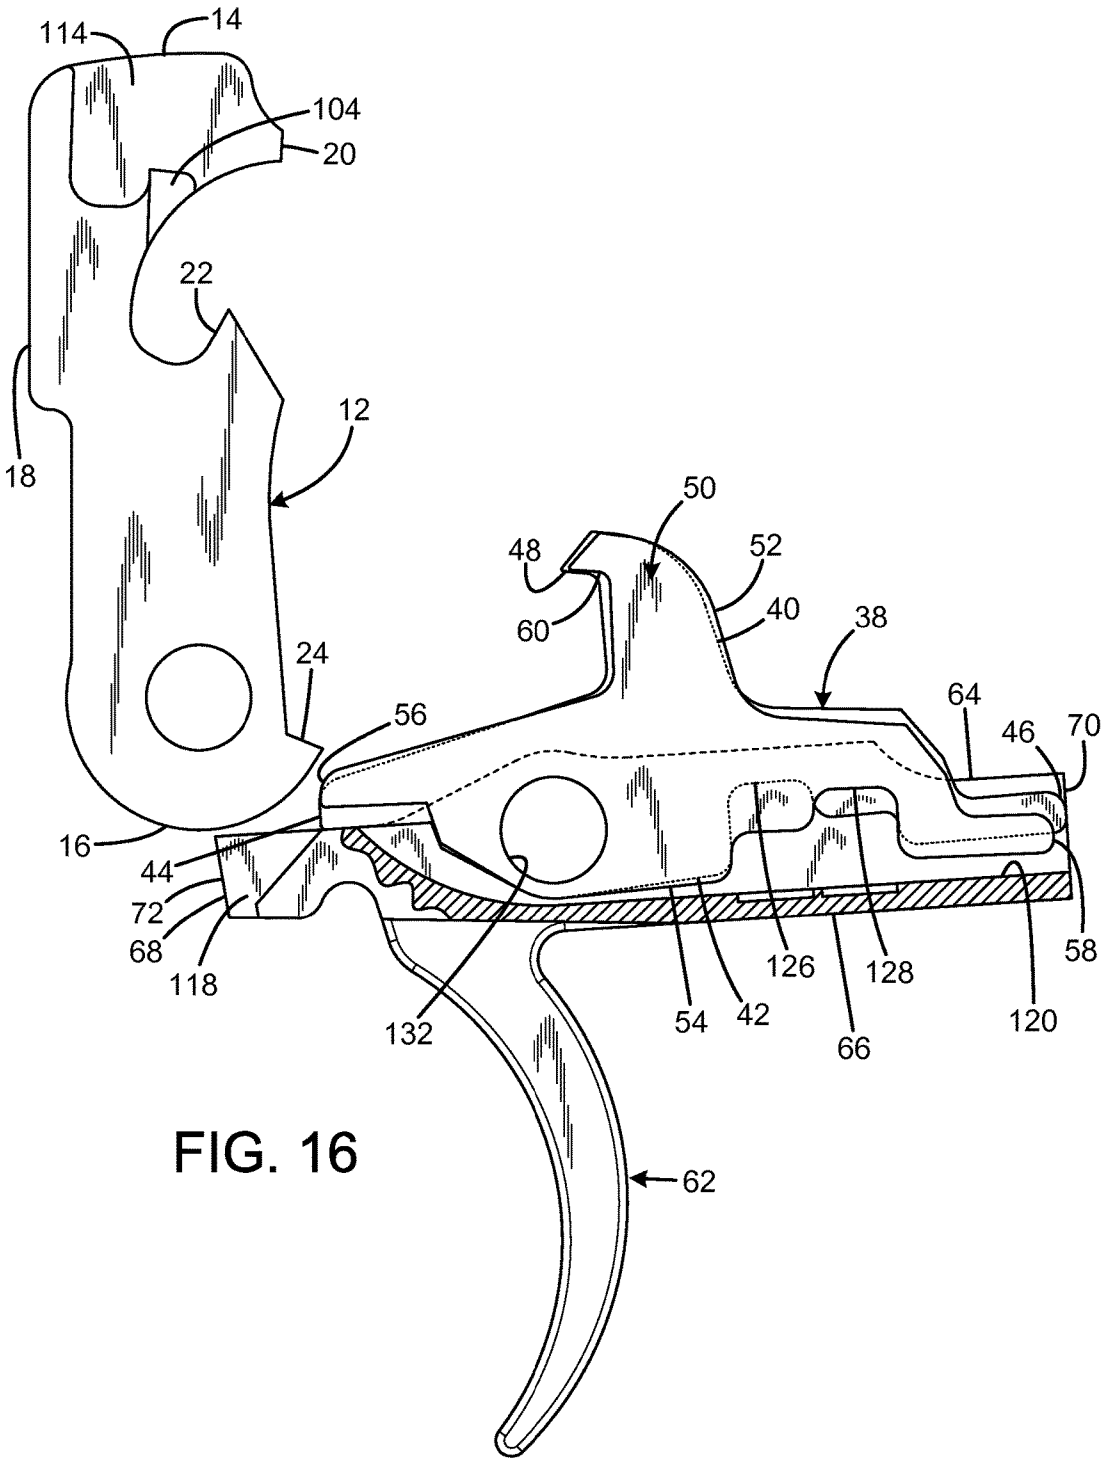

114
14
104
20
22
12
18
50
48
52
60
40
38
24
64
56
46
70
16
44
72
68
118
132
54
42
126
128
66
120
58
62

FIG. 16

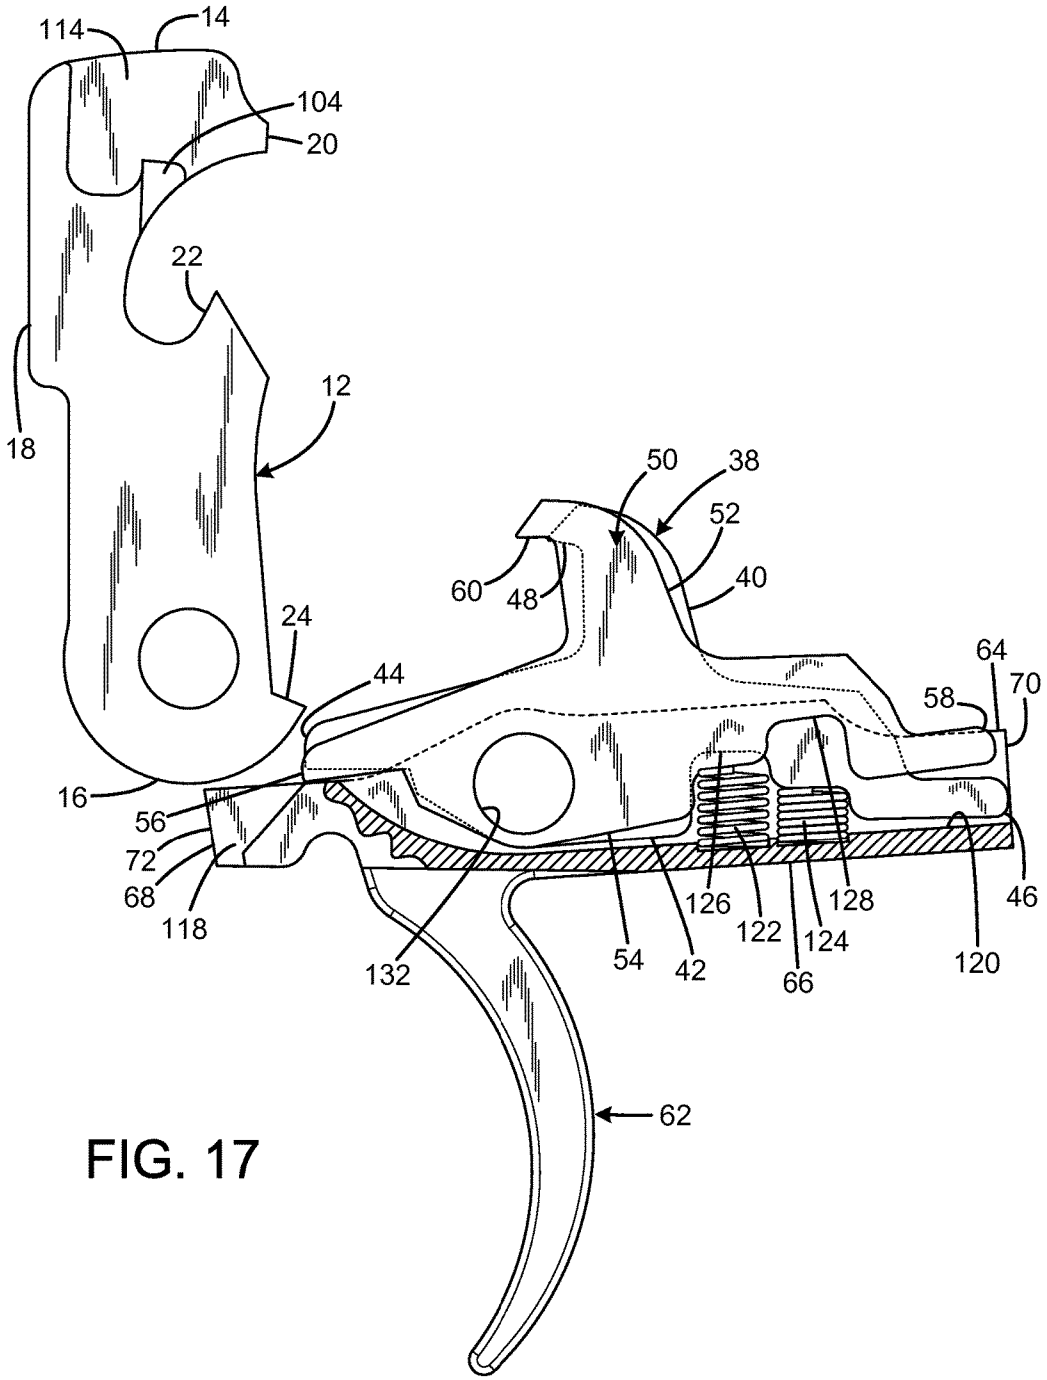

114
14
104
20
22
12
18
50
38
52
40
60
48
24
44
64
70
58
16
56
72
68
118
132
54
42
126
122
124
66
128
120
46
62

FIG. 17

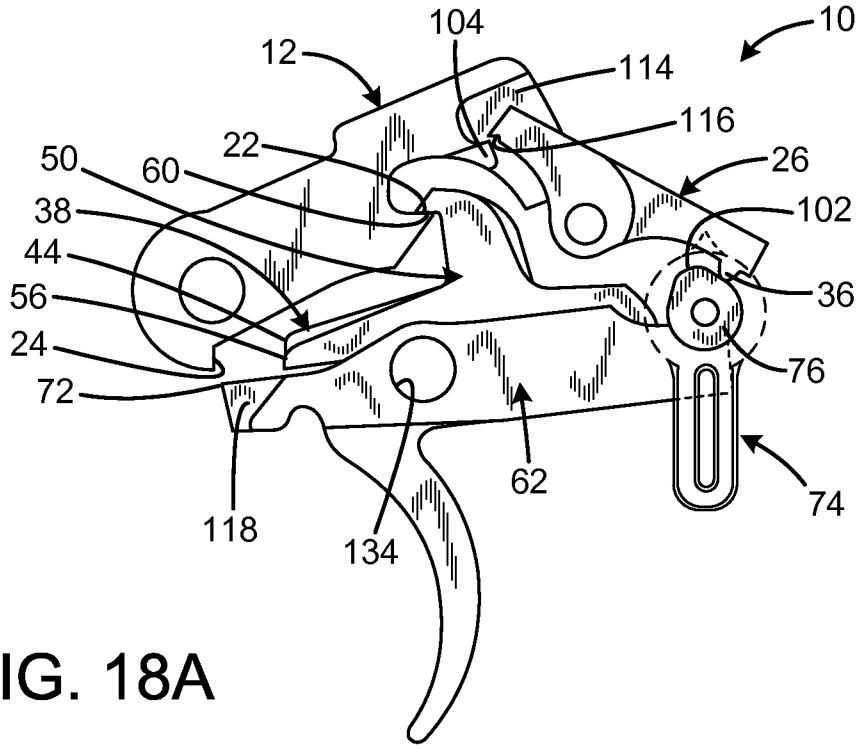


FIG. 18A

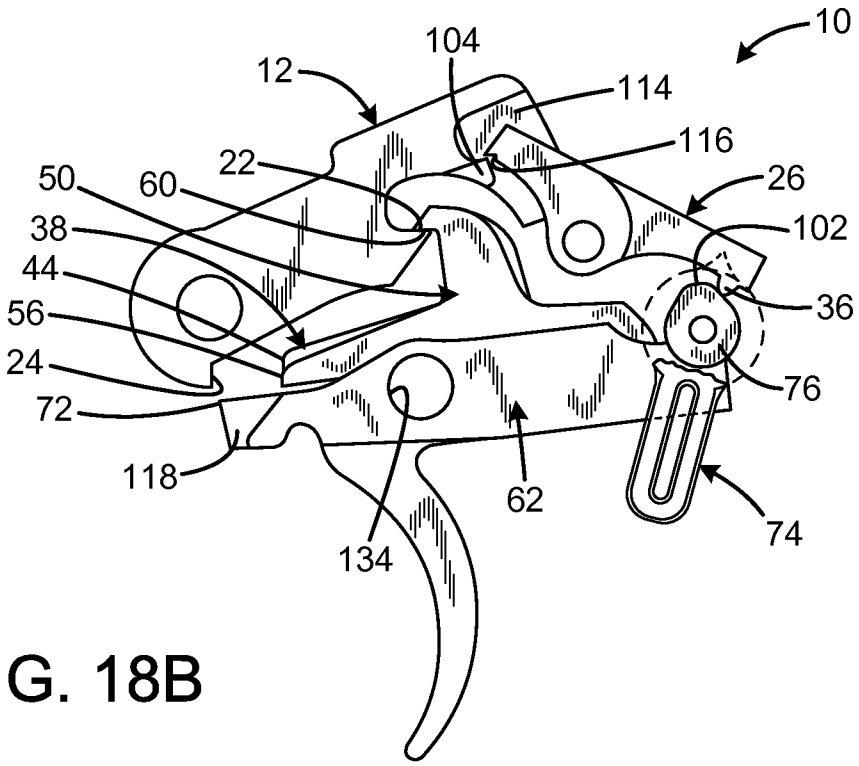


FIG. 18B

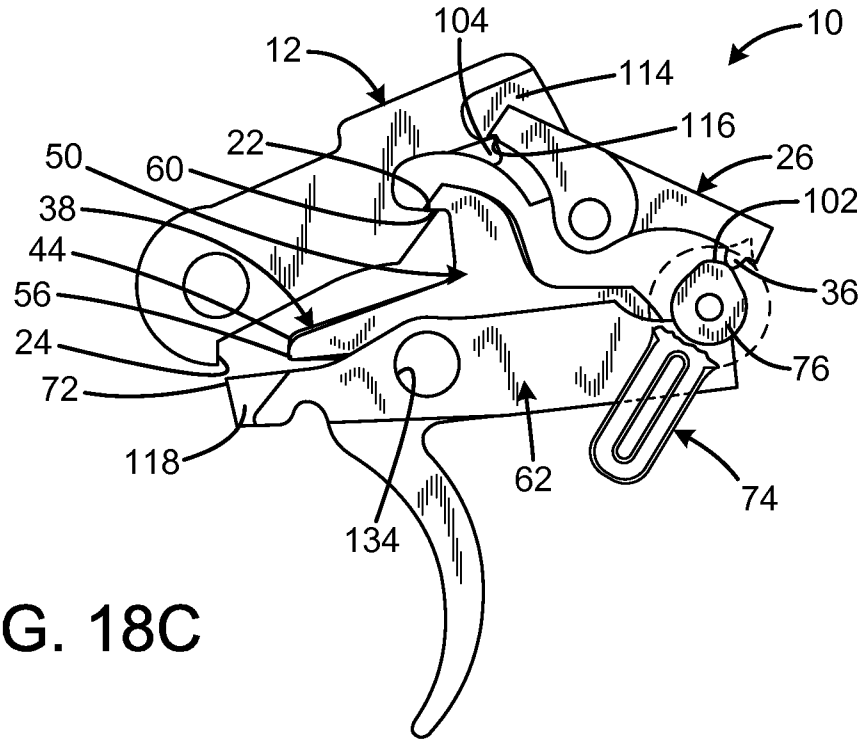


FIG. 18C

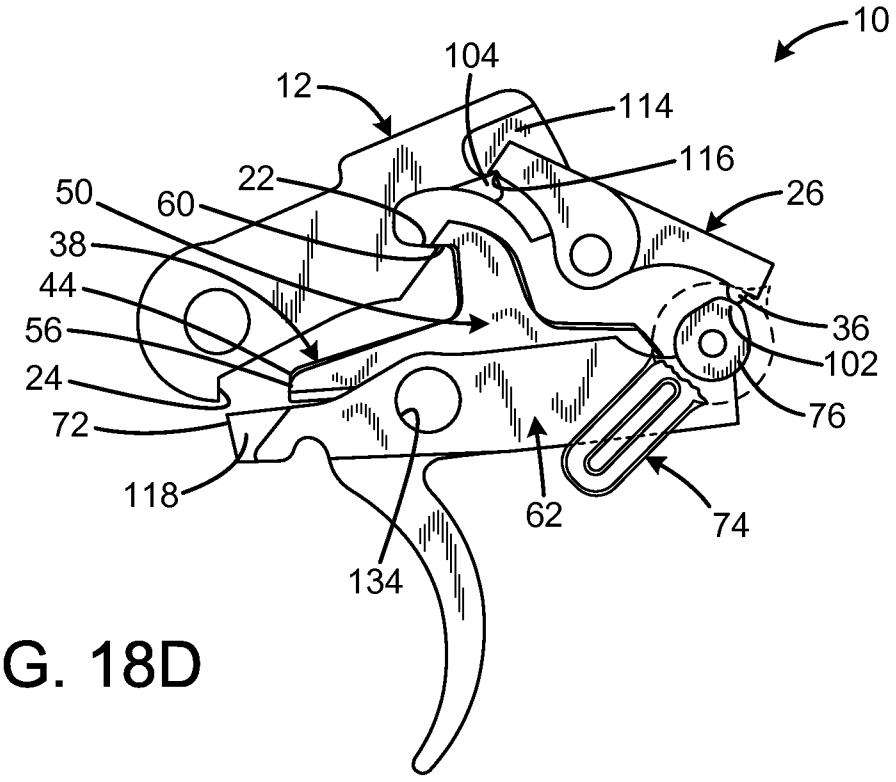


FIG. 18D

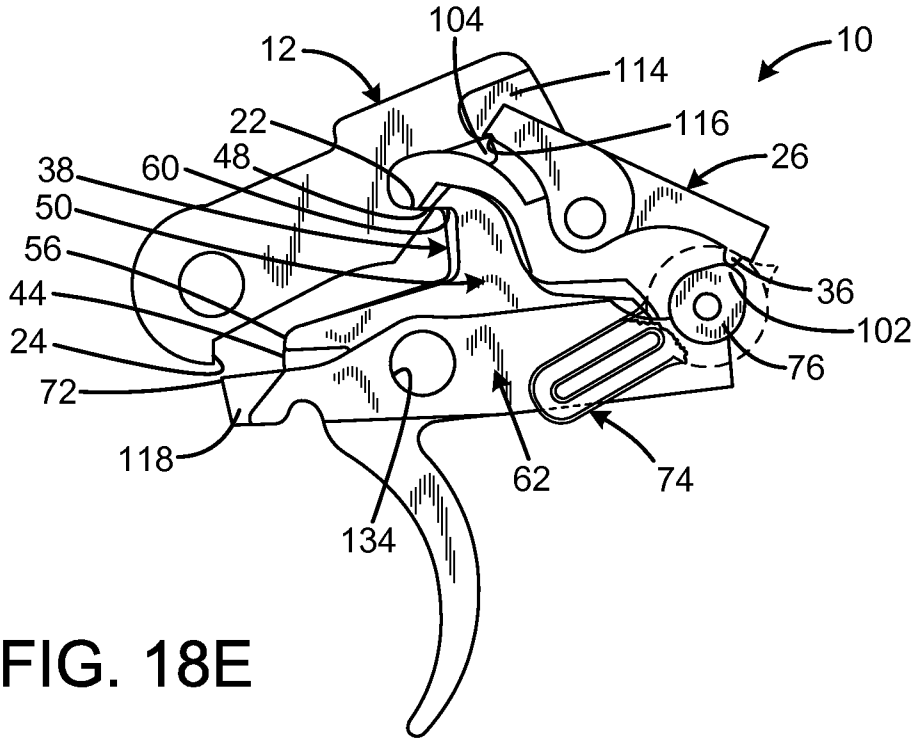


FIG. 18E

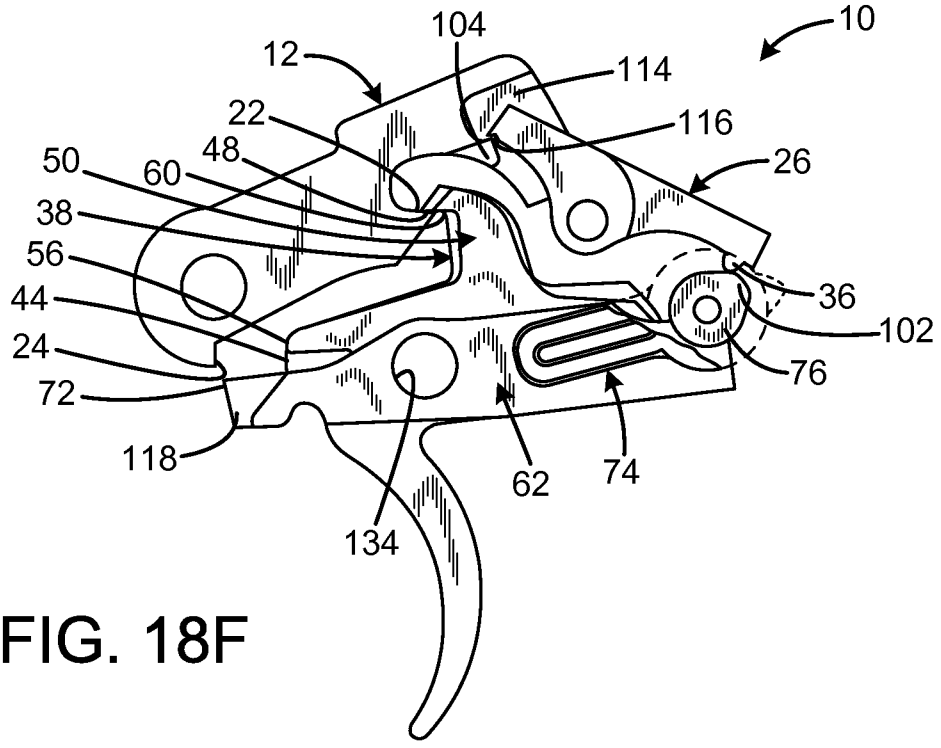


FIG. 18F

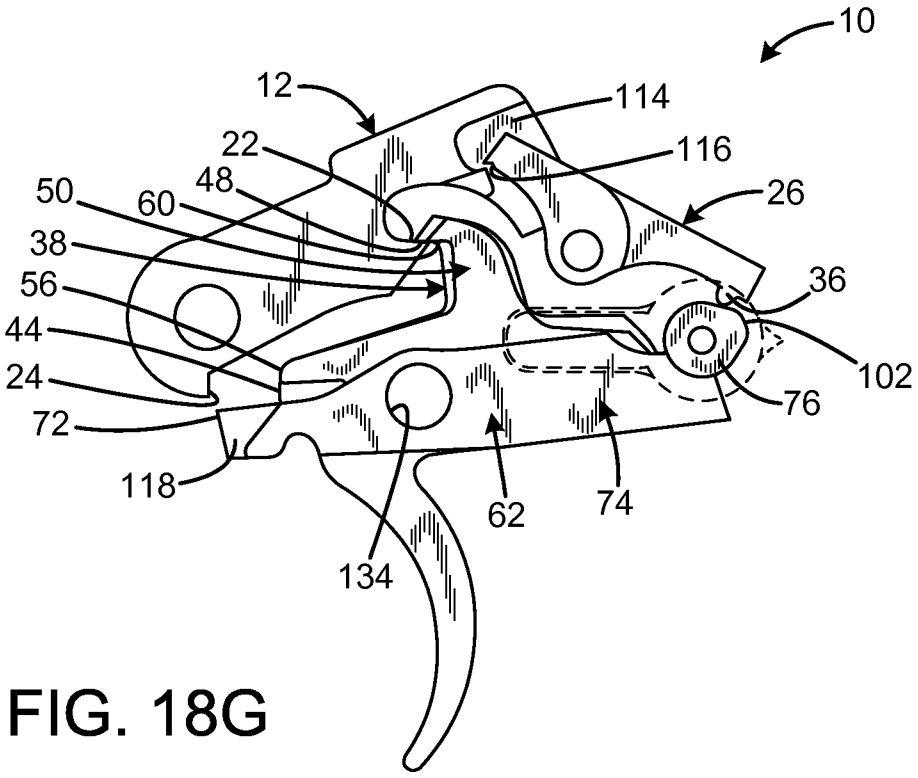


FIG. 18G

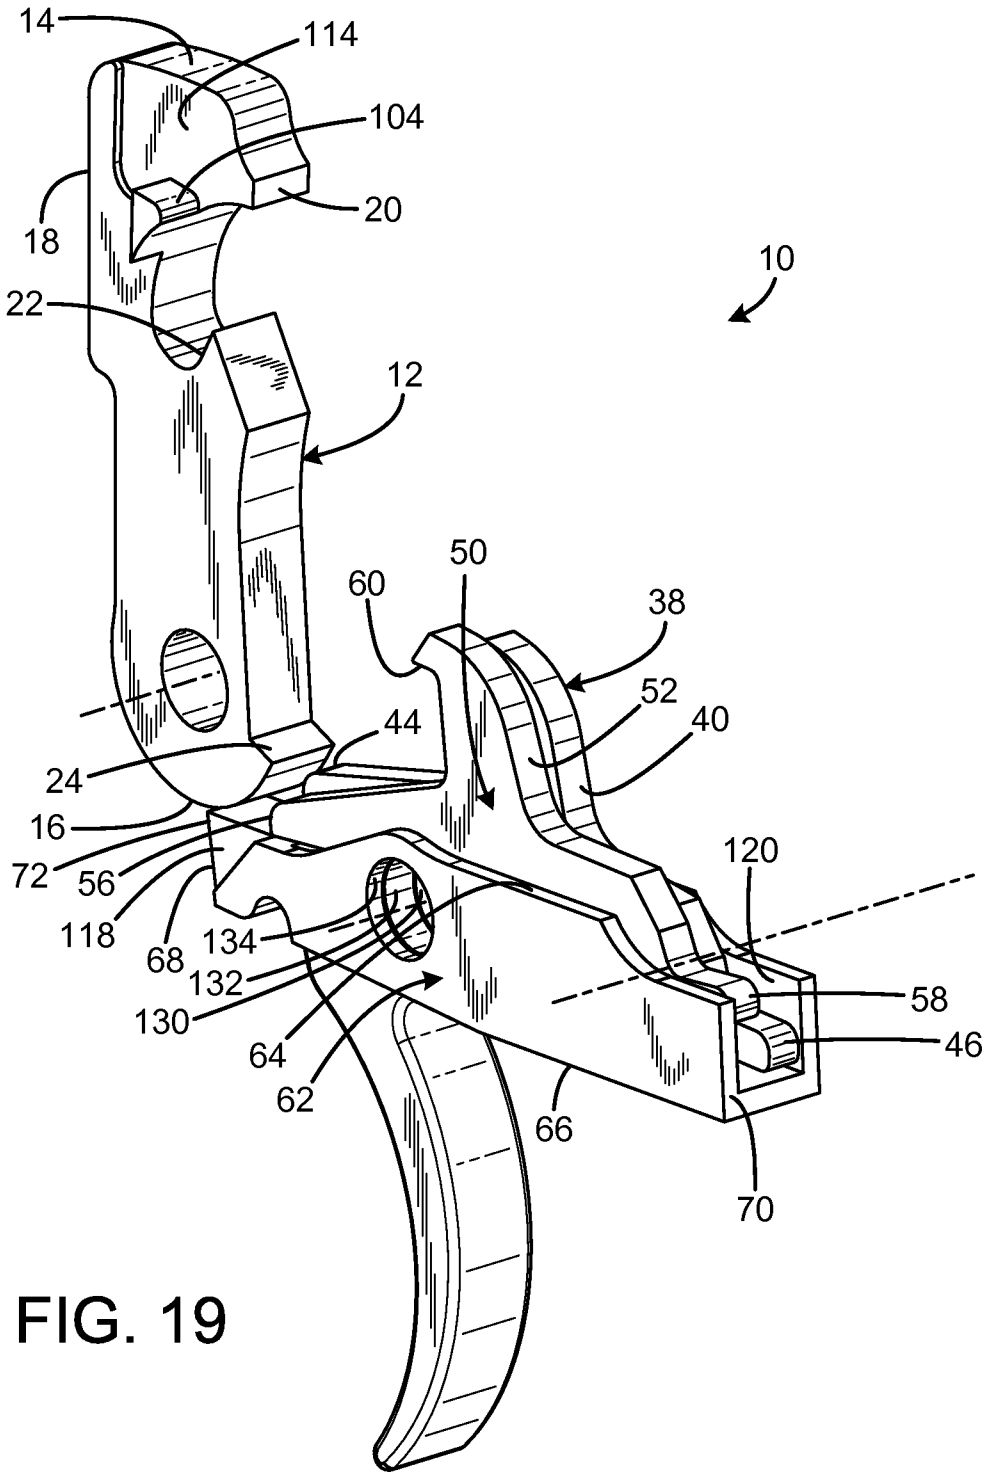

14
114
104
20
18
22
10
12
50
60
38
52
40
44
24
16
72
56
118
68
134
132
130
64
62
66
120
58
46
70

FIG. 19

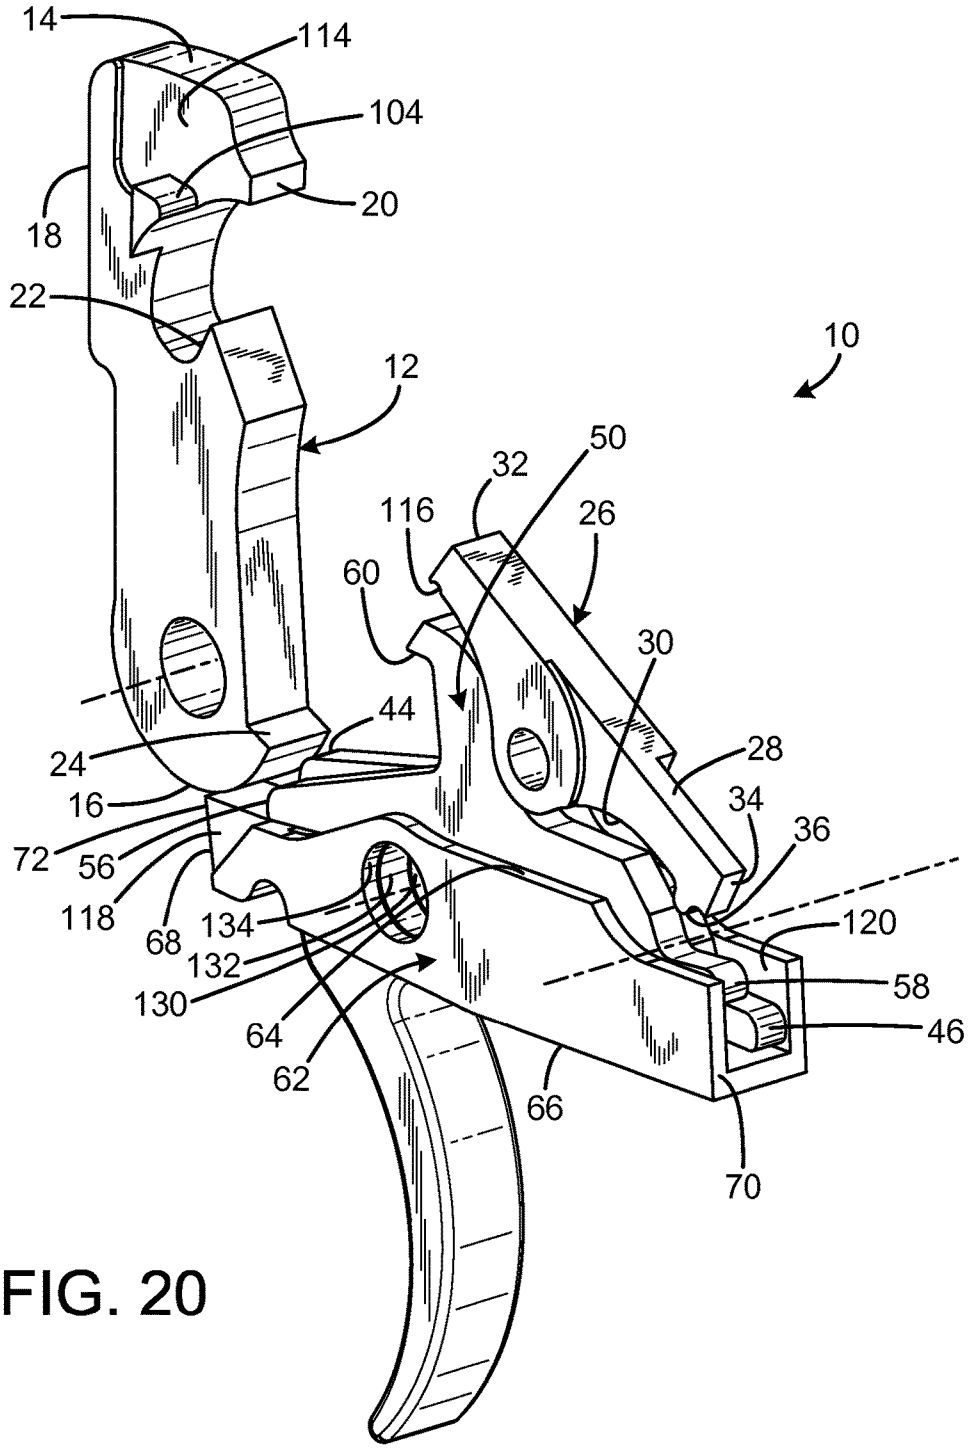

14
114
104
20
18
22
12
10
50
32
116
26
60
30
44
28
24
34
16
36
72
56
120
118
68
134
58
132
46
130
64
62
66
70

FIG. 20

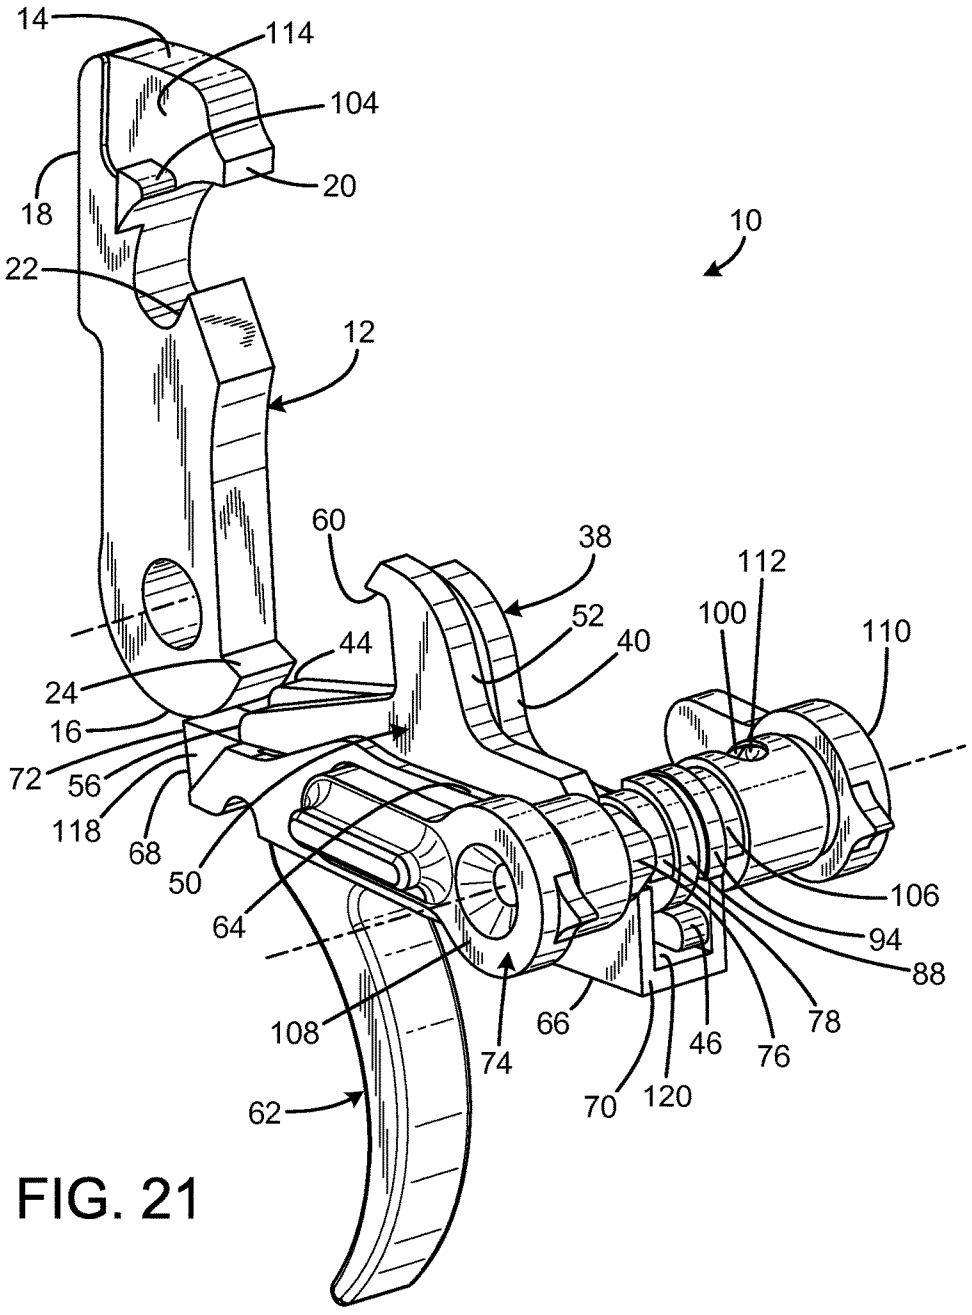

14
114
104
20
18
10
22
12
60
38
112
100
110
52
40
44
24
16
72
56
118
68
50
64
106
94
88
108
74
66
78
46
76
70
120
62

FIG. 21

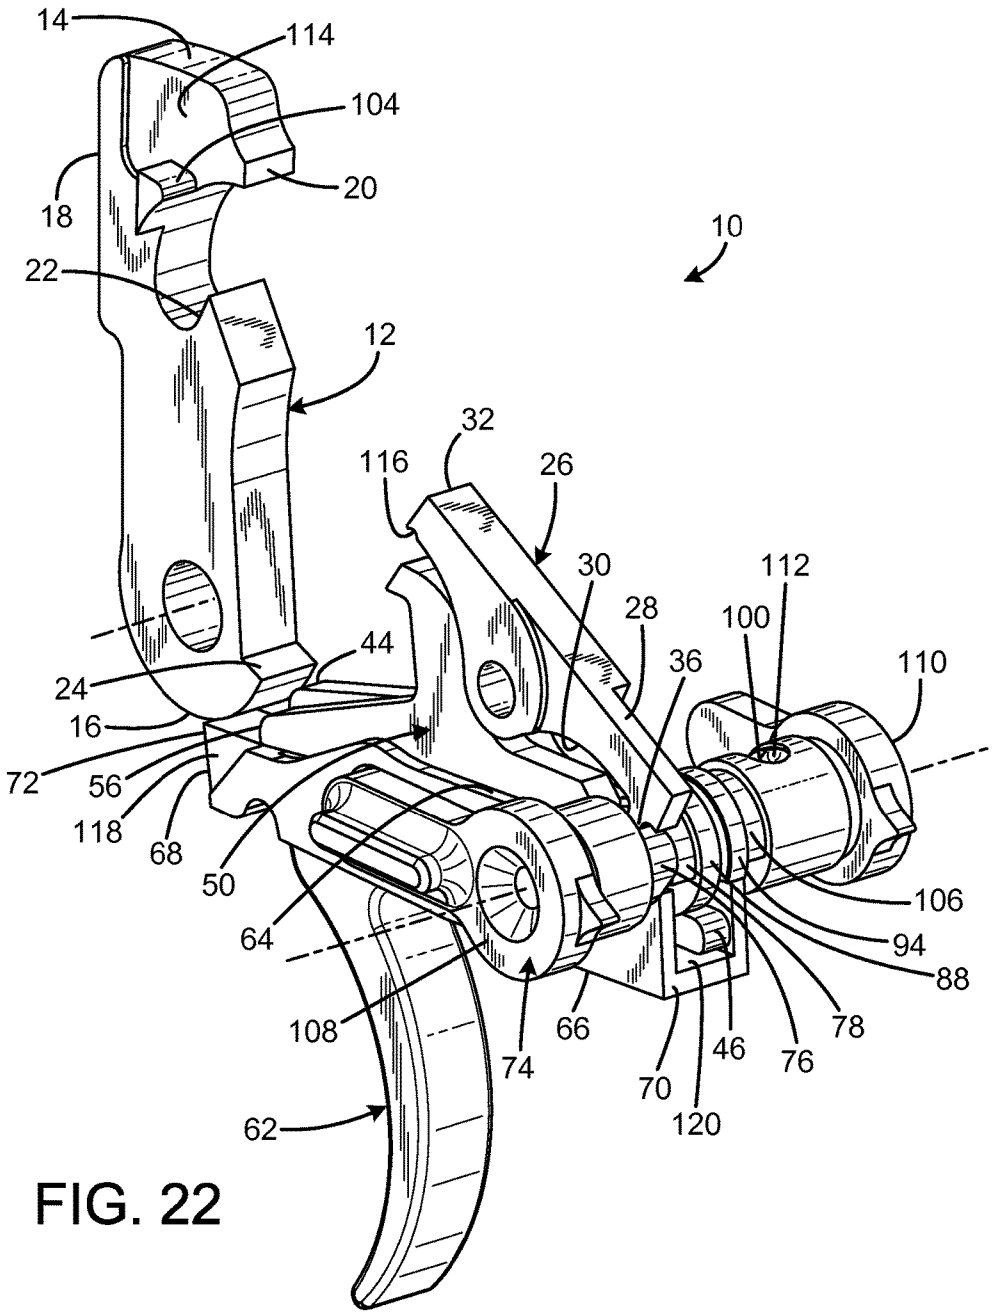

14
114
104
20
18
10
22
12
32
116
26
30
112
28
100
44
36
110
24
16
72
56
118
68
50
106
64
94
88
108
66
78
74
46
76
70
120
62

FIG. 22

TRIGGER GROUP FOR SEMI-AUTOMATIC FIREARMS

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of U.S. Provisional Patent Application No. 62/026,621 filed on Jul. 19, 2014, entitled "BINARY FIRING SYSTEM (aka BFS)," which is hereby incorporated by reference in its entirety for all that is taught and disclosed therein.

FIELD OF THE INVENTION

The present invention relates to firearms, and more particularly to a trigger group for semi-automatic firearms.

BACKGROUND OF THE INVENTION

A trigger group includes all parts of the firearm that initiate the firing of the bullet. Parts include the trigger, which is usually a lever that is tripped by one or more fingers of the firing hand; the sear, which holds the hammer back until the trigger has been pulled; a disconnector, which keeps the hammer in place until the trigger is released and the sear takes over after a cycle of semi-automatic fire has occurred; and several springs throughout the group. The sear may be a separate part or can be a surface incorporated into the trigger. As the trigger is pulled, the sear slips, allowing the hammer to strike the firing pin to discharge a round.

The National Firearms Act, as interpreted by the Bureau of Alcohol, Tobacco, Firearms and Explosives Technology Branch, defines the pull of a trigger as a function, and the release of the trigger as a second function. As a result, a firearm that fires a shot upon the pull of a trigger and fires a second shot upon the release of the trigger is not a machine gun as defined by the National Firearms Act, 26 U.S.C. 5845(b), and is not subject to the associated legal restrictions.

An existing approach to a trigger system that fires one round with trigger pull and fires another round with trigger release is disclosed in U.S. Pat. No. 8,667,881 to Hawbaker. Hawbaker's trigger system provides one mode for normal semi-automatic operation and another mode that fires by pulling the trigger and fires a second round upon trigger release. However, Hawbaker's trigger system suffers from multiple disadvantages. First, a selector lever that is attached to the trigger must be manipulated within the trigger guard in order to change the mode of firing from semi-automatic to double fire. This attribute greatly increases the likelihood of an accidental discharge occurring from manipulating the selector lever. Second, once the trigger has been pulled in double fire mode, the user cannot place the firearm in safe mode, and instead must fire a second shot upon trigger release.

Therefore, a need exists for a new and improved trigger group for semi-automatic firearms that places the selector lever outside of the trigger guard and enables the firearm to be placed in safe mode even if the trigger has been pulled in double/binary fire mode. In this regard, the various embodiments of the present invention substantially fulfill at least some of these needs. In this respect, the trigger group for semi-automatic firearms according to the present invention substantially departs from the conventional concepts and designs of the prior art, and in doing so provides an apparatus primarily developed for the purpose of providing a semi-automatic firearm with a fixed magazine without requiring modifications to the firearm.

SUMMARY OF THE INVENTION

The present invention provides an improved trigger group for semi-automatic firearms, and overcomes the above-mentioned disadvantages and drawbacks of the prior art. As such, the general purpose of the present invention, which will be described subsequently in greater detail, is to provide an improved trigger group for semi-automatic firearms that has all the advantages of the prior art mentioned above.

To attain this, the preferred embodiment of the present invention essentially comprises a hammer movable between a cocked position and a striking position, the hammer being biased toward the striking position, the hammer having a first hammer hook, the hammer having a second hammer hook, a trigger element connected to the frame and movable by a user between a rest position and an actuated position, a movable sear responsive to movement of the trigger element and operable to engage the first hammer hook to restrain the hammer in the cocked position when the trigger element is in the rest position, and in response to pulling the trigger element to the actuated position to release the hammer to the striking position to discharge the firearm, a selector movable between at least a first position and a second position, a disconnector assembly operably connected to the selector and having a hammer retention facility selectable engaging the second hammer hook, the disconnector assembly operable when the selector is in the first position to retain the hammer in the cocked position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element, and the disconnector assembly operable when the selector is in the second position to release the hammer to the striking position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element, such that the firearm discharges once per cycle of the trigger element when the selector is in the first position, and fires once for each forward or rearward motion of the trigger element when the selector is in the second position, instead of firing only on the rearward trigger motion.

There are, of course, additional features of the invention that will be described hereinafter and which will form the subject matter of the claims attached.

There has thus been outlined, rather broadly, the more important features of the invention in order that the detailed description thereof that follows may be better understood and in order that the present contribution to the art may be better appreciated.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is an exploded view of the current embodiment of the trigger group for semi-automatic firearms constructed in accordance with the principles of the present invention.

FIG. **2** is a front isometric view of the current embodiment of the trigger group for semi-automatic firearms of FIG. **1**.

FIG. **3** is a top view of the current embodiment of the trigger group for semi-automatic firearms of FIG. **1**.

FIG. **4** is a rear view of the current embodiment of the trigger group for semi-automatic firearms of FIG. **1**.

FIG. **5**A is a top view of the safety selector of FIG. **1**.

FIG. **5**B is a sectional view of the safety selector taken along line **5**B-**5**B of FIG. **5**A.

Atrius Ex. 1013--0027

FIG. **5**C is a sectional view of the safety selector taken along line **5**C-**5**C of FIG. **5**A.

FIG. **5**D is a sectional view of the safety selector taken along line **5**D-**5**D of FIG. **5**A.

FIG. **5**E is a sectional view of the safety selector taken along line **5**E-**5**E of FIG. **5**A.

FIG. **5**F is a top isometric view of the safety selector of FIG. **1**.

FIG. **6** is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector in safe mode.

FIG. **7** is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector in semi-automatic mode.

FIG. **8** is a left side view of the trigger group for semi-automatic firearms of FIG. **1** after firearm discharge with the safety selector in semi-automatic mode.

FIG. **9**A is a left side view of the trigger group for semi-automatic firearms of FIG. **1** after the firearm has been re-cocked with the trigger pulled when the safety selector is in semi-automatic mode.

FIG. **9**B is a left side enlarged view of the safety selector, semi-automatic disconnector, and binary disconnector of FIG. **9**A.

FIG. **9**C is a front isometric enlarged view of the safety selector, semi-automatic disconnector, and binary disconnector of FIG. **9**A.

FIG. **10**A is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector in transition from semi-automatic mode to binary mode.

FIG. **10**B is a top view of the safety selector and hammer lever of FIG. **10**A.

FIG. **10**C is a side sectional view of the safety selector and hammer lever taken along line **10**C-**10**C of FIG. **10**B.

FIG. **10**D is a top view of the safety selector and hammer lever with the safety selector in binary mode.

FIG. **10**E is a side sectional view of the safety selector and hammer lever taken along line **10**E-**10**E of FIG. **10**D.

FIG. **11**A is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector in binary mode.

FIG. **11**B is a left side enlarged view of the safety selector, semi-automatic disconnector, and binary disconnector of FIG. **11**A.

FIG. **12** is a left side view of the trigger group for semi-automatic firearms of FIG. **1** after firearm discharge with the safety selector in binary mode.

FIG. **13** is a left side view of the trigger group for semi-automatic firearms of FIG. **1** after the firearm has been re-cocked with the trigger pulled when the safety selector is in binary mode.

FIG. **14** is a left side view of the trigger group for semi-automatic firearms of FIG. **1** after the firearm has discharged a second time upon trigger release when the safety selector is in binary mode.

FIG. **15** is a left side view of the binary disconnector of FIG. **1** placed atop the semi-automatic disconnector of FIG. **1**.

FIG. **16** is a left side sectional view of the trigger group for semi-automatic firearms of FIG. **1** with the semi-automatic disconnector spring and binary disconnector spring removed.

FIG. **17** is a left side sectional view of the trigger group for semi-automatic firearms of FIG. **1** with the semi-automatic disconnector spring and binary disconnector spring present.

FIG. **18**A is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector in binary mode.

FIG. **18**B is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector rotated 15° counterclockwise relative to FIG. **18**A.

FIG. **18**C is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector rotated 15° counterclockwise relative to FIG. **18**B.

FIG. **18**D is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector rotated 15° counterclockwise relative to FIG. **18**C.

FIG. **18**E is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector rotated 15° counterclockwise relative to FIG. **18**D.

FIG. **18**F is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector rotated 15° counterclockwise relative to FIG. **18**E.

FIG. **18**G is a left side view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector in semi-automatic mode.

FIG. **19** is a rear isometric view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector and the hammer lever removed.

FIG. **20** is a rear isometric view of the trigger group for semi-automatic firearms of FIG. **1** with the safety selector removed.

FIG. **21** is a rear isometric view of the trigger group for semi-automatic firearms of FIG. **1** with the hammer lever removed.

FIG. **22** is a rear isometric view of the trigger group for semi-automatic firearms of FIG. **1**.

The same reference numerals refer to the same parts throughout the various figures.

DESCRIPTION OF THE CURRENT EMBODIMENT

An embodiment of the trigger group for semi-automatic firearms of the present invention is shown and generally designated by the reference numeral **10**.

FIGS. **1-4** illustrate the improved trigger group for semi-automatic firearms **10** of the present invention. More particularly, the trigger group for semi-automatic firearms **10** has a hammer **12**, hammer lever **26**, binary disconnector **38**, semi-automatic disconnector **50**, trigger **62**, and safety selector **74**. When assembled, the hammer, hammer lever, binary disconnector, semi-automatic disconnector, trigger, and safety selector are connected to a housing **136**. Each side of the housing has a front aperture **138**, a central aperture **140**, and a rear aperture **142**. The apertures receive cross-pins (unlabeled) that are received within axles (unlabeled), which are cylinders with a thru-hole. The cross-pins hold the trigger group for semi-automatic firearms **10** within the lower of the firearm (not shown). The axles fit through apertures in the hammer, trigger, hammer spacers **144**, and the housing. The hammer spacers are on the same level as the hammer and trigger, and keep the hammer and trigger from sliding laterally within the housing.

The hammer has a top **14**, bottom **16**, front **18**, and rear **20**. The top rear of the hammer defines a curved notch **22**, and the bottom rear of the hammer defines a hammer hook notch **24**. The hammer also includes a leftward protruding ridge **104** directly above the notch **22**. A relief area **114** is present above the ridge. The relief area is an optional feature depending upon the thickness of the hammer to provide clearance for the hammer lever. The hammer lever has a top

28, bottom 30, front 32, and rear 34. The bottom front of the hammer lever includes a small notch 116, which improves the reliability of the mechanism. The bottom rear of the hammer lever includes a downward protrusion 36.

The binary disconnector 38 has a top 40, bottom 42, front 44, rear 46, and central aperture 130.

The top of the binary disconnector includes a forward facing hook 48, and the bottom rear defines a notch 126. The semi-automatic disconnector has a top 52, bottom 54, front 56, rear 58, and central aperture 132. The top of the semi-automatic disconnector includes a forward facing hook 60, and the bottom rear defines a notch 128. The trigger has a top 64, bottom 66, front 68, rear 70, and central aperture 134. The top of the front of the trigger includes a sear 72. A small relief groove 118 is present in the front section of the sear. This relief groove enables a spring (not shown) to sit modestly higher and allows the trigger slightly more rearward travel than the trigger would otherwise have. Various pins and springs required to operate the trigger group are omitted for clarity. In the current embodiment, the safety selector 74 is ambidextrous, with the lever on the left 108 being larger than the lever on the right 110. The safety selector is swappable, which enables the user to place the larger lever on the desired side of the firearm. The trigger group for semi-automatic firearms 10 is suitable for use with an AR-15 rifle in the current embodiment.

FIGS. 5A-F illustrate the improved safety selector 74 of the present invention. More particularly, the safety selector provides the user of an associated firearm with three distinct modes: safe mode, semi-automatic mode, and binary mode. The safety selector has five cam lobe profiles 76, 78, 88, 94, 106 and a safety dent trough 100 extending from left 108 to right 110. Cam lobe 76 regulates the movement of the hammer lever 26. Cam lobe 78 regulates the movement of the trigger 62. Cam lobe 88 regulates the movement of the semi-automatic disconnector 50. Cam lobe 94 regulates the movement of the binary disconnector 38. A fifth cam lobe 106 has a profile that matches cam lobe 78 and performs the same function of regulating the movement of the trigger. Cam lobe 106 is used in conjunction with the ambidextrous lever when the safety selector's orientation is swapped to place the larger lever on the right side of the firearm.

The hammer lever cam 76 has a tip 102 of the cam lobe that engages the protrusion 36 on the hammer lever 26. The trigger relief and safety cam 78 has a full diameter section 80 that limits trigger 62 travel to prevent firing in safe mode, a trigger relief cut 82 to enable binary mode firing, and a rounded edge 84 to provide a smooth transition between firing modes. The semi-automatic disconnector cam 88 has a cam lobe portion 90 that limits semi-automatic disconnector 50 travel when engaged and a relief 92 that allows the semi-automatic disconnector to fully articulate. The binary disconnector cam 94 has a cam lobe portion 96 that limits binary disconnector 38 travel when engaged and a relief 98 that allows the binary disconnector to fully articulate. The cam 106 is identical to the trigger relief and safety cam 78.

The safety dent trough 100 located on the far right side 110 of the safety selector is a shallow groove with three plunge cuts 112 spaced 90° apart. A spring loaded safety detent (not shown) travels in this groove and stops at each plunge cut. This feature defines the three separate modes noted above. When additional finger pressure is applied to the safety selector lever, the safety detent spring is overridden, and the safety selector travels to the next plunge cut that defines the next mode.

FIG. 6 illustrates the improved trigger group for semi-automatic firearms 10 of the present invention. More particularly, the trigger group for semi-automatic firearms 10 is shown in safe mode with the safety selector 74 pointing at the 9 o'clock position. The trigger is physically prevented from being pulled because cam lobe 78 on the safety selector 74 is restricting the rearward section 70 of the trigger from moving upward. Since the trigger is immobilized, the hammer 12 is restricted from rotating forward under spring pressure because the sear 72 on the front 68 edge of the trigger is caught on notch 24 of the hammer.

FIG. 7 illustrates the improved trigger group for semi-automatic firearms 10 of the present invention. More particularly, the trigger group for semi-automatic firearms 10 is shown in semi-automatic mode with the safety selector 74 pointing at the 12 o'clock position. In this mode, cam lobe 78 on the safety selector 74 is recessed to allow the trigger 62 to be pulled when the hammer 12 is cocked. Cam lobe 88 on the safety selector is also recessed to allow the rear 58 of the semi-automatic disconnector 50 to rotate counterclockwise under spring pressure so that the hook 60 on the semi-automatic disconnector is able to come into contact with the notch 22 on the hammer. The cam lobe 94 is pushing down on the binary disconnector 38 to prevent the rear 46 from rotating counterclockwise under spring pressure so that the hook 48 on the binary disconnector is able to interface with the hammer. If the trigger is pulled in this mode, the hammer will rotate forward under spring pressure and hit the firing pin (not shown) to discharge a round.

FIG. 8 illustrates the improved trigger group for semi-automatic firearms 10 of the present invention. More particularly, the trigger group for semi-automatic firearms 10 is shown in semi-automatic mode with the safety selector 74 pointing at the 12 o'clock position. The trigger 62 has been pulled, which has disengage the sear 72 from the notch 24 on the hammer. The disengagement has enabled the hammer 12 to rotate forward under spring pressure to hit the firing pin to discharge a round. The semi-automatic disconnector 50 is rotated counterclockwise relative to the binary disconnector 38. In this position, the hook 60 on the semi-automatic disconnector is positioned in front of the hook 48 on the binary disconnector.

FIGS. 9A-C illustrate the improved trigger group for semi-automatic firearms 10 of the present invention. More particularly, the trigger group for semi-automatic firearms 10 is shown in semi-automatic mode with the safety selector 74 pointing at the 12 o'clock position. Gas pressure resulting from the discharge of a round has driven the bolt carrier group (not shown) rearward, pushing the hammer 12 back into the cocked position. The notch 22 of the hammer has latched onto the hook 60 of the semi-automatic disconnector 50. This engagement prevents the hammer from rotating forward again even though the trigger 62 remains pulled. The hook 48 on the binary disconnector 38 is held behind the hook on the semi-automatic disconnector, which prevents the hook on the binary disconnector from engaging the notch 22 on the hammer. As the trigger is released, the front 56 of the semi-automatic disconnector is pushed up. This movement disengages the notch 22 of the hammer from the hook 60 of the semi-automatic disconnector. Just prior to the hammer disengaging from the semi-automatic disconnector, the sear 72 on the trigger 62 is positioned to catch the notch 24 in the hammer, which preventing the hammer from rotating forward until the trigger is pulled again. This is the position shown in FIG. 4.

FIGS. 10A-E illustrate the improved trigger group for semi-automatic firearms 10 of the present invention. More particularly, the trigger group for semi-automatic firearms 10 is shown in transition from semi-automatic mode to

binary mode (FIGS. **10**A-C) and in semi-automatic mode (FIGS. **10**D-E). The hammer lever **26** and ridge **104** on the hammer **12** were created for safer and easier transition between the semi-automatic disconnector **50** and the binary disconnector **38**. Without the use of the hammer lever and ridge, it would be unsafe to transition from binary mode to semi-automatic mode while holding the trigger **62** back since the semi-automatic disconnector could force the binary disconnector off of the hammer. The hammer would then rotate forward under spring pressure and hit the firing pin. This would create the unfavorable circumstance of inadvertently allowing the firearm to discharge by simply manipulating the safety selector **74**. The hammer lever resolves this safety issue by insuring the hammer cannot rotate forward during mode transition. To further improve operation, all cam lobes were smoothly radiused between semi-automatic mode and binary mode.

As is shown in FIG. **10**D-E and FIG. **7**, when the safety selector **74** is an semi-automatic mode, the front **32** of the hammer lever **26** is disengage from the ridge **104** on the hammer. As a result, the hammer is free to rotate forward once the trigger **62** is pulled. However, as the safety selector is rotated clockwise towards the 3 o'clock position to place the firearm in binary mode, the protrusion **36** on the bottom **30** rear **34** of the hammer lever contacts the tip **102** of the cam lobe **76**. The contact lifts the rear of the hammer lever and pivots the front **32** downwards into engagement with the ridge on the hammer (shown in FIGS. **7**A-C). As long as the hammer lever engages the ridge on the hammer, the hammer cannot rotate forward. Once the safety selector reaches the binary mode position (shown in FIGS. **8**A-B), the tip of the cam lobe rotates past the protrusion on the hammer lever, and spring pressure disengages the front of the hammer lever from the ridge on the hammer to permit firearm operation.

FIGS. **11**A-B illustrate the improved trigger group for semi-automatic firearms **10** of the present invention. More particularly, the trigger group for semi-automatic firearms **10** is shown in binary mode with the safety selector **74** pointing at the 12 o'clock position. In this mode, cam lobe **78** on the safety selector **74** is recessed to allow the trigger **62** to be pulled when the hammer **12** is cocked. Cam lobe **94** on the safety selector is also recessed to allow the rear **46** of the binary disconnector **38** to rotate counterclockwise under spring pressure so that the hook **48** on the binary disconnector is able to come into contact with the notch **22** on the hammer. The cam lobe **88** is pushing down on the semi-automatic disconnector **50** to prevent the rear **58** from rotating counterclockwise under spring pressure so that the hook **60** on the semi-automatic disconnector is able to interface with the hammer. If the trigger is pulled in this mode, the hammer will rotate forward under spring pressure and hit the firing pin (not shown) to discharge a round.

FIG. **12** illustrates the improved trigger group for semi-automatic firearms **10** of the present invention. More particularly, the trigger group for semi-automatic firearms **10** is shown in binary mode with the safety selector **74** pointing at the 3 o'clock position. The trigger **62** has been pulled, which has disengage the sear **72** from the notch **24** on the hammer. The disengagement has enabled the hammer **12** to rotate forward under spring pressure to hit the firing pin to discharge a round. The binary disconnector **38** is rotated counterclockwise relative to the semi-automatic disconnector **50**. In this position, the hook **48** on the binary disconnector is positioned in front of the hook **60** on the semi-automatic disconnector.

FIGS. **13** and **14** illustrate the improved trigger group for semi-automatic firearms **10** of the present invention. More particularly, the trigger group for semi-automatic firearms **10** is shown in binary mode with the safety selector **74** pointing at the 3 o'clock position. Gas pressure resulting from the discharge of a round has driven the bolt carrier group (not shown) rearward, pushing the hammer **12** back into the cocked position shown in FIG. **10**. The notch **22** of the hammer has latched onto the hook **48** of the binary disconnector **38**. This engagement prevents the hammer from rotating forward again even though the trigger **62** remains pulled. The hook **60** on the semi-automatic disconnector **50** is held behind the hook on the binary disconnector, which prevents the hook on the semi-automatic disconnector from engaging the notch **22** on the hammer. As the trigger is released, the front **44** of the binary disconnector is pushed up. This movement disengages the notch **22** of the hammer from the hook **48** of the binary disconnector. Unlike semi-automatic mode, the sear **72** on the trigger **62** is not positioned to catch the notch **24** in the hammer **12** just prior to the hammer disengaging from the binary disconnector **38**. As a result, the hammer rotates forward again upon release of the trigger, discharging a second round. This is the position shown in FIG. **14**.

As is shown in FIG. **15-17**, the binary disconnector **38** and the semi-automatic disconnector **50** differ in subtle ways. First, the binary disconnector has a reversed bottom **42** rear **46** profile relative to the semi-automatic disconnector **50**. Second, the bottom **42** front **44** of the binary disconnector is positioned slightly higher than the bottom **54** front **56** of the semi-automatic disconnector. Third, the forward facing hook **60** of the semi-automatic disconnector extends slightly forward of the forward facing hook **48** of the binary disconnector. A binary disconnector spring **122** has one end received within a notch **126** in the bottom rear of the binary disconnector. A semi-automatic disconnector spring **124** has one end received within a notch **128** in the bottom rear of the semi-automatic disconnector. The springs cause the disconnectors to be biased to rotate counterclockwise about a pin (not shown) inserted through aperture **130** in the binary disconnector and aperture **132** in the semi-automatic disconnector.

While the semi-automatic disconnector **50** and the binary disconnector **38** differ in seemingly minor ways, these slight changes in geometry affect what gun designers refer to as the "timing" of the trigger group **10**. These changes in geometry are normally used to provide the proper function for a conventional semi-automatic rifle (especially to prevent it from being readily modified) or for full-automatic or select fire machine guns.

Because of the geometry, the semi-automatic disconnector **50** operates to catch the hammer **12** as the hammer is pushed back by the bolt after firing, even while the trigger **62** is still pulled back from a shot. When the trigger is released, the geometry of the semi-automatic disconnector provides that the trigger sear **72** is elevated adequately by the time the hammer swings forward slightly, so that the hammer hook notch **24** catches on the sear, readying the trigger for firing.

When the binary disconnector **38** is enabled (which occurs in the same manner as enabling the semi-automatic disconnector **50** by the safety selector **74** shifting the binary disconnector forward so that the binary disconnector's forward facing hook **48** can engage the hammer **12**) the slightly different timing geometry gives a different result when the trigger **62** is released. Instead of releasing the hammer to the sear **72**, the different geometry allows the hammer hook notch **24** to bypass the sear, and the hammer to fly forward

to fire another shot. The bolt cocks back the hammer, where the binary disconnector catches the hammer until the trigger is pulled back.

FIGS. **18**A-G illustrate the improved trigger group for semi-automatic firearms **10** of the present invention. More particularly, the trigger group for semi-automatic firearms **10** is shown transitioning from binary mode to semi-automatic mode. In each figure, the safety selector **74** has been rotated 15° counterclockwise relative to the previous figure. In binary mode (FIG. **18**A), the front **32** of the hammer lever does not engage the ridge **104** on the hammer **12**, leaving the hammer free to rotate forward as the trigger **62** is pulled and released. Once the safety selector has been rotated 15° counterclockwise (FIG. **18**B), though, the protrusion **36** on the bottom **30** rear **34** of the hammer lever has begun to contact the tip **102** of the cam lobe **76**. The tip of the cam lobe raises the rear of the hammer lever and pushes the front of the hammer lever downward into engagement with the ridge on the hammer. As the safety selector continues to be rotated counterclockwise, the hammer notch **22** transitions from engagement with hook **48** on the binary disconnector **38** to engagement with hook **60** on the semi-automatic disconnector **50** (FIGS. **18**C-F). In the event the hammer notch **22** becomes disengaged from the hook on the binary disconnector prior to engaging with the hook on the semi-automatic disconnector, the engagement of the hammer lever with the ridge prevents the hammer from rotating forward and discharging a firearm even if the trigger were being pulled. FIG. **18**G shows the result of the final 15° of counterclockwise rotation of the safety selector, which is to place the firearm in semi-automatic mode.

If desired, the user can continue to rotate the safety selector **74** counterclockwise to return the firearm to safe mode. This can be accomplished even if the firearm is initially in binary mode with the trigger held back waiting to fire a second round upon trigger release. The user can manipulate the selector to return the firearm to safe mode while holding the trigger back without discharging the second round. This is an incredibly important capability since persons utilizing deadly force must generally cease fire when a threat has been eliminated. To fire an additional round in such an instance would be a significant liability for the owner of the firearm and the manufacturer of the trigger.

FIGS. **19-21** illustrate the improved trigger group for semi-automatic firearms **10** of the present invention. More particularly, the trigger group for semi-automatic firearms **10** is shown with the hammer lever **26** and safety selector **74** both present and removed. As a result, it can be appreciated that the binary disconnector **38** and semi-automatic disconnector **50** fit in a channel **120** along the top spine of the trigger **62**.

In the context of the specification, the terms "rear" and "rearward," and "front" and "forward" have the following definitions: "rear" or "rearward" means in the direction away from the muzzle of the firearm while "front" or "forward" means it is in the direction towards the muzzle of the firearm.

While a current embodiment of a trigger group for semi-automatic firearms has been described in detail, it should be apparent that modifications and variations thereto are possible, all of which fall within the true spirit and scope of the invention. With respect to the above description then, it is to be realized that the optimum dimensional relationships for the parts of the invention, to include variations in size, materials, shape, form, function and manner of operation, assembly and use, are deemed readily apparent and obvious to one skilled in the art, and all equivalent relationships to those illustrated in the drawings and described in the specification are intended to be encompassed by the present invention. For example, although an AR-15 is disclosed, the invention is suitable for use with a wide variety of firearm platforms including the AK-47, FN-FAL, Mini-14, UZI, MIA, Garand, and Remington 740, 7400, and 750.

Therefore, the foregoing is considered as illustrative only of the principles of the invention. Further, since numerous modifications and changes will readily occur to those skilled in the art, it is not desired to limit the invention to the exact construction and operation shown and described, and accordingly, all suitable modifications and equivalents may be resorted to, falling within the scope of the invention.

We claim:

1. A trigger group for a firearm, the trigger group comprising:

a hammer movable between a cocked position and a striking position;

the hammer being biased toward the striking position;

the hammer having a first hammer hook;

the hammer having a second hammer hook;

a trigger element movable by a user between a rest position and an actuated position;

a movable sear responsive to movement of the trigger element and operable to engage the first hammer hook to restrain the hammer in the cocked position when the trigger element is in the rest position, and in response to pulling the trigger element to the actuated position to release the hammer to the striking position to discharge the firearm;

a single selector movable between at least a first position, a second position, and a third position;

a disconnector assembly operably connected to the selector and having a hammer retention facility selectably engaging the second hammer hook;

the disconnector assembly operable when the selector is in the first position to retain the hammer in the cocked position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element;

the disconnector assembly operable when the selector is in the second position to release the hammer to the striking position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element, such that the firearm discharges once per cycle of the trigger element when the selector is in the first position, and twice for each rearward-forward motion sequence of the trigger element when the selector is in the second position; and

the disconnector assembly being operable when the selector is in the third position to prevent discharge of the firearm in response to an application of force on the trigger.

2. The trigger group of claim **1** wherein the disconnector assembly includes two disconnector elements, each movable independently of each other.

3. The trigger group of claim **2** wherein each disconnector element contacts a respective different portion of the selector.

4. The trigger group of claim **2** wherein the selector has a first cam profile portion aligned with a first one of the disconnectors, and a second cam profile aligned with a second one of the disconnectors.

5. The trigger group of claim **1** wherein the disconnector assembly includes two disconnector elements, each disconnector element being a planar element, and the two disconnector elements being parallel to and overlaying each other.

6. A firearm trigger group comprising:
a frame;
a trigger;
a hammer operably interactive with the trigger;
a single selector having at least first and second selector positions;
a first disconnector operably interactive with the selector;
the first disconnector being operably interactive with the hammer when the selector is in the first selector position; and
the second disconnector being operably interactive with the hammer when the selector is in the second selector position;
wherein the first disconnector is operable to retain the hammer after a discharge while the trigger is pulled and to release the hammer to a cocked position when the trigger is released after a discharge, and the second disconnector is operable to retain the hammer after a discharge while the trigger is pulled and to release the hammer to discharge the firearm when the trigger is released after a discharge.

7. The trigger group of claim 6 wherein the first disconnector has a first hammer engaging feature, and the second disconnector has a second hammer engaging feature, and wherein the first and second hammer engaging features differ from each other such that the trigger group has a different operating characteristic based on the position of the selector.

8. The trigger group of claim 6 wherein the selector has a first cam profile portion aligned with the first disconnector, and a second cam profile aligned with the second disconnector.

9. The trigger group of claim 6 including a hammer retention element operable to retain the hammer when in a first position and operable to release the hammer when in a second position, the selector having a cam surface registered with and operably interactive with the hammer retention element to retain the hammer when the selector is transitioned between at least two of the positions.

10. The trigger group of claim 6 wherein the disconnectors are pivotally connected to the trigger, and operable to move in response to trigger movement.

11. A trigger group for a firearm, the trigger group comprising:
a hammer movable between a cocked position and a striking position;
the hammer being biased toward the striking position; the hammer having a first hammer hook;
the hammer having a second hammer hook;
a trigger element connected to the frame and movable by a user between a rest position and an actuated position;
a movable sear responsive to movement of the trigger element and operable to engage the first hammer hook to restrain the hammer in the cocked position when the trigger element is in the rest position, and in response to pulling the trigger element to the actuated position to release the hammer to the striking position to discharge the firearm;
a single selector movable between at least a first position and a second position;
a disconnector assembly operably connected to the selector and having a hammer retention facility selectably engaging the second hammer hook;
the disconnector assembly operable when the selector is in the first position to retain the hammer in the cocked position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element;
the disconnector assembly operable when the selector is in the second position to release the hammer to the striking position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element, such that the firearm discharges once per cycle of the trigger element when the selector is in the first position, and twice for each rearward-forward motion sequence of the trigger element when the selector is in the second position;
wherein the disconnector assembly includes two disconnector elements, each movable independently of each other; and
wherein the selector is adapted to engage both disconnector elements.

12. The trigger group of claim 11 wherein the selector has a first cam profile portion aligned with a first one of the disconnectors, and a second cam profile aligned with a second one of the disconnectors.

13. The trigger group of claim 11 wherein the disconnector elements are coextensive with each other.

14. The trigger group of claim 11 wherein the disconnector elements have peripheries registered with each other.

15. The trigger group of claim 11 wherein the disconnector elements pivot on a common axis.

16. The trigger group of claim 11 wherein the disconnector elements each define an aperture, and wherein the apertures are registered with each other.

17. The trigger group of claim 11 wherein the disconnector elements are positioned side by side.

18. The trigger group of claim 11 wherein the first and second disconnectors each have a rear portion adapted for engagement by the selector.

19. The trigger group of claim 11 wherein the first and second disconnectors each have an upper hook portion adapted for engagement by adjacent portions of a common element of the hammer.

20. The trigger group of claim 11 wherein the first and second disconnectors each have a forward protrusion portion adapted for engagement with a forward portion of the trigger.

21. The trigger group of claim 11 wherein the first and second disconnectors each define a pivot aperture, and including a common pin received in the pivot apertures.

22. The trigger group of claim 11 wherein the selector is connected directly to the frame.

23. The trigger group of claim 11 wherein the selector is in direct contact with the frame.

24. The trigger group of claim 11 wherein the frame defines a bore and the selector has a barrel portion received within the bore.

25. The trigger group of claim 24 wherein the bore is transverse to the frame.

26. The trigger group of claim 24 wherein the bore defines a bore axis, and where the trigger is adapted to pivot on a trigger axis parallel to the bore axis.

27. The trigger group of claim 24 wherein the bore defines a bore axis, and where the trigger is adapted to pivot on a trigger axis forward of the bore axis.

28. The trigger group of claim 24 wherein the frame has a major face and wherein the bore defines a bore axis perpendicular to the major face.

29. The trigger group of claim 11 wherein the selector is positioned aft of the trigger.

30. The trigger group of claim 11 wherein the selector is separate from the trigger.

31. The trigger group of claim 11 wherein the selector is only indirectly connected to the trigger.

32. A trigger group for a firearm, the trigger group comprising:

a hammer movable between a cocked position and a striking position;

the hammer being biased toward the striking position; the hammer having a first hammer hook;

the hammer having a second hammer hook;

a trigger element connected to the frame and movable by a user between a rest position and an actuated position;

a movable sear responsive to movement of the trigger element and operable to engage the first hammer hook to restrain the hammer in the cocked position when the trigger element is in the rest position, and in response to pulling the trigger element to the actuated position to release the hammer to the striking position to discharge the firearm;

a selector movable between at least a first position and a second position;

a disconnector assembly operably connected to the selector and having a hammer retention facility selectably engaging the second hammer hook;

the disconnector assembly operable when the selector is in the first position to retain the hammer in the cocked position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element;

the disconnector assembly operable when the selector is in the second position to release the hammer to the striking position in response to release of the trigger element to the rest position subsequent to discharge of the firearm by pulling the trigger element, such that the firearm discharges once per cycle of the trigger element when the selector is in the first position, and twice for each rearward-forward motion sequence of the trigger element when the selector is in the second position;

wherein the disconnector assembly includes two disconnector elements, each movable independently of each other;

wherein the selector is adapted to engage both disconnector elements; and

wherein the disconnector elements pivot on a common axis.

* * * * *