



US012265696B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.: US 12,265,696 B2**
(45) **Date of Patent: Apr. 1, 2025**

(54) **USER INTERFACE FOR AUDIO MESSAGE**

(56) **References Cited**

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

U.S. PATENT DOCUMENTS

(72) Inventors: **Andrew Seunghyun Kim**, Walnut Creek, CA (US); **Patrick L. Coffman**, San Francisco, CA (US)

102,663 A 5/1870 Dillen
4,975,694 A 12/1990 McLaughlin et al.
(Continued)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

AU 2007100826 A4 9/2007
AU 2008100011 A4 2/2008
(Continued)

(21) Appl. No.: **17/970,417**

OTHER PUBLICATIONS

(22) Filed: **Oct. 20, 2022**

Corrected Notice of Allowance received for U.S. Appl. No. 17/752,582, mailed on Jul. 17, 2023, 3 pages.

(65) **Prior Publication Data**

US 2023/0041125 A1 Feb. 9, 2023

(Continued)

Related U.S. Application Data

Primary Examiner — Linh K Pham

(74) *Attorney, Agent, or Firm* — DLA Piper LLP (US)

(63) Continuation of application No. 17/027,373, filed on Sep. 21, 2020, now Pat. No. 11,513,667.
(Continued)

(57) **ABSTRACT**


The present disclosure generally relates to receiving voice input via the one or more microphones; and displaying a visual indication of the voice input, where in accordance with a determination that a portion of the voice input corresponds to voice input that is to be transmitted to one or more devices displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to the one or more devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

(51) **Int. Cl.**
G06F 3/048 (2013.01)
G06F 3/04842 (2022.01)
G06F 3/0488 (2022.01)
G06F 3/16 (2006.01)
G06F 9/451 (2018.01)
(Continued)

(52) **U.S. Cl.**
CPC **G06F 3/04842** (2013.01); **G06F 3/0488** (2013.01); **G06F 3/167** (2013.01); **G06F 9/453** (2018.02); **H04M 1/72412** (2021.01); **H04M 1/72433** (2021.01)

(58) **Field of Classification Search**
CPC G06F 3/048; G06F 3/167
See application file for complete search history.

45 Claims, 77 Drawing Sheets

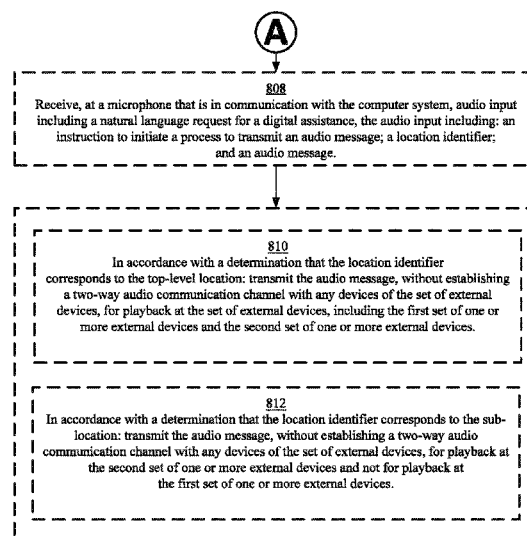

Related U.S. Application Data

- (60) Provisional application No. 63/041,979, filed on Jun. 21, 2020, provisional application No. 63/023,225, filed on May 11, 2020.

(51) Int. Cl.

H04M 1/72412 (2021.01)
H04M 1/72433 (2021.01)

(56) References Cited

U.S. PATENT DOCUMENTS

5,086,385 A 2/1992 Launey et al.
 5,146,217 A 9/1992 Holmes et al.
 5,202,961 A 4/1993 Mills et al.
 5,418,528 A 5/1995 Hosack et al.
 5,483,595 A 1/1996 Owen
 5,617,526 A 4/1997 Oran et al.
 5,687,216 A 11/1997 Svensson
 5,793,366 A 8/1998 Mano et al.
 5,801,700 A 9/1998 Ferguson
 5,835,084 A 11/1998 Bailey et al.
 5,872,521 A 2/1999 Lopatukin et al.
 5,875,403 A 2/1999 Christal
 5,923,327 A 7/1999 Smith et al.
 5,974,235 A 10/1999 Nunally et al.
 6,002,402 A 12/1999 Schacher
 6,014,429 A 1/2000 Laporta et al.
 6,016,248 A 1/2000 Anzai et al.
 6,025,871 A 2/2000 Kantor et al.
 6,084,529 A 7/2000 Lee et al.
 6,094,197 A 7/2000 Buxton et al.
 6,124,947 A 9/2000 Seo
 6,140,987 A 10/2000 Stein et al.
 6,169,911 B1 1/2001 Wagner et al.
 6,191,807 B1 2/2001 Hamada et al.
 6,216,008 B1 4/2001 Lee
 6,230,019 B1 5/2001 Lee
 6,256,663 B1 7/2001 Davis
 6,292,473 B1 9/2001 Duske et al.
 6,333,973 B1 12/2001 Smith et al.
 6,346,962 B1 2/2002 Goodridge
 6,362,842 B1 3/2002 Tahara et al.
 6,393,464 B1 5/2002 Dieterman
 6,456,306 B1 9/2002 Chin et al.
 6,456,841 B1 9/2002 Tomimori
 6,457,122 B1 9/2002 Ramezani
 6,483,986 B1 11/2002 Krapf
 6,504,934 B1 1/2003 Kasai et al.
 6,662,023 B1 12/2003 Helle
 6,674,452 B1 1/2004 Kraft et al.
 6,714,965 B2 3/2004 Kakuta et al.
 6,720,863 B2 4/2004 Hull et al.
 6,721,784 B1 4/2004 Leonard et al.
 6,726,094 B1 4/2004 Rantze et al.
 6,728,784 B1 4/2004 Mattaway
 6,731,308 B1 5/2004 Tang et al.
 6,741,232 B1 5/2004 Siedlikowski et al.
 6,778,642 B1 8/2004 Schmidt et al.
 6,792,448 B1 9/2004 Smith
 6,833,848 B1 12/2004 Wolff et al.
 6,850,781 B2 2/2005 Goto
 6,901,439 B1 5/2005 Bonasia et al.
 6,912,429 B1 6/2005 Bilger
 6,931,594 B1 8/2005 Jun
 6,934,738 B1 8/2005 Furusawa et al.
 6,937,707 B2 8/2005 Kim et al.
 7,092,768 B1 8/2006 Labuda
 7,102,663 B2 9/2006 Crook
 7,120,455 B1 10/2006 Chen et al.
 7,124,164 B1 10/2006 Chemtob
 7,148,911 B1 12/2006 Mitsui et al.
 7,149,893 B1 12/2006 Leonard et al.
 7,185,054 B1 2/2007 Ludwig et al.
 7,197,122 B2 3/2007 Vuori
 7,250,955 B1 7/2007 Beeman et al.

7,293,280 B1 11/2007 Gupta et al.
 7,365,736 B2 4/2008 Marvit et al.
 7,401,351 B2 7/2008 Boreczky et al.
 7,433,920 B2 10/2008 Blagsvedt et al.
 7,478,129 B1 1/2009 Chemtob
 7,496,385 B2 2/2009 Gruen et al.
 7,571,014 B1 8/2009 Lambourne et al.
 7,603,379 B2 10/2009 Kang et al.
 7,636,578 B1 12/2009 Cope et al.
 7,650,361 B1 1/2010 Wong et al.
 7,656,393 B2 2/2010 King et al.
 7,665,031 B2 2/2010 Matthews et al.
 7,680,895 B2 3/2010 Perlow et al.
 7,685,530 B2 3/2010 Sherrard et al.
 7,716,593 B2 5/2010 Durazo et al.
 7,730,223 B1 6/2010 Bavor et al.
 7,789,225 B2 9/2010 Whiteis
 7,797,390 B2 9/2010 Hagale et al.
 7,801,971 B1 9/2010 Amidon et al.
 7,831,054 B2 11/2010 Ball et al.
 7,834,861 B2 11/2010 Lee
 7,859,571 B1 12/2010 Brown et al.
 7,870,199 B2 1/2011 Galli et al.
 7,876,996 B1 1/2011 Herz
 7,899,474 B2 3/2011 Neil et al.
 7,903,171 B2 3/2011 Takabatake et al.
 7,904,814 B2 3/2011 Errico et al.
 7,908,219 B2 3/2011 Abanami et al.
 7,912,904 B2 3/2011 Buchheit et al.
 7,921,166 B2 4/2011 Karn
 7,982,762 B2 7/2011 Chatting et al.
 8,019,822 B2 9/2011 Martino et al.
 8,024,758 B2 9/2011 Byun et al.
 8,028,323 B2 9/2011 Weel
 8,031,230 B2 10/2011 Takada
 8,036,901 B2 10/2011 Mozer
 8,037,139 B1 10/2011 Fish et al.
 8,037,141 B2 10/2011 Daniell
 8,060,621 B2 11/2011 Lee et al.
 8,116,807 B2 2/2012 Matas
 8,121,586 B2 2/2012 Araradian et al.
 8,139,573 B2 3/2012 Kim
 8,150,930 B2 4/2012 Satterfield et al.
 8,169,463 B2 5/2012 Enstad et al.
 8,180,382 B1 5/2012 Graefen
 RE43,462 E 6/2012 Washino et al.
 8,196,043 B2 6/2012 Crow et al.
 8,209,384 B2 6/2012 Tom et al.
 8,209,634 B2 6/2012 Klassen et al.
 8,214,494 B1 7/2012 Slavin
 8,234,395 B2 7/2012 Millington
 8,253,704 B2 8/2012 Jang
 8,255,830 B2 8/2012 Ordning et al.
 8,274,544 B2 9/2012 Kurtz et al.
 8,280,539 B2 10/2012 Jehan et al.
 8,290,603 B1 10/2012 Lambourne
 8,311,562 B2 11/2012 Klassen
 8,370,448 B2 2/2013 Galchev
 8,458,780 B1 6/2013 Takkallapally et al.
 8,462,961 B1 6/2013 Bywaters et al.
 8,479,122 B2 7/2013 Hotelling et al.
 8,488,752 B1 7/2013 Wiesen
 8,502,856 B2 8/2013 Jeong et al.
 8,516,374 B2 8/2013 Fleischman et al.
 8,527,345 B2 9/2013 Rothschild et al.
 8,572,493 B2 10/2013 Qureshi
 8,607,334 B2 12/2013 Brown et al.
 8,611,873 B2 12/2013 Onyon et al.
 8,624,952 B2 1/2014 Currihan et al.
 8,648,799 B1 2/2014 Lloyd
 8,650,652 B2 2/2014 Adams
 8,676,901 B1 3/2014 Nicolaou et al.
 8,689,147 B2 4/2014 Griffin et al.
 8,706,818 B2 4/2014 Krzyzanowski et al.
 8,725,880 B2 5/2014 Santamaria et al.
 8,745,500 B1 6/2014 Kostello et al.
 8,751,594 B2 6/2014 Aceves
 8,762,844 B2 6/2014 Kim et al.
 8,830,181 B1 9/2014 Clark et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

8,848,932 B2	9/2014	Poulsen et al.	10,027,775 B1	7/2018	Mierau et al.
8,849,928 B2	9/2014	Yuyama	10,055,094 B2	8/2018	Li et al.
8,856,105 B2	10/2014	Gargi	10,068,364 B2	9/2018	Cui
8,914,752 B1	12/2014	Spiegel	10,091,017 B2	10/2018	Landow et al.
8,918,128 B2	12/2014	Merrett	10,104,089 B2	10/2018	Kim et al.
8,922,485 B1	12/2014	Lloyd	10,110,530 B2	10/2018	Sachtjen
8,924,866 B2	12/2014	Shin et al.	10,120,536 B2	11/2018	Cha et al.
8,954,889 B2	2/2015	Fujibayashi	10,129,044 B2	11/2018	Kangshang et al.
8,984,444 B2	3/2015	O	10,142,122 B1	11/2018	Hill et al.
8,990,861 B2	3/2015	Nishikawa et al.	10,157,040 B2 *	12/2018	Ballinger G10L 15/26
9,021,526 B1	4/2015	Baron et al.	10,182,138 B2	1/2019	Motika et al.
9,042,556 B2	5/2015	Kallai et al.	10,194,189 B1	1/2019	Goetz et al.
9,080,736 B1 *	7/2015	Salzinger H05B 47/11	10,198,563 B2	2/2019	Wang et al.
9,082,018 B1	7/2015	Laska et al.	10,200,468 B2	2/2019	Leban et al.
9,084,003 B1	7/2015	Sanio et al.	10,219,026 B2	2/2019	Eim et al.
9,112,849 B1	8/2015	Werkelin Ahlin et al.	10,237,141 B2	3/2019	Sasaki et al.
9,112,984 B2	8/2015	Sejnoha et al.	10,270,983 B1	4/2019	Van Os et al.
9,134,902 B2	9/2015	Kang et al.	10,282,068 B2	5/2019	Dubin et al.
9,158,974 B1	10/2015	Laska et al.	10,284,812 B1	5/2019	Van Os et al.
9,170,707 B1	10/2015	Laska et al.	10,284,980 B1	5/2019	Woo et al.
9,185,062 B1	11/2015	Yang et al.	10,296,128 B1	5/2019	Nold et al.
9,202,509 B2	12/2015	Kallai et al.	10,298,643 B1	5/2019	Toal et al.
9,207,835 B1	12/2015	Yang et al.	10,299,300 B1	5/2019	Young
9,247,363 B2	1/2016	Triplett et al.	10,300,394 B1 *	5/2019	Evans A63F 13/86
9,247,380 B1	1/2016	Vincent	10,303,422 B1	5/2019	Woo et al.
9,251,787 B1	2/2016	Hart et al.	10,306,049 B1	5/2019	Bauer et al.
9,253,531 B2	2/2016	Relyea et al.	10,310,725 B2	6/2019	Smith et al.
9,294,853 B1	3/2016	Dhaundiyal	10,339,769 B2 *	7/2019	Mixer G06F 3/167
9,313,160 B1	4/2016	Shamis et al.	10,353,532 B1	7/2019	Holz et al.
9,313,556 B1	4/2016	Borel et al.	10,362,272 B1	7/2019	Van Os et al.
9,319,782 B1	4/2016	Crump et al.	10,374,804 B2	8/2019	Lee et al.
9,329,831 B1	5/2016	Fullerton et al.	10,386,994 B2	8/2019	Singal et al.
9,361,011 B1	6/2016	Burns et al.	10,389,977 B1	8/2019	Van Os et al.
9,361,521 B1	6/2016	McLean et al.	10,409,239 B2	9/2019	Reeder et al.
9,374,607 B2	6/2016	Bates et al.	10,410,426 B2	9/2019	Kamini et al.
9,380,264 B1	6/2016	Vakalapudi	10,416,844 B2	9/2019	Yang et al.
D765,118 S	8/2016	Bachman et al.	10,436,977 B2	10/2019	Bergman et al.
9,413,606 B1	8/2016	Roberts	10,454,781 B2	10/2019	Sasaki et al.
9,431,021 B1	8/2016	Scalise et al.	10,474,349 B2	11/2019	Jang et al.
9,433,032 B1	8/2016	Ghadge et al.	10,511,456 B2	12/2019	Smith et al.
9,444,898 B1	9/2016	Cheng et al.	10,511,559 B2	12/2019	Stovicek et al.
9,445,048 B1	9/2016	Nariyawala et al.	10,515,623 B1	12/2019	Grizzel
9,450,812 B2	9/2016	Lee et al.	10,523,625 B1	12/2019	Allen et al.
9,454,336 B1	9/2016	Rudradevan et al.	10,523,976 B2	12/2019	Hemmati et al.
9,462,017 B1	10/2016	Siracusano, Jr.	10,524,300 B2	12/2019	Ueda et al.
9,483,529 B1	11/2016	Pasoi et al.	10,630,795 B2	4/2020	Aoki et al.
D773,510 S	12/2016	Foss et al.	10,631,123 B2	4/2020	O'keeffe
9,519,413 B2	12/2016	Bates	10,645,294 B1	5/2020	Manzari et al.
9,578,160 B2	2/2017	Kim et al.	10,708,653 B1	7/2020	Stinson et al.
9,582,178 B2	2/2017	Grant et al.	10,713,699 B1	7/2020	Lien et al.
9,588,661 B1	3/2017	Jauhal et al.	10,732,819 B2	8/2020	Wang et al.
9,628,414 B1	4/2017	Umapathy et al.	10,742,645 B2	8/2020	Hevizi et al.
9,635,314 B2	4/2017	Barkley et al.	10,742,648 B2	8/2020	Magyar et al.
9,653,067 B2	5/2017	Brooks et al.	10,757,366 B1	8/2020	Kwatra et al.
9,665,242 B2	5/2017	Kim et al.	10,771,740 B1	9/2020	Reynolds et al.
D789,381 S	6/2017	Okumura et al.	10,771,741 B1	9/2020	Reynolds et al.
9,680,982 B2	6/2017	Fiedler	10,779,085 B1	9/2020	Carrigan
9,710,639 B1	7/2017	Saini	10,783,883 B2 *	9/2020	Mixer G06F 3/167
9,727,346 B2	8/2017	Shao	10,824,299 B2	11/2020	Bai
9,727,749 B2	8/2017	Tzeng et al.	10,833,887 B2	11/2020	Wu
9,728,230 B2	8/2017	Cudak et al.	10,909,586 B2	2/2021	Avedissian et al.
9,750,116 B2	8/2017	Witzgall	10,924,446 B1	2/2021	Paul
9,759,917 B2	9/2017	Osterhout et al.	10,929,099 B2 *	2/2021	Querze G06F 3/167
9,784,417 B1	10/2017	Springer	10,963,145 B1	3/2021	Voss et al.
9,787,938 B2	10/2017	Cranfill et al.	10,972,655 B1	4/2021	Ostap et al.
9,794,720 B1	10/2017	Kadri	11,012,575 B1	5/2021	Leblang et al.
9,800,951 B1	10/2017	Carlson et al.	11,024,303 B1 *	6/2021	Devaraj G10L 15/1815
9,819,877 B1	11/2017	Faulkner et al.	11,064,256 B1	7/2021	Voss et al.
9,820,323 B1	11/2017	Young et al.	11,079,913 B1	8/2021	Kim et al.
9,858,739 B1	1/2018	Johnson et al.	11,133,008 B2	9/2021	Piernot et al.
9,886,953 B2	2/2018	Lemay et al.	11,144,885 B2	10/2021	Rosenberg
9,898,175 B2	2/2018	Fiedler	11,157,143 B2	10/2021	Yang et al.
9,898,250 B1	2/2018	Williams et al.	11,164,113 B2	11/2021	Howard
9,954,989 B2	4/2018	Zhou	11,164,580 B2 *	11/2021	Kraker G06F 3/167
9,992,450 B1	6/2018	Yuan et al.	11,176,940 B1 *	11/2021	Zhong G06F 3/167
			11,212,449 B1	12/2021	Manzari et al.
			11,258,619 B2	2/2022	Libin
			11,283,916 B2 *	3/2022	Coffman G06F 3/04847
			11,290,687 B1	3/2022	Becchetti

(56)

References Cited

U.S. PATENT DOCUMENTS

- | | | | | | | |
|-----------------|---------|---------------------|--------------|-----------------|---------|--------------------------|
| 11,316,709 B2 * | 4/2022 | Brown | H04L 12/282 | 2005/0052458 A1 | 3/2005 | Lambert |
| 11,343,370 B1 | 5/2022 | Gordon et al. | | 2005/0055412 A1 | 3/2005 | Kaminsky et al. |
| 11,343,613 B2 * | 5/2022 | Gordon | G06F 9/542 | 2005/0055472 A1 | 3/2005 | Krzyzanowski et al. |
| 11,360,634 B1 | 6/2022 | Chang et al. | | 2005/0086605 A1 | 4/2005 | Ferrer et al. |
| 11,431,834 B1 | 8/2022 | Gordon et al. | | 2005/0091314 A1 | 4/2005 | Blagsvedt et al. |
| 11,449,188 B1 | 9/2022 | Chang et al. | | 2005/0094610 A1 | 5/2005 | De et al. |
| 11,463,576 B1 | 10/2022 | Gordon et al. | | 2005/0099492 A1 | 5/2005 | Orr |
| 11,523,166 B1 * | 12/2022 | Tu | G06F 3/04883 | 2005/0114753 A1 | 5/2005 | Kumar et al. |
| 11,671,697 B2 | 6/2023 | O'leary et al. | | 2005/0120306 A1 | 6/2005 | Klassen et al. |
| 11,726,647 B2 | 8/2023 | Kim | | 2005/0124365 A1 | 6/2005 | Balasuriya et al. |
| 11,770,600 B2 | 9/2023 | O'leary et al. | | 2005/0130631 A1 | 6/2005 | Maguire et al. |
| 12,014,118 B2 * | 6/2024 | Gruber | G06F 3/04817 | 2005/0138552 A1 | 6/2005 | Venolia |
| 12,085,421 B2 * | 9/2024 | Yedid | H04N 23/58 | 2005/0143104 A1 | 6/2005 | Kim |
| 2001/0030597 A1 | 10/2001 | Inoue et al. | | 2005/0144247 A1 | 6/2005 | Christensen et al. |
| 2001/0033298 A1 | 10/2001 | Slotznick | | 2005/0144568 A1 | 6/2005 | Gruen et al. |
| 2001/0041007 A1 | 11/2001 | Aoki | | 2005/0163345 A1 | 7/2005 | Van et al. |
| 2002/0002039 A1 | 1/2002 | Qureshey et al. | | 2005/0169503 A1 | 8/2005 | Howell et al. |
| 2002/0012526 A1 | 1/2002 | Sai et al. | | 2005/0181821 A1 | 8/2005 | Elomaa et al. |
| 2002/0057262 A1 | 5/2002 | Patrick et al. | | 2005/0188320 A1 | 8/2005 | Bocking |
| 2002/0057284 A1 | 5/2002 | Dalby et al. | | 2005/0191996 A1 | 9/2005 | Cha |
| 2002/0060701 A1 | 5/2002 | Naughton et al. | | 2005/0193345 A1 | 9/2005 | Klassen et al. |
| 2002/0063737 A1 | 5/2002 | Feig et al. | | 2005/0198128 A1 | 9/2005 | Anderson et al. |
| 2002/0093531 A1 | 7/2002 | Barile | | 2005/0216568 A1 | 9/2005 | Walkush et al. |
| 2002/0093536 A1 | 7/2002 | Hong | | 2005/0223058 A1 | 10/2005 | Buchheit et al. |
| 2002/0101446 A1 | 8/2002 | Tang et al. | | 2005/0223066 A1 | 10/2005 | Buchheit et al. |
| 2002/0120869 A1 | 8/2002 | Engstrom | | 2005/0223075 A1 | 10/2005 | Swearingen et al. |
| 2002/0126135 A1 | 9/2002 | Ball et al. | | 2005/0233780 A1 | 10/2005 | Jani et al. |
| 2002/0152220 A1 | 10/2002 | Kang et al. | | 2005/0233784 A1 | 10/2005 | You et al. |
| 2002/0154888 A1 | 10/2002 | Allen et al. | | 2005/0262199 A1 | 11/2005 | Chen et al. |
| 2002/0167488 A1 | 11/2002 | Hinckley et al. | | 2005/0266884 A1 | 12/2005 | Marriott et al. |
| 2002/0168938 A1 | 11/2002 | Chang | | 2005/0275626 A1 | 12/2005 | Mueller et al. |
| 2002/0180774 A1 | 12/2002 | Errico et al. | | 2006/0002315 A1 | 1/2006 | Theurer et al. |
| 2003/0003897 A1 | 1/2003 | Hyon | | 2006/0002523 A1 | 1/2006 | Bettis et al. |
| 2003/0023684 A1 | 1/2003 | Brown et al. | | 2006/0005156 A1 | 1/2006 | Korpiää et al. |
| 2003/0028382 A1 | 2/2003 | Chambers et al. | | 2006/0009243 A1 | 1/2006 | Dahan et al. |
| 2003/0040813 A1 | 2/2003 | Gonzales et al. | | 2006/0013554 A1 | 1/2006 | Poslinski et al. |
| 2003/0063130 A1 | 4/2003 | Barbieri et al. | | 2006/0019639 A1 | 1/2006 | Adams et al. |
| 2003/0073496 A1 | 4/2003 | D'amico et al. | | 2006/0031775 A1 | 2/2006 | Sattler et al. |
| 2003/0078833 A1 | 4/2003 | Suzuki et al. | | 2006/0034586 A1 | 2/2006 | Millar et al. |
| 2003/0093790 A1 | 5/2003 | Logan et al. | | 2006/0044283 A1 | 3/2006 | Eri et al. |
| 2003/0110511 A1 | 6/2003 | Schutte et al. | | 2006/0053194 A1 | 3/2006 | Schneider et al. |
| 2003/0112938 A1 | 6/2003 | Kanakubo et al. | | 2006/0056837 A1 | 3/2006 | Vapaakoski |
| 2003/0120957 A1 | 6/2003 | Pathiyal | | 2006/0075027 A1 | 4/2006 | Zager et al. |
| 2003/0158886 A1 | 8/2003 | Walls et al. | | 2006/0084450 A1 | 4/2006 | Dam et al. |
| 2003/0160861 A1 | 8/2003 | Barlow et al. | | 2006/0085505 A1 | 4/2006 | Gillum et al. |
| 2003/0162554 A1 | 8/2003 | Kim | | 2006/0085515 A1 | 4/2006 | Kurtz et al. |
| 2003/0225836 A1 | 12/2003 | Lee et al. | | 2006/0094416 A1 | 5/2006 | Endo et al. |
| 2003/0229722 A1 | 12/2003 | Beyda | | 2006/0098085 A1 | 5/2006 | Nichols et al. |
| 2004/0003040 A1 | 1/2004 | Beavers et al. | | 2006/0098634 A1 | 5/2006 | Umemoto et al. |
| 2004/0003051 A1 | 1/2004 | Krzyzanowski et al. | | 2006/0123353 A1 | 6/2006 | Matthews et al. |
| 2004/0015548 A1 | 1/2004 | Lee et al. | | 2006/0128404 A1 | 6/2006 | Klassen et al. |
| 2004/0015553 A1 | 1/2004 | Griffin et al. | | 2006/0132455 A1 | 6/2006 | Rimas-ribikauskas et al. |
| 2004/0032955 A1 | 2/2004 | Hashimoto et al. | | 2006/0135136 A1 | 6/2006 | Kim et al. |
| 2004/0048601 A1 | 3/2004 | Lee et al. | | 2006/0149399 A1 | 7/2006 | Norhammar et al. |
| 2004/0048612 A1 | 3/2004 | Virtanen et al. | | 2006/0158730 A1 | 7/2006 | Kira |
| 2004/0070511 A1 | 4/2004 | Kim | | 2006/0161621 A1 | 7/2006 | Rosenberg |
| 2004/0078444 A1 | 4/2004 | Malik et al. | | 2006/0161629 A1 | 7/2006 | Cohen et al. |
| 2004/0078446 A1 | 4/2004 | Daniell et al. | | 2006/0161870 A1 | 7/2006 | Hotelling et al. |
| 2004/0095377 A1 | 5/2004 | Salandro | | 2006/0161871 A1 | 7/2006 | Hotelling et al. |
| 2004/0102225 A1 | 5/2004 | Furuta et al. | | 2006/0171453 A1 | 8/2006 | Rohlfing et al. |
| 2004/0119740 A1 | 6/2004 | Chang et al. | | 2006/0174035 A1 | 8/2006 | Tufail |
| 2004/0131254 A1 | 7/2004 | Liang et al. | | 2006/0187897 A1 | 8/2006 | Dabbs et al. |
| 2004/0172455 A1 | 9/2004 | Green et al. | | 2006/0195787 A1 | 8/2006 | Topiwala et al. |
| 2004/0202117 A1 | 10/2004 | Wilson et al. | | 2006/0221184 A1 | 10/2006 | Vallone et al. |
| 2004/0208301 A1 | 10/2004 | Urban et al. | | 2006/0256188 A1 | 11/2006 | Mock et al. |
| 2004/0218035 A1 | 11/2004 | Crook | | 2006/0258289 A1 | 11/2006 | Dua |
| 2004/0225502 A1 | 11/2004 | Bear et al. | | 2006/0279628 A1 | 12/2006 | Fleming |
| 2004/0239692 A1 | 12/2004 | Balle et al. | | 2006/0280186 A1 | 12/2006 | Carlton et al. |
| 2004/0239763 A1 | 12/2004 | Notea et al. | | 2006/0286968 A1 | 12/2006 | Klassen et al. |
| 2004/0248598 A1 | 12/2004 | Ding et al. | | 2007/0004389 A1 | 1/2007 | Wallace et al. |
| 2004/0261010 A1 | 12/2004 | Matsuishi | | 2007/0004461 A1 | 1/2007 | Bathina et al. |
| 2004/0264916 A1 | 12/2004 | Van et al. | | 2007/0027682 A1 | 2/2007 | Bennett |
| 2005/0004990 A1 | 1/2005 | Durazo et al. | | 2007/0033632 A1 | 2/2007 | Baynger et al. |
| 2005/0015286 A1 | 1/2005 | Rudnik et al. | | 2007/0037605 A1 | 2/2007 | Logan et al. |
| 2005/0041793 A1 | 2/2005 | Fulton et al. | | 2007/0040898 A1 | 2/2007 | Lee et al. |
| | | | | 2007/0050452 A1 | 3/2007 | Raju et al. |
| | | | | 2007/0053337 A1 | 3/2007 | Aoyama |
| | | | | 2007/0061020 A1 | 3/2007 | Bovee et al. |
| | | | | 2007/0064112 A1 | 3/2007 | Chatting et al. |

(56)

References Cited

U.S. PATENT DOCUMENTS

2007/0073823	A1	3/2007	Cohen	2008/0215698	A1	9/2008	Baratakke et al.
2007/0083623	A1	4/2007	Nishimura et al.	2008/0216022	A1	9/2008	Lorch et al.
2007/0085157	A1	4/2007	Fadell et al.	2008/0246778	A1	10/2008	Ham et al.
2007/0093256	A1	4/2007	Cha	2008/0250319	A1	10/2008	Lee et al.
2007/0097083	A1	5/2007	Seok et al.	2008/0256190	A1	10/2008	Ryan et al.
2007/0113294	A1	5/2007	Field et al.	2008/0261569	A1	10/2008	Britt et al.
2007/0115349	A1	5/2007	Currihan et al.	2008/0262715	A1	10/2008	Geelen et al.
2007/0117549	A1	5/2007	Arnos	2008/0268901	A1	10/2008	Miramontes et al.
2007/0124403	A1	5/2007	Umezawa et al.	2008/0270560	A1	10/2008	Tysowski et al.
2007/0124783	A1	5/2007	Ahiska et al.	2008/0273712	A1	11/2008	Eichfeld et al.
2007/0143415	A1	6/2007	Daigle	2008/0273713	A1	11/2008	Hartung et al.
2007/0150834	A1	6/2007	Muller et al.	2008/0285772	A1	11/2008	Haulick et al.
2007/0150836	A1	6/2007	Deggelmann et al.	2008/0307305	A1	12/2008	Klassen et al.
2007/0157097	A1	7/2007	Peters et al.	2008/0310602	A1	12/2008	Bhupati
2007/0157106	A1	7/2007	Bishop	2008/0313278	A1	12/2008	Hochberg
2007/0162762	A1	7/2007	Huh et al.	2008/0316295	A1	12/2008	King et al.
2007/0173233	A1	7/2007	Vander Veen et al.	2008/0319782	A1	12/2008	Good
2007/0173267	A1	7/2007	Klassen et al.	2009/0002335	A1	1/2009	Chaudhri
2007/0174774	A1	7/2007	Lerman et al.	2009/0003552	A1	1/2009	Goldman et al.
2007/0177025	A1	8/2007	Kopet et al.	2009/0003620	A1	1/2009	Mckillop et al.
2007/0191008	A1	8/2007	Bucher et al.	2009/0005011	A1	1/2009	Christie et al.
2007/0192486	A1	8/2007	Wilson et al.	2009/0005089	A1	1/2009	Paik et al.
2007/0198111	A1	8/2007	Oetzel et al.	2009/0007017	A1	1/2009	Anzures et al.
2007/0198645	A1	8/2007	Chen et al.	2009/0007188	A1	1/2009	Omernick
2007/0203991	A1	8/2007	Fisher et al.	2009/0031245	A1	1/2009	Brezina et al.
2007/0213099	A1	9/2007	Bast	2009/0037536	A1	2/2009	Braam
2007/0216659	A1	9/2007	Amineh	2009/0042607	A1	2/2009	Adachi et al.
2007/0224979	A1	9/2007	Oneal et al.	2009/0046075	A1	2/2009	Kim et al.
2007/0236475	A1	10/2007	Wherry	2009/0049446	A1	2/2009	Merten et al.
2007/0241945	A1	10/2007	Moorer et al.	2009/0049502	A1	2/2009	Levien et al.
2007/0243889	A1	10/2007	Choi et al.	2009/0051648	A1	2/2009	Shamaie et al.
2007/0264977	A1	11/2007	Zinn et al.	2009/0055377	A1	2/2009	Hedge et al.
2007/0271527	A1	11/2007	Paas et al.	2009/0055383	A1	2/2009	Zalewski
2007/0279482	A1	12/2007	Oswald et al.	2009/0059922	A1	3/2009	Appelman et al.
2007/0291736	A1	12/2007	Furlong et al.	2009/0061837	A1	3/2009	Chaudhri et al.
2007/0300140	A1	12/2007	Makela et al.	2009/0066648	A1	3/2009	Kerr et al.
2008/0014989	A1	1/2008	Sandegard et al.	2009/0082043	A1	3/2009	Lazaridis
2008/0030496	A1	2/2008	Lee et al.	2009/0088204	A1	4/2009	Culbert et al.
2008/0032704	A1	2/2008	Oneil et al.	2009/0093273	A1	4/2009	Dietrich
2008/0036743	A1	2/2008	Westerman et al.	2009/0106376	A1	4/2009	Tom et al.
2008/0036849	A1	2/2008	Oh et al.	2009/0109276	A1	4/2009	Kim
2008/0037722	A1	2/2008	Klassen	2009/0117936	A1	5/2009	Maeng
2008/0051065	A1	2/2008	Hong	2009/0125571	A1	5/2009	Kiilerich et al.
2008/0052945	A1	3/2008	Matas et al.	2009/0133070	A1	5/2009	Hamano et al.
2008/0055264	A1	3/2008	Anzures et al.	2009/0138828	A1	5/2009	Schultz et al.
2008/0063389	A1	3/2008	Fang et al.	2009/0144391	A1	6/2009	Jung et al.
2008/0068447	A1	3/2008	Mattila et al.	2009/0153289	A1	6/2009	Hope et al.
2008/0070593	A1	3/2008	Altman et al.	2009/0164219	A1	6/2009	Yeung et al.
2008/0074049	A1	3/2008	Kitai et al.	2009/0164322	A1	6/2009	Khan et al.
2008/0074550	A1	3/2008	Park	2009/0164587	A1	6/2009	Gavita et al.
2008/0081558	A1	4/2008	Dunko et al.	2009/0174763	A1	7/2009	Bengtsson et al.
2008/0084400	A1	4/2008	Rosenberg	2009/0175425	A1	7/2009	Lee
2008/0084482	A1	4/2008	Hansson et al.	2009/0176517	A1	7/2009	Christie et al.
2008/0091717	A1	4/2008	Garbow et al.	2009/0183125	A1	7/2009	Magal et al.
2008/0094370	A1	4/2008	Ording et al.	2009/0187842	A1	7/2009	Collins et al.
2008/0114849	A1	5/2008	Yuyama	2009/0199119	A1	8/2009	Park et al.
2008/0117876	A1	5/2008	Hidaka et al.	2009/0199130	A1	8/2009	Tsern et al.
2008/0120427	A1	5/2008	Ramanathan et al.	2009/0209293	A1	8/2009	Louch
2008/0122794	A1	5/2008	Koiso et al.	2009/0220206	A1	9/2009	Kisliakov
2008/0122796	A1	5/2008	Jobs et al.	2009/0228820	A1	9/2009	Kim et al.
2008/0126935	A1	5/2008	Blomgren	2009/0228825	A1	9/2009	Van Os et al.
2008/0129816	A1	6/2008	Mattila et al.	2009/0228938	A1	9/2009	White et al.
2008/0129844	A1	6/2008	Cusack et al.	2009/0232028	A1	9/2009	Baalbergen et al.
2008/0133336	A1	6/2008	Altman et al.	2009/0232129	A1	9/2009	Wong et al.
2008/0146289	A1	6/2008	Korneluk et al.	2009/0248751	A1	10/2009	Myman et al.
2008/0153459	A1	6/2008	Kansal et al.	2009/0249244	A1	10/2009	Robinson et al.
2008/0155474	A1	6/2008	Duhig et al.	2009/0256780	A1	10/2009	Small et al.
2008/0162649	A1	7/2008	Lee et al.	2009/0262200	A1	10/2009	Takabatake et al.
2008/0163127	A1	7/2008	Newell et al.	2009/0262206	A1	10/2009	Park
2008/0165136	A1	7/2008	Christie et al.	2009/0265643	A1	10/2009	Jachner et al.
2008/0165160	A1	7/2008	Kocienda et al.	2009/0282362	A1	11/2009	Matsumoto
2008/0165388	A1	7/2008	Serlet	2009/0287790	A1	11/2009	Upton et al.
2008/0168185	A1	7/2008	Robbin et al.	2009/0299810	A1	12/2009	Jardine et al.
2008/0171535	A1	7/2008	Carmody et al.	2009/0304205	A1	12/2009	Hardacker et al.
2008/0178175	A1	7/2008	Woundy et al.	2009/0305679	A1	12/2009	Kim
				2009/0309897	A1	12/2009	Morita et al.
				2009/0313582	A1	12/2009	Rupasingh et al.
				2010/0004031	A1	1/2010	Kim
				2010/0009719	A1	1/2010	Oh et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2010/0011065	A1	1/2010	Scherpa et al.	2011/0164032	A1	7/2011	Shadmi
2010/0017474	A1	1/2010	Kandekar et al.	2011/0164058	A1	7/2011	Lemay
2010/0039498	A1	2/2010	Liu et al.	2011/0173545	A1	7/2011	Meola et al.
2010/0040292	A1	2/2010	Clarkson	2011/0193995	A1	8/2011	Goh et al.
2010/0053212	A1	3/2010	Kang et al.	2011/0205333	A1	8/2011	Wu et al.
2010/0054497	A1	3/2010	Bull et al.	2011/0228084	A1	9/2011	Colciago
2010/0058253	A1	3/2010	Son	2011/0234746	A1	9/2011	Saleh et al.
2010/0069104	A1	3/2010	Neil et al.	2011/0235549	A1	9/2011	Ahlers et al.
2010/0070490	A1	3/2010	Amidon et al.	2011/0242002	A1	10/2011	Kaplan et al.
2010/0073454	A1	3/2010	Lovhaugen et al.	2011/0242356	A1	10/2011	Aleksic et al.
2010/0073455	A1	3/2010	Iwabuchi et al.	2011/0246942	A1	10/2011	Misawa
2010/0081375	A1	4/2010	Rosenblatt et al.	2011/0249073	A1	10/2011	Cranfill et al.
2010/0085416	A1	4/2010	Hegde et al.	2011/0249074	A1	10/2011	Cranfill et al.
2010/0087230	A1	4/2010	Peh et al.	2011/0249086	A1	10/2011	Guo et al.
2010/0094809	A1	4/2010	Consul et al.	2011/0249861	A1	10/2011	Tokutake
2010/0097438	A1	4/2010	Ujii	2011/0252146	A1	10/2011	Santamaria et al.
2010/0106647	A1	4/2010	Raman	2011/0252357	A1	10/2011	Chaudhri
2010/0121636	A1	5/2010	Burke et al.	2011/0254683	A1	10/2011	Soldan et al.
2010/0124906	A1	5/2010	Hautala	2011/0273526	A1	11/2011	Mehin et al.
2010/0138007	A1	6/2010	Clark et al.	2011/0276901	A1	11/2011	Zambetti et al.
2010/0145485	A1	6/2010	Duchene et al.	2011/0283334	A1	11/2011	Choi et al.
2010/0162138	A1	6/2010	Pascal et al.	2011/0291971	A1	12/2011	Masaki et al.
2010/0162171	A1	6/2010	Felt et al.	2011/0296163	A1	12/2011	Abernethy et al.
2010/0169435	A1	7/2010	Osullivan et al.	2011/0304648	A1	12/2011	Kim et al.
2010/0177156	A1	7/2010	Kim et al.	2011/0316769	A1	12/2011	Boettcher et al.
2010/0178873	A1	7/2010	Lee et al.	2012/0002001	A1	1/2012	Prentice
2010/0189096	A1	7/2010	Flynn et al.	2012/0004920	A1	1/2012	Kelly et al.
2010/0191575	A1	7/2010	Raleigh	2012/0019610	A1	1/2012	Hornyak et al.
2010/0191833	A1	7/2010	Hofrichter et al.	2012/0022872	A1	1/2012	Gruber et al.
2010/0201815	A1	8/2010	Anderson et al.	2012/0033028	A1	2/2012	Murphy et al.
2010/0205563	A1	8/2010	Haapsaari et al.	2012/0038546	A1	2/2012	Cromer et al.
2010/0235729	A1	9/2010	Kocienda et al.	2012/0050185	A1	3/2012	Davydov et al.
2010/0235746	A1	9/2010	Anzures et al.	2012/0051560	A1	3/2012	Sanders
2010/0247077	A1	9/2010	Yamamoto et al.	2012/0054278	A1	3/2012	Taleb et al.
2010/0251119	A1	9/2010	Geppert et al.	2012/0054655	A1	3/2012	Kang et al.
2010/0251158	A1	9/2010	Geppert et al.	2012/0060077	A1	3/2012	Mate et al.
2010/0251304	A1	9/2010	Donoghue et al.	2012/0062784	A1	3/2012	Van et al.
2010/0259482	A1	10/2010	Ball	2012/0066632	A1	3/2012	Sundermeyer et al.
2010/0262714	A1	10/2010	Hile	2012/0070129	A1	3/2012	Lin et al.
2010/0267370	A1	10/2010	Lee	2012/0092436	A1	4/2012	Pahud et al.
2010/0273456	A1	10/2010	Wolovitz et al.	2012/0098854	A1	4/2012	Ohnishi
2010/0277579	A1	11/2010	Cho et al.	2012/0110455	A1	5/2012	Sharma et al.
2010/0279663	A1	11/2010	Wang et al.	2012/0114108	A1	5/2012	Katis et al.
2010/0280983	A1	11/2010	Cho et al.	2012/0115608	A1	5/2012	Pfeifer et al.
2010/0284389	A1	11/2010	Ramsay et al.	2012/0131458	A1	5/2012	Hayes et al.
2010/0287249	A1	11/2010	Mgang et al.	2012/0143361	A1	6/2012	Kurabayashi et al.
2010/0293598	A1	11/2010	Collart et al.	2012/0144416	A1	6/2012	Wetzer et al.
2010/0296678	A1	11/2010	Kuhn-rahloff et al.	2012/0149405	A1	6/2012	Bhat
2010/0299639	A1	11/2010	Ramsay et al.	2012/0157114	A1	6/2012	Alameh et al.
2010/0309284	A1	12/2010	Samadani et al.	2012/0169583	A1	7/2012	Rippel et al.
2010/0318908	A1	12/2010	Neuman et al.	2012/0173383	A1	7/2012	Badawiyeh et al.
2010/0318917	A1	12/2010	Holladay et al.	2012/0173767	A1	7/2012	Kim et al.
2010/0318928	A1	12/2010	Neuman et al.	2012/0177339	A1	7/2012	Chang et al.
2010/0318939	A1	12/2010	Moon	2012/0178431	A1	7/2012	Gold
2010/0321201	A1	12/2010	Huang et al.	2012/0182381	A1	7/2012	Abate et al.
2010/0332518	A1	12/2010	Song et al.	2012/0185355	A1	7/2012	Kilroy
2011/0030324	A1	2/2011	Higgins	2012/0185547	A1	7/2012	Hugg et al.
2011/0032324	A1	2/2011	George et al.	2012/0188394	A1	7/2012	Park et al.
2011/0040754	A1	2/2011	Peto et al.	2012/0197419	A1	8/2012	Dhruv et al.
2011/0040760	A1	2/2011	Fleischman et al.	2012/0198017	A1	8/2012	Levasseur et al.
2011/0054830	A1	3/2011	Logan	2012/0201479	A1	8/2012	Zhang et al.
2011/0071656	A1	3/2011	Mckiel, Jr.	2012/0210226	A1	8/2012	Mccoy et al.
2011/0080356	A1	4/2011	Kang et al.	2012/0218177	A1	8/2012	Pang et al.
2011/0085017	A1	4/2011	Robinson et al.	2012/0222092	A1	8/2012	Rabii
2011/0092190	A1	4/2011	Willey et al.	2012/0223890	A1	9/2012	Borovsky et al.
2011/0106279	A1	5/2011	Cho et al.	2012/0223959	A1	9/2012	Lengeling et al.
2011/0107216	A1	5/2011	Bi	2012/0229591	A1	9/2012	Lee
2011/0115875	A1	5/2011	Sadwick et al.	2012/0233571	A1	9/2012	Wever et al.
2011/0117898	A1	5/2011	Pereira et al.	2012/0254324	A1	10/2012	Majeti et al.
2011/0126148	A1	5/2011	Krishnaraj et al.	2012/0254325	A1	10/2012	Majeti et al.
2011/0138284	A1	6/2011	Wigdor et al.	2012/0260169	A1	10/2012	Schwartz et al.
2011/0145745	A1	6/2011	Hyeon et al.	2012/0266199	A1	10/2012	Noonan et al.
2011/0159469	A1	6/2011	Hwang et al.	2012/0269361	A1	10/2012	Bhow et al.
2011/0159927	A1	6/2011	Choi	2012/0272230	A1	10/2012	Lee
2011/0161836	A1	6/2011	Mu et al.	2012/0282974	A1	11/2012	Green et al.
				2012/0293605	A1	11/2012	Seferian et al.
				2012/0294118	A1	11/2012	Haulick et al.
				2012/0296972	A1	11/2012	Backer
				2012/0304079	A1	11/2012	Rideout et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2012/0306770	A1	12/2012	Moore et al.	2013/0325949	A1	12/2013	Virani et al.
2012/0311444	A1	12/2012	Chaudhri	2013/0328770	A1	12/2013	Parham
2012/0311499	A1	12/2012	Dellinger et al.	2013/0329924	A1	12/2013	Fleizach et al.
2012/0313847	A1	12/2012	Boda et al.	2013/0331083	A1	12/2013	Oslund
2012/0320141	A1	12/2012	Bowen et al.	2013/0332856	A1	12/2013	Sanders et al.
2013/0007617	A1	1/2013	Mackenzie et al.	2013/0346859	A1	12/2013	Bates et al.
2013/0022221	A1	1/2013	Kallai et al.	2013/0347022	A1	12/2013	Bates et al.
2013/0026293	A1	1/2013	Schneider et al.	2014/0012927	A1	1/2014	Gertzfield et al.
2013/0027289	A1	1/2013	Choi et al.	2014/0013243	A1	1/2014	Flynn et al.
2013/0035942	A1	2/2013	Kim et al.	2014/0018053	A1	1/2014	Cho et al.
2013/0047084	A1	2/2013	Sanders et al.	2014/0024340	A1	1/2014	Raleigh
2013/0051755	A1	2/2013	Brown et al.	2014/0025798	A1	1/2014	Apte et al.
2013/0053007	A1	2/2013	Cosman et al.	2014/0026074	A1	1/2014	Cortes et al.
2013/0053107	A1	2/2013	Kang et al.	2014/0032682	A1	1/2014	Prado et al.
2013/0055113	A1	2/2013	Chazin et al.	2014/0037107	A1	2/2014	Marino et al.
2013/0055150	A1	2/2013	Galor	2014/0043424	A1	2/2014	Gava et al.
2013/0060352	A1	3/2013	Kouda et al.	2014/0045463	A1	2/2014	Hsieh et al.
2013/0061155	A1	3/2013	Hon	2014/0046464	A1	2/2014	Reimann
2013/0067027	A1	3/2013	Song et al.	2014/0047020	A1	2/2014	Matus et al.
2013/0070046	A1	3/2013	Wolf et al.	2014/0049447	A1	2/2014	Choi
2013/0073584	A1	3/2013	Kuper et al.	2014/0053281	A1	2/2014	Benoit et al.
2013/0080516	A1	3/2013	Bologh	2014/0055552	A1	2/2014	Song et al.
2013/0080955	A1	3/2013	Reimann et al.	2014/0059448	A1	2/2014	Lee
2013/0088413	A1	4/2013	Raffle et al.	2014/0063176	A1	3/2014	Modai et al.
2013/0091298	A1	4/2013	Ozzie et al.	2014/0068439	A1	3/2014	Lacaze et al.
2013/0091443	A1	4/2013	Park et al.	2014/0068486	A1	3/2014	Sellers et al.
2013/0093833	A1	4/2013	Al-asaad et al.	2014/0070959	A1	3/2014	Bhargava et al.
2013/0094666	A1	4/2013	Haaff et al.	2014/0075311	A1	3/2014	Boettcher et al.
2013/0094770	A1	4/2013	Lee et al.	2014/0075321	A1	3/2014	Masera
2013/0099672	A1	4/2013	Lin et al.	2014/0080416	A1	3/2014	Seo et al.
2013/0111603	A1	5/2013	Sakai et al.	2014/0082501	A1	3/2014	Bae et al.
2013/0113822	A1	5/2013	Putrevu et al.	2014/0085487	A1	3/2014	Park et al.
2013/0117693	A1	5/2013	Anderson et al.	2014/0092292	A1	4/2014	Kuznetsov et al.
2013/0124207	A1*	5/2013	Sarin	2014/0099004	A1	4/2014	Dibona et al.
			G06F 3/167	2014/0105372	A1	4/2014	Nowack et al.
			704/E11.001	2014/0108084	A1	4/2014	Bargetzi et al.
				2014/0108568	A1	4/2014	Lee
2013/0124997	A1	5/2013	Speir et al.	2014/0114966	A1	4/2014	Bilinski et al.
2013/0132865	A1	5/2013	Li	2014/0136989	A1	5/2014	Choi
2013/0138272	A1	5/2013	Louise-babando et al.	2014/0136990	A1	5/2014	Gonnen et al.
2013/0141223	A1	6/2013	Brandsma et al.	2014/0143737	A1	5/2014	Mistry et al.
2013/0141378	A1	6/2013	Yumiki et al.	2014/0150029	A1	5/2014	Avedissian et al.
2013/0151623	A1	6/2013	Weiser et al.	2014/0155123	A1	6/2014	Lee et al.
2013/0159858	A1	6/2013	Joffray et al.	2014/0171156	A1	6/2014	Pattikonda et al.
2013/0162411	A1	6/2013	Moses et al.	2014/0173082	A1	6/2014	Shin
2013/0162781	A1	6/2013	Hubner et al.	2014/0176298	A1	6/2014	Kumar et al.
2013/0166580	A1	6/2013	Maharajh et al.	2014/0181202	A1	6/2014	Gossain
2013/0169742	A1	7/2013	Wu et al.	2014/0181654	A1	6/2014	Kumar et al.
2013/0173794	A1	7/2013	Agerbak et al.	2014/0181658	A1	6/2014	Kumar et al.
2013/0191454	A1	7/2013	Oliver et al.	2014/0201126	A1	7/2014	Zadeh et al.
2013/0194476	A1	8/2013	Shimosato	2014/0201632	A1	7/2014	Kunigita et al.
2013/0205375	A1	8/2013	Woxblom et al.	2014/0207707	A1	7/2014	Na et al.
2013/0212470	A1	8/2013	Karunamuni et al.	2014/0215356	A1	7/2014	Brander et al.
2013/0216206	A1	8/2013	Dubin et al.	2014/0215365	A1	7/2014	Hiraga et al.
2013/0219276	A1	8/2013	Shan	2014/0215404	A1	7/2014	Kong et al.
2013/0222230	A1	8/2013	Choi et al.	2014/0218371	A1	8/2014	Du et al.
2013/0225140	A1	8/2013	Greisson	2014/0218461	A1	8/2014	Deland
2013/0225152	A1	8/2013	Matthews et al.	2014/0218517	A1	8/2014	Kim
2013/0227414	A1	8/2013	Hwang et al.	2014/0222933	A1	8/2014	Stovicek et al.
2013/0234924	A1	9/2013	Janefalkar et al.	2014/0229835	A1	8/2014	Ravine
2013/0243924	A1	9/2013	Bhandari et al.	2014/0232273	A1	8/2014	Sasaki et al.
2013/0246522	A1	9/2013	Bilinski et al.	2014/0236325	A1	8/2014	Sasaki et al.
2013/0246916	A1	9/2013	Reimann et al.	2014/0237361	A1	8/2014	Martin et al.
2013/0254714	A1	9/2013	Shin et al.	2014/0237419	A1	8/2014	Ryu
2013/0259247	A1	10/2013	Kim	2014/0240122	A1	8/2014	Roberts et al.
2013/0262298	A1	10/2013	Morley et al.	2014/0247368	A1	9/2014	Chinn
2013/0268593	A1	10/2013	Parekh	2014/0257532	A1	9/2014	Kim et al.
2013/0275881	A1	10/2013	Hahm et al.	2014/0258854	A1	9/2014	Li
2013/0282180	A1	10/2013	Layton	2014/0267002	A1	9/2014	Luna
2013/0282844	A1	10/2013	Logan et al.	2014/0267068	A1	9/2014	Smith et al.
2013/0283161	A1	10/2013	Reimann et al.	2014/0267549	A1	9/2014	Pinter et al.
2013/0298021	A1	11/2013	Park et al.	2014/0267911	A1	9/2014	Grant et al.
2013/0301482	A1	11/2013	Katis et al.	2014/0270183	A1	9/2014	Luna
2013/0305354	A1	11/2013	King et al.	2014/0274211	A1	9/2014	Sejnoha et al.
2013/0310089	A1	11/2013	Gianoukos et al.	2014/0278435	A1	9/2014	Ganong, III et al.
2013/0322634	A1	12/2013	Bennett et al.	2014/0280812	A1	9/2014	Bealkowski et al.
2013/0324081	A1	12/2013	Gargi et al.	2014/0285017	A1	9/2014	Noguchi et al.
				2014/0293046	A1	10/2014	Ni
				2014/0313032	A1	10/2014	Sager et al.

(56)	References Cited					
	U.S. PATENT DOCUMENTS					
2014/0331149	A1	11/2014	Labey	2015/0188724	A1	7/2015 Kim et al.
2014/0334644	A1	11/2014	Selig et al.	2015/0188869	A1	7/2015 Smilak et al.
2014/0335789	A1	11/2014	Cohen et al.	2015/0189426	A1	7/2015 Pang
2014/0337791	A1	11/2014	Agnetta et al.	2015/0193127	A1	7/2015 Chai et al.
2014/0344687	A1	11/2014	Durham et al.	2015/0193130	A1	7/2015 Cho et al.
2014/0344711	A1	11/2014	Hallerstrom Sjostedt et al.	2015/0193196	A1	7/2015 Lin et al.
2014/0349754	A1	11/2014	Kaneoka et al.	2015/0198938	A1	7/2015 Steele et al.
2014/0354527	A1	12/2014	Chen et al.	2015/0200715	A1	7/2015 Oiwa et al.
2014/0354759	A1	12/2014	Cranfill et al.	2015/0201062	A1	7/2015 Shih et al.
2014/0359524	A1	12/2014	Sasaki et al.	2015/0201480	A1	7/2015 Ogawa
2014/0362293	A1	12/2014	Bakar et al.	2015/0205511	A1	7/2015 Vinna et al.
2014/0363024	A1	12/2014	Apodaca	2015/0205971	A1	7/2015 Sanio et al.
2014/0364056	A1	12/2014	Belk et al.	2015/0206529	A1*	7/2015 Kwon G10L 15/22 704/246
2014/0365226	A1	12/2014	Sinha	2015/0207849	A1	7/2015 Bingzhou et al.
2014/0365904	A1	12/2014	Kim et al.	2015/0212705	A1	7/2015 Sasaki et al.
2014/0365980	A1	12/2014	Morrison et al.	2015/0215382	A1	7/2015 Arora et al.
2014/0368547	A1	12/2014	Elings	2015/0222615	A1	8/2015 Allain et al.
2014/0368719	A1	12/2014	Kaneko et al.	2015/0222680	A1	8/2015 Grover
2014/0373081	A1	12/2014	Dodson et al.	2015/0223005	A1	8/2015 Hardman et al.
2014/0375747	A1	12/2014	Martinez et al.	2015/0229650	A1	8/2015 Grigg et al.
2014/0375819	A1	12/2014	Larsen et al.	2015/0229782	A1	8/2015 Zuidema et al.
2014/0380234	A1	12/2014	Shim et al.	2015/0242065	A1	8/2015 Ko et al.
2015/0008845	A1	1/2015	Kim et al.	2015/0242073	A1	8/2015 Munoz et al.
2015/0010167	A1	1/2015	Arling et al.	2015/0242597	A1	8/2015 Danciu
2015/0032457	A1	1/2015	Koo et al.	2015/0242611	A1	8/2015 Cotterill
2015/0032812	A1	1/2015	Dudley	2015/0242837	A1	8/2015 Yarbrough et al.
2015/0033149	A1	1/2015	Kuchoor	2015/0243163	A1	8/2015 Shoemake
2015/0033361	A1	1/2015	Choi et al.	2015/0244539	A1	8/2015 Ickman et al.
2015/0040012	A1*	2/2015	Faaborg G10L 15/1815 715/728	2015/0248167	A1	9/2015 Turbell et al.
2015/0040029	A1	2/2015	Koum et al.	2015/0248268	A1	9/2015 Kumar et al.
2015/0042576	A1	2/2015	Wang	2015/0253960	A1	9/2015 Lin et al.
2015/0042852	A1	2/2015	Lee et al.	2015/0256796	A1	9/2015 Ma
2015/0052222	A1	2/2015	Farrell et al.	2015/0256957	A1	9/2015 Kim et al.
2015/0058413	A1	2/2015	Ge	2015/0261493	A1	9/2015 Lemmon et al.
2015/0058780	A1	2/2015	Malik et al.	2015/0264004	A1	9/2015 Khoo
2015/0062158	A1	3/2015	Hildreth et al.	2015/0264303	A1	9/2015 Chastney et al.
2015/0067541	A1	3/2015	Owens et al.	2015/0264304	A1	9/2015 Chastney et al.
2015/0067803	A1	3/2015	Alduaiji	2015/0271120	A1	9/2015 Langholz
2015/0070272	A1	3/2015	Kim et al.	2015/0286360	A1	10/2015 Wachter
2015/0071601	A1	3/2015	Dabous et al.	2015/0288868	A1	10/2015 Slavin et al.
2015/0078680	A1	3/2015	Shakib et al.	2015/0296077	A1	10/2015 Wakeyama et al.
2015/0081072	A1	3/2015	Kallai et al.	2015/0301338	A1	10/2015 Van Heugten
2015/0082225	A1	3/2015	Shearer	2015/0304366	A1	10/2015 Bader-Natal et al.
2015/0085057	A1	3/2015	Ouyang et al.	2015/0304413	A1	10/2015 Park
2015/0089359	A1	3/2015	Brisebois	2015/0309768	A1	10/2015 Van Der Heide
2015/0092009	A1	4/2015	Deluca et al.	2015/0312184	A1	10/2015 Langholz et al.
2015/0092520	A1	4/2015	Robison et al.	2015/0312185	A1	10/2015 Langholz et al.
2015/0095804	A1	4/2015	Grossman et al.	2015/0312299	A1	10/2015 Chen
2015/0095937	A1	4/2015	Tobin	2015/0319006	A1	11/2015 Plummer et al.
2015/0100623	A1	4/2015	Gudell et al.	2015/0319046	A1	11/2015 Plummer et al.
2015/0106720	A1	4/2015	Backer	2015/0319144	A1	11/2015 Barton et al.
2015/0106721	A1	4/2015	Cha et al.	2015/0324552	A1	11/2015 Beckhardt
2015/0113407	A1	4/2015	Hoffert et al.	2015/0326510	A1	11/2015 Tomlinson et al.
2015/0113418	A1	4/2015	Sasaki et al.	2015/0331881	A1	11/2015 Myles
2015/0116353	A1	4/2015	Miura et al.	2015/0332586	A1	11/2015 Hamm et al.
2015/0116363	A1	4/2015	Monte et al.	2015/0334140	A1	11/2015 Singh et al.
2015/0120768	A1	4/2015	Wellen et al.	2015/0341227	A1	11/2015 Tatzel et al.
2015/0130737	A1	5/2015	Im et al.	2015/0347086	A1	12/2015 Liedholm et al.
2015/0135049	A1	5/2015	Murphy	2015/0347738	A1	12/2015 Ulrich et al.
2015/0135068	A1	5/2015	Chiu	2015/0348493	A1	12/2015 Chae et al.
2015/0135098	A1	5/2015	Geppert et al.	2015/0348548	A1	12/2015 Piernot et al.
2015/0138101	A1	5/2015	Park et al.	2015/0350031	A1	12/2015 Burks et al.
2015/0142587	A1	5/2015	Salgar et al.	2015/0350141	A1	12/2015 Yang et al.
2015/0145435	A1	5/2015	Ogawa	2015/0350143	A1	12/2015 Lemay et al.
2015/0146945	A1	5/2015	Han	2015/0350533	A1	12/2015 Harris et al.
2015/0147067	A1	5/2015	Ryan et al.	2015/0355816	A1	12/2015 Shim
2015/0149599	A1	5/2015	Caunter et al.	2015/0355818	A1	12/2015 Corbin
2015/0159895	A1	6/2015	Quam et al.	2015/0355879	A1	12/2015 Beckhardt et al.
2015/0160797	A1	6/2015	Shearer et al.	2015/0356278	A1	12/2015 Britt et al.
2015/0169893	A1	6/2015	Desai	2015/0358043	A1	12/2015 Jeong et al.
2015/0172393	A1	6/2015	Oplinger et al.	2015/0358304	A1	12/2015 Beckhardt et al.
2015/0172584	A1	6/2015	Park et al.	2015/0358484	A1	12/2015 Permude
2015/0177914	A1	6/2015	Coyner et al.	2015/0358584	A1	12/2015 Mattson
2015/0180922	A1	6/2015	Draznin et al.	2015/0365306	A1	12/2015 Chaudhri et al.
				2015/0370230	A1	12/2015 Duchene et al.
				2015/0370426	A1	12/2015 Carrigan et al.
				2015/0370455	A1	12/2015 Van Os et al.
				2015/0373065	A1	12/2015 Holmquist et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2015/0373172	A1	12/2015	Boesen	2016/0173318	A1	6/2016	Ha et al.
2015/0373178	A1	12/2015	Felt et al.	2016/0179068	A1	6/2016	Qian et al.
2015/0378522	A1	12/2015	Butts	2016/0180259	A1	6/2016	Marianko et al.
2016/0004393	A1	1/2016	Faaborg et al.	2016/0183046	A1	6/2016	Kwon
2016/0004417	A1	1/2016	Bates	2016/0187995	A1	6/2016	Rosewall
2016/0004499	A1	1/2016	Kim et al.	2016/0191992	A1	6/2016	Kwon
2016/0005280	A1	1/2016	Laska et al.	2016/0196042	A1	7/2016	Laute et al.
2016/0005281	A1	1/2016	Laska et al.	2016/0196106	A1	7/2016	Hammer et al.
2016/0011850	A1	1/2016	Sheen et al.	2016/0202866	A1	7/2016	Zambetti
2016/0014059	A1	1/2016	Rathod	2016/0209939	A1	7/2016	Zambetti et al.
2016/0014477	A1	1/2016	Siders	2016/0210602	A1	7/2016	Siddique et al.
2016/0018872	A1	1/2016	Tu et al.	2016/0210983	A1	7/2016	Amada et al.
2016/0018899	A1	1/2016	Tu et al.	2016/0212374	A1	7/2016	Usbergo et al.
2016/0018900	A1	1/2016	Tu et al.	2016/0224233	A1	8/2016	Phang et al.
2016/0021155	A1	1/2016	Sawato	2016/0227095	A1	8/2016	Yoshizawa et al.
2016/0021603	A1	1/2016	Mueck et al.	2016/0231902	A1	8/2016	Sirpal et al.
2016/0026429	A1	1/2016	Triplett	2016/0239167	A1	8/2016	Reimann et al.
2016/0029004	A1	1/2016	Campbell et al.	2016/0241983	A1	8/2016	Lambourne et al.
2016/0029146	A1	1/2016	Tembey et al.	2016/0246566	A1	8/2016	Fullerton et al.
2016/0033985	A1	2/2016	Gulli' et al.	2016/0253145	A1	9/2016	Lee et al.
2016/0036996	A1	2/2016	Midholt et al.	2016/0255706	A1	9/2016	Kim et al.
2016/0037140	A1	2/2016	Lindsey et al.	2016/0259459	A1	9/2016	Yang et al.
2016/0037436	A1	2/2016	Spencer et al.	2016/0259528	A1	9/2016	Foss et al.
2016/0041597	A1	2/2016	Graham et al.	2016/0260436	A1	9/2016	Lemay et al.
2016/0043905	A1	2/2016	Fiedler	2016/0261653	A1	9/2016	Kim
2016/0043962	A1	2/2016	Kim et al.	2016/0261790	A1	9/2016	Lee et al.
2016/0048705	A1	2/2016	Yang	2016/0267319	A1	9/2016	Murillo et al.
2016/0050476	A1	2/2016	Patil	2016/0277708	A1	9/2016	Rintel et al.
2016/0054841	A1	2/2016	Yang et al.	2016/0277885	A1	9/2016	Shan et al.
2016/0057173	A1	2/2016	Singman et al.	2016/0277903	A1	9/2016	Poosala et al.
2016/0062487	A1	3/2016	Foss et al.	2016/0283194	A1	9/2016	Patil et al.
2016/0062567	A1	3/2016	Yang et al.	2016/0286630	A1	9/2016	Witzgall
2016/0062589	A1	3/2016	Wan et al.	2016/0291824	A1	10/2016	Grossman et al.
2016/0062606	A1	3/2016	Vega et al.	2016/0291924	A1	10/2016	Bierbower et al.
2016/0062719	A1	3/2016	Romano et al.	2016/0294958	A1	10/2016	Zhang et al.
2016/0065832	A1	3/2016	Kim et al.	2016/0295340	A1	10/2016	Baker et al.
2016/0066277	A1	3/2016	Yang et al.	2016/0299669	A1	10/2016	Bates
2016/0070244	A1	3/2016	Cipollo et al.	2016/0299736	A1	10/2016	Bates et al.
2016/0072861	A1	3/2016	Woolsey et al.	2016/0301566	A1	10/2016	Ramasubramani et al.
2016/0073185	A1	3/2016	Kannappan et al.	2016/0306422	A1	10/2016	Parham et al.
2016/0073197	A1	3/2016	Hammer et al.	2016/0306504	A1	10/2016	Brunsch et al.
2016/0073439	A1	3/2016	Palin et al.	2016/0308920	A1	10/2016	Brunsch et al.
2016/0073482	A1	3/2016	Fok et al.	2016/0316038	A1	10/2016	Jolfaei
2016/0077734	A1	3/2016	Buxton et al.	2016/0320849	A1	11/2016	Koo
2016/0077794	A1	3/2016	Kim et al.	2016/0335041	A1	11/2016	Wachter et al.
2016/0080552	A1	3/2016	Keating et al.	2016/0336531	A1	11/2016	Yokoyama
2016/0085412	A1	3/2016	Meganathan et al.	2016/0342386	A1	11/2016	Kallai et al.
2016/0088039	A1	3/2016	Millington et al.	2016/0345039	A1	11/2016	Billmeyer
2016/0088146	A1	3/2016	Mng et al.	2016/0350839	A1	12/2016	Avidor et al.
2016/0088438	A1	3/2016	Okeeffe	2016/0351191	A1	12/2016	Vilermo et al.
2016/0092072	A1	3/2016	So et al.	2016/0352661	A1	12/2016	Yang et al.
2016/0093180	A1	3/2016	Fitzgibbon et al.	2016/0357507	A1	12/2016	Decker et al.
2016/0093338	A1	3/2016	Laska et al.	2016/0360344	A1	12/2016	Shim et al.
2016/0099901	A1	4/2016	Allen et al.	2016/0364106	A1	12/2016	Koum et al.
2016/0099987	A1	4/2016	Shamma	2016/0364114	A1	12/2016	Von Dehsen et al.
2016/0103830	A1	4/2016	Cheong et al.	2016/0364123	A1	12/2016	Burns et al.
2016/0117402	A1	4/2016	Gowel	2016/0364129	A1	12/2016	McLean et al.
2016/0120009	A1	4/2016	Aliakseyeu et al.	2016/0364600	A1	12/2016	Shah et al.
2016/0127636	A1	5/2016	Ito et al.	2016/0366481	A1	12/2016	Lim et al.
2016/0127799	A1	5/2016	Alsina et al.	2016/0366531	A1	12/2016	Popova
2016/0133297	A1	5/2016	Thornton et al.	2016/0372113	A1	12/2016	David et al.
2016/0134942	A1	5/2016	Lo	2016/0379633	A1	12/2016	Lehman et al.
2016/0139752	A1	5/2016	Shim et al.	2016/0380780	A1	12/2016	Stephenson et al.
2016/0139785	A1	5/2016	Griffin et al.	2016/0381476	A1	12/2016	Gossain et al.
2016/0142450	A1	5/2016	Paul et al.	2017/0003931	A1	1/2017	Dvortsov et al.
2016/0142763	A1	5/2016	Kim et al.	2017/0006162	A1	1/2017	Bargetzi et al.
2016/0150135	A1	5/2016	Chen	2017/0010794	A1	1/2017	Cho et al.
2016/0150624	A1	5/2016	Meerbeck et al.	2017/0013562	A1	1/2017	Lim et al.
2016/0155443	A1	6/2016	Khan et al.	2017/0017531	A1	1/2017	Choi et al.
2016/0156687	A1	6/2016	Leung	2017/0024100	A1	1/2017	Pieper et al.
2016/0156957	A1	6/2016	Yun	2017/0025124	A1	1/2017	Mixter et al.
2016/0156992	A1	6/2016	Kuper	2017/0026686	A1	1/2017	Glazier et al.
2016/0162252	A1	6/2016	Di Censo et al.	2017/0031552	A1	2/2017	Lin
2016/0165390	A1	6/2016	Hartzell et al.	2017/0031557	A1	2/2017	Xiangli et al.
2016/0165600	A1	6/2016	Choi et al.	2017/0031648	A1	2/2017	So et al.
				2017/0034583	A1	2/2017	Long et al.
				2017/0041727	A1	2/2017	Reimann
				2017/0046025	A1	2/2017	Dascola et al.
				2017/0048817	A1	2/2017	Yang et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2017/0053008	A1	2/2017	Frenkel et al.	2018/0013799	A1	1/2018	Davies
2017/0064184	A1	3/2017	Tsai	2018/0013815	A1	1/2018	Gold
2017/0068402	A1	3/2017	Lochhead et al.	2018/0014043	A1	1/2018	Zhang et al.
2017/0068507	A1	3/2017	Kim et al.	2018/0014077	A1	1/2018	Hou et al.
2017/0070346	A1	3/2017	Lombardi et al.	2018/0018081	A1	1/2018	Dattilo-green et al.
2017/0070775	A1	3/2017	Taxier et al.	2018/0019889	A1	1/2018	Burns et al.
2017/0078294	A1	3/2017	Medvinsky	2018/0020530	A1*	1/2018	Scordato F21V 29/70
2017/0078767	A1	3/2017	Borel et al.	2018/0039916	A1	2/2018	Ravindra
2017/0083189	A1	3/2017	Yang et al.	2018/0040324	A1	2/2018	Wilberding
2017/0083202	A1	3/2017	Yang et al.	2018/0047200	A1	2/2018	O'hara et al.
2017/0083285	A1	3/2017	Meyers et al.	2018/0048820	A1	2/2018	Hinkel et al.
2017/0083494	A1	3/2017	Kim et al.	2018/0061158	A1	3/2018	Greene
2017/0084135	A1	3/2017	Yu	2018/0062691	A1	3/2018	Barnett, Jr.
2017/0091551	A1	3/2017	Zhang et al.	2018/0067712	A1	3/2018	Behzadi et al.
2017/0092085	A1	3/2017	Agarwal	2018/0069957	A1	3/2018	Mushikabe et al.
2017/0092270	A1	3/2017	Newendorp et al.	2018/0070144	A1	3/2018	Tang et al.
2017/0094019	A1	3/2017	Ahmed et al.	2018/0070187	A1	3/2018	Drinkwater et al.
2017/0097621	A1	4/2017	Ackmann et al.	2018/0081522	A1	3/2018	Greenberg et al.
2017/0099270	A1	4/2017	Anson	2018/0088795	A1	3/2018	Van Os et al.
2017/0111587	A1	4/2017	Herbst et al.	2018/0091732	A1	3/2018	Wilson et al.
2017/0111595	A1	4/2017	Soni et al.	2018/0095616	A1	4/2018	Valdivia et al.
2017/0115940	A1	4/2017	Byeon	2018/0096064	A1	4/2018	Lennon et al.
2017/0126592	A1	5/2017	El	2018/0101297	A1	4/2018	Yang et al.
2017/0127145	A1	5/2017	Rajapakse	2018/0103074	A1	4/2018	Rosenberg
2017/0134553	A1	5/2017	Jeon et al.	2018/0109754	A1	4/2018	Kwon
2017/0134567	A1	5/2017	Jeon et al.	2018/0113577	A1	4/2018	Burns et al.
2017/0134872	A1	5/2017	Silva et al.	2018/0115788	A1	4/2018	Burns et al.
2017/0142087	A1	5/2017	Maninder et al.	2018/0122378	A1*	5/2018	Mixter G10L 15/22
2017/0150904	A1	6/2017	Park et al.	2018/0123986	A1	5/2018	Faulkner et al.
2017/0176035	A1	6/2017	Reeder et al.	2018/0124128	A1	5/2018	Faulkner et al.
2017/0180843	A1	6/2017	Perianu et al.	2018/0124359	A1	5/2018	Faulkner
2017/0185277	A1	6/2017	Sundermeyer et al.	2018/0131732	A1	5/2018	Aronoff et al.
2017/0185373	A1	6/2017	Kim et al.	2018/0139292	A1	5/2018	Koren et al.
2017/0193813	A1	7/2017	Carroll et al.	2018/0139374	A1	5/2018	Yu
2017/0195130	A1	7/2017	Landow et al.	2018/0150433	A1	5/2018	Sowden et al.
2017/0195772	A1	7/2017	Han et al.	2018/0157455	A1	6/2018	Troy et al.
2017/0206779	A1	7/2017	Lee et al.	2018/0159810	A1	6/2018	Buchheit et al.
2017/0220212	A1	8/2017	Yang et al.	2018/0160072	A1	6/2018	Cranfill et al.
2017/0230585	A1	8/2017	Nash et al.	2018/0181185	A1	6/2018	Graham et al.
2017/0230705	A1*	8/2017	Pardue H04N 21/42222	2018/0190279	A1	7/2018	Anderson et al.
2017/0235545	A1	8/2017	Millington et al.	2018/0191965	A1	7/2018	Faulkner et al.
2017/0242653	A1	8/2017	Lang et al.	2018/0199080	A1	7/2018	Jackson et al.
2017/0244932	A1	8/2017	Pistilli et al.	2018/0199137	A1	7/2018	Mate et al.
2017/0251314	A1	8/2017	Pye et al.	2018/0199164	A1	7/2018	Bargetzi et al.
2017/0280494	A1	9/2017	Jung et al.	2018/0203577	A1	7/2018	Astavans et al.
2017/0285788	A1	10/2017	Park et al.	2018/0204111	A1	7/2018	Zadeh et al.
2017/0302779	A1	10/2017	Zhao et al.	2018/0205797	A1	7/2018	Faulkner
2017/0309174	A1	10/2017	Gonzales et al.	2018/0213144	A1	7/2018	Kim et al.
2017/0322713	A1	11/2017	Hwang et al.	2018/0213396	A1*	7/2018	Segal H04L 63/00
2017/0324784	A1	11/2017	Taine et al.	2018/0217709	A1	8/2018	Hotelling
2017/0336960	A1	11/2017	Chaudhri et al.	2018/0227341	A1	8/2018	Rizzi
2017/0337791	A1	11/2017	Gordon-carroll	2018/0228003	A1	8/2018	O'driscoll et al.
2017/0344253	A1	11/2017	Zhang	2018/0228006	A1*	8/2018	Baker G10L 15/22
2017/0345420	A1	11/2017	Barnett, Jr.	2018/0232592	A1	8/2018	Stewart et al.
2017/0352380	A1	12/2017	Doumbouya et al.	2018/0232705	A1	8/2018	Baker et al.
2017/0353508	A1	12/2017	Yoakum	2018/0246639	A1	8/2018	Han et al.
2017/0357382	A1	12/2017	Miura et al.	2018/0249047	A1	8/2018	Marlatt
2017/0357420	A1	12/2017	Dye et al.	2018/0249113	A1	8/2018	Faulkner
2017/0357421	A1	12/2017	Dye et al.	2018/0253152	A1	9/2018	Forsblom et al.
2017/0357425	A1	12/2017	Smith et al.	2018/0267773	A1	9/2018	Kim et al.
2017/0357434	A1	12/2017	Coffman et al.	2018/0267774	A1*	9/2018	Williams G06F 3/041
2017/0357439	A1	12/2017	Lemay et al.	2018/0286395	A1*	10/2018	Li G10L 17/04
2017/0357477	A1	12/2017	Im et al.	2018/0288104	A1*	10/2018	Padilla H04L 65/1069
2017/0357479	A1	12/2017	Shenoy et al.	2018/0293959	A1	10/2018	Monga et al.
2017/0357917	A1	12/2017	Holmes et al.	2018/0295079	A1	10/2018	Longo
2017/0359189	A1	12/2017	Smith et al.	2018/0308480	A1	10/2018	Jang et al.
2017/0359191	A1	12/2017	Smith et al.	2018/0309801	A1	10/2018	Rathod
2017/0359285	A1	12/2017	Weinig et al.	2018/0329585	A1	11/2018	Carrigan et al.
2017/0359311	A1	12/2017	Chen	2018/0329586	A1	11/2018	Sundstrom et al.
2017/0359555	A1	12/2017	Irani et al.	2018/0329672	A1	11/2018	Sadak et al.
2017/0363436	A1	12/2017	Eronen et al.	2018/0332559	A1	11/2018	Gudivada et al.
2017/0367484	A1	12/2017	Salvoni et al.	2018/0335903	A1	11/2018	Coffman et al.
2017/0371496	A1	12/2017	Denoue et al.	2018/0337924	A1	11/2018	Graham et al.
2017/0373868	A1	12/2017	Deets, Jr.	2018/0338038	A1*	11/2018	Ly H04M 3/42008
2018/0012596	A1	1/2018	Piernot et al.	2018/0341448	A1	11/2018	Behzadi et al.
				2018/0348764	A1	12/2018	Zhang et al.
				2018/0351762	A1	12/2018	Iyengar et al.
				2018/0352072	A1	12/2018	Christie et al.
				2018/0359293	A1	12/2018	Faulkner et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2018/0364665	A1	12/2018	Clymer et al.	2020/0135191	A1 *	4/2020	Nourbakhsh	G10L 15/22
2018/0367483	A1	12/2018	Rodriguez et al.	2020/0142667	A1 *	5/2020	Querze	G06F 3/165
2018/0367484	A1	12/2018	Rodriguez et al.	2020/0143593	A1	5/2020	Rudman et al.	
2018/0367578	A1	12/2018	Verma et al.	2020/0152186	A1	5/2020	Koh et al.	
2018/0375676	A1	12/2018	Bader-Natal et al.	2020/0154583	A1	5/2020	Lee et al.	
2019/0005419	A1	1/2019	Howard	2020/0183548	A1	6/2020	Anzures et al.	
2019/0012069	A1	1/2019	Bates	2020/0186378	A1	6/2020	Six et al.	
2019/0012073	A1	1/2019	Hwang	2020/0186576	A1	6/2020	Gopal et al.	
2019/0012966	A1	1/2019	Shi	2020/0193997	A1	6/2020	Piernot et al.	
2019/0013018	A1	1/2019	Rekstad	2020/0195887	A1	6/2020	Van Os et al.	
2019/0025943	A1	1/2019	Jobs et al.	2020/0201491	A1	6/2020	Coffman et al.	
2019/0026021	A1	1/2019	Coffman et al.	2020/0201495	A1	6/2020	Coffman et al.	
2019/0028419	A1	1/2019	Sullivan	2020/0213530	A1	7/2020	Ahn	
2019/0034849	A1	1/2019	Romaine et al.	2020/0218486	A1	7/2020	Behzadi et al.	
2019/0056854	A1	2/2019	Azzolin et al.	2020/0220914	A1	7/2020	Carrigan et al.	
2019/0056907	A1	2/2019	So et al.	2020/0225817	A1	7/2020	Coffman et al.	
2019/0058777	A1	2/2019	Chen	2020/0225841	A1	7/2020	Coffman et al.	
2019/0068670	A1	2/2019	Adam et al.	2020/0226896	A1	7/2020	Robertson et al.	
2019/0089934	A1	3/2019	Goulden et al.	2020/0242788	A1	7/2020	Jacobs et al.	
2019/0102049	A1	4/2019	Anzures et al.	2020/0274726	A1	8/2020	Setteboun et al.	
2019/0102145	A1	4/2019	Wilberding et al.	2020/0279279	A1	9/2020	Chaudhuri	
2019/0110087	A1	4/2019	Parasseeeri et al.	2020/0296329	A1	9/2020	Tang et al.	
2019/0124021	A1	4/2019	Demattei	2020/0302913	A1	9/2020	Marcinkiewicz	
2019/0129661	A1	5/2019	Hirota et al.	2020/0312318	A1 *	10/2020	Olson	G10L 15/22
2019/0130185	A1	5/2019	Delaney et al.	2020/0335187	A1 *	10/2020	Lefkofsky	G16H 50/50
2019/0138951	A1	5/2019	Brownhill et al.	2020/0348807	A1	11/2020	Garcia et al.	
2019/0149768	A1	5/2019	Mcardle	2020/0371577	A1	11/2020	Graham et al.	
2019/0149887	A1	5/2019	Williams et al.	2020/0379711	A1	12/2020	Graham et al.	
2019/0158645	A1	5/2019	Yang et al.	2020/0379712	A1	12/2020	Carrigan	
2019/0173939	A1	6/2019	Lewis et al.	2020/0379713	A1	12/2020	Carrigan	
2019/0187787	A1	6/2019	White et al.	2020/0379714	A1	12/2020	Graham et al.	
2019/0199963	A1	6/2019	Ahn et al.	2020/0379716	A1	12/2020	Carrigan et al.	
2019/0199993	A1	6/2019	Babu J D et al.	2020/0379729	A1	12/2020	Graham et al.	
2019/0205861	A1	7/2019	Bace	2020/0379730	A1	12/2020	Graham et al.	
2019/0208282	A1	7/2019	Singh et al.	2020/0382332	A1	12/2020	Carrigan et al.	
2019/0222775	A1	7/2019	Ahn	2020/0382559	A1	12/2020	Kramar et al.	
2019/0228495	A1	7/2019	Tremblay et al.	2020/0383157	A1	12/2020	Lee et al.	
2019/0236142	A1	8/2019	Balakrishnan et al.	2020/0385116	A1	12/2020	Sabripour et al.	
2019/0265946	A1	8/2019	Bae et al.	2020/0395012	A1	12/2020	Kim et al.	
2019/0273664	A1	9/2019	Fujita et al.	2020/0400957	A1	12/2020	Van Heugten	
2019/0279634	A1 *	9/2019	Tak	2020/0413197	A1	12/2020	Carrigan et al.	
2019/0286651	A1	9/2019	Lee et al.	2021/0011588	A1	1/2021	Coffman et al.	
2019/0294406	A1	9/2019	Bierbower et al.	2021/0043189	A1 *	2/2021	Pyun	G06F 21/32
2019/0295393	A1	9/2019	Lee et al.	2021/0064317	A1	3/2021	Juenger et al.	
2019/0297039	A1	9/2019	Rodriguez et al.	2021/0065134	A1	3/2021	Chhabra et al.	
2019/0297439	A1	9/2019	Maeda	2021/0092491	A1	3/2021	Carrigan et al.	
2019/0303861	A1	10/2019	Mathias et al.	2021/0096703	A1	4/2021	Anzures et al.	
2019/0306607	A1	10/2019	Clayton et al.	2021/0097768	A1	4/2021	Malia et al.	
2019/0332400	A1 *	10/2019	Spoor	2021/0099829	A1	4/2021	Soto et al.	
2019/0339769	A1 *	11/2019	Cox	2021/0136129	A1	5/2021	Ponnusamy et al.	
2019/0339784	A1	11/2019	Lemay et al.	2021/0141437	A1	5/2021	Graham et al.	
2019/0339825	A1	11/2019	Anzures et al.	2021/0144336	A1	5/2021	Van Os et al.	
2019/0342507	A1	11/2019	Dye et al.	2021/0152503	A1	5/2021	Rodriguez et al.	
2019/0342519	A1	11/2019	Van Os et al.	2021/0152685	A1	5/2021	Li	
2019/0342621	A1	11/2019	Carrigan et al.	2021/0158622	A1	5/2021	Leelaphattarakij et al.	
2019/0342622	A1	11/2019	Carrigan et al.	2021/0158830	A1	5/2021	Boehlke	
2019/0347181	A1	11/2019	Cranfill et al.	2021/0176204	A1	6/2021	Geppert et al.	
2019/0354252	A1 *	11/2019	Badr	2021/0181903	A1	6/2021	Carrigan et al.	
2019/0361575	A1 *	11/2019	Ni	2021/0182169	A1	6/2021	Mardente et al.	
2019/0361694	A1	11/2019	Gordon et al.	2021/0195084	A1	6/2021	Olajos et al.	
2019/0362555	A1	11/2019	Chen et al.	2021/0203878	A1	7/2021	Lee et al.	
2019/0370805	A1	12/2019	Van Os et al.	2021/0217106	A1	7/2021	Hauser et al.	
2020/0005539	A1	1/2020	Hwang et al.	2021/0255816	A1	8/2021	Behzadi et al.	
2020/0034033	A1	1/2020	Chaudhri et al.	2021/0255819	A1	8/2021	Graham et al.	
2020/0050426	A1	2/2020	Jung et al.	2021/0263702	A1	8/2021	Carrigan	
2020/0050502	A1	2/2020	Ghafourifar et al.	2021/0265032	A1	8/2021	Burgess et al.	
2020/0055515	A1	2/2020	Herman et al.	2021/0266274	A1	8/2021	Liu et al.	
2020/0059628	A1	2/2020	Cranfill et al.	2021/0306288	A1	9/2021	Boyd et al.	
2020/0098362	A1	3/2020	Piernot et al.	2021/0321197	A1 *	10/2021	Annamraju	G06F 3/167
2020/0098368	A1	3/2020	Lemay et al.	2021/0323406	A1	10/2021	So et al.	
2020/0104018	A1	4/2020	Coffman et al.	2021/0333864	A1	10/2021	Harvey et al.	
2020/0106952	A1	4/2020	Missig et al.	2021/0349680	A1	11/2021	Kim et al.	
2020/0106965	A1	4/2020	Malia et al.	2021/0352172	A1	11/2021	Kim et al.	
2020/0112690	A1	4/2020	Harrison et al.	2021/0360192	A1	11/2021	Cranfill et al.	
2020/0127988	A1 *	4/2020	Bradley	2021/0360199	A1	11/2021	Oz et al.	
				2021/0366480	A1	11/2021	Lemay et al.	
				2021/0373672	A1	12/2021	Schwarz et al.	
				2021/0390955	A1	12/2021	Piernot et al.	
				2021/0392223	A1	12/2021	Coffman et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2021/0407507 A1 12/2021 Zhou et al.
 2021/0409359 A1 12/2021 Eirinberg et al.
 2022/0004356 A1 1/2022 Kim et al.
 2022/0006946 A1 1/2022 Missig et al.
 2022/0019292 A1 1/2022 Lemay et al.
 2022/0021680 A1 1/2022 Roedel et al.
 2022/0043626 A1 2/2022 Carrigan
 2022/0046186 A1 2/2022 Fayad et al.
 2022/0046222 A1 2/2022 Meier
 2022/0050578 A1 2/2022 Waldman et al.
 2022/0053142 A1 2/2022 Manzari et al.
 2022/0100362 A1 3/2022 Kim
 2022/0100367 A1 3/2022 Carrigan et al.
 2022/0103784 A1 3/2022 Pollefeys
 2022/0122089 A1 4/2022 Bonilla Kuhlmann et al.
 2022/0141329 A1 5/2022 Christie et al.
 2022/0147135 A1 5/2022 Graham et al.
 2022/0180862 A1* 6/2022 Sharifi G10L 15/22
 2022/0244836 A1 8/2022 O'leary et al.
 2022/0247587 A1 8/2022 Rolin et al.
 2022/0247918 A1 8/2022 O'leary et al.
 2022/0247919 A1 8/2022 O'leary et al.
 2022/0253136 A1 8/2022 Holder et al.
 2022/0254074 A1 8/2022 Berliner et al.
 2022/0269882 A1 8/2022 Proschowsky et al.
 2022/0278992 A1 9/2022 Baker et al.
 2022/0279022 A1 9/2022 Kramar et al.
 2022/0279063 A1 9/2022 Coffman et al.
 2022/0286314 A1 9/2022 Meyer et al.
 2022/0286549 A1 9/2022 Coffman et al.
 2022/0303150 A1 9/2022 Jensen et al.
 2022/0303383 A1 9/2022 Coffman et al.
 2022/0326817 A1 10/2022 Carrigan et al.
 2022/0343569 A1 10/2022 Karri et al.
 2022/0350482 A1 11/2022 Carrigan et al.
 2022/0365643 A1 11/2022 Triverio et al.
 2022/0365667 A1 11/2022 Carrigan et al.
 2022/0365739 A1 11/2022 Chang et al.
 2022/0365740 A1 11/2022 Chang et al.
 2022/0368548 A1 11/2022 Chang et al.
 2022/0368659 A1 11/2022 Chang et al.
 2022/0368742 A1 11/2022 Chang et al.
 2022/0374136 A1 11/2022 Chang et al.
 2023/0004264 A1 1/2023 Anzures et al.
 2023/0035941 A1 2/2023 Herman et al.
 2023/0040703 A1 2/2023 Lemay et al.
 2023/0057851 A1 2/2023 Ansari et al.
 2023/0073844 A1 3/2023 Coffman et al.
 2023/0079965 A1 3/2023 Garcia et al.
 2023/0082492 A1 3/2023 Coffman et al.
 2023/0084551 A1 3/2023 Coffman et al.
 2023/0094453 A1 3/2023 O'Leary et al.
 2023/0098395 A1 3/2023 O'Leary et al.
 2023/0104819 A1 4/2023 Coffman et al.
 2023/0106600 A1 4/2023 Coffman et al.
 2023/0106761 A1 4/2023 Coffman et al.
 2023/0109787 A1 4/2023 O'leary et al.
 2023/0143275 A1 5/2023 Opara et al.
 2023/0188674 A1 6/2023 Van Os et al.
 2023/0213764 A1 7/2023 Arngren et al.
 2023/0246857 A1 8/2023 Boucheron et al.
 2023/0262196 A1 8/2023 Cranfill et al.
 2023/0262317 A1 8/2023 O'Leary et al.
 2023/0266866 A1 8/2023 Bates et al.
 2023/0319413 A1 10/2023 Manzari et al.
 2023/0370507 A1 11/2023 Chang et al.
 2023/0376268 A1 11/2023 Carrigan et al.
 2023/0393705 A1 12/2023 Krenn
 2023/0393714 A1 12/2023 Giuliani
 2023/0393809 A1 12/2023 Carrigan et al.
 2023/0403509 A1 12/2023 Carrigan et al.
 2023/0409191 A1 12/2023 Carrigan et al.
 2024/0036804 A1 2/2024 Chang et al.
 2024/0040198 A1 2/2024 Carrigan et al.
 2024/0056521 A1 2/2024 Christie et al.

2024/0064270 A1 2/2024 Van Os et al.
 2024/0064395 A1 2/2024 O'Leary et al.
 2024/0069711 A1 2/2024 Carrigan et al.
 2024/0080642 A1 3/2024 Carrigan et al.
 2024/0103677 A1 3/2024 Mckenzie et al.
 2024/0104819 A1 3/2024 Chand et al.
 2024/0118793 A1 4/2024 Triverio et al.
 2024/0176441 A1 5/2024 Yang et al.
 2024/0259638 A1 8/2024 Carrigan et al.
 2024/0259669 A1 8/2024 Missig et al.
 2024/0377922 A1 11/2024 Rajam et al.
 2024/0406632 A1 12/2024 Carrigan et al.
 2024/0419322 A1 12/2024 Carrigan et al.

FOREIGN PATENT DOCUMENTS

AU 2015100713 A4 6/2015
 AU 2022201622 A1 3/2022
 CA 2532145 A1 7/1995
 CA 2845537 A1 9/2014
 CN 1473430 A 2/2004
 CN 1641589 A 7/2005
 CN 1679019 A 10/2005
 CN 1689327 A 10/2005
 CN 1801926 A 7/2006
 CN 1863281 A 11/2006
 CN 1890996 A 1/2007
 CN 1985319 A 6/2007
 CN 101046721 A 10/2007
 CN 101075173 A 11/2007
 CN 101107668 A 1/2008
 CN 101276255 A 10/2008
 CN 101296356 A 10/2008
 CN 101374090 A 2/2009
 CN 101431564 A 5/2009
 CN 101517557 A 8/2009
 CN 101535940 A 9/2009
 CN 101566866 A 10/2009
 CN 101567858 A 10/2009
 CN 101627361 A 1/2010
 CN 101682622 A 3/2010
 CN 101853132 A 10/2010
 CN 101854247 A 10/2010
 CN 101854261 A 10/2010
 CN 101861562 A 10/2010
 CN 101917529 A 12/2010
 CN 101989072 A 3/2011
 CN 102063253 A 5/2011
 CN 102202192 A 9/2011
 CN 102215217 A 10/2011
 CN 102215374 A 10/2011
 CN 102281294 A 12/2011
 CN 102301323 A 12/2011
 CN 102414755 A 4/2012
 CN 102572369 A 7/2012
 CN 102651731 A 8/2012
 CN 102740146 A 10/2012
 CN 102915630 A 2/2013
 CN 102932216 A 2/2013
 CN 102968267 A 3/2013
 CN 103039064 A 4/2013
 CN 103119968 A 5/2013
 CN 103136497 A 6/2013
 CN 103207674 A 7/2013
 CN 103222247 A 7/2013
 CN 103237191 A 8/2013
 CN 103260079 A 8/2013
 CN 103309606 A 9/2013
 CN 103347116 A 10/2013
 CN 103384235 A 11/2013
 CN 103399703 A 11/2013
 CN 103440247 A 12/2013
 CN 103442774 A 12/2013
 CN 103458215 A 12/2013
 CN 103473004 A 12/2013
 CN 103581544 A 2/2014
 CN 103583031 A 2/2014
 CN 103593154 A 2/2014
 CN 103649985 A 3/2014

(56)	References Cited					
	FOREIGN PATENT DOCUMENTS					
CN	103677711	A	3/2014	CN	106383645	A 2/2017
CN	103685729	A	3/2014	CN	106416142	A 2/2017
CN	103718152	A	4/2014	CN	106471793	A 3/2017
CN	103748610	A	4/2014	CN	106537991	A 3/2017
CN	103809905	A	5/2014	CN	106572326	A 4/2017
CN	103914238	A	7/2014	CN	106713946	A 5/2017
CN	103959751	A	7/2014	CN	106797415	A 5/2017
CN	104010158	A	8/2014	CN	106843626	A 6/2017
CN	104076757	A	10/2014	CN	107066523	A 8/2017
CN	104081335	A	10/2014	CN	107077288	A 8/2017
CN	104106036	A	10/2014	CN	107122049	A 9/2017
CN	104155938	A	11/2014	CN	107197441	A 9/2017
CN	104205785	A	12/2014	CN	107250949	A 10/2017
CN	104247449	A	12/2014	CN	107491257	A 12/2017
CN	104270597	A	1/2015	CN	107533368	A 1/2018
CN	104284477	A	1/2015	CN	107533417	A 1/2018
CN	104298188	A	1/2015	CN	107534656	A 1/2018
CN	204155434	U	2/2015	CN	107613235	A 1/2018
CN	104427288	A	3/2015	CN	107637073	A 1/2018
CN	104429094	A	3/2015	CN	107683470	A 2/2018
CN	104469143	A	3/2015	CN	107704177	A 2/2018
CN	104469512	A	3/2015	CN	107728876	A 2/2018
CN	104581043	A	4/2015	CN	107819928	A 3/2018
CN	104602133	A	5/2015	CN	104025538	B 4/2018
CN	104618672	A	5/2015	CN	107949879	A 4/2018
CN	104684207	A	6/2015	CN	104012150	B 5/2018
CN	104766021	A	7/2015	CN	107992248	A 5/2018
CN	104780654	A	7/2015	CN	108289239	A 7/2018
CN	104820631	A	8/2015	CN	108292203	A 7/2018
CN	104869046	A	8/2015	CN	108933965	A 12/2018
CN	104898603	A	9/2015	CN	108958608	A 12/2018
CN	104956276	A	9/2015	CN	109117078	A 1/2019
CN	104956417	A	9/2015	CN	109196825	A 1/2019
CN	104980578	A	10/2015	CN	109287140	A 1/2019
CN	105069118	A	11/2015	CN	109302531	A 2/2019
CN	105094957	A	11/2015	CN	109314795	A 2/2019
CN	105141498	A	12/2015	CN	109347581	A 2/2019
CN	105159107	A	12/2015	CN	109348052	A 2/2019
CN	105204742	A	12/2015	CN	109461462	A 3/2019
CN	105204846	A	12/2015	CN	109584879	A 4/2019
CN	105208511	A	12/2015	CN	109688441	A 4/2019
CN	105263114	A	1/2016	CN	109688442	A 4/2019
CN	105264473	A	1/2016	CN	110456971	A 11/2019
CN	105278681	A	1/2016	CN	111108740	A 5/2020
CN	105283840	A	1/2016	CN	111601065	A 8/2020
CN	103583031	B	2/2016	CN	112088530	A 12/2020
CN	105308634	A	2/2016	CN	112214275	A 1/2021
CN	105359199	A	2/2016	CN	112261338	A 1/2021
CN	105373165	A	3/2016	CN	105900376	B 2/2021
CN	105374192	A	3/2016	CN	112416223	A 2/2021
CN	105388773	A	3/2016	CN	109584879	B 7/2021
CN	105388998	A	3/2016	CN	113835583	A 12/2021
CN	105389173	A	3/2016	CN	108958608	B 7/2022
CN	105391778	A	3/2016	EP	1133119	A2 9/2001
CN	105474580	A	4/2016	EP	1881649	A2 1/2008
CN	105531671	A	4/2016	EP	1903791	A2 3/2008
CN	105549947	A	5/2016	EP	1986431	A2 10/2008
CN	105553796	A	5/2016	EP	2018032	A1 1/2009
CN	105554429	A	5/2016	EP	2056568	A1 5/2009
CN	105554516	A	5/2016	EP	2237536	A1 10/2010
CN	105578111	A	5/2016	EP	2490432	A1 8/2012
CN	205263700	U	5/2016	EP	2582120	A1 4/2013
CN	105657465	A	6/2016	EP	2600584	A1 6/2013
CN	105745863	A	7/2016	EP	2629291	A1 8/2013
CN	105794231	A	7/2016	EP	2675195	A2 12/2013
CN	105847746	A	8/2016	EP	2750062	A2 7/2014
CN	105900376	A	8/2016	EP	2770673	A1 8/2014
CN	105940678	A	9/2016	EP	2784611	A2 10/2014
CN	106030700	A	10/2016	EP	2797391	A1 10/2014
CN	106062810	A	10/2016	EP	2879470	A1 6/2015
CN	106134209	A	11/2016	EP	2892240	A1 7/2015
CN	106170783	A	11/2016	EP	2894948	A2 7/2015
CN	106210855	A	12/2016	EP	2446619	B1 10/2015
CN	106303648	A	1/2017	EP	2933953	A1 10/2015
CN	103914238	B	2/2017	EP	2981093	A1 2/2016
				EP	2993909	A1 3/2016
				EP	3032537	A2 6/2016
				EP	3038427	A1 6/2016
				EP	3041229	A1 7/2016

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	3057342	A1	8/2016	JP	2007-58663	A	3/2007
EP	3073703	A1	9/2016	JP	2007-88630	A	4/2007
EP	2761582	B1	3/2017	JP	2007-140060	A	6/2007
EP	3138300	A1	3/2017	JP	2007-150877	A	6/2007
EP	3163495	A1	5/2017	JP	2007-150921	A	6/2007
EP	3227771	A1	10/2017	JP	2007-200329	A	8/2007
EP	3276905	A1	1/2018	JP	2007-201727	A	8/2007
EP	2258103	B1	5/2018	JP	2007-274034	A	10/2007
EP	3379853	A1	9/2018	JP	2007-282263	A	10/2007
EP	3420441	A1	1/2019	JP	2007-300452	A	11/2007
EP	3445058	A1	2/2019	JP	2008-28586	A	2/2008
EP	3460770	A1	3/2019	JP	2008-99330	A	4/2008
EP	3038427	B1	12/2019	JP	2008-125105	A	5/2008
EP	3579093	A1	12/2019	JP	2008-136119	A	6/2008
EP	3163866	B1	5/2020	JP	2008-526156	A	7/2008
EP	3751405	A1	12/2020	JP	2008-533838	A	8/2008
EP	4109891	A1	12/2022	JP	2008-289014	A	11/2008
EP	4134799	A1	2/2023	JP	2008-546069	A	12/2008
FR	3069679	A1	2/2019	JP	2009-502048	A	1/2009
GB	2341698	A	3/2000	JP	2009-159253	A	7/2009
GB	0412212		7/2004	JP	2009-188975	A	8/2009
GB	2402105	A	12/2004	JP	2009-201127	A	9/2009
GB	2499123	A	8/2013	JP	2009-232290	A	10/2009
GB	2512821	A	10/2014	JP	2009-265692	A	11/2009
GB	2533101	A	6/2016	JP	2009-296583	A	12/2009
IN	1038/MUM/2005	A	6/2007	JP	2010-15239	A	1/2010
JP	4-175921	A	6/1992	JP	2010-503126	A	1/2010
JP	6-113297	A	4/1994	JP	2010-503332	A	1/2010
JP	6-178356	A	6/1994	JP	2010-541398	A	12/2010
JP	6-276335	A	9/1994	JP	2011-60281	A	3/2011
JP	6-276515	A	9/1994	JP	2011-65654	A	3/2011
JP	7-135594	A	5/1995	JP	2011-107823	A	6/2011
JP	9-182046	A	7/1997	JP	2011-124665	A	6/2011
JP	9-233384	A	9/1997	JP	2012-73839	A	4/2012
JP	9-247655	A	9/1997	JP	2012-508530	A	4/2012
JP	9-265457	A	10/1997	JP	2012-123460	A	6/2012
JP	11-98249	A	4/1999	JP	2012-244340	A	12/2012
JP	2001-67099	A	3/2001	JP	2013-37688	A	2/2013
JP	2001-169166	A	6/2001	JP	2013-98613	A	5/2013
JP	2002-58082	A	2/2002	JP	2013-524683	A	6/2013
JP	2002-153678	A	5/2002	JP	2013-200879	A	10/2013
JP	2002-163217	A	6/2002	JP	2013-542522	A	11/2013
JP	2002-251365	A	9/2002	JP	2014-71835	A	4/2014
JP	2002-320140	A	10/2002	JP	2014-87126	A	5/2014
JP	2002-351802	A	12/2002	JP	2014-135000	A	7/2014
JP	2003-101981	A	4/2003	JP	2014-160461	A	9/2014
JP	2003-134382	A	5/2003	JP	2014-170982	A	9/2014
JP	2003-141050	A	5/2003	JP	2014-186961	A	10/2014
JP	2003-189168	A	7/2003	JP	5628461	B1	11/2014
JP	2003-228780	A	8/2003	JP	2015-11507	A	1/2015
JP	2003-274376	A	9/2003	JP	2015-61318	A	3/2015
JP	2003-299050	A	10/2003	JP	2015-70327	A	4/2015
JP	2003-348444	A	12/2003	JP	2015-125671	A	7/2015
JP	2004-96397	A	3/2004	JP	2015-128043	A	7/2015
JP	2004-110559	A	4/2004	JP	2015-128326	A	7/2015
JP	2004-187273	A	7/2004	JP	2015-149710	A	8/2015
JP	2004-193860	A	7/2004	JP	2015-154253	A	8/2015
JP	2004-221738	A	8/2004	JP	2015-170234	A	9/2015
JP	2005-94696	A	4/2005	JP	2015-195222	A	11/2015
JP	2005-159567	A	6/2005	JP	2015-201087	A	11/2015
JP	2005-260289	A	9/2005	JP	2015-211035	A	11/2015
JP	2005-286445	A	10/2005	JP	2015-533441	A	11/2015
JP	2005-303736	A	10/2005	JP	2016-1446	A	1/2016
JP	2005-333294	A	12/2005	JP	2016-24557	A	2/2016
JP	2006-72489	A	3/2006	JP	2016-38615	A	3/2016
JP	2006-135495	A	5/2006	JP	2016-51661	A	4/2016
JP	2006-135667	A	5/2006	JP	2016-53929	A	4/2016
JP	2006-166414	A	6/2006	JP	2016-63531	A	4/2016
JP	2006-185154	A	7/2006	JP	2016-72953	A	5/2016
JP	2006-222822	A	8/2006	JP	2016-100791	A	5/2016
JP	2006-245732	A	9/2006	JP	2016-119600	A	6/2016
JP	2006-246019	A	9/2006	JP	2016-525732	A	8/2016
JP	2006-254350	A	9/2006	JP	2016-157292	A	9/2016
JP	2006-319742	A	11/2006	JP	2016-167806	A	9/2016
JP	2006-350819	A	12/2006	JP	2016-174282	A	9/2016
				JP	2017-34563	A	2/2017
				JP	2017-41008	A	2/2017
				JP	2017-508195	A	3/2017
				JP	2017-84253	A	5/2017

(56) References Cited			KR	10-2020-0039030	A	4/2020
FOREIGN PATENT DOCUMENTS			TW	1321955	B	3/2010
			TW	201547326	A	12/2015
			TW	201629750	A	8/2016
			WO	00/39964	A1	7/2000
JP 2017-143357	A	8/2017	WO	2001/18665	A1	3/2001
JP 2017-158202	A	9/2017	WO	02/37848	A1	5/2002
JP 2017-173998	A	9/2017	WO	2003/077553	A1	9/2003
JP 2017-212096	A	11/2017	WO	2004/032507	A1	4/2004
JP 2017-532645	A	11/2017	WO	2005/055521	A1	6/2005
JP 2017-228843	A	12/2017	WO	2005/060501	A2	7/2005
JP 2017-229060	A	12/2017	WO	2005/086159	A2	9/2005
JP 2017-537361	A	12/2017	WO	2006/063343	A2	6/2006
JP 2018-7158	A	1/2018	WO	2007/008321	A2	1/2007
JP 2016-63520	A	4/2018	WO	2007/063922	A1	6/2007
JP 2018-56719	A	4/2018	WO	2008/027924	A2	3/2008
JP 2018-63826	A	4/2018	WO	2008/030972	A1	3/2008
JP 2018-136828	A	8/2018	WO	2008/030976	A2	3/2008
JP 2018-147265	A	9/2018	WO	2008/040566	A1	4/2008
JP 2018-200624	A	12/2018	WO	2009/005563	A1	1/2009
JP 2019-114282	A	7/2019	WO	2009/005914	A1	1/2009
JP 2019-526095	A	9/2019	WO	2009/010827	A2	1/2009
JP 2020-510929	A	4/2020	WO	2009/042579	A1	4/2009
JP 2021-40300	A	3/2021	WO	2009/067670	A1	5/2009
KR 1997-0031883	A	6/1997	WO	2009/071112	A1	6/2009
KR 1999-0044201	A	6/1999	WO	2009/086599	A1	7/2009
KR 10-2001-0091156	A	10/2001	WO	2010/001672	A1	1/2010
KR 10-2004-0016688	A	2/2004	WO	2010/054373	A2	5/2010
KR 10-2004-0045338	A	6/2004	WO	2010/087988	A1	8/2010
KR 10-2004-0089329	A	10/2004	WO	2010/137513	A1	12/2010
KR 10-2005-0054684	A	6/2005	WO	2011/011224	A1	1/2011
KR 10-2006-0031959	A	4/2006	WO	2011/027964	A1	3/2011
KR 10-2006-0064326	A	6/2006	WO	2011/126502	A1	10/2011
KR 10-2006-0116902	A	11/2006	WO	2011/126505	A1	10/2011
KR 10-2007-0111270	A	11/2007	WO	2011/127457	A1	10/2011
KR 10-2008-0096042	A	10/2008	WO	2011/146605	A1	11/2011
KR 10-2009-0002641	A	1/2009	WO	2011/146839	A1	11/2011
KR 10-2009-0004176	A	1/2009	WO	2011/161145	A1	12/2011
KR 10-2009-0017901	A	2/2009	WO	2011/163350	A1	12/2011
KR 10-2009-0017906	A	2/2009	WO	2012/004288	A1	1/2012
KR 10-2009-0036226	A	4/2009	WO	2012/037170	A1	3/2012
KR 110-2009-0042499	A	4/2009	WO	2012/085794	A1	6/2012
KR 110-0891449	B1	4/2009	WO	2012/104288	A1	8/2012
KR 10-2009-0122805	A	12/2009	WO	2012/166277	A1	12/2012
KR 10-2009-0126516	A	12/2009	WO	2012/166352	A1	12/2012
KR 10-2010-0036351	A	4/2010	WO	2012/170118	A1	12/2012
KR 10-2011-0022980	A	3/2011	WO	2013/021385	A2	2/2013
KR 10-2011-0075136	A	7/2011	WO	2013/048880	A1	4/2013
KR 10-2011-0093040	A	8/2011	WO	2013/049346	A1	4/2013
KR 10-2012-0059860	A	6/2012	WO	2013/114821	A1	8/2013
KR 10-2012-0079208	A	7/2012	WO	2013/153405	A2	10/2013
KR 10-2013-0115611	A	10/2013	WO	2013/169875	A2	11/2013
KR 10-2014-0148289	A	12/2014	WO	2014/030320	A1	2/2014
KR 10-2015-0005134	A	1/2015	WO	2014/030540	A1	2/2014
KR 10-2015-0031010	A	3/2015	WO	2014/046475	A1	3/2014
KR 10-2015-0043146	A	4/2015	WO	2014/052871	A1	4/2014
KR 10-1522311	B1	5/2015	WO	2014/058937	A1	4/2014
KR 10-2015-0121177	A	10/2015	WO	2014/077987	A1	5/2014
KR 10-2015-0136440	A	12/2015	WO	2014/107469	A2	7/2014
KR 10-2016-0012008	A	2/2016	WO	2014/128800	A1	8/2014
KR 10-2016-0092363	A	8/2016	WO	2014/143776	A2	9/2014
KR 10-2016-0092820	A	8/2016	WO	2014/151089	A1	9/2014
KR 10-2016-0141847	A	12/2016	WO	2014/155429	A1	10/2014
KR 10-2017-0008601	A	1/2017	WO	2014/159581	A1	10/2014
KR 10-2017-0027435	A	3/2017	WO	2014/168616	A1	10/2014
KR 10-2017-0027999	A	3/2017	WO	2014/197339	A1	12/2014
KR 10-2017-0082022	A	7/2017	WO	2014/200730	A1	12/2014
KR 10-2017-0100358	A	9/2017	WO	2014/208057	A1	12/2014
KR 10-2017-0107058	A	9/2017	WO	2014/210304	A1	12/2014
KR 10-2017-0124954	A	11/2017	WO	2015/008409	A1	1/2015
KR 10-2017-0128498	A	11/2017	WO	2015/039000	A1	3/2015
KR 10-2018-0034637	A	4/2018	WO	2015/076930	A1	5/2015
KR 10-2018-0085931	A	7/2018	WO	2015/102572	A1	7/2015
KR 10-2019-0002658	A	1/2019	WO	2015/105763	A1	7/2015
KR 10-2019-0014495	A	2/2019	WO	2015/114690	A1	8/2015
KR 10-2019-0022883	A	3/2019	WO	2015/124831	A1	8/2015
KR 10-2019-0033082	A	3/2019	WO	2015/134692	A1	9/2015
KR 10-2019-0057414	A	5/2019	WO	2015/179031	A1	11/2015
KR 10-1989433	B1	6/2019	WO	2015/183755	A1	12/2015
KR 10-2011177	B1	8/2019	WO			

(56)

References Cited**FOREIGN PATENT DOCUMENTS**

WO	2015/185123	A1	12/2015
WO	2016/033400	A1	3/2016
WO	2016/036472	A1	3/2016
WO	2016/036541	A2	3/2016
WO	2016/039992	A1	3/2016
WO	2016/040405	A1	3/2016
WO	2016/052888	A1	4/2016
WO	2016/057117	A1	4/2016
WO	2016/079889	A1	5/2016
WO	2016/144983	A1	9/2016
WO	2016/168154	A1	10/2016
WO	2016/200603	A1	12/2016
WO	2016/204186	A1	12/2016
WO	2017/027526	A1	2/2017
WO	2017/058293	A1	4/2017
WO	2017/058442	A1	4/2017
WO	2017/112003	A1	6/2017
WO	2017/147081	A1	8/2017
WO	2017/173155	A1	10/2017
WO	2017/205657	A1	11/2017
WO	2017/218143	A1	12/2017
WO	2017/218153	A1	12/2017
WO	2017/218192	A1	12/2017
WO	2017/218199	A1	12/2017
WO	2018/048510	A1	3/2018
WO	2018/057272	A1	3/2018
WO	2018/084802	A1	5/2018
WO	2018/098136	A1	5/2018
WO	2018/144339	A2	8/2018
WO	2018/213401	A1	11/2018
WO	2018/213415	A1	11/2018
WO	2018/213844	A1	11/2018
WO	2018/232333	A1	12/2018
WO	2019/067131	A1	4/2019
WO	2019/090653	A1	5/2019
WO	2019/217009	A1	11/2019
WO	2019/217341	A1	11/2019
WO	2019/217477	A1	11/2019
WO	2020/063762	A1	4/2020
WO	2021/112983	A1	6/2021
WO	2021/231412	A1	11/2021

OTHER PUBLICATIONS

Non-Final Office Action received for U.S. Appl. No. 17/992,229, mailed on Jul. 13, 2023, 14 pages.

Notice of Allowance received for Australian Patent Application No. 2022228207, mailed on Jul. 3, 2023, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 202110328601.5, mailed on Jul. 5, 2023, 5 pages (1 page of English Translation and 4 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Jul. 19, 2023, 13 pages.

Notice of Allowance received for U.S. Appl. No. 17/483,564, mailed on Jul. 17, 2023, 46 pages.

Notice of Allowance received for U.S. Appl. No. 17/867,317, mailed on Jul. 6, 2023, 11 pages.

Office Action received for Korean Patent Application No. 10-2022-7001521, mailed on Jun. 21, 2023, 10 pages (5 page of English Translation and 5 pages of Official Copy).

Garrison Dr., "An Analysis and Evaluation of Audio Teleconferencing to Facilitate Education at a Distance", Online Available at: <https://doi.org/10.1080/08923649009526713>, American journal of distance education, Vol. 4, No. 3, Sep. 24, 2009, 14 pages.

Shangmeng Li, "The Design and Implementation of Mobile Terminal System of Multimedia Conference Based on Symbian Operating System", China Academic Journal Electronic Publishing House, online available at: <http://www.cnki.net>, 2011, 66 pages (Official Copy only) See Communication under 37 CFR § 1.98(a) (3).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/467,700, mailed on Mar. 28, 2023, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/747,804, mailed on Mar. 17, 2023, 4 pages.

Notice of Acceptance received for Australian Patent Application No. 2021261941, mailed on Mar. 15, 2023, 3 pages.

Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Mar. 22, 2023, 8 pages.

Notice of Allowance received for U.S. Appl. No. 18/077,905, mailed on Mar. 24, 2023, 18 pages.

Office Action received for Australian Patent Application No. 2022241590, mailed on Mar. 17, 2023, 5 pages.

Office Action received for Indian Patent Application No. 202015013360, mailed on Mar. 17, 2023, 7 pages.

Advisory Action received for U.S. Appl. No. 16/830,838, mailed on Oct. 10, 2023, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/684,843, mailed on Oct. 5, 2023, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/950,922, mailed on Oct. 2, 2023, 3 pages.

Final Office Action received for U.S. Appl. No. 17/742,273, mailed on Oct. 12, 2023, 58 pages.

Notice of Allowance received for Japanese Patent Application No. 2022-016138, mailed on Sep. 25, 2023, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/479,897, mailed on Oct. 3, 2023, 5 pages.

Notice of Allowance received for U.S. Appl. No. 17/732,204, mailed on Oct. 12, 2023, 8 pages.

Notice of Allowance received for U.S. Appl. No. 17/740,104, mailed on Oct. 4, 2023, 5 pages.

Office Action received for Japanese Patent Application No. 2022-104306, mailed on Sep. 19, 2023, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

"6. Voice chat with friends through QQ", Online available at: <https://v.qq.com/x/page/a0166p7xrt0.html>, Sep. 22, 2015, 1 page (Official Copy Only). {See Communication under 37 CFR § 1.98(a) (3)}.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,564, mailed on Apr. 21, 2023, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/752,582, mailed on Apr. 17, 2023, 3 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 20205496.1, mailed on Apr. 19, 2023, 1 page.

Corrected Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Apr. 14, 2023, 6 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/467,700, mailed on Apr. 17, 2023, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/482,977, mailed on Apr. 24, 2023, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/950,900, mailed on Apr. 14, 2023, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/950,922, mailed on Apr. 14, 2023, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/077,905, mailed on Apr. 19, 2023, 2 pages.

Intention to Grant received for European Patent Application No. 18728002.9, mailed on Apr. 12, 2023, 9 pages.

Jiutian Technology, "Windows 8 Chinese version from entry to proficiency", Jan. 1, 2014, 5 pages (Official Copy Only). {See Communication under 37 CFR § 1.98(a) (3)}.

Non-Final Office Action received for U.S. Appl. No. 17/479,897, mailed on Apr. 25, 2023, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 17/903,946, mailed on Apr. 14, 2023, 17 pages.

Notice of Allowance received for Chinese Patent Application No. 202080039642.6, mailed on Apr. 17, 2023, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110327012.5, mailed on Mar. 16, 2023, 12 pages (7 pages of English Translation and 5 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110328601.5, mailed on Mar. 24, 2023, 25 pages (15 pages of English Translation and 10 pages of Official Copy).

(56)

References Cited**OTHER PUBLICATIONS**

Office Action received for European Patent Application No. 20720310.0, mailed on Apr. 11, 2023, 8 pages.

Result of Consultation received for European Patent Application No. 20205496.1, mailed on Apr. 18, 2023, 3 pages.

Song Jianhua, "Guidelines for Network", Feb. 29, 2008, 11 pages (Official Copy Only). {See Communication under 37 CFR § 1.98(a)(3)}.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,679, mailed on Aug. 18, 2023, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/479,897, mailed on Aug. 17, 2023, 2 pages.

Ex-Parte Quayle Action received for U.S. Appl. No. 17/903,946, mailed on Aug. 4, 2023, 4 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2022/014271, mailed on Aug. 10, 2023, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 17/684,843, mailed on Aug. 11, 2023, 23 pages.

Notice of Allowance received for U.S. Appl. No. 17/483,542, mailed on Aug. 11, 2023, 9 pages.

Notice of Allowance received for U.S. Appl. No. 17/872,736, mailed on Aug. 21, 2023, 6 pages.

Office Action received for Australian Patent Application No. 2022218540, mailed on Aug. 3, 2023, 5 pages.

Office Action received for Australian Patent Application No. 2022241590, mailed on Aug. 15, 2023, 6 pages.

Office Action received for European Patent Application No. 20746426.4, mailed on Aug. 17, 2023, 5 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Jan. 9, 2022, 3 pages.

Examiner's Pre-Review Report received for Japanese Patent Application No. 2020-047952, mailed on Dec. 13, 2022, 10 pages (5 pages of English Translation and 5 pages of Official Copy).

Extended European Search Report received for European Patent Application No. 22195584.2, mailed on Jan. 5, 2023, 13 pages.

Final Office Action received for U.S. Appl. No. 17/116,938, mailed on Dec. 29, 2022, 42 pages.

Final Office Action received for U.S. Appl. No. 17/479,897, mailed on Jan. 10, 2023, 15 pages.

Invitation to Pay Search Fees received for European Patent Application No. 20760624.5, mailed on Jan. 2, 2023, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 202110819254.6, mailed on Dec. 27, 2022, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110328602.X, mailed on Dec. 1, 2022, 28 pages (17 pages of English Translation 11 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2022-7001521, mailed on Dec. 26, 2022, 13 pages (6 pages of English Translation and 7 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,542, mailed on May 22, 2023, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,679, mailed on May 19, 2023, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/509,356, mailed on May 24, 2023, 2 pages.

Decision to Grant received for Danish Patent Application No. PA202270464, mailed on May 9, 2023, 1 page.

Decision to Refuse received for European Patent Application No. 20205496.1, mailed on May 12, 2023, 16 pages.

Minutes of the Oral Proceedings received for European Patent Application No. 20205496.1, mailed on May 9, 2023, 7 pages.

Mitroff Sarah, "8 things you should know about Apple Music for Android", CNET website, downloaded from <https://www.cnet.com/tech/services-and-software/apple-music-for-android-what-to-know/>, Nov. 11, 2015, 4 pages.

Non-Final Office Action received for U.S. Appl. No. 17/872,736, mailed on May 11, 2023, 17 pages.

Notice of Acceptance received for Australian Patent Application No. 2022204555, mailed on May 11, 2023, 3 pages.

Notice of Allowance received for Japanese Patent Application No. 2021-206121, mailed on May 15, 2023, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/848,845, mailed on May 24, 2023, 26 pages.

Ochs Susie, "Getting Started with Apple Music: 12 Things to Do First", Macworld website, downloaded from <https://www.macworld.com/article/225812/getting-started-with-apple-music-12-things-to-do-first.html>, Jun. 30, 2015, 12 pages.

Office Action received for Australian Patent Application No. 2022228207, mailed on Apr. 28, 2023, 3 pages.

Office Action received for Japanese Patent Application No. 2022-016138, mailed on Apr. 24, 2023, 9 pages (5 pages of English Translation and 4 pages of Official Copy).

Corrected Notice of Allowance received for U.S. Appl. No. 17/740,104, mailed on Jan. 2, 2024, 2 pages.

Decision to Grant received for Japanese Patent Application No. 2022-104306, mailed on Jan. 4, 2024, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Intention to Grant received for European Patent Application No. 20746426.4, mailed on Jan. 5, 2024, 9 pages.

Office Action received for Korean Patent Application No. 10-2022-7001521, mailed on Dec. 19, 2023, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2023-7011715, mailed on Dec. 20, 2023, 9 pages (4 pages of English Translation and 5 pages of Official Copy).

Summons to Attend Oral Proceedings received for European Patent Application No. 20720310.0, mailed on Jan. 3, 2024, 12 pages.

Advisory Action received for U.S. Appl. No. 17/483,679, mailed on Sep. 20, 2022, 8 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on Sep. 21, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/922,675, mailed on Nov. 15, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/116,938, mailed on Oct. 13, 2022, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/314,948, mailed on Oct. 21, 2022, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/479,897, mailed on Oct. 31, 2022, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,542, mailed on Nov. 23, 2022, 4 pages.

Communication of the Board of Appeal received for European Patent Application No. 15728307.8, mailed on Sep. 14, 2022, 9 pages.

Communication of the Board of Appeal received for European Patent Application No. 15729286.3, mailed on Oct. 6, 2022, 8 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/936,164, mailed on Oct. 13, 2022, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/936,164, mailed on Oct. 28, 2022, 3 pages.

Decision to Grant received for Danish Patent Application No. PA202170320, mailed on Nov. 10, 2022, 2 pages.

Extended European Search Report received for European Patent Application No. 22191264.5, mailed on Nov. 11, 2022, 8 pages.

Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Oct. 14, 2022, 16 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2022/029261, mailed on Oct. 20, 2022, 18 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2022/029261, mailed on Aug. 29, 2022, 16 pages.

Minutes of Oral Proceedings received for European Patent Application No. 15728307.8, mailed on Nov. 11, 2022, 4 pages.

Non-Final Office Action received for U.S. Appl. No. 17/482,977, mailed on Oct. 13, 2022, 20 pages.

Non-Final Office Action received for U.S. Appl. No. 17/483,542, mailed on Sep. 22, 2022, 18 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Notice of Allowance received for Chinese Patent Application No. 201910400179.2, mailed on Oct. 9, 2022, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 202011450203.2, mailed on Sep. 30, 2022, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2022-0091730, mailed on Oct. 4, 2022, 5 pages (2 pages of English Translation and 3 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 16/888,775, mailed on Oct. 19, 2022, 6 pages.

Notice of Allowance received for U.S. Appl. No. 16/936,164, mailed on Sep. 21, 2022, 9 pages.

Office Action received for Australian Patent Application No. 2021261941, mailed on Nov. 3, 2022, 3 pages.

Office Action received for Australian Patent Application No. 2022200515, mailed on Nov. 2, 2022, 2 pages.

Office Action received for Chinese Patent Application No. 202080039642.6, mailed on Sep. 5, 2022, 12 pages (6 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110235995.X, mailed on Sep. 30, 2022, 13 pages (7 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110328597.2, mailed on Oct. 10, 2022, 13 pages (7 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110819254.6, mailed on Sep. 15, 2022, 13 pages (7 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202111652452.4, mailed on Aug. 29, 2022, 23 pages (12 pages of English Translation and 11 pages of Official Copy).

Office Action received for Danish Patent Application No. PA202270464, mailed on Oct. 25, 2022, 9 pages.

Office Action received for European Patent Application No. 20720310.0, mailed on Oct. 4, 2022, 9 pages.

Office Action received for Korean Patent Application No. 10-2021-7029861, mailed on Nov. 1, 2022, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Summons to Attend Oral Proceedings received for European Patent Application No. 21160991.2, mailed on Oct. 19, 2022, 10 pages.

Minutes of Oral Proceedings received for European Patent Application No. 18728002.9, mailed on Dec. 22, 2022, 7 pages.

Non-Final Office Action received for U.S. Appl. No. 17/509,356, mailed on Dec. 22, 2022, 16 pages.

Notice of Acceptance received for Australian Patent Application No. 2022200515, mailed on Dec. 21, 2022, 3 pages.

Office Action received for Danish Patent Application No. PA202270464, mailed on Dec. 20, 2022, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on Jun. 1, 2023, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/476,404, mailed on Jun. 2, 2023, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/747,804, mailed on May 31, 2023, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/867,317, mailed on May 30, 2023, 4 pages.

Final Office Action received for U.S. Appl. No. 17/483,564, mailed on May 25, 2023, 26 pages.

Non-Final Office Action received for U.S. Appl. No. 17/306,354, mailed on Jun. 2, 2023, 21 pages.

Notice of Acceptance received for Australian Patent Application No. 2022201532, mailed on May 22, 2023, 3 pages.

Notice of Allowance received for U.S. Appl. No. 17/019,845, mailed on Jun. 5, 2023, 10 pages.

Office Action received for Chinese Patent Application No. 201811539259.8, mailed on May 24, 2023, 22 pages (2 pages of English Translation and 20 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110328597.2, mailed on May 15, 2023, 13 pages (6 pages of English Translation and 7 pages of Official Copy).

Office Action received for European Patent Application No. 21197457.1, mailed on May 30, 2023, 8 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/077,905, mailed on Apr. 26, 2023, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/077,905, mailed on May 4, 2023, 2 pages.

Final Office Action received for U.S. Appl. No. 17/747,804, mailed on Apr. 28, 2023, 17 pages.

Office Action received for Korean Patent Application No. 10-2022-7001332, mailed on Apr. 20, 2023, 8 pages (4 pages of English Translation and 4 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on Sep. 22, 2023, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/742,273, mailed on Sep. 27, 2023, 4 pages.

Extended European Search Report received for European patent Application No. 23191379.9, mailed on Sep. 18, 2023, 8 pages.

Final Office Action received for U.S. Appl. No. 17/992,229, mailed on Sep. 25, 2023, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 17/483,679, mailed on Sep. 13, 2023, 32 pages.

Non-Final Office Action received for U.S. Appl. No. 17/742,273, mailed on Sep. 13, 2023, 58 pages.

Notice of Allowance received for U.S. Appl. No. 17/950,922, mailed on Sep. 20, 2023, 6 pages.

Notice of Hearing received for Indian Patent Application No. 201814036860, mailed on Sep. 8, 2023, 2 pages.

Office Action received for European Patent Application No. 20746429.8, mailed on Sep. 20, 2023, 10 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/476,404, mailed on Oct. 31, 2023, 4 pages.

Examiner's Answer to Appeal Brief received for U.S. Appl. No. 17/116,938, mailed on Oct. 31, 2023, 55 pages.

Office Action received for Australian Patent Application No. 2022291522, mailed on Oct. 11, 2023, 2 pages.

Office Action received for Australian Patent Application No. 2023248185, mailed on Oct. 20, 2023, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/482,977, mailed on Dec. 5, 2022, 2 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 18728002.9, mailed on Nov. 28, 2022, 7 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2021/031760, mailed on Nov. 24, 2022, 11 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2022/029273, mailed on Oct. 27, 2022, 19 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2022/029282, mailed on Nov. 9, 2022, 22 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2022/029580, mailed on Nov. 7, 2022, 20 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2022/029282, mailed on Sep. 15, 2022, 15 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2022/029580, mailed on Sep. 5, 2022, 13 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2022/029273, mailed on Sep. 2, 2022, 13 pages.

Invitation to Pay Search Fees received for European Patent Application No. 21728781.2, mailed on Dec. 2, 2022, 3 pages.

Non-Final Office Action received for U.S. Appl. No. 17/483,564, mailed on Nov. 28, 2022, 24 pages.

Non-Final Office Action received for U.S. Appl. No. 17/742,273, mailed on Dec. 7, 2022, 47 pages.

Office Action received for Australian Patent Application No. 2022241590, mailed on Nov. 18, 2022, 8 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Office Action received for Chinese Patent Application No. 202110328601.5, mailed on Nov. 2, 2022, 32 pages (19 pages of English Translation and 13 pages of Official Copy).

QQ, "Method of QQ voice chat", Online Available at: <https://www.taodocs.com/p-47909082.html>, May 25, 2016, 3 pages (Official Copy only) See Communication Under 37 CFR § 1.98(a) (3).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,679, mailed on Dec. 18, 2023, 2 pages.

Final Office Action received for U.S. Appl. No. 18/067,350, mailed on Dec. 13, 2023, 44 pages.

Intention to Grant received for European Patent Application No. 21728781.2, mailed on Dec. 12, 2023, 9 pages.

Notice of Allowance received for U.S. Appl. No. 17/483,542, mailed on Dec. 20, 2023, 6 pages.

Office Action received for Chinese Patent Application No. 202110817799.3, mailed on Oct. 26, 2023, 22 pages (13 pages of English Translation and 9 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2022-155232, mailed on Dec. 15, 2023, 9 pages (4 pages of English Translation and 5 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/509,356, mailed on Feb. 3, 2023, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Jan. 20, 2023, 3 pages.

Dolan, Tim, "How To Make a Laptop Webcam into a Document Camera—IPEVO Mirror-Cam Review", Retrieved from the internet: <https://www.youtube.com/watch?v=-K8jyZlhbBg>, Aug. 29, 2020, 1 page.

Larson, Tom, "How to Turn your Webcam into a Document Camera", Retrieved from the Internet: <https://www.youtube.com/watch?v=UlaW22FxrZM>, Nov. 7, 2020, 1 page.

Non-Final Office Action received for U.S. Appl. No. 17/483,542, mailed on Jan. 31, 2023, 14 pages.

Notice of Allowance received for Japanese Patent Application No. 2022-014389, mailed on Jan. 27, 2023, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2022-125792, mailed on Jan. 27, 2023, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2022-7006175, mailed on Jan. 12, 2023, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/482,977, mailed on Jan. 24, 2023, 10 pages.

Office Action received for European Patent Application No. 20719301.2, mailed on Jan. 24, 2023, 9 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/684,843, mailed on Mar. 4, 2024, 2 pages.

Notice of Allowance received for Japanese Patent Application No. 2022-155232, mailed on Feb. 26, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7008877, mailed on Feb. 20, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7039382, mailed on Feb. 13, 2024, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2024-7000870, mailed on Feb. 13, 2024, 5 pages (2 pages of English Translation and 3 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 18/375,457, mailed on Feb. 23, 2024, 16 pages.

Office Action received for Australian Patent Application No. 2023203357, mailed on Feb. 14, 2024, 3 pages.

Office Action received for Chinese Patent Application No. 201880031407.7, mailed on Jan. 12, 2024, 15 pages (7 pages of English Translation and 8 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2023-022576, mailed on Feb. 26, 2024, 10 pages (5 pages of English Translation and 5 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2022-7044372, mailed on Feb. 13, 2024, 10 pages (4 pages of English Translation and 6 pages of Official Copy).

Final Office Action received for U.S. Appl. No. 17/742,273, mailed on Feb. 15, 2023, 56 pages.

Non-Final Office Action received for U.S. Appl. No. 17/467,700, mailed on Feb. 21, 2023, 11 pages.

Non-Final Office Action received for U.S. Appl. No. 17/747,804, mailed on Mar. 1, 2023, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 17/867,317, mailed on Feb. 28, 2023, 18 pages.

Notice of Allowance received for U.S. Appl. No. 16/888,775, mailed on Feb. 21, 2023, 5 pages.

Office Action received for Australian Patent Application No. 2022204555, mailed on Feb. 17, 2023, 5 pages.

Office Action received for Chinese Patent Application No. 201911288715.0, mailed on Jan. 20, 2023, 23 pages (11 pages of English Translation and 12 pages of Official Copy).

Supplemental Notice of Allowance received for U.S. Appl. No. 16/888,775, mailed on Mar. 1, 2023, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/992,229, mailed on Nov. 30, 2023, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/067,350, mailed on Sep. 11, 2023, 4 pages.

Extended European Search Report received for European Patent Application No. 23172038.4, mailed on Oct. 11, 2023, 10 pages.

Extended European Search Report received for European Patent Application No. 23190753.6, mailed on Nov. 22, 2023, 13 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2023/020569, mailed on Sep. 21, 2023, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 18/067,350, mailed on Aug. 3, 2023, 41 pages.

Notice of Acceptance received for Australian Patent Application No. 2022241590, mailed on Nov. 14, 2023, 3 pages.

Office Action received for Australian Patent Application No. 2023248185, mailed on Nov. 22, 2023, 2 pages.

Office Action received for Japanese Patent Application No. 2022-129377, mailed on Nov. 10, 2023, 6 pages (3 pages of English Translation and 3 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2023-0001668, mailed on Nov. 3, 2023, 5 pages (2 pages of English Translation and 3 pages of Official Copy).

Summons to Attend Oral Proceedings received for European Patent Application No. 21197457.1, mailed on Nov. 23, 2023, 12 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/732,204, mailed on Nov. 16, 2023, 6 pages.

Final Office Action received for U.S. Appl. No. 17/484,899, mailed on Nov. 6, 2023, 39 pages.

Notice of Allowance received for Korean Patent Application No. 10-2022-7001332, mailed on Oct. 25, 2023, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Office Action received for European Patent Application No. 20166552.8, mailed on Nov. 3, 2023, 3 pages.

Office Action received for Japanese Patent Application No. 2022-149476, mailed on Nov. 2, 2023, 9 pages (4 pages of English Translation and 5 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/484,899, mailed on Feb. 14, 2024, 8 pages.

Decision to Grant received for European Patent Application No. 21728781.2, mailed on Feb. 8, 2024, 3 pages.

Extended European Search Report received for European Patent Application No. 23203433.0, mailed on Feb. 7, 2024, 7 pages.

Non-Final Office Action received for U.S. Appl. No. 17/978,930, mailed on Feb. 12, 2024, 25 pages.

Non-Final Office Action received for U.S. Appl. No. 17/992,229, mailed on Feb. 15, 2024, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 18/237,341, mailed on Feb. 14, 2024, 13 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Notice of Acceptance received for Australian Patent Application No. 2022291522, mailed on Jan. 31, 2024, 3 pages.

Notice of Allowance received for U.S. Appl. No. 17/684,843, mailed on Feb. 14, 2024, 8 pages.

Office Action received for Chinese Patent Application No. 202211558100.7, mailed on Jan. 8, 2024, 12 pages (6 pages of English Translation and 6 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/479,897, mailed on Jun. 12, 2023, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,564, mailed on Jun. 21, 2023, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/509,356, mailed on Jun. 13, 2023, 2 pages.

Final Office Action received for U.S. Appl. No. 17/483,679, mailed on Jun. 13, 2023, 33 pages.

Non-Final Office Action received for U.S. Appl. No. 17/484,899, mailed on Jun. 14, 2023, 41 pages.

Notice of Allowance received for Japanese Patent Application No. 2021-166451, mailed on Jun. 5, 2023, 4 pages (1 pages of English Translation and 3 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/752,582, mailed on Jun. 13, 2023, 18 pages.

Notice of Allowance received for U.S. Appl. No. 17/950,900, mailed on Jun. 16, 2023, 6 pages.

Notice of Allowance received for U.S. Appl. No. 17/989,086, mailed on Jun. 9, 2023, 8 pages.

Office Action received for Australian Patent Application No. 2022204466, mailed on Jun. 7, 2023, 4 pages.

Office Action received for Australian Patent Application No. 2022241590, mailed on Jun. 7, 2023, 7 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/732,204, mailed on Jan. 18, 2024, 5 pages.

Non-Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Jan. 22, 2024, 17 pages.

Office Action received for Australian Patent Application No. 2023204396, mailed on Jan. 8, 2024, 5 pages.

Office Action received for Chinese Patent Application No. 202210463449.6, mailed on Dec. 19, 2023, 11 pages (6 pages of English Translation and 5 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/742,273, mailed on Jan. 18, 2023, 4 pages.

Extended European Search Report received for European Patent Application No. 22196865.4, mailed on Jan. 13, 2023, 7 pages.

Extended European Search Report received for European Patent Application No. 22201007.6, mailed on Jan. 12, 2023, 7 pages.

Notice of Allowance received for Chinese Patent Application No. 202111612841.4, mailed on Jan. 5, 2023, 3 pages (2 pages of English Translation & 1 page of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2021-7029861, mailed on Jan. 4, 2023, 7 pages (2 pages of English Translation & 5 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2021-166451, mailed on Jan. 5, 2023, 6 pages (3 pages of English Translation and 3 pages of Official Copy).

"How to use popular SNS confidence (wechat) in China 2 _ voice message, press together, shake function etc.", Available at "<http://seechina365.com/2014/04/05/wechat02/>", Apr. 5, 2014, 27 pages.

"WhatsApp" users over 400 million people! I tried to investigate the most used messaging application in the world, Available at "<http://www.apppps.jp/2128786/>", Jan. 24, 2014, 10 pages.

Abdulezer et al., "Skype For Dummies", Available Online at: <https://ixn.es/Skype%20For%20Dummies.pdf>, 2007, 361 pages.

Advisory Action received for U.S. Appl. No. 13/038,217, mailed on Dec. 8, 2014, 3 pages.

Advisory Action received for U.S. Appl. No. 15/730,610, mailed on Oct. 24, 2019, 5 pages.

Advisory Action received for U.S. Appl. No. 16/404,605, mailed on Apr. 15, 2020, 10 pages.

Advisory Action received for U.S. Appl. No. 16/583,989, mailed on Sep. 22, 2020, 5 pages.

Akshay, "Control your SmartThings compatible devices on the Gear S2 and S3 with the Smarter Things app", Online available at: Online available at: <https://iotgadgets.com/2017/09/control-smarththings-compatible-devices-gear-s2-s3-smarter-things-app/> Sep. 7, 2017, 4 pages.

Alba Davey, "Samsung Shape: for \$400, Your Music Can Follow You Around the House", Online available at: <https://www.popularmechanics.com/technology/audio/a9536/samsung-shape-for-400-your-music-can-follow-you-aroundnd-15997831/>, Oct. 3, 2013, 5 pages.

Ambrogio Robert, "Send Secure, Self-Destructing Messages with Wickr", Lawsites Blog, Available online at: Lawsites Blog, Available online at: <https://www.lawsitesblog.com/2013/11/send-secure-self-destructing-messages-wickr.html>, Nov. 5, 2013, 3 pages.

Androidcentral, "How do i respond to group messages from notification bar?", Available online at: <https://forums.androidcentral.com/ask-question/952030-how-do-i-respond-group-messages-notification-bar.html>, Mar. 25, 2019, 3 pages.

Apple, "iPhone User's Guide", iPhone first generation, Available at: <http://pocketpccentral.net/iphone/products/1_g_iphone.htm>, Jun. 29, 2007, 124 pages.

Applicant initiated interview summary received for U.S. Appl. No. 15/488,093, mailed on Jan. 14, 2020, 4 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/404,605, mailed on Nov. 13, 2019, 3 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/583,989, mailed on Aug. 3, 2020, 6 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/583,989, mailed on Mar. 25, 2020, 4 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/583,994, mailed on Apr. 3, 2020, 5 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/584,490, mailed on Jul. 28, 2020, 4 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/702,968, mailed on Jul. 1, 2020, 5 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/790,619, mailed on Jul. 28, 2020, 3 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 16/817,328, mailed on Dec. 21, 2021, 3 pages.

Applicant Initiated Interview Summary received for U.S. Appl. No. 17/176,908, mailed on Jun. 14, 2022, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/730,610, mailed on Aug. 25, 2020, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/910,263, mailed on Nov. 18, 2020, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/960,330, mailed on Aug. 11, 2020, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/960,330, mailed on Jan. 21, 2021, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/528,941, mailed on Jun. 19, 2020, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/528,941, mailed on Nov. 10, 2020, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/583,981, mailed on Mar. 9, 2020, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/583,981, mailed on Sep. 14, 2020, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/583,994, mailed on May 28, 2021, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/583,994, mailed on Nov. 24, 2020, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/584,490, mailed on Jan. 31, 2020, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/584,743, mailed on May 1, 2020, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/586,002, mailed on Apr. 28, 2020, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/702,968, mailed on Sep. 28, 2020, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/723,583, mailed on Dec. 28, 2020, 6 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/799,481, mailed on Jul. 24, 2020, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/803,849, mailed on Aug. 21, 2020, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/803,849, mailed on Dec. 21, 2020, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/803,849, mailed on Feb. 28, 2022, 9 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/803,849, mailed on Oct. 12, 2021, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/807,604, mailed on Dec. 21, 2020, 7 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/807,604, mailed on Jul. 24, 2020, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on Apr. 6, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on May 24, 2021, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/836,571, mailed on Jul. 7, 2021, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/922,675, mailed on Dec. 16, 2020, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/922,675, mailed on Nov. 2, 2020, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/922,675, mailed on Sep. 3, 2021, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/936,164, mailed on Aug. 23, 2022, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/936,164, mailed on Mar. 22, 2022, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/026,818, mailed on Dec. 15, 2020, 7 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/026,818, mailed on Mar. 8, 2021, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/031,833, mailed on Dec. 21, 2020, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/031,833, mailed on May 24, 2021, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/116,938, mailed on Dec. 13, 2021, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/116,938, mailed on Jun. 14, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/121,610, mailed on Oct. 29, 2021, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/168,069, mailed on Nov. 17, 2021, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/223,794, mailed on Sep. 7, 2021, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/461,103, mailed on Jan. 26, 2022, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/476,404, mailed on Jul. 27, 2022, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/476,404, mailed on Mar. 18, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/482,987, mailed on Apr. 11, 2022, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,564, mailed on Jul. 21, 2022, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,564, mailed on Mar. 14, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,679, mailed on Apr. 29, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/483,679, mailed on Aug. 23, 2022, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/484,899, mailed on Apr. 27, 2022, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/484,899, mailed on Sep. 1, 2022, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/484,907, mailed on Jan. 10, 2022, 2 pages.

Benjamin Jeff, "iOS 10: How to use the new Home app to control HomeKit devices [Video]", Available online at: <https://9to5mac.com/2016/09/23/ios-10-how-to-use-new-home-app-control-homekit-devices-video>, Sep. 23, 2016, 36 pages.

Bennett Stephen, "ES2: Logic's Most Sophisticated Virtual Analogue Synth", Logic Notes & Techniques, Jun. 2007, 6 pages.

Board Decision received for Chinese Patent Application No. 201580029071.7, mailed on Jul. 13, 2021, 2 pages.

Boxer David, "Change the permissions of the Google Drive file or folder or Share the file or folder", Blake School Website, Online Available at: <https://support.blakeschool.org/hc/en-us/articles/231790648-Change-the-permissions-of-the-Google-Drive-file-or-folder-or-Share-the-file-or-folder>, Oct. 31, 2016, 2 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 17167629.9, mailed on Nov. 12, 2020, 2 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 17813777.4, mailed on Nov. 23, 2020, 6 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 18197583.0, mailed on Feb. 18, 2021, 2 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 19182037.2, mailed on Apr. 15, 2021, 2 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 19728558.8, mailed on Jul. 5, 2022, 1 page.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 20158824.1, mailed on May 30, 2022, 1 page.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 20187610.9, mailed on May 31, 2022, 1 page.

Call Me, "Samsung R3 speaker gives you a delicious 360-degree sound experience—with WIFI and Bluetooth | Call me", 0:24 / 3:22, Available Online at: https://www.youtube.com/watch?v=4Uv_sOhlrro, Sep. 22, 2016, 3 pages.

Certificate of Examination received for Australian Patent Application No. 2019100487, mailed on Jan. 7, 2020, 2 pages.

Certificate of Examination received for Australian Patent Application No. 2019100499, mailed on Aug. 15, 2019, 2 pages.

Certificate of Examination received for Australian Patent Application No. 2019101062, mailed on Jun. 2, 2020, 2 pages.

Certificate of Examination received for Australian Patent Application No. 2020100303, mailed on Apr. 17, 2020, 2 pages.

Certificate of Examination received for Australian Patent Application No. 2020100886, mailed on Dec. 22, 2020, 2 pages.

Certificate of Examination received for Australian Patent Application No. 2020101324, mailed on Sep. 7, 2020, 2 pages.

Certificate of Examination received for Australian Patent Application No. 2021100721, mailed on Dec. 16, 2021, 2 pages.

Certification of Examination received for Australian Patent Application No. 2017100666, mailed on Jan. 29, 2018, 2 pages.

Computeradv, "Sonos App Navigation & Menu on iPhone", Available online at: <https://www.youtube.com/watch?v=Jhz9XvWQ204>, Aug. 4, 2015, 1 page.

Corrected International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2017/035293, mailed on Dec. 8, 2017, 21 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 12/163,908, mailed on Feb. 22, 2018, 8 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 14/928,865, mailed on Aug. 5, 2019, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 14/928,865, mailed on May 16, 2019, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 15/366,763, mailed on Jan. 2, 2020, 5 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 15/366,890, mailed on Feb. 12, 2020, 2 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Corrected Notice of Allowance received for U.S. Appl. No. 15/427,516, mailed on Apr. 29, 2019, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 15/427,516, mailed on May 8, 2019, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 15/488,093, mailed on Jun. 15, 2020, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 15/488,093, mailed on Jun. 30, 2020, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 15/730,610, mailed on Nov. 27, 2020, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 15/910,263, mailed on Feb. 10, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 15/910,263, mailed on Mar. 17, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 15/910,263, mailed on Mar. 18, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/109,552, mailed on Jun. 13, 2019, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Dec. 18, 2019, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Feb. 14, 2020, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Mar. 3, 2020, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Mar. 12, 2020, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/144,572, mailed on Mar. 21, 2019, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/147,432, mailed on Jan. 18, 2019, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/147,432, mailed on Jul. 16, 2019, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/404,605, mailed on Dec. 23, 2020, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/511,578, mailed on Feb. 13, 2020, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/583,981, mailed on Apr. 6, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/583,981, mailed on May 17, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/583,994, mailed on Jul. 6, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/584,743, mailed on Dec. 30, 2020, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/702,968, mailed on Jun. 8, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/702,968, mailed on Jun. 16, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/702,968, mailed on Jun. 28, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/702,968, mailed on May 26, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/702,968, mailed on May 28, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/790,619, mailed on Oct. 13, 2020, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/799,481, mailed on Oct. 27, 2020, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/803,849, mailed on Jul. 7, 2022, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/803,849, mailed on Jun. 8, 2022, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/807,604, mailed on Jul. 26, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/807,604, mailed on Jun. 28, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/807,604, mailed on May 28, 2021, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/807,604, mailed on Oct. 4, 2021, 5 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/807,604, mailed on Oct. 14, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/807,604, mailed on Oct. 22, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/836,571, mailed on Dec. 6, 2021, 5 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/836,571, mailed on Mar. 25, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/836,571, mailed on Nov. 4, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/836,571, mailed on Nov. 18, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/836,571, mailed on Oct. 12, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Mar. 4, 2022, 6 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/027,373, mailed on Jul. 12, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/027,373, mailed on Oct. 26, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/031,833, mailed on Aug. 2, 2021, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/121,610, mailed on Jun. 7, 2022, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/121,610, mailed on Mar. 31, 2022, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/121,610, mailed on May 20, 2022, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Apr. 13, 2022, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Apr. 25, 2022, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Dec. 9, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Dec. 15, 2021, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Jan. 5, 2022, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Jun. 29, 2022, 4 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/168,069, mailed on Feb. 9, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/461,103, mailed on Apr. 14, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/461,103, mailed on Aug. 3, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/461,103, mailed on May 10, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/483,549, mailed on Aug. 24, 2022, 3 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/483,582, mailed on Feb. 15, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/484,907, mailed on Aug. 26, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/484,907, mailed on Jun. 15, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 17/484,907, mailed on Mar. 18, 2022, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Aug. 15, 2019, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Nov. 12, 2019, 2 pages.
 Corrected Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Oct. 16, 2019, 2 pages.
 Corrected Search Report and Opinion received for Danish Patent Application No. PA201870364, mailed on Sep. 5, 2018, 13 pages.
 Crutnacker, "Amazon Echo Tips and Tricks: Playing Music Demonstration", Available Online at: https://www.youtube.com/watch?v=W_bqy2ynUll, Nov. 4, 2015, 1 page.

(56)

References Cited**OTHER PUBLICATIONS**

Customize Notifications and Content on Your Galaxy Phone's Lock Screen, Online Available at: <https://www.samsung.com/us/support/answer/ANS00062636>, Oct. 4, 2017, 5 pages.

David Chanceg., "Unpublished U.S. Appl. No. 16/583,989, filed Sep. 26, 2019, titled User Interfaces for Audio Media Control".

Decision on Appeal received for U.S. Appl. No. 14/503,355, mailed on Aug. 25, 2020, 10 pages.

Decision to Grant received for Danish Patent Application No. PA201670601, mailed on Jun. 21, 2019, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201670602, mailed on Nov. 30, 2018, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201670604, mailed on Aug. 22, 2018, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201670605, mailed on Nov. 29, 2018, 2 pages.

Decision to Grant received for Danish Patent Application No. PA21770392, mailed on Oct. 24, 2018, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201770401, mailed on Oct. 24, 2018, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201770403, mailed on Oct. 24, 2018, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201770404, mailed on Nov. 11, 2019, 3 pages.

Decision to Grant received for Danish Patent Application No. PA201770406, mailed on May 15, 2020, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201870293, mailed on Dec. 3, 2018, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201870362, mailed on May 15, 2020, 2 pages.

Decision to Grant received for Danish Patent Application No. PA201870435, mailed on Oct. 20, 2020, 2 pages.

Decision to Grant received for Danish Patent Application No. PA202070560, mailed on Oct. 21, 2021, 2 pages.

Decision to Grant received for European Patent Application No. 18197583.0, mailed on Feb. 3, 2022, 3 pages.

Decision to Grant received for European Patent Application No. 18197589.7, mailed on Jun. 10, 2021, 2 pages.

Decision to Grant received for European Patent Application No. 19182037.2, mailed on Sep. 16, 2021, 3 pages.

Decision to Grant received for European Patent Application No. 19207753.5, mailed on Jun. 2, 2022, 3 pages.

Decision to Grant received for European Patent Application No. 19729395.4, mailed on Dec. 9, 2021, 2 pages.

Decision to Grant received for Japanese Patent Application No. 2021-051415, mailed on Jan. 6, 2022, 3 pages.

Decision to Refuse received for European Patent Application No. 15728307.8, mailed on Dec. 18, 2019, 14 pages.

Decision to Refuse received for European Patent Application No. 15729286.3, mailed on Dec. 18, 2019, 13 pages.

Decision to Refuse received for European Patent Application No. 17167629.9, mailed on Nov. 24, 2020, 2 pages.

Decision to Refuse received for European Patent Application No. 20187610.9, mailed on Jul. 19, 2022, 13 pages.

Detroitborg, "Apple Music: Walkthrough", YouTube Video, online available at: "<https://www.youtube.com/watch?v=NLgjodiAtbQ>", Jun. 30, 2015, 1 page.

Ex Parte Quayle Action received for U.S. Appl. No. 17/121,610, mailed on Dec. 9, 2021, 7 pages.

Initiated-Interview Summary received for U.S. Appl. No. 16/528,941, mailed on Dec. 1, 2020, 2 pages.

Examiner-Initiated Interview Summary received for U.S. Appl. No. 17/027,373, mailed on Mar. 31, 2022, 4 pages.

Answer to Appeal Brief received for U.S. Appl. No. 14/503,355, mailed on Apr. 17, 2020, 17 pages.

Extended European Search Report (includes Supplementary European Search Report and Search Opinion) received for European Patent Application No. 17813777.4, mailed on Mar. 25, 2019, 8 pages.

Extended European Search Report Received for European Patent Application No. 17167629.9, mailed on Jun. 2, 2017, 7 pages.

Extended European Search Report received for European Patent Application No. 18197583.0, mailed on Jun. 4, 2019, 20 pages.

Extended European Search Report received for European Patent Application No. 18197589.7, mailed on Jan. 7, 2019, 9 pages.

Extended European Search Report received for European Patent Application No. 19182037.2, mailed on Oct. 31, 2019, 8 pages.

Extended European Search Report received for European Patent Application No. 19207753.5, mailed on Dec. 18, 2019, 9 pages.

Extended European Search Report received for European Patent Application No. 20158824.1, mailed on Aug. 10, 2020, 13 pages.

Extended European Search Report received for European Patent Application No. 20166552.8, mailed on Jun. 12, 2020, 9 pages.

Extended European Search Report received for European Patent Application No. 20187610.9, mailed on Nov. 16, 2020, 7 pages.

Extended European Search Report received for European Patent Application No. 20205496.1, mailed on Mar. 11, 2021, 11 pages.

Extended European Search Report received for European Patent Application No. 21160991.2, mailed on Jul. 16, 2021, 14 pages.

Extended European Search Report received for European Patent Application No. 21197457.1, mailed on Nov. 15, 2021, 8 pages.

Extended Search Report received for European Patent Application No. 21161005.0, mailed on Jun. 14, 2021, 12 pages.

Farmboyreef, "Apple watch controlling your tv", Available online at: <https://www.youtube.com/watch?v=xaJPG0Wm3Tg>, Jun. 23, 2015, 3 pages.

Final Office Action received for U.S. Appl. No. 12/163,908, mailed on Nov. 7, 2012, 15 pages.

Final Office Action received for U.S. Appl. No. 13/038,217, mailed on May 6, 2014, 11 pages.

Final Office Action received for U.S. Appl. No. 13/489,245, mailed on Mar. 28, 2014, 23 pages.

Final Office Action received for U.S. Appl. No. 13/489,245, mailed on Oct. 16, 2019, 25 pages.

Final Office Action received for U.S. Appl. No. 13/489,245, mailed on Sep. 27, 2018, 25 pages.

Final Office Action received for U.S. Appl. No. 14/503,355, mailed on May 20, 2019, 27 pages.

Final Office Action received for U.S. Appl. No. 14/503,355, mailed on Sep. 8, 2017, 25 pages.

Final Office Action received for U.S. Appl. No. 14/928,865, mailed on Dec. 5, 2018, 15 pages.

Final Office Action received for U.S. Appl. No. 15/730,610, mailed on Aug. 6, 2019, 28 pages.

Final Office Action received for U.S. Appl. No. 15/910,263, mailed on Aug. 28, 2019, 32 pages.

Final Office Action received for U.S. Appl. No. 15/960,330, mailed on Nov. 10, 2020, 19 pages.

Final Office Action received for U.S. Appl. No. 16/404,605, mailed on Feb. 10, 2020, 21 pages.

Final Office Action received for U.S. Appl. No. 16/528,941, mailed on Jul. 13, 2020, 15 pages.

Final Office Action received for U.S. Appl. No. 16/583,981, mailed on Apr. 16, 2020, 19 pages.

Final Office Action received for U.S. Appl. No. 16/583,989, mailed on Jul. 10, 2020, 23 pages.

Final Office Action received for U.S. Appl. No. 16/583,994, mailed on Jul. 23, 2020, 16 pages.

Final Office Action received for U.S. Appl. No. 16/584,490, mailed on May 1, 2020, 48 pages.

Final Office Action received for U.S. Appl. No. 16/702,968, mailed on Jul. 27, 2020, 21 pages.

Final Office Action received for U.S. Appl. No. 16/723,583, mailed on Feb. 5, 2021, 15 pages.

Final Office Action received for U.S. Appl. No. 16/803,849, mailed on Nov. 2, 2021, 37 pages.

Final Office Action received for U.S. Appl. No. 16/803,849, mailed on Sep. 24, 2020, 29 pages.

Final Office Action received for U.S. Appl. No. 16/807,604, mailed on Aug. 19, 2020, 35 pages.

Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Dec. 9, 2021, 16 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Final Office Action received for U.S. Appl. No. 16/922,675, mailed on Dec. 3, 2020, 21 pages.

Final Office Action received for U.S. Appl. No. 16/922,675, mailed on Nov. 30, 2020, 12 pages.

Final Office Action received for U.S. Appl. No. 16/936,164, mailed on Jul. 6, 2022, 21 pages.

Final Office Action received for U.S. Appl. No. 17/026,818, mailed on Jan. 29, 2021, 21 pages.

Final Office Action received for U.S. Appl. No. 17/031,833, mailed on Jan. 26, 2021, 17 pages.

Final Office Action received for U.S. Appl. No. 17/116,938, mailed on Mar. 1, 2022, 27 pages.

Final Office Action received for U.S. Appl. No. 17/476,404, mailed on May 5, 2022, 30 pages.

Final Office Action received for U.S. Appl. No. 17/483,564, mailed on Apr. 18, 2022, 23 pages.

Final Office Action received for U.S. Appl. No. 17/483,679, mailed on May 24, 2022, 21 pages.

Final Office Action received for U.S. Appl. No. 17/484,899, mailed on May 12, 2022, 29 pages.

Finkelstein Ellen, "Temporarily Override Object Snap Settings", AutoCAD Tips Blog, Apr. 9, 2007, 4 pages.

Free Virtual Classic Analogue Mono Synth, Samsara Cycle Audio Releases DEISK-O, Jan. 2, 2011, 3 pages.

Gil Lory, "How to control Apple TV with your Apple Watch", Available online at: <https://www.imore.com/how-control-your-apple-tv-remote-app%ADapple-watch>, Jun. 6, 2016, 24 pages.

Google, "Google Home Help, Listen to music", Datasheet [online], Available Online at: <https://web.archive.org/web/20170326051235/https://support.google.com/googlehome/answer/7030379?hl=en&ref_topic=7030084>, Mar. 26, 2017, 3 pages.

Gookin Dan, "Lock Screen Settings on Your Android Phone", Online Available at: <https://www.dummies.com/consumer-electronics/smartphones/droid/lock-screen-settings-on-your-android-phone/>, Sep. 23, 2015, 6 pages.

Graham et al., "Unpublished U.S. Appl. No. 16/584,490, filed Sep. 26, 2019, titled User Interfaces for Audio Media Control".

Hobbyistsoftwareld, "VLC Remote", Online available at: <https://watchaware.com/watch-apps/297244048>, 2016, 7 pages.

Hoffberger Chase, "Spotify's Collaborative Playlists Let Friends Listen Together", Evolver.fm, available online at <http://www.evolver.fm/2011/08/22/spotify-collaborative-playlists/>, Aug. 22, 2011, 4 pages.

Howcast, "How to Create and Edit Playlists on iPhone", Youtube, Available online at: <https://www.youtube.com/watch?v=YPOnKUvcs04>, Mar. 13, 2014, 3 pages.

HuddleCamHD SimpliTrack2 Auto Tracking Camera Installation & Operation Manual, Available Online at: https://huddlecamlhd.com/wp-content/uploads/2021/01/SimpliTrack2-User-Manual-v1_2-6-20.pdf, Jun. 2020, 41 pages.

IDB, "HomeCam is the Best Way to View Multiple HomeKit Cameras on iPhone & Apple TV", Available online at: <https://www.youtube.com/watch?v=6x2oCHgSVU0>, Feb. 20, 2018, 3 pages.

Intention to Grant received for Danish Patent Application No. PA201670601, mailed on Apr. 10, 2019, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201670602, mailed on Aug. 1, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201670604, mailed on Jun. 14, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201670604, mailed on Mar. 15, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201670605, mailed on Aug. 1, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201770392, mailed on Aug. 31, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201770392, mailed on Jul. 2, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201770401, mailed on Jun. 14, 2018, 2 Pages.

Intention to Grant received for Danish Patent Application No. PA201770401, mailed on Sep. 17, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201770403, mailed on May 7, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201770403, mailed on Oct. 3, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201770404, mailed on Sep. 23, 2019, 3 pages.

Intention to Grant received for Danish Patent Application No. PA201770406, mailed on Feb. 6, 2020, 3 pages.

Intention to Grant received for Danish Patent Application No. PA201770408, mailed on Nov. 30, 2018, 3 pages.

Intention to Grant received for Danish Patent Application No. PA201870293, mailed on Aug. 31, 2018, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201870362, mailed on Feb. 14, 2020, 2 pages.

Intention to Grant received for Danish Patent Application No. PA201870435, mailed on Jul. 1, 2020, 2 pages.

Intention to Grant received for Danish Patent Application No. PA202070560, mailed on Apr. 26, 2021, 2 pages.

Intention to Grant received for Danish Patent Application No. PA202070617, mailed on Nov. 15, 2021, 2 pages.

Intention to Grant received for Danish Patent Application No. PA202170320, mailed on Jul. 27, 2022, 2 pages.

Intention to Grant received for European Patent Application No. 18197583.0, mailed on Jan. 17, 2022, 9 pages.

Intention to Grant received for European Patent Application No. 18197583.0, mailed on Jul. 23, 2021, 9 pages.

Intention to Grant received for European Patent Application No. 18197589.7, mailed on Jan. 21, 2021, 8 pages.

Intention to Grant received for European Patent Application No. 19182037.2, mailed on May 4, 2021, 9 pages.

Intention to Grant received for European Patent Application No. 19207753.5, mailed on Jan. 28, 2022, 8 pages.

Intention to Grant received for European Patent Application No. 19207753.5, mailed on Sep. 3, 2021, 8 pages.

Intention to Grant received for European Patent Application No. 19729395.4, mailed on Jul. 23, 2021, 10 pages.

Intention to Grant received for European Patent Application No. 20158824.1, mailed on Aug. 11, 2022, 10 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2012/025314, mailed on Sep. 12, 2013, Sep. 12, 2013, 8 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2015/032305, mailed on Dec. 15, 2016, 8 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2015/032309, mailed on Dec. 15, 2016, 8 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2017/035293, mailed on Dec. 27, 2018, 16 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2018/032158, mailed on Nov. 21, 2019, 12 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2018/032904, mailed on Nov. 28, 2019, 14 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2018/048151, mailed on Apr. 9, 2020, 14 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2019/030963, mailed on Nov. 19, 2020, 12 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2019/031202, mailed on Nov. 19, 2020, 13 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2020/024390, mailed on Dec. 9, 2021, 20 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2020/026044, mailed on Dec. 9, 2021, 18 pages.

(56)

References Cited**OTHER PUBLICATIONS**

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2020/035426, mailed on Dec. 9, 2021, 10 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2020/035446, mailed on Dec. 9, 2021, 14 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2020/035488, mailed on Dec. 9, 2021, 16 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2012/025314, mailed on May 14, 2012, 10 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2015/032305, mailed on Sep. 10, 2015, 10 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2015/032309, mailed on Sep. 2, 2015, 10 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2017/035293, mailed on Oct. 10, 2017, 25 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2018/032158, mailed on Nov. 2, 2018, 19 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2018/032904, mailed on Oct. 1, 2018, 21 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2018/048151, mailed on Jan. 10, 2019, 23 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2019/030963, mailed on Oct. 17, 2019, 21 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2019/031202, mailed on Oct. 4, 2019, 19 pages.

International Search Report and written Opinion received for PCT Patent Application No. PCT/US2020/024390, mailed on Aug. 17, 2020, 22 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2020/024390, mailed on Oct. 23, 2020, 26 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2020/026044, mailed on Sep. 9, 2020, 26 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2020/035426, mailed on Sep. 11, 2020, 12 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2020/035446, mailed on Nov. 10, 2020, 20 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2020/035488, mailed on Nov. 17, 2020, 21 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2021/031760, mailed on Sep. 16, 2021, 18 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2021/048358, mailed on Feb. 24, 2022, 21 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2022/014271, mailed on Jul. 4, 2022, 23 pages.

Invitation to Pay Addition Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2018/032904, mailed on Jul. 31, 2018, 18 pages.

Invitation to Pay Addition Fees received for PCT Patent Application No. PCT/US2017/035293, mailed on Aug. 17, 2017, 3 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2022/014271, mailed on May 12, 2022, 20 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2020/024390, mailed on Jun. 26, 2020, 15 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2018/032158, mailed on Sep. 10, 2018, 16 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2018/048151, mailed on Nov. 6, 2018, 18 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2019/030963, mailed on Aug. 22, 2019, 12 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2019/031202, mailed on Aug. 8, 2019, 12 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2020/026044, mailed on Jun. 25, 2020, 12 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2020/035446, mailed on Sep. 11, 2020, 12 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2020/035488, mailed on Sep. 23, 2020, 15 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2021/048358, mailed on Dec. 23, 2021, 14 pages.

Invitation to Pay Search Fees received for European Patent Application No. 18728002.9, mailed on Sep. 2, 2020, 8 pages.

Invitation to Pay Search Fees received for European Patent Application No. 18733381.0, mailed on Jun. 30, 2021, 4 pages.

Invitation to Pay Search Fees received for European Patent Application No. 19728558.8, mailed on Apr. 20, 2021, 4 pages.

Invitation to Pay Search Fees received for European Patent Application No. 20719301.2, mailed on Dec. 17, 2020, 5 pages.

IJungles, "iPhone 6: How to Pair with Another Bluetooth Device", Available Online at: <https://www.youtube.com/watch?v=9setanYtHAK>, Aug. 5, 2015, 3 pages.

Jarvie, "Alexa plays me music", Available online at: <https://www.youtube.com/watch?v=bR2ZC8Sy8YQ>, Feb. 23, 2015, 1 page.

Kim et al., "An Energy Efficient Transmission Scheme for Real-Time Data in Wireless Sensor Networks", Sensors, vol. 15, in Sensors 2015, May 20, 2015, 25 pages.

Klein Matt, "How to Add, Remove, and Rearrange Apps on the Apple Watch's Dock", Available online at: <https://www.howtogeek.com/279796/how-to-add-remove-and-rearrange-apps-on-the-apple-watch%E2%80%99s-dock/>, Nov. 18, 2016, 10 pages.

Locklear Mallory, "Samsung to bring SmartThings control to its Gear smartwatches", Online available at: <https://www.engadget.com/2018-01-08-samsung-smartthings-app-gear-smartwatches.html>, Jan. 8, 2018, 12 pages.

Low Cheryllyn, "So you bought a smartwatch. Now what?", Online available at: <https://www.engadget.com/2018-02-06-how-to-set-up-your-smartwatch.html>, Feb. 6, 2018, 19 pages.

Minutes of Oral Proceedings received for European Patent Application No. 15728307.8, mailed on Dec. 13, 2019, 4 pages.

Minutes of Oral Proceedings received for European Patent Application No. 15729286.3, mailed on Dec. 13, 2019, 4 pages.

Minutes of the Oral Proceedings received for European Patent Application No. 18197583.0, mailed on Mar. 9, 2021, 6 pages.

Minutes of the Oral Proceedings received for European Patent Application No. 19729395.4, mailed on Jul. 21, 2021, 6 pages.

Minutes of the Oral Proceedings received for European Patent Application No. 20187610.9, mailed on Jun. 7, 2022, 6 pages.

Mobile How To, "How to Send A Picture Message/MMS—Samsung Galaxy Note 3", Online Available at: <https://www.youtube.com/watch?v=-3d0z8-KeDw>, Published on Nov. 3, 2013, 1 page.

NBC News, "NBC News—YouTube Democratic Debate (full)", Online available at: <https://www.youtube.com/watch?v=t2Nokoq1J4>, Jan. 17, 2016, 1 page.

(56)

References Cited**OTHER PUBLICATIONS**

Nikolov Anton, "Design principle: Consistency", Available online at: <https://uxdesign.cc/design-principle-consistency-6b0cf7e7339f>, Apr. 8, 2017, 9 pages.

Non-Final Office Action received for U.S. Appl. No. 16/035,422, mailed on Nov. 30, 2018, 13 Pages.

Non-Final Office Action received for U.S. Appl. No. 17/157,166, mailed on Jul. 9, 2021, 12 pages.

Non-Final Office Action received for U.S. Appl. No. 12/163,908, mailed on Apr. 7, 2017, 13 pages.

Non-Final Office Action received for U.S. Appl. No. 12/163,908, mailed on Jun. 13, 2012, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 13/038,217, mailed on Sep. 13, 2013, Sep. 13, 2013, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 13/489,245, mailed on Apr. 8, 2019, 27 pages.

Non-Final Office Action received for U.S. Appl. No. 13/489,245, mailed on Dec. 27, 2017, 22 pages.

Non-Final Office Action for U.S. Appl. No. 13/489,245, mailed on Nov. 20, 2013, 25 pages.

Non-Final Office Action received for U.S. Appl. No. 14/503,355, mailed on Dec. 30, 2016, 23 pages.

Non-Final Office Action received for U.S. Appl. No. 14/503,355, mailed on Sep. 4, 2018, 25 pages.

Non-Final Office Action received for U.S. Appl. No. 14/503,376, mailed on Dec. 22, 2014, 21 pages.

Non-Final Office Action received for U.S. Appl. No. 14/503,386, mailed on Jan. 7, 2015, 19 pages.

Non-Final Office Action received for U.S. Appl. No. 14/928,865, mailed on Mar. 27, 2018, 15 pages.

Non-Final Office Action received for U.S. Appl. No. 15/366,763, mailed on Mar. 8, 2019, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 15/366,890, mailed on May 8, 2019, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 15/427,516, mailed on Aug. 28, 2018, 11 pages.

Non-Final Office Action received for U.S. Appl. No. 15/488,093, mailed on Oct. 4, 2019, 18 pages.

Non-Final Office Action received for U.S. Appl. No. 15/730,610, mailed on Apr. 15, 2020, 36 pages.

Non-Final Office Action received for U.S. Appl. No. 15/730,610, mailed on Feb. 1, 2019, 22 pages.

Non-Final Office Action received for U.S. Appl. No. 15/910,263, mailed on Jun. 15, 2020, 38 pages.

Non-Final Office Action received for U.S. Appl. No. 15/910,263, mailed on Mar. 4, 2019, 26 pages.

Non-Final Office Action received for U.S. Appl. No. 15/960,330, mailed on Apr. 28, 2020, 20 pages.

Non-Final Office Action received for U.S. Appl. No. 16/109,552, mailed on Oct. 17, 2018, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 16/143,379, mailed on Mar. 14, 2019, 10 pages.

Non-Final Office Action received for U.S. Appl. No. 16/144,572, mailed on Nov. 30, 2018, 8 pages.

Non-Final Office Action received for U.S. Appl. No. 16/383,403, mailed on Aug. 23, 2019, 10 pages.

Non-Final Office Action for U.S. Appl. No. 16/404,605, mailed on Aug. 1, 2019, 19 pages.

Non-Final Office Action received for U.S. Appl. No. 16/404,605, mailed on Jun. 24, 2020, 18 pages.

Non-Final Office Action received for U.S. Appl. No. 16/404,612, mailed on Feb. 28, 2020, 13 pages.

Non-Final Office Action received for U.S. Appl. No. 16/528,941, mailed on Dec. 7, 2020, 15 pages.

Non-Final Office Action received for U.S. Appl. No. 16/528,941, mailed on Jan. 30, 2020, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 16/583,981, mailed on Dec. 6, 2019, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 16/583,989, mailed on Jan. 24, 2020, 20 pages.

Non-Final Office Action received for U.S. Appl. No. 16/583,994, mailed on Dec. 23, 2020, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 16/583,994, mailed on Dec. 30, 2019, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 16/584,490, mailed on Dec. 10, 2019, 27 pages.

Non-Final Office Action received for U.S. Appl. No. 16/584,743, mailed on Feb. 6, 2020, 15 pages.

Non-Final Office Action received for U.S. Appl. No. 16/586,002, mailed on Feb. 20, 2020, 15 pages.

Non-Final Office Action received for U.S. Appl. No. 16/702,968, mailed on Apr. 8, 2020, 20 pages.

Non-Final Office Action received for U.S. Appl. No. 16/723,583, mailed on Aug. 13, 2020, 13 pages.

Non-Final Office Action received for U.S. Appl. No. 16/790,619, mailed on May 4, 2020, 13 pages.

Non-Final Office Action received for U.S. Appl. No. 16/799,481, mailed on May 1, 2020, 13 pages.

Non-Final Office Action received for U.S. Appl. No. 16/803,849, mailed on Jul. 13, 2020, 23 pages.

Non-Final Office Action received for U.S. Appl. No. 16/803,849, mailed on May 14, 2021, 34 pages.

Non-Final Office Action received for U.S. Appl. No. 16/807,604, mailed on Jun. 2, 2020, 28 pages.

Non-Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Oct. 29, 2021, 9 pages.

Non-Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Apr. 1, 2021, 13 pages.

Non-Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Jun. 9, 2022, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 16/836,571, mailed on Mar. 25, 2021, 28 pages.

Non-Final Office Action received for U.S. Appl. No. 16/922,675, mailed on Aug. 13, 2020, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 16/922,675, mailed on Jun. 8, 2022, 21 pages.

Non-Final Office Action received for U.S. Appl. No. 16/922,675, mailed on May 4, 2021, 23 pages.

Non-Final Office Action received for U.S. Appl. No. 16/936,164, mailed on Jan. 18, 2022, 18 pages.

Non-Final Office Action received for U.S. Appl. No. 17/026,818, mailed on Nov. 25, 2020, 20 pages.

Non-Final Office Action received for U.S. Appl. No. 17/027,373, mailed on Feb. 2, 2022, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 17/031,833, mailed on Dec. 7, 2020, 13 pages.

Non-Final Office Action received for U.S. Appl. No. 17/116,938, mailed on Aug. 1, 2022, 15 pages.

Non-Final Office Action received for U.S. Appl. No. 17/116,938, mailed on Jul. 30, 2021, 19 pages.

Non-Final Office Action received for U.S. Appl. No. 17/121,610, mailed on May 13, 2021, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 17/168,069, mailed on Jul. 21, 2021, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 17/176,908, mailed on Feb. 24, 2022, 28 pages.

Non-Final Office Action received for U.S. Appl. No. 17/223,794, mailed on Jun. 16, 2021, 32 pages.

Non-Final Office Action received for U.S. Appl. No. 17/314,948, mailed on Aug. 1, 2022, 33 pages.

Non-Final Office Action received for U.S. Appl. No. 17/461,103, mailed on Nov. 22, 2021, 15 pages.

Non-Final Office Action received for U.S. Appl. No. 17/476,404, mailed on Feb. 8, 2022, 26 pages.

Non-Final Office Action received for U.S. Appl. No. 17/476,404, mailed on Sep. 14, 2022, 31 pages.

Non-Final Office Action received for U.S. Appl. No. 17/479,897, mailed on Aug. 30, 2022, 10 pages.

Non-Final Office Action received for U.S. Appl. No. 17/482,987, mailed on Jan. 18, 2022, 25 pages.

Non-Final Office Action received for U.S. Appl. No. 17/483,549, mailed on Jan. 11, 2022, 5 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Non-Final Office Action received for U.S. Appl. No. 17/483,564, mailed on Jan. 6, 2022, 23 pages.

Non-Final Office Action received for U.S. Appl. No. 17/483,679, mailed on Feb. 1, 2022, 19 pages.

Non-Final Office Action received for U.S. Appl. No. 17/484,899, mailed on Jan. 24, 2022, 24 pages.

Non-Final Office Action received for U.S. Appl. No. 17/484,907, mailed on Nov. 19, 2021, 24 pages.

Noriega Josh, "How to Store and Listen to Music Directly from Your Android Wear Smartwatch", Guiding Tech, Available online at: <https://www.guidingtech.com/55254/listen-music-android-wear-smartwatch>, Jan. 15, 2016, 16 pages.

Norman Don, "Affordances and Design", Jng.org, Available at <http://jnd.org/dn.mss/affordances_and.html>, Jan. 14, 2006, 5 pages.

Notice of Acceptance received for Australian Patent Application No. 2015267259, mailed on Jan. 30, 2018, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2015267260, mailed on Jan. 30, 2018, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2018203215, mailed on Nov. 20, 2019, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2018223051, mailed on Oct. 30, 2018, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2018236872, mailed on Jul. 9, 2019, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2019266225, mailed on Dec. 23, 2020, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2019268111, mailed on Feb. 18, 2021, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2020201575, mailed on Mar. 15, 2021, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2020217458, mailed on Sep. 7, 2022, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2020239711, mailed on Dec. 16, 2021, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2020257092, mailed on Aug. 27, 2021, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2020282362, mailed on Jan. 4, 2022, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2020285524, mailed on Dec. 17, 2021, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2021200789, mailed on Feb. 26, 2021, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2021201403, mailed on Oct. 22, 2021, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2021202815, mailed on Jun. 16, 2022, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2021203669, mailed on May 25, 2022, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2021203903, mailed on May 25, 2022, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2021204454, mailed on Feb. 25, 2022, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2022201369, mailed on Mar. 17, 2022, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2022202458, mailed on May 6, 2022, 3 pages.

Notice of Allowance received for Australian Patent Application No. 2017286129, mailed on Dec. 10, 2018, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 201510290133.1, mailed on Jan. 9, 2019, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 201510291012.9, mailed on Jan. 9, 2019, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 201520365358.4, mailed on Nov. 20, 2015, 4 pages.

Notice of Allowance received for Chinese Patent Application No. 201520365843.1, issued on Feb. 15, 2016, 5 pages.

Notice of Allowance received for Chinese Patent Application No. 201580029071.7, mailed on Aug. 19, 2021, 5 pages.

Notice of Allowance received for Chinese Patent Application No. 201710267617.3, mailed on May 8, 2021, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 201710493025.3, mailed on May 7, 2021, 6 pages.

Notice of Allowance received for Chinese Patent Application No. 201810730279.7, mailed on Nov. 5, 2020, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 201811151702.4, mailed on Jul. 6, 2020, 6 pages.

Notice of Allowance received for Chinese Patent Application No. 201811152097.2, mailed on Oct. 28, 2019, 6 pages.

Notice of Allowance received for Chinese Patent Application No. 201811539260.0, mailed on Mar. 15, 2021, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 201880001436.9, mailed on May 8, 2020, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 201880056514.5, mailed on Jan. 11, 2021, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 201910400180.5, mailed on Nov. 5, 2020, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 202010125114.4, mailed on Nov. 24, 2021, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 202010742019.9, mailed on Jul. 6, 2021, 7 pages.

Notice of Allowance received for Chinese Patent Application No. 202011243876.0, mailed on Sep. 8, 2021, 4 pages.

Notice of Allowance received for Chinese Patent Application No. 202011336156.9, mailed on Jan. 6, 2022, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 202110248576.X, mailed on Mar. 21, 2022, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 202110818370.6, mailed on Sep. 2, 2022, 7 pages.

Notice of Allowance received for Danish Patent Application No. PA201770408, mailed on Feb. 8, 2019, 2 pages.

Notice of Allowance received for Japanese Patent Application No. 2017-514992, mailed on Feb. 15, 2019, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2017-514993, mailed on Jan. 12, 2018, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2018-018497, mailed on Jun. 21, 2019, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2018-183504, mailed on Sep. 27, 2019, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2018-562659, mailed on Jul. 30, 2021, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2019-050138, mailed on Jun. 15, 2020, 5 pages.

Notice of Allowance received for Japanese Patent Application No. 2019-194597, mailed on Nov. 19, 2021, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2020-118723, mailed on Oct. 16, 2020, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2020-159840, mailed on Jul. 8, 2022, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2020-187397, mailed on Sep. 10, 2021, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2020-558885, mailed on Jul. 26, 2021, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2020-560927, mailed on May 30, 2022, 3 pages.

Notice of Allowance received for Japanese Patent Application No. 2021-026630, mailed on Jan. 7, 2022, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2021-563716, mailed on Mar. 14, 2022, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2021-571464, mailed on May 30, 2022, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2022-079682, mailed on Jul. 15, 2022, 4 pages.

Notice of Allowance received for Japanese Patent Application No. 2022-102840, mailed on Aug. 19, 2022, 4 pages.

Notice of Allowance received for Korean Patent Application No. 10-2018-7034909, mailed on Sep. 30, 2019, 4 pages.

Notice of Allowance received for Korean Patent Application No. 10-2019-7038093, mailed on Aug. 10, 2020, 5 pages.

Notice of Allowance received for Korean Patent Application No. 10-2020-0123805, mailed on Jun. 19, 2022, 5 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Notice of Allowance received for Korean Patent Application No. 10-2020-7031319, mailed on Apr. 6, 2021, 5 pages.
Notice of Allowance received for Korean Patent Application No. 10-2020-7031700, mailed on Apr. 21, 2021, 4 pages.
Notice of Allowance received for Korean Patent Application No. 10-2020-7032110, mailed on Mar. 8, 2021, 4 pages.
Notice of Allowance received for Korean Patent Application No. 10-2020-7032488, mailed on Jun. 16, 2021, 4 pages.
Notice of Allowance received for Korean Patent Application No. 10-2021-7021047, mailed on Dec. 6, 2021, 3 pages.
Notice of Allowance received for Korean Patent Application No. 10-2021-7022610, mailed on Oct. 13, 2021, 3 pages.
Notice of Allowance received for Korean Patent Application No. 10-2021-7035472, mailed on Nov. 23, 2021, 4 pages.
Notice of Allowance received for Korean Patent Application No. 10-2021-7039234, mailed on Dec. 20, 2021, 4 pages.
Notice of Allowance received for Korean Patent Application No. 10-2022-7008567, mailed on Jul. 4, 2022, 9 pages.
Notice of Allowance received for U.S. Appl. No. 16/035,422, mailed on Apr. 10, 2019, 6 pages.
Notice of Allowance received for U.S. Appl. No. 16/528,941, mailed on Aug. 10, 2021, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/528,941, mailed on May 19, 2021, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/702,968, mailed on Apr. 21, 2021, 20 pages.
Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Nov. 16, 2021, 6 pages.
Notice of Allowance received for U.S. Appl. No. 12/163,908, mailed on Nov. 30, 2017, 13 pages.
Notice of Allowance received for U.S. Appl. No. 14/503,376, mailed on Jul. 29, 2015, 13 pages.
Notice of Allowance received for U.S. Appl. No. 14/503,376, mailed on Sep. 2, 2015, 2 pages.
Notice of Allowance received for U.S. Appl. No. 14/503,376, mailed on Sep. 24, 2015, 5 pages.
Notice of Allowance received for U.S. Appl. No. 14/503,386, mailed on Jul. 30, 2015, 12 pages.
Notice of Allowance received for U.S. Appl. No. 14/503,386, mailed on Sep. 24, 2015, 5 pages.
Notice of Allowance received for U.S. Appl. No. 14/928,865, mailed on Apr. 3, 2019, 7 pages.
Notice of Allowance received for U.S. Appl. No. 14/928,865, mailed on Jul. 22, 2019, 7 pages.
Notice of Allowance received for U.S. Appl. No. 15/366,763, mailed on Oct. 8, 2019, 10 pages.
Notice of Allowance received for U.S. Appl. No. 15/366,890, mailed on Nov. 14, 2019, 9 pages.
Notice of Allowance received for U.S. Appl. No. 15/427,516, mailed on Mar. 4, 2019, 7 pages.
Notice of Allowance received for U.S. Appl. No. 15/488,093, mailed on Apr. 22, 2020, 8 pages.
Notice of Allowance received for U.S. Appl. No. 15/730,610, mailed on Oct. 21, 2020, 29 pages.
Notice of Allowance received for U.S. Appl. No. 15/910,263, mailed on Feb. 18, 2021, 3 pages.
Notice of Allowance received for U.S. Appl. No. 15/910,263, mailed on Jan. 22, 2021, 33 pages.
Notice of Allowance received for U.S. Appl. No. 15/960,330, mailed on Apr. 30, 2021, 18 pages.
Notice of Allowance received for U.S. Appl. No. 16/109,552, mailed on Mar. 13, 2019, 25 pages.
Notice of Allowance received for U.S. Appl. No. 16/109,552, mailed on May 13, 2019, 2 pages.
Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Jan. 29, 2020, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/144,572, mailed on Feb. 28, 2019, 7 pages.

Notice of Allowance received for U.S. Appl. No. 16/147,432, mailed on Dec. 18, 2018, 13 pages.
Notice of Allowance received for U.S. Appl. No. 16/147,432, mailed on May 20, 2019, 6 pages.
Notice of Allowance received for U.S. Appl. No. 16/383,403, mailed on Jan. 10, 2020, 11 pages.
Notice of Allowance received for U.S. Appl. No. 16/404,605, mailed on Sep. 18, 2020, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/404,612, mailed on Jul. 13, 2020, 6 pages.
Notice of Allowance received for U.S. Appl. No. 16/404,612, mailed on Aug. 7, 2019, 9 pages.
Notice of Allowance received for U.S. Appl. No. 16/511,578, mailed on Nov. 18, 2019, 12 pages.
Notice of Allowance received for U.S. Appl. No. 16/583,981, mailed on Mar. 26, 2021, 10 pages.
Notice of Allowance received for U.S. Appl. No. 16/583,989, mailed on Apr. 1, 2021, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/583,989, mailed on Dec. 24, 2020, 7 pages.
Notice of Allowance received for U.S. Appl. No. 16/583,994, mailed on Jun. 24, 2021, 10 pages.
Notice of Allowance received for U.S. Appl. No. 16/584,490, mailed on Aug. 27, 2020, 13 pages.
Notice of Allowance received for U.S. Appl. No. 16/584,490, mailed on Mar. 26, 2021, 13 pages.
Notice of Allowance received for U.S. Appl. No. 16/584,743, mailed on Aug. 7, 2020, 8 pages.
Notice of Allowance received for U.S. Appl. No. 16/584,743, mailed on Nov. 16, 2020, 7 pages.
Notice of Allowance received for U.S. Appl. No. 16/586,002, mailed on June. 9, 2020, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/790,619, mailed on Sep. 8, 2020, 6 pages.
Notice of Allowance received for U.S. Appl. No. 16/799,481, mailed on Sep. 8, 2020, 6 pages.
Notice of Allowance received for U.S. Appl. No. 16/803,849, mailed on May 17, 2022, 12 pages.
Notice of Allowance received for U.S. Appl. No. 16/807,604, mailed on Apr. 30, 2021, 25 pages.
Notice of Allowance received for U.S. Appl. No. 16/817,328, mailed on Apr. 18, 2022, 8 pages.
Notice of Allowance received for U.S. Appl. No. 16/817,328, mailed on Feb. 16, 2022, 9 pages.
Notice of Allowance received for U.S. Appl. No. 16/836,571, mailed on Feb. 14, 2022, 31 pages.
Notice of Allowance received for U.S. Appl. No. 16/836,571, mailed on Sep. 8, 2021, 25 pages.
Notice of Allowance received for U.S. Appl. No. 16/888,775, mailed on Jan. 12, 2022, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/888,775, mailed on Jul. 26, 2021, 5 pages.
Notice of Allowance received for U.S. Appl. No. 16/888,775, mailed on Jun. 3, 2021, 11 pages.
Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Feb. 10, 2022, 8 pages.
Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Jan. 21, 2021, 7 pages.
Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Sep. 27, 2021, 10 pages.
Notice of Allowance received for U.S. Appl. No. 17/026,818, mailed on May 13, 2021, 10 pages.
Notice of Allowance received for U.S. Appl. No. 17/027,373, mailed on Aug. 2, 2022, 2 pages.
Notice of Allowance received for U.S. Appl. No. 17/027,373, mailed on Jun. 3, 2022, 8 pages.
Notice of Allowance received for U.S. Appl. No. 17/027,373, mailed on Oct. 3, 2022, 5 pages.
Notice of Allowance received for U.S. Appl. No. 17/031,833, mailed on Jun. 25, 2021, 15 pages.
Notice of Allowance received for U.S. Appl. No. 17/031,833, mailed on Sep. 20, 2021, 6 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Notice of Allowance received for U.S. Appl. No. 17/121,610, mailed on Jul. 7, 2022, 5 pages.
 Notice of Allowance received for U.S. Appl. No. 17/121,610, mailed on Jul. 13, 2022, 4 pages.
 Notice of Allowance received for U.S. Appl. No. 17/121,610, mailed on Mar. 11, 2022, 5 pages.
 Notice of Allowance received for U.S. Appl. No. 17/157,166, mailed on Mar. 30, 2022, 6 pages.
 Notice of Allowance received for U.S. Appl. No. 17/168,069, mailed on Jan. 19, 2022, 12 pages.
 Notice of Allowance received for U.S. Appl. No. 17/168,069, mailed on Mar. 22, 2022, 5 pages.
 Notice of Allowance received for U.S. Appl. No. 17/461,103, mailed on Jun. 20, 2022, 6 pages.
 Notice of Allowance received for U.S. Appl. No. 17/461,103, mailed on Mar. 17, 2022, 10 pages.
 Notice of Allowance received for U.S. Appl. No. 17/482,987, mailed on Jun. 23, 2022, 9 pages.
 Notice of Allowance received for U.S. Appl. No. 17/482,987, mailed on May 11, 2022, 10 pages.
 Notice of Allowance received for U.S. Appl. No. 17/483,549, mailed on Apr. 15, 2022, 10 pages.
 Notice of Allowance received for U.S. Appl. No. 17/483,582, mailed on Apr. 19, 2022, 5 pages.
 Notice of Allowance received for U.S. Appl. No. 17/483,582, mailed on Jan. 20, 2022, 10 pages.
 Notice of Allowance received for U.S. Appl. No. 17/484,907, mailed on Jul. 25, 2022, 10 pages.
 Notice of Allowance received for U.S. Appl. No. 17/484,907, mailed on Mar. 2, 2022, 13 pages.
 Notice of Allowance received for U.S. Appl. No. 17/484,907, mailed on May 20, 2022, 13 pages.
 Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Jun. 26, 2019, 5 pages.
 Notice of Allowance received for U.S. Appl. No. 16/143,379, mailed on Sep. 25, 2019, 5 pages.
 Office Action received for Australian Patent Application No. 2015100711, issued on Jul. 27, 2015, 7 pages.
 Office Action Received for Australian Patent Application No. 2015100711, mailed on Nov. 19, 2015, 6 pages.
 Office Action received for Australian Patent Application No. 2015267259, mailed on Jun. 2, 2017, 2 pages.
 Office Action received for Australian Patent Application No. 2015267260, mailed on Jun. 2, 2017, 2 pages.
 Office Action received for Australian Patent Application No. 2016102028, mailed on Feb. 13, 2017, 4 pages.
 Office Action received for Australian Patent Application No. 2016102029, mailed on Feb. 22, 2017, 4 pages.
 Office Action received for Australian Patent Application No. 2017100666, mailed on Jul. 27, 2017, 4 pages.
 Office Action received for Australian Patent Application No. 2017286129, mailed on Oct. 18, 2018, 3 pages.
 Office Action received for Australian Patent Application No. 2018203215, mailed on Mar. 29, 2019, 3 pages.
 Office Action received for Australian Patent Application No. 2018236870, mailed on Jul. 29, 2019, 7 pages.
 Office Action received for Australian Patent Application No. 2018236870, mailed on Nov. 21, 2018, 10 pages.
 Office Action received for Australian Patent Application No. 2018236870, mailed on Oct. 31, 2019, 8 pages.
 Office Action received for Australian Patent Application No. 2018236872, mailed on Nov. 23, 2018, 4 pages.
 Office Action received for Australian Patent Application No. 2019100487, mailed on Aug. 16, 2019, 5 pages.
 Office Action received for Australian Patent Application No. 2019100499, mailed on Jun. 28, 2019, 4 pages.
 Office Action received for Australian Patent Application No. 2019100523, mailed on Jan. 23, 2020, 3 pages.

Office Action received for Australian Patent Application No. 2019100523, mailed on Mar. 2, 2020, 3 pages.
 Office Action received for Australian Patent Application No. 2019100523, mailed on Sep. 2, 2019, 3 pages.
 Office Action received for Australian Patent Application No. 2019101062, mailed on Apr. 22, 2020, 2 pages.
 Office Action received for Australian Patent Application No. 2019101062, mailed on Dec. 5, 2019, 3 pages.
 Office Action received for Australian Patent Application No. 2019201853, mailed on Apr. 23, 2020, 5 pages.
 Office Action received for Australian Patent Application No. 2019201853, mailed on Aug. 10, 2020, 4 pages.
 Office Action received for Australian Patent Application No. 2019201853, mailed on Aug. 16, 2019, 5 pages.
 Office Action received for Australian Patent Application No. 2019201853, mailed on Dec. 9, 2019, 5 pages.
 Office Action received for Australian Patent Application No. 2019266225, mailed on Nov. 23, 2020, 4 pages.
 Office Action received for Australian Patent Application No. 2019267527, mailed on Dec. 2, 2021, 4 pages.
 Office Action received for Australian Patent Application No. 2019267527, mailed on Jun. 15, 2022, 3 pages.
 Office Action received for Australian Patent Application No. 2019267527, mailed on Jun. 24, 2021, 8 pages.
 Office Action received for Australian Patent Application No. 2019267527, mailed on Mar. 3, 2022, 3 pages.
 Office Action received for Australian Patent Application No. 2019268111, mailed on Oct. 27, 2020, 7 pages.
 Office Action received for Australian Patent Application No. 2020100886, mailed on Aug. 5, 2020, 6 pages.
 Office Action received for Australian Patent Application No. 2020201575, mailed on Dec. 22, 2020, 3 pages.
 Office Action received for Australian Patent Application No. 2020217458, mailed on Aug. 2, 2022, 4 pages.
 Office Action received for Australian Patent Application No. 2020217458, mailed on May 10, 2022, 3 pages.
 Office Action received for Australian Patent Application No. 2020217458, mailed on Sep. 2, 2021, 6 pages.
 Office Action received for Australian Patent Application No. 2020239711, mailed on Sep. 13, 2021, 5 pages.
 Office Action received for Australian Patent Application No. 2020257092, mailed on Mar. 3, 2021, 7 pages.
 Office Action received for Australian Patent Application No. 2020257092, mailed on Nov. 30, 2020, 6 pages.
 Office Action received for Australian Patent Application No. 2020282362, mailed on Nov. 25, 2021, 3 pages.
 Office Action received for Australian Patent Application No. 2021100721, mailed on Jun. 4, 2021, 7 pages.
 Office Action received for Australian Patent Application No. 2021100721, mailed on Oct. 18, 2021, 4 pages.
 Office Action received for Australian Patent Application No. 2021201403, mailed on Mar. 16, 2021, 3 pages.
 Office Action received for Australian Patent Application No. 2021202815, mailed on Apr. 11, 2022, 2 pages.
 Office Action received for Australian Patent Application No. 2021203669, mailed on Apr. 5, 2022, 3 pages.
 Office Action received for Australian Patent Application No. 2021203903, mailed on Feb. 24, 2022, 3 pages.
 Office Action received for Australian Patent Application No. 2021204454, mailed on Aug. 9, 2021, 7 pages.
 Office Action received for Chinese Patent Application No. 201510290133.1, mailed on Feb. 9, 2018, 10 pages.
 Office Action Received for Chinese Patent Application No. 201510291012.9, mailed on Feb. 8, 2018, 10 pages.
 Office Action received for Chinese Patent Application No. 201520365358.4, mailed on Aug. 11, 2015, 4 pages.
 Office Action received for Chinese Patent Application No. 201520365843.1, mailed on Aug. 25, 2015, 4 pages.
 Office Action Received for Chinese Patent Application No. 201520365843.1, mailed on Nov. 16, 2015, 3 pages.
 Office Action received for Chinese Patent Application No. 201580029071.7, mailed on Apr. 2, 2021, 19 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Office Action received for Chinese Patent Application No. 201580029071.7, mailed on Apr. 9, 2020, 33 pages.

Office Action received for Chinese Patent Application No. 201580029071.7, mailed on Jul. 2, 2019, 29 pages.

Office Action received for Chinese Patent Application No. 201580029071.7, mailed on Oct. 29, 2020, 20 pages.

Office Action received for Chinese Patent Application No. 201620393549.6, mailed on Aug. 18, 2016, 2 pages.

Office Action received for Chinese Patent Application No. 201620393549.6, mailed on Jan. 13, 2017, 2 pages.

Office Action received for Chinese Patent Application No. 201620393748.7, mailed on Aug. 18, 2016, 2 pages.

Office Action received for Chinese Patent Application No. 201620393748.7, mailed on Jan. 13, 2017, 2 pages.

Office Action received for Chinese Patent Application No. 201710267617.3, mailed on Apr. 17, 2020, 23 pages.

Office Action received for Chinese Patent Application No. 201710267617.3, mailed on Jul. 10, 2019, 18 pages.

Office Action received for Chinese Patent Application No. 201710267617.3, mailed on Nov. 2, 2020, 6 pages.

Office Action received for Chinese Patent Application No. 201710493025.3, mailed on Dec. 6, 2019, 11 pages.

Office Action received for Chinese Patent Application No. 201710493025.3, mailed on Jan. 6, 2021, 17 pages.

Office Action received for Chinese Patent Application No. 201710493025.3, mailed on Jul. 10, 2020, 17 pages.

Office Action received for Chinese Patent Application No. 201710493025.3, mailed on Sep. 19, 2017, 2 pages.

Office Action received for Chinese Patent Application No. 201810730279.7, mailed on Jul. 6, 2020, 7 pages.

Office Action received for Chinese Patent Application No. 201810730279.7, mailed on Mar. 4, 2020, 14 pages.

Office Action received for Chinese Patent Application No. 201810730279.7, mailed on May 7, 2019, 15 pages.

Office Action received for Chinese Patent Application No. 201810730279.7, mailed on Nov. 5, 2019, 14 pages.

Office Action received for Chinese Patent Application No. 201811151702.4, mailed on Mar. 4, 2020, 13 pages.

Office Action received for Chinese Patent Application No. 201811151702.4, mailed on May 7, 2019, 16 pages.

Office Action received for Chinese Patent Application No. 201811151702.4, mailed on Oct. 9, 2019, 11 pages.

Office Action received for Chinese Patent Application No. 201811152097.2, mailed on May 7, 2019, 18 pages.

Office Action received for Chinese Patent Application No. 201811152726.1, mailed on Apr. 22, 2019, 15 pages.

Office Action received for Chinese Patent Application No. 201811152726.1, mailed on Apr. 28, 2021, 14 pages.

Office Action received for Chinese Patent Application No. 201811152726.1, mailed on Jan. 28, 2021, 13 pages.

Office Action received for Chinese Patent Application No. 201811152726.1, mailed on Mar. 18, 2020, 12 pages.

Office Action received for Chinese Patent Application No. 201811152726.1, mailed on Oct. 24, 2019, 14 pages.

Office Action received for Chinese Patent Application No. 201811152726.1, mailed on Oct. 29, 2020, 12 pages.

Office Action received for Chinese Patent Application No. 201811539259.8, mailed on Apr. 3, 2020, 10 pages.

Office Action received for Chinese Patent Application No. 201811539259.8, mailed on Sep. 3, 2020, 10 pages.

Office Action received for Chinese Patent Application No. 201811539259.8, mailed on Sep. 18, 2019, 12 pages.

Office Action received for Chinese Patent Application No. 201811539260.0, mailed on Jun. 3, 2020, 8 pages.

Office Action received for Chinese Patent Application No. 201811539260.0, mailed on Nov. 4, 2020, 9 pages.

Office Action received for Chinese Patent Application No. 201811539260.0, mailed on Oct. 8, 2019, 14 pages.

Office Action received for Chinese Patent Application No. 201880001436.9, mailed on Apr. 28, 2019, 19 pages.

Office Action received for Chinese Patent Application No. 201880001436.9, mailed on Nov. 6, 2019, 24 pages.

Office Action received for Chinese Patent Application No. 201880056514.5, mailed on Sep. 2, 2020, 7 pages.

Office Action received for Chinese Patent Application No. 201910400179.2, mailed on Dec. 27, 2021, 32 pages.

Office Action received for Chinese Patent Application No. 201910400180.5, mailed on Jun. 1, 2020, 11 pages.

Office Action received for Chinese Patent Application No. 201910704856.X, mailed on Apr. 6, 2021, 13 pages.

Office Action received for Chinese Patent Application No. 201910704856.X, mailed on Dec. 9, 2020, 23 pages.

Office Action received for Chinese Patent Application No. 201910704856.X, mailed on May 27, 2020, 26 pages.

Office Action received for Chinese Patent Application No. 201911128105.4, mailed on Apr. 8, 2021, 10 pages.

Office Action received for Chinese Patent Application No. 201911128105.4, mailed on Jan. 4, 2021, 14 pages.

Office Action received for Chinese Patent Application No. 201911128105.4, mailed on Jul. 3, 2020, 18 pages.

Office Action received for Chinese Patent Application No. 202010125114.4, mailed on Aug. 21, 2020, 16 pages.

Office Action received for Chinese Patent Application No. 202010125114.4, mailed on Jun. 7, 2021, 7 pages.

Office Action received for Chinese Patent Application No. 202010125114.4, mailed on Mar. 1, 2021, 15 pages.

Office Action received for Chinese Patent Application No. 202010126661.4, mailed on Feb. 3, 2021, 16 pages.

Office Action received for Chinese Patent Application No. 202010126661.4, mailed on Jun. 2, 2022, 11 pages.

Office Action received for Chinese Patent Application No. 202010126661.4, mailed on Mar. 4, 2022, 13 pages.

Office Action received for Chinese Patent Application No. 202010742019.9, mailed on Feb. 3, 2021, 17 pages.

Office Action received for Chinese Patent Application No. 202011243876.0, mailed on Apr. 6, 2021, 11 pages.

Office Action received for Chinese Patent Application No. 202011336156.9, mailed on May 20, 2021, 13 pages.

Office Action received for Chinese Patent Application No. 202011450203.2, mailed on Apr. 20, 2022, 9 pages.

Office Action received for Chinese Patent Application No. 202011450203.2, mailed on Sep. 1, 2021, 12 pages.

Office Action received for Chinese Patent Application No. 202110235995.X, mailed on Mar. 22, 2022, 17 pages.

Office Action received for Chinese Patent Application No. 202110248576.X, mailed on Sep. 15, 2021, 28 pages.

Office Action received for Chinese Patent Application No. 202110327012.5, mailed on Apr. 29, 2022, 17 pages.

Office Action received for Chinese Patent Application No. 202110328597.2, mailed on Apr. 15, 2022, 18 pages.

Office Action received for Chinese Patent Application No. 202110328601.5, mailed on Apr. 27, 2022, 25 pages.

Office Action received for Chinese Patent Application No. 202110328602.X, mailed on Mar. 24, 2022, 6 pages.

Office Action received for Chinese Patent Application No. 202110818370.6, mailed on Jun. 22, 2022, 7 pages.

Office Action received for Chinese Patent Application No. 202110818370.6, mailed on Mar. 2, 2022, 13 pages.

Office Action received for Chinese Patent Application No. 202110819254.6, mailed on May 16, 2022, 16 pages.

Office Action received for Chinese Patent Application No. 202111612841.4, mailed on Jul. 22, 2022, 13 pages.

Office Action Received for Danish Patent Application No. PA201670601, mailed on Apr. 10, 2018, 3 pages.

Office Action received for Danish Patent Application No. PA201670601, mailed on Aug. 9, 2018, 2 pages.

Office Action Received for Danish Patent Application No. PA201670601, mailed on Dec. 11, 2018, 3 pages.

Office Action Received for Danish Patent Application No. PA201670601, mailed on Feb. 6, 2017, 5 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Office Action Received for Danish Patent Application No. PA201670601, mailed on Oct. 21, 2016, 9 pages.
 Office Action Received for Danish Patent Application No. PA201670601, mailed on Sep. 26, 2017, 3 pages.
 Office Action received for Danish Patent Application No. PA201670602, mailed on Apr. 16, 2018, 3 pages.
 Office Action received for Danish Patent Application No. PA201670602, mailed on Feb. 9, 2017, 3 pages.
 Office Action received for Danish Patent Application No. PA201670602, mailed on Oct. 25, 2016, 9 pages.
 Office Action received for Danish Patent Application No. PA201670602, mailed on Sep. 26, 2017, 3 pages.
 Office Action received for Danish Patent Application No. PA201670603, mailed on Nov. 1, 2016, 9 pages.
 Office Action received for Danish Patent Application No. PA201670604, mailed on Feb. 19, 2018, 3 pages.
 Office Action received for Danish Patent Application No. PA201670604, mailed on Jun. 9, 2017, 3 pages.
 Office Action received for Danish Patent Application No. PA201670604, mailed on Nov. 8, 2016, 8 pages.
 Office Action received for Danish Patent Application No. PA201670605, mailed on Apr. 9, 2018, 2 pages.
 Office Action received for Danish Patent Application No. PA201670605, mailed on Feb. 19, 2018, 2 pages.
 Office Action received for Danish Patent Application No. PA201670605, mailed on Jun. 13, 2017, 4 pages.
 Office Action received for Danish Patent Application No. PA201670605, mailed on Nov. 14, 2016, 8 pages.
 Office Action received for Danish Patent Application No. PA201770392, mailed on Apr. 17, 2018, 2 pages.
 Office Action received for Danish Patent Application No. PA201770392, mailed on Dec. 8, 2017, 4 pages.
 Office Action received for Danish Patent Application No. PA201770392, mailed on Jun. 20, 2017, 11 pages.
 Office Action received for Danish Patent Application No. PA201770401, mailed on Jan. 31, 2018, 3 pages.
 Office Action received for Danish Patent Application No. PA201770401, mailed on May 17, 2018, 3 pages.
 Office Action received for Danish Patent Application No. PA201770402, mailed on Apr. 16, 2018, 5 pages.
 Office Action received for Danish Patent Application No. PA201770402, mailed on Dec. 18, 2017, 6 pages.
 Office Action received for Danish Patent Application No. PA201770402, mailed on Jun. 19, 2017, 11 pages.
 Office Action received for Danish Patent Application No. PA201770403, mailed on Dec. 12, 2017, 3 pages.
 Office Action received for Danish Patent Application No. PA201770403, mailed on Jun. 16, 2017, 8 pages.
 Office Action received for Danish Patent Application No. PA201770404, mailed on Aug. 8, 2018, 4 pages.
 Office Action received for Danish Patent Application No. PA201770404, mailed on Dec. 1, 2017, 5 pages.
 Office Action received for Danish Patent Application No. PA201770404, mailed on Feb. 21, 2019, 2 pages.
 Office Action received for Danish Patent Application No. PA201770404, mailed on May 1, 2019, 2 pages.
 Office Action received for Danish Patent Application No. PA201770406, mailed on Feb. 27, 2018, 7 pages.
 Office Action received for Danish Patent Application No. PA201770406, mailed on Jan. 25, 2019, 8 pages.
 Office Action received for Danish Patent Application No. PA201770406, mailed on Jun. 22, 2017, 11 pages.
 Office Action received for Danish Patent Application No. PA201770406, mailed on Mar. 26, 2019, 3 pages.
 Office Action received for Danish Patent Application No. PA201770406, mailed on Nov. 11, 2019, 4 pages.
 Office Action received for Danish Patent Application No. PA201770408, mailed on Dec. 21, 2017, 6 pages.

Office Action received for Danish Patent Application No. PA201770408, mailed on Jun. 20, 2017, 9 pages.
 Office Action received for Danish Patent Application No. PA201770408, mailed on May 3, 2018, 7 pages.
 Office Action received for Danish Patent Application No. PA201770410, mailed on Apr. 9, 2018, 5 pages.
 Office Action received for Danish Patent Application No. PA201770410, mailed on Jun. 23, 2017, 9 pages.
 Office Action received for Danish Patent Application No. PA201770410, mailed on Nov. 22, 2018, 5 pages.
 Office Action received for Danish Patent Application No. PA201870060, mailed on Jan. 15, 2019, 4 pages.
 Office Action received for Danish Patent Application No. PA201870060, mailed on Jul. 25, 2019, 2 pages.
 Office Action received for Danish Patent Application No. PA201870293, mailed on Jul. 17, 2018, 2 pages.
 Office Action received for Danish Patent Application No. PA201870293, mailed on Jun. 19, 2018, 8 pages.
 Office Action received for Danish Patent Application No. PA201870362, mailed on Aug. 22, 2019, 4 pages.
 Office Action received for Danish Patent Application No. PA201870362, mailed on Dec. 18, 2018, 2 pages.
 Office Action received for Danish Patent Application No. PA201870363, mailed on Mar. 26, 2019, 3 pages.
 Office Action received for Danish Patent Application No. PA201870364, mailed on Jan. 28, 2019, 8 pages.
 Office Action received for Danish Patent Application No. PA201870364, mailed on Jun. 11, 2019, 11 pages.
 Office Action received for Danish Patent Application No. PA201870419, mailed on Feb. 27, 2020, 8 pages.
 Office Action received for Danish Patent Application No. PA201870419, mailed on Sep. 30, 2019, 4 pages.
 Office Action received for Danish Patent Application No. PA201870435, mailed on Feb. 6, 2020, 3 pages.
 Office Action received for Danish Patent Application No. PA201870435, mailed on May 2, 2019, 3 pages.
 Office Action received for Danish Patent Application No. PA201870435, mailed on May 25, 2020, 3 pages.
 Office Action received for Danish Patent Application No. PA201870598, mailed on May 1, 2019, 3 pages.
 Office Action received for Danish Patent Application No. PA201870598, mailed on Nov. 8, 2019, 4 pages.
 Office Action received for Danish Patent Application No. PA201970533, mailed on Apr. 20, 2021, 2 pages.
 Office Action received for Danish Patent Application No. PA201970533, mailed on Jul. 17, 2020, 6 pages.
 Office Action received for Danish Patent Application No. PA202070560, mailed on Dec. 11, 2020, 7 pages.
 Office Action received for Danish Patent Application No. PA202070560, mailed on Mar. 10, 2021, 7 pages.
 Office Action received for Danish Patent Application No. PA202070617, mailed on Sep. 24, 2021, 4 pages.
 Office Action received for Danish Patent Application No. PA202170320, mailed on May 3, 2022, 3 pages.
 Office Action received for European Patent Application No. 15729286.3, mailed on Feb. 7, 2018, 7 pages.
 Office Action received for European Patent Application No. 15728307.8, mailed on Feb. 8, 2018, 7 pages.
 Office Action received for European Patent Application No. 17167629.9, mailed on Jan. 25, 2019, 7 pages.
 Office Action received for European Patent Application No. 17813777.4, mailed on Jan. 3, 2020, 5 pages.
 Office Action received for European Patent Application No. 18197583.0, mailed on Feb. 28, 2020, 8 pages.
 Office Action received for European Patent Application No. 18197589.7, mailed on Oct. 1, 2019, 5 pages.
 Office Action received for European Patent Application No. 18728002.9, mailed on Dec. 14, 2020, 15 pages.
 Office Action received for European Patent Application No. 18733381.0, mailed on Oct. 29, 2021, 9 pages.
 Office Action received for European Patent Application No. 18779093.6, mailed on Dec. 11, 2020, 4 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Office Action received for European Patent Application No. 18779093. 6, mailed on Mar. 17, 2022, 4 pages.

Office Action received for European Patent Application No. 19182037. 2, mailed on Jun. 16, 2020, 6 pages.

Office Action received for European Patent Application No. 19207753. 5, mailed on May 10, 2021, 4 pages.

Office Action received for European Patent Application No. 19207753. 5, mailed on Nov. 12, 2020, 5 pages.

Office Action received for European Patent Application No. 19728558. 8, mailed on Jun. 21, 2021, 9 pages.

Office Action received for European Patent Application No. 19729395. 4, mailed on Jul. 15, 2020, 4 pages.

Office Action received for European Patent Application No. 19729395. 4, mailed on Sep. 29, 2020, 10 pages.

Office Action received for European Patent Application No. 20158824. 1, mailed on Jun. 13, 2022, 5 pages.

Office Action received for European Patent Application No. 20158824. 1, mailed on May 18, 2021, 10 pages.

Office Action received for European Patent Application No. 20166552. 8, mailed on Mar. 24, 2021, 8 pages.

Office Action received for European Patent Application No. 20187610. 9, mailed on May 21, 2021, 7 pages.

Office Action received for European Patent Application No. 20205496. 1, mailed on Nov. 10, 2021, 5 pages.

Office Action received for European Patent Application No. 20719301. 2, mailed on Feb. 21, 2022, 9 pages.

Office Action received for European Patent Application No. 20719301. 2, mailed on Jan. 28, 2021, 15 pages.

Office Action received for European Patent Application No. 21160991. 2, mailed on Mar. 24, 2022, 11 pages.

Office Action received for European Patent Application No. 21161005. 0, mailed on Apr. 22, 2022, 11 pages.

Office Action received for European Patent Application No. 21197457. 1, mailed on Sep. 2, 2022, 8 pages.

Office Action received for Indian Patent Application No. 201814036860, mailed on Jul. 29, 2021, 8 pages.

Office Action received for Indian Patent Application No. 202014041529, mailed on Dec. 6, 2021, 6 pages.

Office Action received for Indian Patent Application No. 202118046028, mailed on Apr. 6, 2022, 6 pages.

Office Action received for Japanese Patent Application No. 2017-514992, mailed on Apr. 6, 2018, 11 pages.

Office Action received for Japanese Patent Application No. 2018-018497, mailed on Dec. 10, 2018, 8 pages.

Office Action received for Japanese Patent Application No. 2018-562659, mailed on Dec. 6, 2019, 7 pages.

Office Action received for Japanese Patent Application No. 2018-562659, mailed on Jul. 26, 2019, 9 pages.

Office Action received for Japanese Patent Application No. 2018-562659, mailed on Mar. 12, 2021, 79 pages.

Office Action received for Japanese Patent Application No. 2018-562659, mailed on May 28, 2020, 5 pages.

Office Action received for Japanese Patent Application No. 2019-050138, mailed on Jan. 27, 2020, 9 pages.

Office Action received for Japanese Patent Application No. 2019-194597, mailed on Jan. 18, 2021, 10 pages.

Office Action received for Japanese Patent Application No. 2020-047952, mailed on Aug. 27, 2021, 13 pages.

Office Action received for Japanese Patent Application No. 2020-047952, mailed on Feb. 8, 2021, 6 pages.

Office Action received for Japanese Patent Application No. 2020-047952, mailed on Jul. 1, 2022, 8 pages.

Office Action received for Japanese Patent Application No. 2020-159840, mailed on Dec. 10, 2021, 13 pages.

Office Action received for Japanese Patent Application No. 2020-159840, mailed on Mar. 28, 2022, 6 pages.

Office Action received for Japanese Patent Application No. 2020-187397, mailed on Mar. 12, 2021, 8 pages.

Office Action received for Japanese Patent Application No. 2020-560927, mailed on Dec. 1, 2021, 3 pages.

Office Action received for Japanese Patent Application No. 2020-560927, mailed on Jun. 10, 2021, 5 pages.

Office Action received for Japanese Patent Application No. 2021-026630, mailed on Aug. 20, 2021, 7 pages.

Office Action received for Japanese Patent Application No. 2021-051415, mailed on Jul. 19, 2021, 4 pages.

Office Action received for Korean Patent Application No. 10-2019-7038093, mailed on Feb. 13, 2020, 11 pages.

Office Action received for Korean Patent Application No. 10-2020-7031319, mailed on Dec. 8, 2020, 14 pages.

Office Action received for Korean Patent Application No. 10-2020-7031700, mailed on Dec. 15, 2020, 6 pages.

Office Action received for Korean Patent Application No. 10-2020-7032110, mailed on Dec. 15, 2020, 6 pages.

Office Action received for Korean Patent Application No. 10-2020-7032488, mailed on Feb. 9, 2021, 11 pages.

Office Action received for Korean Patent Application No. 10-2021-7017731, mailed on May 30, 2022, 5 pages.

Office Action received for Korean Patent Application No. 10-2021-7021047, mailed on Aug. 13, 2021, 5 pages.

Office Action received for Korean Patent Application No. 10-2021-7029861, mailed on Jan. 25, 2022, 11 pages.

Office Action received for Korean Patent Application No. 10-2022-7006175, mailed on May 27, 2022, 7 pages.

Office Action received for Korean Patent Application No. 10-2022-7008567, mailed on Mar. 28, 2022, 5 pages.

Ojeda-Zapata Julio, "Five Apps That Play Podcasts Directly from Your Apple Watch", Available online at: <https://tidbits.com/2018/04/09/five-apps-that-play-podcasts-directly-from-your-apple-watch/>, Apr. 9, 2018, 12 pages.

Olson Parry, "Delete by Default: Why More Snapchat-Like Messaging Is On Its Way", Forbes.com, Available Online at <https://www.forbes.com/sites/parmyolson/2013/11/22/delete-by-default-why-more-snapchat-like-messaging-is-on-its-way>, Nov. 22, 2013, 6 pages.

Pairing Your Apple Watch with Your AppleTV, Available online at: <https://www.youtube.com/watch?v=C4t8YFSJ-UY>, Apr. 27, 2015, 3 pages.

Partial European Search Report received for European Patent Application No. 20158824.1, mailed on May 8, 2020, 14 pages.

Partial European Search Report received for European Patent Application No. 18197583.0, mailed on Jan. 14, 2019, 18 pages.

Party Share—turn your Xperia into a jukebox, Available at: <https://forum.xda-developers.com/crossdevice-dev/sony/app-partyshare-xperia-jukebox-t2877807>, Sep. 15, 2014, 5 pages.

Petternitter, "User Restricted Collaborative Playlists—The Spotify Community", Downloaded from: <https://community.spotify.com/t5/Archived-Ideas/User-restricted-collaborative-playlists/idi-p/70721>, May 28, 2012, 4 pages.

Plaisant et al., "Touchscreen Toggle Switches: Push or slide? Design Issues and Usability Study", Technical Report CAR-TR-521, CS-TR-2557, Nov. 1990, pp. 1-10.

Result of Consultation received for European Patent Application No. 15728307.8, mailed on Nov. 21, 2019, 7 pages.

Result of Consultation received for European Patent Application No. 15729286.3, mailed on Nov. 21, 2019, 6 pages.

Result of Consultation received for European Patent Application No. 17167629.9, mailed on Nov. 10, 2020, 3 pages.

Result of Consultation received for European Patent Application No. 18197583.0, mailed on Feb. 24, 2021, 3 pages.

Result of Consultation received for European Patent Application No. 18197589.7, mailed on Dec. 1, 2020, 9 pages.

Result of Consultation received for European Patent Application No. 18197589.7, mailed on Dec. 17, 2020, 6 pages.

Result of Consultation received for European Patent Application No. 19182037.2, mailed on Mar. 22, 2021, 5 pages.

Result of Consultation received for European Patent Application No. 19728558.8, mailed on Jun. 28, 2022, 4 pages.

Result of Consultation received for European Patent Application No. 19729395.4, mailed on Jun. 22, 2021, 3 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Result of Consultation received for European Patent Application No. 19729395.4, mailed on Jun. 23, 2021, 3 pages.

Result of Consultation received for European Patent Application No. 20158824.1, mailed on May 17, 2022, 7 pages.

Result of Consultation received for European Patent Application No. 20187610.9, mailed on Jun. 1, 2022, 3 pages.

Review: Samsung Radiant R3 Wireless Speakers, Available Online at: <<https://www.youtube.com/watch?v=ZBICVE1WdKE>>, Jan. 19, 2016, 3 pages.

Richards, "TN Audio Mixer and Master Volume Control with Automatic Configuration", Technical Disclosure Bulletin, vol. 37, No. 01, Jan. 1, 1994, pp. 485-486.

Rossignol Joe, "iOS 10 Concept Simplifies Lock Screen with Collapsed Notifications", Available online at: <https://www.macrumors.com/2016/06/16/ios-10-collapsed-notifications-concept/>, Jun. 16, 2016, 10 pages.

Samsung, "Control an individual smart device on your watch", Online Available at: <https://www.samsung.com/us/support/troubleshooting/TSG01003208/>, Nov. 9, 2018, 1 page.

Samsung, "Problems with SmartThings on your Samsung Smartwatch", Online Available at: <https://www.samsung.com/us/support/troubleshooting/TSG01003169/#smartthings-error-on-samsung-smartwatch>, Nov. 9, 2018, 10 pages.

Samsung, "Samsung—User manual—Galaxy Watch", Online available at: <https://content.abt.com/documents/90234/SM-R810NZDAXAR-use.pdf>, Aug. 24, 2018, 102 pages.

Samsung, "Samsung R3 Wireless 360° Smart Speaker (Black)", User Manual ver. 1.0 (English), User manual [online], Available Online at: <<https://www.samsung.com/uk/support/model/WAM3500/XU/>>, Dec. 16, 2016, 3 pages.

Sandrahoutz, "How Do I Delete a Playlist from a Synced iPod but Not Remove it From the Library in iTunes", Apple Communities Website, Available online at: <https://discussions.apple.com/thread/7503609>, Mar. 23, 2016, 2 pages.

Search Report and Opinion received for Danish Patent Application No. PA201770401, mailed on Jun. 19, 2017, 6 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870060 mailed on Apr. 30, 2018, 7 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870362, mailed on Sep. 7, 2018, 9 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870363, mailed on Sep. 11, 2018, 12 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870364, mailed on Sep. 4, 2018, 12 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870419, mailed on Aug. 27, 2018, 7 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870419, mailed on Sep. 10, 2018, 9 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870435, mailed on Oct. 26, 2018, 9 pages.

Search Report and Opinion received for Danish Patent Application No. PA201870598, mailed on Dec. 5, 2018, 8 pages.

Search Report and Opinion received for Danish Patent Application No. PA201970533, mailed on Oct. 25, 2019, 9 pages.

Search Report and Opinion received for Danish Patent Application No. PA202070617, mailed on Dec. 23, 2020, 8 pages.

Search Report and Opinion received for Danish Patent Application No. PA202170320, mailed on Oct. 6, 2021, 9 pages.

Search Report received for Danish Patent Application No. PA201770404, mailed on Jun. 20, 2017, 8 pages.

Search Report received for Danish Patent Application No. PA201770409, mailed on Jun. 20, 2017, 9 pages.

Seifert Dan, "Google Home review: Home is where the smart is", The Verge, Available Online at: <<https://www.theverge.com/2016/11/3/13504658/google-home-review-speaker-assistant-amazon-echo-competitor>>, Nov. 3, 2016, 11 pages.

Seifi Joe, "Pianist Pro Review", available at <<http://www.appsafari.com/productivity/11529/pianist-pro/>>, Apr. 24, 2010, 9 pages.

Senicar et al., "User-Centred Design and Development of an Intelligent Light Switch for Sensor Systems", Technical Gazette, vol. 26, No. 2, available online at: <https://hrcak.srce.hr/file/320403>, 2019, pp. 339-345.

Sharepoint At Rackspace, "Sharepoint 2013: How to Edit a List or Library Using Quick Edit", Available online at: <https://www.youtube.com/watch?v=foZXcFC1k80>, Oct. 10, 2014, 1 page.

Singh Ajit, "Mytunz: Free Iphone Media Player App With Sleep Timer, Gesture Control", Available online at: <https://www.ilovefreesoftware.com/01/iphone/mytunz-free-iphone-media-player-app.html>, Jul. 1, 2014, 6 pages.

Smart Home App—What is the Widget, Online Available at: <https://support.vivint.com/s/article/Vivint-Smart-Home-App-What-is-the-Widget>, Jan. 26, 2019, 4 pages.

Smarrtricks, "Top 3 Music Player for Android", Available online at: <<https://www.youtube.com/watch?v=He7RTn4CL34>>, Feb. 22, 2017, 4 pages.

Softonic, "Beginners Guide to WhatsApp", Retrieved from the Internet: <https://www.youtube.com/watch?v=1YN36KYDgrk>, Apr. 29, 2013, 2 pages.

SolarWinds Network Configuration Manager Administrator Guide, Available online at:—<https://web.archive.org/web/20141031133207/http://www.solarwinds.com/documentation/orionNCM/docs/OrionNCMAdministratorGuide.pdf>, Oct. 31, 2014, 466 pages.

Sonos, "Sonos Controller App for iPad Product Guide", Available online at:—https://www.sonos.com/documents/productguides/en/iPadGuide_EN.pdf, Nov. 2014, 47 pages.

Stroud Forrest, "Screen Lock Meaning & Definition", Online Available at: <https://www.webopedia.com/definitions/screen-lock>, Jan. 30, 2014, 3 pages.

Summons to Attend Oral Proceedings received for European Patent Application 20158824.1, mailed on Dec. 7, 2021, 6 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 15728307.8, mailed on Jun. 28, 2019, 10 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 15728307.8, mailed on Mar. 7, 2022, 4 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 15729286.3, mailed on Jun. 27, 2019, 9 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 15729286.3, mailed on Mar. 10, 2022, 3 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 17167629.9, mailed on Jun. 3, 2020, 11 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 17813777.4, mailed on Jun. 18, 2020, 8 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 18197583.0, mailed on Aug. 14, 2020, 12 pages.

Summons to attend Oral proceedings received for European Patent Application No. 18197589.7, mailed on Apr. 9, 2020, 7 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 18728002.9, mailed on Jun. 3, 2022, 15 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 19182037.2, mailed on Nov. 24, 2020, 12 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 19728558.8, mailed on Jan. 18, 2022, 9 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 19729395.4, mailed on Mar. 11, 2021, 7 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 19729395.4, mailed on Mar. 19, 2021, 9 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 20187610.9, mailed on Dec. 16, 2021, 12 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 20187610.9, mailed on Jan. 27, 2022, 2 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 20205496.1, mailed on Sep. 8, 2022, 9 pages.

Supertunetv, "Ipod Nano 6G—Sync Selected Playlist iTunes", YouTube, Available online at: <https://www.youtube.com/watch?v=xU3rYRabI>, Sep. 10, 2012, 3 pages.

Supplemental Notice of Allowance received for U.S. Appl. No. 16/584,490, mailed on Apr. 13, 2021, 2 pages.

Supplemental Notice of Allowance received for U.S. Appl. No. 16/584,743, mailed on Nov. 25, 2020, 2 pages.

Supplemental Notice of Allowance received for U.S. Appl. No. 17/168,069, mailed on Apr. 20, 2022, 2 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Supplemental Notice of Allowance received for U.S. Appl. No. 17/168,069, mailed on Feb. 2, 2022, 2 pages.

Technique, "How to Send Voice Messages in WhatsApp", Published on YouTube.com, Available at: <https://www.youtube.com/watch?v=mkJqYO984v0>, Aug. 12, 2013, 1 page.

Tedeschi Bob, "Stoking a Music Fan's Fancy with Apps That Rock", available at <<http://www.nytimes.com/2010/05/20/technology/personaltech/20smart.html>>, May 19, 2010, 3 pages.

The Single Keyboard Piano, available at <<http://moocowmusic.com/PianistPro/Manual/ManualSingleKeyboardPiano.html>>, Sep. 26, 2010, 4 pages.

Wechat Philippines, "WeChat TVC—Hold to Talk", available at <https://www.youtube.com/watch?v=E_UxteOWVSo>, May 11, 2013, 1 page.

WeChat Wiki, available on <http://web.archive.org/web/20130514131044/http://wechat.wikia.com/wiki/WeChat_Wiki>, May 14, 2013, 12 pages.

Whitney Lance, "How to Listen to Music on Your Apple Watch", Available Online at: <https://medium.com/pcmag-access/how-to-listen-to-music-on-your-apple-watch-f48a6c20dd52#:~:text=On%20your%20iPhone%2C%20go%20to,%E2%80%9D%20Tap%20on%20Add%20Music,> Mar. 2, 2018, 13 pages.

Whitwam Ryan, "How to Sync and Play Music on Your Android Wear Watch", Available online at: <https://www.greenbot.com/article/2997520/how-to-sync-and-play-music-on-your-android-wear-watch.html>, Nov. 2, 2015, 4 pages.

Woolsey Amanda, "Apple Watch Tips—How to Add and Play Music", Available online at: <<https://www.youtube.com/watch?v=E0QEuqMaoi8>>, Apr. 26, 2015, 3 pages.

You can use Line perfectly if you just read this!! , How to use & set up Line, Line convenience book for 50 million people, Japan, EI Publishing Co., Ltd., Mar. 10, 2014, pp. 16-55.

Yundanfengqingdeqing, "A light cloud and light breeze; How to upload multiple pictures on Sina Weibo", Baidu Experience, Available Online at: <<https://jingyan.baidu.com/article/6181c3e074ad0d152ff15353.html>>, Jan. 13, 2014, 12 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/483,542, mailed on Feb. 5, 2024, 3 pages.

Extended European Search Report received for European Patent Application No. 23203414.0, mailed on Jan. 26, 2024, 10 pages.

Final Office Action received for U.S. Appl. No. 17/483,679, mailed on Feb. 6, 2024, 45 pages.

Notice of Acceptance received for Australian Patent Application No. 2023248185, mailed on Jan. 23, 2024, 3 pages.

Office Action received for Australian Patent Application No. 2022291522, mailed on Jan. 19, 2024, 2 pages.

Office Action received for Indian Patent Application No. 202117048581, mailed on Feb. 1, 2024, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/872,736, mailed on Jul. 25, 2023, 2 pages.

Notice of Allowance received for Chinese Patent Application No. 201911288715.0, mailed on Jul. 12, 2023, 5 pages (1 page of English Translation and 4 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/306,354, mailed on Jul. 24, 2023, 7 pages.

Notice of Allowance received for U.S. Appl. No. 17/479,897, mailed on Jul. 26, 2023, 7 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/872,736, mailed on Oct. 13, 2023, 4 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2023/017280, mailed on Jun. 26, 2023, 20 pages.

Notice of Acceptance received for Australian Patent Application No. 2022218540, mailed on Oct. 16, 2023, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 202111483033.2, mailed on Oct. 7, 2023, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7024157, mailed on Sep. 19, 2023, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 18/077,891, mailed on Oct. 19, 2023, 18 pages.

Office Action received for European Patent Application No. 20719301.2, mailed on Oct. 20, 2023, 11 pages.

Office Action received for European Patent Application No. 22201007.6, mailed on Oct. 9, 2023, 5 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/732,204, mailed on Dec. 4, 2023, 5 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2022/029261, mailed on Nov. 30, 2023, 12 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2022/029273, mailed on Nov. 30, 2023, 14 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2022/029282, mailed on Nov. 30, 2023, 17 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2022/029580, mailed on Nov. 30, 2023, 14 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2023/020569, mailed on Nov. 13, 2023, 23 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2023/024279, mailed on Nov. 17, 2023, 20 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2023/024279, mailed on Sep. 26, 2023, 12 pages.

Office Action received for Korean Patent Application No. 10-2023-7008877, mailed on Nov. 29, 2023, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Final Office Action received for U.S. Appl. No. 17/314,948, mailed on Mar. 7, 2023, 31 pages.

Intention to Grant received for Danish Patent Application No. PA202270464, mailed on Feb. 20, 2023, 2 pages.

Non-Final Office Action received for U.S. Appl. No. 17/752,582, mailed on Mar. 6, 2023, 17 pages.

Notice of Acceptance received for Australian Patent Application No. 2022200901, mailed on Mar. 9, 2023, 3 pages.

Notice of Allowance received for Korean Patent Application No. 10-2021-7017731, mailed on Feb. 28, 2023, 5 pages (2 pages of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202111652452.4, mailed on Feb. 11, 2023, 28 pages (13 pages of English Translation and 15 pages of Official Copy).

Office Action received for European Patent Application No. 20760624.5, mailed on Mar. 7, 2023, 13 pages.

Office Action received for European Patent Application No. 21728781.2, mailed on Mar. 1, 2023, 13 pages.

Office Action received for Japanese Patent Application No. 2021-206121, mailed on Feb. 20, 2023, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Philips Support Website, "How to switch to preferred audio language in Philips TV from a broadcast with multiple languages audio stream?", Available Online at: <https://www.usa.philips.com/c-f/XC000010105/how-to-switch-to-preferred-audio-language-in-philips-tv-from-a-broadcast-with-multiple-languages-audio-stream>, Dec. 29, 2016, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on Dec. 16, 2022, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/476,404, mailed on Dec. 20, 2022, 2 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 18728002.9, mailed on Dec. 7, 2022, 1 page.

Cohn, Emily, "Sonos Just Fixed the Most Annoying Thing About Its iPhone App", online available at: <https://www.businessinsider.com/sonos-mobile-app-works-on-lock-screen-2016-6>, Jun. 27, 2016, 2 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Decision of Board of Appeal received for European Patent Application No. 15728307.8, mailed on Dec. 8, 2022, 17 pages.

Decision to Grant received for European Patent Application No. 20158824.1, mailed on Dec. 15, 2022, 3 pages.

Fingas, Jon, "Sonos Puts Speaker Controls On Your iPhone's Lock Screen", online available at <https://www.engadget.com/2016-06-21-sonos-ios-lock-screen-controls.html>, Jun. 21, 2016, 3 pages.

Kazmucha, Allyson, "Sonos Controller App for iPhone and iPad Review", online available at <https://www.imore.com/sonos-controller-app-iphone-and-ipad-review>, Mar. 1, 2018, 4 pages.

Minutes of the Oral Proceedings received for European Patent Application No. 15729286.3, mailed on Dec. 6, 2022, 5 pages.

Non-Final Office Action received for U.S. Appl. No. 17/483,679, mailed on Dec. 9, 2022, 31 pages.

Notice of Allowance received for U.S. Appl. No. 16/922,675, mailed on Dec. 8, 2022, 9 pages.

Office Action received for Australian Patent Application No. 2022200901, mailed on Dec. 19, 2022, 4 pages.

Office Action received for Australian Patent Application No. 2022201532, mailed on Dec. 19, 2022, 5 pages.

Office Action received for Chinese Patent Application No. 202110327012.5, mailed on Nov. 28, 2022, 16 pages (10 pages of English Translation and 6 pages of Official Copy).

Summons to Attend Oral Proceedings received for European Patent Application No. 21161005.0, mailed on Dec. 13, 2022, 9 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/019,845, mailed on Aug. 7, 2023, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/848,845, mailed on Aug. 9, 2023, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/989,086, mailed on Aug. 7, 2023, 2 pages.

Extended European Search Report received for European Patent Application No. 23168537.1, mailed on Jul. 25, 2023, 13 pages.

Intention to Grant received for European Patent Application No. 20166552.8, mailed on Jun. 29, 2023, 8 pages.

Intention to Grant received for European Patent Application No. 21728781.2, mailed on Jul. 28, 2023, 9 pages.

Non-Final Office Action received for U.S. Appl. No. 17/732,204, mailed on Aug. 4, 2023, 18 pages.

Non-Final Office Action received for U.S. Appl. No. 17/740,104, mailed on Aug. 2, 2023, 15 pages.

Notice of Acceptance received for Australian Patent Application No. 2022204466, mailed on Jul. 25, 2023, 3 pages.

Notice of Allowance received for U.S. Appl. No. 17/746,789, mailed on Aug. 9, 2023, 7 pages.

Office Action received for Australian Patent Application No. 2022291522, mailed on Jul. 20, 2023, 3 pages.

Office Action received for Chinese Patent Application No. 202110328597.2, mailed on Jul. 18, 2023, 21 pages (6 pages of English Translation and 15 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110328602.X, mailed on Jun. 29, 2023, 27 pages (18 pages of English Translation and 9 pages of Official Copy).

Office Action received for European Patent Application No. 20720310.0, mailed on Jul. 25, 2023, 11 pages.

Summons to Attend Oral Proceedings received for European Patent Application No. 18733381.0, mailed on Jul. 25, 2023, 7 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/742,273, mailed on Mar. 30, 2023, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/950,900, mailed on Jan. 26, 2023, 5 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/077,905, mailed on Apr. 10, 2023, 2 pages.

Decision to Refuse received for European Patent Application No. 22209306.4, mailed on Mar. 20, 2023, 2 pages.

Final Office Action received for U.S. Appl. No. 17/950,900, mailed on Jan. 23, 2023, 14 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2021/048358, mailed on Apr. 6, 2023, 15 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2022/044592, mailed on Mar. 14, 2023, 22 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2022/044592, mailed on Jan. 16, 2023, 21 pages.

Non-Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Mar. 30, 2023, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 17/476,404, mailed on Mar. 30, 2023, 29 pages.

Non-Final Office Action received for U.S. Appl. No. 17/835,110, mailed on Apr. 3, 2023, 28 pages.

Non-Final Office Action received for U.S. Appl. No. 17/950,900, mailed on Dec. 1, 2022, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 17/989,086, mailed on Apr. 12, 2023, 21 pages.

Non-Final Office Action received for U.S. Appl. No. 18/077,971, mailed on Apr. 3, 2023, 24 pages.

Notice of Allowance received for U.S. Appl. No. 17/467,700, mailed on Apr. 7, 2023, 12 pages.

Notice of Allowance received for U.S. Appl. No. 17/509,356, mailed on Apr. 7, 2023, 11 pages.

Notice of Allowance received for U.S. Appl. No. 17/950,900, mailed on Mar. 7, 2023, 10 pages.

Notice of Allowance received for U.S. Appl. No. 17/950,922, mailed on Apr. 5, 2023, 10 pages.

Notice of Reasons for Refusal received for Japanese Patent Application No. 2020-047952, mailed on Apr. 3, 2023, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

Office Action received for Chinese Patent Application No. 201811539259.8, mailed on Mar. 13, 2023, 16 pages (8 pages of English Translation and 8 pages of Official Copy).

Office Action received for Indian Patent Application No. 202215025360, mailed on Mar. 29, 2023, 6 pages.

Office Action received for Indian Patent Application No. 202215025361, mailed on Mar. 29, 2023, 6 pages.

Office Action received for Indian Patent Application No. 202215025363, mailed on Mar. 29, 2023, 6 pages.

Office Action received for Indian Patent Application No. 202215025364, mailed on Mar. 29, 2023, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/484,899, mailed on Sep. 12, 2023, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/992,229, mailed on Aug. 28, 2023, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/483,542, mailed on Aug. 25, 2023, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/848,845, mailed on Aug. 28, 2023, 3 pages.

Decision to Grant received for European Patent Application No. 18728002.9, mailed on Aug. 31, 2023, 4 pages.

Final Office Action received for U.S. Appl. No. 17/476,404, mailed on Sep. 12, 2023, 30 pages.

Notice of Allowance received for U.S. Appl. No. 17/867,317, mailed on Aug. 30, 2023, 6 pages.

Notice of Allowance received for U.S. Appl. No. 17/872,736, mailed on Aug. 30, 2023, 4 pages.

Office Action received for Korean Patent Application No. 10-2022-7044372, mailed on Aug. 21, 2023, 9 pages (4 pages of English Translation and 5 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/067,350, mailed on Jul. 29, 2024, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/204,888, mailed on Aug. 5, 2024, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/235,291, mailed on Aug. 7, 2024, 2 pages.

Decision to Refuse received for Japanese Patent Application No. 2023-022576, mailed on Jul. 26, 2024, 6 pages (3 pages of English Translation and 3 pages of Official Copy).

Extended European Search Report received for European Patent Application No. 24159026.4, mailed on Jul. 10, 2024, 9 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Intention to Grant received for European Patent Application No. 23168537.1, mailed on Jul. 25, 2024, 8 pages.

Invitation to Pay Additional Fees received for PCT Patent Application No. PCT/US2024/017017, mailed on May 15, 2024, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 202110744381.4, mailed on Jul. 15, 2024, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2023-097196, mailed on Jul. 29, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2023-571161, mailed on Jul. 30, 2024, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2023-571312, mailed on Jul. 16, 2024, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2024-7019962, mailed on Jul. 16, 2024, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Supplemental Notice of Allowance received for U.S. Appl. No. 18/229,989, mailed on Aug. 7, 2024, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/903,946, mailed on Sep. 3, 2024, 2 pages.

Final Office Action received for U.S. Appl. No. 17/950,868, mailed on Aug. 29, 2024, 13 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2024/017017, mailed on Aug. 2, 2024, 27 pages.

Non-Final Office Action received for U.S. Appl. No. 18/389,655, mailed on Aug. 23, 2024, 23 pages.

Notice of Allowance received for U.S. Appl. No. 17/484,899, mailed on Aug. 26, 2024, 21 pages.

Notice of Allowance received for U.S. Appl. No. 17/903,946, mailed on Aug. 27, 2024, 5 pages.

Office Action received for Chinese Patent Application No. 202311321231.8, mailed on Jul. 28, 2024, 9 pages (5 pages of English Translation and 4 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2023-028786, mailed on Aug. 23, 2024, 10 pages (5 pages of English Translation and 5 pages of Official Copy).

Result of Consultation received for European Patent Application No. 22201007.6, mailed on Aug. 20, 2024, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on Mar. 11, 2024, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/978,930, mailed on Mar. 13, 2024, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/992,229, mailed on Mar. 11, 2024, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/067,350, mailed on Mar. 13, 2024, 4 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2023/032084, mailed on Nov. 27, 2023, 10 pages.

Notice of Allowance received for Chinese Patent Application No. 202210463449.6, mailed on Mar. 9, 2024, 2 pages (1 page of English Translation and 1 page of Official Copy).

Office Action received for Chinese Patent Application No. 201910704856.X, mailed on Mar. 8, 2024, 13 pages (7 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202010728844.3, mailed on Jan. 27, 2024, 16 pages (8 pages of English Translation and 8 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110817799.3, mailed on Feb. 22, 2024, 24 pages (15 pages of English Translation and 9 pages of Official Copy).

Office Action received for European Patent Application No. 22201007.6, mailed on Mar. 13, 2024, 4 pages.

Office Action received for Korean Patent Application No. 10-2023-7018775, mailed on Feb. 28, 2024, 8 pages (3 pages of English Translation and 5 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/950,868, mailed on Jul. 19, 2024, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/235,291, mailed on Jul. 18, 2024, 3 pages.

Extended European Search Report received for European Patent Application No. 24165156.1, mailed on Jul. 16, 2024, 7 pages.

Intention to Grant received for European Patent Application No. 21197457.1, mailed on Jul. 9, 2024, 12 pages.

Non-Final Office Action received for U.S. Appl. No. 18/204,888, mailed on Jul. 18, 2024, 21 pages.

Non-Final Office Action received for U.S. Patent Application No. 18/380,116, mailed on Jul. 18, 2024, 16 pages.

Notice of Allowance received for Chinese Patent Application No. 202010728711.6, mailed on Jul. 1, 2024, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 202110744146.7, mailed on Jul. 9, 2024, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7040599, mailed on Jun. 26, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 16/830,838, mailed on Jul. 15, 2024, 8 pages.

Notice of Allowance received for U.S. Appl. No. 18/229,989, mailed on Jul. 24, 2024, 5 pages.

Office Action received for Australian Patent Application No. 2023204647, mailed on Jul. 5, 2024, 3 pages.

Office Action received for Chinese Patent Application No. 201910704856.X, mailed on Jun. 23, 2024, 12 pages (6 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202311185909.4, mailed on Jun. 12, 2024, 18 pages (10 pages of English Translation and 8 pages of Official Copy).

Office Action received for European Patent Application No. 22201007.6, mailed on Jul. 18, 2024, 4 pages.

Office Action received for European Patent Application No. 23203433.0, mailed on Jul. 9, 2024, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/237,341, mailed on Mar. 22, 2024, 4 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2023/032792, mailed on Jan. 19, 2024, 15 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2023/032911, mailed on Jan. 4, 2024, 18 pages.

Invitation to Pay Search Fees received for European Patent Application No. 21789897.2, mailed on Mar. 14, 2024, 3 pages.

Non-Final Office Action received for U.S. Appl. No. 17/484,899, mailed on Mar. 21, 2024, 42 pages.

Office Action received for Chinese Patent Application No. 201911128105.4, mailed on Mar. 19, 2024, 9 pages (1 page of English Translation and 8 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2023-028786, mailed on Mar. 22, 2024, 10 pages (5 pages of English Translation and 5 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2023-7040599, mailed on Mar. 12, 2024, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Applicant-Initiated Interview Summary received for U.S. Appl. No. 16/830,838, mailed on Jun. 17, 2024, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/484,899, mailed on Jun. 24, 2024, 4 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 21197457.1, mailed on Jun. 19, 2024, 1 page.

Decision on Appeal received for U.S. Appl. No. 17/116,938, mailed on Jun. 14, 2024, 12 pages.

Intention to Grant received for European Patent Application No. 20720310.0, mailed on Jun. 13, 2024, 13 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Notice of Allowance received for Korean Patent Application No. 10-2023-0001668, mailed on May 22, 2024, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Office Action received for Chinese Patent Application No. 201910704856.X, mailed on Jun. 11, 2024, 33 pages (1 page of English Translation and 32 pages of Official Copy).

Avery et al., "Kinect", Wikipedia, Feb. 26, 2015, 14 pages.

Brief Communication Regarding Oral Proceedings received for European Patent Application No. 21197457.1, mailed on May 23, 2024, 5 pages.

Extended European Search Report received for European Patent Application No. 24160234.1, mailed on May 28, 2024, 6 pages.

Minutes of the Oral Proceedings received for European Patent Application No. 20720310.0, mailed on Jun. 7, 2024, 7 pages.

Non-Final Office Action received for U.S. Appl. No. 17/747,804, mailed on Jun. 4, 2024, 20 pages.

Non-Final Office Action received for U.S. Appl. No. 18/229,989, mailed on May 31, 2024, 18 pages.

Notice of Acceptance received for Australian Patent Application No. 2024202768, mailed on Jun. 4, 2024, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 201911128105.4, mailed on May 24, 2024, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2024-7001084, mailed on May 22, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/684,843, mailed on Jun. 5, 2024, 5 pages.

Office Action received for European Patent Application No. 22705232.1, mailed on May 27, 2024, 7 pages.

Office Action received for Japanese Patent Application No. 2023-571161, mailed on May 28, 2024, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

Record of Oral Hearing received for U.S. Appl. No. 17/116,938, mailed on May 29, 2024, 13 pages.

Result of Consultation received for European Patent Application No. 20720310.0, mailed on Jun. 4, 2024, 3 pages.

Non-Final Office Action received for U.S. Appl. No. 18/067,350, mailed on May 28, 2024, 43 pages.

Notice of Acceptance received for Australian Patent Application No. 2023203357, mailed on May 16, 2024, 3 pages.

Notice of Allowance received for Chinese Patent Application No. 202311042451.7, mailed on May 15, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110744381.4, mailed on Mar. 25, 2024, 17 pages (6 pages of English Translation and 11 pages of Official Copy).

Office Action received for European Patent Application No. 21789897.2, mailed on May 23, 2024, 12 pages.

Decision to Grant received for European Patent Application No. 20746426.4, mailed on May 10, 2024, 2 pages.

Notice of Allowance received for Japanese Patent Application No. 2022-129377, mailed on Apr. 26, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 18/375,457, mailed on May 16, 2024, 15 pages.

Office Action received for Chinese Patent Application No. 202110744146.7, mailed on Apr. 1, 2024, 13 pages (6 pages of English Translation and 7 pages of Official Copy).

Anonymous, "Split Your Screen with IPEVO Visualizer Software", On IPEVO, Available online at: <https://medium.com/ipevo/split-your-screen-with-ipevo-visualizer-software-e9641024d24f>, Feb. 24, 2020, 10 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/229,989, mailed on Jun. 28, 2024, 2 pages.

Cosmic Mook, "Line Laboratory, New function Exhaustive Coverage! LINE 120% Application Guide, Inc.", Jan. 24, 2018, 7 pages (Official Copy Only). {See Communication Under Rule 37 CFR § 1.98(a) (3)}.

Create Confirmation Dialog Box—Matlab Ulconfirm, Online available at: <https://www.mathworks.com/help/matlab/ref/ulconfirm.html>, 2017, 19 pages.

Examiner-Initiated Interview Summary received for U.S. Appl. No. 17/950,868, mailed on Jul. 5, 2024, 2 pages.

Intention to Grant received for European Patent Application No. 20719301.2, mailed on Jul. 2, 2024, 9 pages.

Minutes of the Oral Proceedings received for European Patent Application No. 21197457.1, mailed on Jul. 3, 2024, 9 pages.

Myoko Mori, "Line Perfect Guidebook [Revised Version]", Sotec Co. Ltd., Dec. 31, 2013, 5 pages (Official Copy Only). {See Communication Under Rule 37 CFR § 1.98(a) (3)}.

Non-Final Office Action received for U.S. Appl. No. 18/228,597, mailed on Jul. 8, 2024, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 18/234,613, mailed on Jul. 1, 2024, 19 pages.

Notice of Allowance received for U.S. Appl. No. 18/235,291, mailed on Jul. 3, 2024, 18 pages.

Octoba, "Enjoy free calls with Line! Part 2", retrieved from: <https://web.archive.org/web/20170923013859/https://octoba.net/archives/line-call2.html>, Sep. 23, 2017, 13 pages (Official Copy Only). {See Communication Under Rule 37 CFR § 1.98(a) (3)}.

Office Action received for Chinese Patent Application No. 202311305998.1, mailed on May 29, 2024, 13 pages (7 pages of English Translation and 6 pages of Official Copy).

Office Action received for European Patent Application No. 22792995.7, mailed on Jun. 24, 2024, 6 pages.

Office Action received for European Patent Application No. 23190753.6, mailed on Jun. 25, 2024, 10 pages.

Office Action received for Japanese Patent Application No. 2023-097196, mailed on Jun. 7, 2024, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2024-003876, mailed on Jul. 2, 2024, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Window confirm (), Online available at: https://www.w3schools.com/jsref/met_win_confirm.asp, 2014, 5 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/375,457, mailed on Apr. 11, 2024, 2 pages.

Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Apr. 11, 2024, 17 pages.

Final Office Action received for U.S. Appl. No. 17/978,930, mailed on Apr. 5, 2024, 28 pages.

Intention to Grant received for European Patent Application No. 20746426.4, mailed on Apr. 12, 2024, 9 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2022/044592, mailed on Apr. 4, 2024, 21 pages.

Notice of Allowance received for Chinese Patent Application No. 202211558100.7, mailed on Mar. 29, 2024, 3 pages (2 pages of English Translation and 1 page of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2022-7001521, mailed on Mar. 22, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7044044, mailed on Mar. 14, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/903,946, mailed on Apr. 10, 2024, 7 pages.

Notice of Allowance received for U.S. Appl. No. 17/992,229, mailed on Apr. 17, 2024, 9 pages.

Office Action received for Chinese Patent Application No. 201911128105.4, mailed on Mar. 16, 2024, 7 pages (4 pages of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202010728711.6, mailed on Feb. 1, 2024, 30 pages (18 pages of English Translation and 12 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202311321231.8, mailed on Mar. 10, 2024, 15 pages (9 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2022-7032414, mailed on Mar. 26, 2024, 11 pages (5 pages of English Translation and 6 pages of Official Copy).

(56)

References Cited**OTHER PUBLICATIONS**

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/978,930, mailed on Apr. 26, 2024, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/903,946, mailed on Apr. 22, 2024, 2 pages.

Final Office Action received for U.S. Appl. No. 18/237,341, mailed on Apr. 23, 2024, 15 pages.

Non-Final Office Action received for U.S. Appl. No. 17/950,868, mailed on Apr. 24, 2024, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 18/138,348, mailed on Apr. 30, 2024, 16 pages.

Notice of Acceptance received for Australian Patent Application No. 2023204396, mailed on Apr. 15, 2024, 3 pages.

Office Action received for Chinese Patent Application No. 202080039832.8, mailed on Mar. 23, 2024, 22 pages (12 pages of English Translation and 10 pages of Official Copy).

Office Action received for Indian Patent Application No. 202118049678, mailed on Apr. 18, 2024, 8 pages.

Office Action received for Japanese Patent Application No. 2022-149476, mailed on Apr. 22, 2024, 8 pages (4 pages of English Translation and 4 pages of Official Copy).

Result of Consultation received for European Patent Application No. 20720310.0, mailed on Apr. 17, 2024, 9 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/228,597, mailed on Aug. 8, 2024, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/375,457, mailed on Aug. 16, 2024, 2 pages.

Examiner-Initiated Interview Summary received for U.S. Appl. No. 18/234,613, mailed on Aug. 9, 2024, 2 pages.

Notice of Allowance received for Japanese Patent Application No. 2022-149476, mailed on Aug. 2, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2022-7044372, mailed on Jul. 30, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7011715, mailed on Jul. 25, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 17/978,930, mailed on Aug. 19, 2024, 9 pages.

Office Action received for Australian Patent Application No. 2023251497, mailed on Aug. 9, 2024, 2 pages.

That Guy who Loves Metv, "Kinect Party Gameplay", Available online at: https://youtu.be/bkbOlzfYLzc?si=QAAKh_V4aqY0iegL, Oct. 20, 2021, 2 pages.

Xbox, "Kinect Tips, Part 3: Gesture Controls", Available online at: <https://youtu.be/VXhhE-I96qQ?si=gLmHbp9jOm-w0fNW>, May 7, 2014, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/234,613, mailed on Jan. 10, 2025, 5 pages.

Decision to Grant received for European Patent Application No. 21197457.1, mailed on Jan. 7, 2025, 4 pages.

Decision to Grant received for European Patent Application No. 22734711.9, mailed on Jan. 7, 2025, 2 pages.

Final Office Action received for U.S. Appl. No. 18/228,597, mailed on Jan. 8, 2025, 19 pages.

Notice of Allowance received for Chinese Patent Application No. 202311305998.1, mailed on Jan. 2, 2025, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 202311312328.2, mailed on Jan. 3, 2025, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2023-022576, mailed on Dec. 24, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Hearing received for Indian Patent Application No. 202015013360, mailed on Dec. 26, 2024, 2 pages.

Notice of Allowance received for Japanese Patent Application No. 2023-028786, mailed on Dec. 2, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2024-0112016, mailed on Dec. 2, 2024, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Advisory Action received for U.S. Appl. No. 14/263,889, mailed on May 26, 2016, 4 pages.

Advisory Action received for U.S. Appl. No. 15/725,868, mailed on Dec. 10, 2018, 5 pages.

Advisory Action received for U.S. Appl. No. 16/666,073, mailed on Jul. 7, 2020, 5 pages.

Advisory Action received for U.S. Appl. No. 17/950,868, mailed on Sep. 24, 2024, 3 pages.

Advisory Action received for U.S. Appl. No. 18/204,888, mailed on Dec. 13, 2024, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 14/263,889, mailed on Apr. 15, 2016, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/725,868, mailed on Jul. 25, 2018, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/725,868, mailed on May 13, 2019, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 15/725,868, mailed on Nov. 20, 2018, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/950,868, mailed on Sep. 10, 2024, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/991,708, mailed on Dec. 16, 2024, 5 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/067,350, mailed on Nov. 26, 2024, 3 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/140,449, mailed on Aug. 27, 2024, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/140,449, mailed on Nov. 26, 2024, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/204,888, mailed on Nov. 27, 2024, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/237,364, mailed on Dec. 17, 2024, 4 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/237,364, mailed on Nov. 8, 2024, 2 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/389,655, mailed on Sep. 20, 2024, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 18/504,001, mailed on Oct. 29, 2024, 4 pages.

Baudisch et al., "Back-of-device interaction allows creating very small touch devices", Chi 2009—Digital Life, New World:Conference Proceedings And Extended Abstracts; The 27th Annual Chi Conference On Human Factors In Computing Systems. Available online at <<http://dx.doi.org/10.1145/1518701.1518995>>, Apr. 9, 2009, pp. 1923-1932.

Corrected Notice of Allowance received for U.S. Appl. No. 15/725,868, mailed on Aug. 23, 2019, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 15/725,868, mailed on Sep. 30, 2019, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/666,073, mailed on Apr. 6, 2021, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/666,073, mailed on Apr. 26, 2021, 4 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/666,073, mailed on Feb. 22, 2021, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 16/666,073, mailed on Mar. 11, 2021, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/684,843, mailed on Oct. 7, 2024, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/745,680, mailed on Nov. 20, 2024, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/848,845, mailed on Dec. 11, 2024, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/950,868, mailed on Nov. 27, 2024, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/992,229, mailed on Oct. 31, 2024, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/138,348, mailed on Nov. 27, 2024, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 18/234,613, mailed on Nov. 20, 2024, 2 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Corrected Notice of Allowance received for U.S. Appl. No. 18/234,613, mailed on Oct. 28, 2024, 2 pages.

Decision on Appeal received for Korean Patent Application No. 10-2020-7034959, mailed on Jul. 25, 2022, 28 pages (5 pages of English Translation and 23 pages of Official Copy).

Decision to Grant received for European Patent Application No. 10763539.3, mailed on Jul. 19, 2018, 3 pages.

Decision to Grant received for European Patent Application No. 18188433.9, mailed on Aug. 13, 2020, 3 pages.

Decision to Grant received for European Patent Application No. 20719301.2, mailed on Nov. 7, 2024, 3 pages.

Decision to Grant received for European Patent Application No. 20720310.0, mailed on Dec. 5, 2024, 2 pages.

Decision to Grant received for Japanese Patent Application No. 2023-571312, mailed on Aug. 29, 2024, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Decision to Grant received for Japanese Patent Application No. 2024-003876, mailed on Sep. 2, 2024, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Decision to Refuse received for Japanese Patent Application No. 2013-503731, mailed on Jun. 23, 2014, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

Examiner's Pre-Review Report received for Japanese Patent Application No. 2014-212867, mailed on Nov. 4, 2016, 5 pages (2 pages of English Translation and 3 pages of Official Copy).

Extended European Search Report received for European Patent Application No. 18188433.9, mailed on Oct. 29, 2018, 8 pages.

Extended European Search Report received for European Patent Application No. 24211972.5, mailed on Jan. 2, 2025, 7 pages.

Final Office Action received for U.S. Appl. No. 12/794,766, mailed on Nov. 26, 2012, 23 pages.

Final Office Action received for U.S. Appl. No. 14/263,889, mailed on Jan. 4, 2016, 9 pages.

Final Office Action received for U.S. Appl. No. 15/725,868, mailed on Sep. 27, 2018, 25 pages.

Final Office Action received for U.S. Appl. No. 16/666,073, mailed on Apr. 17, 2020, 18 pages.

Final Office Action received for U.S. Appl. No. 17/332,829, mailed on Feb. 6, 2023, 19 pages.

Final Office Action received for U.S. Appl. No. 17/991,708, mailed on Dec. 30, 2024, 22 pages.

Final Office Action received for U.S. Appl. No. 18/067,350, mailed on Oct. 31, 2024, 44 pages.

Final Office Action received for U.S. Appl. No. 18/138,348, mailed on Oct. 18, 2024, 10 pages.

Final Office Action received for U.S. Appl. No. 18/140,449, mailed on Oct. 18, 2024, 11 pages.

Final Office Action received for U.S. Appl. No. 18/204,888, mailed on Nov. 18, 2024, 21 pages.

Final Office Action received for U.S. Appl. No. 18/237,364, mailed on Nov. 27, 2024, 13 pages.

Grothaus, Michael, "WhatsApp Introduces Major New Audio Features", Engadget, Available at <<http://www.engadget.com/2013/08/07/whatsapp-introduces-major-new-audio-features/>>, Aug. 7, 2013, 4 pages.

Intention to Grant received for European Patent Application No. 10763539.3, mailed on Mar. 15, 2018, 6 pages.

Intention to Grant received for European Patent Application No. 18188433.9, mailed on Apr. 6, 2020, 9 pages.

Intention to Grant received for European Patent Application No. 20720310.0, mailed on Oct. 7, 2024, 14 pages.

Intention to Grant received for European Patent Application No. 21197457.1, mailed on Nov. 21, 2024, 12 pages.

Intention to Grant received for European Patent Application No. 21197457.1, mailed on Oct. 24, 2024, 12 pages.

Intention to Grant received for European Patent Application No. 21789897.2, mailed on Nov. 12, 2024, 9 pages.

Intention to Grant received for European Patent Application No. 22734711.9, mailed on Sep. 13, 2024, 7 pages.

Intention to Grant received for European Patent Application No. 23168537.1, mailed on Dec. 2, 2024, 8 pages.

Intention to Grant received for European Patent Application No. 24160234.1, mailed on Nov. 4, 2024, 9 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2010/050311, mailed on Oct. 18, 2012, 11 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2023/017280, mailed on Oct. 17, 2024, 15 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2023/020569, mailed on Nov. 21, 2024, 16 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US2023/024279, mailed on Dec. 12, 2024, 15 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2010/050311, mailed on Aug. 24, 2011, 15 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US2024/023231, mailed on Oct. 23, 2024, 24 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2010/050311, mailed on Dec. 21, 2010, 6 pages.

Invitation to Pay Additional Fees and Partial International Search Report received for PCT Patent Application No. PCT/US2024/023231, mailed on Aug. 29, 2024, 17 pages.

Koyama, Kaori, "Mac Fan Macintosh Master Book Mac OS X v10.4 "Tiger" & iLife", '06 version, Mainichi Communications Inc. Nobuyuki Nakagawa, Jul. 9, 2007, 4 pages (Official Copy Only). {See Communication Under Rule 37 CFR § 1.98(a) (3)}.

Non-Final Office Action received for U.S. Appl. No. 12/794,766, mailed on Aug. 5, 2013, 9 pages.

Non-Final Office Action received for U.S. Appl. No. 12/794,766, mailed on Jun. 25, 2012, 18 pages.

Non-Final Office Action received for U.S. Appl. No. 12/794,768, mailed on Oct. 10, 2012, 14 pages.

Non-Final Office Action received for U.S. Appl. No. 14/263,889, mailed on Jul. 2, 2015, 9 pages.

Non-Final Office Action received for U.S. Appl. No. 14/263,889, mailed on Jul. 26, 2016, 11 pages.

Non-Final Office Action received for U.S. Appl. No. 15/725,868, mailed on Apr. 27, 2018, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 15/725,868, mailed on Feb. 12, 2019, 26 pages.

Non-Final Office Action received for U.S. Appl. No. 16/666,073, mailed on Dec. 10, 2019, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 17/332,829, mailed on Aug. 1, 2022, 17 pages.

Non-Final Office Action received for U.S. Appl. No. 17/991,708, mailed on Oct. 22, 2024, 20 pages.

Non-Final Office Action received for U.S. Appl. No. 18/140,449, mailed on May 24, 2024, 19 pages.

Non-Final Office Action received for U.S. Appl. No. 18/237,364, mailed on Sep. 25, 2024, 18 pages.

Non-Final Office Action received for U.S. Appl. No. 18/504,001, mailed on Oct. 9, 2024, 28 pages.

Notice of Acceptance received for Australian Patent Application No. 2010350749, mailed on Jan. 13, 2015, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2015201127, mailed on Feb. 14, 2017, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2023204647, mailed on Oct. 28, 2024, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2023251497, mailed on Sep. 19, 2024, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2023266353, mailed on Oct. 1, 2024, 3 pages.

Notice of Acceptance received for Australian Patent Application No. 2024200283, mailed on Nov. 13, 2024, 3 pages.

Notice of Allowance received for Brazilian Patent Application No. BR112012025746-3, mailed on Jul. 6, 2021, 3 pages (1 page of English Translation and 2 pages of Official Copy).

(56)

References Cited**OTHER PUBLICATIONS**

Notice of Allowance received for Chinese Patent Application No. 201010602653.9, mailed on Nov. 15, 2014, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 2010106600623.4, mailed on Aug. 11, 2014, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 201410575145.4, mailed on May 10, 2018, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 201910704856.X, mailed on Sep. 30, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 202010728844.3, mailed on Sep. 29, 2024, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 202080032669.2, mailed on Nov. 11, 2024, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Chinese Patent Application No. 202110817799.3, mailed on Dec. 1, 2024, 3 pages (2 pages of English Translation and 1 page of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2014-212867, mailed on Mar. 30, 2018, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2016-151497, mailed on Jun. 4, 2018, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2019-182484, mailed on Aug. 30, 2021, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2021-154573, mailed on Nov. 11, 2022, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Japanese Patent Application No. 2022-197327, mailed on May 31, 2024, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2012-7028535, mailed on Jul. 16, 2014, 5 pages (1 page of English Translation and 4 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2014-7005164, mailed on Dec. 21, 2014, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2014-7029838, mailed on Jul. 28, 2015, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2015-7007050, mailed on Feb. 26, 2016, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2016-7014580, mailed on Dec. 17, 2019, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2018-7036975, mailed on Sep. 18, 2019, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2020-7002845, mailed on Sep. 24, 2020, 5 pages (1 page of English Translation and 4 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2022-7032414, mailed on Nov. 27, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7005442, mailed on Jan. 22, 2024, 8 pages (2 pages of English Translation and 6 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7018775, mailed on Sep. 30, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2023-7040599, mailed on Oct. 18, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for Korean Patent Application No. 10-2024-7028393, mailed on Nov. 29, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Notice of Allowance received for Mexican Patent Application No. MX/a/2012/011623, mailed on Jan. 16, 2014, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Mexican Patent Application No. MX/a/2014/004295, mailed on May 21, 2015, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Mexican Patent Application No. MX/a/2015/010523, mailed on May 25, 2016, 2 pages (1 page of English Translation and 1 page of Official Copy).

Notice of Allowance received for Mexican Patent Application No. MX/a/2016/012174, mailed on Jan. 17, 2020, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Notice of Allowance received for Mexican Patent Application No. MX/a/2020/003290, mailed on Feb. 9, 2023, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Notice of Allowance received for Taiwanese Patent Application No. 099132253, mailed on Apr. 27, 2016, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Notice of Allowance received for Taiwanese Patent Application No. 099132254, mailed on Feb. 18, 2014, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Notice of Allowance received for U.S. Appl. No. 12/794,766, mailed on Jan. 17, 2014, 6 pages.

Notice of Allowance received for U.S. Appl. No. 12/794,768, mailed on Mar. 22, 2013, 6 pages.

Notice of Allowance received for U.S. Appl. No. 14/263,889, mailed on Feb. 1, 2017, 10 pages.

Notice of Allowance received for U.S. Appl. No. 14/263,889, mailed on Jun. 16, 2017, 6 pages.

Notice of Allowance received for U.S. Appl. No. 15/725,868, mailed on Jun. 12, 2019, 9 pages.

Notice of Allowance received for U.S. Appl. No. 16/666,073, mailed on Jan. 21, 2021, 11 pages.

Notice of Allowance received for U.S. Appl. No. 17/116,938, mailed on Sep. 18, 2024, 5 pages.

Notice of Allowance received for U.S. Appl. No. 17/483,679, mailed on Nov. 21, 2024, 8 pages.

Notice of Allowance received for U.S. Appl. No. 17/684,843, mailed on Sep. 17, 2024, 5 pages.

Notice of Allowance received for U.S. Appl. No. 17/745,680, mailed on Dec. 12, 2024, 2 pages.

Notice of Allowance received for U.S. Appl. No. 17/745,680, mailed on Nov. 12, 2024, 8 pages.

Notice of Allowance received for U.S. Appl. No. 17/848,845, mailed on Oct. 11, 2024, 26 pages.

Notice of Allowance received for U.S. Appl. No. 17/950,868, mailed on Oct. 23, 2024, 10 pages.

Notice of Allowance received for U.S. Appl. No. 17/992,229, mailed on Oct. 22, 2024, 9 pages.

Notice of Allowance received for U.S. Appl. No. 18/077,891, mailed on Dec. 10, 2024, 9 pages.

Notice of Allowance received for U.S. Appl. No. 18/138,348, mailed on Nov. 13, 2024, 10 pages.

Notice of Allowance received for U.S. Appl. No. 18/234,613, mailed on Dec. 12, 2024, 7 pages.

Notice of Allowance received for U.S. Appl. No. 18/234,613, mailed on Oct. 11, 2024, 10 pages.

Notice of Allowance received for U.S. Appl. No. 18/389,655, mailed on Nov. 27, 2024, 8 pages.

Notice of Allowance received for U.S. Appl. No. 18/627,363, mailed on Dec. 20, 2024, 14 pages.

Office Action received for Australian Patent Application No. 2010350749, mailed on Oct. 16, 2013, 3 pages.

Office Action received for Australian Patent Application No. 2015201127, mailed on Mar. 21, 2016, 3 pages.

Office Action received for Australian Patent Application No. 2023204647, mailed on Sep. 19, 2024, 2 pages.

Office Action received for Australian Patent Application No. 2023266353, mailed on Sep. 19, 2024, 2 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Office Action received for Australian Patent Application No. 2024200283, mailed on Oct. 8, 2024, 2 pages.

Office Action received for Brazilian Patent Application No. BR112012025746-3, mailed on Jun. 2, 2020, 7 pages (4 pages of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 201010602653.9, mailed on Apr. 1, 2013, 21 pages (13 pages of English Translation and 8 pages of Official Copy).

Office Action received for Chinese Patent Application No. 201010602653.9, mailed on Dec. 9, 2013, 10 pages (6 pages of English Translation and 4 pages of Official Copy).

Office Action received for Chinese Patent Application No. 201010602653.9, mailed on May 15, 2014, 6 pages (3 pages of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 2010106600623.4, mailed on Apr. 28, 2014, 7 pages (4 pages of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 2010106600623.4, mailed on Jan. 24, 2014, 7 pages (4 pages of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 2010106600623.4, mailed on May 2, 2013, 27 pages (15 pages of English Translation and 12 pages of Official Copy).

Office Action received for Chinese Patent Application No. 201410575145.4, mailed on Feb. 13, 2017, 18 pages (11 pages of English Translation and 7 pages of Official Copy).

Office Action received for Chinese Patent Application No. 201410575145.4, mailed on Nov. 30, 2017, 17 pages (11 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202080032669.2, mailed on Sep. 20, 2024, 9 pages (4 pages of English Translation and 5 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202110817799.3, mailed on Sep. 4, 2024, 23 pages (15 pages of English Translation and 8 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202310794146.7, mailed on Aug. 30, 2024, 18 pages (11 pages of English Translation and 7 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202310794146.7, mailed on Nov. 13, 2024, 17 pages (11 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202311305998.1, mailed on Oct. 19, 2024, 6 pages (3 pages of English Translation and 3 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202311753064.4, mailed on Aug. 23, 2024, 18 pages (11 pages of English Translation and 7 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202311831154.0, mailed on Aug. 30, 2024, 13 pages (7 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202311835200.4, mailed on Aug. 29, 2024, 16 pages (7 pages of English Translation and 9 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202410030102.1, mailed on Jul. 23, 2024, 18 pages (9 pages of English Translation and 9 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202410229610.2, mailed on Dec. 2, 2024, 14 pages (8 pages of English Translation and 6 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202410229610.2, mailed on Sep. 3, 2024, 14 pages (7 pages of English Translation and 7 pages of Official Copy).

Office Action received for European Patent Application No. 10763539.3, mailed on Jun. 13, 2016, 5 pages.

Office Action received for European Patent Application No. 22196865.4, mailed on Oct. 18, 2024, 6 pages.

Office Action received for European Patent Application No. 22705232.1, mailed on Sep. 26, 2024, 8 pages.

Office Action received for European Patent Application No. 22733778.9, mailed on Oct. 22, 2024, 6 pages.

Office Action received for European Patent Application No. 22792995.7, mailed on Oct. 15, 2024, 8 pages.

Office Action received for Japanese Patent Application No. 2013-503731, mailed on Mar. 3, 2014, 8 pages (2 pages of English Translation and 6 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2013-503731, mailed on Sep. 24, 2013, 3 pages (1 page of English Translation and 2 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2014-212867, mailed on Aug. 18, 2017, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2014-212867, mailed on Jun. 29, 2015, 8 pages (4 pages of English Translation and 4 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2016-151497, mailed on Sep. 25, 2017, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2018-127760, mailed on Feb. 22, 2019, 10 pages (5 pages of English Translation and 5 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2018-127760, mailed on Jul. 5, 2019, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2019-182484, mailed on Dec. 4, 2020, 6 pages (1 page of English Translation and 5 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2022-197327, mailed on Mar. 1, 2024, 14 pages (7 pages of English Translation and 7 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2023-572748, mailed on Jul. 29, 2024, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

Office Action received for Japanese Patent Application No. 2024-146741, mailed on Nov. 24, 2024, 12 pages (6 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2012-7028535, mailed on Nov. 26, 2013, 10 pages (4 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2014-7005164, mailed on May 23, 2014, 15 pages (6 pages of English Translation and 9 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2014-7029838, mailed on Dec. 20, 2014, 13 pages (5 pages of English Translation and 8 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2015-7007050, mailed on Apr. 16, 2015, 14 pages (6 pages of English Translation and 8 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2015-7007050, mailed on Oct. 23, 2015, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2016-7014580, mailed on Jan. 30, 2018, 10 pages (4 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2016-7014580, mailed on Jul. 30, 2018, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2016-7014580, mailed on Jun. 29, 2017, 7 pages (1 page of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2016-7014580, mailed on Sep. 19, 2018, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2016-7014580, mailed on Sep. 27, 2016, 9 pages (4 pages of English Translation and 5 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2017-7002774, mailed on Apr. 18, 2017, 10 pages (4 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2017-7002774, mailed on Jul. 30, 2018, 6 pages (3 pages of English Translation and 3 pages of Official Copy).

(56)

References Cited**OTHER PUBLICATIONS**

Office Action received for Korean Patent Application No. 10-2017-7002774, mailed on Sep. 20, 2018, 12 pages (6 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2018-7036975, mailed on Mar. 22, 2019, 11 pages (5 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2020-7002845, mailed on Feb. 17, 2020, 14 pages (6 pages of English Translation and 8 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2020-7034959, mailed on Jan. 27, 2022, 7 pages (3 pages of English Translation and 4 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2020-7034959, mailed on Mar. 2, 2021, 12 pages (5 pages of English Translation and 7 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2020-7034959, mailed on Oct. 27, 2021, 8 pages (4 pages of English Translation and 4 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2022-7006973, mailed on May 19, 2022, 10 pages (4 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2022-7006973, mailed on Nov. 24, 2022, 6 pages (3 pages of English Translation and 3 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2023-7005442, mailed on Jul. 25, 2023, 10 pages (4 pages of English Translation and 6 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2024-7019962, mailed on Sep. 25, 2024, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Office Action received for Korean Patent Application No. 10-2024-7028393, mailed on Sep. 24, 2024, 6 pages (2 pages of English Translation and 4 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2014/004295, mailed on Aug. 21, 2014, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2014/004295, mailed on Jan. 20, 2015, 4 pages (1 page of English Translation and 3 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2015/010523, mailed on Jan. 26, 2016, 4 pages (2 pages of English Translation and 2 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2016/012174, mailed on Apr. 10, 2019, 7 pages (4 pages of English Translation and 3 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2016/012174, mailed on Aug. 8, 2019, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2020/003290, mailed on Nov. 11, 2022, 7 pages (2 pages of English Translation and 5 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2020/003290, mailed on Oct. 26, 2022, 8 pages (3 pages of English Translation and 5 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2023/005388, mailed on Dec. 15, 2023, 18 pages (9 pages of English Translation and 9 pages of Official Copy).

Office Action received for Mexican Patent Application No. MX/a/2023/005388, mailed on Jun. 2, 2023, 24 pages (12 pages of English Translation and 12 pages of Official Copy).

Office Action received for Taiwanese Patent Application No. 099132253, mailed on Jun. 24, 2013, 16 pages (8 pages of English Translation and 8 pages of Official Copy).

Office Action received for Taiwanese Patent Application No. 099132253, mailed on Mar. 27, 2014, 10 pages (4 pages of English Translation and 6 pages of Official Copy).

Office Action received for Taiwanese Patent Application No. 099132254, mailed on May 27, 2013, 24 pages (12 pages of English Translation and 12 pages of Official Copy).

Prabeesh RK., "Android Studio Tutorial-17—Highlight selected item in a ListView", Available Online at: <https://www.youtube.com/watch?v=W6bBYmXP0HY>, Feb. 24, 2015, 5 pages.

Samsung, "SM-G900F User Manual", English (EU). Rev.1.0, Mar. 2014, 249 pages.

Sharf et al., "SnapPaste: an interactive technique for easy mesh composition", The Visual Computer; International Journal Of Computer Graphics, Springer, Berlin, DE, vol. 22, No. 9-11. Available Online at <<http://dx.doi.org/10.1007/s00371-006-0068-5>>, Aug. 25, 2006, pp. 835-844.

Sony Ericsson Mobile Comm., "User guide SmartWatch MN2", Available online at: <https://manualzz.com/doc/23127468/sony-smartwatch-mn2-user-guide>, Dec. 2011, 19 pages.

Sony, "Sony Smartwatch 3 SWR50", User Guide, Jul. 2014, 31 pages.

Supplemental Notice of Allowance received for U.S. Appl. No. 17/484,899, mailed on Oct. 29, 2024, 5 pages.

Supplemental Notice of Allowance received for U.S. Appl. No. 17/484,899, mailed on Sep. 30, 2024, 5 pages.

Szogyenyi, Zina, "Improving the usability of multi-selecting from a long list", Available online at: <https://medium.com/tripaneer-techblog/improving-the-usability-of-multi-selecting-from-a-long-list-63e1a67aab35>, Jun. 13, 2018, 12 pages.

"User Manual", Available online at <<http://www.manualslib.com/download/754923/Samsung-Gear-2.html>>, Apr. 9, 2014, 97 pages.

Advisory Action received for U.S. Appl. No. 17/747,804, mailed on Jun. 23, 2023, 6 pages.

Applicant-Initiated Interview Summary received for U.S. Appl. No. 17/306,354, mailed on Jun. 28, 2023, 3 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/950,900, mailed on Jun. 30, 2023, 2 pages.

Corrected Notice of Allowance received for U.S. Appl. No. 17/989,086, mailed on Jun. 22, 2023, 2 pages.

Examiner Interview Summary received for U.S. Appl. No. 17/903,946, mailed on Jun. 28, 2023, 2 pages.

Final Office Action received for U.S. Appl. No. 16/830,838, mailed on Jun. 26, 2023, 16 pages.

Non-Final Office Action received for U.S. Appl. No. 17/746,789, mailed on Jun. 22, 2023, 8 pages.

Notice of Allowance received for Japanese Patent Application No. 2020-047952, mailed on Jun. 26, 2023, 25 pages (1 page of English Translation and 24 pages of Official Copy).

Office Action received for Chinese Patent Application No. 202111652452.4, mailed on May 19, 2023, 15 pages (8 pages of English Translation and 7 pages of Official Copy).

Office Action received for European Patent Application No. 18779093.6, mailed on Jun. 28, 2023, 4 pages.

* cited by examiner

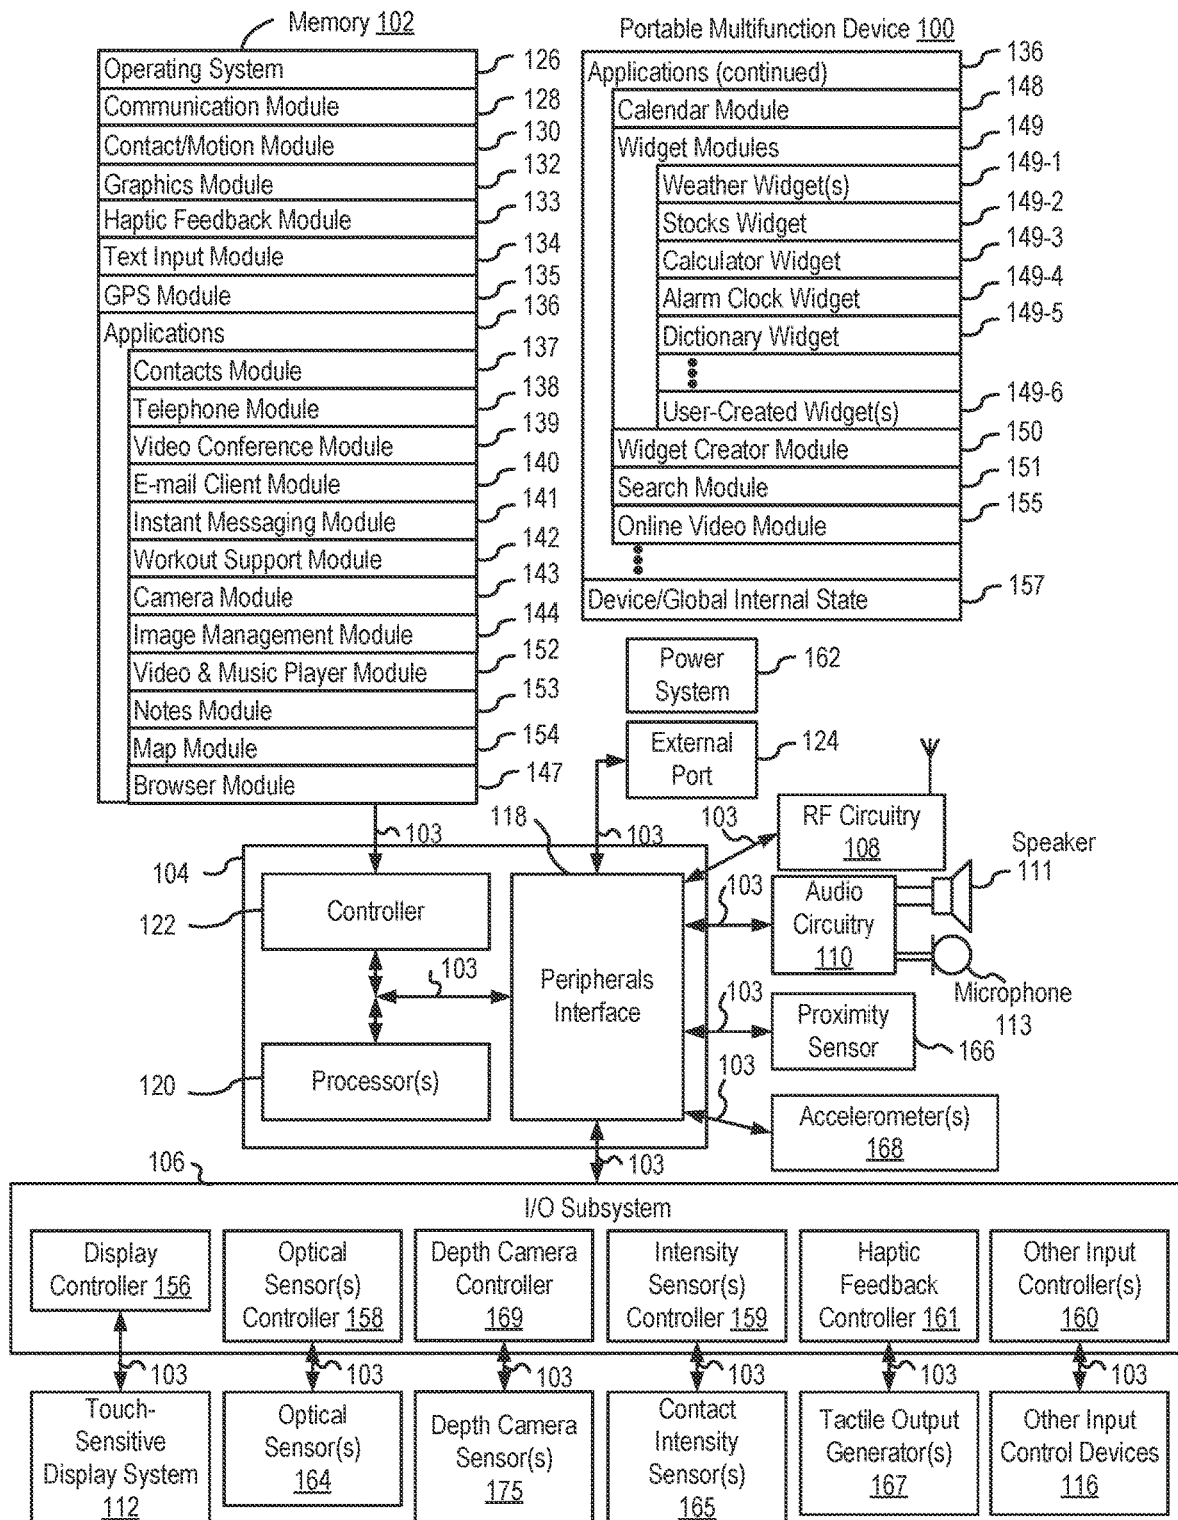


FIG. 1A

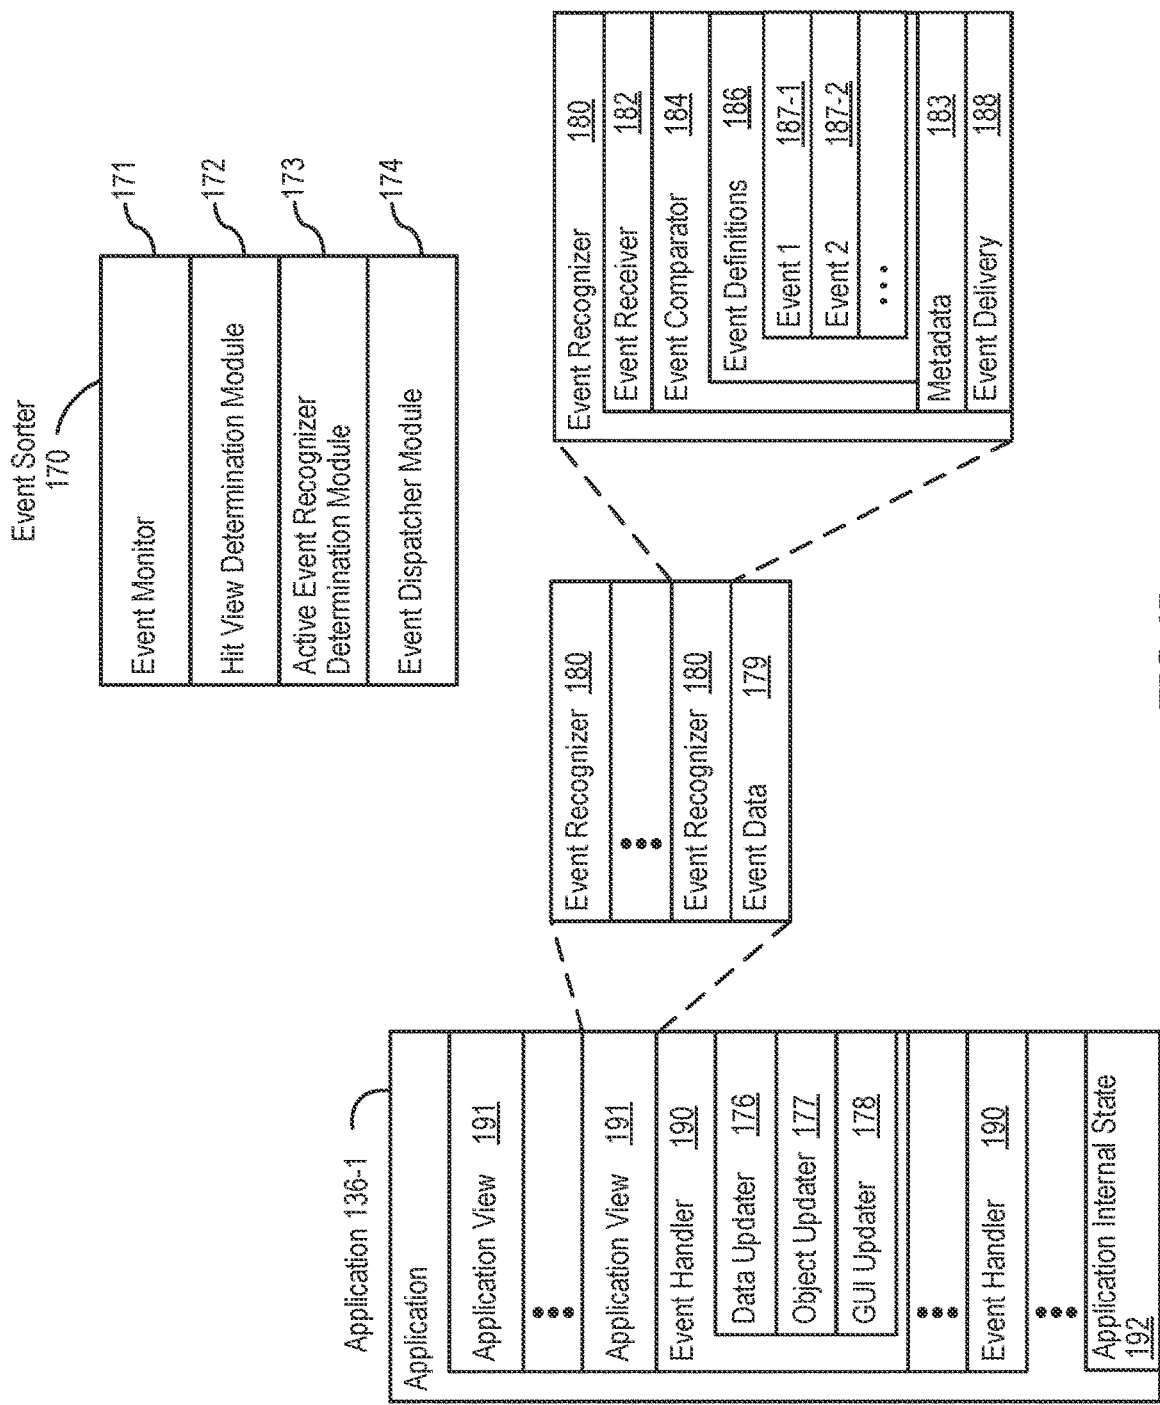


FIG. 1B

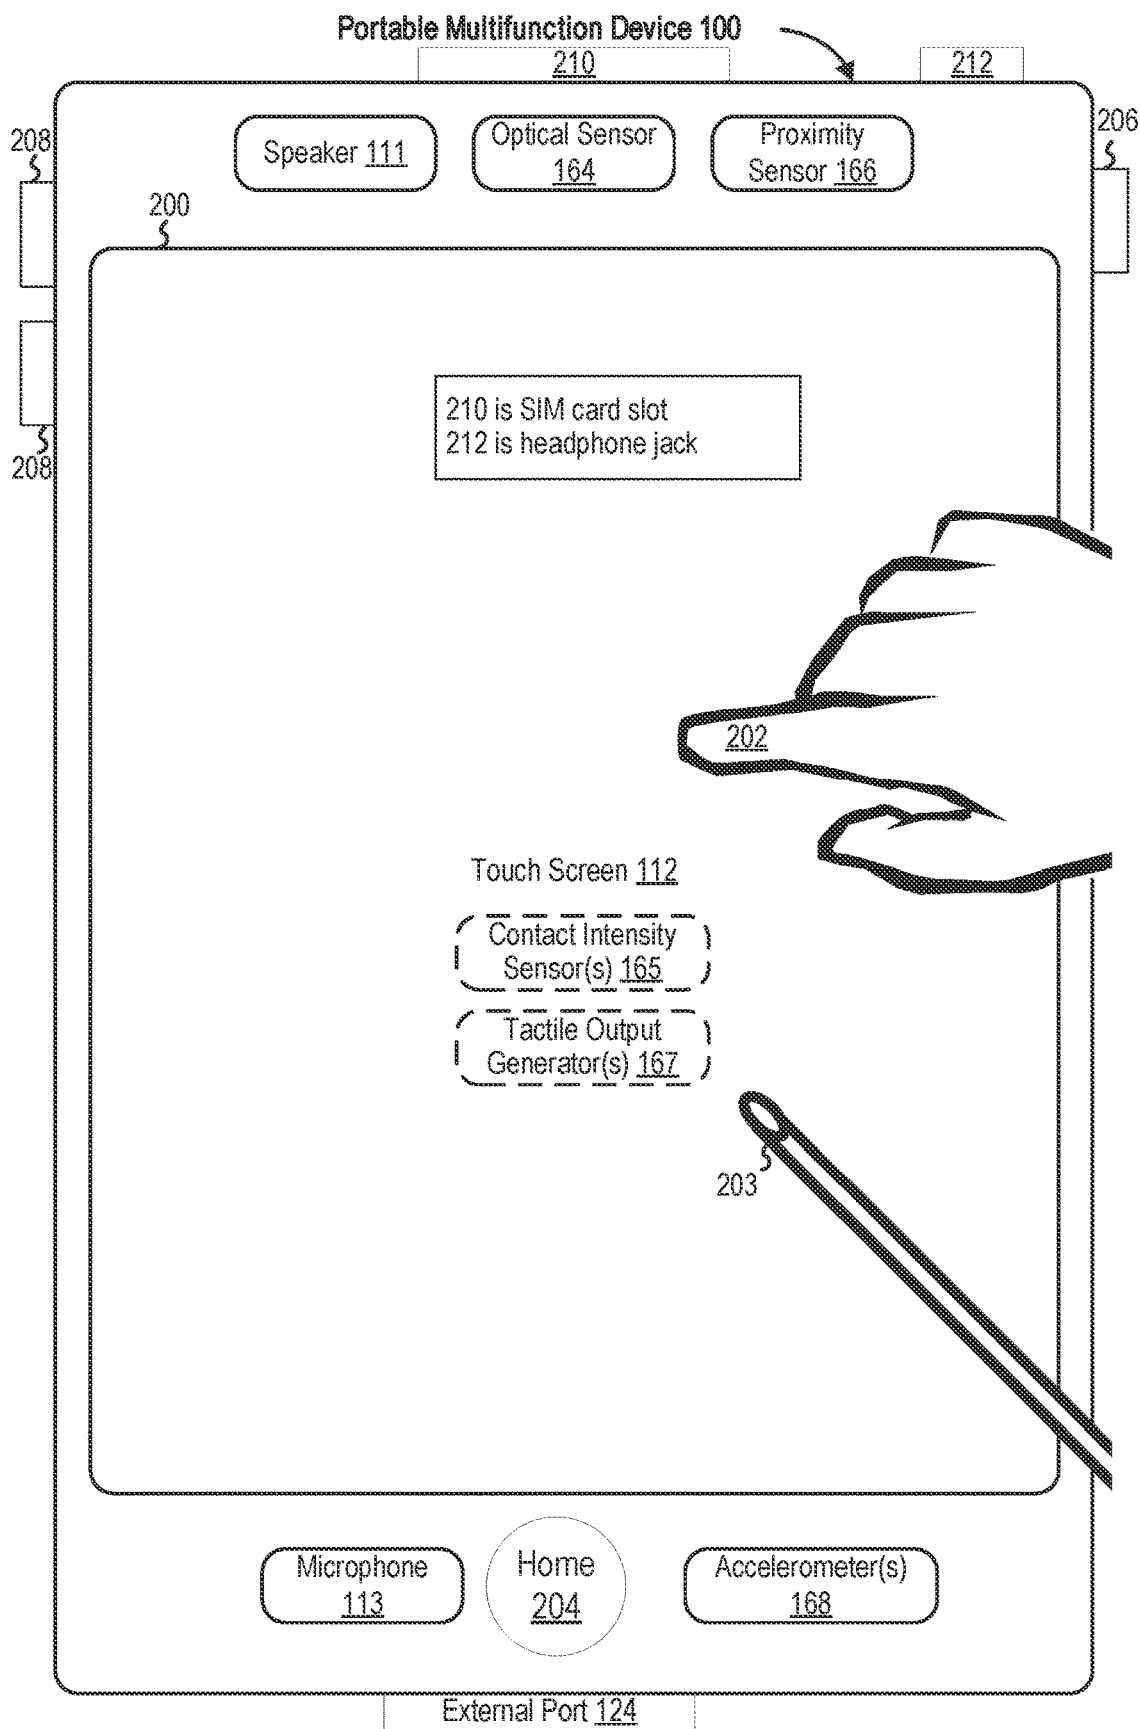


FIG. 2

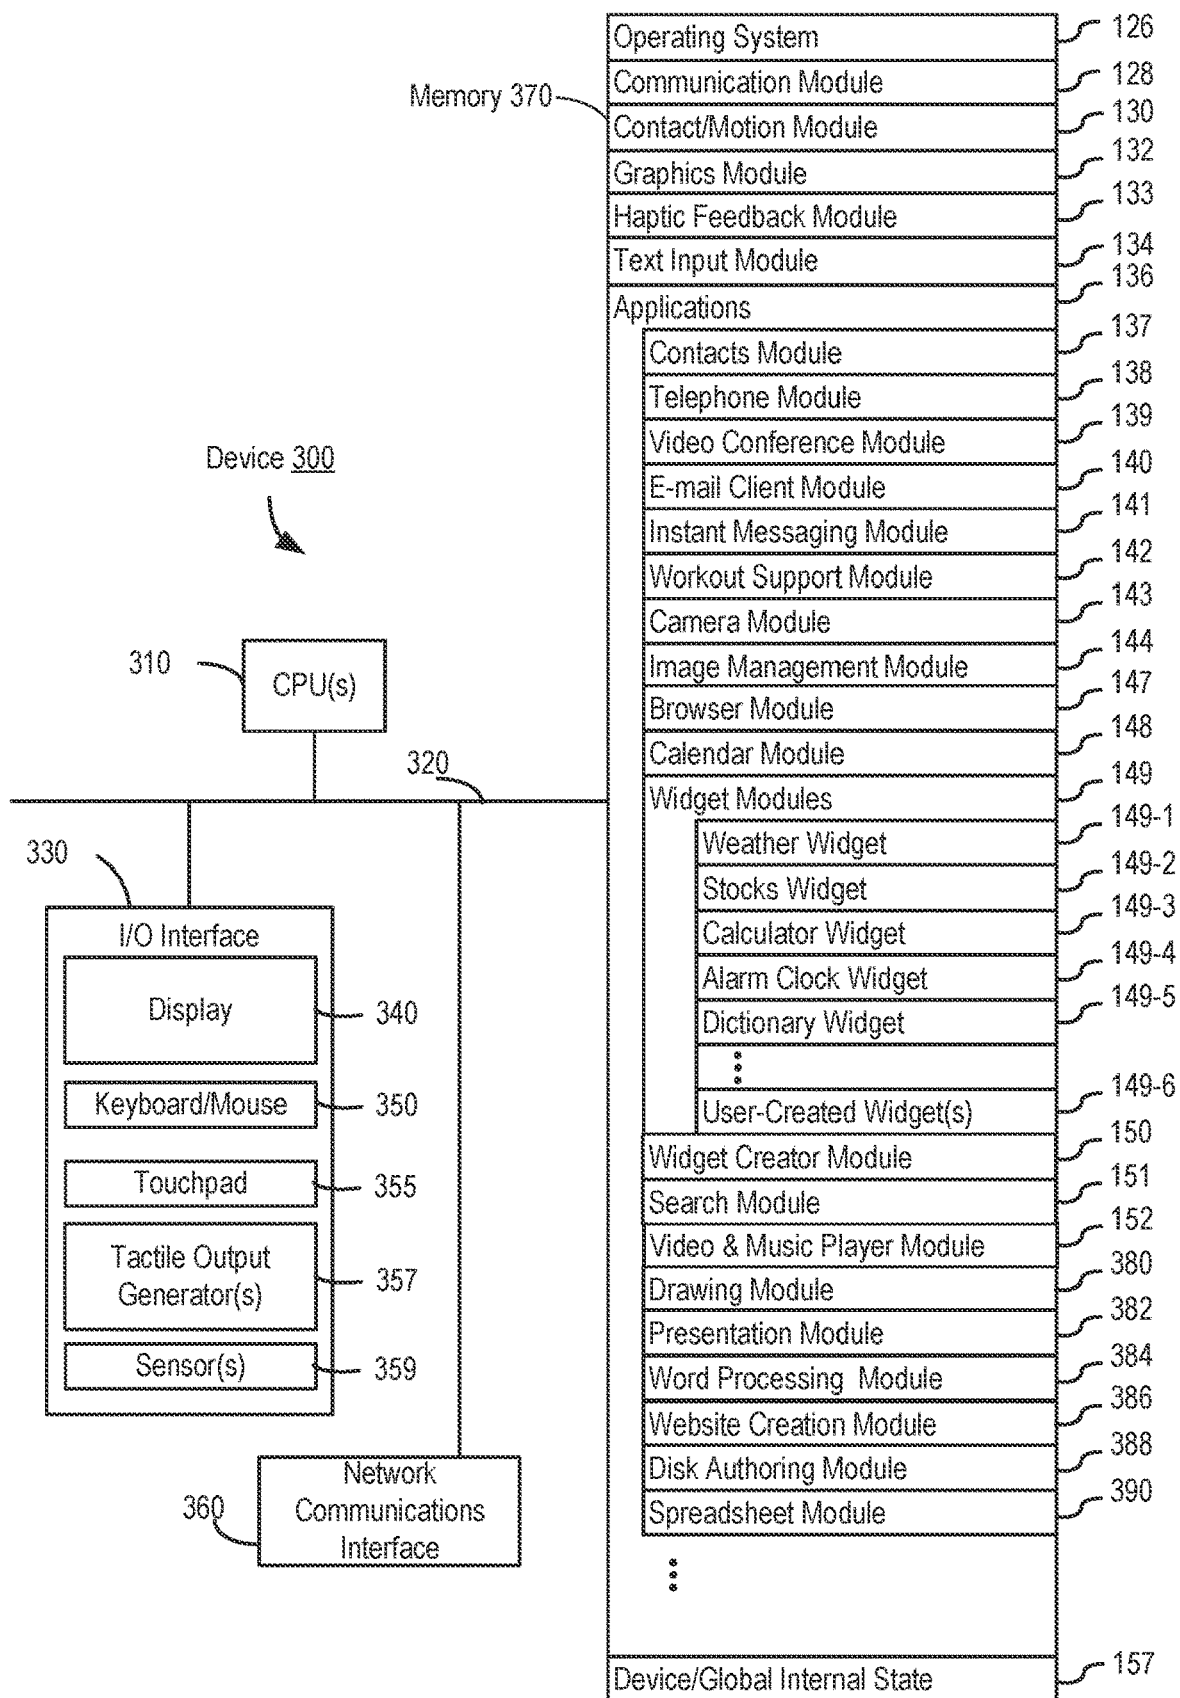


FIG. 3

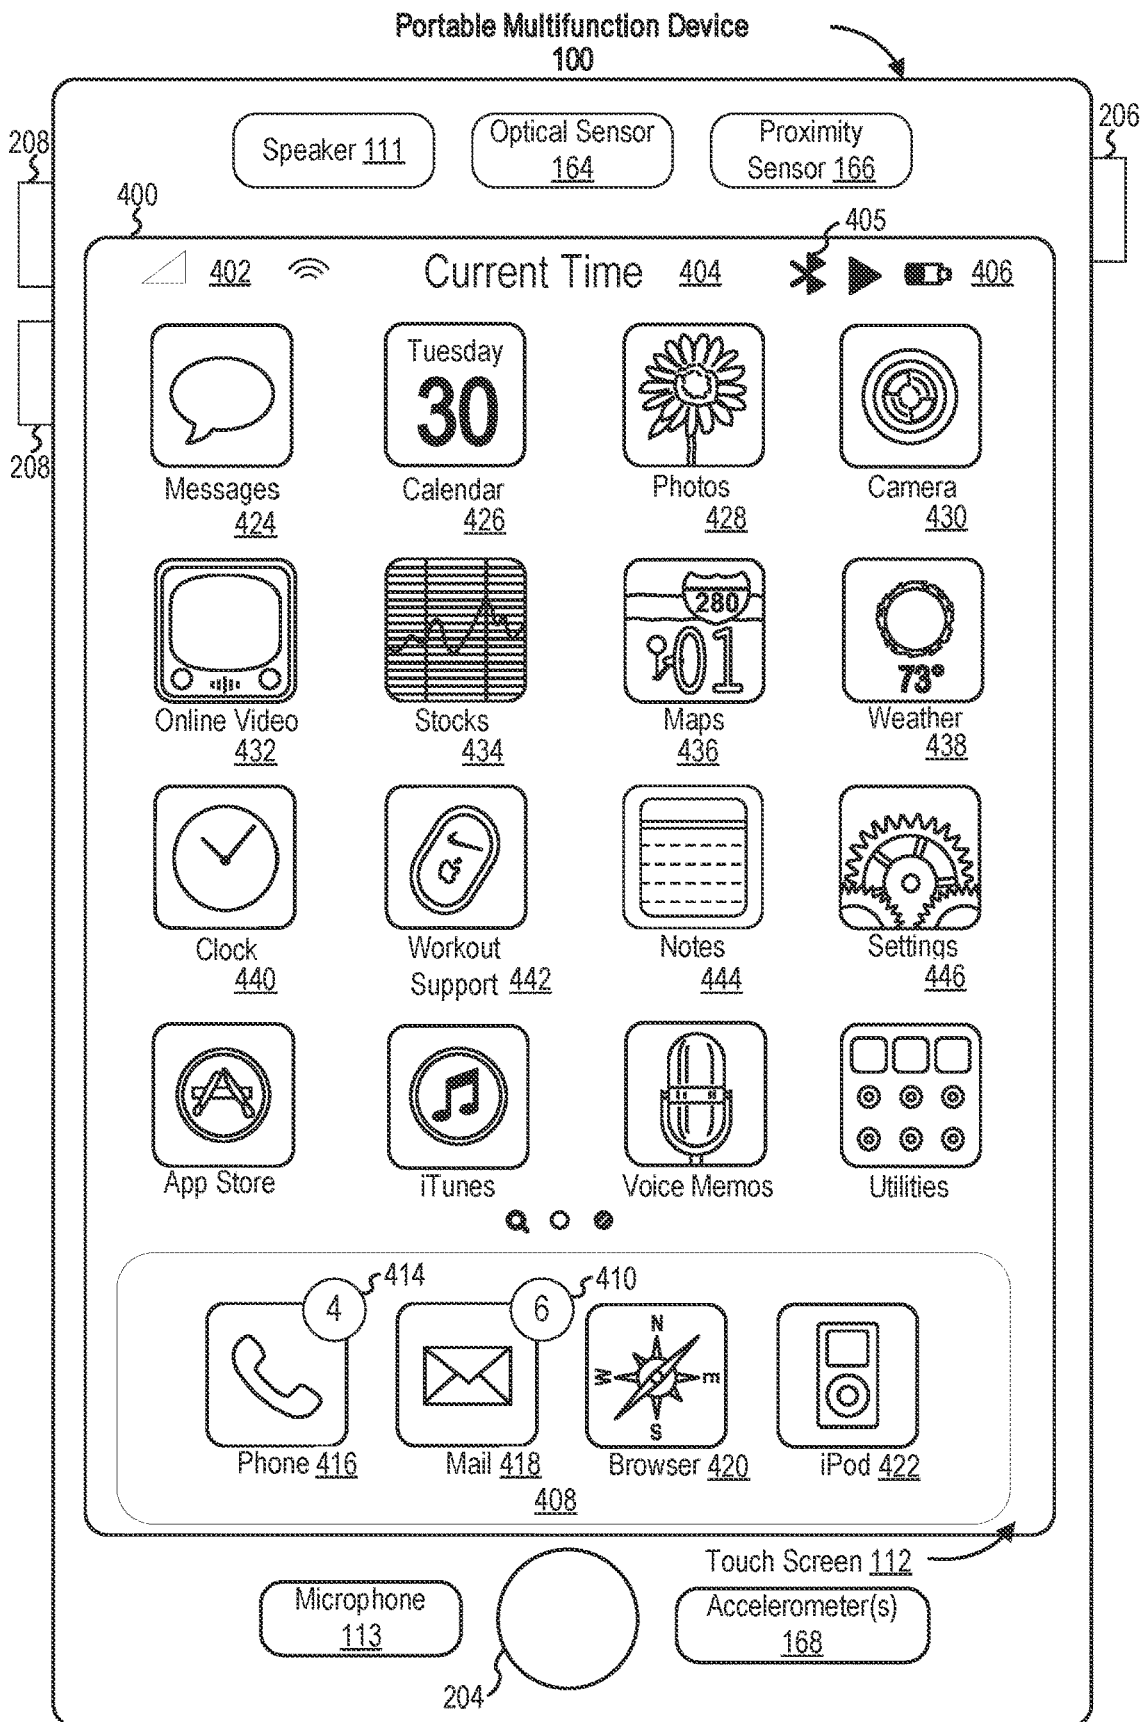


FIG. 4A

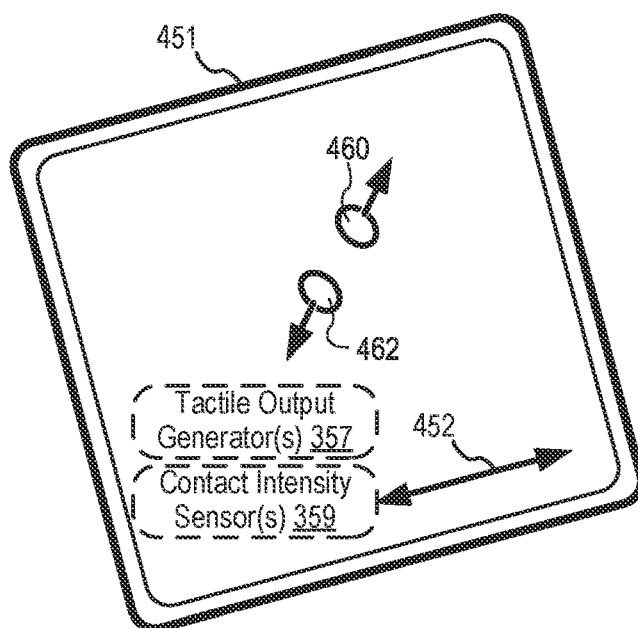
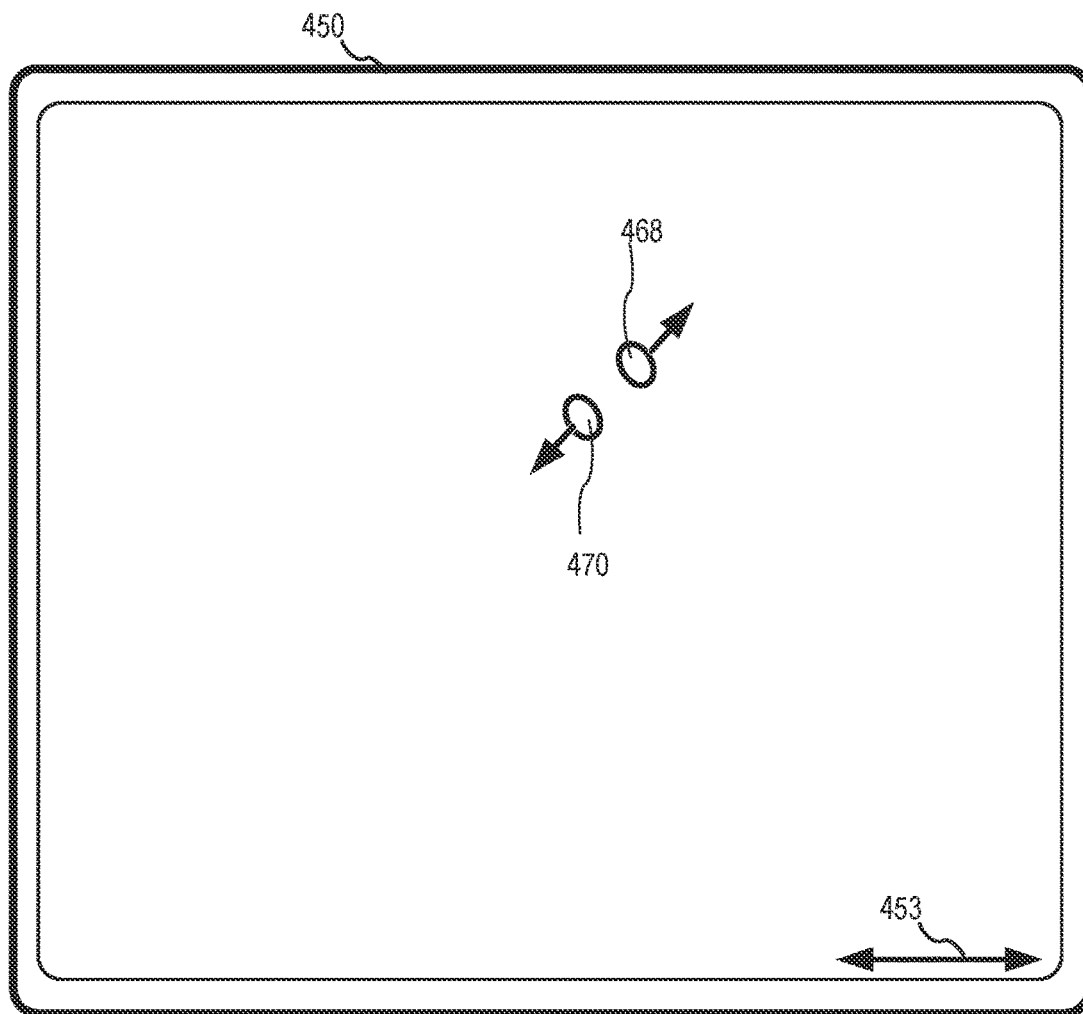


FIG. 4B

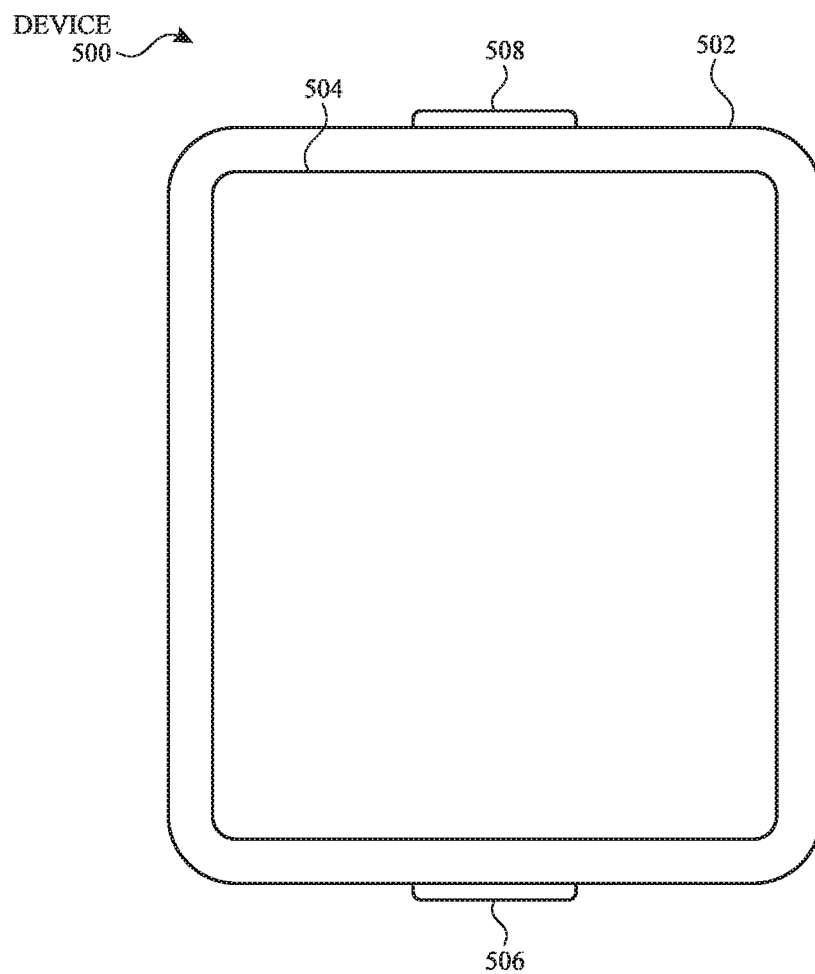


FIG. 5A

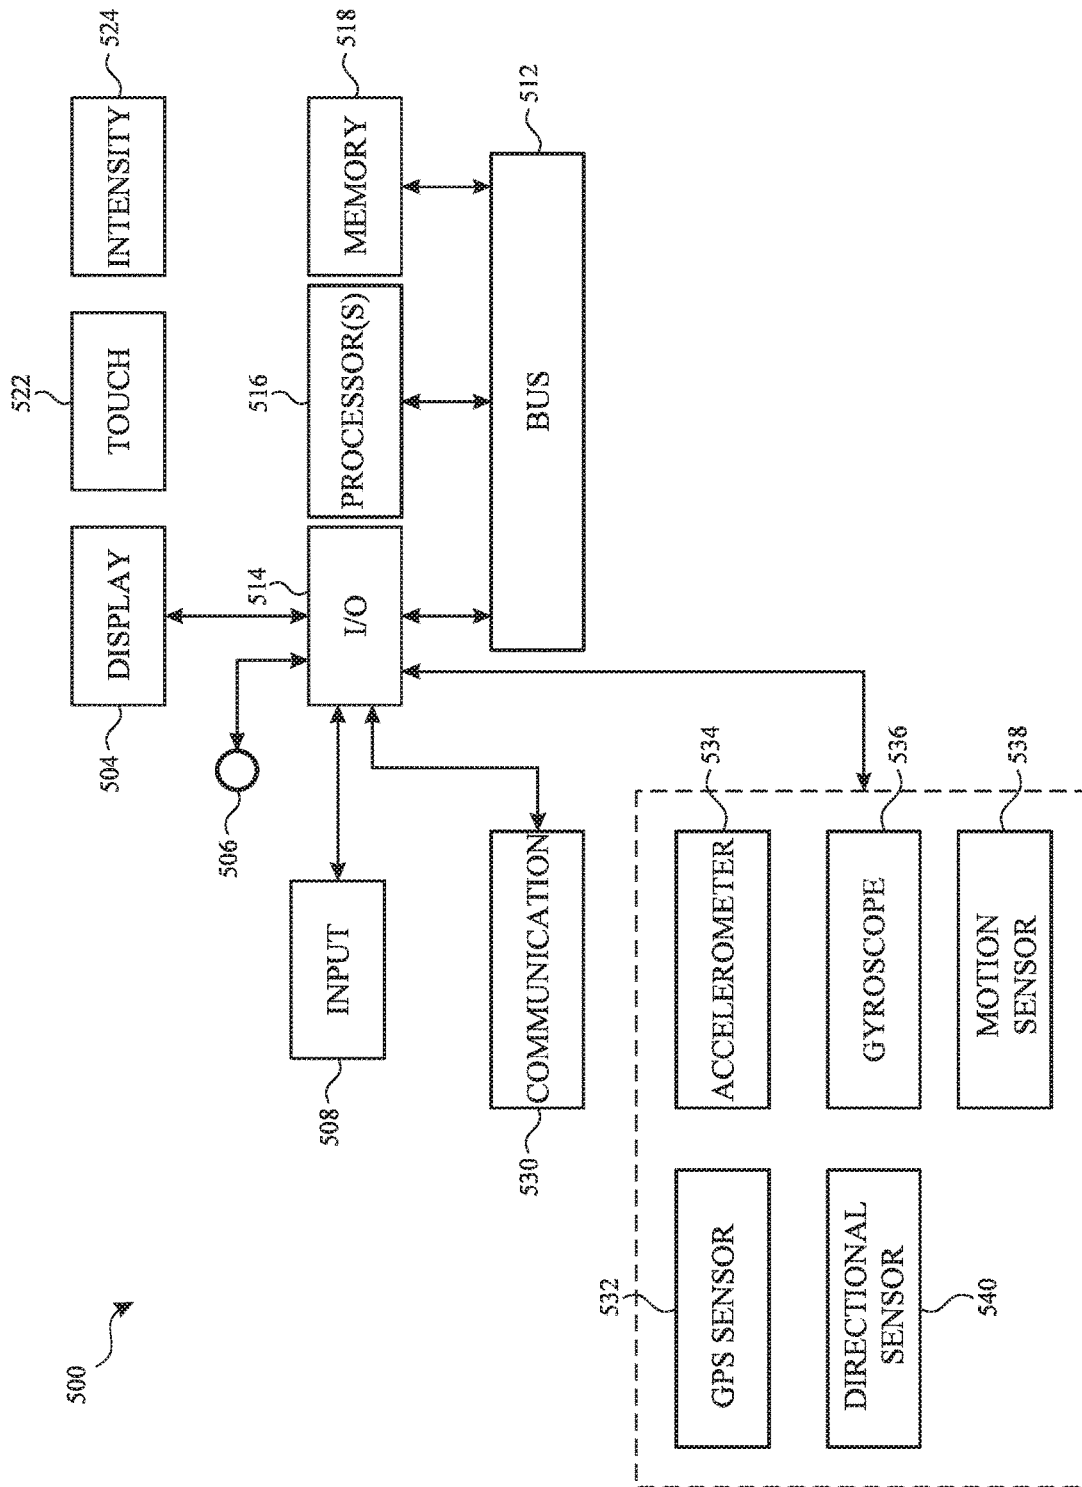


FIG. 5B

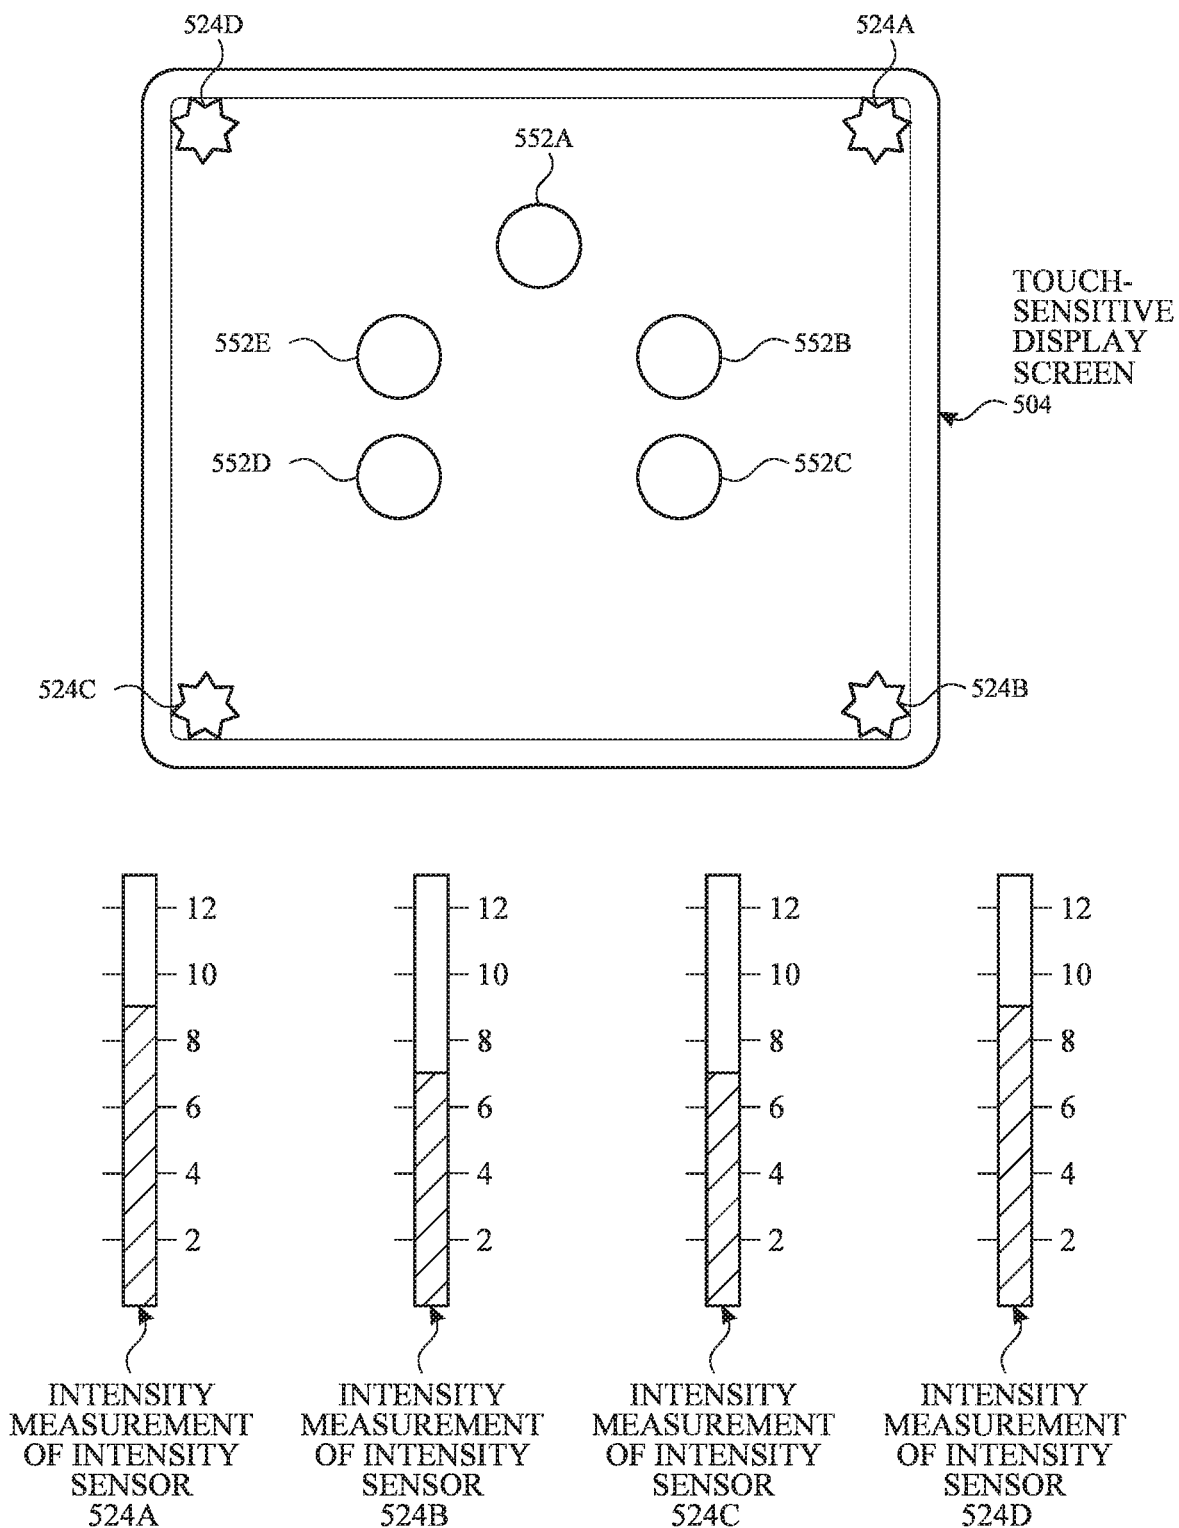


FIG. 5C

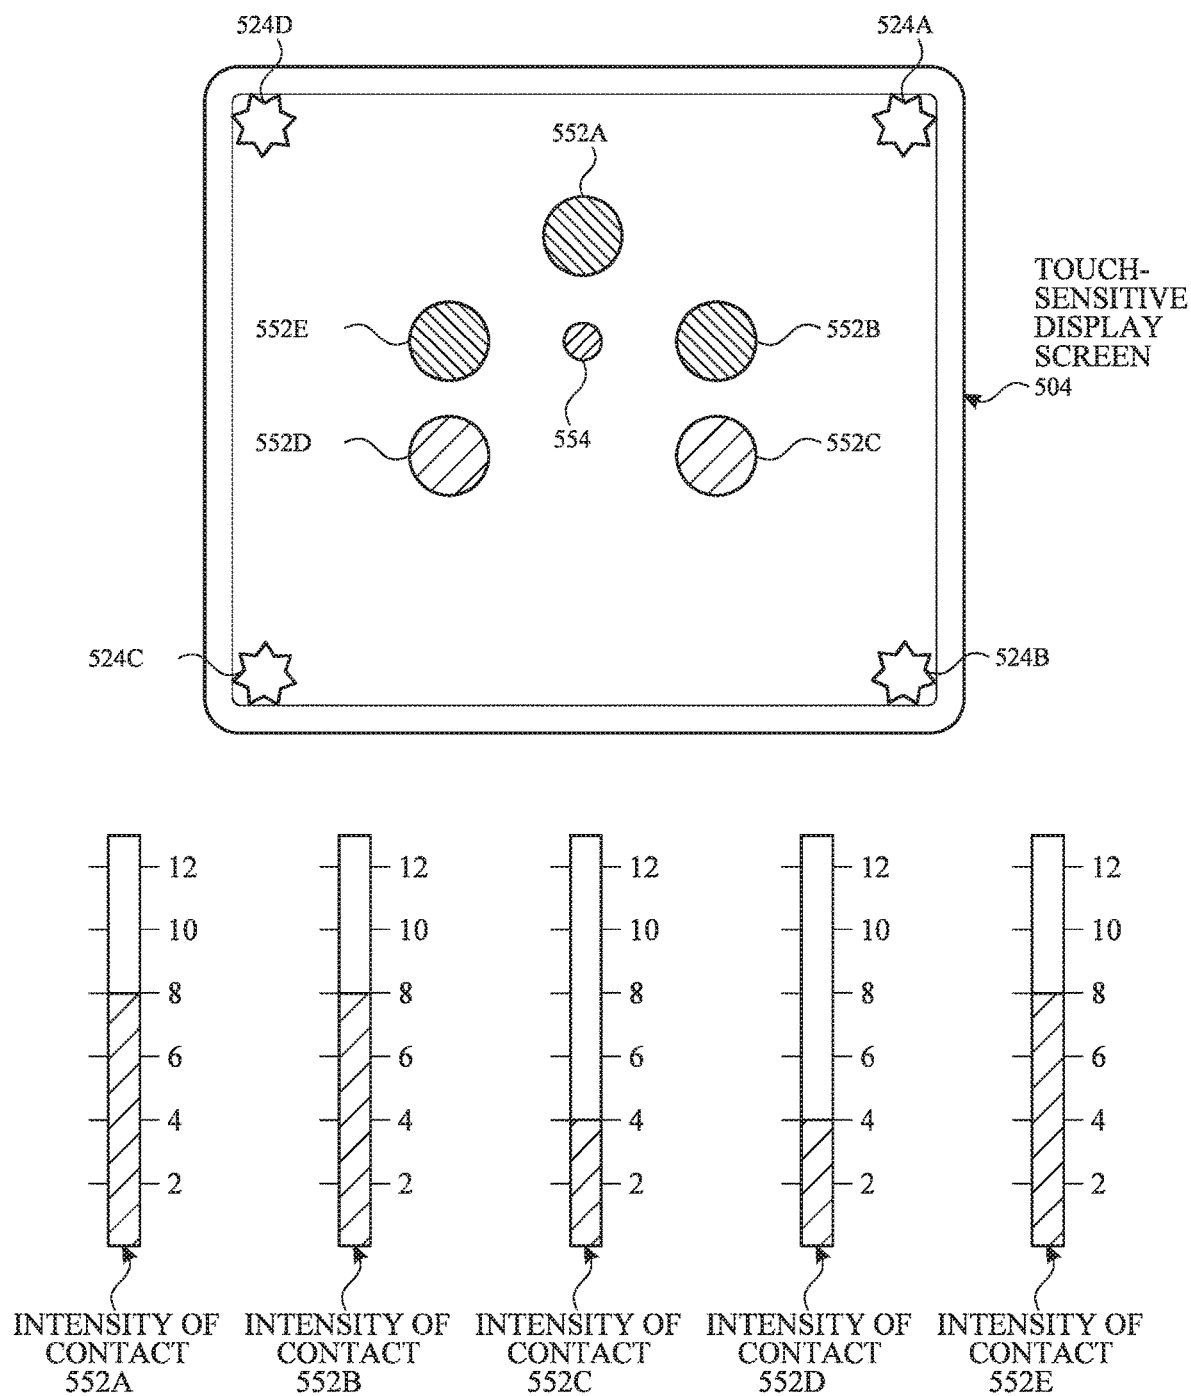


FIG. 5D

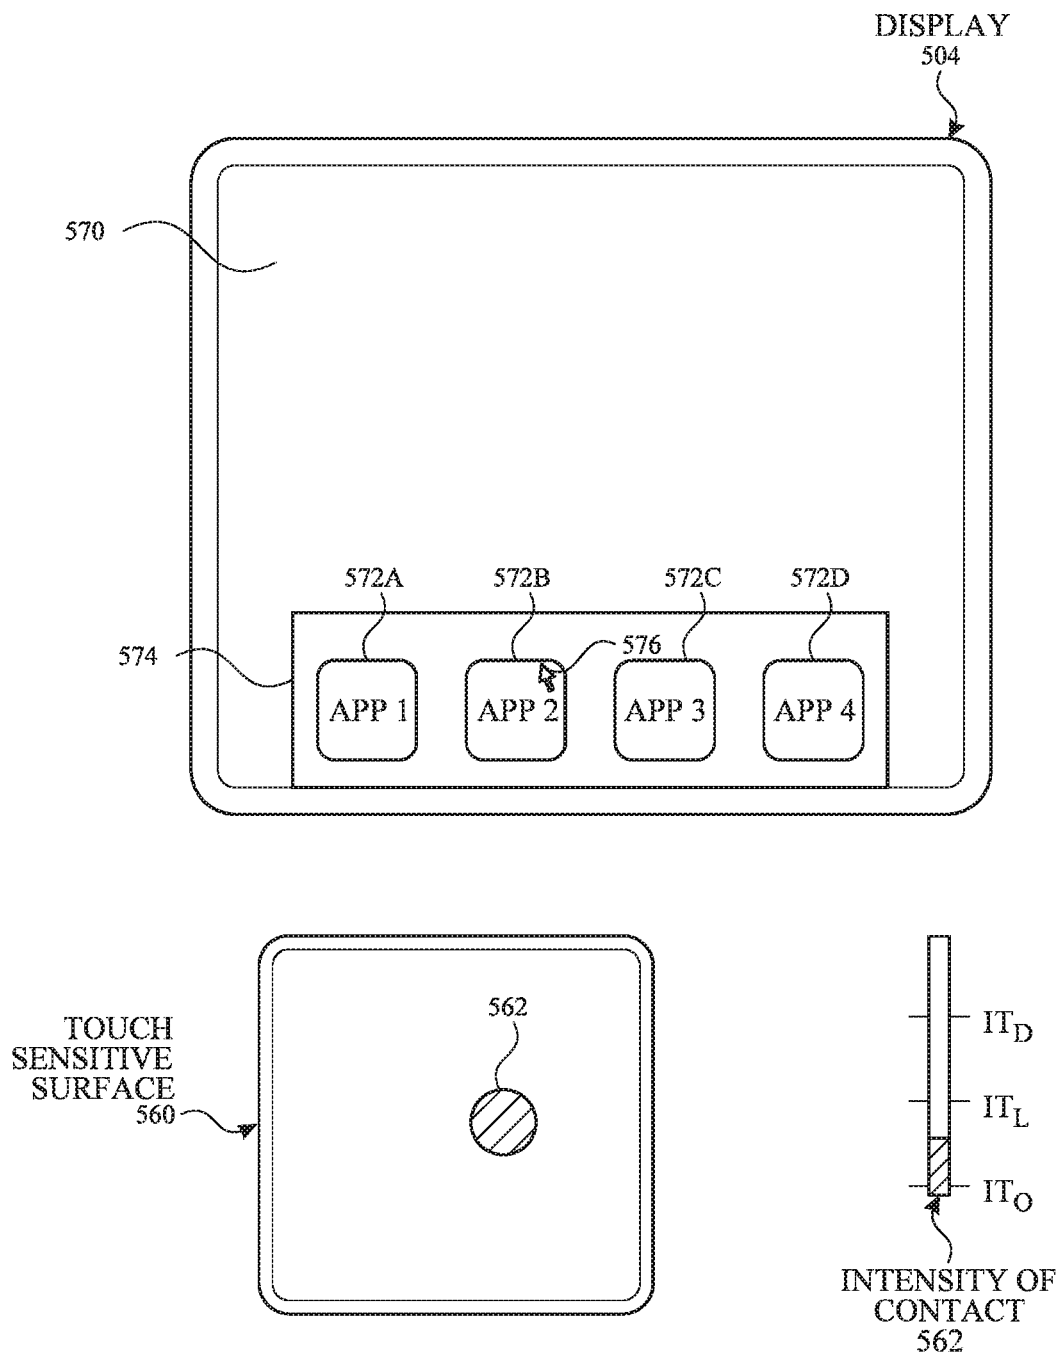


FIG. 5E

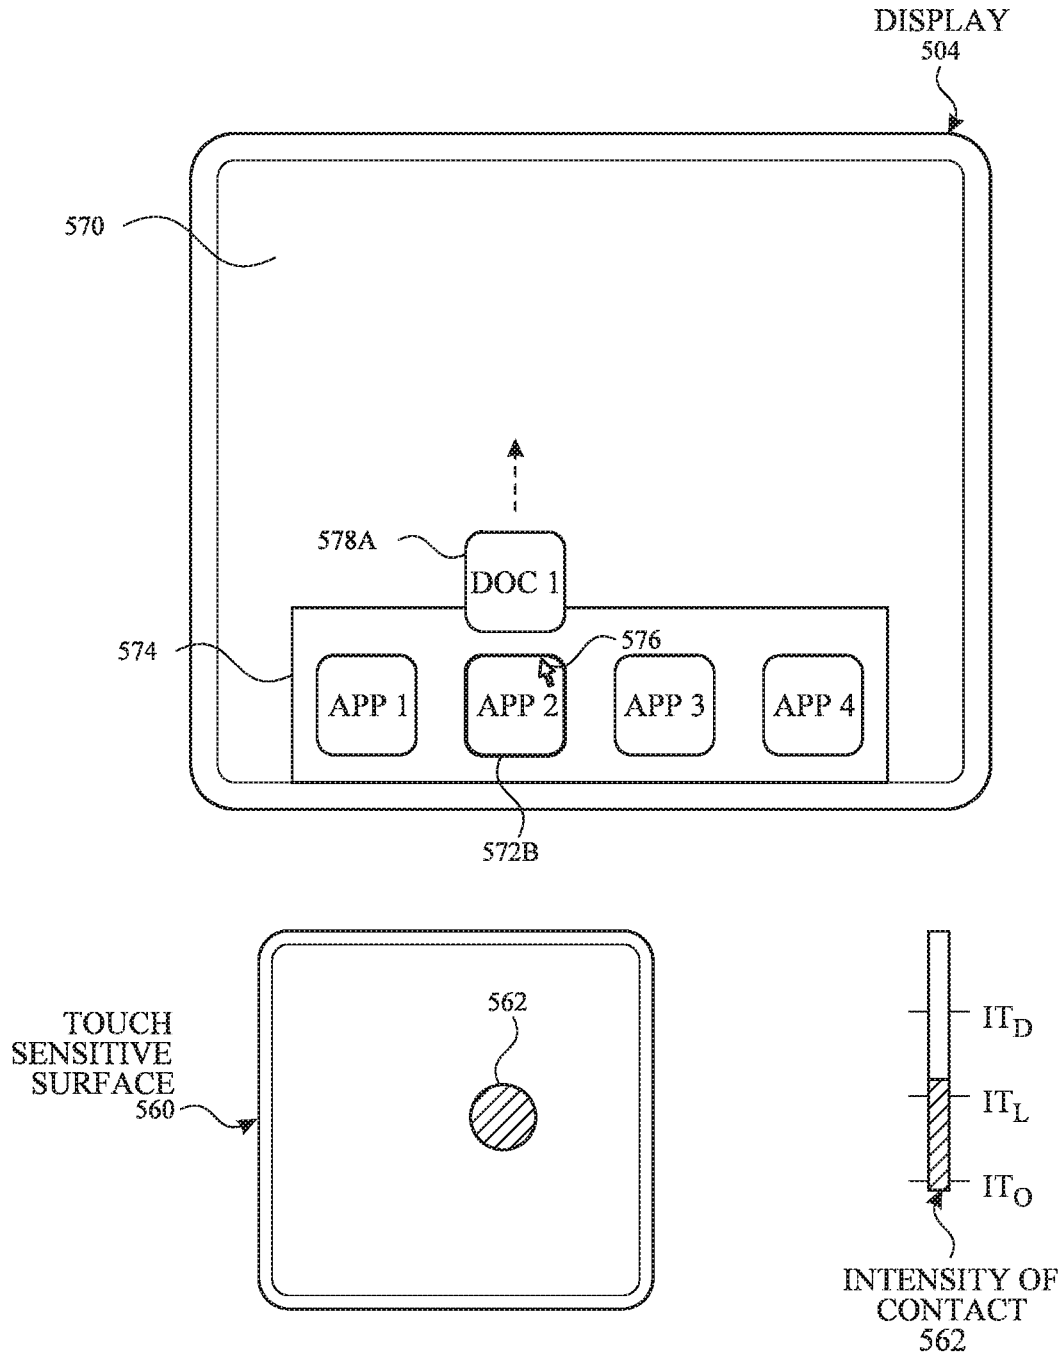
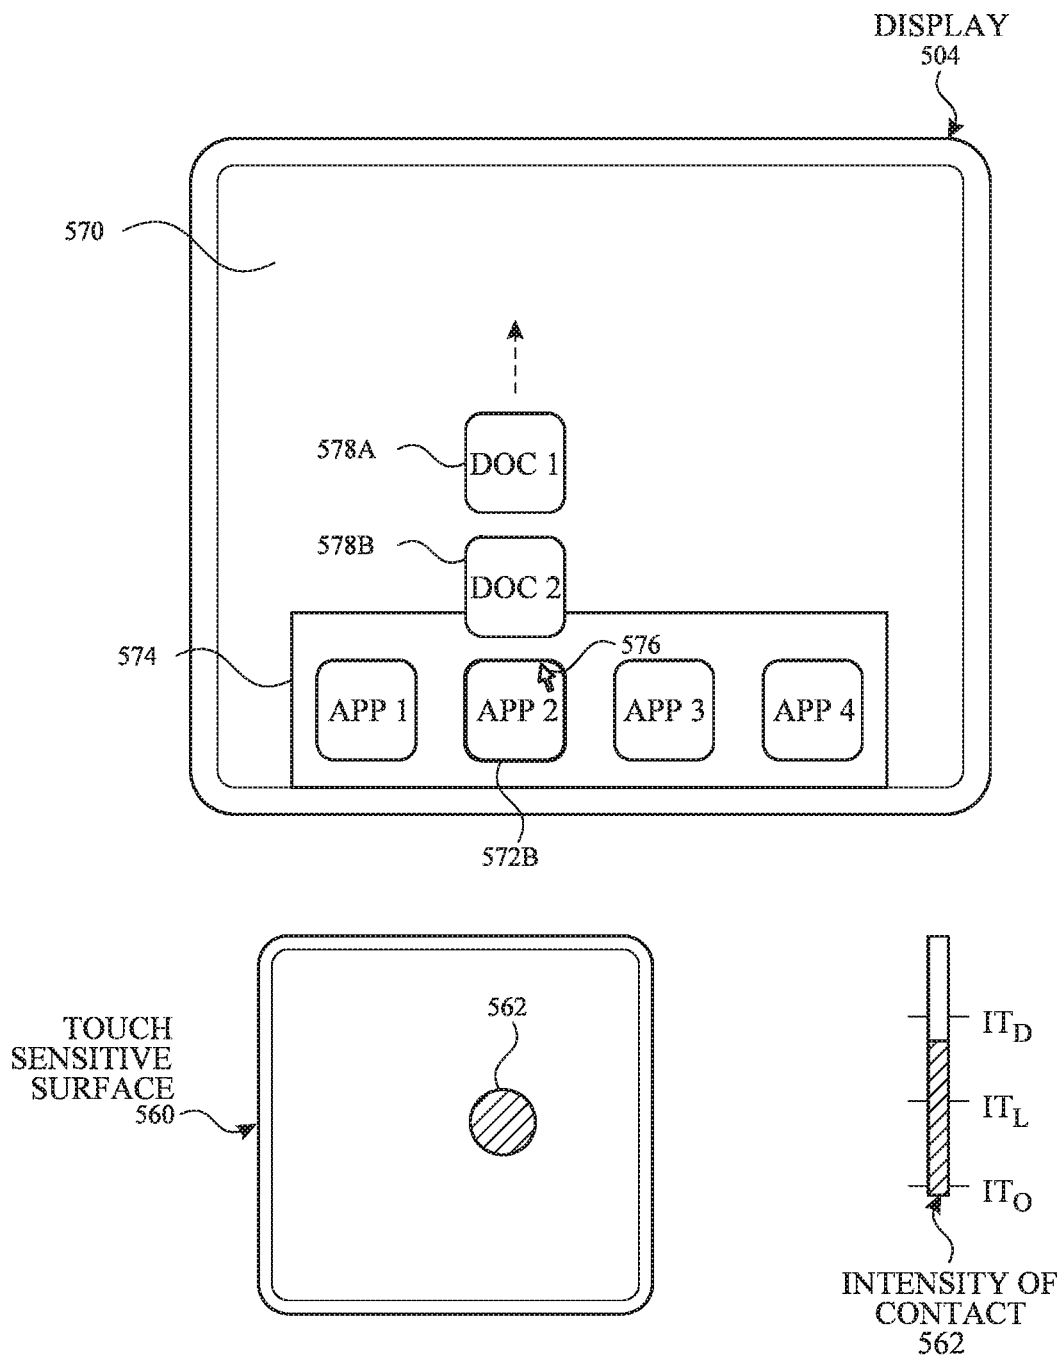


FIG. 5F



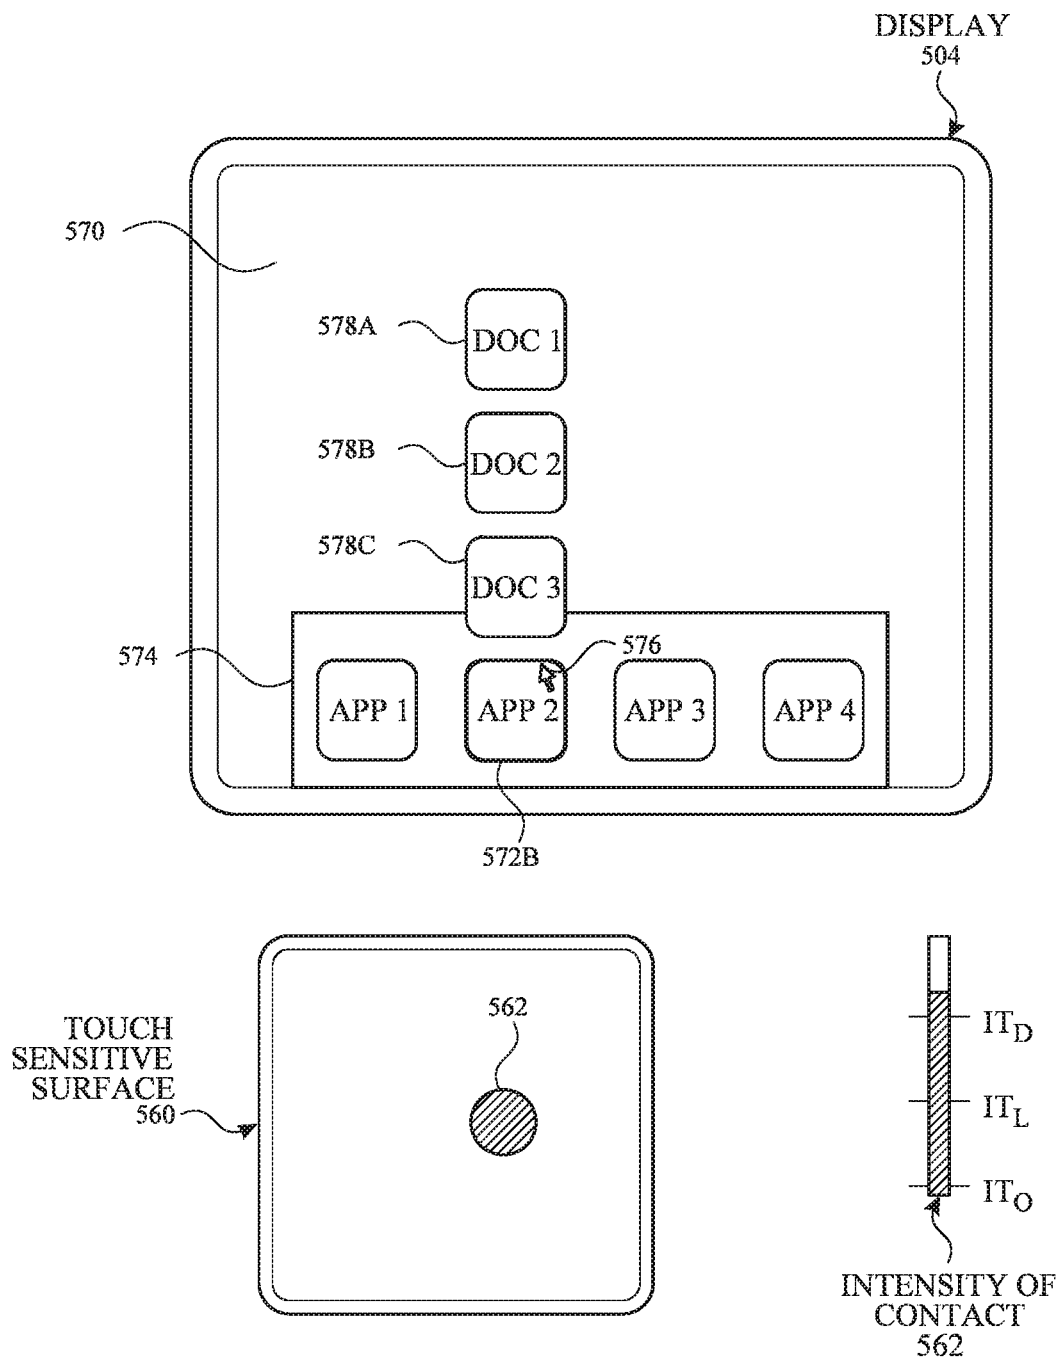


FIG. 5H

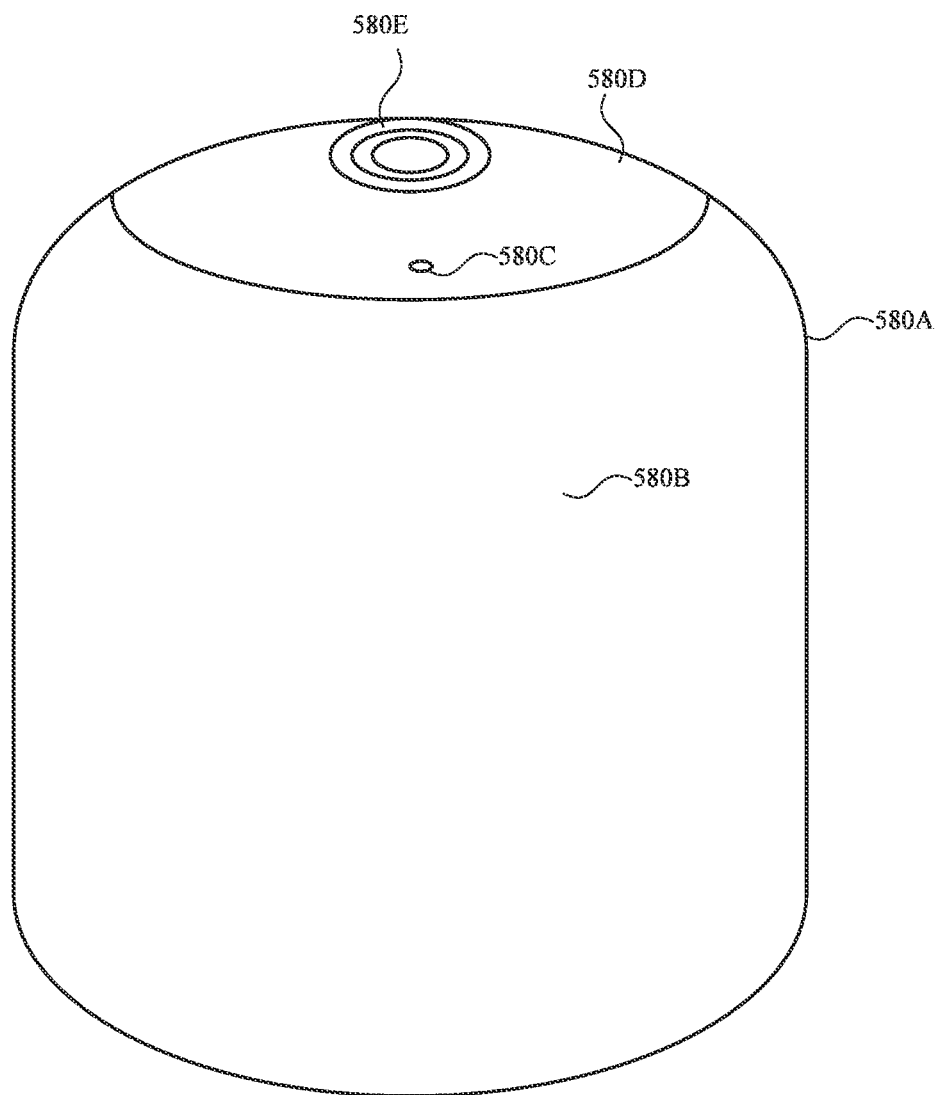


FIG. 5I

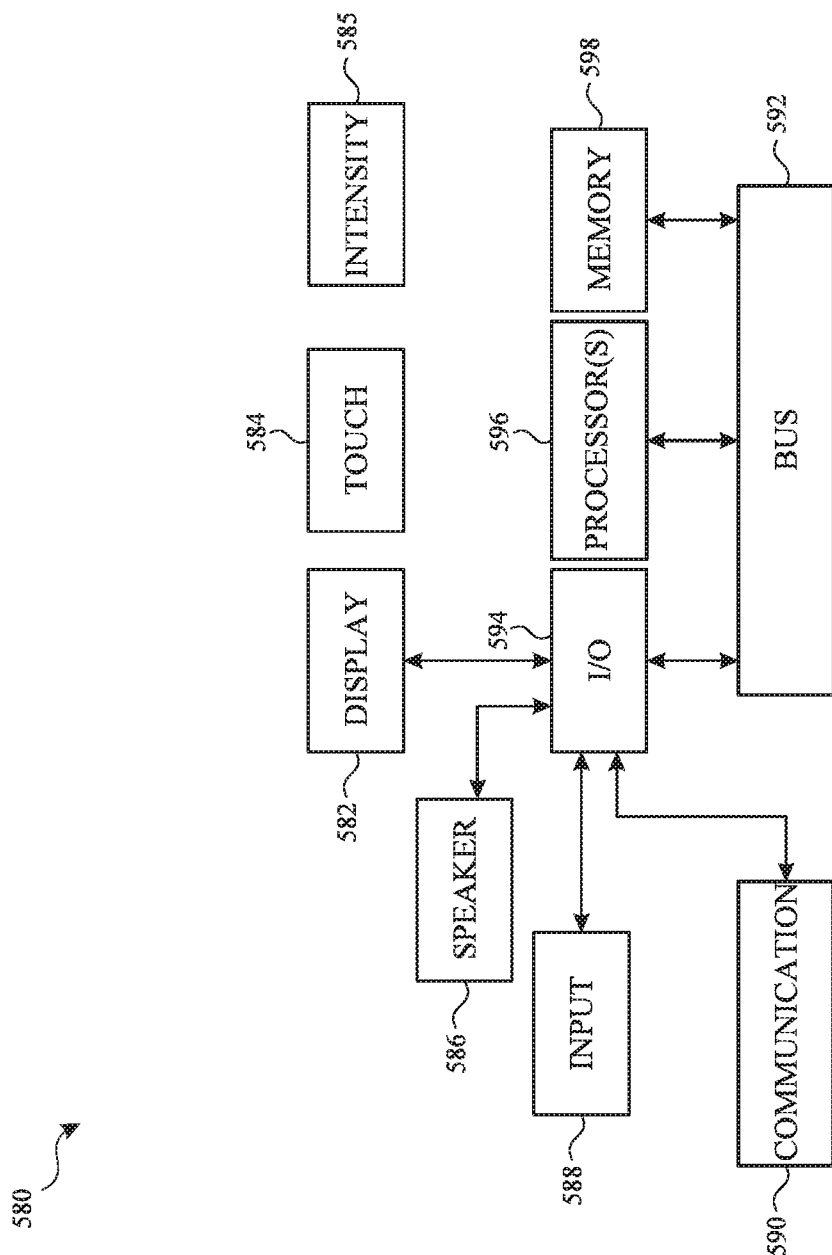


FIG. 5J

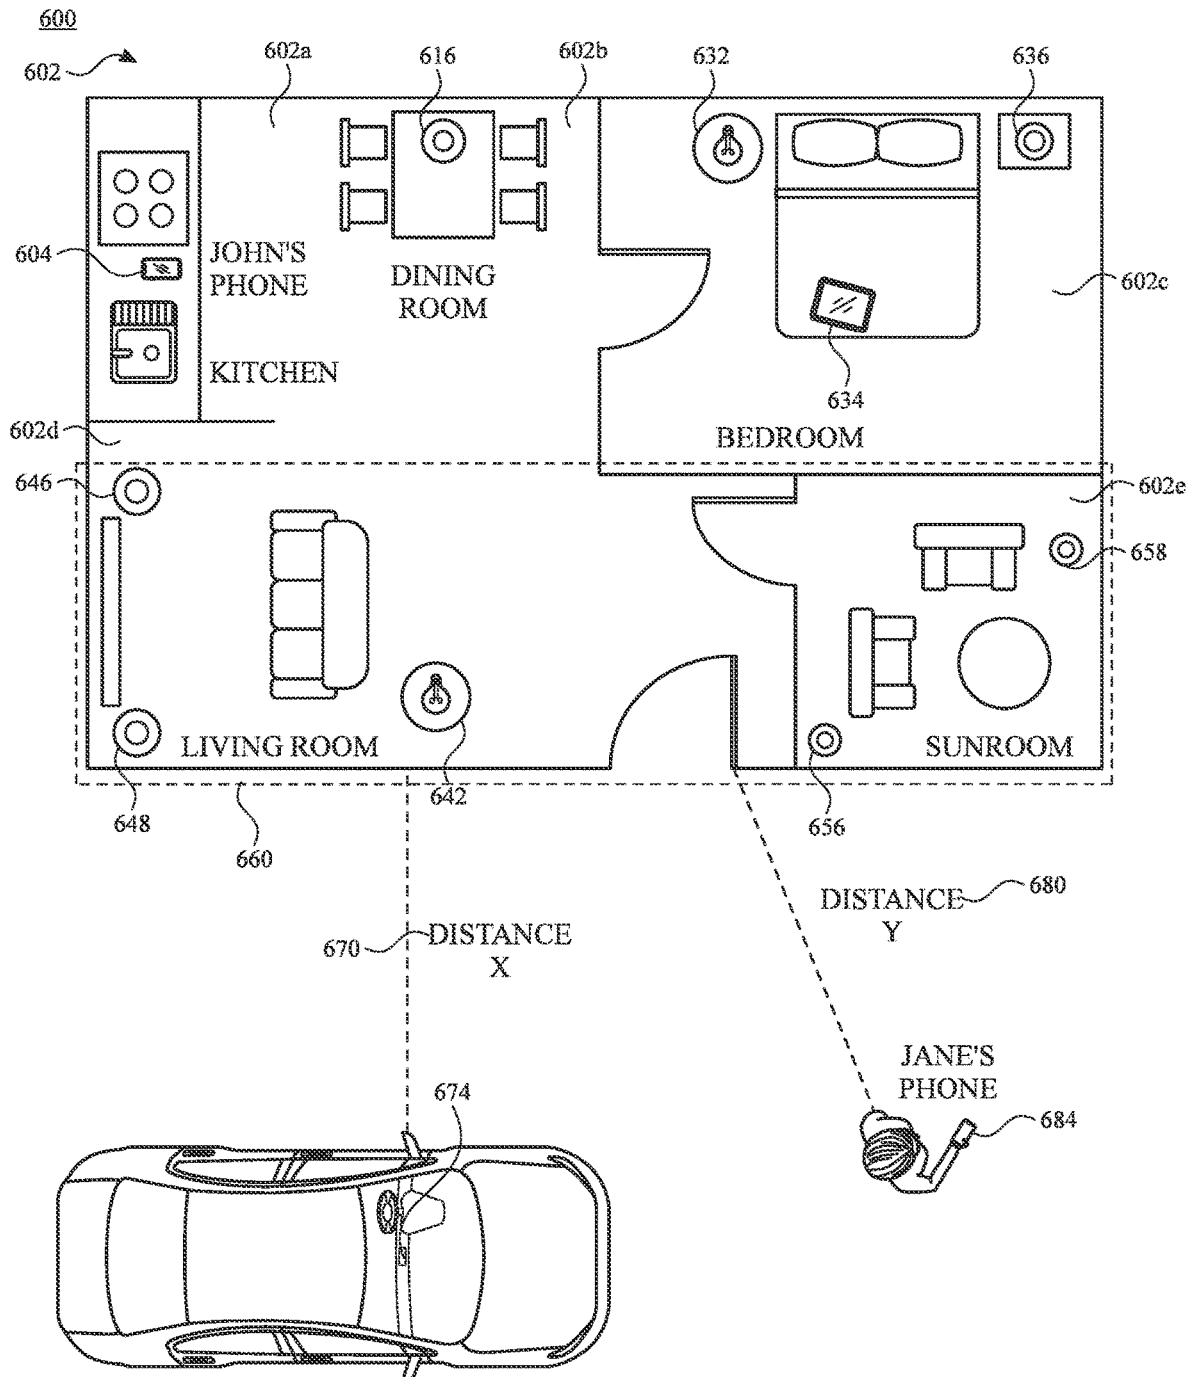
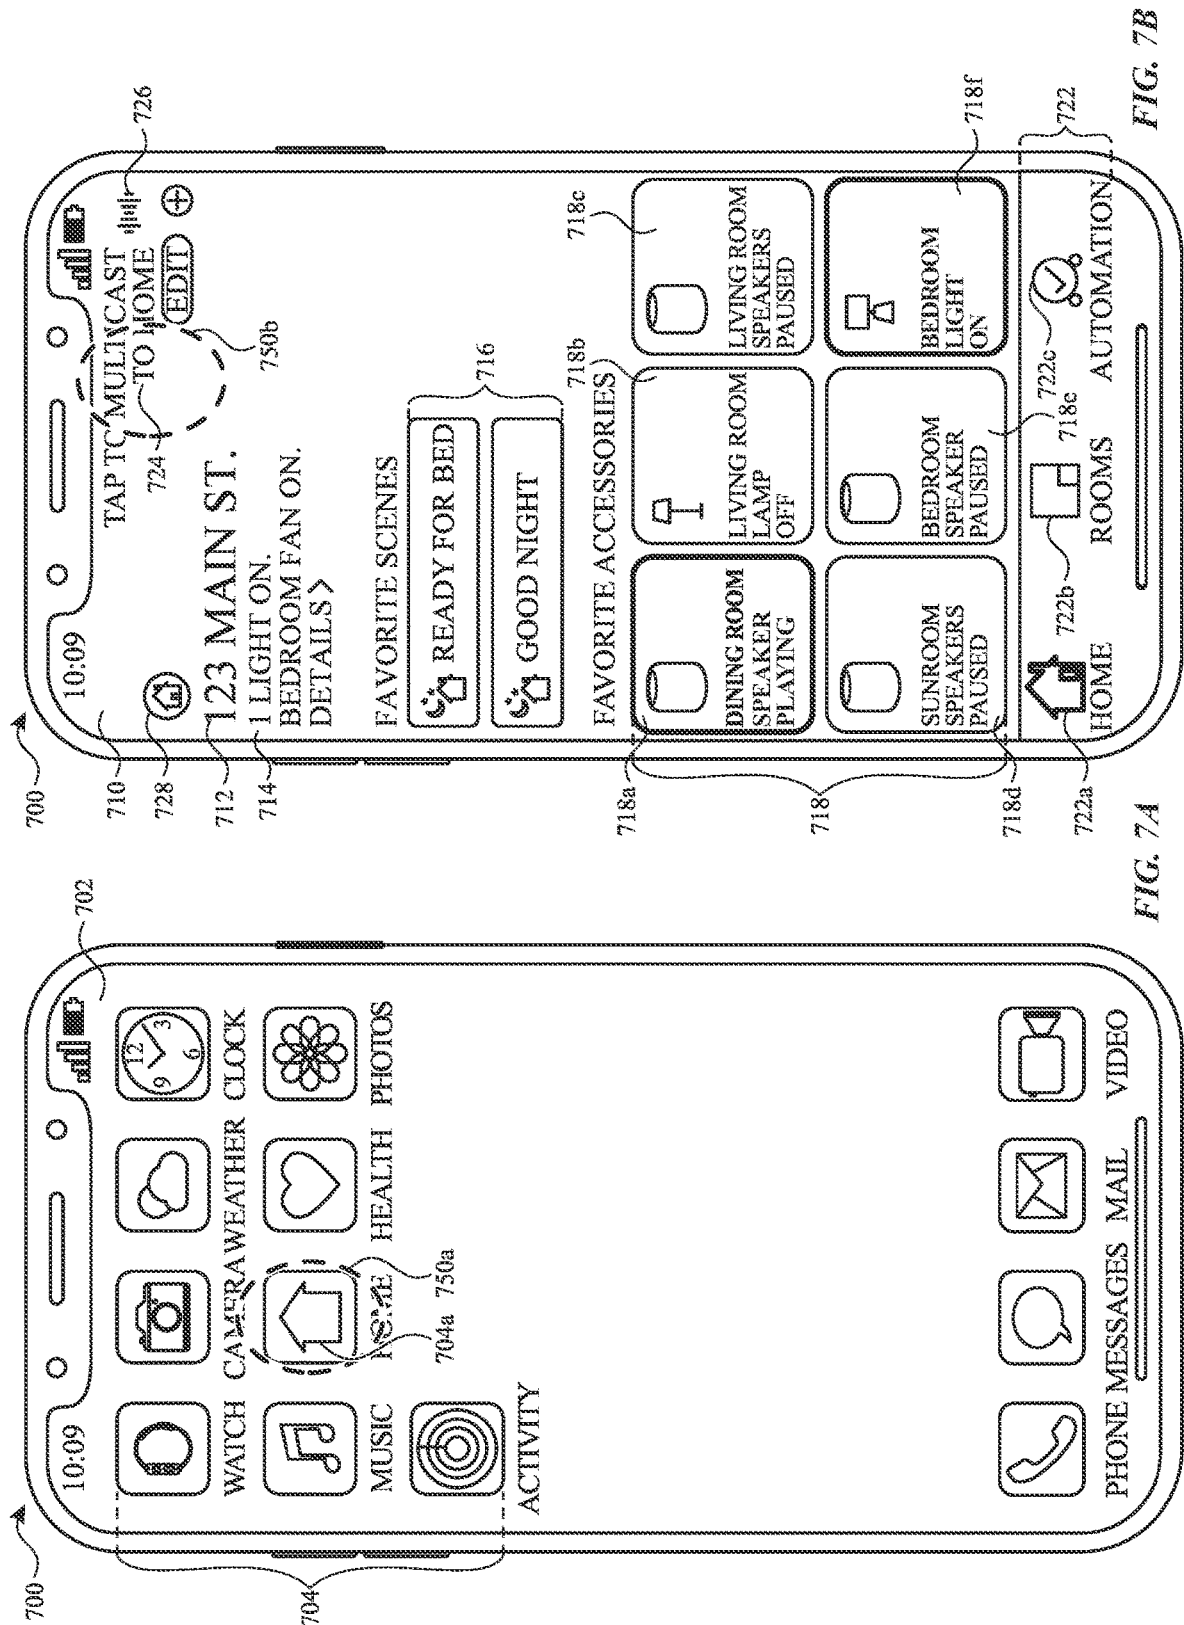
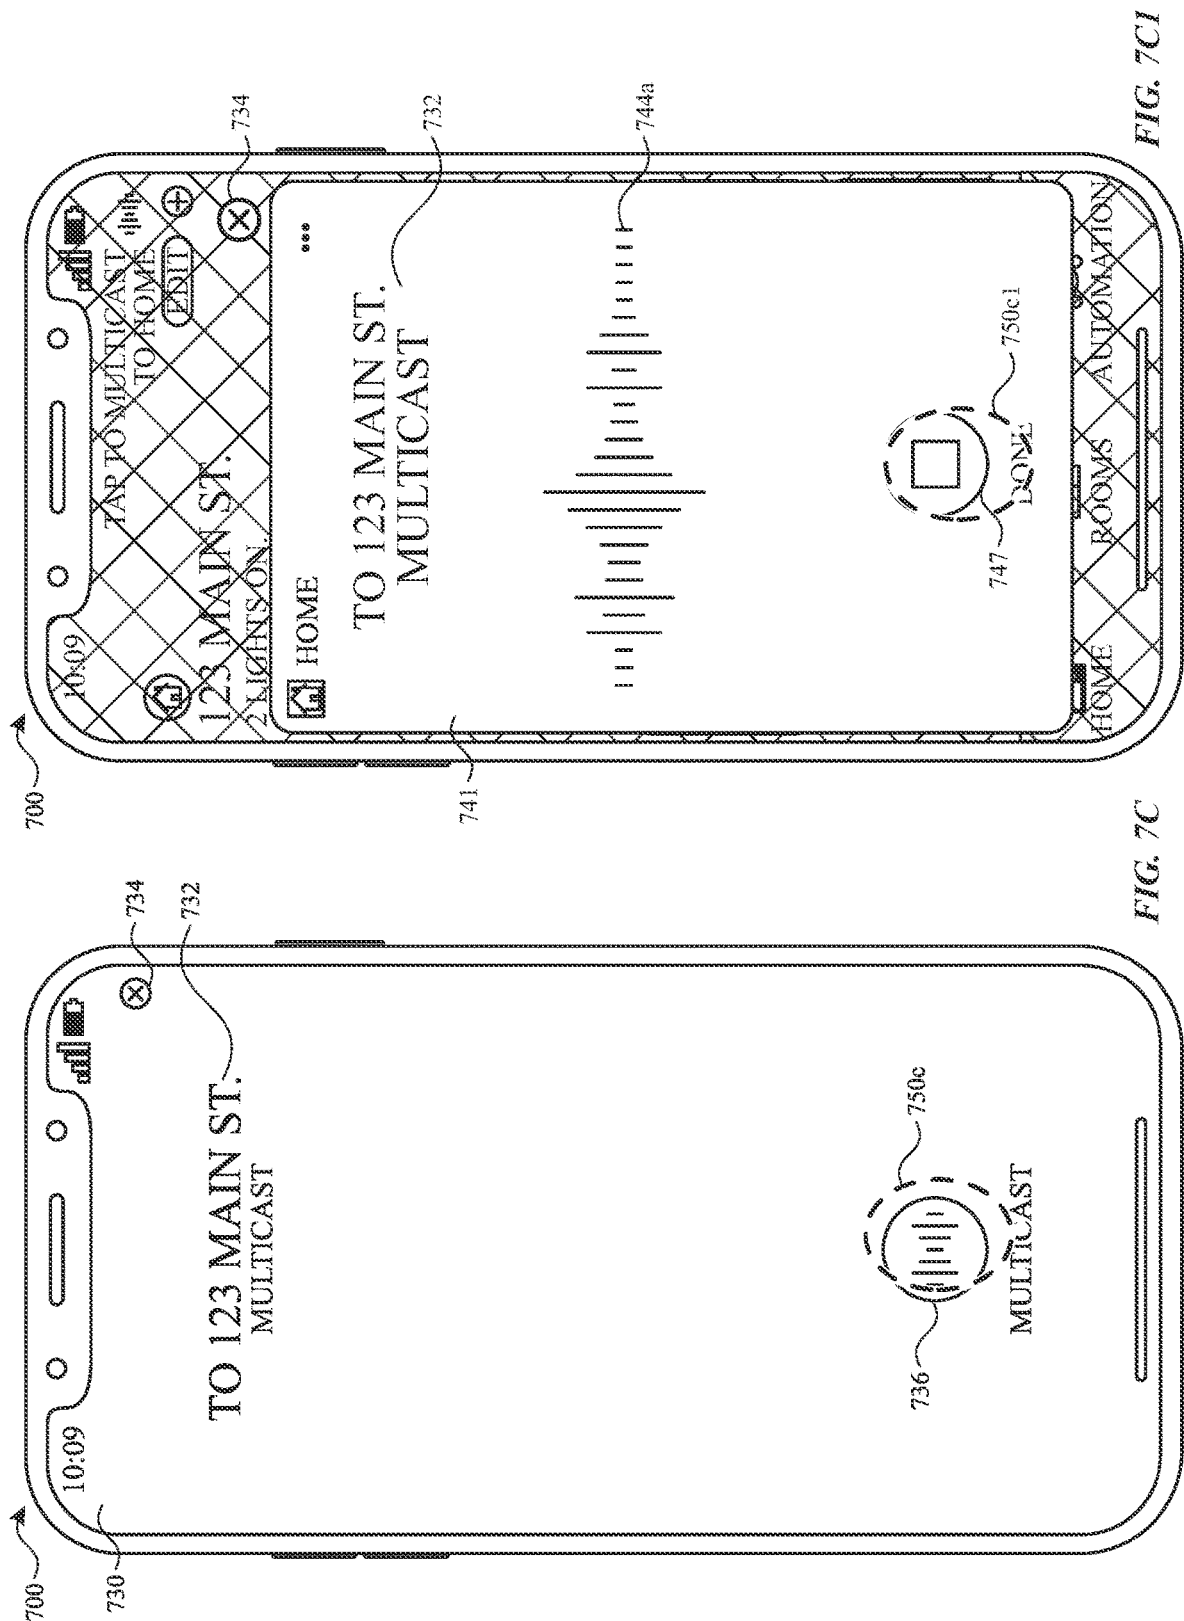
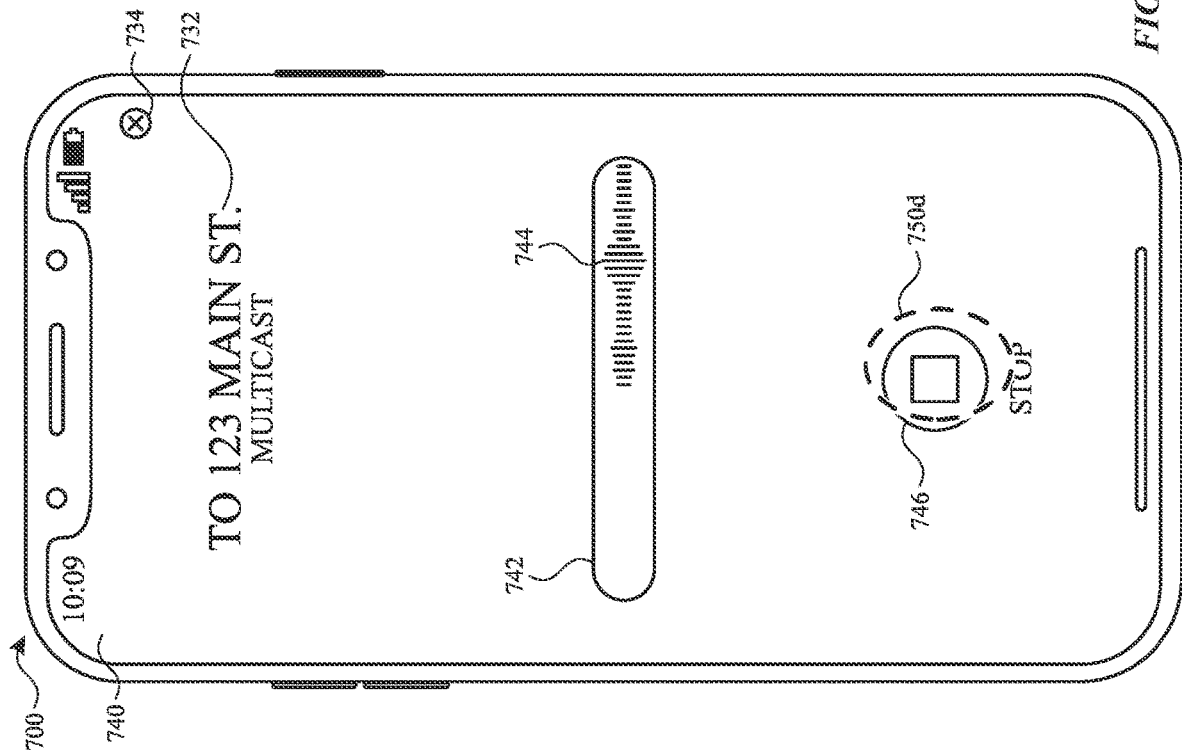
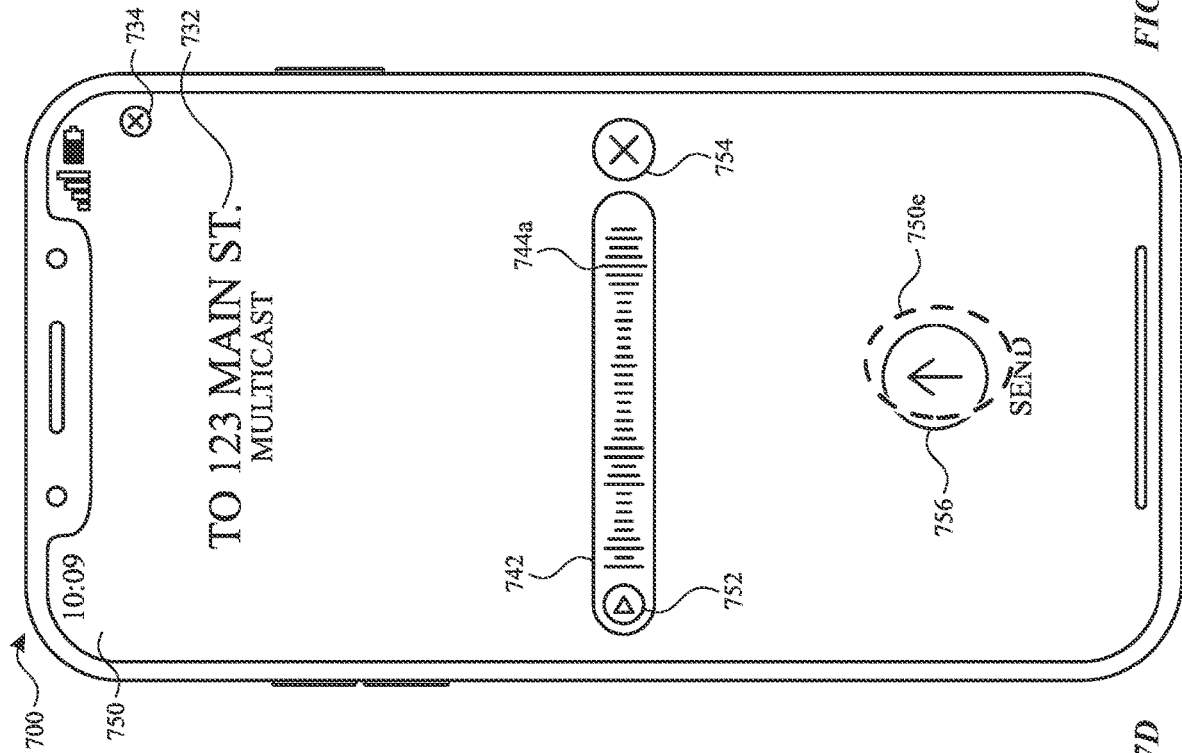


FIG. 6







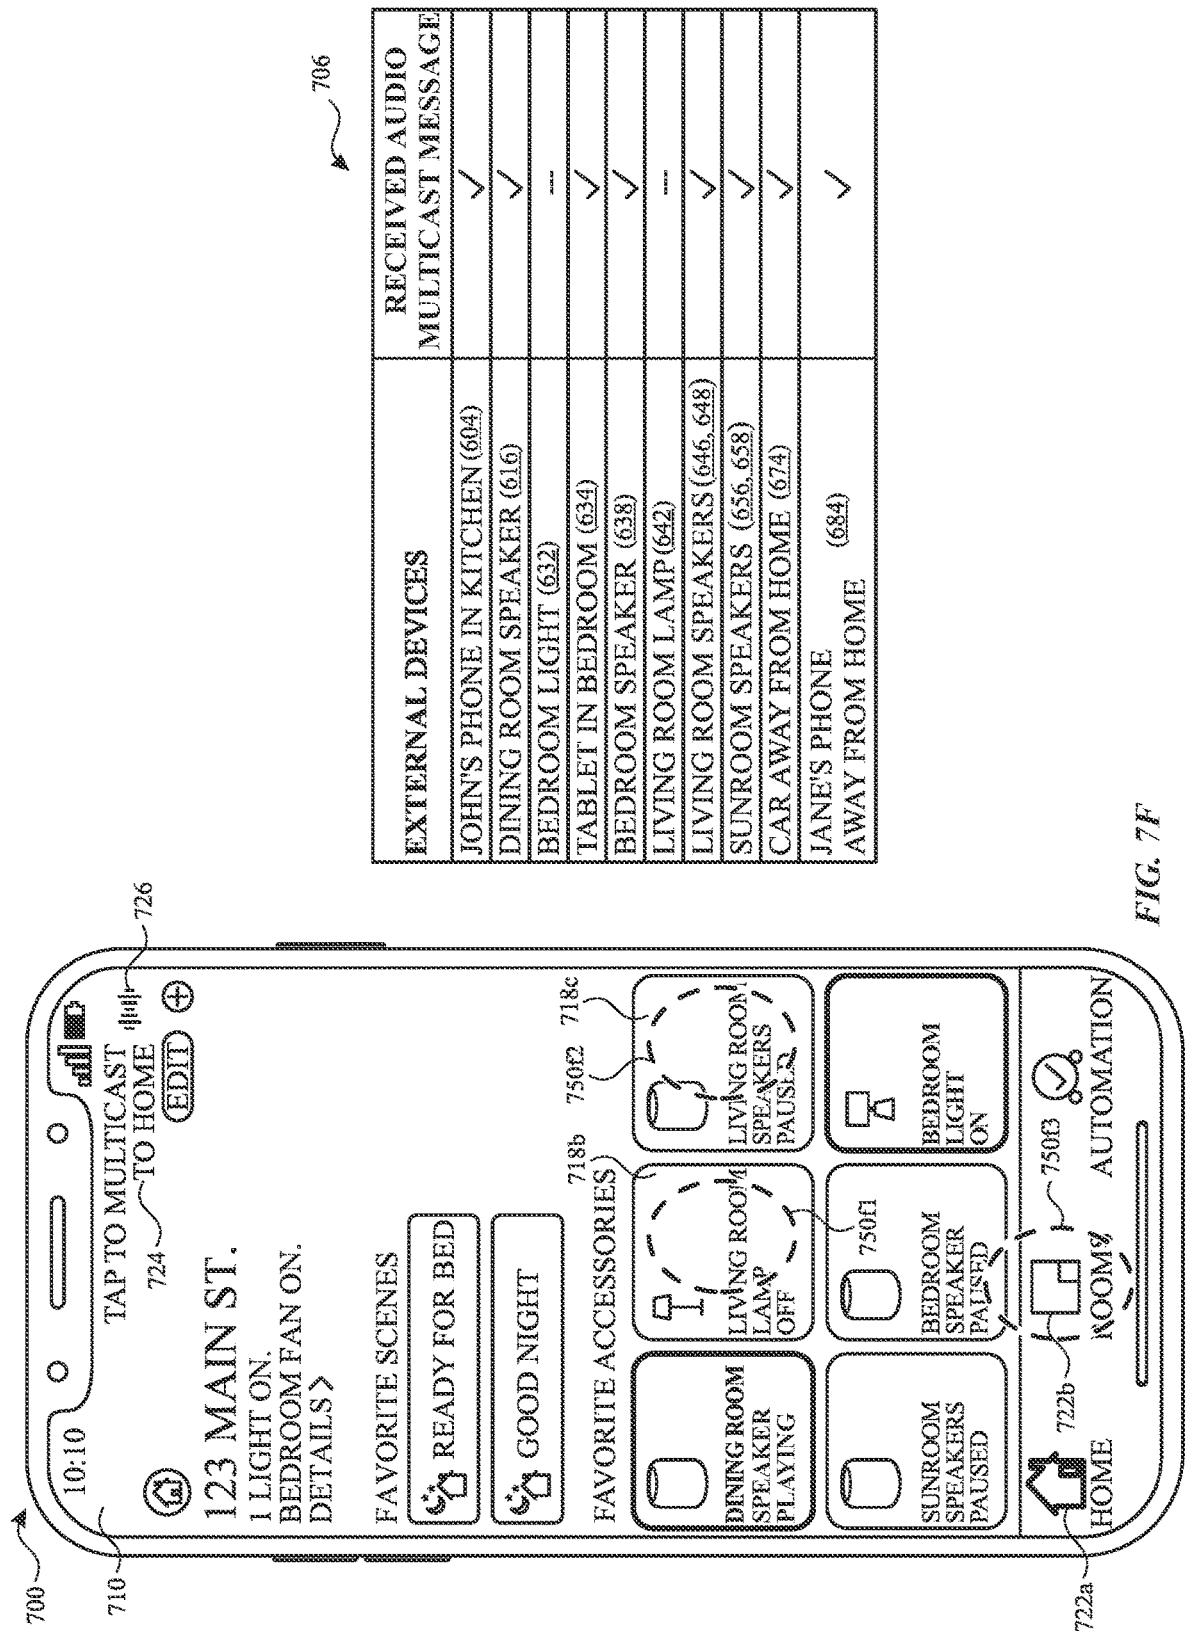


FIG. 7F

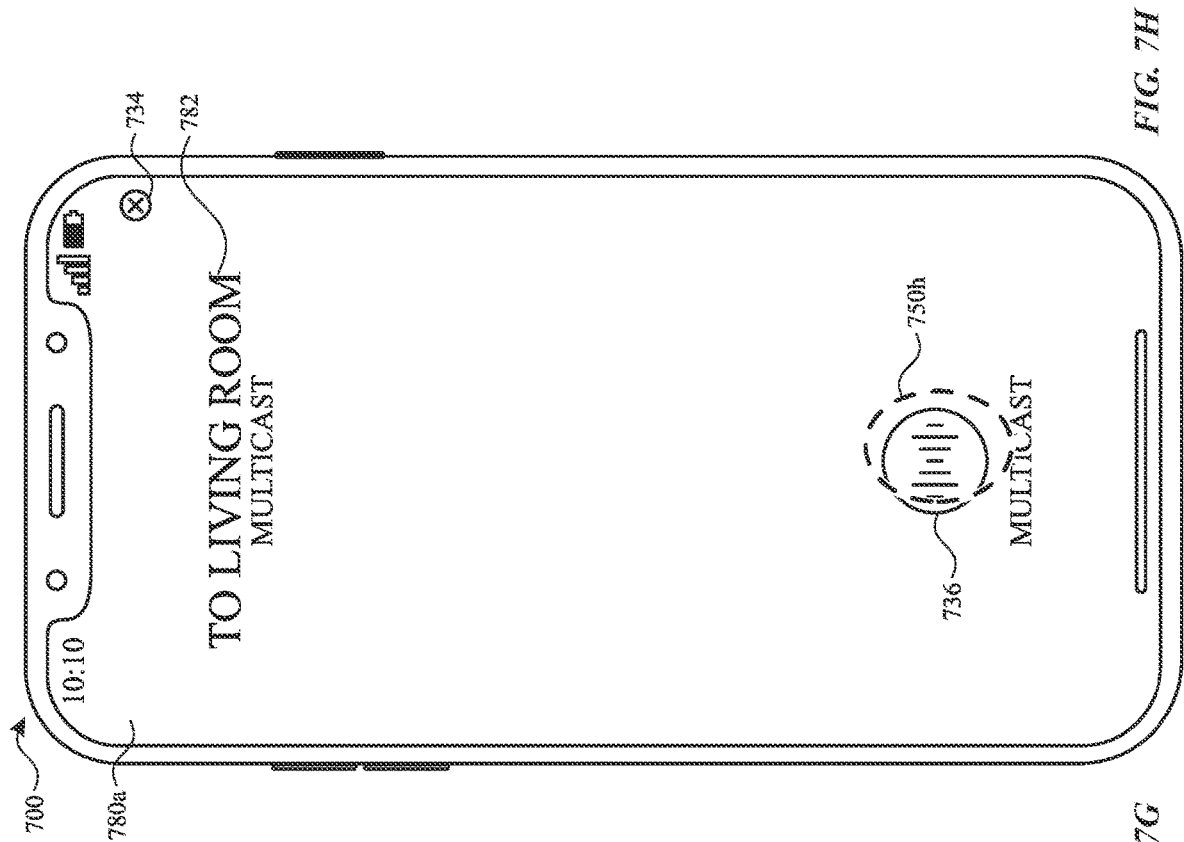


FIG. 7H

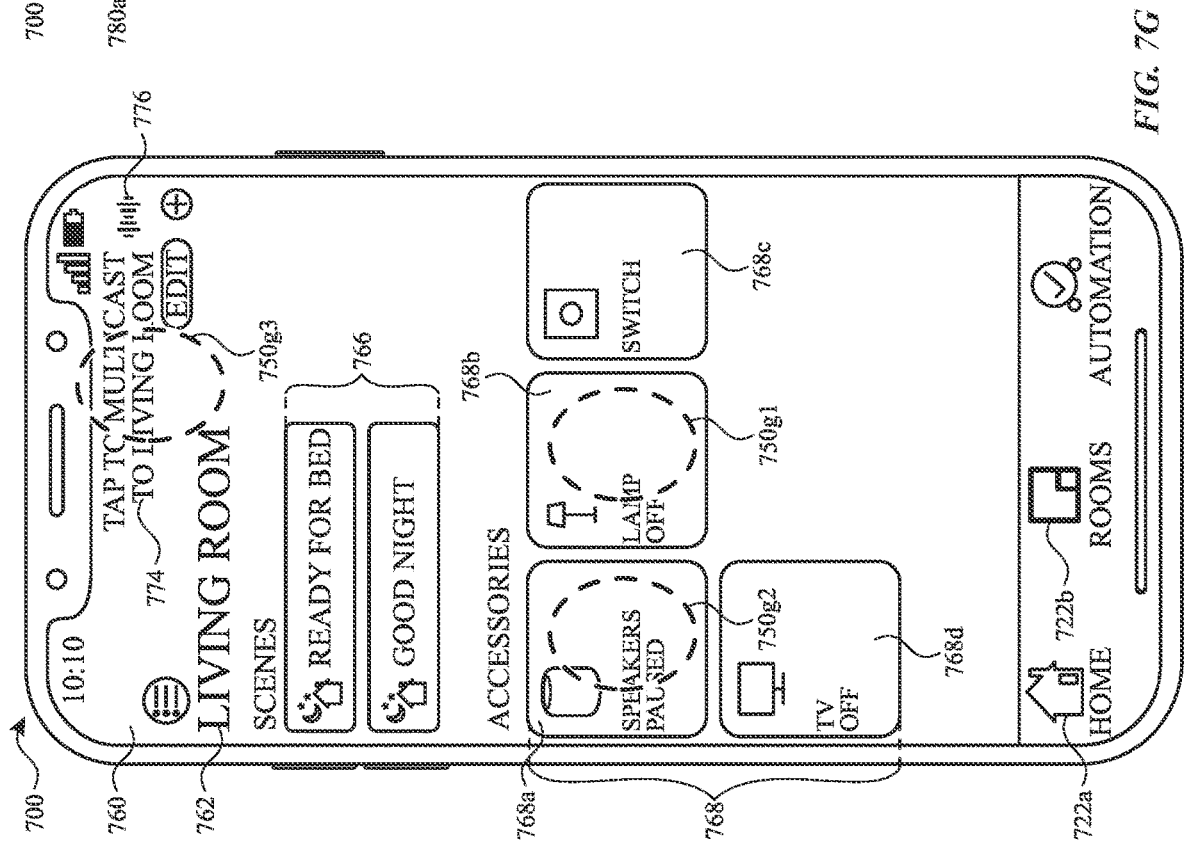
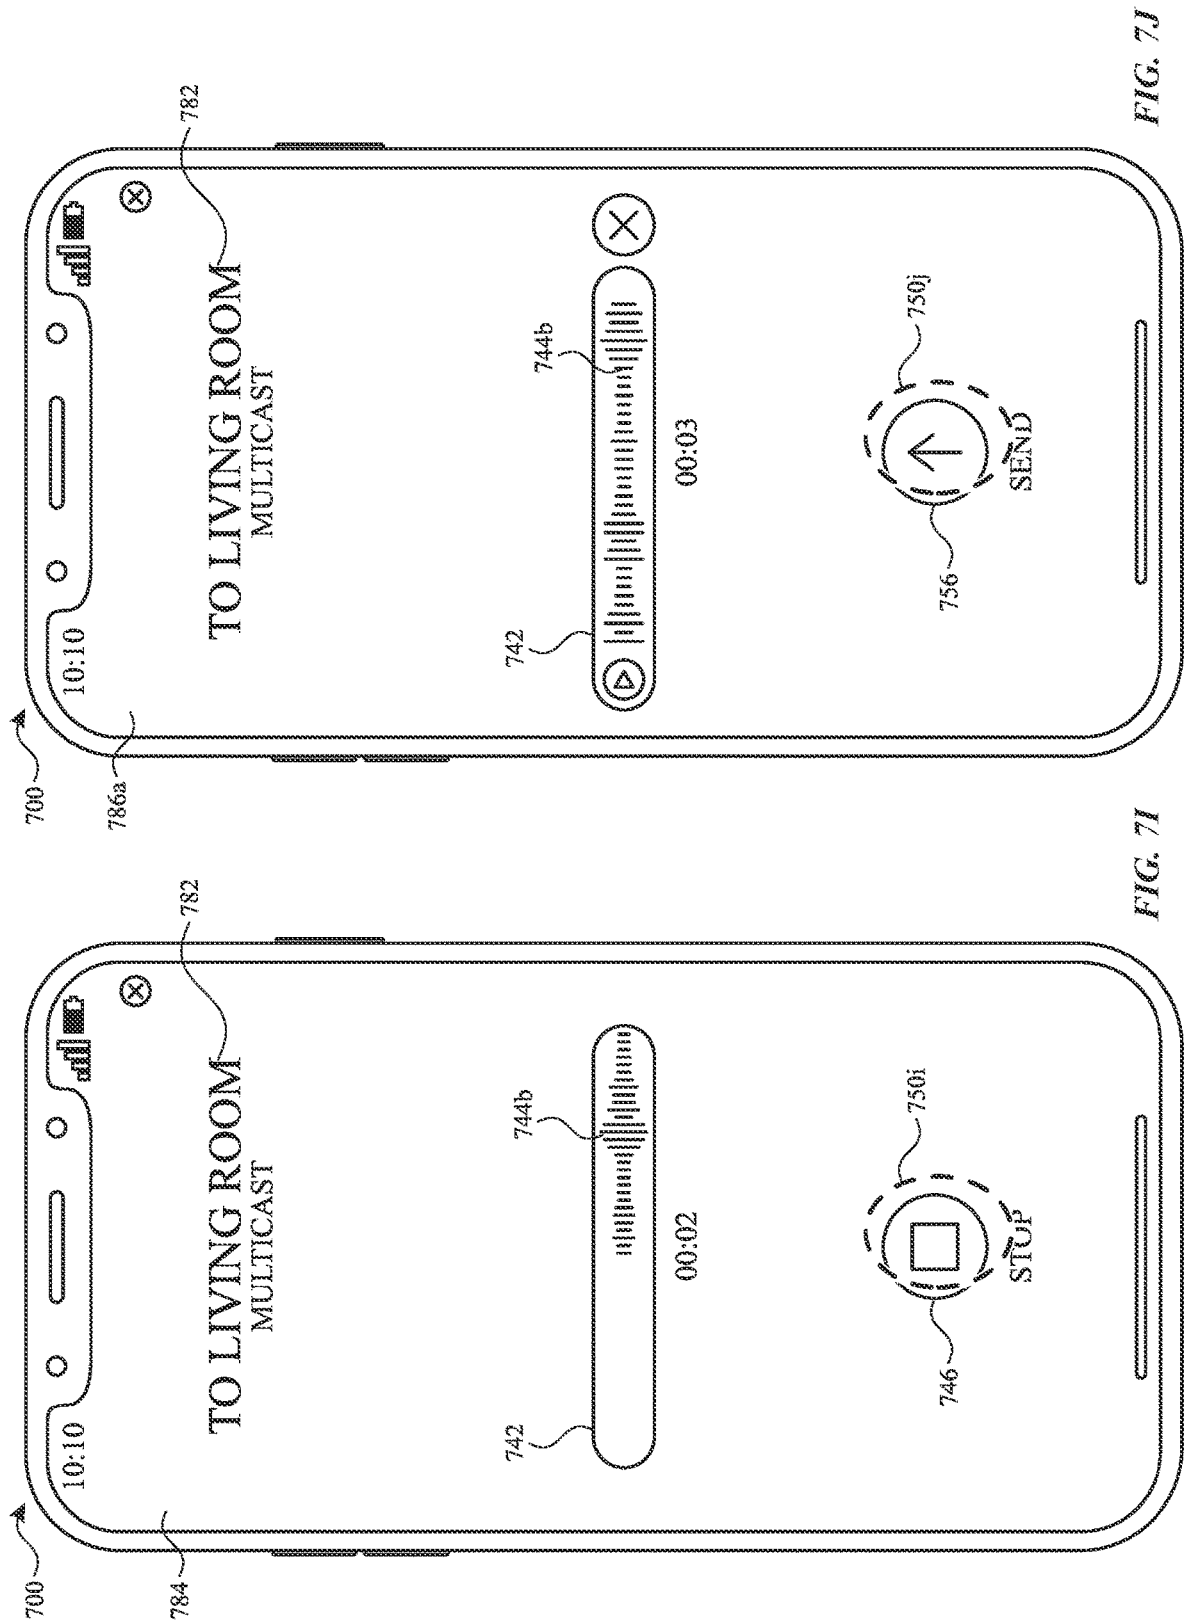
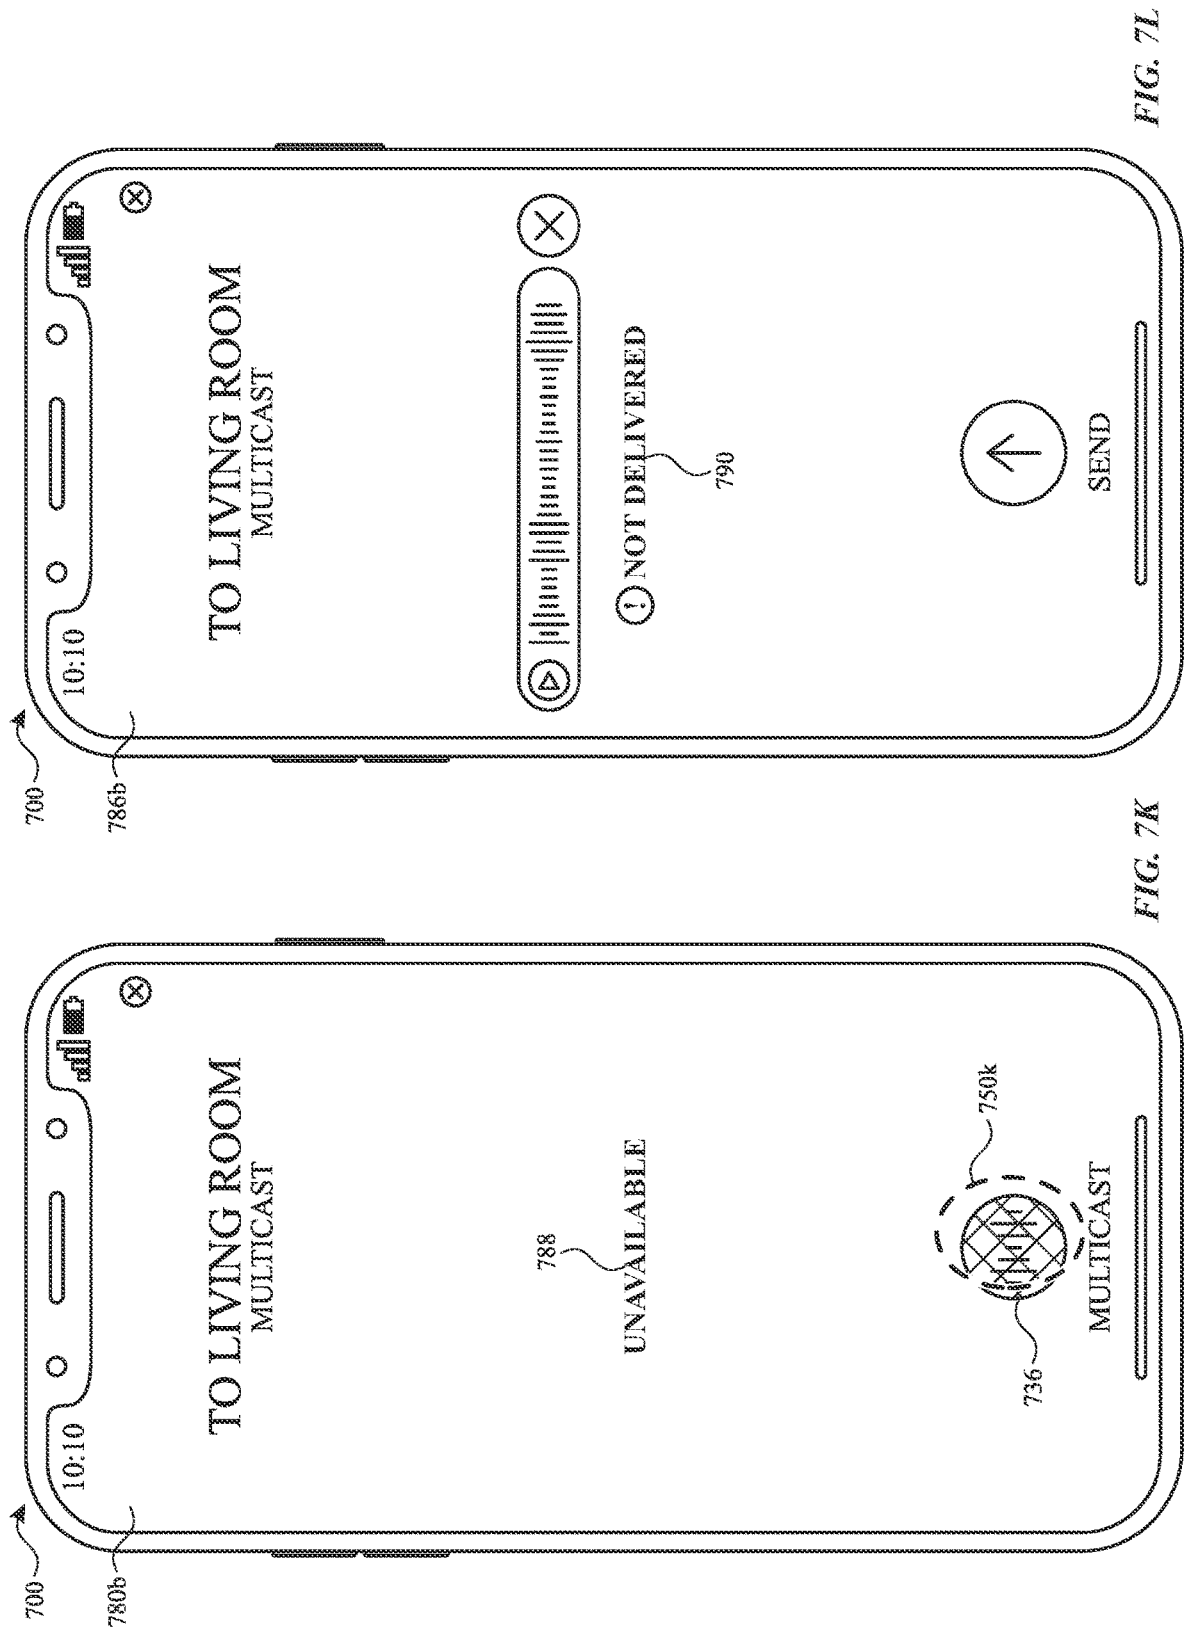


FIG. 7G





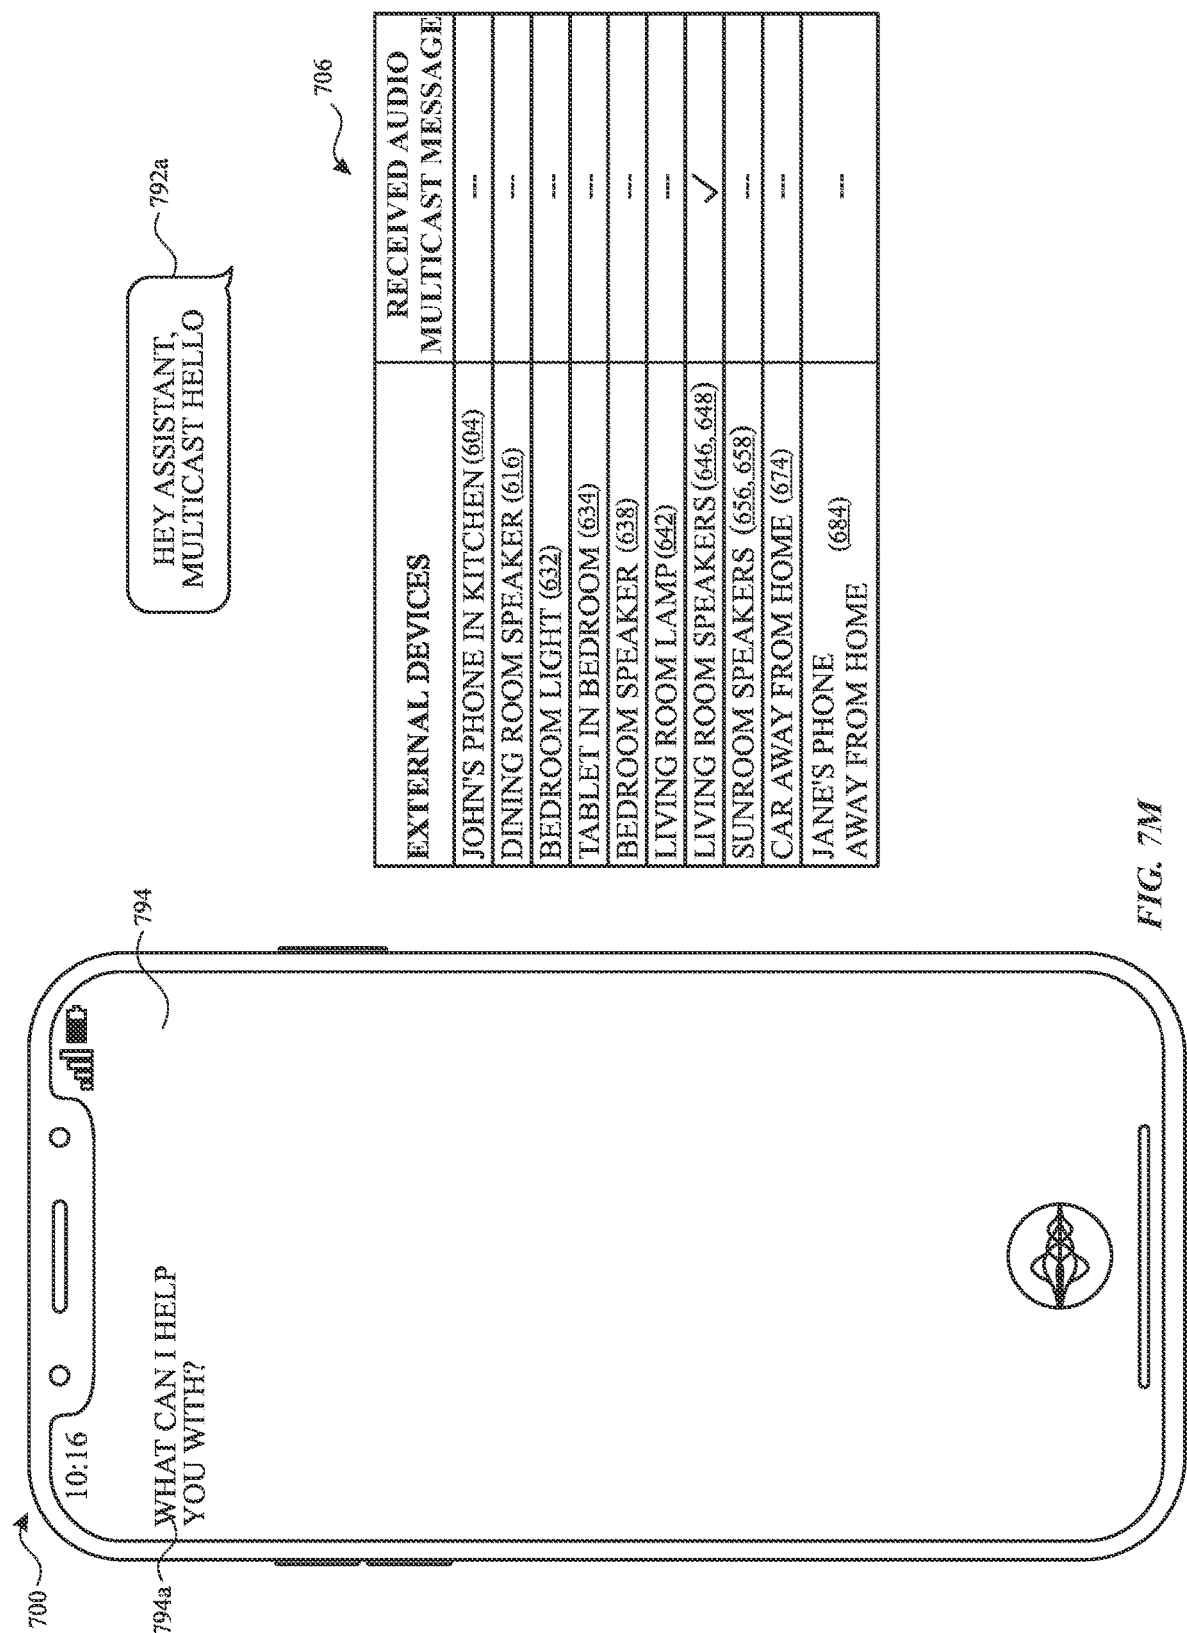


FIG. 7M

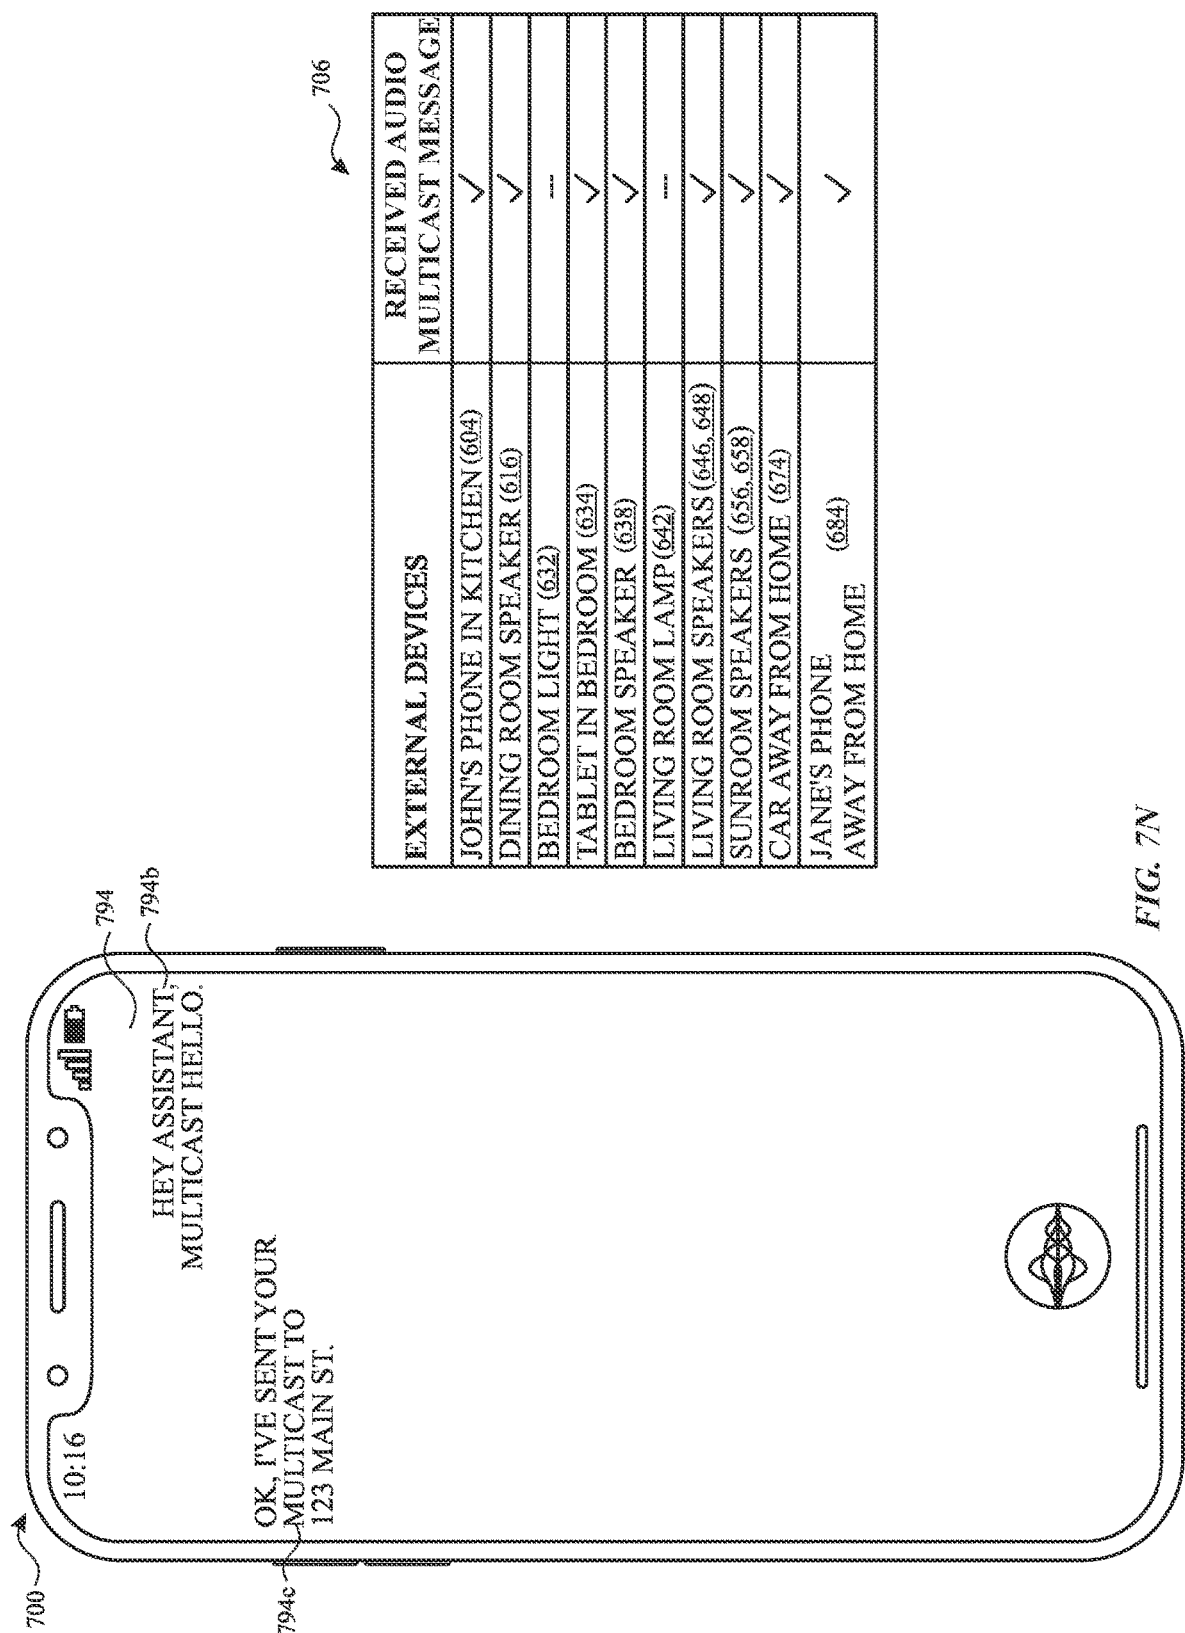


FIG. 7N

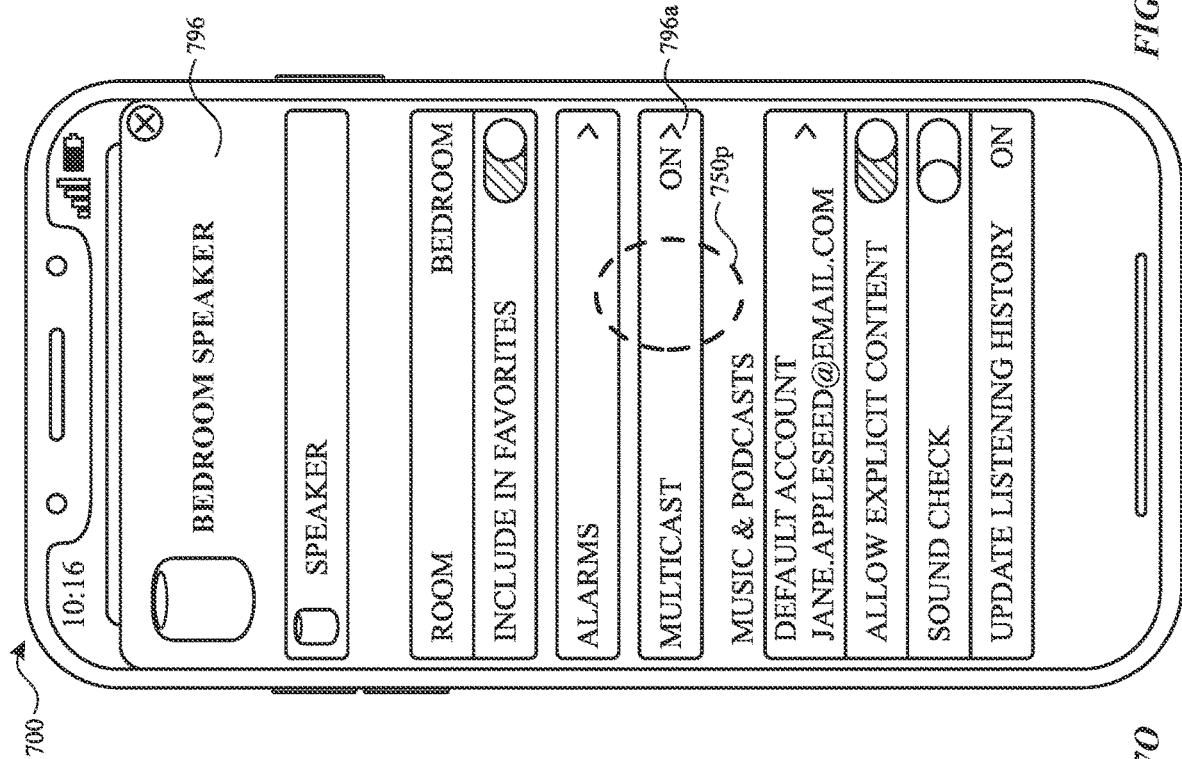


FIG. 70

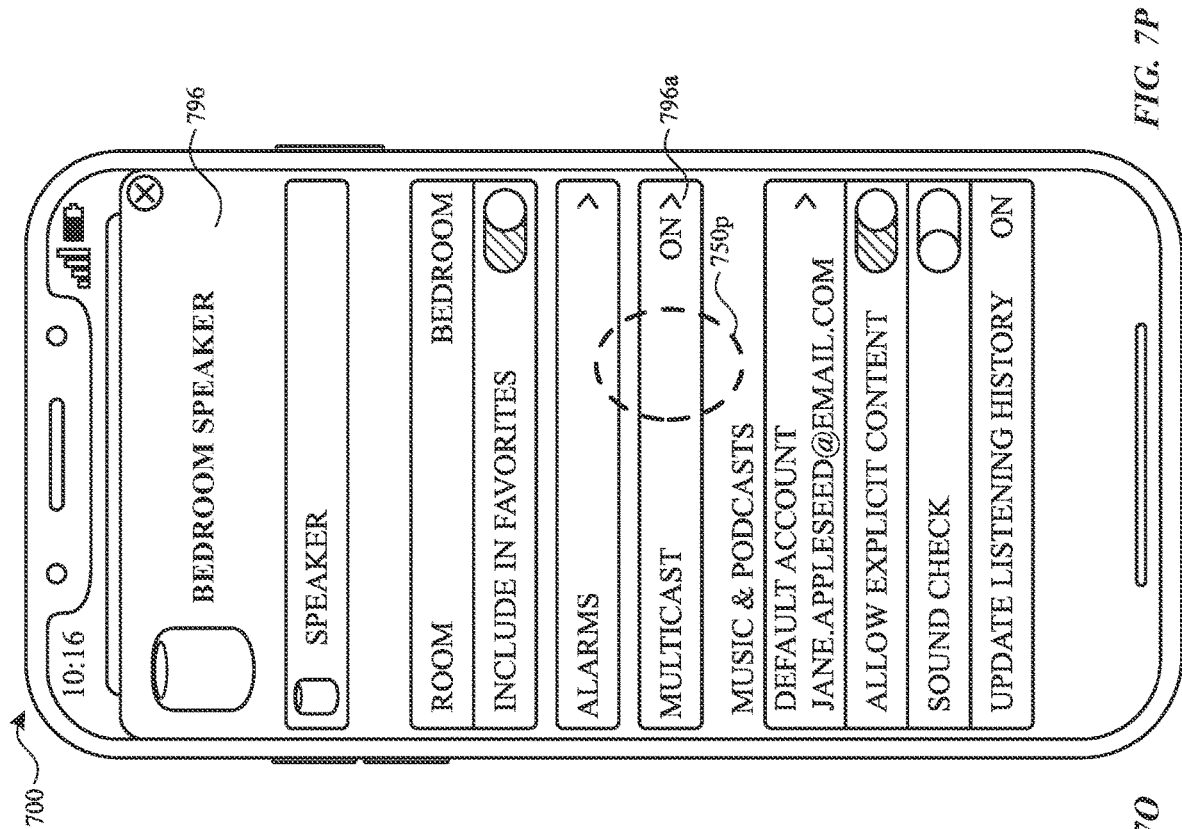
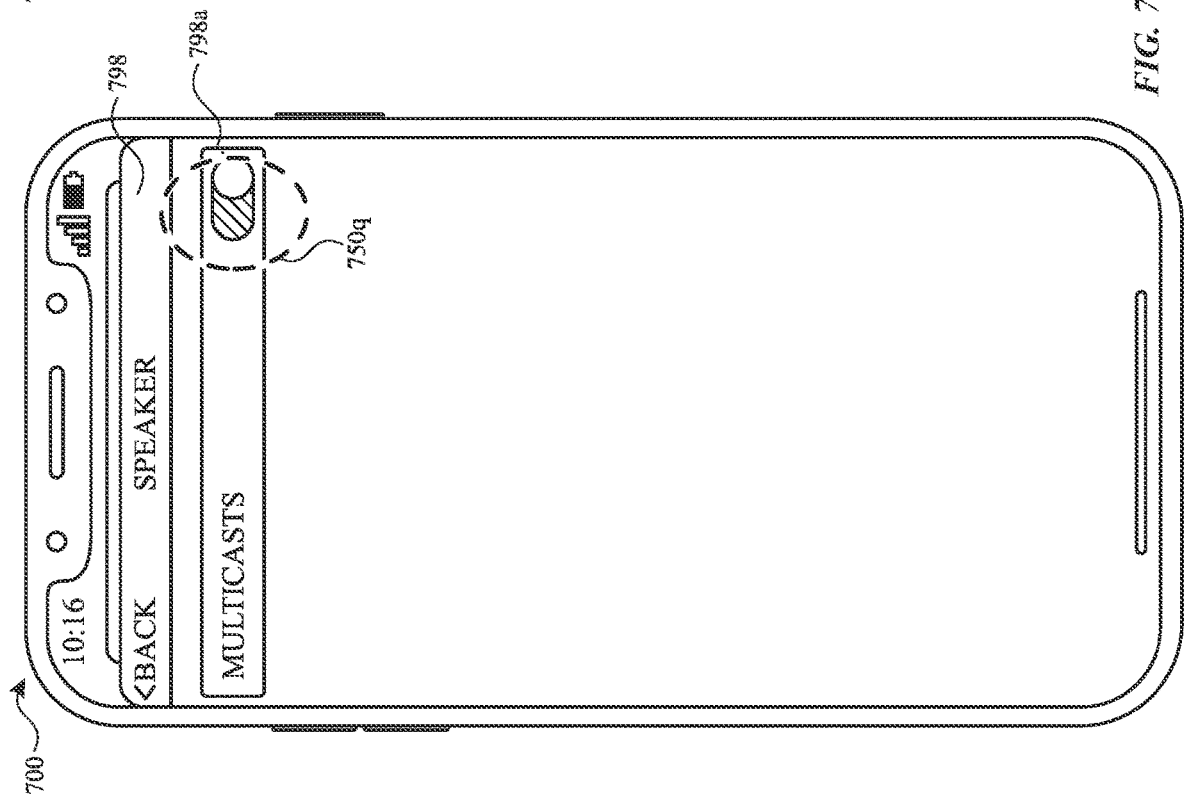
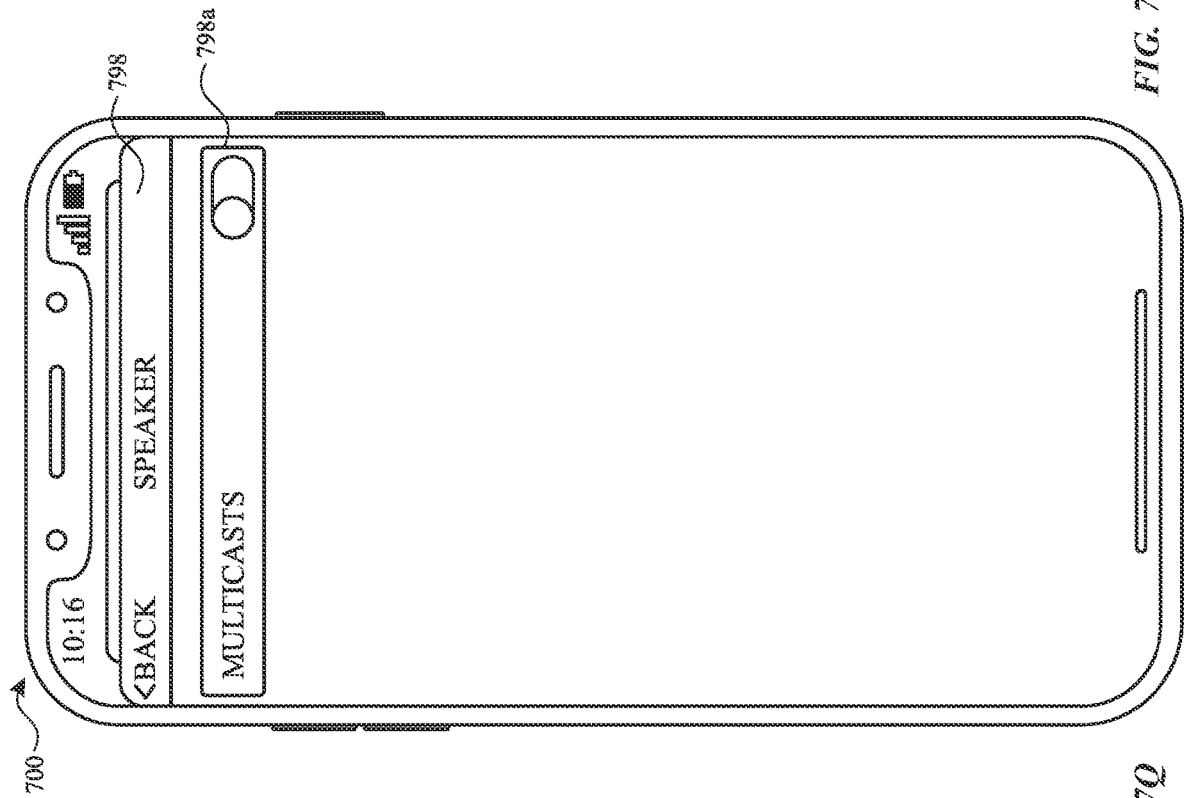
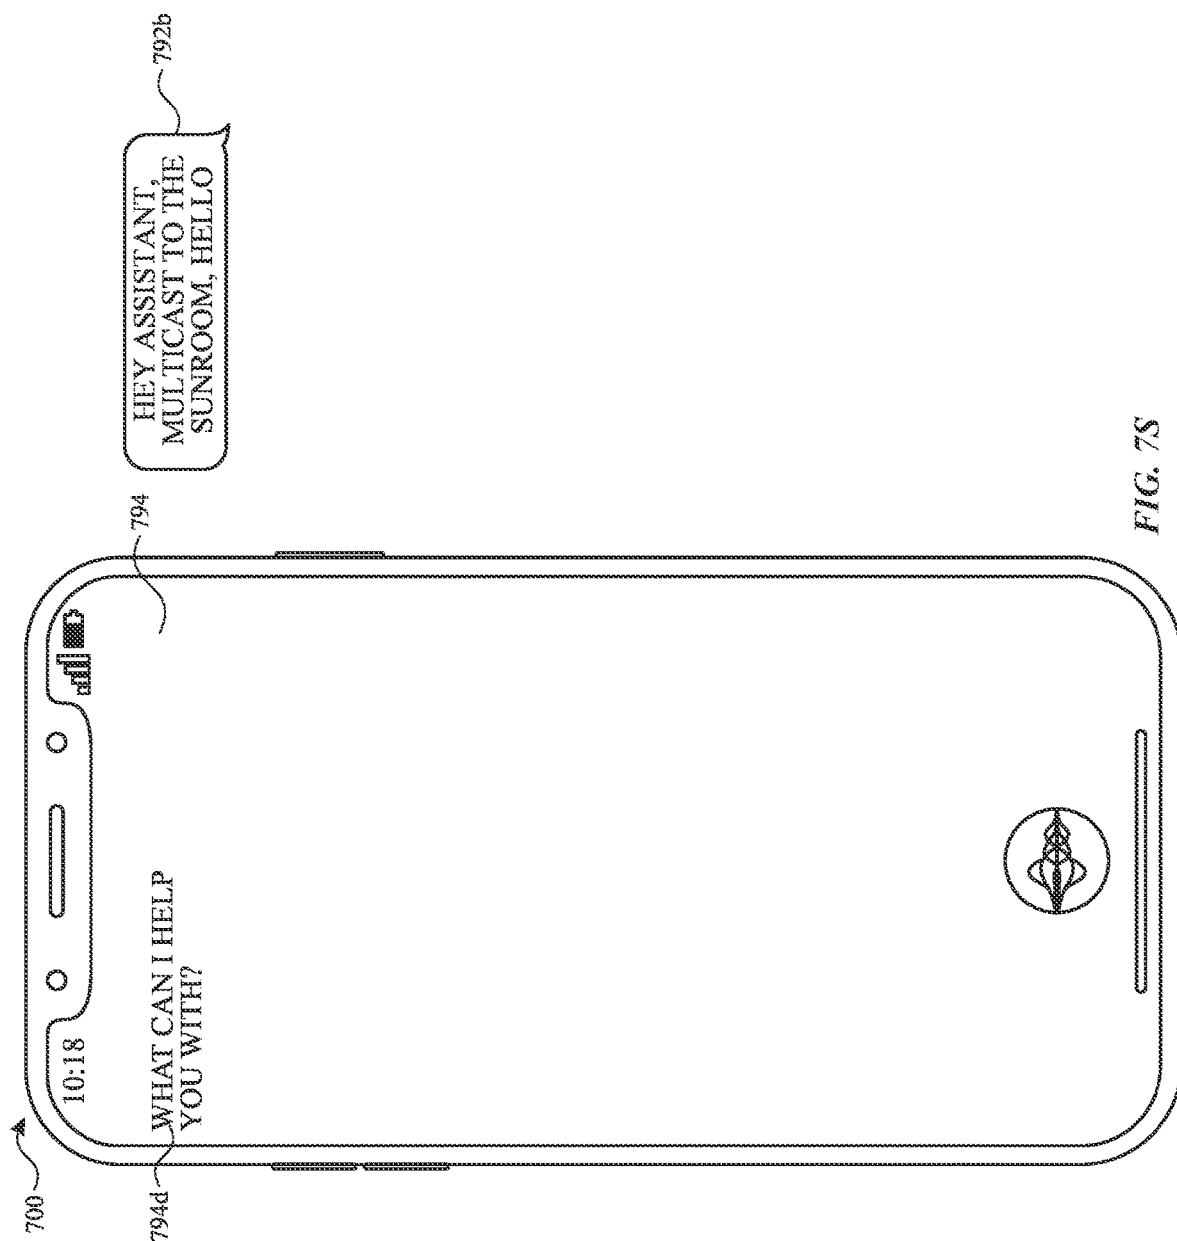


FIG. 7P





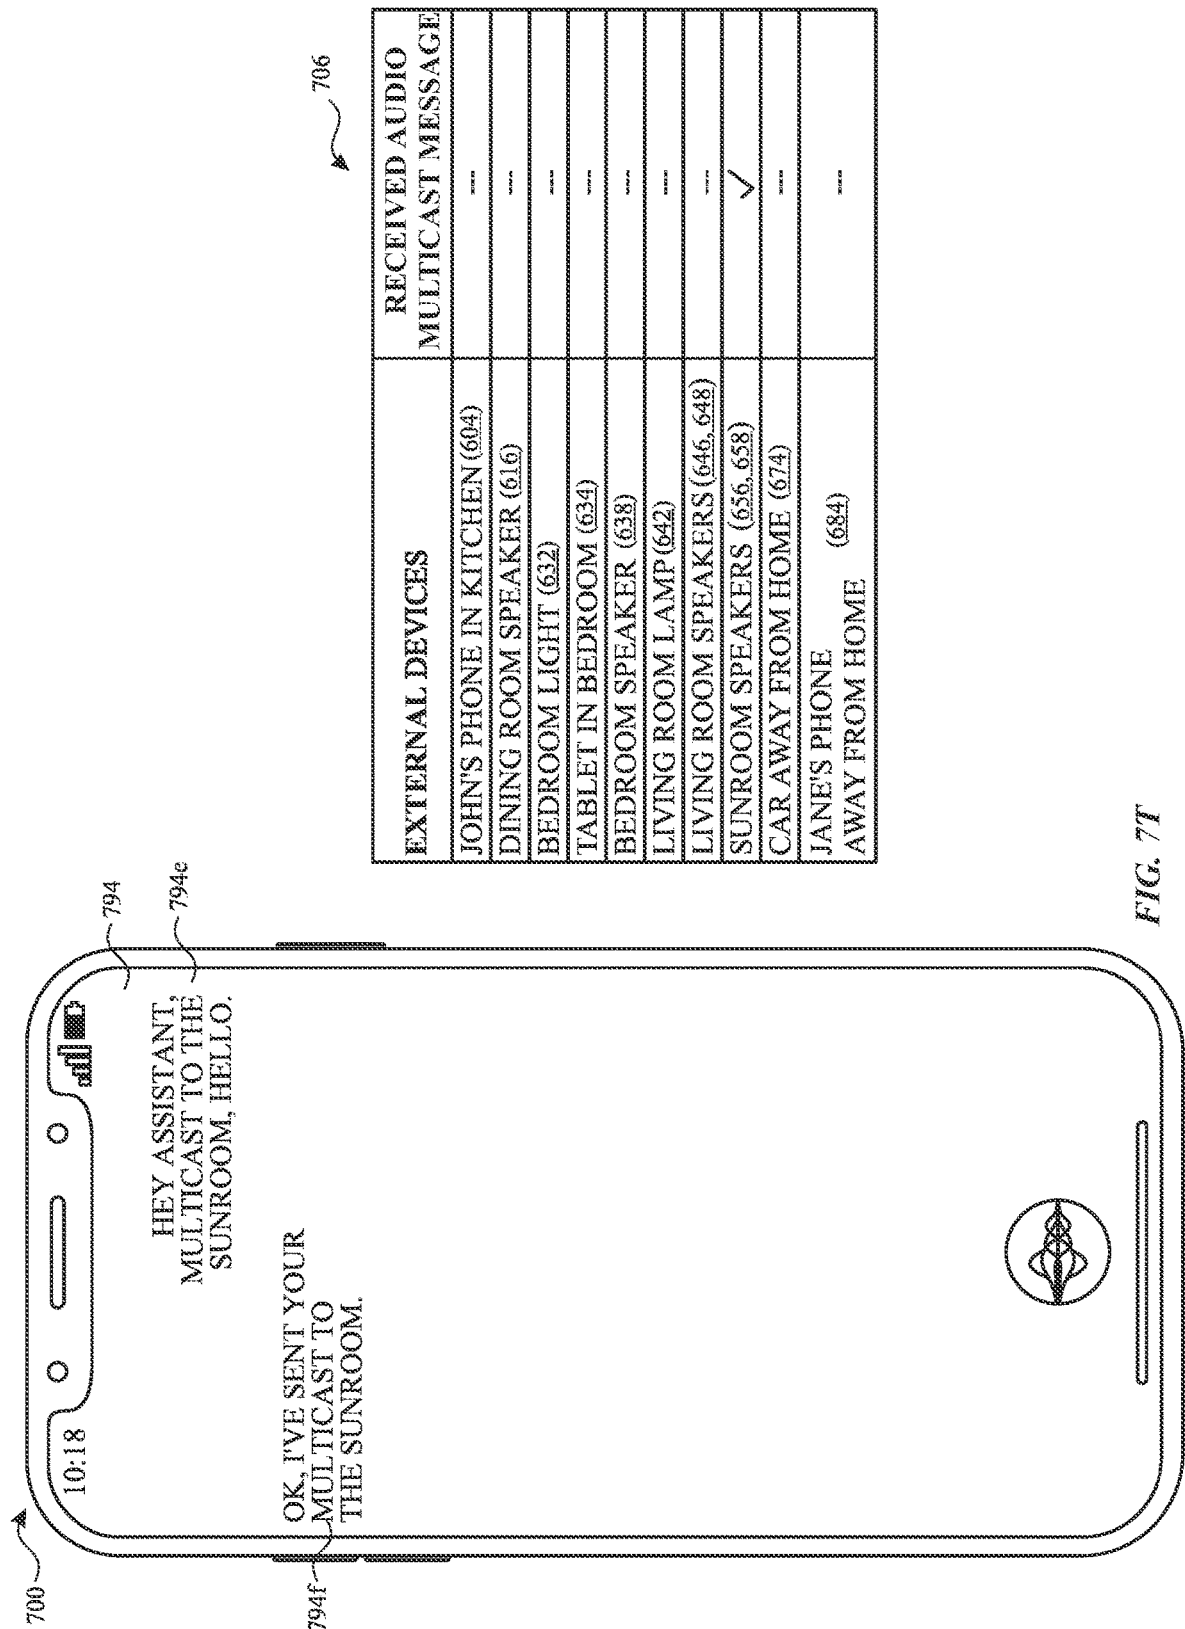
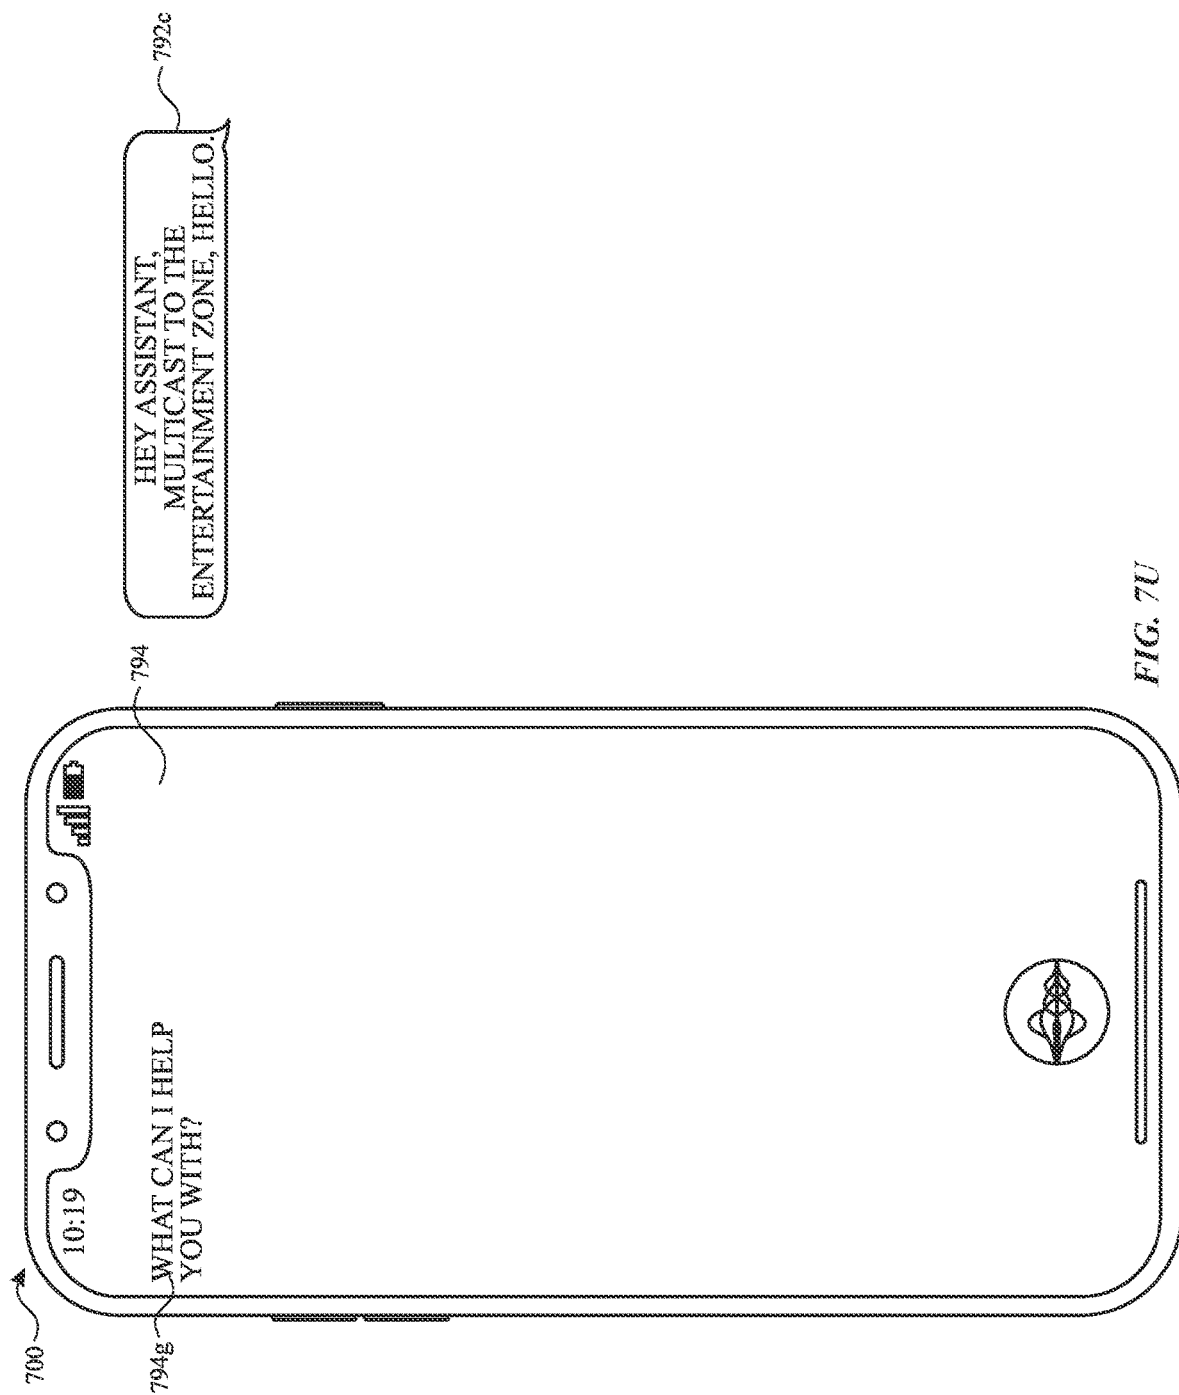
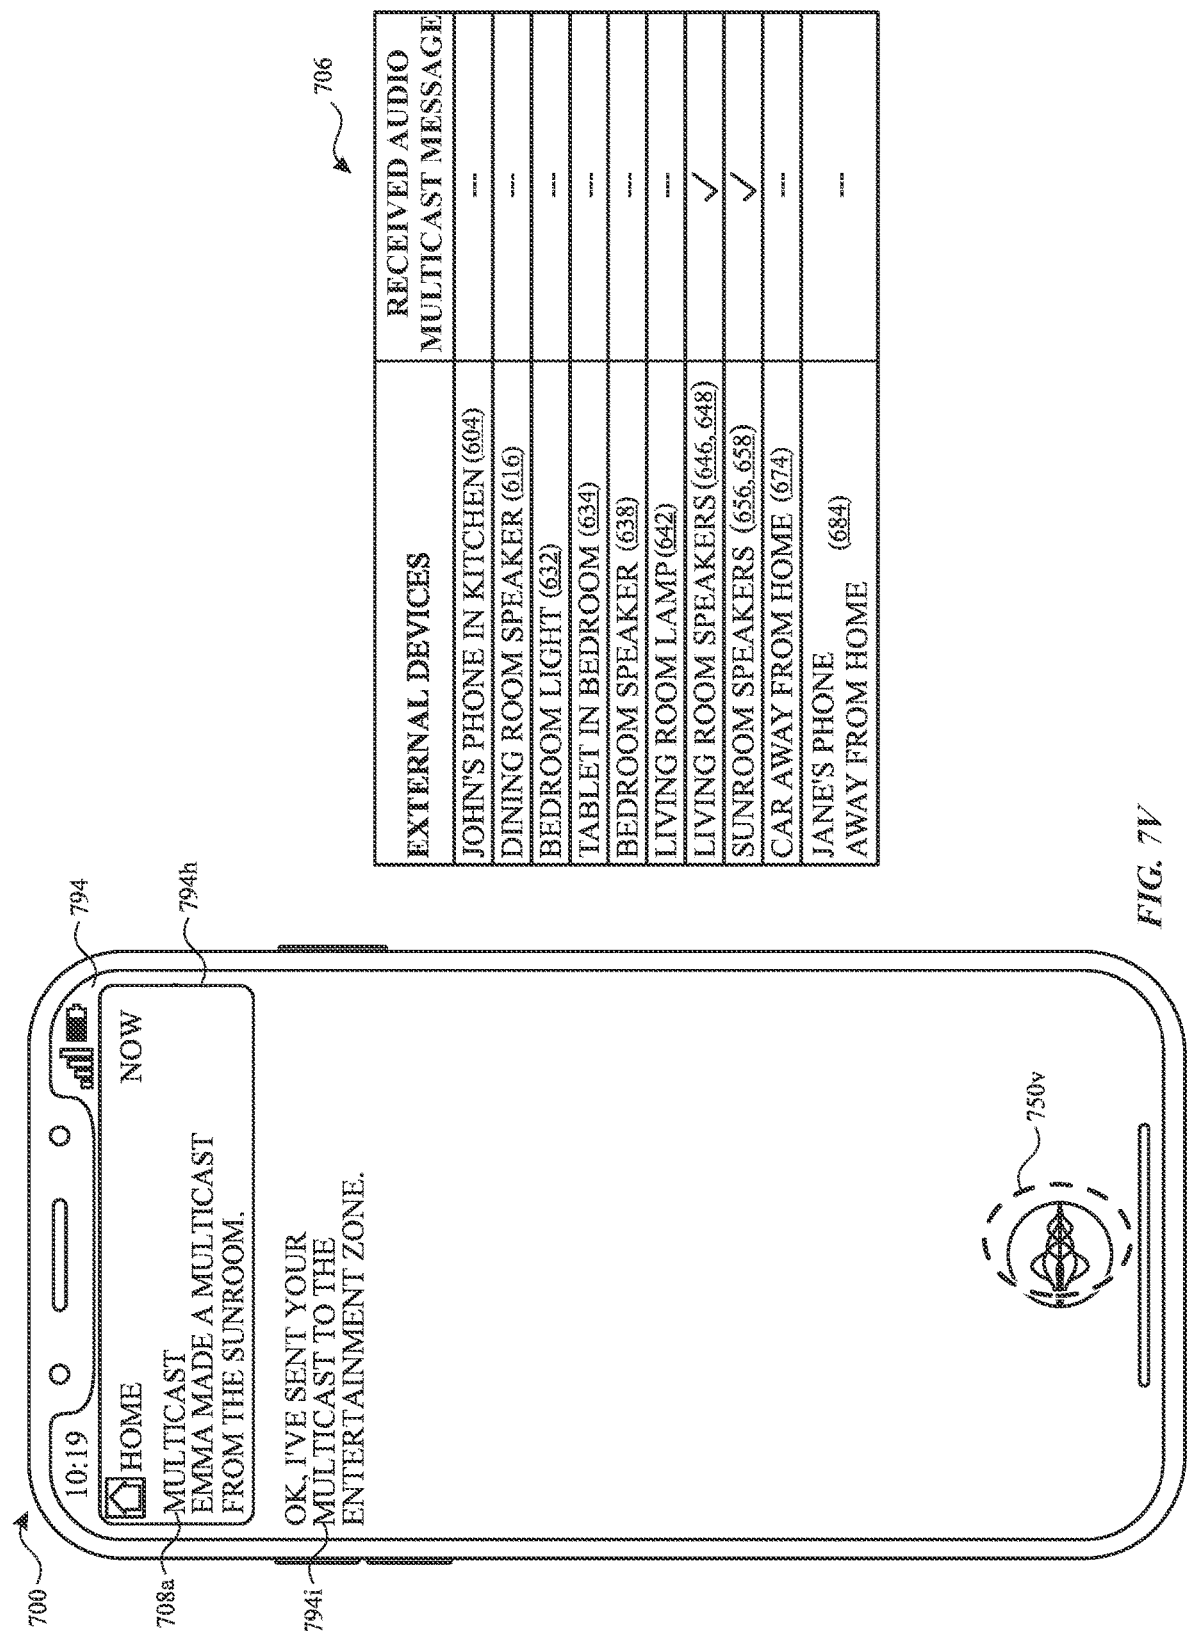
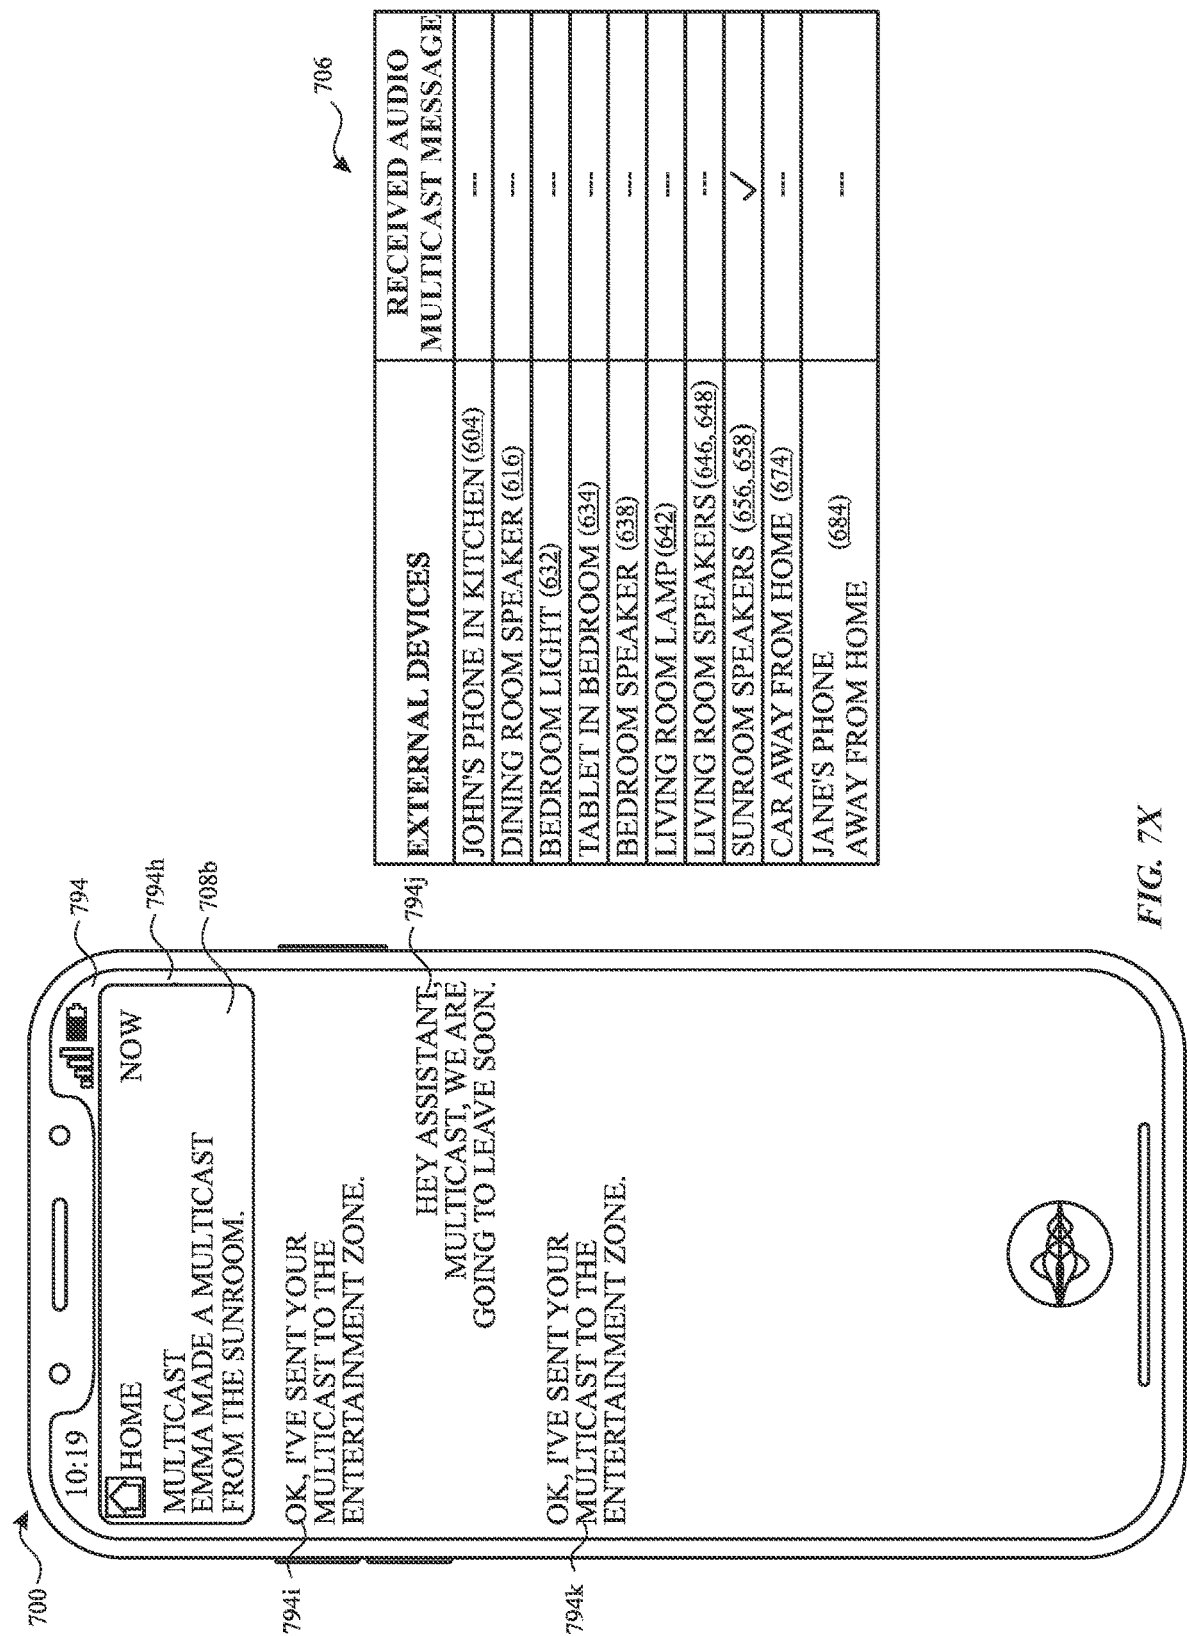



FIG. 7T










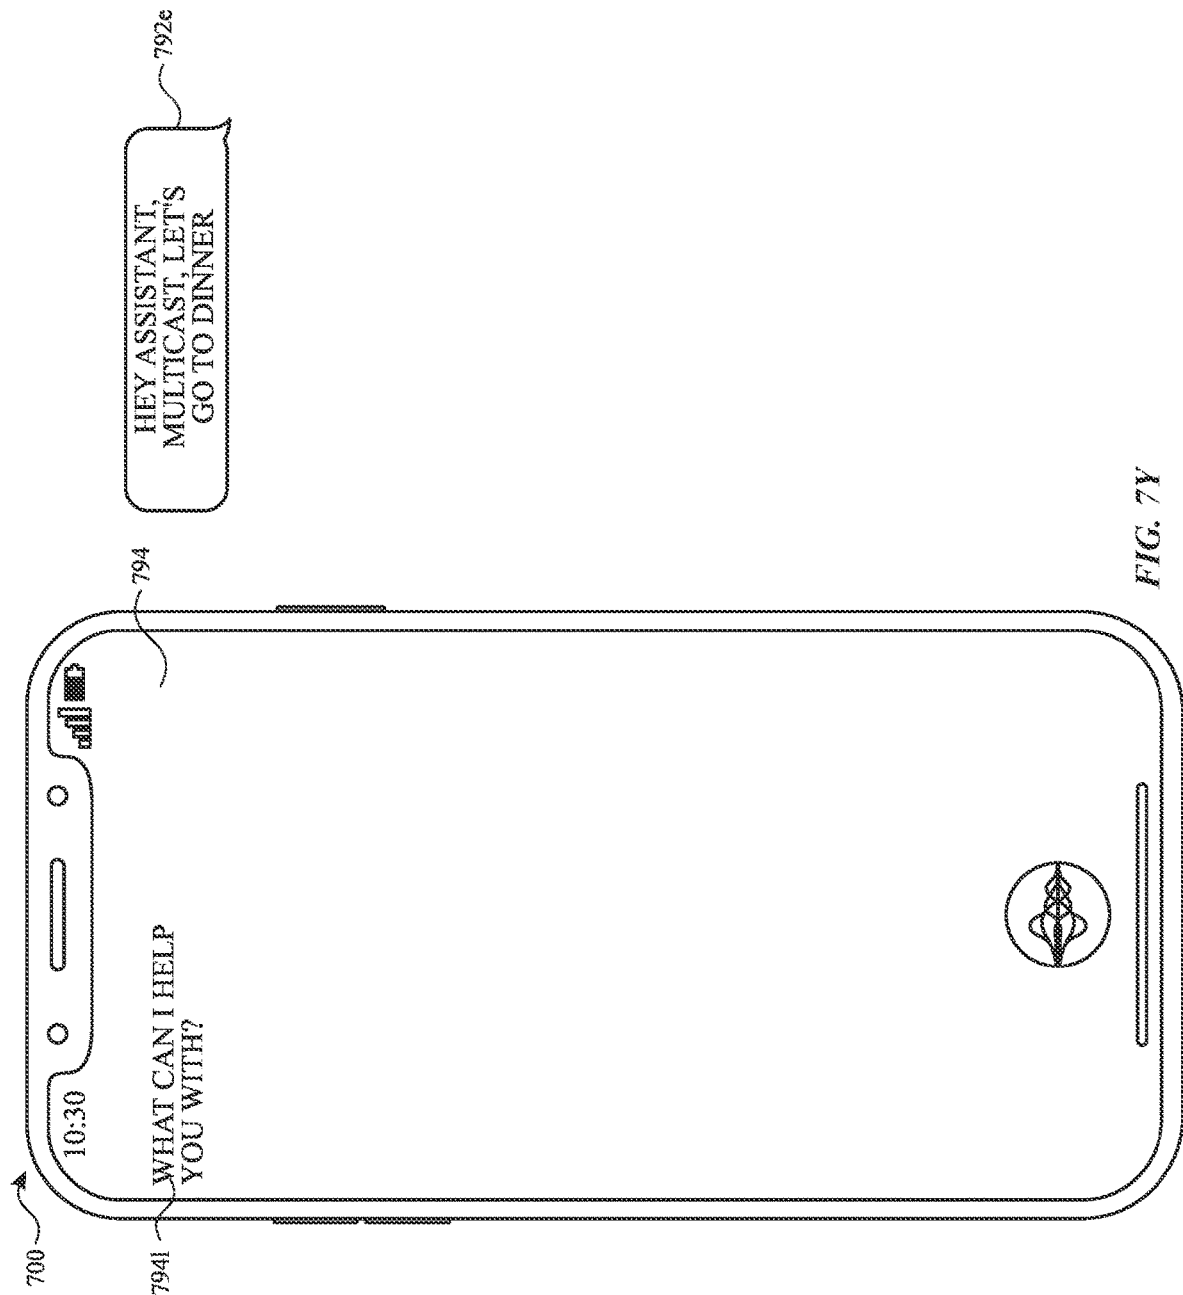

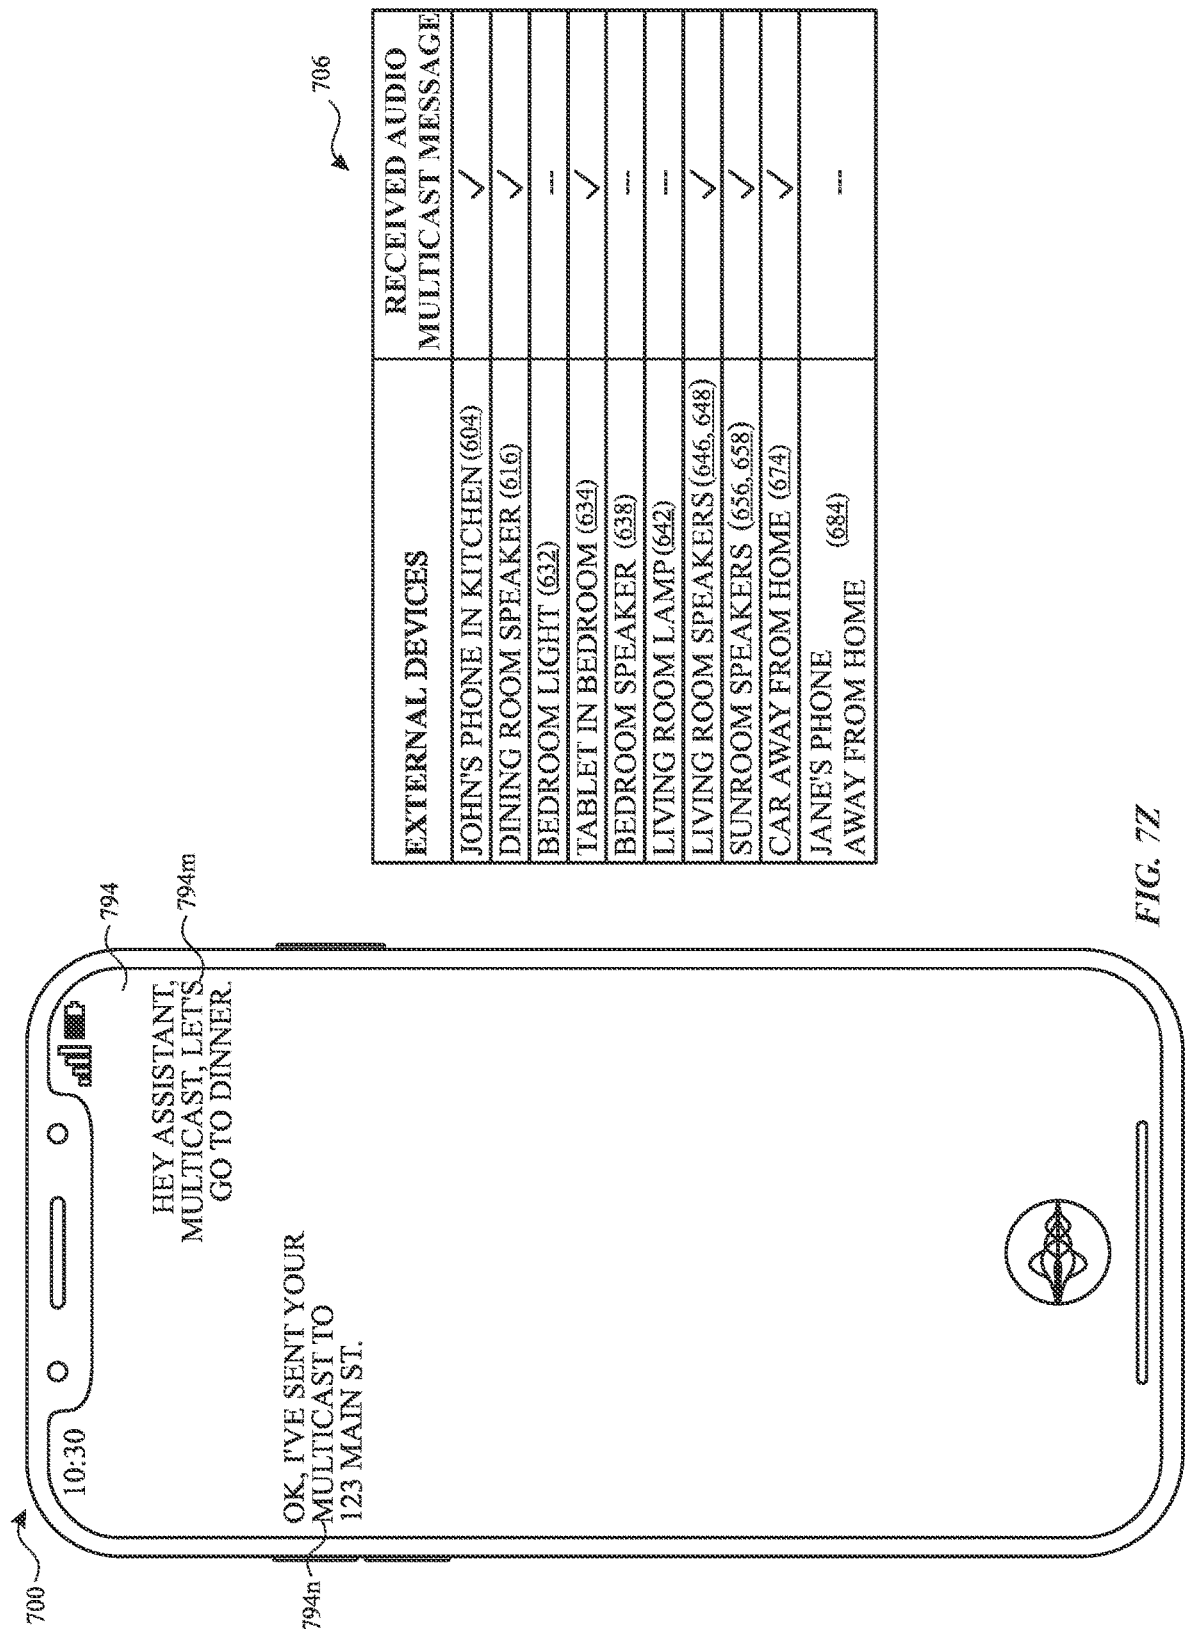

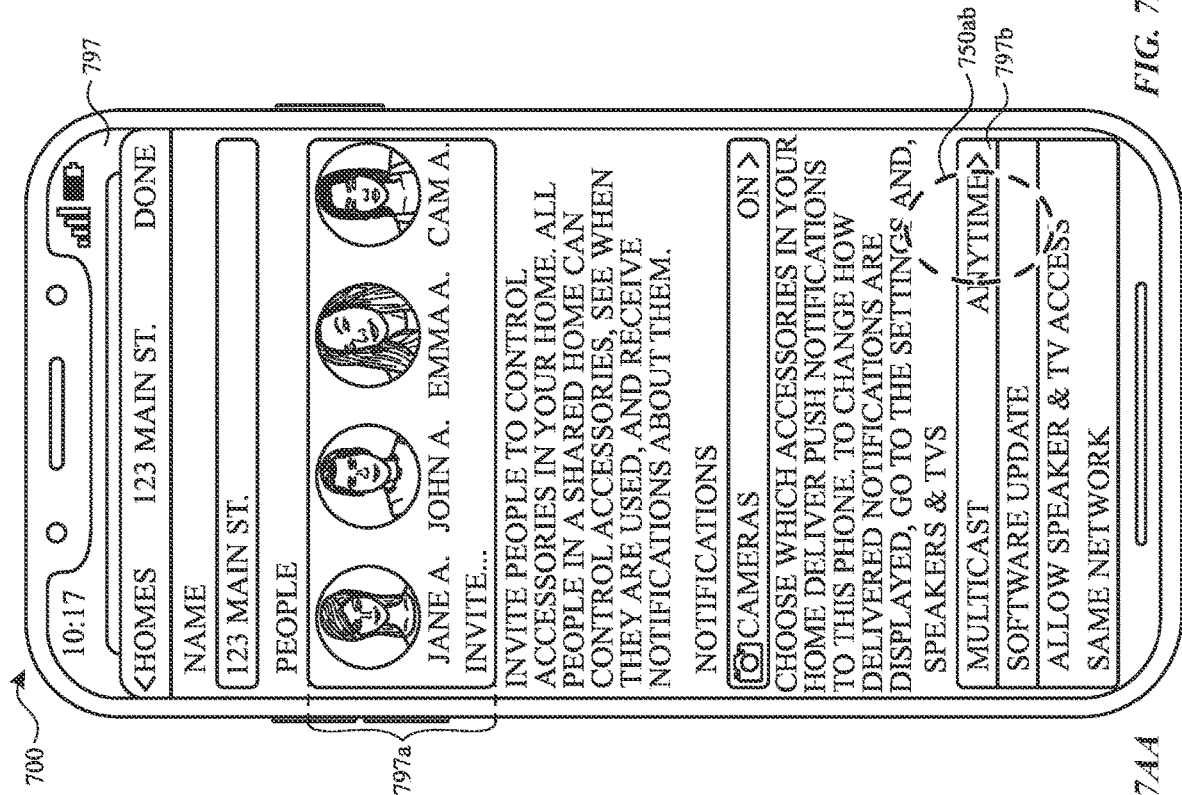


FIG. 7AB

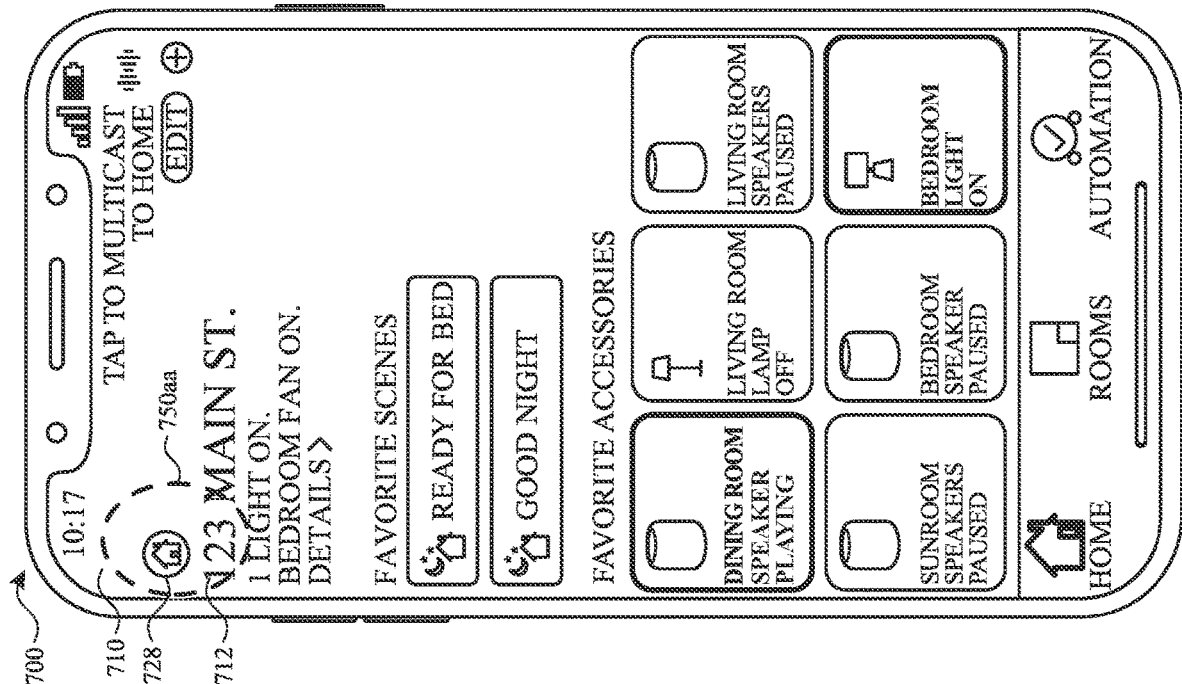
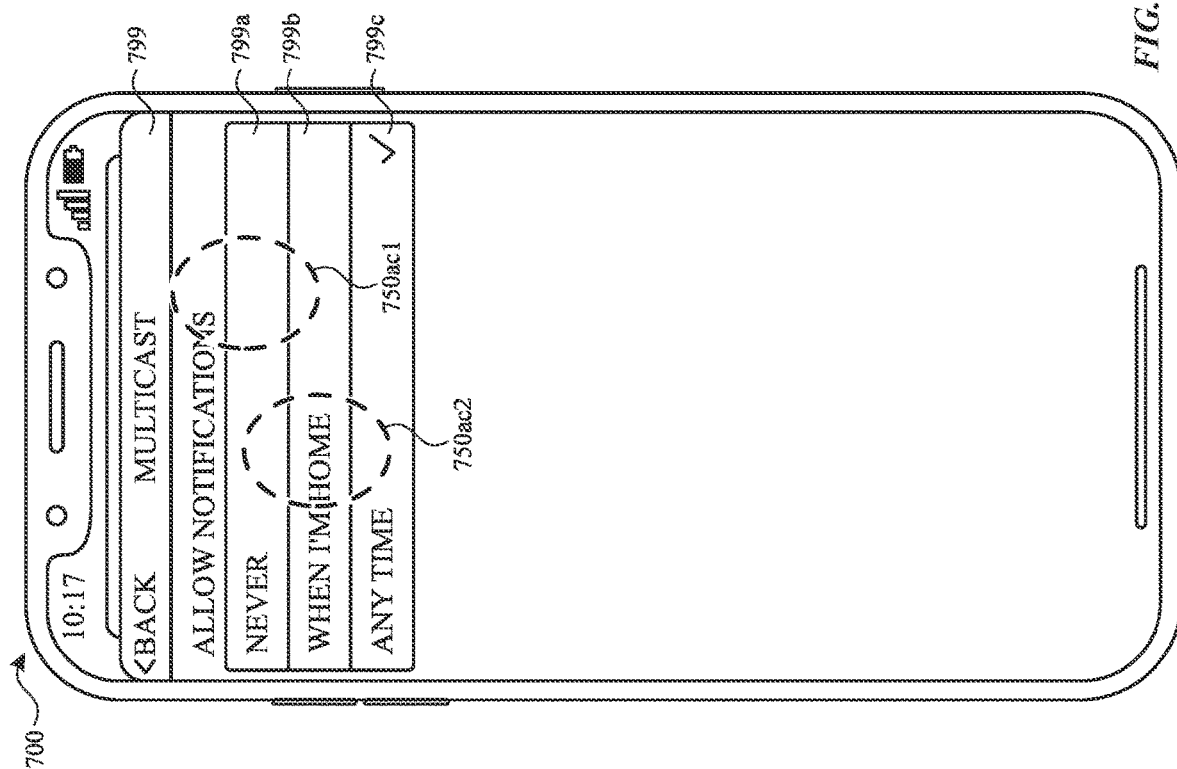


FIG. 7AA



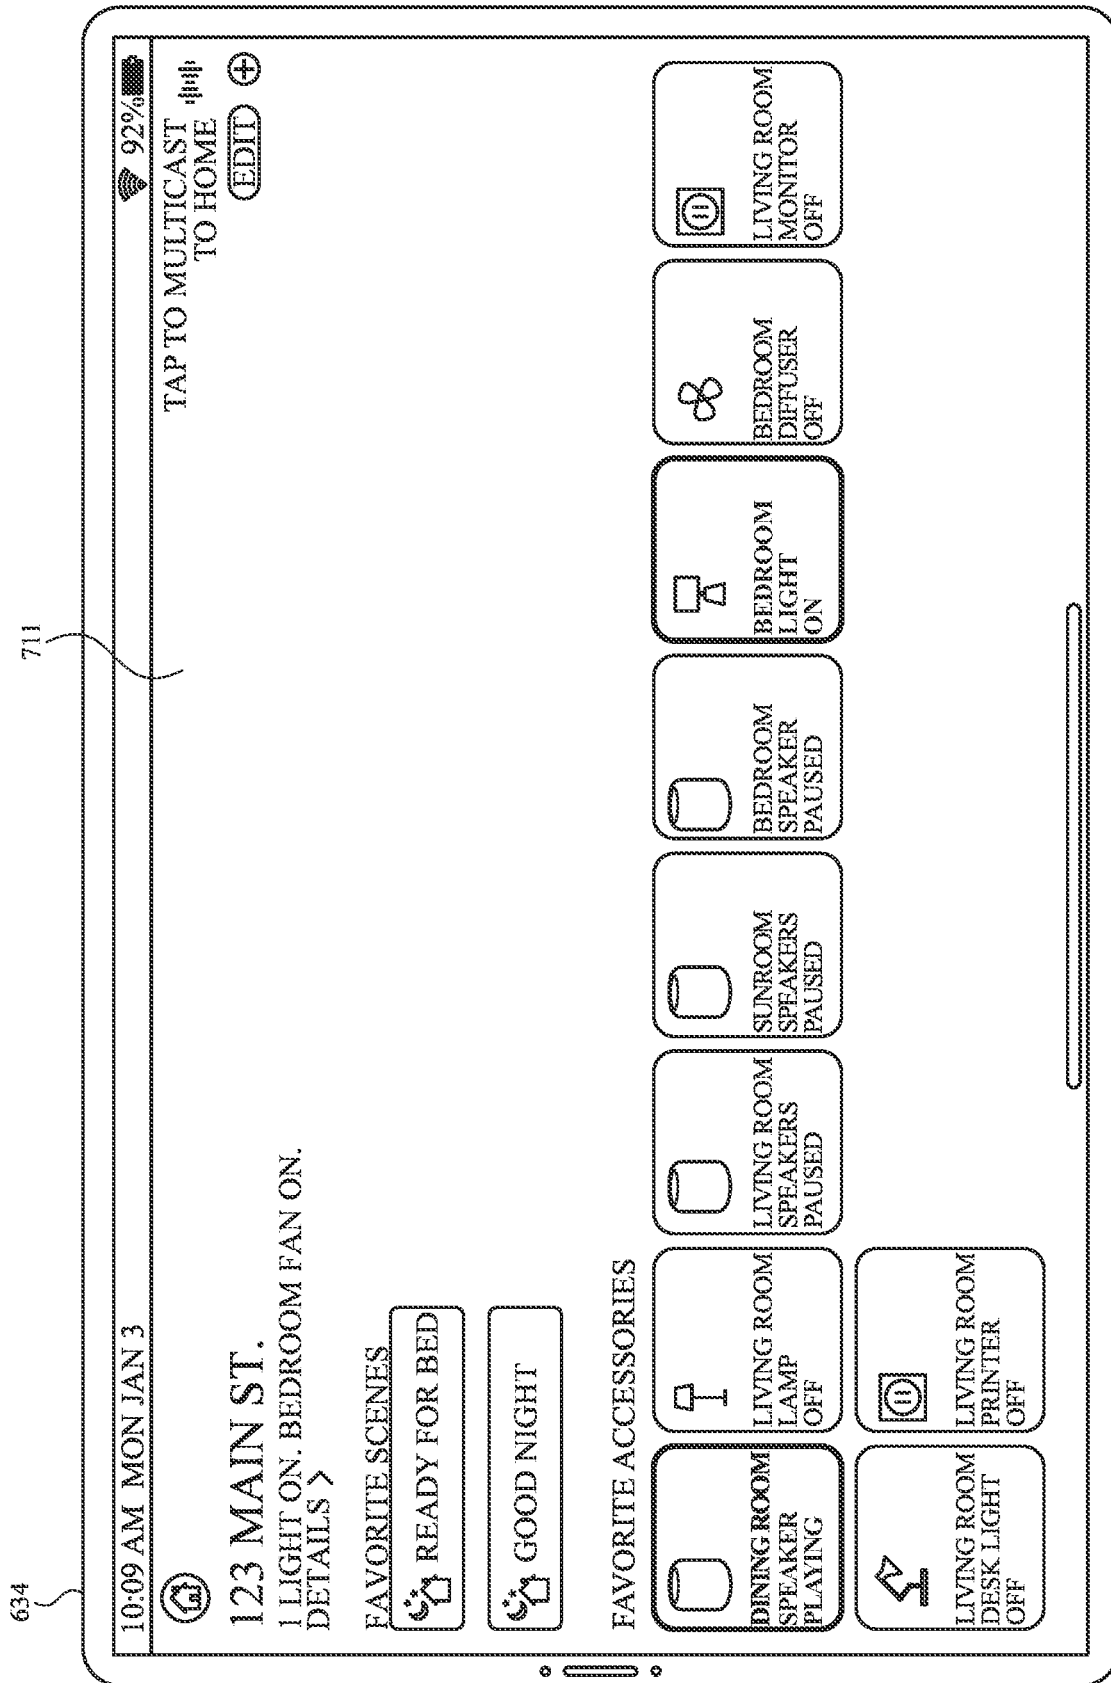


FIG. 7AD

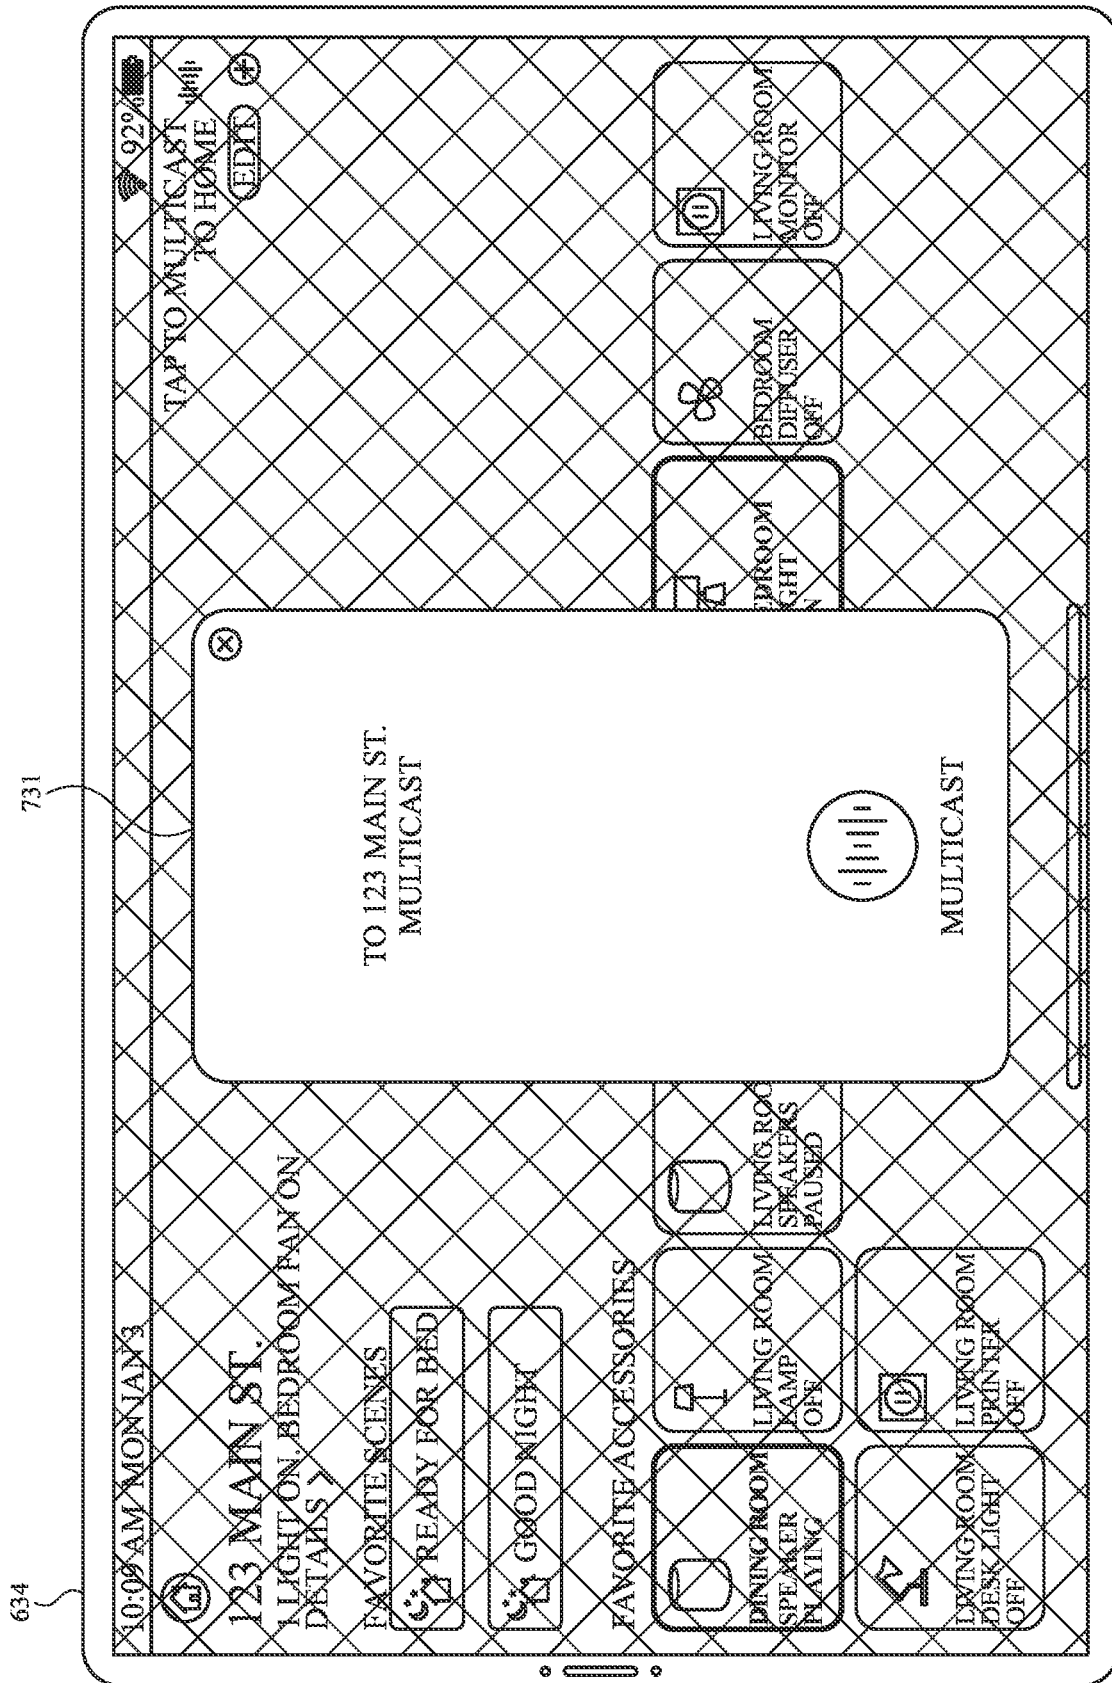


FIG. 7AE

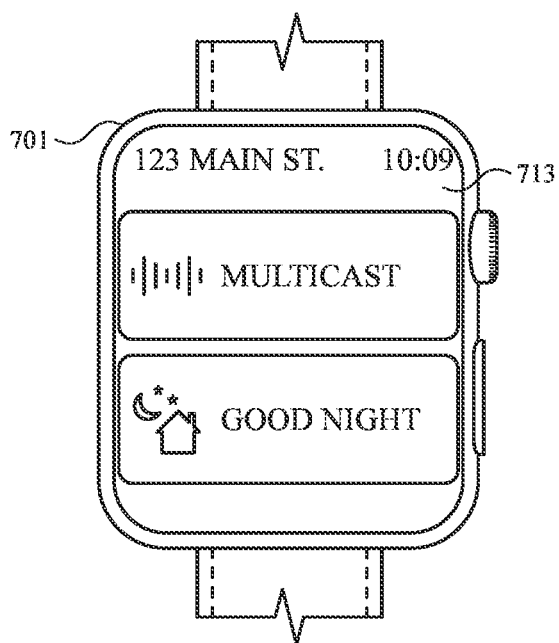


FIG. 7AF

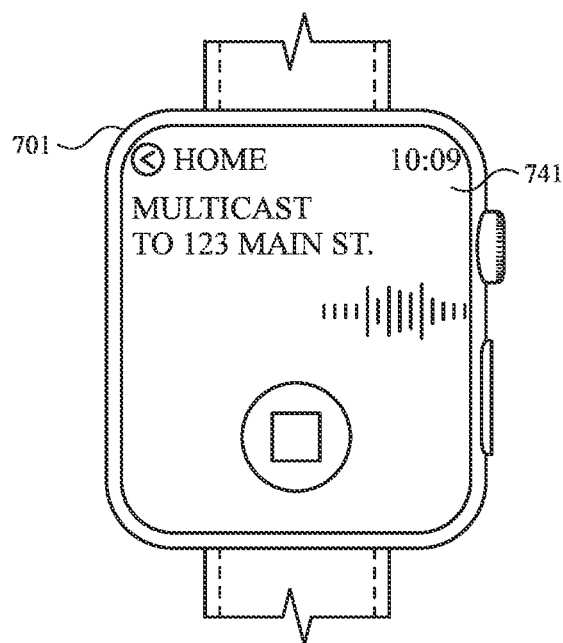


FIG. 7AG

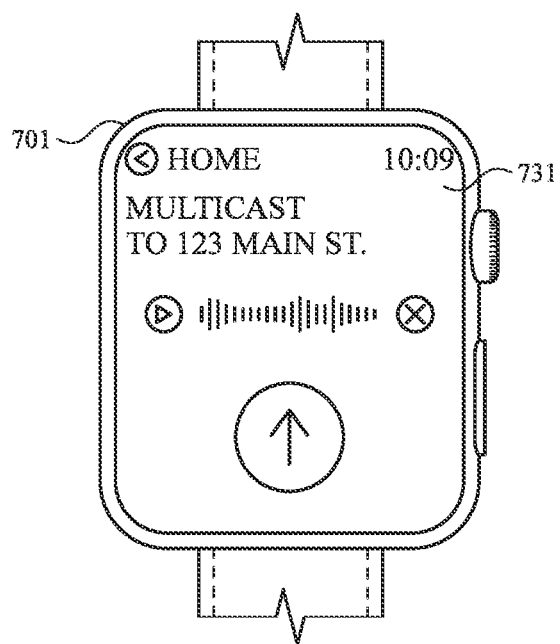


FIG. 7AH

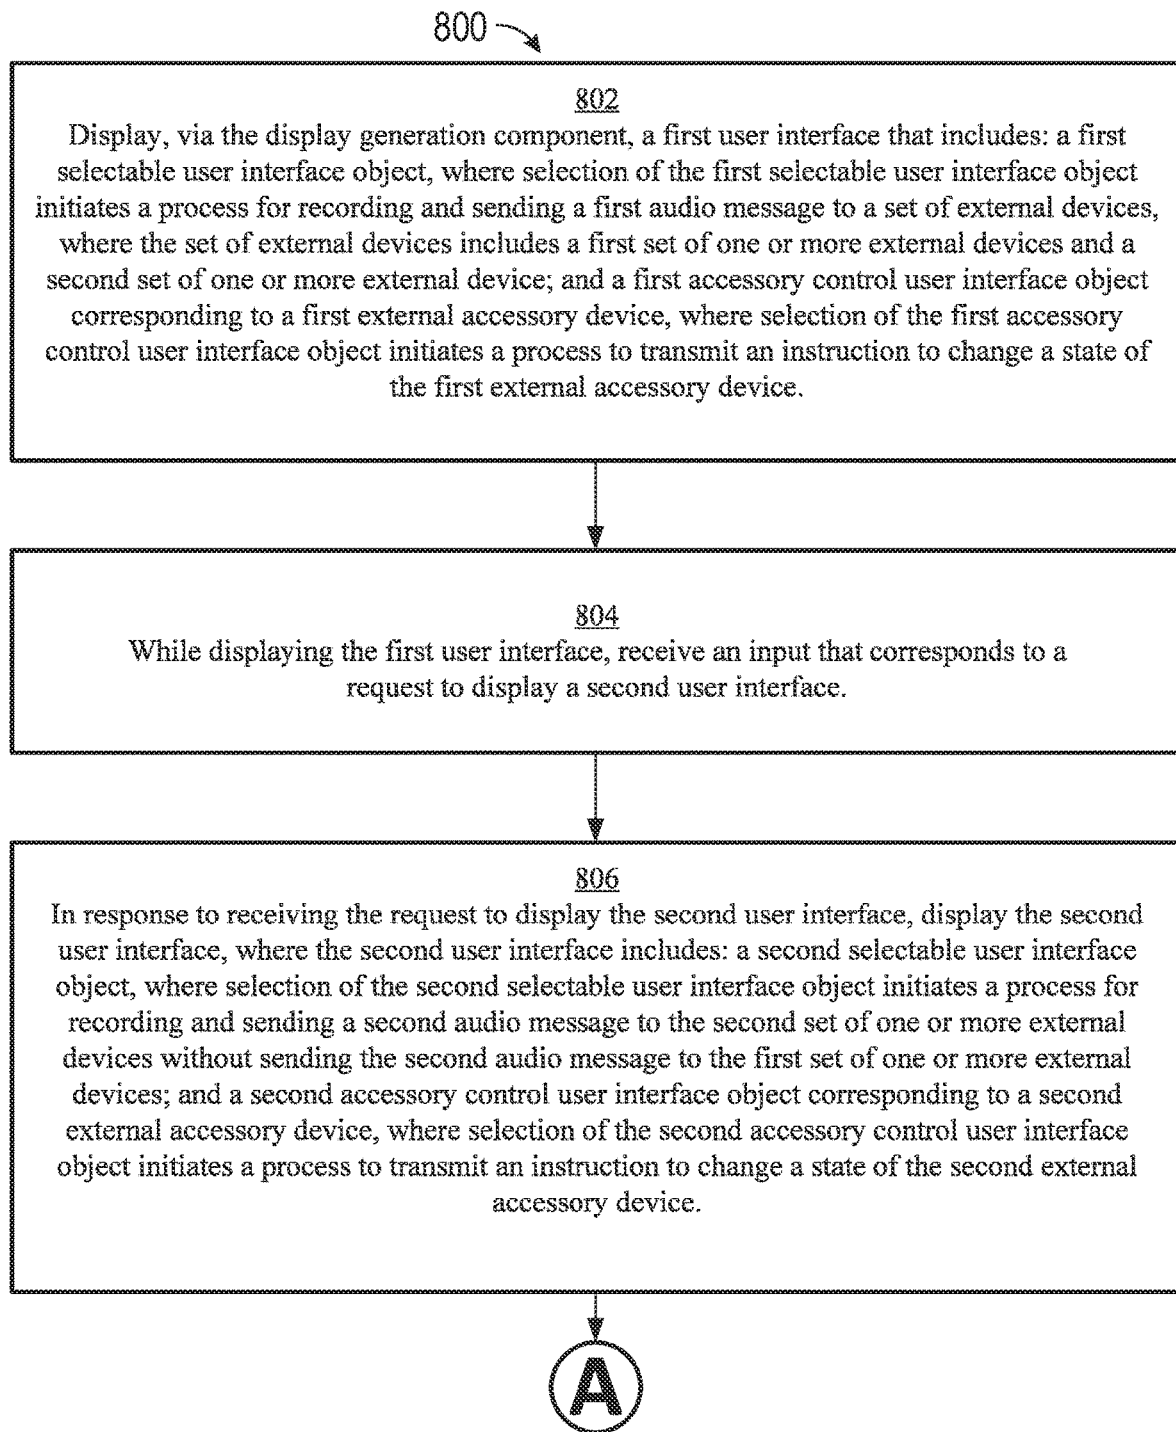
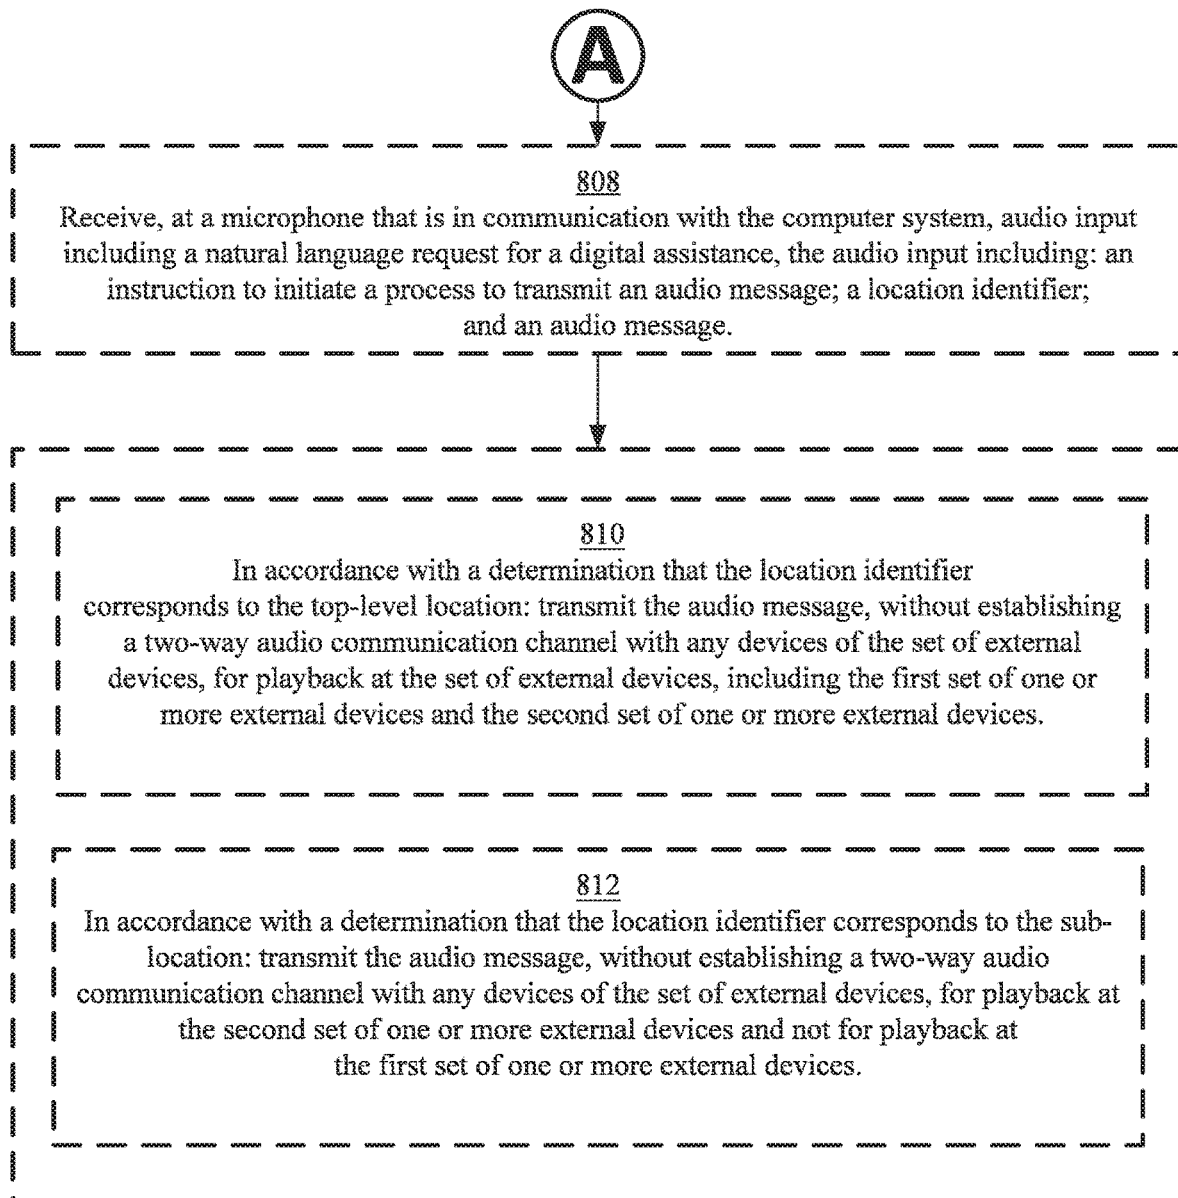


FIG. 8A

*FIG. 8B*

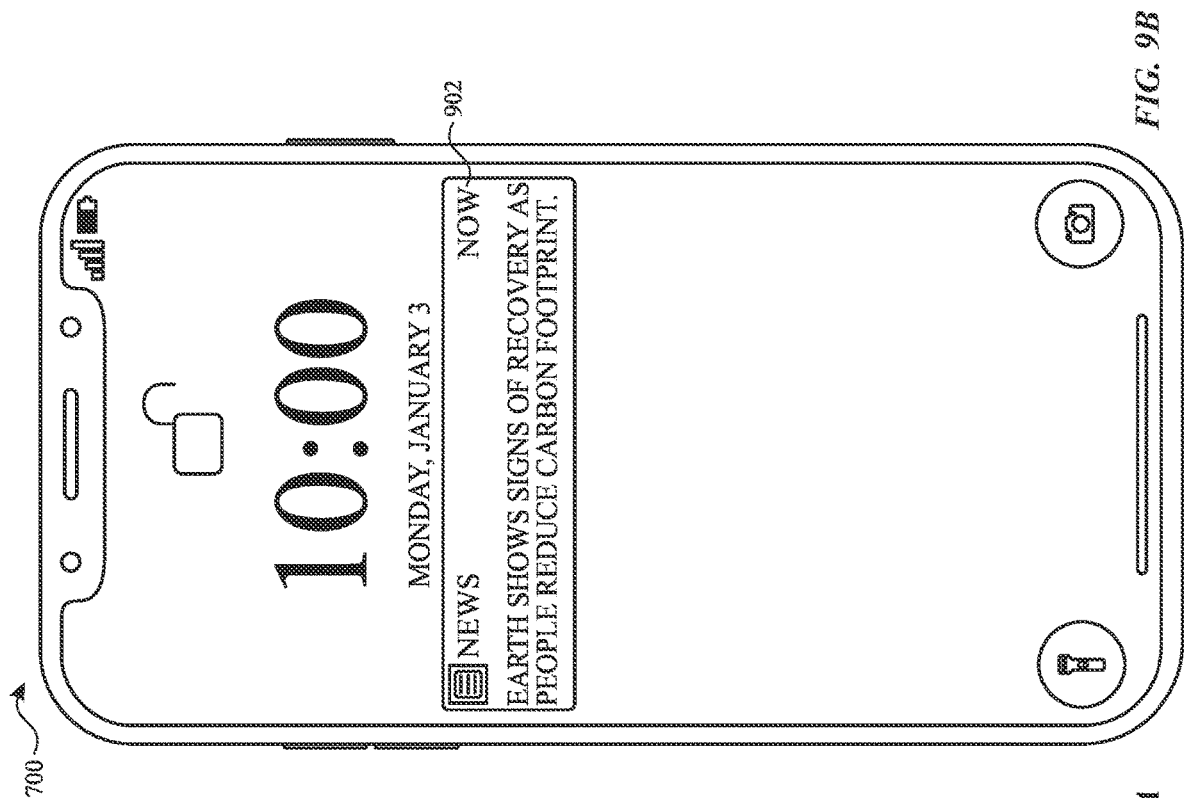


FIG. 9B

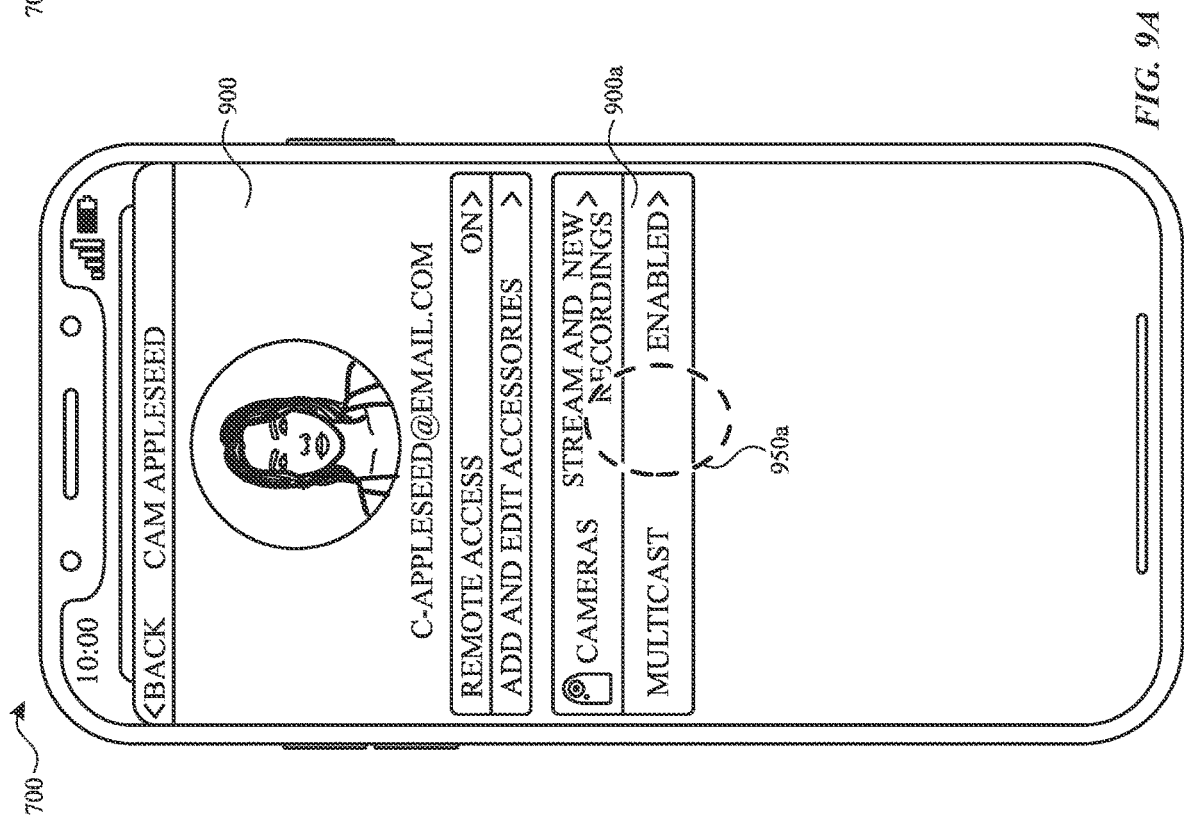
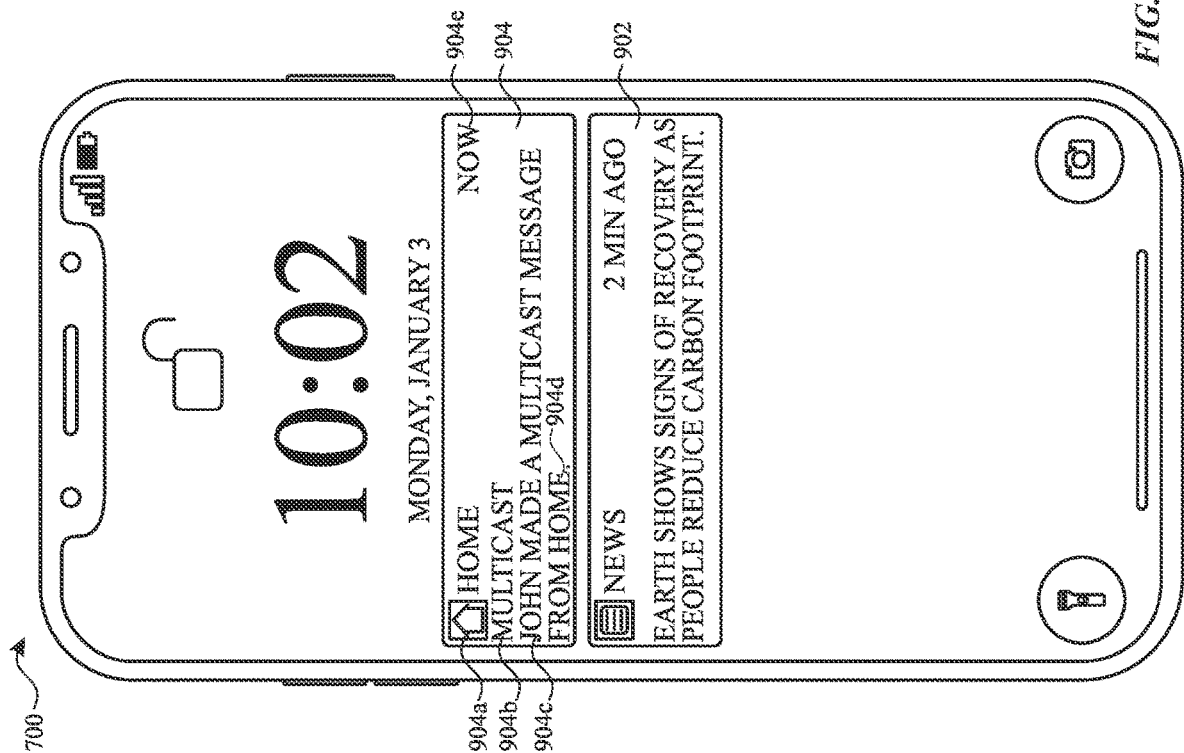
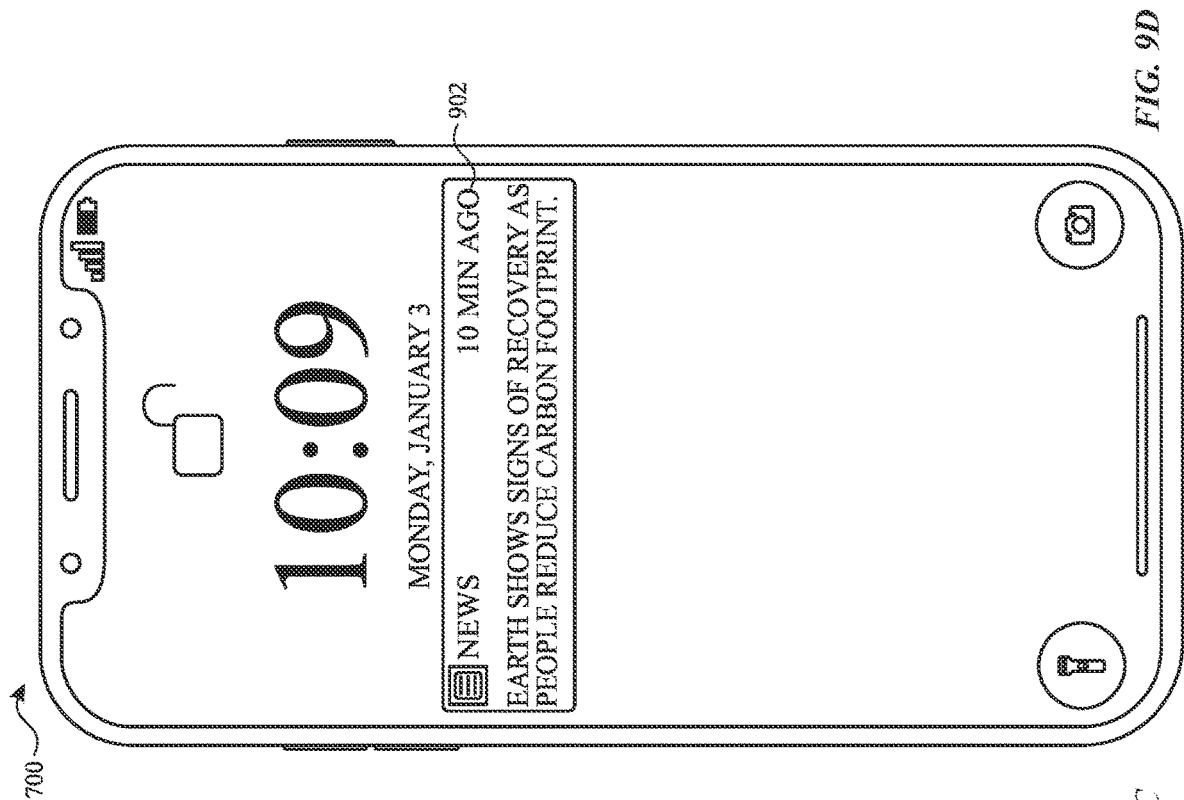
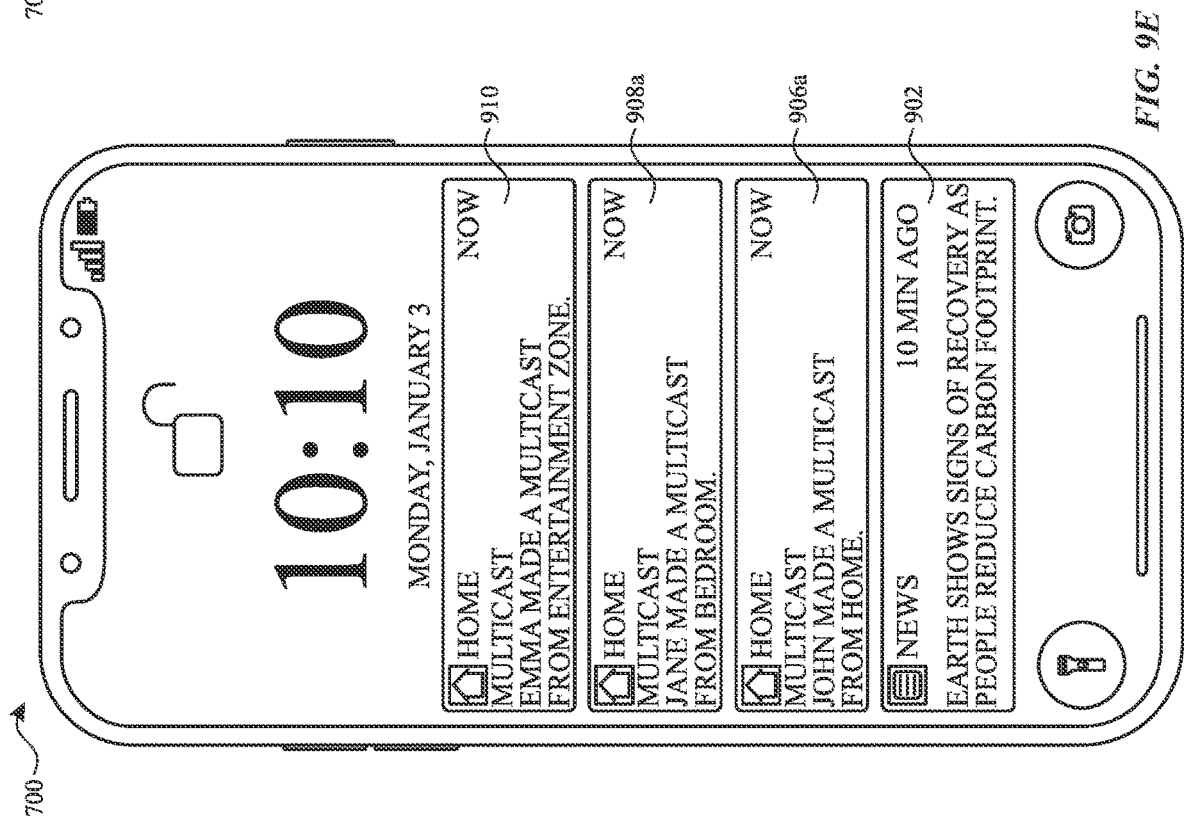
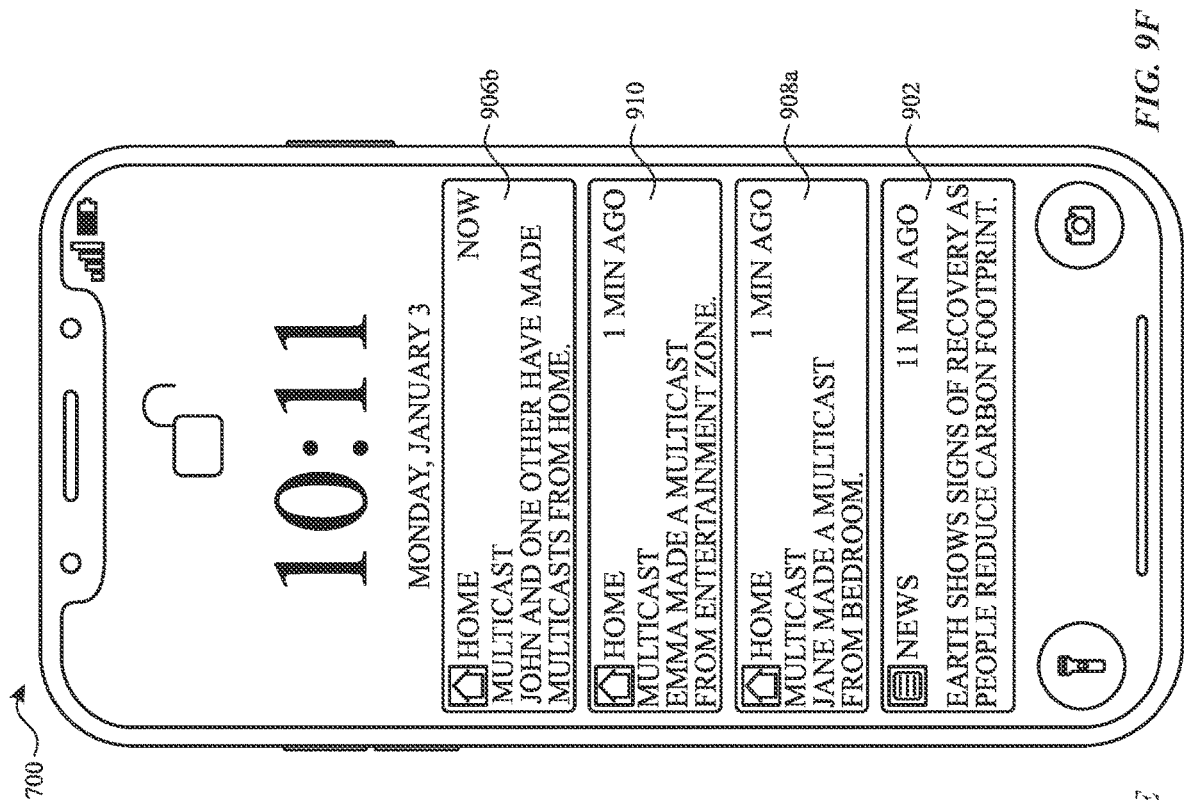
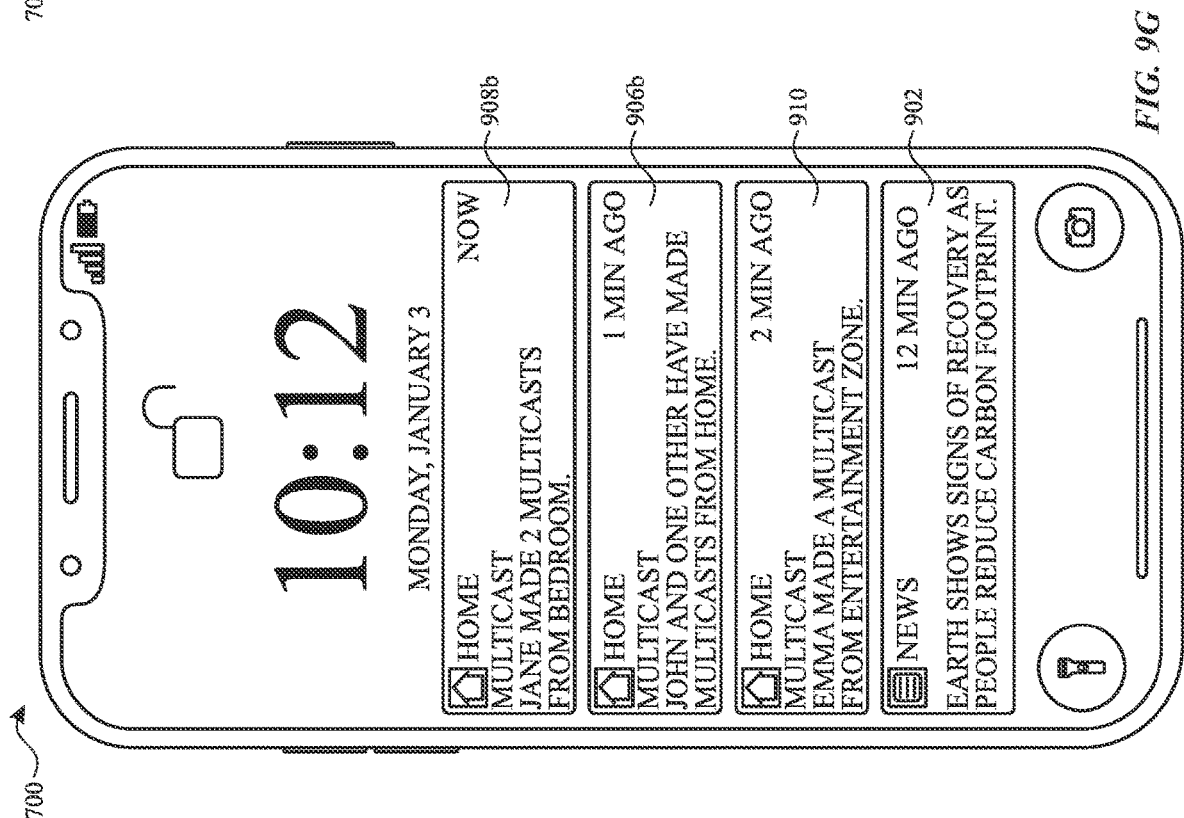
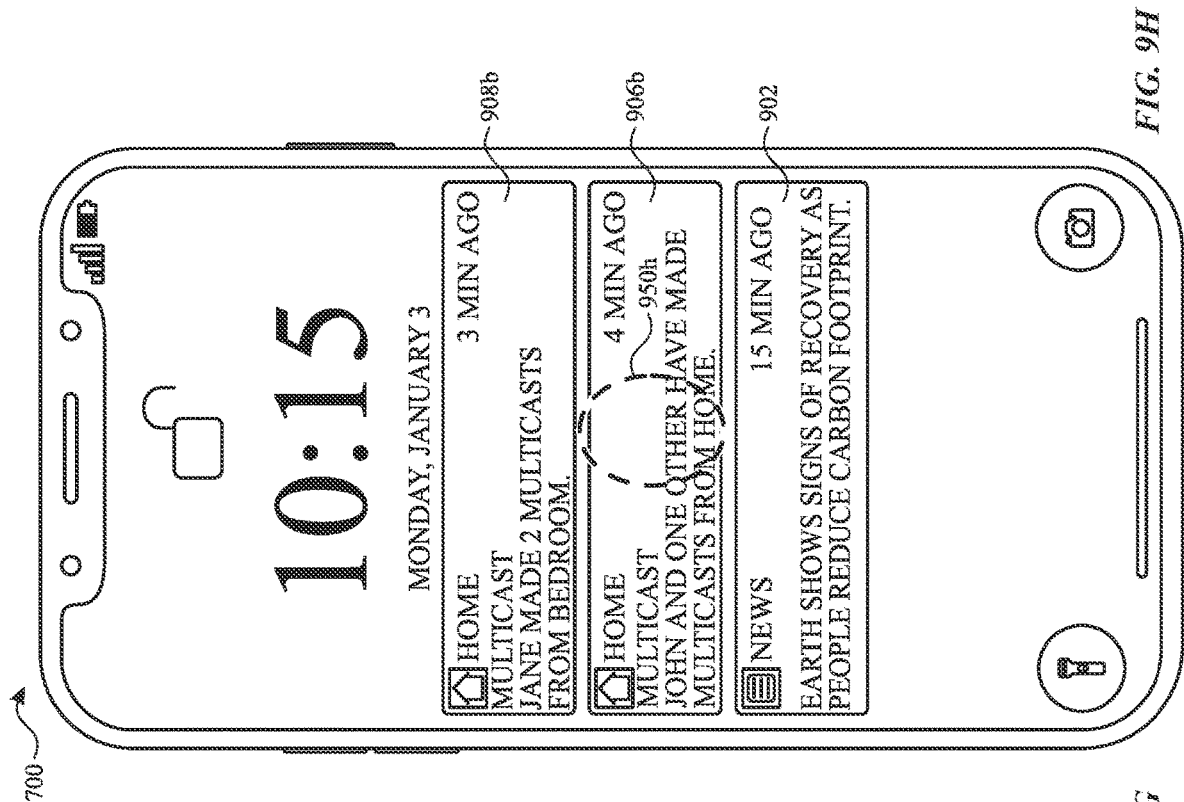
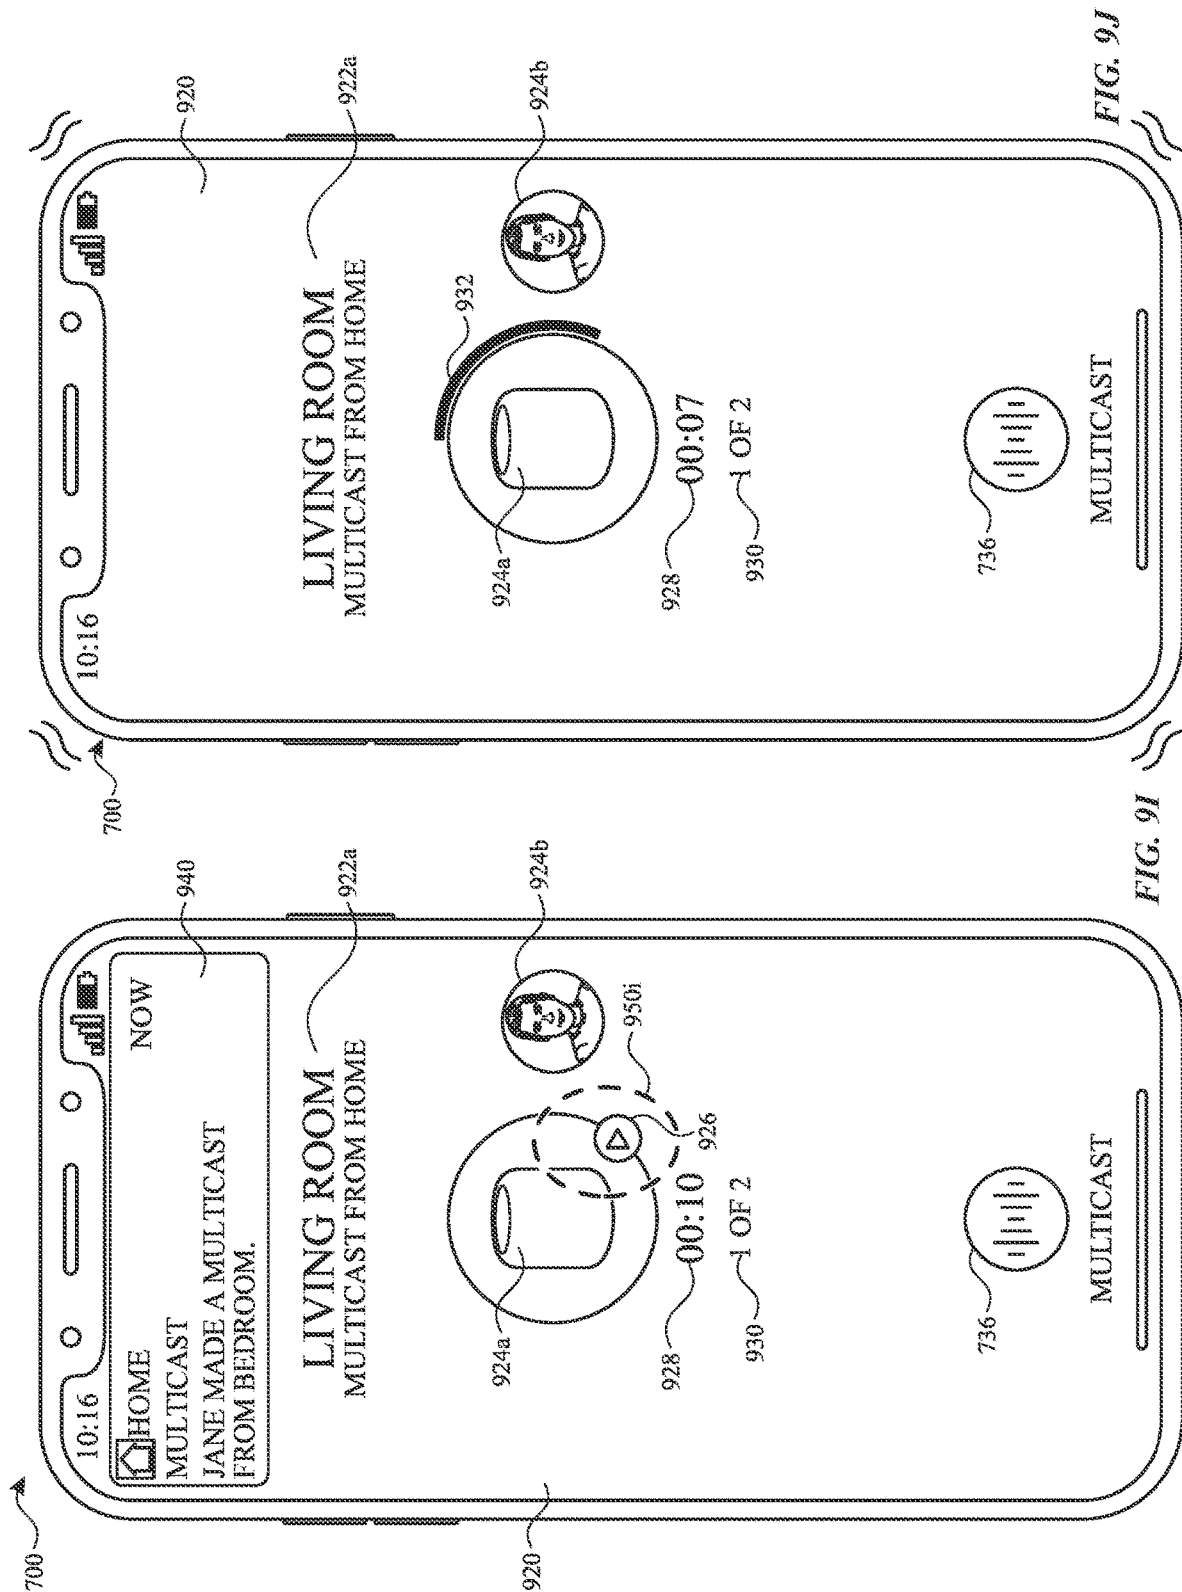



FIG. 9A












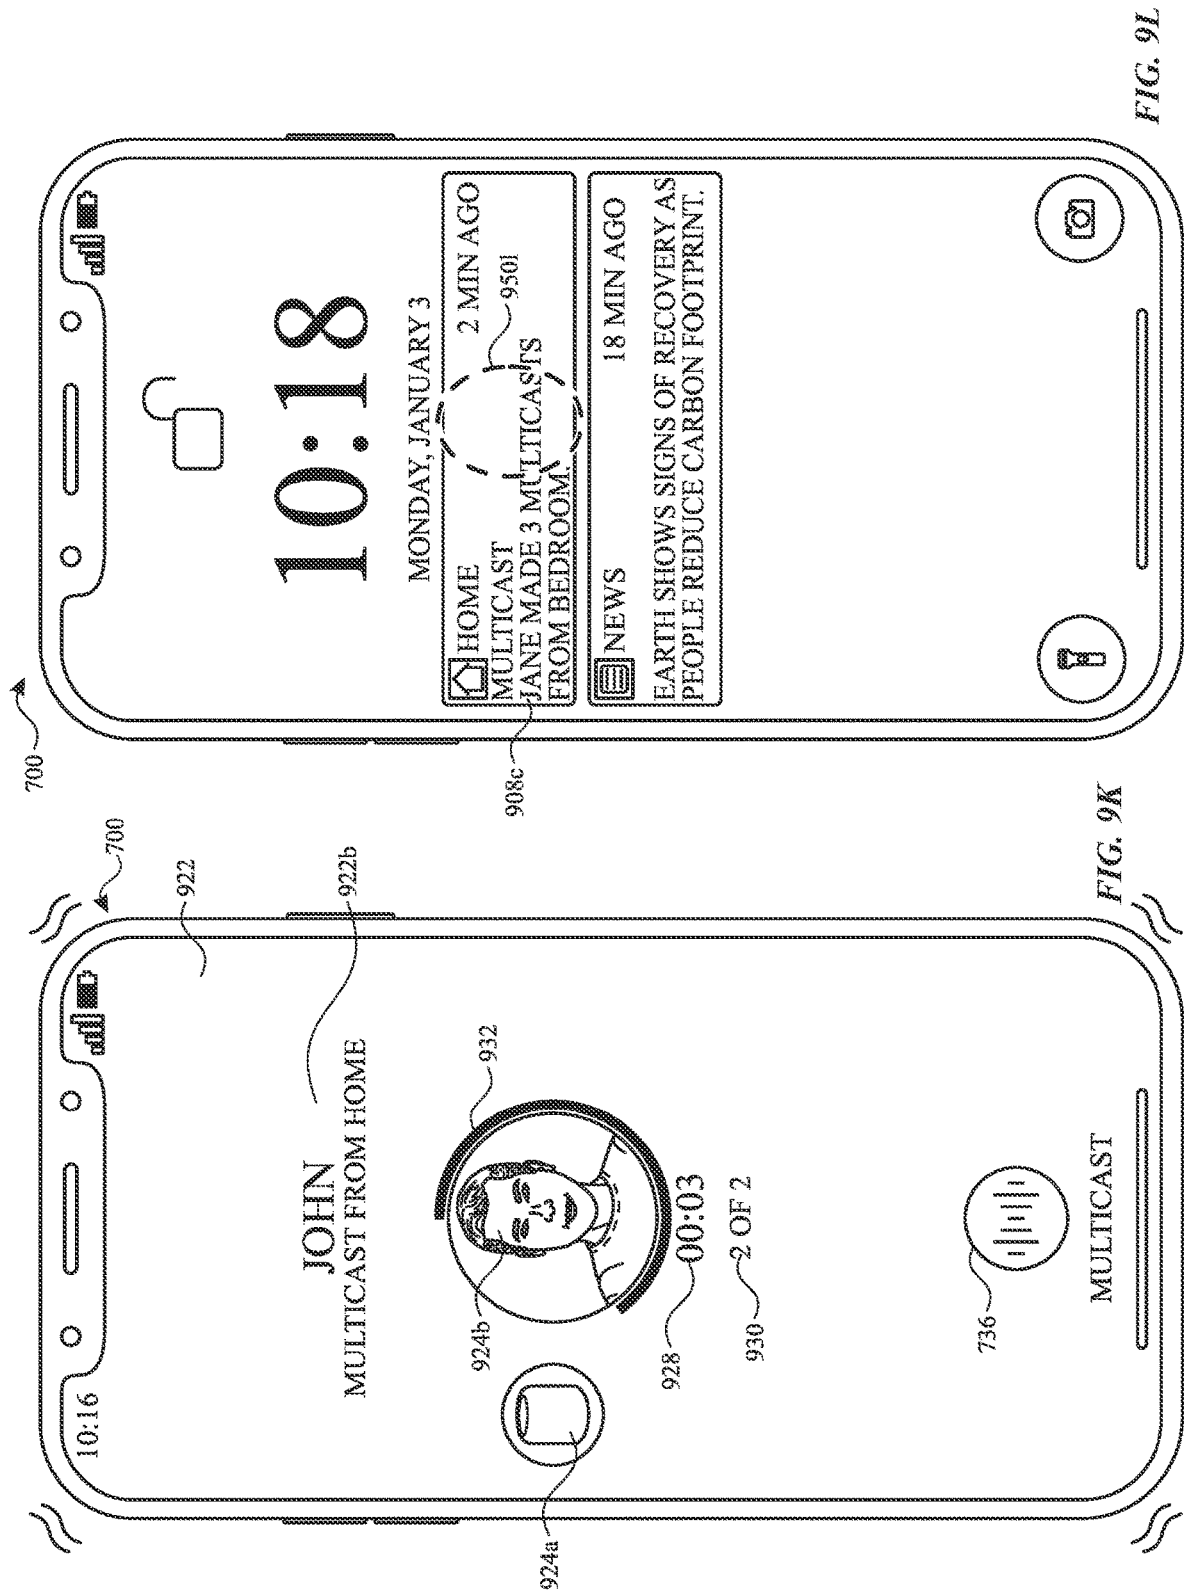

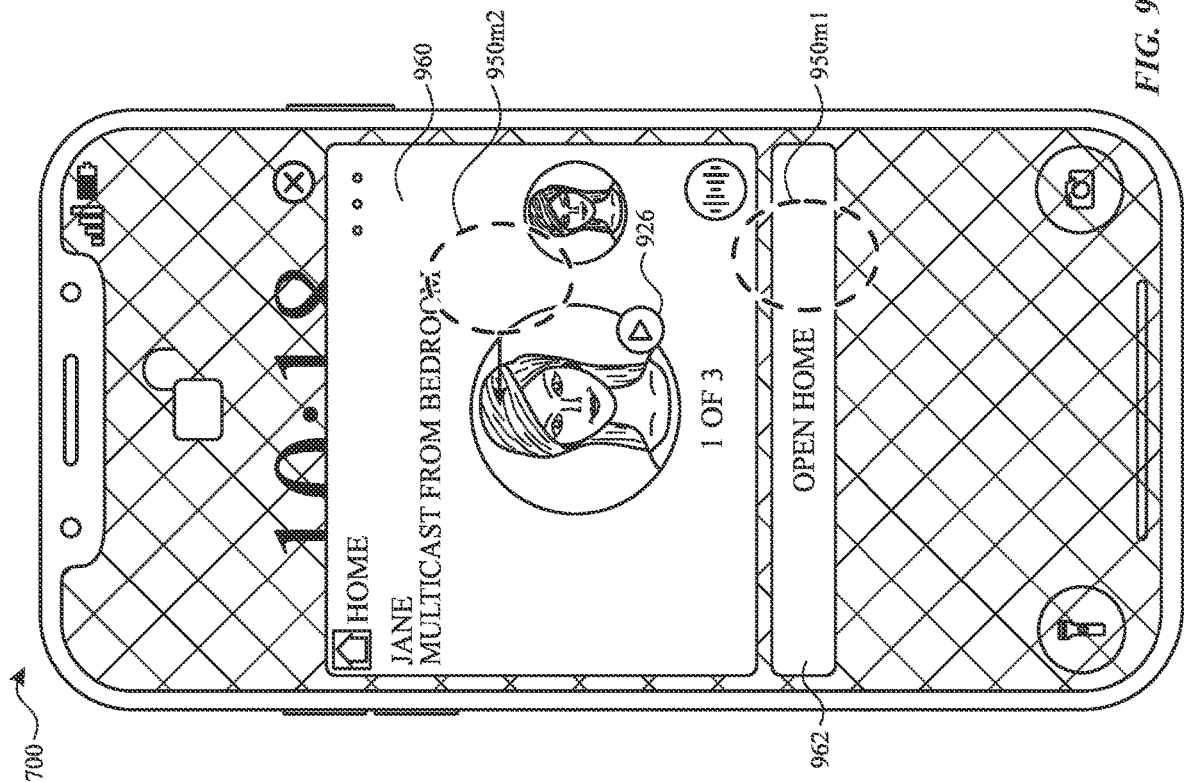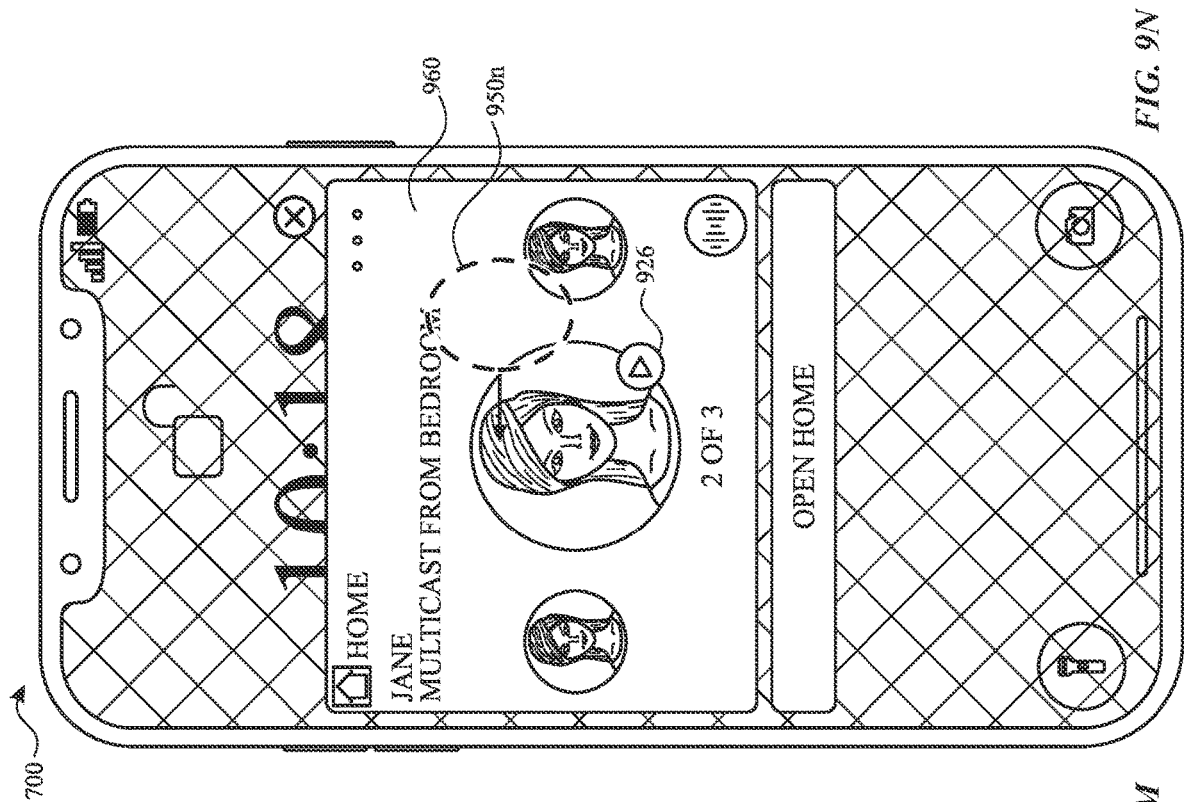

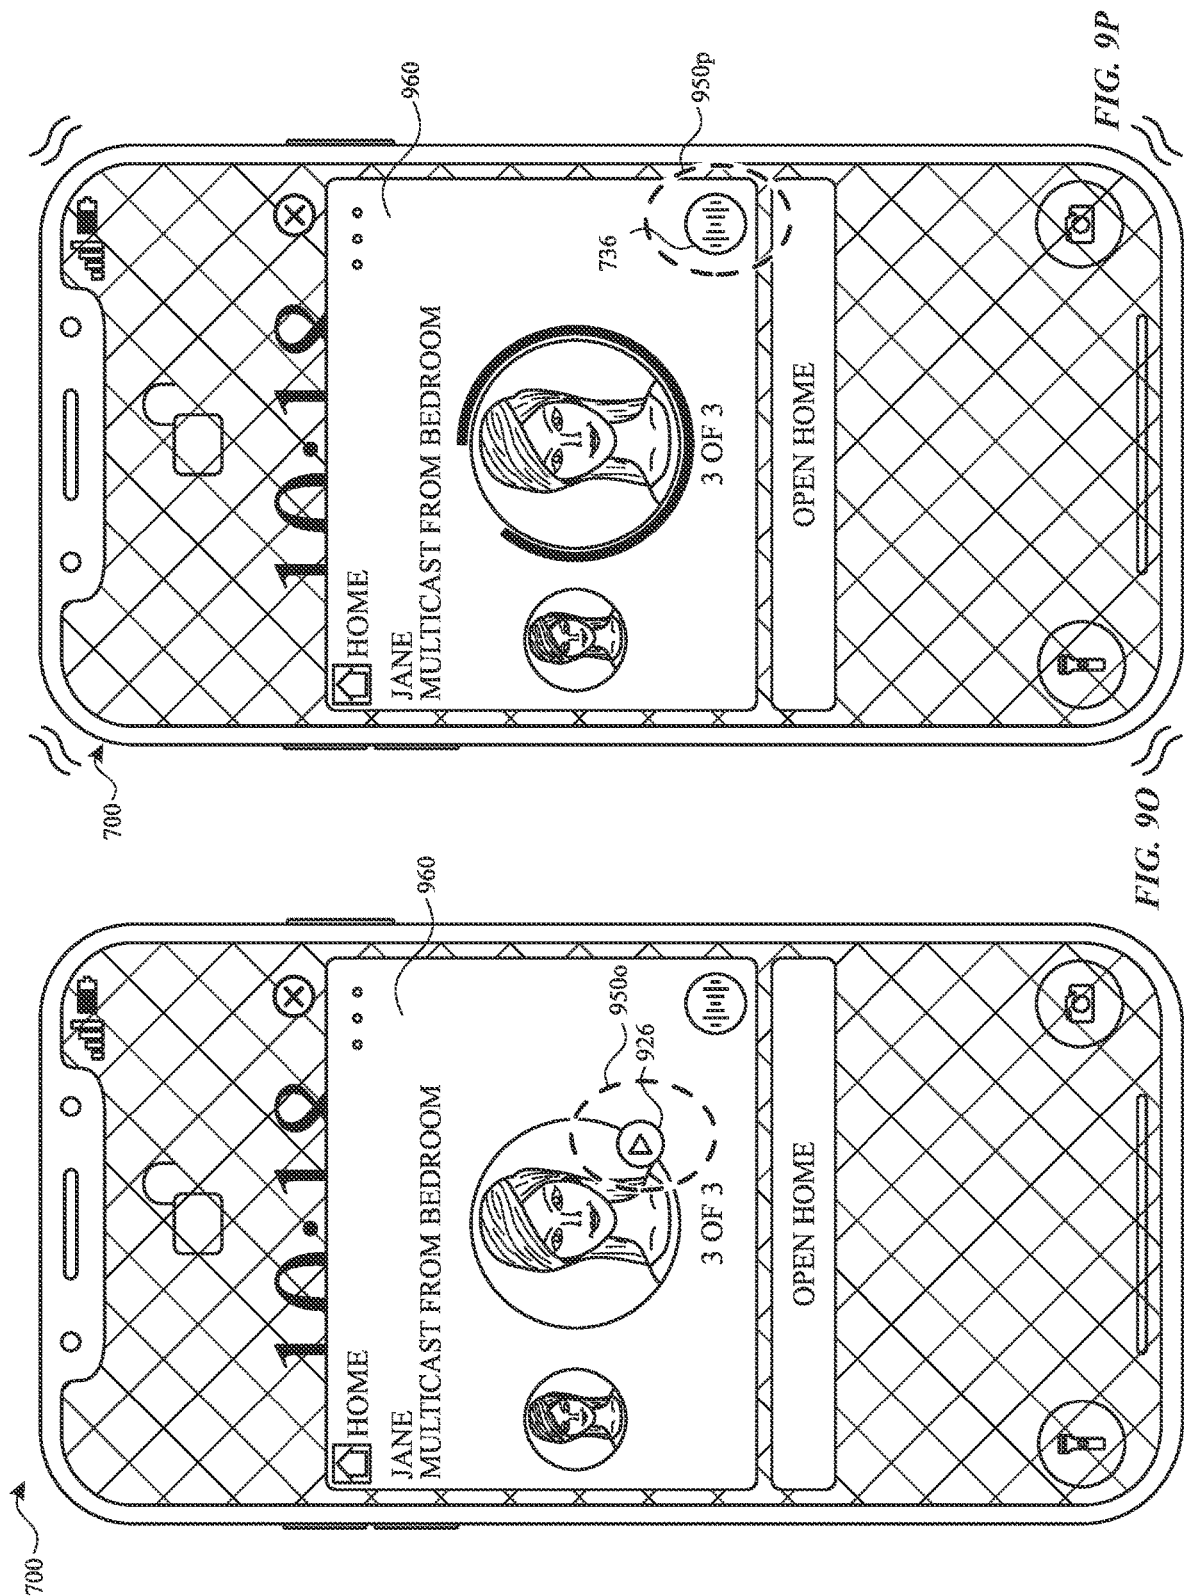

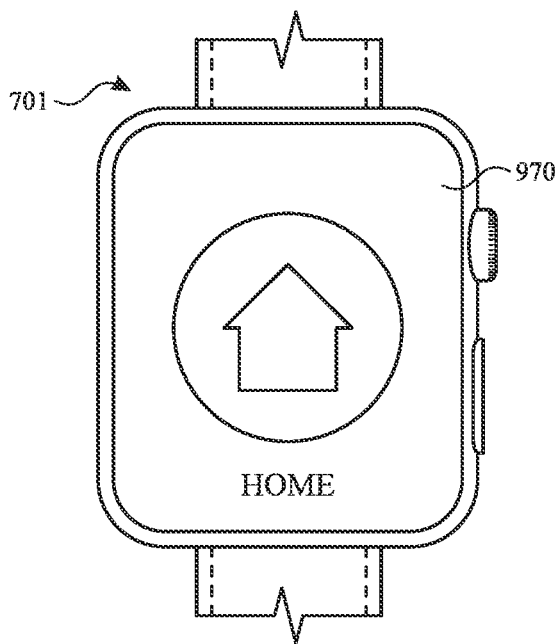


FIG. 9Q

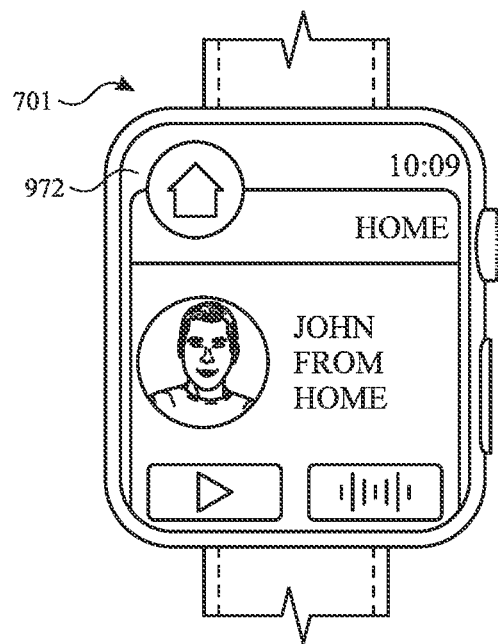


FIG. 9R

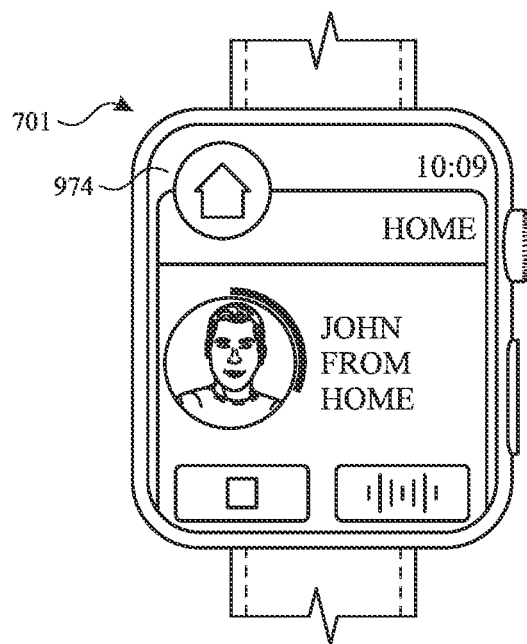


FIG. 9S

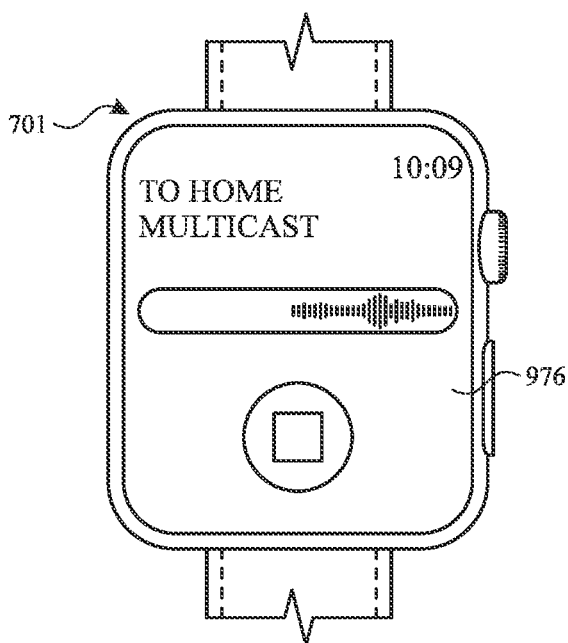


FIG. 9T

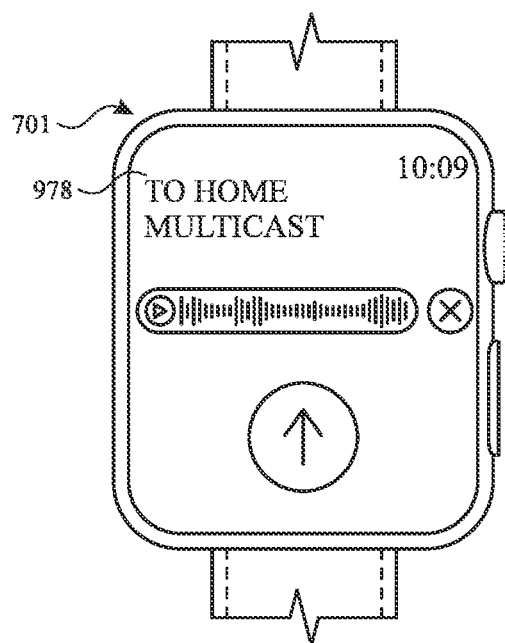


FIG. 9U

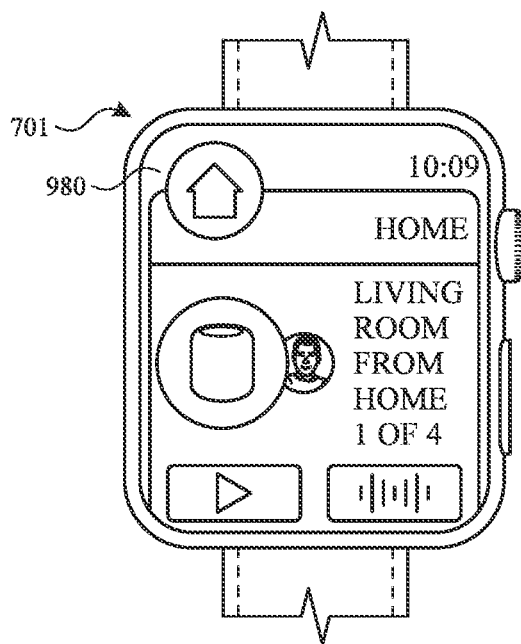


FIG. 9V

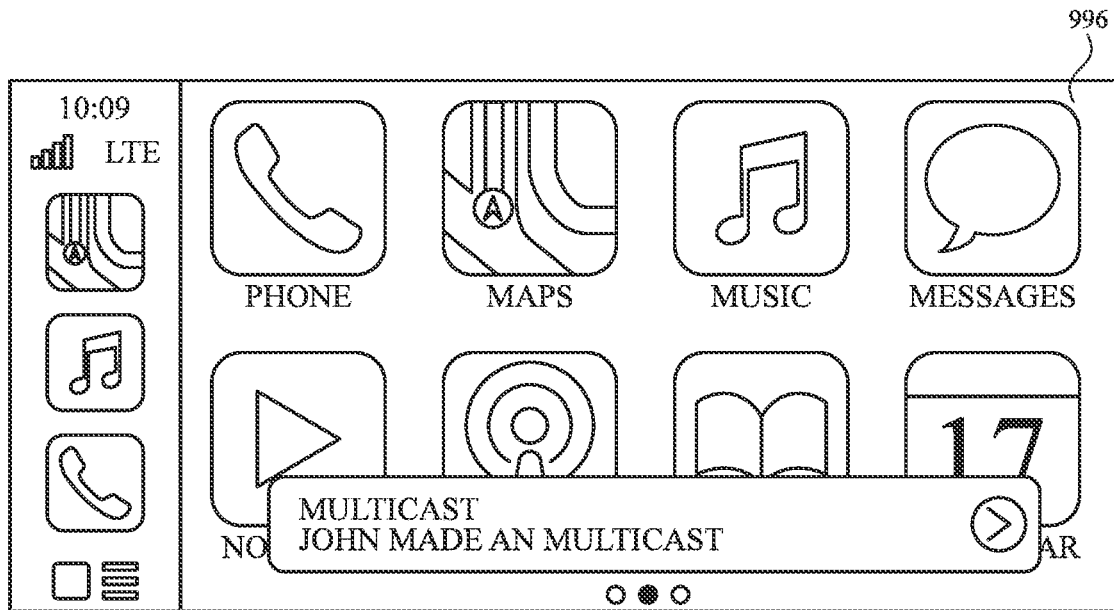


FIG. 9W

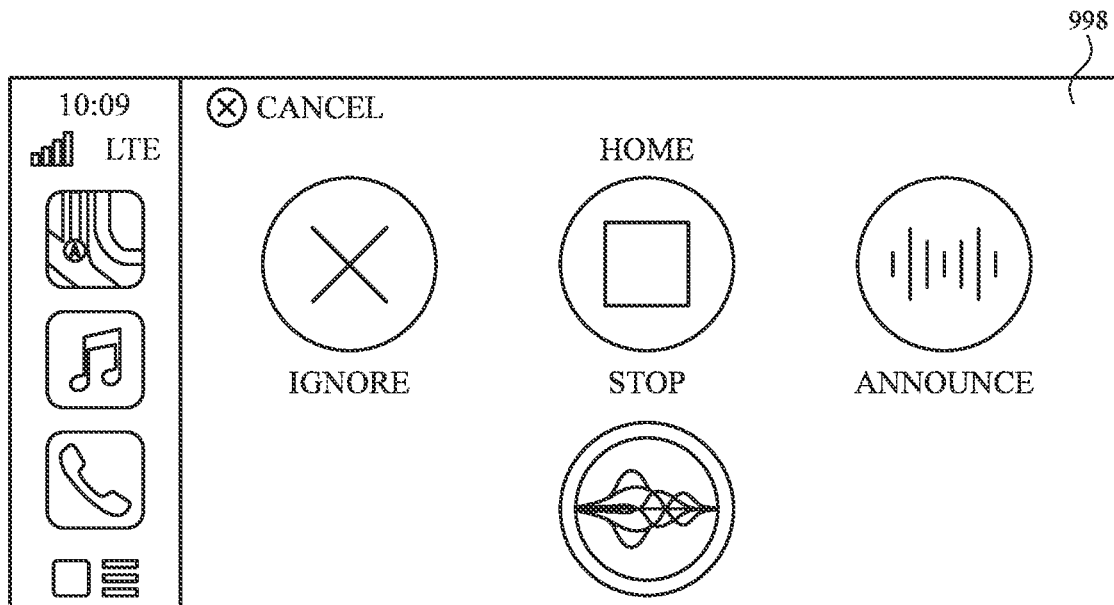


FIG. 9X

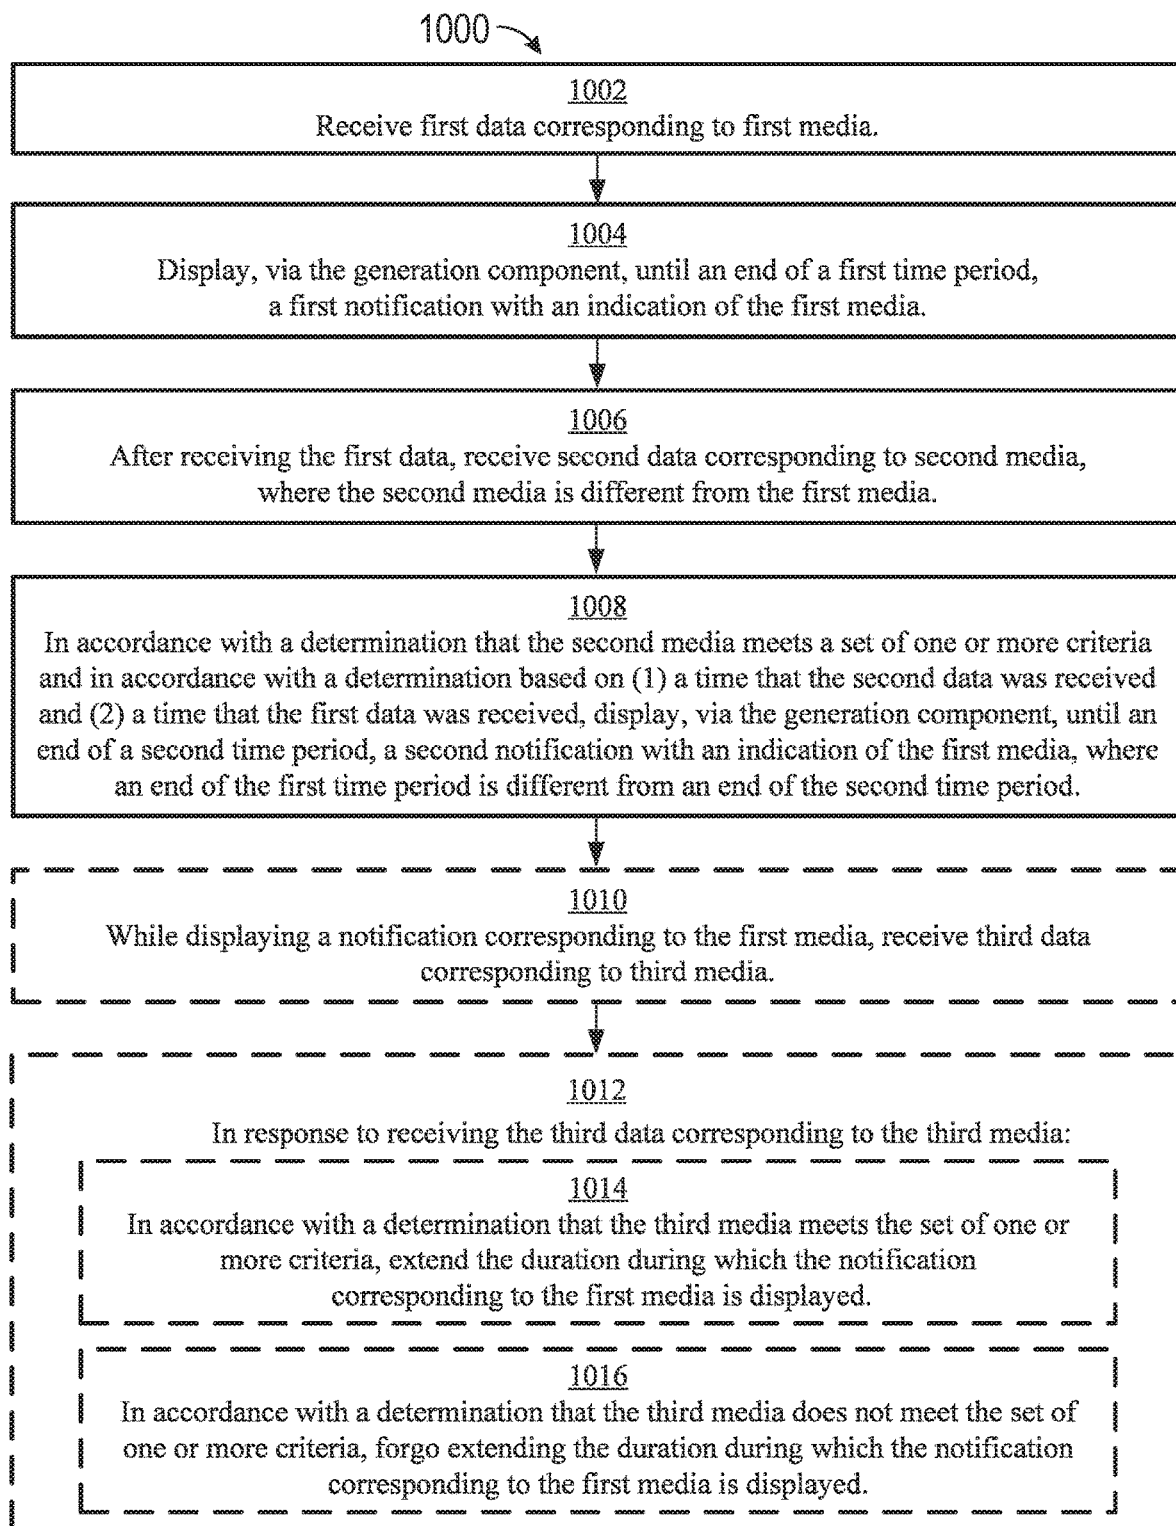


FIG. 10

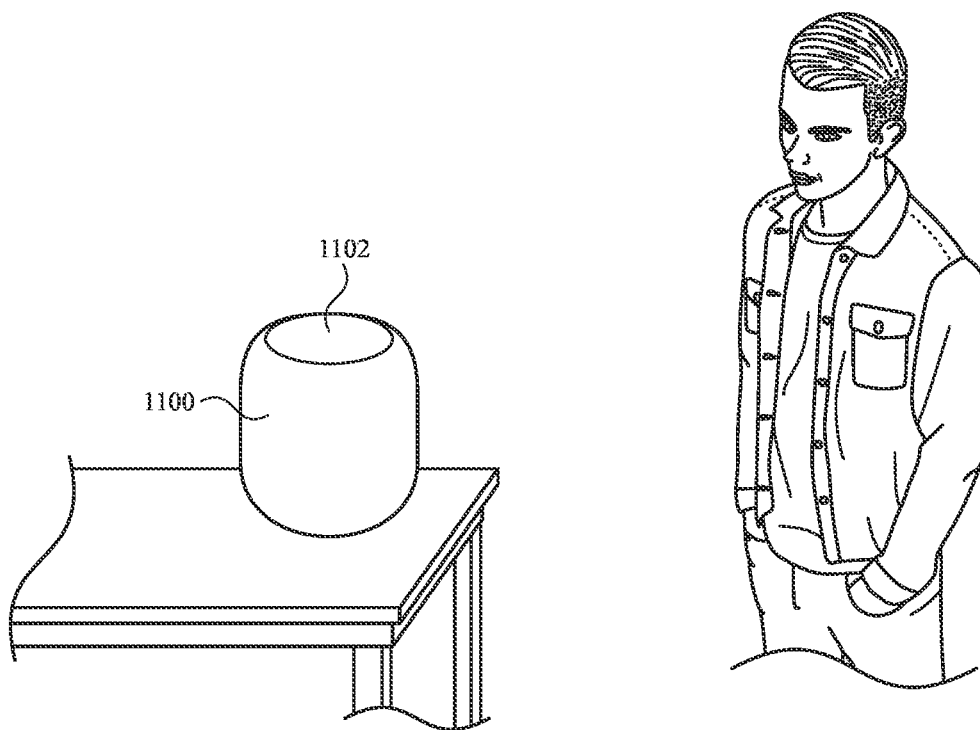


FIG. 11A

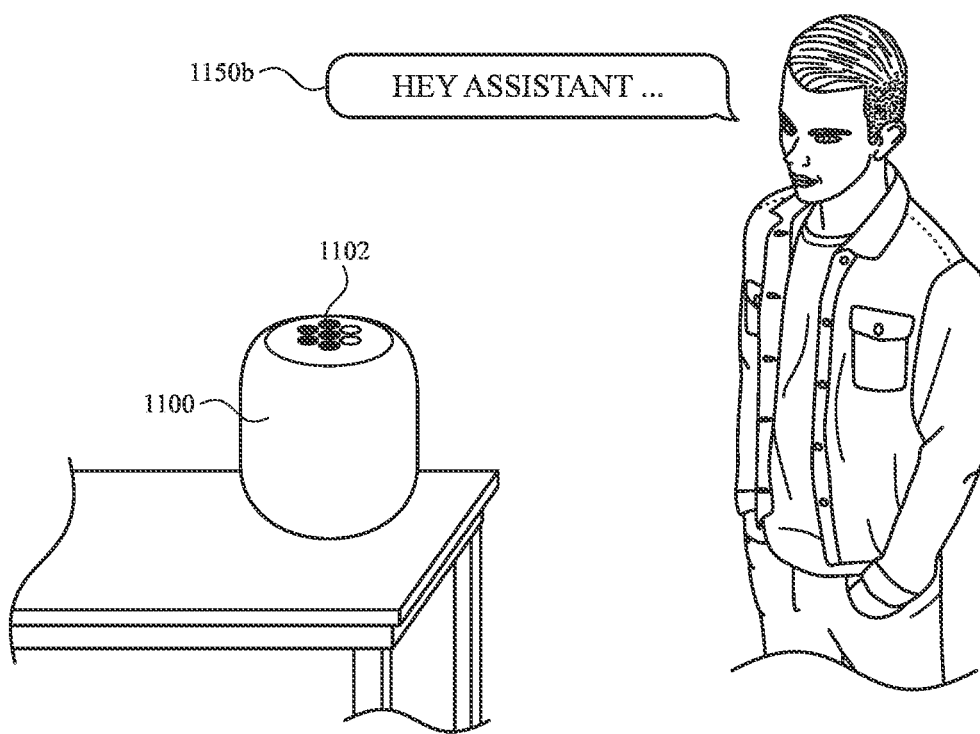


FIG. 11B

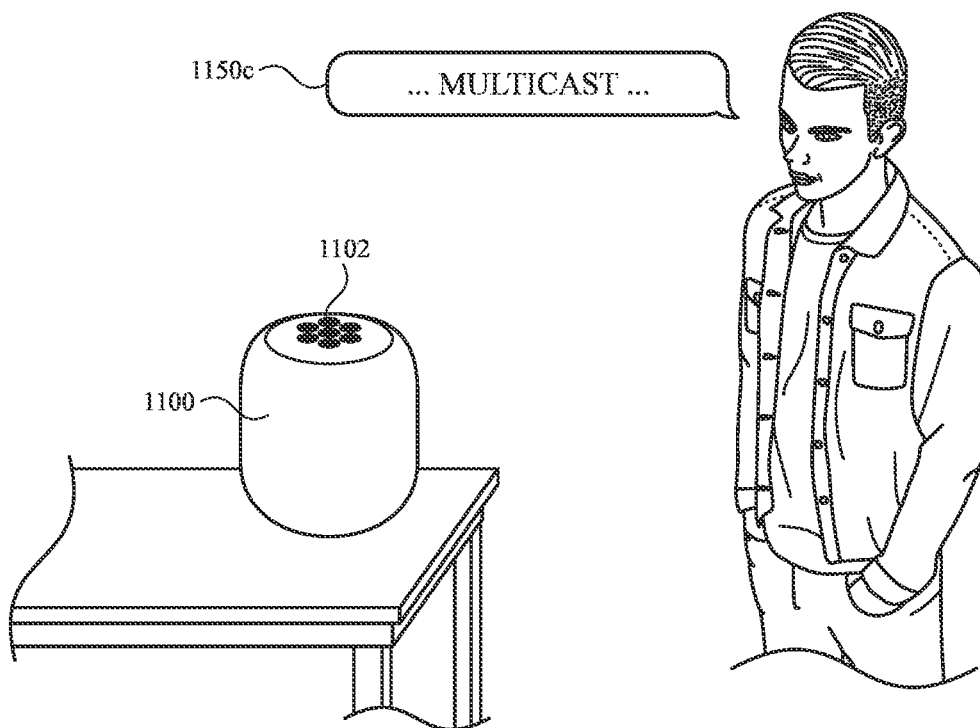


FIG. 11C

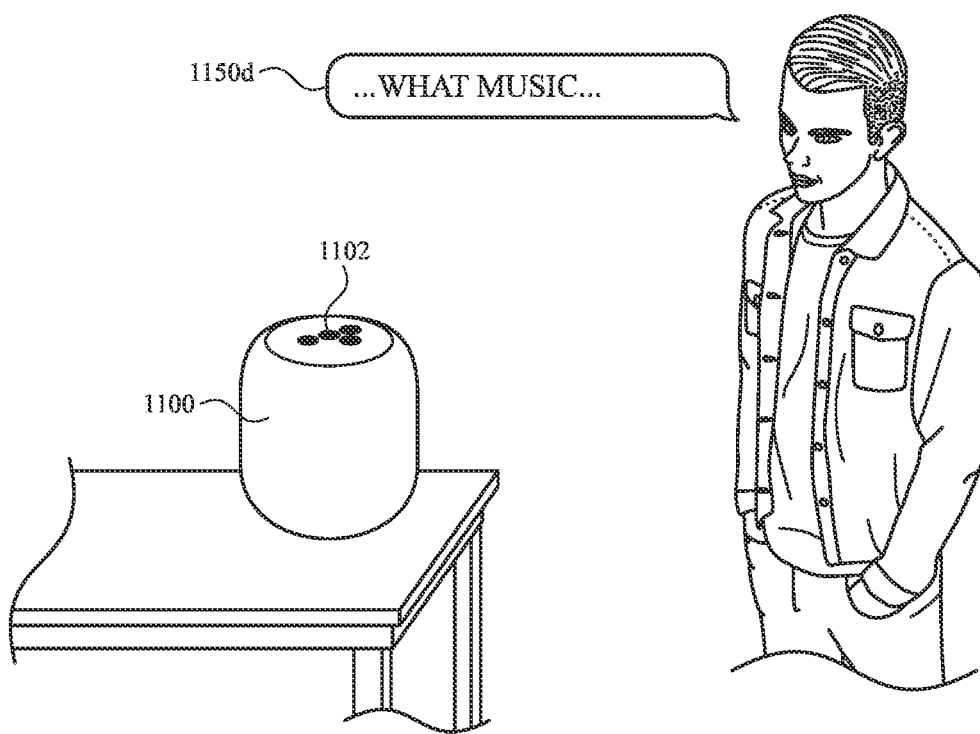


FIG. 11D

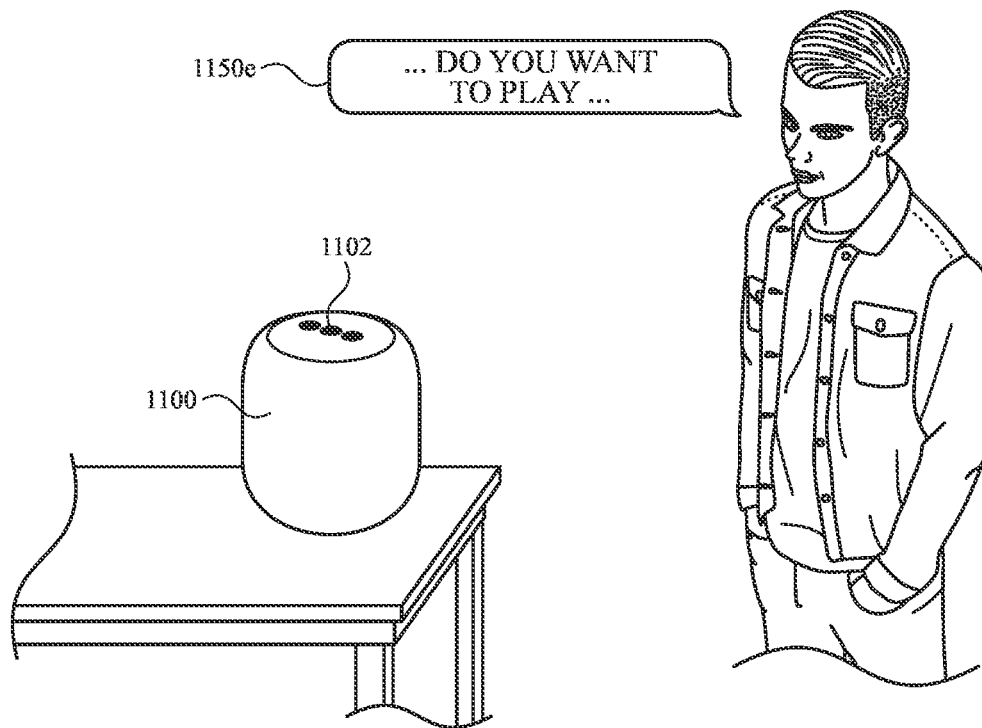


FIG. 11E

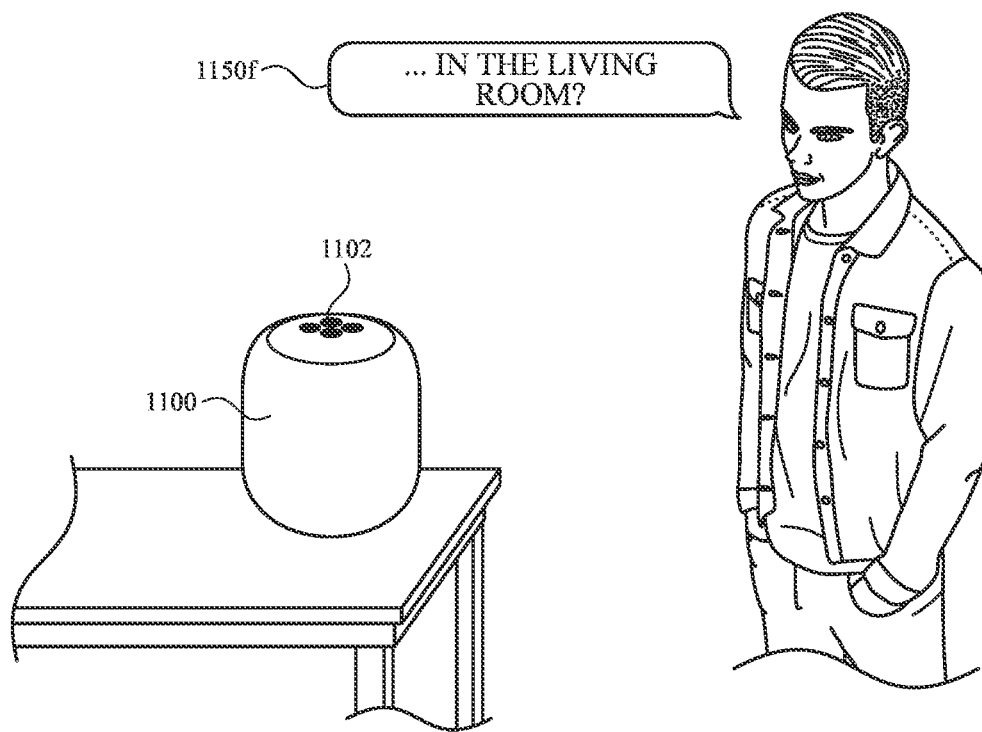


FIG. 11F

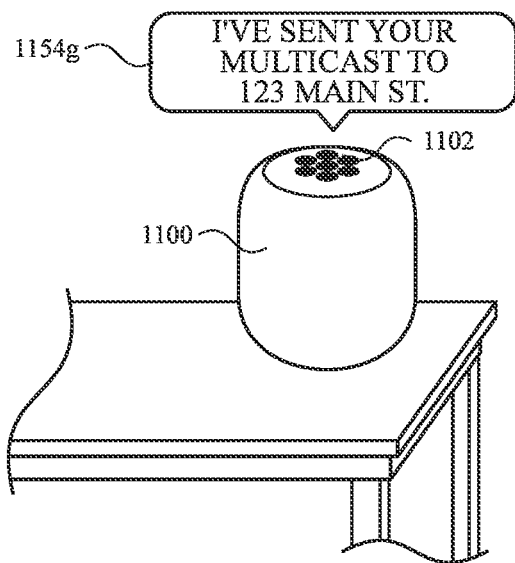


FIG. 11G

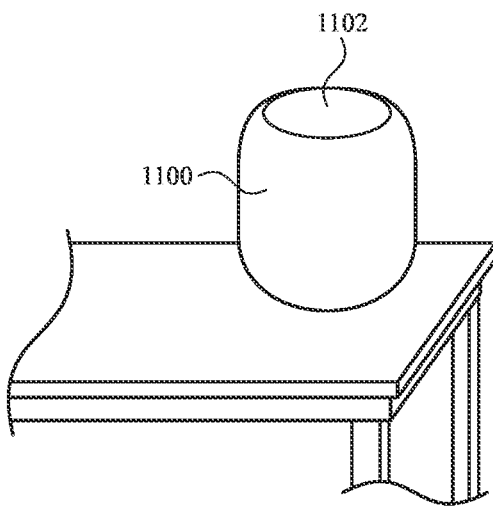
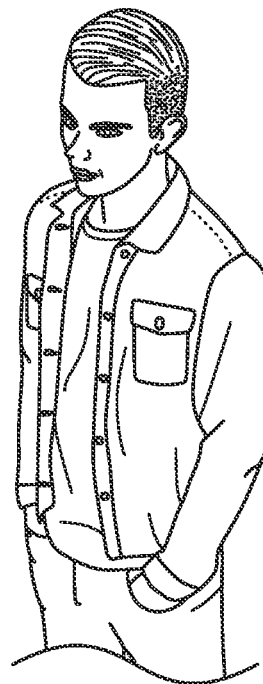
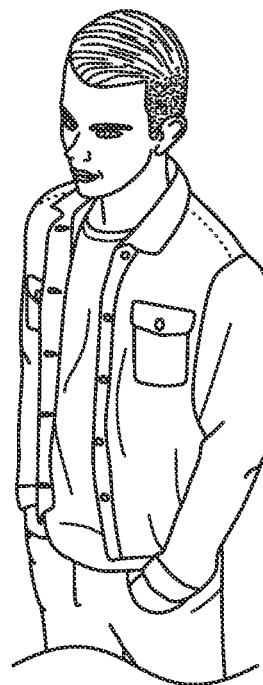


FIG. 11H



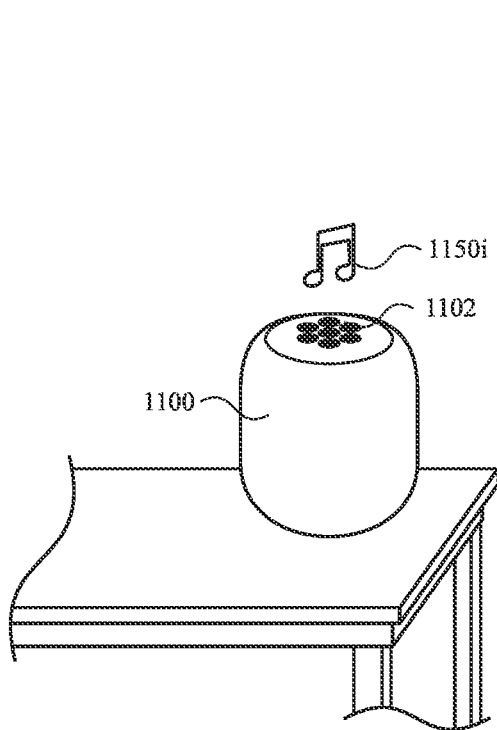


FIG. 11I

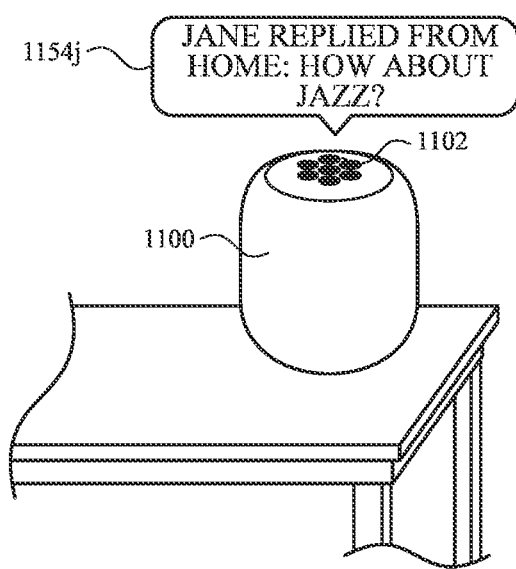
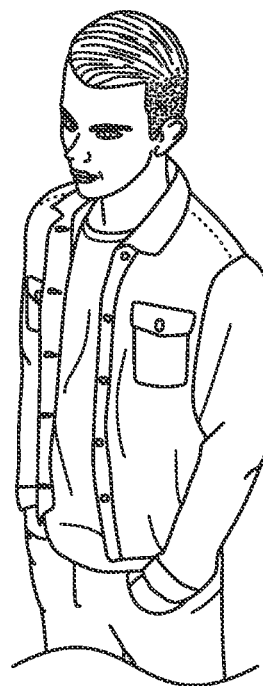
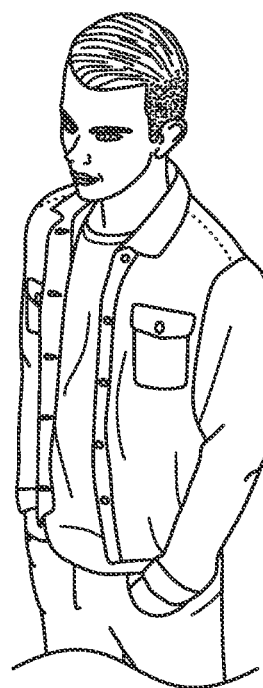


FIG. 11J



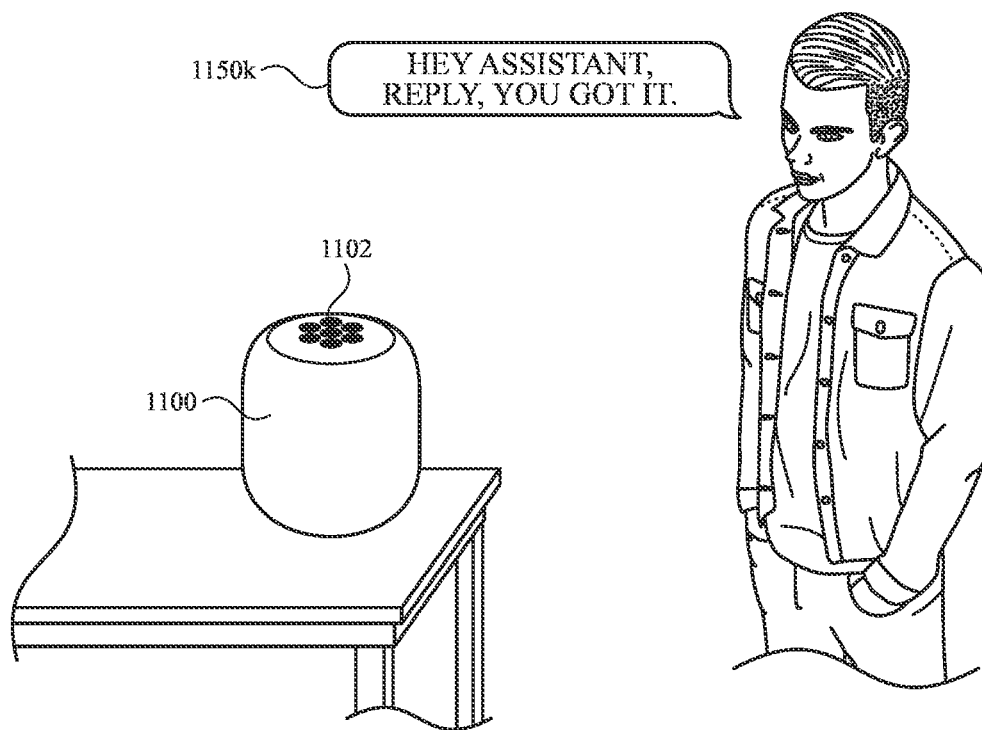


FIG. 11K

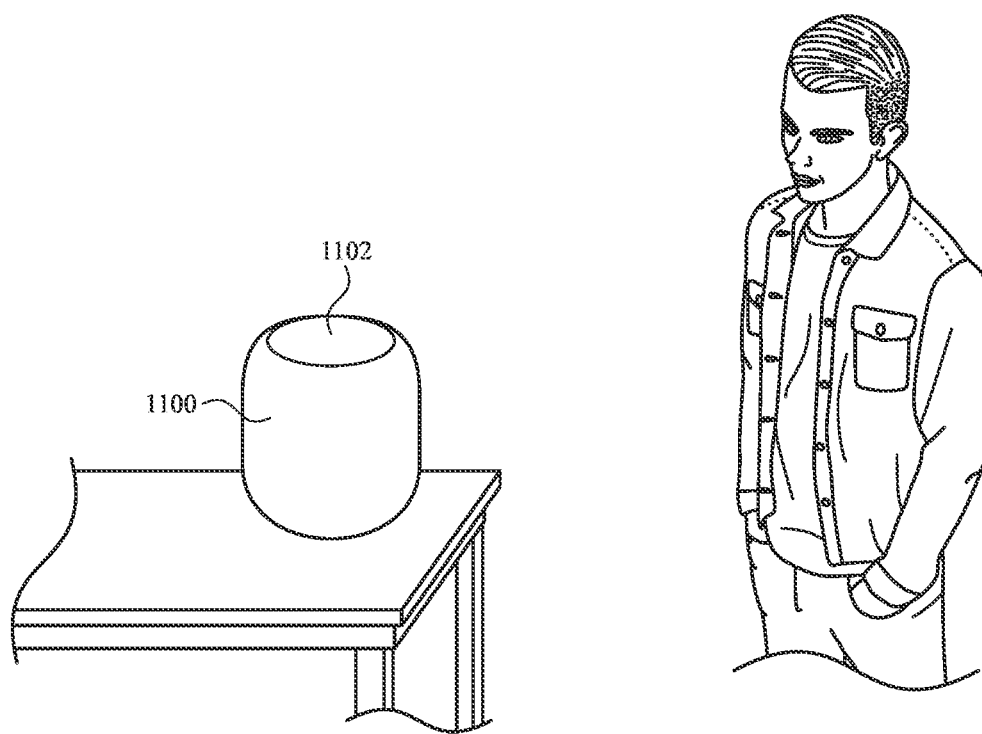


FIG. 11L

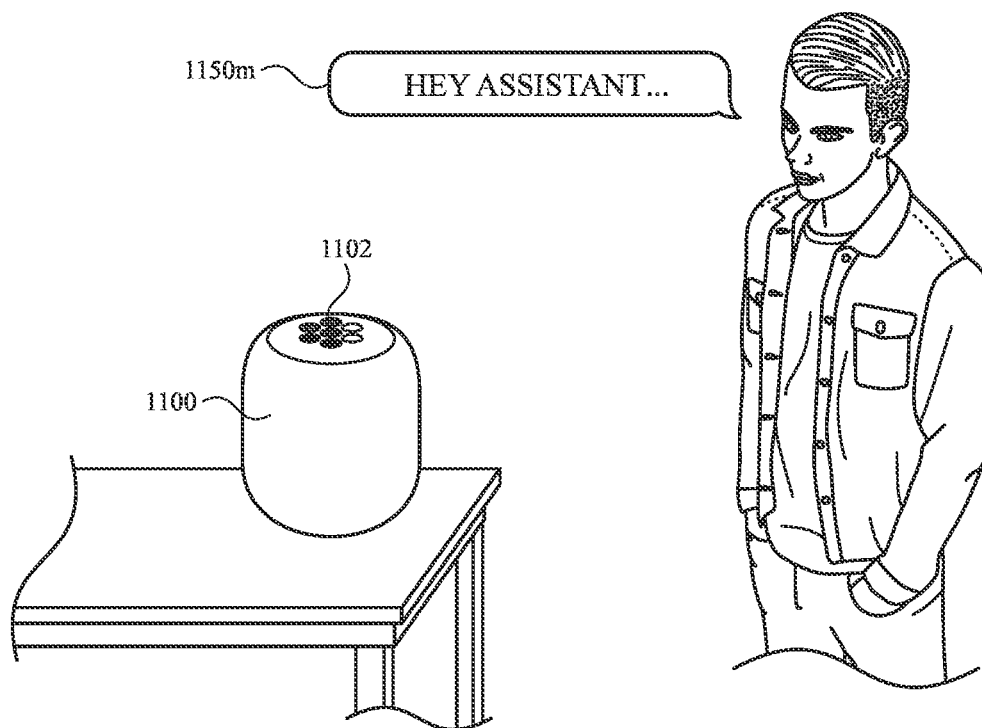


FIG. 11M

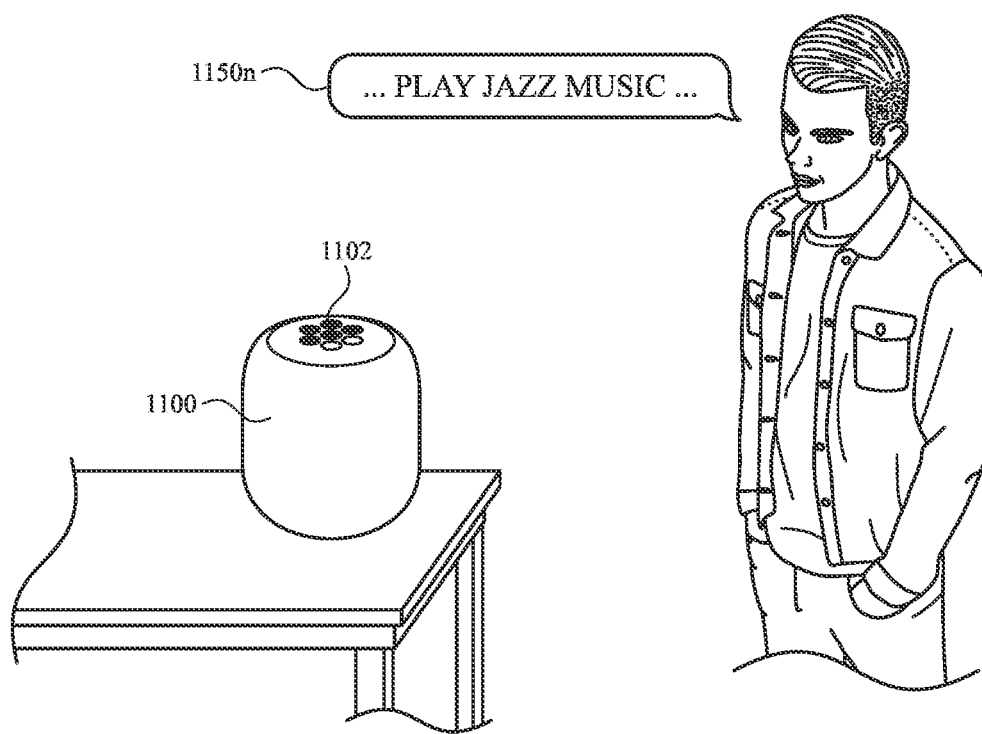


FIG. 11N

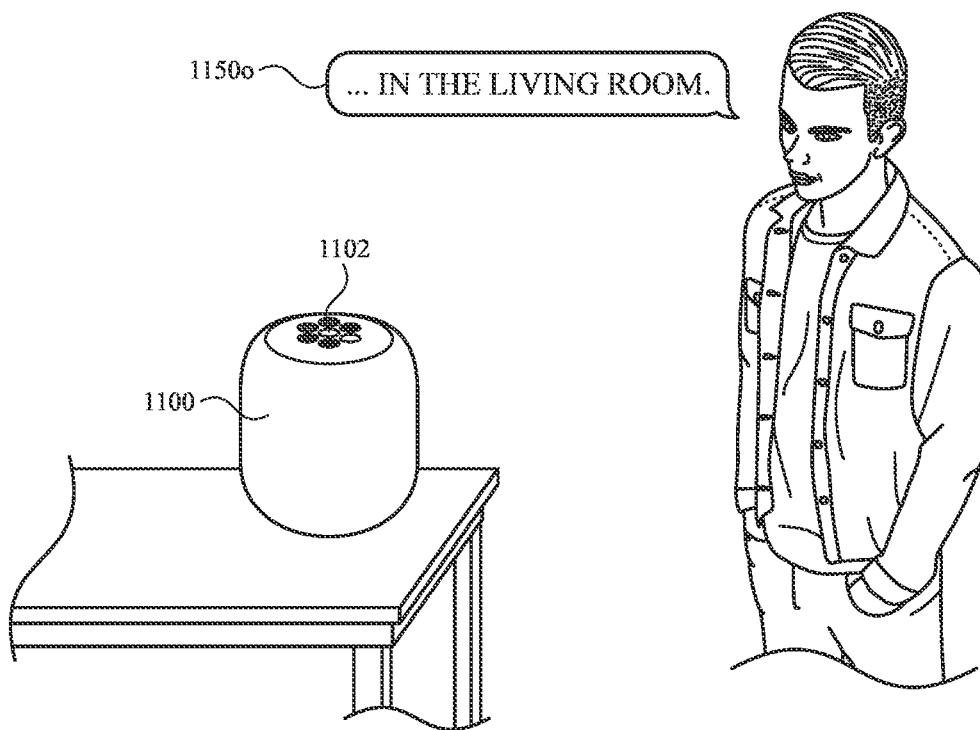


FIG. 110

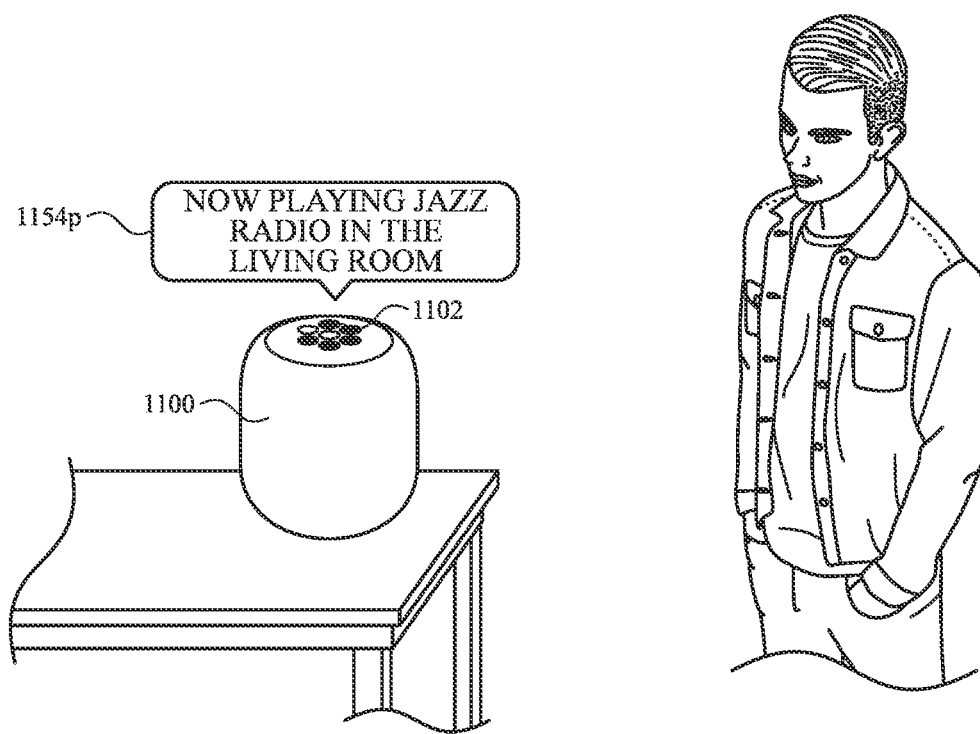


FIG. 11P

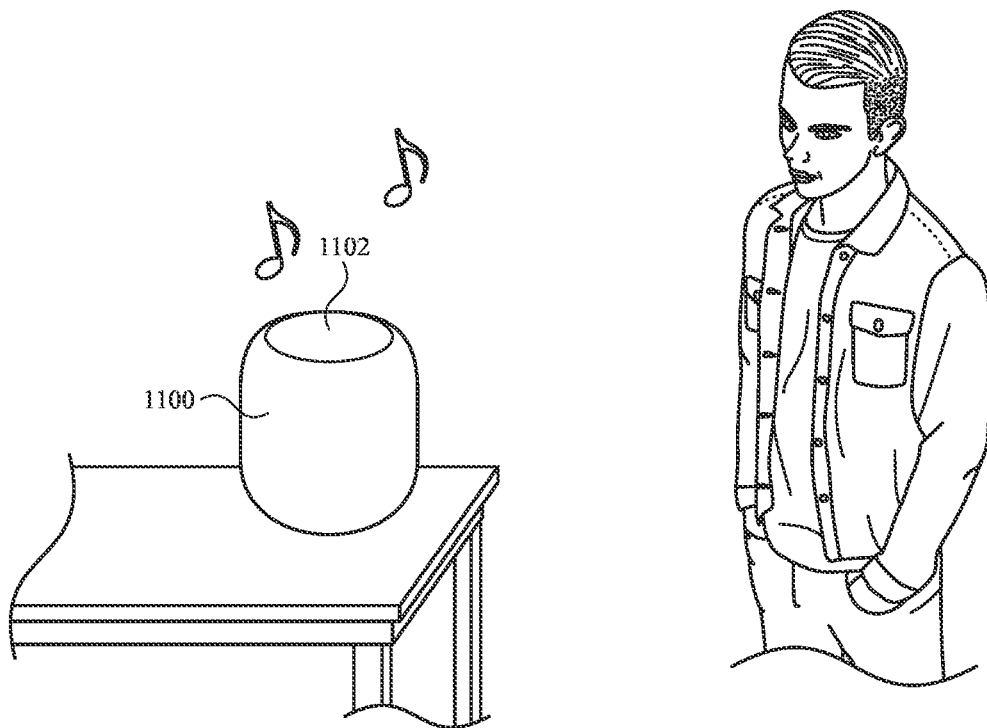


FIG. 11Q

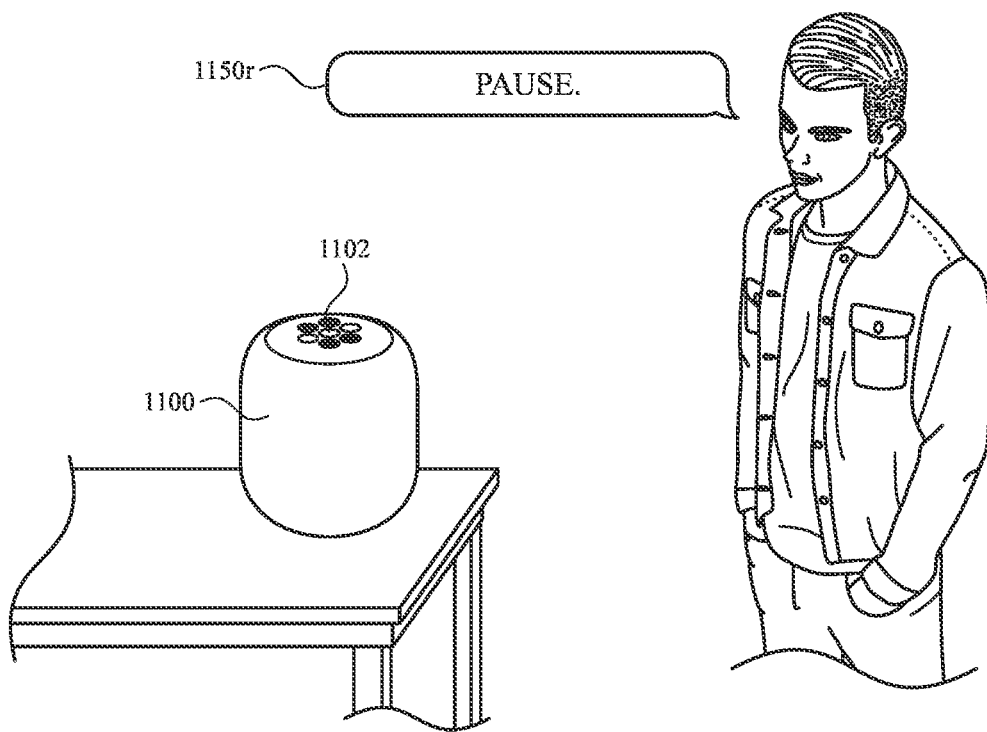


FIG. 11R

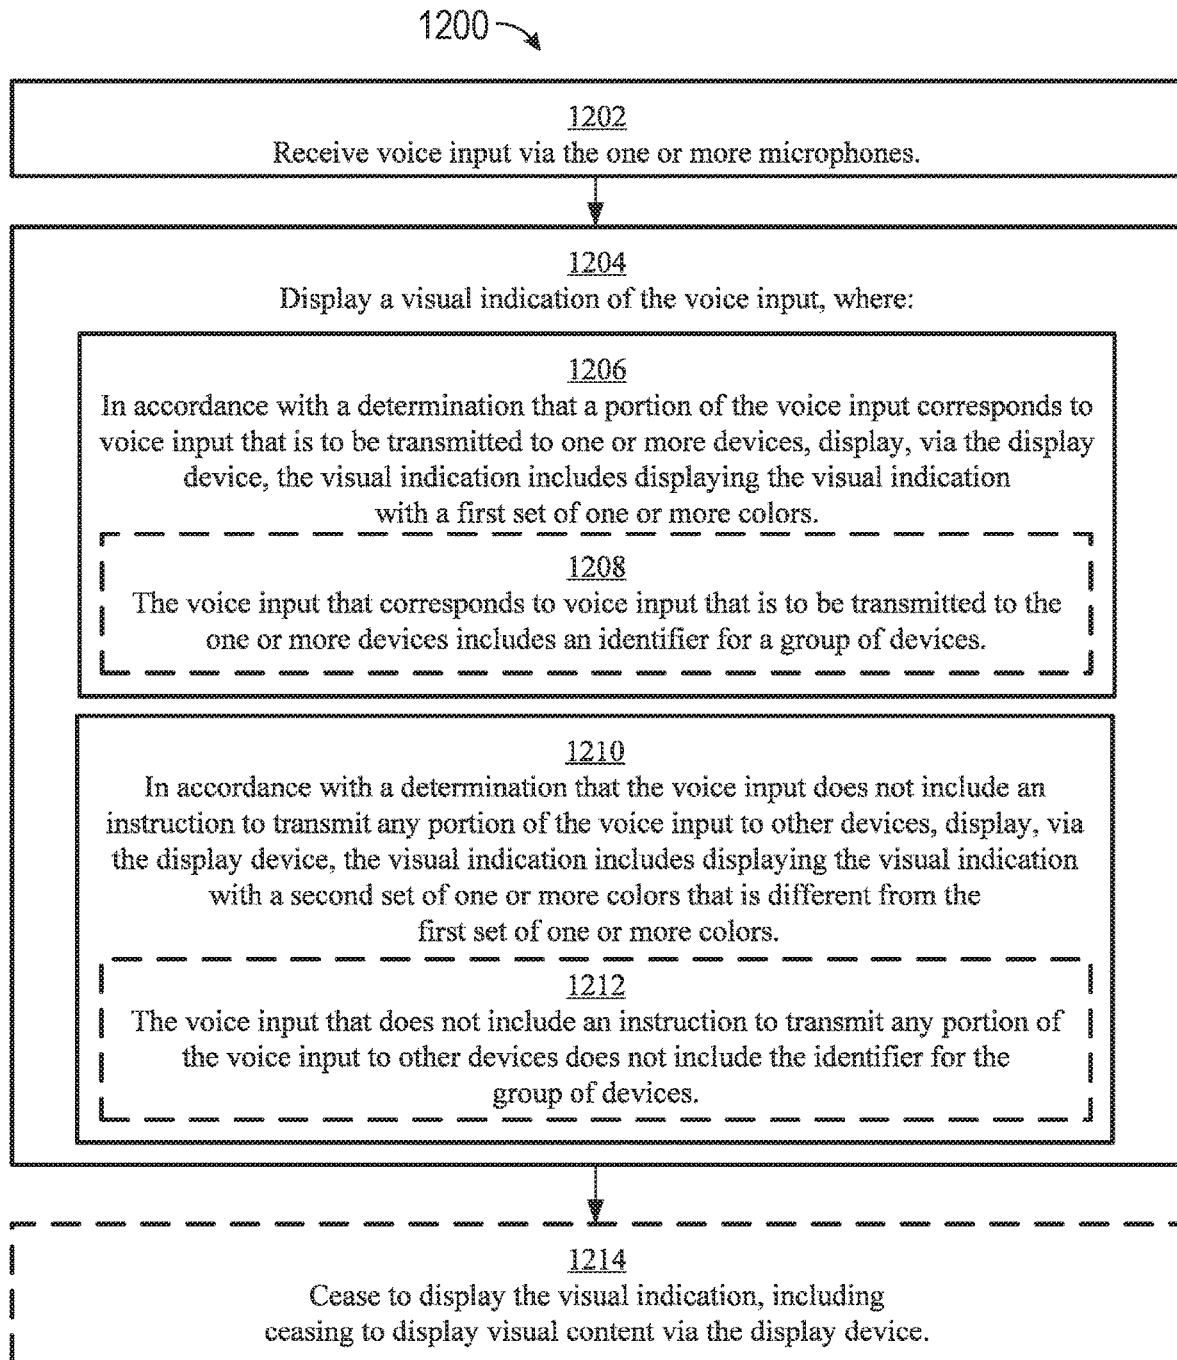
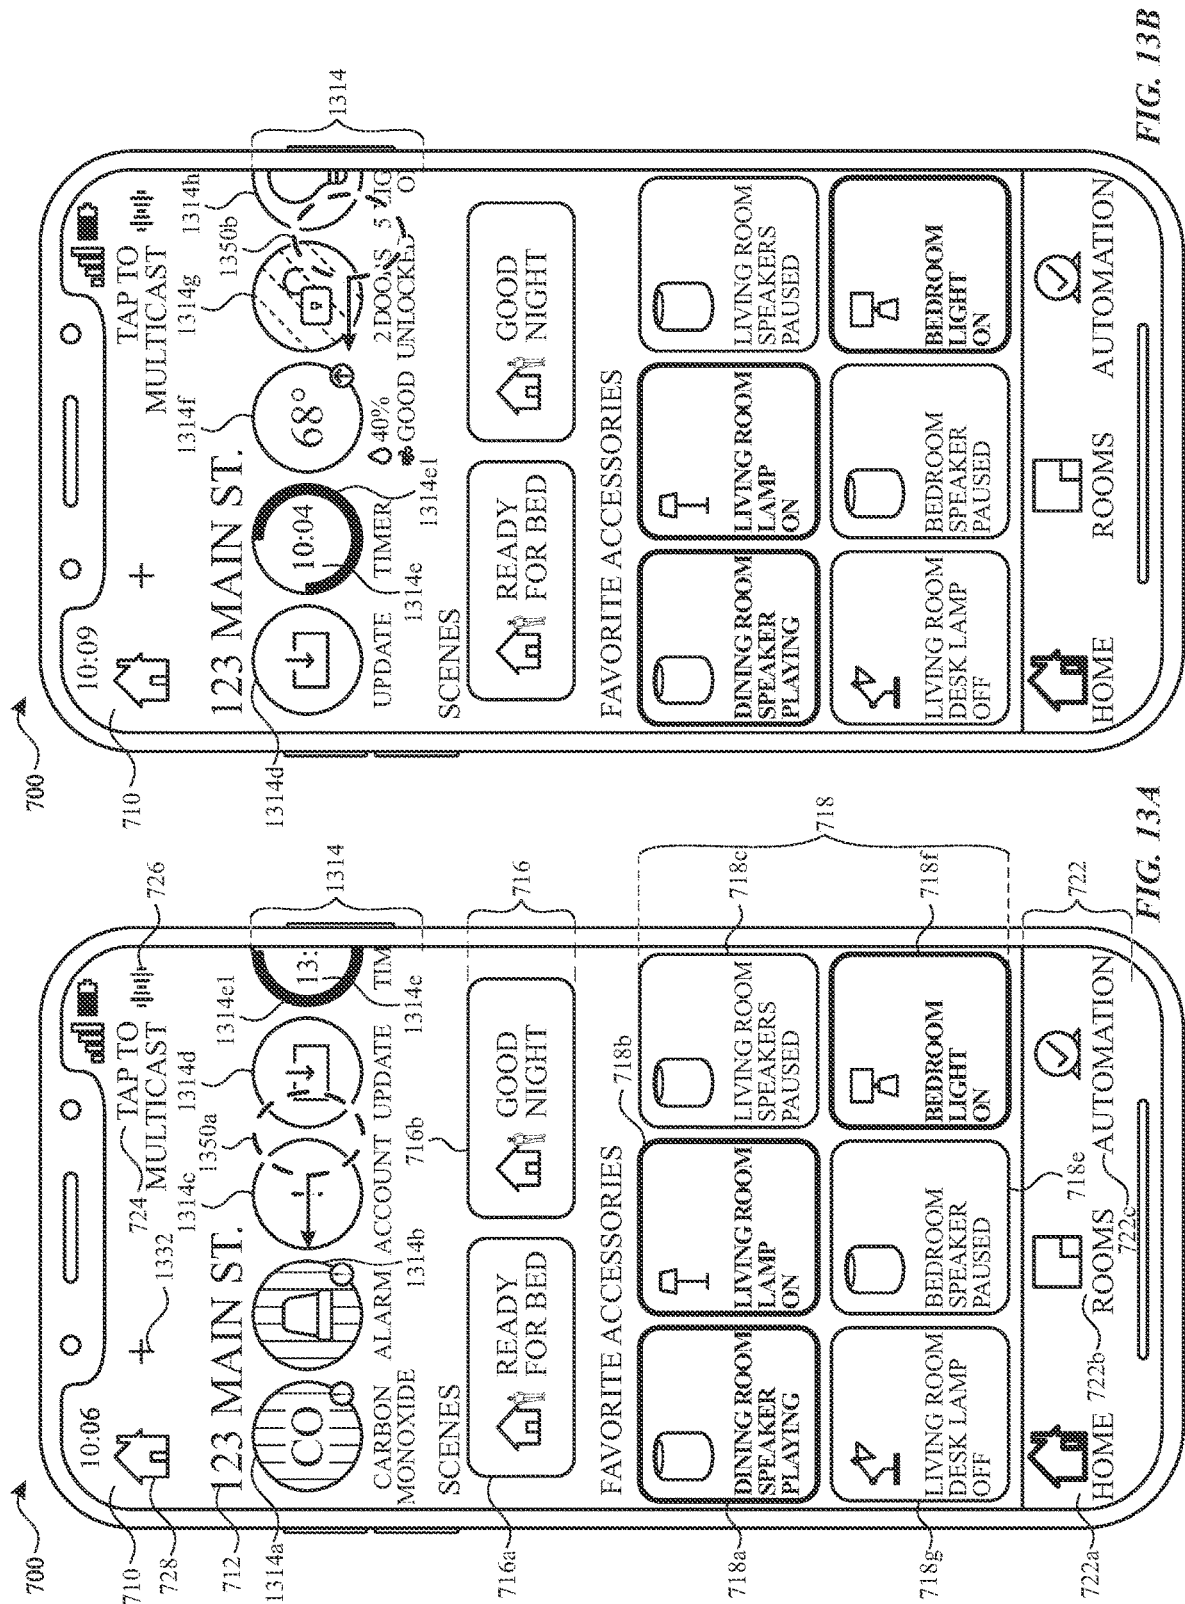
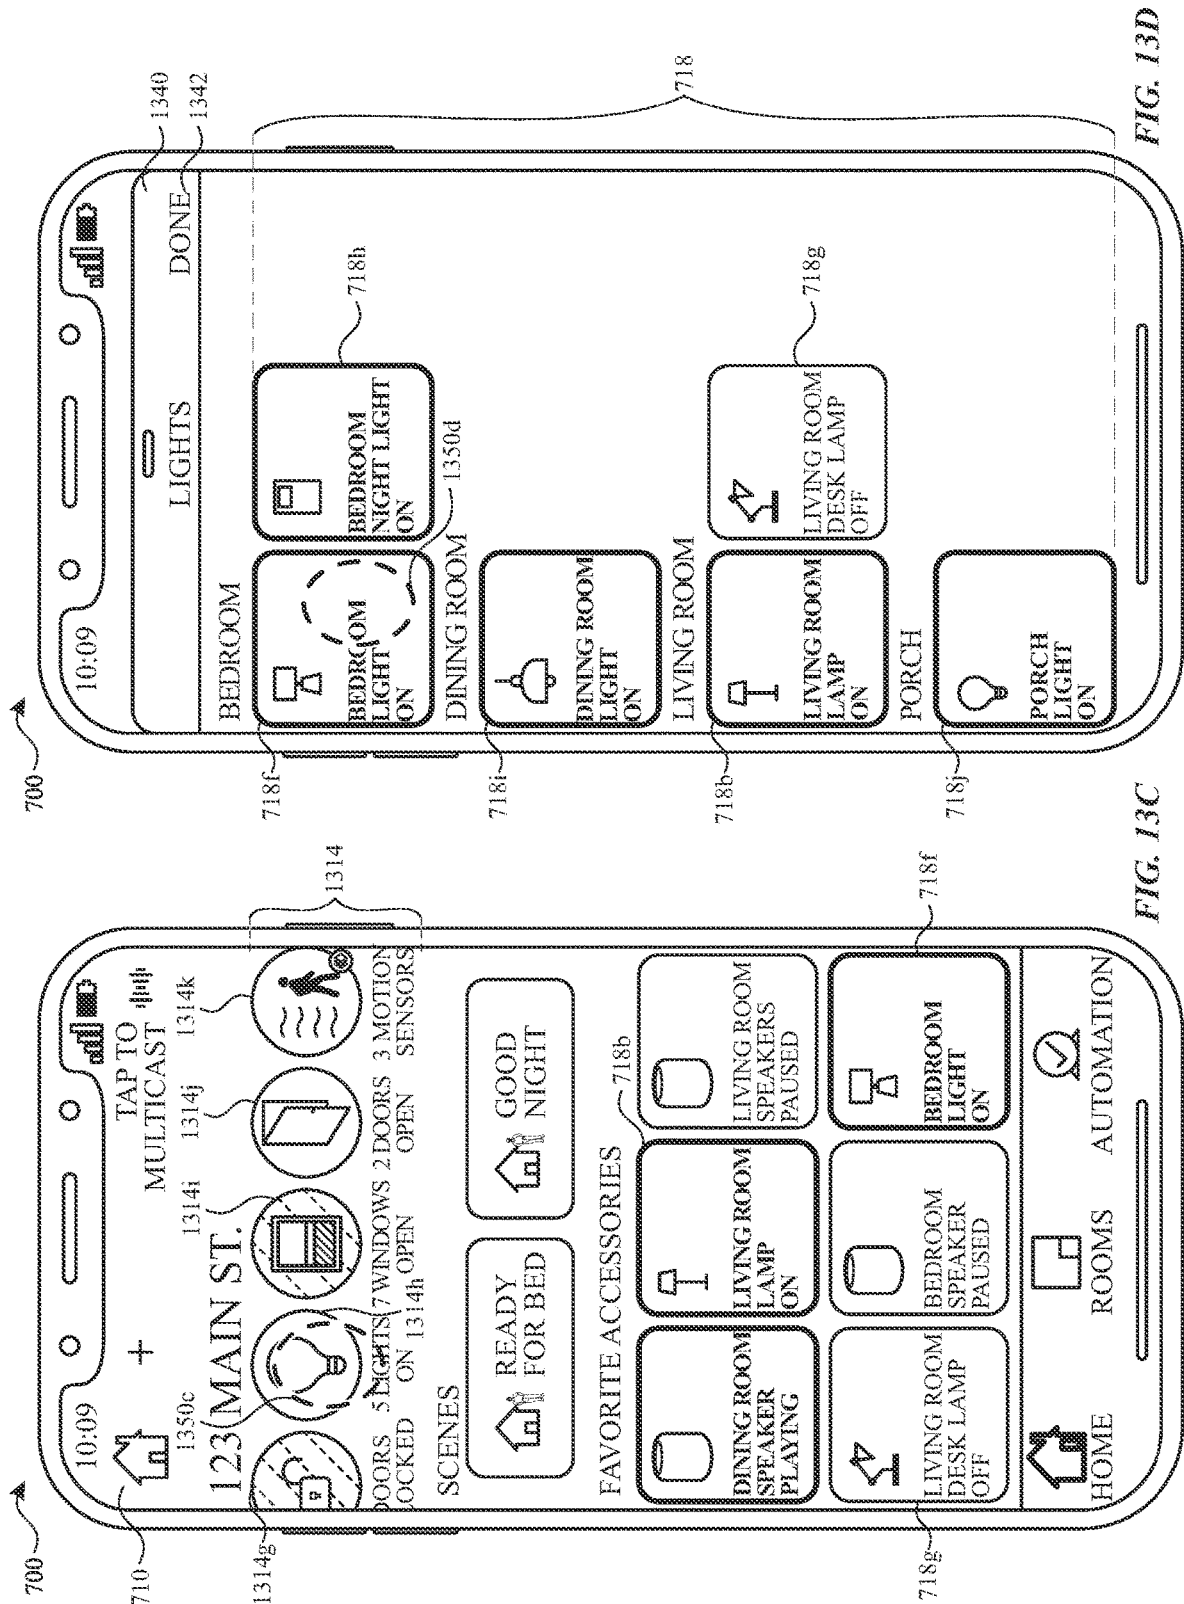
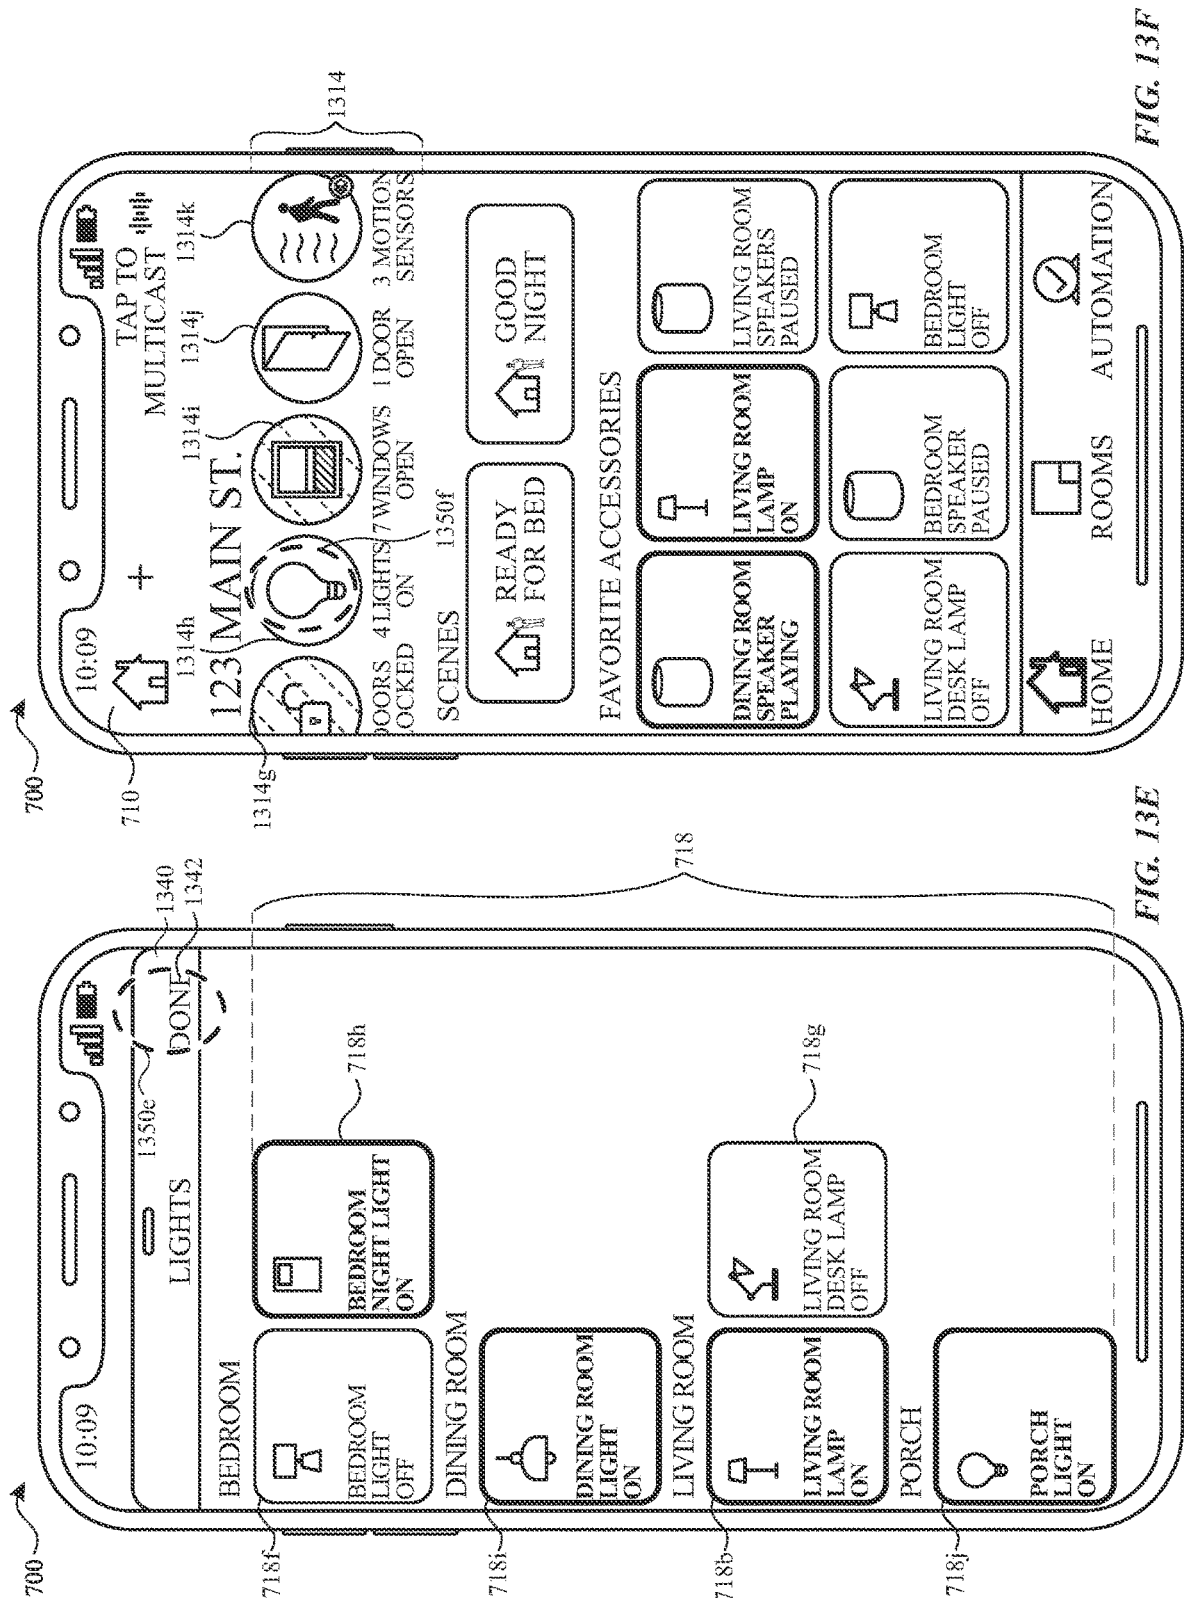


FIG. 12







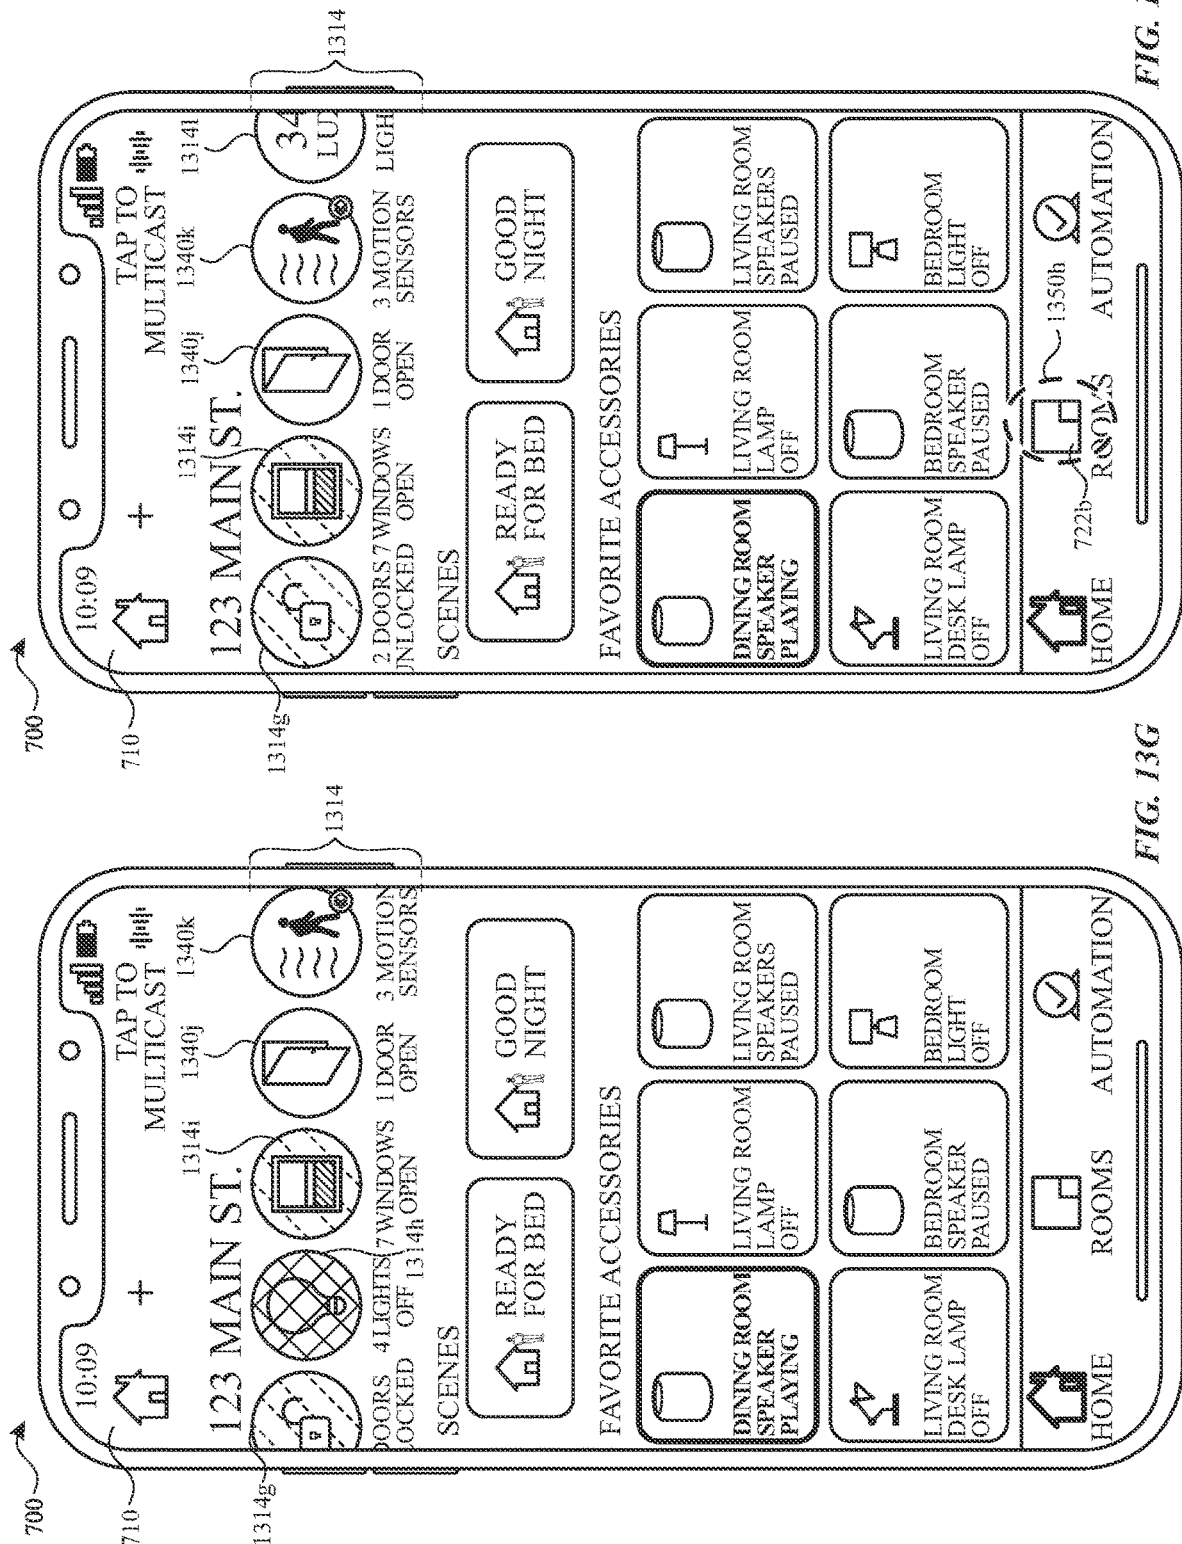
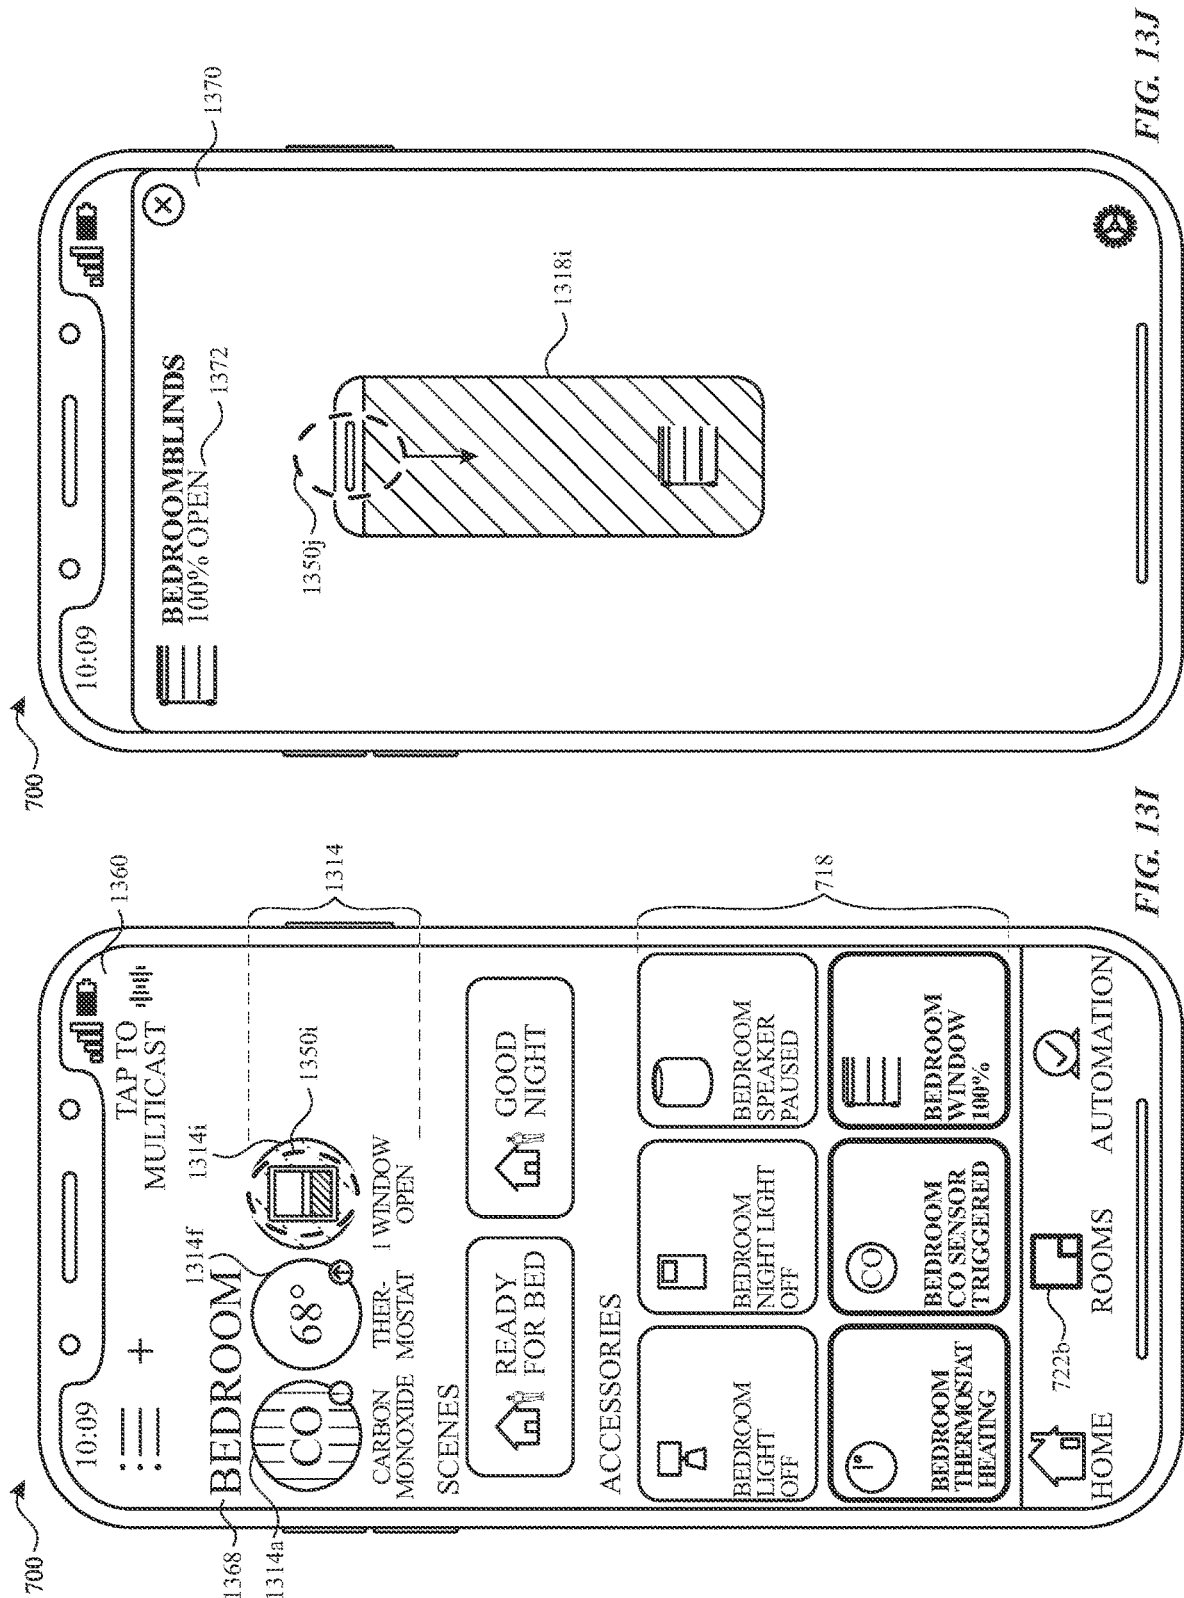
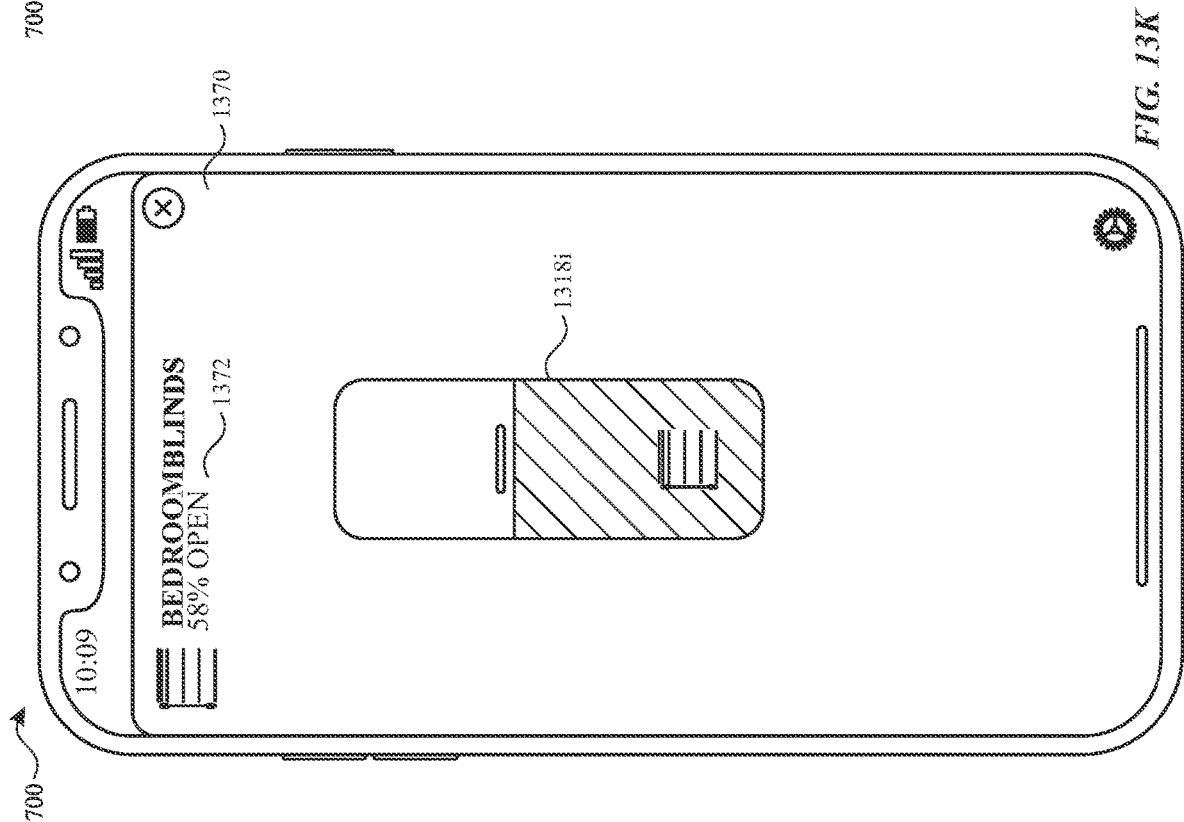
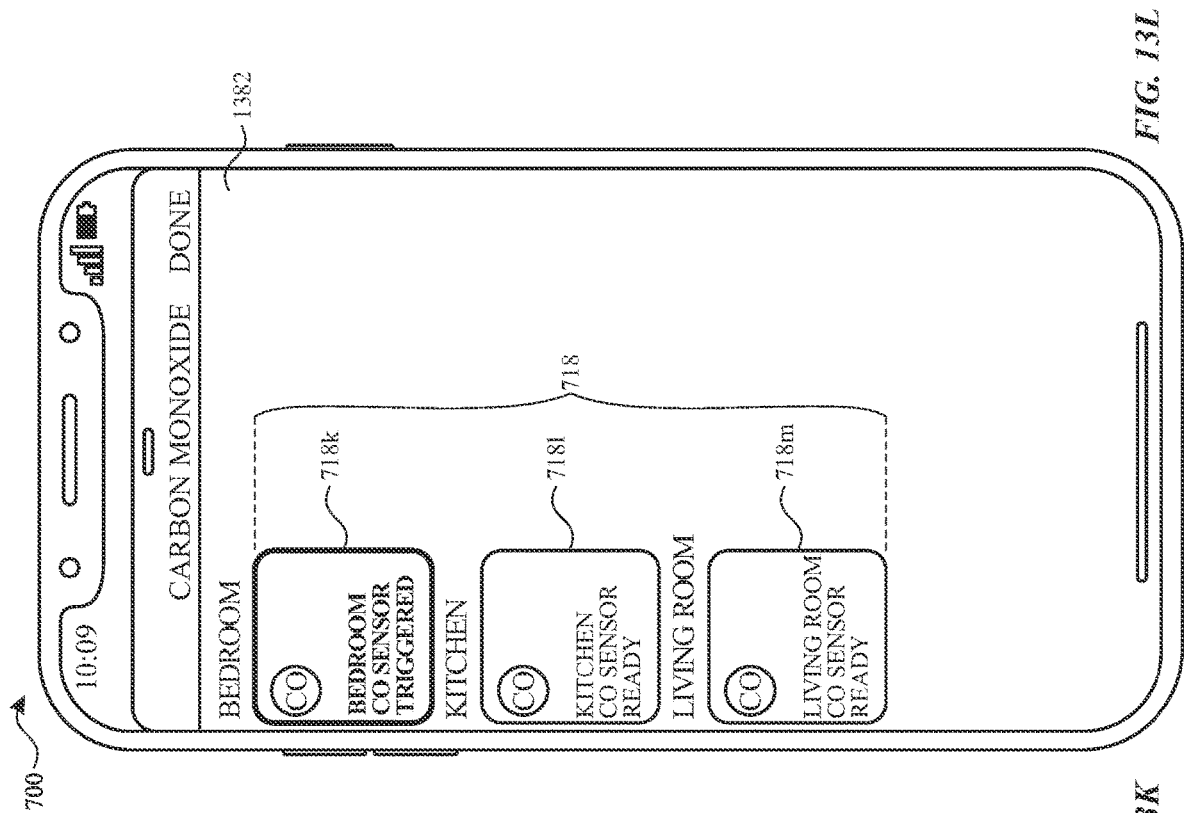
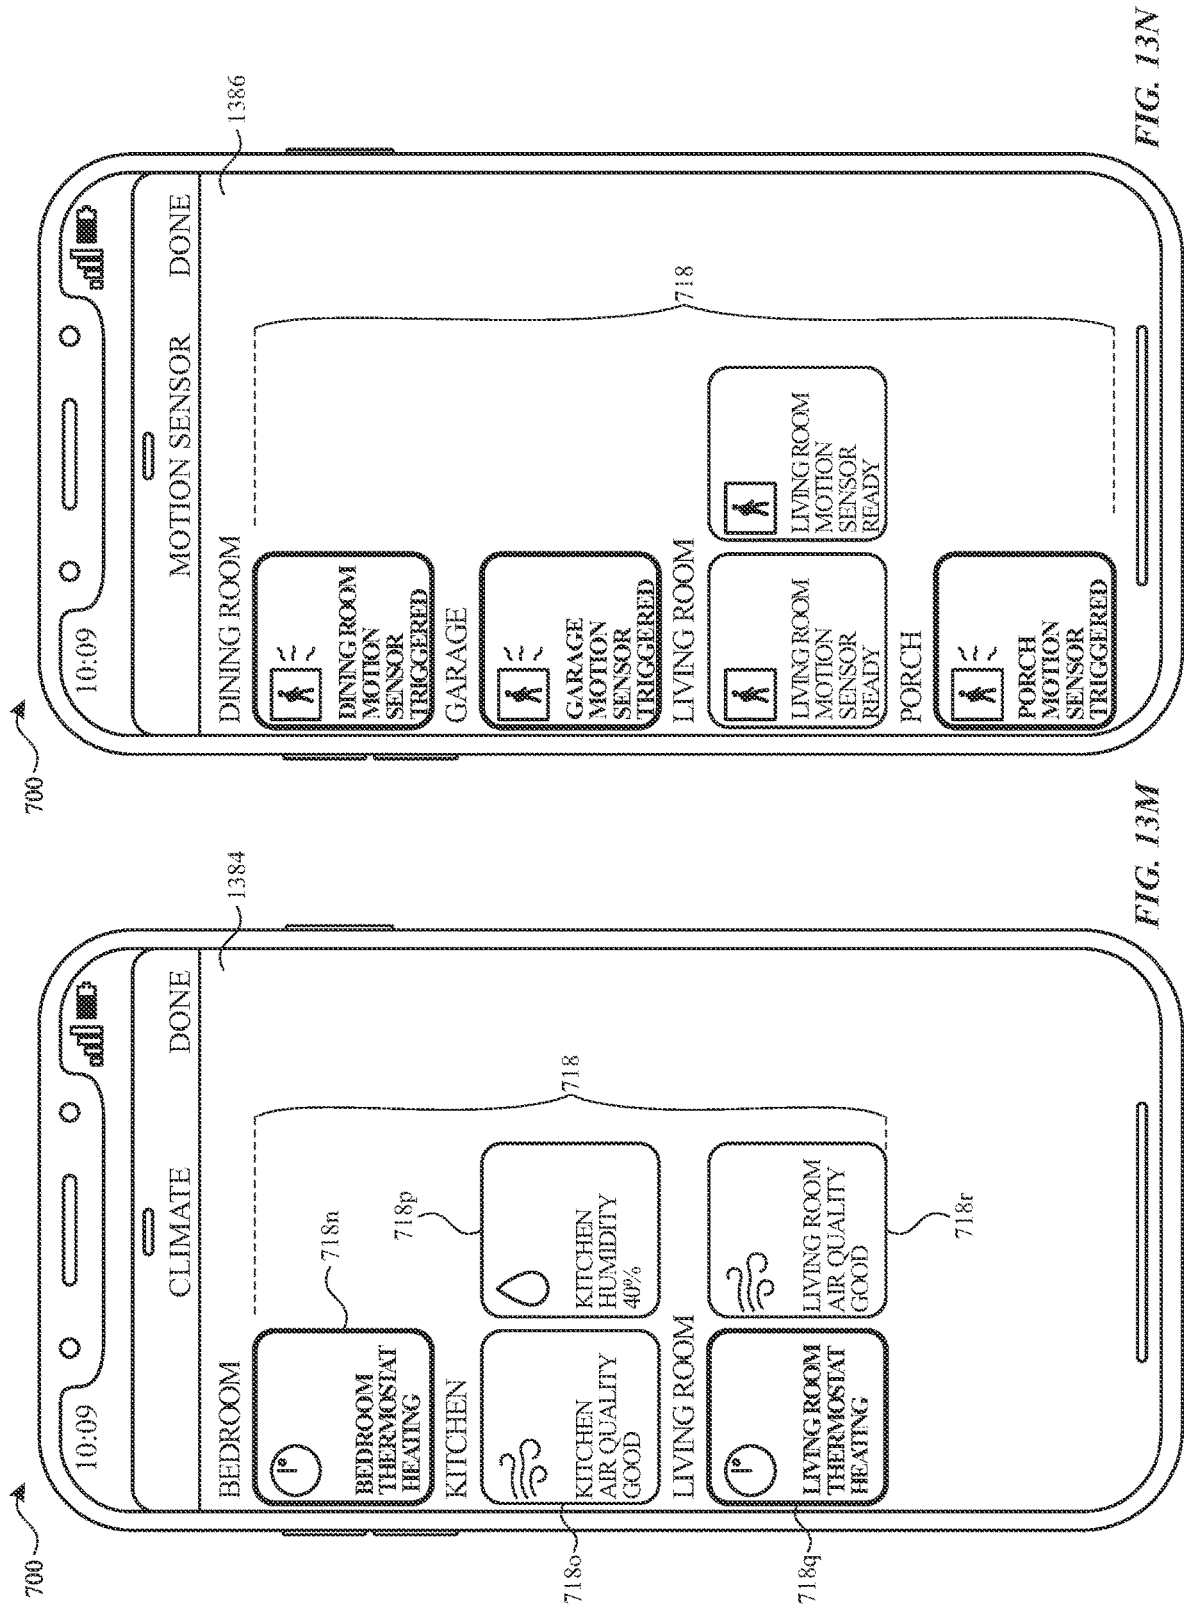


FIG. 134

FIG. 13G







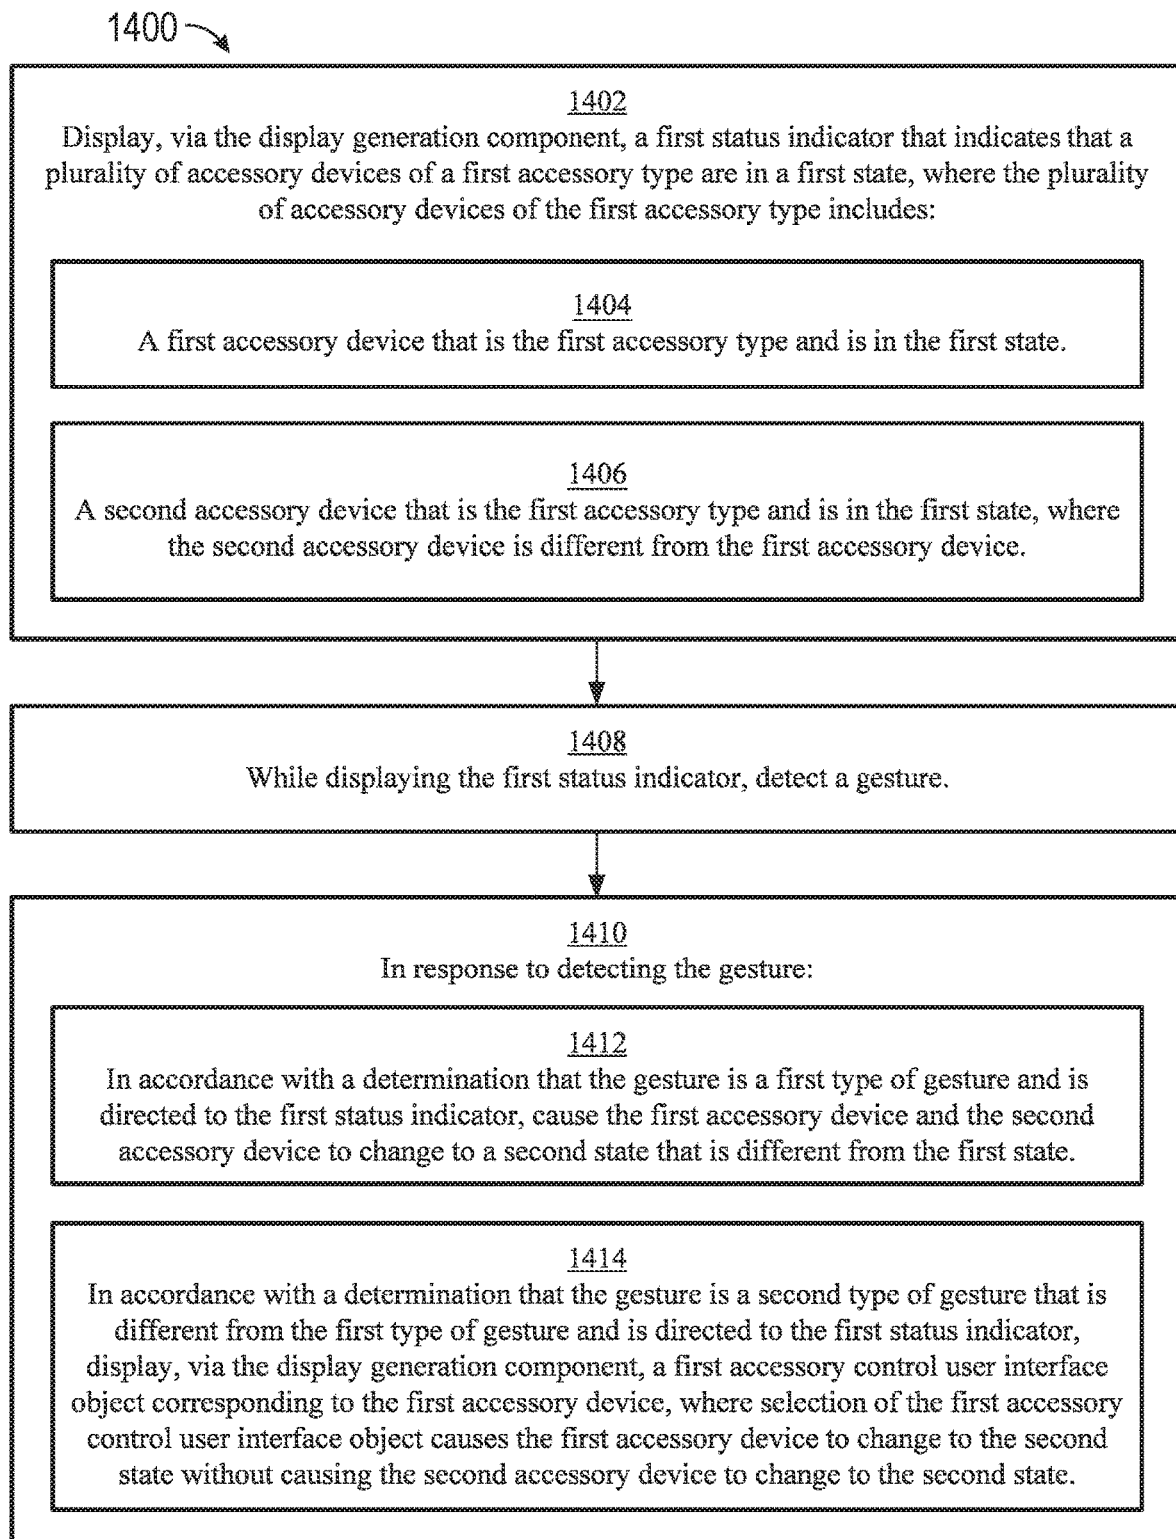


FIG. 14

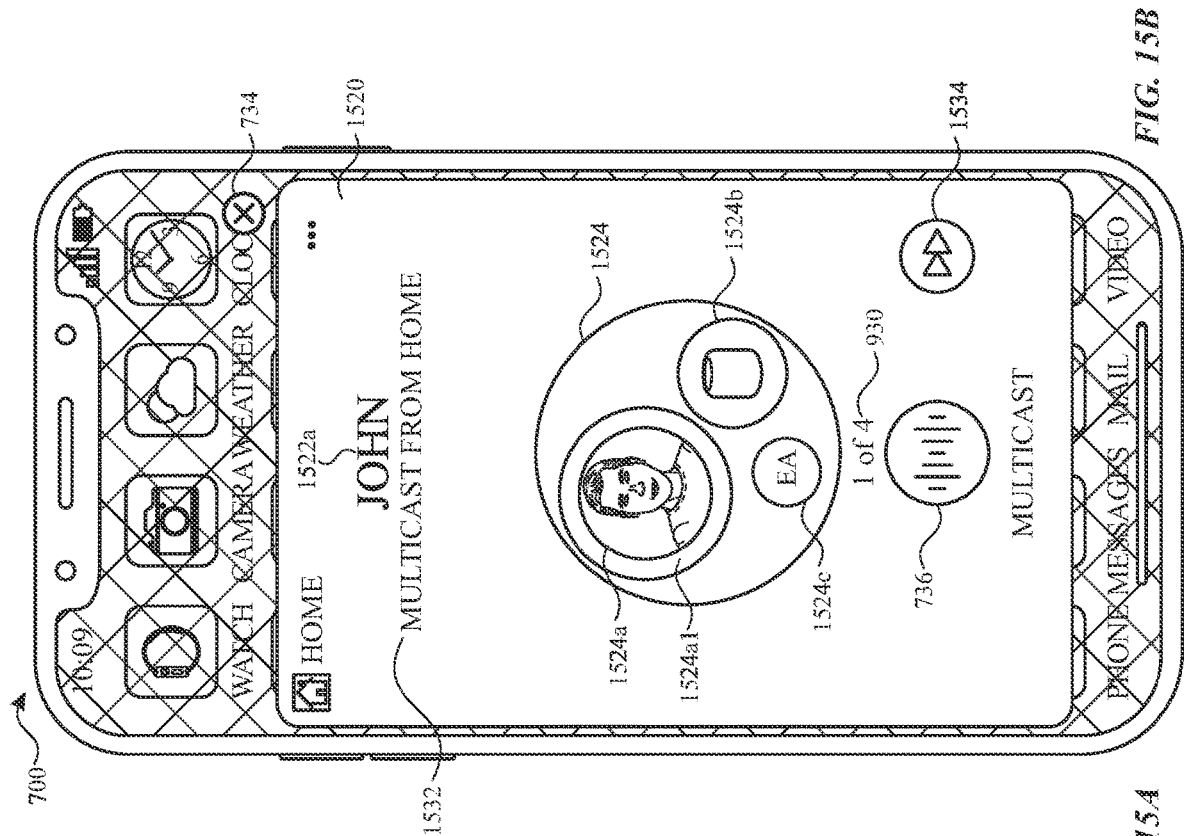


FIG. 15A

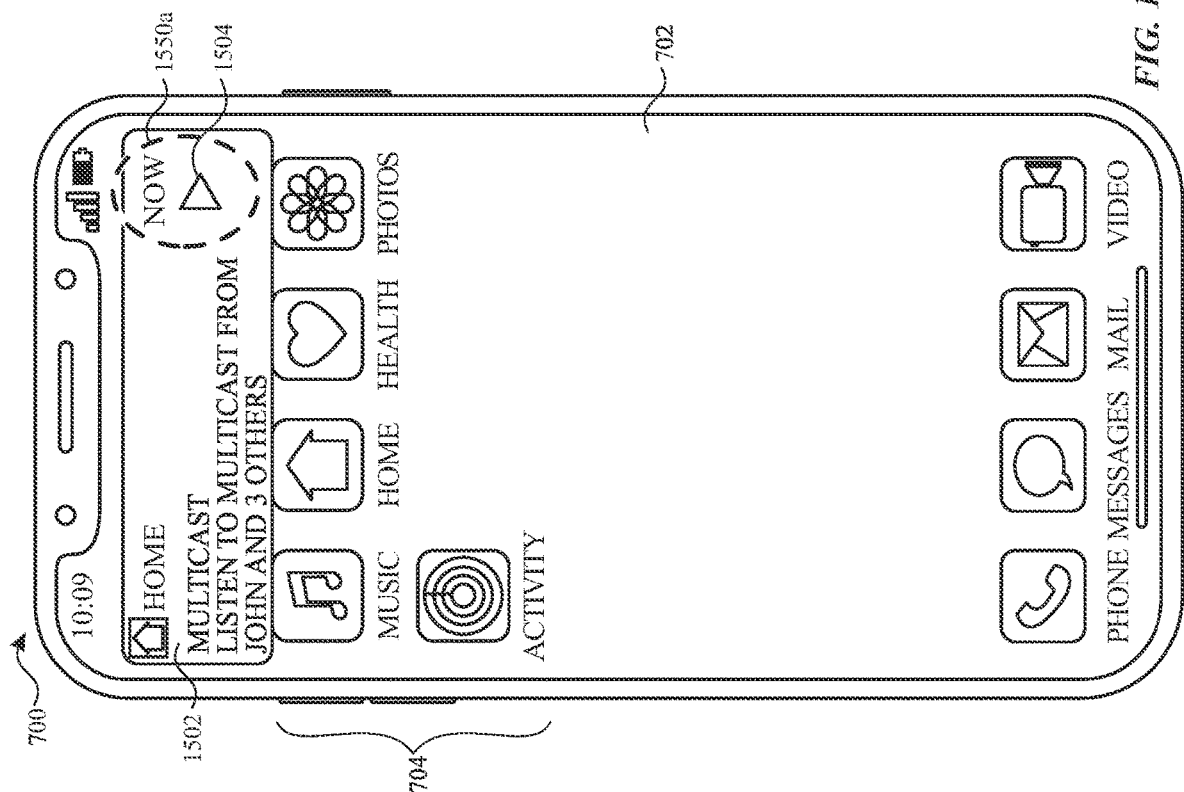
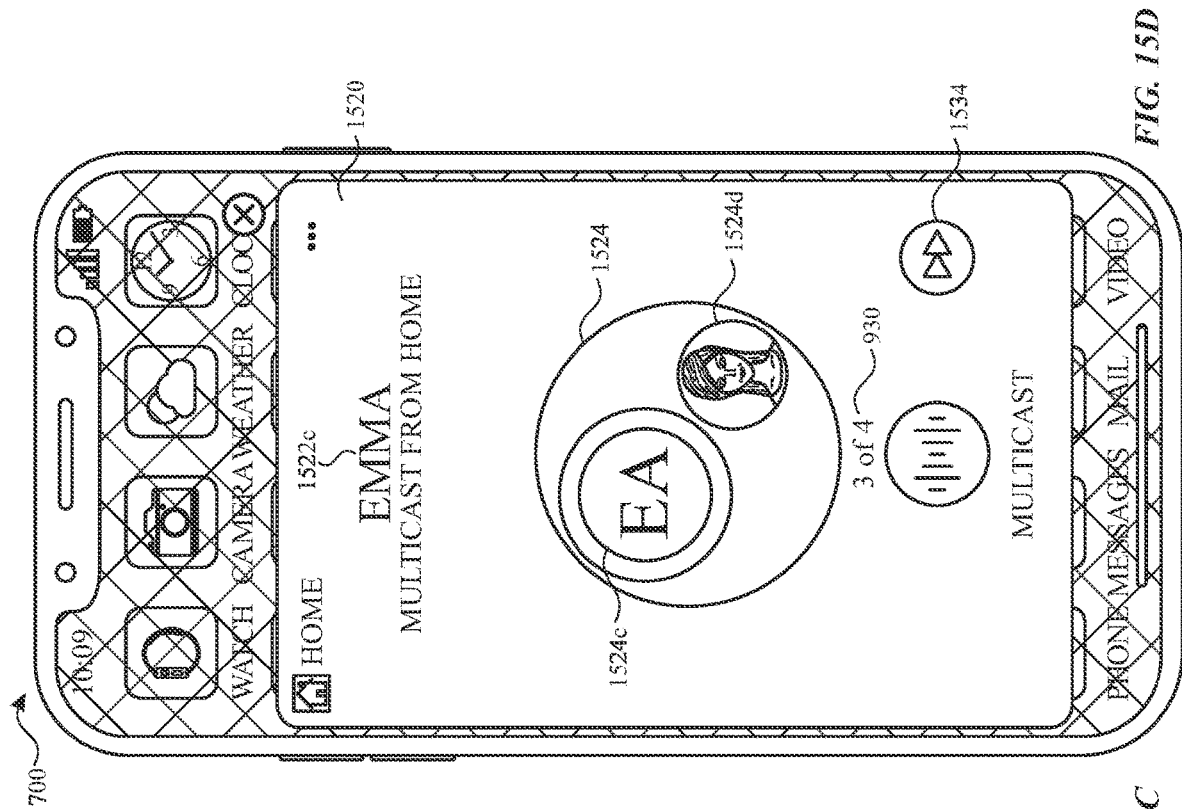
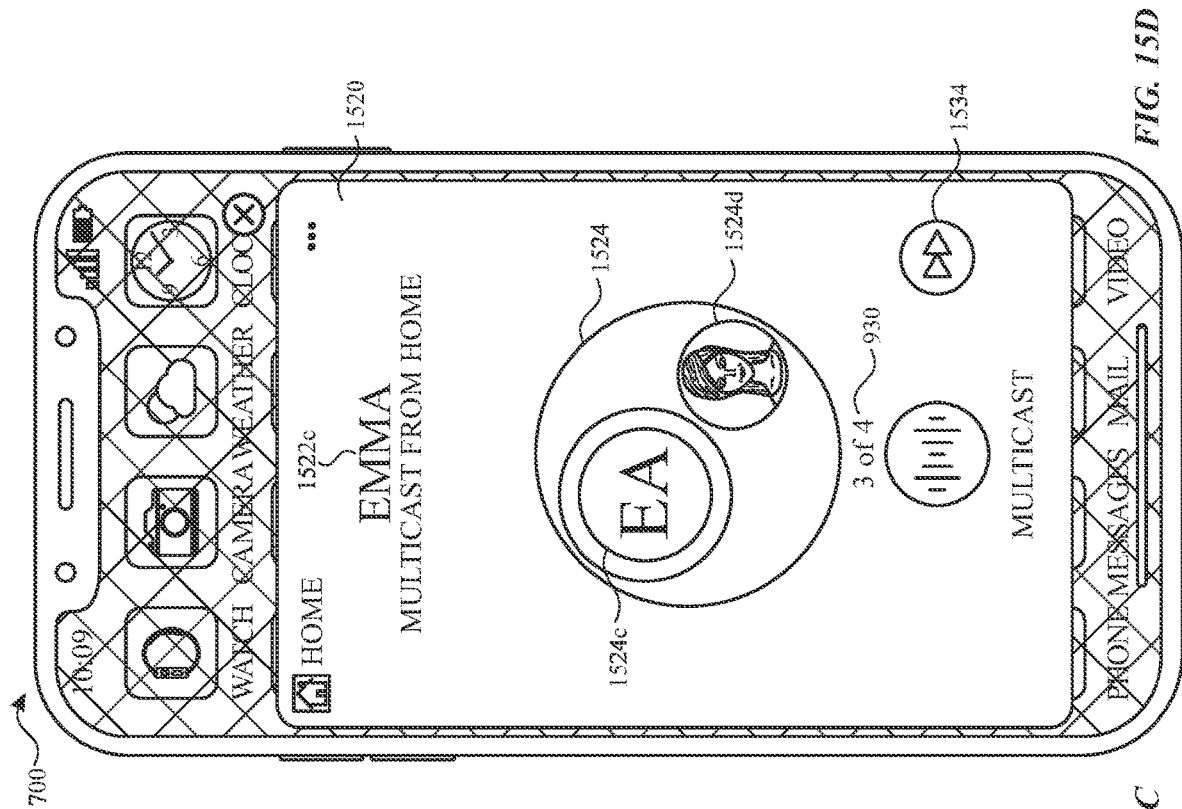
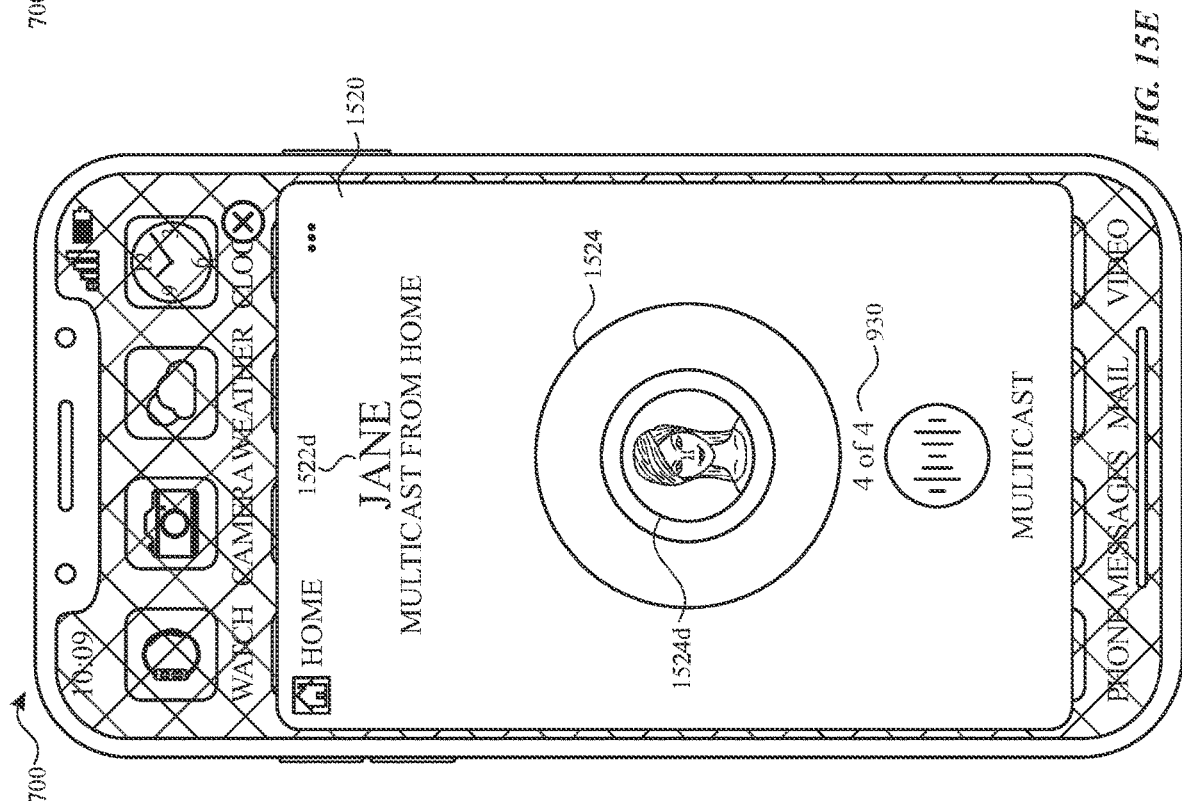
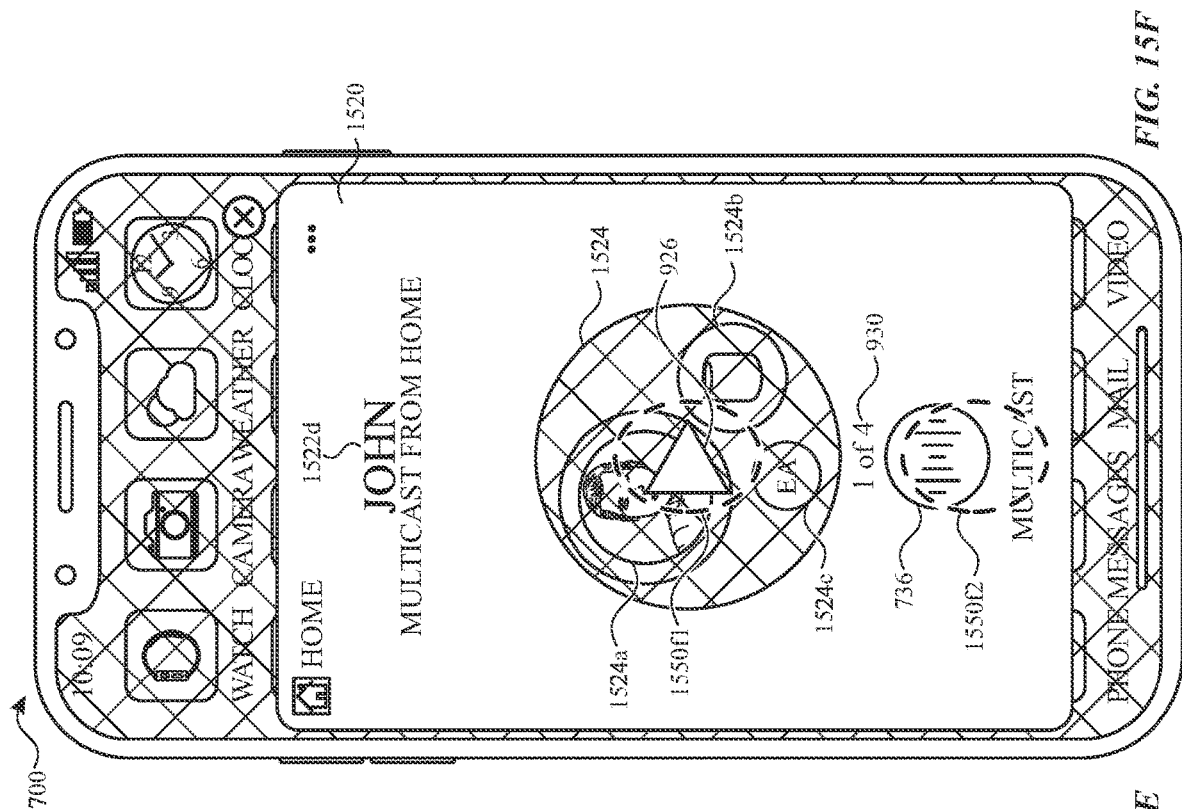


FIG. 15B





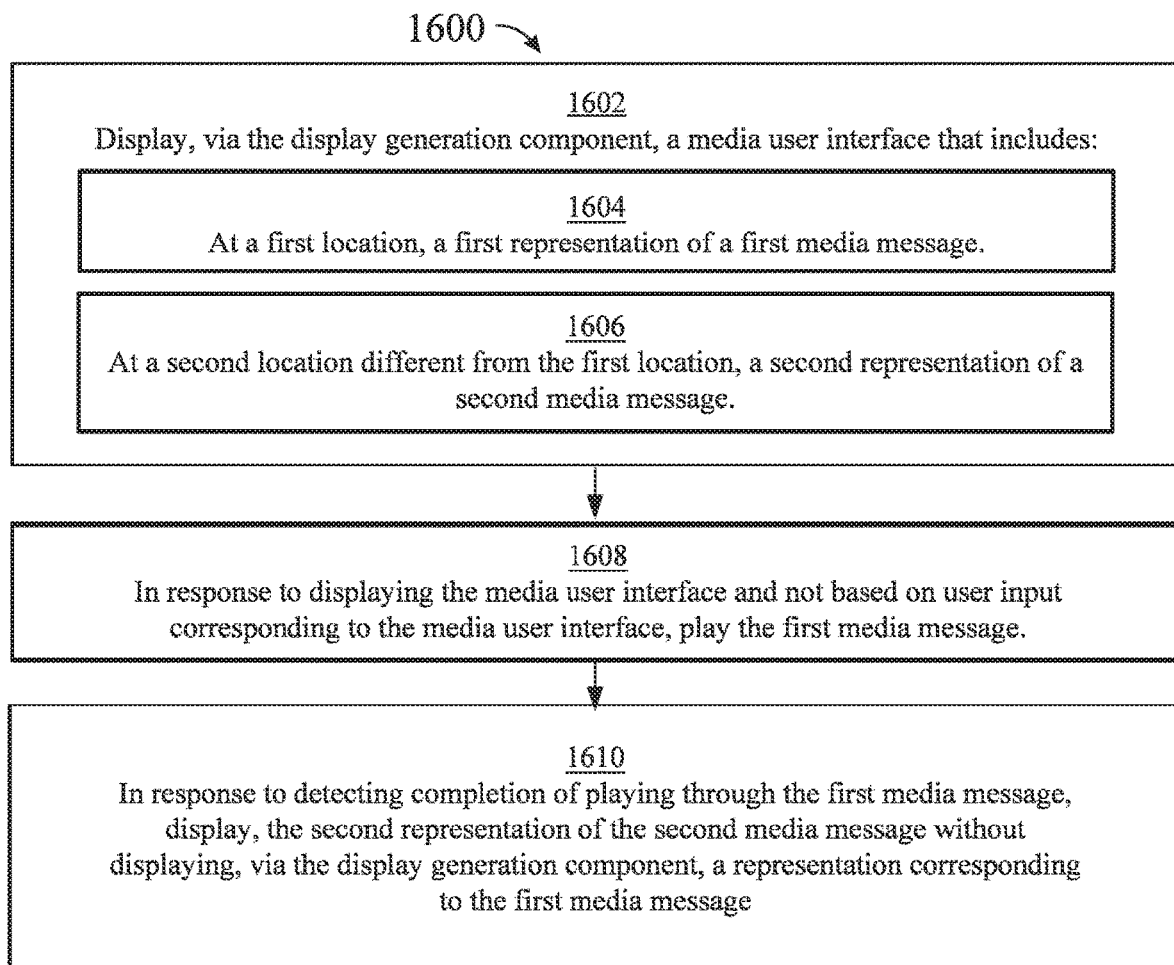


FIG. 16

USER INTERFACE FOR AUDIO MESSAGE**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application is a continuation of to U.S. patent application Ser. No. 17/027,373, filed on Sep. 21, 2020, titled "USER INTERFACE FOR AUDIO MESSAGE," which claims priority to U.S. Provisional Patent Application Ser. No. 63/041,979, filed on Jun. 21, 2020, titled "USER INTERFACE FOR AUDIO MESSAGE," and U.S. Provisional Patent Application Ser. No. 63/023,225, filed on May 11, 2020, titled "USER INTERFACE FOR AUDIO MESSAGE," the contents of which are hereby incorporated by reference in their entireties.

FIELD

The present disclosure relates generally to computer user interfaces, and more specifically to techniques for managing audio messages.

BACKGROUND

Users send instant messages to communicate with other users using alphanumeric text. Such messaging techniques typically require the user to enter text using a keyboard or for a device to transcribe audio into text to be subsequently sent. Users interact with external devices using mobile devices. Such interactions often are cumbersome and require the user to interact with multiple external devices individually.

BRIEF SUMMARY

Current techniques for managing audio messages using electronic devices are generally cumbersome and inefficient. For example, some existing techniques use a complex and time-consuming user interface, which may include multiple key presses or keystrokes. Existing techniques require more time than necessary, wasting user time and device energy. This latter consideration is particularly important in battery-operated devices.

Accordingly, the present technique provides electronic devices with faster, more efficient methods and interfaces for managing audio messages. Such methods and interfaces optionally complement or replace other methods for managing messages. Such methods and interfaces reduce the cognitive burden on a user and produce a more efficient human-machine interface. For battery-operated computing devices, such methods and interfaces conserve power and increase the time between battery charges. Such methods and interfaces enable messages to be transmitted that include the tone of the message (e.g., importance, seriousness, sarcastic, sad, cheerful), rather than just the words of the message, and enable the recipient to recognize the speaker of the message by the speaker's own voice. Such methods and interfaces also reduce or eliminate the need to provide input using a keyboard or to correct a transcription using input.

Current techniques for managing statuses of external devices at a mobile device are generally cumbersome and inefficient. For example, some existing techniques use a complex and time-consuming user interface, which may include multiple key presses or keystrokes. Existing techniques require more time than necessary, wasting user time

and device energy. This latter consideration is particularly important in battery-operated devices.

Accordingly, the present technique provides electronic devices with faster, more efficient methods and interfaces for managing external devices. Such methods and interfaces optionally complement or replace other methods for managing external devices, such as allowing a user to manage external devices individual or managing external devices at the same time via a single input. Such methods and interfaces reduce the cognitive burden on a user and produce a more efficient human-machine interface. For battery-operated computing devices, such methods and interfaces conserve power and increase the time between battery charges.

In accordance with some embodiments, a method is described. The method is performed at a computer system that is in communication with a display generation component. The method comprises: displaying, via the display generation component, a first user interface that includes: a first selectable user interface object, wherein selection of the first selectable user interface object initiates a process for recording and sending a first audio message to a set of external devices, wherein the set of external devices includes a first set of one or more external devices and a second set of one or more external devices; and a first accessory control user interface object corresponding to a first external accessory device, wherein selection of the first accessory control user interface object initiates a process to transmit an instruction to change a state of the first external accessory device; while displaying the first user interface, receiving an input that corresponds to a request to display a second user interface; and in response to receiving the request to display the second user interface, displaying the second user interface, wherein the second user interface includes: a second selectable user interface object, wherein selection of the second selectable user interface object initiates a process for recording and sending a second audio message to the second set of one or more external devices without sending the second audio message to the first set of one or more external devices; and a second accessory control user interface object corresponding to a second external accessory device, wherein selection of the second accessory control user interface object initiates a process to transmit an instruction to change a state of the second external accessory device.

In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system in communication with a display generation component, the one or more programs including instructions for: displaying, via the display generation component, a first user interface that includes: a first selectable user interface object, wherein selection of the first selectable user interface object initiates a process for recording and sending a first audio message to a set of external devices, wherein the set of external devices includes a first set of one or more external devices and a second set of one or more external devices; and a first accessory control user interface object corresponding to a first external accessory device, wherein selection of the first accessory control user interface object initiates a process to transmit an instruction to change a state of the first external accessory device; while displaying the first user interface, receiving an input that corresponds to a request to display a second user interface; and in response to receiving the request to display the second user interface, displaying the second user interface, wherein the second user interface includes: a second selectable user interface object, wherein selection of the second selectable

user interface object initiates a process for recording and sending a second audio message to the second set of one or more external devices without sending the second audio message to the first set of one or more external devices; and a second accessory control user interface object corresponding to a second external accessory device, wherein selection of the second accessory control user interface object initiates a process to transmit an instruction to change a state of the second external accessory device.

In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system in communication with a display generation component, the one or more programs including instructions for: displaying, via the display generation component, a first user interface that includes: a first selectable user interface object, wherein selection of the first selectable user interface object initiates a process for recording and sending a first audio message to a set of external devices, wherein the set of external devices includes a first set of one or more external devices and a second set of one or more external devices; and a first accessory control user interface object corresponding to a first external accessory device, wherein selection of the first accessory control user interface object initiates a process to transmit an instruction to change a state of the first external accessory device; while displaying the first user interface, receiving an input that corresponds to a request to display a second user interface; and in response to receiving the request to display the second user interface, displaying the second user interface, wherein the second user interface includes: a second selectable user interface object, wherein selection of the second selectable user interface object initiates a process for recording and sending a second audio message to the second set of one or more external devices without sending the second audio message to the first set of one or more external devices; and a second accessory control user interface object corresponding to a second external accessory device, wherein selection of the second accessory control user interface object initiates a process to transmit an instruction to change a state of the second external accessory device.

In accordance with some embodiments, a computer system is described. The computer system comprises: one or more processors, wherein the computer system is in communication with a display generation component; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: displaying, via the display generation component, a first user interface that includes: a first selectable user interface object, wherein selection of the first selectable user interface object initiates a process for recording and sending a first audio message to a set of external devices, wherein the set of external devices includes a first set of one or more external devices and a second set of one or more external devices; and a first accessory control user interface object corresponding to a first external accessory device, wherein selection of the first accessory control user interface object initiates a process to transmit an instruction to change a state of the first external accessory device; while displaying the first user interface, receiving an input that corresponds to a request to display a second user interface; and in response to receiving the request to display the second user interface, displaying the second user interface, wherein the second user interface includes: a second selectable user interface object, wherein selection of the second selectable user interface object

initiates a process for recording and sending a second audio message to the second set of one or more external devices without sending the second audio message to the first set of one or more external devices; and a second accessory control user interface object corresponding to a second external accessory device, wherein selection of the second accessory control user interface object initiates a process to transmit an instruction to change a state of the second external accessory device.

In accordance with some embodiments, a computer system is described. The computer system comprising: means for displaying, via a display generation component that is in communication with the computer system, a first user interface that includes: a first selectable user interface object, wherein selection of the first selectable user interface object initiates a process for recording and sending a first audio message to a set of external devices, wherein the set of external devices includes a first set of one or more external devices and a second set of one or more external devices; and a first accessory control user interface object corresponding to a first external accessory device, wherein selection of the first accessory control user interface object initiates a process to transmit an instruction to change a state of the first external accessory device; means, while displaying the first user interface, for receiving an input that corresponds to a request to display a second user interface; and means, responsive to receiving the request to display the second user interface, for displaying the second user interface, wherein the second user interface includes: a second selectable user interface object, wherein selection of the second selectable user interface object initiates a process for recording and sending a second audio message to the second set of one or more external devices without sending the second audio message to the first set of one or more external devices; and a second accessory control user interface object corresponding to a second external accessory device, wherein selection of the second accessory control user interface object initiates a process to transmit an instruction to change a state of the second external accessory device.

In accordance with some embodiments, a method is described. The method is performed at a computer system in communication with a display generation component. The method comprises: receiving first data corresponding to first media; displaying, via the display generation component, until an end of a first time period, a first notification with an indication of the first media; after receiving the first data, receiving second data corresponding to second media, wherein the second media is different from the first media; and in accordance with a determination that the second media meets a set of one or more criteria and in accordance with a determination based on (1) a time that the second data was received and (2) a time that the first data was received, displaying, via the display generation component, until an end of a second time period, a second notification with an indication of the first media, wherein an end of the first time period is different from an end of the second time period.

In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system in communication with a display generation component, the one or more programs including instructions for: receiving first data corresponding to first media; displaying, via the display generation component, until an end of a first time period, a first notification with an indication of the first media; after receiving the first data, receiving second data corresponding to second media,

5

wherein the second media is different from the first media; and in accordance with a determination that the second media meets a set of one or more criteria and in accordance with a determination based on (1) a time that the second data was received and (2) a time that the first data was received, displaying, via the display generation component, until an end of a second time period, a second notification with an indication of the first media, wherein an end of the first time period is different from an end of the second time period.

In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system in communication with a display generation component, the one or more programs including instructions for: receiving first data corresponding to first media; displaying, via the display generation component, until an end of a first time period, a first notification with an indication of the first media; after receiving the first data, receiving second data corresponding to second media, wherein the second media is different from the first media; and in accordance with a determination that the second media meets a set of one or more criteria and in accordance with a determination based on (1) a time that the second data was received and (2) a time that the first data was received, displaying, via the display generation component, until an end of a second time period, a second notification with an indication of the first media, wherein an end of the first time period is different from an end of the second time period.

In accordance with some embodiments, a computer system is described. The computer system comprises: one or more processors, wherein the computer system is in communication with a display generation component; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: receiving first data corresponding to first media; displaying, via the display generation component, until an end of a first time period, a first notification with an indication of the first media; after receiving the first data, receiving second data corresponding to second media, wherein the second media is different from the first media; and in accordance with a determination that the second media meets a set of one or more criteria and in accordance with a determination based on (1) a time that the second data was received and (2) a time that the first data was received, displaying, via the display generation component, until an end of a second time period, a second notification with an indication of the first media, wherein an end of the first time period is different from an end of the second time period.

In accordance with some embodiments, a computer system is described. The computer system comprises: means for receiving first data corresponding to first media; means for displaying, via a generation component that is in communication with the computer system, until an end of a first time period, a first notification with an indication of the first media; means, after receiving the first data, for receiving second data corresponding to second media, wherein the second media is different from the first media; and means, in accordance with a determination that the second media meets a set of one or more criteria and in accordance with a determination based on (1) a time that the second data was received and (2) a time that the first data was received, for displaying, via the display generation component, until an end of a second time period, a second notification with an indication of the first media, wherein an end of the first time period is different from an end of the second time period.

6

In accordance with some embodiments, a method is described. The method is performed at an electronic device having one or more microphones, one or more speakers, and one or more display devices. The method comprises: receiving voice input via the one or more microphones; and displaying a visual indication of the voice input, wherein: in accordance with a determination that a portion of the voice input corresponds to voice input that is to be transmitted to one or more devices displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to other devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device having one or more microphones, one or more speakers, and one or more display devices, the one or more programs including instructions for: receiving voice input via the one or more microphones; and displaying a visual indication of the voice input, wherein: in accordance with a determination that a portion of the voice input corresponds to voice input that is to be transmitted to one or more devices displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to other devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of an electronic device having one or more microphones, one or more speakers, and one or more display devices, the one or more programs including instructions for: receiving voice input via the one or more microphones; and displaying a visual indication of the voice input, wherein: in accordance with a determination that a portion of the voice input corresponds to voice input that is to be transmitted to one or more devices displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to other devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more microphones; one or more speakers; one or more display devices; one or more processors; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: receiving voice input via the one or more microphones; and displaying a visual indication of the voice input, wherein: in accordance with a determination that a

portion of the voice input corresponds to voice input that is to be transmitted to one or more devices displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to other devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

In accordance with some embodiments, an electronic device is described. The electronic device comprises: one or more microphones; one or more speakers; one or more display devices; means for receiving voice input via the one or more microphones; and means displaying a visual indication of the voice input, wherein: in accordance with a determination that a portion of the voice input corresponds to voice input that is to be transmitted to one or more devices displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to other devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

In accordance with some embodiments, a method is described. The method is performed at a computer system, wherein the computer system is in communication with a display generation component and one or more input devices. The method comprises: displaying, via the display generation component, a first status that indicates that a plurality of accessory devices of a first accessory type are in a first state, wherein the plurality of accessory devices of the first accessory type includes: a first accessory device that is the first accessory type and is in the first state; and a second accessory device that is the first accessory type and is in the first state, wherein the second accessory device is different from the first accessory device; while displaying the first status indicator, detecting a gesture; and in response to detecting the gesture: in accordance with a determination that the gesture is a first type of gesture and is directed to the first status indicator, causing the first accessory device and the second accessory device to change to a second state that is different from the first state; and in accordance with a determination that the gesture is a second type of gesture that is different from the first type of gesture and is directed to the first status indicator, displaying, via the display generation component, a first accessory control user interface object corresponding to the first accessory device, wherein selection of the first accessory control user interface object causes the first accessory device to change to the second state without causing the second accessory device to change to the second state.

In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system, wherein the computer system is in communication with a display generation component and one or more input devices, the one or more programs including instructions for: displaying, via the display generation component, a first status that indicates that a plurality of accessory devices of a first accessory type are in a first state, wherein the plurality of accessory devices

of the first accessory type includes: a first accessory device that is the first accessory type and is in the first state; and a second accessory device that is the first accessory type and is in the first state, wherein the second accessory device is different from the first accessory device; while displaying the first status indicator, detecting a gesture; and in response to detecting the gesture: in accordance with a determination that the gesture is a first type of gesture and is directed to the first status indicator, causing the first accessory device and the second accessory device to change to a second state that is different from the first state; and in accordance with a determination that the gesture is a second type of gesture that is different from the first type of gesture and is directed to the first status indicator, displaying, via the display generation component, a first accessory control user interface object corresponding to the first accessory device, wherein selection of the first accessory control user interface object causes the first accessory device to change to the second state without causing the second accessory device to change to the second state.

In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system, wherein the computer system is in communication with a display generation component and one or more input devices, the one or more programs including instructions for: displaying, via the display generation component, a first status that indicates that a plurality of accessory devices of a first accessory type are in a first state, wherein the plurality of accessory devices of the first accessory type includes: a first accessory device that is the first accessory type and is in the first state; and a second accessory device that is the first accessory type and is in the first state, wherein the second accessory device is different from the first accessory device; while displaying the first status indicator, detecting a gesture; and in response to detecting the gesture: in accordance with a determination that the gesture is a first type of gesture and is directed to the first status indicator, causing the first accessory device and the second accessory device to change to a second state that is different from the first state; and in accordance with a determination that the gesture is a second type of gesture that is different from the first type of gesture and is directed to the first status indicator, displaying, via the display generation component, a first accessory control user interface object corresponding to the first accessory device, wherein selection of the first accessory control user interface object causes the first accessory device to change to the second state without causing the second accessory device to change to the second state.

In accordance with some embodiments, a computer system is described. The computer system comprises: one or more processors, wherein the computer system is in communication with a display generation component and one or more input devices; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: displaying, via the display generation component, a first status that indicates that a plurality of accessory devices of a first accessory type are in a first state, wherein the plurality of accessory devices of the first accessory type includes: a first accessory device that is the first accessory type and is in the first state; and a second accessory device that is the first accessory type and is in the first state, wherein the second accessory device is different from the first accessory device; while displaying the first status indicator, detecting

a gesture; and in response to detecting the gesture: in accordance with a determination that the gesture is a first type of gesture and is directed to the first status indicator, causing the first accessory device and the second accessory device to change to a second state that is different from the first state; and in accordance with a determination that the gesture is a second type of gesture that is different from the first type of gesture and is directed to the first status indicator, displaying, via the display generation component, a first accessory control user interface object corresponding to the first accessory device, wherein selection of the first accessory control user interface object causes the first accessory device to change to the second state without causing the second accessory device to change to the second state.

In accordance with some embodiments, a computer system is described. The computer system comprising: means for, displaying, via the display generation component, a first status that indicates that a plurality of accessory devices of a first accessory type are in a first state, wherein the plurality of accessory devices of the first accessory type includes: a first accessory device that is the first accessory type and is in the first state; and a second accessory device that is the first accessory type and is in the first state, wherein the second accessory device is different from the first accessory device; means, while displaying the first status indicator, for detecting a gesture; and means, responsive to detecting the gesture, for: in accordance with a determination that the gesture is a first type of gesture and is directed to the first status indicator, causing the first accessory device and the second accessory device to change to a second state that is different from the first state; and in accordance with a determination that the gesture is a second type of gesture that is different from the first type of gesture and is directed to the first status indicator, displaying, via the display generation component, a first accessory control user interface object corresponding to the first accessory device, wherein selection of the first accessory control user interface object causes the first accessory device to change to the second state without causing the second accessory device to change to the second state.

In accordance with some embodiments, a method is described. The method is performed at a computer system that is in communication with a display generation component and one or more inputs devices. The method comprises: displaying, via the display generation component, a media user interface that includes: at a first location, a first representation of a first media message, and at a second location different from the first location, a second representation of a second media message; in response to displaying the media user interface and not based on user input corresponding to the media user interface, playing the first media message; and in response to detecting completion of playing through the first media message: displaying, the second representation of the second media message without displaying, via the display generation component, a representation corresponding to the first media message.

In accordance with some embodiments, a non-transitory computer-readable storage medium is described. The non-transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system, wherein the computer system is in communication with a display generation component and one or more input devices, the one or more programs including instructions for: displaying, via the display generation component, a media user interface that includes: at a first location, a first representation of a first media message, and at a second location different from the

first location, a second representation of a second media message; in response to displaying the media user interface and not based on user input corresponding to the media user interface, playing the first media message; and in response to detecting completion of playing through the first media message: displaying, the second representation of the second media message without displaying, via the display generation component, a representation corresponding to the first media message.

In accordance with some embodiments, a transitory computer-readable storage medium is described. The transitory computer-readable storage medium stores one or more programs configured to be executed by one or more processors of a computer system, wherein the computer system is in communication with a display generation component and one or more input devices, the one or more programs including instructions for: displaying, via the display generation component, a media user interface that includes: at a first location, a first representation of a first media message, and at a second location different from the first location, a second representation of a second media message; in response to displaying the media user interface and not based on user input corresponding to the media user interface, playing the first media message; and in response to detecting completion of playing through the first media message: displaying, the second representation of the second media message without displaying, via the display generation component, a representation corresponding to the first media message.

In accordance with some embodiments, a computer system is described. The computer system comprises: one or more processors, wherein the computer system is in communication with a display generation component and one or more input devices; and memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for: displaying, via the display generation component, a media user interface that includes: at a first location, a first representation of a first media message, and at a second location different from the first location, a second representation of a second media message; in response to displaying the media user interface and not based on user input corresponding to the media user interface, playing the first media message; and in response to detecting completion of playing through the first media message: displaying, the second representation of the second media message without displaying, via the display generation component, a representation corresponding to the first media message.

In accordance with some embodiments, a computer system is described. The computer system is in communication with a display generation component and one or more inputs devices. The computer system comprises: means for displaying, via the display generation component, a media user interface that includes: at a first location, a first representation of a first media message, and at a second location different from the first location, a second representation of a second media message; means, responsive to displaying the media user interface and not based on user input corresponding to the media user interface, for playing the first media message; and means, responsive to detecting completion of playing through the first media message, for: displaying, the second representation of the second media message without displaying, via the display generation component, a representation corresponding to the first media message.

Executable instructions for performing these functions are, optionally, included in a non-transitory computer-readable storage medium or other computer program product

11

configured for execution by one or more processors. Executable instructions for performing these functions are, optionally, included in a transitory computer-readable storage medium or other computer program product configured for execution by one or more processors.

Thus, devices are provided with faster, more efficient methods and interfaces for managing audio messages, thereby increasing the effectiveness, efficiency, and user satisfaction with such devices. Such methods and interfaces may complement or replace other methods for managing audio messages.

DESCRIPTION OF THE FIGURES

For a better understanding of the various described embodiments, reference should be made to the Description of Embodiments below, in conjunction with the following drawings in which like reference numerals refer to corresponding parts throughout the figures.

FIG. 1A is a block diagram illustrating a portable multifunction device with a touch-sensitive display in accordance with some embodiments.

FIG. 1B is a block diagram illustrating exemplary components for event handling in accordance with some embodiments.

FIG. 2 illustrates a portable multifunction device having a touch screen in accordance with some embodiments.

FIG. 3 is a block diagram of an exemplary multifunction device with a display and a touch-sensitive surface in accordance with some embodiments.

FIG. 4A illustrates an exemplary user interface for a menu of applications on a portable multifunction device in accordance with some embodiments.

FIG. 4B illustrates an exemplary user interface for a multifunction device with a touch-sensitive surface that is separate from the display in accordance with some embodiments.

FIG. 5A illustrates a personal electronic device in accordance with some embodiments.

FIG. 5B is a block diagram illustrating a personal electronic device in accordance with some embodiments.

FIGS. 5C-5D illustrate exemplary components of a personal electronic device having a touch-sensitive display and intensity sensors in accordance with some embodiments.

FIGS. 5E-5H illustrate exemplary components and user interfaces of a personal electronic device in accordance with some embodiments.

FIG. 5I illustrates an electronic device in accordance with some embodiments.

FIG. 5J is a block diagram illustrating an electronic device in accordance with some embodiments.

FIG. 6 is a diagram illustrating a physical structure and an exemplary set of devices in accordance with some embodiments.

FIGS. 7A-7AH illustrate exemplary user interfaces for sending an audio message in accordance with some embodiments.

FIGS. 8A-8B are a flow diagram illustrating a method for sending an audio message in accordance with some embodiments.

FIGS. 9A-9X illustrate exemplary user interfaces for displaying notifications in accordance with some embodiments.

FIG. 10 is a flow diagram illustrating a method for displaying notifications in accordance with some embodiments.

12

FIGS. 11A-11R illustrate exemplary user interfaces for displaying visual indications, in accordance with some embodiments.

FIG. 12 is a flow diagram illustrating a method for displaying visual indications in accordance with some embodiments.

FIGS. 13A-13N illustrate exemplary user interfaces for managing external devices in accordance with some embodiments.

FIG. 14 is a flow diagram illustrating a method for managing external devices in accordance with some embodiments.

FIGS. 15A-15F illustrate exemplary user interfaces for playing back audio messages in accordance with some embodiments.

FIG. 16 is a flow diagram illustrating a method for playing back audio messages in accordance with some embodiments.

DESCRIPTION OF EMBODIMENTS

The following description sets forth exemplary methods, parameters, and the like. It should be recognized, however, that such description is not intended as a limitation on the scope of the present disclosure but is instead provided as a description of exemplary embodiments.

There is a need for electronic devices that provide efficient methods and interfaces for managing audio messages. The techniques for managing audio messages increase the efficiency of the devices (e.g., reduce unnecessary display), increase information provided about external devices (e.g., displaying the source of audio messages), and increase privacy (by providing visual feedback to the user of the state of the device about audio input received). Such techniques can reduce the cognitive burden on a user who uses audio messages, thereby enhancing productivity. Further, such techniques can reduce processor and battery power otherwise wasted on redundant user inputs.

Below, FIGS. 1A-1B, 2, 3, 4A-4B, and 5A-5J provide a description of exemplary devices for performing the techniques for sending and receiving audio messages. FIG. 6 is a diagram illustrating a physical structure and an exemplary set of devices for performing the techniques for sending and receiving audio messages, in accordance with some embodiments.

FIGS. 7A-7AH illustrate exemplary user interfaces for sending an audio message, in accordance with some embodiments. FIGS. 8A-8B are a flow diagram illustrating a method for sending an audio message, in accordance with some embodiments. The user interfaces in FIGS. 7A-7AH are used to illustrate the processes described below, including the processes in FIGS. 8A-8B.

FIGS. 9A-9X illustrate exemplary user interfaces for displaying notifications, in accordance with some embodiments. FIG. 10 is a flow diagram illustrating a method for displaying notifications, in accordance with some embodiments. The user interfaces in FIGS. 9A-9X are used to illustrate the processes described below, including the processes in FIG. 10.

FIGS. 11A-11R illustrate exemplary user interfaces for displaying visual indications. FIG. 12 is a flow diagram illustrating a method for displaying visual indications. The user interfaces in FIGS. 11A-11R are used to illustrate the processes described below, including the processes in FIG. 12.

FIGS. 13A-13N illustrate exemplary user interfaces for managing statuses of devices. FIG. 14 is a flow diagram

13

illustrating a method for managing statuses of devices. The user interfaces in FIGS. 13A-13N are used to illustrate the processes described below, including the processes in FIG. 14.

FIGS. 15A-15F illustrate exemplary user interfaces for playing back audio messages in accordance with some embodiments. FIG. 16 is a flow diagram illustrating a method for playing back audio messages in accordance with some embodiments. The user interfaces in FIGS. 15A-15F are used to illustrate the processes described below, including the processes in FIG. 16.

Although the following description uses terms “first,” “second,” etc. to describe various elements, these elements should not be limited by the terms. These terms are only used to distinguish one element from another. For example, a first touch could be termed a second touch, and, similarly, a second touch could be termed a first touch, without departing from the scope of the various described embodiments. The first touch and the second touch are both touches, but they are not the same touch.

The terminology used in the description of the various described embodiments herein is for the purpose of describing particular embodiments only and is not intended to be limiting. As used in the description of the various described embodiments and the appended claims, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that the term “and/or” as used herein refers to and encompasses any and all possible combinations of one or more of the associated listed items. It will be further understood that the terms “includes,” “including,” “comprises,” and/or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

The term “if” is, optionally, construed to mean “when” or “upon” or “in response to determining” or “in response to detecting,” depending on the context. Similarly, the phrase “if it is determined” or “if [a stated condition or event] is detected” is, optionally, construed to mean “upon determining” or “in response to determining” or “upon detecting [the stated condition or event]” or “in response to detecting [the stated condition or event],” depending on the context.

Embodiments of electronic devices, user interfaces for such devices, and associated processes for using such devices are described. In some embodiments, the device is a portable communications device, such as a mobile telephone, that also contains other functions, such as PDA and/or music player functions. Exemplary embodiments of portable multifunction devices include, without limitation, the iPhone®, iPod Touch®, and iPad® devices from Apple Inc. of Cupertino, California. Other portable electronic devices, such as laptops or tablet computers with touch-sensitive surfaces (e.g., touch screen displays and/or touchpads), are, optionally, used. It should also be understood that, in some embodiments, the device is not a portable communications device, but is a desktop computer with a touch-sensitive surface (e.g., a touch screen display and/or a touchpad).

In the discussion that follows, an electronic device that includes a display and a touch-sensitive surface is described. It should be understood, however, that the electronic device optionally includes one or more other physical user-interface devices, such as a physical keyboard, a mouse, and/or a joystick.

14

The device typically supports a variety of applications, such as one or more of the following: a drawing application, a presentation application, a word processing application, a website creation application, a disk authoring application, a spreadsheet application, a gaming application, a telephone application, a video conferencing application, an e-mail application, an instant messaging application, a workout support application, a photo management application, a digital camera application, a digital video camera application, a web browsing application, a digital music player application, and/or a digital video player application.

The various applications that are executed on the device optionally use at least one common physical user-interface device, such as the touch-sensitive surface. One or more functions of the touch-sensitive surface as well as corresponding information displayed on the device are, optionally, adjusted and/or varied from one application to the next and/or within a respective application. In this way, a common physical architecture (such as the touch-sensitive surface) of the device optionally supports the variety of applications with user interfaces that are intuitive and transparent to the user.

Attention is now directed toward embodiments of portable devices with touch-sensitive displays. FIG. 1A is a block diagram illustrating portable multifunction device 100 with touch-sensitive display system 112 in accordance with some embodiments. Touch-sensitive display 112 is sometimes called a “touch screen” for convenience and is sometimes known as or called a “touch-sensitive display system.” Device 100 includes memory 102 (which optionally includes one or more computer-readable storage mediums), memory controller 122, one or more processing units (CPUs) 120, peripherals interface 118, RF circuitry 108, audio circuitry 110, speaker 111, microphone 113, input/output (I/O) subsystem 106, other input control devices 116, and external port 124. Device 100 optionally includes one or more optical sensors 164. Device 100 optionally includes one or more contact intensity sensors 165 for detecting intensity of contacts on device 100 (e.g., a touch-sensitive surface such as touch-sensitive display system 112 of device 100). Device 100 optionally includes one or more tactile output generators 167 for generating tactile outputs on device 100 (e.g., generating tactile outputs on a touch-sensitive surface such as touch-sensitive display system 112 of device 100 or touchpad 355 of device 300). These components optionally communicate over one or more communication buses or signal lines 103.

As used in the specification and claims, the term “intensity” of a contact on a touch-sensitive surface refers to the force or pressure (force per unit area) of a contact (e.g., a finger contact) on the touch-sensitive surface, or to a substitute (proxy) for the force or pressure of a contact on the touch-sensitive surface. The intensity of a contact has a range of values that includes at least four distinct values and more typically includes hundreds of distinct values (e.g., at least 256). Intensity of a contact is, optionally, determined (or measured) using various approaches and various sensors or combinations of sensors. For example, one or more force sensors underneath or adjacent to the touch-sensitive surface are, optionally, used to measure force at various points on the touch-sensitive surface. In some implementations, force measurements from multiple force sensors are combined (e.g., a weighted average) to determine an estimated force of a contact. Similarly, a pressure-sensitive tip of a stylus is, optionally, used to determine a pressure of the stylus on the touch-sensitive surface. Alternatively, the size of the contact area detected on the touch-sensitive surface and/or changes

15

thereto, the capacitance of the touch-sensitive surface proximate to the contact and/or changes thereto, and/or the resistance of the touch-sensitive surface proximate to the contact and/or changes thereto are, optionally, used as a substitute for the force or pressure of the contact on the touch-sensitive surface. In some implementations, the substitute measurements for contact force or pressure are used directly to determine whether an intensity threshold has been exceeded (e.g., the intensity threshold is described in units corresponding to the substitute measurements). In some implementations, the substitute measurements for contact force or pressure are converted to an estimated force or pressure, and the estimated force or pressure is used to determine whether an intensity threshold has been exceeded (e.g., the intensity threshold is a pressure threshold measured in units of pressure). Using the intensity of a contact as an attribute of a user input allows for user access to additional device functionality that may otherwise not be accessible by the user on a reduced-size device with limited real estate for displaying affordances (e.g., on a touch-sensitive display) and/or receiving user input (e.g., via a touch-sensitive display, a touch-sensitive surface, or a physical/mechanical control such as a knob or a button).

As used in the specification and claims, the term “tactile output” refers to physical displacement of a device relative to a previous position of the device, physical displacement of a component (e.g., a touch-sensitive surface) of a device relative to another component (e.g., housing) of the device, or displacement of the component relative to a center of mass of the device that will be detected by a user with the user’s sense of touch. For example, in situations where the device or the component of the device is in contact with a surface of a user that is sensitive to touch (e.g., a finger, palm, or other part of a user’s hand), the tactile output generated by the physical displacement will be interpreted by the user as a tactile sensation corresponding to a perceived change in physical characteristics of the device or the component of the device. For example, movement of a touch-sensitive surface (e.g., a touch-sensitive display or trackpad) is, optionally, interpreted by the user as a “down click” or “up click” of a physical actuator button. In some cases, a user will feel a tactile sensation such as an “down click” or “up click” even when there is no movement of a physical actuator button associated with the touch-sensitive surface that is physically pressed (e.g., displaced) by the user’s movements. As another example, movement of the touch-sensitive surface is, optionally, interpreted or sensed by the user as “roughness” of the touch-sensitive surface, even when there is no change in smoothness of the touch-sensitive surface. While such interpretations of touch by a user will be subject to the individualized sensory perceptions of the user, there are many sensory perceptions of touch that are common to a large majority of users. Thus, when a tactile output is described as corresponding to a particular sensory perception of a user (e.g., an “up click,” a “down click,” “roughness”), unless otherwise stated, the generated tactile output corresponds to physical displacement of the device or a component thereof that will generate the described sensory perception for a typical (or average) user.

It should be appreciated that device **100** is only one example of a portable multifunction device, and that device **100** optionally has more or fewer components than shown, optionally combines two or more components, or optionally has a different configuration or arrangement of the components. The various components shown in FIG. 1A are implemented in hardware, software, or a combination of

16

both hardware and software, including one or more signal processing and/or application-specific integrated circuits.

Memory **102** optionally includes high-speed random access memory and optionally also includes non-volatile memory, such as one or more magnetic disk storage devices, flash memory devices, or other non-volatile solid-state memory devices. Memory controller **122** optionally controls access to memory **102** by other components of device **100**.

Peripherals interface **118** can be used to couple input and output peripherals of the device to CPU **120** and memory **102**. The one or more processors **120** run or execute various software programs and/or sets of instructions stored in memory **102** to perform various functions for device **100** and to process data. In some embodiments, peripherals interface **118**, CPU **120**, and memory controller **122** are, optionally, implemented on a single chip, such as chip **104**. In some other embodiments, they are, optionally, implemented on separate chips.

RF (radio frequency) circuitry **108** receives and sends RF signals, also called electromagnetic signals. RF circuitry **108** converts electrical signals to/from electromagnetic signals and communicates with communications networks and other communications devices via the electromagnetic signals. RF circuitry **108** optionally includes well-known circuitry for performing these functions, including but not limited to an antenna system, an RF transceiver, one or more amplifiers, a tuner, one or more oscillators, a digital signal processor, a CODEC chipset, a subscriber identity module (SIM) card, memory, and so forth. RF circuitry **108** optionally communicates with networks, such as the Internet, also referred to as the World Wide Web (WWW), an intranet and/or a wireless network, such as a cellular telephone network, a wireless local area network (LAN) and/or a metropolitan area network (MAN), and other devices by wireless communication. The RF circuitry **108** optionally includes well-known circuitry for detecting near field communication (NFC) fields, such as by a short-range communication radio. The wireless communication optionally uses any of a plurality of communications standards, protocols, and technologies, including but not limited to Global System for Mobile Communications (GSM), Enhanced Data GSM Environment (EDGE), high-speed downlink packet access (HSDPA), high-speed uplink packet access (HSUPA), Evolution, Data-Only (EV-DO), HSPA, HSPA+, Dual-Cell HSPA (DC-HSPA), long term evolution (LTE), near field communication (NFC), wideband code division multiple access (W-CDMA), code division multiple access (CDMA), time division multiple access (TDMA), Bluetooth, Bluetooth Low Energy (BTLE), Wireless Fidelity (Wi-Fi) (e.g., IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, and/or IEEE 802.11ac), voice over Internet Protocol (VoIP), Wi-MAX, a protocol for e-mail (e.g., Internet message access protocol (IMAP) and/or post office protocol (POP)), instant messaging (e.g., extensible messaging and presence protocol (XMPP), Session Initiation Protocol for Instant Messaging and Presence Leveraging Extensions (SIMPLE), Instant Messaging and Presence Service (IMPS)), and/or Short Message Service (SMS), or any other suitable communication protocol, including communication protocols not yet developed as of the filing date of this document.

Audio circuitry **110**, speaker **111**, and microphone **113** provide an audio interface between a user and device **100**. Audio circuitry **110** receives audio data from peripherals interface **118**, converts the audio data to an electrical signal, and transmits the electrical signal to speaker **111**. Speaker **111** converts the electrical signal to human-audible sound waves. Audio circuitry **110** also receives electrical signals

17

converted by microphone **113** from sound waves. Audio circuitry **110** converts the electrical signal to audio data and transmits the audio data to peripherals interface **118** for processing. Audio data is, optionally, retrieved from and/or transmitted to memory **102** and/or RF circuitry **108** by peripherals interface **118**. In some embodiments, audio circuitry **110** also includes a headset jack (e.g., **212**, FIG. 2). The headset jack provides an interface between audio circuitry **110** and removable audio input/output peripherals, such as output-only headphones or a headset with both output (e.g., a headphone for one or both ears) and input (e.g., a microphone).

I/O subsystem **106** couples input/output peripherals on device **100**, such as touch screen **112** and other input control devices **116**, to peripherals interface **118**. I/O subsystem **106** optionally includes display controller **156**, optical sensor controller **158**, depth camera controller **169**, intensity sensor controller **159**, haptic feedback controller **161**, and one or more input controllers **160** for other input or control devices. The one or more input controllers **160** receive/send electrical signals from/to other input control devices **116**. The other input control devices **116** optionally include physical buttons (e.g., push buttons, rocker buttons, etc.), dials, slider switches, joysticks, click wheels, and so forth. In some alternate embodiments, input controller(s) **160** are, optionally, coupled to any (or none) of the following: a keyboard, an infrared port, a USB port, and a pointer device such as a mouse. The one or more buttons (e.g., **208**, FIG. 2) optionally include an up/down button for volume control of speaker **111** and/or microphone **113**. The one or more buttons optionally include a push button (e.g., **206**, FIG. 2).

A quick press of the push button optionally disengages a lock of touch screen **112** or optionally begins a process that uses gestures on the touch screen to unlock the device, as described in U.S. patent application Ser. No. 11/322,549, "Unlocking a Device by Performing Gestures on an Unlock Image," filed Dec. 23, 2005, U.S. Pat. No. 7,657,849, which is hereby incorporated by reference in its entirety. A longer press of the push button (e.g., **206**) optionally turns power to device **100** on or off. The functionality of one or more of the buttons are, optionally, user-customizable. Touch screen **112** is used to implement virtual or soft buttons and one or more soft keyboards.

Touch-sensitive display **112** provides an input interface and an output interface between the device and a user. Display controller **156** receives and/or sends electrical signals from/to touch screen **112**. Touch screen **112** displays visual output to the user. The visual output optionally includes graphics, text, icons, video, and any combination thereof (collectively termed "graphics"). In some embodiments, some or all of the visual output optionally corresponds to user-interface objects.

Touch screen **112** has a touch-sensitive surface, sensor, or set of sensors that accepts input from the user based on haptic and/or tactile contact. Touch screen **112** and display controller **156** (along with any associated modules and/or sets of instructions in memory **102**) detect contact (and any movement or breaking of the contact) on touch screen **112** and convert the detected contact into interaction with user-interface objects (e.g., one or more soft keys, icons, web pages, or images) that are displayed on touch screen **112**. In an exemplary embodiment, a point of contact between touch screen **112** and the user corresponds to a finger of the user.

Touch screen **112** optionally uses LCD (liquid crystal display) technology, LPD (light emitting polymer display) technology, or LED (light emitting diode) technology, although other display technologies are used in other

18

embodiments. Touch screen **112** and display controller **156** optionally detect contact and any movement or breaking thereof using any of a plurality of touch sensing technologies now known or later developed, including but not limited to capacitive, resistive, infrared, and surface acoustic wave technologies, as well as other proximity sensor arrays or other elements for determining one or more points of contact with touch screen **112**. In an exemplary embodiment, projected mutual capacitance sensing technology is used, such as that found in the iPhone® and iPod Touch® from Apple Inc. of Cupertino, California.

A touch-sensitive display in some embodiments of touch screen **112** is, optionally, analogous to the multi-touch sensitive touchpads described in the following U.S. Pat. No. 6,323,846 (Westerman et al.), U.S. Pat. No. 6,570,557 (Westerman et al.), and/or U.S. Pat. No. 6,677,932 (Westerman), and/or U.S. Patent Publication 2002/0015024A1, each of which is hereby incorporated by reference in its entirety. However, touch screen **112** displays visual output from device **100**, whereas touch-sensitive touchpads do not provide visual output.

A touch-sensitive display in some embodiments of touch screen **112** is described in the following applications: (1) U.S. patent application Ser. No. 11/381,313, "Multipoint Touch Surface Controller," filed May 2, 2006; (2) U.S. patent application Ser. No. 10/840,862, "Multipoint Touchscreen," filed May 6, 2004; (3) U.S. patent application Ser. No. 10/903,964, "Gestures For Touch Sensitive Input Devices," filed Jul. 30, 2004; (4) U.S. patent application Ser. No. 11/048,264, "Gestures For Touch Sensitive Input Devices," filed Jan. 31, 2005; (5) U.S. patent application Ser. No. 11/038,590, "Mode-Based Graphical User Interfaces For Touch Sensitive Input Devices," filed Jan. 18, 2005; (6) U.S. patent application Ser. No. 11/228,758, "Virtual Input Device Placement On A Touch Screen User Interface," filed Sep. 16, 2005; (7) U.S. patent application Ser. No. 11/228,700, "Operation Of A Computer With A Touch Screen Interface," filed Sep. 16, 2005; (8) U.S. patent application Ser. No. 11/228,737, "Activating Virtual Keys Of A Touch-Screen Virtual Keyboard," filed Sep. 16, 2005; and (9) U.S. patent application Ser. No. 11/367,749, "Multi-Functional Hand-Held Device," filed Mar. 3, 2006. All of these applications are incorporated by reference herein in their entirety.

Touch screen **112** optionally has a video resolution in excess of 100 dpi. In some embodiments, the touch screen has a video resolution of approximately 160 dpi. The user optionally makes contact with touch screen **112** using any suitable object or appendage, such as a stylus, a finger, and so forth. In some embodiments, the user interface is designed to work primarily with finger-based contacts and gestures, which can be less precise than stylus-based input due to the larger area of contact of a finger on the touch screen. In some embodiments, the device translates the rough finger-based input into a precise pointer/cursor position or command for performing the actions desired by the user.

In some embodiments, in addition to the touch screen, device **100** optionally includes a touchpad for activating or deactivating particular functions. In some embodiments, the touchpad is a touch-sensitive area of the device that, unlike the touch screen, does not display visual output. The touchpad is, optionally, a touch-sensitive surface that is separate from touch screen **112** or an extension of the touch-sensitive surface formed by the touch screen.

Device **100** also includes power system **162** for powering the various components. Power system **162** optionally includes a power management system, one or more power

19

sources (e.g., battery, alternating current (AC)), a recharging system, a power failure detection circuit, a power converter or inverter, a power status indicator (e.g., a light-emitting diode (LED)) and any other components associated with the generation, management and distribution of power in portable devices.

Device **100** optionally also includes one or more optical sensors **164**. FIG. 1A shows an optical sensor coupled to optical sensor controller **158** in I/O subsystem **106**. Optical sensor **164** optionally includes charge-coupled device (CCD) or complementary metal-oxide semiconductor (CMOS) phototransistors. Optical sensor **164** receives light from the environment, projected through one or more lenses, and converts the light to data representing an image. In conjunction with imaging module **143** (also called a camera module), optical sensor **164** optionally captures still images or video. In some embodiments, an optical sensor is located on the back of device **100**, opposite touch screen display **112** on the front of the device so that the touch screen display is enabled for use as a viewfinder for still and/or video image acquisition. In some embodiments, an optical sensor is located on the front of the device so that the user's image is, optionally, obtained for video conferencing while the user views the other video conference participants on the touch screen display. In some embodiments, the position of optical sensor **164** can be changed by the user (e.g., by rotating the lens and the sensor in the device housing) so that a single optical sensor **164** is used along with the touch screen display for both video conferencing and still and/or video image acquisition.

Device **100** optionally also includes one or more depth camera sensors **175**. FIG. 1A shows a depth camera sensor coupled to depth camera controller **169** in I/O subsystem **106**. Depth camera sensor **175** receives data from the environment to create a three dimensional model of an object (e.g., a face) within a scene from a viewpoint (e.g., a depth camera sensor). In some embodiments, in conjunction with imaging module **143** (also called a camera module), depth camera sensor **175** is optionally used to determine a depth map of different portions of an image captured by the imaging module **143**. In some embodiments, a depth camera sensor is located on the front of device **100** so that the user's image with depth information is, optionally, obtained for video conferencing while the user views the other video conference participants on the touch screen display and to capture selfies with depth map data. In some embodiments, the depth camera sensor **175** is located on the back of device, or on the back and the front of the device **100**. In some embodiments, the position of depth camera sensor **175** can be changed by the user (e.g., by rotating the lens and the sensor in the device housing) so that a depth camera sensor **175** is used along with the touch screen display for both video conferencing and still and/or video image acquisition.

Device **100** optionally also includes one or more contact intensity sensors **165**. FIG. 1A shows a contact intensity sensor coupled to intensity sensor controller **159** in I/O subsystem **106**. Contact intensity sensor **165** optionally includes one or more piezoresistive strain gauges, capacitive force sensors, electric force sensors, piezoelectric force sensors, optical force sensors, capacitive touch-sensitive surfaces, or other intensity sensors (e.g., sensors used to measure the force (or pressure) of a contact on a touch-sensitive surface). Contact intensity sensor **165** receives contact intensity information (e.g., pressure information or a proxy for pressure information) from the environment. In some embodiments, at least one contact intensity sensor is collocated with, or proximate to, a touch-sensitive surface

20

(e.g., touch-sensitive display system **112**). In some embodiments, at least one contact intensity sensor is located on the back of device **100**, opposite touch screen display **112**, which is located on the front of device **100**.

Device **100** optionally also includes one or more proximity sensors **166**. FIG. 1A shows proximity sensor **166** coupled to peripherals interface **118**. Alternately, proximity sensor **166** is, optionally, coupled to input controller **160** in I/O subsystem **106**. Proximity sensor **166** optionally performs as described in U.S. patent application Ser. No. 11/241,839, "Proximity Detector In Handheld Device"; Ser. No. 11/240,788, "Proximity Detector In Handheld Device"; Ser. No. 11/620,702, "Using Ambient Light Sensor To Augment Proximity Sensor Output"; Ser. No. 11/586,862, "Automated Response To And Sensing Of User Activity In Portable Devices"; and Ser. No. 11/638,251, "Methods And Systems For Automatic Configuration Of Peripherals," which are hereby incorporated by reference in their entirety. In some embodiments, the proximity sensor turns off and disables touch screen **112** when the multifunction device is placed near the user's ear (e.g., when the user is making a phone call).

Device **100** optionally also includes one or more tactile output generators **167**. FIG. 1A shows a tactile output generator coupled to haptic feedback controller **161** in I/O subsystem **106**. Tactile output generator **167** optionally includes one or more electroacoustic devices such as speakers or other audio components and/or electromechanical devices that convert energy into linear motion such as a motor, solenoid, electroactive polymer, piezoelectric actuator, electrostatic actuator, or other tactile output generating component (e.g., a component that converts electrical signals into tactile outputs on the device). Contact intensity sensor **165** receives tactile feedback generation instructions from haptic feedback module **133** and generates tactile outputs on device **100** that are capable of being sensed by a user of device **100**. In some embodiments, at least one tactile output generator is collocated with, or proximate to, a touch-sensitive surface (e.g., touch-sensitive display system **112**) and, optionally, generates a tactile output by moving the touch-sensitive surface vertically (e.g., in/out of a surface of device **100**) or laterally (e.g., back and forth in the same plane as a surface of device **100**). In some embodiments, at least one tactile output generator sensor is located on the back of device **100**, opposite touch screen display **112**, which is located on the front of device **100**.

Device **100** optionally also includes one or more accelerometers **168**. FIG. 1A shows accelerometer **168** coupled to peripherals interface **118**. Alternately, accelerometer **168** is, optionally, coupled to an input controller **160** in I/O subsystem **106**. Accelerometer **168** optionally performs as described in U.S. Patent Publication No. 20050190059, "Acceleration-based Theft Detection System for Portable Electronic Devices," and U.S. Patent Publication No. 20060017692, "Methods And Apparatuses For Operating A Portable Device Based On An Accelerometer," both of which are incorporated by reference herein in their entirety. In some embodiments, information is displayed on the touch screen display in a portrait view or a landscape view based on an analysis of data received from the one or more accelerometers. Device **100** optionally includes, in addition to accelerometer(s) **168**, a magnetometer and a GPS (or GLONASS or other global navigation system) receiver for obtaining information concerning the location and orientation (e.g., portrait or landscape) of device **100**.

In some embodiments, the software components stored in memory **102** include operating system **126**, communication

21

module (or set of instructions) **128**, contact/motion module (or set of instructions) **130**, graphics module (or set of instructions) **132**, text input module (or set of instructions) **134**, Global Positioning System (GPS) module (or set of instructions) **135**, and applications (or sets of instructions) **136**. Furthermore, in some embodiments, memory **102** (FIG. 1A) or **370** (FIG. 3) stores device/global internal state **157**, as shown in FIGS. 1A and 3. Device/global internal state **157** includes one or more of: active application state, indicating which applications, if any, are currently active; display state, indicating what applications, views or other information occupy various regions of touch screen display **112**; sensor state, including information obtained from the device's various sensors and input control devices **116**; and location information concerning the device's location and/or attitude.

Operating system **126** (e.g., Darwin, RTXC, LINUX, UNIX, OS X, iOS, WINDOWS, or an embedded operating system such as VxWorks) includes various software components and/or drivers for controlling and managing general system tasks (e.g., memory management, storage device control, power management, etc.) and facilitates communication between various hardware and software components.

Communication module **128** facilitates communication with other devices over one or more external ports **124** and also includes various software components for handling data received by RF circuitry **108** and/or external port **124**. External port **124** (e.g., Universal Serial Bus (USB), FIREWIRE, etc.) is adapted for coupling directly to other devices or indirectly over a network (e.g., the Internet, wireless LAN, etc.). In some embodiments, the external port is a multi-pin (e.g., 30-pin) connector that is the same as, or similar to and/or compatible with, the 30-pin connector used on iPod® (trademark of Apple Inc.) devices.

Contact/motion module **130** optionally detects contact with touch screen **112** (in conjunction with display controller **156**) and other touch-sensitive devices (e.g., a touchpad or physical click wheel). Contact/motion module **130** includes various software components for performing various operations related to detection of contact, such as determining if contact has occurred (e.g., detecting a finger-down event), determining an intensity of the contact (e.g., the force or pressure of the contact or a substitute for the force or pressure of the contact), determining if there is movement of the contact and tracking the movement across the touch-sensitive surface (e.g., detecting one or more finger-dragging events), and determining if the contact has ceased (e.g., detecting a finger-up event or a break in contact). Contact/motion module **130** receives contact data from the touch-sensitive surface. Determining movement of the point of contact, which is represented by a series of contact data, optionally includes determining speed (magnitude), velocity (magnitude and direction), and/or an acceleration (a change in magnitude and/or direction) of the point of contact. These operations are, optionally, applied to single contacts (e.g., one finger contacts) or to multiple simultaneous contacts (e.g., "multitouch"/multiple finger contacts). In some embodiments, contact/motion module **130** and display controller **156** detect contact on a touchpad.

In some embodiments, contact/motion module **130** uses a set of one or more intensity thresholds to determine whether an operation has been performed by a user (e.g., to determine whether a user has "clicked" on an icon). In some embodiments, at least a subset of the intensity thresholds are determined in accordance with software parameters (e.g., the intensity thresholds are not determined by the activation thresholds of particular physical actuators and can be adjusted without changing the physical hardware of device

22

100). For example, a mouse "click" threshold of a trackpad or touch screen display can be set to any of a large range of predefined threshold values without changing the trackpad or touch screen display hardware. Additionally, in some implementations, a user of the device is provided with software settings for adjusting one or more of the set of intensity thresholds (e.g., by adjusting individual intensity thresholds and/or by adjusting a plurality of intensity thresholds at once with a system-level click "intensity" parameter).

Contact/motion module **130** optionally detects a gesture input by a user. Different gestures on the touch-sensitive surface have different contact patterns (e.g., different motions, timings, and/or intensities of detected contacts). Thus, a gesture is, optionally, detected by detecting a particular contact pattern. For example, detecting a finger tap gesture includes detecting a finger-down event followed by detecting a finger-up (liftoff) event at the same position (or substantially the same position) as the finger-down event (e.g., at the position of an icon). As another example, detecting a finger swipe gesture on the touch-sensitive surface includes detecting a finger-down event followed by detecting one or more finger-dragging events, and subsequently followed by detecting a finger-up (liftoff) event.

Graphics module **132** includes various known software components for rendering and displaying graphics on touch screen **112** or other display, including components for changing the visual impact (e.g., brightness, transparency, saturation, contrast, or other visual property) of graphics that are displayed. As used herein, the term "graphics" includes any object that can be displayed to a user, including, without limitation, text, web pages, icons (such as user-interface objects including soft keys), digital images, videos, animations, and the like.

In some embodiments, graphics module **132** stores data representing graphics to be used. Each graphic is, optionally, assigned a corresponding code. Graphics module **132** receives, from applications etc., one or more codes specifying graphics to be displayed along with, if necessary, coordinate data and other graphic property data, and then generates screen image data to output to display controller **156**.

Haptic feedback module **133** includes various software components for generating instructions used by tactile output generator(s) **167** to produce tactile outputs at one or more locations on device **100** in response to user interactions with device **100**.

Text input module **134**, which is, optionally, a component of graphics module **132**, provides soft keyboards for entering text in various applications (e.g., contacts **137**, e-mail **140**, IM **141**, browser **147**, and any other application that needs text input).

GPS module **135** determines the location of the device and provides this information for use in various applications (e.g., to telephone module **138** for use in location-based dialing; to camera module **143** as picture/video metadata; and to applications that provide location-based services such as weather widgets, local yellow page widgets, and map/navigation widgets).

Applications **136** optionally include the following modules (or sets of instructions), or a subset or superset thereof:

- Contacts module **137** (sometimes called an address book or contact list);
- Telephone module **138**;
- Video conference module **139**;
- E-mail client module **140**;
- Instant messaging (IM) module **141**;
- Workout support module **142**;

23

Camera module **143** for still and/or video images;
 Image management module **144**;
 Video player module;
 Music player module;
 Browser module **147**;
 Calendar module **148**;
 Widget modules **149**, which optionally include one or more of: weather widget **149-1**, stocks widget **149-2**, calculator widget **149-3**, alarm clock widget **149-4**, dictionary widget **149-5**, and other widgets obtained by the user, as well as user-created widgets **149-6**;
 Widget creator module **150** for making user-created widgets **149-6**;
 Search module **151**;
 Video and music player module **152**, which merges video player module and music player module;
 Notes module **153**;
 Map module **154**; and/or
 Online video module **155**.

Examples of other applications **136** that are, optionally, stored in memory **102** include other word processing applications, other image editing applications, drawing applications, presentation applications, JAVA-enabled applications, encryption, digital rights management, voice recognition, and voice replication.

In conjunction with touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, and text input module **134**, contacts module **137** are, optionally, used to manage an address book or contact list (e.g., stored in application internal state **192** of contacts module **137** in memory **102** or memory **370**), including: adding name(s) to the address book; deleting name(s) from the address book; associating telephone number(s), e-mail address(es), physical address(es) or other information with a name; associating an image with a name; categorizing and sorting names; providing telephone numbers or e-mail addresses to initiate and/or facilitate communications by telephone module **138**, video conference module **139**, e-mail **140**, or IM **141**; and so forth.

In conjunction with RF circuitry **108**, audio circuitry **110**, speaker **111**, microphone **113**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, and text input module **134**, telephone module **138** are optionally, used to enter a sequence of characters corresponding to a telephone number, access one or more telephone numbers in contacts module **137**, modify a telephone number that has been entered, dial a respective telephone number, conduct a conversation, and disconnect or hang up when the conversation is completed. As noted above, the wireless communication optionally uses any of a plurality of communications standards, protocols, and technologies.

In conjunction with RF circuitry **108**, audio circuitry **110**, speaker **111**, microphone **113**, touch screen **112**, display controller **156**, optical sensor **164**, optical sensor controller **158**, contact/motion module **130**, graphics module **132**, text input module **134**, contacts module **137**, and telephone module **138**, video conference module **139** includes executable instructions to initiate, conduct, and terminate a video conference between a user and one or more other participants in accordance with user instructions.

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, and text input module **134**, e-mail client module **140** includes executable instructions to create, send, receive, and manage e-mail in response to user instructions. In conjunction with image management module **144**, e-mail

24

client module **140** makes it very easy to create and send e-mails with still or video images taken with camera module **143**.

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, and text input module **134**, the instant messaging module **141** includes executable instructions to enter a sequence of characters corresponding to an instant message, to modify previously entered characters, to transmit a respective instant message (for example, using a Short Message Service (SMS) or Multimedia Message Service (MMS) protocol for telephony-based instant messages or using XMPP, SIMPLE, or IMPS for Internet-based instant messages), to receive instant messages, and to view received instant messages. In some embodiments, transmitted and/or received instant messages optionally include graphics, photos, audio files, video files and/or other attachments as are supported in an MMS and/or an Enhanced Messaging Service (EMS). As used herein, "instant messaging" refers to both telephony-based messages (e.g., messages sent using SMS or MMS) and Internet-based messages (e.g., messages sent using XMPP, SIMPLE, or IMPS).

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, text input module **134**, GPS module **135**, map module **154**, and music player module, workout support module **142** includes executable instructions to create workouts (e.g., with time, distance, and/or calorie burning goals); communicate with workout sensors (sports devices); receive workout sensor data; calibrate sensors used to monitor a workout; select and play music for a workout; and display, store, and transmit workout data.

In conjunction with touch screen **112**, display controller **156**, optical sensor(s) **164**, optical sensor controller **158**, contact/motion module **130**, graphics module **132**, and image management module **144**, camera module **143** includes executable instructions to capture still images or video (including a video stream) and store them into memory **102**, modify characteristics of a still image or video, or delete a still image or video from memory **102**.

In conjunction with touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, text input module **134**, and camera module **143**, image management module **144** includes executable instructions to arrange, modify (e.g., edit), or otherwise manipulate, label, delete, present (e.g., in a digital slide show or album), and store still and/or video images.

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, and text input module **134**, browser module **147** includes executable instructions to browse the Internet in accordance with user instructions, including searching, linking to, receiving, and displaying web pages or portions thereof, as well as attachments and other files linked to web pages.

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, text input module **134**, e-mail client module **140**, and browser module **147**, calendar module **148** includes executable instructions to create, display, modify, and store calendars and data associated with calendars (e.g., calendar entries, to-do lists, etc.) in accordance with user instructions.

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, text input module **134**, and browser module **147**, widget modules **149** are mini-applications that are, optionally, downloaded and used by a user (e.g., weather

25

widget **149-1**, stocks widget **149-2**, calculator widget **149-3**, alarm clock widget **149-4**, and dictionary widget **149-5**) or created by the user (e.g., user-created widget **149-6**). In some embodiments, a widget includes an HTML (Hypertext Markup Language) file, a CSS (Cascading Style Sheets) file, and a JavaScript file. In some embodiments, a widget includes an XML (Extensible Markup Language) file and a JavaScript file (e.g., Yahoo! Widgets).

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, text input module **134**, and browser module **147**, the widget creator module **150** are, optionally, used by a user to create widgets (e.g., turning a user-specified portion of a web page into a widget).

In conjunction with touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, and text input module **134**, search module **151** includes executable instructions to search for text, music, sound, image, video, and/or other files in memory **102** that match one or more search criteria (e.g., one or more user-specified search terms) in accordance with user instructions.

In conjunction with touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, audio circuitry **110**, speaker **111**, RF circuitry **108**, and browser module **147**, video and music player module **152** includes executable instructions that allow the user to download and play back recorded music and other sound files stored in one or more file formats, such as MP3 or AAC files, and executable instructions to display, present, or otherwise play back videos (e.g., on touch screen **112** or on an external, connected display via external port **124**). In some embodiments, device **100** optionally includes the functionality of an MP3 player, such as an iPod (trademark of Apple Inc.).

In conjunction with touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, and text input module **134**, notes module **153** includes executable instructions to create and manage notes, to-do lists, and the like in accordance with user instructions.

In conjunction with RF circuitry **108**, touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, text input module **134**, GPS module **135**, and browser module **147**, map module **154** are, optionally, used to receive, display, modify, and store maps and data associated with maps (e.g., driving directions, data on stores and other points of interest at or near a particular location, and other location-based data) in accordance with user instructions.

In conjunction with touch screen **112**, display controller **156**, contact/motion module **130**, graphics module **132**, audio circuitry **110**, speaker **111**, RF circuitry **108**, text input module **134**, e-mail client module **140**, and browser module **147**, online video module **155** includes instructions that allow the user to access, browse, receive (e.g., by streaming and/or download), play back (e.g., on the touch screen or on an external, connected display via external port **124**), send an e-mail with a link to a particular online video, and otherwise manage online videos in one or more file formats, such as H.264. In some embodiments, instant messaging module **141**, rather than e-mail client module **140**, is used to send a link to a particular online video. Additional description of the online video application can be found in U.S. Provisional Patent Application No. 60/936,562, "Portable Multifunction Device, Method, and Graphical User Interface for Playing Online Videos," filed Jun. 20, 2007, and U.S. patent application Ser. No. 11/968,067, "Portable Multifunction Device, Method, and Graphical User Interface for

26

Playing Online Videos," filed Dec. 31, 2007, the contents of which are hereby incorporated by reference in their entirety.

Each of the above-identified modules and applications corresponds to a set of executable instructions for performing one or more functions described above and the methods described in this application (e.g., the computer-implemented methods and other information processing methods described herein). These modules (e.g., sets of instructions) need not be implemented as separate software programs, procedures, or modules, and thus various subsets of these modules are, optionally, combined or otherwise rearranged in various embodiments. For example, video player module is, optionally, combined with music player module into a single module (e.g., video and music player module **152**, FIG. **1A**). In some embodiments, memory **102** optionally stores a subset of the modules and data structures identified above. Furthermore, memory **102** optionally stores additional modules and data structures not described above.

In some embodiments, device **100** is a device where operation of a predefined set of functions on the device is performed exclusively through a touch screen and/or a touchpad. By using a touch screen and/or a touchpad as the primary input control device for operation of device **100**, the number of physical input control devices (such as push buttons, dials, and the like) on device **100** is, optionally, reduced.

The predefined set of functions that are performed exclusively through a touch screen and/or a touchpad optionally include navigation between user interfaces. In some embodiments, the touchpad, when touched by the user, navigates device **100** to a main, home, or root menu from any user interface that is displayed on device **100**. In such embodiments, a "menu button" is implemented using a touchpad. In some other embodiments, the menu button is a physical push button or other physical input control device instead of a touchpad.

FIG. **1B** is a block diagram illustrating exemplary components for event handling in accordance with some embodiments. In some embodiments, memory **102** (FIG. **1A**) or **370** (FIG. **3**) includes event sorter **170** (e.g., in operating system **126**) and a respective application **136-1** (e.g., any of the aforementioned applications **137-151**, **155**, **380-390**).

Event sorter **170** receives event information and determines the application **136-1** and application view **191** of application **136-1** to which to deliver the event information. Event sorter **170** includes event monitor **171** and event dispatcher module **174**. In some embodiments, application **136-1** includes application internal state **192**, which indicates the current application view(s) displayed on touch-sensitive display **112** when the application is active or executing. In some embodiments, device/global internal state **157** is used by event sorter **170** to determine which application(s) is (are) currently active, and application internal state **192** is used by event sorter **170** to determine application views **191** to which to deliver event information.

In some embodiments, application internal state **192** includes additional information, such as one or more of: resume information to be used when application **136-1** resumes execution, user interface state information that indicates information being displayed or that is ready for display by application **136-1**, a state queue for enabling the user to go back to a prior state or view of application **136-1**, and a redo/undo queue of previous actions taken by the user.

Event monitor **171** receives event information from peripherals interface **118**. Event information includes information about a sub-event (e.g., a user touch on touch-

sensitive display 112, as part of a multi-touch gesture). Peripherals interface 118 transmits information it receives from I/O subsystem 106 or a sensor, such as proximity sensor 166, accelerometer(s) 168, and/or microphone 113 (through audio circuitry 110). Information that peripherals interface 118 receives from I/O subsystem 106 includes information from touch-sensitive display 112 or a touch-sensitive surface.

In some embodiments, event monitor 171 sends requests to the peripherals interface 118 at predetermined intervals. In response, peripherals interface 118 transmits event information. In other embodiments, peripherals interface 118 transmits event information only when there is a significant event (e.g., receiving an input above a predetermined noise threshold and/or for more than a predetermined duration).

In some embodiments, event sorter 170 also includes a hit view determination module 172 and/or an active event recognizer determination module 173.

Hit view determination module 172 provides software procedures for determining where a sub-event has taken place within one or more views when touch-sensitive display 112 displays more than one view. Views are made up of controls and other elements that a user can see on the display.

Another aspect of the user interface associated with an application is a set of views, sometimes herein called application views or user interface windows, in which information is displayed and touch-based gestures occur. The application views (of a respective application) in which a touch is detected optionally correspond to programmatic levels within a programmatic or view hierarchy of the application. For example, the lowest level view in which a touch is detected is, optionally, called the hit view, and the set of events that are recognized as proper inputs are, optionally, determined based, at least in part, on the hit view of the initial touch that begins a touch-based gesture.

Hit view determination module 172 receives information related to sub-events of a touch-based gesture. When an application has multiple views organized in a hierarchy, hit view determination module 172 identifies a hit view as the lowest view in the hierarchy which should handle the sub-event. In most circumstances, the hit view is the lowest level view in which an initiating sub-event occurs (e.g., the first sub-event in the sequence of sub-events that form an event or potential event). Once the hit view is identified by the hit view determination module 172, the hit view typically receives all sub-events related to the same touch or input source for which it was identified as the hit view.

Active event recognizer determination module 173 determines which view or views within a view hierarchy should receive a particular sequence of sub-events. In some embodiments, active event recognizer determination module 173 determines that only the hit view should receive a particular sequence of sub-events. In other embodiments, active event recognizer determination module 173 determines that all views that include the physical location of a sub-event are actively involved views, and therefore determines that all actively involved views should receive a particular sequence of sub-events. In other embodiments, even if touch sub-events were entirely confined to the area associated with one particular view, views higher in the hierarchy would still remain as actively involved views.

Event dispatcher module 174 dispatches the event information to an event recognizer (e.g., event recognizer 180). In embodiments including active event recognizer determination module 173, event dispatcher module 174 delivers the event information to an event recognizer determined by

active event recognizer determination module 173. In some embodiments, event dispatcher module 174 stores in an event queue the event information, which is retrieved by a respective event receiver 182.

In some embodiments, operating system 126 includes event sorter 170. Alternatively, application 136-1 includes event sorter 170. In yet other embodiments, event sorter 170 is a stand-alone module, or a part of another module stored in memory 102, such as contact/motion module 130.

In some embodiments, application 136-1 includes a plurality of event handlers 190 and one or more application views 191, each of which includes instructions for handling touch events that occur within a respective view of the application's user interface. Each application view 191 of the application 136-1 includes one or more event recognizers 180. Typically, a respective application view 191 includes a plurality of event recognizers 180. In other embodiments, one or more of event recognizers 180 are part of a separate module, such as a user interface kit or a higher level object from which application 136-1 inherits methods and other properties. In some embodiments, a respective event handler 190 includes one or more of: data updater 176, object updater 177, GUI updater 178, and/or event data 179 received from event sorter 170. Event handler 190 optionally utilizes or calls data updater 176, object updater 177, or GUI updater 178 to update the application internal state 192. Alternatively, one or more of the application views 191 include one or more respective event handlers 190. Also, in some embodiments, one or more of data updater 176, object updater 177, and GUI updater 178 are included in a respective application view 191.

A respective event recognizer 180 receives event information (e.g., event data 179) from event sorter 170 and identifies an event from the event information. Event recognizer 180 includes event receiver 182 and event comparator 184. In some embodiments, event recognizer 180 also includes at least a subset of: metadata 183, and event delivery instructions 188 (which optionally include sub-event delivery instructions).

Event receiver 182 receives event information from event sorter 170. The event information includes information about a sub-event, for example, a touch or a touch movement. Depending on the sub-event, the event information also includes additional information, such as location of the sub-event. When the sub-event concerns motion of a touch, the event information optionally also includes speed and direction of the sub-event. In some embodiments, events include rotation of the device from one orientation to another (e.g., from a portrait orientation to a landscape orientation, or vice versa), and the event information includes corresponding information about the current orientation (also called device attitude) of the device.

Event comparator 184 compares the event information to predefined event or sub-event definitions and, based on the comparison, determines an event or sub-event, or determines or updates the state of an event or sub-event. In some embodiments, event comparator 184 includes event definitions 186. Event definitions 186 contain definitions of events (e.g., predefined sequences of sub-events), for example, event 1 (187-1), event 2 (187-2), and others. In some embodiments, sub-events in an event (187) include, for example, touch begin, touch end, touch movement, touch cancellation, and multiple touching. In one example, the definition for event 1 (187-1) is a double tap on a displayed object. The double tap, for example, comprises a first touch (touch begin) on the displayed object for a predetermined phase, a first liftoff (touch end) for a predetermined phase,

a second touch (touch begin) on the displayed object for a predetermined phase, and a second liftoff (touch end) for a predetermined phase. In another example, the definition for event 2 (187-2) is a dragging on a displayed object. The dragging, for example, comprises a touch (or contact) on the displayed object for a predetermined phase, a movement of the touch across touch-sensitive display 112, and liftoff of the touch (touch end). In some embodiments, the event also includes information for one or more associated event handlers 190.

In some embodiments, event definition 187 includes a definition of an event for a respective user-interface object. In some embodiments, event comparator 184 performs a hit test to determine which user-interface object is associated with a sub-event. For example, in an application view in which three user-interface objects are displayed on touch-sensitive display 112, when a touch is detected on touch-sensitive display 112, event comparator 184 performs a hit test to determine which of the three user-interface objects is associated with the touch (sub-event). If each displayed object is associated with a respective event handler 190, the event comparator uses the result of the hit test to determine which event handler 190 should be activated. For example, event comparator 184 selects an event handler associated with the sub-event and the object triggering the hit test.

In some embodiments, the definition for a respective event (187) also includes delayed actions that delay delivery of the event information until after it has been determined whether the sequence of sub-events does or does not correspond to the event recognizer's event type.

When a respective event recognizer 180 determines that the series of sub-events do not match any of the events in event definitions 186, the respective event recognizer 180 enters an event impossible, event failed, or event ended state, after which it disregards subsequent sub-events of the touch-based gesture. In this situation, other event recognizers, if any, that remain active for the hit view continue to track and process sub-events of an ongoing touch-based gesture.

In some embodiments, a respective event recognizer 180 includes metadata 183 with configurable properties, flags, and/or lists that indicate how the event delivery system should perform sub-event delivery to actively involved event recognizers. In some embodiments, metadata 183 includes configurable properties, flags, and/or lists that indicate how event recognizers interact, or are enabled to interact, with one another. In some embodiments, metadata 183 includes configurable properties, flags, and/or lists that indicate whether sub-events are delivered to varying levels in the view or programmatic hierarchy.

In some embodiments, a respective event recognizer 180 activates event handler 190 associated with an event when one or more particular sub-events of an event are recognized. In some embodiments, a respective event recognizer 180 delivers event information associated with the event to event handler 190. Activating an event handler 190 is distinct from sending (and deferred sending) sub-events to a respective hit view. In some embodiments, event recognizer 180 throws a flag associated with the recognized event, and event handler 190 associated with the flag catches the flag and performs a predefined process.

In some embodiments, event delivery instructions 188 include sub-event delivery instructions that deliver event information about a sub-event without activating an event handler. Instead, the sub-event delivery instructions deliver event information to event handlers associated with the series of sub-events or to actively involved views. Event

handlers associated with the series of sub-events or with actively involved views receive the event information and perform a predetermined process.

In some embodiments, data updater 176 creates and updates data used in application 136-1. For example, data updater 176 updates the telephone number used in contacts module 137, or stores a video file used in video player module. In some embodiments, object updater 177 creates and updates objects used in application 136-1. For example, object updater 177 creates a new user-interface object or updates the position of a user-interface object. GUI updater 178 updates the GUI. For example, GUI updater 178 prepares display information and sends it to graphics module 132 for display on a touch-sensitive display.

In some embodiments, event handler(s) 190 includes or has access to data updater 176, object updater 177, and GUI updater 178. In some embodiments, data updater 176, object updater 177, and GUI updater 178 are included in a single module of a respective application 136-1 or application view 191. In other embodiments, they are included in two or more software modules.

It shall be understood that the foregoing discussion regarding event handling of user touches on touch-sensitive displays also applies to other forms of user inputs to operate multifunction devices 100 with input devices, not all of which are initiated on touch screens. For example, mouse movement and mouse button presses, optionally coordinated with single or multiple keyboard presses or holds; contact movements such as taps, drags, scrolls, etc. on touchpads; pen stylus inputs; movement of the device; oral instructions; detected eye movements; biometric inputs; and/or any combination thereof are optionally utilized as inputs corresponding to sub-events which define an event to be recognized.

FIG. 2 illustrates a portable multifunction device 100 having a touch screen 112 in accordance with some embodiments. The touch screen optionally displays one or more graphics within user interface (UI) 200. In this embodiment, as well as others described below, a user is enabled to select one or more of the graphics by making a gesture on the graphics, for example, with one or more fingers 202 (not drawn to scale in the figure) or one or more styluses 203 (not drawn to scale in the figure). In some embodiments, selection of one or more graphics occurs when the user breaks contact with the one or more graphics. In some embodiments, the gesture optionally includes one or more taps, one or more swipes (from left to right, right to left, upward and/or downward), and/or a rolling of a finger (from right to left, left to right, upward and/or downward) that has made contact with device 100. In some implementations or circumstances, inadvertent contact with a graphic does not select the graphic. For example, a swipe gesture that sweeps over an application icon optionally does not select the corresponding application when the gesture corresponding to selection is a tap.

Device 100 optionally also include one or more physical buttons, such as "home" or menu button 204. As described previously, menu button 204 is, optionally, used to navigate to any application 136 in a set of applications that are, optionally, executed on device 100. Alternatively, in some embodiments, the menu button is implemented as a soft key in a GUI displayed on touch screen 112.

In some embodiments, device 100 includes touch screen 112, menu button 204, push button 206 for powering the device on/off and locking the device, volume adjustment button(s) 208, subscriber identity module (SIM) card slot 210, headset jack 212, and docking/charging external port 124. Push button 206 is, optionally, used to turn the power

31

on/off on the device by depressing the button and holding the button in the depressed state for a predefined time interval; to lock the device by depressing the button and releasing the button before the predefined time interval has elapsed; and/or to unlock the device or initiate an unlock process. In an alternative embodiment, device 100 also accepts verbal input for activation or deactivation of some functions through microphone 113. Device 100 also, optionally, includes one or more contact intensity sensors 165 for detecting intensity of contacts on touch screen 112 and/or one or more tactile output generators 167 for generating tactile outputs for a user of device 100.

FIG. 3 is a block diagram of an exemplary multifunction device with a display and a touch-sensitive surface in accordance with some embodiments. Device 300 need not be portable. In some embodiments, device 300 is a laptop computer, a desktop computer, a tablet computer, a multimedia player device, a navigation device, an educational device (such as a child's learning toy), a gaming system, or a control device (e.g., a home or industrial controller). Device 300 typically includes one or more processing units (CPUs) 310, one or more network or other communications interfaces 360, memory 370, and one or more communication buses 320 for interconnecting these components. Communication buses 320 optionally include circuitry (sometimes called a chipset) that interconnects and controls communications between system components. Device 300 includes input/output (I/O) interface 330 comprising display 340, which is typically a touch screen display. I/O interface 330 also optionally includes a keyboard and/or mouse (or other pointing device) 350 and touchpad 355, tactile output generator 357 for generating tactile outputs on device 300 (e.g., similar to tactile output generator(s) 167 described above with reference to FIG. 1A), sensors 359 (e.g., optical, acceleration, proximity, touch-sensitive, and/or contact intensity sensors similar to contact intensity sensor(s) 165 described above with reference to FIG. 1A). Memory 370 includes high-speed random access memory, such as DRAM, SRAM, DDR RAM, or other random access solid state memory devices; and optionally includes non-volatile memory, such as one or more magnetic disk storage devices, optical disk storage devices, flash memory devices, or other non-volatile solid state storage devices. Memory 370 optionally includes one or more storage devices remotely located from CPU(s) 310. In some embodiments, memory 370 stores programs, modules, and data structures analogous to the programs, modules, and data structures stored in memory 102 of portable multifunction device 100 (FIG. 1A), or a subset thereof. Furthermore, memory 370 optionally stores additional programs, modules, and data structures not present in memory 102 of portable multifunction device 100. For example, memory 370 of device 300 optionally stores drawing module 380, presentation module 382, word processing module 384, website creation module 386, disk authoring module 388, and/or spreadsheet module 390, while memory 102 of portable multifunction device 100 (FIG. 1A) optionally does not store these modules.

Each of the above-identified elements in FIG. 3 is, optionally, stored in one or more of the previously mentioned memory devices. Each of the above-identified modules corresponds to a set of instructions for performing a function described above. The above-identified modules or programs (e.g., sets of instructions) need not be implemented as separate software programs, procedures, or modules, and thus various subsets of these modules are, optionally, combined or otherwise rearranged in various embodiments. In some embodiments, memory 370 optionally stores a subset

32

of the modules and data structures identified above. Furthermore, memory 370 optionally stores additional modules and data structures not described above.

Attention is now directed towards embodiments of user interfaces that are, optionally, implemented on, for example, portable multifunction device 100.

FIG. 4A illustrates an exemplary user interface for a menu of applications on portable multifunction device 100 in accordance with some embodiments. Similar user interfaces are, optionally, implemented on device 300. In some embodiments, user interface 400 includes the following elements, or a subset or superset thereof:

Signal strength indicator(s) 402 for wireless communication(s), such as cellular and Wi-Fi signals;

Time 404;

Bluetooth indicator 405;

Battery status indicator 406;

Tray 408 with icons for frequently used applications, such as:

Icon 416 for telephone module 138, labeled "Phone," which optionally includes an indicator 414 of the number of missed calls or voicemail messages;

Icon 418 for e-mail client module 140, labeled "Mail," which optionally includes an indicator 410 of the number of unread e-mails;

Icon 420 for browser module 147, labeled "Browser;" and

Icon 422 for video and music player module 152, also referred to as iPod (trademark of Apple Inc.) module 152, labeled "iPod;" and

Icons for other applications, such as:

Icon 424 for IM module 141, labeled "Messages;"

Icon 426 for calendar module 148, labeled "Calendar;"

Icon 428 for image management module 144, labeled "Photos;"

Icon 430 for camera module 143, labeled "Camera;"

Icon 432 for online video module 155, labeled "Online Video;"

Icon 434 for stocks widget 149-2, labeled "Stocks;"

Icon 436 for map module 154, labeled "Maps;"

Icon 438 for weather widget 149-1, labeled "Weather;"

Icon 440 for alarm clock widget 149-4, labeled "Clock;"

Icon 442 for workout support module 142, labeled "Workout Support;"

Icon 444 for notes module 153, labeled "Notes;" and

Icon 446 for a settings application or module, labeled "Settings," which provides access to settings for device 100 and its various applications 136.

It should be noted that the icon labels illustrated in FIG. 4A are merely exemplary. For example, icon 422 for video and music player module 152 is labeled "Music" or "Music Player." Other labels are, optionally, used for various application icons. In some embodiments, a label for a respective application icon includes a name of an application corresponding to the respective application icon. In some embodiments, a label for a particular application icon is distinct from a name of an application corresponding to the particular application icon.

FIG. 4B illustrates an exemplary user interface on a device (e.g., device 300, FIG. 3) with a touch-sensitive surface 451 (e.g., a tablet or touchpad 355, FIG. 3) that is separate from the display 450 (e.g., touch screen display 112). Device 300 also, optionally, includes one or more contact intensity sensors (e.g., one or more of sensors 359) for detecting intensity of contacts on touch-sensitive surface

451 and/or one or more tactile output generators 357 for generating tactile outputs for a user of device 300.

Although some of the examples that follow will be given with reference to inputs on touch screen display 112 (where the touch-sensitive surface and the display are combined), in some embodiments, the device detects inputs on a touch-sensitive surface that is separate from the display, as shown in FIG. 4B. In some embodiments, the touch-sensitive surface (e.g., 451 in FIG. 4B) has a primary axis (e.g., 452 in FIG. 4B) that corresponds to a primary axis (e.g., 453 in FIG. 4B) on the display (e.g., 450). In accordance with these embodiments, the device detects contacts (e.g., 460 and 462 in FIG. 4B) with the touch-sensitive surface 451 at locations that correspond to respective locations on the display (e.g., in FIG. 4B, 460 corresponds to 468 and 462 corresponds to 470). In this way, user inputs (e.g., contacts 460 and 462, and movements thereof) detected by the device on the touch-sensitive surface (e.g., 451 in FIG. 4B) are used by the device to manipulate the user interface on the display (e.g., 450 in FIG. 4B) of the multifunction device when the touch-sensitive surface is separate from the display. It should be understood that similar methods are, optionally, used for other user interfaces described herein.

Additionally, while the following examples are given primarily with reference to finger inputs (e.g., finger contacts, finger tap gestures, finger swipe gestures), it should be understood that, in some embodiments, one or more of the finger inputs are replaced with input from another input device (e.g., a mouse-based input or stylus input). For example, a swipe gesture is, optionally, replaced with a mouse click (e.g., instead of a contact) followed by movement of the cursor along the path of the swipe (e.g., instead of movement of the contact). As another example, a tap gesture is, optionally, replaced with a mouse click while the cursor is located over the location of the tap gesture (e.g., instead of detection of the contact followed by ceasing to detect the contact). Similarly, when multiple user inputs are simultaneously detected, it should be understood that multiple computer mice are, optionally, used simultaneously, or a mouse and finger contacts are, optionally, used simultaneously.

FIG. 5A illustrates exemplary personal electronic device 500. Device 500 includes body 502. In some embodiments, device 500 can include some or all of the features described with respect to devices 100 and 300 (e.g., FIGS. 1A-4B). In some embodiments, device 500 has touch-sensitive display screen 504, hereafter touch screen 504. Alternatively, or in addition to touch screen 504, device 500 has a display and a touch-sensitive surface. As with devices 100 and 300, in some embodiments, touch screen 504 (or the touch-sensitive surface) optionally includes one or more intensity sensors for detecting intensity of contacts (e.g., touches) being applied. The one or more intensity sensors of touch screen 504 (or the touch-sensitive surface) can provide output data that represents the intensity of touches. The user interface of device 500 can respond to touches based on their intensity, meaning that touches of different intensities can invoke different user interface operations on device 500.

Exemplary techniques for detecting and processing touch intensity are found, for example, in related applications: International Patent Application Serial No. PCT/US2013/040061, titled "Device, Method, and Graphical User Interface for Displaying User Interface Objects Corresponding to an Application," filed May 8, 2013, published as WIPO Publication No. WO/2013/169849, and International Patent Application Serial No. PCT/US2013/069483, titled "Device, Method, and Graphical User Interface for Transi-

tioning Between Touch Input to Display Output Relationships," filed Nov. 11, 2013, published as WIPO Publication No. WO/2014/105276, each of which is hereby incorporated by reference in their entirety.

In some embodiments, device 500 has one or more input mechanisms 506 and 508. Input mechanisms 506 and 508, if included, can be physical. Examples of physical input mechanisms include push buttons and rotatable mechanisms. In some embodiments, device 500 has one or more attachment mechanisms. Such attachment mechanisms, if included, can permit attachment of device 500 with, for example, hats, eyewear, earrings, necklaces, shirts, jackets, bracelets, watch straps, chains, trousers, belts, shoes, purses, backpacks, and so forth. These attachment mechanisms permit device 500 to be worn by a user.

FIG. 5B depicts exemplary personal electronic device 500. In some embodiments, device 500 can include some or all of the components described with respect to FIGS. 1A, 1B, and 3. Device 500 has bus 512 that operatively couples I/O section 514 with one or more computer processors 516 and memory 518. I/O section 514 can be connected to display 504, which can have touch-sensitive component 522 and, optionally, intensity sensor 524 (e.g., contact intensity sensor). In addition, I/O section 514 can be connected with communication unit 530 for receiving application and operating system data, using Wi-Fi, Bluetooth, near field communication (NFC), cellular, and/or other wireless communication techniques. Device 500 can include input mechanisms 506 and/or 508. Input mechanism 506 is, optionally, a rotatable input device or a depressible and rotatable input device, for example. Input mechanism 508 is, optionally, a button, in some examples.

Input mechanism 508 is, optionally, a microphone, in some examples. Personal electronic device 500 optionally includes various sensors, such as GPS sensor 532, accelerometer 534, directional sensor 540 (e.g., compass), gyroscope 536, motion sensor 538, and/or a combination thereof, all of which can be operatively connected to I/O section 514.

Memory 518 of personal electronic device 500 can include one or more non-transitory computer-readable storage mediums, for storing computer-executable instructions, which, when executed by one or more computer processors 516, for example, can cause the computer processors to perform the techniques described below, including processes 800 (FIGS. 8A-8B), 1000 (FIG. 10), 1200 (FIG. 12), 1400 (FIG. 14), and 1600 (FIG. 16). A computer-readable storage medium can be any medium that can tangibly contain or store computer-executable instructions for use by or in connection with the instruction execution system, apparatus, or device. In some examples, the storage medium is a transitory computer-readable storage medium. In some examples, the storage medium is a non-transitory computer-readable storage medium. The non-transitory computer-readable storage medium can include, but is not limited to, magnetic, optical, and/or semiconductor storages. Examples of such storage include magnetic disks, optical discs based on CD, DVD, or Blu-ray technologies, as well as persistent solid-state memory such as flash, solid-state drives, and the like. Personal electronic device 500 is not limited to the components and configuration of FIG. 5B, but can include other or additional components in multiple configurations.

As used here, the term "affordance" refers to a user-interactive graphical user interface object that is, optionally, displayed on the display screen of devices 100, 300, and/or 500 (FIGS. 1A, 3, and 5A-5B). For example, an image (e.g., icon), a button, and text (e.g., hyperlink) each optionally constitute an affordance.

35

As used herein, the term “focus selector” refers to an input element that indicates a current part of a user interface with which a user is interacting. In some implementations that include a cursor or other location marker, the cursor acts as a “focus selector” so that when an input (e.g., a press input) is detected on a touch-sensitive surface (e.g., touchpad 355 in FIG. 3 or touch-sensitive surface 451 in FIG. 4B) while the cursor is over a particular user interface element (e.g., a button, window, slider, or other user interface element), the particular user interface element is adjusted in accordance with the detected input. In some implementations that include a touch screen display (e.g., touch-sensitive display system 112 in FIG. 1A or touch screen 112 in FIG. 4A) that enables direct interaction with user interface elements on the touch screen display, a detected contact on the touch screen acts as a “focus selector” so that when an input (e.g., a press input by the contact) is detected on the touch screen display at a location of a particular user interface element (e.g., a button, window, slider, or other user interface element), the particular user interface element is adjusted in accordance with the detected input. In some implementations, focus is moved from one region of a user interface to another region of the user interface without corresponding movement of a cursor or movement of a contact on a touch screen display (e.g., by using a tab key or arrow keys to move focus from one button to another button); in these implementations, the focus selector moves in accordance with movement of focus between different regions of the user interface. Without regard to the specific form taken by the focus selector, the focus selector is generally the user interface element (or contact on a touch screen display) that is controlled by the user so as to communicate the user’s intended interaction with the user interface (e.g., by indicating, to the device, the element of the user interface with which the user is intending to interact). For example, the location of a focus selector (e.g., a cursor, a contact, or a selection box) over a respective button while a press input is detected on the touch-sensitive surface (e.g., a touchpad or touch screen) will indicate that the user is intending to activate the respective button (as opposed to other user interface elements shown on a display of the device).

As used in the specification and claims, the term “characteristic intensity” of a contact refers to a characteristic of the contact based on one or more intensities of the contact. In some embodiments, the characteristic intensity is based on multiple intensity samples. The characteristic intensity is, optionally, based on a predefined number of intensity samples, or a set of intensity samples collected during a predetermined time period (e.g., 0.05, 0.1, 0.2, 0.5, 1, 2, 5, 10 seconds) relative to a predefined event (e.g., after detecting the contact, prior to detecting liftoff of the contact, before or after detecting a start of movement of the contact, prior to detecting an end of the contact, before or after detecting an increase in intensity of the contact, and/or before or after detecting a decrease in intensity of the contact). A characteristic intensity of a contact is, optionally, based on one or more of: a maximum value of the intensities of the contact, a mean value of the intensities of the contact, an average value of the intensities of the contact, a top 10 percentile value of the intensities of the contact, a value at the half maximum of the intensities of the contact, a value at the 90 percent maximum of the intensities of the contact, or the like. In some embodiments, the duration of the contact is used in determining the characteristic intensity (e.g., when the characteristic intensity is an average of the intensity of the contact over time). In some embodiments, the characteristic intensity is compared to a set of one or more intensity

36

thresholds to determine whether an operation has been performed by a user. For example, the set of one or more intensity thresholds optionally includes a first intensity threshold and a second intensity threshold. In this example, a contact with a characteristic intensity that does not exceed the first threshold results in a first operation, a contact with a characteristic intensity that exceeds the first intensity threshold and does not exceed the second intensity threshold results in a second operation, and a contact with a characteristic intensity that exceeds the second threshold results in a third operation. In some embodiments, a comparison between the characteristic intensity and one or more thresholds is used to determine whether or not to perform one or more operations (e.g., whether to perform a respective operation or forgo performing the respective operation), rather than being used to determine whether to perform a first operation or a second operation.

FIG. 5C illustrates detecting a plurality of contacts 552A-552E on touch-sensitive display screen 504 with a plurality of intensity sensors 524A-524D. FIG. 5C additionally includes intensity diagrams that show the current intensity measurements of the intensity sensors 524A-524D relative to units of intensity. In this example, the intensity measurements of intensity sensors 524A and 524D are each 9 units of intensity, and the intensity measurements of intensity sensors 524B and 524C are each 7 units of intensity. In some implementations, an aggregate intensity is the sum of the intensity measurements of the plurality of intensity sensors 524A-524D, which in this example is 32 intensity units. In some embodiments, each contact is assigned a respective intensity that is a portion of the aggregate intensity. FIG. 5D illustrates assigning the aggregate intensity to contacts 552A-552E based on their distance from the center of force 554. In this example, each of contacts 552A, 552B, and 552E are assigned an intensity of contact of 8 intensity units of the aggregate intensity, and each of contacts 552C and 552D are assigned an intensity of contact of 4 intensity units of the aggregate intensity. More generally, in some implementations, each contact j is assigned a respective intensity I_j that is a portion of the aggregate intensity, A , in accordance with a predefined mathematical function, $I_j = A \cdot (D_j / \sum D_i)$, where D_j is the distance of the respective contact j to the center of force, and $\sum D_i$ is the sum of the distances of all the respective contacts (e.g., $i=1$ to last) to the center of force. The operations described with reference to FIGS. 5C-5D can be performed using an electronic device similar or identical to device 100, 300, or 500. In some embodiments, a characteristic intensity of a contact is based on one or more intensities of the contact. In some embodiments, the intensity sensors are used to determine a single characteristic intensity (e.g., a single characteristic intensity of a single contact). It should be noted that the intensity diagrams are not part of a displayed user interface, but are included in FIGS. 5C-5D to aid the reader.

In some embodiments, a portion of a gesture is identified for purposes of determining a characteristic intensity. For example, a touch-sensitive surface optionally receives a continuous swipe contact transitioning from a start location and reaching an end location, at which point the intensity of the contact increases. In this example, the characteristic intensity of the contact at the end location is, optionally, based on only a portion of the continuous swipe contact, and not the entire swipe contact (e.g., only the portion of the swipe contact at the end location). In some embodiments, a smoothing algorithm is, optionally, applied to the intensities of the swipe contact prior to determining the characteristic intensity of the contact. For example, the smoothing algo-

rithm optionally includes one or more of: an unweighted sliding-average smoothing algorithm, a triangular smoothing algorithm, a median filter smoothing algorithm, and/or an exponential smoothing algorithm. In some circumstances, these smoothing algorithms eliminate narrow spikes or dips in the intensities of the swipe contact for purposes of determining a characteristic intensity.

The intensity of a contact on the touch-sensitive surface is, optionally, characterized relative to one or more intensity thresholds, such as a contact-detection intensity threshold, a light press intensity threshold, a deep press intensity threshold, and/or one or more other intensity thresholds. In some embodiments, the light press intensity threshold corresponds to an intensity at which the device will perform operations typically associated with clicking a button of a physical mouse or a trackpad. In some embodiments, the deep press intensity threshold corresponds to an intensity at which the device will perform operations that are different from operations typically associated with clicking a button of a physical mouse or a trackpad. In some embodiments, when a contact is detected with a characteristic intensity below the light press intensity threshold (e.g., and above a nominal contact-detection intensity threshold below which the contact is no longer detected), the device will move a focus selector in accordance with movement of the contact on the touch-sensitive surface without performing an operation associated with the light press intensity threshold or the deep press intensity threshold. Generally, unless otherwise stated, these intensity thresholds are consistent between different sets of user interface figures.

An increase of characteristic intensity of the contact from an intensity below the light press intensity threshold to an intensity between the light press intensity threshold and the deep press intensity threshold is sometimes referred to as a “light press” input. An increase of characteristic intensity of the contact from an intensity below the deep press intensity threshold to an intensity above the deep press intensity threshold is sometimes referred to as a “deep press” input. An increase of characteristic intensity of the contact from an intensity below the contact-detection intensity threshold to an intensity between the contact-detection intensity threshold and the light press intensity threshold is sometimes referred to as detecting the contact on the touch-surface. A decrease of characteristic intensity of the contact from an intensity above the contact-detection intensity threshold to an intensity below the contact-detection intensity threshold is sometimes referred to as detecting liftoff of the contact from the touch-surface. In some embodiments, the contact-detection intensity threshold is zero. In some embodiments, the contact-detection intensity threshold is greater than zero.

In some embodiments described herein, one or more operations are performed in response to detecting a gesture that includes a respective press input or in response to detecting the respective press input performed with a respective contact (or a plurality of contacts), where the respective press input is detected based at least in part on detecting an increase in intensity of the contact (or plurality of contacts) above a press-input intensity threshold. In some embodiments, the respective operation is performed in response to detecting the increase in intensity of the respective contact above the press-input intensity threshold (e.g., a “down stroke” of the respective press input). In some embodiments, the press input includes an increase in intensity of the respective contact above the press-input intensity threshold and a subsequent decrease in intensity of the contact below the press-input intensity threshold, and the respective operation is performed in response to detecting the subsequent

decrease in intensity of the respective contact below the press-input threshold (e.g., an “up stroke” of the respective press input).

FIGS. 5E-5H illustrate detection of a gesture that includes a press input that corresponds to an increase in intensity of a contact 562 from an intensity below a light press intensity threshold (e.g., “IT_L”) in FIG. 5E, to an intensity above a deep press intensity threshold (e.g., “IT_D”) in FIG. 5H. The gesture performed with contact 562 is detected on touch-sensitive surface 560 while cursor 576 is displayed over application icon 572B corresponding to App 2, on a displayed user interface 570 that includes application icons 572A-572D displayed in predefined region 574. In some embodiments, the gesture is detected on touch-sensitive display 504. The intensity sensors detect the intensity of contacts on touch-sensitive surface 560. The device determines that the intensity of contact 562 peaked above the deep press intensity threshold (e.g., “IT_D”). Contact 562 is maintained on touch-sensitive surface 560. In response to the detection of the gesture, and in accordance with contact 562 having an intensity that goes above the deep press intensity threshold (e.g., “IT_D”) during the gesture, reduced-scale representations 578A-578C (e.g., thumbnails) of recently opened documents for App 2 are displayed, as shown in FIGS. 5F-5H. In some embodiments, the intensity, which is compared to the one or more intensity thresholds, is the characteristic intensity of a contact. It should be noted that the intensity diagram for contact 562 is not part of a displayed user interface, but is included in FIGS. 5E-5H to aid the reader.

In some embodiments, the display of representations 578A-578C includes an animation. For example, representation 578A is initially displayed in proximity of application icon 572B, as shown in FIG. 5F. As the animation proceeds, representation 578A moves upward and representation 578B is displayed in proximity of application icon 572B, as shown in FIG. 5G. Then, representation 578A moves upward, 578B moves upward toward representation 578A, and representation 578C is displayed in proximity of application icon 572B, as shown in FIG. 5H. Representations 578A-578C form an array above icon 572B. In some embodiments, the animation progresses in accordance with an intensity of contact 562, as shown in FIGS. 5F-5G, where the representations 578A-578C appear and move upwards as the intensity of contact 562 increases toward the deep press intensity threshold (e.g., “IT_D”). In some embodiments, the intensity, on which the progress of the animation is based, is the characteristic intensity of the contact. The operations described with reference to FIGS. 5E-5H can be performed using an electronic device similar or identical to device 100, 300, or 500.

In some embodiments, the device employs intensity hysteresis to avoid accidental inputs sometimes termed “jitter,” where the device defines or selects a hysteresis intensity threshold with a predefined relationship to the press-input intensity threshold (e.g., the hysteresis intensity threshold is X intensity units lower than the press-input intensity threshold or the hysteresis intensity threshold is 75%, 90%, or some reasonable proportion of the press-input intensity threshold). Thus, in some embodiments, the press input includes an increase in intensity of the respective contact above the press-input intensity threshold and a subsequent decrease in intensity of the contact below the hysteresis intensity threshold that corresponds to the press-input intensity threshold, and the respective operation is performed in response to detecting the subsequent decrease in intensity of the respective contact below the hysteresis intensity thresh-

old (e.g., an “up stroke” of the respective press input). Similarly, in some embodiments, the press input is detected only when the device detects an increase in intensity of the contact from an intensity at or below the hysteresis intensity threshold to an intensity at or above the press-input intensity threshold and, optionally, a subsequent decrease in intensity of the contact to an intensity at or below the hysteresis intensity, and the respective operation is performed in response to detecting the press input (e.g., the increase in intensity of the contact or the decrease in intensity of the contact, depending on the circumstances).

For ease of explanation, the descriptions of operations performed in response to a press input associated with a press-input intensity threshold or in response to a gesture including the press input are, optionally, triggered in response to detecting either: an increase in intensity of a contact above the press-input intensity threshold, an increase in intensity of a contact from an intensity below the hysteresis intensity threshold to an intensity above the press-input intensity threshold, a decrease in intensity of the contact below the press-input intensity threshold, and/or a decrease in intensity of the contact below the hysteresis intensity threshold corresponding to the press-input intensity threshold. Additionally, in examples where an operation is described as being performed in response to detecting a decrease in intensity of a contact below the press-input intensity threshold, the operation is, optionally, performed in response to detecting a decrease in intensity of the contact below a hysteresis intensity threshold corresponding to, and lower than, the press-input intensity threshold.

FIG. 5I illustrates exemplary electronic device 580. Device 580 includes body 580A. In some embodiments, device 580 can include some or all of the features described with respect to devices 100, 300, and 500 (e.g., FIGS. 1A-5B). In some embodiments, device 580 has one or more speakers 580B (concealed in body 580A), one or more microphones 580C, one or more touch-sensitive surfaces 580D, and one or more displays 580E. Alternatively, or in addition to a display and touch-sensitive surface 580D, the device has a touch-sensitive display (also referred to as a touchscreen). As with devices 100, 300, and 500, in some embodiments, touch-sensitive surface 580D (or the touch screen) optionally includes one or more intensity sensors for detecting intensity of contacts (e.g., touches) being applied. The one or more intensity sensors of touch-sensitive surface 580D (or the touchscreen) can provide output data that represents the intensity of touches. The user interface of device 580 can respond to touches based on their intensity, meaning that touches of different intensities can invoke different user interface operations on device 580. In some embodiments, the one or more displays 580E are one or more light-emitting diodes (LEDs). For example, a display can be a single LED, an LED cluster (e.g., a red, a green, and a blue LED), a plurality of discrete LEDs, a plurality of discrete LED clusters, or other arrangement of one or more LEDs. For example, the display 580E can be an array of nine discrete LED clusters arranged in a circular shape (e.g., a ring). In some examples, the one or more displays are comprised of one or more of another type of light-emitting elements.

FIG. 5J depicts exemplary personal electronic device 580. In some embodiments, device 580 can include some or all of the components described with respect to FIGS. 1A, 1B, 3, and 5A-5B. Device 580 has bus 592 that operatively couples I/O section 594 with one or more computer processors 596 and memory 598. I/O section 594 can be connected to display 582, which can have touch-sensitive component 584

and, optionally, intensity sensor 585 (e.g., contact intensity sensor). In some embodiments, touch-sensitive component 584 is a separate component than display 582. In addition, I/O section 594 can be connected with communication unit 590 for receiving application and operating system data, using Wi-Fi, Bluetooth, near field communication (NFC), cellular, and/or other wireless communication techniques. Device 580 can include input mechanisms 588. Input mechanism 588 is, optionally, a button, in some examples. Input mechanism 588 is, optionally, a microphone, in some examples. Input mechanism 588 is, optionally, a plurality of microphones (e.g., a microphone array).

Electronic device 580 includes speaker 586 for outputting audio. Device 580 can include audio circuitry (e.g., in I/O section 594) that receives audio data, converts the audio data to an electrical signal, and transmits the electrical signal to speaker 586. Speaker 586 converts the electrical signal to human-audible sound waves. The audio circuitry (e.g., in I/O section 594) also receives electrical signals converted by a microphone (e.g., input mechanism 588) from sound waves. The audio circuitry (e.g., in I/O section 594) converts the electrical signal to audio data. Audio data is, optionally, retrieved from and/or transmitted to memory 598 and/or RF circuitry (e.g., in communication unit 590) by I/O section 594.

Memory 598 of personal electronic device 580 can include one or more non-transitory computer-readable storage mediums, for storing computer-executable instructions, which, when executed by one or more computer processors 596, for example, can cause the computer processors to perform the techniques described below, including processes 800 (FIGS. 8A-8B), 1000 (FIG. 10), 1200 (FIG. 12), 1400 (FIG. 14), and 1600 (FIG. 16). A computer-readable storage medium can be any medium that can tangibly contain or store computer-executable instructions for use by or in connection with the instruction execution system, apparatus, or device. In some examples, the storage medium is a transitory computer-readable storage medium. In some examples, the storage medium is a non-transitory computer-readable storage medium. The non-transitory computer-readable storage medium can include, but is not limited to, magnetic, optical, and/or semiconductor storages. Examples of such storage include magnetic disks, optical discs based on CD, DVD, or Blu-ray technologies, as well as persistent solid-state memory such as flash, solid-state drives, and the like. Personal electronic device 580 is not limited to the components and configuration of FIG. 5J, but can include other or additional components in multiple configurations.

Attention is now directed towards embodiments of user interfaces (“UI”) and associated processes that are implemented on an electronic device, such as portable multifunction device 100, device 300, or device 500.

FIG. 6 includes diagram 600, illustrating a physical structure and an exemplary set of devices in accordance with some embodiments. FIG. 6 is used to illustrate the processes described below, including the processes in FIGS. 8A-8B, FIG. 10, and FIG. 12.

Diagram 600 includes home 602 and a set of devices (e.g., device 646, device 604, etc.). Home 602 includes multiple rooms, such as kitchen 602a, dining room 602b, bedroom 602c, living room 602d, and sunroom 602e. Kitchen 602a is in the upper left portion of home 602 and dining room 602b is between kitchen 602a and bedroom 602c, where bedroom 602c is to the right of dining room 602b. Kitchen 602a and dining room 602b do not have a wall between them while dining room 602b and bedroom 602c have a wall between them. Living room 602d is in the bottom left portion of home

41

602 and sunroom 602e is in the bottom right portion of home 602. In some embodiments, home 602 includes other rooms than those depicted in FIG. 6 and/or excludes rooms that are depicted in FIG. 6. While diagram 600 depicts a home, it should be recognized that this is merely an example and techniques described herein can work with other types of physical structures, such as an office building, a hotel, an apartment, etc.

As illustrated in FIG. 6, each room in home 602 has at least one device. However, in some embodiments, a room in home 602 has no devices.

As illustrated in FIG. 6, John's phone 604 is in kitchen 602a, lying on a counter between a stove and a sink. In dining room 602b, dining room speaker 616 is sitting on a dining room table. In bedroom 602c, personal tablet 634 is lying on a bed, bedroom speaker 636 is sitting on a nightstand that is adjacent to the bed, and bedroom light 632 is positioned on the opposite side of the bed. In living room 602d, living room speaker 646 and living room speaker 648 are on opposite sides of a television, and living room lamp 642 is positioned in front of the television screen. In sunroom 602e, sunroom speaker 656 and sunroom speaker 658 are positioned on opposite sides of the room.

As illustrated in FIG. 6, computer device 674 and Jane's phone 684 are outside of home 602. Computer device 674 is position within the dashboard of a car that is distance 670 from home 602; and Jane's phone 684 is distance 680 away from home 602 and is currently in the possession of Jane. In some embodiments, computer device 674 is connected to an electronic device, such as a cellphone (e.g., a personal phone that is similar to John's phone 604 and/or Jane's phone 684), and the electronic device provides instructions to computer device 674 that causes the computer device 674 to display visual content. Distance 670 and 680 are more than a threshold distance away (e.g., 1, 5, 10 meters) from the home, such that computer device 674 and Jane's phone 684 are not considered to be in locations that correspond to home 602 (e.g., are not within a geofence of the home or are not connected to a wireless network associated with (e.g., set up within) home 602)).

In this example, the speakers (e.g., dining room speaker 616, bedroom speaker 636, living room speaker 646, living room speaker 648, sunroom speaker 656, and sunroom speaker 658), lights (e.g., bedroom light 632 and living room lamp 642), and personal devices (e.g., John's phone 604, tablet 634, computer device 674, and Jane's phone 684) shown in FIG. 6 are assigned to (e.g., programmatically mapped (e.g., by a user account associated with home 602, such as John's user account or Jane's user account) to a group that corresponds to) home 602.

In addition, each individual speaker and light are also assigned to (e.g., mapped to a group that corresponds to) a room in which it is positioned. For example, dining room speaker 616 is assigned to (e.g., programmatically mapped to a group that corresponds to) dining room 602b; bedroom speaker 636 and bedroom light 632 are assigned to bedroom 602c; living room lamp 642, living room speaker 646, and living room speaker 648 are assigned to living room 602d; and sunroom speaker 656 and sunroom speaker 658 assigned to sunroom 602e. In some embodiments, each group that corresponds to each room is also assigned to home 602. Thus, devices that are mapped to a room of home 602 are also concurrently mapped to home 602.

An external device cannot be assigned to two different groups of devices that correspond to different rooms. For example, dining room speaker 616 cannot be assigned to kitchen 602a (e.g., a group corresponding to kitchen 602a)

42

and dining room 602b at the same time. However, two groups of devices that are each assigned to respective rooms can be mapped to a (same) zone. In this example, entertainment zone 660 is assigned to living room 602d in FIG. 6 and sunroom 602e in FIG. 6. In this example, entertainment zone 660 is not a physical room in home 602c; however, the entertainment zone is programmatically defined as being assigned to sunroom living room 602d and sunroom 602e. In some embodiments, two different zones share a group of devices (e.g., include some overlapping devices and each include some non-overlapping devices). For example, the group of devices that are assigned to sunroom 602e can be mapped to entertainment zone 660 and an eating zone (e.g., where the eating zone is assigned to a group of devices that are assigned to dining room 602b and sunroom 602e).

In this example, the personal devices (e.g., John's phone 604, tablet 634, and Jane's phone 684) are not programmatically mapped to a group that corresponds to a room and only are mapped to a group that corresponds to a home.

In some embodiments, the speakers, lights, and personal devices (e.g., John's phone 604, tablet 634, Jane's phone 684) shown in FIG. 6 are smart devices that are directly connected to each other or indirectly connected to each other via one or more networks (e.g., wireless networks (e.g., Bluetooth, NFC, Wi-Fi, 4G, etc.)). In some embodiments, other smart devices, such as smart appliances, smart thermostats, smart plug outlets, etc. are connected to the one or more networks. In some embodiments, the one or more personal devices can also include other types of personal devices, such as smartwatches, laptops, desktops, etc.

FIGS. 7A-7AH illustrate exemplary electronic devices and user interfaces for sending an audio message in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIGS. 8A-8B.

FIG. 7A illustrates electronic device 700 displaying user interface 702. In FIG. 7A, electronic device 700 is a portable multifunction device and has one or more components described above in relation to one or more of devices 100, 200, 300, and 500. With respect to the figures below, in some embodiments, device 700 is operating at a location that is less than a predetermined distance away from home 602; however, in other embodiments, device 700 is operating at a location that is greater than a predetermined distance away from home 602. In some embodiments, device 700 is connected to a network (e.g., wireless network) that is associated with home 602, such that device 700 is connected to the same wireless network to which at least one of the devices (e.g., speakers, lights) located in home 602 are connected. In some embodiments, more than one wireless network is associated with home 602. In some embodiments, device 700 is connected to at least one of those networks. In some embodiments, device 700 is not connected to the one or more networks that is associated with home 602. Thus, device 700 can send audio multicast messages and communicate with devices within home 602, irrespective of the distance that device 700 is from home 602 or the network to which device 700 is connected.

While this description often refers to messages as multicast messages (or audio multicast messages), it should be recognized that such messages are optionally sent using (1) a multicast communication, (2) a broadcast communication, (3) a unicast communication, (4) or any combination thereof (e.g., (1) a first device (e.g., a controller) sends a unicast communication to a second device (e.g., a hub in a home) and (2) the second device sends either a multicast or a broadcast communication (e.g., including content from the

43

unicast communication) to one or more third devices (e.g., one or more accessory devices within the home and/or one or more personal devices). In some embodiments, a multicast communication is a communication sent to multiple recipients. In some embodiments, a broadcast communication is a communication transmitted to devices on a channel or network. In some embodiments, a broadcast communication is a communication transmitted to all devices on a channel or network. In some embodiments, a unicast communication is a communication transmitted to a single recipient. In such embodiments, multiple unicast communications are sent when content needs to be sent to multiple devices.

In some embodiments, a broadcast communication is a communication transmitted to all devices on a channel or network. In such embodiments, multiple unicast communications are sent when content needs to be sent to multiple devices.

As illustrated in FIG. 7A, user interface 702 includes applications icons 704, such as home application icon 704a. Each of application icons 704 corresponds to an application, such that, when an application icon is selected, the selection will cause device 700 to display a user interface of a respective application. For example, home application icon 704a corresponds to a home application. At FIG. 7A, device 700 detects a tap gesture 750a (e.g., a selection) at a location that corresponds to home application icon 704a.

As illustrated in FIG. 7B, in response to detecting tap gesture 750a, device 700 displays user interface 710 of the home application. User interface 710 is a user interface for controlling multiple external devices assigned to home 602. User interface 710 includes home location identifier 712, status information 714, macro controls 716, external device controls 718, navigations controls 722, home multicast instruction 724, and home multicast affordance 726 (e.g., selectable user interface object).

Home location identifier 712 is a name that corresponds to home 602. In this example, the location identifier is part of the address (e.g., "123 Main Street") of home 602. In some embodiments, the location identifier is an alias, such as an alias assigned to the home. In some embodiments, the alias is a system-created alias. In some embodiments, the alias is a user-created alias. In some embodiments, the location identifier is set by a user of device 700 or an external device. In some embodiments, the location identifier is a graphical user interface object, such as an image.

Status information 714 includes information concerning the current status of some of the devices assigned to home 602. Here, status information 714 indicates that at least one light is on in the home 602. In some embodiments, status information 714 includes information concerning the status of multiple devices (e.g., "bedroom fan on").

As illustrated in FIG. 7B, there are two rows of macro controls 716 below home location identifier 712 and status information 714. Macro controls 716 are affordances (e.g., selectable user interface objects) for initiating a respective macro. In some embodiments, the respective macro causes one or more external devices to perform an action. For example, the "Good Night" macro control, when selected, cause one or more lights to turn off, one or more speakers to stop playback media, and/or one or more deadbolt locks to lock.

Additionally, in FIG. 7B, user interface 710 includes rows for external device controls 718 below macro controls 716. In FIG. 7B, the two rows of external device controls 718 extend across three columns, so there is a total of six displayed (e.g., where three device controls are on each respective row). In some embodiments, a user may have

44

fewer external devices to control requiring fewer external device controls 718. In other embodiments, a user may have more external devices to control requiring more external device controls 718. In some embodiments, when there are more external device controls 718 to display than screen space available, the screen scrolls (e.g., up and down or left and right) to display all external device controls. External device controls 718 include dining room speaker control 718a, living room lamp control 718b, living room speakers control 718c, sunroom speakers control 718d, bedroom speaker control 718e, and bedroom light control 718f. Additionally, each of external device controls 718 include status information that is representative of the current state of each respective external device. For example, the status information for dining room speaker control 718a indicates that dining room speaker 616 is currently playing media (which is not represented by status information 714 in this example) and the status information for living room lamp control 718b indicates that living room lamp 642 is currently off (which is represented by status information 714 in this example).

Each of external device controls 718, when selected, control at least one device assigned to home 602. For example, dining room speaker control 718a, when selected, causes dining room speaker 616 to play or pause music. In some embodiments, when dining room speaker control 718a is selected, the status information on dining room speaker control 718a changes to show that dining room speaker 616 has paused the playback of media (e.g., as shown by bedroom speaker control 718e) or stopped the playback of media. Some of external device controls 718 control multiple devices when selected. For example, sunroom speakers control 718d, when selected, causes sunroom speakers 656 and 658 to play or pause the playback of media and the status information displayed on sunroom speakers control 718d changes accordingly. Some of external device controls 718 are not speaker device controls. For example, external device controls 718 includes living room lamp control 718b that, when selected, causes living room lamp 642 to turn on/off and the status information displayed on living room lamp control 718b changes accordingly.

In some embodiments, external device controls 718 are selected from a group of other external controls that are also assigned to home 602. For example, the six controls that are shown in FIG. 7B can be selected from a group of 10, 20, or 50 (or any other number greater than 6) external controls that are also assigned to home 602. In some embodiments, external device controls 718 are selected based on a determination that each of these external device controls are a favorite control. In some embodiments, the determination of whether an external device is a favorite control is based on whether the external device control (or the external device) was most recently used, most frequently used, newly added, designated as a favorite, important external device control (e.g., via the detection of one or more inputs), etc., or any combination thereof.

At the bottom of user interface 710 are navigation controls 722. Navigation controls 722 include home navigation control 722a, room navigation control 722b, and automation navigation control 722c. Each of navigation controls 722, when selected, causes device 700 to display a different user interface for the home application.

As illustrated in FIG. 7B, user interface 710 includes home multicast instruction 724 that is adjacent to home multicast affordance 726. In FIG. 7B, home multicast instruction 724 indicates that a user should select (e.g., "tap") home multicast affordance 726 in order to send an audio message that will be multicast to one or more devices

45

assigned to home 602. At FIG. 7B, device 700 detects tap gesture 750b at a location that corresponds to home multicast affordance 726.

In response to detecting tap gesture 750b, device 700 initiates a process for sending an audio multicast message to one or more devices assigned to home 602. In some embodiments, the process includes displaying user interfaces depicted in FIGS. 7C, 7D, and 7E, as described below. In some embodiments, the process includes displaying user interface depicted in FIG. 7C1, as described below.

As illustrated in FIG. 7C, in response to detecting tap gesture 750b, user interface 730 includes home destination identifier 732, exit affordance 734, and multicast recording affordance 736. Home destination identifier 732 indicates that the audio multicast message is directed to a group of devices assigned to home 602 (e.g., will receive an audio multicast message). Exit affordance 734 is an affordance for exiting out of user interface 730. In some embodiments, when exit affordance 734 is selected, device 700 ceases to display user interface 730 and re-displays user interface 710, as depicted in FIG. 7B. At FIG. 7C, device 700 detects tap gesture 750c at a location that corresponds to multicast recording affordance 736.

As illustrated in FIG. 7D, in response to detecting tap gesture 750c, device 700 displays user interface 740. User interface 740 includes home destination identifier 732 and exit affordance 734, which were also included in user interface 730. In addition, user interface 740 also includes audio status bar 742 and audio wave 744a.

Additionally, at FIG. 7D, device 700 also starts recording an audio multicast message in response to detecting tap gesture 750c. The audio for the audio multicast message is detected via one or more microphones of device 700. The audio for the audio multicast message is detected from one or more external sources (e.g., such as a user voice). Here, the recorded audio is represented by audio wave 744a, which is filling up audio status bar 742 over a period of time as more audio input is received by device 700.

As illustrated in FIG. 7D, in response to detecting tap gesture 750c, device 700 displays multicast recording stop affordance 746 at the position that multicast recording affordance 736 was previously displayed in FIG. 7C. At FIG. 7D, device 700 detects tap gesture 750d at a location that corresponds to multicast stop recording affordance 746.

As illustrated in FIG. 7E, in response to detecting tap gesture 750d, device 700 displays user interface 750. At FIG. 7E, in response to detecting tap gesture 750d, device 700 has ceased recording or capturing audio from the one or more external sources. As such, user interface 750 includes audio status bar 742 that is mostly filled by audio wave 744a, which represents at least a portion of the recorded audio multicast message. As illustrated in FIG. 7E, user interface 750 includes audio multicast message playback affordance 752 and audio multicast message deletion affordance 754 (e.g., in addition to including home destination identifier 732, exit affordance 734, audio status bar 742, audio wave 744a). In some embodiments, in response to detecting a selection of audio multicast message playback affordance 752, device 700 will initiate playback of the audio multicast message. In some embodiments, in response to detecting a selection of audio multicast message deletion affordance 754, device 700 will delete the audio multicast message. In some embodiments, in response detecting a selection of audio multicast message deletion affordance 754, device 700 re-displays user interfaces 710, 730, and/or 740.

As illustrated in FIG. 7E, in response to detecting tap gesture 750d, device 700 displays multicast send affordance

46

756 at the position that multicast stop recording affordance 746 was previously displayed in FIG. 7D (that is also the position in which multicast recording affordance 736 was displayed in FIG. 7C).

As an alternative to the flow described in FIGS. 7C, 7D, and 7E, device 700 can display the user interface illustrated in FIG. 7C1 in response to detecting tap gesture 750b in FIG. 7B. As illustrated in FIG. 7C1, in response to detecting tap gesture 750b, device 700 displays user interface 741 and automatically starts recording an audio multicast message (e.g., without detecting any further gestures, such as tap gesture 750c). As illustrated in FIG. 7C1, user interface 741 includes home destination identifier 732, exit affordance 734, audio wave 744a, multicast send affordance 747, which device 700 displays using similar techniques to those described above in relation to FIGS. 7C, 7D, and 7E. For example, in FIG. 7C1, audio wave 744a is dynamic and changes over time with respect to one or more characteristics (e.g., volume level, pitch, tone) of audio that is currently being recorded over the length of time that audio is being record. In some embodiments, audio wave 744a moves to the left as audio is being recorded over the length of time that audio is being record.

In some embodiments, audio is recorded using user interface 710 of FIG. 7B or user interface 741 of FIG. 7C1, instead of through the flow described in FIGS. 7C, 7D, and 7E and/or through the flow described in FIG. 7C. For example, in response to detecting a hold gesture on home multicast affordance 726, device 700 starts recording an audio multicast message. In such an example, the recording is stopped when the hold gesture is terminated (e.g., released), causing replacement of home multicast affordance 726 with a send affordance (e.g., similar to multicast send affordance 756). In some embodiments, when the hold gesture is terminated, the audio is automatically sent as a multicast message. In some embodiments, when the hold gesture is terminated, home multicast instruction 724 is replaced with an affordance to play the audio (e.g., similar to audio status bar 742) and an affordance to delete the audio (e.g., similar to audio multicast message deletion affordance 754). In another example, in response to detecting a tap gesture on home multicast affordance 726, home multicast affordance 726 operates similar to multicast recording affordance 736 (e.g., replaced with a stop affordance (similar to multicast recording stop affordance 746)). In such an example, in response to detecting a tap gesture on the stop affordance, (1) the stop affordance is replaced with a send affordance (e.g., similar to multicast send affordance 756) and (2) home multicast instruction 724 is replaced with an affordance to play the audio (e.g., similar to audio status bar 742) and an affordance to delete the audio (e.g., similar to audio multicast message deletion affordance 754). At FIG. 7E, device 700 detects tap gesture 750e at a location that corresponds to multicast send affordance 756, or device 700, at FIG. 7C1, device detects tap gesture 750c1 at a location that corresponds to multicast send affordance 747.

As illustrated in FIG. 7F, in response to detecting tap gesture 750e or tap gesture 750c1 (or a tap gesture on a send affordance, as described in the previous paragraph), device 700 causes the audio multicast message to be multicast (sent) to a set of external devices that are assigned to home 602. Such sending optionally includes (1) sending a message including the audio multicast message to another device (e.g., a device located within the home) and (2) the other device sending the audio multicast message to the set of external devices (in some embodiments, the other device identifies the set of external devices instead of device 700).

Table **706** is provided to illustrate the external devices to which the audio multicast message is directed. For example, a checkmark in the “received audio multicast message” column indicates that the audio multicast message was directed to (e.g., sent to) the external device on the respective row of the checkmark and a dash in the “received audio multicast message” column indicates that the audio multicast message was not directed to (e.g., not sent to) the external device on the respective row of the dash.

In FIG. 7F, table **706** shows that the audio multicast message was directed to (and received by) each speaker (e.g., dining room speaker **616**, bedroom speaker **636**, living room speaker **646**, living room speaker **648**, sunroom speaker **656**, and sunroom speaker **658**). Notably, the audio multicast message was also directed to the personal devices (e.g., John’s phone **604**, tablet **634**, and Jane’s phone **684**). In some embodiments, the audio multicast message is directed to the personal device irrespective of whether the personal device was at a location that corresponds to the home or not (e.g., independent of whether distances **670** and **680** exceed the threshold distance). For example, the audio multicast message was directed to John’s phone **604** and tablet **634**, which in FIG. 6 are located inside of home **602**. In addition, the audio multicast message was also directed to computer device **674** and Jane’s phone **684**, which are outside of home **602** (respectively distance **670** and distance **680** away from home **602**). In some embodiments, the audio multicast message is directed to the personal device dependent on whether the personal device is included in a network of the home (e.g., the audio multicast message is directed to the personal device when the personal device is included in the network of the home).

Table **706** in FIG. 7F also indicates that the audio multicast message was not directed to some external devices (and thus did not received the audio multicast message), although they are assigned to home **602**. For example, table **706** shows that the audio multicast message was not directed to bedroom light **632** and living room lamp **642**. In some embodiments, audio multicast messages are not directed to some types of external devices, irrespective of whether the external devices are assigned to a group of devices to which the audio multicast message is being sent. In some embodiments, these types of external devices include devices that do not have one or more audio input devices (e.g., microphones) and/or one or more audio output devices (e.g., speakers). In some embodiments, these types of external devices include devices that are inactive, not powered, or not functional at the time (or before the time) that the audio message is sent.

As illustrated in FIG. 7F, at some point after detecting tap gesture **750e** or tap gesture **750c1** (or a tap gesture on a send affordance, as described above), device **700** re-displays user interface **710**. In some embodiments, user interface **710** is displayed without device **700** detecting any additional inputs after detecting tap gesture **750e** or tap gesture **750c1** (e.g., after a predetermined period of time after detecting tap gesture **750e** or tap gesture **750c1**) (or a tap gesture on a send affordance, as described above (e.g., after a predetermined period of time after detecting the tap gesture)). In some embodiments, user interface **710** is displayed when one or more additional inputs are detected, such as a tap gesture input that is detected on exit affordance **734** in FIG. 7E.

In some embodiments, in response to detecting tap gesture **750f1** at a location that corresponds to living room lamp control **718b**, device **700** will send instructions that causes living room lamp **642** to turn on (or off if current state was on). In some embodiments, in response to detecting tap

gesture **750f2** at a location that corresponds to living room speaker control **718c**, device **700** will send instructions that cause living room speakers **646** and **648** (or at least one of them) to initiate playback of media (e.g., or pause playback of media if current state was playing). At FIG. 7F, device **700** detects tap gesture **750f3** at a location that corresponds to room navigation affordance **722b**.

As illustrated in FIG. 7G, in response to detecting tap gesture **750f3**, device **700** displays user interface **760** of home application and indicates that room navigation control **722b** is selected (e.g., bold in FIG. 7G) instead of home navigation control **722a** (e.g., not bold in FIG. 7G). User interface **760** is a user interface for controlling multiple external devices assigned to living room **602d**, as indicated by living room location identifier **762**. User interface **710** includes macro controls **766**, external device controls **768**, navigation controls **722**, living room multicast instruction **774**, and living room multicast affordance **776**. These elements of user interface **760** are specific controls for devices of the living room as opposed to the elements of user interface **710** that were controls for devices of the entire home. In some embodiments, one or more of these elements of user interface **760** have a similar purpose or functionality to one or more of the elements of user interface **710** described above (e.g., in FIG. 7B). In some embodiments, user interface **760** includes status information that includes the current status of devices that are assigned to living room **602d**. In some embodiments, device **700** displays user interface **760** of home application after receiving a swipe gesture on user interface **710**.

Notably, the user interfaces (e.g., user interfaces **710** and **760**) in the home application are laid out in a hierarchy. For example, user interface **710** is the top node of the hierarchy and includes controls for a group of external devices that are assigned to home **602**. And, while displaying user interface **710**, input (e.g., a single input (e.g., tap gesture **750f**)) can be detected that causes device **700** to display user interface **760**, which is a lower node in the hierarchy and includes controls for a group of external devices that are assigned to a respective room in home **602** (e.g., living room **602d**) (and not other rooms).

As illustrated in FIG. 7G, external device controls **768** include living room speakers control **768a**, living room lamp control **768b**, living room switch (e.g. light switch) control **768c**, and living television control **768d**. In FIG. 7G, living room speakers control **768a** and living room lamp control **768b** causes each of their respective external device(s) to perform the same action(s), when selected, than the action(s) that living room lamp device control **718b** and living room speakers device control **718c** would cause their respective external device(s) to perform (e.g., in FIG. 7B). Thus, in this example, living room speakers control **768a** and living room lamp control **768b** are effectively the same controls as living room speakers device control **718c** and living room lamp device control **718b**, although they look visually different from each of their respective counterparts. In some embodiments, living room speakers control **768a** and living room lamp control **768b** do not look visually different from living room speakers device control **718c** and living room lamp device control **718b**.

When compared to external device controls **718** displayed in FIG. 7B, external device controls **768** include at least one external device control (e.g., living room speakers control **768a** and living room lamp control **768b**) that was displayed as a part of external device controls **718** in FIG. 7B and at least one external device control (e.g., living room switch control **768c** and living room television controls **768d**) that

was not. In other words, at least one external device (e.g., living room speakers **646** and **648**) can be controlled from user interfaces **710** and **760** and at least one external device (e.g., bedroom speaker **636** and living room television in user interface **760**) can only be controlled from only one of user interface **710** and user interface **760**. In some embodiments, in response to detecting tap gesture **750g1** at a location that corresponds to living room lamp control **768b**, device **700** will send instructions that causes living room lamp **642** to turn on (or off if current state was on). In some embodiments, in response detecting tap gesture **750g2** at a location that corresponds to living room speaker control **768a**, device **700** will send instructions that causes living room speakers **646** and **648** (or at least one of them) to initiate playback of media (e.g., or pause playback of media if current state was playing).

Additionally, while external device controls **718** were designated as being a favorite set of controls for home **602** in FIG. 7B, external device controls **768** are a set of all the controls that are assigned to living room **602d** in FIG. 7G. In FIG. 7B, user interface **760** does not include any external devices that are not assigned to living room **602d**. For example, dining room speaker device control **718a**, sunroom speakers device control **718d**, bedroom speaker device control **718e**, and bedroom light device control **718f** are not displayed on user interface **760**. In some embodiments, a user interface for controlling multiple external devices for another room (e.g., such as the bedroom, sunroom, kitchen) is displayed in response to detecting tap gesture **750/3**. In some embodiments, a user for controlling multiple external devices for another room is displayed in response to one or more inputs (e.g., a swipe input) that is detected at FIG. 7G.

As illustrated in FIG. 7G, user interface **760** includes living room multicast instruction **774** that is adjacent to living room multicast affordance **776**. In FIG. 7G, living room multicast instruction **774** indicates that a user should select (e.g., “tap”) living room multicast affordance **776** in order to send an audio multicast message that will be multicast to one or more devices assigned to living room **602d**. Here, living room multicast affordance **776** does not look visually different from home multicast affordance **726** (e.g., in FIG. 7B) and is displayed in the same position on device **700** that home multicast affordance **726** was displayed in FIG. 7B. In some embodiments, living room multicast affordance **776** looks visually different from home multicast affordance **726**. At FIG. 7G, device **700** detects tap gesture **750g3** at a location that corresponds to living room multicast affordance **776**.

In response to detecting tap gesture **750g3**, device **700** initiates a process for sending an audio multicast message to one or more devices assigned to living room **602d**. In some embodiments, the process includes displaying user interface **780a**, as depicted in FIG. 7H. In some embodiments, the process includes device **700** displaying a user interface, similar to user interface **741** of FIG. 7C1, that is displayed in response to detecting tap gesture **750g3**. In some embodiments, the process includes device **700** displaying a user interface, similar to user interface **741** of FIG. 7C1, to record an audio multicast message to send to a group of devices that are assigned to living room **602d**. In some embodiments, the process includes device **700** displaying user interfaces, as described below in FIGS. 7H-7J, where audio is recorded and sent to a group of devices that assigned to living room **602d**.

As illustrated in FIG. 7H, in response to detecting tap gesture **750g3**, user interface **780a** is similar to user interface **730** in FIG. 7C, such that user interface **780a** also includes

exit affordance **734** and multicast recording affordance **736**. However, user interface **780a** includes living room destination identifier **782** instead of home destination identifier **732**. Living room destination identifier **782** indicates that a group of devices that are assigned to living room **602d** will receive a multicast message sent via user interface **780a**. In some embodiments, user interface **780a** does not list the individual names/identifiers of the devices that are part of the group. In some embodiments, one or more techniques discussed above in relation to user interface **730** can be applied to user interface **780a**.

Turning to FIG. 7K, in some embodiments, user interface **780b** is displayed in response to detecting tap gesture **750g3** and in accordance with a determination that one or more (or all) external devices (e.g., speakers) assigned to living room **602d** are not available (e.g., are inactive or off). As illustrated in FIG. 7K, user interface **780b** includes an unavailable indication **788** to indicate that one or more of the external devices assigned to living room **602d** are unavailable (or all and not when less than all are unavailable) and multicast recording affordance **736** is displayed as being dimmed or greyed-out. At FIG. 7K, in response to detecting tap gesture **750k**, device **700** continues to display user interface **780b** (e.g., until the one or more external devices assigned to the living room **602d** are available) because multicast recording affordance **736** is disabled. In some embodiments, a similar user interface to user interface **780b** is displayed in response to device **700** detecting tap gesture **750c** in FIG. 7C.

Turning back to FIG. 7H, device **700** receives tap gesture **750h** at a location that corresponds to multicast recording affordance **736**.

As illustrated in FIG. 7I, in response to receiving tap gesture **750h**, device **700** starts recording audio (e.g., using a microphone of device **700**) from one or more external sources and displays user interface **784**, which is similar to user interface **740** in FIG. 7D. Like user interface **740**, user interface **784** includes exit affordance **734**, audio status bar **742**, and multicast recording stop affordance **746**. However, user interface **784** includes audio wave **744b** that represents different audio that is being record from the audio recorded in FIG. 7D that was represented by audio wave **744a**. User interface **784** also includes living room destination identifier **782** instead of home destination identifier **732**. In some embodiments, one or more techniques discussed above in relation to user interface **740** can be applied to user interface **784**. At FIG. 7I, device **700** detects tap gesture **750i** at a location that corresponds to multicast stop recording affordance **746**.

As illustrated in FIG. 7J, in response to detecting tap gesture **750i**, device **700** displays user interface **786** and ceasing recording or capture audio from one or more external sources. User interface **786** is similar to user interface **750**, except for audio wave **744b** being displayed (instead of audio wave **744a**) and living room destination identifier **782** being displayed (instead of home destination identifier **732**). In some embodiments, one or more techniques discussed above in relation to user interface **750** can be applied to user interface **786**. At FIG. 7J, device **700** detects tap gesture **750j** at a location that corresponds to multicast send affordance **756** (or a tap gesture (e.g., similar to tap gesture **750c1**) on a user interface that is similar to user interface **741** of FIG. 7C1 as described above).

In some embodiments, device **700** displays user interface **790** in response to detecting tap gesture **750j** (or a tap gesture (e.g., similar to tap gesture **750c1**) on a user interface that is similar to user interface **741** of FIG. 7C1 as described

51

above), as illustrated in FIG. 7L. Device 700 displays user interface 790 when a determination that the audio multicast message cannot be delivered to one or more (or all) of the external devices assigned to living room 602d. User interface 790 includes not delivered indication 791 to indicate that the audio multicast message was not delivered to the targeted external devices. In some embodiments, a similar user interface to user interface 790 is displayed in response to device 700 detecting tap gesture 750e in FIG. 7E or tap gesture 750c1 in FIG. 7C1.

In some embodiments, one or more of user interface 730, 740, 750, 780a, 780b, 784, 786, and 790 include an affordance to swap the intended target of the recorded audio multicast message (e.g., change the destination identifier). For example, after initiating a process for sending an audio multicast message to a first group of device (e.g., devices assigned to home 602) (such as while showing FIG. 7J and before receiving input 750j or a tap gesture (e.g., similar to tap gesture 750c1) on a user interface that is similar to user interface 741 of FIG. 7C1 as described above), device 700 can detect a selection of the affordance to swap the intended target of the recorded audio multicast message (e.g., or multiple affordances to swap the intended target) from the first group of devices to a second group of device (e.g., devices assigned to dining room 602b).

In some embodiments, audio is recorded and sent from a user interface similar to user interface 741 of FIG. 7C1 that is displayed in response to detecting tap gesture 750g. In some embodiments, audio is recorded from user interface 760 in FIG. 7G, instead of through the flow described in FIGS. 7H-7J. For example, in response to detecting a hold gesture on living room multicast affordance 776, device 700 starts recording an audio multicast message. In such an example, the recording is stopped when the hold gesture is terminated (e.g., released), causing replacement of living room multicast affordance 776 with a send affordance (e.g., similar to multicast send affordance 756). In such an example, living room multicast instruction 774 is replaced with an affordance to play the audio (e.g., similar to audio status bar 742) and an affordance to delete the audio (e.g., similar to audio multicast message deletion affordance 754). In another example, in response to detecting a tap gesture on living room multicast affordance 776, living room multicast affordance 776 operates similar to multicast recording affordance 736 (e.g., replaced with a stop affordance (similar to multicast recording stop affordance 746)). In such an example, in response to detecting a tap gesture on the stop affordance, the stop affordance is replaced with a send affordance (e.g., similar to multicast send affordance 756) and living room multicast instruction 774 is replaced with an affordance to play the audio (e.g., similar to audio status bar 742) and an affordance to delete the audio (e.g., similar to audio multicast message deletion affordance 754).

As illustrated in Table 706 of FIG. 7M, in response to detecting tap gesture 750j (or a tap gesture on a send affordance, as described in the previous paragraph or a tap gesture (e.g., similar to tap gesture 750c1) on a user interface that is similar to user interface 741 of FIG. 7C1 as described above), device 700 causes the audio multicast message to be multicast (sent or directed to) to a set of external devices that are assigned to living room 602d. Such sending optionally includes (1) sending a message including the audio multicast message to another device (e.g., a device located with the living room) and (2) the other device sending the audio multicast message to the set of external devices (in some embodiments, the other device identifies the set of external devices instead of device 700). As shown by table 706, the

52

audio multicast message is direct to only living room speakers 646 and 648, which receive the audio multicast message. Notably, the audio multicast message is not directed to the personal devices (e.g., John's phone 604, tablet 634, and Jane's phone 684) because personal devices are not assigned to groups that correspond to rooms (e.g., personal devices are not assigned to the group that corresponds to living room 602d). Additionally, the audio multicast message is not directed to living room lamp 642 because living room lamp 642 is not the type of external device that can receive audio multicast messages for similar reasons discussed above (e.g., in FIG. 7F).

At FIG. 7M, device 700 detects voice input 792a that includes the phrase "HEY ASSISTANT, MULTICAST HELLO." Sometime after detecting a portion of voice input 792a, device 700 displays user interface 794 with indication 794a (e.g., on the left side of user interface 794). Here, indication 794a is a response to the portion of voice input 792a. Indication 794a is text that reads: "WHAT CAN I HELP YOU WITH?" In some embodiments, device 700 outputs media that includes an audible version of indication 794a.

At FIG. 7N, after displaying user interface 794 in FIG. 7M, device 700 displays indication 794b on the right side of user interface 794. In addition, device 700 displays indication 794c on the left side of user interface 794 and below indication 794b. Indication 794b is text that reads "HEY ASSISTANT, MULTICAST HELLO" which is the text that corresponds to the audible phrase included in voice input 792a. Additionally, indication 794c is text that reads "OK, I'VE SENT YOUR MULTICAST TO 123 MAIN ST." Notably, 123 Main St. is the identifier for home 602 (e.g., home location identifier 712 in FIG. 7B). In some embodiments, device 700 outputs media that includes an audible version of response 794c.

As shown by table 706 in FIG. 7N, after detecting voice input 792a, device 700 directs (e.g., sends) an audio multicast message to one or more devices assigned to home 602, as described above in relation to FIG. 7F. Table 706 shows that the audio multicast message (e.g., "Hello") is directed to each speaker (e.g., dining room speaker 616, bedroom speaker 636, living room speaker 646, living room speaker 648, sunroom speaker 656, and sunroom speaker 658) of the home and that the audio multicast message (e.g., "Hello") is directed to the personal devices (e.g., John's phone 604, tablet 634, Jane's phone 684) of the home, irrespective of whether a device was at a location that corresponds to the home or not and/or irrespective of whether the device is connected to the network associated with the home (as discussed above).

As illustrated in FIG. 7O, sometime after displaying user interface 794 in FIG. 7N, device 700 displays user interface 710. While displaying user interface 710, device 700 detects gesture 750o (e.g., a long press gesture) at a location that corresponds to bedroom speaker control 718e at FIG. 7O.

As illustrated in FIG. 7P, in response to detecting gesture 750o, device 700 displays user interface 796 that includes a plurality of setting affordances for controlling bedroom speaker 636 (e.g., a room setting (e.g., where bedroom is selected in FIG. 7P to show that bedroom speaker 636 is assigned to bedroom 602c), a favorites setting (e.g., where include in favorites is selected in FIG. 7P, which can cause bedroom speaker control 718e to be displayed on user interface 710)). As illustrated in FIG. 7P, one of the settings affordances is multicast setting affordance 796a, which includes an indication that bedroom speaker 636 is configured to receive multicast messages. At FIG. 7P, device 700

53

detects tap gesture **750p** at a location that corresponds to multicast setting affordance **796a**.

As illustrated in FIG. 7Q, in response to detecting tap gesture **750p**, device **700** displays user interface **798**, which includes multicast settings toggle **798a**. In FIG. 7Q, multicast settings toggle **798a** indicates that bedroom speaker **636** is configured to receive multicast messages (e.g., circle displayed to the right side of the settings toggle). At FIG. 7Q, device **700** detects tap gesture **750q** at a location that corresponds to multicast setting affordance **798a**.

As illustrated in FIG. 7R, in response to detecting tap gesture **750q**, device **700** changes the state of multicast toggle **798a** (e.g., moves circle to the left side of the settings toggle) to indicate that bedroom speaker **636** is not configured to receive multicast messages. In some embodiments, multicast setting affordance **796a** in FIG. 7P is selectable to change a setting from on to off without navigating to a different user interface (e.g., user interface **798**).

At FIG. 7S, device **700** detects voice input **792b** that includes the phrase “HEY ASSISTANT, MULTICAST TO THE SUNROOM, HELLO.” Sometime after detecting a portion of voice input **792b**, device **700** displays user interface **794** with indication **794d** (e.g., on the left side of user interface **794**). Here, indication **794d** is a response the portion of voice input **792b**. Indication **794d** is text that reads “WHAT CAN I HELP YOU WITH?” In some embodiments, device **700** outputs media that includes an audible version of indication **794d**.

At FIG. 7T, after displaying user interface **794** in FIG. 7S, device **700** displays indication **794e** on the right side of user interface **794** and displays indication **794f** on the left side of user interface **794** (and below indication **794e**). Indication **794e** is text that reads, “HEY ASSISTANT, MULTICAST TO THE SUNROOM, HELLO,” which is the text that corresponds to the audible phrase included in voice input **792b**. Additionally, indication **794f** is text that reads “OK, I’VE SENT YOUR MULTICAST TO THE SUNROOM.” Notably, “sunroom” is an identifier for a group of devices that are assigned to sunroom **602e** in FIG. 6.

As shown by table **706** in FIG. 7T, after detecting voice input **792b**, device **700** directs (e.g., sends) an audio multicast message to one or more devices assigned to sunroom **602e**. Table **706** shows that the audio multicast message (e.g., “Hello”) is directed to sunroom speaker **656** and sunroom speaker **658** and the audio multicast message (e.g., “Hello”) is not directed to the other devices. Notably, voice input **792b** included an identifier (e.g., “sunroom”) while voice **792a** did not include an identifier. Thus, in some embodiments, when voice input is detected without an identifier, device **700** will send the audio multicast messages to the group of devices assigned to a default group. In some embodiments, the default group is a group that corresponds to a home (e.g., such as home **602**), as described above in relation to FIG. 7N.

At FIG. 7U, device **700** detects voice input **792c** that includes the phrase “HEY ASSISTANT, MULTICAST TO THE ENTERTAINMENT ZONE, HELLO.” Sometime after detecting a portion of voice input **792c**, device **700** displays user interface **794** with indication **794g** (e.g., on the left side of user interface **794**). Here, indication **794g** is a response to a portion of voice input **792c**. Indication **794g** is text that reads, “WHAT CAN I HELP YOU WITH?” In some embodiments, device **700** outputs media that includes an audible version of indication **794g**.

At FIG. 7V, sometime after displaying user interface **794** in FIG. 7U, device **700** displays indication **794i** on the left side of user interface **794** (and below indication **794h**).

54

Indication **794i** is text that reads, “OK, I’VE SENT YOUR MULTICAST TO THE ENTERTAINMENT ZONE.” A zone is an identifier for multiple groups of devices. Here, entertainment zone **660** is assigned to the group of devices that corresponds to sunroom **602e** in FIG. 6 and the group of devices that corresponds to living room **602d** in FIG. 6.

As shown by table **706** in FIG. 7V, after detecting voice input **792c**, device **700** directs (e.g., sends) an audio multicast message to one or more devices assigned to the entertainment zone. Table **706** shows that the audio multicast message (e.g., “Hello”) is directed to living room speaker **646**, living room speaker **648**, sunroom speaker **656**, and sunroom speaker **658** and that the audio multicast message (e.g., “Hello”) is not directed to the other devices.

As illustrated in FIG. 7V, device **700** also displays multicast notification **708a**, which indicates that a new audio multicast message has been received from the group of devices assigned to sunroom **602e**. The new audio multicast message is a reply to the audio multicast message sent in FIG. 7T.

At FIG. 7W, device **700** detects voice input **792d** that includes the phrase “Hey Assistant, Multicast, we are going to leave soon.”

At FIG. 7X, sometime after detecting voice input **792d**, device **700** displays indication **794j** on the left side of user interface **794** and under indication **794i**. Indication **794j** is text that reads: “HEY ASSISTANT, MULTICAST, WE ARE GOING TO LEAVE SOON.” This text corresponds to the audible phrase included in voice input **792d**. Here, voice input **792d** does not include an identifier. Additionally, at FIG. 7X, device **700** also displays indication **794k** on the right side of user interface **794** and under indication **794j**. Indication **794k** is text that reads: “OK, I’VE SENT YOUR MULTICAST TO THE SUNROOM.”

As shown by table **706** in FIG. 7X, after detecting voice input **792d**, device **700** initiates a process for sending the audio multicast message (e.g., “We are going to leave soon”) to the group of devices assigned to sunroom. In particular, device **700** directs (e.g., sends) the audio multicast message to one or more devices assigned to sunroom **602e** without voice input **792d** including an identifier for the sunroom. Thus, because voice input **792d** was detected within a predetermined period of time after receiving multicast notification **708a**, device **700** intelligently directs the next detected audio multicast message to the sunroom instead of the default group (group corresponding to home **602**). In some embodiments, device **700** intelligently routes the next detected audio multicast message to the sunroom, instead of the default group, because voice input **702d** is received within a predetermined of time from when the previous multicast message was sent to the sunroom. In some embodiments, two different zones can share at least one group of devices (e.g., same group of devices assigned to a particular room).

As illustrated in FIG. 7X, device **700** also displays multicast notification **708b**, which indicates that an audio multicast message has been received from the group of devices assigned to sunroom **602e**. Here, device **700** receives this message at 10:19.

At FIG. 7Y, device **700** detects voice input **792e** that includes the phrase “HEY ASSISTANT, MULTICAST, LET’S GO TO DINNER” and displays user interface **794** with indication **794l**. Indication **794l** reads: “WHAT CAN I HELP YOU WITH?” At FIG. 7Y, the time is now 10:30 (e.g., 11 minutes has gone by since the user interface in FIG. 7X was displayed.)

55

At FIG. 7Z, after displaying user interface 794 in FIG. 7Y, device 700 displays indication 794_m on the right side of user interface 794 and displays indication 794_n on the left side of user interface 794 (and below indication 794_m). Indication 794_m is text that reads “HEY ASSISTANT, MULTICAST, LET’S GO TO DINNER,” which is the text that corresponds to the audio phrase included in voice input 792_e. Additionally, indication 794_n is text that reads “OK, I’VE SENT YOUR MULTICAST TO 123 MAIN ST.”

As shown by table 706 in FIG. 7Z, after detecting voice input 792_e, device 700 directs (e.g., sends) an audio multicast message (e.g., “Let’s go to dinner”) to one or more devices assigned to home 602, without voice input 792_e including an identifier for home 602. Here, because more than a predetermined period of time has passed since multicast notification 708_b was received, device 700 intelligently routes the next detected audio multicast message to the default group (group corresponding to home 602) instead of sunroom 602_e. In some embodiments, device 700 intelligently routes the detected audio multicast message to the default group because voice input 702_e is not received within a predetermined time from when the previous multicast message was sent to sunroom 602_e.

Further, as shown by table 706 in FIG. 7Z, the multicast message of FIG. 7Z (as opposed to FIG. 7N) was not directed to bedroom speaker 636 because the multicast setting for bedroom speaker 636 was turned off in response to detecting tap gesture 750_q in FIG. 7Q.

At some time after displaying user interface 794 in FIG. 7Z, device 700 displays user interface 710 as illustrated in 7AA. At FIG. 7AA, device 700 detects tap gesture 750_{aa} at a location that corresponds to home settings affordance 728, which is above home location identifier 712 in FIG. 7AA.

As illustrated in FIG. 7AB, in response to detecting tap gesture 750_{aa}, device 700 displays user interface 797. User interface 797 includes a group of people 797_a having one or more personal devices that are assigned to the home application (e.g., a group that corresponds to home 602_a). User interface 797 also includes a multicast permissions affordance 797_b. At FIG. 7AB, device 700 detects tap gesture 750_{ab} at a location that corresponds to multicast permissions affordance 797_b.

As illustrated in FIG. 7AC, in response to detecting tap gesture 750_{ab}, device 700 displays user interface 799, which includes a plurality of options of when to allow audio multicast messages to be sent to a personal device. In FIG. 7AC, the options include never option 799_a, at home option 799_b, and anytime option 799_c. In FIG. 7AC, anytime option 799_c is selected. Thus, in some embodiments, device 700 is configured to receive multicast messages at any time, irrespective of the location of device 700. In some embodiments, in response to detecting tap gesture 750_{c1} at a location that corresponds to never option 799_a, device 700 is configured to never receive multicast messages, irrespective of the location of device 700. In some embodiments, in response to detecting tap gesture 750_{c2} at a location that corresponds to at home option 799_b, device 700 is configured to only receive multicast message while device 700 is at a location that corresponds to home 602 or within home 602 (e.g., within the threshold distance of the home or with respect to whether the device is connected to one or more networks associated with home 602). In some embodiments, when device 700 is distance 670 and distance 680 away from home, such as computer device 674 and Jane’s Phone 684, device 700 would not receive an audio multicast message when at home option 799_b is selected if those distances are greater than the threshold distance. In some embodiments,

56

one or more options are selectable and displayed, such as an option to only receive message while the device is away from the home. In some embodiments, when device 700 is connected to the one or more networks associated with home 602 (e.g., connected to the home Wi-Fi network), device 700 would receive an audio multicast message when at home option 799_b is selected; and when device 700 is not connected to the one or more networks associated with home 602 (e.g., not connected to the home Wi-Fi network), device 700 would not receive an audio multicast message when at home option 799_b is selected (e.g., irrespective of the location of the device).

FIGS. 7AD-7AE illustrate exemplary user interfaces for displaying the user interfaces described above on a device with a bigger screen than device 700, such as tablet 634. User interface 711 in FIG. 7AD corresponds to user interface 710 discussed above. In addition, user interface 731 in FIG. 7AE corresponds to user interface 730 discussed above. However, any of the user interfaces discussed above, can be displayed and transitioned on tablet 634, using one or more similar techniques to those discussed above for FIGS. 7A-7AC.

FIGS. 7AF-7AH illustrate exemplary user interfaces for displaying the user interfaces described above on a device with a smaller screen than device 700, such as smartwatch 701. User interface 713 in FIG. 7AF corresponds to user interface 710 discussed above. Moreover, user interface 741 in FIG. 7AG corresponds to user interface 740 discussed above. Further, user interface 751 in FIG. 7AH corresponds to user interface 750 discussed above. However, any of the user interfaces discussed above, can be displayed and transitioned on smartwatch 701, using one or more similar techniques to those discussed above for FIGS. 7A-7AC.

FIGS. 8A-8B are a flow diagram illustrating a method for sending an audio message, in accordance with some embodiments. Method 800 is performed at a computer system (e.g., 100, 300, 500, 634, 674, 700, 701, 850) in communication with a display generation component (e.g., a touch-sensitive display). Some operations in method 800 are, optionally, combined, the orders of some operations are, optionally, changed, and some operations are, optionally, omitted.

As described below, method 800 provides an intuitive way for sending an audio message, in accordance with some embodiments. The method reduces the cognitive burden on a user for sending an audio message, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to send audio messages faster and more efficiently conserves power and increases the time between battery charges.

The computer system displays (802), via the display generation component, a first user interface (e.g., 730) (e.g., a user interface for controlling a set of external devices). The first user interface includes (e.g., includes display): a first selectable user interface object (e.g., 726), where selection of the first selectable user interface object initiates a process (e.g., user interfaces 730, 740, and 750) for recording (e.g., at the computer system via a microphone) and sending a first audio message to a set of external devices (e.g., 706 in FIG. 7F) (e.g. each external device in the set of external devices), wherein the set of external devices includes a first set of one or more external devices (e.g., 616) and a second set of one or more external devices (e.g., 646, 648). In some embodiments, while displaying the first selectable user interface object, the computer system receives input that corresponds to a selection of the first selectable user interface object and, in response to receiving the input that corresponds to the

selection of the first selectable user interface object, the computer system displays a user interface for recording and sending an audio message to the first set of one or more devices and the second set of one or more devices (e.g., the set of external devices). In some embodiments, the first set of one or more devices is different from the second set of one or more devices. In some embodiments, the user interface for controlling the set of external devices includes displaying a plurality of representations and/or accessory control user interface objects that corresponds to the first set of one or more devices and the second set of one or more devices. In some embodiments, the plurality of accessory control user interface objects corresponds to the first set of one or more devices and the second set of one or more devices is a set of one or more selectable user interface objects. In some embodiments, each of the plurality of accessory control user interface objects, when selected, causes a respective accessory device in the set of external devices to perform one or more functions and/or change a state of the respective accessory device. In some embodiments, the set of external devices includes a type of external electronic device (e.g., a cellular phone, tablet computer) that is not in the first set of one or more devices (e.g., a smart speaker) or the second set of one or more devices (e.g., a smart speaker). In some embodiments, set of external devices is associated with a top-level location (or destination) (e.g., a location of a first type) (e.g., a home location, business, an office (e.g., a location that is a top-level location (e.g., a location that defines one or more locations (e.g., sub-locations) and/or one or more regions (or zones) that are within an area and/or perimeter that is defined by the location of the top-level location, a location that is at the top level of a hierarchy of locations, a location that is linked (e.g., programmatically) to one or more locations (e.g., sub-locations) and/or one or more regions (or zones))). In some embodiments, set of external devices includes the first group of devices (e.g., a subgroup of devices) and the second group of devices (e.g., a subgroup of devices). In some embodiments, a sub-group of devices is associated with a sub-location (e.g., a room positioned (e.g., in the boundary, area, or perimeter of the top-level location; and/or defined, identified, and/or linked (e.g., programmatically linked) (e.g., by a user) to the top-level location) in a top-level location and/or a zone (e.g., a location that is defined by two or more sub-locations within (e.g., within the boundary, area, or perimeter of the top-level location and/or defined, identified, and/or linked (e.g., by a user)) the top-level location (e.g., an entertainment zone that includes a living room and a dining room within the top-level location, a personal zone that includes two or more bedrooms, living rooms, bathrooms within the top-level location) in the top-level location). In some embodiments, the target group is associated with the sub-group of devices and not the top-level group of devices.

The first user interface includes a first accessory control user interface object (e.g., one of **718**) (e.g., a selectable user interface object) corresponding to a first external accessory device, where selection (e.g., **750/1**, **750/2**) of the first accessory control user interface object initiates a process to transmit an instruction (e.g., selection causes transmission of the instruction) to change a state of the first external accessory device (e.g., causes the door to lock or unlock, causes the light to turn on or off). In some embodiments, in response to receiving an input, the computer system initiates a process to transmit an instruction (e.g., selection causes transmission of the instruction) to change a state of the first external accessory device and the visual appearance of the first accessory control user interface object changes from a

first visual appearance to a second visual appearance that is different from the first visual appearance (e.g., pressed to depressed state (or vice-versa), a first color to a second color, one or more difference characters (e.g., “on to “off” (or vice-versa))).

The computer system, while displaying the first user interface (e.g., and the first user interface), receives (**804**) an input (e.g., **750/3**) (e.g., a single user input (e.g., a tap input on a selectable user interface object or icon that will navigate to the user interface for controlling the second set of one or more external device) or multiple user inputs that are received while the first selectable user interface object are displayed) that corresponds to a request to display a second user interface (e.g., **760**) (e.g., a user interface for controlling the second set of one or more external devices (e.g., without controlling the first set of one or more external devices)). In some embodiments, the computer system receives the request to display the second user interface when the computer system receives selection of a selectable user interface object for displaying the second user interface.

In response to receiving the request to display the second user interface, the computer system displays (**806**) the second user interface (e.g., **760**). The second user interface includes (e.g., includes displaying) a second selectable user interface object (**812**) (e.g., **776**), where selection of the second selectable user interface object initiates a process (e.g., user interfaces **780a**, **784**, and **786a**) for recording and sending a second audio message to the second set of one or more external devices (e.g., **646**, **648**) without sending the second audio message to the first set of one or more external devices (e.g., **706** in FIG. 7M). The second user interface includes a second accessory control user interface object (**814**) (e.g., one of **768**) (e.g., a selectable user interface object) corresponding to a second external accessory device (e.g., **642**, **646**, **648**) (e.g., without corresponding to the first set of one or more devices), where selection (e.g., **750g1**, **750g2**) of the second accessory control user interface object initiates a process to transmit an instruction (e.g., selection causes transmission of the instruction) to change a state of the second external accessory device. In some embodiments, in response to receiving an input, the computer system initiates a process to transmit an instruction (e.g., selection causes transmission of the instruction) to change a state of the second external accessory device and the visual appearance of the second accessory control user interface object changes from a first visual appearance to a second visual appearance that is different from the first visual appearance (e.g., pressed to depressed state (or vice-versa), a first color to a second color, one or more difference characters (e.g., “on to “off” (or vice-versa))). In some embodiments, in response to receiving the request to display the second user interface, the computer system ceases to display the first user interface and first user interface object. In some embodiments, the second selectable user interface object replaces the first selectable user interface object. In some embodiments, the second selectable user interface object is displayed at the same location as where the first selectable user interface object was previously displayed. In some embodiments, the second user interface replaces display of the first user interface. In some embodiments, the computer system cannot control (e.g., cannot cause an external device to change state) the first set of one or more external devices from the second user interface (e.g., an accessory control user interface object corresponds to one of the first set of one or more devices is not displayed). In some embodiments, the first user interface includes displaying a set of one or more representations and/or accessory control user interface

objects that corresponds to the first set of one or more external devices (without display a set of one or more representations that corresponds to the second set of one or more external devices). In some embodiments, each of accessory control user interface objects, when selected, causes a respective device to perform one or more functions or change a state of the respective device. In some embodiments, while displaying the second selectable user interface object, the computer system receives input that corresponds to a selection of the second selectable user interface object and, in response to receiving the input that corresponds to the selection of the second selectable user interface object, the computer system displays a user interface for recording and sending an audio message to the second set of one or more external devices without sending the audio message to the first set of one or more external devices. In some embodiments, while displaying the second selectable user interface object, the computer system receives a user input (e.g., a swipe input) that corresponds to a request to display a user interface for controlling the first set of one or more external devices (e.g., without controlling the second set of one or more external devices) that includes displaying a selectable user interface object, that, when selected, initiates a process for recording and sending the audio message to the first set of one or more external devices without sending the audio message to the second set of one or more external devices. In some embodiments, an audio message includes audio that is recorded at the computer system. In some embodiments, the process for recording and sending an audio message to an external device includes recording the audio message using the computer system (e.g., using a microphone that is in communication with the computer system). In some embodiments, the audio message includes voice audio of the user of the computer system. Providing hierarchal user interfaces to control a hierarchal set of controls, where each user interface corresponds to a node in the respective hierarchy, provides a user with visual feedback concerning the sets of devices in the hierarchy of controls that can be controls via a respective user interface along with visual feedback concerning how the user can intuitively navigate to another respective user interface for controlling another respective set of devices. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-sys interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the device more quickly and efficiently.

In some embodiments, the first external accessory device (e.g., **718b**) is different from the second external accessory device (e.g., **768c**). In some embodiments, the first external accessory device is an external device that is grouped under the "Home" group, but is not part of the "Dining Room" category (e.g., a light located in a bedroom) and the second external accessory device is an external device that is grouped under both the "Home" group the "Dining Room" category (e.g., a light located in the dining room). In contrast, in some embodiments, the first external accessory device is the same device as the second external accessory device (e.g., they are the same light located in the dining room, or they are the same smart speaker located in the dining room).

In some embodiments, the first selectable user interface object (e.g., **726**) (e.g., while displayed as part of the first user interface) is displayed at a first location (e.g., location

of **726** and **776**) via the display generation component (e.g., on the display generation component) and the second selectable user interface object (e.g., **776**) (e.g., while displayed as part of the second user interface) is displayed at the first location (e.g., location of **726** and **776**) via the display generation component (e.g., on the display generation component). In some embodiments, the input received while displaying the first user interface causes the second selectable user interface object to replace display of the first selectable user interface object. Providing the first selectable user interface or the second selectable user interface objects at the same location when prescribed conditions are met allows the user to quickly locate a selectable user interface object for multicasting without having to identify any different operational characteristics (e.g., what particular set of devices will selectable the particular selectable user interface object send a record audio message to) of the selectable user interface object. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the first external accessory device (e.g., **646**, **648**) (e.g., a smart speaker, wherein playback of music can be configured using the first accessory control user interface object) is included in the set of external devices (e.g., the first external accessory device can be configured from the first user interface and audio (recorded at the computer system) is sent to the first external accessory device using the first selectable user interface object). In some embodiments, the first user interface includes a third accessory control user interface object (e.g., **718b**) (e.g., a selectable user interface object) corresponding to a third external accessory device (e.g., **642**). In some embodiments, selection of the third accessory control user interface object initiates a process to transmit an instruction (e.g., selection causes transmission of the instruction) to change a state of the third external accessory device (e.g., causes the door to lock or unlock, causes the light to turn on or off). In some embodiments, the third external accessory device (e.g., **642**) is not included in the set of external devices and selection of the first selectable user interface object (e.g., **776**) does not initiate a process for sending (and/or recording) the first audio message to the third external accessory device (e.g., **706** in **7F**). In some embodiments, the first user interface includes accessory control user interface objects for some external accessory devices that can be controlled (e.g., turned on/off), but that are not sent the first audio message (e.g., because the external accessory devices do not have a speaker for playback of the audio message) and the first user interface includes accessory control user interface objects for some external accessory devices that can be controlled (e.g., turned on/off) and that are sent the first audio message (e.g., because the external accessory devices have speakers for playback of the audio message). In some embodiments, the second user interface includes accessory control user interface objects for some external accessory devices that can be controlled (e.g., turned on/off), but that are not sent the second audio message (e.g., because the external accessory devices do not have a speaker for playback of the audio message) and the second user interface includes accessory control user interface objects for some external accessory devices that can be controlled (e.g., turned on/off) and that are sent the second audio message (e.g., because the external

61

accessory devices have speakers for playback of the audio message). In some embodiments, the first set of one or more external devices (e.g., the device in the bedroom group to which the audio message is sent) does not include the first external accessory device (e.g., a light in the bedroom group to which the audio message is not sent) and the second set of external devices (e.g., the device in the dining room group to which the audio message is sent) does not include the second external accessory device (e.g., a light in the dining room group to which the audio message is not sent). Thus, in some embodiments, the audio message is not transmitted to all devices that can be controlled using the accessory control user interface objects which, when selected, cause a respective accessory device to perform one or more functions and/or change a state of the respective accessory device. In some embodiments, an external device that can be controlled (to perform one or more functions and/or change a state of the respective accessory device) using a respective accessory control user interface object is included in the set of external devices (e.g., the first or second set of external devices) and, thus, an audio message can be transmitted to that external device and that external device can be separately controlled.

In some embodiments, the first user interface corresponds to a top-level location (e.g., 602) (e.g., a structure, a home) and the second user interface corresponds to a first sub-location (e.g., 602d) of a first type (e.g., 602a-602e) (e.g., a room of the structure, a dining room in the home). In some embodiments, the second set of one or more external devices (e.g., 646, 648) correspond to the first sub-location (e.g., 602d) (e.g., the second set of one or more external devices have been assigned to the sub-location of the first type). In some embodiments, (e.g., any of) the second set of one or more external devices (e.g., 646, 648) cannot be made to correspond to a second sub-location (e.g., 602a, 602b, 602c, or 602e) (e.g., any sub-location (other than the first sub-location) of the first type (e.g., any other room of the structure) based on the second set of one or more external devices corresponding to the first sub-location (e.g., 602a-602e). In some embodiments, the first user interface corresponds to a top-level location and the second user interface corresponds to a sub-location (e.g., a room of the home) of the top-level location. In some embodiments, the first room and a second room are part of a zone (e.g., a collection of rooms grouped together). In some embodiments, the second set of one or more external devices are devices identified (e.g., by a user) of being located in the room to which the second user interface corresponds.

In some embodiments, the first user interface corresponds to a top-level location (e.g., a structure, a home) and the second user interface corresponds to a third sub-location of a second type (e.g., entertainment zone (e.g., 602d and 602e)) (e.g., a first zone, main floor) that corresponds to a plurality (e.g., 602a-602e) of sub-locations of a first type (e.g., 602a-602e) (e.g., a plurality of rooms). In some embodiments, the second set of one or more external devices corresponds to the third sub-location based on the second set of one or more external devices being included in the plurality of sub-locations of the first type (e.g., 602a-602e) (e.g., a plurality of rooms of the structure, including a first room (e.g., a dining room in the home) and a second room (e.g., a bedroom in the home)). In some embodiments, the first user interface corresponds to a top-level location and the second user interface corresponds to a sub-location (e.g., multiple rooms of the home) of the top-level location. In some embodiments, the second set of one or more external devices includes at least one device assigned to the first

62

room and at least one device assigned to the second room. In some embodiments, the top-level location corresponds to at least one device to which the third sub-location does not correspond (e.g., the home includes some devices that are not included in the third sub-location).

In some embodiments, the second external accessory device is associated with (e.g., corresponds to) the third sub-location (e.g., entertainment zone (e.g., 602d and 602e)) (e.g., the first zone) of the second type. In some embodiments, the second external accessory device (e.g., 646, 648) is also associated with (e.g., corresponds to) a fourth sub-location (e.g., second zone) of the second type (e.g., entertainment zone (e.g., 602d and 602e)) that is different from the third sub-location. In some embodiments, the second zone is a sub-location (e.g., multiple rooms of the home). In some embodiments, the second zone is associated with an external accessory device that is not associated with the first zone. In some embodiments, the computer system can initiate processes for recording and sending messages to various zones. A first zone and a second zone can correspond to different sets of devices, some of which correspond to both the first zone and the second zone and some of which corresponds to only one of the first zone or the second zone.

In some embodiments, the second set of one or more external devices (e.g., 646, 648) is associated with a first location (e.g., 602d) (e.g., a room, a sub-location, a zone) and wherein the process for recording and sending the second audio message to the second set of one or more external devices without sending the second audio message to the first set of one or more external devices includes displaying an indication (e.g., textual indication, graphical indication) of the first location (e.g., 782) (e.g., text specifying the name of the room or zone that the audio message will be transmitted to). In some embodiments, processes for recording and sending audio messages include displaying an indication of the location that corresponds to the external devices to which the respective audio message will be sent. In some embodiments, the first user interface corresponds to a top-level location (e.g., a structure, such as a home) and the second user interface corresponds to a sub-location (e.g., a room of the home, a zone of the home) of the top-level location. In some embodiments, displaying the second user interface, the computer system detects selection of (e.g., tap on, press and hold on) the second selectable user interface object. In some embodiments, in response to detecting selection of the second selectable user interface object, the computer system displays a recording user interface (e.g., by replacing all or part of the second user interface) that concurrently includes: a record user interface object (e.g., a selectable record button), wherein selection of (e.g., tap on, press and hold on) the record user interface object causes recording of an audio message by recording audio detected by the computer system; and an indication (e.g., textual indication, graphical indication) of the sub-location (e.g., text specifying the name of the room or zone that the audio message will be transmitted to). In some embodiments, the second user interface includes the indication of the sub-location. Displaying an indication of a location that is associated with a group of devices to which an audio message is intended to be multicast provide the user with visual feedback concerning the state of the process for recording and sending the audio message. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces

power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, as a part of initiating a process for recording and sending an audio message to external devices, the computer system initiates, automatically (e.g., without intervening user input that corresponds to a request to initiate recording of the audio), the recording of a new audio message and displays a recording user interface (e.g., **741**) that includes a dynamic indication (e.g., **744a**) of the audio being recording.

In some embodiments, the computer system detects selection of (e.g., tap on, press and hold on) the record user interface object. In response to detecting selection of the record user interface object, the computer system records an audio message. Subsequent to recording the audio message (and prior to transmitting the audio message), the computer system provides an option to change the external devices to which the message will be transmitted. In some embodiments, the computer system receives activation of a drop-down affordance and, in response, displays one or more sub-locations (each of which correspond to a respective set of external devices). The computer system receives selection of one of the one or more sub-locations and a confirmation to transmit the audio message. In response, the computer system transmits the audio message to the respective set of external devices corresponding to the selected sub-location, rather than to the second set of one or more external devices corresponding to the second user interface.

In some embodiments, the set of external devices includes a personal mobile electronic device (e.g., **604**, **634**, **684**) (e.g., a smart phone, a cell phone, a watch). In some embodiments, the personal mobile electronic device is not included in the first set of one or more devices and is not included in the second set of one or more external devices. In some embodiments, the personal mobile electronic device is not assigned to any sub-location of the top-level location, but is a member of the top-level location. Thus, in some embodiments, selecting the first selectable user interface object initiates a process to record and send an audio message to the set of external devices, including the personal mobile electronic device (and any other personal mobile electronic devices that are members of the top-level location).

In some embodiments, the second set of one or more external devices does not include a personal mobile electronic device (e.g., **604**, **634**, **684**) (e.g., a smart phone, a cell phone, a watch). In some embodiments, the personal mobile electronic device is not included in the first set of one or more devices and is not included in the second set of one or more devices. In some embodiments, the set of external devices includes the personal mobile electronic device and, therefore, audio messages sent from the first user interface are transmitted to the personal mobile electronic device (and, optionally, other mobile devices that are part of the home). In some embodiments, audio messages sent from the second user interface (or any user interface corresponding to a sub-location) are not transmitted to the personal mobile electronic device (and, optionally, are also not transmitted to other mobile devices that are part of the home). In some embodiments, the computer system disallows assigning personal mobile electronic devices to any sub-location of the top-level location, but permits assigning personal mobile electronic devices to the top-level location. Thus, in some embodiments, selecting the second selectable user interface object initiates a process to record and send an audio message to the second set of one or more devices, which

does not include the personal mobile electronic device (or any other personal mobile electronic devices that are members of the top-level location).

In some embodiments, the computer system, subsequent to displaying the second user interface, receives input (e.g., **750g**) (e.g., user input; an input on a settings user interface) to disable sending audio messages to the second set of one or more external devices (e.g., **638**). In some embodiments, in response to receiving the input to disable sending audio messages to the second set of one or more external devices, the computer system disables (e.g., **768a**) sending of audio messages to the second set of one or more external devices via selection of the first selectable user interface object (e.g., **726**) (e.g., without disabling sending of audio messages to the first set of one or more external devices via selection of the first selectable user interface object) and via selection of the second selectable user interface object (e.g., **776**). In some embodiments, after disabling sending of audio messages to the second set of one or more external devices, navigating back to the first user interface and receiving selection of the first selectable user interface object initiates a process for recording and sending an audio message to the first set of one or more external devices without sending the audio message to the second set of one or more external devices. In some embodiments, in response to receiving the input to disable sending audio messages to the second set of one or more external devices, the computer system removes the second set of one or more external devices from the set of external devices. In some embodiments, after disabling sending of audio messages to the second set of one or more external devices, navigating back to the second user interface and receiving selection of the second selectable user interface object does not initiate a process for recording and sending an audio message to any devices. In some embodiments, after disabling sending of audio messages to the second set of one or more external devices, the second user interface does not include the second selectable user interface object (or includes a non-selectable/disabled version of the user interface object) such that the process for recording and sending an audio message to the second set of one or more external devices cannot be initiated.

In some embodiments, the first user interface corresponds to a top-level location (e.g., **602**) (e.g., a structure, such as a home) and the second user interface corresponds to a sub-location (e.g., **602a-602d**) (e.g., a room of the home, a zone of the home) of the top-level location (e.g., **602**). In some embodiments, the computer system receives (**808**) (e.g., while not displaying the first user interface and not displaying the second user interface), at a microphone that is in communication with the computer system (e.g., a microphone of the computer system), audio input (e.g., **792a-792e**) including a natural language request for a digital assistance, the audio input including: an instruction to initiate a process to transmit an audio message (e.g., including the term “multicast”), a location identifier (e.g., the top-level location, a sub-location), and an audio message (e.g., received subsequent to the instruction to initiate a process to transmit an audio message and/or received subsequent to the identifier of the location). In some embodiments, in accordance with a determination that the location identifier corresponds to the top-level location (e.g., **782a**), the computer system transmits (**810**) (e.g., multicasting) the audio message, without establishing a two-way audio communication channel (e.g., without establishing a full-duplex audio communication channel) with any devices of the set of external devices, for playback at the set of external devices, including the first set of one or more external devices and the second

65

set of one or more external devices. In some embodiments, in accordance with a determination that the location identifier corresponds to the sub-location (e.g., 792b, 792c): the computer system transmits (812) (e.g., multicasting) the audio message, without establishing a two-way audio communication channel with any devices of the set of external devices, for playback at the second set of one or more external devices and not for playback at the first set of one or more external devices. In some embodiments, the computer system transmits the location identifier along with the audio message such that a remote device (e.g., a service, an external device of the set of external devices) can distribute the audio message to the external devices corresponding to the respective external devices.

In some embodiments, as a part of initiating a process for recording and sending an audio message to external devices includes, the computer displays a recording user interface (e.g., 730, 740, 750) (e.g., by replacing all or part of the second user interface) that concurrently includes: a record user interface object (e.g., 736) (e.g., a selectable record button), wherein selection (e.g., 750c) of (e.g., tap on and then press end when audio message is complete, press and hold on while speaking audio message, tap on and allow the computer system to identify the end of the audio message) the record user interface object causes recording of an audio message by recording audio detected by the computer system; and a send user interface object (e.g., 756) (e.g., a selectable send button), wherein selection (e.g., 750e) of (e.g., tap on) the second user interface object causes the computer system to send the audio message to the external devices. In some embodiments, the recording user interface also concurrently includes an indication (e.g., textual indication, graphical indication) of the location (e.g., top-level location, sub-location; text specifying the name of the room or zone that the audio message will be transmitted to) corresponding to the external devices to which the audio message will be sent.

In some embodiments, the computer system is in communication with one or more input devices including a microphone. In some embodiments, as a part of the process (e.g., user interfaces 730, 740, 750) for recording and sending the first audio message to the set of external devices, the computer system receives, via the microphone, a second audio input. In some embodiments, the computer system transmits the first audio message to the set of external devices, wherein the first audio message is based on (e.g., includes a recording of) the second audio input.

Note that details of the processes described above with respect to method 800 (e.g., FIGS. 8A-8B) are also applicable in an analogous manner to the methods described below. For example, method 800 optionally includes one or more of the characteristics of the various methods described below with reference to methods 1000 and 1200. For example, the computer systems can be the same systems. For another example, the audio message sent in method 800 can be the media received in 1000. For another example, the voice input transmitted in method 1200 can be the same as the media received in method 1000. For brevity, these details are not repeated below.

FIGS. 9A-9X illustrate exemplary devices and exemplary user interfaces for displaying notifications in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. 10.

The phrases “multicast message” and/or “audio multicast message” are used generally herein with respect to FIGS. 9A-9X to refer to multicast messages that are sent from a

66

device, using similar techniques as described in FIGS. 7A-7AH, 8A-8B, 11A-11F, and 12. However, multicast message and/or audio multicast message, as used herein, are not necessarily intended to include multicast communication that are sent using other features of device 700.

FIG. 9A illustrates electronic device 700 displaying user interface 900. In FIG. 9A, electronic device 700 is a portable multifunction device and has one or more components described above in relation to one or more of devices 100, 200, 300, and 500. With respect to the figures described below, in some embodiments, device 700 is operating at a location that is less than a threshold distance away from home 602; however, in other embodiments, device 700 is operating at a location that is greater than a threshold distance away from home 602.

As illustrated in FIG. 9A, user interface 900 is a settings user interface that corresponds to the home application, as discussed above (e.g., in FIG. 6 and FIGS. 7A-7AH). Here, the settings user interface is a settings page for Cam Appleseed, a person (e.g., user) who is registered to device 700 and a person who is recognized by the home application (e.g., group of people 797a in FIG. 7AB). As illustrated in FIG. 9A, device 700 is currently configured to receive multicast notifications, which is shown by the multicast option 900a being enabled in FIG. 9A. Since the multicast option 900a is enabled, the multicast notifications will be received by device 700 as illustrated in the FIGS. 9B-9X. In some embodiments, device 700 detects tap gesture 950a at a location that corresponds to multicast option 900a. In some embodiments, in response to detecting tap gesture 950a (or one or more subsequent tap gestures), device 700 changes multicast option 900a from being enabled to disabled and device 700 is not configured to receive multicast messages that are sent based on flows described herein. Thus, in some embodiments, device 700 does not receive multicast messages when multicast option 900a is disabled.

FIGS. 9B-9H illustrate multicast notifications and non-multicast notifications being displayed over a period of time, while multicast option 900a is enabled. In particular, FIGS. 9B-9H illustrate that multicast notifications (e.g., multicast message sent using the methods described herein) that are directed to (e.g., correspond to) a particular target group of devices decay or cease to be displayed (e.g., after a predetermined period of time) unless a new multicast notification that is also directed to the particular target group of devices is received within a with a predetermined period of time. In some embodiments, the particular target group of devices is a group of devices assigned to a home (e.g., home 602 in FIG. 6), a room (e.g., dining room 602b, bedroom 602c in FIG. 6), or a zone (e.g., “entertainment zone” as described, for example, in relation to FIG. 7U).

For example, in FIG. 9B, at 10:00 AM, device 700 receives data indicating updated content has been published by a news application.

As illustrated in FIG. 9B, in response to receiving the data, device 700 displays a user interface that includes news notification 902. In FIG. 9B, news notification 902 is not a multicast notification. Therefore, news notification 902 is displayed regardless of whether multicast option 900a is enabled or disabled. In other words, the state of multicast option 900a does not impact news notification 902 because it is not a multicast notification.

At 10:02 AM, device 700 receives data indicating that a new audio multicast message has been sent (e.g., directed to devices that include electronic device 700) to home 602 (“home target group”). In some embodiments, the data

67

includes a target group identifier (e.g., “Home”) as the receiver for the new audio multicast message.

As illustrated in FIG. 9C, in response to receiving the data, device 700 displays multicast notification 904, which is representative of the data received at 10:02 AM. In FIG. 9C, multicast notification 904 is displayed concurrently with news notification 902. Multicast notification 904 includes application indication 904a, notification type indication 904b, sender indication 904c, target indication 904d, and time of receipt indication 904e.

Application indication 904a indicates an application that is providing the notification. Here, application indication 904a includes a graphical representation icon that is assigned to a home application and is similar to home icon 704a in FIG. 7A.

Notification type indication 904b indicates the notification type of the notification. Here, the notification type is a multicast notification.

Sender indication 904c indicates the sender of the audio multicast message. Here, the sender is a person, John, who is registered with the device (e.g., a device that is in the home target group) that has initiated the process for sending the audio multicast message. In some embodiments, when the sender is a person, an identity of the sender is established by one or more devices analyzing voice input corresponding to the audio multicast messages, using one or more voice identification algorithms. In some embodiments, when the identity of the sender cannot be established as a person, sender indication 904c indicates that the sender is a device (e.g., “Living Speaker”), such as the device that sent the audio multicast message. In some embodiments, the sender is not established as a person, for example, a person is not established at the sender device when a person is not registered with the sender device that initiated the process for sending the audio multicast message and/or multiple people are registered with the device that initiated the process for sending the audio multicast message.

Target indication 904d indicates a target group of devices to which an audio multicast message corresponds. Here, target indication 904d is the home target group (e.g., “From Home”). In some embodiments, the target group (that corresponds to the audio multicast message) is the group identified by the sender of the audio multicast message, as described above in relation to FIGS. 7E-7F, 7J-7M, and 7S-7U. In some embodiments, the target group is identified by the sender of the audio multicast messages based on one or more user inputs (e.g., voice input (e.g., 792a-729d) and/or gestures (e.g., 750b and 750g3). In some embodiments, the target group is identified based on an initial audio multicast message when a reply message is received at device 700. For example, device 700 can receive a reply audio multicast message with a target group that corresponds to bedroom 602c in certain situations, such when device 700 has previously directed an initial audio multicast message to the group of devices assigned to bedroom 602c.

Time of receipt indication 904e indicates when the notification was displayed (or, in some embodiments, when data that corresponds to the notification was received). Here, time of receipt indication 904e shows that the notification was displayed “NOW” or at 10:02 AM.

As illustrated in FIG. 9D, at 10:09 AM, device 700 continues to display of news notification 902 and ceases to display multicast notification 904. In some embodiments, the notification 904 is not displayed on any user interface of device 700 after the multicast notification ceases to be displayed. In some embodiments, the notification 904 is not displayed on the user interface in FIG. 9D at any other time

68

after the multicast notification ceases to be displayed. In some embodiments, the device receives user input to view pending notifications (e.g., notifications that have not been acted on by the user), and in response, displays news notification 902 without displaying multicast notification 904.

As illustrated in FIG. 9D, device 700 ceases to display multicast notification 904 (even when the display is on) because data corresponding to a new audio multicast message corresponding to the home target group was not received before the decay period (e.g., 1 second, 30 seconds, 60 seconds, 300 seconds, etc.) of multicast notification 904 ended (and/or within a predetermined period of time). On the other hand, device 700 continues to display news notification 902 because news notification 902 is not a multicast notification and does not cease to be displayed once a predetermined period of time elapses (and when the display is on).

FIGS. 9E-9H illustrate examples of the technique, in addition to the example described above in relation to FIGS. 9B-9D. In FIGS. 9B-9D, the decay period for a multicast notification (e.g., the predetermined period of time) is five minutes for illustrative purposes only. In some embodiments, the decay period is shorter or longer than five minutes.

At 10:10, device 700 receives three different sets of data. The first set of data indicates that a new audio multicast message corresponding to the home target group has been received. The second set of data indicates that a new audio multicast message corresponding to a group of devices assigned to bedroom 602c (“bedroom target group”) has been received. The third set of data indicates that a new audio multicast message corresponding to a group of devices assigned to the entertainment zone (“the entertainment zone target group”) (e.g., a combination of a group of devices assigned to living room 602d and sunroom 602e) has been received.

In some embodiments, the first set of data represents an initial audio multicast message or a reply audio multicast message (e.g., a reply to an initial audio multicast message that device 700 sent) corresponding to the home target group. In some embodiments, the second set of data and the third set of data represent reply audio multicast messages, that is, audio multicast messages that are received in response to initial audio multicast messages that were separately sent to each respective target group. In some embodiments, the second set of data and the third set of data are not initial messages that are received from their respective target group because device 700 is not assigned to zone or room target groups and cannot receive initial messages sent from those target groups, as discussed above (e.g., in relation to FIGS. 7M, 7T, 7V, and 7X).

As illustrated in FIG. 9E, in response to receiving the three sets of data, device 700 displays multicast notifications 906a, 908a, and 910. Device 700 also continues to display news notification 902. As illustrated in FIG. 9E, the notifications are displayed in a notification list. The oldest notification is displayed at the bottom of the list (e.g., news notification 902), and the newest notification is at the top of the list (e.g., multicast notification 910). Thus, while notifications 906a, 908a, and 910 were displayed at around the same time, notifications 906a, 908a, and 910 were respectively displayed in the order shown in FIG. 9E. In some embodiments, the notifications are displayed in a different order or in a different arrangement.

As illustrated in FIG. 9E, notification 906a indicates that an audio multicast message has been sent by “John” from the

home target group; notification **908a** indicates that an audio multicast message has been sent by “Jane” from the bedroom target group; and notification **910** indicates that an audio multicast message has been sent by “Emma” from the entertainment zone target group. As illustrated in FIG. 9E, all three of the new multicast notifications include a time receipt indication of “Now” because data was recently received (or they were recently displayed) at 10:10 AM. However, the time receipt indication for news notification **902** is “10 MINS AGO” because its data was received (or the notification was displayed) at 10:00.

At 10:11 AM, device **700** receives data indicating that a new audio multicast message corresponding to the home target group has been received.

As illustrated in FIG. 9F, in response to receiving the new data, device **700** displays multicast notification **906b** because data indicating a new audio multicast message corresponding to the home target group was received (e.g., data received at 10:11) before the decay period for multicast notification **906a** expired (e.g., within a predetermined period of time after displaying multicast notification **906a** or receiving the first data in FIG. 9E). Notably, device **700** does not update the display of the notifications **906a** and **910** and continues to display these notifications because data indicating a new audio multicast message corresponding to their respective target groups has not been received and their decay period has not expired (e.g., they have not been displayed for more than five minutes without receiving data that corresponds to a new multicast message for their target groups).

Multicast notification **906b** is an updated version of multicast notification **906a**, which device **700** has ceased to display in FIG. 9F. Looking back at FIG. 9E, multicast notification **906a** indicates that John sent a multicast message that corresponds to the home target group. Turning back to FIG. 9F, multicast notification **906b** also includes information (e.g., “John” in notification **906b**) that John sent an earlier multicast message (the multicast message originally represented by notification **906a**) that corresponds to the home target group. In addition, multicast notification **906b** includes information that one other has sent a multicast message that corresponds to the home target group. Thus, multicast notification **906b** includes information concerning two audio multicast messages, that is, multicast notification **906b** includes information that is representative of the sender (“John”) of the first audio multicast message that corresponds to the home target group and information that is representative of the sender (e.g., “one other”) of the second audio multicast message that corresponds to the home target group.

As illustrated in FIG. 9F, multicast notification **906b** is displayed at the top of the list with a time receipt indication of now because it is the most recent notification. Notably, multicast notification **906b**’s time receipt indication changes in FIG. 9F to reflect the time at which the new audio multicast message corresponding to the home target group was received (e.g., data received at 10:11), although multicast notification **906a** first displayed (or data that corresponds to multicast notification **906a** was first received) at 10:10 AM in FIG. 9E. In some embodiments, multicast notification **906a** is displayed concurrently with multicast notification **906b**. In some embodiments, when multicast notification **906a** is displayed concurrently with multicast notification **906b**, the time receipt indication of multicast notification **906a** is updated to read, “NOW.” In some embodiments, updating the time indication of multicast notification **906a** extends the decay period of multicast

notification **906a**. In some embodiments, receiving the data at FIG. 9F extends the decay period of multicast notification **906a** (e.g., or the content of multicast notification **906a** because multicast notification **906b** includes content representative of the audio multicast message represented by multicast notification **906a**).

As illustrated in FIG. 9F, notifications **910**, **908a**, and **902**, which are listed respectively from most recent to least recent, are below multicast notification **906b**. In addition, the time receipt indications of notifications **910**, **908a**, and **902** have been updated in FIG. 9F to reflect the length of time that each has respectively been displayed (or the time that has passed since data has been received that corresponds to each respective notification).

At 10:12 AM, device **700** receives data indicating that a new audio multicast message corresponding to the bedroom target group has been received.

As illustrated in FIG. 9G, in response to receiving the data, device **700** displays multicast notification **908b** because data indicating a new audio multicast message corresponding to the bedroom target group was received (e.g., data received at 10:12) before the decay period for multicast notification **908b** expired (e.g., within a predetermined period of time after displaying multicast notification **908b** or receiving the second data in FIG. 9E). Notably, device **700** does not update notifications **908b** and **910** and continues to display the notifications **908b** and **910** because data indicating a new audio multicast message corresponding to their respective target groups has not been received, and their decay period has not expired. In some embodiments, multicast notification **908b** is displayed using similar techniques to those described above in FIG. 9F with respect to multicast notification **906b**.

Multicast notification **908b** is an updated version of multicast notification **908a**, which device **700** has ceased to display in FIG. 9G. Looking back at FIG. 9E, multicast notification **908a** indicates that Jane sent a multicast message that corresponds to the bedroom target group. Turning back to FIG. 9G, multicast notification **908b** indicates that two multicast messages have been sent by Jane that correspond to the bedroom target group. Here, instead of multicast notification **908b** including a new sender, multicast notification **908b** displays content that is representative of an increased amount of notifications that were sent by the respective sender when compared to multicast notification **908a**. In some embodiments, multicast notification **908a** includes a representation of the amount of notifications that were received from the bedroom target group, irrespective of whether a different sender has sent the new multicast message.

As illustrated in FIG. 9H, multicast notification **908b** is displayed at the top of the list, and notifications **906b**, **910**, and **902** are displayed under multicast notification **908b** in order from most recent to least recent.

As illustrated in FIG. 9H, at 10:15 AM, device **700** ceases to display multicast notification **910** because the decay period for multicast notification **910** has expired. In other words, device **700** has not received data indicating a new audio multicast message corresponding to the target group of multicast notification **910** (e.g., “the entertainment zone”) within a predetermined amount of time (or before the end of the decay period of notification **910**) of when multicast notification **910** was initially displayed (or data indicating an audio multicast message corresponding to the entertainment target group was received). As such, with reference to FIG. 9E, device **700** continues to display content representative of the first set of data (e.g., John in multicast notification **906b**)

71

and content representative of the second set of data (e.g., one of the multicasts in multicast notification **908b**) and no longer displays content representative of the third set of data (e.g., multicast notification **910**) because data corresponding to the respective target groups indicated in the first and second sets of data was received before each respective notification's decay period ended while data corresponding to the target group indicated in the third set of data was not received before the decay period of multicast notification **910** ended.

FIGS. **9I-9P** illustrate user interfaces for playback of received audio multicast messages. In particular, FIGS. **9I-9K** illustrate a scenario where multiple audio multicast messages are played back automatically in response to a single input. In addition, FIG. **9L-9P** illustrate a scenario where one received audio multicast message is selected from a group of other received audio multicast messages and played back. At FIG. **9H**, device **700** detects tap gesture **950h** at a location that corresponds to multicast notification **906b**.

As illustrated in FIG. **9I**, in response to detecting tap gesture **950h**, device **700** displays user interface **920**. User interface **920** is a user interface for displaying the audio multicast messages that are indicated in multicast notification **906b**, which are audio multicast messages that correspond to the home target group (as shown by "MULTICAST FROM HOME" in FIG. **9I**). User interface **920** includes graphical sender indication **924a** and graphical sender indication **924b**, where each represents one of the audio multicast messages represented in multicast notification **906b**. Here, graphical sender indication **924a** is larger than graphical sender indication **924b** and in the center of the user interface, which indicates that the audio multicast message that corresponds to graphical sender indication **924a** is currently selected for playback. Graphical sender indication **924a** is an image of a speaker device and representative of data corresponding to the audio multicast message sent by "one other" that was received at 10:11 AM in FIG. **9F**. And graphical sender indication **924b** is an image of John (i.e., **797a** including an image of John A. in FIG. **7AB**) and representative of data corresponds to the audio multicast message sent by John that was received at 10:10 AM in FIG. **9E**. In some embodiments, the audio messages are displayed in the order that they were received (e.g., graphical sender indication **924b** and graphical sender indication **924a** are switched in FIG. **9E**). User interface **920** further includes current sender indication **922a**, which indicates a name that is assigned to the speaker or device that is displayed in the middle of the user interface (or the largest graphical sender indication). Here, current sender indication **922a** indicates that the speaker has the name of "Living Room," and an audio multicast message from the sender is currently playing or can currently be played back by a selection of playback affordance **926**. In addition, device **700** also displays remaining indication **928**, which shows that the currently selected audio multicast message has a length of ten seconds that can be played back, and count indication **930**, which represents that the selected audio multicast message is message **1** of **2** of the total number of audio multicast messages that correspond to the home target group. In some embodiments, when a setting is enabled to allow transcription of the audio multicast message, user interface **920** includes a textual representation of the currently selected audio multicast message.

As illustrated in FIG. **9I**, device **700** receives data indicating that a new audio multicast message that corresponds to the bedroom target group has been received and displays

72

multicast notification **940** in response to receiving the data. In some embodiments, device **700** updates the list of notifications based on this received data, as discussed in relation to FIG. **9L** below. At FIG. **9I**, device **700** receives tap gesture **950i** at a location that corresponds to playback affordance **926**.

As illustrated in FIGS. **9J-9K**, in response to detecting tap gesture **950i**, device **700** initiates playback of media. As illustrated in FIG. **9J**, device **700** plays back the last received audio multicast message that corresponds to the home target group (e.g., received at 10:11 in FIG. **9F** above). In FIG. **9J**, while playing back the currently selected audio multicast message (e.g., audio multicast message from "one other" received at 10:11), device **700** displays time indication **932** and updates indications **928** and **930**. As illustrated in FIG. **9K**, device **700** is currently playing back the first audio multicast message that corresponds to the home target group (e.g., received at 10:10 from John in FIG. **9E** above). Notably, device **700** plays back the first audio multicast message, automatically (e.g., without receiving additional input after detecting tap gesture **950i**) after completing playback of the last audio multicast message that corresponded to the home target group.

As illustrated in FIG. **9L**, sometime after displaying the user interface in FIG. **9K**, device **700** re-displays the list of notifications. Here, notification **902b** has ceased to be displayed. In some embodiments, notification **902b** has ceased to be displayed because a gesture was detected at a location corresponding to the notification and/or one or more of the audio multicast messages were played back in FIGS. **9J-9K**. In some embodiments, notification **902b** ceases to be displayed because its decay period has ended (e.g., at 10:16 AM) before a new multicast corresponding to the home target group has been received.

In FIG. **9L**, device **700** is also displaying multicast notification **908c** and has ceased to display multicast notification **908b**. Multicast notification **908c** is an updated version of multicast notification **908b**, which has been updated to reference data corresponding to the audio multicast message that was received in FIG. **9I**, which was represented by multicast notification **940** in FIG. **9I**. Thus, while multicast notification **908b** included content indicating that two multicast notifications have been received that correspond to the bedroom target group, multicast notification **908c** has been updated to include content indicating that three multicast notifications have been received that correspond to the bedroom target group. At FIG. **9L**, device **700** detects press-and-hold gesture **950l** at a location that corresponds to multicast notification **908c**. In some embodiments, device **700** detects press-and-hold gesture **950l** while the gesture continues to be detected (or held). In some embodiments, device **700** detects press-and-hold gesture after the gesture has been released.

As illustrated in FIG. **9M**, in response to detecting press-and-hold gesture **950l**, device **700** displays user interface **960** (e.g., after an end of press-and-hold gesture **950l**, while continuing to detecting press-and-hold gesture **950l**). User interface **960** includes similar user interface elements to user interface **920** (as discussed above in relation to FIGS. **9I-9K**). However, user interface **960** has less area than user interface **920**. While user interface **960** is a user interface for playback audio multicast messages from the bedroom target group, device **700** can use one or more techniques as described above in relation to user interface **920**. In some embodiments, in response to detecting user input **950m1** on open affordance **962**, device **700** ceases to display user interface **960** and displays a user interface that is similar in

73

size to user interface **920**. At FIG. **9M**, device **700** detects swipe gesture **950m2** at a location that corresponds to user interface **960**.

As illustrated in FIG. **9N**, in response to detecting a first gesture (e.g., swipe gesture **950m2**), device **700** changes the currently selected audio multicast message from the last received audio multicast message corresponding to the bedroom target group (e.g., where its corresponding data was received in FIG. **9I**) to the second-to-last received audio multicast message corresponding to the bedroom target group (e.g., where its corresponding data was received in FIG. **9G**). At FIG. **9N**, device **700** detects swipe gesture **950n** at a location that corresponds to user interface **960**.

As illustrated in FIG. **9O**, in response to detecting a second gesture (e.g., swipe gesture **950n**), device **700** changes the currently selected audio multicast message from the second-to-last received audio multicast message corresponding to the bedroom target group (e.g., where its corresponding data was received in FIG. **9F**) to the first received audio multicast message corresponding to the bedroom target group (e.g., where its corresponding data was received in FIG. **9E**). At FIG. **9O**, device **700** detects tap gesture **950o** at a location that corresponds to user interface **960** (e.g., on playback affordance **926**).

As illustrated in FIG. **9P**, in response to detecting tap gesture **950o**, device **700** initiates playback of the first received audio multicast message (e.g., currently selected) corresponding to the bedroom target group without initiating playback of the other audio multicast messages. In some embodiments, at FIG. **9P** (or **9I-9J**), device **700** detects tap gesture **950p** at a location that corresponds to multicast affordance **736**; and, in response to detecting tap gesture **950p** at a location that corresponds to multicast affordance **736**, device **700** starts recording media, via one or more input devices, as described above (e.g., in FIGS. **7C** and **7I**). In some embodiments, at FIG. **9P**, device **700** detects one or more voice inputs, such as voice input **720a** (as described above), to send an audio multicast message corresponding to the bedroom target group in order to replay to Jane.

FIGS. **9Q-9V** illustrate exemplary user interfaces for displaying the user interfaces described above on a device with a smaller display than device **700**, such as smartwatch **701**. Any of the user interfaces discussed above can be displayed and transitioned on smartwatch **701** (e.g., user interfaces **970**, **972**, **974**, **976**, **978**, and **980**) (or tablet **634**), using one or more similar techniques to those discussed above for FIGS. **9A-9P**.

FIGS. **9W-9X** illustrate exemplary user interfaces for displaying the user interfaces described above on a device, such as computer device **674**. As described above, computer device **674** is in communication with one or more devices that sends instructions for computer device **674** to display one or more user interfaces, in some embodiments. Any of the user interfaces discussed above can be displayed and transitioned on computer device **674** (e.g., user interfaces **996** and **998**), using one or more similar techniques to those discussed above for FIGS. **9A-9P**.

FIG. **10** is a flow diagram illustrating a method for displaying notifications using a computer system in accordance with some embodiments. Method **1000** is performed at a computer system (e.g., **100**, **300**, **500**, **634**, **674**, **700**, **701**, **850**) in communication with a display generation component. Some operations in method **1000** are, optionally, combined, the orders of some operations are, optionally, changed, and some operations are, optionally, omitted.

As described below, method **1000** provides an intuitive way for displaying notifications. The method reduces the

74

cognitive burden on a user for view notifications, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to access notifications faster and more efficiently conserves power and increases the time between battery charges.

The computer system receives (**1002**) first data corresponding to first media.

The computer system displays (**1004**) (e.g., in response to receiving the first data), via the display generation component, until an end of a first time period (e.g., a predetermined first time period), a first notification (e.g., **906a**, **908a**, **910**) with an indication of the first media (e.g., **904b**, **904c**) (e.g., a notification corresponding to the first data) (e.g., a notification selectable to initiate a process to play the first media).

The computer system, after receiving the first data (e.g., after the start of display of the first notification), receives (**1006**) second data corresponding to second media, wherein the second media (e.g., **932** in **9J**) is different from the first media (e.g., **932** in **9K**).

The computer system, in accordance with a determination that the second media meets a set of one or more criteria (and, in some embodiments, the one or more criteria includes a criterion that is met when the second media is directed to the same target group as the first media) and in accordance with a determination based on (1) a time that the second data was received and (2) a time that the first data was received (e.g., a determination that the second data was received within a predefined amount of time after the first data was received), displays (**1008**) (e.g., in response to receiving the second data), via the display generation component, until an end of a second time period. In some embodiments, the second time period is based on receipt of the second data. In some embodiments, the second time period is not based on receipt of the first data. In some embodiments, the second time period is a predetermined second time period, a second notification (e.g., **906b**, **908b**, **908c**) with an indication (e.g., indication in **906b** (e.g., "John"), **908b** (e.g., "2")) of the first media (e.g., **932** in **9K**) (e.g., a notification corresponding to at least the first data) (e.g., a notification selectable to initiate a process to play at least the first media) (e.g., a notification indicating receipt of at least the first data), where an end of the first time period is different from an end of the second time period. In some embodiments, the second notification is the first notification. In some embodiments, the second notification is different from the first notification (e.g., the second notification is a notification combining (1) information corresponding to the first media and (2) information corresponding to the second media). In some embodiments, the second notification is displayed (e.g., initially displayed) after the first time period. In some embodiments, when receipt of the second media is within a predetermined time of receipt of the first media, a length of time is extended for which information corresponding to the first media is displayed. In some embodiments, the second time period is determined based on a difference between the when the first data was received and when the second data was received. In some embodiments, the media (e.g., first media, second media) is an audio message that was recorded at another device and transmitted to a group of devices, including the computer system receiving the first data and the second data. In some embodiments, the set of one or more criteria includes a criterion that is met when the second media is received prior to an end of a display period (e.g., a duration during which the notification is valid, a duration during which the notification will be displayed in a collection of notifications) of the first media. In some embodiments, the set of one or more criteria

includes a criterion that is met when the second media is received prior ceasing to display the first notification (e.g., via activation of the first notification, via receiving user input clearing the first notification). Dynamically displaying a second notification that includes an indication that is included in a first notification that was related to the second notification when certain criteria are met provides the user with feedback about the relationship between the second notification and the first notification while also allowing the indication that is included in the first notification to continue to be displayed even if the first notification has ceased to be displayed. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the first notification (e.g., **906a**) is being displayed at the time the second data is received (e.g., in accordance with the determination that the second media meets the set of one or more criteria). In some embodiments, as a part of displaying the second notification (e.g., **906b**), the computer system ceases to display the first notification (e.g., in FIG. 9E). In some embodiments, in accordance with the determination that the second media meets the set of one or more criteria (and, in some embodiments, the one or more criteria includes a criterion that is met when the second media is directed to the same target group as the first media) and in accordance with a determination that the second data was received within a predefined amount of time after the first data was received, ceasing to display the first notification. Ceasing to display the first notification when a second notification includes information concerning the first notification provides the user with feedback about the information in the first notification without cluttering the user interface. Providing improved visual feedback to the user enhances the operability of the device and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the first media is a first audio message (e.g., **932** in **9K**) (e.g., an audio message recorded (using a microphone) at an external device and transmitted by the external device to a group of devices, an audio message that was directed to (e.g., transmitted to) a plurality of external devices that includes the computer system). In some embodiments, the second audio message is a second audio message that was directed (or transmitted) to a second plurality of external devices (e.g., same as the plurality of external devices, different from the plurality of external devices). Displaying a notification that is associated with audio messages that have been multicast provides the user with visual feedback concerning the type of notification, which cause the user to identify that the notification will decay and needs to be responded to in a predetermined period of time. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves

battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the first notification (e.g., **904**) includes an indication (e.g., **904d**) of a group of a plurality of external devices to which the first media (e.g., **932** in **9K**) was directed (e.g., to which the first data corresponding to the media was transmitted). In some embodiments, the first data identifies the group of the plurality of external devices to which the first media was directed. In some embodiments, the plurality of external devices includes the computer system. Displaying a notification that includes an indication of the group of devices in which the first media is directed provides the user with feedback about the devices that sent and/or will receive a replay message. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, in response to receiving the first data, the computer system adds the first notification (e.g., **906a**) to a collection of notifications (e.g., notifications displayed in FIGS. 9B-9H) (e.g., a collection of notifications which are accessible for display, which are displayed in response to user input requesting to display the collection of notifications, a listing of recent notifications) until an end of the first time period (e.g., a predetermined first time period). In some embodiments, in accordance with reaching the end of the first time period, the computer system removes the first notification (e.g., **904**) from the collection of notifications. In some embodiments, in accordance with receiving, prior to the end of the first time period, the second data that corresponds to the second media and in accordance with a determination that the second media meets the set of one or more criteria, the computer system removes the first notification (e.g., **906a**) from the collection of notifications; and adds the second notification (e.g., **906b**) to the collection of notifications. In some embodiments, in accordance with receiving, prior to the end of the first predetermined time period, data that corresponds to media and in accordance with a determination that the second media does not meet the set of one or more criteria: adding the second notification to the collection of notifications without removing the first notification from the collection of notifications. In some embodiments, the computer system removes the first notification from the collection of notifications in accordance with the end-of-display condition being met for the first notification. Choosing to remove a notification when no additional data (e.g., no updates or no new media) that is related to the notification has been received within a certain period of time allows the device to avoid providing stale notifications (e.g., old, non-relevant) to the user that would clutter the UI, without requiring the user to manually delete the notifications. Performing an optimized operation when a set of conditions has been met without requiring further user input enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the first data identifies a target group of a plurality of external devices to which the first

media was directed (e.g., transmitted to). In some embodiments, while displaying a notification (e.g., **906a**, **908a**, **910**) (e.g., the first notification) corresponding to the first media (e.g., and which, when the notification is activated, initiates a process for playing the first media (e.g., first audio message)), the computer system receives (**1010**) third data corresponding to third media. In some embodiments, in response to (**1012**) receiving the third data corresponding to the third media and in accordance with a determination that the third media meets the set of one or more criteria (wherein, in some embodiments, the one or more criteria includes a criterion that is met when the media is directed to the same target group of devices as the first media), the computer system extends (**1014**) the duration during which the notification (e.g., the first notification, the second notification) corresponding to the first media (e.g., and which, when the notification is activated, initiates a process for playing the first media (e.g., first audio message)) is displayed (e.g., **906b** in FIG. 9F). In some embodiments, in response to (**1012**) receiving the third data corresponding to the third media and in accordance with a determination that the third media does not meet the set of one or more criteria (e.g., the third media is directed to a different set of target devices as compared to the first media), the computer system forgoes (**1016**) extending the duration during which the notification corresponding to the first media is displayed (e.g., **908a**, **910** in FIG. 9F). In some embodiments, as the computer system receives additional data that corresponds to media that meet the set of one or more criteria, the device continues to extend the duration during which notifications are displayed via the display generation component as long as the immediately previous notification that was displayed in response to the media meeting the set of one or more criteria has not yet ceased to be displayed based on reaching the end of a time period. Thus, as audio messages are received directed to the same set of target devices (e.g., external devices), the notification for that chain of audio messages continues to be displayed as long as the most recently received audio message does not reach the corresponding predetermined time period for display. Choosing to whether to extend a decay period for a notification based on whether updated information related to the notification has been received for a predetermined period of time allows the device to providing fresh (e.g., new, relevant) notifications to the user while avoiding the provision of stale notifications (e.g., old, non-relevant) to the user that would clutter the UI, without requiring the user to manually update/delete the notifications. Performing an optimized operation when a set of conditions has been met without requiring further user input enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, in accordance with the determination that the second media meets the set of one or more criteria, the second notification (e.g., that meets the set of one or more criteria) includes an indicator (e.g., a number) that is based on (e.g., that indicates) a number (e.g., in **908a** and **908b**) of media, including the first media, (e.g., the number of audio messages) represented by the second notification. In some embodiments, each subsequent notification after the first notification in a chain of notifications includes an indication of the number of media (e.g., number

of audio messages) represented by the notification being displayed. For example, if a notification is the 5th notification in the chain, the notification indicates that the notification corresponds to 5 received media (e.g., 5 audio messages). In some embodiments, in accordance with a determination that the second media does not meet the set of one or more criteria, the second notification (e.g., that meets the set of one or more criteria) does not include an indicator (e.g., a number) that is based on (e.g., that indicates) a number of media, including the first media, (e.g., the number of audio messages) represented by the second notification. Updating an indication of the number of media items (audio multicast message (e.g., an audio message that is multicast to one or more devices)) that has been received from a target group of devices provides the user with feedback about the current state the number of media items that have been received for the respected target group of devices. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the second notification includes the indication of the first media. In some embodiments, while displaying the second notification (e.g., **602b**), the computer system receives input (e.g., **950h**) directed to the second notification. In some embodiments, in response to receiving the input directed to the second notification (e.g., and in accordance with a determination that the second media meets the set of one or more criteria), the computer system initiates a process (e.g., **920**, **922** in FIGS. 9I-9J) for playing back the first media and the second media (e.g., displaying a user interface for playing back the first media and the second media, starting playback of the first media and, subsequently, the second media). In some embodiments, initiating a process for playing back the first and the second media includes automatically (e.g., in response to receiving the input directed to the second notification without intervening user input) playing back the first media and, subsequently, the second media and displaying a user interface (e.g., **741**) for playing back the first media. In some embodiments, in response to receiving the input directed to the second notification and in accordance with a determination that the second media does not meet the set of one or more criteria, as a part of initiating a process for playing back the second media without playing back the first media (e.g., displaying a user interface for playing back the second media and not the first media), the computer system starts playback of the second media and, not automatically subsequently playing back the first media. In some embodiments, in accordance with a determination that the second media does not meet the set of one or more criteria and while displaying the first notification, the computer system receives input directed to the first notification, and in response to receiving input directed to the first notification, initiates a process for playing back the first media without playing back the second media.

In some embodiments, the second media meets the set of one or more criteria (e.g., the second media is directed to the same external devices as the first media). In some embodiments, while displaying the second notification (e.g., **908c**), the computer system receives input (e.g., **950i**) directed to the second notification. In some embodiments, in response to receiving the input directed to the second notification

(e.g., and in accordance with a determination that the second media meets the set of one or more criteria), the computer system displays a user interface (e.g., **960**) for playing back the first media (e.g., as part of initiating a process for playing back the first media and the second media), wherein the user interface for playing back the first media includes a record user interface object (e.g., a selectable record button). In some embodiments, selection (e.g., **950p**) of the record (e.g., **736**) user interface object causes, in accordance with a determination that the first data identifies a first group (e.g., bedroom devices) of a plurality of external devices to which the first media was directed (e.g., transmitted), the computer system to initiate a process (e.g., **730**, **740**, **750**) for transmitting an audio message to the first group of plurality of external devices (e.g., and not the second group). In some embodiments, selection (e.g., **950p**) of the record (e.g., **736**) user interface object causes, in accordance with a determination that the first data identifies a second group (e.g., home devices) of a plurality of external devices to which the first media was directed (e.g., transmitted), different from the first group, the computer system to initiate a process (e.g., **780a**, **784**, **786a**) for transmitting an audio message to the second group of plurality of external devices (e.g., and not the first group). In some embodiments, the computer system detects selection of (e.g., tap on, press and hold on) the record user interface object, and in response to detecting selection of the record user interface object initiates the corresponding operation, as noted above. In some embodiments, the set of external devices is associated with a top-level location (or destination) (e.g., a location of a first type) (e.g., a home location, business, an office (e.g., a location that is a top-level location (e.g., a location that defines one or more locations (e.g., sub-locations) and/or one or more regions (or zones) that are within an area and/or perimeter that is defined by the location of the top-level location, a location that is at the top level of a hierarchy of locations, a location that is linked (e.g., programmatically) to one or more locations (e.g., sub-locations) and/or one or more regions (or zones))). In some embodiments, initiating a process for transmitting an audio message includes recording an audio message by recording audio detected by the computer system. In some embodiments, the user interface for playing back the first media includes an indication (e.g., textual indication, graphical indication) of the group (e.g., a top-level location, sub-location) (e.g., text specifying the name of the room or zone that the audio message will be transmitted to).

In some embodiments, while displaying a user interface (e.g., **960**) for playing back the first media (e.g., as part of initiating a process for playing back the first media and the second media), the computer system receives user input (e.g., **950i**, **950m2**, **950n**) (e.g., via one or more input devices, using a touch-sensitive surface). In some embodiments, in response to receiving the user input and in accordance with a determination that the user input (e.g., **950i**) is directed to selection of a play user interface object (e.g., a tap on a play button displayed as part of the user interface for playing back the first media), the computer system plays back the first media (and, optionally, automatically subsequently playing back the second media and switching to the user interface for playing back the second media). In some embodiments, in response to receiving the user input and in accordance with a determination that the user input is a swipe gesture (e.g., **950m2**, **950n**) directed to the user interface for playing back the first media (e.g., a left swipe gesture on the user interface for playing back the first media), the computer system replaces display of the user

interface for playing back the first media with display of a user interface for playing back the second media (e.g., which includes a play button for playing the second media without playing the first media). In some embodiments, in response to receiving the user input and in accordance with a determination that the user input (e.g., **950i**) is directed to selection of a play user interface object (e.g., a tap on a play button displayed as part of the user interface for playing back the first media), the computer system plays back the second media (e.g., the most recently received media corresponding to the notification) and subsequently plays back the first media.

In some embodiments, while displaying a user interface (e.g., **720** of FIGS. **15B-15E**) for playing back the first media (e.g., as part of initiating a process for playing back the first media and the second media) and while playing back the first media, the computer system receives input. In some embodiments, in response to receiving the user input and in accordance with a determination that the user input is directed to a first location (e.g., location of **736** on user interface **720**) on the user interface for playing back the first media, computer system displays a user interface (e.g., **741**) for sending and recording new media (e.g., one or more audio multicast messages) (and, optionally, automatically starts to record audio for sending). In some embodiments, in response to receiving the user input and in accordance with a determination that the user input is directed to a second location (e.g., a location of **1534**) on the user interface for playing back the first media, the computer system replaces display of the user interface for playing back the first media (e.g., that corresponds to **1524a**) with display of a user interface for playing back the second media (e.g., that corresponds to **1524b**), wherein the second location on the user interface for playing back the first media is different from the first location on the user interface for playback the first media. In accordance with a determination that the user input is directed to the first location and is a tap input, the computer system automatically records audio (e.g., via one or more microphones) until a subsequent input is detected (e.g., a subsequent input that is detected in the same location (or near the first location) as the first location). In accordance with a determination that the user input is directed to the first location and is a press-and-hold gesture, the computer system automatically records audio (e.g., via one or more microphones) until the end of the user input is detected. In some embodiments, while displaying the second notification, the computer system receives input (e.g., **950h**) directed to the second notification. In some embodiments, in response to receiving the input directed to the second notification, the computer system ceases to display the second notification. In some embodiments, once the second notification is activated, the second notification is removed from a collection of notifications (e.g., that are user-accessible for display, that are displayed in response to user input requesting to display the collection of notifications, a listing of recent notifications received at the computer system). In some embodiments, the collection of notifications continues to include other notifications (e.g., email notifications, instant messaging notifications). Choosing to remove a notification when the notification has been interacted with allows the device to avoid providing stale notifications (e.g., old, non-relevant) to the user that would clutter the UI, without requiring the user to manually delete the notifications. Performing an optimized operation when a set of conditions has been met without requiring further user input enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the

81

user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the computer system displays a user interface for configuring whether to include the computer system in a group of plurality of external devices that receive data corresponding to media (e.g., device that receive audio messages directed to external devices of the home) directed to a location (e.g., a top-level location (a home), a sub-location (a room of the home), wherein the user interface for configuring whether to include the computer system in a group includes: a first option (e.g., **799c**) to (e.g., always) include the computer system in the group of plurality of external devices that receive data corresponding to media (e.g., device that receive audio messages directed to external devices of the home) directed to the location, regardless of a current physical location of the computer system (e.g., as determined by a location sensor of the computer system); and a second option (e.g., **799a**) to (e.g., never) not include the computer system in the group of plurality of external devices that receive data corresponding to media (e.g., device that receive audio messages directed to external devices of the home) directed to the location, regardless of the current physical location of the computer system (e.g., as determined by a location sensor of the computer system). In some embodiments, the user can configure the computer system to register/unregister to receive data corresponding to the media or to enable/disable display of notifications based on received data corresponding to the media.

In some embodiments, the computer system displays a user interface for configuring whether to include the computer system in a group of plurality of external devices that receive data corresponding to media (e.g., device that receive audio messages directed to external devices of the home) directed to a location (e.g., a top-level location (a home), a sub-location (a room of the home), wherein the user interface for configuring whether to include the computer system in a group includes a third option (e.g., **77b**) to include the computer system (e.g., **700**) in the group of plurality of external devices that receive data corresponding to media (e.g., device that receive audio messages directed to external devices of the home) directed to the location when the computer system (e.g., **700**) is currently at a physical location (e.g., within a geo-fenced perimeter of the home, within a particular room of the home, as determined by a location sensor of the computer system) corresponding to the location and not include the computer system (e.g., **700**) in the group of plurality of external devices that receive data corresponding to media (e.g., device that receive audio messages directed to external devices of the home) directed to the location when the computer system (e.g., **700**) is not currently at the physical location (e.g., within a geo-fenced perimeter of the home, within a particular room of the home, as determined by a location sensor of the computer system) corresponding to the location. In some embodiments, the user can provide input to configure the computer system to only receive data corresponding to media (and/or to only display notifications) directed to a group of devices of a location when the computer system is at that location (e.g., only get messages directed to the home when the computer system is in the home, only get messages directed to a room when the computer system is in that room).

Note that details of the processes described above with respect to method **1000** (e.g., FIG. **10**) are also applicable in

82

an analogous manner to the methods described below/above. For example, method **1000** optionally includes one or more of the characteristics of the various methods described above/below with reference to methods **800** and **1200**. For example, the computer systems can be the same systems. For another example, the audio message sent in method **800** can be the media received in method **1000**. For another example, the voice input transmitted in method **1200** can be the same as the media received in method **1000**. For brevity, these details are not repeated below.

FIGS. **11A-11R** illustrate electronic devices and exemplary user interfaces for managing visual displays. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. **12**.

FIGS. **11A-11R** illustrate scenarios where device **1100** displays a visual indication with visual content of a first type (e.g., single-colored lights) when device **1100** determines that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message and where device **1100** displays a visual indication with visual content of a second type (e.g., multi-colored lights) when device **1100** cannot determine that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message (e.g., determines that no portion of the voice input should be transmitted to one or more external devices as an audio multicast message). The first and second types of visual content are described below for exemplary purposes only. The first and second types of visual content are different to provide a visual indication to the user of whether uttered voice input will be potentially multicast to one or more external devices.

FIG. **11A** illustrates electronic device **1100** in a position on a table that is located in front of a person. Device **1100** is a smart speaker and includes one or more features of device **580**. For example, device **1100** includes one or more displays **1102** that includes one or more components of one or more displays **580E**. Displays **1102** include a plurality of LEDs. In some embodiments, device **1100** includes one or more features of device **100**, **300**, or **500**. In FIG. **11A**, device **1100** is associated with home **602** and living room **602d** for exemplary purposes only. Thus, in FIG. **11A**, device **1100** is one of living room speakers **646** and **648**, as described above in relation to FIG. **6**. In some embodiments, device **1100** is associated with another room in home **602** (or another home).

As illustrated in FIG. **11A**, device **1100** is in an inactive state (e.g., a sleep state, a low power state, a state where device **1100** is not displaying, via displays **1102**, visual content), such that displays **1102** are not displaying visual content (e.g., a visual indication). In some embodiments, when device **1100** is not displaying visual content, the LEDs of displays **1102** are not lit.

FIGS. **11A-11L** illustrate device **1100** displaying visual content in response to receiving voice input that includes information that is to be multicast to one or more target group of devices. In some embodiments, one or more similar techniques described above in relation to device **700** receiving voice input FIGS. **7M-7N** and **7S-7Z** can be applied to device **1100** receiving voice input, as described below (or vice-versa).

FIGS. **11B-11F** illustrate device **1100** receiving voice input from the person standing in front of device **1100**. The voice input received by device **1100** in FIGS. **11B-11F** is "HEY ASSISTANT, MULTICAST, WHAT MUSIC DO YOU WANT TO PLAY IN THE LIVING ROOM?" The voice input received in FIGS. **11B-11F** can be received in a natural speaking way or another way. FIGS. **11B-11F** are

illustrated to provide an exemplary embodiment of how device 1100 may react to different portions of the voice input.

At FIG. 11B, device 1100 receives, via one or more microphones of device 1100, voice input portion 1150b from the person standing in front of device 1100. Here, the person has uttered the phrase, "HEY ASSISTANT."

As illustrated in FIG. 11B, in response to receiving voice input portion 1150b, device 1100 changes to be in an active state (e.g., an awake state, a powered state, a state where displays 1102 are displayed visual content), such that device 1100 displays, via displays 1102, visual content. In FIG. 11B, device 1100 displays visual content (e.g., a visual indication) (e.g., lights) that is multi-colored, which is represented by the different types of discs on displays 1102 (e.g., the black discs, white discs, and patterned discs of 1102 in FIG. 11B). At FIG. 11B, device 1100 displays visual content that is multi-colored because device 1100 has not determined that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message.

At FIG. 11C, device 1100 receives, via one or more microphones of device 1100, voice input portion 1150c from the person standing in front of device 1100. Here, the person has uttered the phrase, "MULTICAST."

As illustrated in FIG. 11C, in response to receiving voice input portion 1150c, device 1100 remains in the active state. In FIG. 11C, device 1100 displays visual content that is a single color (e.g., the black discs of 1102 in FIG. 11B without there being any other types of discs) because device 1100 has determined that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message. Here, device 1100 determines that the portion of the voice input should be transmitted (e.g., multicast) as an audio multicast message because device 1100 detected an instruction (e.g., "MULTICAST") phrase that indicates that the person is issuing a multicast command (e.g., a command to multicast an audio message).

At FIG. 11D, device 1100 receives, via one or more microphones of device 1100, voice input portion 1150d from the person standing in front of device 1100. Here, the person has uttered the phrase, "WHAT MUSIC."

As illustrated in FIG. 11D, in response to receiving voice input portion 1150d, device 1100 remains in the active state. In FIG. 11D, device 1100 continues to display visual content that is a single color based on the determination that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message (e.g., as described above in relation to FIG. 11C). In some embodiments, device 1100 determines that a portion of the voice input should be transmitted to one or more devices assigned to home 602 (e.g., for similar reasons as described above in relation to FIGS. 7M-7N). In some embodiments, device 1100 determines the one or more devices to transmit a portion of the voice input based on whether a portion of the voice input is assigned to a group of devices based on the voice input corresponds to a group identifier (e.g., "Home," "Living Room," "Entertainment Zone," "to Dining Room").

Notably, when compared to FIG. 11C, the pattern of the visual content displayed by device 1100 in FIG. 11D is different from the pattern of the visual content displayed by device 1100 in FIG. 11C. As illustrated in FIGS. 11C-11D, device 1100 displays, via displays 1102, different visual content that reacts to the voice of the person. In other words, because "MULTICAST" and "WHAT MUSIC" are different phrases, device 1100 changes the pattern of the visual content. In some embodiments, device 1100 changes the

pattern of the visual content based on the speed, sharpness, volume, pitch, tone, and/or rhythm (e.g., beat) of the portion of the voice content, such that portions of voice content that are different produce a different pattern of visual content. In some embodiments, device 1100 changes the color saturation, brightness, size, or position of the visual content based on the speed, sharpness, volume, pitch, tone, and/or rhythm (e.g., beat) of the portion of the voice content. In some embodiments, device 1100 does not change the pattern of the visual content and/or is not reactive to the voice of the person.

At FIG. 11E, device 1100 continues to receive, via one or more microphones of device 1100, voice input portion 1150e from the person standing in front of device 1100. Here, the person has uttered the phrase, "DO YOU WANT TO PLAY."

As illustrated in FIG. 11E, in response to receiving voice input portion 1150e, device 1100 remains in the active state. In FIG. 11E, device 1100 continues to display visual content that is a single color based on the determination that a portion of the voice input should be transmitted to one or more external devices. In addition, device 1100 changes the pattern of visual content because voice input portion 1150e is different from voice input portion 1150d.

At FIG. 11F, device 1100 continues to receive, via one or more microphones of device 1100, voice input portion 1150f from the person standing in front of device 1100. Here, the person has uttered the phrase, "IN THE LIVING ROOM?"

As illustrated in FIG. 11F, in response to receiving voice input portion 1150f, device 1100 remains in the active state. In FIG. 11F, device 1100 continues to display visual content that is a single color based on the determination that a portion of the voice input should be transmitted to one or more external devices. In addition, device 1100 changes the pattern of visual content because voice input portion 1150f is different from voice input portion 1150e.

At FIG. 11F, device 1100 detects an end of the voice input received in FIGS. 11B-11F. At FIG. 11F, in response to detecting the end of the voice input, device 1100 sends one or more portions of the voice input to one or more external devices as an audio multicast message. In some embodiments, the audio multicast message includes 1150c-1150d (e.g., "WHAT MUSIC DO YOU WANT TO PLAY IN THE LIVING ROOM?"). In some embodiments, the audio multicast message does not include voice input portions 1150b ("HEY, ASSISTANT") and/or 1150c ("MULTICAST") because of a determination that voice input portions 1150b and/or 1150c correspond to a command portion of the voice input. In some embodiments, when the input includes a portion that corresponds to a target group identifier (e.g., "Home" or "Living Room"), the target group identifier (not the portion of the voice input that corresponds to the target group identifier) is transmitted along with the audio multicast message (e.g., as plain text) but is not output as audio by the one or more external devices. In some embodiments, the audio multicast message that is output by the one or more external devices sounds like the person (is a recording that is played back of the person who uttered the voice input) and is not computer-generated speech via a device.

As illustrated in FIG. 11G, device 1100 provides (e.g., outputs) output 1154g, which indicates that a portion of the voice input has been sent to the target group identifier that corresponds to home 602 (e.g., "123 Main St." as described above in relation to home location identifier 712). When outputting output 1154g, device 1100 displays visual content that is a single color because of the determination that a portion of the voice input (e.g., received in FIGS. 11B-11F) should be transmitted to one or more external devices as an

85

audio multicast message. In some embodiments, device **1100** displays multi-colored visual content when outputting audio confirmation **1154g**, irrespective of this determination.

As illustrated in FIG. **11H**, device **1100** changes to an inactive state. At FIG. **11I**, device **1100** receives data corresponding to an audio multicast message from Jane, via one or more of the external devices assigned to home **602**.

As illustrated in FIG. **11I**, in response to receiving the audio multicast message (and without (independent of) receiving user input), device **1100** provides output **1154i**, which is an introductory tone or chime. As illustrated in FIG. **11J**, after providing output **1154i**, device **1100** provides output **1154j**, which corresponds to the audio multicast message that was received at FIG. **11I**.

As illustrated in FIGS. **11I-11J**, device **1100** displays visual content that is the single color when providing output **1150i** and output **1150j**. Device **1100** displays visual content that is a single color because device **1100** is outputting an audio multicast message. As illustrated in FIGS. **11I-11J**, device **1100** also displays visual content that is the same pattern. Thus, in FIGS. **11I-11J**, device **1100** does not change the visual content based on the different content of outputs **1150i** and output **1150j**. In some embodiments, device **1100** does change the visual content based on the different content of output **1150i** and output **1150j**. In some embodiments, device **1100** provides output **1154 1150i** and/or output **1150j** at the current volume level (e.g., system volume level) of the device **1100**. In some embodiments, one of output **1154i** and/or output **1150j** are provided at the volume level of device **1100** while the other one is not. In some embodiments, device **1100** receives multiple audio multicast messages within a period of time and outputs the same (or different) introductory tone before each of the audio multicast messages is played. In some embodiments, device **1100** receives multiple audio multicast messages within a period of time and outputs the same (or different) introductory tone before each group (e.g., grouped by target group of devices) of audio multicast messages that are played.

As illustrated in FIG. **11J**, the audio message provided by device **1100** says, "JANE REPLIED FROM HOME: HOW ABOUT JAZZ?" Here, the audio message provided by device **1100** includes a target identifier; in some embodiments, it does not.

At FIG. **11K**, device **1100** receives, via one or more microphones of device **1100**, voice input portion **1150k** from the person standing in front of device **1100**. Here, the person has uttered the phrase, "HEY ASSISTANT, REPLY, YOU GOT IT."

As illustrated in FIG. **11K**, device **1100** displays visual content that is a single color (e.g., the black discs of **1102** in FIG. **11K**) because device **1100** has determined that a portion of voice input portion **1150k** should be transmitted to one or more external devices as an audio multicast message. In some embodiments, device **1100** makes this determination because voice input portion **1150k** was received within a predetermined time (e.g., 1, 2, 30, 60 seconds) after device **1100** provided output **1150j** (e.g., audio multicast message received in FIG. **11J**). In some embodiments, device **1100** makes this determination because voice input portion **1150k** includes the phrase, "Reply," and/or includes the phrase, "Reply," within a second predetermined amount of time after device **1100** provided output **1150j**. In some embodiments, the second predetermined period of time is greater than the first predetermined period of time.

As illustrated in FIG. **11L**, device **1100** changes to an inactive state.

86

FIGS. **11M-11R** illustrate device **1100** displaying visual content in response to receiving voice input that does not include information that is to be multicast to one or more target group of devices.

FIGS. **11M-11O** illustrated device **1100** receiving voice input from the person standing in front of device **1100**. The voice input received by device **1100** in FIGS. **11M-11O** is "HEY ASSISTANT, PLAY JAZZ MUSIC IN THE LIVING ROOM." The voice input received in FIGS. **11M-11O** can be received in a natural speaking way or another way. FIGS. **11M-11O** are illustrated to provide an exemplary embodiment of how device **1100** may react to different portions of the voice input.

At FIG. **11M**, device **1100** receives, via one or more microphones of device **1100**, voice input portion **1150m** from the person standing in front of device **1100**. Here, the person has uttered the phrase, "HEY ASSISTANT." As illustrated in FIG. **11M**, in response to receiving voice input portion **1150m**, device **1100** changes to an active state, using one or more techniques similar to those described above in FIG. **11B**. In addition, device **1100** displays visual content (e.g., lights) that is multi-colored because device **1100** has not determined that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message.

At FIG. **11N**, device **1100** receives, via one or more microphones of device **1100**, voice input portion **1150n** from the person standing in front of device **1100**. Here, the person has uttered the phrase, "PLAY JAZZ MUSIC." As illustrated in FIG. **11N**, in response to receiving voice input portion **1150n**, device **1100** displays visual content (e.g., lights) that is multi-colored because device **1100** has not determined that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message.

At FIG. **11O**, device **1100** receives, via one or more microphones of device **1100**, voice input portion **1150o** from the person standing in front of device **1100**. Here, the person has uttered the phrase, "IN THE LIVING ROOM." As illustrated in FIG. **11O**, in response to receiving voice input portion **1150o**, device **1100** displays visual content (e.g., lights) that is multi-colored because device **1100** has not determined that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message.

In FIGS. **11M-11O**, device **1100** the visual content is not reactive to the voice input. In some embodiments, device **1100** does not change the pattern of the visual content when device **1100** has not determined that a portion of the voice input should be transmitted to one or more external devices as an audio multicast message. In some embodiments, device **1100** changes the pattern of the visual content to be reactive to different voice input portions, irrespective of this determination.

As illustrated in FIG. **11P**, device **1100** provides (e.g., outputs) output **1154p**, which indicates that device **1100** is now playing jazz radio. When providing output **1154g**, device **1100** displays visual content (e.g., visual indication) that is multi-colored because of the determination that a portion of the voice input (e.g., received in FIGS. **11M-11O**) should not be transmitted to one or more external devices as an audio multicast message. At FIG. **11P**, device **1100** also outputs jazz music.

As illustrated in FIG. **11Q**, while outputting jazz music, device **1100** changes to an inactive state.

As illustrated in FIG. **11R**, device **1100** receives, via one or more microphones of device **1100**, voice input portion **1150r** from the person standing in front of device **1100**.

Here, the person has uttered the phrase, "PAUSE." As illustrated in FIG. 11R, in response to receiving voice input portion 1150r, device 1100 displays visual content (e.g., lights) that is multi-colored because device 1100 has not determined that a portion of the voice input should be (e.g., has determined that no portion of the voice input should be) transmitted to one or more external devices as an audio multicast message. At FIG. 11R, device 1100 also stops outputting the jazz music and pauses the media corresponding to the jazz music, in response to receiving the "PAUSE" instruction.

FIG. 12 is a flow diagram illustrating a method for displaying visual indications using an electronic device in accordance with some embodiments. Method 1200 is performed at a device (e.g., 100, 300, 500, 634, 674, 700, 701, 850) having one or more microphones, one or more speakers, and one or more display devices. Some operations in method 1200 are, optionally, combined, the orders of some operations are, optionally, changed, and some operations are, optionally, omitted.

As described below, method 1200 provides an intuitive way for displaying visual indications. The method reduces the cognitive burden on a user for determining a type of command given to a device, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to recognize the type of command faster and more efficiently conserves power and increases the time between battery charges.

The electronic device receives (1202) voice input (e.g., 1150a-1150r) via the one or more microphones.

The electronic device displays (1204) a visual indication (e.g., lights displayed via 1102) of the voice input, where: in accordance with a determination that a portion of the voice input (e.g., 1150b-1150f, 1150r) corresponds to voice input that is to be transmitted to one or more devices (e.g., and/or transmitted (e.g., multicast) to a plurality of devices) (e.g., and, in some embodiments, another portion (e.g., a portion of the voice input that is not transmitted) of the voice input corresponds to a first type of command (e.g., command that initiates a process for transmitting at least some of the voice input to a plurality of external devices (e.g., personal device (e.g., cellular phone), external accessory devices (e.g., smart home accessory device (e.g., a smart (e.g., intelligent) light bulbs, thermostat, door lock, door opener (e.g., garage door opener), speaker, television, electric outlet, power strip, camera, appliance (e.g., a refrigerator, stove))))), displays (1206), via the one or more display devices, the visual indication (e.g., 1102 in 11B-11F, 11K) includes displaying the visual indication with a first set of one or more colors; and in accordance with a determination that the voice input (e.g., 1150m-1150o, 1150r) does not include an instruction to transmit (e.g., an instruction to multicast) any portion of the voice input to other devices (e.g., to output a part of the voice input, such as by speakers of the other devices (e.g., a plurality of other devices)) (e.g., another portion of the voice input is a second type of command), displays (1210), via the one or more display devices, the visual indication (e.g., 1102 in FIGS. 11M-11O, 11R) includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors. In some embodiments, the first type of command is a command that initiates a process for transmitting at least some of the voice input (e.g., the portion of the voice input that is to be transmitted) to a plurality of external devices. In some embodiments, transmitting at least some of the voice input to the plurality of devices causes two or more of the plurality of external devices to output (e.g., automatically (e.g.,

without intervening user input) output) some of the voice input. In some embodiments, the plurality of external devices includes different types (e.g., a personal device, an external accessory device) of external electronic device. In some embodiments, the plurality of devices are associated with a first group that is associated with a top-level location (or destination) (e.g., a location of a first type) (e.g., a home location, business, an office (e.g., a location that is a top-level location (e.g., a location that defines one or more locations (e.g., sub-locations) and/or one or more regions (or zones) that are within an area and/or perimeter that is defined by the location of the top-level location, a location that is at the top level of a hierarchy of locations, a location that is linked (e.g., programmatically) to one or more locations (e.g., sub-locations) and/or one or more regions (or zones))))). In some embodiments, the first group of devices can include a plurality of subgroups of devices. In some embodiments, a sub-group of devices is associated with a sub-location (e.g., a room positioned (e.g., in the boundary, area, or perimeter of the top-level location; and/or defined, identified, and/or linked (e.g., programmatically linked) (e.g., by a user) to the top-level location) in a top-level location and/or a zone (e.g., a location that is defined by two or more sub-locations within (e.g., within the boundary, area, or perimeter of the top-level location and/or defined, identified, and/or linked (e.g., by a user)) the top-level location (e.g., an entertainment zone that includes a living room and a dining room within the top-level location, a personal zone that includes two or more bedrooms, living rooms, bathrooms within the top-level location) in the top-level location). In some embodiments, the first user interface is a control user interface. In some embodiments, the plurality of devices is associated with a plurality of subgroups of devices. In some embodiments, the visual indication continues to be displayed while receiving voice input via the one or more microphones. In some embodiments, the visual indication ceases to display after initially being displayed while receiving voice input via the one or more microphones. In some embodiments, the second type of command is not a command that initiates a process for transmitting at least some of the voice input to a plurality of external device (e.g., speakers, personal device (e.g., cellular phone). In some embodiments, the visual indication continues to be displayed while receiving voice input via the one or more microphones. In some embodiments, the visual indication ceases to display after initially being displayed while receiving voice input via the one or more microphones. Displaying a visual indication with a first set of colors when it is determined that a portion of the voice input is to be transmitted to one or more devices provides the user with feedback regarding whether a portion of the voice input will be played back at external electronic devices, such that a user can be aware that their utterances can be potentially heard by other people. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently. Displaying a visual indication with a second set of one or more colors (e.g., that is different from the first set of one or more colors) when it is determined that the user's voice input does not include an instruction to transmit any portion of the voice input to other devices provides the user with reassurances that the user's utterances will not be heard by individuals at other external devices. Providing

improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, voice input (e.g., **1150m-1150o**) requesting for the electronic device to retrieve information (e.g., retrieve information, such as the weather, answers to one or more queries) or change one or more states (e.g., change one or more of an audio state (e.g., answering/placing a phone call, adjusting a volume), a state of media playback (e.g., pausing, playing, fast-forwarding, rewinding, skipping, shuffling media), an on/off state) of the electronic device is the voice input that does not include an instruction to transmit any portion of the voice input to other devices.

In some embodiments, the voice input that corresponds (e.g., **1150b-1150f**, **1150k**) to voice input that is to be transmitted to the one or more devices includes (**1208**) an identifier (e.g., a location, a sub-location, a location that corresponds to a group (“home”) or category (e.g., “dining room,” “living room,” “sunroom” within the group) for a group of devices. In some embodiments, the voice input includes the identifier for the group of devices and an audio message that will be transmitted to the group of devices. In some embodiments, the voice input (e.g., **1150m-1150o**, **1150r**) that does not include an instruction to transmit any portion of the voice input to other devices does not include (**1212**) the identifier for the group of devices. In some embodiments, the voice input does not include an identifier for a group of devices and an audio message is not transmitted to the group of devices.

In some embodiments, the first set of one or more colors (e.g., **1102** in FIGS. **11C-11F**) is a solid color and the second set of one or more colors (e.g., **1102** in FIGS. **11M-11O**) is a plurality of colors. In some embodiments, the solid color is not included in the plurality of colors. Applying different visual effects to the electronic device when different prescribed conditions are met allows the user to quickly recognize whether their utterances will be transmitted and played back by external electronic devices. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, as a part of displaying the visual indication (e.g., **1102** in FIGS. **11C-11F**) with the first set of one or more colors, the electronic device displays an animation (e.g., **1102** in FIGS. **11C-11F**) (e.g., of a pattern (e.g., a spatial pattern) of lights) that changes (e.g., in size, brightness, saturation, and/or position) over a period of time (e.g., 1, 5, 10 seconds) (e.g., based on the amount of time that the voice input is received) based on the voice input (e.g., based on a variation in a value for an input parameter (such as a volume, tone, and/or pitch) of the voice input).

In some embodiments, as a part of displaying the animation (e.g., **1102** in FIGS. **11C-11F**), the electronic device changes (e.g., increasing or decreasing) one or more of the brightness, size, color saturation, or position of the visual indication (e.g., **1102** in FIGS. **11C-11F**) based on one or more of a volume or pitch of the voice input. In some embodiments, as the volume and/or pitch of the voice input

increases/decreases the one or more of the brightness, size, color saturation of the visual indication. In some embodiments, as the rhythm (e.g., or beat) of the voice input increases/decreases the rhythm (or beat) of the animation increases/decreases. In some embodiments, as the volume and/or pitch of the voice input increases/decreases the visual indication takes up more/less of the area of the display device. Updating the visual characteristics (e.g., brightness, size, color saturation, or position) of the visual indication to reflect a change in the user’s voice input (e.g., change in volume or pitch of voice input) provides the user with visual feedback regarding various characteristics of the user’s voice input. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the electronic receives data corresponding to a plurality of audio messages for playback. In some embodiments, the data corresponding to the plurality of audio messages for playback includes an identifier (e.g., a location that corresponds to a group (“home”) or category (e.g., “dining room,” “living room,” “sunroom” within the group) for a group of devices. In some embodiments, the plurality of audio messages are for a plurality of identifiers, where each identifier corresponds to a different group or category. In some embodiments, in response to receiving the data corresponding to the plurality of audio message for playback, the electronic device outputs an introductory tone (e.g., **1154i**) (e.g., a dinging or ringing sound, the introductory tone or chime for all audio messages) before (e.g., and before outputting an identifier for the group of devices) outputting each respective audio message of the plurality of audio messages. In some embodiments, the identifier is output before a group of audio messages that corresponds to the identifier (e.g., that identifies a target group of devices) are output. Outputting same introductory tone before outputting different audio messages that have been multicast alerts recipients that the audio message is a multicast type of audio message. Providing improved audio feedback enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the electronic device receives data corresponding to an audio message (e.g., an audio multicast message) for playback. In some embodiments, the data corresponding to the audio message for playback includes an identifier (e.g., a location that corresponds to a group (“home”) or category (e.g., “dining room,” “living room,” “sunroom” within the group) associated with a group of devices. In some embodiments, in response to receiving the data, the electronic device, automatically, without user input, outputs (e.g., **1154j**) (e.g., via a speaker of the electronic device) the audio message. In some embodiments, outputting the audio message includes outputting an identifier (e.g., a location that corresponds to a group (“home”) or category (e.g., “dining room,” “living room,” “sunroom” within the group) for a group of devices.

In some embodiments, before outputting the audio message, displaying a second visual indication (e.g., **1102** in **11I**)

in response to receiving the data. In some embodiments, the second visual indication has a first visual appearance (e.g., color, size, brightness) when the audio message is an audio message transmitted to multiple devices (e.g., a group of devices). In some embodiments, the second visual indication

has a second visual appearance that is different from the first visual appearance when the audio message is an audio message transmitted to the electronic device and not to other devices. In some embodiments, the electronic device receives data corresponding to an audio message (e.g., an audio multicast message) for playback. In some embodiments, the data corresponding to the audio message for playback includes an identifier (e.g., a location that corresponds to a group (“home”) or category (e.g., “dining room,” “living room,” “sunroom”) within the group) associated with a group of devices. In some embodiments, outputs the audio message (e.g., automatically, in response to a user request). In some embodiments, while outputting the audio message, the electronic device concurrently displays a visual indication (e.g., **1102** in FIG. **11J**) that does not change based on one or more characteristics (e.g., volume, pitch, tone, rhythm (e.g., beat)) of the audio message.

In some embodiments, the audio message is output (e.g., **1154**) based on the volume level (e.g., a system-level audio level) (e.g., a current volume level) of the electronic device. In some embodiments, the electronic device is not displaying visual content (e.g., **1102** in FIG. **11A**) (e.g., any lights (e.g., no LEDs are turned on)) before the visual indication (e.g., **1102** in FIGS. **11B-11F**) is displayed. In some embodiments, the electronic device is in an inactive display state (e.g., LEDs are not lit) before the visual indication is displayed. In some embodiments, while displaying the visual indication, the electronic device is in an active display state (e.g., some LEDs are lit). Not displaying visual content when no voice input is being received provides the user with visual feedback that no voice input is being received and that any utterances by the user are not being transmitted and played back by other external devices. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the electronic device ceases (**1214**) to display the visual indication (e.g., **1102** in FIGS. **11G**), including ceasing to display visual content (e.g., **1102** in FIG. **11H**) via the one or more display devices. In some embodiments, the electronic device is in an inactive display state after ceasing to display the visual content. Not displaying visual content when no voice input is being received provides the user with visual feedback that no voice input is being received and extends the battery life of the device because the device is in an inactive state. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the visual indication (e.g., **1102** in FIG. **11G**) is not displayed concurrently with another visual indication (e.g., a visual indication that corresponds to a status or a process that is different from the status or process

that the visual indication corresponds to (e.g., a multicast process or a process for sending/receiving audio multicast messages)) (e.g., or other visual content). Providing only one visual indication at a time provides the user with clarity regarding the status of the electronic device and whether the user’s utterances are being transmitted and played back by other external devices. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the visual indication (e.g., **1102** in FIG. **11G**) is a light (e.g., LEDs of **1102**) indication that provides different lights based on a status (e.g., a status for a multicast process or a process for sending/receiving audio multicast messages, a process associated with a state of the electronic device, a process associated with a state of the electronic device) of one or more applications in communication with (e.g., executing on the electronic device or one or more external applications that send data to or receive data from the electronic device) the electronic device.

Note that details of the processes described above with respect to method **1200** (e.g., FIG. **12**) are also applicable in an analogous manner to the methods described above. For example, method **1200** optionally includes one or more of the characteristics of the various methods described above with reference to methods **800** and **1000**. For example, the computer systems can be the same systems. For another example, the audio message sent in method **800** can be the media received in method **1000**. For another example, the voice input transmitted in method **1200** can be the same as the media received in method **1000**. For brevity, these details are not repeated below.

FIGS. **13A-13N** illustrate exemplary electronic devices and user interfaces for managing external devices in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. **14**.

FIG. **13A** illustrates electronic device **700** displaying user interface **710**. In some embodiments, device **700** can be related to (e.g., in communication with or not in communication with one or more networks in relation to, positioned at a physical location relative to, interact with one or more devices assigned to, etc.) home **602** as described above (e.g., in FIGS. **7A-7AH**). User interface **710** is a user interface for controlling multiple external devices assigned to home **602**. User interface **710** includes home location identifier **712**, macro controls **716**, external device controls **718**, navigations controls **722**, home multicast instruction **724**, and home multicast affordance **726** (e.g., selectable user interface object), which have one or more characteristics and can be responded to in a manner as described above in relation to FIGS. **7A-7AH**.

User interface **710** also includes status indicators **1314**. Each of the status indicators includes information concerning the current status of some of the devices currently assigned to home **602** (e.g., some of which have been described above in relation to FIG. **6**). As illustrated in FIG. **13A**, status indicators **1314** include carbon monoxide status indicator **1314a**, alarm status indicator **1314b**, account error status indicator **1314c**, update available status indicator **1314d**, and a portion of timer status indicator **1314e** (respectively, from left-to-right). Carbon monoxide status indicator **1314a** indicates that one or more carbon monoxide detectors

or sensors have detected the presence of carbon monoxide in home 602 and, thus, the one or more carbon monoxide detectors or sensors are in a carbon monoxide detected state, e.g., alert “on” state, detecting a carbon monoxide leak. Alarm status indicator 1314b indicates that one or more alarms have been tripped that are related to home 602 and, thus, the one or more alarms are in an active, e.g., triggered or alerting, state. Account error status indicator 1314c indicates that device 700 is currently having issues with an account associated with home 602, such as device 700 not being currently logged into the account associated with home 602 or device 700 having issues connecting to one or more known external devices assigned to home 602. Update available status indicator 1314d indicates that updated software is available to be installed on one or more external devices and/or device 700 (e.g., software that contains one or more functions corresponding to the home application). Timer status indicator 1314e indicates that one or more timers are currently active. In addition, timer status indicator 1314e indicates that at least one timer (or an aggregate of the total time of multiple timers) is in a state where about 0% of the time has elapsed from the time that the timer (or multiple timers) was originally set. In particular, this state is represented by remaining time indication 1314e1, which covers approximately 100% of the perimeter of timer status indicator 1314e.

Each status indicator contains a name (e.g., “carbon monoxide”) associated with the status indicator (e.g., carbon monoxide status indicator 1314a) and can be displayed with at least one particular visual characteristic (e.g., a color (e.g., red, greyed-out, etc.), a pattern, a shape, etc.). In some embodiments, one or more of the status indicators include a representation of a number of devices of a certain type (e.g., carbon monoxide detector or sensor) that are in the state (e.g., active, alerting, or needing attention) that is represented by the status indicators. Each status indicator may also include a quick visual representation of the status indicator’s state.

In FIG. 13A, each status indicator is within (e.g., included, a part of, or belongs to) a particular status indicator category, and the status indicators are displayed in order based on the respective status indicator category to which each of the respective status indicators corresponds. In FIG. 13A, the particular status indicator category of a status indicator denotes the urgency (or importance) of the status indicator. Status indicators that are within one status indicator category can have one or more characteristics that are different from the one or more characteristics of status indicators that are within a different status indicator category. As illustrated in FIG. 13A, carbon monoxide status indicator 1314a and alarm status indicator 1314b are in a first status indicator category (e.g., a most urgent category, an alarm category) and are displayed with a first color (e.g., red, as indicated by the vertical hatching). In some embodiments, the first status indicator category indicates that the external devices associated with a particular status indicator should be addressed as soon as possible. Next, in FIG. 13A, account error status indicator 1314c and update available status indicator 1314d are in a second status indicator category (e.g., a second-most urgent category, a status indicator category that is less urgent than the first status indicator category, an action required category) and are displayed with a different color (e.g., as indicated by no hatching) from the color of the status indicators in the first category. In FIG. 13A, timer status indicator 1314e is in a third status indicator category (e.g., a third-most urgent category, a status indicator category that is less urgent than

the second status indicator category). Timer status indicator 1314e includes one or more dynamic components (e.g., remaining time indication 1314e1) that are relevant to the state of the timer that corresponds to timer status indicator 1314e. In some embodiments, the one or more dynamic components (e.g., remaining time indication 1314e1) are updated in real-time (e.g., as further explained below with reference to FIG. 13B). In some embodiments, status indicators that are in the first and/or second status indicator categories do not have one or more dynamic components that are relative to the particular state of the one or more external devices that correspond to the respective status indicator.

In some embodiments, when a determination is made that a new status indicator will need to be displayed, device 700 will display the new status indicator after (or before or among) the status indicators in the same status indicator category as the new status indicator. For example, when a determination is made that a new status indicator should be displayed and the new status indicator is in the second status indicator category, device 700 displays the new status indicator between update available status indicator 1314d and timer status indicator 1314e (e.g., instead of appending the new status indicator at the beginning and/or end of all of the displayed status indicators 1314). Thus, the new status indicator is displayed on device 700 at a position that is relevant to the urgency of the status indicator to allow the user to identify and/or interact with the new status indicator based on the new status indicator’s relevant urgency as compared to the relevant urgency of the other displayed status indicators. At FIG. 13A, device 700 detects gesture 1350a at a location that corresponds to status indicators 1314.

At FIG. 13B, device 700 determines that gesture 1350a is a leftward swipe gesture. As illustrated in FIG. 13B, because device 700 has determined that gesture 1350a is a swipe gesture, device 700 displays additional status indicators if there are more status indicators than can be displayed (e.g., within the same region as status indicators 1314) on device 700 at one time. In particular, device 700 moves status indicators 1314 that were previously displayed on FIG. 13A to the left (e.g., in the direction of gesture 1350a), such that carbon monoxide status indicator 1314a, alarm status indicator 1314b, and account error status indicator 1314c cease to be displayed, update available status indicator 1314d and timer status indicator 1314e have respectively replaced carbon monoxide status indicator 1314a and alarm status indicator 1314b, and climate status indicator 1314f, door lock status indicator 1314g, and a portion of light status indicator 1314h are newly displayed at FIG. 13B.

As illustrated in FIG. 13B, timer status indicator 1314e includes a dynamic component, remaining time indication 1314e1. When looking at FIG. 13A-13B, remaining time indication 1314e1 moves (e.g., not in response to user input but rather in response to time passing) from being around roughly 100% of the perimeter of timer status indicator 1314e in FIG. 13A to being around roughly 75% of the perimeter of timer status indicator 1314e in FIG. 13B since the timer starts at 13 minutes in FIG. 13A and runs until it has approximately 10 minutes left in FIG. 13B.

In FIG. 13B, climate status indicator 1314f is in the third status indicator category, which is the same status category that timer status indicator 1314e is in as discussed above in relation to FIG. 13A. Climate status indicator 1314f represents a status indicator that corresponds to the states of multiple different types (e.g., air quality sensors, temperature, humidity sensors) of external devices. Climate status

indicator **1314f** indicates that an average temperature detected by one or more climate control devices (or in which one or more climate control devices are set) is 68 degrees, the average humidity detected by one or more humidity sensors is 40%, and the average air quality detected by one or more air quality sensors is good. Moreover, status indicator **1314f** also indicates that the thermostat control is causing a heating system to be activated (e.g., a room is being heated by a device that the thermostat control is controlling), which is indicated by the upward point arrow on status indication **1314f**. In some embodiments, when status indicator **1314f** includes a downward pointing arrow, status indicator **1314f** indicates that the thermostat control is causing an air conditioning system to be activated (e.g., a room is being cooled by a device that the thermostat control is controlling). In some embodiments, when status indicator **1314f** includes a dash, status indicator **1314f** indicates that the thermostat control is not causing an air-conditioning system or a heating system to be activated (e.g., a room is detected being at the specified temperature to which the thermostat is set). At FIG. 13B, device **700** detects gesture **1350b** at a location that corresponds to status indicators **1314**.

At FIG. 13C, device **700** determines that gesture **1350b** is a leftward swipe gesture. As illustrated in FIG. 13C, because device **700** has determined that gesture **1350b** is a swipe gesture, device **700** displays additional status indicators. In particular, device **700** moves status indicators **1314** that were previously displayed on FIG. 13B to the left, such that update available status indicator **1314d**, timer status indicator **1314e**, and climate status indicator **1314f** cease to be displayed, door lock status indicator **1314g**, light status indicator **1314h** has slid to the left, and open window status indicator **1314i**, door sensor status indicator **1314j**, and motion sensor status indicator **1314k** are newly displayed at FIG. 13C. In embodiments where gesture **1350b** is determined to be a rightward swipe gesture, device **700** moves the status indicators to right to display one or more of the previously displayed status indicators (e.g., carbon monoxide status indicator **1314a**, alarm status indicator **1314b** displayed in FIG. 13A).

At FIG. 13C, door lock status indicator **1314g**, light status indicator **1314h**, and open window status indicator **1314i** are in a fourth status indicator category (e.g., a fourth-most urgent category, a status indicator category that is less urgent than the third status indicator category, a quick action status indicator category). Although, as described, the categories for certain status types are pre-defined, in some embodiments, the category for a specific type of status indicator can be specified via one or more user inputs. In some embodiments, device **700** displays one or more settings for a particular type of device (e.g., lights) and/or a particular type of status indicator that allow the user to set the status category of a status indicator related to the particular type of device and/or the particular type of status indicator (e.g., most important, second-most important, third-most urgent, etc.)

A status indicator in the fourth status indicator category indicates that a number of external devices of a certain type are in a certain state. For example, as illustrated in FIG. 13B, door lock status indicator **1314g** indicates that two door locks are in an unlocked state. As another example, in FIG. 13C, light status indicator **1314h** indicates that five lights are in an active (or on) state and open window status indicator **1314i** indicates that seven window blinds (e.g., coverings, shades) are in an open state. Notably, the status indicator in the fourth status indicator category excludes information

concerning devices of the same type that are in a different state. For example, the living room desk lamp assigned to home **602** is off (e.g., as indicated by living room desk lamp control **718g**). In FIG. 13C, light status indicator **1314h** does not include information concerning the living room desk lamp because the living room desk lamp is off (as explained in further detail below with respect to in FIGS. 13D-13F).

FIGS. 13C-13H illustrate different gestures detected by device **700** that are directed to a status indicator (e.g., a status indicator in the fourth status indicator category). In particular, FIGS. 13C-13H illustrate different gestures being directed to light status indicator **1314h**. However, similar techniques, as described herein, could be applied to gestures being directed to other status indicators, such as door lock status indicator **1314g** and open window status indicator **1314i**. At FIG. 13C, device **700** detects gesture **1350c** directed to (e.g., on, at a location corresponding to) light status indicator **1314h**.

At FIG. 13D, device **700** determines that gesture **1350c** is a press-and-hold gesture (e.g., a gesture that is detected for more than a predetermined period of time). As illustrated in FIG. 13D, because device **700** has determined that gesture **1350c** is a press-and-hold gesture, device **700** displays user interface **1340** (e.g., as opposed to displaying additional status indicator when it was determined that gesture **1350b** was a swipe gesture). As shown in FIG. 13D, user interface **1340** has replaced user interface **710** that was previously displayed in FIG. 13C.

As illustrated in FIG. 13D, user interface **1340** includes the external device controls **718** for the lights (e.g., lighting devices) that are assigned to home **602** because light status indicator **1314h** indicates a status of one or more lights assigned to home **602**. As illustrated in FIG. 13D, external device controls **718** displayed on user interface **1340** are ordered by a room or a portion of home **602** (e.g., "bedroom," "dining room," "living room," "porch") to which each respective external device control is assigned. For example, bedroom light control **718f** and bedroom night light control **718h** are assigned to the bedroom (e.g., **602c**) of home **602** and are under a "BEDROOM" heading on user interface **1340**, dining room light control **718i** is assigned to the dining room (e.g., **602b**) of home **602** and is under a "DINING ROOM" heading on user interface **1340**, living room lamp control **718b** and living room desk lamp control **718g** is assigned to the living room (e.g., **602d**) of home **602** and is under a "LIVING ROOM" heading on user interface **1340**, and porch light control **718j** is assigned to the porch of home **602** and is under a "PORCH" heading on user interface **1340**.

Notably, as illustrated in FIG. 13D, bedroom light control **718f**, bedroom night light control **718h**, dining room light control **718i**, living room lamp control **718b**, and porch light control **718j** each indicate that the respective devices (e.g., light bulbs) to which they correspond are on or activated. In other words, the devices corresponding to bedroom light control **718f**, bedroom night light control **718h**, dining room light control **718i**, living room lamp control **718b**, and porch light control **718j** are on and are indicative of one of the "five lights on" indication as shown by light status indicator **1314h** in FIG. 13C. Moreover, when looking at light status indicator **1314h**, there is no indication of a sixth light and/or the status of a sixth light, although six lights are shown on user interface **1340**. Even though only five lights are on or active and identified in the light status indicator **1314h**, the home may have more lights, e.g., lights that are inactive or off, to which the home is associated. In some implementations, user interface **1340** shows the detailed

status of all lights when displaying detailed statuses of lights. In FIG. 13D, the living room desk lamp is displayed with a different visual indication than the other lights (e.g., indicating living room desk lamp control **718g** is off). In some embodiments, user interface **1340** does not include living room desk lamp control **718g** at FIG. 13D because the living room desk lamp is not in the same state of the other light controls that are represented by light status indicator **1314h** in FIG. 13C. In some embodiments, when user interface **1340** does not include living room lamp control **718g** at FIG. 13D, device **700** can display living room lamp control **718g** on user interface **1340** in response to receiving an indication that the state of the living room desk lamp has changed to on (e.g., when someone has physically turned on the living room desk lamp) or the same state of the other light controls that are represented by light status indicator **1314h**. At FIG. 13D, device **700** detects tap gesture **1350d** directed to bedroom light control **718f**.

At FIG. 13E, in response to detecting tap gesture **1350d**, device **700** transmits an instruction that causes bedroom light **632** to change state (e.g., turn off) and updates the visual appearance of bedroom light control **718f**. As illustrated in FIG. 13E, bedroom light control **718f** indicates that the bedroom light (e.g., bedroom light **632**) corresponding to bedroom light control **718f** is off, e.g., in an inactive state, as opposed to being on, e.g., in an active state, as shown in FIG. 13D. Notably, the other light controls displayed on user interface **1340** have not changed at FIGS. 13D-13E. In response to detecting tap gesture **1350d**, device **700** sends an instruction that causes bedroom light **632** to change state without causing the other lights represented by the other light controls to change state. Thus, user interface **1340** allows a user to cause each device represented by each respective control to individually perform an action (e.g., change the state of the device) without causing the other devices to perform the action. At FIG. 13E, device **700** detects tap gesture **1350e** directed to done affordance **1342**.

As illustrated in FIG. 13F, in response to detecting tap gesture **1350e**, device **700** ceases to display user interface **1340** and re-displays user interface **710** that has status indicators **1314**. As illustrated in FIG. 13F, light status indicator **1314h** is updated to reflect that four lights are on in home **602** as opposed to five lights being on as indicated by light status indicator **1314h** in FIG. 13C. Thus, some status indicators are updated to indicate the number of devices that are currently in a particular state (e.g., whether a device has changed from that particular state or whether a device has changed to that particular state). Moreover, at FIG. 13F, bedroom light control **718f** has also changed on user interface **710** to reflect that the bedroom light is off while the other light controls (e.g., living room lamp control **718b** and living room desk lamp control **718g**) displayed on user interface **710** have not changed when compared to their respective appearances as illustrated on FIG. 13C. Therefore, the device controls displayed on user interface **710** are also updated in response to device **700** detecting gestures (e.g., gesture **1350d**) directed to device controls displayed via user interface **1340**. At FIG. 13F, device **700** detects gesture **1350f** directed to light status indicator **1314h**.

At FIG. 13G, device **700** determines that gesture **1350f** is a tap gesture (e.g., a gesture that is detected for less than a predetermined period of time, a gesture that is different from gestures **1350a-1350c**). At FIG. 13G, because device **700** has determined that gesture **1350f** is a tap gesture, device **700** transmits an instruction that causes the four lights indicated as on by light status indicator **1314h** in FIG. 13F to turn off (or change state). Thus, bedroom light light

control **718h**, dining room light control **718i**, living room lamp control **718b**, and porch light control **718j** are off in FIG. 13G. As illustrated in FIG. 13G, because device **700** has determined that gesture **1350f** is a tap gesture, device **700** changes the visual appearance of light status indicator **1314h** (e.g., shown by the newly introduced hatching in FIG. 13G as compared to no hatching in FIG. 13F) and updates light status indicator **1314h** to indicate that the four lights have been turned off. Notably, as illustrated in FIG. 13G, living room lamp control **718b** and living room desk lamp control **718g** are also changed to indicate that their respective corresponding devices have been turned off. Thus, at FIG. 13G, device **700** changes the state of multiple devices (e.g., devices assigned to different rooms) in response to a single gesture (e.g., a tap) on a status indicator, which is different from device **700** only changing the state of one device in response to the same type of gesture (e.g., a tap) on an external device control (e.g., as described above in relation to gesture **1350d** in FIG. 13D). Moreover, at FIG. 13G, device **700** causes the multiple devices to change state by performing the same action (e.g., turning lights on, locking door, close blinds) that is based on the type of device (e.g., lights, door locks, window blinds adjusters) indicated by the status indicator to which the tap gesture was directed. As illustrated in FIG. 13G, because gesture **1350f** in FIG. 13H is a tap gesture that was directed to light status indicator **1314h**, device **700** does not change the status of the other status indicators, does not transmit an instruction that causes other devices corresponding to the other status indicators to change state, and maintains the appearance of the other status indicators (e.g., when comparing FIGS. 13F-13G).

At FIG. 13H, device **700** determines that a predetermined period of time has passed since gesture **1350f** was detected without device **700** detecting another gesture directed to light status indicator **1314h**. As illustrated in FIG. 13H, because the determination is made that the predetermined period of time has passed since gesture **1350f** was detected, device **700** ceases to display light status indicator **1314h** and moves open window status indicator **1314i**, door sensor status indicator **1314j**, and motion sensor status indicator **1314k** to the left in order to fill the space previously occupied by light status indicator **1314h**. For example, open window status indicator **1314i** was adjacent to light status indicator **1314h** in FIG. 13G, and open window status indicator **1314i** occupies the location vacated by light status indicator **1314h** in FIG. 13H. Because some of the status indicators have shifted to the left, an additional status indicator, light sensor status indicator **1314k**, is newly displayed. Door sensor status indicator **1314j**, motion sensor status indicator **1314k** and light sensor status indicator **1314k** are in a fifth status indicator category (e.g., a fifth-most urgent category, a status indicator category that is less urgent than the fourth status indicator category, a sensor status indicator category). Door sensor status indicator **1314j** indicates that a door sensor assigned to home **602** has detected that a door is ajar. Motion sensor status indicator **1314k** indicates that motion has been detected by one or more motion sensors assigned to home **602**. Light sensor status indicator **1314i** indicates that one or more door sensors have detected that one or more doors that are assigned to home **602** are opened. In some embodiments, when a gesture directed to light status indicator **1314h** is detected before the predetermined period of time has elapsed, device **700** transmits an instruction that causes the four lights to change back to being in the on state and updates light status indicator **1314h** to indicate that the four lights are on (e.g., as shown in FIG. 13F). This ability to still view a status indicator for

a predetermined period of time after accessories associated with the status indicator have changed from an urgent or active state provides the user with the opportunity to easily undo a state change of accessories. In some embodiments, when the gesture directed to light status indicator **1314h** is detected before the predetermined period of time has elapsed, device **700** maintains display of light status indicator **1314h**, irrespective of the amount of time that passes before an additional gesture is received. In some of these embodiments, device **700** maintains display of light status indicator **1314h** because light status indicator **1314h** is indicating that one or more of the lights are back in the original state that the one or more lights were in when light status indicator **1314h** was first displayed on user interface **710** (e.g., in FIG. 13B). At FIG. 13H, device **700** detects tap gesture **1350h** on room navigation control **722b**.

As illustrated in FIG. 13I, in response to detecting tap gesture **1350h**, device **700** displays user interface **1360** of the home application and indicates that room navigation control **722b** is selected (e.g., as indicated by being bold). User interface **1360** is a user interface for controlling multiple external devices assigned to bedroom **602c**, as indicated by bedroom identifier **1368**. In some embodiments, device **700** can use one or more techniques as described above in relation to displaying user interface **760** of FIG. 7G in order to display user interface **1360** of FIG. 13I. In some embodiments, user interface **1360** can be alternatively displayed in response to detecting tap gesture **750/3** in FIG. 7F and/or user interface **760** can be alternatively displayed in response to detecting tap gesture **1350h** in FIG. 13H.

As illustrated in FIG. 13I, user interface **1360** includes a reduced set of status indicators than the status indicators that were displayed in FIGS. 13A-13C and 13F-13H. User interface **1360** includes a reduced set of status indicators because a determination is made that the respective status indicators displayed on user interface **1360** correspond to at least one device assigned to the bedroom **602**. In other words, when displaying user interface **1360** for controlling multiple external devices assigned to bedroom **602c**, device **700** ceases to display status indicators that do not correspond to at least one device that is assigned to bedroom **602c**.

As illustrated in FIG. 13I, the reduced set of status indicators include carbon monoxide status indicator **1314a**, climate status indicator **1314f**, and open window status indicator **1314i**. Notably, climate status indicator **1314f** of FIG. 13I indicates a temperature related to a thermostat that is assigned to the bedroom but does not indicate the humidity and/or air quality information that climate status indicator **1314f** of FIG. 13B indicated. Here, climate status indicator **1314f** of FIG. 13I does not indicate the humidity and/or air quality information because no humidity and air quality sensors are assigned to the bedroom. However, climate status indicator **1314f** of FIG. 13I indicates the temperature related to a thermostat control because at least one thermostat is assigned to the bedroom. Moreover, status indicator **1314f** of FIG. 13I also continues to indicate (e.g., when compared to **1314f** of FIG. 13B) that the thermostat control is causing a heating system to be activated (e.g., a room is being heated by a device that the thermostat control is controlling), which is indicated by the upward point arrow on status indication **1314f** of FIG. 13I. Thus, status indicators that correspond to multiple devices of the same type can cease to display information concerning one or more of the types of devices when navigating to user interfaces that correspond to different portions or rooms of home **602**. Moreover, open window status indicator **1314i** of FIG. 13I has changed to indicate that one window is opened as

opposed to indicating that seven windows are opened, as illustrated in FIG. 13H. Open window status indicator **1314i** of FIG. 13I has changed to indicate that one window is opened because only one bedroom window has a window blinds adjuster device that is assigned to bedroom **602c**. At FIG. 13I, device **700** detects press-and-hold gesture **1350i** that is directed to open window status indicator **1314i**.

As illustrated in FIG. 13J, in response to detecting press-and-hold gesture **1350i**, device **700** displays user interface **1370** that includes window blinds adjustable control **1318i**. At FIG. 13J, device **700** detects gesture **1350j** (a swipe down gesture) on window blinds adjustable control **1318i**. As illustrated in FIG. 13K, in response to detecting gesture **1350j**, device **700** transmits an instruction to a window blinds adjuster device assigned to bedroom **602b** that causes the windows blinds adjuster to change from being 100% (as indicated by indication **1372** of FIG. 13J) opened to being 58% opened (e.g., as indicated by indication **1372** of FIG. 13K).

Notably, at FIG. 13J, device **700** displays window blinds adjustable control **1318i**, where a selection of window blinds adjustable control **1318i** changes the state of a window blinds adjuster device to a state that is different from the state (e.g., "open," 100% open) indicated by window blinds adjustable control **1318i** and a state (e.g., "closed," 0% open) that is opposite of the state (e.g., "open") indicated by window blinds adjustable control **1318i**. Thus, selection of window blinds adjustable control **1318i** allows a user to change the window blinds adjuster device to a state that is different from the state in which a user can change the window blinds adjuster device by directing a tap gesture toward open window status indicator **1314i** in FIG. 13I. In some embodiments, device **700** displays a user interface similar to user interface **1340** of FIG. 13D when open window status indicator **1314i** of FIG. 13I indicates that more than the predetermined number of devices. Thus, when there are more than a predetermined number of devices indicated by window status indicator **1314i** of FIG. 13I, multiple controls are displayed that control multiple devices, and selection of one of the respective controls causes the device to change in the opposite state (e.g., on/off state, open/closed state, locked/unlocked state). In some embodiments, device **700** displays controls that allow a user to have more (or different) control over the one or more devices when there are less than a predetermined number of devices than when there are more than the predetermined number of devices indicated by a status indicator. In some embodiments, when there are less than a predetermined number of devices indicated by a status indicator and a tap-and-hold gesture is detected on the status indicator, device **700** displays more controls for controlling a particular device than the number of controls that are displayed for the particular device when more than the predetermined number of devices are indicated to be in a particular state by a status indicator.

FIGS. 13L-13N illustrate exemplary user interfaces that are displayed in response to detecting gestures directed to other status indicators. In some embodiments, the gesture directed to the other status indicators can be the same type of gesture as gesture **1350c** (e.g., press-and-hold gesture) or the same type of gesture as gesture **1350f** (e.g., a tap gesture) to display the respective user interfaces of FIGS. 13L-13N. Thus, in some embodiments, device **700** displays the respective user interface of FIGS. 13L-13N in response to detecting either type of gesture (e.g., a press-and-hold gesture or a tap gesture).

101

FIG. 13L illustrates device 700 displaying user interface 1382. User interface 1370 is displayed in response to device 700 detecting a gesture directed to carbon monoxide status indicator 1314a of FIG. 13A. As illustrated in FIG. 13L, user interface 1382 includes external device controls 718, where each external device control indicates the status of a carbon monoxide device assigned to home 602. As shown by user interface 1382, the bedroom carbon monoxide sensor is triggered (e.g., as indicated by bedroom carbon monoxide control 718k) and kitchen carbon monoxide sensor and living room carbon monoxide sensor are not triggered (as indicated by carbon monoxides controls 718l-718m). Thus, in response to device 700 detecting a gesture directed to a status indicator in a status indicator category other than the fourth status indicator category (e.g., carbon monoxide status indicator 1314a), device 700 displays the device controls of the particular type that corresponds to the status indicator of the respective category, where the device controls have one or more visual appearances that are indicative of a state that a device corresponding to a respective control is in. In some embodiments, user interface 1370 is displayed using similar techniques to those described above in relation to FIGS. 13D-13E.

FIG. 13M illustrates device 700 displaying user interface 1384. User interface 1384 is displayed in response to device 700 detecting a gesture directed to climate status indicator 1314f in FIG. 13B. As illustrated in FIG. 13L, user interface 1384 includes controls corresponding to multiple types of devices because climate status indicator 1314f indicates the status of multiple types of devices (e.g., as described above in relation to FIG. 13B). For example, in FIG. 13L, user interface 1384 includes controls for controlling thermostat devices (e.g., bedroom thermostat control 718n and living room thermostat control 718r), controls for controlling air quality sensors (e.g., kitchen air quality sensor control 718o and living room air quality sensor control 718r), and a control for controlling a humidity sensor (e.g., kitchen humidity sensor control 718p).

FIG. 13N illustrates device 700 displaying user interface 1386. User interface 1386 is displayed in response to device 700 detecting a gesture directed to motion sensor status indicator 1314k in FIG. 13H. As illustrated in 13N, user interface 1386 includes controls corresponding to motion sensors that are assigned to home 602. User interface 1386 is displayed using similar techniques to those described above in relation to FIGS. 13D-13E and 13L.

FIG. 14 is a flow diagram illustrating a method for managing external devices using a computer system in accordance with some embodiments. Method 1400 is performed at a computer system (e.g., 100, 300, 500, 634, 674, 700, 701, 850) in communication with a display generation component (e.g., a display) and one or more input devices (e.g., a touch-sensitive display screen). Some operations in method 1400 are, optionally, combined, the orders of some operations are, optionally, changed, and some operations are, optionally, omitted.

As described below, method 1400 provides an intuitive way for managing external devices. The method reduces the cognitive burden on a user for managing external devices, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to recognize device status faster and more efficiently conserves power and increases the time between battery charges.

The computer system displays (e.g., 1402), via the display generation component, a first status indicator (e.g., 1314g, 1314h, 1314i) (e.g., as a part of displaying a first user interface (e.g., a user interface for controlling a set of

102

accessory devices) that includes (e.g., includes displaying)) that indicates (e.g., a graphical representation and corresponding text (e.g., 2 light bulbs are on)) that a plurality of accessory devices of a first accessory type (e.g., light bulbs, windows, switches, outlets, locks (e.g., door locks, window locks), televisions) are in a first state (e.g., on, off, open, closed, locked, unlocked). The plurality of accessory devices of the first accessory type includes a first accessory device (1404) that is the first accessory type and is in the first state and a second accessory device (1406) that is the first accessory type and is in the first state, where the second accessory device is different from the first accessory device. In some embodiments, the first status indicator does not indicate that an accessory device of the first accessory type that is not in the first state (e.g., in a second state) (e.g., the first status indicator does not indicate or control (e.g., when selected) one or more devices of the first accessory type that are not in the first state (e.g., in the second state)). In some embodiments, the first status indicator does not indicate an accessory device of an accessory type that is not the first accessory type, irrespective of the current state of the accessory device of the accessory type that is not the first accessory type.

The computer system, while displaying the first status indicator, the computer system detects (1408) a gesture (e.g., 1350a-1350c, 1350f) (e.g., via one or more input devices).

In response to (1410) detecting the gesture and in accordance with a determination that the gesture is a first type of gesture (e.g., 1350f) (e.g., a tap gesture) and is directed to (e.g., on, at a location corresponding to) the first status indicator (e.g., 1350h), the computer system causes (1412) (e.g., via initiating a process (and, in some embodiments, the process includes transmitting one or more instructions to one or more devices (e.g., a server, a hub device that is in communication with a plurality of devices that includes the first accessory device and the second accessory device, first accessory device, second accessory device))) the first accessory device (e.g., to perform an action that changes the state of first accessory device) and the second accessory device (e.g., to perform an action that changes the state of the second accessory device) to change to a second state that is different (e.g., an opposite of (e.g., on/off, locked/unlocked, open/closed)) from the first state. In some embodiments, as a part of causing the first accessory device and the second accessory device to be in the second state, the computer system does not cause one or more accessory devices that are in the second state (or any state that is different from the first state) (e.g., before the gesture was detected) to perform any actions and/or to change state.

In response to (1410) detecting the gesture and in accordance with a determination that the gesture is a second type of gesture (e.g., 1350c) (e.g., a long press gesture) that is different from the first type of gesture and is directed to the first status indicator (e.g., 1314h), the computer system displays (1414), via the display generation component, a first accessory control user interface object (e.g., 718b, 718f-718j) (e.g., as a part of displaying a second user interface) corresponding to the first accessory device, where selection (e.g., 1350d) (e.g., via a gesture that is the first type of gesture (e.g., a tap gesture)) of the first accessory control user interface object causes (e.g., via initiating a process (and, in some embodiments, the process includes transmitting an instruction to one or more devices (e.g., a server, a hub device that is in communication with a plurality of accessory devices (e.g., that includes the first and second accessory devices)), first accessory device (not the second accessory device)) the first accessory device (e.g., to per-

form the action that changes a state of the first accessory device) to change to the second state without causing the second accessory device to change to the second state (e.g., the second accessory device continues to be in the first state after causing the first accessory device to be in the first state is completed). In some embodiments, while displaying the first accessory control user interface object corresponding to the first accessory device, the computer system detects a gesture (e.g., a gesture of the first type directed to the first accessory control user interface object) directed to the first accessory control user interface object; and, in response to detecting the gesture directed to the first accessory control user interface object, the computer system causes the first accessory device (e.g., to perform the action that changes the first accessory device) to be in the second state without causing the second accessory device to be in the second state (e.g., the second accessory device continues to be in the first state after the causing the first accessory device to be in the first state is completed). In some embodiments, in response to detecting the gesture directed to the first status indicator and in accordance with the determination that the gesture is the second gesture (e.g., a long press gesture) that is different from the first gesture, the computer system displays, via the display generation component, a third accessory control user interface object corresponding to a third accessory device, where the third accessory device is the first accessory device type and is not in the first state (e.g., is in the second state); and in response to detecting a gesture directed to the third accessory control user interface object, the computer system causes the third accessory device to be in the first state (e.g., to perform the action that changes the third accessory device) without changing the state of the first accessory device and the second accessory device (e.g., without causing the first accessory device and the second accessory device to be in the second state). In some embodiments, the second user interface does not include an (e.g., or any) accessory control user interface object corresponding to an accessory device that is not of the first type (e.g., of a second accessory type that is different from the first accessory type). In some embodiments, in response to detecting the gesture directed to the first status indicator and in accordance with the determination that the gesture is the second gesture (e.g., a long press gesture) that is different from the first gesture, the computer system does not display accessory control user interface objects that are of an accessory type that is different from the first accessory type are displayed via the second user interface). In some embodiments, in response to detecting the gesture directed to the first status indicator and in accordance with the determination that the gesture is the second gesture (e.g., a long press gesture) that is different from the first gesture, the computer system ceases to display the first status indicator. Performing different operations, when a gesture is directed to the first status indicator, based on the type of gesture detected provides the user with more control options without cluttering the user interface. Providing additional control of the system without cluttering the UI with additional displayed controls enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently. Causing the first accessory device and the second accessory device to change to a second state that is different from the first state provides the user with one control that causes multiple devices to change state, which reduces the number of inputs needed to

cause the multiple devices to change state. Reducing the number of inputs needed to perform an operation enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, in accordance with the determination that the gesture is the second type of gesture (e.g., **1350c**) that is different from the first type of gesture and is directed to the first status indicator (e.g., **1314h**), the computer system displays, via the display generation component and concurrently with the first accessory control user interface object (e.g., **718b**, **718f-718j**), a second accessory control user interface object (e.g., **718b**, **718f-718j**) corresponding to the second accessory device. In some embodiments, selection (e.g., via a gesture that is the first type of gesture (e.g., a tap gesture)) of the second accessory control user interface object causes (e.g., via a process (and, in some embodiments, the process includes transmitting an instruction to one or more devices (e.g., a server, a hub device that is in communication with a plurality of accessory devices (e.g., that includes the first and second accessory devices)), second accessory device (not the first accessory device)) the second accessory device to change to the second state without causing the first accessory device to change to the second state. In some embodiments, while displaying the second accessory control user interface object corresponding to the second accessory device, the computer system detects a gesture (e.g., a gesture of the first type directed to the first accessory control user interface object) directed to the first accessory control user interface object; and, in response to detecting the gesture directed to the second accessory control user interface object, the computer system causes the second accessory device (e.g., to perform the action that changes the second accessory device) to be in the second state without causing the first accessory device to be in the second state (e.g., the first accessory device continues to be in the first state after the causing the second accessory device to be in the first state is completed). In some embodiments, in response to detecting the gesture directed to the second accessory control user interface object, the second accessory control user interface object is modified from having a first visual appearance (e.g., text, size, color, pressed state (e.g., depressed, pressed)) to a second visual appearance (e.g., text, size, color, pressed state (e.g., depressed, pressed)) that is different from the first visual appearance. Displaying a second accessory control user interface object corresponding to the second accessory device concurrently with the first accessory control corresponding to the first accessory device (e.g., in accordance with the determination that the gesture is the second type of gesture that is different from the first type of gesture and is directed to the first status indicator) provides the user with more control options to control individual accessory devices without cluttering the user interface. Providing additional control of the system without cluttering the UI with additional displayed controls enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

105

In some embodiments, the gesture is detected while concurrently displaying, with the first status indicator, a second status indicator (e.g., **1314g**, **1314i**) that indicates that a plurality of accessory devices of a second accessory type, different from the first accessory type, is in a third state, the plurality of accessory devices of the second accessory type including a third accessory device that is the second accessory type and is in the third state (e.g., a different state than the first state and the second state) and a fourth accessory device that is the second accessory type and is in the third state. In some embodiments, the third accessory device that is the second accessory type and is in the second state and the fourth accessory device that is the second accessory type and is in the second state is different from the first accessory device and the second accessory device. In some embodiments, in accordance with a determination that the gesture is the first type of gesture (e.g., similar to **1350f**) (e.g., a tap gesture) and is directed to (e.g., on, at a location corresponding to) the second status indicator (e.g., **1314g**, **1314i**), the computer system causes (e.g., via a process initiating a process (and, in some embodiments, the process includes transmitting one or more instructions to one or more devices (e.g., a server, a hub device that is in communication with a plurality of devices that includes the first accessory device, the second accessory device, the third accessory device, and the fourth accessory device))) the third accessory device and the fourth accessory device to change to a fourth state that is different from the third state (e.g., without causing the first accessory device and the second accessory device to change to a different state (e.g., the second state that is different (e.g., an opposite of (e.g., on/off, locked/unlocked, open/closed)) from the first state)). In some embodiments, in accordance with a determination that the gesture is the second type of gesture (e.g., similar to **1350c**) (e.g., a press-and-hold gesture) and is directed to (e.g., on, at a location corresponding to) the second status indicator (e.g., **1314g**, **1314i**), the computer system displays, via the display generation component, a third accessory control user interface object (e.g., as a part of displaying a second user interface) corresponding to the third accessory device. In some embodiments, selection (e.g., via a gesture that is the first type of gesture (e.g., a tap gesture)) of the third accessory control user interface object causes (e.g., via a process (and, in some embodiments, the process includes transmitting an instruction to one or more devices (e.g., a server, a hub device that is in communication with a plurality of accessory devices (e.g., that includes the first, second, third, and fourth accessory devices))), third accessory device (not the fourth accessory device)) the third accessory device (e.g., to perform the action that changes a state of the first accessory device) to change to the fourth state without causing the fourth accessory device to change to the fourth state (and, in some embodiments, without displaying, via the display generation component, the first accessory control user interface object (e.g., as a part of displaying the second user interface) corresponding to the first accessory device and/or the second accessory control user interface object) (e.g., the fourth accessory device continues to be in the third state after causing the third accessory device has been caused to be in the fourth state). In some embodiments, in accordance with a determination that the gesture is the second type of gesture (e.g., a press-and-hold gesture) and is directed to (e.g., on, at a location corresponding to) the second status indicator, the computer system displays a fourth accessory control user interface object concurrently with the third accessory control user interface object. In some embodiments, when the fourth accessory control user

106

interface object is selected, the computer system causes (e.g., via a process (and, in some embodiments, the process includes transmitting an instruction to one or more devices (e.g., a server, a hub device that is in communication with a plurality of accessory devices (e.g., that includes the first, second, third, fourth accessory devices))), fourth accessory device (not the third accessory device)) the fourth accessory device to change to the fourth state without causing the third accessory device to change to the fourth state. Performing different operations based on the status indicator to which the gesture is directed and the type of gesture detected provides the user with more control options to control different accessory device types without cluttering the user interface. Providing additional control of the system without cluttering the UI with additional displayed controls enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently. Causing the third accessory device and the fourth accessory device to change to a fourth state provides the user with one control that causes multiple devices to change state and reduces the number of inputs needed to cause the multiple devices to change state. Reducing the number of inputs needed to perform an operation enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, in accordance with a determination that a fifth accessory device (e.g., device represented by **718b** in FIG. 13A) is the first accessory device type and the fifth accessory device (e.g., device represented by **718b** in FIG. 13A) is in the first state, the plurality of accessory devices of the first accessory type includes (e.g., as indicated by **1314h**) the fifth accessory device (e.g., that is different from the first accessory device and the second accessory device). In some embodiments, in accordance with a determination that the fifth accessory device (e.g., device represented by **718g** in FIG. 13A) is the first accessory device type and the fifth accessory device (e.g., device represented by **718g** in FIG. 13A) is not in the first state, the plurality of accessory devices of the first accessory type does not include (e.g., as indicated by **1314h**) the fifth accessory device. In some embodiments, in accordance with a determination that the fifth accessory device is not the first accessory device type and the fifth accessory device is in the first state, the plurality of accessory devices of the fifth accessory type does not include the fifth accessory device. In some embodiments, in accordance with a determination that the fifth accessory device is not the first accessory device type and the fifth accessory device is not in the first state, the plurality of accessory devices of the first accessory type does not include the fifth accessory device. Providing a status indicator that controls accessory devices of a first accessory device type that are in a first state and does not control accessory devices of the first accessory device type that are not in the first state automatically provides the user with a status indicator that will control accessory devices that meet certain prescribed conditions. Performing an operation when a set of conditions has been met without requiring further user input enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the

user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, the first type of gesture is a tap gesture (e.g., 1350f) (e.g., a gesture that is detected (e.g., via the one or more input devices) for less than a predetermined period of time). In some embodiments, the second type of gesture is a press-and-hold gesture (e.g., 1350c) (e.g., a gesture that is detected (e.g., via the one or more input devices) for more than a predetermined period of time).

In some embodiments, in response to detecting the gesture and in accordance with a determination that the gesture is a third type of gesture (e.g., 1350a) (e.g., a swipe gesture, a gesture that moves in a direction (e.g., a lateral direction)) (e.g., and is directed to the first status indicator), the computer system displays (e.g., by scrolling the status indicators) a status indicator (e.g., 1314f in FIG. 13B) that was not previously displayed (e.g., the status indicator that was not previously displayed indicates that a plurality of accessory devices of an accessory that is different from the first accessory device type are in the same state). In some embodiments, in accordance with a determination that the gesture is the third type of gesture, ceasing to display the first status indicator (e.g., by scrolling the first status indicator out of view). In some embodiments, in accordance with a determination that the gesture is a third type of gesture, moving (e.g., in the direction (e.g., left, right, up, down, etc.) of the gesture) a plurality of displayed status indicators such that, after the plurality of status indicators are moved, the first status indicator ceases to be displayed while one or more status indicators that were not displayed before detecting the third type of gesture are displayed. In some embodiments, one or more controls that are not status indicators (e.g., scene control, external accessory device controls) remain displayed after the gesture is detected. Performing different operations when a third type of gesture is directed to the first status indicator provides the user with more control options (e.g., more status indicators) without cluttering the user interface. Providing additional control of the system without cluttering the UI with additional displayed controls enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, as a part of causing the first accessory device and the second accessory device to change to the second state, the computer system causes the first accessory device and the second accessory device to perform a type of action (e.g., turn off lights, unlock door locks, open blinds a certain percentage, turn off ac/heat) that is based on the first accessory type (e.g., lights, door locks, blinds, temperature controls). Causing the first accessory device and the second accessory device to perform a type of action that is based on the first accessory type allows the computer system to cause a particular action to be performed that is based on certain prescribed conditions. Performing an operation when a set of conditions has been met without requiring further user input enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and

improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, before detecting the gesture, the computer system displays a third status indicator (e.g., 1314b) (e.g., that indicates that a plurality of accessory devices of a second accessory type (e.g., that is different from the first accessory type) are in a third state) adjacent to the first status indicator and a fourth status indicator (e.g., 1314c) (e.g., that indicates that a plurality of accessory devices of a third accessory type (e.g., that is different from the second accessory type and the first accessory type) are in a fourth state) adjacent to the third status indicator (e.g., 1314e). In some embodiments, the first status indicator, the third status indicator, and fourth status indicator are displayed in an order based on a respective status indicator category (e.g., alarms (e.g., co, co2, smoke, leak, alarm), action required (e.g., accessories not responding, account error, low battery, updated available), significant status (things that are important: home temperature, open doors or windows), quick actions (e.g., categories that will flip the state of accessory, doors unlocked, windows open, 5 lights on, 2 fans on), sensors (e.g., humidity level, light level “34 lux”, etc.)) that corresponds to each respective status indicator (e.g., a respective status indicator category that each respective status indicator is in). In some embodiments, while displaying the first status indicator, the third status indicator, and the fourth status indicator in the order, the computer system receives an indication that a fifth status indicator should be displayed (e.g., the state of one or more of a different accessory device type (e.g., than the accessory device types that are indicated by the first status indicator, the second status indicator, and the third status indicator) has changed); and in response to receiving the indicator that the indication that the fifth status indicator should be displayed: (1) in accordance with a determination that the fifth status indicator is in a first status indicator category (e.g., same status indicator category as the first status indicator), the computer system displays the fifth status indicator at a first location (e.g., a location that is adjacent to the first status indicator); (2) in accordance with a determination that the fifth status indicator is in a second status indicator category (e.g., different status indicator category from the first status indicator category) (e.g., same status indicator category as the third status indicator), displaying the fifth status indicator at a second location (e.g., a location that is adjacent to the third status indicator) that is different from the first location; and (3) in accordance with a determination that the fifth status indicator is in a third status indicator category (e.g., different status indicator category from the first status indicator category and the third status indicator category) (e.g., same status indicator category as the fourth status indicator), displaying the fifth status indicator at the third location (e.g., a location that is adjacent to the fourth status indicator) that is different from the first location and the second location). Displaying status indicators in an order based on their respective categories provides the user with enhanced feedback concerning the importance or the category of a particular status indicator and allows a user to quickly recognize the category to which a particular status indicator corresponds. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the computer system detects a change in a state of a respective accessory device of the first accessory type. In some embodiments, in response to detecting the change in the state of the respective accessory device of the first accessory type and in accordance with a determination that a state of a respective accessory device has changed to a first state, the computer system adds the respective accessory device to the plurality of accessory devices of the first accessory type (e.g., light bulbs, windows, switches, outlets, locks (e.g., door locks, window locks), televisions) that are in the first state. In some embodiments, in response to detecting the change in the state of the respective accessory device of the first accessory type and in accordance with a determination that the state of the respective accessory device has changed to the second state (or, alternatively, has changed to not be the first state), the computer system removes the respective accessory device from the plurality of accessory devices of the first accessory type (e.g., light bulbs, windows, switches, outlets, locks (e.g., door locks, window locks), televisions) that are in the first state. Thus, as additional accessories of a respective type are detected to be in the respective state, the additional accessories are added to the respective status indicator, such that the additional accessories are controlled by activating the status indicator; as some accessories of a respective type are detected to no longer be in the respective state, the accessories are removed from the respective status indicator, such that the removed accessories are not controlled by activating the status indicator. Updating the plurality of accessory devices based on the status of accessories allows the system to enable the user to quickly change the status of the accessories of the same type and state, and to individually access the accessories (e.g., via a press-and-hold). Providing additional control of the system without cluttering the UI with additional displayed controls enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, the first status indicator includes an indication of a number of accessory devices that are displayed (or updated) based on a current number of accessory devices of the first accessory type that are in the first state. In some embodiments, before detecting the gesture, the first status indicator includes an indication of a first number of accessory devices (e.g., that are the first accessory type and are in the first state). In some embodiments, in accordance with a determination that a tenth accessory device that is the first accessory device type and has changed to be in the first state, the computer system updates the first status indicator to include an indication of a second number of accessory devices (e.g., that are the second accessory type and are in the second state) that is different from the indication of the first number of accessory devices. In some embodiments, in accordance with a determination that the second accessory has changed to not be in the first state, the computer system updates the first status indicator to include an indication of a third number of accessory devices that is different from the indication of the first number of accessory devices and the indication of the second number of accessory devices. In some embodiments, the second number of accessory devices is greater than the first number of accessory devices, and the third number of accessory devices is less than the first number of accessory devices. Displaying

a status indicator that includes an indication that is based on the current number of accessory devices allows the user to quickly recognize the number of devices to which the status indicated by the status indicator corresponds and provides the user with enhanced feedback concerning how many devices that input on the status indicator could potentially impact. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, in accordance with a determination that the gesture is the first type of gesture (e.g., **1350f**) and is directed to the first status indicator (e.g., **1350h**), the computer system ceases to display the first status indicator (e.g., **1350h** in FIG. 13G has ceased to be displayed in FIG. 13H) after a predetermined period of time (e.g., 1 second, 5 seconds, 30 seconds) (e.g., a predetermined period of time after the gesture is detected). In some embodiments, in accordance with a determination that a second gesture that is the first type of gesture is received after receiving the gesture that is the first type and before the predetermined time, forgoing to cease to display the first status indicator. In some embodiments, in accordance with a determination the gesture is the first type of gesture and is directed to the first status indicator and in accordance with a determination that the status indicator that is in a first category, the computer system ceases to display the status indicator when the accessory devices represented by the status indicator have changed to a particular state (e.g., lights are off, doors are locked, alarms are not active, etc. after a second predetermined period of time) and/or after the predetermined period of time. In some embodiments, in accordance with a determination that the gesture is the first type of gesture and is directed to the first status indicator and in accordance with a determination the status indicator is in a second category that is different from the first category, the computer system does not cease to display the status indicator when the accessory devices represented by the status indicator have changed to a particular state (e.g., lights are off, doors are locked, alarms are not active, etc. after a second predetermined period of time) and/or after the predetermined period of time. Ceasing to display a status indicator after detecting an input of the first type of gesture provides the user with visual feedback that an action has been performed to change the state of the accessory devices controlled via the status indicator. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the first status indicator (e.g., **1314h**) is displayed at a first location when the gesture is detected. In some embodiments, in accordance with a determination that the gesture is the first type of gesture (e.g., **1350f**) and is directed to the first status indicator (e.g., **1314h**), the computer system ceases to display the first status indicator (e.g., **1314h**) at the first location and displays a sixth status indicator (e.g., **1314i** in FIG. 13H) (e.g., that is different from the first status indicator) at the first location. In some embodiments, the sixth status indicator was adja-

cent to the first status indicator before the gesture was detected. In some embodiments, displaying the status indicator that is different from the first status indicator at the first location includes moving, via an animation, the status indicator that is different from the first status indicator from a third location to the first location. Ceasing to display a status indicator and displaying an adjacent status indicator in its place after detecting an input of the first type of gesture reduces the number of inputs that are needed to delete the status indicator and display new status indicator (e.g., the adjacent status indicator) on a display (e.g., via the display generation component). Reducing the number of inputs needed to perform an operation enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, in accordance with the determination that the gesture is the first type of gesture (e.g., **1350i**) and is directed to the first status indicator (e.g., **1314h**), the computer system visually updates the first status indicator (e.g., **1314h** in FIG. 13G) such that the first status indicator is changed from indicating that the plurality of accessory devices of the first accessory type is in the first state (e.g., or being displayed with a first visual appearance) to indicate that the plurality of accessory devices of the first accessory type has changed state (e.g., are not in the first state, are in the second state (e.g., or to being displayed with a second visual appearance that is different from the first visual appearance)). In some embodiments, the first status indicator ceases to be displayed a predetermined period of time after visually updating. In some embodiments, in accordance with the determination that the gesture is the second type of gesture (or the third type of gesture) and is directed to the first status indicator, the computer system forgoes to update the first status indicator to indicate that the plurality of accessory devices of the first accessory type is in the second state (and/or maintaining the first status indicator (e.g., to indicate that the plurality of accessory devices of the first accessory type are in the first state). Updating a status indicator to indicate that the plurality of accessory devices have changed state after detecting an input of the first type of gesture provides the user with visual feedback that an action has been performed to change the state of the accessory devices controlled via the status indicator. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, the first status indicator (e.g., **1314h**) is displayed on a first user interface (e.g., **710**). In some embodiments, the computer system receives (e.g., while displaying the first status indicator on the first user interface) a request (e.g., **1350h**) to display a second user interface (e.g., **1360**) that is different from the first user interface (e.g., **710**). In some embodiments, in response to receiving the request (e.g., **1350h**) to display the second user interface, the computer system displays the second user interface (e.g., **1360**) that includes a status indicator (e.g., **1350i** in FIG. 13I) that indicates that one or more accessory devices of the first accessory type that are in the first state,

where: in accordance with a determination that the second user interface (e.g., **1360**) (e.g., user interface that is currently displayed) corresponds to a first group of accessory devices (e.g., a group of a devices that are assigned to a group representing a portion (e.g., room (e.g., bedroom, living room, office, garage), porch) of a building (e.g., a home))) and the first accessory device corresponds to the first group of accessory devices (e.g., and while the first accessory device is in the first state), the one or more accessory devices of the first accessory type includes the first accessory device; and in accordance with a determination that the second user interface (e.g., **1360**) (e.g., user interface that is currently displayed) corresponds to the first group of accessory devices and the first accessory device does not correspond to the first group of accessory devices (e.g., and while the first accessory device is in the first state), the one or more accessory devices of the first accessory type does not include the first accessory device. In some embodiments, in response to receiving the request to display the second user interface, the computer system ceases to display the first user interface that includes the first user interface. Displaying a status indicator that indicates a state of a plurality of devices when certain prescribed conditions are met (e.g., based on whether the user interface that includes the status corresponds to a group of accessory devices and whether a particular device that is relevant (e.g., same state and accessory type) to the status indicator corresponds to the group of accessory devices) automatically provides the user with a status indicator that indicates a plurality of devices that are relevant to the user interface that corresponds to the particular group of accessory devices. Performing an operation when a set of conditions has been met without requiring further user input enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently. Displaying a status indicator that a state of a plurality of devices based on whether the user interface that includes the status corresponds to a group of accessory devices and whether a particular device that is relevant (e.g., same state and accessory type) to the status indicator corresponds to the group of accessory devices provides the user with visual feedback concerning the status indicators that indicate devices that are relevant to the particular user interfaces being displayed. Providing improved visual feedback to the user enhances the operability of the computer system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the computer system) which, additionally, reduces power usage and improves battery life of the computer system by enabling the user to use the computer system more quickly and efficiently.

In some embodiments, before detecting the gesture (e.g., **1350a-1350c** and **1350f**), an eighth status indicator that indicates that one or more accessory devices of a third accessory type are in a seventh state (e.g., on/off, open, closed) is displayed. In some embodiments, the one or more accessory devices include an eighth accessory device of the third accessory type. In some embodiments, in accordance with a determination that the gesture (e.g., **1350f**; **1350i**) is the second type of gesture (e.g., a press-and-hold gesture) and is directed to (e.g., on, at a location corresponding to) the eighth status indicator (e.g., **1314h**) and in accordance with a determination that the eighth status indicator (e.g.,

113

1314h in FIG. **13I**) corresponds to (and/or indicates that) less than a predetermined number (e.g., less than 2) of accessory devices of the third accessory type that are in the seventh state (e.g., only 1 accessory of the third accessory type is in the seventh state), the computer system displays an eighth accessory control user interface object (e.g., **1318**) (e.g., with more control and/or precision than the ninth accessory control user interface object) corresponding to the eighth accessory device. In some embodiments, selection of the eighth accessory control user interface object causes the eighth accessory device to change to an eighth state (e.g., 80% brightness, 20% brightness, 40% opened, 20% opened, a state that is not completely opposite of the seventh state, state that corresponds to a different characteristic (e.g., color (e.g., blue, red, green, yellow, white) of lights) that can be represented by the device than the characteristic (e.g., on/off) that corresponds to the seventh state). In some embodiments, in accordance with a determination that the gesture (e.g., **1350i**; **1350i**) is the second type of gesture (e.g., a press-and-hold gesture) and is directed to (e.g., on, at a location corresponding to) the eighth status indicator (e.g., **1314h**) and in accordance with a determination that the eighth status indicator (e.g., **1314h** in FIG. **13I**) corresponds to (e.g., and/or indicates that) not less than the predetermined number (e.g., 2 or more) of the accessory devices of the third accessory type are in the seventh state, the computer system displays a ninth accessory control user interface object (e.g., control like, for example, **718h**) corresponding to the eighth accessory device. In some embodiments, selection of the ninth accessory control user interface object causes the eighth accessory device to change to a ninth state (e.g., on/off, open/closed, an opposite state than the seventh state) that is different from the eighth state (e.g., without displaying the eighth accessory control user interface object). In some embodiments, the number of accessory user interface control objects that correspond to the eighth accessory device is greater when the determination is made that the eighth status indicator indicates that less than the predetermined number (e.g., 2) of accessory devices of the third accessory type are in the seventh state than when the determination is made that the eighth status indicator indicates that less than the predetermined number (e.g., 2) of the third accessory type is in the seventh state. In some embodiments, the eighth accessory control user interface object is larger than the ninth accessory control user interface object. Displaying controls that change, when selected, an accessory device differently based on the number of controls represented by the status indicator allows the device to provide additional or different controls in some situations without cluttering the UI. Providing additional control of the system without cluttering the UI with additional displayed controls enhances the operability of the system and makes the user-system interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the system) which, additionally, reduces power usage and improves battery life of the system by enabling the user to use the system more quickly and efficiently.

In some embodiments, in accordance with a respective status indicator (e.g., the eighth status indicator) corresponding to a single accessory device, the respective status indicator includes a name (e.g., alphanumeric text) of the accessory device. In accordance with the respective status indicator (e.g., the eighth status indicator) corresponding to a plurality of accessory devices, the respective status indicator includes an indication (e.g., a numeric representation) of the number of accessory devices represented.

114

In some embodiments, the computer system detects a tap on another type of status indicator (e.g., **1314a-1314f** and **1314j-1314l**) (e.g., climate control, sensors (e.g., different types of sensors may be combined in a single status indicator)) and, in response to detecting the tap, displays a user interface (e.g., **1382**, **1384**, **1386**) for controlling the plurality of a type of devices related to the other type of status indicator. In some embodiments, device **700** does not cease to display the other type of control after detecting the tap on it.

Note that details of the processes described above with respect to method **1400** (e.g., FIG. **14**) are also applicable in an analogous manner to the methods described above. For example, method **1400** optionally includes one or more of the characteristics of the various methods described above with reference to methods **800** and **1000**. For another example, the audio message sent in method **800** can be change or more status indicators as described above in relation to method **1400**. For brevity, these details are not repeated below.

FIGS. **15A-15F** illustrate exemplary user interfaces for playing back audio messages in accordance with some embodiments. The user interfaces in these figures are used to illustrate the processes described below, including the processes in FIG. **16**.

FIG. **15A** illustrates device **700** displaying user interface **702** that includes affordances **704**. As illustrated in FIG. **15A**, multicast notification **1502** is displayed over a portion of user interface **702**. Multicast notification **1502** indicates that audio multicast messages have been sent out from John and three others to a group of devices assigned to home **602**, which includes device **700**. In other words, because device **700** is assigned to home **602**, device **700** has received the audio multicast messages from John and three others. Multicast notification **1502** includes play representation **1504**. In some embodiments, play representation **1504** is selectable. In some embodiments, multicast notification **1502** can include one or more features, as described above in relation to the other multicast messages described above (e.g., multicast notification **708a**, multicast notification **708**, multicast notification **904**, multicast notification **906a**, multicast notification **906b**, multicast notification **908a**, multicast notification **908b**, multicast notification **908c**, multicast notification **910**). In some embodiments, the other multicast messages described above can include one or more features (e.g., play representation **1504**) of multicast notification **1502**. At FIG. **15A**, device **700** detects tap gesture **1550a** on multicast notification **1502**.

FIGS. **15B-15F** illustrate exemplary user interfaces for playing back audio multicast messages (e.g., automatically). In some embodiments, the user interfaces described in relation to FIGS. **15B-15F** can be displayed in lieu of one or more user interfaces described above, such as user interfaces of **9I-9J** and/or user interfaces of **9M-9P**.

As illustrated in FIG. **15B**, in response to detecting tap gesture **1550a**, device **700** displays user interface **1520** overlaid on to a portion of user interface **702** and automatically (e.g., without intervening user input after detecting tap gesture **1550a**) initiates playback of an audio multicast message received from John, as indicated by current sender indication **1322a**. In some embodiments, as a part of initiating playback of audio, device **700** outputs audio via one or more speakers that are electronically coupled to device **700**.

As illustrated in FIG. **15B**, user interface **1520** includes multicast home identifier **1532**, which indicates that audio multicast messages that were sent to a group of devices associated with home **602** are being played back. User

115

interface **1520** also includes multicast recording affordance **736**, current sender indication **1522a**, graphical sender indications **1524**, and count indication **930**. In some embodiments, device **700** uses one or more techniques described above to display and operate in view of multicast recording affordance **736**, current sender indication **1522a**, graphical sender indications **1524**, and count indication **930** that device **700** uses to, respectively, display and operate in view of multicast recording affordance **736**, current sender indication **922a-922b**, graphical sender indications **924a-924b**, and count indication **930** described above.

Looking back at FIG. **15A**, notification **1502** indicated that four audio multicast messages were received (e.g., “John and 3 others”) to be played back. Accordingly, in FIG. **15B**, user interface **1520** includes graphical sender indications **1524** corresponding to a portion of the received messages. In FIG. **15B**, graphical sender indications **1524** include graphical sender indications **1524a-1524c**. Graphical indication **1524a** corresponds to a first audio multicast message, which was received from “John.” Graphical indication **1524b** corresponds to a second audio multicast message that was received (or sent) after the first audio multicast message. Graphical indication **1524c** corresponds to a third audio multicast message that was received (or sent) after the second audio multicast message. Notably, in FIG. **15A**, user interface **1520** does not include a graphical indication that corresponds to the fourth audio multicast message because a determination has been made that no more than a predetermined number (e.g., three) graphical indications should be concurrently displayed.

Graphical indications **1524a-1524c** correspond to different multicast messages that were sent by different users (or devices), which are illustrated by graphical indications **1524a-1524c** depicting different representations. Graphical indication **1524a** includes a visual representation of a sender (e.g., “John”) (e.g., a determined sender) of the first audio multicast message. Graphical indication **1524b** includes a visual representation of a device (e.g., a speaker) that recorded the second audio multicast message. Graphical indication **1524c** includes a visual representation of text that corresponds to a sender (e.g., “EA,” which stands for “Emma Appleseed,” who is a person associated with home **602** as indicated in FIG. **7AB**) of the third audio multicast message. Graphical indication **1524b** includes a visual representation of a device instead of a visual representation of a sender because a person who produced the second audio multicast message could not be determined. Graphical indication **1524c** includes a visual representation of text instead of a visual representation of a user because device **700** does not have access to a visual representation of a user (e.g., Emily). In some embodiments, multiple graphical indications include the same visual representations when a determination is made that the audio multicast messages corresponding to the graphical indications were sent by the same sender.

As illustrated in FIG. **15B**, graphical indication **1524a** is the largest graphical indication displayed on user interface **1520** and is displayed with audio indication **1524a1** (e.g., circles surrounding graphical indication **1524a**). As indicated by current sender indication **1522a**, the first audio multicast message from John is currently being played back. Accordingly, graphical indication **1524a** is the largest graphical representation and is displayed with audio indication **1524a1** to indicate that the audio multicast message from John is currently being played back. In some embodiments, the audio indication **1524a1** is dynamic and varies in size in accordance with the first audio multicast message

116

being played back. Graphical indication **1524b** is the second largest graphical indication displayed on user interface **1520** because the second audio multicast message is the next audio multicast message in the queue to be played back by device **700**. Graphical indication **1524c** is the third largest graphical indication displayed on user interface **1520** because the third audio multicast message is the next audio multicast message in the queue to be played back by device **700** after the second audio multicast message. At FIG. **15B**, device **700** determines that the first audio multicast message will end within a predetermined period of time (e.g., 0 second, 1 second) (or the next message (e.g., the second message) will begin within a predetermined period of time).

In response to determining that the first audio multicast message will end within a predetermined period of time (or has ended) (e.g., without user input, based on a tap gesture on skip affordance **1534**), device **700** rotates graphical indications **1524b-1524c** counter-clockwise and ceases to display graphical indication **1524a**. As illustrated in FIG. **15C**, in response to determining that the first audio multicast message will end within a predetermined period of time (or has ended), graphical indication **1524b** is displayed at a position at which graphical representation **1524a** was previously displayed in FIG. **15B**, and graphical indication **1524c** is displayed at a position at which graphical representation **1524b** was previously displayed in FIG. **15B**. As illustrated in FIG. **15C**, graphical indication **1524a** is displayed at the same size at which graphical indication **1524b** was previously displayed in FIG. **15B**, and graphical indication **1524c** is displayed at the same size at which graphical indication **1524b** was previously displayed in FIG. **15B**.

As shown in FIG. **15C**, current sender indication **1522b** has replaced current sender indication **1522a**, which was previously displayed in FIG. **15B**. Thus, at FIG. **15C**, device **700** is currently playing back the second audio multicast message because playback of the first audio multicast message has completed by the time that user interface **1520** of FIG. **15C** is displayed. As shown in FIG. **15C**, graphical indication **1524b** is now displayed with audio indication **1524b1**, which is displayed using similar techniques to those described above in relation to audio indication **1524a1**. As illustrated in FIG. **15C**, graphical indication **1524c** does not have an audio indication surrounding graphical indication **1524c** because device **700** is not currently outputting the third audio multicast message (e.g., an audio multicast message that corresponds to graphical indication **1524c**). In some embodiments, device **600** displays an animation gradually increasing the sizes of graphical indications **1524b-1524c** while transitioning between displaying user interface **1520** of **15B** and displaying user interface **1520** of FIG. **15C**.

As illustrated in FIG. **15C**, because device **700** has ceased to display graphical indication **1524a** (e.g., the first audio multicast message has ended), device **700** newly displays graphical indication **1524d**, which corresponds to the fourth audio multicast message that was sent by Jane (as shown by current sender indication **1522d** in FIG. **15E**). Graphical indication **1524d** is displayed at the same size of and in the same location as graphical indication **1524c** of FIG. **15B** (e.g., because graphical indication **1524d** is now second in the queue for audio playback). At FIG. **15C**, device **700** determines that the second audio multicast message will end within a predetermined period of time (e.g., 0-1 second) (or the next message (e.g., the third audio multicast message) will begin within a predetermined period of time) (or has ended).

117

In response to determining that the second audio multicast message will end within a predetermined period of time (or has ended), device 700 rotates graphical indications 1524c-1524d counter-clockwise and ceases to display graphical indication 1524b. As illustrated in FIG. 15D, in response to determining that the second audio multicast message will end within a predetermined period of time, graphical indication 1524c is displayed at a position and size at which graphical representation 1524b was previously displayed in FIG. 15C, and graphical indication 1524d is displayed at a position and a size at which graphical representation 1524c was previously displayed in FIG. 15C.

As shown in FIG. 15D, current sender indication 1522c has replaced current send indication 1522b, which was previously displayed in FIG. 15C. Thus, at FIG. 15D, device 700 is currently playing back the third audio multicast message because playback of the second audio multicast message has completed by the time that user interface 1520 of FIG. 15D is displayed. Device 700 plays back the third audio multicast message automatically, without intervening input, at a predetermined period of time after playback of the second audio multicast message ends. In some embodiments, device 700 plays a predetermined sound (e.g., a chime, a buzz, a tone) between multicast messages that are played back. For example, device 700 can play a first sound before automatically starting playback of the second audio multicast message and can play a second sound (e.g., the same chime) before automatically starting playback of the third audio multicast message. In some embodiments, device 600 transitions the user interfaces (e.g., user interface 1520 of FIG. 15C transitioning to the user interface 1520 of FIG. 15D) while (after or before) playing back the predetermined sound. In some embodiments, in response to detecting an input on skip affordance 1534 of FIG. 15C, device 700 ends playback of the second audio message (e.g., being played back in FIG. 15C) (before reaching the end of the second audio message) and starts playback of the third audio message and transitions the user interfaces (e.g., user interface 1520 of FIG. 15C transitioning to the user interface 1520 of FIG. 15D). At FIG. 15D, device 700 determines that the third audio multicast message will end within a predetermined period of time (e.g., 0-1 second) (or the next message (e.g., the fourth audio multicast message) will begin within a predetermined period of time) (or has ended).

In response to determining that the third audio multicast message will end within a predetermined period of time (or has ended), device 700 moves (e.g., changes the position of) and enlarges graphical indication 1524d counter-clockwise and ceases to display graphical indication 1524c. As illustrated in FIG. 15E, because graphical indication 1524d is the only displayed graphical indication, device 700 increase size of graphical indication 1524d to a size that is greater than the size at which graphical indication 1524c was previously displayed. In some embodiments, graphical indication 1524d is displayed at a different location in FIG. 15E (e.g., at a center of 1524) as compared to the location of graphical indication 1524a in FIG. 15B. As shown in FIG. 15E, current sender indication 1522d has replaced current send indication 1522c, which was previously displayed in FIG. 15D. Thus, at FIG. 15E, device 700 is currently playing back the fourth audio multicast message (e.g., the audio multicast message that corresponds to graphical indication 1524d) because playback of the third audio multicast message has completed by the time that user interface 1520 of FIG. 15E is displayed. Device 700 plays back the fourth audio multicast message automatically, without intervening input, at a predetermined period of time after playback of the third

118

audio multicast message ends (e.g., once the third audio multicast message has ended).

As illustrated in FIG. 15F, after determining that playback of the fourth audio message has ended, device 700 updates user interface 1520 to include graphical indications 1524a-1524c without playing back additional media (or multicast audio messages). In addition to re-displaying graphical indication 1524a-1524c, device 700 displays playback affordance 926. In some embodiments, in response to detecting tap gesture 1550/1 on playback affordance 926, device 700 initiates playback of the first audio multicast message and repeats the flow described above in FIGS. 15B-15E. In some embodiments, in response to detecting tap gesture 1550/2 (or a press-and-hold gesture) on multicast affordance multicasting recording affordance 736, device 700 displays a user interface for recording and send an audio message to the group of devices associated with home 602 (e.g., to reply to the group of devices to which the multicast audio messages (e.g., first, second, third, fourth audio multicast messages) were sent). Thus, in some embodiments, device 700 displays user interface 741 of FIG. 7C1, user interface 730 of FIG. 7C, or user interface 740 of FIG. 7D in response to detecting a tap gesture on multicast recording affordance 736. In some embodiments, a tap gesture on multicast recording affordance 736 starts audio recording until an end recording input (e.g., another tap gesture) is detected. Once the end recording input is detected, the recorded audio message is sent to the group of devices. In some embodiments, a press-and-hold gesture is detected on multicast recording affordance 736. When the press-and-hold gesture is detected, audio recording begins. Once an end (e.g., lift-off) of the press-and-hold gesture is detected, the audio recording ends, and the recorded audio message is sent to the group of devices. In some embodiments, detecting activation (e.g., tap gesture, tap-and-hold gesture) of multicast recording affordance 736 in any of the user interfaces in FIGS. 15B-15E causes playback of the currently playback message to stop and starting the process for recording an audio message to send to the group of devices.

FIG. 16 is a flow diagram illustrating a method for playing back audio messages using a computer system in accordance with some embodiments. Method 1600 is performed at a computer system (e.g., 100, 300, 500, 634, 674, 700, 701, 850) that is in communication with a display generation component (e.g., an integrated display, a connected display) and one or more inputs devices (e.g., a touch-sensitive surface). Some operations in method 1600 are, optionally, combined, the orders of some operations are, optionally, changed, and some operations are, optionally, omitted.

As described below, method 1600 provides an intuitive way for playing media content. The method reduces the cognitive burden on a user for playing media messages, thereby creating a more efficient human-machine interface. For battery-operated computing devices, enabling a user to play media content faster and more efficiently conserves power and increases the time between battery charges.

The computer system (e.g., 700) displays (1602), via the display generation component, a media user interface (e.g., 1520) that includes: at a first location, a first representation (1604) (e.g., 1524a in FIG. 15B) of a first media message (e.g., audio media; visual media; audiovisual media), and at a second location different from the first location, a second representation (1606) (e.g., 1524b in FIG. 15B) of a second media message. In some embodiments, the media user interface includes representations of a plurality of (e.g., some of, not all of) media messages of a group of media (e.g., the group of media being in an ordered set).

In response to displaying the media user interface and not based on user input corresponding to the media user interface (e.g., **1520**), the computer system (e.g., **700**) plays (**1608**) the first media message (e.g., outputting audio and/or video of the first media message).

In response to detecting completion of playing through the first media message (e.g., reaching an end of the first media message by playing through to the end of the first media message), the computer system (e.g., **700**) displays (**1610**), the second representation (e.g., **1524b**) of the second media message (e.g., as in FIG. **15C**) without displaying, via the display generation component, a representation (e.g., **1524a**) (e.g., any representation) corresponding to the first media message (e.g., as in FIG. **15C**).

Displaying representations of various media message at different locations provides the user with feedback about the order of the media message and, for example, which media message is currently playing and which media message will play next. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the representations of the plurality of (e.g., some of, not all of, three of) media message are displayed with varying sizes based on the order of the ordered set. In some embodiments, the earlier the media message is in the ordered set the larger the representation of the corresponding media message (e.g., a representation of a currently playing media message is the largest, a representation of a media message to be played next is the next largest, etc). Thus, the order of the media message is reflected in the comparative sizes of their corresponding displayed representations.

In accordance with some embodiments, displaying, the first representation (e.g., **1524a** in FIG. **15B**) of the first media message (e.g., audio media; visual media; audiovisual media) at the first location includes displaying the first representation (e.g., **1524a**) of the first media message (e.g., audio media; visual media; audiovisual media) at the first location and at a first size (e.g., as in FIG. **15B**). In accordance with some embodiments, displaying the second representation (e.g., **1524b** in FIG. **15B**) of the second media message at the second location includes displaying the second representation (e.g., **1524b**) of the second media message at the second location and at a second size different from (e.g., smaller than) the first size (e.g., as in FIG. **15B**).

Displaying representations of various media message at different sizes provides the user with feedback about the order of the media message (e.g., bigger size is earlier in the ordered set) and, for example, which media message is currently playing and which media message will play next. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In accordance with some embodiments, the computer system (e.g., **700**) displays, via the display generation component, concurrently with the first representation of the first media message at the first location and with the second representation of the second media message at the second

location: at a third size (e.g., the same as the second size, smaller than the second size) different from the first size (and, optionally, different from the second size) and at a third location different from the first location and second location, a third representation (e.g., **1524c**) of a third media message. In response to detecting completion of playing through the first media message (e.g., reaching an end of the first media message by playing through to the end of the first media message): the computer system (e.g., **700**) displays, at the first size and at the first location, the second representation (e.g., **1524b**) of the second media message (e.g., as in FIG. **15C**) without displaying, via the display generation component, the first representation (e.g., **1524a**) of the first media message; and the computer system (e.g., **700**) displays, at the second size and at the second location, the third representation (e.g., **1524c**) of the third media message (e.g., as in FIG. **15C**).

Displaying representations of various media message at different locations and at different sizes provides the user with feedback about the order of the media message to be played. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In accordance with some embodiments, the computer system (e.g., **700**) receives (e.g., via a wireless network) data (e.g., first, second, third, and fourth data) corresponding to media message (e.g., the group of media, the first, second, third, and fourth media message) including the first media message that is a first (e.g., audio) message (e.g., directed to a target group of devices (e.g., a plurality of devices of a home (e.g., a home automation system)), including the computer system) from a first remote user and the second media message that is a second (e.g., audio) message (e.g., directed to the target group of devices (e.g., the plurality of devices of the home (e.g., a home automation system)), including the computer system) from a second remote user that is different from the first remote user. The computer system (e.g., **700**) displays (e.g., in response to receiving the data, until an end of a time period (as described in further detail above)), via the display generation component, a notification (e.g., **1502**) corresponding to the media message. While displaying the notification (e.g., **1502**), the computer system (e.g., **700**) receives, via the one or more input devices, selection (e.g., **1550a**) of the notification (e.g., activation of the notification displayed on a lock screen, the notification corresponding to the group of media, the group of media being in an ordered set). In some embodiments, displaying the media user interface occurs in response to receiving selection (e.g., **1550a**) of the notification (e.g., **1502**). In some embodiments, playing the first media message occurs in response to receiving selection (e.g., **1550a**) of the notification (e.g., **1502**).

Displaying the media user interface and automatically playing the first media message in response to a selection of a notification enables the computer system to perform two functions (display and playback) in response to the same input, thereby reducing the need for the computer system to receive additional inputs to start the playback. Reducing the number of inputs needed to perform an operation enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/

121

interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the first representation (e.g., **1524a**), the second representation (e.g., **1524b**), and the third representation (e.g., **1524c**) are not displayed in a line (e.g., the first, second, and third locations are not all on a line). In some embodiments, the representations of media that are displayed (e.g., as representations removed and new representations are added) are not displayed in a line.

In accordance with some embodiments, the first size is larger than the second size. In some embodiments, the second size is larger than the third size. In some embodiments, the second size and the third size are the same size. In some embodiments, the representation (e.g., **1524a** in FIG. 15B, **1524b** in FIG. 15C) of the currently playing media file is displayed at a size that is larger than the size of multiple other (e.g., all) displayed representations of media message.

Displaying representations of various media message at increasingly larger sizes provides the user with feedback about the order of the media message. For example, the larger the representation the earlier the corresponding media message is in the ordered set of media message, with (for example) the largest representation being the currently playing media item. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In accordance with some embodiments, in response to detecting completion of playing through the first media message (e.g., reaching an end of the first media message by playing through to the end of the first media message), playing the second media message (e.g., outputting audio and/or video of the second media) without receiving (or requiring) further user input. In some embodiments, the second media message is played in conjunction with displaying, at the first size and at the first location, the second representation of the second media message.

Automatically playing the second media message in response completion of the first media message eliminates the need for the computer system to receive additional inputs to start the playback of the second media message. Reducing the number of inputs needed to perform an operation enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, in response to detecting completion of playing the second media message (e.g., reaching an end of the second media message; skipping the remainder of the first media), the computer system plays the third media message (e.g., outputting audio and/or video of the third media message) without receiving (or requiring) further user input. In some embodiments, the third media message is played in conjunction with displaying, at the first size and at the first location, the third representation of the third media message. In some embodiments, a fifth representation of a

122

fifth media is not displayed after detecting completion of playing the second media message.

In accordance with some embodiments, prior to detecting completion of playing through the first media message, a fourth representation (e.g., **1524d**) of a fourth media message (e.g., audio media; visual media; audiovisual media) is not concurrently displayed with the first representation of the first media (e.g., in the media user interface, as shown in FIG. 15B). After (e.g., in response to) detecting completion of playing through the first media message (e.g., reaching an end of the first media message by playing through to the end of the first media message) (In some embodiments, in response to detecting completion of playing the first media message), the computer system (e.g., **700**) displays, via the display generation component, (e.g., at the third size and at the third location) the fourth representation (e.g., **1524d**) of the fourth media message (e.g., in the media user interface (e.g., **1520**)) (In some embodiments, the fourth media message is displayed concurrently with the second and third representations of media message).

Displaying representations of a first predetermined number of media message of the group of media message without displaying representations of additional media message in the group of media until media message is played and the representation of the played media message is removed provides the user with feedback that additional media message are available for playback without cluttering the user interface. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, when the media user interface is initially displayed (e.g., in response to selection of a displayed notification), the media user interface includes the first representation, the second representation, and the third representation without including the fourth representation.

In some embodiments, in response to detecting completion of playing the third media message (e.g., reaching an end of the third media message; skipping the remainder of the third media message), displaying, at a size different from (e.g., larger than) the first size and at a location different from the first location, the fourth representation (e.g., **1524d**) of the fourth media message and playing the fourth media message without receiving (or requiring) user input (e.g., as shown in FIG. 15E).

In accordance with some embodiments, while playing the second media message, the computer system (e.g., **700**) displays a next media user interface object (e.g., **1534**) in the media user interface (e.g., **1520**) that, when activated (e.g., detecting a tap on), causes completion of playing of the second media message (e.g., ceasing playing the currently playing media message; forgoing playing the remainder of the second media message; skipping past the remainder of the second media message) (and, optionally, begins playing the third media message). While playing the second media message, the computer system (e.g., **700**) receives, via the one or more input devices, activation of (e.g., a tap on) the next media user interface object (e.g., **1534**). In response to receiving activation of the next media user interface object (e.g., **1534**), the computer system (e.g., **700**) displays, via the display generation component, the third representation of the third media message at the first location (and, optionally, at the first size) without displaying, via the display

123

generation component, the second representation of the second media message. In some embodiments, the third media message plays in conjunction with displaying the third representation of the third media message at the first location at the first size. In some embodiments, the next media user interface object, when activated, causes completion of the currently playing media message. In some embodiments, detecting completion of the currently playing media message causes (e.g., except when the currently playing media message is the final media message of the group of media) the technique to proceed to playing the next media message in the ordered set. In some embodiments, in response to receiving activation of the next media user interface object (e.g., 1534), the computer system ceases playing the second media message (e.g., without playing through to the end of the second media message) and plays the third media message.

Displaying a next media user interface object enables the computer system to receive user input to skip to playing the next media message without spending additional time playing the remainder of the currently playing media message. Providing the user with this additional control enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the computer system does not display the previous media user interface object (e.g., concurrently with playing the second media) (e.g., in the media user interface) that, when activated (e.g., detecting a tap on), causes completion of playing the (e.g., second) media message and begins playing a previous (e.g., first) media message. In some embodiments, the computer system forgoes displaying the next media user interface object when a last (e.g., the fourth) media message (e.g., of the group of media) is playing (e.g., as in FIG. 15E).

In some embodiments, the first media message, the second media message, and the third media message are part of a group of media. In accordance with some embodiments, subsequent to (e.g., in response to detection of completion of) playing a final media message (e.g., after playing or skipping through all media message of the group of media), the computer system (e.g., 700) displays, via the display generation component, a replay user interface object (e.g., 926, at the first location, at the location at which the fourth representation of the fourth media message was displayed) in the media user interface that, when activated (e.g., 1550/1, detecting a tap on), plays the first media message (e.g., outputting audio and/or video of the first media message) before proceeding to playing subsequent media message (e.g., the second, third, and fourth media message). In some embodiments, activation of the replay user interface object restarts the process again to replay the media message of the group of media. In some embodiments, subsequent to playing the final media message (e.g., of the group of media), the computer system deletes (e.g., after a predefined duration of time has passed) the first, second, and third media message (and, optionally the fourth media message) from the computer system (or makes the media message otherwise inaccessible to the user).

Displaying a replay user interface object (e.g., a replay button) to replay the media message of the group of media message allows the user to replay (and re-listen to, re-watch) the media message without needing to individually select each media message to play back. Providing additional

124

control options without cluttering the UI with additional displayed controls enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In accordance with some embodiments, the first media message, the second media message, and the third media message (and, optionally, the fourth media message) were directed to a target group of devices (e.g., a plurality of devices of a home (e.g., a home automation system)), including the computer system. In accordance with some embodiments, the computer system (e.g., 700) displays, via the display generation component, a multicast affordance (e.g., 736) in the media user interface that, when activated (e.g., 1550/2, detecting a tap on), initiates a process for sending an audio multicast message to the target group of devices. In some embodiments, the process for sending the audio multicast message includes displaying the user interface of FIG. 7C1 and is described with respect to FIG. 7C1. In some embodiments, the one or more devices are electronic devices that are part of a group of electronic device to which the first, second, and third media message were directed.

Displaying a multicast affordance to initiate a process for sending an audio multicast message to one or more devices provides the user with the ability to respond to the media message that include messages without the need to individually select which users/devices will receive the message, thereby reducing the number of inputs the user needs to provide to respond. Reducing the number of inputs needed to perform an operation enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, the process for sending the audio multicast message includes recording, at the computer system, an audio message. In some embodiments, the audio message is made available for playback at the computer system (e.g., as part of the group of media). In some embodiments, the computer system deletes the first, second, and third media message (and, optionally the fourth media message) from the computer system (or makes the media message otherwise inaccessible to the user) in conjunction with sending the audio multicast message.

In accordance with some embodiments, while playing a respective media message (e.g., the first media message, the second media message), the computer system (e.g., 700) displays, via the display generation component and in the media user interface, a name of a respective user (e.g., 1524a, 1524b, 1524c, 1524d) from which the respective media message was received. In some embodiments, as the media message that is playing changes, the name of the respective user is replaced (e.g., the previous name, the current name, the next name are displayed at the same location).

Displaying a name of a respective user from which the currently playing media was received provides the user with feedback about the source from which the computer system received the currently playing media message. Providing improved visual feedback to the user enhances the operability of the device and makes the user-device interface more

125

efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In accordance with some embodiments, a representation of a currently playing media message (e.g., **1524a** in FIG. **15B**, **1524b** in FIG. **15C**) is displayed with a first background color (e.g., green) that is different from the background color of respective displayed representations (e.g., **1524b** and **1524c** in FIG. **15B**, **1524c** and **1524d** in FIG. **15C**) of media message that are not currently playing.

In accordance with some embodiments, the media message are audio messages (e.g., multicast audio messages). In some embodiments, the audio message (e.g., first media message) is an audio message recorded (using a microphone) at an external device and transmitted by the external device to a group of devices and/or an audio message that was directed to (e.g., transmitted to) a plurality of external devices that includes the computer system). In some embodiments, the second media message is a second audio message that was directed (or transmitted) to a second plurality of external devices (e.g., same as the plurality of external devices, different from the plurality of external devices).

Automatically playing back multiple audio messages of a conversation (e.g., in order) enables the computer system to output a conversation (e.g., an audio conversation among multiple participants) without requiring the user to individually select particular audio messages to play back, thereby reducing the number of required inputs. Reducing the number of inputs needed to perform an operation enhances the operability of the device and makes the user-device interface more efficient (e.g., by helping the user to provide proper inputs and reducing user mistakes when operating/interacting with the device) which, additionally, reduces power usage and improves battery life of the device by enabling the user to use the device more quickly and efficiently.

In some embodiments, a total count (e.g., “4” in “1 of 4” of **930** in FIG. **15B**) of media message in the group of media is displayed. In some embodiments, (e.g., along with the total count) a number (e.g., “1” in “1 of 4” of **930** in FIG. **15B**, in the ordered set of the group of media) of the currently playing media is displayed (e.g., “3 of 4” as in FIG. **15D**).

In some embodiments, a media message (e.g., the first media message) corresponds to a multi-user device (e.g., a device that is configured for multiple users, a device that is not configured for a particular user). In some embodiments, a media message (e.g., the second media message) corresponds to a single-user device (e.g., a device that is configured for a single user). In some embodiments, a visual indicator (e.g., **1522a**, **1524a**, **1522c**, **1524c**) of a corresponding user of a media message is displayed concurrent with playing the media message corresponding to the user. In some embodiments, a visual indicator (e.g., **1522b**, **1524b**) that indicates a multi-user device is displayed while playing the media message corresponding to the multi-user device.

Note that details of the processes described above with respect to method **1600** (e.g., FIG. **16**) are also applicable in an analogous manner to the methods described above. For example, method **1600** optionally includes one or more of the characteristics of the various methods described above with reference to methods **800**, **1000**, and **1400**. For another example, the audio message of method **800** can be the same as the audio message sent in method **1600**. For another example, the displayed notifications described with respect

126

to method **800** can be the same notification displayed in method **1600**. For another example, voice input transmitted to one or more devices with respect to method **1200** can be the same audio message received and played at the computer system of method **1600**. For brevity, these details are not repeated above.

The foregoing description, for purpose of explanation, has been described with reference to specific embodiments. However, the illustrative discussions above are not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in view of the above teachings. The embodiments were chosen and described in order to best explain the principles of the techniques and their practical applications. Others skilled in the art are thereby enabled to best utilize the techniques and various embodiments with various modifications as are suited to the particular use contemplated.

Although the disclosure and examples have been fully described with reference to the accompanying drawings, it is to be noted that various changes and modifications will become apparent to those skilled in the art. Such changes and modifications are to be understood as being included within the scope of the disclosure and examples as defined by the claims.

As described above, one aspect of the present technology is the gathering and use of data available from various sources to improve the delivery to users of visual content (e.g., visual indications) or any other content that provides the user with information concerning whether voice input will be sent as an audio messages to one or more devices. The present disclosure contemplates that in some instances, this gathered data may include personal information data that uniquely identifies or can be used to contact or locate a specific person.

The present disclosure recognizes that the use of personal information data, in the present technology, can be used to the benefit of users. For example, the personal information data can be used to improve the display of an indication so that a respective user can determine whether voice input will be transmitted as an audio message. Accordingly, use of such personal information data enables users to have calculated control over sending audio messages. Further, other uses for personal information data that benefit the user are also contemplated by the present disclosure.

The present disclosure contemplates that the entities responsible for the collection, analysis, disclosure, transfer, storage, or other use of such personal information data will comply with well-established privacy policies and/or privacy practices. In particular, such entities should implement and consistently use privacy policies and practices that are generally recognized as meeting or exceeding industry or governmental requirements for maintaining personal information data private and secure. Such policies should be easily accessible by users, and should be updated as the collection and/or use of data changes. Personal information from users should be collected for legitimate and reasonable uses of the entity and not shared or sold outside of those legitimate uses. Further, such collection/sharing should occur after receiving the informed consent of the users. Additionally, such entities should consider taking any needed steps for safeguarding and securing access to such personal information data and ensuring that others with access to the personal information data adhere to their privacy policies and procedures. Further, such entities can subject themselves to evaluation by third parties to certify their adherence to widely accepted privacy policies and practices. In addition, policies and practices should be

127

adapted for the particular types of personal information data being collected and/or accessed and adapted to applicable laws and standards, including jurisdiction-specific considerations. For instance, in the US, collection of or access to certain health data may be governed by federal and/or state laws, such as the Health Insurance Portability and Accountability Act (HIPAA); whereas health data in other countries may be subject to other regulations and policies and should be handled accordingly. Hence different privacy practices should be maintained for different personal data types in each country.

Despite the foregoing, the present disclosure also contemplates embodiments in which users selectively block the use of, or access to, personal information data. That is, the present disclosure contemplates that hardware and/or software elements can be provided to prevent or block access to such personal information data. For example, in the case of receiving voice input from a user, the present technology can be configured to allow users to select to “opt in” or “opt out” of participation in the collection of personal information data during registration for services or anytime thereafter. In another example, users can choose not to provide voice input to be sent as an audio message based on the indication that is displayed. In yet another example, users can select to limit the content of the audio message that corresponds to the voice input based on the indication that is displayed. In addition to providing “opt in” and “opt out” options, the present disclosure contemplates providing notifications relating to the access or use of personal information. For instance, a user may be notified upon downloading an app that their personal information data will be accessed and then reminded again just before personal information data is accessed by the app.

Moreover, it is the intent of the present disclosure that personal information data should be managed and handled in a way to minimize risks of unintentional or unauthorized access or use. Risk can be minimized by limiting the collection of data and deleting data once it is no longer needed. In addition, and when applicable, including in certain health related applications, data de-identification can be used to protect a user’s privacy. De-identification may be facilitated, when appropriate, by removing specific identifiers (e.g., date of birth, etc.), controlling the amount or specificity of data stored (e.g., collecting location data a city level rather than at an address level), controlling how data is stored (e.g., aggregating data across users), and/or other methods.

Therefore, although the present disclosure broadly covers use of personal information data to implement one or more various disclosed embodiments, the present disclosure also contemplates that the various embodiments can also be implemented without the need for accessing such personal information data. That is, the various embodiments of the present technology are not rendered inoperable due to the lack of all or a portion of such personal information data. For example, the visual indication can be displayed to users based on non-personal information data or a bare minimum amount of personal information, such as the content being requested by the device associated with a user, other non-personal information available to the audio message transmitting services, or publicly available information.

128

What is claimed is:

1. An electronic device, comprising:

one or more microphones;

one or more display devices;

one or more processors; and

memory storing one or more programs configured to be executed by the one or more processors, the one or more programs including instructions for:

receiving voice input via the one or more microphones, wherein the voice input includes at least a first portion of the voice input and a second portion of the voice input different from the first portion of the voice input; and

while continuing to receive the voice input, displaying a visual indication of the voice input, wherein:

in accordance with a determination that the first portion of the voice input corresponds to voice input that is to be transmitted to one or more external devices as an audio message to be outputted by the one or more external devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and

in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to the one or more external devices as an audio message to be outputted by the one or more external devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

2. The electronic device of claim 1, wherein voice input requesting for the electronic device to retrieve information or change one or more states of the electronic device is the voice input that does not include the instruction to transmit any portion of the voice input to the one or more devices.

3. The electronic device of claim 1, wherein:

the voice input that corresponds to voice input that is to be transmitted to the one or more devices includes an identifier for a group of devices; and

the voice input that does not include the instruction to transmit any portion of the voice input to the one or more devices does not include the identifier for the group of devices.

4. The electronic device of claim 1, wherein the first set of one or more colors is a solid color and the second set of one or more colors are a plurality of colors.

5. The electronic device of claim 1, wherein displaying the visual indication with the first set of one or more colors includes displaying an animation that changes over a period of time based on the voice input.

6. The electronic device of claim 5, wherein displaying the animation includes changing one or more of a brightness, size, color saturation, or position of the visual indication based on one or more of a volume or pitch of the voice input.

7. The electronic device of claim 1, the one or more programs further including instructions for:

receiving data corresponding to a plurality of audio messages for playback; and

in response to receiving the data corresponding to the plurality of audio messages for playback, outputting an introductory tone before outputting each respective audio message of the plurality of audio messages.

129

8. The electronic device of claim 1, the one or more programs further including instructions for:

receiving data corresponding to an audio message for playback; and

in response to receiving the data, automatically, without user input, outputting the audio message.

9. The electronic device of claim 8, the one or more programs further including instructions for:

before outputting the audio message, displaying a second visual indication in response to receiving the data.

10. The electronic device of claim 1, the one or more programs further including instructions for:

receiving data corresponding to an audio message for playback;

outputting the audio message; and

while outputting the audio message, concurrently displaying a respective visual indication that does not change based on one or more characteristics of the audio message.

11. The electronic device of claim 10, wherein the audio message is output based on a volume level of the electronic device.

12. The electronic device of claim 1, wherein the electronic device is not displaying visual content before the visual indication is displayed.

13. The electronic device of claim 1, the one or more programs further including instructions for:

ceasing to display the visual indication includes ceasing to display visual content via the one or more display devices.

14. The electronic device of claim 1, wherein the visual indication is not displayed concurrently with another visual indication.

15. The electronic device of claim 1, wherein the visual indication is a light indication that provides different lights based on a status of one or more applications in communication with the electronic device.

16. A non-transitory computer-readable storage medium storing one or more programs configured to be executed by one or more processors of an electronic device with one or more microphones, one or more speakers, and one or more display devices, the one or more programs including instructions for:

receiving voice input via the one or more microphones, wherein the voice input includes at least a first portion of the voice input and a second portion of the voice input different from the first portion of the voice input; and

while continuing to receive the voice input, displaying a visual indication of the voice input, wherein:

in accordance with a determination that the first portion of the voice input corresponds to voice input that is to be transmitted to one or more external devices as an audio message to be outputted by the one or more external devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and

in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to the one or more external devices as an audio message to be outputted by the one or more external devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

130

17. The non-transitory computer-readable storage medium of claim 16, wherein voice input requesting for the electronic device to retrieve information or change one or more states of the electronic device is the voice input that does not include the instruction to transmit any portion of the voice input to the one or more devices.

18. The non-transitory computer-readable storage medium of claim 16, wherein:

the voice input that corresponds to voice input that is to be transmitted to the one or more devices includes an identifier for a group of devices; and

the voice input that does not include the instruction to transmit any portion of the voice input to the one or more devices does not include the identifier for the group of devices.

19. The non-transitory computer-readable storage medium of claim 16, wherein the first set of one or more colors is a solid color and the second set of one or more colors are a plurality of colors.

20. The non-transitory computer-readable storage medium of claim 16, wherein displaying the visual indication with the first set of one or more colors includes displaying an animation that changes over a period of time based on the voice input.

21. The non-transitory computer-readable storage medium of claim 20, wherein displaying the animation includes changing one or more of a brightness, size, color saturation, or position of the visual indication based on one or more of a volume or pitch of the voice input.

22. The non-transitory computer-readable storage medium of claim 16, the one or more programs further including instructions for:

receiving data corresponding to a plurality of audio messages for playback; and

in response to receiving the data corresponding to the plurality of audio messages for playback, outputting an introductory tone before outputting each respective audio message of the plurality of audio messages.

23. The non-transitory computer-readable storage medium of claim 16, the one or more programs further including instructions for:

receiving data corresponding to an audio message for playback; and

in response to receiving the data, automatically, without user input, outputting the audio message.

24. The non-transitory computer-readable storage medium of claim 23, the one or more programs further including instructions for:

before outputting the audio message, displaying a second visual indication in response to receiving the data.

25. The non-transitory computer-readable storage medium of claim 16, the one or more programs further including instructions for:

receiving data corresponding to an audio message for playback;

outputting the audio message; and

while outputting the audio message, concurrently displaying a respective visual indication that does not change based on one or more characteristics of the audio message.

26. The non-transitory computer-readable storage medium of claim 25, wherein the audio message is output based on a volume level of the electronic device.

27. The non-transitory computer-readable storage medium of claim 16, wherein the electronic device is not displaying visual content before the visual indication is displayed.

131

28. The non-transitory computer-readable storage medium of claim 16, the one or more programs further including instructions for:

ceasing to display the visual indication includes ceasing to display visual content via the one or more display devices.

29. The non-transitory computer-readable storage medium of claim 16, wherein the visual indication is not displayed concurrently with another visual indication.

30. The non-transitory computer-readable storage medium of claim 16, wherein the visual indication is a light indication that provides different lights based on a status of one or more applications in communication with the electronic device.

31. A method, comprising:

at an electronic device having one or more microphones, one or more speakers, and one or more display devices: receiving voice input via the one or more microphones, wherein the voice input includes at least a first portion of the voice input and a second portion of the voice input different from the first portion of the voice input; and

while continuing to receive the voice input, displaying a visual indication of the voice input, wherein:

in accordance with a determination that the first portion of the voice input corresponds to voice input that is to be transmitted to one or more external devices as an audio message to be outputted by the one or more external devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a first set of one or more colors; and

in accordance with a determination that the voice input does not include an instruction to transmit any portion of the voice input to the one or more external devices as an audio message to be outputted by the one or more external devices, displaying, via the one or more display devices, the visual indication includes displaying the visual indication with a second set of one or more colors that is different from the first set of one or more colors.

32. The method of claim 31, wherein voice input requesting for the electronic device to retrieve information or change one or more states of the electronic device is the voice input that does not include the instruction to transmit any portion of the voice input to the one or more devices.

33. The method of claim 31, wherein:

the voice input that corresponds to voice input that is to be transmitted to the one or more devices includes an identifier for a group of devices; and

132

the voice input that does not include the instruction to transmit any portion of the voice input to the one or more devices does not include the identifier for the group of devices.

34. The method of claim 31, wherein the first set of one or more colors is a solid color and the second set of one or more colors are a plurality of colors.

35. The method of claim 31, wherein displaying the visual indication with the first set of one or more colors includes displaying an animation that changes over a period of time based on the voice input.

36. The method of claim 35, wherein displaying the animation includes changing one or more of a brightness, size, color saturation, or position of the visual indication based on one or more of a volume or pitch of the voice input.

37. The method of claim 31, further comprising: receiving data corresponding to a plurality of audio messages for playback; and

in response to receiving the data corresponding to the plurality of audio messages for playback, outputting an introductory tone before outputting each respective audio message of the plurality of audio messages.

38. The method of claim 31, further comprising: receiving data corresponding to an audio message for playback; and

in response to receiving the data, automatically, without user input, outputting the audio message.

39. The method of claim 38, further comprising: before outputting the audio message, displaying a second visual indication in response to receiving the data.

40. The method of claim 31, further comprising: receiving data corresponding to an audio message for playback;

outputting the audio message; and while outputting the audio message, concurrently displaying a respective visual indication that does not change based on one or more characteristics of the audio message.

41. The method of claim 40, wherein the audio message is output based on a volume level of the electronic device.

42. The method of claim 31, wherein the electronic device is not displaying visual content before the visual indication is displayed.

43. The method of claim 31, further comprising: ceasing to display the visual indication includes ceasing to display visual content via the one or more display devices.

44. The method of claim 31, wherein the visual indication is not displayed concurrently with another visual indication.

45. The method of claim 31, wherein the visual indication is a light indication that provides different lights based on a status of one or more applications in communication with the electronic device.

* * * * *