



- (54) METHOD AND APPARATUS FOR A PARALLEL CORRELATOR AND APPLICATIONS THEREOF
- (75) Inventors: Gregory S. Rawlins, Heathrow, FL (US); Michael W. Rawlins, Lake Mary, FL (US); David F. Sorrells, Middleburg, FL (US)

Correspondence Address:
STERNE, KESSLER, GOLDSTEIN & FOX PLLC
1100 NEW YORK AVENUE, N.W., SUITE 600
WASHINGTON, DC 20005-3934 (US)

- (73) Assignee: ParkerVision, Inc.
- (21) Appl. No.: 09/987,193
- (22) Filed: Nov. 13, 2001

Related U.S. Application Data

- (60) Provisional application No. 60/248,001, filed on Nov. 14, 2000.


Publication Classification

- (51) Int. Cl.⁷ G06F 17/15
- (52) U.S. Cl. 708/422; 708/424

(57) ABSTRACT

A fast correlator transform (FCT) algorithm and methods and systems for implementing same, correlate an encoded

data word (X_0 - X_{M-1}) with encoding coefficients (C_0 - C_{M-1}), wherein each of (X_0 - X_{M-1}) is represented by one or more bits and each said coefficient is represented by one or more bits, wherein each coefficient has k possible states, and wherein M is greater than 1. In accordance with the invention, X_0 is multiplied by each state ($C_{0(0)}$ through $C_{0(k-1)}$) of the coefficient C_0 , thereby generating results $X_0C_{0(0)}$ through $X_0C_{0(k-1)}$. This is repeating for data bits (X_1 - X_{M-1}) and corresponding coefficients (C_1 - C_{M-1}), respectively. The results are grouped into N groups. Members of each of the N groups are added to one another, thereby generating a first layer of correlation results. The first layer of results is grouped and the members of each group are summed with one another to generate a second layer of results. This process is repeated as necessary until a final layer of results is generated. The final layer of results includes a separate correlation output for each possible state of the complete set of coefficients (C_0 - C_{M-1}). The final layer of results is compared to identify a most likely code encoded on said data word. In an embodiment, the summations are pruned to exclude summations that would result in invalid combinations of the encoding coefficients (C_0 - C_{M-1}). In an embodiment, substantially the same hardware is utilized for processing in-phase and quadrature phase components of the data word (X_0 - X_{M-1}). In an embodiment, the coefficients (C_0 - C_{M-1}) represent real numbers. In an alternative embodiment, the coefficients (C_0 - C_{M-1}) represent complex numbers. In an embodiment, the coefficients (C_0 - C_{M-1}) are represented with a single bit. Alternatively, the coefficients (C_0 - C_{M-1}) are represented with multiple bits (e.g., magnitude). In an embodiment, the coefficients (C_0 - C_{M-1}) represent a cyclic code keying ("CCK") code set substantially in accordance with IEEE 802.11 WLAN standard.

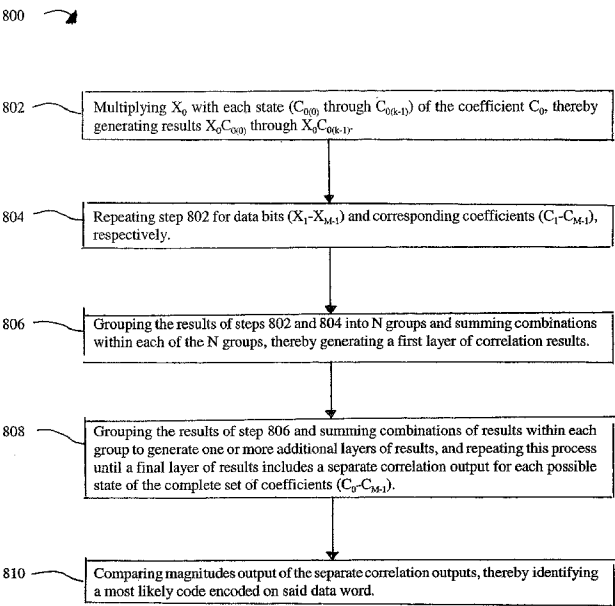

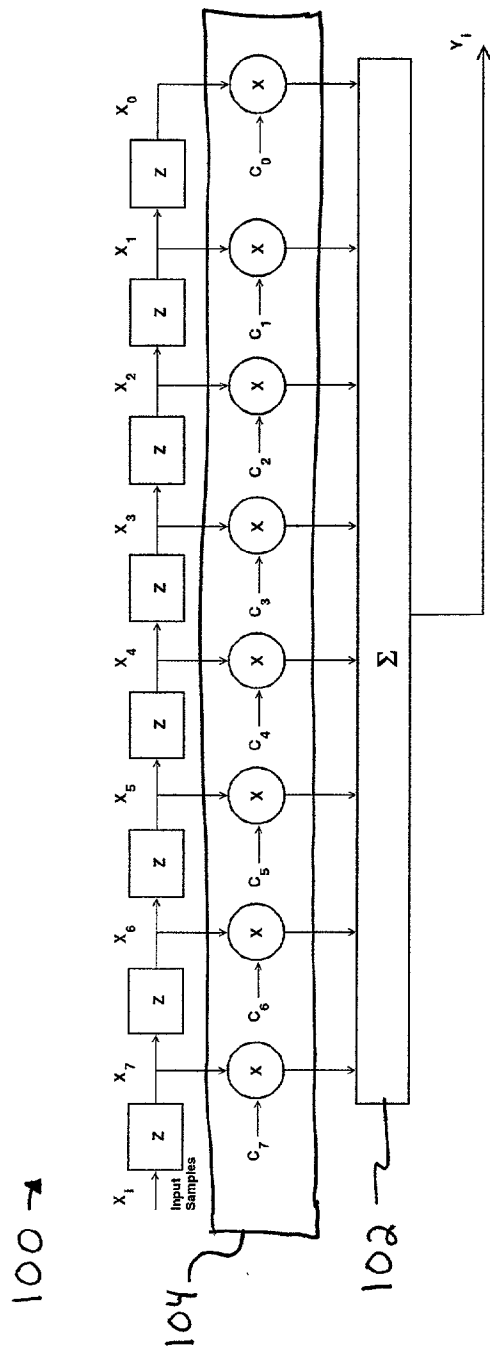


FIG. 1

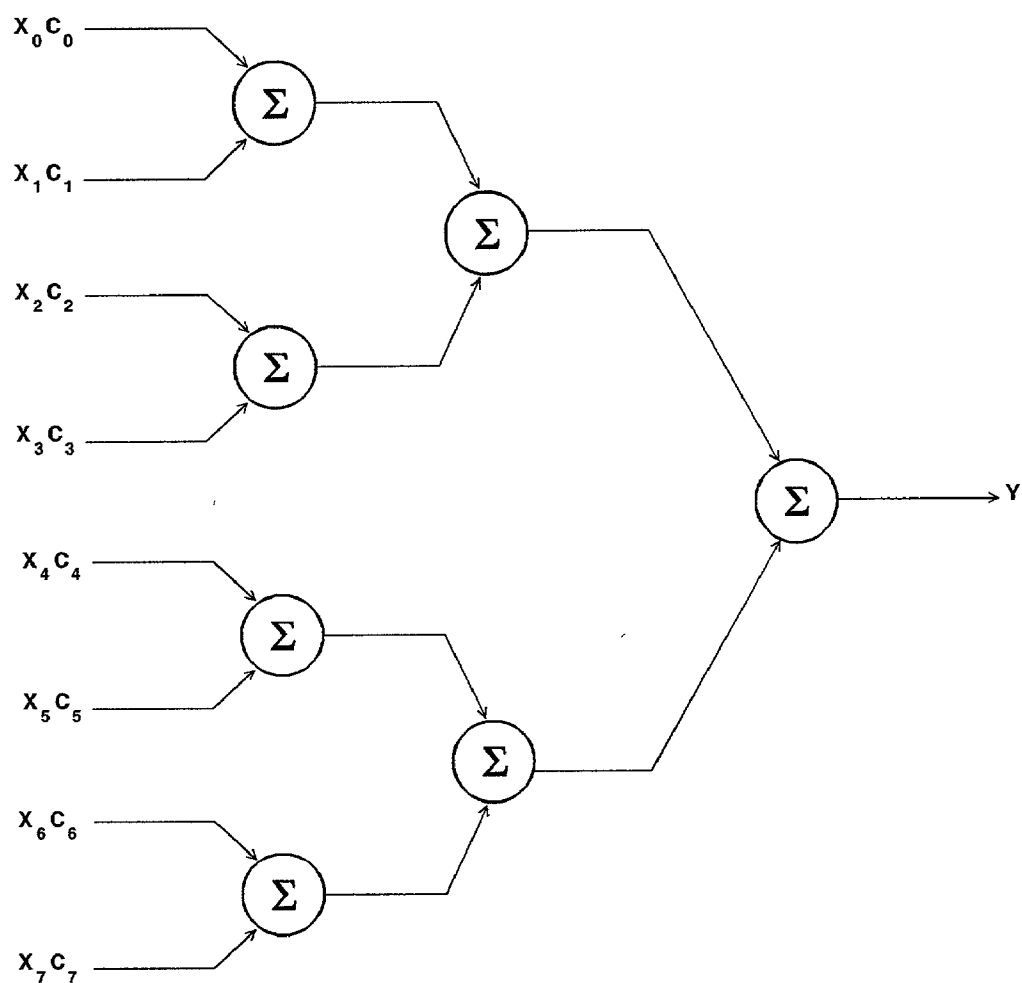


FIG. 2

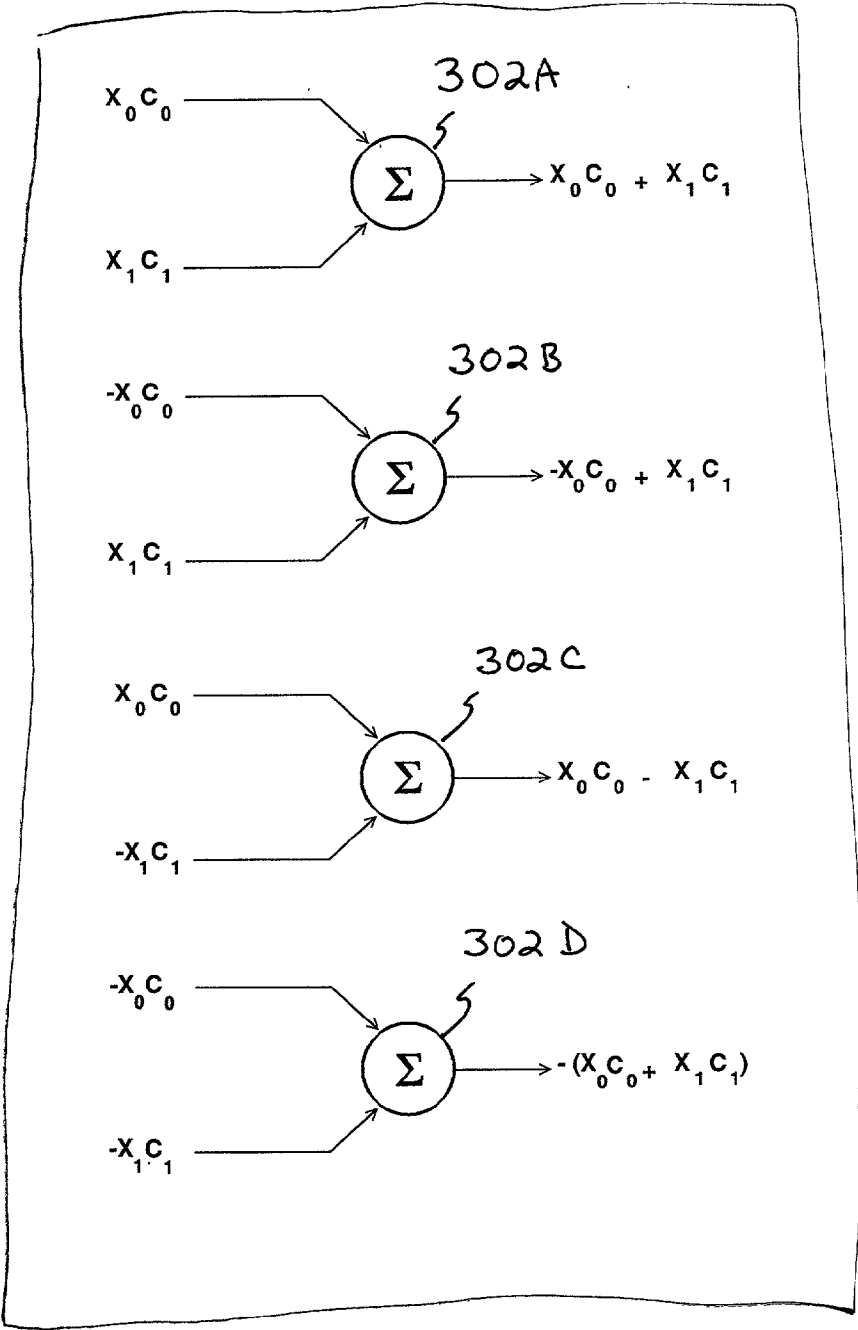
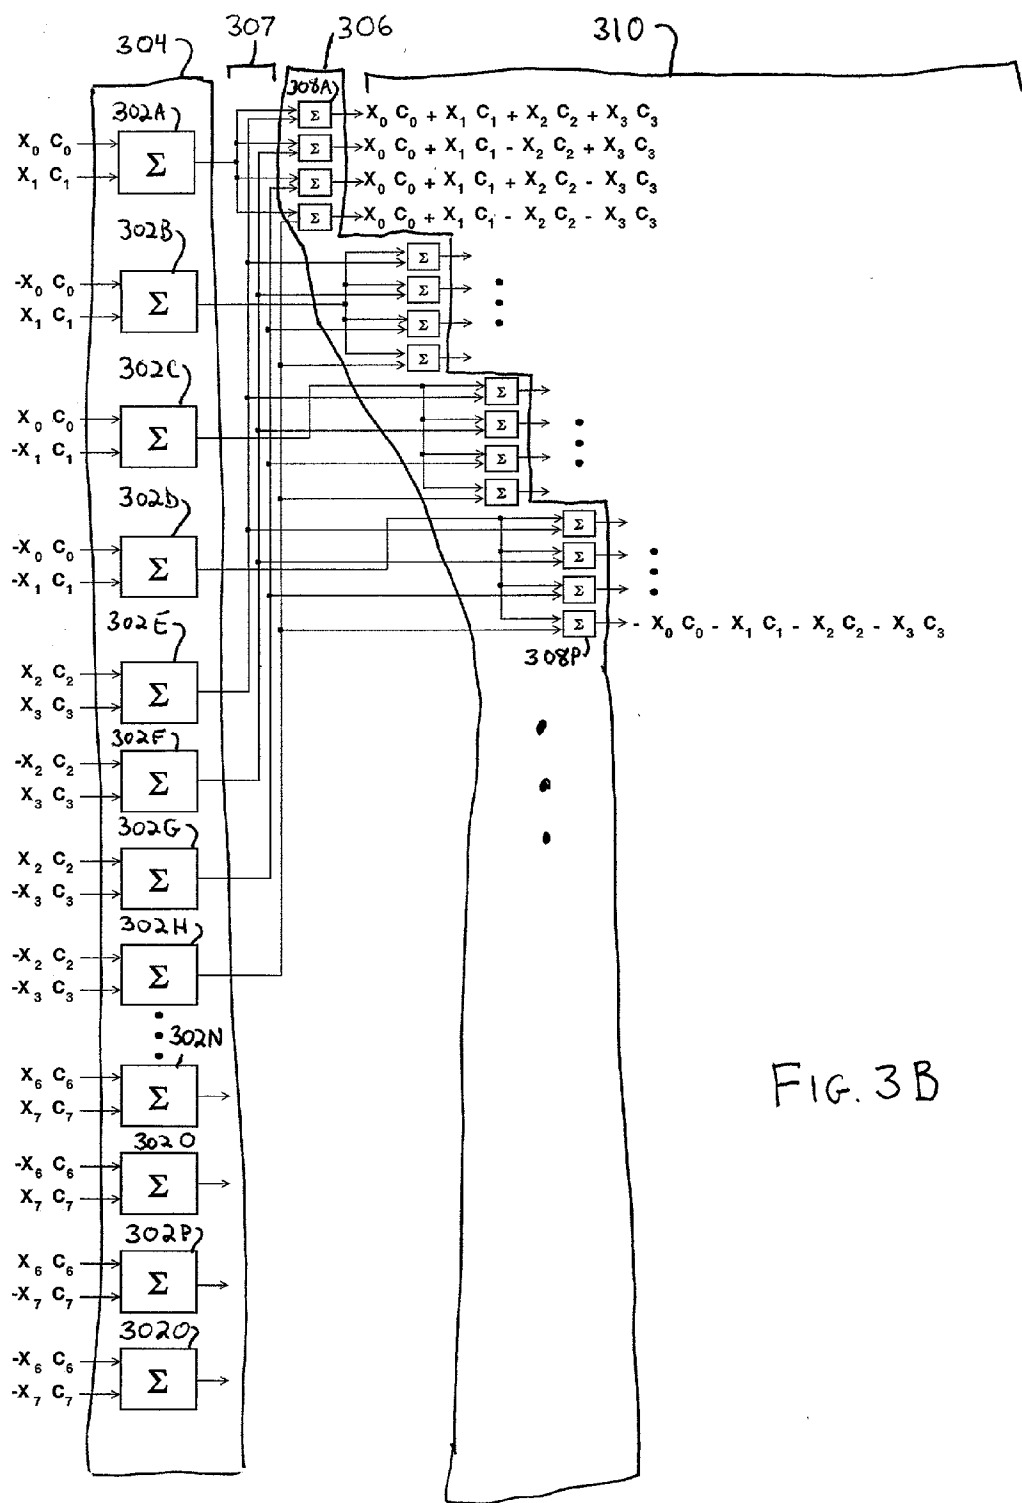


FIG. 3A



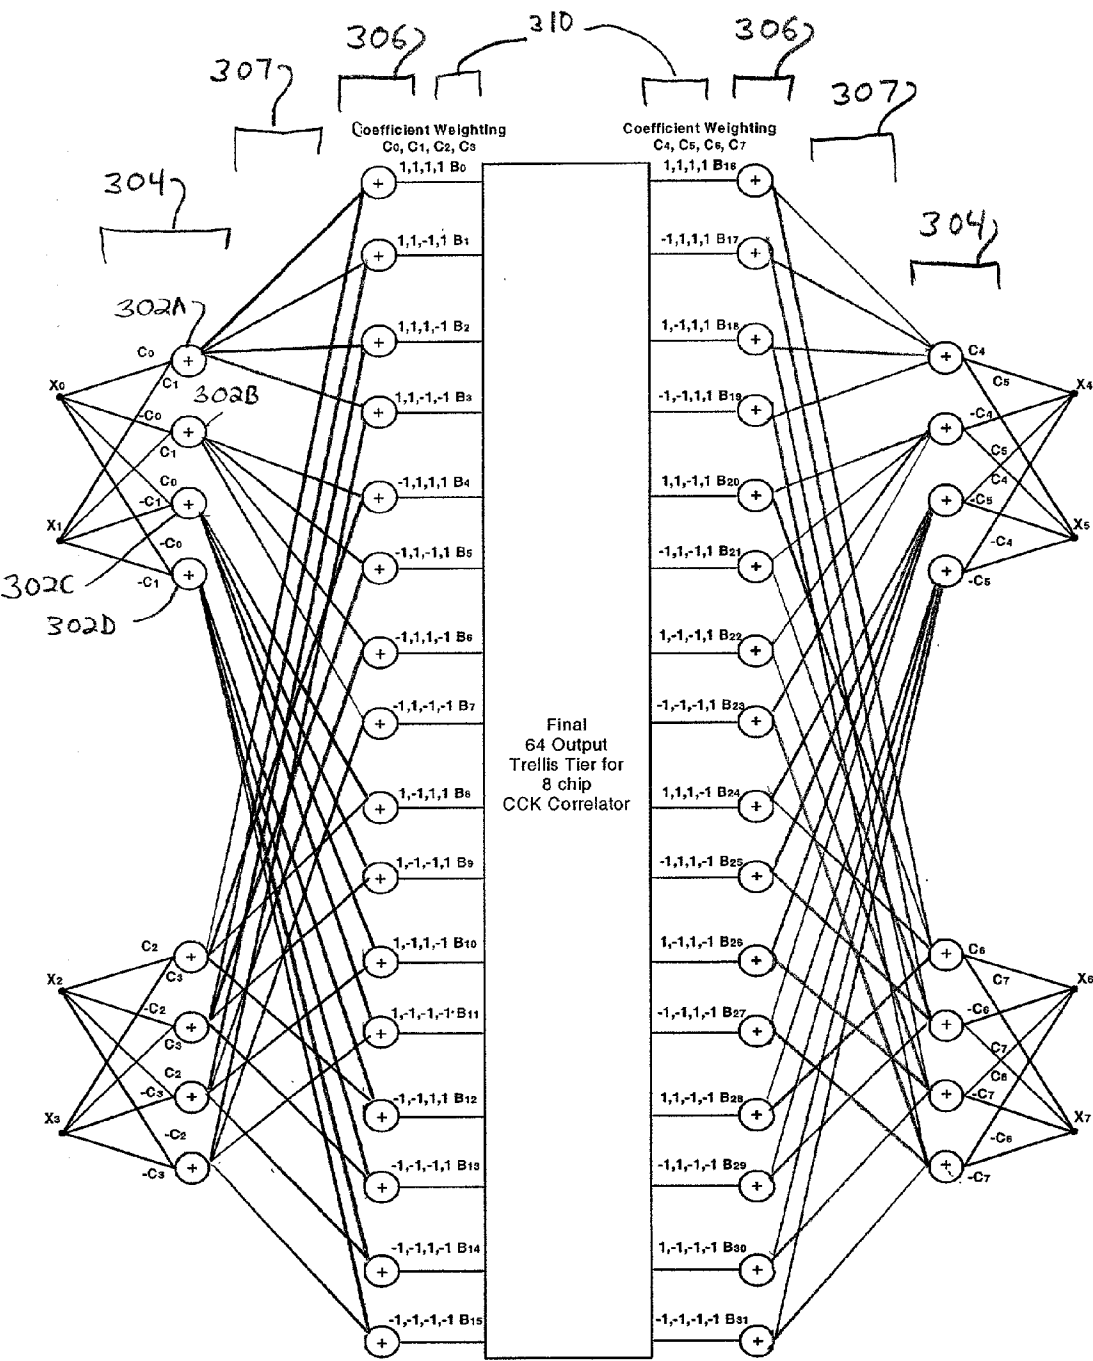


FIG. 3C


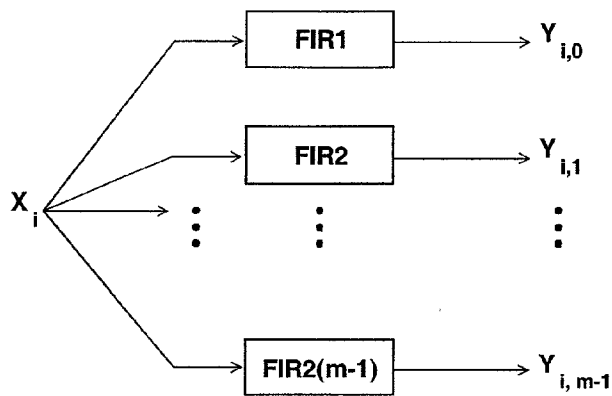


FIG. 4A

$$C_{k,m-1} = \begin{bmatrix} C_{0,0} & C_{0,1} & \dots & C_{0,m-1} \\ & \cdot & & \\ C_{1,0} & & \cdot & \\ & & \cdot & \\ C_{2,0} & & & \cdot \\ & & & \cdot \\ \vdots & & & \cdot \\ & & & \cdot \\ C_{k,0} & & & C_{k,m-1} \end{bmatrix}$$

FIG. 4B

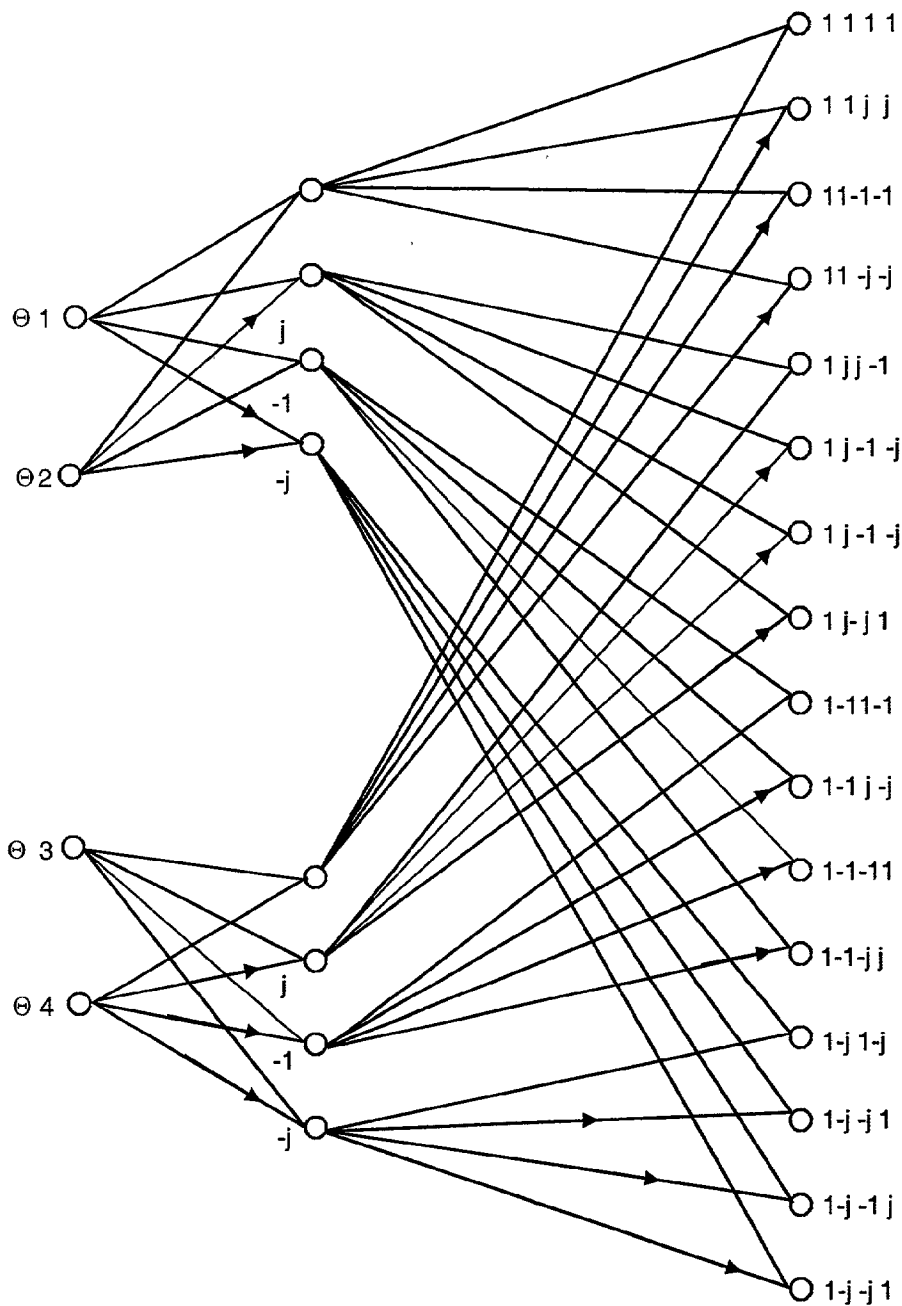

PSK Fast Hadamard Transform

FIG. 5


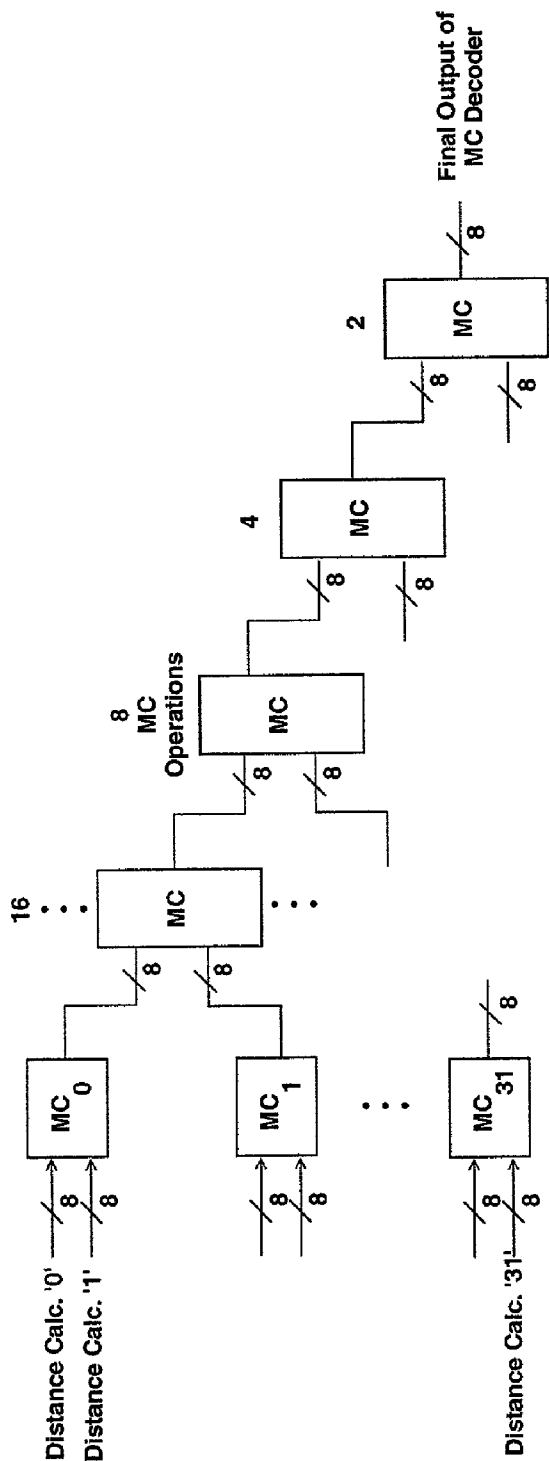


FIG. 6

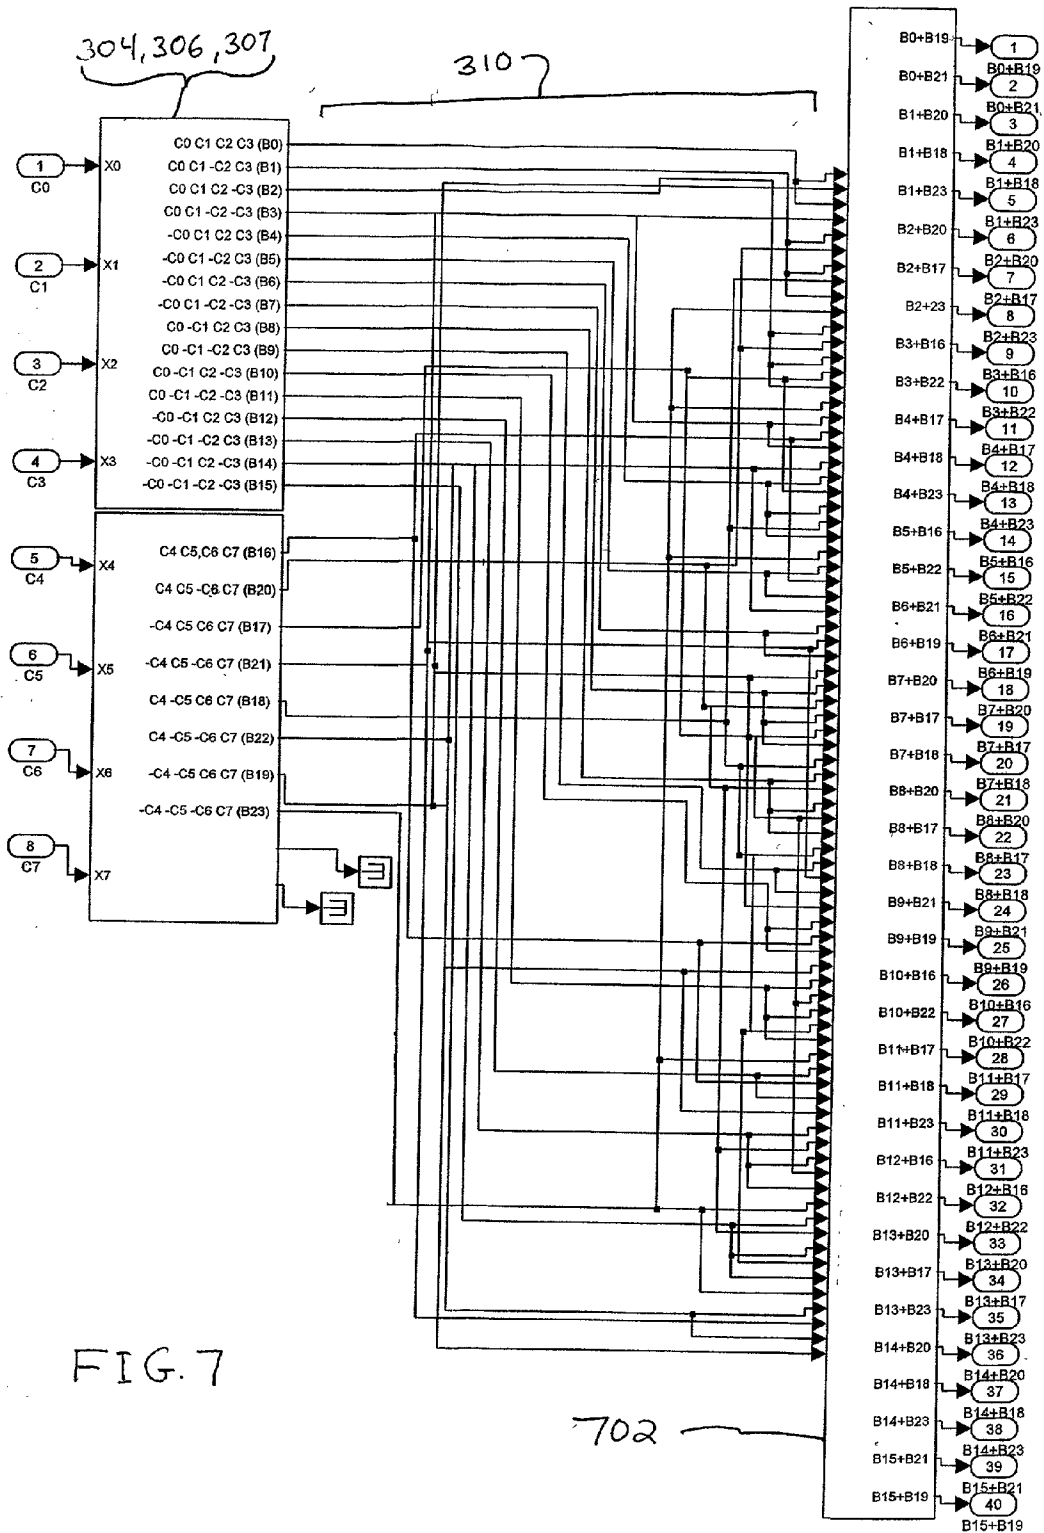

800 

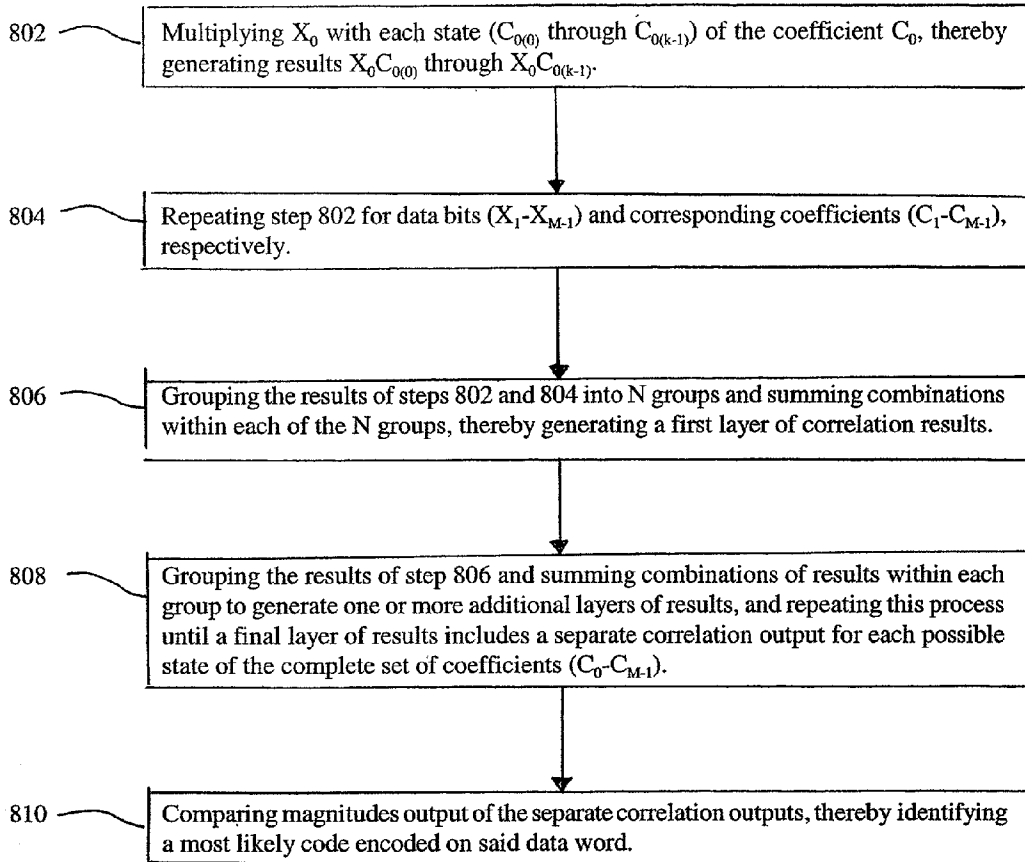


FIG. 8

METHOD AND APPARATUS FOR A PARALLEL CORRELATOR AND APPLICATIONS THEREOF

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This patent application claims priority to U.S. provisional application, "Method and Apparatus for a Parallel Correlator and Applications Thereof," Ser. No. 60/248,001, filed Nov. 14, 2000, incorporated herein by reference in its entirety.

[0002] The following application of common assignee is related to the present application, and is herein incorporated by reference in its entirety: U.S. non-provisional application, "Method and System for Down-Converting an Electromagnetic Signal, Transforms for Same, and Aperture Relationships," Ser. No. 09/550,644, filed Apr. 14, 2000.

BACKGROUND OF THE INVENTION

[0003] 1. Field of the Invention

[0004] The present invention relates to matched filters and correlators and, more particularly, to a novel fast correlator transform ("FCT") and to methods and systems for implementing same.

[0005] 2. Related Art

[0006] Matched Filter Theory was introduced by D.O. North in 1943. Others such as Van Vleck, Middleton, Weiner, and Turin, have added to the body of knowledge and application, ranging from RADAR to SONAR and communications. Although the basic theory was originally applied to continuous time systems and linear networks, the theory has been augmented to absorb discrete sampled filters and correlator operations. Indeed Paul Green pointed out in the June 1960 IRE Transactions on Information Theory, Matched Filter Issue:

[0007] "Correlation detection was studied at first as a separate subject, but the equivalence of the two operations (meaning matched filters and correlators) was soon appreciated."

[0008] IRE Transactions on Information Theory, New York, N.Y.: Professional Group on Information, Institute of Radio Engineers, June, 1960, incorporated herein by reference in its entirety.

[0009] More recently Van Whalen and Blahut as well as others have provided proofs of mathematical equivalence of correlation or matched filtering based on a change of variables formulation.

[0010] With the surge of DSP and proliferation of VLSI CMOS circuits as well as the universal push for software radios, many discrete matched filter realizations have evolved. The most notable digital implementation is the Transversal or Finite Impulse Response Filter which may realize the time flipped impulse response of the waveform to be processed or utilized as a correlator, both which produce the equivalent result at the optimum observation instant.

[0011] A particular concern arises when multiple filtering operations are required, concurrently, as is the case for parallel correlators. The complexity, clock speeds and signal flow control typically increase cost, size, and power.

[0012] What are needed are improved methods and systems for performing matched filtering and/or correlating functions, including concurrent and/or parallel correlations.

SUMMARY OF THE INVENTION

[0013] The present invention is directed to methods and systems for performing matched filtering and/or correlating functions, including concurrent and/or parallel correlations. More particularly, the present invention is directed to a fast correlator transform (FCT) algorithm and methods and systems for implementing same. The invention is useful for, among other things, correlating an encoded data word (X_0 - X_{M-1}) with encoding coefficients (C_0 - C_{M-1}), wherein each of (X_0 - X_{M-1}) is represented by one or more bits and each coefficient is represented by one or more bits, wherein each coefficient has k possible states, and wherein M is greater than 1.

[0014] In accordance with the invention, X_0 is multiplied by each state ($C_{0(0)}$ through $C_{0(k-1)}$) of the coefficient C_0 , thereby generating results $X_0 C_{0(0)}$ through $X_0 C_{0(k-1)}$. This is repeating for data bits (X_1 - X_{M-1}) and corresponding coefficients (C_1 - C_{M-1}), respectively. The results are grouped into N groups combinations within each of said N groups are added to one another, thereby generating a first layer of correlation results.

[0015] The first layer of results is grouped and the members of each group are summed with one another to generate a second layer of results. This process is repeated as necessary until a final layer of results is generated. The final layer of results includes a separate correlation output for each possible state of the complete set of coefficients (C_0 - C_{M-1}). The results in the final layer are compared with one another to identify a most likely code encoded on said data word.

[0016] In an embodiment, the summations are pruned to exclude summations that would result in invalid combinations of the encoding coefficients (C_0 - C_{M-1}). In an embodiment, substantially the same hardware is utilized for processing in-phase and quadrature phase components of the data word (X_0 - X_{M-1}). In an embodiment, the coefficients (C_0 - C_{M-1}) represent real numbers. In an alternative embodiment, the coefficients (C_0 - C_{M-1}) represent complex numbers. In an embodiment, the coefficients (C_0 - C_{M-1}) are represented with a single bit. Alternatively, the coefficients (C_0 - C_{M-1}) are represented with multiple bits (e.g., magnitude). In an embodiment, the coefficients (C_0 - C_{M-1}) represent a cyclic code keying ("CCK") code set substantially in accordance with IEEE 802.11 WLAN standard.

[0017] Further features and advantages of the invention, as well as the structure and operation of various embodiments of the invention, are described in detail below with reference to the accompanying drawings. It is noted that the invention is not limited to the specific embodiments described herein. Such embodiments are presented herein for illustrative purposes only. Additional embodiments will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. The drawing in which an element first appears is typically indicated by the leftmost digit(s) in the corresponding reference number.

BRIEF DESCRIPTION OF THE DRAWINGS/FIGURES

[0018] The present invention will be described with reference to the accompanying drawings wherein:

[0019] FIG. 1 is a block diagram of an example discrete transversal matched filter or correlator, in which the present invention can be implemented;

[0020] FIG. 2 is an expanded view of the summation function illustrated in FIG. 1;

[0021] FIG. 3A illustrates example correlation kernels, in accordance with an aspect of the present invention;

[0022] FIG. 3B illustrates example first and second layers of an FCT processing hierarchy in accordance with an aspect of the invention;

[0023] FIG. 3C illustrates an example signal flow diagram for the first and second layers illustrated in FIG. 3B;

[0024] FIG. 4A illustrates a relationship between a conventional parallel correlator approach and Equation 7;

[0025] FIG. 4B illustrates an example matrix form of coefficients for a parallel correlator in accordance with an aspect of the present invention;

[0026] FIG. 5 illustrates an example complex fast Hadamard Transform;

[0027] FIG. 6 illustrates an example parallel magnitude compare operation in accordance with an aspect of the invention;

[0028] FIG. 7 illustrates an example final layer of an FCT processing hierarchy in accordance with an aspect of the invention;

[0029] FIG. 8 illustrates an example process flowchart for implementing an FCT algorithm in accordance with an aspect of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0030]

DETAILED DESCRIPTION OF THE INVENTION	
TABLE OF CONTENTS	
I.	Introduction
II.	Example Environment: 802.11
III.	Fast Correlator Transform and Correlator Kernels
IV.	Mathematical Formulation
V.	Comparisons to the Hadamard Transform
VI.	Maximum Likelihood Decoding (AWGN, no Multipath)
VII.	A. Magnitude Comparator
VIII.	Example Methods for Implementing the FCT Algorithm
IX.	CCK Chip Code Words
X.	Conclusion
I.	Introduction

[0031] FIG. 1 is a block diagram of an example discrete transversal matched filter or correlator 100, also referred to herein as a finite impulse response (“FIR”) filter 100. The FIR filter 100 includes a set of multipliers 104 that multiply data words X_i by coefficients C. The FIR filter 100 also a final accumulate or summation function 102. The matched filter 100 implements the following discrete sampling equation;

$$y_i = \sum_{k=0}^{n-1} c_k x_{(i-k)}$$

(Eq. 1)

[0032] In Eq. 1, X_i are typically derived from a sampling device such as an A/D converter and can be represented as signed magnitude, two’s complement, or other binary representation in parallel bit format. Likewise the multiplier tap coefficients $C_0 \dots C_n$ can be 1 bit values or k bit (soft) values depending on the application. In the case of soft value implementations, the multiplier functions can represent considerable hardware or algorithmic complexity. The final summation can be implemented using discrete adder technologies or floating point processors. The entire architecture can be implemented in hardware, software, or a hybrid of each.

[0033] A particular concern arises when multiple filtering operations are required, concurrently, as is the case for parallel correlators. The complexity, clock speeds and signal flow control typically increase cost, size, and power. Hence, efficient architectures are often pursued to streamline the implementation and thereby differentiate product offerings.

[0034] The present invention is directed to a novel fast correlator transform (“FCT”) algorithm that reduces the number of additions for parallel correlation, as compared to conventional techniques. The present invention is also directed to methods and systems for implementing the novel FCT algorithm. Conventional techniques are typically of less universal application and restricted to certain signaling schemes. The present invention, on the other hand, is applicable to a variety of parallel matched filter and/or correlator operations.

[0035] The present invention is as efficient or more efficient than the Fast Walsh Transform, currently applied as the “state of the art,” and is more universally applicable to signaling schemes employing higher order signaling spaces such as MQAM, CDMA, etc. In addition, classical multipath processor algorithms are more easily applied using the classical correlator/matched filter kernel, in accordance with the present invention, rather than the conventional modified Fast Walsh Transform.

[0036] II. Example Environment: 802.11

[0037] The present invention is described herein as implemented in an example environment of an IEEE 802.11b 11 MBPS physical layer signaling scheme. IEEE 802.11 is a well-known communications standard and is described in, for example, “Medium Access Control (MAC) and Physical (PHY) Specifications,” ANS/IEE Std 802.11, published by IEEE, (1999Ed.), and incorporated herein by reference in its entirety.

[0038] The present invention is not, however, limited to the IEEE 802.11 communications standard. Based on the description herein, one skilled in the relevant art(s) will understand that the present invention can be implemented for a variety of other applications as well. Such other applications are within the spirit and scope of the present invention.

[0039] The 802.11 signaling scheme of interest is based on Cyclic Code Keying (“CCK”) derived from Walsh/Had-

amard functions. A restricted set within the available coding space was selected so that the Fast Walsh Transform could be utilized to implement an efficient correlator architecture. Originally, both Harris and Lucent could not figure out how to apply a classical parallel matched filter or correlator, efficiently, to process the waveforms. The current coding space provides for 64 code words. Harris erroneously predicted that a classical parallel matched filter approach would require $8 \times 64 = 512$ complex additions since each code word is 8 bits, on I and Q and there are 64 code words. However, the true estimate is $7 \times 64 = 448$ complex additions as illustrated in the example 8-way adder tree illustrated in FIG. 2.

[0040] FIG. 2 is an expanded view of the final accumulate or summation function 102 in FIG. 1, part of the FIR filter 100. Notice that only 7 adders are required for the example implementation. Nevertheless, 448 complex additions represent a significant number of operations. Lucent, Harris/Intersil, and Alantro apply the Fast Walsh Transform ("FWT") to the CCK code set to reduce the correlation operation down to 112 complex multiplies due to the restriction placed on the code set.

[0041] The FWT is actually more of a decoder than a correlator. It reduces to the performance of a correlator for this specific application if the coefficients in the butterfly branches are weighted with simple hard coded values, i.e., 1, -1, j, -j. The imaginary numbers are included for the case of complex signaling.

[0042] The FCT algorithm, according to the present invention, is truly a correlation or matched filter operation and can be applied with soft value weighting or hard value weighting. Furthermore, the present invention is intuitively satisfying, possessing direct correspondence of matched filter tap weights or coefficients maintained throughout the hierarchical structure. This permits easy extension of the matched filter concept to accommodate channel equalization, MLSE, and other adaptive applications.

[0043] III. Fast Correlator Transform and Correlator Kernels

[0044] The available coding space for a 16 bit word is $2^{16} = 65536$. CCK whittles this space down to a code set formed by 8 in-phase ("I") chip and 8 quadrature phase ("Q") chip complex symbols. 64 code words are retained, carrying 6 bits of information. 2 more bits are contained in the complex QPSK representation, for a total of 8 bits of information.

[0045] Suppose then that 8 samples of an input vector $X_0, X_1, \dots, X_7$ are associated with optimal sampling instants from the output of a chip matched filter. Each of these samples would normally be weighted by the coefficients $C_0 \dots C_7$ then assimilated as illustrated in FIGS. 1 and 2.

[0046] In the 802.11 example, $C_0 \dots C_7$ correspond to samples of the CCK code set symbols. The unknowns $X_0 \dots X_7$ are noisy input samples from which a specific code must be extracted. Conceptually, 64 such complex filtering operations should be performed concurrently since a specific code word cannot be predicted a priori. The largest output from the parallel bank of correlators would then be selected as the most likely code word correlation match at that particularly symbol sample time.

[0047] In accordance with the present invention, a general philosophy for correlation is imposed for partitioned seg-

ments of code words. In an embodiment, the code word correlations are divided into sub-sets. In the illustrated example embodiment, the code word correlations are divided into sample pairs. The present invention is not, however, limited to this example embodiment. In other embodiments, the code word correlations are divided into triplets, quintuplets, and/or any other suitable sub-sets.

[0048] Combinations of the code word correlation sub-sets are then provided to correlation kernels. FIG. 3A illustrates example correlation kernels 302a-302d, in accordance with an aspect of the present invention.

[0049] The correlation kernels 302a-302d represent all or substantially all possible correlation options for the first 2 samples X_0, X_1 . In a similar fashion the remaining groupings of double samples $(X_2, X_3), (X_4, X_5), (X_6, X_7)$ Will also spawn their own set of 4 correlation kernels.

[0050] The number of separate correlation kernels spawned is determined by the number of correlated samples per summation, the number of correlation variations possible, and, in an embodiment, the number of invalid combinations of correlated samples. In the present example, each coefficient has two possible states (i.e., hard value weighting). Thus each subset correlation generates 4 outputs. In alternative embodiments, soft weighting is implemented, where each coefficient is represented with multiple bits (e.g., magnitude representation).

[0051] In an embodiment, binary antipodal signaling in accordance with the present invention is implemented in accordance with Eq. 2.

$$N_k = \frac{n!}{r!(n-r)!} - L \quad (\text{Eq. 2})$$

[0052] The result for the example environment described above, using 2 input summers, is shown in Eq. 3:

$$N_k = \frac{4!}{2!(2)!} - 2 \quad (\text{Eq. 3})$$

[0053] wherein:

[0054] n is the number of uniquely available summer inputs;

[0055] r is the number of summing inputs per kernel; and

[0056] L is the number of invalid combinations.

[0057] N_k is thus the number of correlation kernels and therefore the number of adders or summers required. Groupings of two correlation samples provide for convenient binary expansion. As stated above, however, the present invention is not limited to groupings of two.

[0058] The term L represents the number of invalid or disallowed combinations. For instance, $X_0 C_0$ and $-X_0 C_0$ is an invalid combination when added and therefore can be subtracted from the total number of combinations. In an embodiment, 3 way adders or summers are utilized. In other embodiments, other algorithmic partitioning is utilized. For

the current example, partitioning in powers of 2 is convenient and attractive in terms of potential hardware implementation.

[0059] FIG. 3B illustrates example first and second layers 304 and 306, respectively, of an FCT processing hierarchy in accordance with an aspect of the invention.

[0060] The second layer 306 includes 32 additions 308, of which 308a through 308p are illustrated, to process combinations of correlations from the first layer 304 of correlation kernels. The first layer 304 includes 16 additions related to the first 4 sample correlations $X_0C_0 \dots X_3C_3$, and 16 additions related to the 2nd 4 sample correlations. Hence, the first layer 304 of kernels includes 16 adders 302 and the second layer possesses 32 adders 308. Once the second layer 306 is accomplished, each term that results includes 4 correlation components.

[0061] Note that 4 unique samples $X_0 \dots X_3$ at the system input spawns 2^4 unique 4-tuple correlations at the second layer 306 of kernel processing. The corresponding number of additions is calculated for the 4 sample correlation sequences from Eq. 4:

$$N = \frac{8!}{2!6!} - 2\left(\frac{4!}{2!2!}\right) = 16 \quad (\text{Eq. 4})$$

[0062] At this point it is important to realize that all that is required is one more level of processing to obtain correlation terms consisting of 8 components which represents a full length correlation. However, it must also be recognized that there are 16 upper 4-tuple correlations as well as 16 lower 4-tuple correlations, which if exploited for all combinations in this case would yield 256 addition operations! Fortunately the CCK code set is well defined and possesses only 64 valid 8 chip component correlations. Hence, the final layer, illustrated in FIG. 7, is pruned to perform only 64 unique addition operations. Thus, a total (upper bound) number of adders used for the algorithm are:

$$16 \text{ (first hierarchical layer)} + 32 \text{ (second layer)} + 64 \text{ (third layer)} = 112$$

[0063] This is a remarkable result because a conventional parallel matched filter or correlator bank would require 448 complex additions. Theoretically, 112 is the upper bound. However, in practice, the Trellis may be pruned to a maximum of 78 additions on the I and 78 and the Q.

[0064] FIG. 3C illustrates an example signal flow diagram for the FCT algorithm through the first 2 layers 304 and 306. In accordance with the example above, there are 8 input samples and 32 output correlation options through the first 2 layers 304 and 306. Correlation combinations from the upper and lower 16 4-tuples provide a final trellis with 64 8-tuple options, each representing a different CCK symbol. The option having the highest output is selected during each symbol cycle as the most likely CCK symbol. In the example embodiment, the correlation operation utilizes I and Q matched filters since the symbols are complex.

[0065] IV. Mathematical Formulation

[0066] In an embodiment, a receiver in accordance with the present invention receives a waveform and an analog-to-digital converter function samples the received waveform

and converts the waveform down to baseband. The received sampled waveform may be represented from Eq. 5:

$$X_i = S_i + N_i \quad (\text{Eq. 5})$$

[0067] Where S_i represents samples from the received signal and N_i represent noise sampled from an average white Gaussian noise ("AWGN") process. This equation does not account for multi-path. The samples can be considered as complex, with I and Q components. The receiver output can be represented by Eq. 6:

$$Y_i = \sum_{k=0}^{n-1} C_k X(i-k) \quad (\text{Eq. 6})$$

[0068] The coefficients, C_k , are considered constant for the nominal case of an AWGN channel. n is the FIR filter or correlator depth. For a case of m correlators operating on X_i in parallel, Eq. 6 becomes Eq. 7:

$$Y_{i,m-1} = \sum_{k=0}^{n-1} C_{k,m-1} X(i-k) \quad (\text{Eq. 7})$$

[0069] The m th correlator branch then contains correlator coefficients uniquely related to that branch.

[0070] FIG. 4A illustrates a conventional parallel correlator approach and relates it to Eq. 7. The present invention breaks the sum over $n-1$ into smaller sums, typically, although not necessarily, sums of 2. The present invention applies all, or substantially all potential cross correlations and carries the 4 results forward to a subsequent level of processing. An example mathematical formulation of this operation is provided in Eq. 8;

$$Y(i)_{l,v,p,u} = \sum_{k=0}^1 C_{k,l} X(i-k) + \sum_{k=2}^3 C_{k,v} X(i-k) + \sum_{k=4}^5 C_{k,p} X(i-k) + \sum_{k=6}^7 C_{k,u} X(i-k) \quad (\text{Eq. 8})$$

[0071] Where l,v,p , and u may be considered as indices to select different coefficients. All indices should be considered in terms of a final valid code word correlation. In the 802.11 case, 256 correlation sequences are defined by Eq. 8, but the options are sifted to correspond only to valid CCK code words. FIG. 4B illustrates an example matrix form of coefficients for a parallel correlator according to the present invention.

[0072] The coefficients all take on the values of ± 1 for the examples herein. The indices are permitted to contain zeros for consistency with the original FIR formulation. The FCT sub-matrices however are simply;

$$C_{k,l} = C_{k,v} = C_{k,p} = C_{k,u} = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \quad (\text{Eq. } 9)$$

[0073] The indices l,v,p,u are manipulated specifically to match the coefficients to the desired code words at the $Y(i)_{l,v,p,u}$ outputs. The indices also uniquely specify the trajectory through the signal flow path. Breaking up the original parallel matched filter coefficient matrix into the smaller 2x2 matrix permits the FCT algorithm to exploit redundant correlation operations.

[0074] V. Comparisons to the Hadamard Transform

[0075] An FCT algorithm trellis, in accordance with the present invention, is described above. A corresponding length 4 complex fast Hadamard Transform is illustrated in **FIG. 5**. As with the FCT algorithm, there are two such trellis structures corresponding to 8 input samples and 32 outputs. The 32 outputs include two 16 wide 4-tuple groupings, which are then utilized in combinations to produce the final 54 8-tuple correlations.

[0076] There are distinct differences between the two algorithms. For example, the FCT algorithm can function on arbitrary correlation words, even in matched filter scenarios, while the FWT requires certain signal coding structure. Also, the FCT algorithm permits greater efficiency because the number of adds may be tailored for a specific code set or application.

[0077] Harris and Lucent advertise an efficiency of 112 complex additions for CCK demodulation, which amounts to 2x112 additions. The bounding case for 64 arbitrary correlations with the FCT was shown to be 112, maximum. It turns out that the specific case of CCK may be accommodated using a pruned FCT algorithm having 78 additions on the in-phase correlation band and 78 additions on the quadrature correlation bank. Therefore, the FCT possesses greater redundancy for the CCK application, which is exploited to implement significantly more efficient structures.

[0078] VI. Maximum Likelihood Decoding (AWGN, no Multipath)

[0079] The modified Fast Walsh/Hadamard Transform implements a complex trellis decoder for which maximum scores may be compared at the trellis output. Thus there are 64 distinct outputs of the trellis which are preferred based on Euclidean distance calculations along the trellis trajectories. Only certain specific trajectories are considered up through the second tier of the trellis. The distance properties for the decoding trellis are also Euclidean for the in-phase and quadrature phase correlators. However, it is important to realize that the total distance should be calculated within the complex plane rather than simply on I independently of Q. That is, scoring is based on Eq. 10.

$$\text{Distance} = \sqrt{I_{\text{score}}^2 + Q_{\text{score}}^2} \quad (\text{Eq. } 10)$$

[0080] This comes from the fact that there are pairs of I and Q chip code words which are dependent. That is the nature of the complex Walsh-Hadamard codes. Fortunately, a sufficient statistic exists which does not require the square root operation. Simply calculating the sum of the squares or

estimating the vector magnitude will suffice. In this manner then the total distance or weighting through complex space is calculated. The largest output out of the 64 complex operations (weighting scenario) then becomes the most likely 8 chip complex code.

[0081] A. Magnitude Comparator

[0082] In order to determine which code symbol was most likely encoded, a magnitude compare operation is performed on the outputs from the summer **102** (**FIG. 1**). A variety of types of magnitude compare operations can be performed.

[0083] **FIG. 6** illustrates an example parallel magnitude compare operation in accordance with an aspect of the invention. In operation, the I and Q inputs, 8 bits wide each, for example, are squared and summed at the correlator outputs to form 64 scores. These 64 scores are compared and the largest result selected as the maximum likelihood symbol estimate. Each of the 64 outputs are assigned their corresponding chip code-to-6-bit data map. An additional di-bit is decoded from the differential phase decoder. In an embodiment, the squaring operation results in 16 bit output value when the inputs from each I and Q correlator are truncated to an extent reasonable to minimize the compare tree. In an embodiment, a parallel compare tree utilizes $\log_2(64)-1$ compares to obtain the most likely result.

[0084] In an embodiment, the magnitude compare operation illustrated in **FIG. 6** utilizes a flag at each level of compare to indicate the winning local score at that level. The winning local score can be traced from the output back to one of the 64 original input correlation scores to decide which 6-bit word is most likely. In an embodiment, outcomes of tie scores at one or more levels are arbitrarily determined. In an embodiment, magnitude compare operations are performed with an adder/subtractor to create the result $C=A-B$, where A and B are inputs.

[0085] Another magnitude compare technique that can be utilized is referred to herein as space slicing, which includes the steps of examining the MSB of the correlator outputs, and throwing away results not active in the MSB. If none are active in the MSB then the next MSB is compared, so on and so forth. Any surviving correlator outputs are compared in the next most significant MSB in succession until all necessary compares are exhausted. This technique is useful because it requires only 1-bit compares at each level down to the final compare. In an embodiment, 1 bit compares are performed with an exclusive OR gate. Generally, there is no deterministic way to predict the number of surviving compares which may be passed on to the next level, but the maximum number typically reduces by a factor of 2 at each level. This approach relies on a statistical distribution of scores, which may permit rapid sifting. If all of the distances are similar in magnitude then sifting typically requires more operations. For instance, if all 64 distance calculations/scores possess an active MSB then the first round of sifting will not eliminate any scores and all scores are then be compared in the next MSB. Although this is not likely to occur, it should be anticipated for associated hardware realization.

[0086] VII. Example Methods for Implementing the FCT Algorithm

[0087] **FIG. 8** illustrates an example process flowchart **800** for implementing the FCT algorithm in accordance with

an aspect of the present invention. For illustrative purposes, the flowchart **800** is described herein with reference to one or more of the drawing figures described above. The invention is not, however, limited to the examples illustrated in the drawings. Based on the description herein, one skilled in the relevant art(s) will understand that the invention can be implemented in a variety of ways.

[0088] The example process flowchart **800** illustrates a method for correlating an encoded data word (X_0 - X_{M-1}) with encoding coefficients (C_0 - C_{M-1}), wherein each of (X_0 - X_{M-1}) is represented by one or more bits and each said coefficient is represented by one or more bits, wherein each coefficient has k possible states, wherein M is greater than 1.

[0089] The process begins with step **802**, which includes multiplying X_0 with each state ($C_{0(0)}$ through $C_{0(k-1)}$) of the coefficient C_0 , thereby generating results $X_0C_{0(0)}$ through $X_0C_{0(k-1)}$. This is illustrated, for example, in **FIGS. 3A, 3B, and 3C** just prior to the kernels **302A, B, C, and D**.

[0090] Step **804** includes repeating step **802** for data bits (X_1 - X_{M-1}) and corresponding coefficients (C_1 - C_{M-1}), respectively. This is illustrated, for example, in **FIGS. 3B, and 3C** just prior to the kernels **302E through 302Q**.

[0091] Step **806** includes grouping the results of steps **802** and **804** into N groups and summing combinations within each of said N groups, thereby generating a first layer of correlation results. This is illustrated, for example, in **FIGS. 3A, 3B, and 3C** by the kernels **302**, and the resultant first layer of results **307**.

[0092] Step **808** includes grouping the results of step **806** and summing combinations of results within each group to generate one or more additional layers of results, and repeating this process until a final layer of results includes a separate correlation output for each possible state of the complete set of coefficients (C_0 - C_{M-1}). This is illustrated in **FIG. 3C** and **FIG. 7**, where the summers **306** generate a second layer **310**, the FCT final output trellis **702 (FIG. 7)** provides separate outputs for each possible state of the complete set of coefficients (C_0 - C_{M-1}) in a final layer **704**.

[0093] In an embodiment, steps **806** and **808** include the step of omitting summations that would result in invalid combinations of the encoding coefficients (C_0 - C_{M-1}). This is illustrated, for example, in **FIG. 7**, wherein the second level of results **310** omits the following combinations:

- [0094] $C_4C_5C_6(-C_7)$;
- [0095] $C_4C_5(-C_6)(-C_7)$;
- [0096] $(-C_4)C_5C_6(-C_7)$;
- [0097] $(-C_4)C_5(-C_6)(-C_7)$;
- [0098] $C_4(-C_5)C_6(-C_7)$;
- [0099] $C_4(-C_5)(-C_6)(-C_7)$;
- [0100] $(-C_4)(-C_5)C_6(-C_7)$ and
- [0101] $(-C_4)(-C_5)(-C_6)(-C_7)$.

[0102] In this example, the omissions eliminate performing summations for combinations that are invalid in light of the CCK code. In other embodiments, different combinations may or may not be omitted based on particular codes.

[0103] Step **810** includes comparing magnitudes of said separate correlation outputs, thereby identifying a most likely code encoded on said data word. This is illustrated, for example, in **FIG. 6**, by the example parallel magnitude compare operation.

[0104] In an embodiment, the process flowchart **800** further includes the step of performing steps (1) through (5) using substantially the same hardware for in-phase and quadrature phase components of the data word (X_0 - X_{M-1}).

[0105] In an embodiment, the coefficients (C_0 - C_{M-1}) represent real numbers.

[0106] In an alternative embodiment, the coefficients (C_0 - C_{M-1}) represent complex numbers.

[0107] In an embodiment, the coefficients (C_0 - C_{M-1}) are represented with a single bit. Alternatively, the coefficients (C_0 - C_{M-1}) are represented with multiple bits (e.g., magnitude).

[0108] In an embodiment, the coefficients (C_0 - C_{M-1}) represent a cyclic code keying ("CCK") code set substantially in accordance with IEEE 802.11 WLAN standard, illustrated in the tables below.

[0109] In an embodiment, as illustrated in one or more of the prior drawing figures, M equals 8, N equal 4, and the coefficients (C_0 - C_{M-1}) have two states, plus and minus.

[0110] VIII. CCK Chip Code Words

[0111] Tables are provided below that illustrate source-input data symbols, 8-bits long (d_0 - d_7), and corresponding in-phase and quadrature phase 8 chip symbols used for CCK. The complex chip notation is provided for reference. In addition the algorithm flow diagram 4-tuple sums are provided since the last level of flow diagram becomes complex and difficult to follow. $B_0 \dots B_{31}$ are the 4-tuple intermediate correlation results relating to the signal flow diagrams presented for the correlator algorithm. Two branch 4-tuples form the final output result for each correlator. $B_0 \dots B_{15}$ provide options for the first branch component to form a final output correlator 8-tuple while $B_{16} \dots B_{31}$ provide the second branch component or second 4-tuple. For instance, Table 1 illustrates an example build-up:

TABLE 1

4-tuple Designator	4-tuple Coefficient Sequence
B_6	-1, 1, 1, -1
B_{28}	1, 1, -1, -1
4-tuple Combination	Final 8-tuple Correlator Coefficient Sequence
$B_6 + B_{28} \Rightarrow$	-1, 1, 1, -1, 1, 1, -1 -1

[0112] Logical zeros become weighted by an arithmetic value, -1. In this manner the optimum correlator trajectory for a particular chip sequence is projected through the correlator trellis. The example above corresponds to the in-phase correlator waiting for an originally transmitted data sequence $d_0 \dots d_7$ of 0,0,1,0,1,0,1,0. For this example, that particular branch represents a correlation provided in Eq. 11;

$$y_{47} = x_0(-1) + x_1(1) + x_2(1) + x_3(-1) + x_4(1) + x_5(1) + x_6(-1) + x_7(-1)$$

(Eq. 1)

[0113] $x_0 \dots x_7$ represent corrupted or noisy input signal samples. When the x_i match the coefficients significantly then that 8-tuple (1 of 64) output possesses maximum

weighting and is declared most likely by the magnitude comparator. Another strategy seeks to minimize the distance between the x_i and c_i . The process is similar in either case.

[0114] Table 2 illustrates example in-phase and quadrature 4-tuple combinations. It is noted that the examples provided

in Tables 1 and 2 are provided for illustrative purposes and are not limiting. Other specific examples will be apparent to persons skilled in the relevant arts based on the teachings herein, and such other examples are within the scope and spirit of the invention.

TABLE 2

d0	d1	d2	d3					
d4	d5	d6	d7	In phase	4-tuple Combination	Quadrature	4-tuple Combination	Complex
D ₀	00000000	11101101		B ₂ + B ₂₀	11101101	B ₂ + B ₂₀	111-111-11	
D ₁	00000001	00011101		B ₁₃ + B ₂₀	11101101	B ₂ + B ₂₀	jjj-j11-11	
D ₂	00000010	00011101		B ₁₃ + B ₂₀	00011101	B ₁₃ + B ₂₀	-1-1-1111-11	
D ₃	00000011	11101101		B ₂ + B ₂₀	00011101	B ₁₃ + B ₂₀	-j-j-jj11-11	
D ₄	00000100	00100001		B ₁₄ + B ₂₃	11101101	B ₂ + B ₂₀	jj1-1jj-11	
D ₅	00000101	00010001		B ₁₃ + B ₂₃	00101101	B ₁₄ + B ₂₀	-1-1j-jjj-11	
D ₆	00000110	11010001		B ₁ + B ₂₃	00011101	B ₁₃ + B ₂₀	-j-j-11jj-11	
D ₇	00000111	11100001		B ₂ + B ₂₃	11011101	B ₁ + B ₂₀	11-jjjj-11	
D ₈	00001000	00100001		B ₁₄ + B ₂₃	00100001	B ₁₄ + B ₂₃	-1-11-1-1-1-11	
D ₉	00001001	11010001		B ₁ + B ₂₃	00100001	B ₁₄ + B ₂₃	-j-jj-j-1-1-1-11	
D ₁₀	00001010	11010001		B ₁ + B ₂₃	11010001	B ₁ + B ₂₃	11-11-1-1-1-11	
D ₁₁	00001011	00100001		B ₁₄ + B ₂₃	11010001	B ₁ + B ₂₃	jj-jj-1-1-1-11	
D ₁₂	00001100	11101101		B ₂ + B ₂₀	00100001	B ₁₄ + B ₂₃	-j-j1-1-j-j-11	
D ₁₃	00001101	11011101		B ₁ + B ₂₀	11100001	B ₂ + B ₂₃	11j-j-j-j-11	
D ₁₄	00001110	00011101		B ₁₃ + B ₂₀	11010001	B ₁ + B ₂₃	jj-11-j-j-11	
D ₁₅	00001111	00101101		B ₁₄ + B ₂₀	00010001	B ₁₃ + B ₂₃	-1-1-jj-j-j-11	
D ₁₆	00010000	01000111		B ₇ + B ₁₇	11101101	B ₂ + B ₂₀	1j1-1j1-j1	
D ₁₇	00010001	00010111		B ₁₃ + B ₁₇	01001101	B ₇ + B ₂₀	-1j-1-jj1-j1	
D ₁₈	00010010	10110111		B ₈ + B ₁₇	00011101	B ₁₃ + B ₂₀	-j-1-j1j1-j1	
D ₁₉	00010011	11100111		B ₂ + B ₁₇	10111101	B ₈ + B ₂₀	1-j1j1-j1	
D ₂₀	00010100	00000011		B ₁₅ + B ₁₉	01100101	B ₆ + B ₂₁	-1jj-1-1j-j1	
D ₂₁	00010101	10010011		B ₉ + B ₁₉	00000101	B ₁₅ + B ₂₁	-j-1-1-j-1j-j1	
D ₂₂	00010110	11110011		B ₀ + B ₁₉	10010101	B ₉ + B ₂₁	1-j-j1-1j-j1	
D ₂₃	00010111	01100011		B ₆ + B ₁₉	11110101	B ₀ + B ₂₁	11j-j-1j-j1	
D ₂₄	00011000	10001011		B ₁₁ + B ₁₈	00100001	B ₁₄ + B ₂₃	-j-1j-1-j-1-j1	
D ₂₅	00011001	11011011		B ₁ + B ₁₈	10000001	B ₁₁ + B ₂₃	1-j-1-j-j-1-j1	
D ₂₆	00011010	01111011		B ₄ + B ₁₈	11010001	B ₁ + B ₂₃	j1-j1-j-1-j1	
D ₂₇	00011011	00101011		B ₁₄ + B ₁₈	01110001	B ₄ + B ₂₃	-1j1j-j-1-j1	
D ₂₈	00011100	11001111		B ₃ + B ₁₆	10101001	B ₁₀ + B ₂₂	1-jj-11-j-j1	
D ₂₉	00011101	01011111		B ₅ + B ₁₆	11001001	B ₃ + B ₂₂	j1-1-j1-j-j1	
D ₃₀	00011110	00111111		B ₁₂ + B ₁₆	01011001	B ₅ + B ₂₂	-1j-j11-j-j1	
D ₃₁	00011111	10101111		B ₁₀ + B ₁₆	00111001	B ₁₂ + B ₂₂	-j-1j1-j-j1	
D ₃₂	00100000	01000111		B ₇ + B ₁₇	01000111	B ₇ + B ₁₇	-11-1-1-1111	
D ₃₃	00100001	10110111		B ₈ + B ₁₇	01000111	B ₇ + B ₁₇	-jj-j-j-1111	
D ₃₄	00100010	10110111		B ₈ + B ₁₇	10110111	B ₈ + B ₁₇	1-111-1111	
D ₃₅	00100011	01000111		B ₇ + B ₁₇	10110111	B ₈ + B ₁₇	j-jjj-1111	
D ₃₆	00100100	10001011		B ₁₁ + B ₁₈	01000111	B ₇ + B ₁₇	-jj-1-1-jj11	
D ₃₇	00100101	10111011		B ₈ + B ₁₈	10000111	B ₁₁ + B ₁₇	1-1-j-j-jj11	
D ₃₈	00100110	01111011		B ₄ + B ₁₈	10110111	B ₈ + B ₁₇	j-j11-jj11	
D ₃₉	00100111	01001011		B ₇ + B ₁₈	01110111	B ₄ + B ₁₇	-11jj-jj11	
D ₄₀	00101000	10001011		B ₁₁ + B ₁₈	10001011	B ₁₁ + B ₁₈	1-1-1-11-1111	
D ₄₁	00101001	01111011		B ₄ + B ₁₈	10001011	B ₁₁ + B ₁₈	j-j-j-j-1111	
D ₄₂	00101010	01111011		B ₄ + B ₁₈	01111011	B ₄ + B ₁₈	-11111-111	
D ₄₃	00101011	10001011		B ₁₁ + B ₁₈	01111011	B ₄ + B ₁₈	-jjjj1-111	
D ₄₄	00101100	01000111		B ₇ + B ₁₇	10001011	B ₁₁ + B ₁₈	j-j-1-1j-j11	
D ₄₅	00101101	01111011		B ₄ + B ₁₇	01001011	B ₇ + B ₁₈	-11-j-jj-j11	
D ₄₆	00101110	10110111		B ₈ + B ₁₇	01111011	B ₄ + B ₁₈	-jj11j-j11	
D ₄₇	00101111	10000111		B ₁₁ + B ₁₇	10111011	B ₈ + B ₁₈	1-1jjj-j11	
D ₄₈	00110000	11101101		B ₂ + B ₂₀	01000111	B ₇ + B ₁₇	-j1-j-1-j1j1	
D ₄₉	00110001	10111101		B ₈ + B ₂₀	11100111	B ₂ + B ₁₇	1j1-j-j-j1	
D ₅₀	00110010	00011101		B ₃ + B ₂₀	10110111	B ₈ + B ₁₇	j-1j1-j1j1	
D ₅₁	00110011	01001101		B ₇ + B ₂₀	00010111	B ₃ + B ₁₇	-1-j-1j-j1j1	
D ₅₂	00110100	10101001		B ₁₀ + B ₂₂	11001111	B ₃ + B ₁₆	1j-j-11jj1	
D ₅₃	00110101	00111001		B ₁₂ + B ₂₂	10101111	B ₁₀ + B ₁₆	j-11-j1jj1	
D ₅₄	00110110	01011001		B ₅ + B ₂₂	00111111	B ₁₂ + B ₁₆	-1-jj11jj1	
D ₅₅	00110111	11001001		B ₃ + B ₂₂	01011111	B ₅ + B ₁₆	-j1-1j1jj1	
D ₅₆	00111000	00100001		B ₁₄ + B ₂₃	10001011	B ₁₁ + B ₁₈	j-1-j-1j-1j1	
D ₅₇	00111001	01110001		B ₄ + B ₂₃	00101011	B ₁₄ + B ₁₈	-1-j1-jj-1j1	
D ₅₈	00111010	11010001		B ₁ + B ₂₃	01111011	B ₄ + B ₁₈	-j1j1j-1j1	
D ₅₉	00111011	10000001		B ₁₁ + B ₂₃	11011011	B ₁ + B ₁₈	1j-1jj-j1j1	
D ₆₀	00111100	01100101		B ₆ + B ₂₁	00000011	B ₁₅ + B ₁₉	-1-j-j-1-1-jj1	
D ₆₁	00111101	11110101		B ₀ + B ₂₁	01100011	B ₆ + B ₁₉	-j1j-j-1-jj1	
D ₆₂	00111110	10010101		B ₉ + B ₂₁	11110011	B ₀ + B ₁₉	1jj1-1-jj1	
D ₆₃	00111111	00000101		B ₁₅ + B ₂₁	10010011	B ₉ + B ₁₉	j-1-1j-1-jj1	

[0115] IX Conclusion

[0116] While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. Other embodiments are possible and are covered by the invention.

What is claimed is:

1. A method for correlating an encoded data word (X_0 - X_{M-1}) with encoding coefficients (C_0 - C_{M-1}), wherein each of (X_0 - X_{M-1}) is represented by one or more bits and each said coefficient is represented by one or more bits, wherein each said coefficient has k possible states, wherein M is greater than 1, comprising the steps of:

- (1) multiplying X_0 with each state ($C_{0(0)}$ through $C_{0(k-1)}$) of said coefficient C_0 , thereby generating results $X_0C_{0(0)}$ through $X_0C_{0(k-1)}$;
 - (2) repeating step (1) for data bits (X_1 - X_{M-1}) and corresponding said coefficients (C_1 - C_{M-1}), respectively;
 - (3) grouping said results of steps (1) and (2) into N groups and summing combinations within each of said N groups, thereby generating a first layer of correlation results;
 - (4) grouping the results of step (3) and summing combinations of results within each group to generate one or more additional layers of results, and repeating this process until a final layer of results includes a separate correlation output for each possible state of the complete set of coefficients (C_0 - C_{M-1}); and
 - (5) comparing magnitudes output of said separate correlation outputs, thereby identifying a most likely code encoded on said data word.
2. The method according to claim 1, wherein steps (3) and (4) comprise the step of omitting summations that would result in invalid combinations of the encoding coefficients (C_0 - C_{M-1}).
3. The method according to claim 1, further comprising the step of performing steps (1) through (5) using substantially the same hardware for in-phase and quadrature phase components of the data word (X_0 - X_{M-1}).
4. The method according to claim 1, wherein said coefficients (C_0 - C_{M-1}) represent are real numbers.
5. The method according to claim 1, wherein said coefficients (C_0 - C_{M-1}) represent complex numbers.
6. The method according to claim 1, wherein each said coefficients (C_0 - C_{M-1}) is represented by a single bit.
7. The method according to claim 1, wherein each said coefficients (C_0 - C_{M-1}) is represented by multiple bits.
8. The method according to claim 1, wherein said code patterns (C_0 - C_{M-1}) represent a cyclic code keying ("CCK") code set substantially in accordance with IEEE 802.11 WLAN standard.
9. The method according to claim 8, wherein:

M equals 8;

each said coefficient (C_0 - C_{M-1}) has two states, plus and minus;

N equals 4;

said first level of results comprises at least a portion of the following;

$$(X_0C_0+X_1C_1), (X_0(-C_0)+X_1C_1), (X_0C_0+X_1(-C_1)), (X_0(-C_0)+X_1(-C_1)), (X_2C_2+X_3C_3), (X_2(-C_2)+X_3C_3), (X_2C_2+X_3(-C_3)), (X_2(-C_2)+X_3(-C_3)),$$

$$(X_4C_4+X_5C_5), (X_4(-C_4)+X_5C_5), (X_4C_4+X_5(-C_5)), (X_4(-C_4)+X_5(-C_5)), (X_6C_6+X_7C_7), (X_6(-C_6)+X_7C_7), (X_6C_6+X_7(-C_7)), \text{ and } (X_6(-C_6)+X_7(-C_7));$$

and

wherein said second level of results comprises at least a portion of the following:

$$((X_0C_0+X_1C_1)+(X_2C_2+X_3C_3)), \text{ (i.e., } B_0), ((X_0C_0+X_1C_1)+(X_2(-C_2)+X_3C_3)), \text{ (i.e., } B_1), ((X_0C_0+X_1C_1)+(X_2C_2+X_3(-C_3)), \text{ (i.e., } B_2), ((X_0C_0+X_1C_1)+(X_2(-C_2)+X_3(-C_3)), \text{ (i.e., } B_3),$$

$$((X_0(-C_0)+X_1C_1)+(X_2C_2+X_3C_3)), \text{ (i.e., } B_4), ((X_0(-C_0)+X_1C_1)+(X_2(-C_2)+X_3C_3)), \text{ (i.e., } B_5), ((X_0(-C_0)+X_1C_1)+(X_2C_2+X_3(-C_3)), \text{ (i.e., } B_6), ((X_0(-C_0)+X_1C_1)+(X_2(-C_2)+X_3(-C_3)), \text{ (i.e., } B_7),$$

$$((X_0C_0+X_1(-C_1)+(X_2C_2+X_3C_3)), \text{ (i.e., } B_8), ((X_0C_0+X_1(-C_1)+(X_2(-C_2)+X_3C_3)), \text{ (i.e., } B_9), ((X_0C_0+X_1(-C_1)+(X_2C_2+X_3(-C_3)), \text{ (i.e., } B_{10}), ((X_0C_0+X_1(-C_1)+(X_2(-C_2)+X_3(-C_3)), \text{ (i.e., } B_{11}),$$

$$((X_0(-C_0)+X_1(-C_1)+(X_2C_2+X_3C_3)), \text{ (i.e., } B_{12}), ((X_0(-C_0)+X_1(-C_1)+(X_2(-C_2)+X_3C_3)), \text{ (i.e., } B_{13}), ((X_0(-C_0)+X_1(-C_1)+(X_2C_2+X_3(-C_3)), \text{ (i.e., } B_{14}), ((X_0(-C_0)+X_1(-C_1)+(X_2(-C_2)+X_3(-C_3)), \text{ (i.e., } B_{15}),$$

$$((X_4C_4+X_5C_5)+(X_6C_6+X_7C_7)), \text{ (i.e., } B_{16}), ((X_4C_4+X_5C_5)+(X_6(-C_6)+X_7C_7)), \text{ (i.e., } B_{20}), ((X_4C_4+X_5C_5)+(X_6C_6+X_7(-C_7)), \text{ (i.e., } B_{24}), ((X_4C_4+X_5C_5)+(X_6(-C_6)+X_7(-C_7)), \text{ (i.e., } B_{28}),$$

$$((X_4(-C_4)+X_5C_5)+(X_6C_6+X_7C_7)), \text{ (i.e., } B_{17}), ((X_4(-C_4)+X_5C_5)+(X_6(-C_6)+X_7C_7)), \text{ (i.e., } B_{21}), ((X_4(-C_4)+X_5C_5)+(X_6C_6+X_7(-C_7)), \text{ (i.e., } B_{25}), ((X_4(-C_4)+X_5C_5)+(X_6(-C_6)+X_7(-C_7)), \text{ (i.e., } B_{29}),$$

$$((X_4C_4+X_5(-C_5)+(X_6C_6+X_7C_7)), \text{ (i.e., } B_{18}), ((X_4C_4+X_5(-C_5)+(X_6(-C_6)+X_7C_7)), \text{ (i.e., } B_{22}), ((X_4C_4+X_5(-C_5)+(X_6C_6+X_7(-C_7)), \text{ (i.e., } B_{26}), ((X_4C_4+X_5(-C_5)+(X_6(-C_6)+X_7(-C_7)), \text{ (i.e., } B_{30}),$$

$$((X_4(-C_4)+X_5(-C_5)+(X_6C_6+X_7C_7)), \text{ (i.e., } B_{19}), ((X_4(-C_4)+X_5(-C_5)+(X_6(-C_6)+X_7C_7)), \text{ (i.e., } B_{23}), ((X_4(-C_4)+X_5(-C_5)+(X_6C_6+X_7(-C_7)), \text{ (i.e., } B_{27}), ((X_4(-C_4)+X_5(-C_5)+(X_6(-C_6)+X_7(-C_7)), \text{ (i.e., } B_{31}).$$

10. The method according to claim 9, wherein said second level of results omits one or more of B_0 through B_{31} .

11. The method according to claim 9, wherein said second level of results omits one or more of B_0 through B_{31} that represent invalid combinations of one or more of (C_0 - C_{M-1}).

12. The method according to claim 9, wherein said second level of results omits one or more of B_0 through B_{31} where the omitted combination(s) would be redundant based on said CCK code specification.

13. The method according to claim 9, wherein said second level of results omits B_{24} through B_{31} .

14. The method according to claim 13, wherein said final level of results comprises:

$$(B_0+B_{19}), (B_0+B_{21}), (B_1+B_{20}), (B_1+B_{18}), (B_1+B_{23}), (B_2+B_{20}), (B_2+B_{17}), (B_2+B_{23}), (B_3+B_{16}), (B_3+B_{22}), (B_4+B_{17}), (B_4+B_{18}), (B_4+B_{23}), (B_5+B_{16}), (B_5+B_{22}), (B_6+B_{21}), (B_6+B_{19}), (B_7+B_{20}), (B_7+B_{17}), (B_7+B_{18}), (B_8+B_{20}), (B_8+B_{17}), (B_8+B_{18}), (B_9+B_{21}), (B_9+B_{19}), (B_{10}+B_{16}), (B_{10}+B_{22}), (B_{11}+B_{17}), (B_{11}+B_{18}), (B_{11}+B_{23}),$$

$(B_{12}+B_{16}), (B_{12}+B_{22}), (B_{13}+B_{20}), (B_{13}+B_{17}), (B_{13}+B_{23}), (B_{14}+B_{20}), (B_{14}+B_{18}), (B_{14}+B_{23}), (B_{15}+B_{21}),$ and $(B_{15}+B_{19}).$

15. The method according to claim 13, wherein said final level of results consists of:

$(B_0+B_{19}), (B_0+B_{21}), (B_1+B_{20}), (B_1+B_{18}), (B_1+B_{23}), (B_2+B_{20}), (B_2+B_{17}), (B_2+B_{23}), (B_3+B_{16}), (B_3+B_{22}), (B_4+B_{17}), (B_4+B_{18}), (B_4+B_{23}), (B_5+B_{16}), (B_5+B_{22}), (B_6+B_{21}), (B_6+B_{19}), (B_7+B_{20}), (B_7+B_{17}), (B_7+B_{18}), (B_8+B_{20}), (B_8+B_{17}), (B_8+B_{18}), (B_9+B_{21}), (B_9+B_{19}), (B_{10}+B_{16}), (B_{10}+B_{22}), (B_{11}+B_{17}), (B_{11}+B_{18}), (B_{11}+B_{23}), (B_{12}+B_{16}), (B_{12}+B_{22}), (B_{13}+B_{20}), (B_{13}+B_{17}), (B_{13}+B_{23}), (B_{14}+B_{20}), (B_{14}+B_{18}), (B_{14}+B_{23}), (B_{15}+B_{21}),$ and $(B_{15}+B_{19}).$

16. The method according to claim 9, wherein said final level of results omits one or more possible combinations of B_0 through B_{31} .

17. The method according to claim 9, wherein said final level of results omits one or more combinations of B_0 through B_{31} that represent invalid combinations of one or more of (C_0-C_{M-1}) .

18. The method according to claim 9, wherein said final level of results omits one or more combinations of B_0 through B_{31} where the omitted combination(s) would be redundant based on a code specification.

19. The method according to claim 9, wherein said final level of results omits one or more combinations B_{24} through B_{31} where the omitted combination(s) would be invalid based on a code specification.

20. The method according to claim 1, further comprising the step of:

(7) performing an equalization process during one or more of steps (3) and (4).

21. The method according to claim 1, further comprising the step of:

(7) performing an MLSE process during one or more of steps (3) and (4).

22. The method according to claim 1, further comprising the step of:

(7) performing an adaptive process during one or more of steps (3) and (4).

23. The method according to claim 1, further comprising the step of:

(7) performing an adaptive equalization process during one or more of steps (3) and (4).

24. The method according to claim 1, wherein one or more of (C_0-C_{M-1}) are constants.

25. The method according to claim 1, wherein one or more of (C_0-C_{M-1}) are variable.

26. The method according to claim 1, wherein steps (3) and (4) are implemented in accordance with:

$$N = \frac{n!}{r!(n-r)!} - L$$

wherein:

n represents a number of summer inputs;

r represents a number of summing inputs per kernel; and

L represents a number of invalid combinations

27. A system for correlating an encoded data word (X_0-X_{M-1}) with encoding coefficients (C_0-C_{M-1}) , wherein each of (X_0-X_{M-1}) is represented by one or more bits and each said coefficient is represented by one or more bits, wherein each said coefficient has k possible states, wherein M is greater than 1, comprising:

inputs for each of (X_0-X_{M-1}) ;

a multiplier coupled to each said input;

N summers, each coupled to a different group of outputs of said multipliers, whereby outputs of said N summers form a first layer of correlation results;

one or more additional layers of summers, each said additional layer of summers coupled to outputs of a previous layer of correlation results, said one or more additional layers of summers including a final layer of summers having a final layer of results including a separate correlation output for each possible state of the complete set of coefficients (C_0-C_{M-1}) ; and

a magnitude comparator coupled to said final layer of results.

28. A system for correlating an encoded data word (X_0-X_{M-1}) with encoding coefficients (C_0-C_{M-1}) , wherein each of (X_0-X_{M-1}) is represented by one or more bits and each said coefficient is represented by one or more bits, wherein each said coefficient has k possible states, wherein M is greater than 1, comprising:

means for multiplying X with each state $(C_{0(0)}$ through $C_{0(k-1)})$ of said coefficient C_0 , thereby generating results $X_0C_{0(0)}$ through $X_0C_{0(k-1)}$;

means for repeating step (1) for data bits (X_1-X_{M-1}) and corresponding said coefficients (C_1-C_{M-1}) , respectively;

means for grouping said results of steps (1) and (2) into N groups and summing combinations within each of said N groups, thereby generating a first layer of correlation results;

means for grouping the results of step (3) and summing combinations of results within each group to generate one or more additional layers of results, and repeating this process until a final layer of results includes a separate correlation output for each possible state of the complete set of coefficients (C_0-C_{M-1}) ; and

means for comparing magnitudes output of said separate correlation outputs, thereby identifying a most likely code encoded on said data word.

29. A method for parallel correlation detection, comprising the steps of:

(1) receiving noisy input samples $X_0, X_1, X_2, X_3, X_4, X_5, X_6,$ and X_7 from which a code must be extracted;

(2) forming four sets of sample pairs $(X_0, X_1), (X_2, X_3), (X_4, X_5),$ and (X_6, X_7) from said input samples;

(3) forming four correlation kernels $(X_iC_i+X_jC_j), (-X_iC_i+X_jC_j), (X_iC_i-X_jC_j),$ and $(-X_iC_i-X_jC_j)$ for each set of sample pairs formed in step (2), wherein X_i and X_j represent one of the four sample pairs formed in step (2) and wherein C_i and C_j represent predetermined weighting factors;

(4) combining the correlation kernels formed in step (3) to form a fast correlation transform trellis with sixty-four eight-tuple options; and

- (5) using the sixty-four eight-tuple options formed in step (4) to extract the code from the input samples received in step (1).

30. A system for parallel correlation detection, comprising:

a module for receiving noisy input samples $X_0, X_1, X_2, X_3, X_4, X_5, X_6,$ and X_7 from which a code must be extracted;

a module for forming four sets of sample pairs $(X_0, X_1), (X_2, X_3), (X_4, X_5),$ and (X_6, X_7) from said input samples;

a module for forming four correlation kernels $(X_iC_i+X_jC_j), (-X_iC_i+X_jC_j), (X_iC_i-X_jC_j),$ and $(-X_iC_i-X_jC_j)$ for each set of sample pairs formed in step (2), wherein X_i and X_j represent one of the four sample pairs formed in step (2) and wherein C_i and C_j represent predetermined weighting factors; and

a module for combining the correlation kernels formed in step (3) to form a fast correlation transform trellis with sixty-four eight-tuple options.

31. A method for correlating an encoded data word (X_0-X_{M-1}) with encoding coefficients (C_0-C_{M-1}) , wherein each of (X_0-X_{M-1}) is represented by one or more bits and each said coefficient is represented by one or more bits, wherein each said coefficient has k possible states, wherein M is greater than 1, comprising the steps of:

(1) multiplying X_0 with states of said coefficient C_0 ;

(2) repeating step (1) for data bits (X_1-X_{M-1}) and corresponding said coefficients, respectively;

(3) grouping said results of steps (1) and (2) into N groups and summing combinations within each of said N groups, thereby generating a first layer of correlation results;

(4) grouping the results of step (3) and summing combinations of results within each group to generate one or more additional layers of results, and repeating this process until a final layer of results includes a correlation output for each possible state of the set of coefficients; and

(5) comparing magnitudes output of said correlation outputs, thereby identifying a most likely code encoded on said data word.

32. A method for parallel correlation detection, comprising the steps of:

(1) receiving noisy input samples from which a code must be extracted;

(2) forming at least four sets of sample pairs from said input samples;

(3) forming at least four correlation kernels for each set of sample pairs formed in step (2), wherein X_i and X_j represent one of the sample pairs formed in step (2) and wherein C_i and C_j represent predetermined weighting factors;

(4) combining the correlation kernels formed in step (3) to form a fast correlation transform trellis with at least sixty-four eight-tuple options; and

(5) using the at least sixty-four eight-tuple options formed in step (4) to extract the code from the input samples received in step (1).

* * * * *

Ex.1011 / Page 21 of 21
Cisco Systems, Inc.