

(12) **United States Patent**
Oehring et al.

(10) **Patent No.:** **US 11,959,371 B2**

(45) **Date of Patent:** **Apr. 16, 2024**

(54) **SUCTION AND DISCHARGE LINES FOR A DUAL HYDRAULIC FRACTURING UNIT**

(71) Applicant: **US Well Services LLC**, Houston, TX (US)

(72) Inventors: **Jared Oehring**, Houston, TX (US);
Robert Kurtz, Houston, TX (US)

(73) Assignee: **US Well Services, LLC**, Houston, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/145,443**

(22) Filed: **May 3, 2016**

(65) **Prior Publication Data**

US 2016/0319650 A1 Nov. 3, 2016

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/679,689, filed on Nov. 16, 2012, now Pat. No. 9,410,410.

(60) Provisional application No. 62/156,301, filed on May 3, 2015.

(51) **Int. Cl.**

E21B 43/26 (2006.01)

E21B 43/267 (2006.01)

(52) **U.S. Cl.**

CPC **E21B 43/2607** (2020.05); **E21B 43/267** (2013.01)

(58) **Field of Classification Search**

CPC E21B 43/26

USPC 137/351, 899.4

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,656,861 A 1/1928 Leonard

1,671,436 A 5/1928 Melott

2,004,077 A 6/1935 McCartney

2,183,364 A 12/1939 Bailey

2,220,622 A 11/1940 Aitken

2,248,051 A 7/1941 Armstrong

2,407,796 A 9/1946 Page

2,416,848 A 3/1947 Rothery

2,610,741 A 9/1952 Schmid

2,753,940 A 7/1956 Bonner

2,976,025 A 3/1961 Pro

(Continued)

FOREIGN PATENT DOCUMENTS

AU 2007340913 7/2008

CA 2406801 11/2001

(Continued)

OTHER PUBLICATIONS

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/293,681 dated Feb. 16, 2017.

(Continued)


Primary Examiner — Steven A MacDonald

(74) Attorney, Agent, or Firm — Hogan Lovells US LLP

(57) **ABSTRACT**

An electrically powered hydraulic fracturing system includes pumps for pressurizing fracturing fluid, piping for carrying fracturing fluid, and field connections in obliquely oriented segments of the piping. The connections are between lead lines that couple directly to the pumps and lines carrying fluid to and from the pump; and are assembled and disassembled in the field. Operations personnel can more easily manipulate connections that are obliquely oriented than those that are horizontal or vertical.

4 Claims, 4 Drawing Sheets

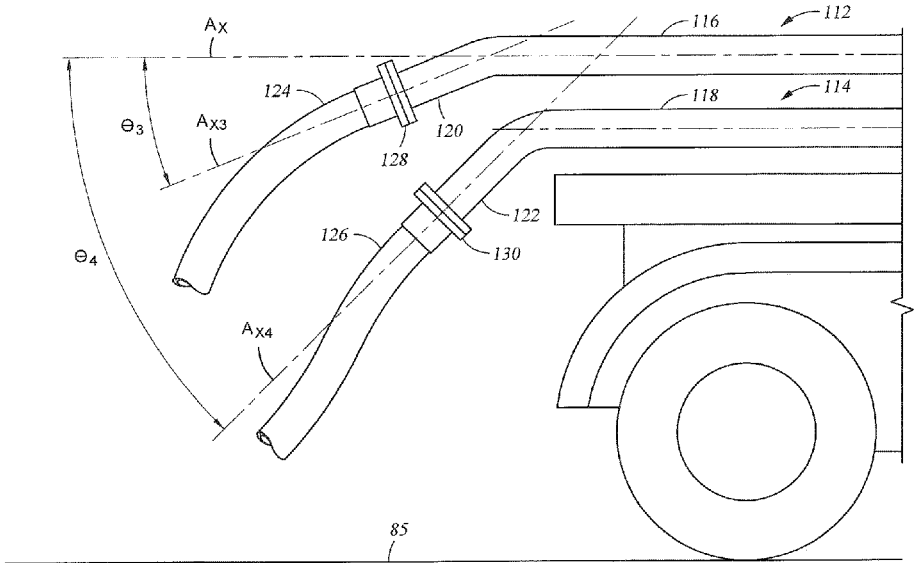

The drawing shows a side view of a hydraulic fracturing unit. A curved pipe assembly is shown, with various components labeled with reference numerals. The pipe assembly includes a main body (112) and a curved section (114). A pump (116) is connected to the pipe assembly. The pipe assembly is supported by a base (118). The drawing also shows a curved section (120) and a curved section (122). The drawing is labeled with reference numerals 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478, 480, 482, 484, 486, 488, 490, 492, 494, 496, 498, 500, 502, 504, 506, 508, 510, 512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 616, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 820, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846, 848, 850, 852, 854, 856, 858, 860, 862, 864, 866, 868, 870, 872, 874, 876, 878, 880, 882, 884, 886, 888, 890, 892, 894, 896, 898, 900, 902, 904, 906, 908, 910, 912, 914, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966, 968, 970, 972, 974, 976, 978, 980, 982, 984, 986, 988, 990, 992, 994, 996, 998, 1000.

LIBERTY EXHIBIT 1021, Page 1

US 11,959,371 B2

Page 2

(56)

References Cited

U.S. PATENT DOCUMENTS

3,055,682	A	9/1962	Bacher
3,061,039	A	10/1962	Peters
3,066,503	A	12/1962	Fleming
3,302,069	A	1/1967	Webster
3,334,495	A	8/1967	Jensen
3,722,595	A	3/1973	Kiel
3,764,233	A	10/1973	Strickland
3,773,140	A	11/1973	Mahajan
3,837,179	A	9/1974	Barth
3,849,662	A	11/1974	Blaskowski
3,878,884	A	4/1975	Raleigh
3,881,551	A	5/1975	Terry
4,037,431	A	7/1977	Sugimoto
4,100,822	A	7/1978	Rosman
4,151,575	A	4/1979	Hogue
4,226,299	A	10/1980	Hansen
4,265,266	A	5/1981	Kierbow et al.
4,411,313	A	10/1983	Johnson et al.
4,432,064	A	2/1984	Barker
4,442,665	A	4/1984	Fick et al.
4,456,092	A	6/1984	Kubozuka
4,506,982	A	3/1985	Smithers et al.
4,512,387	A	4/1985	Rodriguez
4,529,887	A	7/1985	Johnson
4,538,916	A	9/1985	Zimmerman
4,601,629	A	7/1986	Zimmerman
4,676,063	A	6/1987	Goebel et al.
4,759,674	A	7/1988	Schroder
4,768,884	A	9/1988	Elkin
4,793,386	A *	12/1988	Sloan E03F 7/10 137/351
4,845,981	A	7/1989	Pearson
4,922,463	A	5/1990	Del Zotto et al.
5,004,400	A	4/1991	Handke
5,006,044	A	4/1991	Walker, Sr.
5,025,861	A	6/1991	Huber
5,050,673	A	9/1991	Baldrige
5,114,239	A	5/1992	Allen
5,130,628	A	7/1992	Owen
5,131,472	A	7/1992	Dees et al.
5,172,009	A	12/1992	Mohan
5,189,388	A	2/1993	Mosley
5,230,366	A	7/1993	Marandi
5,334,899	A	8/1994	Skybyk
5,366,324	A	11/1994	Arlt
5,422,550	A	6/1995	McClanahan
5,433,243	A	7/1995	Griswold
5,439,066	A	8/1995	Gipson
5,486,047	A	1/1996	Zimmerman
5,517,822	A	5/1996	Haws et al.
5,548,093	A	8/1996	Sato
5,590,976	A	1/1997	Kilheffer et al.
5,655,361	A	8/1997	Kishi
5,736,838	A	4/1998	Dove et al.
5,755,096	A	5/1998	Holleyman
5,790,972	A	8/1998	Kohlenberger
5,798,596	A	8/1998	Lordo
5,813,455	A	9/1998	Pratt et al.
5,865,247	A	2/1999	Paterson
5,879,137	A	3/1999	Yie
5,894,888	A	4/1999	Wiemers
5,907,970	A	6/1999	Havlovick et al.
5,950,726	A	9/1999	Roberts
6,035,265	A	3/2000	Dister et al.
6,097,310	A	8/2000	Harrell et al.
6,121,705	A	9/2000	Hoong
6,138,764	A	10/2000	Scarsdale et al.
6,142,878	A	11/2000	Barin
6,164,910	A	12/2000	Mayleben
6,202,702	B1	3/2001	Ohira
6,208,098	B1	3/2001	Kume
6,254,462	B1	7/2001	Kelton
6,271,637	B1	8/2001	Kushion
6,273,193	B1	8/2001	Hermann et al.
6,315,523	B1	11/2001	Mills

6,442,942	B1	9/2002	Kopko
6,477,852	B2	11/2002	Dodo
6,484,490	B1	11/2002	Olsen
6,491,098	B1	12/2002	Dallas
6,529,135	B1	3/2003	Bowers et al.
6,585,455	B1	7/2003	Petersen et al.
6,626,646	B2	9/2003	Rajewski
6,719,900	B2	4/2004	Hawkins
6,765,304	B2	7/2004	Baten et al.
6,776,227	B2	8/2004	Beida
6,788,022	B2	9/2004	Sopko
6,802,690	B2	10/2004	Han
6,808,303	B2	10/2004	Fisher
6,931,310	B2	8/2005	Shimizu et al.
6,936,947	B1	8/2005	Leijon
6,985,750	B1	1/2006	Vicknair et al.
7,082,993	B2	8/2006	Ayoub
7,104,233	B2	9/2006	Ryczek et al.
7,170,262	B2	1/2007	Pettigrew
7,173,399	B2	2/2007	Sihler
7,308,933	B1	12/2007	Mayfield
7,312,593	B1	12/2007	Streicher et al.
7,336,514	B2	2/2008	Amarillas
7,445,041	B2	11/2008	O'Brien
7,494,263	B2	2/2009	Dykstra et al.
7,500,642	B2	3/2009	Cunningham
7,525,264	B2	4/2009	Dodge
7,563,076	B2	7/2009	Brunet
7,581,379	B2	9/2009	Yoshida
7,675,189	B2	3/2010	Grenier
7,683,499	B2	3/2010	Saucier
7,717,193	B2	5/2010	Egilsson et al.
7,755,310	B2	7/2010	West et al.
7,795,830	B2	9/2010	Johnson
7,807,048	B2	10/2010	Collette
7,835,140	B2	11/2010	Mori
7,845,413	B2	12/2010	Shampine
7,926,562	B2	4/2011	Poitzsch
7,894,757	B2	7/2011	Keast
7,977,824	B2	7/2011	Halen et al.
8,037,936	B2	10/2011	Neuroth
8,054,084	B2	11/2011	Schulz et al.
8,083,504	B2	12/2011	Williams
8,091,928	B2	1/2012	Carrier
8,096,354	B2	1/2012	Poitzsch
8,096,891	B2	1/2012	Ochtfeld
8,139,383	B2	3/2012	Efraimsson
8,146,665	B2	4/2012	Neal
8,154,419	B2	4/2012	Daussin et al.
8,232,892	B2	7/2012	Overholt et al.
8,261,528	B2	9/2012	Chillar
8,272,439	B2	9/2012	Strickland
8,310,272	B2	11/2012	Quarto
8,354,817	B2	1/2013	Yeh et al.
8,474,521	B2	7/2013	Kajaria
8,506,267	B2	8/2013	Gambier et al.
8,534,235	B2	9/2013	Chandler
8,573,303	B2	11/2013	Kerfoot
8,596,056	B2	12/2013	Woodmansee
8,616,005	B1	12/2013	Cousino
8,616,274	B2	12/2013	Belcher et al.
8,646,521	B2	2/2014	Bowen
8,692,408	B2	4/2014	Zhang et al.
8,727,068	B2	5/2014	Bruin
8,760,657	B2	6/2014	Pope
8,763,387	B2	7/2014	Schmidt
8,774,972	B2	7/2014	Rusnak
8,789,601	B2	7/2014	Broussard
8,795,525	B2	8/2014	McGinnis et al.
8,800,652	B2	8/2014	Bartko
8,807,960	B2	8/2014	Stephenson
8,838,341	B2	9/2014	Kumano
8,851,860	B1	10/2014	Mail
8,857,506	B2	10/2014	Stone, Jr.
8,899,940	B2	12/2014	Laugemors
8,905,056	B2	12/2014	Kendrick
8,905,138	B2	12/2014	Lundstedt et al.
8,997,904	B2	4/2015	Cryer
9,018,881	B2	4/2015	Mao et al.

US 11,959,371 B2

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

9,051,822 B2	6/2015	Ayan	10,711,576 B2	7/2020	Bishop
9,051,923 B2	6/2015	Kuo	10,731,561 B2	8/2020	Oehring et al.
9,061,223 B2	6/2015	Winborn	10,740,730 B2	8/2020	Altamirano et al.
9,062,545 B2	6/2015	Roberts et al.	10,767,561 B2	9/2020	Brady
9,067,182 B2	6/2015	Nichols	10,781,752 B2	9/2020	Kikkawa et al.
9,103,193 B2	8/2015	Coli	10,794,165 B2	10/2020	Fischer et al.
9,119,326 B2	8/2015	McDonnell	10,988,998 B2	4/2021	Fischer et al.
9,121,257 B2	9/2015	Coli et al.	2001/0000996 A1	5/2001	Grimland et al.
9,140,105 B2	9/2015	Pattillo	2002/0169523 A1	11/2002	Ross
9,140,110 B2	9/2015	Coli	2003/0056514 A1	3/2003	Lohn
9,160,168 B2	10/2015	Chapel	2003/0079875 A1	5/2003	Weng
9,175,554 B1	11/2015	Watson	2003/0138327 A1	7/2003	Jones et al.
9,206,684 B2	12/2015	Parra	2004/0040746 A1	3/2004	Niedermayr
9,260,253 B2	2/2016	Naizer	2004/0045703 A1	3/2004	Hooper et al.
9,322,239 B2	4/2016	Angeles Boza et al.	2004/0102109 A1	5/2004	Cratty
9,324,049 B2	4/2016	Thomeer	2004/0167738 A1	8/2004	Miller
9,340,353 B2	5/2016	Oren	2005/0061548 A1	3/2005	Hooper
9,353,593 B1	5/2016	Lu et al.	2005/0116541 A1	6/2005	Seiver
9,366,114 B2	6/2016	Coli et al.	2005/0201197 A1	9/2005	Duell et al.
9,410,410 B2	8/2016	Broussard et al.	2005/0274508 A1	12/2005	Folk
9,450,385 B2	9/2016	Kristensen	2006/0052903 A1	3/2006	Bassett
9,458,687 B2	10/2016	Hallundbaek	2006/0065319 A1	3/2006	Csitari
9,475,020 B2	10/2016	Coli et al.	2006/0109141 A1	5/2006	Huang
9,475,021 B2	10/2016	Coli et al.	2006/0260331 A1	11/2006	Andreychuk
9,482,086 B2	11/2016	Richardson et al.	2007/0131410 A1	6/2007	Hill
9,499,335 B2	11/2016	McIver	2007/0187163 A1	8/2007	Cone
9,506,333 B2	11/2016	Castillo et al.	2007/0201305 A1	8/2007	Heilman et al.
9,513,055 B1	12/2016	Seal	2007/0226089 A1	9/2007	DeGaray et al.
9,534,473 B2	1/2017	Morris et al.	2007/0277982 A1	12/2007	Shampine
9,562,420 B2	2/2017	Morris et al.	2007/0278140 A1	12/2007	Mallet et al.
9,587,649 B2	3/2017	Oehring	2008/0017369 A1	1/2008	Sarada
9,611,728 B2	4/2017	Oehring	2008/0041596 A1	2/2008	Blount
9,650,879 B2	5/2017	Broussard et al.	2008/0095644 A1	4/2008	Mantei et al.
9,706,185 B2	7/2017	Ellis	2008/0112802 A1	5/2008	Orlando
9,728,354 B2	8/2017	Skolozdra	2008/0137266 A1	6/2008	Jensen
9,738,461 B2	8/2017	DeGaray	2008/0164023 A1	7/2008	Dykstra et al.
9,739,546 B2	8/2017	Bertilsson et al.	2008/0208478 A1	8/2008	Ella et al.
9,745,840 B2	8/2017	Oehring et al.	2008/0217024 A1	9/2008	Moore
9,790,858 B2	10/2017	Kanebako	2008/0236818 A1	10/2008	Dykstra
9,863,228 B2	1/2018	Shampine et al.	2008/0257449 A1	10/2008	Weinstein et al.
9,909,398 B2	3/2018	Pham	2008/0264625 A1	10/2008	Ochoa
9,915,128 B2	3/2018	Hunter	2008/0264640 A1	10/2008	Eslinger
9,932,799 B2	4/2018	Symchuk	2008/0264649 A1	10/2008	Crawford
9,945,365 B2	4/2018	Hernandez et al.	2008/0277120 A1	11/2008	Hickie
9,963,961 B2	5/2018	Hardin	2009/0045782 A1	2/2009	Datta
9,976,351 B2	5/2018	Randall	2009/0065299 A1	3/2009	Vito
10,008,880 B2	6/2018	Vicknair	2009/0072645 A1	3/2009	Quere
10,184,465 B2	1/2019	Enis et al.	2009/0078410 A1	3/2009	Krenek et al.
10,196,878 B2	2/2019	Hunter	2009/0090504 A1	4/2009	Weightman
10,221,639 B2	3/2019	Romer et al.	2009/0093317 A1	4/2009	Kajiwarra et al.
10,227,854 B2	3/2019	Glass	2009/0095482 A1	4/2009	Surjaatmadja
10,232,332 B2	3/2019	Oehring	2009/0145611 A1	6/2009	Pallini, Jr.
10,246,984 B2	4/2019	Payne	2009/0153354 A1	6/2009	Daussin et al.
10,254,732 B2	4/2019	Oehring	2009/0188181 A1	7/2009	Forbis
10,260,327 B2	4/2019	Kajaria	2009/0200035 A1	8/2009	Bjerkreim et al.
10,280,724 B2	5/2019	Hinderliter	2009/0260826 A1	10/2009	Sherwood
10,287,873 B2	5/2019	Filas	2009/0308602 A1	12/2009	Bruins et al.
10,302,079 B2*	5/2019	Kendrick E21B 43/26	2010/0000508 A1*	1/2010	Chandler F24H 1/06 126/116 R
10,309,205 B2	6/2019	Randall	2010/0019574 A1	1/2010	Baldassarre
10,337,308 B2	7/2019	Broussard	2010/0038907 A1	2/2010	Hunt
10,371,012 B2	8/2019	Davis	2010/0045109 A1	2/2010	Arnold
10,378,326 B2	8/2019	Morris	2010/0051272 A1	3/2010	Loree et al.
10,393,108 B2	8/2019	Chong	2010/0101785 A1	4/2010	Khvoshchev
10,407,990 B2	9/2019	Oehring	2010/0132949 A1	6/2010	DeFosse et al.
10,408,030 B2	9/2019	Oehring et al.	2010/0146981 A1	6/2010	Motakef
10,408,031 B2	9/2019	Oehring et al.	2010/0172202 A1	7/2010	Borgstadt
10,415,332 B2	9/2019	Morris et al.	2010/0200224 A1	8/2010	Nguete
10,436,026 B2	10/2019	Ounadjela	2010/0250139 A1	9/2010	Hobbs et al.
10,627,003 B2	4/2020	Dale et al.	2010/0293973 A1	11/2010	Erickson
10,648,270 B2	5/2020	Brunty et al.	2010/0303655 A1	12/2010	Seekie
10,648,311 B2	5/2020	Oehring et al.	2010/0322802 A1	12/2010	Kugelev
10,669,471 B2	6/2020	Schmidt et al.	2011/0005757 A1	1/2011	Hebert
10,669,804 B2	6/2020	Kotrla	2011/0017468 A1	1/2011	Birch et al.
10,686,301 B2	6/2020	Oehring et al.	2011/0052423 A1	3/2011	Gambier
10,695,950 B2	6/2020	Igo et al.	2011/0061855 A1	3/2011	Case et al.
			2011/0081268 A1	4/2011	Ochoa et al.
			2011/0085924 A1	4/2011	Shampine
			2011/0110793 A1	5/2011	Leugemores et al.

(56)		References Cited	
		U.S. PATENT DOCUMENTS	
2011/0166046	A1	7/2011 Weaver	
2011/0247878	A1	10/2011 Rasheed	
2011/0272158	A1	11/2011 Neal	
2012/0018016	A1	1/2012 Gibson	
2012/0049625	A1	3/2012 Hopwood	
2012/0060929	A1*	3/2012 Kendrick	E21B 21/062 137/1
2012/0063936	A1	3/2012 Baxter et al.	
2012/0085541	A1	4/2012 Love et al.	
2012/0112757	A1	5/2012 Vrankovic et al.	
2012/0127635	A1	5/2012 Grindeland	
2012/0150455	A1	6/2012 Franklin et al.	
2012/0152716	A1	6/2012 Kikukawa et al.	
2012/0205301	A1	8/2012 McGuire et al.	
2012/0205400	A1	8/2012 DeGaray et al.	
2012/0222865	A1	9/2012 Larson	
2012/0232728	A1	9/2012 Karimi	
2012/0247783	A1	10/2012 Berner, Jr.	
2012/0255734	A1*	10/2012 Coli	E21B 43/26 166/305.1
2013/0009469	A1	1/2013 Gillett	
2013/0025706	A1	1/2013 DeGaray et al.	
2013/0051971	A1	2/2013 Wyse et al.	
2013/0175038	A1	7/2013 Conrad	
2013/0175039	A1	7/2013 Guidry	
2013/0180722	A1	7/2013 Olarte Caro	
2013/0189629	A1	7/2013 Chandler	
2013/0199617	A1	8/2013 DeGaray et al.	
2013/0233542	A1	9/2013 Shampine	
2013/0255271	A1	10/2013 Yu et al.	
2013/0284278	A1	10/2013 Winborn	
2013/0284455	A1	10/2013 Kajaria et al.	
2013/0299167	A1	11/2013 Fordyce	
2013/0306322	A1	11/2013 Sanborn	
2013/0317750	A1	11/2013 Hunter	
2013/0341029	A1	12/2013 Roberts et al.	
2013/0343858	A1	12/2013 Flusche	
2014/0000899	A1	1/2014 Nevison	
2014/0010671	A1	1/2014 Cryer et al.	
2014/0054965	A1	2/2014 Jain	
2014/0060658	A1	3/2014 Hains	
2014/0095114	A1	4/2014 Thomeer	
2014/0096974	A1	4/2014 Coli	
2014/0124162	A1	5/2014 Leavitt	
2014/0138079	A1	5/2014 Broussard	
2014/0174717	A1	6/2014 Broussard et al.	
2014/0219824	A1	8/2014 Burnette	
2014/0238683	A1	8/2014 Korach	
2014/0246211	A1	9/2014 Guidry	
2014/0251623	A1	9/2014 Lestz et al.	
2014/0255214	A1	9/2014 Burnette	
2014/0277772	A1	9/2014 Lopez	
2014/0290768	A1	10/2014 Randle	
2014/0379300	A1	12/2014 Devine	
2015/0027712	A1	1/2015 Vicknair	
2015/0053426	A1	2/2015 Smith	
2015/0068724	A1	3/2015 Coli et al.	
2015/0068754	A1	3/2015 Coli et al.	
2015/0075778	A1	3/2015 Walters	
2015/0083426	A1	3/2015 Lesko	
2015/0097504	A1	4/2015 Lamascus	
2015/0114652	A1	4/2015 Lestz	
2015/0136043	A1	5/2015 Shaaban	
2015/0144336	A1	5/2015 Hardin et al.	
2015/0147194	A1	5/2015 Foote	
2015/0159911	A1	6/2015 Holt	
2015/0175013	A1	6/2015 Cryer et al.	
2015/0176386	A1	6/2015 Castillo et al.	
2015/0211512	A1	7/2015 Wiegman	
2015/0211524	A1	7/2015 Broussard	
2015/0217672	A1	8/2015 Shampine	
2015/0225113	A1	8/2015 Lungu	
2015/0233530	A1	8/2015 Sandidge	
2015/0252661	A1	9/2015 Glass	
2015/0300145	A1	10/2015 Coli et al.	
2015/0300336	A1	10/2015 Hernandez	
2015/0314225	A1	11/2015 Coli et al.	
2015/0330172	A1	11/2015 Allmaras	
2015/0354322	A1	12/2015 Vicknair	
2016/0006311	A1	1/2016 Li	
2016/0032703	A1	2/2016 Broussard et al.	
2016/0102537	A1	4/2016 Lopez	
2016/0105022	A1	4/2016 Oehring	
2016/0208592	A1	4/2016 Oehring	
2016/0160889	A1	6/2016 Hoffman et al.	
2016/0177675	A1	6/2016 Morris et al.	
2016/0177678	A1	6/2016 Morris	
2016/0186531	A1	6/2016 Harkless et al.	
2016/0208593	A1	7/2016 Coli et al.	
2016/0208594	A1	7/2016 Coli et al.	
2016/0208595	A1	7/2016 Tang	
2016/0221220	A1	8/2016 Paige	
2016/0230524	A1	8/2016 Dumoit	
2016/0230525	A1	8/2016 Lestz et al.	
2016/0230660	A1	8/2016 Zeitoun et al.	
2016/0258267	A1	9/2016 Payne	
2016/0265457	A1	9/2016 Stephenson	
2016/0273328	A1	9/2016 Oehring	
2016/0273456	A1	9/2016 Zhang et al.	
2016/0281484	A1	9/2016 Lestz	
2016/0290114	A1	10/2016 Oehring	
2016/0290563	A1	10/2016 Diggins	
2016/0312108	A1	10/2016 Lestz et al.	
2016/0319650	A1	11/2016 Oehring	
2016/0326853	A1	11/2016 Fred et al.	
2016/0326854	A1	11/2016 Broussard	
2016/0326855	A1	11/2016 Coli et al.	
2016/0341281	A1	11/2016 Brunvold et al.	
2016/0348479	A1	12/2016 Oehring	
2016/0349728	A1	12/2016 Oehring	
2016/0369609	A1	12/2016 Morris et al.	
2017/0016433	A1	1/2017 Chong	
2017/0021318	A1	1/2017 McIver et al.	
2017/0022788	A1	1/2017 Oehring et al.	
2017/0022807	A1	1/2017 Dursun	
2017/0028368	A1	2/2017 Oehring et al.	
2017/0030177	A1	2/2017 Oehring	
2017/0030178	A1	2/2017 Oehring et al.	
2017/0036178	A1	2/2017 Coli et al.	
2017/0036872	A1	2/2017 Wallace	
2017/0037717	A1	2/2017 Oehring	
2017/0037718	A1	2/2017 Coli et al.	
2017/0043280	A1	2/2017 Vankouwenberg	
2017/0051732	A1	2/2017 Hernandez et al.	
2017/0074076	A1	3/2017 Joseph et al.	
2017/0082033	A1	3/2017 Wu et al.	
2017/0096885	A1	4/2017 Oehring	
2017/0096889	A1	4/2017 Blanckaert et al.	
2017/0104389	A1	4/2017 Morris et al.	
2017/0114625	A1	4/2017 Norris	
2017/0130743	A1	5/2017 Anderson	
2017/0138171	A1	5/2017 Richards et al.	
2017/0146189	A1	5/2017 Herman	
2017/0159570	A1	6/2017 Bickert	
2017/0159654	A1*	6/2017 Kendrick	E21B 43/26
2017/0175516	A1	6/2017 Eslinger	
2017/0204852	A1	7/2017 Barnett	
2017/0212535	A1	7/2017 Shelman et al.	
2017/0218727	A1	8/2017 Oehring	
2017/0218843	A1	8/2017 Oehring et al.	
2017/0222409	A1	8/2017 Oehring et al.	
2017/0226838	A1	8/2017 Ciezobka	
2017/0226842	A1	8/2017 Omont	
2017/0234250	A1	8/2017 Janik	
2017/0241221	A1	8/2017 Seshadri	
2017/0259227	A1	9/2017 Morris et al.	
2017/0292513	A1	10/2017 Haddad	
2017/0313499	A1	11/2017 Hughes et al.	
2017/0314380	A1	11/2017 Oehring	
2017/0314979	A1	11/2017 Ye	
2017/0328179	A1	11/2017 Dykstra	
2017/0369258	A1	12/2017 DeGaray	
2017/0370639	A1	12/2017 Barden et al.	
2018/0028992	A1	2/2018 Stegemoeller	

(56) **References Cited**
U.S. PATENT DOCUMENTS

2018/0038216	A1	2/2018	Zhang
2018/0045331	A1	2/2018	Lopez
2018/0090914	A1	3/2018	Johnson et al.
2018/0181830	A1	6/2018	Luharuka et al.
2018/0216455	A1	8/2018	Andreychuk
2018/0238147	A1	8/2018	Shahri
2018/0245428	A1	8/2018	Richards
2018/0259080	A1	9/2018	Dale et al.
2018/0266217	A1	9/2018	Funkhauser et al.
2018/0266412	A1	9/2018	Stokkevag
2018/0284817	A1	10/2018	Cook et al.
2018/0291713	A1	10/2018	Jeanson
2018/0298731	A1	10/2018	Bishop
2018/0312738	A1	11/2018	Rutsch et al.
2018/0313677	A1	11/2018	Warren et al.
2018/0320483	A1	11/2018	Zhang
2018/0343125	A1	11/2018	Clish
2018/0363437	A1	12/2018	Coli
2018/0363640	A1	12/2018	Kajita et al.
2018/0366950	A1	12/2018	Pedersen et al.
2019/0003329	A1	1/2019	Morris
2019/0010793	A1	1/2019	Hinderliter
2019/0040727	A1	2/2019	Oehring et al.
2019/0063309	A1	2/2019	Davis
2019/0100989	A1	4/2019	Stewart
2019/0112910	A1	4/2019	Oehring
2019/0119096	A1	4/2019	Haile
2019/0120024	A1	4/2019	Oehring
2019/0128080	A1	5/2019	Ross
2019/0128104	A1	5/2019	Graham et al.
2019/0145251	A1	5/2019	Johnson
2019/0154020	A1	5/2019	Glass
2019/0162061	A1	5/2019	Stephenson
2019/0169971	A1	6/2019	Oehring
2019/0178057	A1	6/2019	Hunter
2019/0178235	A1	6/2019	Coskrey
2019/0203567	A1	7/2019	Ross
2019/0203572	A1	7/2019	Morris
2019/0211661	A1	7/2019	Reckels
2019/0226317	A1	7/2019	Payne
2019/0245348	A1	8/2019	Hinderliter
2019/0249527	A1	8/2019	Kraynek
2019/0257462	A1	8/2019	Rogers
2019/0292866	A1	9/2019	Ross
2019/0292891	A1	9/2019	Kajaria
2019/0316447	A1	10/2019	Oehring
2020/0040878	A1	2/2020	Morris
2020/0047141	A1	2/2020	Oehring et al.
2020/0088152	A1	3/2020	Allion et al.
2020/0232454	A1	7/2020	Chretien
2020/0325760	A1	10/2020	Markham
2020/0350790	A1	11/2020	Luft et al.

FOREIGN PATENT DOCUMENTS

CA	2707269	12/2010
CA	2482943	5/2011
CA	3050131	11/2011
CA	2955706	10/2012
CA	2966672	10/2012
CA	3000322	4/2013
CA	2787814	2/2014
CA	2833711	5/2014
CA	2978706	9/2016
CA	2944980	2/2017
CA	3006422	6/2017
CA	3018485	8/2017
CA	2964593	10/2017
CA	2849825	7/2018
CA	3067854	1/2019
CA	2919649	2/2019
CA	2919666	7/2019
CA	2797081	9/2019
CA	2945579	10/2019
CN	201687513	12/2010

CN	101977016	2/2011
CN	202023547	11/2011
CN	102602322	7/2012
CN	104117308	A 10/2014
CN	104196613	A 12/2014
CN	205986303	U 2/2017
CN	108049999	A 5/2018
CN	112196508	A 1/2021
JP	2004264589	9/2004
WO	2009046280	4/2009
WO	2014177346	11/2014
WO	2016/144939	9/2016
WO	2016/160458	10/2016
WO	2018044307	A1 3/2018
WO	2018213925	A1 11/2018
WO	2019210417	11/2019

OTHER PUBLICATIONS

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/294,349 dated Mar. 14, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Jan. 20, 2017.

Notice of Allowance issued in corresponding U.S. Appl. No. 15/217,040 dated Mar. 28, 2017.

Notice of Allowance issued in corresponding U.S. Appl. No. 14/622,532 dated Mar. 27, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/291,842 dated Jan. 6, 2017.

UK Power Networks—Transformers to Supply Heat to Tate Modern—
from Press Releases May 16, 2013.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/486,970 dated Jun. 22, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,656 dated Jun. 23, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,694 dated Jun. 26, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 15/294,349 dated Jul. 6, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/884,363 dated Sep. 5, 2017.

Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Sep. 6, 2017.

Non-Final Office Action dated Oct. 6, 2017 in related U.S. Appl. No. 14/881,535.

Non-Final Office Action dated Nov. 29, 2017 in related U.S. Appl. No. 15/145,414.

Non-Final Office Action dated Nov. 13, 2017 in related U.S. Appl. No. 15/644,487.

Canadian Office Action dated Mar. 2, 2018 in related Canadian Patent Application No. 2,833,711.

Office Action dated Apr. 10, 2018 in related U.S. Appl. No. 15/294,349.

Office Action dated Apr. 2, 2018 in related U.S. Appl. No. 15/183,387.

Office Action dated May 29, 2018 in related U.S. Appl. No. 15/235,716.

Canadian Office Action dated Apr. 18, 2018 in related Canadian Patent Application No. 2,928,711.

Canadian Office Action dated Jun. 22, 2018 in related Canadian Patent Application No. 2,886,697.

Non-Final Office Action dated Oct. 4, 2018 in related U.S. Appl. No. 15/217,081.

International Search Report and Written Opinion dated Sep. 19, 2018 in related PCT Patent Application No. PCT/US2018/040683.

Canadian Office Action dated Sep. 28, 2018 in related Canadian Patent Application No. 2,945,281.

Office Action dated Dec. 12, 2018 in related U.S. Appl. No. 16/160,708.

International Search Report and Written Opinion dated Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54542.

International Search Report and Written Opinion dated Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54548.

(56)

References Cited**OTHER PUBLICATIONS**

International Search Report and Written Opinion dated Dec. 31, 2018 in related PCT Patent Application No. PCT/US18/55913.
 International Search Report and Written Opinion dated Jan. 4, 2019 in related PCT Patent Application No. PCT/US18/57539.
 Office Action dated Jul. 25, 2018 in related U.S. Appl. No. 15/644,487.
 International Search Report and Written Opinion dated Apr. 10, 2019 in corresponding PCT Application No. PCT/US2019/016635.
 Notice of Allowance dated Apr. 23, 2019 in corresponding U.S. Appl. No. 15/635,028.
 Schlumberger, "Jet Manual 23, Fracturing Pump Units, SPF/SPS-343, Version 1.0," Jan. 31, 2007, 68 pages.
 Stewart & Stevenson, "Stimulation Systems," 2007, 20 pages.
 Luis Gamboa, "Variable Frequency Drives in Oil and Gas Pumping Systems," Dec. 17, 2011, 5 pages.
 "Griswold Model 811 Pumps: Installation, Operation and Maintenance Manual, ANSI Process Pump," 2010, 60 pages.
 Non-Final Office Action dated Feb. 12, 2019 in related U.S. Appl. No. 16/170,695.
 International Search Report and Written Opinion dated Feb. 15, 2019 in related PCT Application No. PCT/US18/63977.
 Non-Final Office Action dated Feb. 25, 2019 in related U.S. Appl. No. 16/210,749.
 International Search Report and Written Opinion dated Mar. 5, 2019 in related PCT Application No. PCT/US18/63970.
 Non-Final Office Action dated Mar. 6, 2019 in related U.S. Appl. No. 15/183,387.
 Office Action dated Mar. 1, 2019 in related Canadian Patent Application No. 2,943,275.
 Office Action dated Jan. 30, 2019 in related Canadian Patent Application No. 2,936,997.
 Non-Final Office Action issued in Corresponding U.S. Appl. No. 15/145,491 dated May 15, 2017.
 International Search Report and Written Opinion dated Jun. 2, 2020 in corresponding PCT Application No. PCT/US20/23809.
 International Search Report and Written Opinion dated Jun. 23, 2020 in corresponding PCT Application No. PCT/US20/23912.
 International Search Report and Written Opinion dated Jul. 22, 2020 in corresponding PCT Application No. PCT/US20/00017.
 Office Action dated Aug. 4, 2020 in related U.S. Appl. No. 16/385,070.
 Office Action dated Jun. 29, 2020 in related U.S. Appl. No. 16/404,283.
 Office Action dated Jun. 29, 2020 in related U.S. Appl. No. 16/728,359.
 Office Action dated Jun. 22, 2020 in related U.S. Appl. No. 16/377,861.
 Canadian Office Action dated Aug. 18, 2020 in related CA Patent Application No. 2,933,444.
 Canadian Office Action dated Aug. 17, 2020 in related CA Patent Application No. 2,944,968.
 Non-Final Office dated Oct. 26, 2020 in U.S. Appl. No. 15/356,436.
 Non-Final Office dated Oct. 5, 2020 in U.S. Appl. No. 16/443,273.
 Non-Final Office Action dated Sep. 29, 2020 in U.S. Appl. No. 16/943,727.
 Non-Final Office Action dated Sep. 2, 2020 in U.S. Appl. No. 16/356,263.
 Non-Final Office Action dated Aug. 31, 2020 in U.S. Appl. No. 16/167,083.
 Albone, "Mobile Compressor Stations for Natural Gas Transmission Service," ASME 67-GT-33, Turbo Expo, Power for Land, Sea and Air, vol. 79887, p. 1-10, 1967.
 Canadian Office Action dated Sep. 22, 2020 in Canadian Application No. 2,982,974.
 International Search Report and Written Opinion dated Sep. 3, 2020 in PCT/US2020/36932.
 "Process Burner" (<https://www.cebasrt.com/products/loii-gas/process-burner>) 06 Sep. 6, 2018 (Sep. 6, 2018), entire document, especially para (Burners for refinery Heaters].

Water and Glycol Heating Systems* (<https://www.heat-inc.com/wg-series-water-glycol-systems/>) Jun. 18, 2018 (Jun. 18, 2018), entire document, especially WG Series Water Glycol Systems.
 "Heat Exchanger" (https://en.wikipedia.org/w/index.php?title=Heat_exchanger&oldid=89300146) Dec. 18, 2019 Apr. 2019 (Apr. 18, 2019), entire document, especially para (0001].
 Canadian Office Action dated Sep. 8, 2020 in Canadian Patent Application No. 2,928,707.
 Canadian Office Action dated Aug. 31, 2020 in Canadian Patent Application No. 2,944,980.
 International Search Report and Written Opinion dated Aug. 28, 2020 in PCT/US20/23821.
 International Search Report and Written Opinion dated Jul. 9, 2019 in corresponding PCT Application No. PCT/US2019/027584.
 Office Action dated Jun. 11, 2019 in corresponding U.S. Appl. No. 16/210,749.
 Office Action dated May 10, 2019 in corresponding U.S. Appl. No. 16/268,030.
 Canadian Office Action dated May 30, 2019 in corresponding CA Application No. 2,833,711.
 Canadian Office Action dated Jun. 20, 2019 in corresponding CA Application No. 2,964,597.
 Office Action dated Jun. 7, 2019 in corresponding U.S. Appl. No. 16/268,030.
 International Search Report and Written Opinion dated Sep. 11, 2019 in related PCT Application No. PCT/US2019/037493.
 Office Action dated Aug. 19, 2019 in related U.S. Appl. No. 15/356,436.
 Office Action dated Oct. 2, 2019 in related U.S. Appl. No. 16/152,732.
 Office Action dated Sep. 11, 2019 in related U.S. Appl. No. 16/268,030.
 Office Action dated Oct. 11, 2019 in related U.S. Appl. No. 16/385,070.
 Office Action dated Sep. 3, 2019 in related U.S. Appl. No. 15/994,772.
 Office Action dated Sep. 20, 2019 in related U.S. Appl. No. 16/443,273.
 Canadian Office Action dated Oct. 1, 2019 in related Canadian Patent Application No. 2,936,997.
 International Search Report and Written Opinion dated Jan. 2, 2020 in related PCT Application No. PCT/US19/55325.
 Notice of Allowance dated Jan. 9, 2020 in related U.S. Appl. No. 16/570,331.
 Non-Final Office Action dated Dec. 23, 2019 in related U.S. Appl. No. 16/597,008.
 Non-Final Office Action dated Jan. 10, 2020 in related U.S. Appl. No. 16/597,014.
 Non-Final Office Action dated Dec. 6, 2019 in related U.S. Appl. No. 16/564,186.
 International Search Report and Written Opinion dated Nov. 26, 2019 in related PCT Application No. PCT/US19/51018.
 International Search Report and Written Opinion dated Feb. 11, 2020 in related PCT Application No. PCT/US2019/055323.
 Final Office Action dated Mar. 31, 2020 in related U.S. Appl. No. 15/356,436.
 Non-Final Office Action dated Mar. 3, 2020 in related U.S. Appl. No. 16/152,695.
 Non-Final Office Action issued in U.S. Appl. No. 14/881,535 dated May 20, 2020.
 Non-Final Office Action issued in U.S. Appl. No. 15/145,443 dated May 8, 2020.
 Non-Final Office Action issued in U.S. Appl. No. 16/458,696 dated May 22, 2020.
 International Search Report and Written Opinion issued in PCT/US2020/023809 dated Jun. 2, 2020.
 Karin, "Duel Fuel Diesel Engines," (2015), Taylor & Francis, pp. 62-63, Retrieved from <https://app.knovel.com/hotlink/toc/id:kpDFDE0001/dual-fueal-diesel-engines/duel-fuel-diesel-engines> (Year 2015).
 Goodwin, "High-voltage auxilliary switchgear for power stations," Power Engineering Journal, 1989, 10 pg. (Year 1989).
 International Search Report and Written Opinion mailed in PCT/US20/67526 dated May 6, 2021.

(56)

References Cited

OTHER PUBLICATIONS

International Search Report and Written Opinion mailed in PCT/US20/67608 dated Mar. 30, 2021.
 International Search Report and Written Opinion mailed in PCT/US20/67528 dated Mar. 19, 2021.
 International Search Report and Written Opinion mailed in PCT/US20/67146 dated Mar. 29, 2021.
 International Search Report and Written Opinion mailed in PCT/US20/67523 dated Mar. 22, 2021.
 International Search Report and Written Opinion mailed in PCT/US2020/066543 dated May 11, 2021.
 Morris et al., U.S. Appl. No. 62/526,869; Hydration-Blender Transport and Electric Power Distribution for Fracturing Operation; Jun. 28, 2018; USPTO; see entire document.
 Final Office Action dated Feb. 4, 2021 in U.S. Appl. No. 16/597,014.
 International Search Report and Written Opinion dated Feb. 4, 2021 in PCT/US20/59834.
 International Search Report and Written Opinion dated Feb. 2, 2021 in PCT/US20/58906.
 International Search Report and Written Opinion dated Feb. 3, 2021 in PCT/US20/58899.
 Non-Final Office Action dated Jan. 29, 2021 in U.S. Appl. No. 16/564,185.
 Final Office Action dated Jan. 21, 2021 in U.S. Appl. No. 16/458,696.
 Final Office Action dated Jan. 11, 2021 in U.S. Appl. No. 16/404,283.
 Non-Final Office Action dated Jan. 4, 2021 in U.S. Appl. No. 16/522,043.
 International Search Report and Written Opinion dated Dec. 14, 2020 in PCT/US2020/53980.

Non-Final Office Action issued in U.S. Appl. No. 16/871,928 dated Aug. 25, 2021.
 Non-Final Office Action issued in U.S. Appl. No. 16/943,727 dated Aug. 3, 2021.
 Non-Final Office Action issued in U.S. Appl. No. 14/881,525 dated Jul. 21, 2021.
 Non-Final Office Action issued in U.S. Appl. No. 16/404,283 dated Jul. 21, 2021.
 Notice of Allowance and Notice of Allowability issued in U.S. Appl. No. 15/829,419 dated Jul. 26, 2021.
 Woodbury et al., "Electrical Design Considerations for Drilling Rigs," IEEE Transactions on Industry Applications, vol. 1A-12, No. 4, Jul./Aug. 1976, pp. 421-431.
 Kroposki et al., Making Microgrids Work, 6 IEEE Power and Energy Mag. 40, 41 (2008).
 Dan T. Ton & Merrill A. Smith, The U.S. Department of Energy's Microgrid Initiative, 25 The Electricity J. 84 (2012), pp. 84-94.
 Non-Final Office Action issued in U.S. Appl. No. 16/871,328 dated Dec. 9, 2021.
 Non-Final Office Action issued in U.S. Appl. No. 16/943,935 dated Oct. 21, 2021.
 Non-Final Office Action issued in U.S. Appl. No. 16/564,186, dated Oct. 15, 2021.
 Final Office Action issued in U.S. Appl. No. 16/356,263 dated Oct. 7, 2021.
 Non-Final Office Action issued in U.S. Appl. No. 17/060,647 dated Sep. 20, 2021.
 Non-Final Office Action issued in U.S. Appl. No. 16/901,774 dated Sep. 14, 2021.
 Canadian Office Action issued in Canadian Application No. 3,094,768 dated Oct. 28, 2021.

* cited by examiner

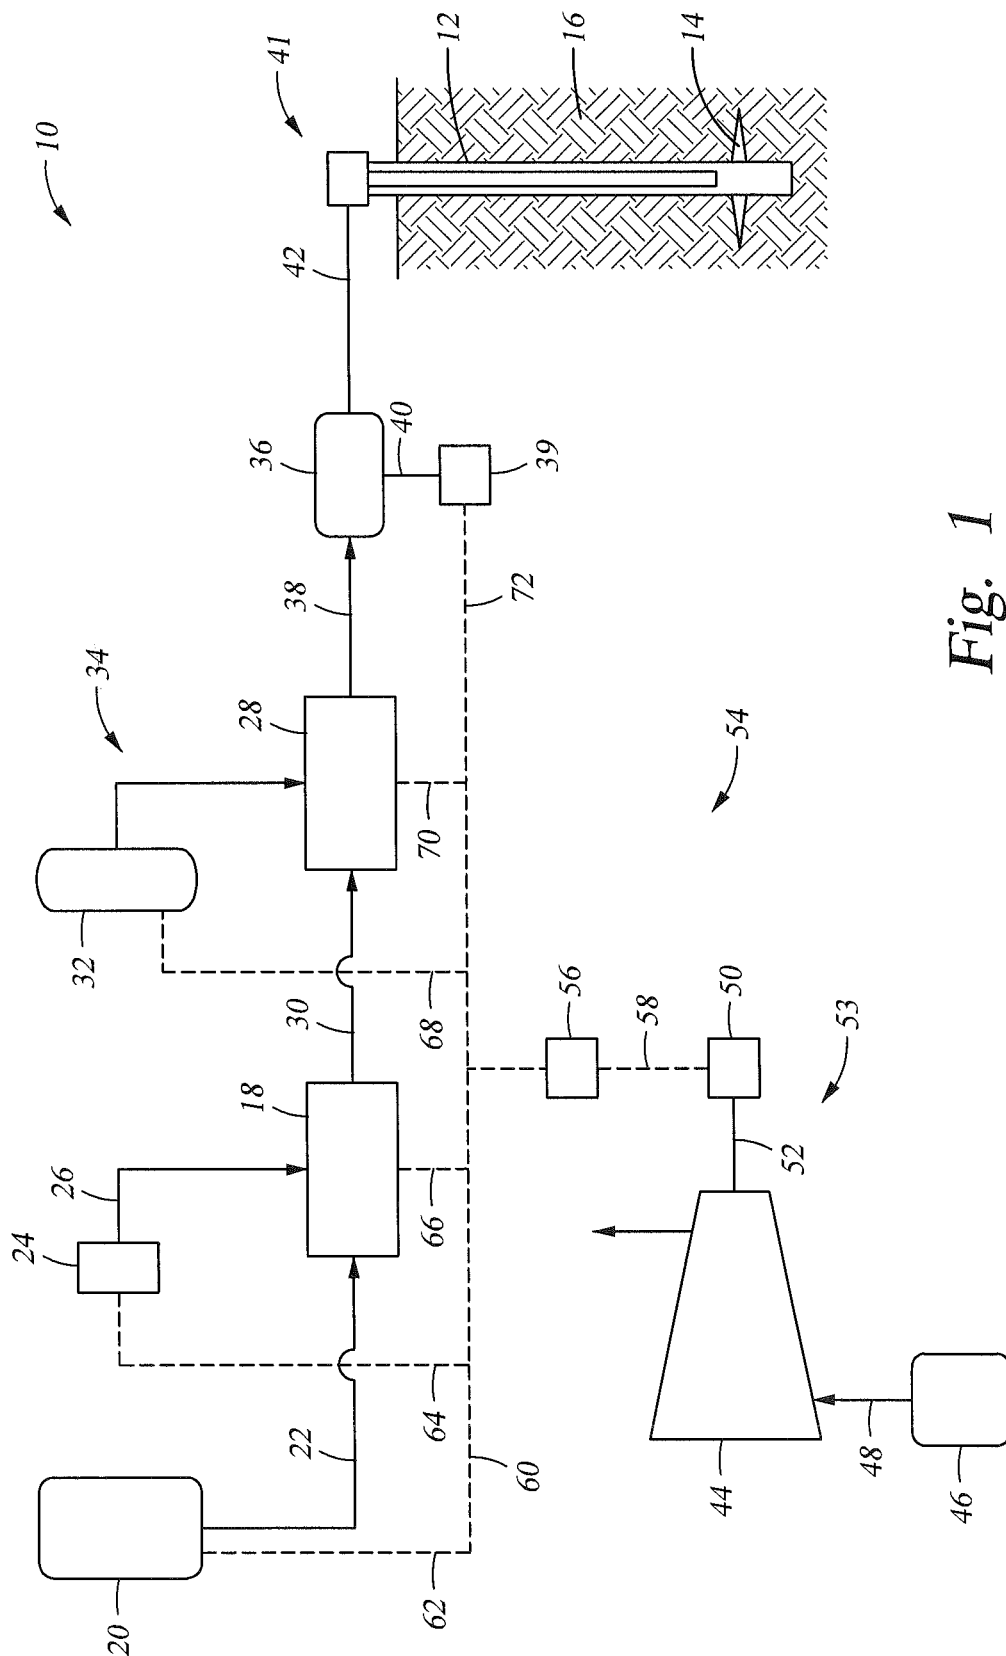


Fig. 1

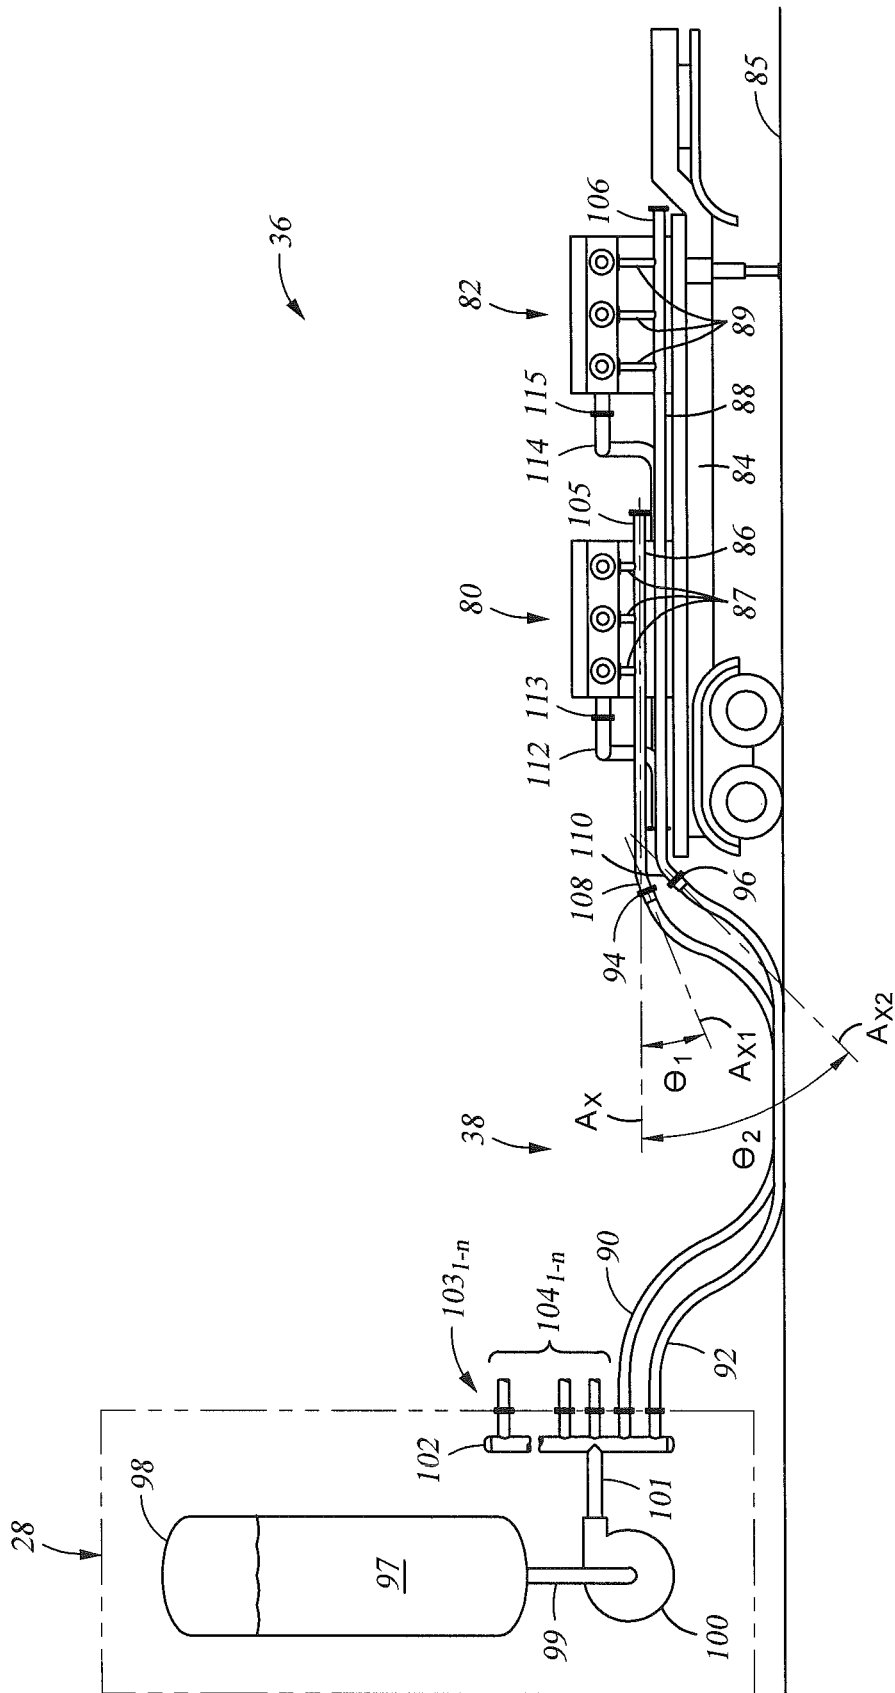


Fig. 2

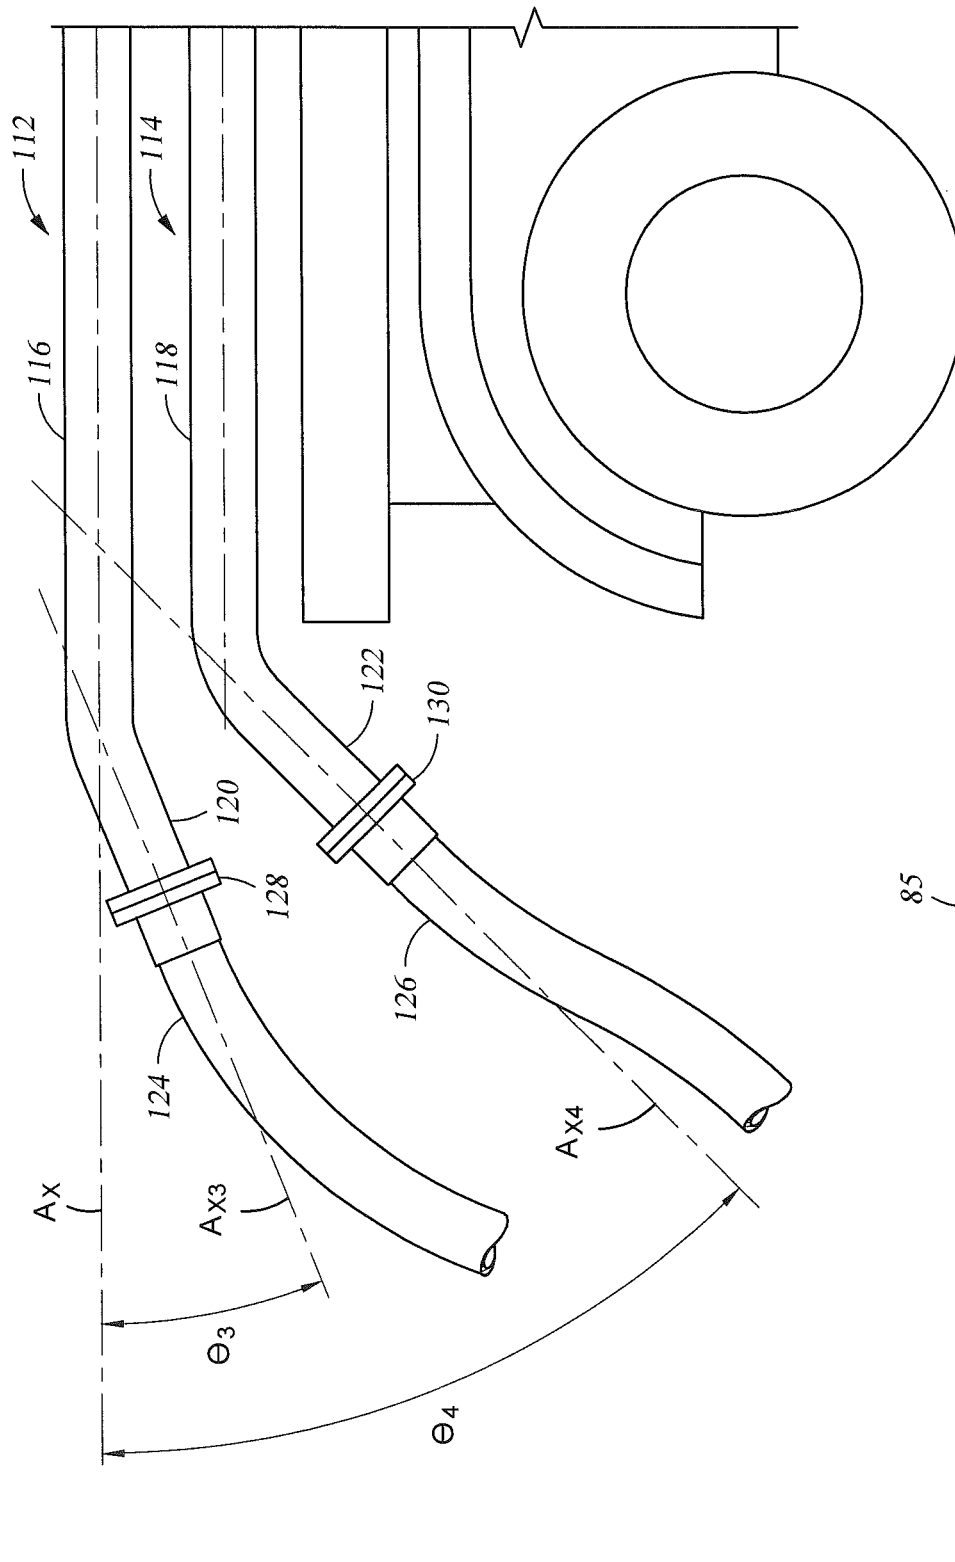


Fig. 3

1

SUCTION AND DISCHARGE LINES FOR A DUAL HYDRAULIC FRACTURING UNIT

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of, and claims priority to and the benefit of, U.S. Provisional Application Ser. No. 62/156,301, filed May 3, 2015 and is a continuation-in-part of, and claims priority to and the benefit of U.S. patent application Ser. No. 13/679,689, filed Nov. 16, 2012, the full disclosures of which are hereby incorporated by reference herein for all purposes.

BACKGROUND OF THE INVENTION

1. Field of Invention

The present disclosure relates to hydraulic fracturing of subterranean formations. In particular, the present disclosure relates to orienting piping connected to a fracturing pump so that connections in the piping are provided where the piping is oblique to a horizontal axis of the pump.

2. Description of Prior Art

Hydraulic fracturing is a technique used to stimulate production from some hydrocarbon producing wells. The technique usually involves injecting fluid into a wellbore at a pressure sufficient to generate fissures in the formation surrounding the wellbore. Typically the pressurized fluid is injected into a portion of the wellbore that is pressure isolated from the remaining length of the wellbore so that fracturing is limited to a designated portion of the formation. The fracturing fluid slurry, whose primary component is usually water, includes proppant (such as sand or ceramic) that migrate into the fractures with the fracturing fluid slurry and remain to prop open the fractures after pressure is no longer applied to the wellbore. A primary fluid for the slurry other than water, such as nitrogen, carbon dioxide, foam, diesel, or other fluids may be used as the primary component instead of water. A typical hydraulic fracturing fleet may include an data van unit, blender unit, hydration unit, chemical additive unit, hydraulic fracturing pump unit, sand equipment, wireline, and other equipment.

Traditionally, the fracturing fluid slurry has been pressurized on surface by high pressure pumps powered by diesel engines. To produce the pressures required for hydraulic fracturing, the pumps and associated engines have substantial volume and mass. Heavy duty trailers, skids, or trucks are required for transporting the large and heavy pumps and engines to sites where wellbores are being fractured. Each hydraulic fracturing pump usually includes power and end fluid ends, as well as seats, valves, springs, and keepers internally. Each pump is usually equipped with a water manifold (referred to as a fluid end) which contains seats, valves, and keepers internally. These parts allow the pump to draw in low pressure fluid (approximately 100 psi) and discharge the same fluid at high pressures (up to 15,000 psi or more). Traditional diesel powered hydraulic fracturing pump units only have one diesel engine, one transmission, and one hydraulic fracturing pump per unit. Recently electrical motors have been introduced to replace the diesel motors, which greatly reduces the emissions and noise generated by the equipment during operation. Because the pumps are generally transported on trailers, connections between segments of pump suction and discharge piping are

2

generally made up in the field. Moreover, the segments having these connections extend horizontally or vertically, and which are difficult connections for operations personnel to handle. Prior turbine powered hydraulic fracturing units with two hydraulic pumps on each unit had one supply line that fed both pumps. Also the discharge lines from both hydraulic fracturing pumps were combined into one discharge line while the unit.

SUMMARY OF THE INVENTION

Disclosed herein is an example of a hydraulic fracturing system for fracturing a subterranean formation, and which includes a trailer having wheels, an electrically powered fracturing pump mounted on the trailer, a supply line having fracturing fluid, and a hard piped suction lead line. In another embodiment, the trailer is replaced by any platform such as a skid or a truck. Suction lead line is made up of a main segment connected to a suction inlet on the electrically powered pump and a tip segment that is angled obliquely to a portion of the main segment proximate the tip segment, an end of the tip segment is connected to an end of the main segment distal from the suction inlet, and the tip segment further having an end distal from the main segment that is connected to an end of the supply line. In one example, the pump, supply line, suction lead line, main segment, and tip segment each respectively make up a first pump, a first supply line, a first suction lead, a first main segment, and a first tip segment, this example of the hydraulic fracturing system further includes a second pump, a second supply line, a second suction lead, a second main segment, and a second tip segment, and wherein the second tip segment is angled with respect to the first tip segment. In one example, the tip segment is angled from about 22 degrees to about 45 degrees with respect to a portion of the main segment proximate the tip segment; and can optionally be angled at about 22 degrees with respect to a portion of the main segment proximate the tip segment. In one alternative, the first tip segment is angled at about 22 degrees with respect to a portion of the first main segment proximate the first tip segment, and the second tip segment is angled at about 45 degrees with respect to a portion of the second main segment proximate the second tip segment. The supply line can be a flexible line made from an elastomeric material. In one alternate embodiment, the tip segment extends away from the main segment in a direction that projects towards a surface on which the trailer is supported. In one embodiment, the supply line for a first pump is separate and distinct from the supply line for a second pump while on the unit. Boost pressure for both the first and second hydraulic fracturing pumps may come from the same blender. The system can further include a hard piped discharge lead line which is made up of a main segment connected to a discharge on the electrically powered pump, and a tip segment that is angled obliquely to a portion of the main segment proximate the tip segment, and having an end connected to an end of the main segment distal from the discharge, and further having an end distal from the main segment that is connected to an end of a discharge line. In one embodiment, the tip segment for the discharge line is parallel with a horizontal plane and is not angled down. In an alternative where the pump, discharge line, discharge lead line, main segment, and tip segment each respectively are a first pump, a first discharge line, a first discharge lead, a first main segment, and a first tip segment, and the hydraulic fracturing system further includes a second pump, a second discharge line, a second discharge lead, a second main

3

segment, and a second tip segment, the second tip segment is angled with respect to the first tip segment. In this example, the tip segment is angled from about 22 degrees to about 45 degrees with respect to a portion of the main segment proximate the tip segment. Optionally, the first tip segment is angled at about 22 degrees with respect to a portion of the first main segment proximate the first tip segment, and wherein the second tip segment is angled at about 45 degrees with respect to a portion of the second main segment proximate the second tip segment. In one embodiment, the tip segment for the discharge line for the first pump is parallel with a horizontal plane and is not angled down. The tip segment for the discharge line for the first pump is offset from the discharge line for the second pump.

Another example of a hydraulic fracturing system for fracturing a subterranean formation includes an electrically powered fracturing pump mounted on a mobile platform, a lead line in fluid communication with the pump and having a tip portion that is oriented along an axis that is oblique to a horizontal axis, and a flow line connected to the tip portion and that is in fluid communication with the lead line. In one example, the axis along which the tip portion is oriented is a first axis, and wherein an angle is defined between the first axis and the horizontal axis that ranges from around 22 degrees to around 45 degrees. The pump, lead line, axis, and flow line each respectively can be referred to as a first pump, a first lead line, a first tip portion, a first axis, and a first flow line, and in this example the hydraulic fracturing system further includes a second pump, a second lead line, a second tip portion, and a second flow line, and wherein the second tip portion extends along a second axis that is oblique with the first axis and the horizontal axis. In this example, the first axis can be at an angle of around 22 degrees with respect to the horizontal axis, and wherein the second axis can be at an angle of around 45 degrees with respect to the horizontal axis. The lead line can optionally be a suction lead line, and the flow line can be a supply line, in this example the hydraulic fracturing system further includes a discharge lead line having a tip portion and a discharge line, and wherein the tip portion of the discharge lead line extends along another axis that is oblique to the horizontal axis. In one embodiment, the discharge lead line and tip portion are parallel with the horizontal axis of the platform and are not angled. In this example, the supply line contains fracturing fluid from a blender, and wherein the discharge line contains fracturing fluid pressurized by the pump.

Another example of a hydraulic fracturing system for fracturing a subterranean formation includes a trailer, a first electrically powered pump mounted on the trailer and having a suction lead line with an end connected to a supply line and that is angled in a range of from around 22 degrees to around 45 degrees with respect to a horizontal axis, and having a discharge lead line with an end connected to a discharge line that is angled in a range of from around 22 degrees to around 45 degrees with respect to the horizontal axis, and a second electrically powered pump mounted on the trailer and having a suction lead line with an end connected to a supply line and that is angled in a range of from around 22 degrees to around 45 degrees with respect to the horizontal axis, and having a discharge lead line with an end connected to a discharge line that is angled in a range of from around 22 degrees to around 45 degrees with respect to the horizontal axis. In one embodiment, the discharge line is not angled and is parallel with the horizontal axis of the trailer.

4

BRIEF DESCRIPTION OF DRAWINGS

Some of the features and benefits of the present invention having been stated, others will become apparent as the description proceeds when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a schematic of an example of a hydraulic fracturing system.

FIGS. 2 and 3 are side views of examples of piping for a fracturing pump having connections in obliquely oriented segments of the piping.

FIG. 4 is an end perspective view of an example of an example fracturing pumps on a trailer having separate and distinct suction and discharge piping.

While the invention will be described in connection with the preferred embodiments, it will be understood that it is not intended to limit the invention to that embodiment. On the contrary, it is intended to cover all alternatives, modifications, and equivalents, as may be included within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF INVENTION

The method and system of the present disclosure will now be described more fully hereinafter with reference to the accompanying drawings in which embodiments are shown. The method and system of the present disclosure may be in many different forms and should not be construed as limited to the illustrated embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey its scope to those skilled in the art. Like numbers refer to like elements throughout. In an embodiment, usage of the term "about" includes $\pm 5\%$ of the cited magnitude. In an embodiment, usage of the term "substantially" includes $\pm 5\%$ of the cited magnitude.

It is to be further understood that the scope of the present disclosure is not limited to the exact details of construction, operation, exact materials, or embodiments shown and described, as modifications and equivalents will be apparent to one skilled in the art. In the drawings and specification, there have been disclosed illustrative embodiments and, although specific terms are employed, they are used in a generic and descriptive sense only and not for the purpose of limitation.

FIG. 1 is a schematic example of a hydraulic fracturing system 10 that is used for pressurizing a wellbore 12 to create fractures 14 in a subterranean formation 16 that surrounds the wellbore 12. Included with the system 10 is a hydration unit 18 that receives fluid from a fluid source 20 via line 22, and also selectively receives additives from an additive source 24 via line 26. Additive source 24 can be separate from the hydration unit 18 as a stand-alone unit, or can be included as part of the same unit as the hydration unit 18. The fluid, which in one example is water, is mixed inside of the hydration unit 18 with the additives. In an embodiment, the fluid and additives are mixed over a period of time to allow for uniform distribution of the additives within the fluid. In the example of FIG. 1, the fluid and additive mixture is transferred to a blender unit 28 via line 30. A proppant source 32 contains proppant, which is delivered to the blender unit 28 as represented by line 34, where line 34 can be a conveyor. Inside the blender unit 28, the proppant and fluid/additive mixture are combined to form a fracturing slurry, which is then transferred to a fracturing pump system 36 via line 38; thus fluid in line 38 includes the discharge of

5

blender unit 28 which is the suction (or boost) for the fracturing pump system 36. Blender unit 28 can have an onboard chemical additive system, such as with chemical pumps and augers. Optionally, additive source 24 can provide chemicals to blender unit 28; or a separate and stand-alone chemical additive system (not shown) can be provided for delivering chemicals to the blender unit 28. In an example, the pressure of the slurry in line 38 ranges from around 80 psi to around 100 psi. The pressure of the slurry can be increased up to around 15,000 psi by pump system 36. A motor 39, which connects to pump system 36 via connection 40, drives pump system 36 so that it can pressurize the slurry. In one example, the motor 39 is controlled by a variable frequency drive ("VFD"). In one embodiment, a motor 39 may connect to a first pump system 36 via connection 40 and to a second pump system 36 via a second connection 40. After being discharged from pump system 36, slurry is pumped into a wellhead assembly 41; discharge piping 42 connects discharge of pump system 36 with wellhead assembly 41 and provides a conduit for the slurry between the pump system 36 and the wellhead assembly 41. In an alternative, hoses or other connections can be used to provide a conduit for the slurry between the pump system 36 and the wellhead assembly 41. Optionally, any type of fluid can be pressurized by the fracturing pump system 36 to form injection fracturing fluid that is then pumped into the wellbore 12 for fracturing the formation 14, and is not limited to fluids having chemicals or proppant.

An example of a turbine 44 is provided in the example of FIG. 1 and which receives a combustible fuel from a fuel source 46 via a feed line 48. In one example, the combustible fuel is natural gas, and the fuel source 46 can be a container of natural gas or a well (not shown) proximate the turbine 44. Combustion of the fuel in the turbine 44 in turn powers a generator 50 that produces electricity. Shaft 52 connects generator 50 to turbine 44. The combination of the turbine 44, generator 50, and shaft 52 define a turbine generator 53. In another example, gearing can also be used to connect the turbine 44 and generator 50. An example of a micro-grid 54 is further illustrated in FIG. 1, and which distributes electricity generated by the turbine generator 53. Included with the micro-grid 54 is a transformer 56 for stepping down voltage of the electricity generated by the generator 50 to a voltage more compatible for use by electrical powered devices in the hydraulic fracturing system 10. In another example, the power generated by the turbine generator and the power utilized by the electrical powered devices in the hydraulic fracturing system 10 are of the same voltage, such as 4160 V so that main power transformers are not needed. In one embodiment, multiple 3500 kVA dry cast coil transformers are utilized. Electricity generated in generator 50 is conveyed to transformer 56 via line 58. In one example, transformer 56 steps the voltage down from 13.8 kV to around 600 V. Other step down voltages can include 4,160 V, 480 V, or other voltages. The output or low voltage side of the transformer 56 connects to a power bus 60, lines 62, 64, 66, 68, 70, and 72 connect to power bus 60 and deliver electricity to electrically powered end users in the system 10. More specifically, line 62 connects fluid source 20 to bus 60, line 64 connects additive source 24 to bus 60, line 66 connects hydration unit 18 to bus 60, line 68 connects proppant source 32 to bus 60, line 70 connects blender unit 28 to bus 60, and line 72 connects motor 39 to bus 60. In an example, additive source 24 contains ten or more chemical pumps for supplementing the existing chemical pumps on the hydration unit 18 and blender unit 28. Chemicals from the additive source 24 can be delivered via lines 26 to either

6

the hydration unit 18 and/or the blender unit 28. In one embodiment, the elements of the system 10 are mobile and can be readily transported to a wellsite adjacent the wellbore 12, such as on trailers or other platforms equipped with wheels or tracks.

FIG. 2 shows in a side view a schematic example of a portion of the hydraulic fracturing system 10 of FIG. 1 and which includes a pair of pumps 80, 82 mounted on a trailer 84. In another embodiment, the platform 84 may be a truck or one or more skids. The pumps 80, 82 and trailer 84 make up one example of a fracturing pump system 36 and which is used for pressurizing fracturing fluid that is then transmitted to the wellhead assembly 41 of FIG. 1. Trailer 84 is shown mounted on a surface 85, which can be any surface proximate wellhead assembly 41 (FIG. 1), such as a paved or unpaved road, a pad (formed from concrete or a mat), gravel, or the Earth's surface. As shown, surface 85 is generally parallel with a horizontal axis A_x which provides one example of a reference axis for comparing relative angles thereto. Further included with the fracturing pump system 36 of FIG. 2 is a suction lead line 86 which is substantially supported on top of trailer 84. In the illustrated example, lead line 86 is hard piped, e.g., formed from metal or other generally non-pliable material. Suction lead line 86 provides a conduit for fracturing fluids supplied from the blender unit 28 and to the suction inlets 87 provided on pump 80. While three suction inlets 87 are shown on pump 80, any number of inlets may be provided depending on the design and application of pump 80. Another suction lead line 88 is provided on trailer 84 which connects to suction inlets 89 formed on pump 82, suction lead line 88 is also hard piped. Suction lead lines 86, 88 respectively couple to supply lines 90, 92, both of which carry fracturing fluid from blender unit 28 and across the distance between blender unit 28 and fracturing pump system 36. In one example supply lines 90, 92 are generally flexible and include elastomeric material. Connections 94, 96 provide a coupling between the suction lead lines 86, 88 and supply lines 90, 92. Connections 94, 96 can be flanged or threaded and may include any different number of connections that are appropriate for use in a field application, such as compression fittings, threaded unions, hammer lug unions, and the like. Fracturing fluid 97 is shown stored within tub 98 which is part of the blender unit 28 and as described above provides a place for preparing fracturing fluid to be used in a fracturing environment. Fracturing fluid 97 is directed from tub 98 through piping 99 to a discharge pump 100 which pressurizes or boosts fracturing fluid 97 for transmitting the fracturing fluid 97 to the fracturing pump system 36. Piping 101 attached to a discharge end of pump 100 directs the pressurized fracturing fluid to a manifold 102. Connections 103_{1-n} formed on manifold 102 attach to supply lines 104_{1-n}, which are similar to supply lines 90, 92 and that direct the fracturing fluid to pumps (not shown). Pumps connected to supply lines 104_{1-n} are similar to pumps 80, 82, and are also part of the fracturing pump system 36.

Suction lead lines 86, 88 of FIG. 2 each include main segments 105, 106; which make up portions of the suction lead lines 86, 88 on the trailer 84 and distal from the supply lines 90, 92. Suction lead lines 86, 88 also include tip segments 108, 110, which include portions of the suction lead lines 86, 88 that connect to ends of main segments 105, 106 respectively, and that are proximate to and connect with the supply lines 90, 92. As shown, tip segments 108, 110 are shown extending along axes A_{x1} , A_{x2} that are oblique with respect to horizontal axis A_x . By obliquely angling the tip segments 108, 110, operations personnel experience signifi-

7

cantly less difficulty in connecting the supply lines 90, 92 to the suction lead lines 86, 88. When connecting/disconnecting a supply line 90, 92 from an obliquely angled tip segment 108, 110 allows operations personnel to hold the portion of the supply lines 90, 92 spaced away from the suction leads 86, 88 vertically lower than the end at the connection 94, 96; which is a more natural and less cumbersome orientation for operations personnel. The angled connections also generate less stress on the supply lines 90, 92 which may lengthen their life and minimize failures. The angled holding of the supply lines 90, 92 is in contrast to the generally horizontal or vertical orientations of ends of traditional suction lead lines, which requires that the rearward portions of the supply lines 90, 92 at the same vertical level as the ends at the connections 94, 96.

In one non-limiting example, axis A_{X1} is at an angle θ_1 of around 22° with respect to horizontal axis A_X . Optionally, axis A_{X2} is at an angle θ_2 of around 45° with respect to horizontal axis A_X . An additional advantage is realized by offsetting the angles of the adjacent tip segments 108, 110 as not only can personnel realize the advantage of the non-horizontal orientation of these tip segments 108, 110 when attaching or moving the supply lines 90, 92, but angularly offsetting the adjacent tip segments 108, 110 reduces interference of operation between these two tip segments 108, 110. It should be pointed out, however, that the axes A_{X1} , A_{X2} along which the tip segments 108, 110 are oriented can range between around 22° and up to around 45° from the horizontal axis A_X . Additionally, the offset angles between axes A_{X1} , A_{X2} and horizontal axis A_X can be less than 22° . In FIG. 2, tip segments 108, 110 are shown projecting along a path that intersects with surface 85. However, embodiments exist wherein one or both of tip segments 108, 110 extend along a path that projects away from surface 85.

Further shown in FIG. 2 is a discharge lead line 112 which is shown connecting to a discharge 113 mounted on a high pressure side of pump 80. A discharge line 114 is shown connecting to a discharge 115 mounted on the high pressure side of pump 82. Referring now to the example of FIG. 3, shown is that discharge lead lines 112, 114 each include main segments 116, 118 and which are primarily mounted on trailer 84. The ends of the discharge lead lines 102, 114 distal from pumps 80, 82 are angled to define tip segments 120, 122 which as shown are oriented respectively along axes A_{X3} , A_{X4} . Like axes A_{X1} , A_{X2} of FIG. 2, axes A_{X3} , A_{X4} of FIG. 3 project at angles with respect to horizontal axis A_X that are oblique. More specifically, A_{X3} is shown at an angle of θ_3 with respect to horizontal axis A_X , and axis A_{X4} is at an angle of θ_4 with respect to horizontal axis A_X . Similar to the tip segments 108, 110 of FIG. 2, obliquely angling of the tip segments 120, 122 provides an easier connection and disconnection of discharge lines 124, 126 shown respectively coupled to the ends of the tip segments 120, 122. Connections 128, 130 are illustrated that provide connection between the discharge lines 124, 126 and tip segments 120, 122. In one optional embodiment, tip segments 108, 110, 120, 122 extend across the outer periphery of the upper surface of trailer 84. Example connections 128, 130 include flange connections, threaded connections, unions, hammer unions, quick disconnect connections, and the like. In one embodiment, the ends of the two discharge lead lines for the first pump and the second pump are parallel to the horizontal plane and are offset from each other.

Further shown in the example of FIG. 4 are hydraulic fracturing pumps 80, 82 mounted on trailer 84. In the illustrated embodiment, suction line 88 and the discharge

8

line 114 fluidly connected to pump 80 and are routed underneath the fluid end of pump 82. Further in this example, the discharge tip segments 120, 122 are offset from one another, but are oriented along paths that are generally parallel with the trailer 84 and surface 85 on which trailer 84 is supported. As shown, the discharge lead lines 112, 114 and respective tip segments 120, 122 remain separate from one another so that pressurized slurry from the pumps 80, 82 remains in separate conduits while on and adjacent trailer 84. Lines 86, 88 and associated tip segments 108, 110 are also kept apart from one another while on and adjacent trailer 84. As indicated above, separating these fluid flow lines, especially proximate the pumps 80, 82 reduces vibration in the hardware coupled with the pumps 80, 82, and flow lines carrying slurry to and from the pumps 80, 82.

The present invention described herein, therefore, is well adapted to carry out the objects and attain the ends and advantages mentioned, as well as others inherent therein. While a presently preferred embodiment of the invention has been given for purposes of disclosure, numerous changes exist in the details of procedures for accomplishing the desired results. These and other similar modifications will readily suggest themselves to those skilled in the art, and are intended to be encompassed within the spirit of the present invention disclosed herein and the scope of the appended claims.

What is claimed is:

1. A hydraulic fracturing system for fracturing a subterranean formation comprising:

a plurality of electrically powered fracturing pumps mounted on a trailer, each of the plurality of electrically powered fracturing pumps attached to a corresponding first lead line and a corresponding second lead line; wherein each of the first lead lines and the second lead lines are separate and apart from one another while on the trailer, each of the first and second lead lines comprising a main segment attached to at least one of the plurality of electrically powered fracturing pumps, and a tip segment that is angled obliquely to a portion of the main segment proximate the tip segment, wherein the tip segment of each of the first lead lines is angled differently with respect to the main segment than the tip segment of the corresponding second lead line, and wherein the main segment and the tip segment comprise a unitary pipe segment; and flow lines in fluid communication with the lead lines.

2. The hydraulic fracturing system of claim 1, wherein the tip segment of each lead line extends along an axis that angles away from a horizontal axis from around 22 degrees to around 45 degrees.

3. The hydraulic fracturing system of claim 2, wherein the tip segment of the first lead line is oriented at an angle of around 22 degrees with respect to the horizontal axis, and segment of the second lead line is oriented at an angle of around 45 degrees with respect to the horizontal axis.

4. The hydraulic fracturing system of claim 1, wherein the lead lines comprise suction lead lines, the system further comprising discharge lead lines that extend along paths that are generally parallel with the horizontal axis, and wherein the suction lead lines connect to a supply line that contains fracturing fluid from a blender, and the discharge line contains fracturing fluid pressurized by the pump.

* * * * *