

US 20060251490A1

(19) **United States**

(12) **Patent Application Publication**
Kleinman et al.

(10) **Pub. No.: US 2006/0251490 A1**

(43) **Pub. Date: Nov. 9, 2006**

(54) **BLIND FASTENER AND METHOD OF
REMOVING IT FROM A WORKPIECE**

Publication Classification

(76) Inventors: **Jeffrey Ralph Kleinman**, Bedfordshire
(GB); **Alan Edward Shawyer**,
Hertfordshire (GB)

(51) **Int. Cl.**
F16B 13/04 (2006.01)

(52) **U.S. Cl.** **411/39**

Correspondence Address:

**TREXLER, BUSHNELL, GIANGIORGI,
BLACKSTONE & MARR, LTD.**
105 WEST ADAMS STREET
SUITE 3600
CHICAGO, IL 60603 (US)

(57) **ABSTRACT**

A blind fastener for insertion through an aperture in a workpiece, the fastener comprising a pin (11), a sleeve (21) and an abutment member (32); the pin (11) extending inside the sleeve (21) and engaging therewith at or near a first end (24) of the sleeve; the sleeve having a radially expandable portion; the abutment member (32) being adjacent the second end (25) of the sleeve and projecting radially therefrom and the pin (11) extending beyond the abutment member (32); in which the abutment member is removably secured to the sleeve by means sufficiently strong to allow handling of the assembled fastener to be inserted in the aperture in the workpiece and installed therein, but sufficiently weak to allow the abutment member to be removed from the sleeve so that the pin and sleeve can be forced out of the aperture on the workpiece, to remove the fastener therefrom.

(21) Appl. No.: **10/545,908**


(22) PCT Filed: **May 11, 2004**




(86) PCT No.: **PCT/GB04/02042**


(30) **Foreign Application Priority Data**


May 14, 2003 (GB) 0311053.3

May 19, 2003 (GB) 0311368.5

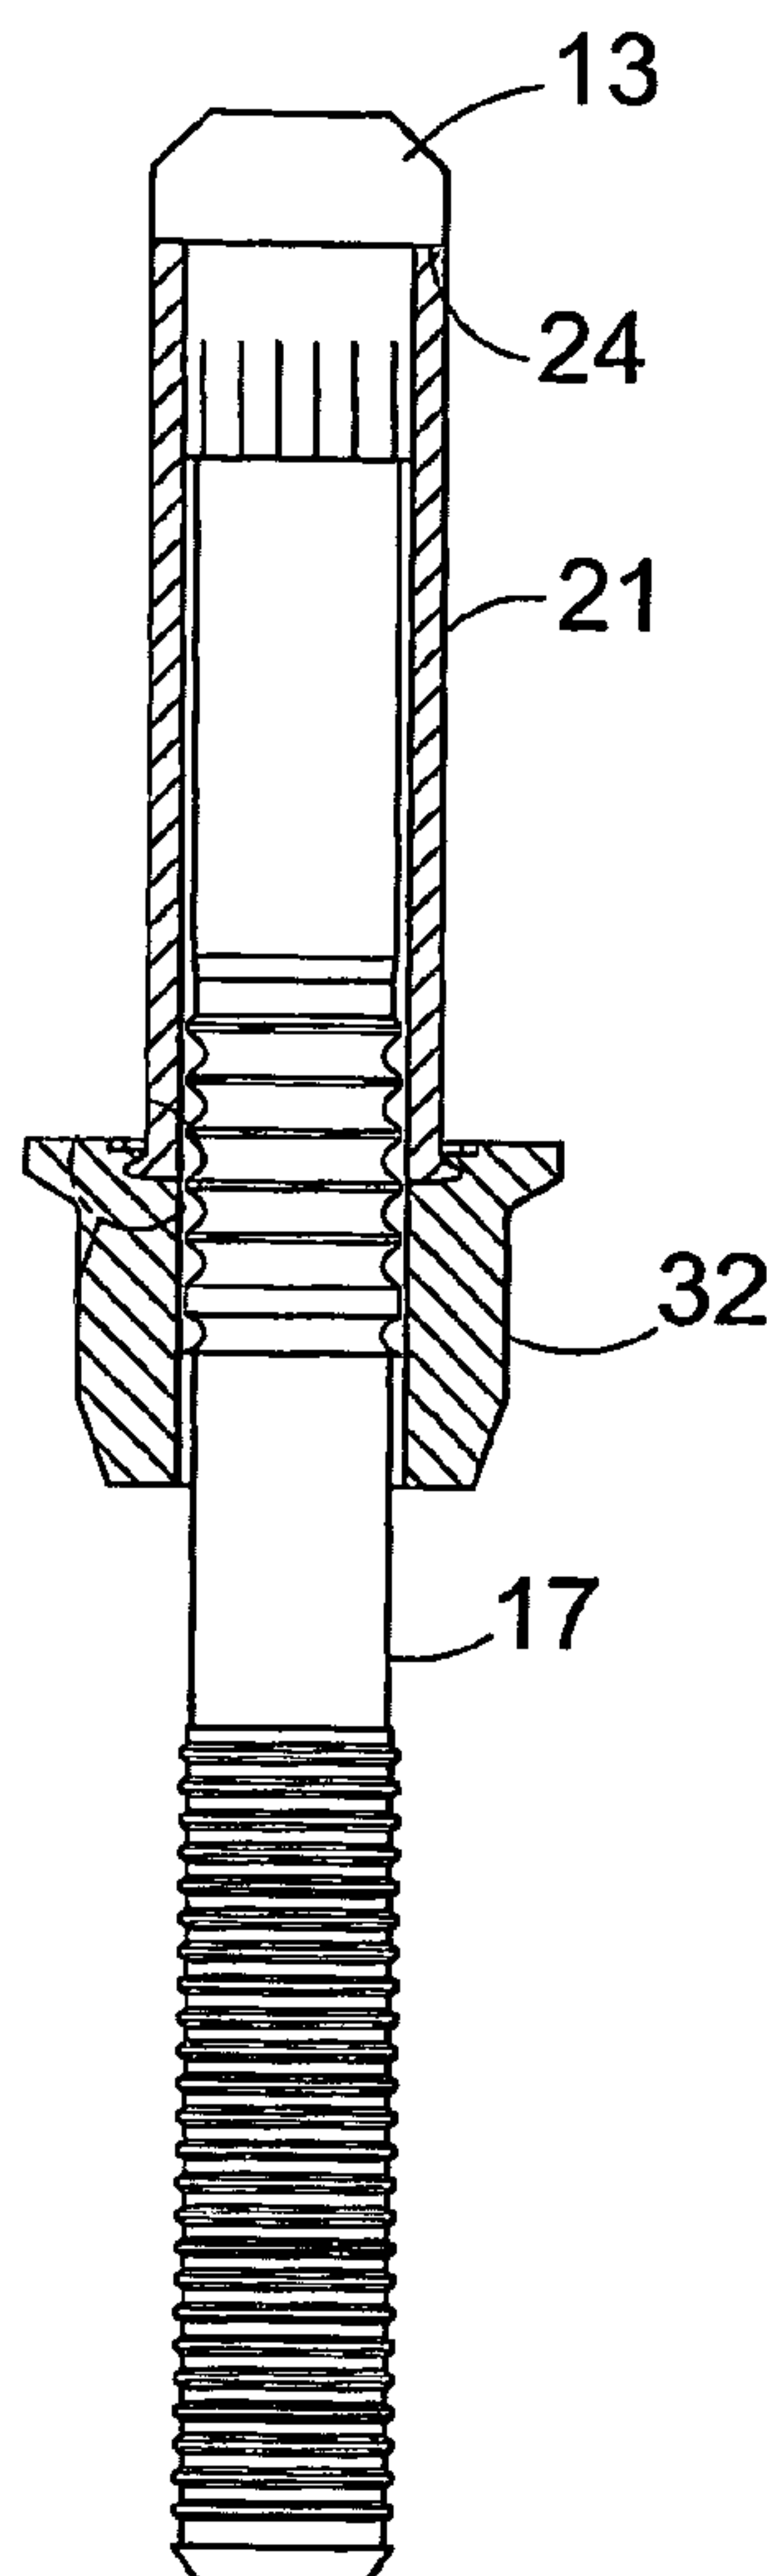

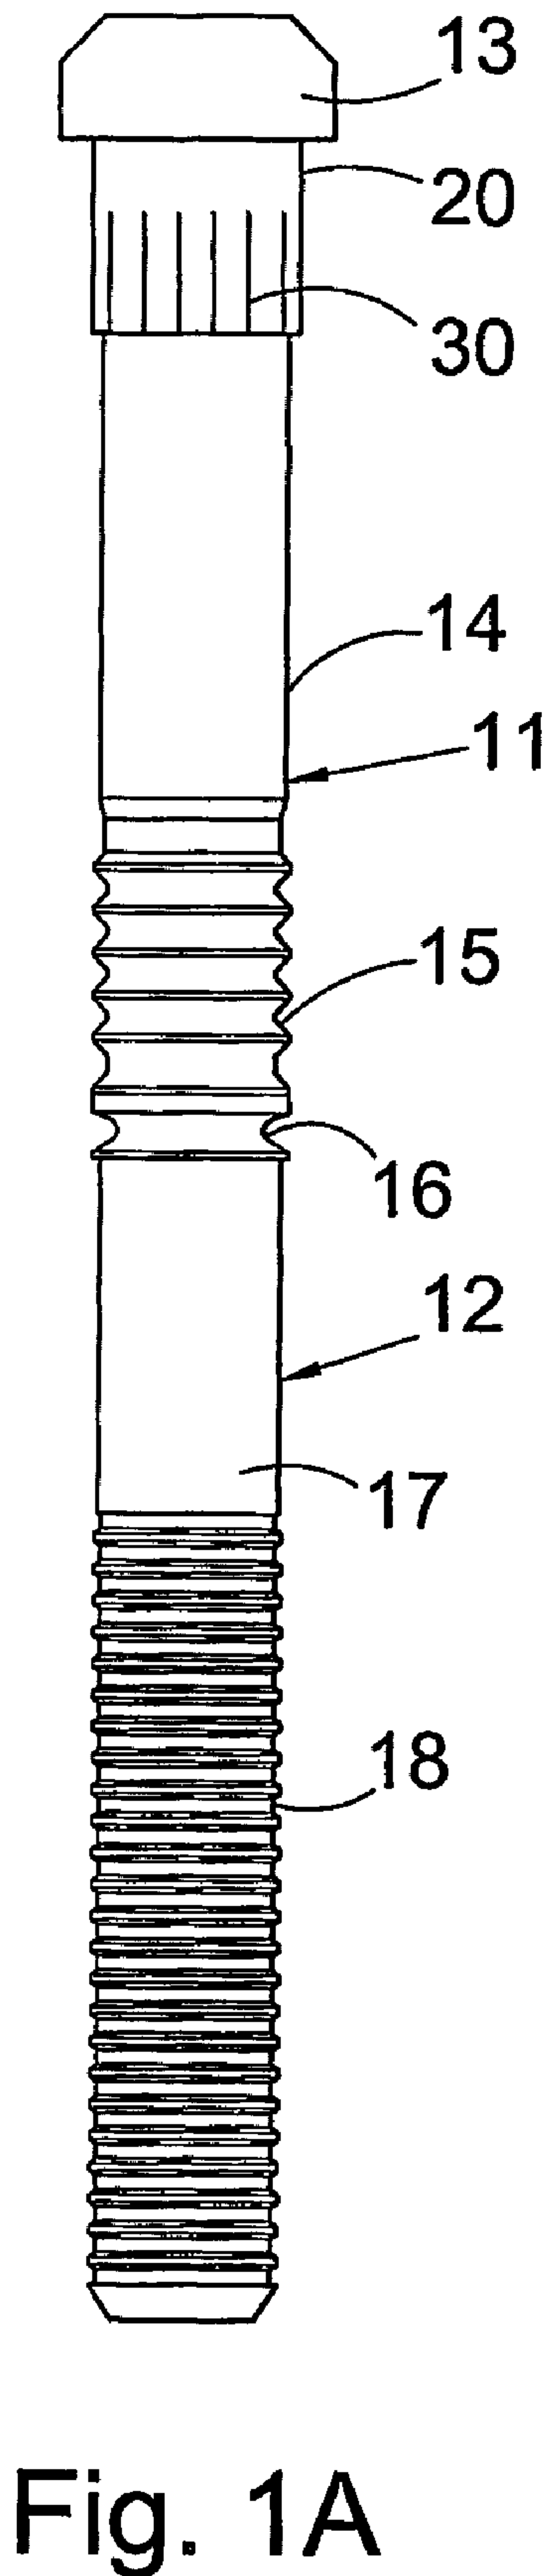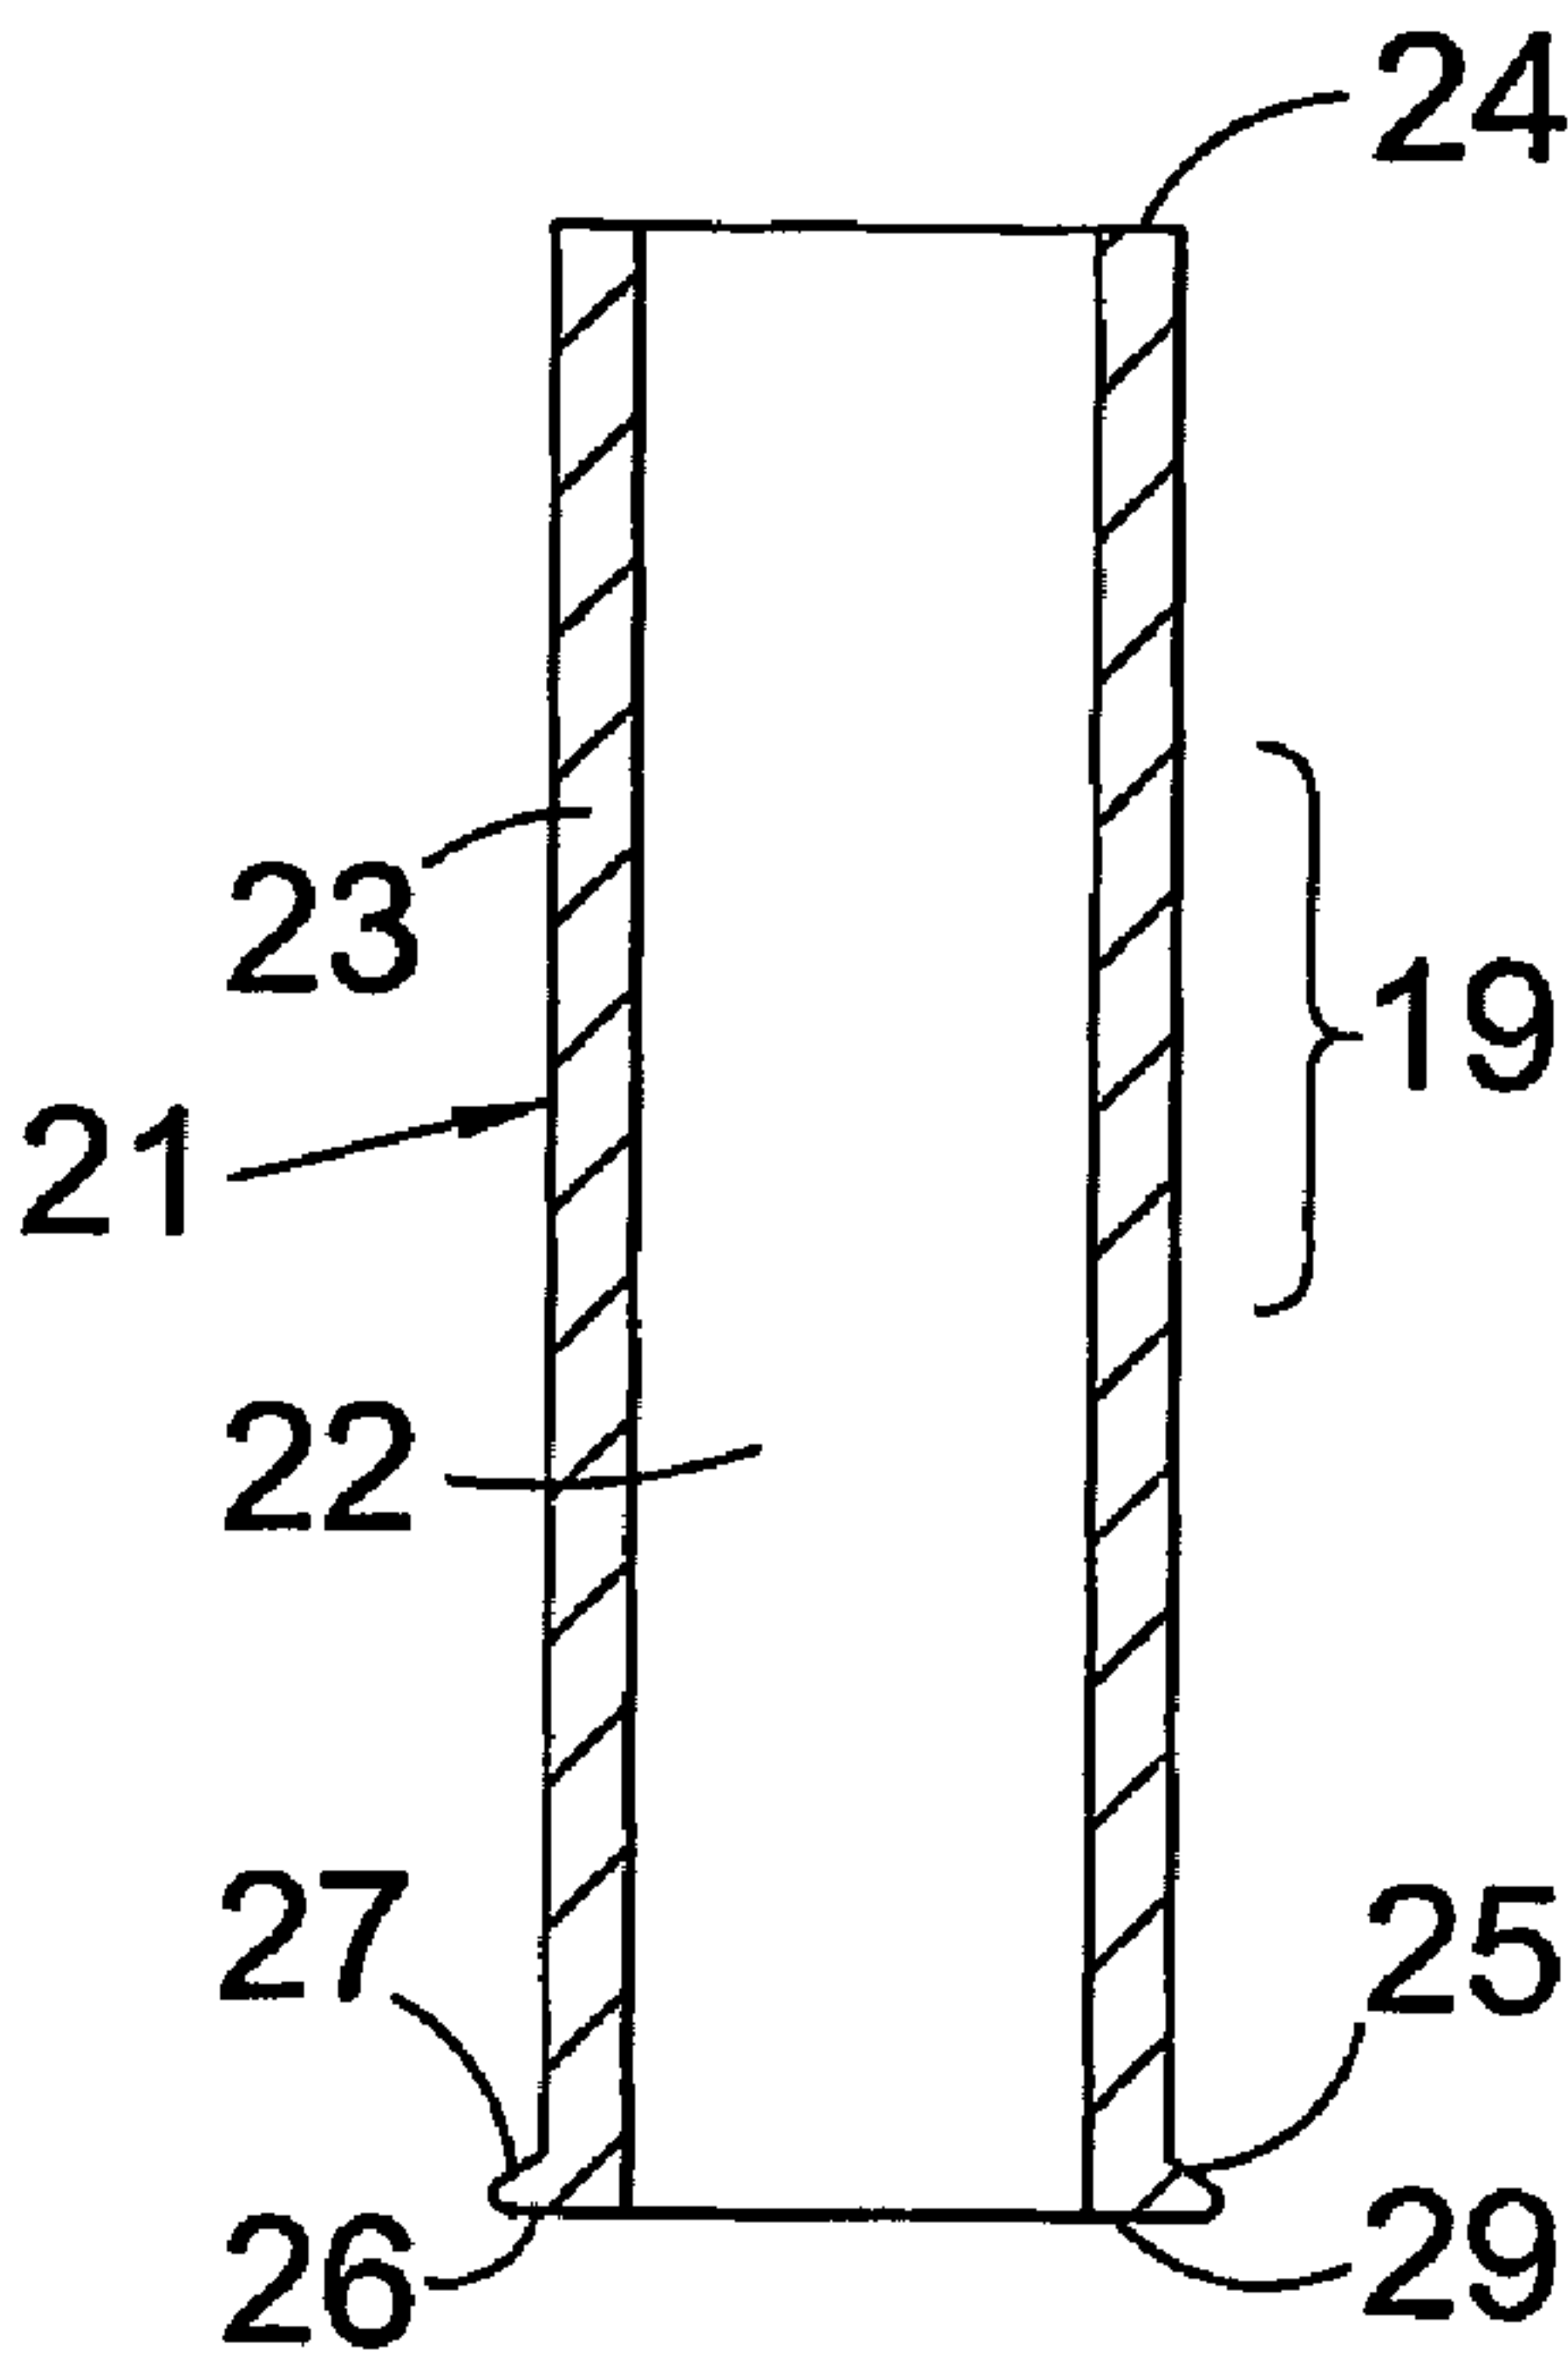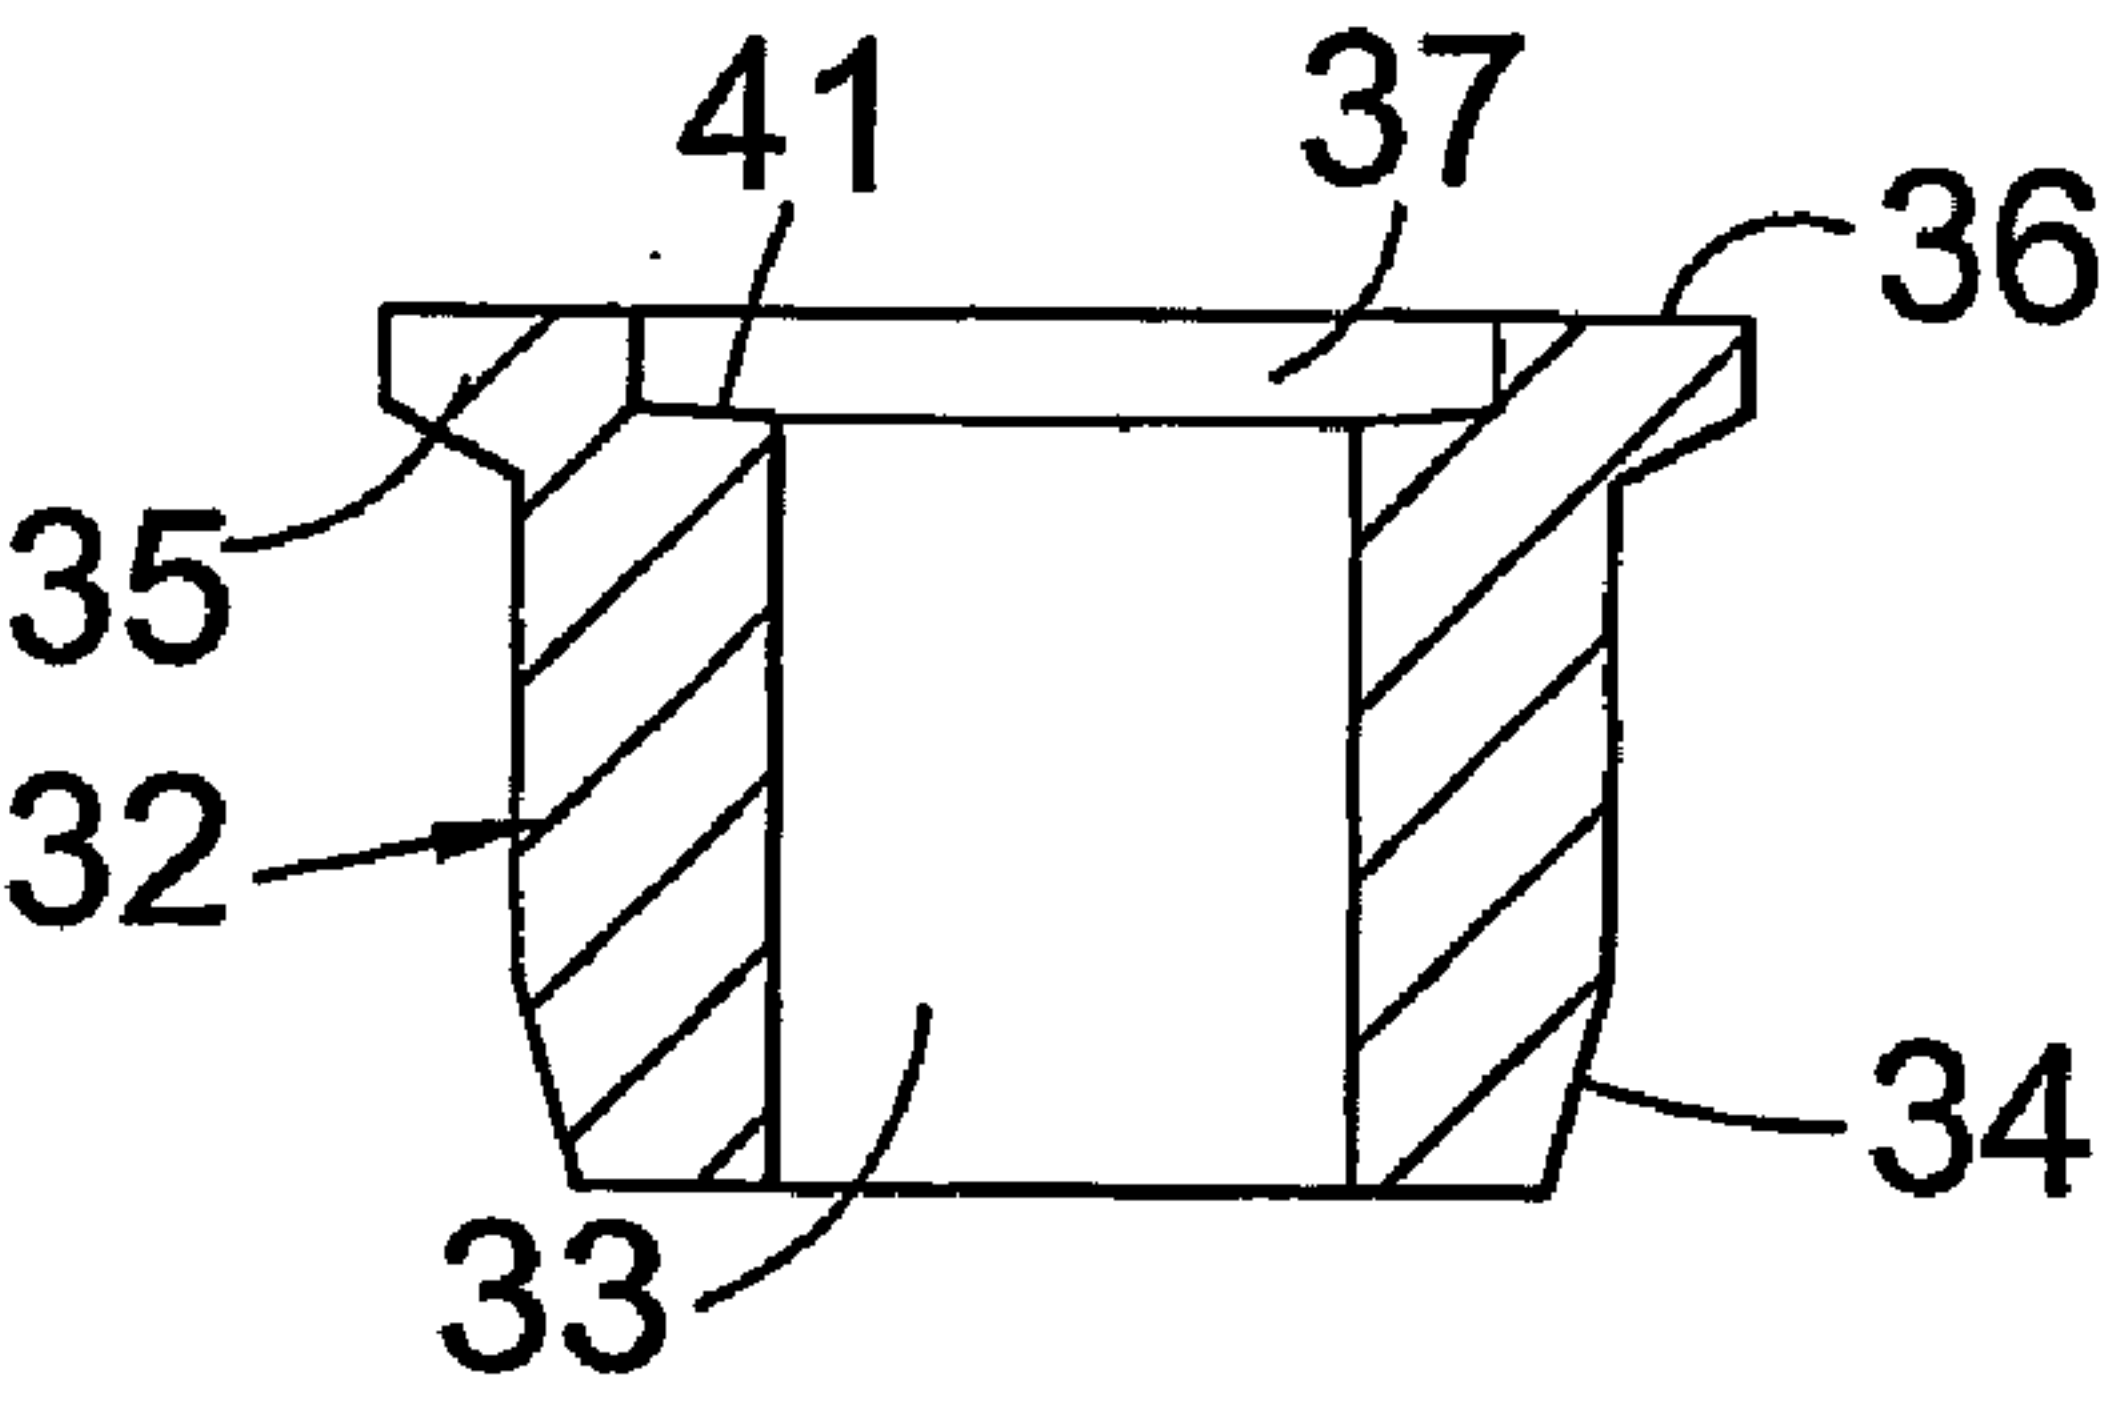

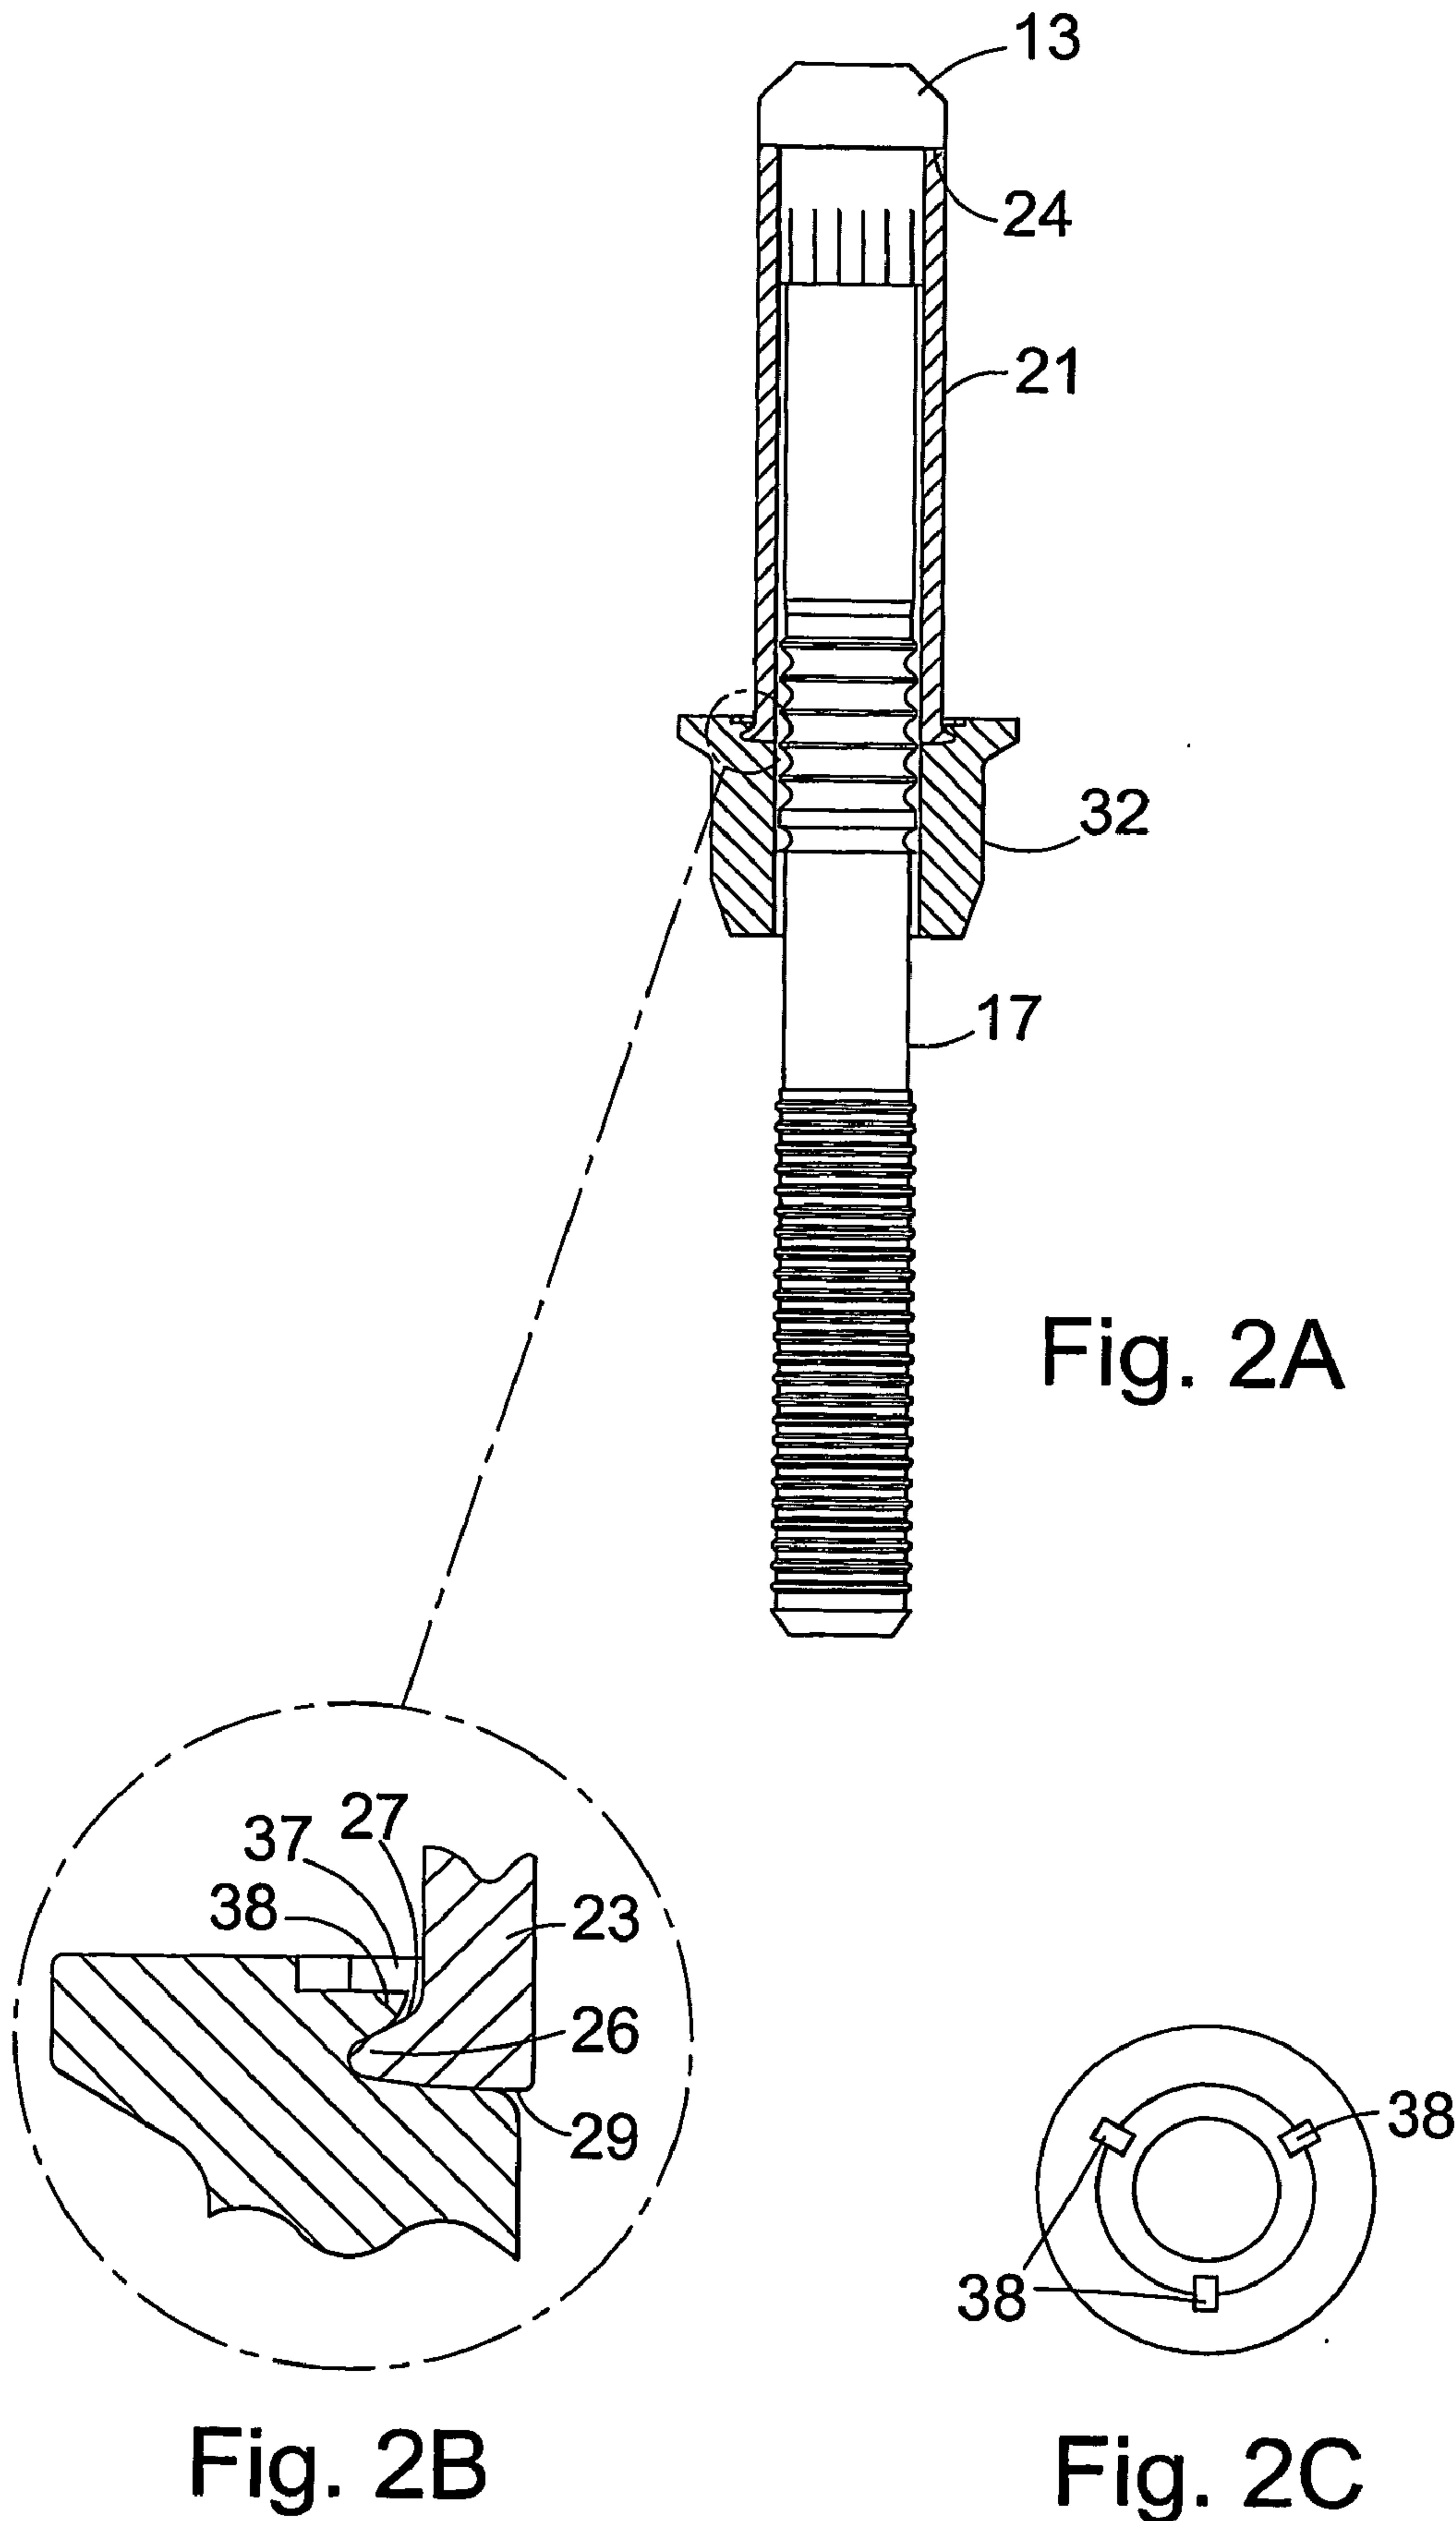

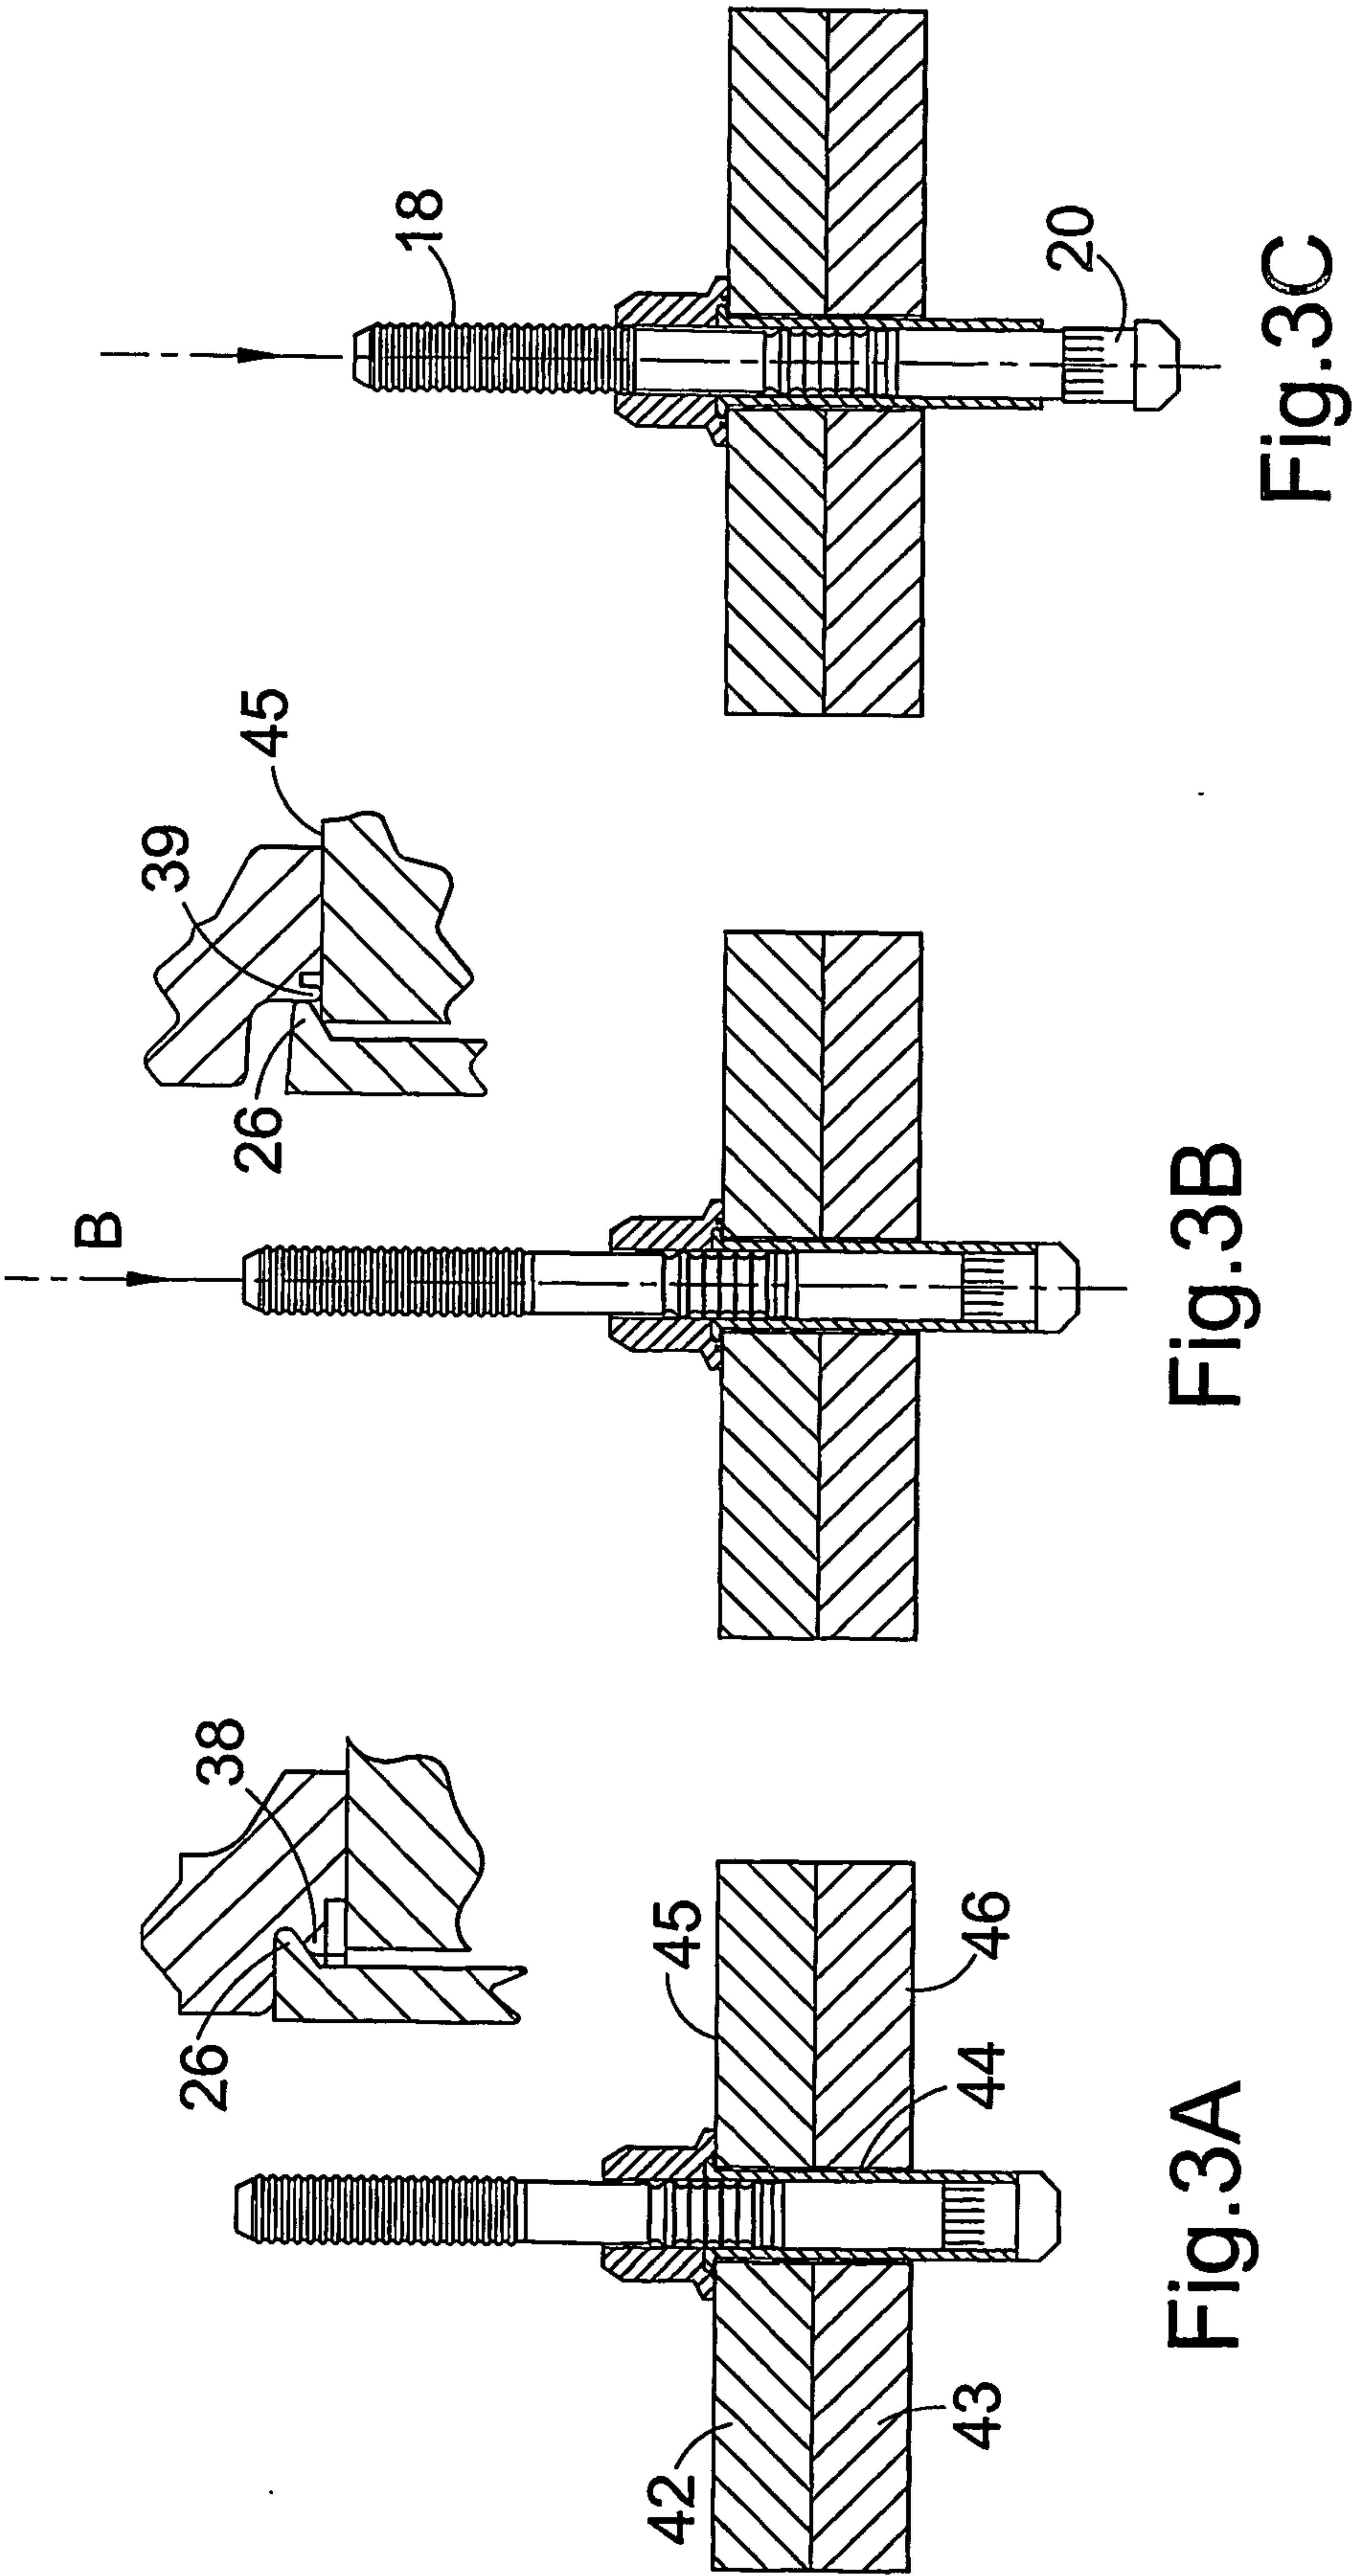

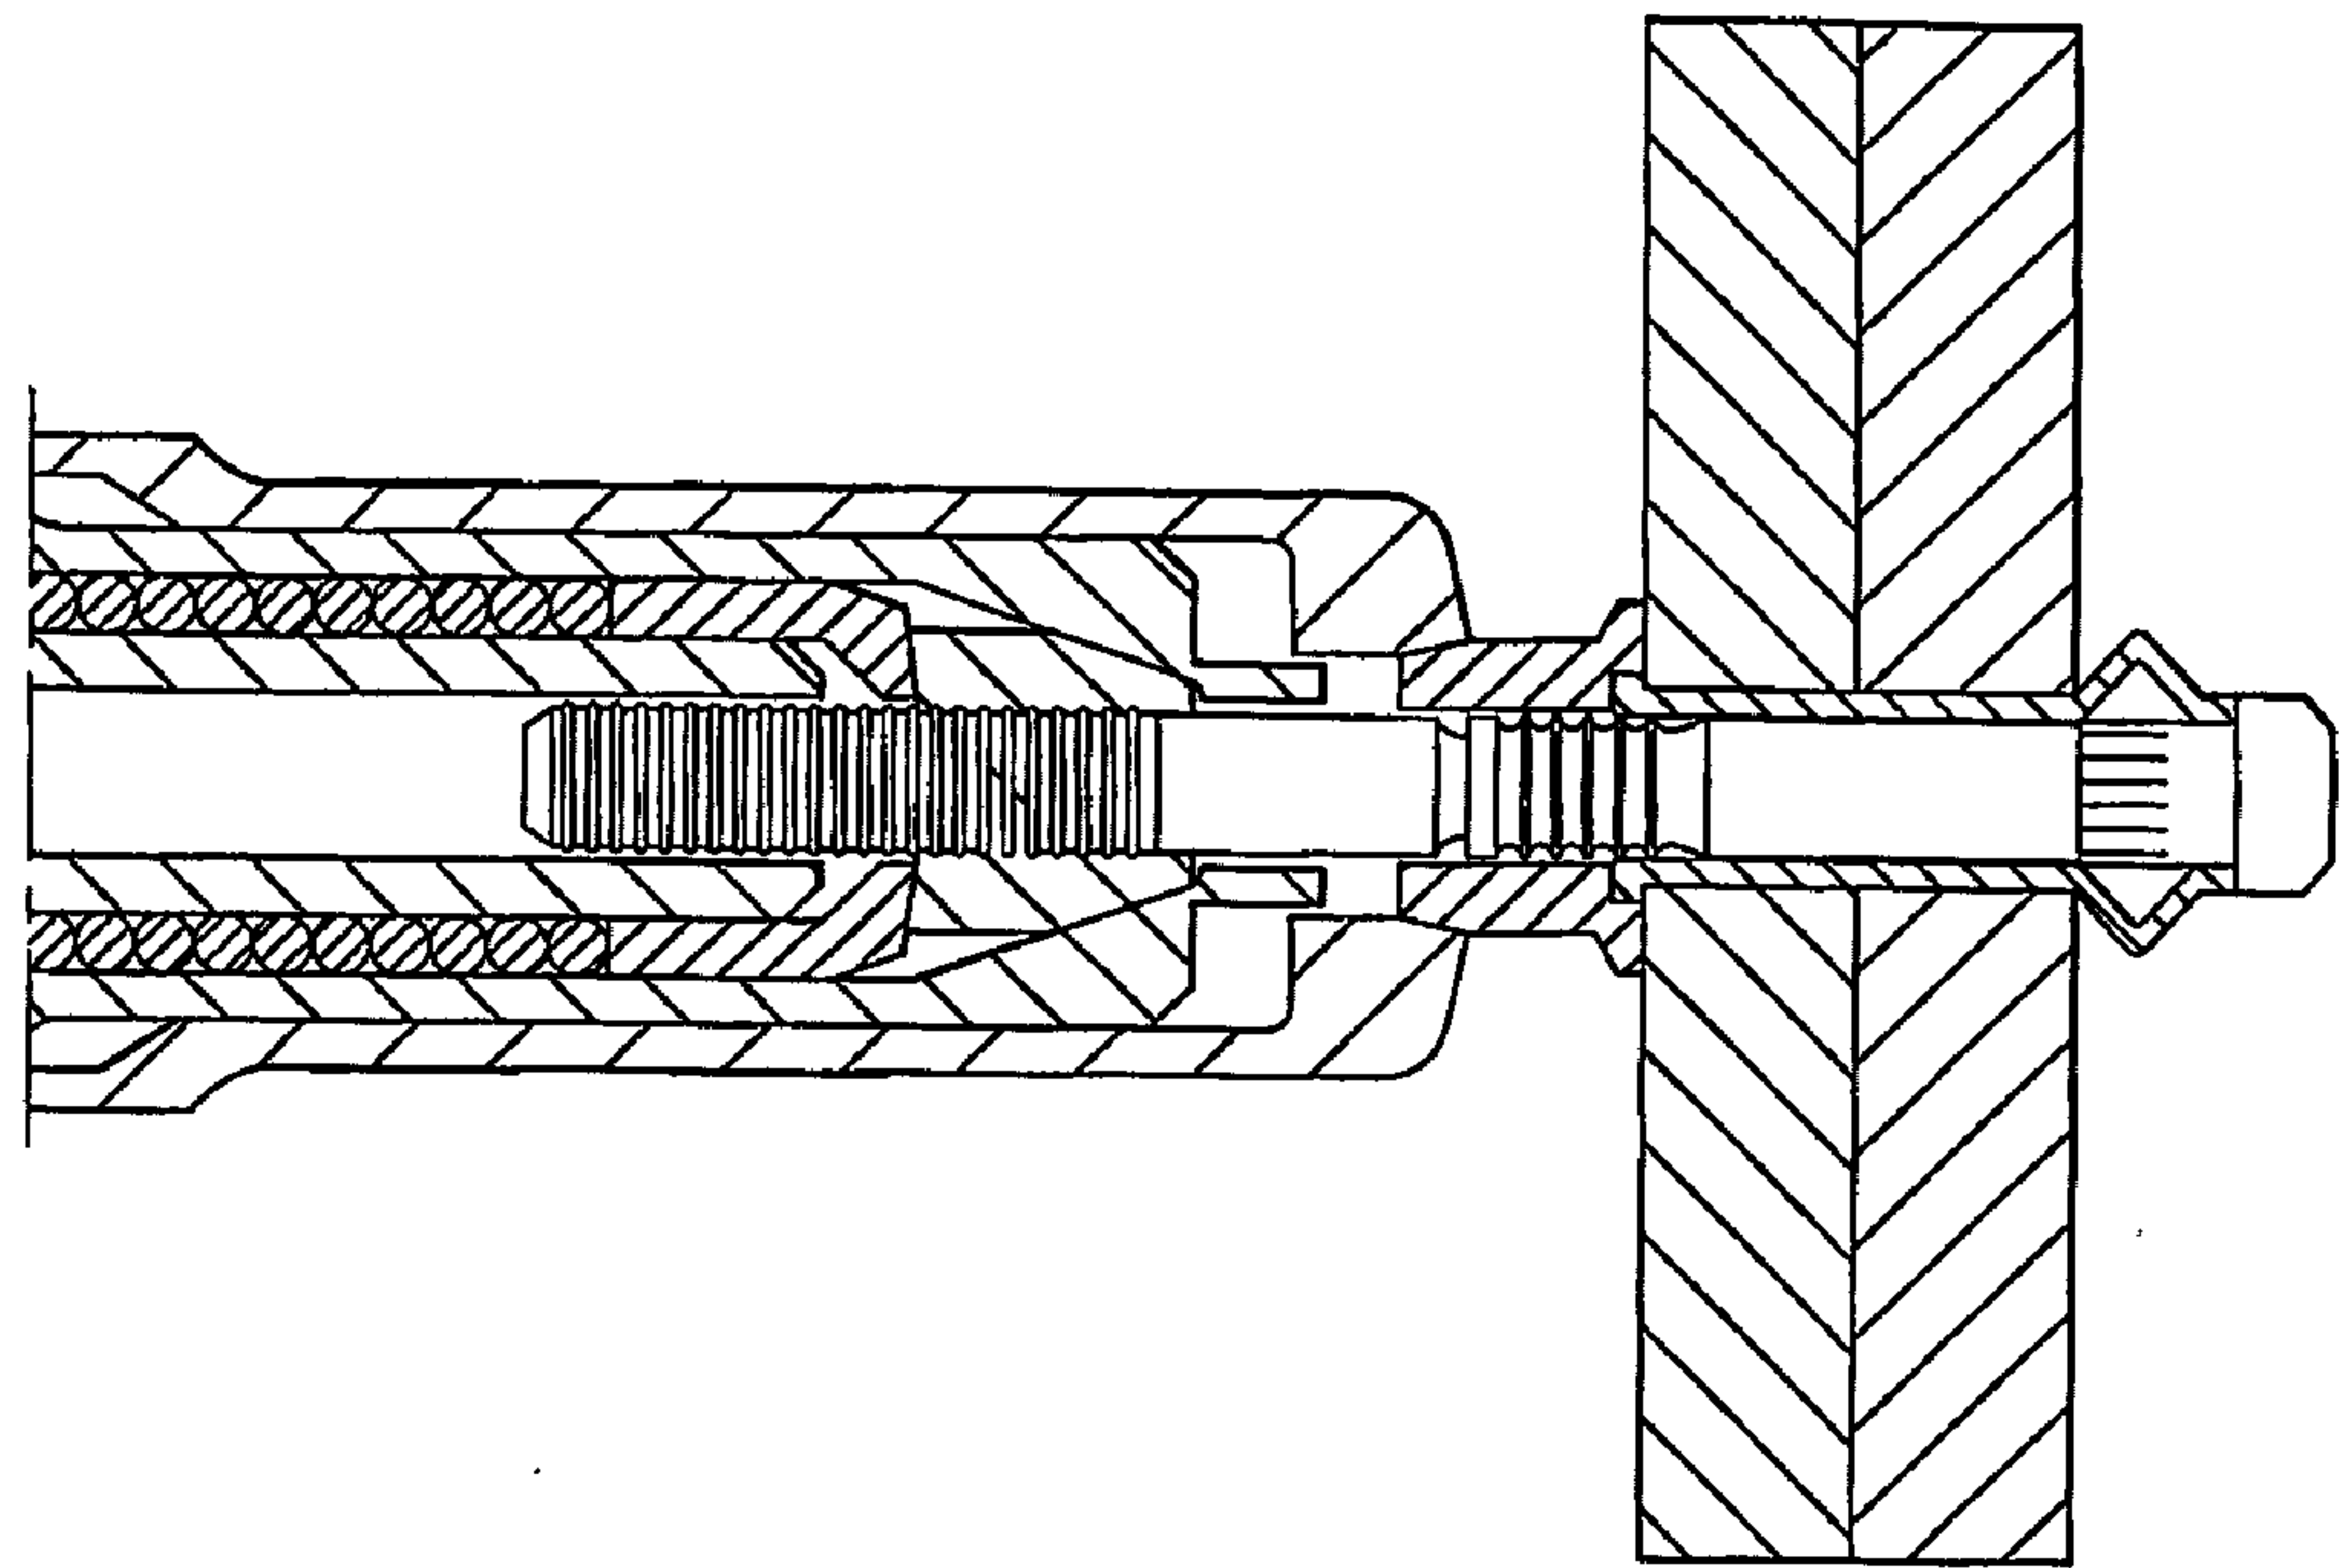


Fig. 4B

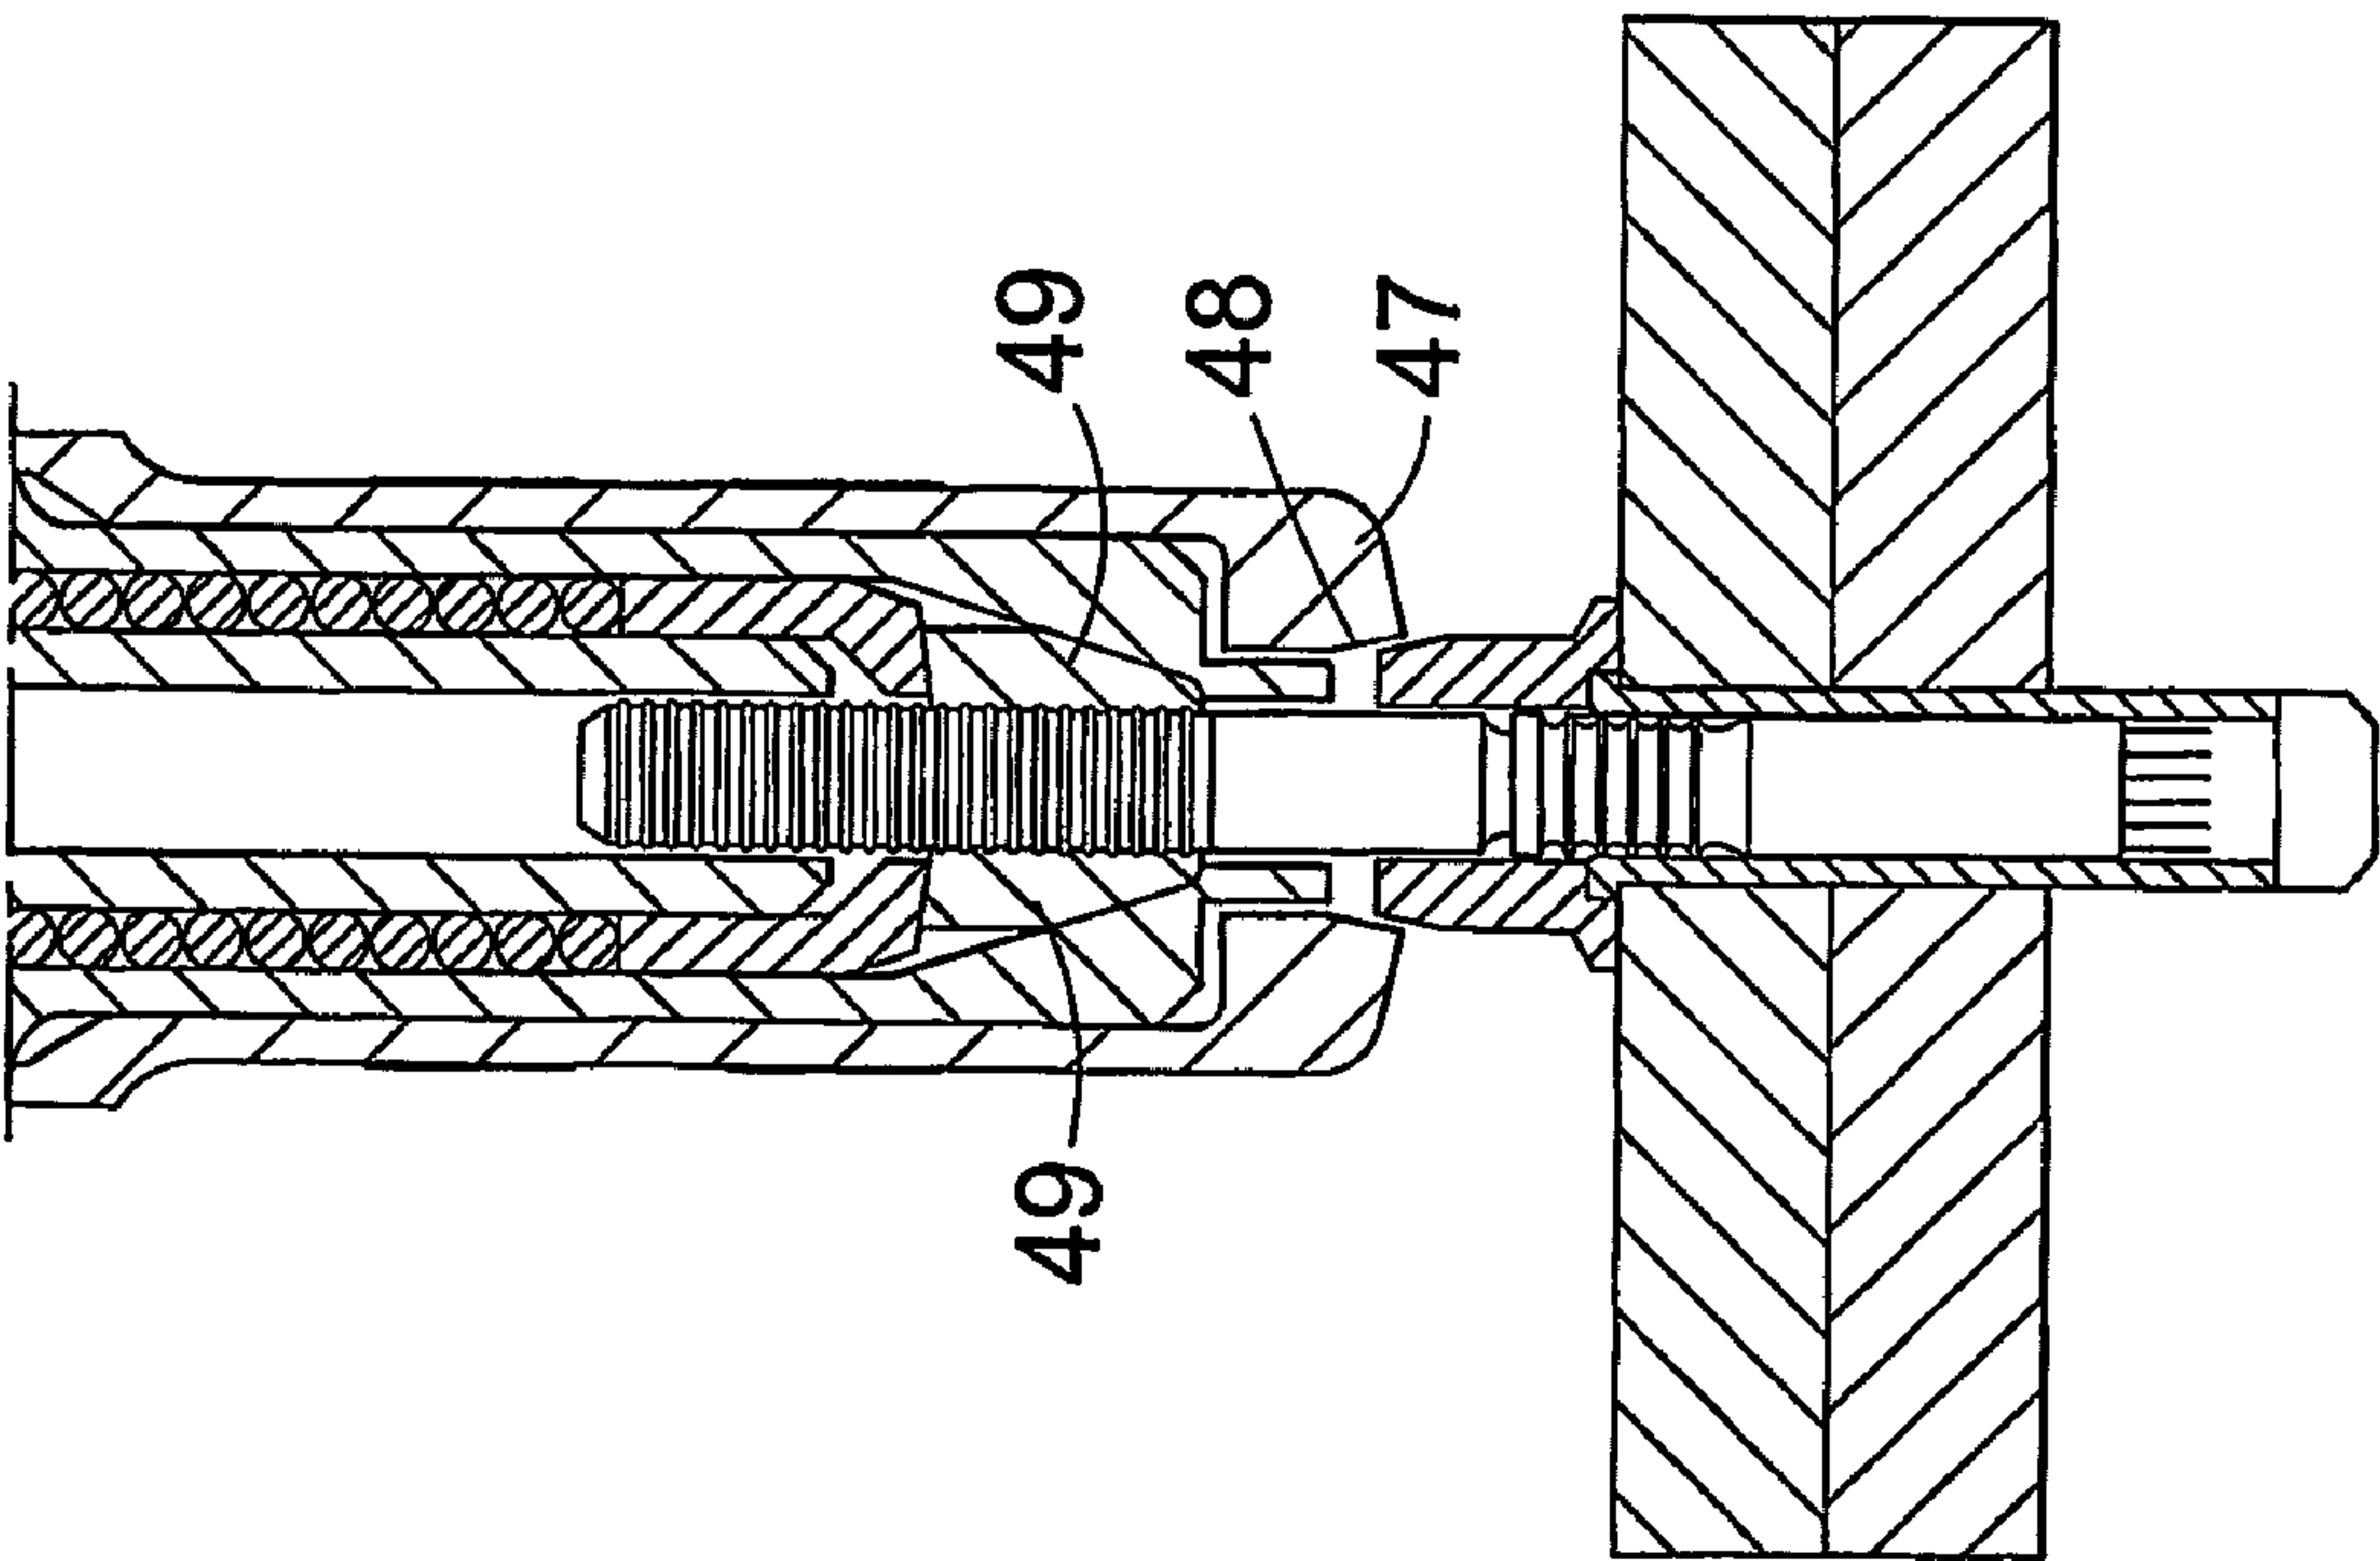


Fig. 4A

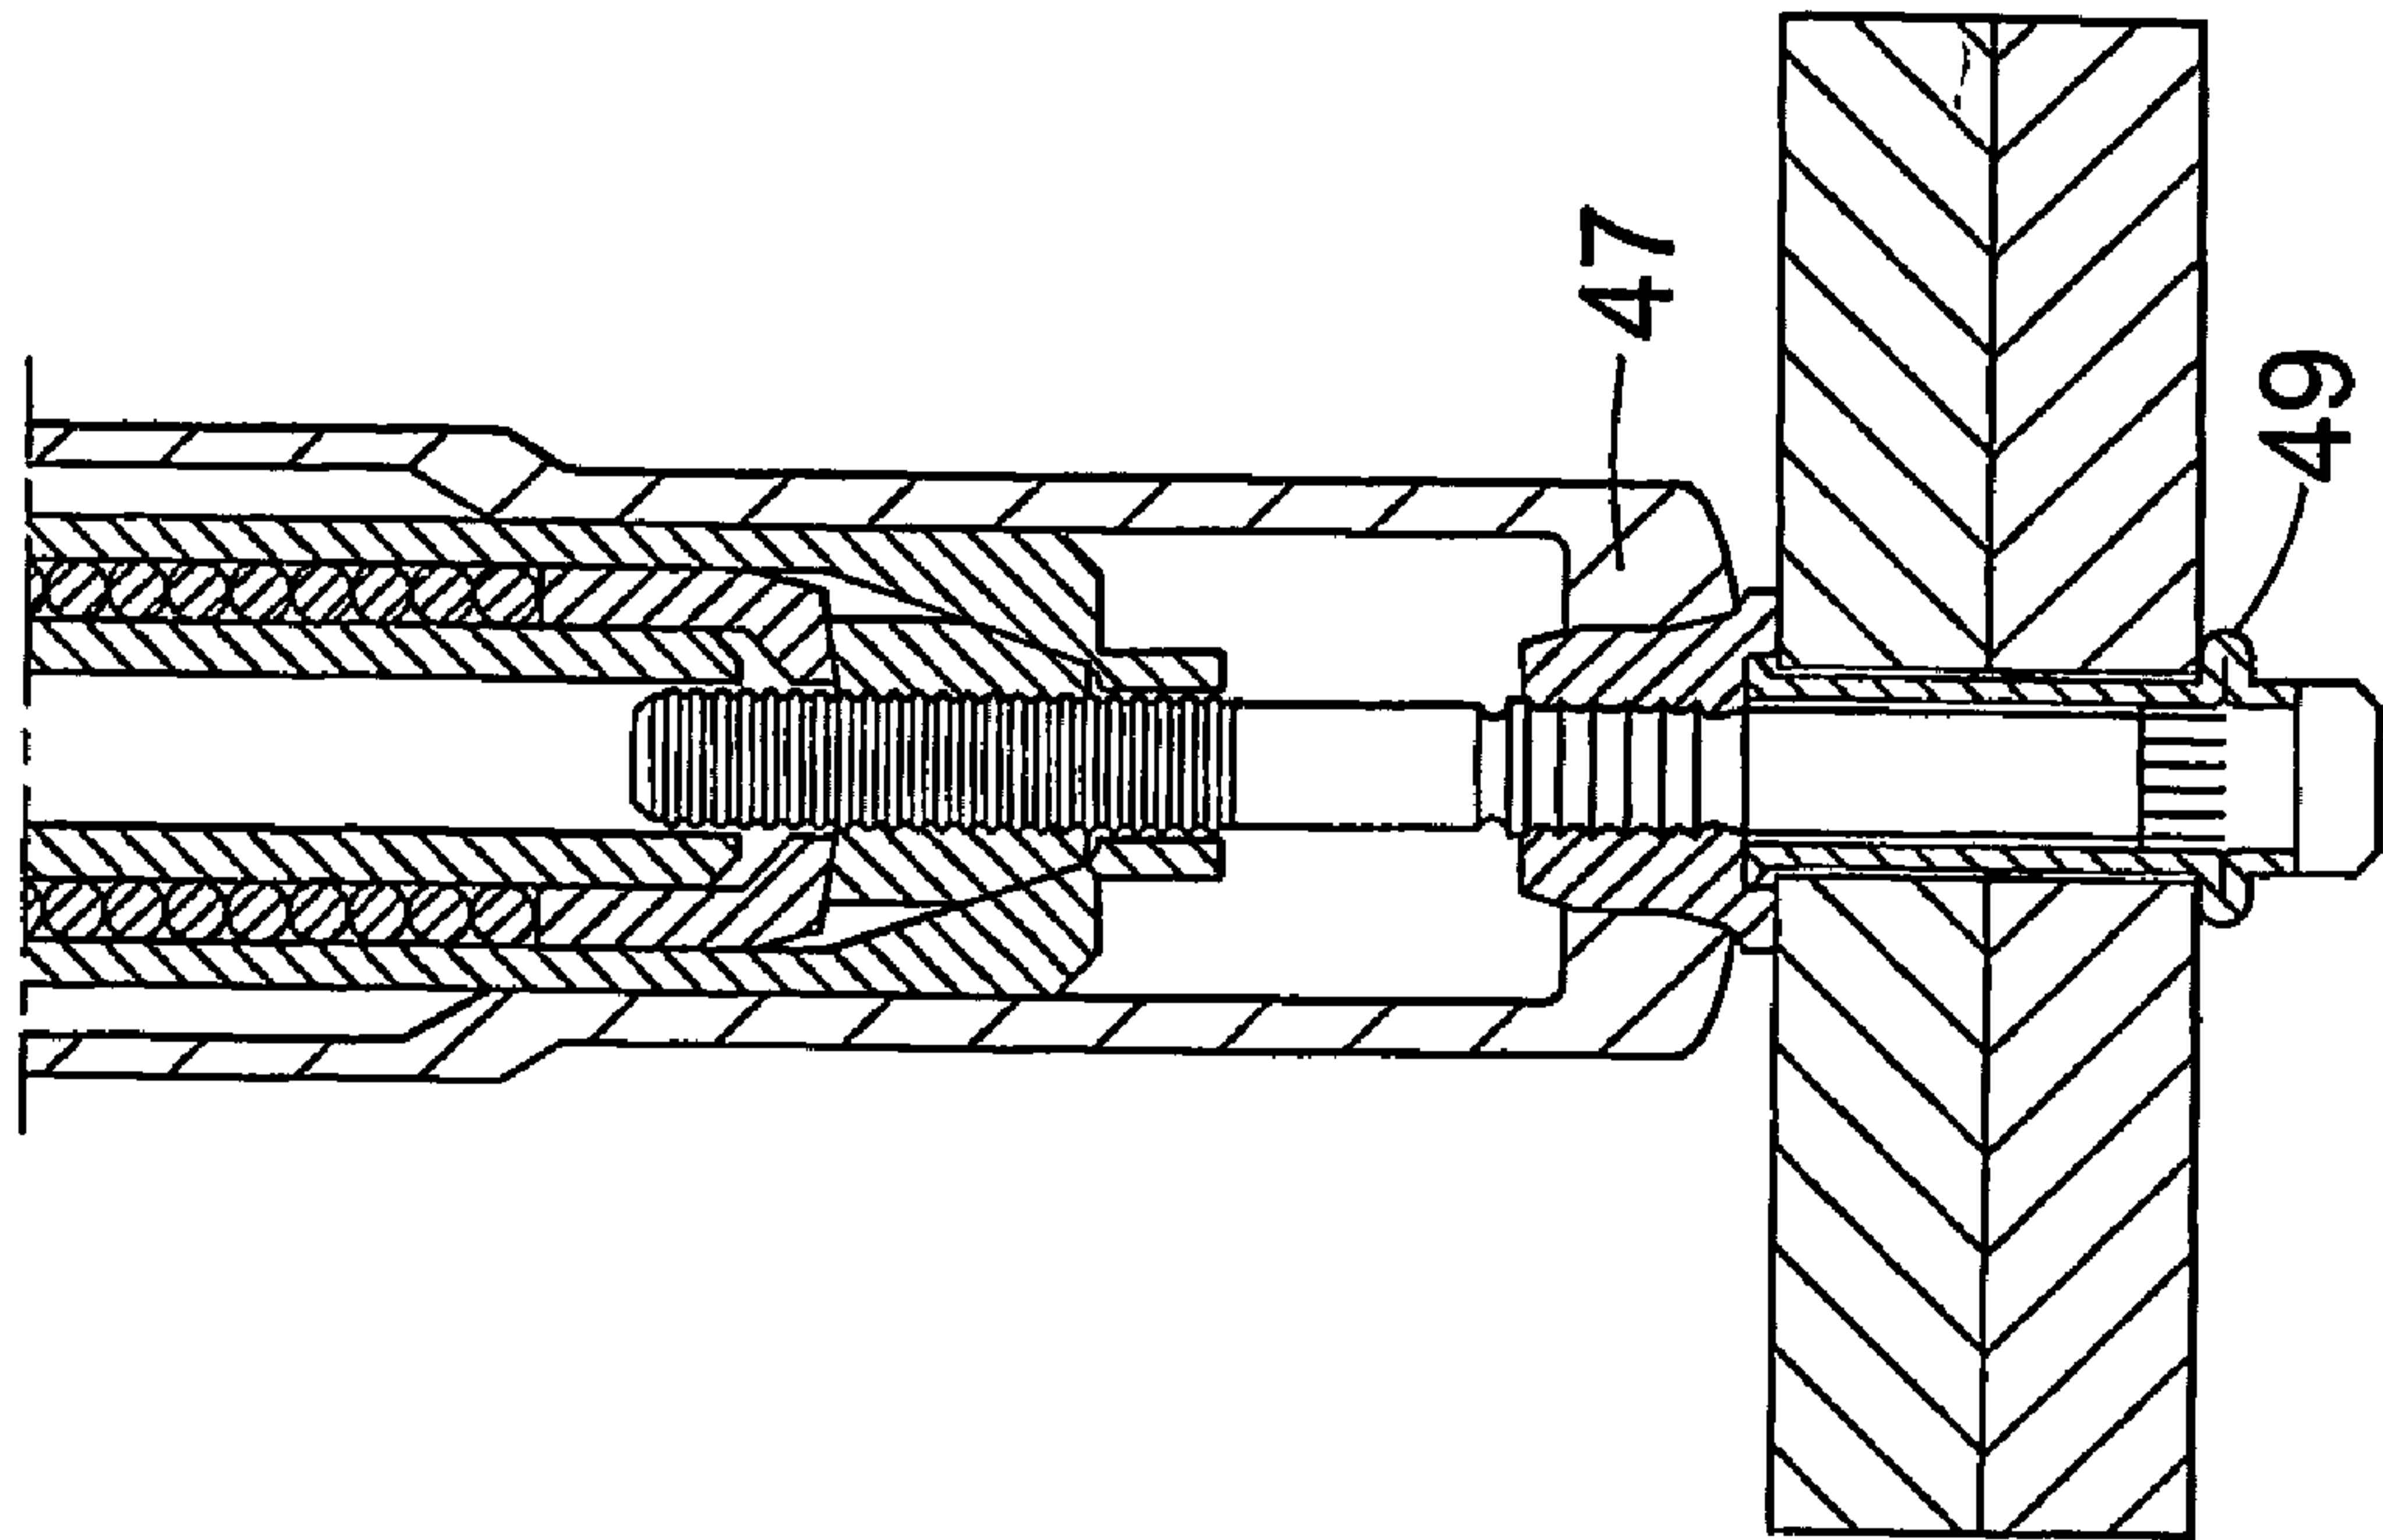


Fig. 5B

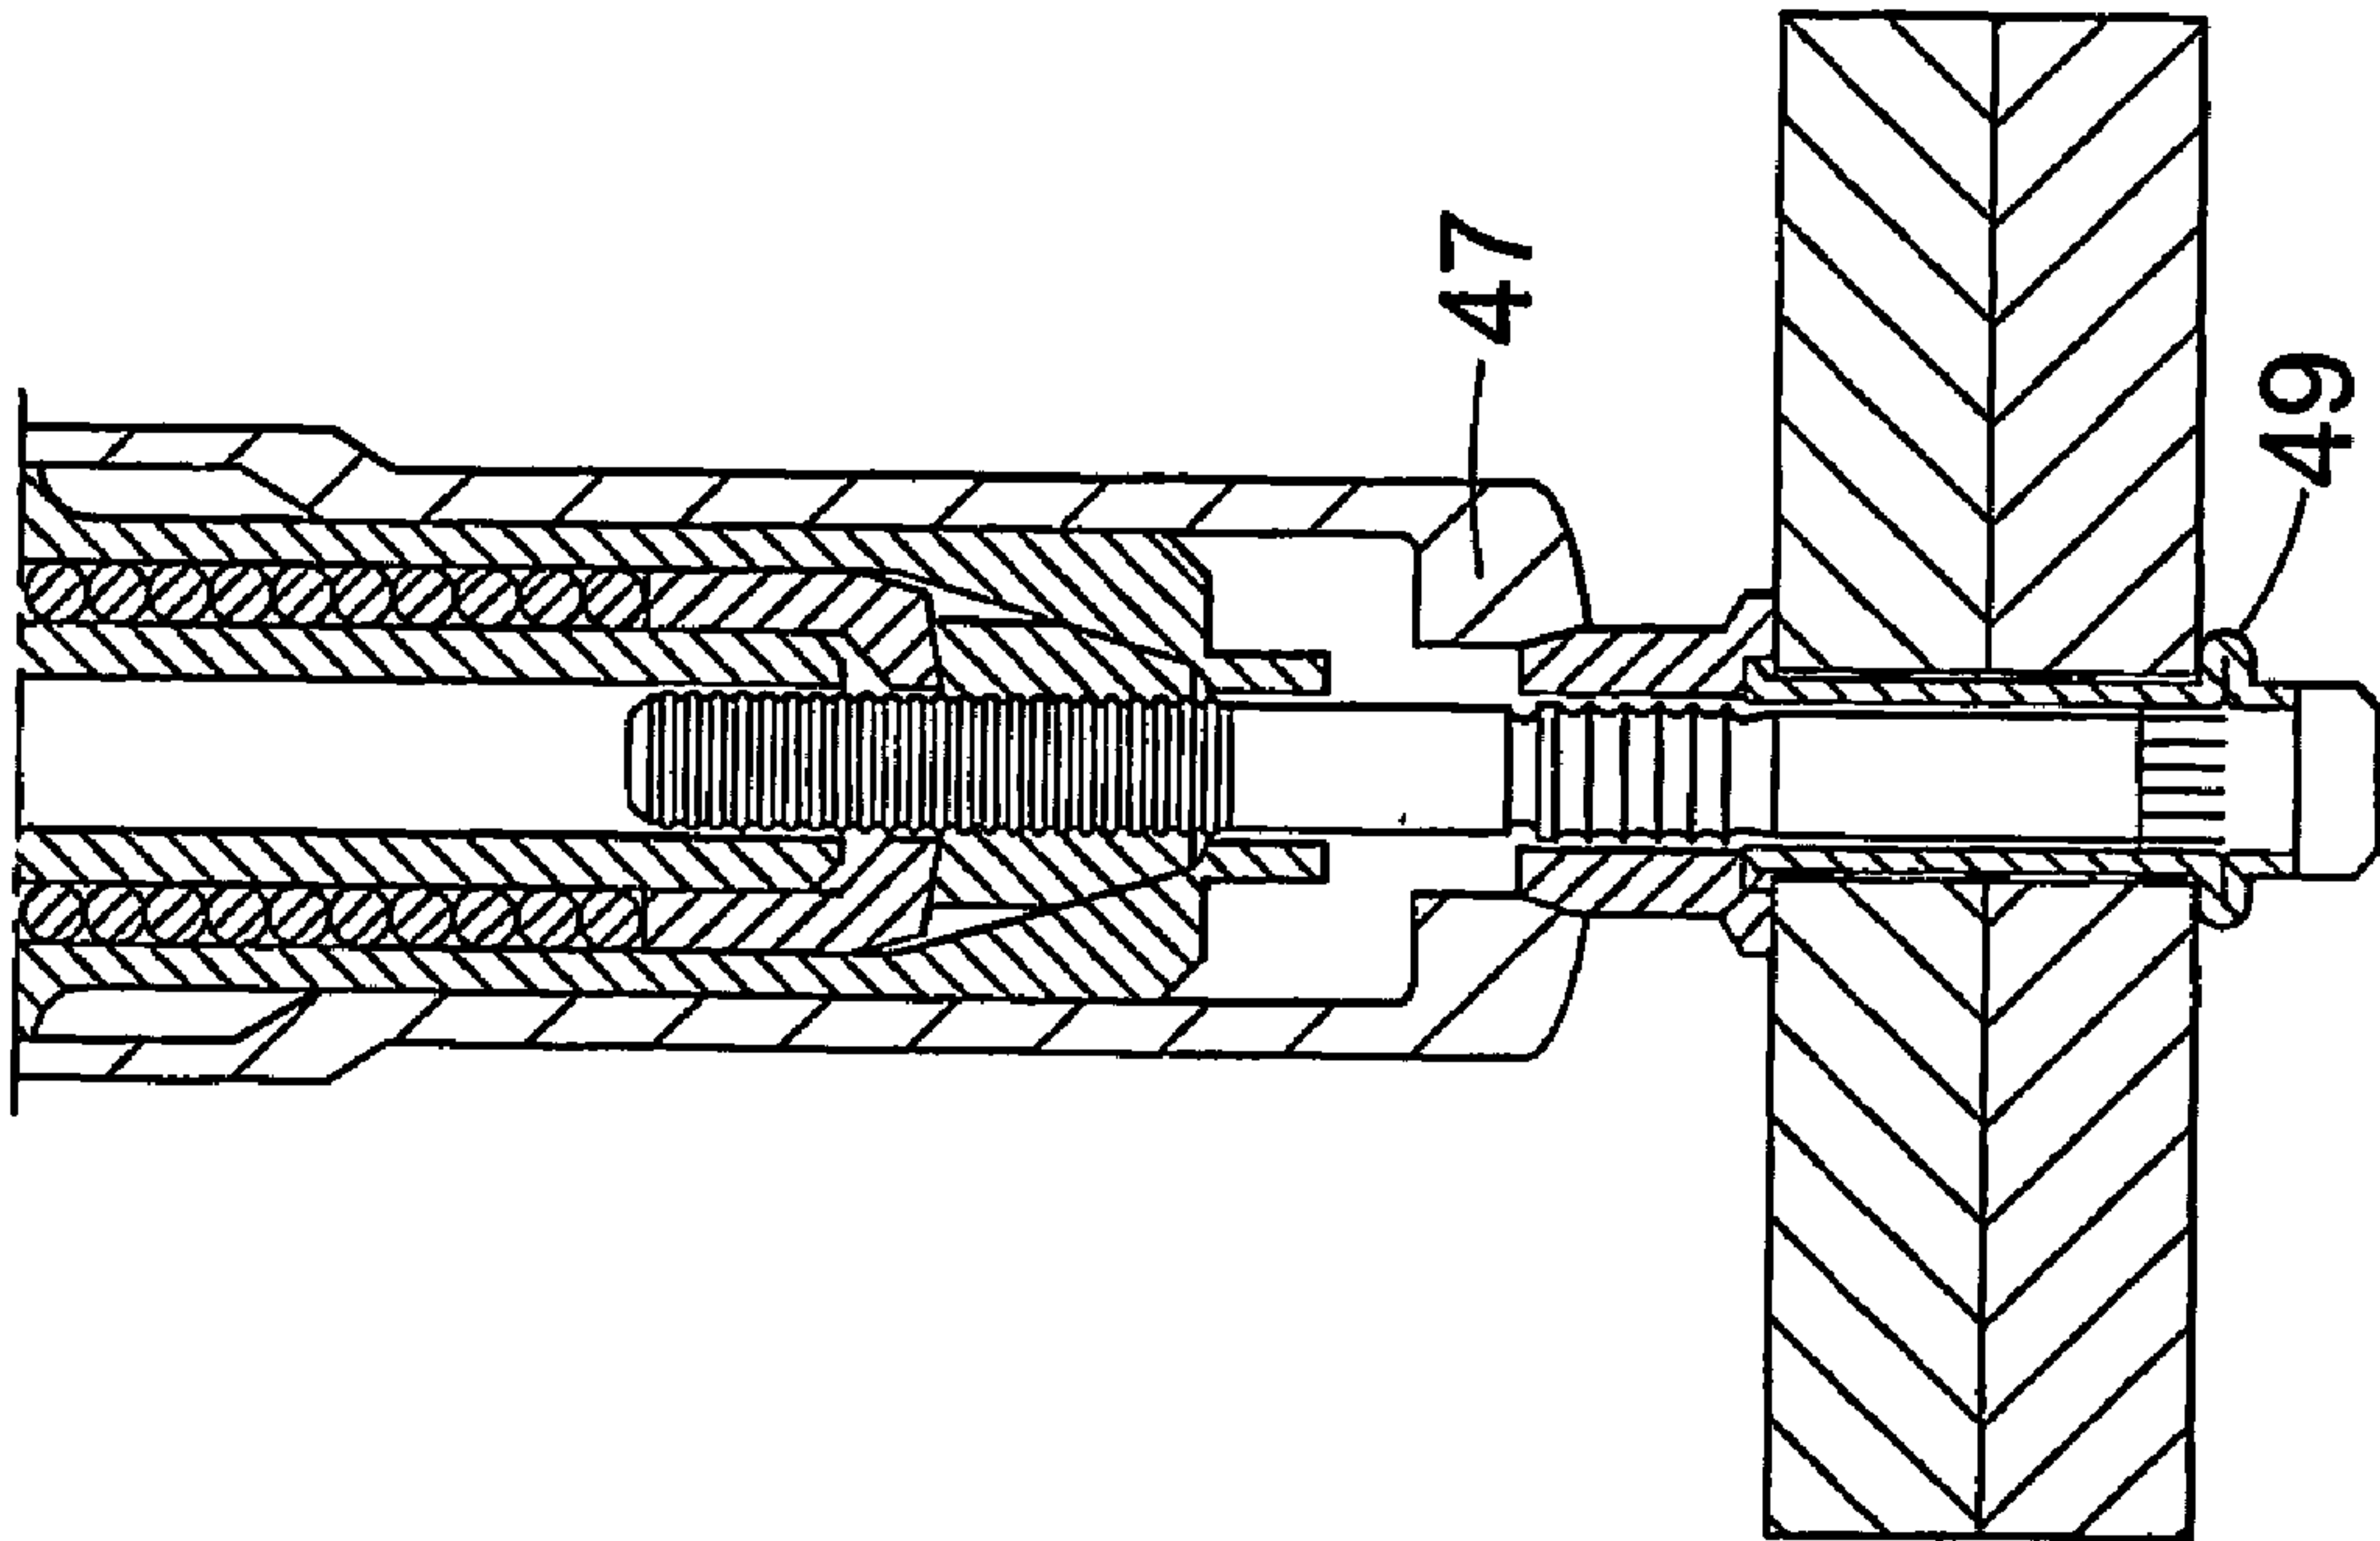


Fig. 5A

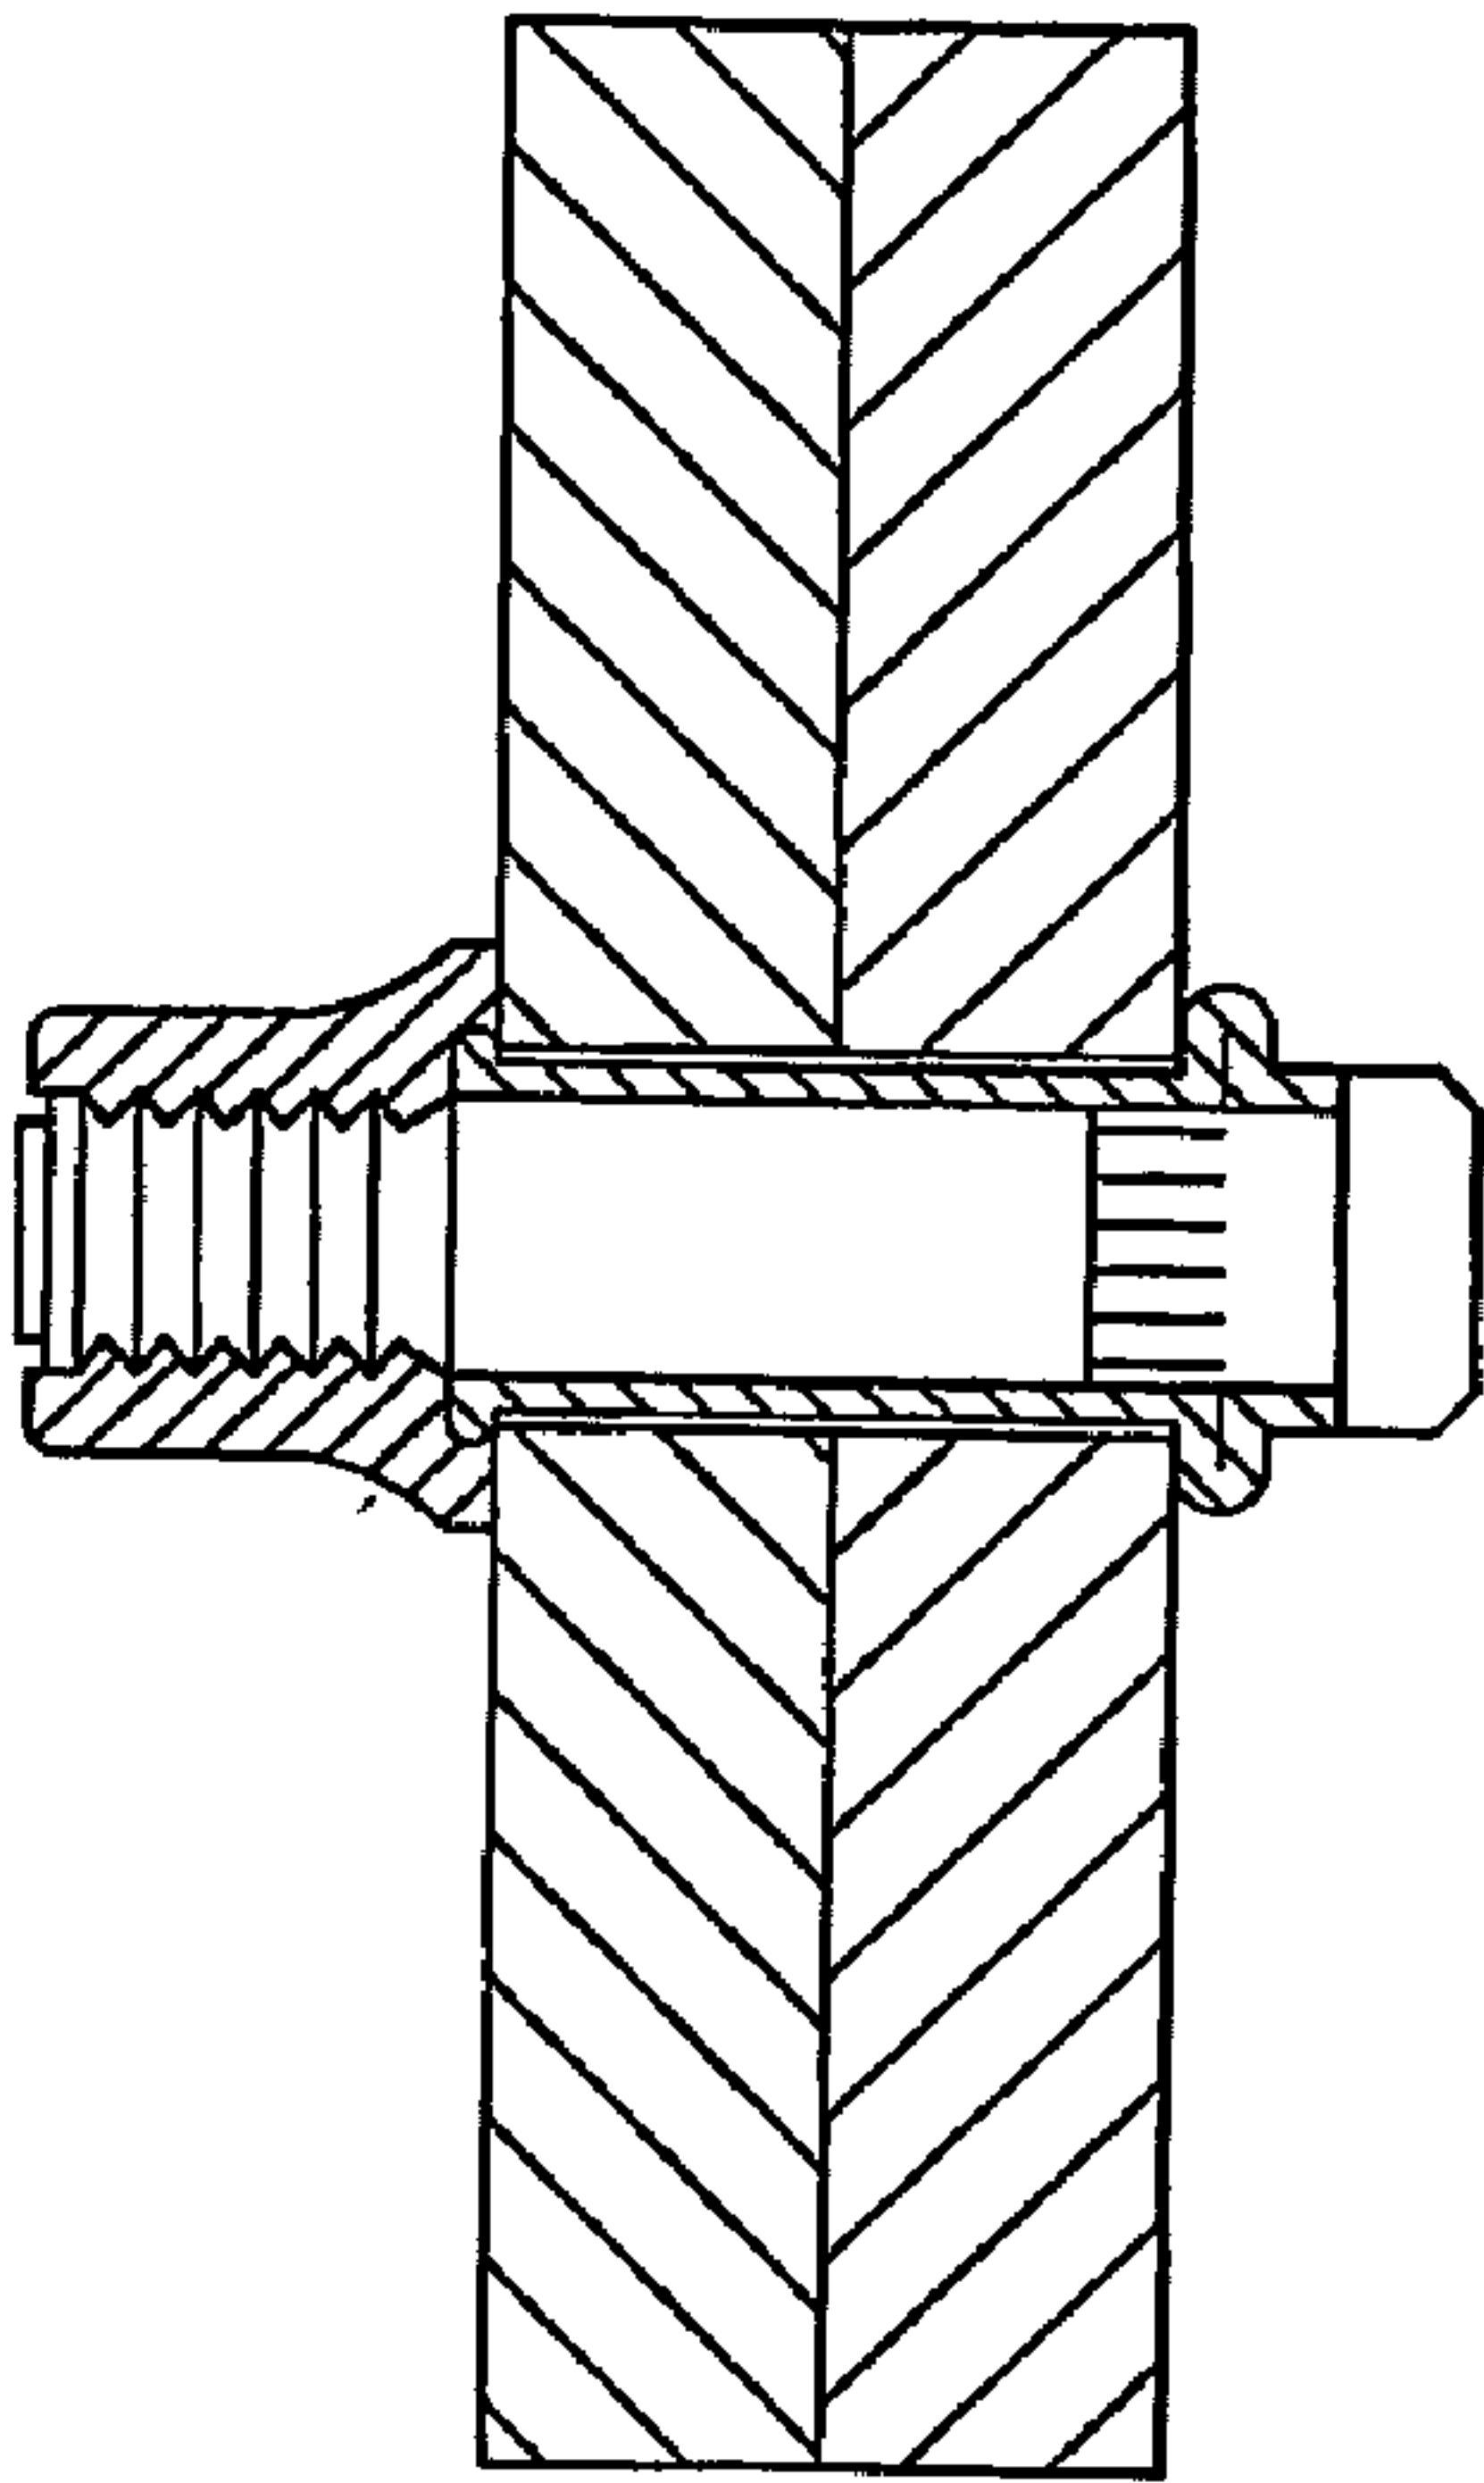


Fig. 6B

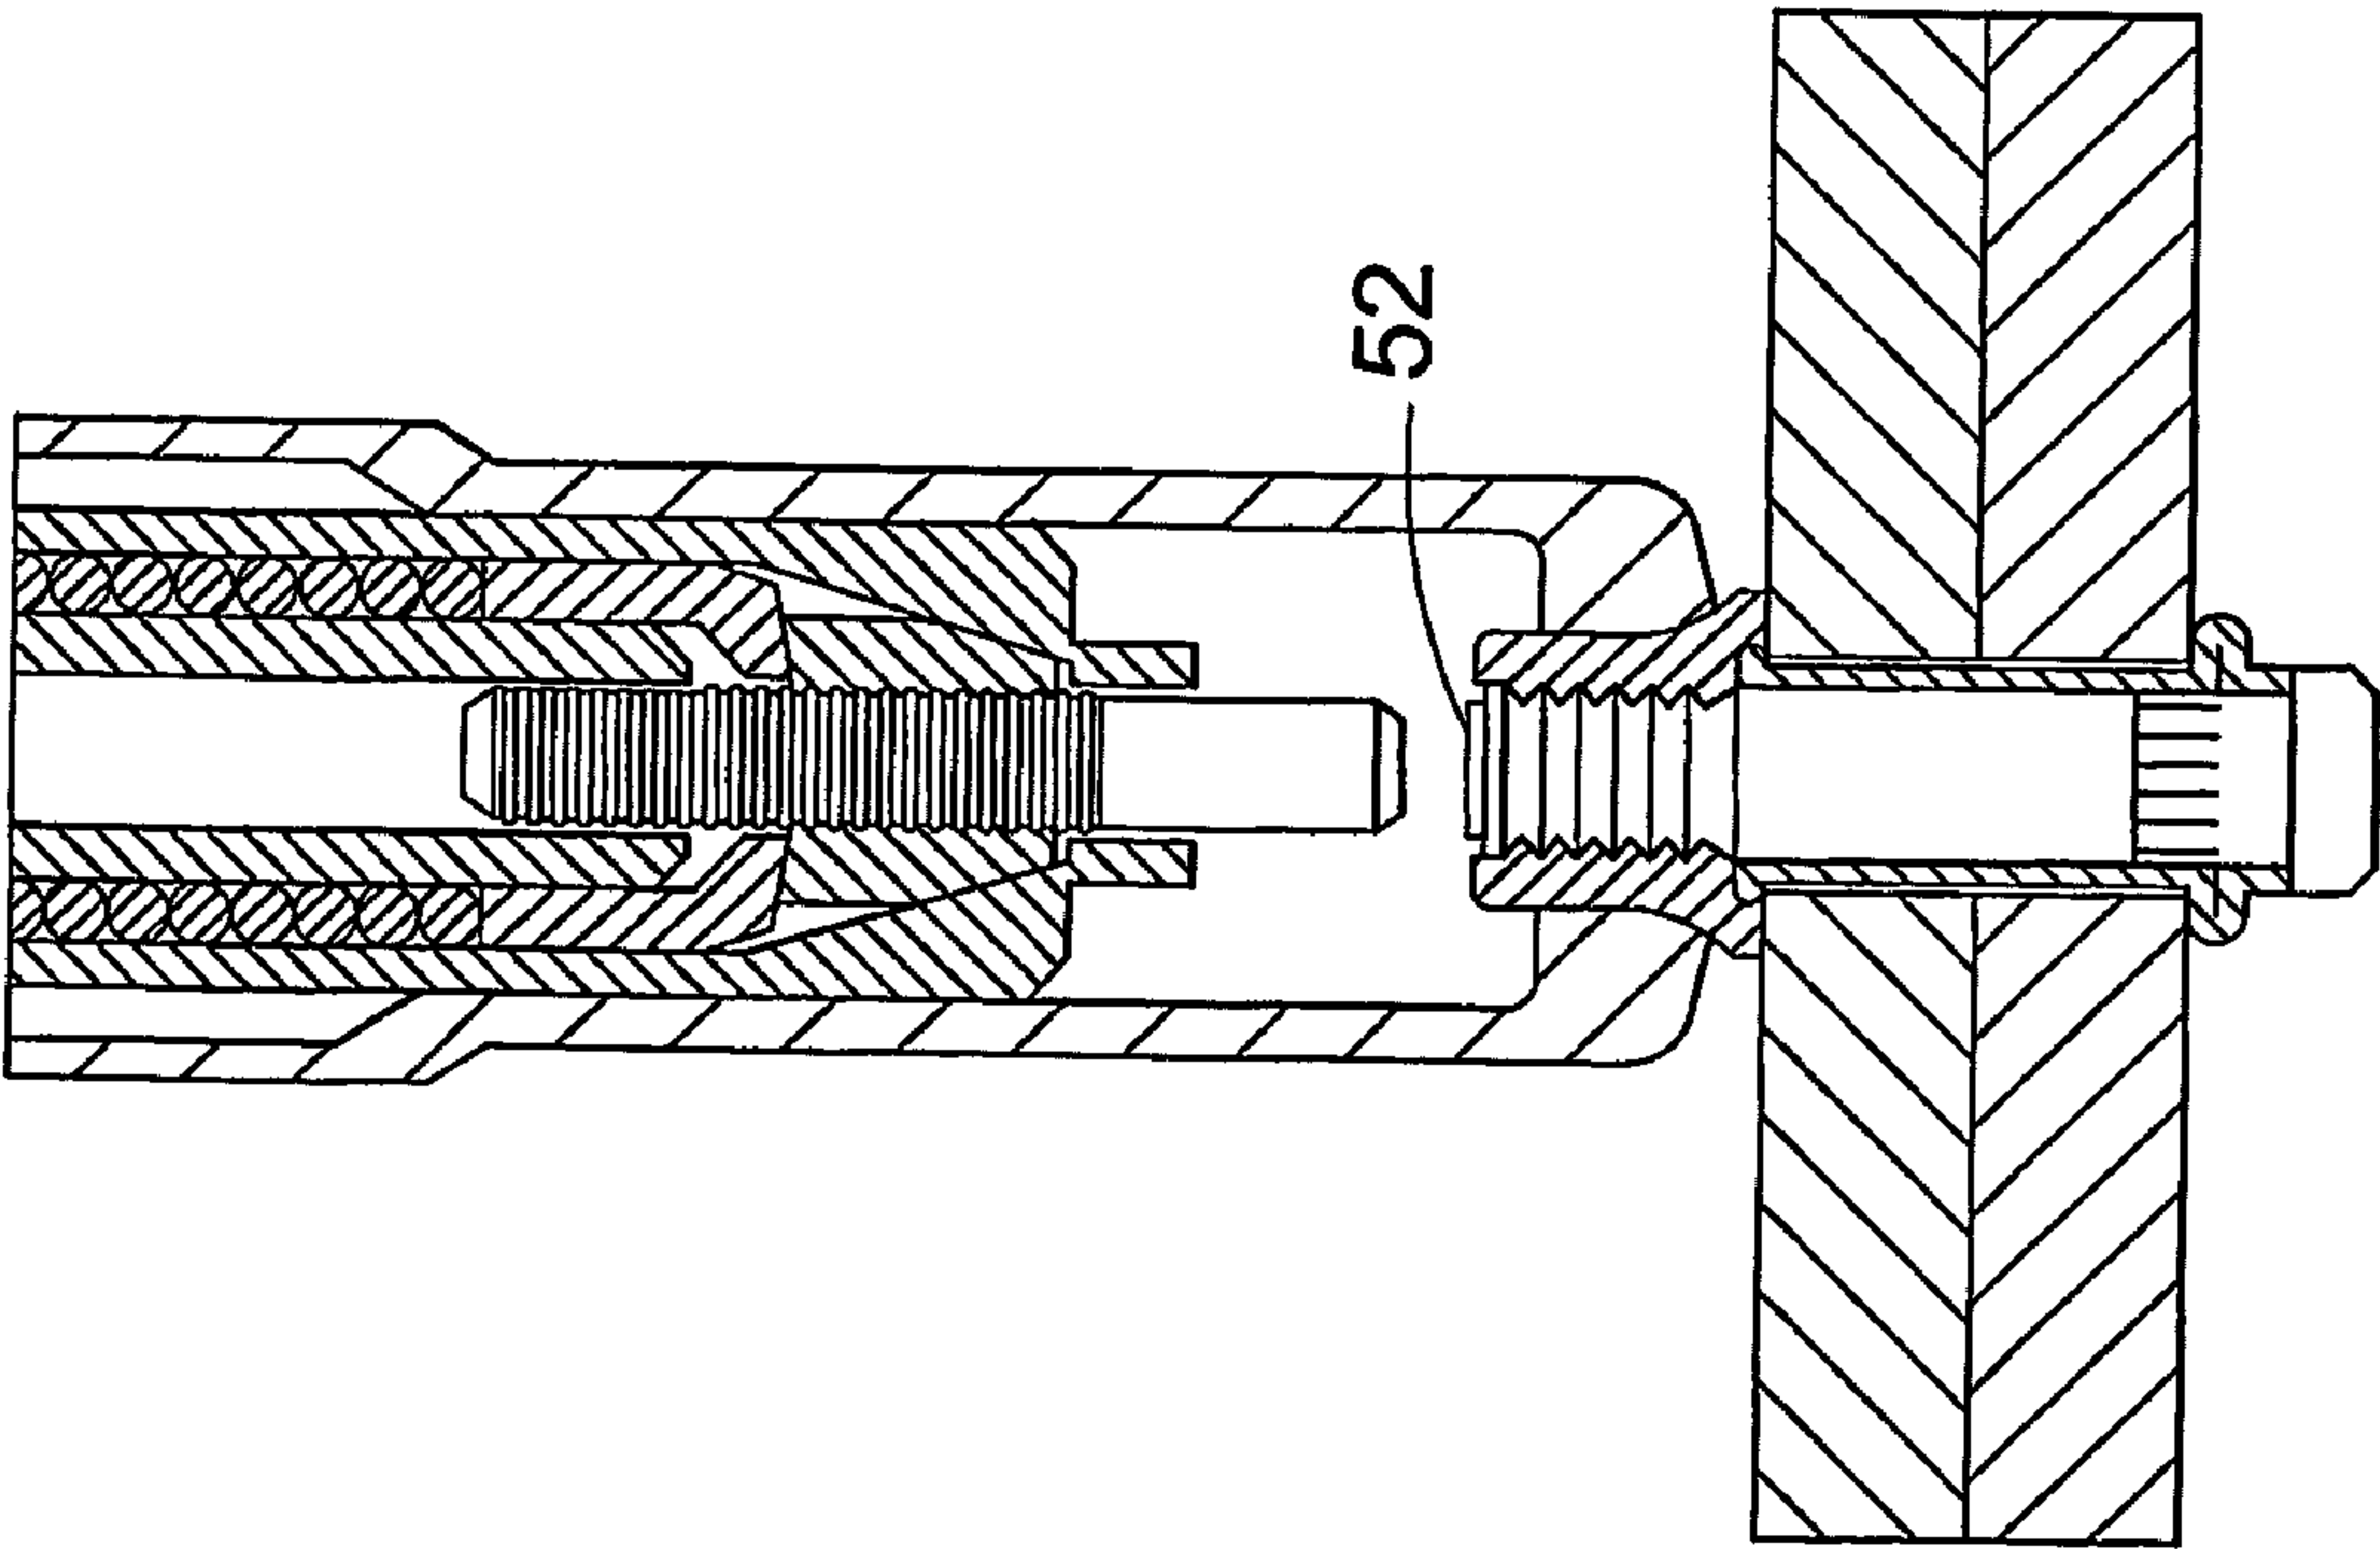


Fig. 6A

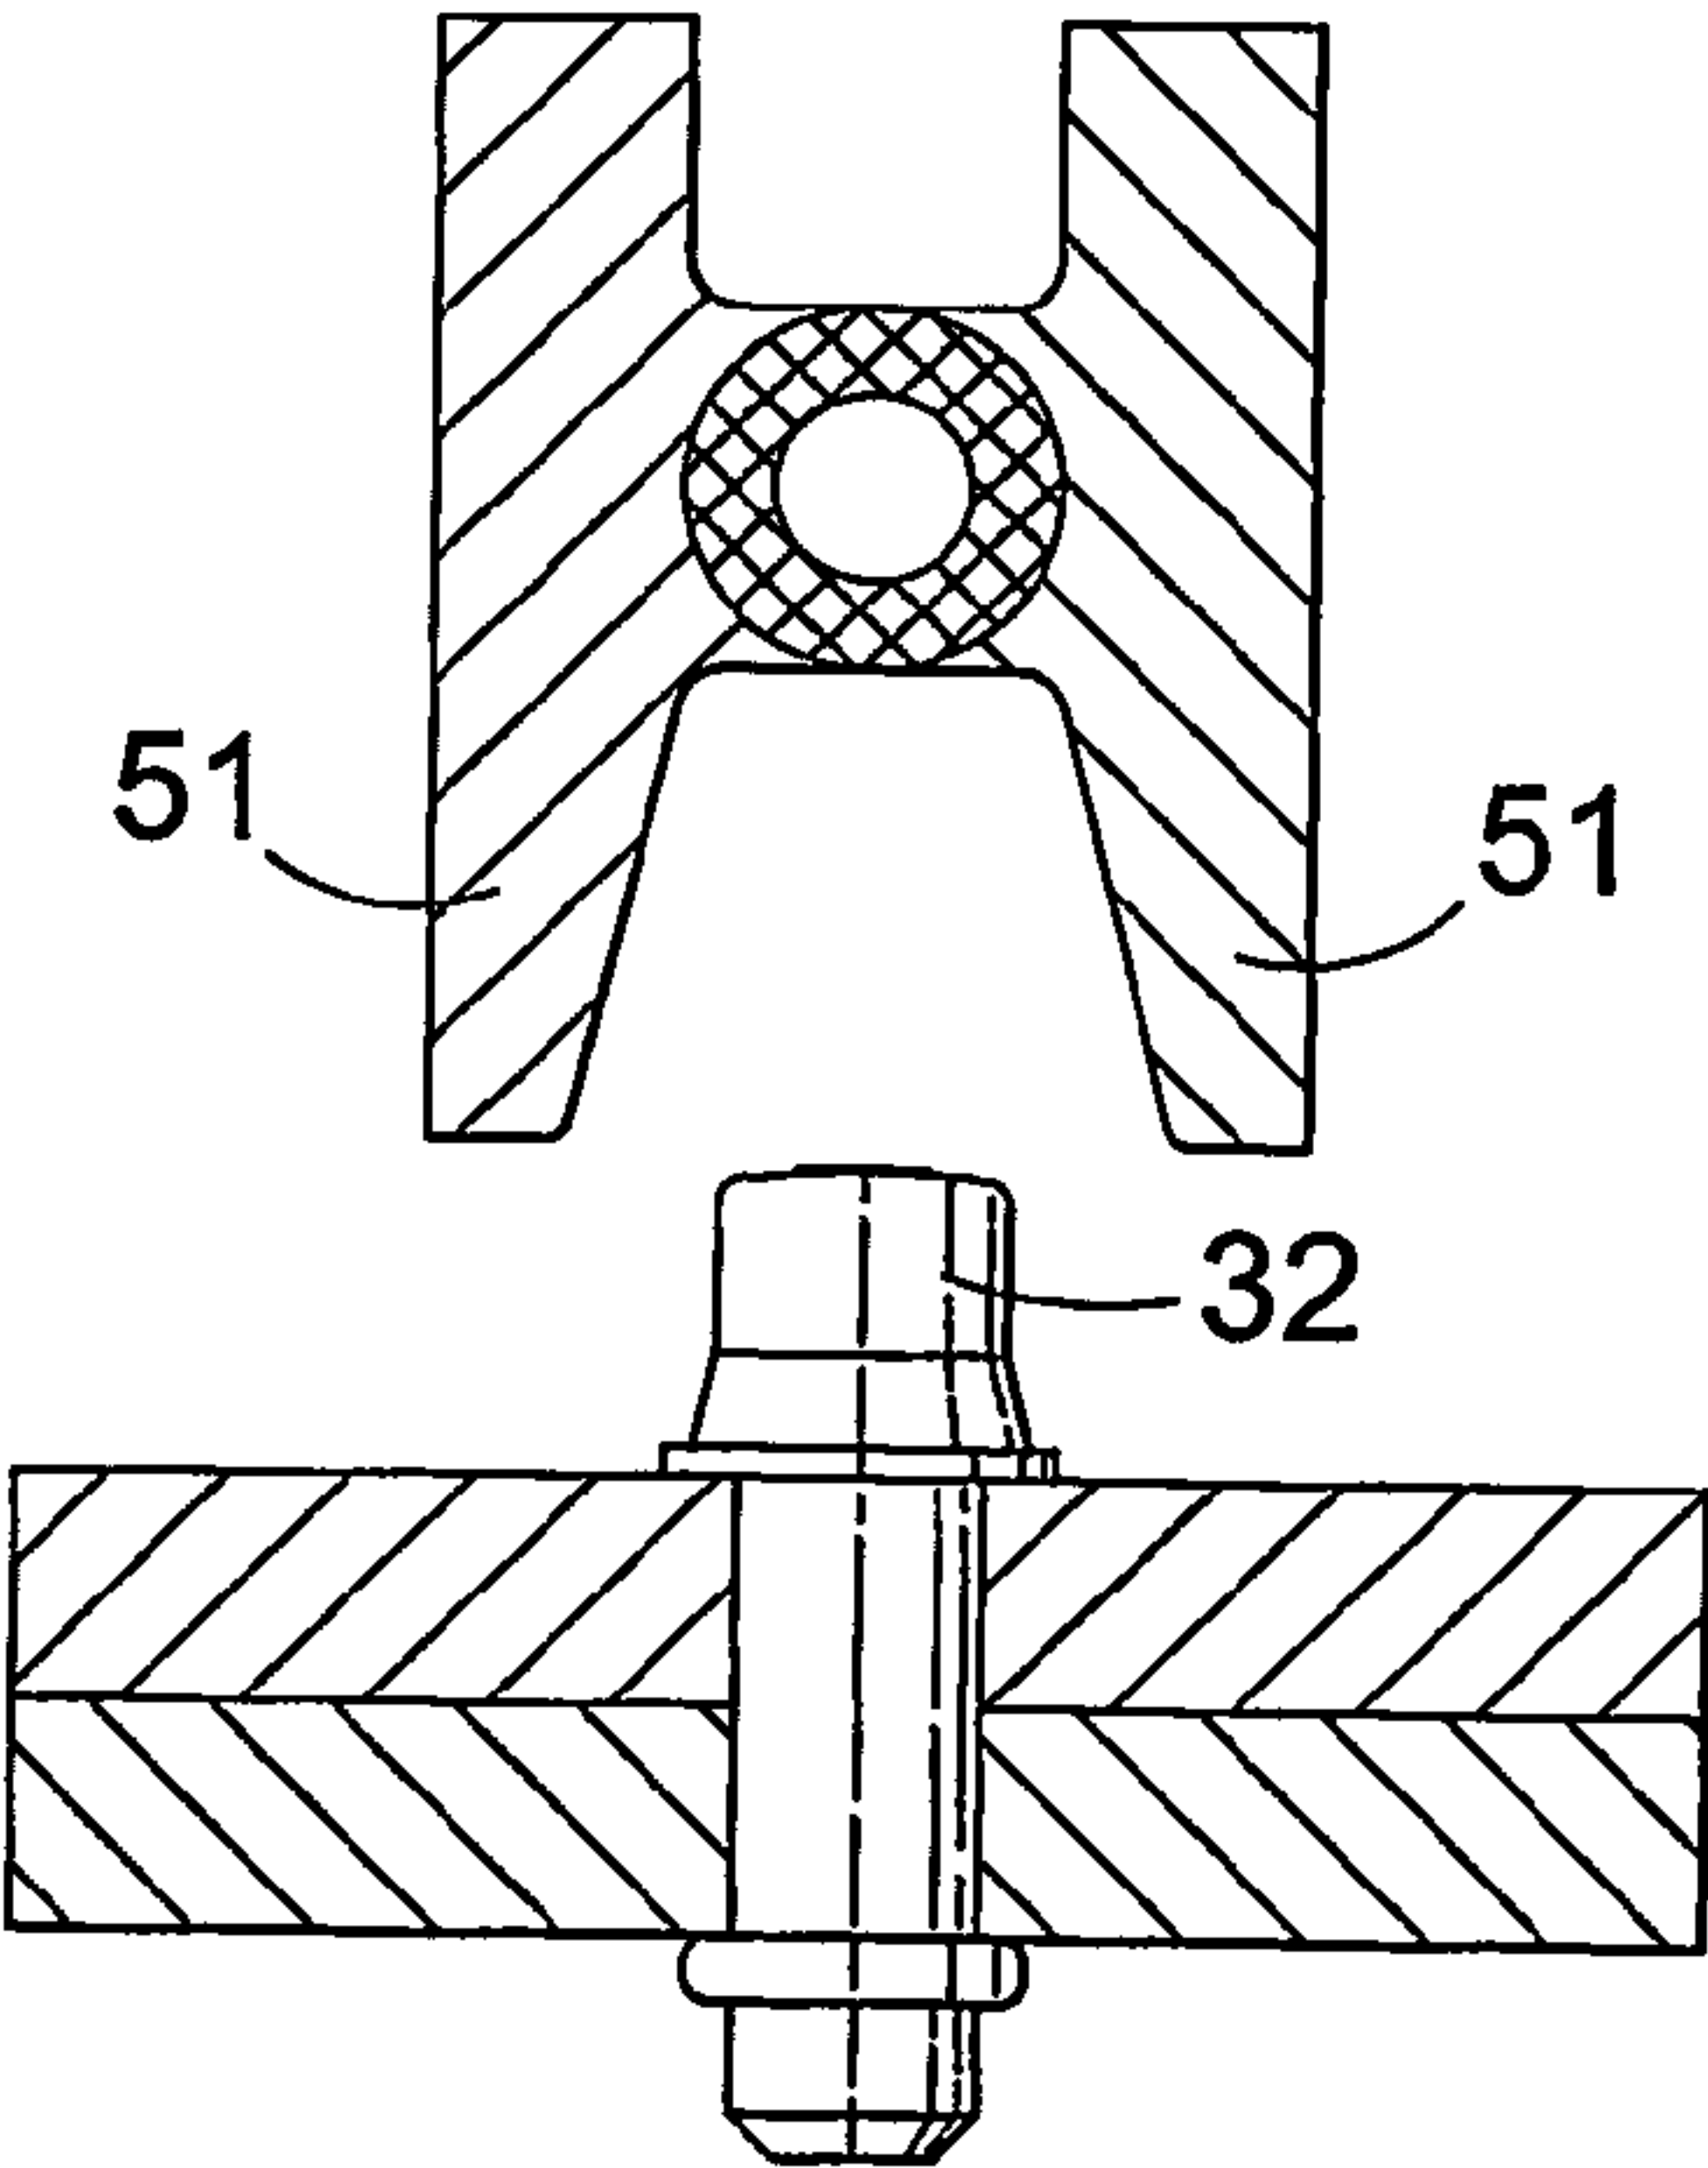


Fig.7A

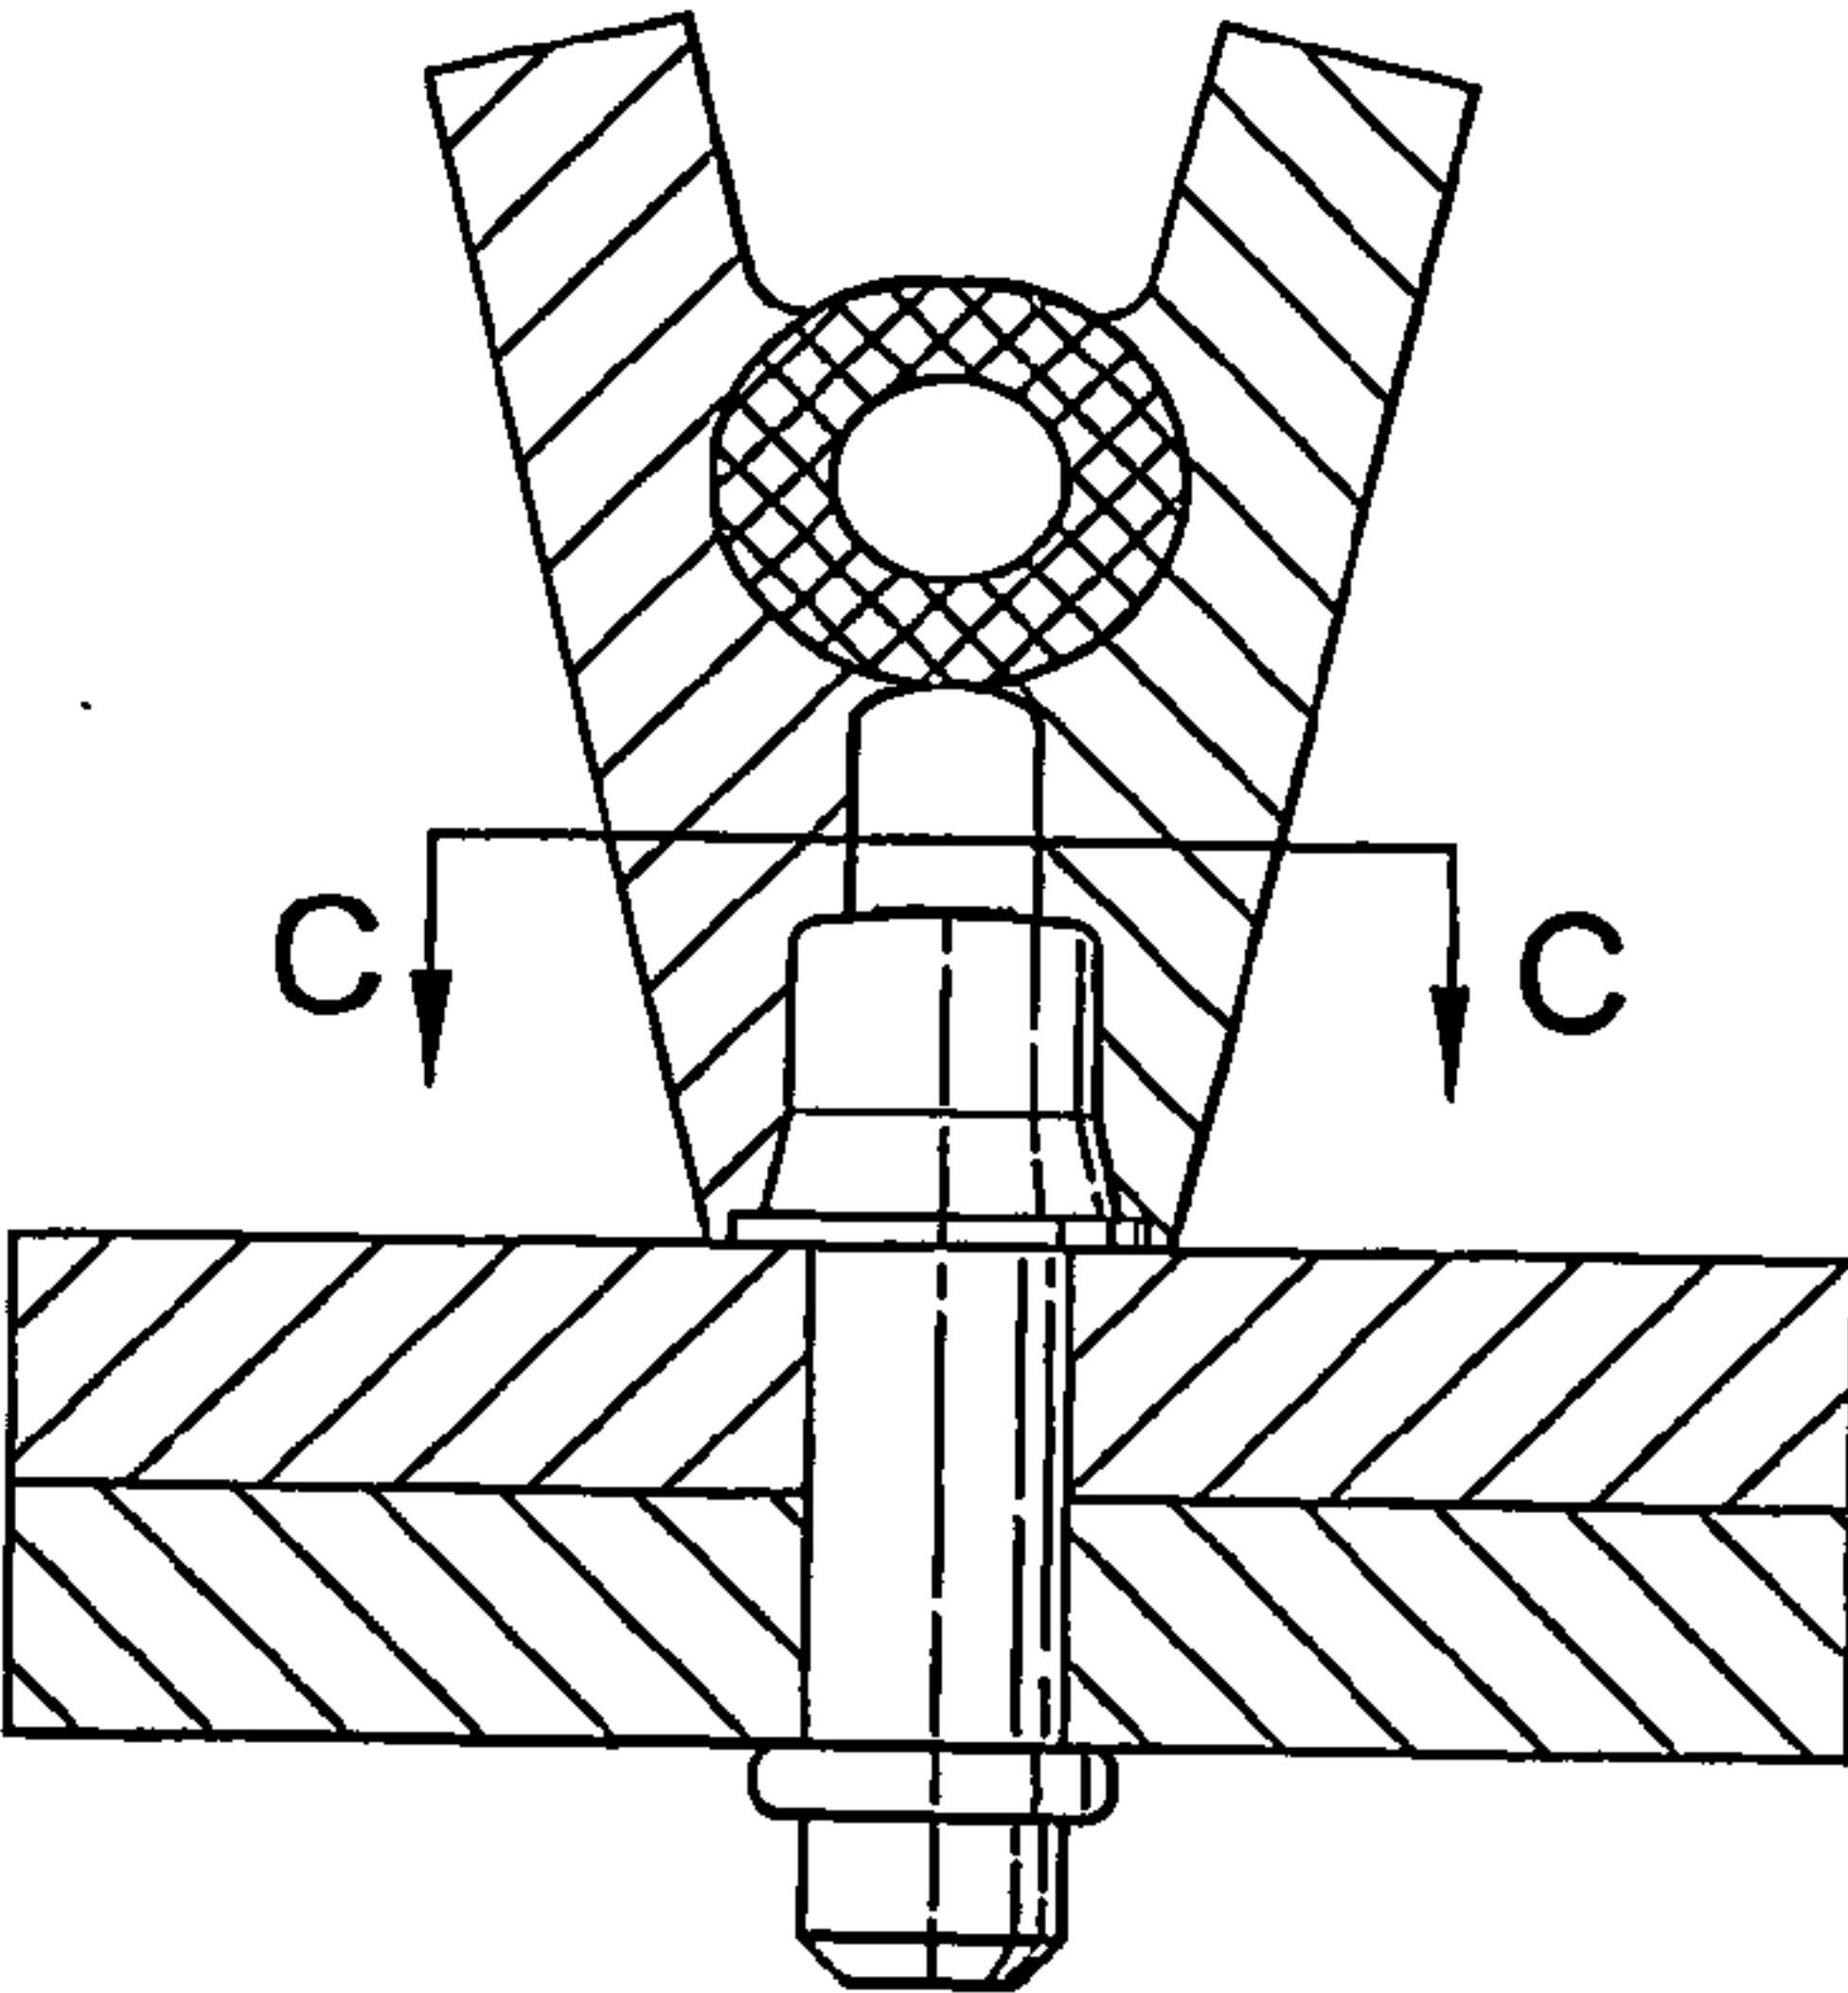


Fig.7B

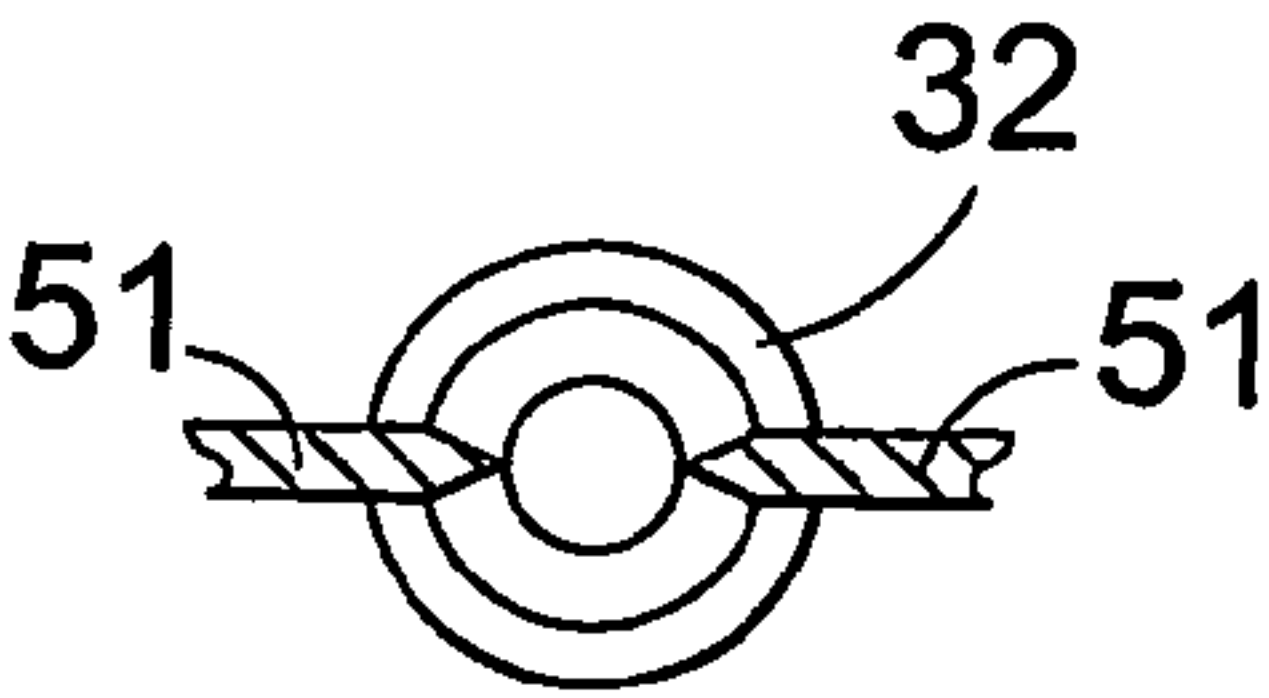


Fig.7C


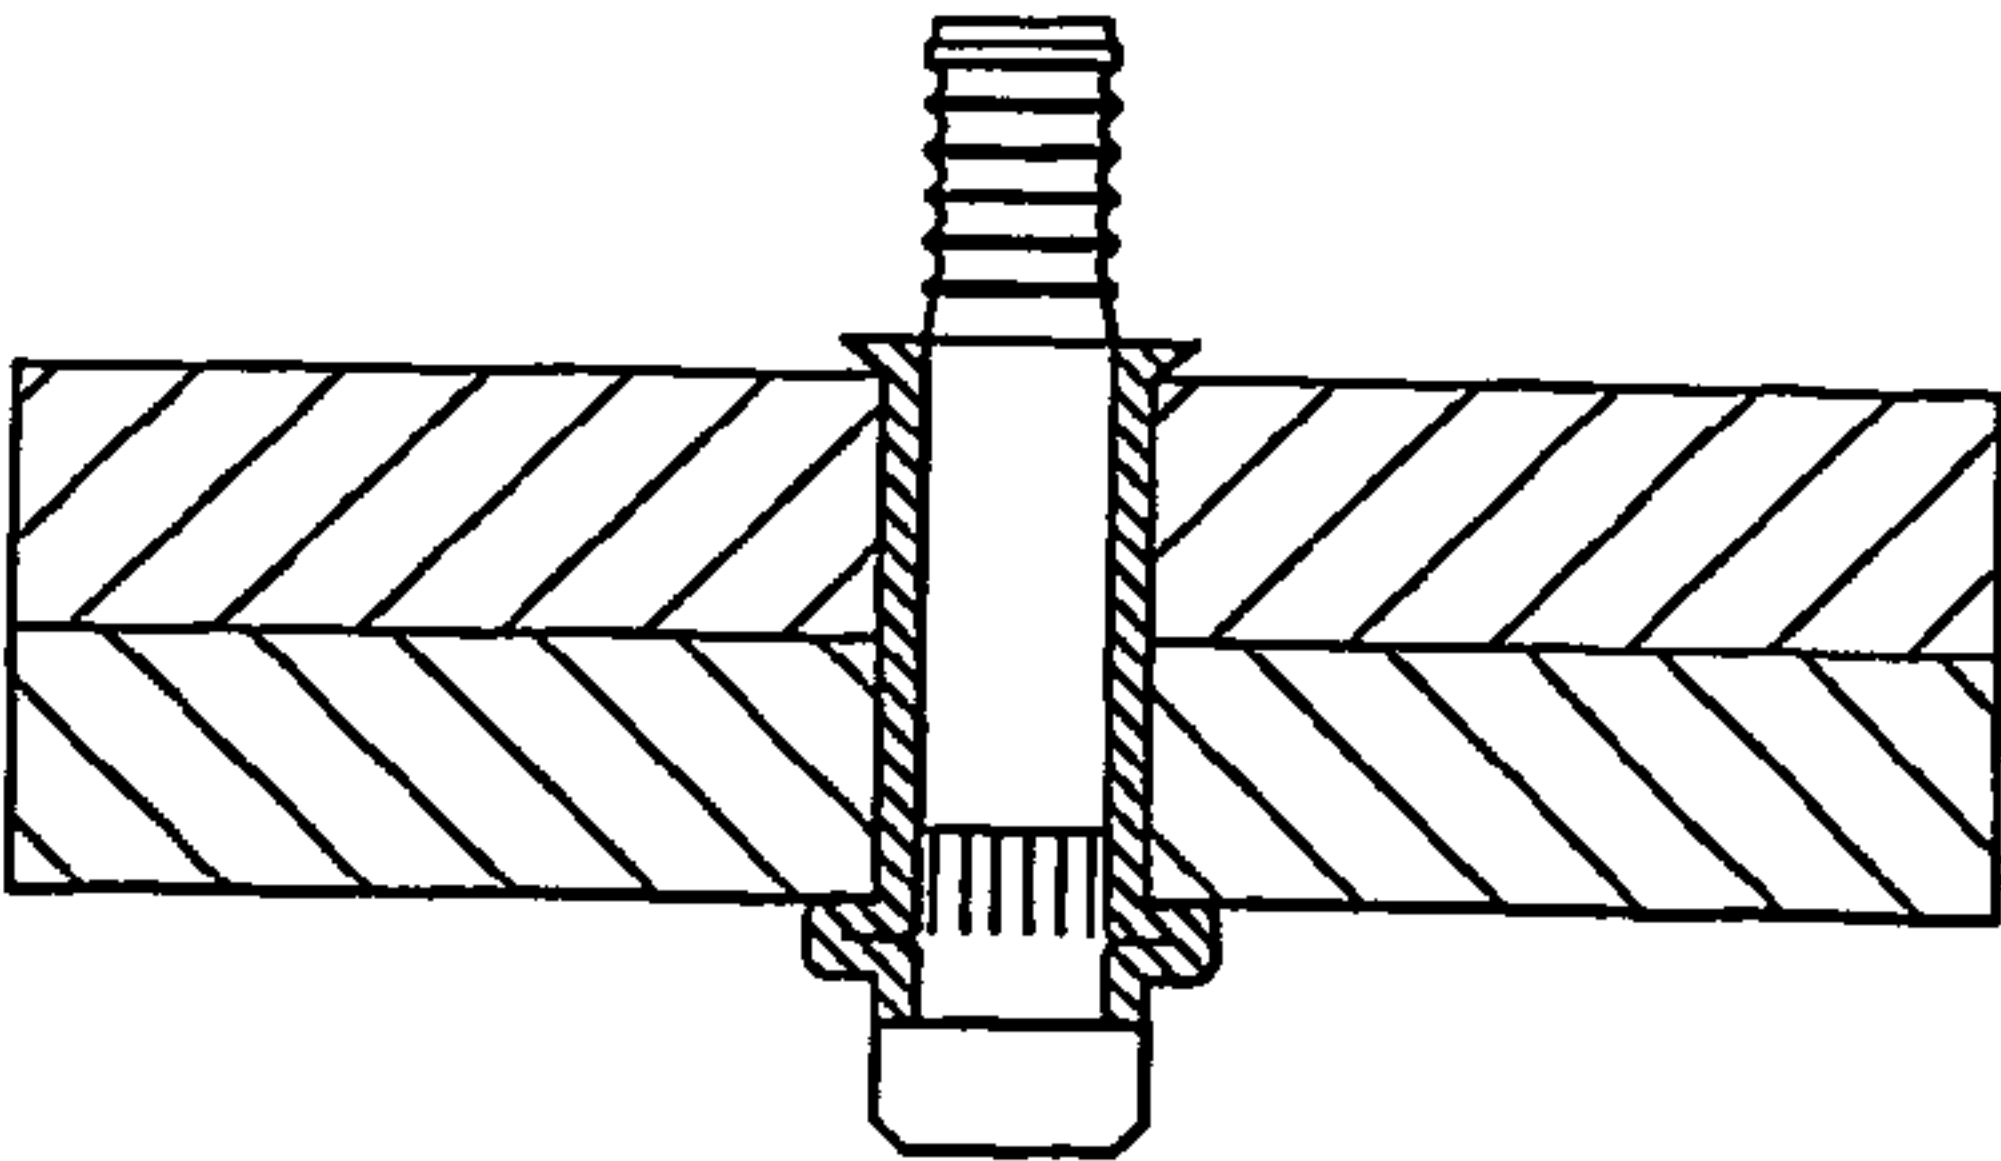


Fig.7D

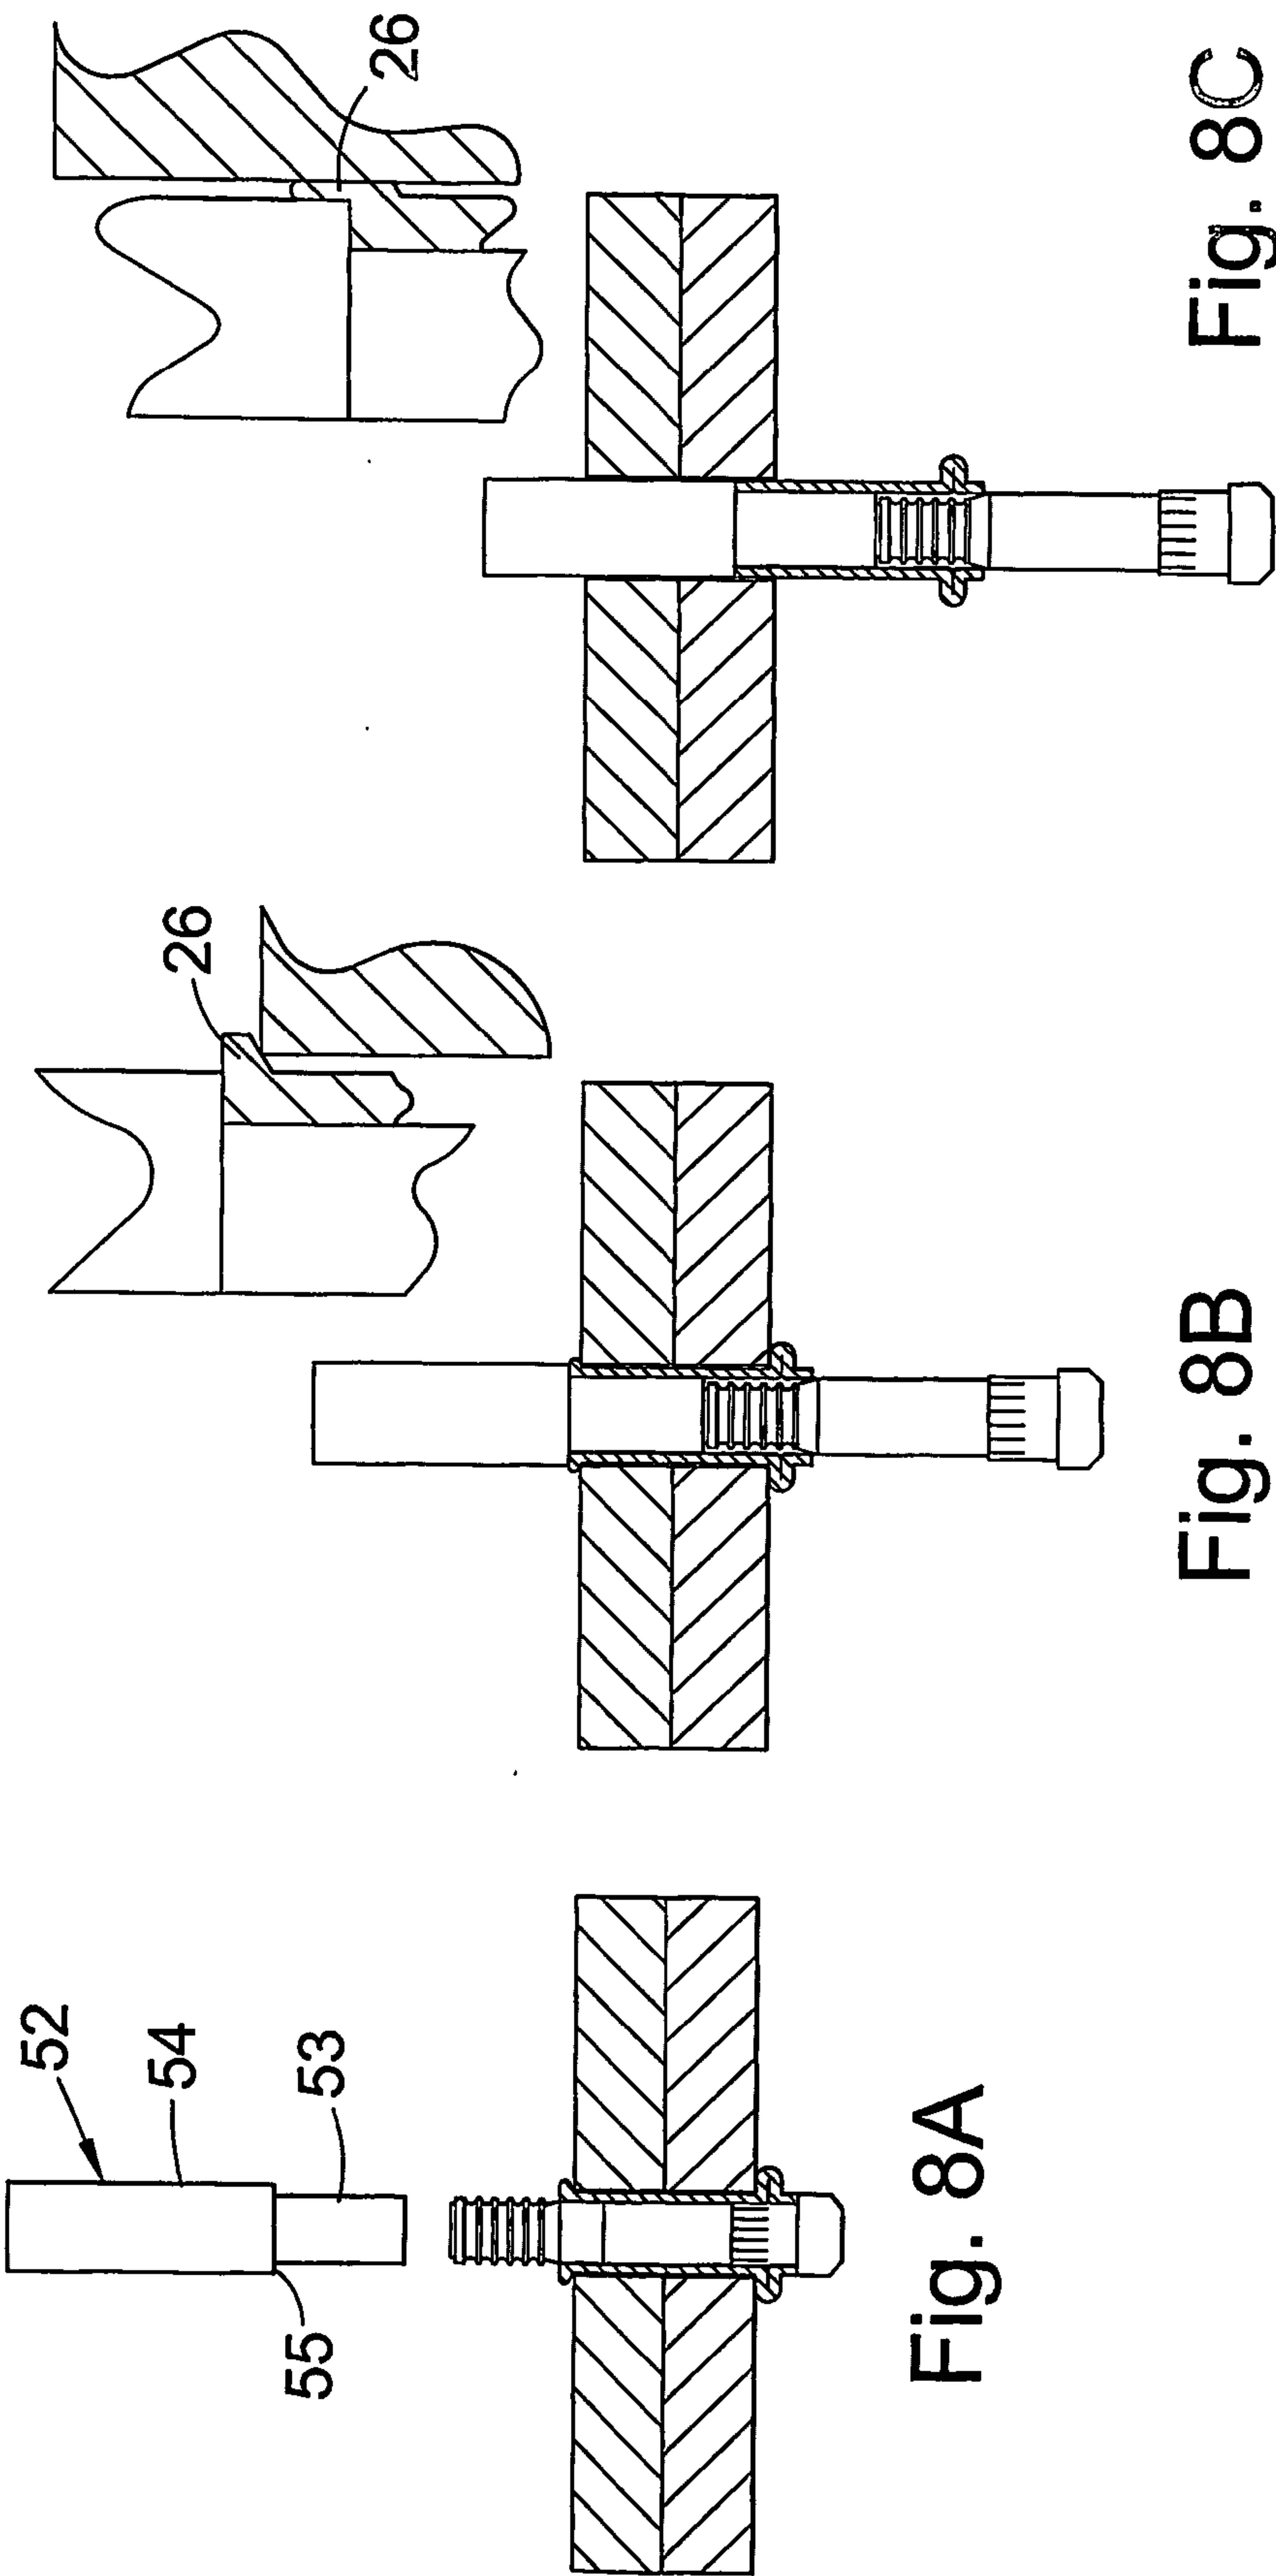

BLIND FASTENER AND METHOD OF REMOVING IT FROM A WORKPIECE

[0001] The invention relates to a blind fastener, that is, one which can be installed by access to one side only of a workpiece. More particularly the invention relates to a blind fastener of the type comprising a pin, a sleeve, and an abutment member. In use of the fastener in a workpiece comprising two or more members to be secured together, the pin and sleeve are inserted through an aperture in the workpiece so that their remote end portions protrude beyond the remote or blind face of the workpiece. The application of axial compression to the sleeve by means of a pulling force on the pin with respect to the sleeve causes the protruding end portion of the sleeve to deform into a blind head which contacts the blind face of the workpiece. The workpiece is then compressed between the blind head and the abutment member and the abutment member is then secured to the pin e.g. by swaging, to secure the workpiece members together in the compressed condition.

[0002] There are alternative possible ways of providing the necessary mechanical engagement between the various component members of the fastener. The remote end of the pin may have a radially protruding head which contacts the end of the sleeve to apply compressive force to it, or the remote end of the pin may be in threaded engagement with the sleeve.

[0003] The abutment member is secured to the near end of the sleeve, to enable correct insertion of the fastener into the aperture through the workpiece.

[0004] One such fastener is that commercially available under the trade mark "HUCK BOM", which is described in U.S. Pat. No. 2,527,307. In this fastener, the abutment is in the form of a radially enlarged head integral with the sleeve.

[0005] In use, it is sometimes found that it is necessary to remove a fastener which has been installed in a workpiece, e.g. for servicing or repairing the equipment of which the workpiece forms a part. It is extremely difficult to do this, since the abutment member is swaged on to the pin, and is integral with the sleeve. The pin is too hard to drill out. In any event, it is unacceptable for removal of the fastener to cause damage to the adjacent part of the workpiece.

[0006] The present invention is intended to provide a fastener of this type which can, if needed, be removed more easily and conveniently.

[0007] The invention provides, in one of its aspects, a blind fastener as set out in claim 1 of the accompanying claims. Further features of the invention are set out in claims 2 through 5. The invention includes a method of removing a fastener as set out in claims 6 and 7.

[0008] A specific embodiment for the invention will now be described by way of example and with reference to the accompanying drawings, in which:

[0009] FIG. 1A is an outside elevation of the pin;

[0010] FIG. 1B is an axial section through the sleeve;

[0011] FIG. 1C is an axial section through the abutment member;

[0012] FIG. 2A shows those three parts assembled to form a fastener ready for installation;

[0013] FIG. 2B is an enlargement of part of FIG. 2A;

[0014] FIG. 2C is a plan view on FIG. 2A;

[0015] FIG. 3A is a section through a fastener inserted in an aperture in a workpiece, ready for installation therein, together with an enlargement of a detail thereof;

[0016] FIGS. 3B and 3C are similar to FIG. 3A but show other possible conditions which will be described below;

[0017] FIGS. 4A, 4B, 5A, 5B, 6A and 6B are similar to FIG. 3A, and show successive stages of the installation of the fastener; and

[0018] FIGS. 7A, 7B, 7D, 8A, 8B and 8C show successive stages of the removal of an installed fastener from the workpiece, FIG. 7C being a section on the line C-C of FIG. 7B.

[0019] The pin, sleeve and abutment member all have circular symmetry.

[0020] The pin 11 (FIG. 1A) is of medium carbon alloy steel and comprises an elongated cylindrical shank 12 with an integral radially enlarged head 13 at one end of the shank, by means of which the pin engages with one end of the sleeve. Adjacent the head 13 the pin shank has a slightly oversize portion 20 formed with longitudinal ribs 30. Next to this portion 20 is a plain portion 14, followed by a locking groove portion 15 and then a breakneck 16 which is the weakest part of the pin. Next to this there is another plain portion 17, followed by a pulling groove portion 18 which grooves are for engagement by the jaws of the fastener installation tool.

[0021] The sleeve 21 (FIG. 1B) is generally cylindrical and is made of low carbon steel. It has a through bore 22 of uniform diameter which is a sliding fit on the pin shank 12, and a cylindrical shank 23 which is of uniform external diameter. At one end (the tail end) the sleeve shank has a flat end face 24 and at the other end (the head end) an integrally formed slightly radially enlarged head 25. The sleeve head comprises a flange 26 having a conical underhead face 27. As illustrated in FIG. 1B, the head has a flat top face 29.

[0022] The sleeve shank includes a radially expandable portion which is centred on a softened zone 19 which, as indicated in FIG. 1B, in this example extends axially from a position about halfway along the length of the sleeve shank 21 to a position about three quarters of the way from the sleeve head 26 towards the sleeve tail 24. In this example, this softened portion 19 is made softer than the remainder of the sleeve by band annealing. It has a through bore 22 which is an interference fit on enlarged portion 20 of the pin shank 12.

[0023] The abutment member (FIG. 1C) is in the form of a collar 32 made of medium carbon steel. The peripheral edge of one end of the collar has a bevel 34, whilst the other end has a radially projecting flange 35. That end face 36 is flat, but is annular, since it is provided with a recess 37, which is generally circular on the axis of the collar. The outer recess 37 is of a diameter and depth suitable to receive the head flange 26 of the sleeve, having an annular bottom face 41 which surrounds the recess 37. The axial depth of the recess 37 is rather greater than the total axial thickness of the sleeve head 26.

[0024] The pin, sleeve and collar are assembled together to form a fastener in the way illustrated in **FIGS. 2A, 2B** and **2C**. The sleeve is assembled on the pin shank **12** so that the sleeve end face **24** abuts the annular face of the pin head **13**, there being an interference fit between the ribbed oversize portion **20** of the pin and the tail end portion of the sleeve **21** beyond the softened zone **19**. The collar **32** is then assembled on to the sleeve by inserting the sleeve head flange **26** into the collar recess **37** so that the sleeve head end face **29** contacts the annular face **41** of the collar recess. The sleeve and collar are then removably secured together by staking down the collar head adjacent the recess **37** at three positions around the periphery of the recess, to deform the head material at those positions over and into contact with the conical face **27** of the sleeve head, to form three lugs or projections **38**. The pin plain portion **17** protrudes from the end face of the collar **32**.

[0025] As illustrated in **FIG. 3A**, the fastener is used to secure together two structural metal panels **42, 43** which have a cylindrical aperture **44** through them in which the sleeve **21** is a clearance fit. The total thickness of the workpiece formed by the panels **42** and **43** is rather more than half of the length of the sleeve shank **23**, so that the nearer end of the sleeve softened zone **19** indicated in **FIG. 1B** lies inside the remote face **46** of the workpiece when the underhead face **36** of the collar contacts the near face **45** of the workpiece.

[0026] As illustrated in the enlarged detail of **FIG. 3A**, the staked lugs **38** which contact the sleeve head flange **26** are undisturbed and continue to hold the sleeve and collar together.

[0027] If however there is resistance to the insertion of the fastener sleeve into the aperture **44** on the workpiece (e.g. because the aperture **44** is undersize and produces an interference fit, or the two parts of the aperture **44** are mis-aligned not shown in **FIGS. 3B** and **3C**), then it may be necessary to use force to insert the fastener, by axial force on the pin, as illustrated by the arrow B in **FIG. 3B**, e.g. by applying hammer blows to the projecting tail end of the pin. It is possible that this may be sufficient to deform the staking lugs **38** in the way shown at **39** in **FIG. 3B** and its enlargement. The sleeve moves so that its head **26** contacts the near face **45** of the workpiece, the radial extent of the head **26** and its strength being sufficient to hold the sleeve in this position.

[0028] If a very large axial force has to be applied to the pin to make the sleeve enter the aperture, it is possible that the retaining force between the pin and sleeve, due to the interference fit between them at portion **20** of the pin, may be overcome, so that the pin moves axially through the sleeve and the interference portion **20** protrudes from the tail end of the sleeve, as illustrated in **FIG. 3C**. Provided that sufficient of the pin pulling groove position **18** remains outside the collar **32**, it would still be possible to install the fastener in the way to be described below, but this might require two successive actuations of the installation tool.

[0029] If the pin is pushed too far into the sleeve, it cannot be installed, and the pin can be knocked completely through the sleeve. The collar can then be lifted off (since its connection to the sleeve has already been broken), and the sleeve punched through and out of the workpiece aperture. Alternatively the uninstalled fastener can be extracted by gripping and pulling the pin or the sleeve.

[0030] A fastener which has been inserted in a workpiece in the normal way as illustrated in **FIG. 3A** is now installed by applying a progressively increasing pull to the protruding part of the pin **11** in relation to the sleeve **21**. This is done by means of a standard hydraulically-powered fastener placing tool, such as that commercially available under the designation AVDEL (Registered Trade Mark) Type 722, which is used for installing pin and collar type fasteners previously referred to.

[0031] The tool includes an annular anvil **47** (**FIG. 4A**) having an internal throat **48** shaped appropriately to swage the collar **32**. The tool also includes jaws **49** which engage with the pulling grooves in the portion **18** of the pin, and a hydraulic piston and cylinder device (not shown) for applying a progressively increasing retraction force to the jaws with respect to the anvil. Such tools and their manner of use are well known to those who use blind fasteners, and need not be described in detail here.

[0032] The tool is offered up to the protruding part of the pin, so that the outer end of the anvil throat contacts the top of the collar **32** around its bevel **34**, as illustrated in **FIG. 4A**. The tool is then actuated so that its jaws engage the pulling groove portion **18** of the pin and exert a progressively increasing pull on it with respect to the anvil **47**. The reaction force is transmitted through the collar **32** to its end face **36** against the workpiece, and thence via the annular face **41** face of the collar to the sleeve head **25**. If, during insertion of the fastener into the aperture, the sleeve head **25** has moved away from the collar annular face **41**, it will be pulled back into contact with it. The sleeve is thus axially compressed between the face of the head flange **26** and its end face **24** in contact with the pin head **13**. The softened portion of the sleeve deforms by bulging outwardly, to progressively form a blind head in contact with rear face **46** of the workpiece. As the blind head progressively forms (See **FIG. 4B**), it exerts a compressive force on the rear face **46** of rear panel **43**, which urges the panels **42, 43** together (and so closes any gap which may exist between them) so that the panels are firmly in contact with each other and compressed together between the collar end face **36** and the blind head. The final form of the blind head, in this example, is illustrated at **49** in **FIG. 5A**.

[0033] As the force applied by the tool further increases, the anvil **47** is pushed down over the exterior of the collar, so that the anvil throat **48** swages the collar **32** radially inwardly into the locking grooves **15** on the pin. The anvil stops with its lower face near the flange at the bottom of the collar. This position is illustrated in **FIG. 5B**.

[0034] Further increase of the force applied by the tool causes the pin to break at the breakneck **16**, the broken off pin tail being pulled away by the jaws, leaving a broken surface **52**, as illustrated in **FIG. 6A**. The tool is then removed, to leave the installed fastener, as illustrated in **FIG. 6B**.

[0035] As previously mentioned, the fastener described above is advantageous in that an installed fastener can, if needed, be removed from the workpiece relatively easily.

[0036] **FIG. 7A** shows a pair of bolt cropper blades **51** being offered up to the collar **32**. These are located fully over the swaged collar, on a diametrical plane thereof, and the tool actuated to force the blades together so that they substantially cut the collar in half, as illustrated in **FIGS. 7B** and **7C**.

[0037] The two halves of the collar may remain connected together by thin pieces of its material, in which case the two halves of the collar can be separated and removed by a hammer and chisel or a power chisel, leaving the pin and sleeve in the workpiece as shown in **FIG. 7D**.

[0038] The pin and sleeve can then be removed from the workpiece, and this is conveniently done by using a single two-stage punch **52**, as illustrated in **FIGS. 8A, 8B** and **8C**. The punch comprises a leading narrower part **53** of appropriate diameter to enter the sleeve and push the pin, and a following wider part **54** having a diameter appropriate to enter the workpiece aperture, joined to the narrower part **53** by an annular face **55** appropriate to contact the sleeve head face. As shown in **FIG. 8A**, the punch portion **53** is offered up to the end of the fastener pin, and axial force applied by hammering, to break the interference fit between the pin and sleeve and drive the pin through the sleeve until the punch annular face contacts the sleeve head face **29**, as shown in **FIG. 8B** including its enlarged detail. Application of further force to the punch deforms the outer peripheral part of the sleeve head flange **26**, as shown in **FIG. 8C** and its enlarged detail (in some cases, the outer peripheral part may be sheared off). Further movement of the punch drives the sleeve and pin through the far end of the workpiece aperture, thus removing the installed fastener.

[0039] It will be apparent that, in order for the fastener to be installed and removed in the way described above, there must be the correct relationship between the various axial forces needed to separate various components. Thus, the axial force needed on the sleeve to separate it from the collar (by overcoming the staked lugs **38**, as described with reference to **FIG. 3B**) must be less than the axial force needed to overcome the interference engagement between the pin and sleeve (as described with reference to **FIGS. 3C and 8B**), which in turn must be less than the force needed to push the sleeve head through the aperture (as described with reference to **FIG. 8C**).

[0040] The three measured force values for an example fastener of sleeve outside diameter 10 mm are respectively 900 Newtons, 1900 Newtons, and between 6000 Newtons (for an aperture of maximum diameter in which sleeve head folds up, **FIG. 8C**) and 9000 Newtons (for an aperture of minimum diameter).

[0041] The invention is not restricted to the details of the foregoing example. For instance, the sleeve and the abutment collar could be releasably connected to each other by any convenient arrangement.

1-7. (canceled)

8. A blind fastener for insertion through an aperture in a workpiece, the fastener comprising a pin (**11**), a sleeve (**21**) and an abutment member (**32**);

the pin (**11**) extending inside the sleeve (**21**) and engaging therewith at or near a first end (**24**) of the sleeve;

the sleeve having a radially expandable portion;

the abutment member (**32**) being adjacent the second end (**25**) of the sleeve and projecting radially therefrom and the pin (**11**) extending beyond the abutment member (**32**);

whereby, when the sleeve (**21**) is inserted into a suitable aperture in a workpiece of suitable thickness with the

expandable portion of the sleeve (**21**) protruding beyond the blind or remote face of the workpiece and the abutment member (**32**) abutting the near face of the workpiece, and when a progressively increasing pulling force is applied to the part of the pin (**11**) extending beyond the abutment member (**32**), the pulling force being supported against the abutment member (**32**), so that axial compression is applied to the sleeve (**21**) between the abutment member (**32**) and its engagement with the pin (**11**), the radially expandable part of the sleeve (**21**) to radially expand to form a blind head in abutment with the remote face of the workpiece; thereby to apply compression to the workpiece between the blind head and the abutment member (**32**); and thereafter the abutment member can be secured to the pin (**11**);

in which the abutment member (**32**) is removably secured to the sleeve (**21**) by means sufficiently strong to allow handling of the assembled fastener to be inserted in the aperture in the workpiece and installed therein, but sufficiently weak to allow the abutment member (**32**) to be removed from the sleeve (**21**) so that the pin (**11**) and sleeve (**21**) can be forced out of the aperture on the workpiece, to remove the fastener therefrom.

9. A fastener as claimed in claim 8, in which the sleeve (**21**) and abutment member (**32**) are separate members and the removable securing means comprises deformation of at least one of them into engagement with the other.

10. A fastener as claimed in claim 9, in which the sleeve (**21**) has a radially extending head (**25**), the rim (**25**) being insufficiently strong to prevent the sleeve being driven through the aperture, the abutment member has a corresponding recess (**37**) in which the sleeve head (**25**) is received, and part of the abutment member adjacent the recess is deformed over and into contact with the sleeve head (**25**).

11. A fastener as claimed in claim 10, in which the abutment member is deformed as aforesaid at a plurality of positions spaced apart around the sleeve head.

12. A method of removing from a workpiece a fastener comprising a pin (**11**), a sleeve (**21**) and an abutment member (**32**);

the pin (**11**) extending inside the sleeve (**21**) and engaging therewith at or near a first end (**24**) of the sleeve;

the sleeve having a radially expandable portion;

the abutment member (**32**) being adjacent the second end (**25**) of the sleeve and projecting radially therefrom and the pin (**11**) extending beyond the abutment member (**32**);

whereby, when the sleeve (**21**) is inserted into a suitable aperture in a workpiece of suitable thickness with the expandable portion of the sleeve (**21**) protruding beyond the blind or remote face of the workpiece and the abutment member (**32**) abutting the near face of the workpiece, and when a progressively increasing pulling force is applied to the part of the pin (**11**) extending beyond the abutment member (**32**), the pulling force being supported against the abutment member (**32**), so that axial compression is applied to the sleeve (**21**) between the abutment member (**32**) and its engagement with the pin (**11**), the radially expandable part of the sleeve (**21**) to radially expand to form a blind head in

abutment with the remote face of the workpiece; thereby to apply compression to the workpiece between the blind head and the abutment member (32); and thereafter the abutment member can be secured to the pin (11);

in which the abutment member (32) is removably secured to the sleeve (21) by means sufficiently strong to allow handling of the assembled fastener to be inserted in the aperture in the workpiece and installed therein, but sufficiently weak to allow the abutment member (32) to be removed from the sleeve (21) so that the pin (11) and

sleeve (21) can be forced out of the aperture on the workpiece, to remove the fastener therefrom, which has been installed in the workpiece as aforesaid, which method comprises removing the abutment member from the sleeve, and then removing the pin and the sleeve through the blind side of the aperture.

13. A method of removing an installed fastener, substantially as hereinbefore described and illustrated in the accompanying drawings.

* * * * *