



(11) **EP 1 914 835 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.04.2008 Bulletin 2008/17

(51) Int Cl.:
H01Q 5/00 ^(2006.01) **H01Q 1/24** ^(2006.01)
H01Q 9/04 ^(2006.01) **H01Q 13/10** ^(2006.01)

(21) Application number: **06122710.4**

(22) Date of filing: **20.10.2006**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**
Designated Extension States:
AL BA HR MK RS

- **Rao, Qinjiang**
Waterloo, Ontario N2L 4X6 (CA)
- **Ali, Shirook**
Mississauga, Ontario L5N 7V1 (CA)
- **Pecen, Mark**
Waterloo, Ontario N2L 5P3 (CA)

(71) Applicant: **Research In Motion Limited**
Waterloo, Ontario N2L 3W8 (CA)

(74) Representative: **Fennell, Gareth Charles**
Kilburn & Strode
20 Red Lion Street
London WC1R 4PJ (GB)

(72) Inventors:
• **Wen, Geyi**
Waterloo
Ontario N2T 2V1 (CA)

Remarks:
Amended claims in accordance with Rule 137(2)
EPC.

(54) **Mobile wireless communications device with multiple RF transceivers using a common antenna at a same time and related methods**

(57) A mobile wireless communications device may include a housing and a common antenna carried by the housing and having a plurality of spaced apart signal feed points thereon. The device may further include a plurality of wireless radio frequency (RF) transceivers carried by the housing and coupled to respective ones of the signal feed points of the common antenna. Each wireless RF

transceiver may also have a respective different operating frequency associated therewith. Furthermore, the device may also include a controller selectively operating at least some of the wireless RF transceivers to advantageously use the common antenna at a same time.

EP 1 914 835 A1

Description

Field of the Invention

[0001] The present invention relates to the field of communications devices, and, more particularly, to mobile wireless communications devices and related methods.

Background of the Invention

[0002] Cellular communications systems continue to grow in popularity and have become an integral part of both personal and business communications. Cellular telephones allow users to place and receive voice calls most anywhere they travel. Moreover, as cellular telephone technology has increased, so too has the functionality of cellular devices and the different types of devices available to users. For example, many cellular devices now incorporate personal digital assistant (PDA) features such as calendars, address books, task lists, etc. Moreover, such multi-function devices may also allow users to wirelessly send and receive electronic mail (email) messages and access the Internet via a cellular network and/or a wireless local area network (WLAN), for example.

[0003] Even so, as the functionality of cellular communications devices continues to increase, so too does the demand for smaller devices which are easier and more convenient for users to carry. One challenge this poses for cellular device manufacturers is designing antennas that provide desired operating characteristics within the relatively limited amount of space available for the antenna. This is particularly true where multi-frequency band operation is required. Some wireless communications devices use multiple antennas to cover multiple radio frequency (RF) bands. Thus, as the number of operating frequency bands increases, so to does the number of antennas that are required. As a result, it may not be possible to include all of the antennas required to provide operation in all desired frequency bands in some embodiments due to such space constraints.

[0004] When the number of operating frequency bands is fairly small, some conventional mobile wireless communications devices will use a single antenna to cover the frequency bands. Yet, in such devices it may be difficult to obtain a desirable match and antenna gain over all of the frequency bands, and some trade-offs may need to be made between the frequency bands.

[0005] One example of a single antenna system used for operating over multiple frequency bands is disclosed in U.S. Patent No. 6,662,028 to Hayes et al. This patent is directed to a planar inverted-F antenna for communications devices, such as radiotelephones, that radiates within multiple frequency bands. Multiple signal feeds extend from a conductive element in respective spaced-apart locations. A respective plurality of micro-electromechanical system (MEMS) switches are electrically connected to the signal feeds and are configured to se-

lectively connect the respective signal feeds to ground or RF circuitry. In addition, each MEMS switch can be opened to electrically isolate a respective signal feed.

[0006] Such antennas may be advantageous for operating over different frequency bands at different times, and over a relatively small range of operating frequencies. Nonetheless, there may be applications in which it is desirable to provide multi-frequency operation at the same time and over a fairly large range of frequencies but while still providing a relatively compact antenna configuration suitable for use in handheld wireless communications devices.

Brief Description of the Drawings

[0007] FIG. 1 is a schematic block diagram of a mobile wireless communications device in accordance with one exemplary embodiment.

[0008] FIG. 2 is a top view of an exemplary patch antenna for use in the wireless communications device of FIG. 1.

[0009] FIG. 3 is a graph of return loss vs. frequency associated with a first feed point of one implementation of the antenna of FIG. 3.

[0010] FIG. 4 is a graph of gain vs. frequency associated with the first feed point of the antenna of FIG. 3.

[0011] FIGS. 5A-5C are top views of the antenna of FIG. 3 illustrating simulated current distributions at 900 MHz, 1800 MHz, and 5 GHz, respectively, using the first signal feed point.

[0012] FIGS. 6A-6C are graphs of simulated antenna radiation patterns for the antenna of FIG. 3 at 900 MHz, 1800 MHz, and 5 GHz, respectively, using the first signal feed point.

[0013] FIG. 7 is a graph of return loss vs. frequency associated with a second feed point of the antenna of FIG. 3.

[0014] FIG. 8 is a graph of gain vs. frequency associated with the second feed point of the antenna of FIG. 3.

[0015] FIG. 9 is a top view of the antenna of FIG. 3 illustrating simulated current distribution at 2.45 GHz using the second signal feed point.

[0016] FIG. 10 is a graph of a simulated antenna radiation pattern for the antenna of FIG. 3 at 2.45 GHz using the second signal feed point.

[0017] FIG. 11 is a graph of return loss vs. frequency associated with a third feed point of the antenna of FIG. 3.

[0018] FIG. 12 is a graph of gain vs. frequency associated with the third feed point of the antenna of FIG. 3.

[0019] FIGS. 13A-13C are top views of the antenna of FIG. 3 illustrating simulated current distributions at 2.1 GHz, 5.2 GHz, and 5.8 GHz, respectively, using the third signal feed point.

[0020] FIGS. 14A-14C are graphs of simulated antenna radiation patterns for the antenna of FIG. 3 at 2.1 GHz, 5.2 GHz, and 5.8 GHz, respectively, using the third signal feed point.

[0021] FIG. 15 is a graph of return loss vs. frequency

associated with a fourth feed point of the antenna of FIG. 3.

[0022] FIG. 16 is a graph of gain vs. frequency associated with the fourth feed point of the antenna of FIG. 3.

[0023] FIG. 17 is a top view of the antenna of FIG. 3 illustrating simulated current distribution at 1.54 GHz using the fourth signal feed point.

[0024] FIG. 18 is a graph of a simulated antenna radiation pattern for the antenna of FIG. 3 at 1.54 GHz using the fourth signal feed point.

[0025] FIG. 19 is a schematic block diagram illustrating exemplary components for use in the mobile wireless communications device of FIG. 1.

Detailed Description of the Preferred Embodiments

[0026] The present description is made with reference to the accompanying drawings, in which preferred embodiments are shown. However, many different embodiments may be used, and thus the description should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete. Like numbers refer to like elements throughout, and prime notation is used to indicate similar elements in different embodiments.

[0027] Generally speaking, a mobile wireless communications device is disclosed herein which may include a housing and a common antenna carried by the housing and having a plurality of spaced apart signal feed points thereon. Moreover, the device may further include a plurality of wireless radio frequency (RF) transceivers carried by the housing and coupled to respective ones of the signal feed points of the common antenna. Each wireless RF transceiver may also have a respective different operating frequency associated therewith. Furthermore, the device may also include a controller selectively operating at least some of the wireless RF transceivers to advantageously use the common antenna at a same time.

[0028] The device may also include a dielectric substrate carried within the housing, and the common antenna may comprise at least one conductive trace on the dielectric substrate. The common antenna may also have a reference voltage feed point. Furthermore, the common antenna may comprise a patch antenna having at least one slot therein. More particularly, the patch antenna may have a generally rectangular perimeter. By way of example, the at least one slot may include a plurality of slots defining an exterior common antenna portion and an interior common antenna portion therein. As such, at least one of the signal feed points may be on the interior common antenna portion, and/or at least one of the signal feed points may be on the exterior common antenna portion.

[0029] At least one of the wireless RF transceivers may be a cellular transceiver, for example. Also by way of example, the different operating frequencies may be

within a range of about 900 MHz to 6 GHz. Further, the different operating frequencies have different user functions associated therewith. More specifically, the different user functions may include at least one of voice communication, email reception, email transmission, data reception, and data transmission, for example.

[0030] Referring initially to FIGS. 1 and 2, a mobile wireless communications device **30** for communicating with one or more communications networks **31** illustratively includes a housing **32** and a common antenna **33** carried by the housing. By way of example, the wireless communications network(s) **31** may be a cellular network and/or wireless local area network (LAN), for example. The common antenna **33** illustratively includes a plurality of spaced apart signal feed points **34a-34n** thereon.

[0031] The antenna **33** is "common" in the sense that it is shared by a plurality of wireless radio frequency (RF) transceivers **35a-35n** (e.g., cellular and/or wireless LAN transceivers) also carried by the housing **32** and coupled to respective ones of the signal feed points **34a-34n** of the common antenna **33**. Each wireless RF transceiver preferably has a respective different operating frequency associated therewith, as will be discussed further below. Furthermore, the device **30** may also include a controller **36** that selectively operates at least some (i.e., two or more) of the wireless RF transceivers **35a-35n** to advantageously use the common antenna **33** at a same time. As used herein, "at the same time" does not mean start and/or stop times are synchronized, but rather merely that there is some overlap in time. Although, it should be noted that the controller **36** need not operate multiple transceivers **35** at all times, i.e., the controller may in some instances operate only one transceiver at a time, as will be appreciated by those skilled in the art.

[0032] The device **30** also illustratively includes a dielectric substrate **37** (FIG. 2), such as a printed circuit board (PCB), carried within the housing **32**, and the common antenna **33** may include at least one conductive trace on the dielectric substrate, as will be appreciated by those skilled in the art. Typically the controller **36** and wireless RF transceivers **35a-35n** will also be carried by the dielectric substrate **37**, as may other components such as a display, keypad, etc., which will be discussed further below. However, it should be noted that the common antenna **33** need not be carried on the same PCB with the wireless RF transceivers **35a-35n** and/or controller in all embodiments, and may instead be carried on a retainer frame extension of the PCB, or otherwise mounted adjacent the PCB within the housing, as will be appreciated by those skilled in the art.

[0033] In accordance with one embodiment, the common antenna **33** may be a substantially linear antenna (e.g., inverted F antenna, monopole, etc.). In the embodiment illustrated in FIG. 2, the common antenna **33** is a patch antenna having first and second slots **40**, **41** defining an exterior common antenna portion **42** and an interior common antenna portion **43** therein. It should be noted that a single slot or more than two slots may be

used in other embodiments. As seen in the illustrated example, the common patch antenna **33** has a generally rectangular perimeter with length and width dimensions L_1 , L_3 , although other shapes are also possible.

[0034] In the exemplary embodiment, the common patch antenna **33** has a single reference voltage (e.g., ground) point **44**, and four signal feed points **45-48**. The reference voltage point **44**, along with the third and fourth signal feed points **47**, **48**, are positioned on the interior common antenna portion **43**, while the first and second feed points **45**, **46** are positioned on the exterior common antenna portion **42** as shown in FIG. 2. However, other placements and numbers of feed points are also possible, including multiple reference voltage or ground points **44**. Additionally, in some embodiments one or more of the signal feed points **45-48** could also be selectively coupled to a reference voltage/ground.

[0035] The first and second slots **40**, **41** also define a plurality of leg portions defined by widths W_1 - W_7 and lengths L_2 and L_4 that may advantageously be selected to tune the desired operating frequencies of the antenna **33**. Some of the leg portions may be substantially related to a given operating frequency band, while other structures may influence multiple operating frequency bands, as will be appreciated by those skilled in the art.

[0036] The common antenna **33** advantageously provides a single multi-feed antenna that may be used instead of a plurality of different antennas as in some conventional handsets to provide multi-frequency band operation. This may provide advantages such as space savings, simplification of the handset design, and avoidance of electromagnetic interference (EMI) problems that are often associated with using multiple antennas in close proximity to one another.

[0037] Turning now to FIGS. 3 through 18, simulated operating characteristics of one implementation of the above-noted patch antenna configuration will now be presented. It should be noted that the patch structure used in the simulations has slightly different dimensions than the general shape illustrated in FIG. 2. Dimensions of the patch antenna structure used in the simulations are provided in Table 1, below.

Table 1

Dimension	Value (mm)
L_1	41
L_2	4.9
L_3	14
L_4	7
W_1	3
W_2	3
W_3	2.8
W_4	3

(continued)

Dimension	Value (mm)
W_5	3.1
W_6	5.5
W_7	4

[0038] By way of example, the different operating frequencies in the present example are within a range of about 900 MHz to 6 GHz, although other frequencies may also be used. The different operating frequencies have different user functions associated therewith. That is, certain of the operating frequencies may be used for one or more of voice communications (i.e., cellular phone calls) and data communications, such as Internet or electronic mail (email) data communication, as will be appreciated by those skilled in the art.

[0039] The operating frequency characteristics associated with the first feed point **45** are illustrated in FIGS. 3-6. More particularly, in the exemplary configuration operation the antenna **33** is tuned to provide operation at 900 MHz, 1800 MHz, and 5 GHz via a selective connection of appropriate wireless RF transceivers **35** to the first feed point **45**. First and second plots **50**, **51** of simulated return loss vs. frequency for first and second simulations are shown in FIG. 3, and a simulated gain vs. frequency plot is shown in FIG. 4. The simulated current distributions across the patch antenna **33** at the above-noted frequencies are shown in FIGS. 5A-5C respectively, while the gain patterns for the frequencies are respectively shown in FIGS. 6A-6C.

[0040] The second feed point **46** is used for an operating frequency of 2.45 GHz. Simulated return loss vs. frequency, simulated gain vs. frequency, simulated current distribution, and simulated antenna radiation patterns associated with using the second feed point **46** at this frequency are shown in FIGS. 7, 8, 9, and 10, respectively. Similar to the first feed point **45**, the third feed point **47** is also used for three operating frequency bands, which are 2.1 GHz, 5.2 GHz, and 5.8 GHz. Simulated return loss vs. frequency, simulated gain vs. frequency, simulated current distribution, and simulated antenna radiation patterns associated with using the third feed point **47** at these frequencies are shown in FIGS. 11, 12, 13A-13C, and 14A-14C, respectively. Furthermore, similar to the second feed point **46**, the fourth feed point **48** is used for one operating frequency of 1.54 GHz. Simulated return loss vs. frequency, simulated gain vs. frequency, simulated current distribution, and simulated antenna radiation patterns associated with using the third feed point **48** at this frequency are shown in FIGS. 15, 16, 17, and 18, respectively.

[0041] Other exemplary components which may be included in the above-described device **30** are now generally discussed with reference to a hand-held mobile wireless communications device **1000** shown in FIG. 19.

The device **1000** illustratively includes a housing **1200**, a keypad **1400** and an output device **1600**. The output device shown is a display **1600**, which is preferably a full graphic LCD. Other types of output devices may alternatively be utilized. A processing device **1800** is contained within the housing **1200** and is coupled between the keypad **1400** and the display **1600**. The processing device **1800** controls the operation of the display **1600**, as well as the overall operation of the mobile device **1000**, in response to actuation of keys on the keypad **1400** by the user.

[0042] The housing **1200** may be elongated vertically, or may take on other sizes and shapes (including clam-shell housing structures). The keypad may include a mode selection key, or other hardware or software for switching between text entry and telephony entry.

[0043] In addition to the processing device **1800**, other parts of the mobile device **1000** are shown schematically in FIG. 19. These include a communications subsystem **1001**; a short-range communications subsystem **1020**; the keypad **1400** and the display **1600**, along with other input/output devices **1060**, **1080**, **1100** and **1120**; as well as memory devices **1160**, **1180** and various other device subsystems **1201**. The mobile device **1000** is preferably a two-way RF communications device having voice and data communications capabilities. In addition, the mobile device **1000** preferably has the capability to communicate with other computer systems via the Internet.

[0044] Operating system software executed by the processing device **1800** is preferably stored in a persistent store, such as the flash memory **1160**, but may be stored in other types of memory devices, such as a read only memory (ROM) or similar storage element. In addition, system software, specific device applications, or parts thereof, may be temporarily loaded into a volatile store, such as the random access memory (RAM) **1180**. Communications signals received by the mobile device may also be stored in the RAM **1180**.

[0045] The processing device **1800**, in addition to its operating system functions, enables execution of software applications **1300A-1300N** on the device **1000**. A predetermined set of applications that control basic device operations, such as data and voice communications **1300A** and **1300B**, may be installed on the device **1000** during manufacture. In addition, a personal information manager (PIM) application may be installed during manufacture. The PIM is preferably capable of organizing and managing data items, such as e-mail, calendar events, voice mails, appointments, and task items. The PIM application is also preferably capable of sending and receiving data items via a wireless network **1401**. Preferably, the PIM data items are seamlessly integrated, synchronized and updated via the wireless network **1401** with the device user's corresponding data items stored or associated with a host computer system.

[0046] Communication functions, including data and voice communications, are performed through the communications subsystem **1001**, and possibly through the

short-range communications subsystem. The communications subsystem **1001** includes a receiver **1500**, a transmitter **1520**, and one or more antennas **1540** and **1560**. In addition, the communications subsystem **1001** also includes a processing module, such as a digital signal processor (DSP) **1580**, and local oscillators (LOs) **1601**. The specific design and implementation of the communications subsystem **1001** is dependent upon the communications network in which the mobile device **1000** is intended to operate. For example, a mobile device **1000** may include a communications subsystem **1001** designed to operate with the Mobitex™, Data TAC™ or General Packet Radio Service (GPRS) mobile data communications networks, and also designed to operate with any of a variety of voice communications networks, such as AMPS, TDMA, CDMA, WCDMA, PCS, GSM, EDGE, etc. Other types of data and voice networks, both separate and integrated, may also be utilized with the mobile device **1000**. The mobile device **1000** may also be compliant with other communications standards such as 3GSM, 3GPP, UMTS, etc.

[0047] Network access requirements vary depending upon the type of communication system. For example, in the Mobitex and DataTAC networks, mobile devices are registered on the network using a unique personal identification number or PIN associated with each device. In GPRS networks, however, network access is associated with a subscriber or user of a device. A GPRS device therefore requires a subscriber identity module, commonly referred to as a SIM card, in order to operate on a GPRS network.

[0048] When required network registration or activation procedures have been completed, the mobile device **1000** may send and receive communications signals over the communication network **1401**. Signals received from the communications network **1401** by the antenna **1540** are routed to the receiver **1500**, which provides for signal amplification, frequency down conversion, filtering, channel selection, etc., and may also provide analog to digital conversion. Analog-to-digital conversion of the received signal allows the DSP **1580** to perform more complex communications functions, such as demodulation and decoding. In a similar manner, signals to be transmitted to the network **1401** are processed (e.g. modulated and encoded) by the DSP **1580** and are then provided to the transmitter **1520** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission to the communication network **1401** (or networks) via the antenna **1560**.

[0049] In addition to processing communications signals, the DSP **1580** provides for control of the receiver **1500** and the transmitter **1520**. For example, gains applied to communications signals in the receiver **1500** and transmitter **1520** may be adaptively controlled through automatic gain control algorithms implemented in the DSP **1580**.

[0050] In a data communications mode, a received signal, such as a text message or web page download, is

processed by the communications subsystem **1001** and is input to the processing device **1800**. The received signal is then further processed by the processing device **1800** for an output to the display **1600**, or alternatively to some other auxiliary I/O device **1060**. A device user may also compose data items, such as e-mail messages, using the keypad **1400** and/or some other auxiliary I/O device **1060**, such as a touchpad, a rocker switch, a thumb-wheel, or some other type of input device. The composed data items may then be transmitted over the communications network **1401** via the communications subsystem **1001**.

[0051] In a voice communications mode, overall operation of the device is substantially similar to the data communications mode, except that received signals are output to a speaker **1100**, and signals for transmission are generated by a microphone **1120**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on the device **1000**. In addition, the display **1600** may also be utilized in voice communications mode, for example to display the identity of a calling party, the duration of a voice call, or other voice call related information.

[0052] The short-range communications subsystem enables communication between the mobile device **1000** and other proximate systems or devices, which need not necessarily be similar devices. For example, the short-range communications subsystem may include an infrared device and associated circuits and components, or a Bluetooth™ communications module to provide for communication with similarly-enabled systems and devices.

[0053] Many modifications and other embodiments will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that various modifications and embodiments are intended to be included within the scope of the appended claims.

Claims

1. A mobile wireless communications device comprising:

a housing;
 a common antenna carried by said housing and having a plurality of spaced apart signal feed points thereon;
 a plurality of wireless radio frequency (RF) transceivers carried by said housing and coupled to respective ones of the signal feed points of said common antenna, each wireless RF transceiver also having a respective different operating frequency associated therewith; and
 a controller selectively operating at least some of the wireless RF transceivers to use said com-

mon antenna at a same time.

2. The mobile wireless communications device of Claim 1 further comprising a dielectric substrate carried within said housing; and wherein said common antenna comprises at least one conductive trace on said dielectric substrate.
3. The mobile wireless communications device of Claim 1 wherein said common antenna also has a reference voltage point.
4. The mobile wireless communications device of Claim 1 wherein said common antenna comprises a patch antenna having at least one slot therein.
5. The mobile wireless communications device of Claim 4 wherein said patch antenna has a generally rectangular perimeter.
6. The mobile wireless communications device of Claim 4 wherein the at least one slot comprises a plurality of slots defining an exterior common antenna portion and an interior common antenna portion therein.
7. The mobile wireless communications device of Claim 6 wherein at least one of the signal feed points is on the interior common antenna portion.
8. The mobile wireless communications device of Claim 6 wherein at least one of the signal feed points is on the exterior common antenna portion.
9. The mobile wireless communications device of Claim 1 wherein at least one of said wireless RF transceivers comprises a cellular transceiver.
10. The mobile wireless communications device of Claim 1 wherein the different operating frequencies are within a range of about 900 MHz to 6 GHz.
11. The mobile wireless communications device of Claim 1 wherein the different operating frequencies have different user functions associated therewith.
12. The mobile wireless communications device of Claim 11 wherein the different user functions comprise at least one of voice communication, email reception, email transmission, data reception, and data transmission.
13. A method for making a mobile wireless communications device comprising:

providing a housing with a common antenna carried thereby, the common antenna having a plurality of spaced apart signal feed points thereon;

coupling a plurality of wireless radio frequency (RF) transceivers also carried by the housing to respective ones of the signal feed points of the common antenna, each wireless RF transceiver also having a respective different operating frequency associated therewith; and
 coupling a controller to the plurality of wireless RF transceivers to selectively operate at least some of the wireless RF transceivers to use the common antenna at a same time.

14. The method of Claim 13 wherein the common antenna comprises at least one conductive trace.
15. The method of Claim 13 wherein the common antenna also has a reference voltage point.
16. The method of Claim 13 wherein the common antenna comprises a patch antenna having at least one slot therein.
17. The method of Claim 16 wherein the at least one slot comprises a plurality of slots defining an exterior common antenna portion and an interior common antenna portion therein.
18. The method of Claim 16 wherein at least one of the signal feed points is on the interior common antenna portion, and at least one of the signal feed points is on the exterior common antenna portion.
19. The method of Claim 13 wherein at least one of the wireless RF transceivers comprises a cellular transceiver.

Amended claims in accordance with Rule 137(2) EPC.

1. A mobile wireless communications device (30) comprising:
 a housing (32);
 a common antenna (33) carried by said housing (32) and comprising an electrical conductor defining a patch antenna having at least one slot (40, 41) therein and having a plurality of spaced-apart signal feed points (34a-34n);
 a plurality of wireless radio frequency "RF" transceivers (35a-35n) carried by said housing (32) and coupled to respective ones of the signal feed points (34a-34n) of said common antenna (33), each wireless RF transceiver (35a-35n) also having a respective different operating frequency associated therewith; and,
 a controller (36) selectively operating at least some of the wireless RF transceivers (35a-35n) to use said common antenna (33) at the same

time.

2. The mobile wireless communications device (30) of Claim 1, further comprising a dielectric substrate (37) carried within said housing (32); and wherein said common antenna (33) comprises at least one conductive trace on said dielectric substrate (37).
3. The mobile wireless communications device (30) of Claim 1, wherein said common antenna (33) also has a reference voltage point (44).
4. The mobile wireless communications device (30) of Claim 1, wherein said patch antenna has a generally rectangular perimeter.
5. The mobile wireless communications device (30) of Claim 1, wherein the at least one slot comprises a plurality of slots (40, 41) defining an exterior common antenna portion (42) and an interior common antenna portion (43) therein.
6. The mobile wireless communications device (30) of Claim 5, wherein at least one of the signal feed points (34a-34n) is on the interior common antenna portion (43).
7. The mobile wireless communications device (30) of Claim 5, wherein at least one of the signal feed points (34a-34n) is on the exterior common antenna portion (42).
8. The mobile wireless communications device (30) of Claim 1, wherein at least one of said wireless RF transceivers (35a-35n) comprises a cellular transceiver.
9. The mobile wireless communications device (30) of Claim 1, wherein the different operating frequencies are within a range of about 900 MHz to 6 GHz.
10. The mobile wireless communications device (30) of Claim 1, wherein the different operating frequencies have different user functions associated therewith.
11. The mobile wireless communications device (30) of Claim 10, wherein the different user functions comprise at least one of voice communication, email reception, email transmission, data reception, and data transmission.
12. A method for making a mobile wireless communications device (30), the method comprising:
 providing a housing (32) with a common antenna carried thereby, the common antenna (33) comprising an electrical conductor defining a patch

antenna having at least one slot (40, 41) therein
and having a plurality of spaced-apart signal
feed points (34a-34n);
coupling a plurality of wireless radio frequency
(RF) transceivers (35a-35n) also carried by the 5
housing (32) to respective ones of the signal
feed points (34a-34n) of the common antenna,
each wireless RF transceiver (35a-35n) also
having a respective different operating frequen- 10
cy associated therewith; and,
coupling a controller (36) to the plurality of wire-
less RF transceivers (35a-35n) to selectively op-
erate at least some of the wireless RF transceiv-
ers (35a-35n) to use the common antenna (33)
at the same time. 15

13. The method of Claim 12, wherein the common
antenna (33) comprises at least one conductive
trace. 20

14. The method of Claim 12, wherein the common
antenna (33) also has a reference voltage point (44).

15. The method of Claim 12, wherein the at least
one slot comprises a plurality of slots defining an 25
exterior common antenna portion (42) and an interior
common antenna portion therein (43).

16. The method of Claim 15, wherein at least one of
the signal feed points (34a-34n) is on the interior 30
common antenna portion (42), and at least one of
the signal feed points (34a-34n) is on the exterior
common antenna portion (43).

17. The method of Claim 12, wherein at least one of 35
the wireless RF transceivers (35a-35n) comprises a
cellular transceiver.

40

45

50

55

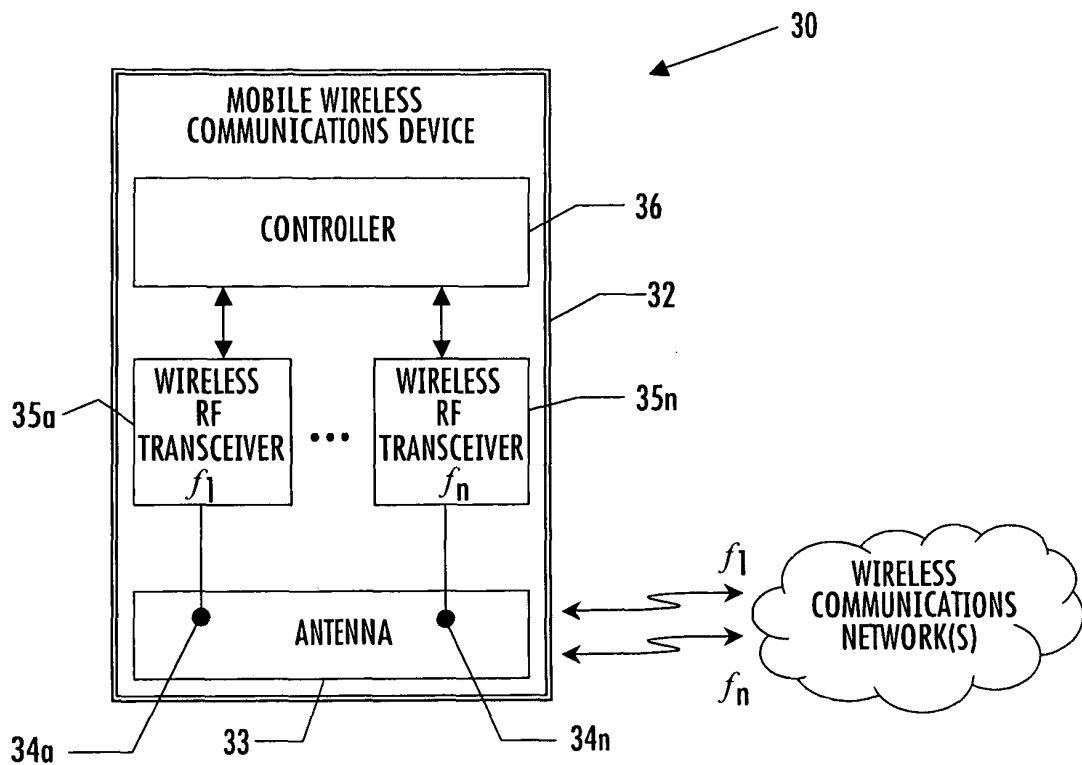


FIG. 1

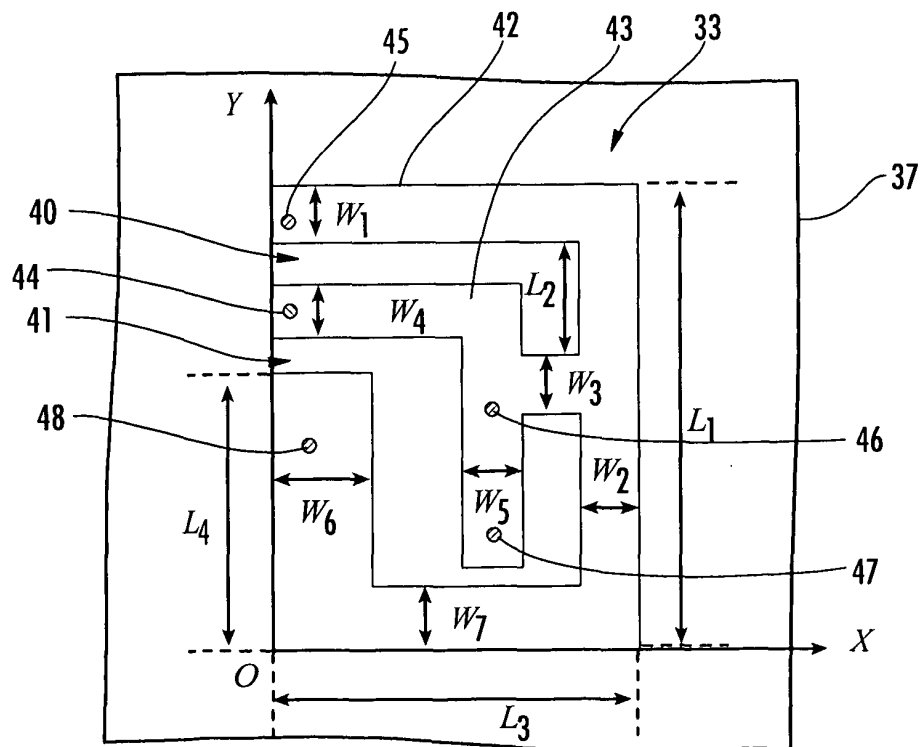


FIG. 2

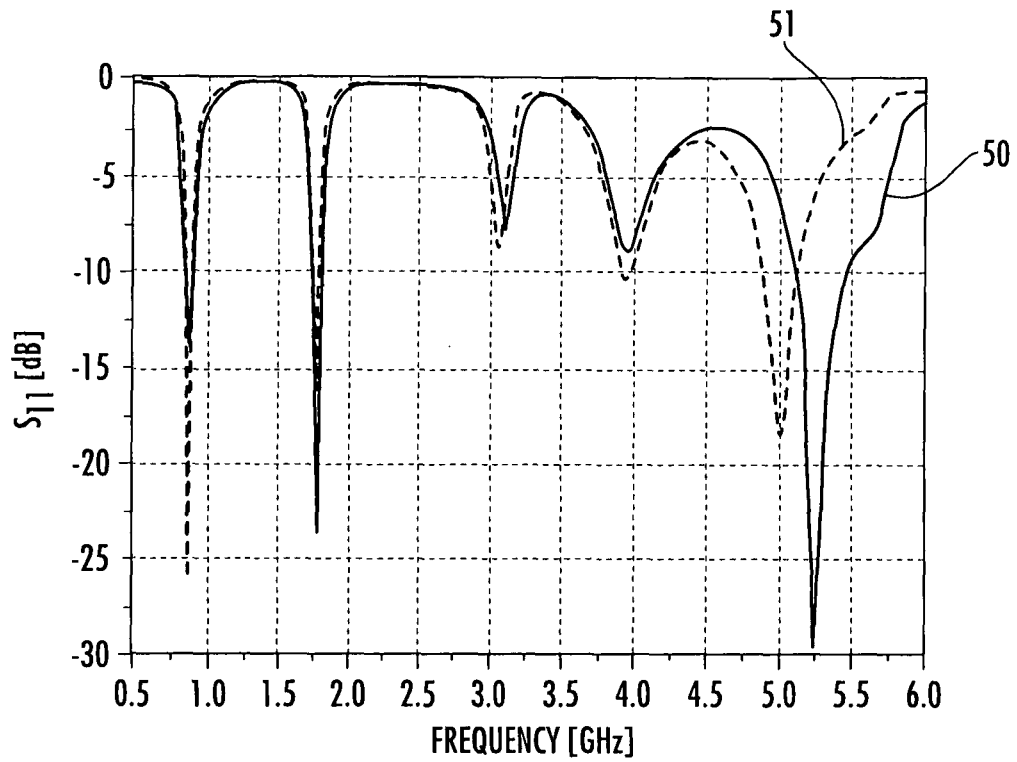


FIG. 3

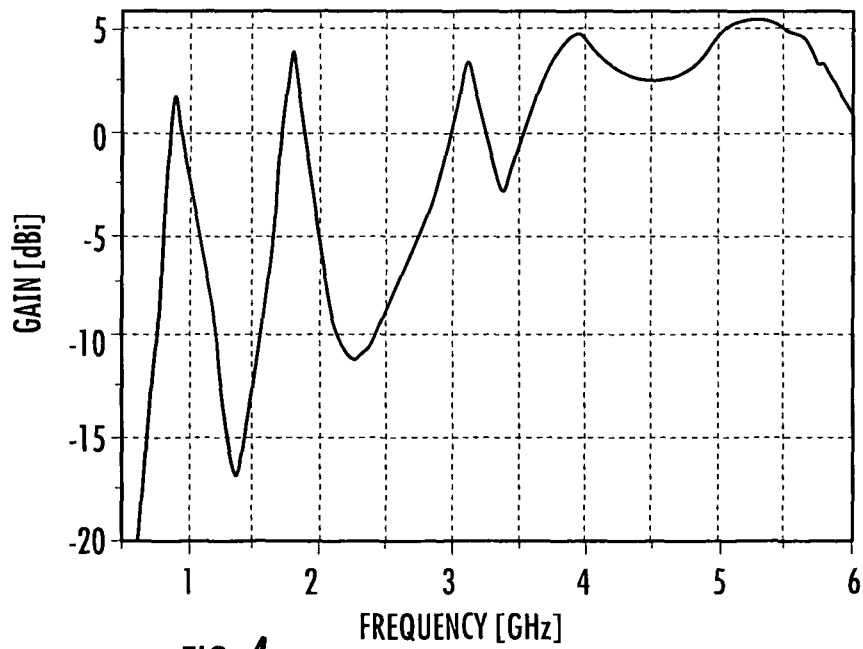


FIG. 4

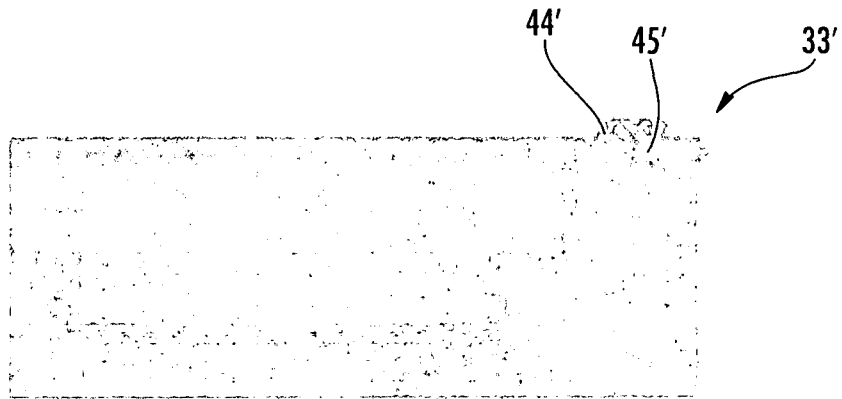


FIG. 5A

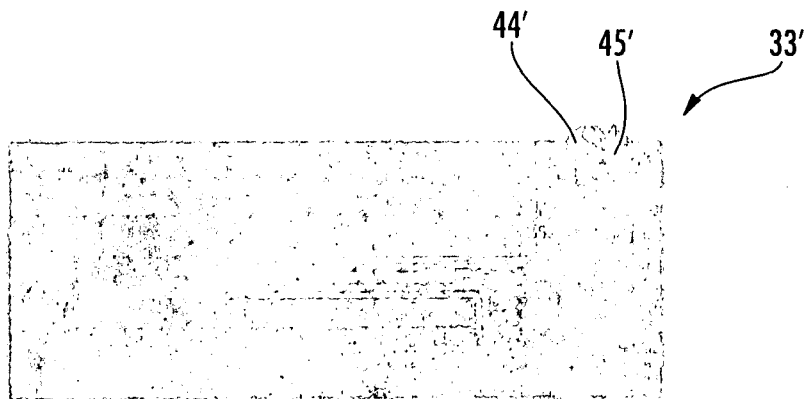


FIG. 5B

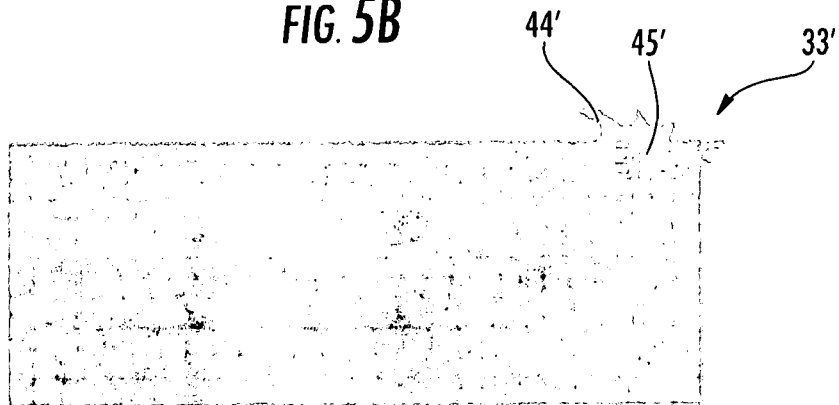


FIG. 5C




FIG. 6A




FIG. 6B




FIG. 6C

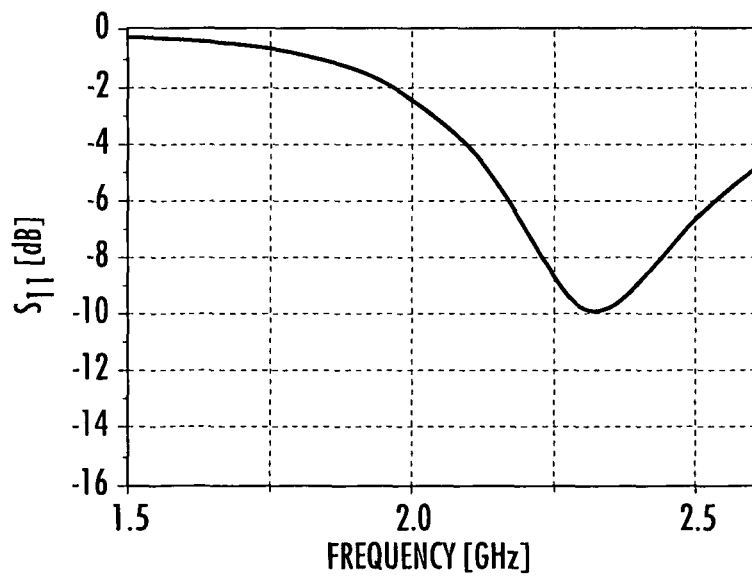


FIG. 7

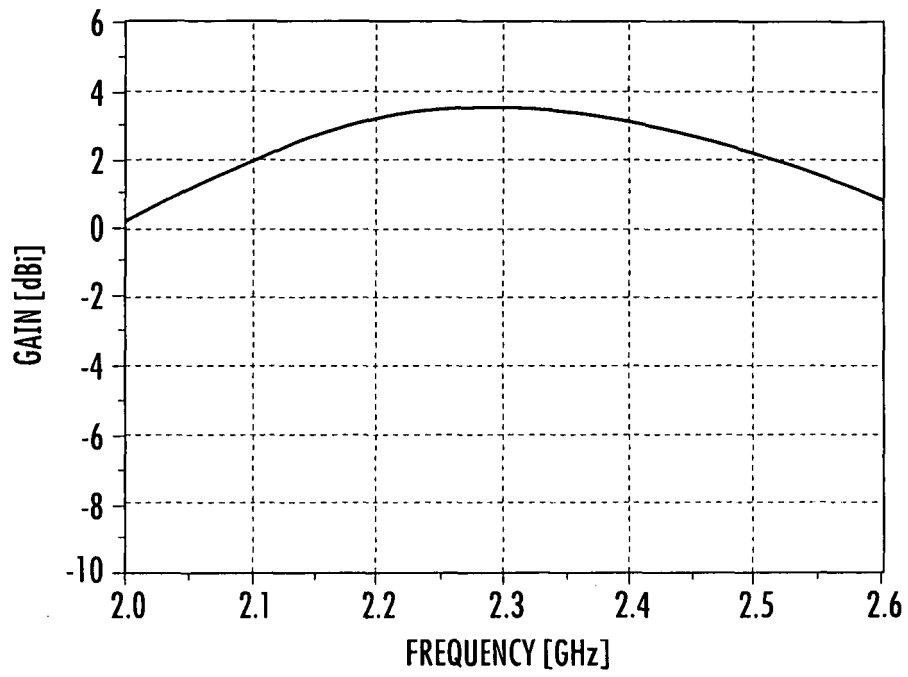


FIG. 8

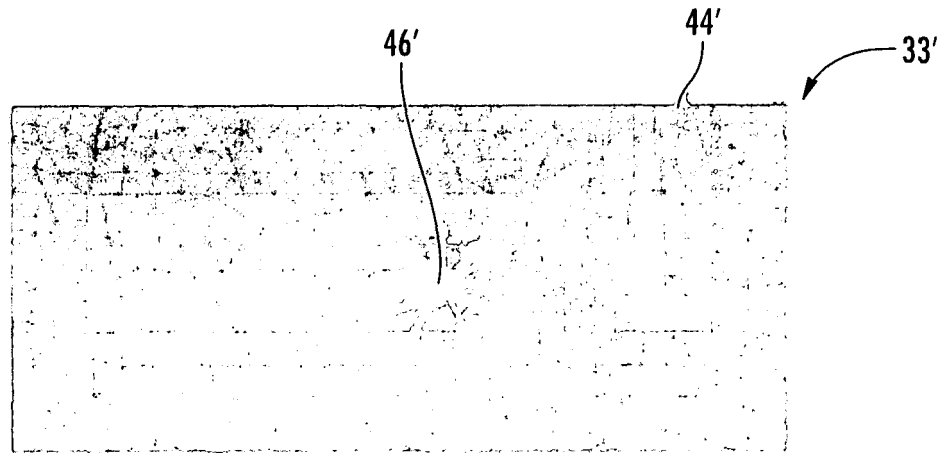


FIG. 9

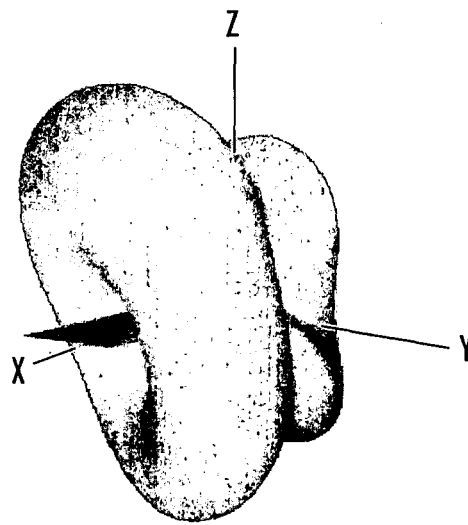


FIG. 10

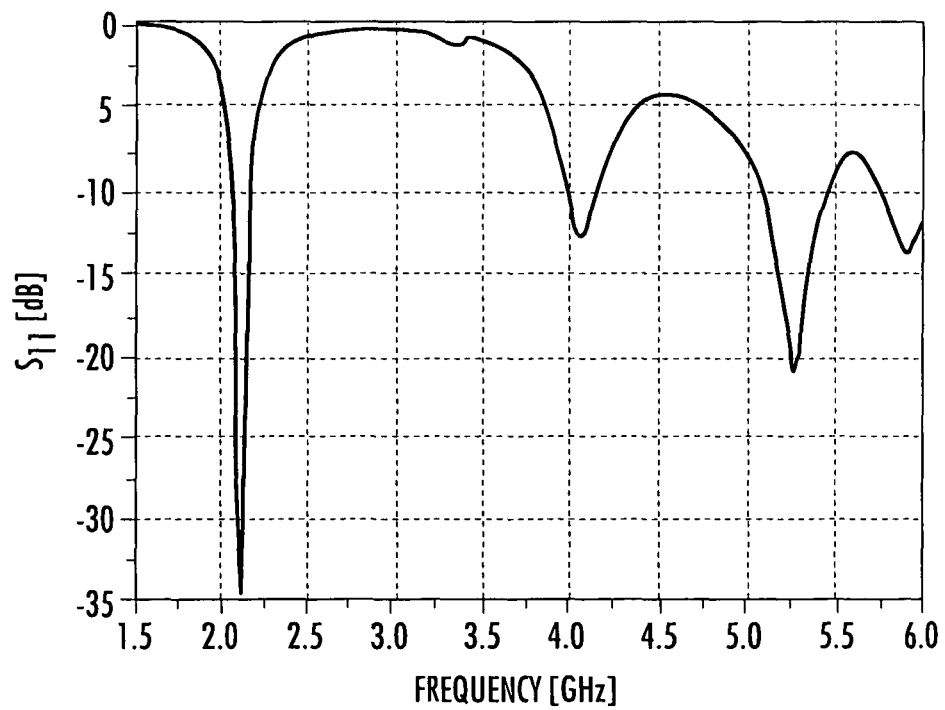


FIG. 11

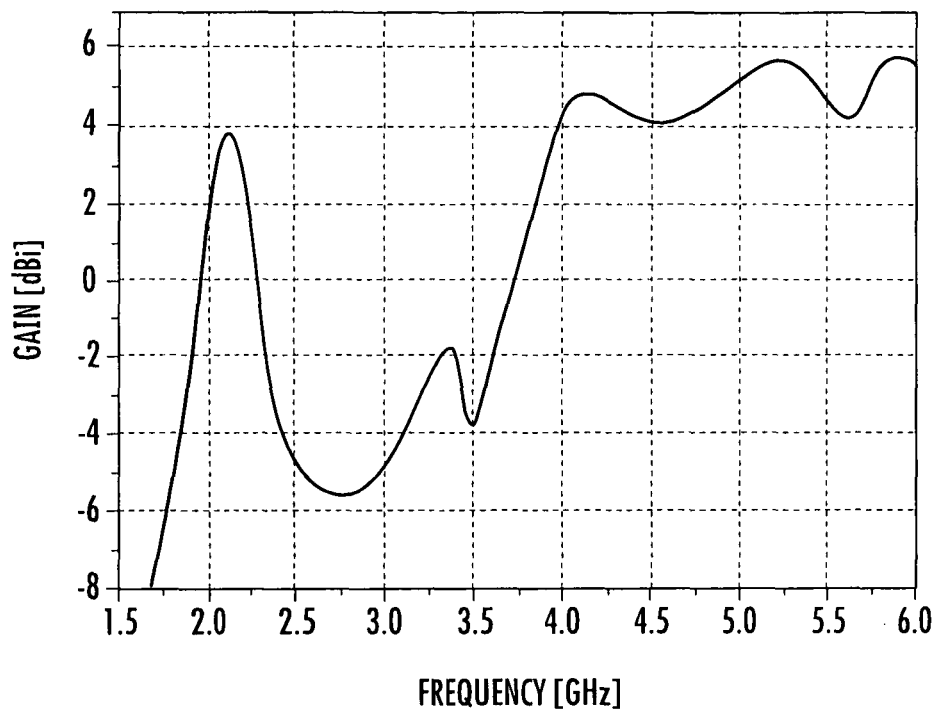


FIG. 12

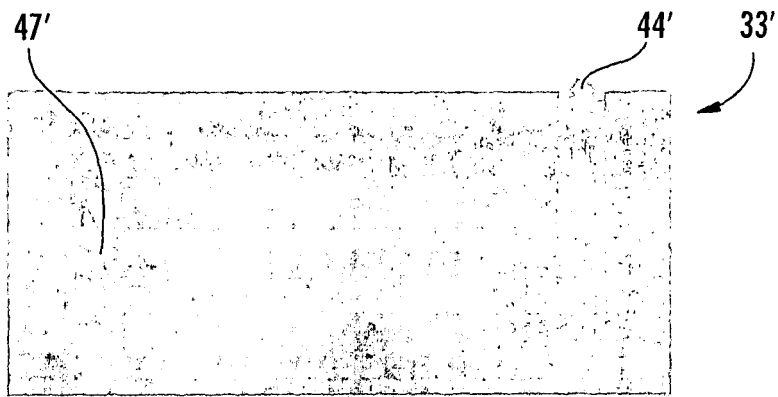


FIG. 13A

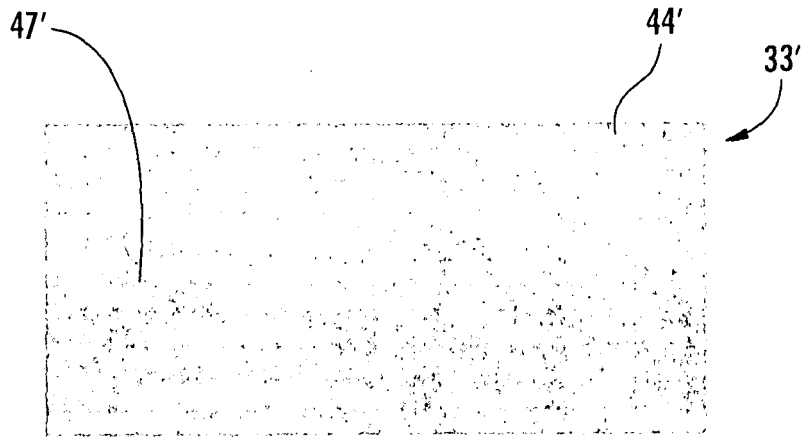


FIG. 13B

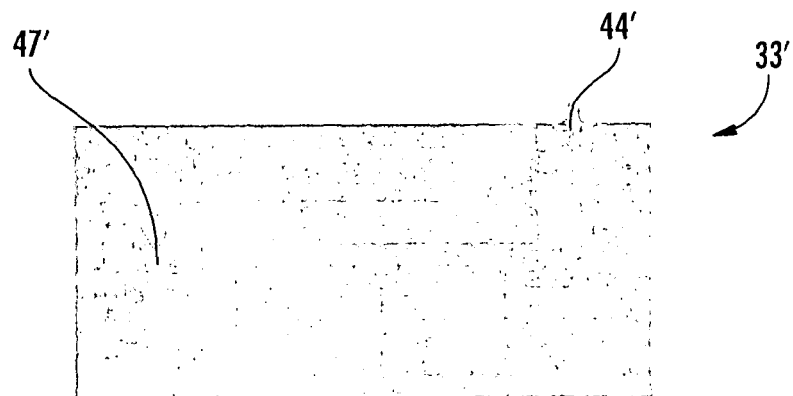


FIG. 13C




FIG. 14A




FIG. 14B




FIG. 14C

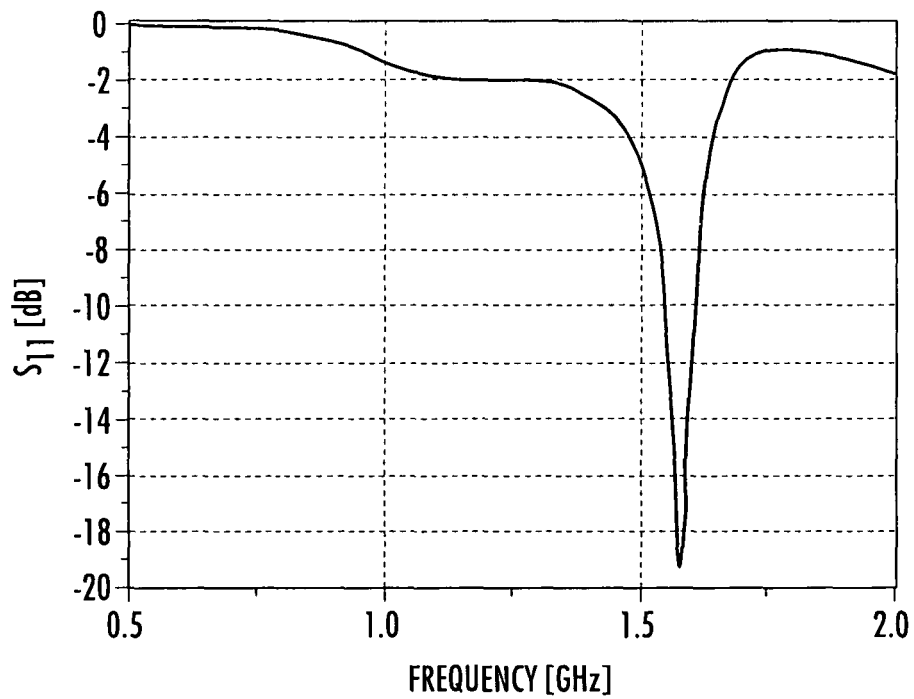


FIG. 15

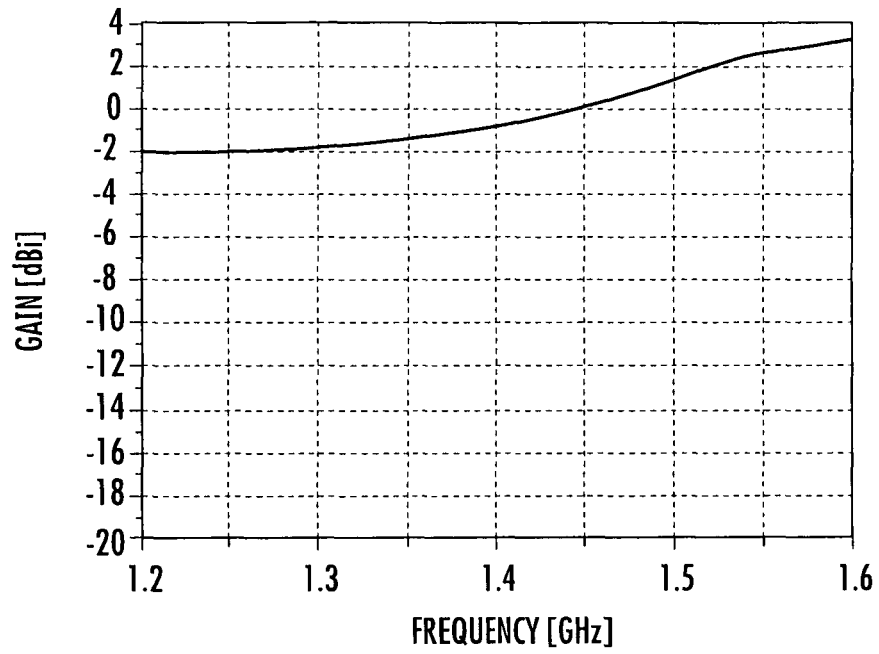


FIG. 16

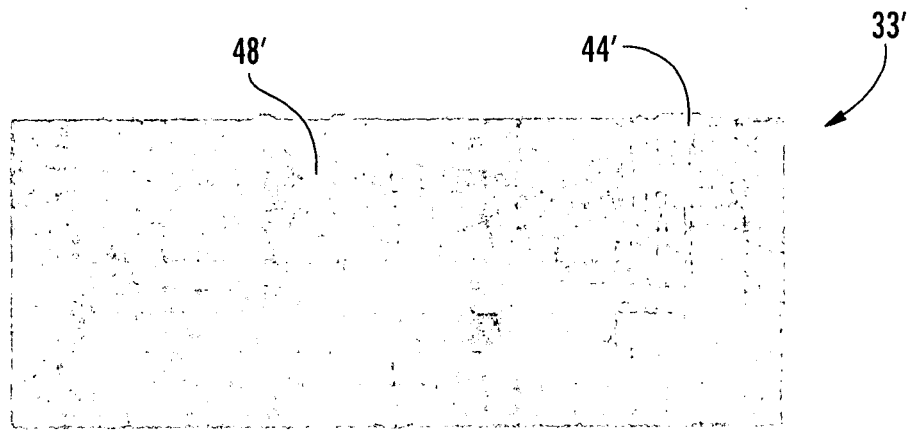


FIG. 17

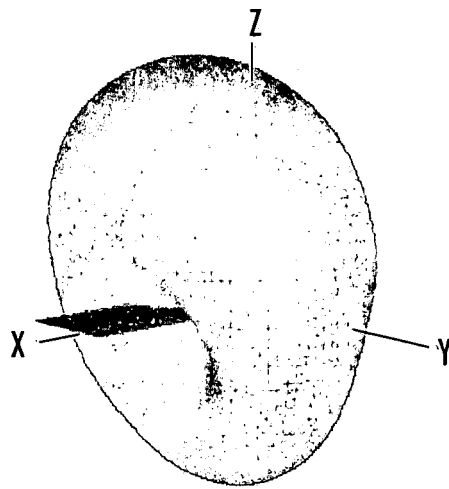


FIG. 18

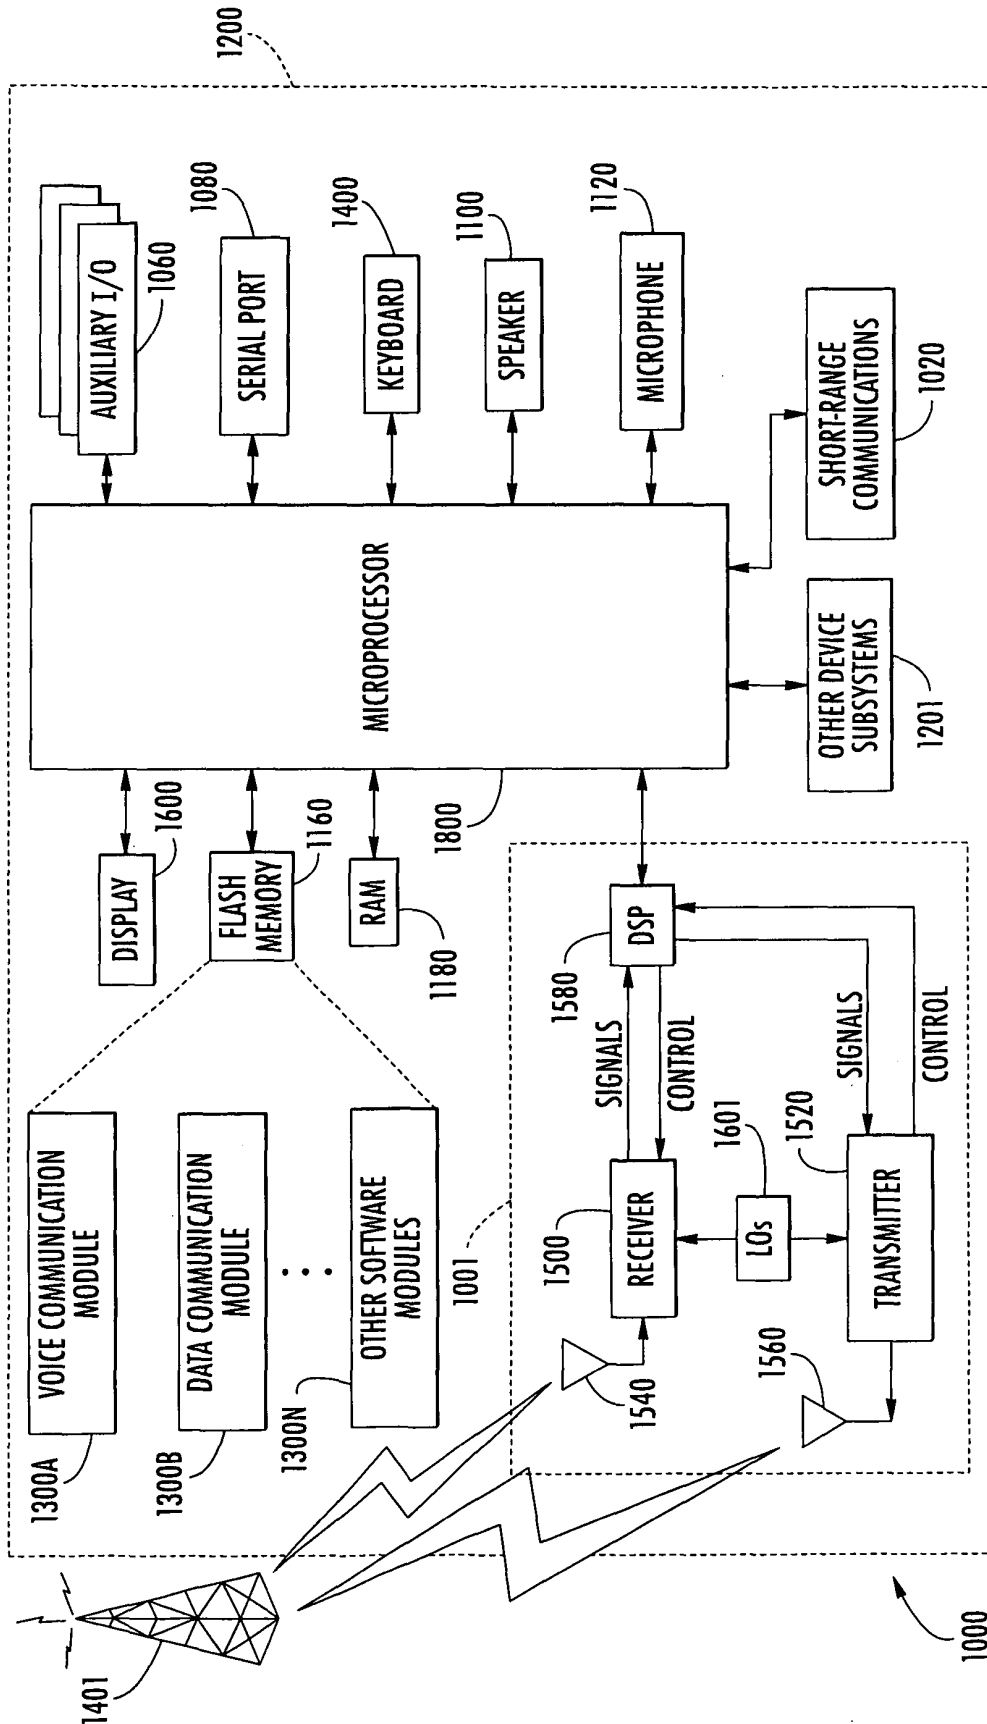


FIG. 19



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 12 2710

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X A	WO 02/078123 A (ERICSSON TELEFON AB L M [SE]; BOLIN THOMAS [SE]; YING ZHINONG [CN]; AN) 3 October 2002 (2002-10-03) * page 3, line 12 - page 4, line 26 * * figure 1 *	1-6, 9-17,19 7,8,18	INV. H01Q5/00 H01Q1/24 H01Q9/04 H01Q13/10
X	US 5 241 321 A1 (TSAO CHICH-HSING A [US]) 31 August 1993 (1993-08-31) * column 4, line 8 - column 6, line 47 * * figure 2 *	1,2,11	
A	WO 03/094346 A (KONINKL PHILIPS ELECTRONICS NV [NL]; BOYLE KEVIN R [GB]) 13 November 2003 (2003-11-13) * page 5, line 17 - page 8, line 22 * * figures 1,2 *	1-19	
A	EP 1 398 875 A (FILTRONIC LK OY [FI]) 17 March 2004 (2004-03-17) * column 5, line 47 - column 7, line 1 * * figure 5 *	1-19	
A	EP 1 498 984 A1 (NOKIA CORP [FI]) 19 January 2005 (2005-01-19) * paragraphs [0017] - [0019] * * paragraphs [0027] - [0031] * * figures 1,2,7 *	1-19	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC) H01Q
Place of search Munich		Date of completion of the search 19 March 2007	Examiner Kruck, Peter
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 12 2710

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-03-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 02078123	A	03-10-2002	EP 1378021 A1	07-01-2004
US 5241321	A1		NONE	
WO 03094346	A	13-11-2003	AU 2003219448 A1	17-11-2003
			CN 1650518 A	03-08-2005
			EP 1508199 A1	23-02-2005
			JP 2005524326 T	11-08-2005
			US 2005181847 A1	18-08-2005
EP 1398875	A	17-03-2004	CN 1496167 A	12-05-2004
			FI 20021630 A	13-03-2004
			US 2004053635 A1	18-03-2004
EP 1498984	A1	19-01-2005	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6662028 B, Hayes [0005]