US 20050233737A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0233737 A1**

Lin (43) **Pub. Date: Oct. 20, 2005**

(54) **MOBILE INSTANT MESSAGING CONFERENCING METHOD AND SYSTEM**

(76) Inventor: **Daniel J. Lin**, San Francisco, CA (US)

Correspondence Address:
MOSER, PATTERSON & SHERIDAN, L.L.P.
3040 POST OAK BOULEVARD
SUITE 1500
HOUSTON, TX 77056 (US)

(21) Appl. No.: **11/091,242**

(22) Filed: **Mar. 28, 2005**

Related U.S. Application Data

(63) Continuation-in-part of application No. 10/817,994, filed on Apr. 5, 2004.

Continuation-in-part of application No. 10/935,342, filed on Sep. 7, 2004.

Continuation-in-part of application No. 11/042,620, filed on Jan. 24, 2005.

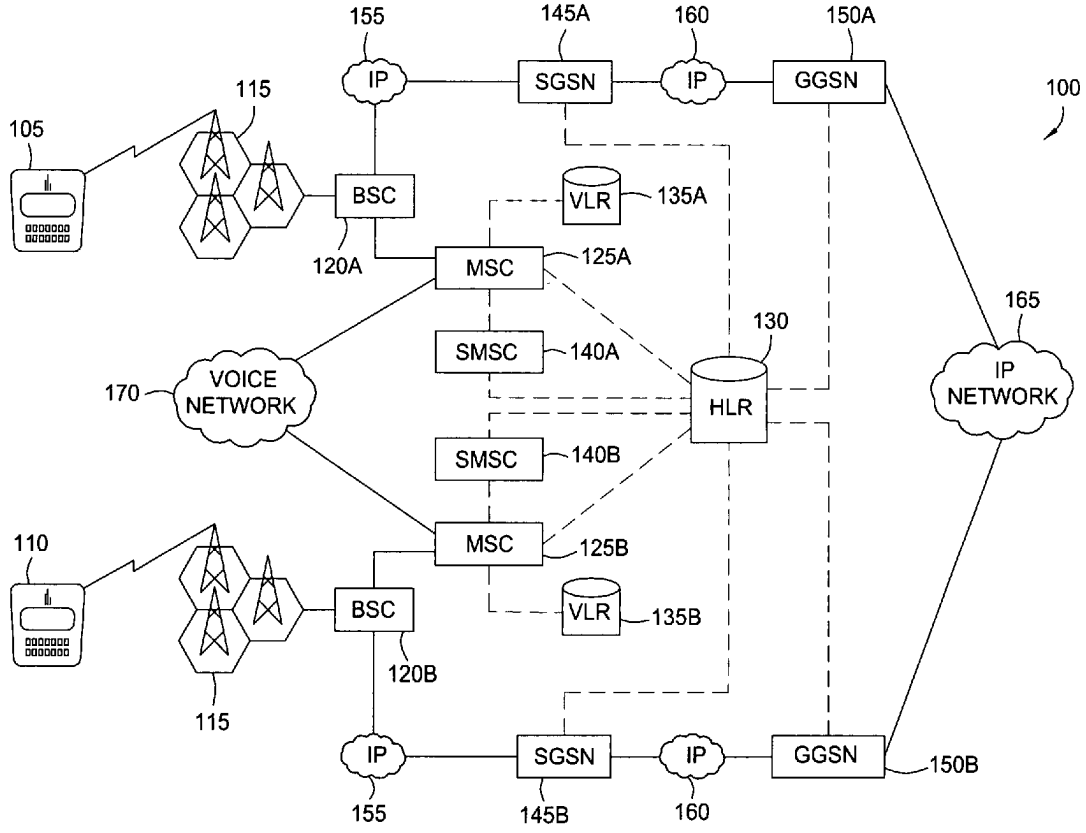
Publication Classification

(51) **Int. Cl.**[7] **H04M 3/42**

(52) **U.S. Cl.** **455/416**

(57) **ABSTRACT**

A server-based architecture for instant messaging conferencing is presented. Session-based instant messaging conferencing is established by transmitting necessary server network address information through page-mode based messaging services to establish connections among the various mobile devices with the server.



APPLE 1041

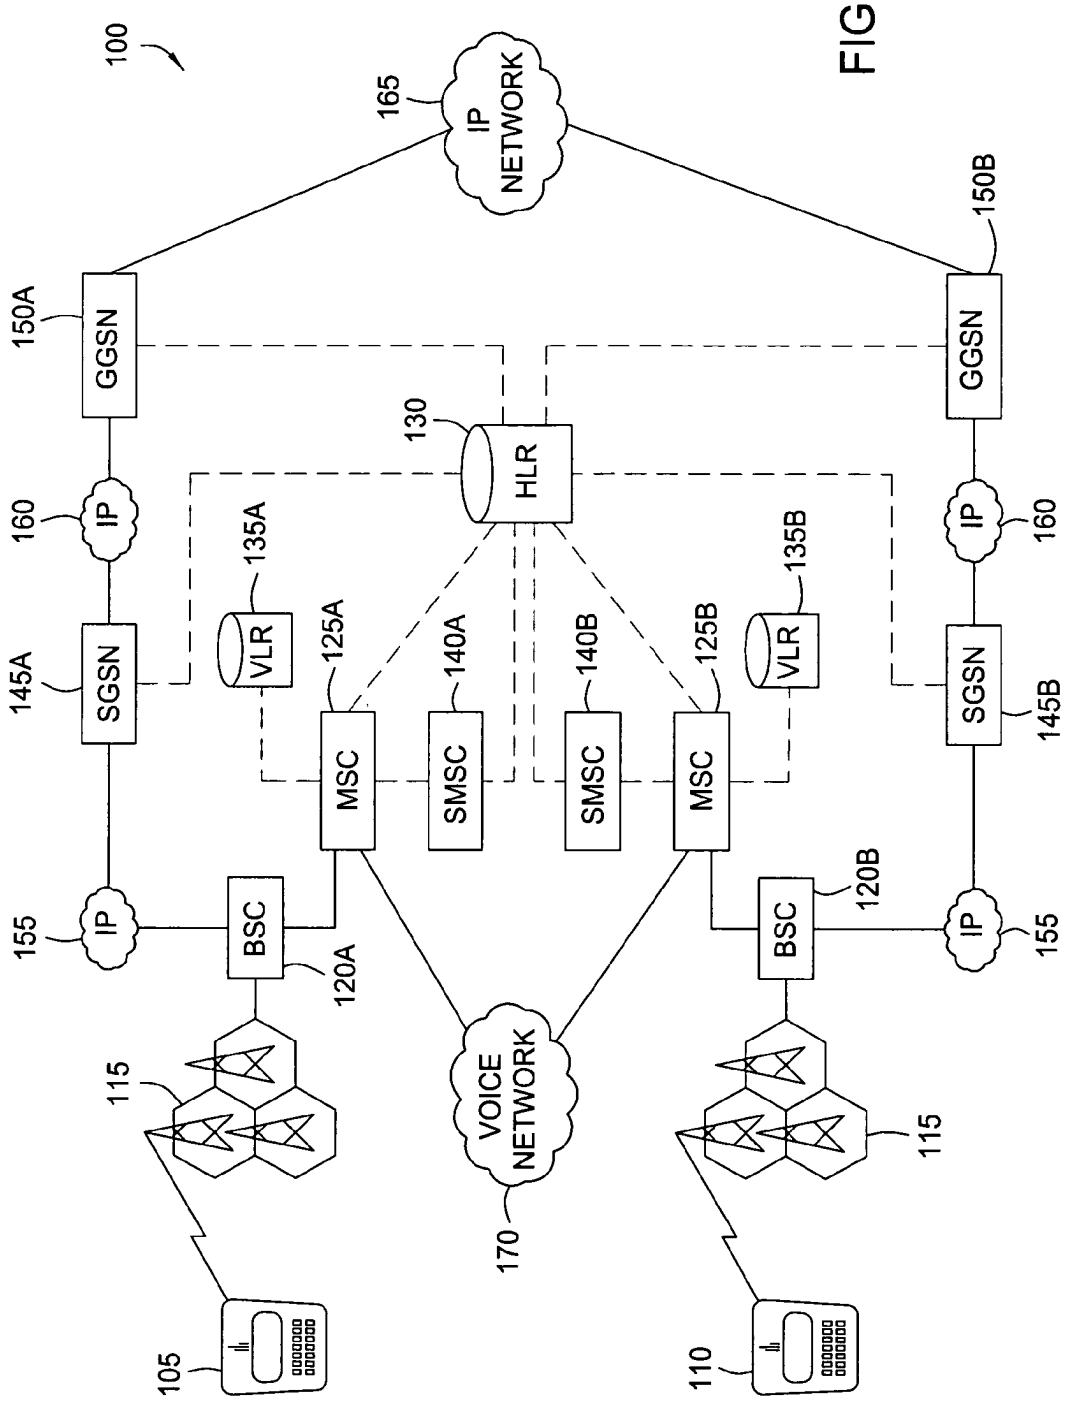

100
165
IP NETWORK
150A
GGSN
150B
GGSN
130
HLR
160
IP
160
IP
135A
VLR
135B
VLR
145A
SGSN
125A
140A
140B
125B
SGSN
145B
MSC
SMSC
SMSC
MSC
155
IP
BSC
120A
120B
BSC
IP
155
115
VOICE NETWORK
115
170
105
110

FIG. 1

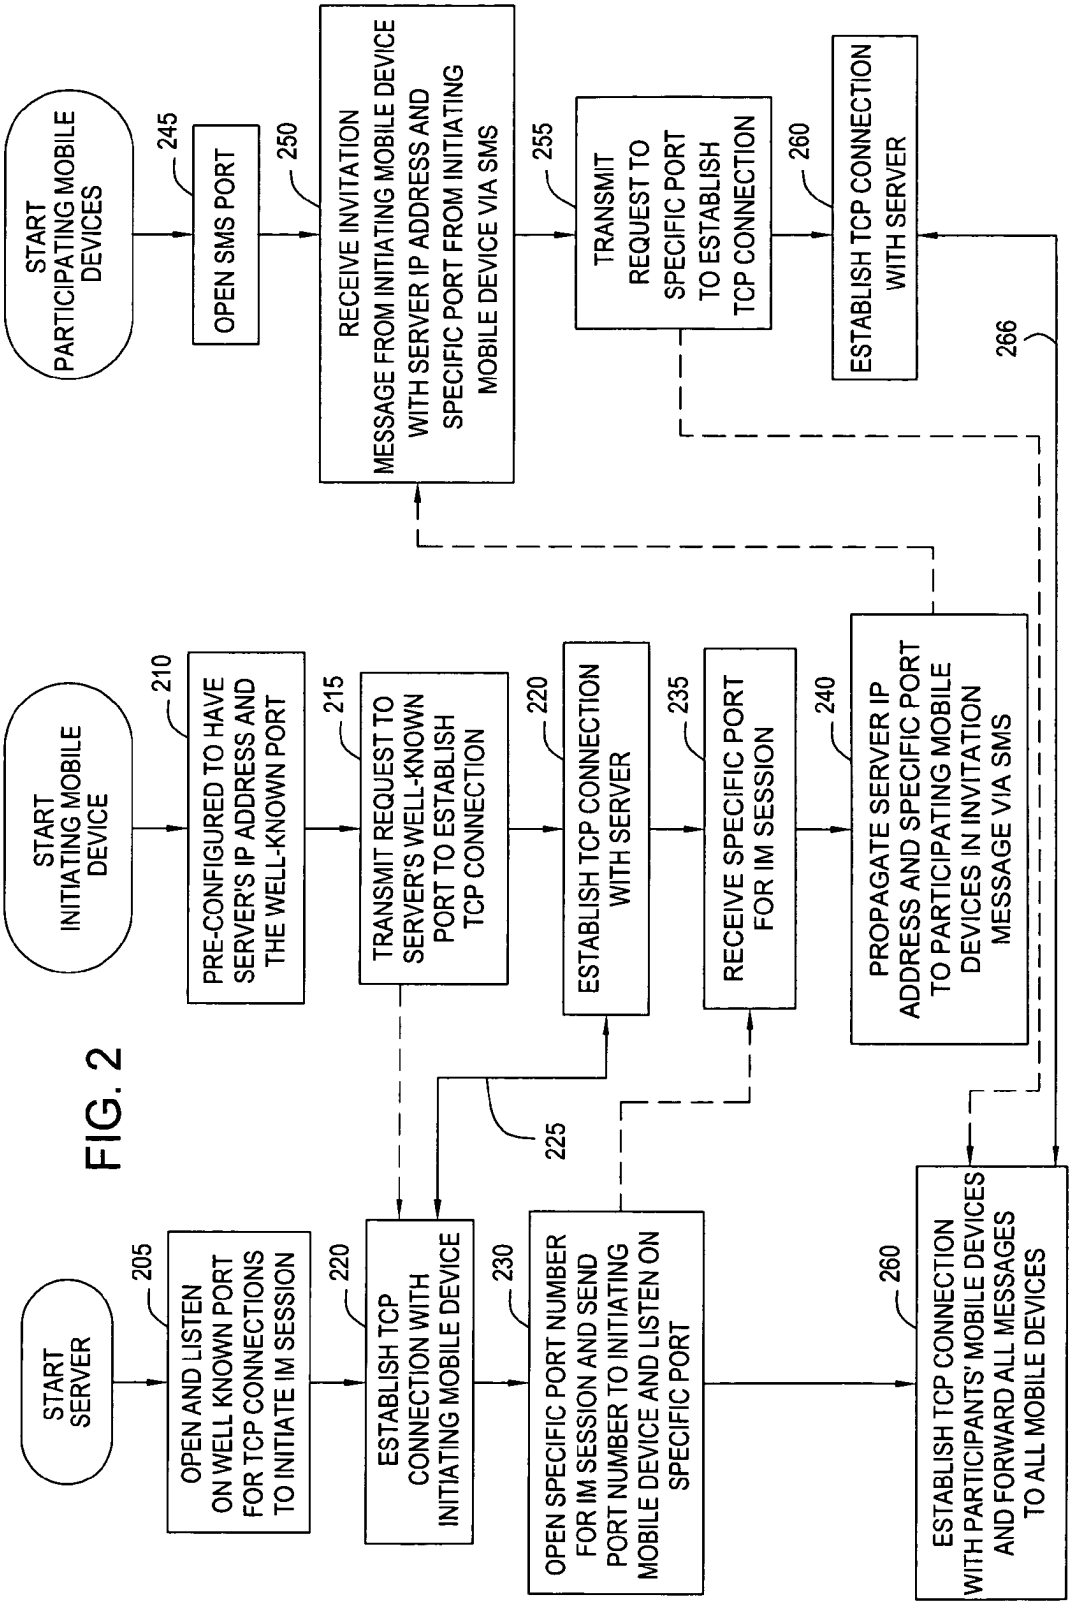

START SERVER
205
OPEN AND LISTEN ON WELL KNOWN PORT FOR TCP CONNECTIONS TO INITIATE IM SESSION
220
ESTABLISH TCP CONNECTION WITH INITIATING MOBILE DEVICE
230
OPEN SPECIFIC PORT NUMBER FOR IM SESSION AND SEND PORT NUMBER TO INITIATING MOBILE DEVICE AND LISTEN ON SPECIFIC PORT
260
ESTABLISH TCP CONNECTION WITH PARTICIPANTS' MOBILE DEVICES AND FORWARD ALL MESSAGES TO ALL MOBILE DEVICES
START INITIATING MOBILE DEVICE
210
PRE-CONFIGURED TO HAVE SERVER'S IP ADDRESS AND THE WELL-KNOWN PORT
215
TRANSMIT REQUEST TO SERVER'S WELL-KNOWN PORT TO ESTABLISH TCP CONNECTION
220
ESTABLISH TCP CONNECTION WITH SERVER
235
RECEIVE SPECIFIC PORT FOR IM SESSION
240
PROPAGATE SERVER IP ADDRESS AND SPECIFIC PORT TO PARTICIPATING MOBILE DEVICES IN INVITATION MESSAGE VIA SMS
225
START PARTICIPATING MOBILE DEVICES
245
OPEN SMS PORT
250
RECEIVE INVITATION MESSAGE FROM INITIATING MOBILE DEVICE WITH SERVER IP ADDRESS AND SPECIFIC PORT FROM INITIATING MOBILE DEVICE VIA SMS
255
TRANSMIT REQUEST TO SPECIFIC PORT TO ESTABLISH TCP CONNECTION
260
ESTABLISH TCP CONNECTION WITH SERVER
266

FIG. 2

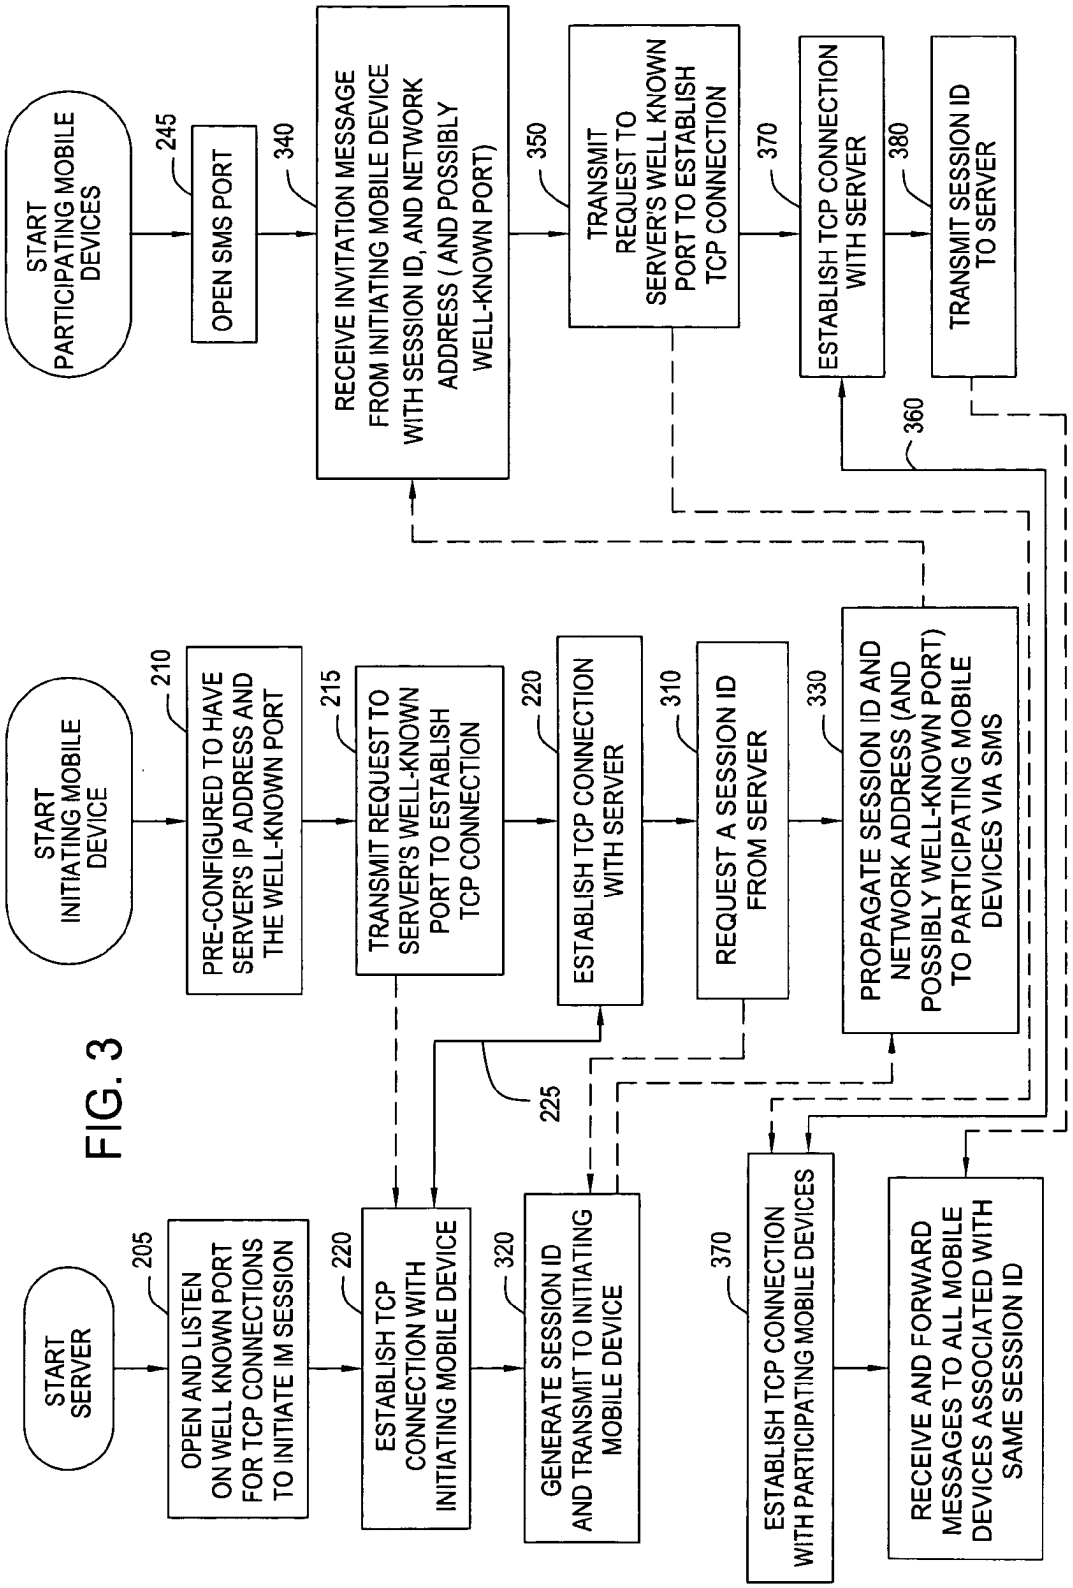

START SERVER
205
OPEN AND LISTEN ON WELL KNOWN PORT FOR TCP CONNECTIONS TO INITIATE IM SESSION
220
ESTABLISH TCP CONNECTION WITH INITIATING MOBILE DEVICE
320
GENERATE SESSION ID AND TRANSMIT TO INITIATING MOBILE DEVICE
225
370
ESTABLISH TCP CONNECTION WITH PARTICIPATING MOBILE DEVICES
RECEIVE AND FORWARD MESSAGES TO ALL MOBILE DEVICES ASSOCIATED WITH SAME SESSION ID
START INITIATING MOBILE DEVICE
210
PRE-CONFIGURED TO HAVE SERVER'S IP ADDRESS AND THE WELL-KNOWN PORT
215
TRANSMIT REQUEST TO SERVER'S WELL-KNOWN PORT TO ESTABLISH TCP CONNECTION
220
ESTABLISH TCP CONNECTION WITH SERVER
310
REQUEST A SESSION ID FROM SERVER
330
PROPAGATE SESSION ID AND NETWORK ADDRESS (AND POSSIBLY WELL-KNOWN PORT) TO PARTICIPATING MOBILE DEVICES VIA SMS
360
START PARTICIPATING MOBILE DEVICES
245
OPEN SMS PORT
340
RECEIVE INVITATION MESSAGE FROM INITIATING MOBILE DEVICE WITH SESSION ID, AND NETWORK ADDRESS (AND POSSIBLY WELL-KNOWN PORT)
350
TRANSMIT REQUEST TO SERVER'S WELL KNOWN PORT TO ESTABLISH TCP CONNECTION
370
ESTABLISH TCP CONNECTION WITH SERVER
380
TRANSMIT SESSION ID TO SERVER

FIG. 3

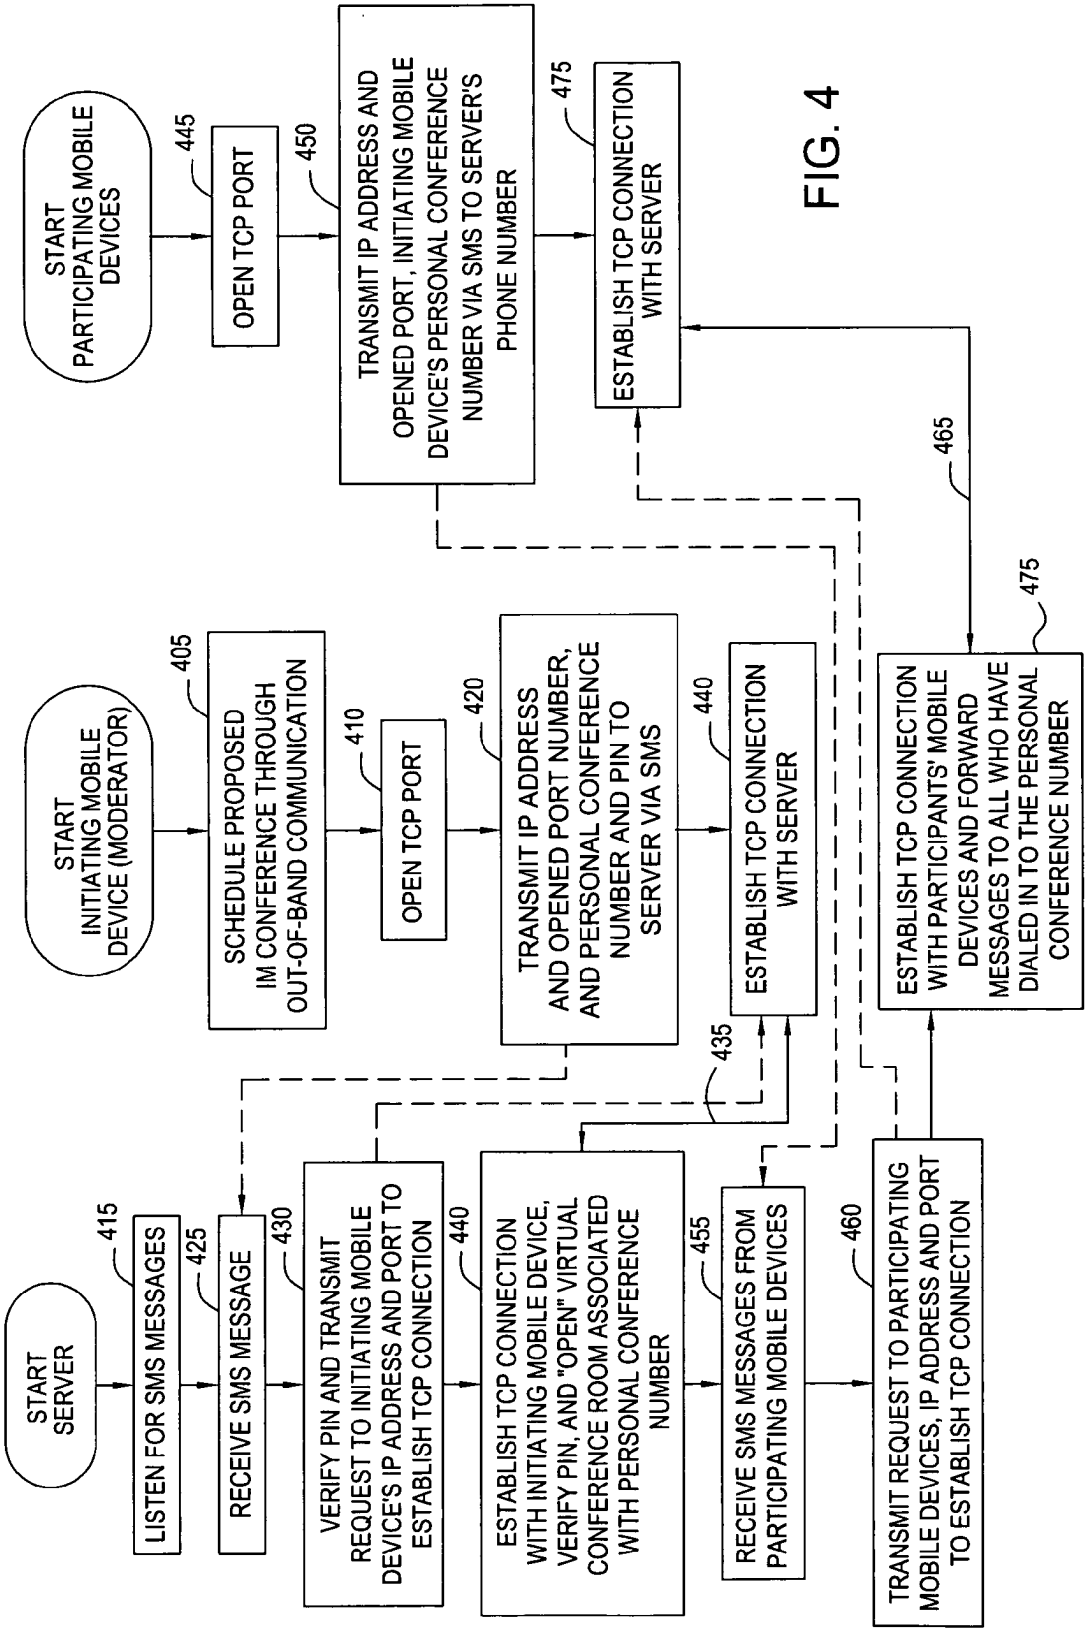

START SERVER
415
LISTEN FOR SMS MESSAGES
425
RECEIVE SMS MESSAGE
430
VERIFY PIN AND TRANSMIT REQUEST TO INITIATING MOBILE DEVICE'S IP ADDRESS AND PORT TO ESTABLISH TCP CONNECTION
440
ESTABLISH TCP CONNECTION WITH INITIATING MOBILE DEVICE, VERIFY PIN, AND "OPEN" VIRTUAL CONFERENCE ROOM ASSOCIATED WITH PERSONAL CONFERENCE NUMBER
455
RECEIVE SMS MESSAGES FROM PARTICIPATING MOBILE DEVICES
460
TRANSMIT REQUEST TO PARTICIPATING MOBILE DEVICES, IP ADDRESS AND PORT TO ESTABLISH TCP CONNECTION
435
START INITIATING MOBILE DEVICE (MODERATOR)
405
SCHEDULE PROPOSED IM CONFERENCE THROUGH OUT-OF-BAND COMMUNICATION
410
OPEN TCP PORT
420
TRANSMIT IP ADDRESS AND OPENED PORT NUMBER, AND PERSONAL CONFERENCE NUMBER AND PIN TO SERVER VIA SMS
440
ESTABLISH TCP CONNECTION WITH SERVER
START PARTICIPATING MOBILE DEVICES
445
OPEN TCP PORT
450
TRANSMIT IP ADDRESS AND OPENED PORT, INITIATING MOBILE DEVICE'S PERSONAL CONFERENCE NUMBER VIA SMS TO SERVER'S PHONE NUMBER
475
ESTABLISH TCP CONNECTION WITH SERVER
465
ESTABLISH TCP CONNECTION WITH PARTICIPANTS' MOBILE DEVICES AND FORWARD MESSAGES TO ALL WHO HAVE DIALED IN TO THE PERSONAL CONFERENCE NUMBER
475

FIG. 4

MOBILE INSTANT MESSAGING CONFERENCING METHOD AND SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation-in-part of U.S. patent application Ser. No. 10/817,994, filed Apr. 4, 2004, a continuation-in-part of U.S. patent application Ser. No. 10/935,342, filed Sep. 7, 2004, and continuation-in-part of U.S. patent application Ser. No. 11/042,620, filed Jan. 24, 2005, all of which are hereby incorporated by reference.

FIELD OF THE INVENTION

[0002] The present invention relates generally to messaging and other data transfer techniques for mobile devices, and more specifically, a server-based architecture to establish an instant messaging conferencing session or other data exchange session among multiple mobile devices across private networks.

BACKGROUND OF THE INVENTION

[0003] According to a recent IDC Research report, the U.S. mobile instant messaging ("IM") market was predicted to reach $365 million in 2004 and is expected to reach $1.2 billion by 2008. However, the current paradigm for IM, adoption of which has been so successful in the desktop PC environment and which cell phone manufacturers have only just begun to offer access to in mobile devices as of the filing date of this patent application, is not easy to use in the mobile environment. In particular, the current IM paradigm is encumbered by the constraint that one can only communicate with those who are currently (i) online, (ii) logged on to same IM service such as AOL's Instant Messenger (AIM), Yahoo! Messenger or MSN Messenger, and (iii) included as a "buddy" on one's "buddy list."

[0004] patent application Ser. No. 10/817,994, entitled "Peer-to-Peer Instant Messaging Method and Device" (hereinafter, the P2P Patent Application) provides techniques for a new paradigm for mobile IM that eliminates these limitations and operates in a manner that all are familiar with—the cell phone. For example, in one embodiment of the P2P Patent Application, by opening a TCP/IP port on one's smart phone and sending the TCP/IP address and port (whether permanent or temporary) to a recipient's phone number through the Short Message Service (SMS), one is able to develop an IM system wherein (i) the initiator dials the cell phone number of the recipient (i.e., sending the SMS message containing the TCP/IP address and port), (ii) the recipient's cell phone rings (i.e., the recipient receives the SMS message), and (iii) if the recipient chooses, he is able answer the call and engage in a real-time text conversation, just like a typical voice call (i.e., the recipient's smart phone extracts the TCP/IP address and port from the SMS message and establishes a direct TCP/IP connection with the initiator). This new yet familiar paradigm essentially turns the restrictive "buddy list" of the current IM paradigm into the entire cellular network.

[0005] However, peer-to-peer techniques such as those described in the P2P Patent Application also have their limitations. Specifically, with pure peer-to-peer IM techniques, it is more difficult to implement a commercially viable IM system that efficiently incorporates the capability to communicate in a real-time messaging session with more than two devices (i.e., adding conferencing capabilities to an IM system). Additionally, to the extent service providers dynamically allocate private IP addresses (rather than allocate public Internet IP addresses) to mobile devices through Network Address Translation (NAT) or any other network address allocation techniques, peer-to-peer IM techniques such as those described in the P2P Patent Application will only work within the private network of the service provider since the private IP addresses allocated to a mobile device will not be properly resolved by a receiving mobile device residing on a separate private network with a separate service provider. As such, what is needed is a server-based IM architecture based upon the core teachings of the P2P Patent Application to address the conferencing and private network limitations discussed above.

SUMMARY OF THE INVENTION

[0006] The present invention provides a method for establishing a real-time session-based IM system or data exchange system between mobile devices over a digital mobile network system that supports data packet-based communications. Under the present invention, an initiating mobile device establishes a data packet-based reliable connection (e.g., TCP connection) with a server that has been allocated a publicly accessible network address (e.g., a public Internet IP address) that is already known by the initiating mobile device. The initiating mobile device requests session identifying information from the server to be used in establishing the IM session. Such session identifying information would, for example and without limitation, be a new listening port number (e.g., TCP port number for a server socket) opened by the server or a session identification number. The initiating mobile device then sends to a target mobile device an invitation message containing the server's network address and the session identifying information (which could be a new listening port number or a session identification number), through a page-mode messaging service (e.g., SMS) that utilizes a unique identification number that is associated with the target mobile device and already known by the initiating mobile device (e.g., telephone number, PIN number, etc.). If the target mobile device desires to engage in a real-time IM session with the initiating mobile device, the target mobile device will establish a reliable connection (e.g., TCP connection) with the server through the network address and session identifying information received by the target mobile device from the initiating mobile device through the page-mode messaging service. The server serves as an intermediary between the initiating mobile device and the target mobile device transferring real-time messages through the reliable session-based connections established with the server by both devices. Thereafter, both the initiating mobile device and the target mobile device can invite additional mobile devices to the real-time IM session by sending such server's network address and the session identifying information to the additional mobile devices through the page-mode messaging service (e.g., SMS).

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] **FIG. 1** depicts a diagram of an environment for establishing an instant messaging conferencing system or data exchange system in accordance with the present inven-

tion between a first mobile device and a second mobile device in a GSM mobile network system supporting GPRS as a data packet-based communications service, SMS as a page-mode messaging service, and TCP/IP as an underlying data packet based network protocol.

[0008] **FIG. 2** depicts a flow chart for a first embodiment of a server based architecture in accordance with the present invention.

[0009] **FIG. 3** depicts a flow chart for a second embodiment of a server-based architecture in accordance with the present invention.

[0010] **FIG. 4** depicts a flow chart for a third embodiment of a server-based architecture with virtual IM conference room capabilities in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0011] A. Network Environment

[0012] **FIG. 1** depicts one environment to deploy an embodiment of the present invention. As depicted, the underlying digital mobile network system in this environment is the Global System for Mobile communications (GSM) **100** standard. Under the GSM standard, each of the mobile devices **105** and **110** includes a Subscriber Information Module (SIM) card that contains unique identification information that enables the GSM system to locate the mobile devices within the network and route data to them. A current commercial example of a mobile device (e.g., smartphone, PDA, handheld, etc.) that might be used in **FIG. 1** could be Research In Motion's (RIM) BlackBerry handheld devices, which include a QWERTY keyboard to facilitate the typing of text. As depicted, a GSM architecture includes the following components: base transceiver stations (BTS) **115** and base station controllers (BSC) (**120**A or **120**B) for managing the transmission of radio signals between the MSC (defined below) and the mobile devices, mobile service-switching centers (MSC) (**125**A and **125**B) for performing the all switching functions and controlling calls to and from other telephone and data systems, a home location register (HLR) **130** for containing all the administrative, routing and location information of each subscriber registered in the network, visitor location registers (VLR) (**135**A and **135**B) for containing selected administrative information about subscribers registered in one HLR who are roaming in another HLR, and an equipment identity register (EIR) (not shown) for containing a list of all valid mobile equipment on the network). As depicted in **FIG. 1**, in one architecture of a GSM network, there may be exist one HLR while there may exist multiple MSCs (each with a related VLR) which each serves a different geographic area. The MSCs also provide the interface for the GSM network to more traditional voice networks **170** such as the PSTN. This underlying GSM architecture provides radio resources management (e.g., access, paging and handover procedures, etc.), mobility management (e.g., location updating, authentication and security, etc.), and communication management (e.g., call routing, etc.) in order to enable mobile devices in the GSM network to send and receive data through a variety of services, including the Short Message Service (SMS), an asynchronous bi-directional text messaging service for short alphanumeric messages (up to 160 bytes) that are transported from one mobile device to another mobile device in a store-and-forward fashion.

[0013] A GSM network within which the present invention may be deployed would also support a page-mode messaging service, such as SMS, that relies upon the underlying GSM mechanisms to resolve routing information in order to locate destination mobile devices. A GSM network supporting SMS text messaging may further include the following SMS specific components: a short message service center (SMSC) (**140**A or **140**B) for storing and forwarding messages to and from one mobile device to another and an SMS Gateway-MSC (SMS GMSC) for receiving the short message from the SMSC (**140**A or **140**B) and interrogating the destination mobile device's HLR **130** for routing information to determine the current location of the destination device to deliver the short message to the appropriate MSC (**125**A or **125**B). The SMS GMSC is typically integrated with the SMSC **140**. In a typical transmission of an SMS text message from an originating mobile device **105** to a receiving mobile device **110**, (i) the text message is transmitted from the mobile **105** to the MSC **125**A, (ii) the MSC **125**A interrogates its VLR **135**A to verify that the message transfer does not violate any supplementary services or restrictions, (iii) the MSC **125**A sends the text message to the SMSC **140**A, (iv) the SMSC **140**A, through the SMS GMSC, interrogates the receiving mobile device's HLR **130** (by accessing the SS7 network) to receive routing information for the receiving mobile device **110**, (v) the SMSC sends the text message to the MSC **125**B servicing receiving mobile device **110**, (vi) the MSC **125**B retrieves subscriber information from the VLR **135**B, and (vii) the MSC **125**A transmits the text message to the receiving mobile device **110**. Similar to other transactions on the GSM network, SMS text messaging utilizes telephone numbers as identifying addresses for mobile devices and as such, utilizes the SS7 network signaling system through which cellular service providers share information from the HLR with other service providers. As depicted in **FIG. 1**, SS7 based signaling communication is represented by the broken lines. In contrast, the solid lines in **FIG. 1** represent data or voice based communications.

[0014] In addition to a page-mode messaging service such as SMS, a GSM network within which the present invention may be deployed would also support a data packet based communications service, such as the General Packet Radio Service (GPRS), that enables TCP/IP transmission protocol based communications between mobile devices within the network. As depicted in **FIG. 1**, a core GPRS network exists in parallel to the existing GSM core network. The BSC **120** may direct voice traffic through the MSC (**125**A or **125**B) to the GSM network and data traffic through the Serving GPRS Support Note (SGSN) (**145**A or **145**B) to the GPRS network. Such communication between the BSC (**125**A or **125**B) and the SGSN (**145**A or **145**B) may be, for example, based upon the IP network protocol communication **155**. As such, GPRS signaling and data traffic do not flow through the core GSM network. Instead, the core GSM network is used by GPRS only for table look-up in the HLR **130** and VLR (**135**A or **135**B) to obtain routing, location and other subscriber information in order to handle user mobility. The SGSN (**145**A or **145**B) serves as a "packet-switched MSC," delivering data packets to mobile devices in its service area. The Gateway GPRS Support Note (GGSN) (**150**A or **150**B) communicates with the SGSN (**145**A or **145**B) through an IP based

GPRS backbone **160** and serves as an interface to other external IP networks **165** such as the Internet and other mobile service providers' GPRS services.

[**0015**] B. Server Based Architecture

[**0016**] Because mobile service providers do not typically allocate publicly accessible network addresses to each mobile device, the present invention requires the presence of a server with a publicly accessible network address (e.g., public Internet IP address) that enables the server to be contacted across all private data packet based networks (e.g., IP networks). **FIG. 2** depicts a flow chart setting forth one embodiment of a server-based architecture in accordance with the present invention. As an initial set-up process, the server will need to have opened and be listening on a well-known port (e.g., server socket) for requests by mobile devices to initiate particular IM sessions **205** and the client software residing on an initiating mobile device will need to be pre-configured with the server's IP address and well-known port **210** (it is not necessary that mobile devices other than the initiating mobile device be pre-configured with the server's IP address and well-known port). To initiate an IM session, the initiating mobile device transmits a request to establish a reliable session-based connection (e.g., TCP connection) with the server by contacting the server at its network address and well-known port **215**. The server receives the connection request from the initiating mobile device and establishes a reliable connection (e.g., TCP connection) with the initiating mobile device **220**. Upon establishing the reliable connection **225**, the server allocates and opens a specific network port number (e.g., a server socket) for the IM session and transmits the port number (and, if needed, the server's IP address) to the initiating mobile device through the reliable connection **230**. In this embodiment, the specific network port number may be considered to be session identifying information for the IM session being initiated by the initiating mobile device. Similar to the teachings in the P2P Patent Application, the initiating mobile device receives the specific port number **235** and then propagates the server's network address and the specific network port number in invitation messages through a page-mode messaging service, such as SMS, to other mobile devices in order to participate in the IM session **240**. Such page-mode messages (e.g., SMS message) may be encoded in a manner such that the mobile devices can distinguish the message from page-mode messages used for purposes other than the present invention, or the page mode-message may be sent to a specific page-mode message port (e.g., SMS port) opened specifically for purposes of this present invention **245**. The other mobile devices receive the invitation message **250** and if they desire to participate in the IM session, they transmit requests to establish reliable connections (e.g., TCP connections) **255** with the server by connecting with the server at the specific network port number allocated to the initiating mobile device **260**. Once the reliable connections **266** with other participating mobile devices are established, the server acts as a manager of the IM session, keeping track of all the established connections relating to the specific port number and IM session and forwarding all messages (via reliable connections **225** and **266**) exchanged among the mobile devices that are communicating within that particular IM session. The server keeps the specific network port for an IM session open so long as mobile devices that have connected to each other through that network port remain engaged in a real-time IM session. Because all participating mobile devices know the server's IP address and the specific allocated port number associated with the IM session, any of such participating mobile devices and invite other mobile devices to join by sending an invitation message through the page-mode messaging service. Furthermore, those skilled in the art will recognize that security enhancements may be added to the foregoing initiating process between the server and the mobile devices. For example and without limitation, a nonce can be issued by the server to the initiating mobile device which is then propagated to other participating mobile devices. This nonce would be used to confirm that any mobile device attempting to join the IM session by connecting related established port was indeed invited to participate.

[**0017**] **FIG. 3** depicts a flow chart setting forth an alternative embodiment of a server-based architecture in accordance with the present invention. Upon establishing the reliable connection in a manner similar to **FIG. 2**, the initiating mobile device requests a session identification number ("Session ID") from the server to initiate an IM session **310**, and the server generates such a Session ID and transmits the Session ID to the initiating mobile device through the reliable connection **320**. Whereas the specific port opened by the server in the embodiment of **FIG. 2** was the session identifying information, the session identifying information in the embodiment of **FIG. 3** is the Session ID. The initiating mobile device will then propagate the server's network address (possibly including the well-known port) and the Session ID in invitation messages through a page-mode messaging service, such as SMS, to other mobile devices **330**. The other mobile devices receive the invitation message **340** and if they desire to participate in the IM session, they will extract the network's address from the page-mode message and transmit a request to establish a reliable connection (e.g., TCP connection) with the server by contacting the server at the server's network address and well-known port **350**. Once a reliable connection **360** is established with the server and a participating mobile device **370**, the participating mobile device and identifies its intent to join an initiated IM session by transmitting the Session ID **380** to the server through the connection **360**. The server acts as a manager of the IM session, keeping track of all the connections relating to the Session ID and forwarding all messages exchanged among the mobile devices that are communicating within that particular IM session.

[**0018**] A server in accordance with the present invention, such as those in **FIG. 2** and **FIG. 3** can be maintained by any entity, from a mobile device service provider to any entity that desires to offer IM conferencing services in accordance with the present invention. So long as the server has a publicly accessible network address (e.g., public Internet IP address), the server need not be part of any particular mobile device's private network (e.g., service provider's mobile data network) and any mobile device associated with any service provider shall be able to connect to the server through the data packet-based network (e.g., IP network) and request the allocation of a specific port or Session ID to establish an IM session. In another embodiment of the present invention, the maintainer of the server may also provide personal conferencing numbers and PIN numbers to users to provide the capability to schedule and set up "virtual IM conference rooms." In such an embodiment, the server also has associated with it at least one unique identification number (e.g., telephone number) that may be used by mobile

devices to contact the server through the page-mode messaging service (e.g., SMS). For example, initially through an offline process (e.g., email, phone call, letter, etc.), the maintainer of the server provides a mobile device user with a phone number associated with the server (e.g., a toll-free number), a personal conference number, and a PIN. Those skilled in the art in the teleconferencing area will recognize the existence of alternative combinations of identification numbers for creating a virtual conference room such as a personal phone number (rather than a common number used by all users) and a PIN, but no personal identification number. Such alternatives can be made without departing from the spirit of the present invention and are therefore considered to be within the scope of the present invention.

[0019] **FIG. 4** provides a flow chart of a server-based architecture with virtual IM conference room capabilities in accordance with the present invention. Initially, through an offline or out-of-band process (e.g., email, phone call, letter, etc.) a user of an initiating mobile device, having the role of the "moderator," will schedule a proposed time for the IM conference and distribute the server's phone number and the user's personal identification number to all participants **405**. At the time of the scheduled conference, the initiating mobile device opens a TCP port (e.g., server socket) to listen for subsequent communications from the server **410**. The server has similarly opened an SMS listening port to receive SMS text messages requesting virtual IM conference rooms to be opened **415**. The initiating mobile device then transmits its IP address, including its TCP port number, the user's personal conference number and the user's PIN (to authenticate the user as the moderator) in an SMS text message to the telephone number of the server **420**. In the embodiment described in **FIG. 4**, the user's personal conference number and PIN may be considered session identifying information. The server receives the SMS text message containing the initiating mobile device's IP address, personal conference number and PIN **425**. The server extracts the IP address, personal conference number and PIN from the SMS text message, confirms that the PIN is correct for the specific personal conference number and then transmits a request to establish a TCP connection to the initiating mobile device's IP address (and specified TCP port number) **430**. The initiating mobile device receives this request and a TCP connection **435** is established between the initiating mobile device and the server and the virtual conference room associated with the user's personal conference number is "opened"**440**. Participants in the scheduled IM conference other than the moderator "dial in" to the IM conference in a similar manner. At the time of the scheduled conference, a participant's mobile device opens a TCP port to listen for subsequent communications from the server **445**. The participant's mobile device then transmits its IP address, including its TCP port number and the moderator's personal conference number in an SMS text message to the phone number of the server **450**. The server receives the SMS text message containing the participant's mobile device's IP address and moderator's personal conference number **455**. The server extracts the IP address and personal conference number from the SMS text message and then transmits a request to establish a TCP connection to the participant's mobile device's IP address **460**. If the moderator has "opened" the virtual IM conference room, then the server announces to all currently connected participants that a new participant has joined the conference room and propagates text messages to all participants through the various TCP connections (**465** and **435**) established with the server **475**. Those skilled in the art will recognize that the information that is embedded in the initial SMS text message can vary and that other information can be exchanged once the TCP connection between the server and the mobile device is established. For example, only the IP address (and port) may be transmitted to the server in the initial SMS text messages and thereafter, the user may be prompted by the server to manually enter the appropriate personal conference number or PIN number through the TCP connection. Additionally, to the extent participating mobile devices are not allocated publicly accessible IP addresses by service providers such that the server can establish a reliable connection (e.g., TCP connection) with such devices, a different "intermediary" server with a public network address (similar to **FIG. 2** and **FIG. 3**) may be used by each participating mobile device to obtain a publicly accessible IP address (e.g., the intermediary server's IP address), transmit that IP address in its SMS message, and have all communication with the conferencing server routed to the mobile device through the intermediary server. Such alternatives can be made without departing from the spirit of the present invention and are therefore considered to be within the scope of the present invention.

[0020] Those skilled in the art will recognize that such a conferencing server in accordance with the present invention may be implemented in software and may reside on the same hardware platform as any firewall, NAT or any other hardware router.

[0021] While the foregoing detailed description has described the present invention using SMS, GSM, GPRS and TCP/IP, other similar services and protocols may be used in a variety of similar environments in which the present invention may be implemented. For example and without limitation, rather than using SMS to transmit an IP address (and port) from the initiating mobile device to the listening mobile device through the devices' telephone numbers, an alternative embodiment of the present invention might use a PIN-to-PIN messaging technology (as, for example, offered in RIM's Blackberry handheld devices) to transmit the IP address (and port) through unique PIN numbers associated with the mobile devices, or an alternative paging protocol using telephone numbers. Furthermore, the present invention contemplates that the actual protocol used during an established IM session may also vary depending upon the preference of the implementation. For example and without limitation, Message Session Relay Protocol (MSRP) or any proprietary based protocol may be used during the IM session that is established in accordance with the present invention. Furthermore, those skilled in the art will recognize that the server-based architecture presented herein can apply to other data exchange environments contexts (other than instant messaging) where reliable connections between multiple mobile devices are desirable (e.g., mobile multiplayer gaming). Additionally, the present server-based architecture may also be used with endpoints (e.g., PCs, workstations, etc.) other than mobile devices, so long as such endpoints have the requirements as described herein (e.g., phone number associated with such endpoint, SMS capabilities, TCP/IP connections, etc.). Thus, various modifications, additions and substitutions and the like can be made without departing from the spirit of the invention and these are therefore considered to be within the scope of the invention as defined in the following claims.

What is claimed is:

1. A method of initiating a conferencing session among mobile devices that support a data packet-based communications service over a digital mobile network system, the method comprising:

transmitting a request to a server's network address and listening port to establish a reliable session-based connection;

establishing the reliable session-based connection with the server;

receiving session identifying information associated with the conferencing session from the server;

transmitting an invitation message containing the server's network address and the session identifying information to a participating mobile device through a page-mode messaging service, wherein the participating mobile device is located by providing to the page-mode messaging service a unique identification number that is used by the digital mobile network system to locate the participating mobile device; and

participating in the conference session through the reliable session-based connection with the participating mobile device, which has established its own reliable session-based connection with the server by transmitting its own request, containing the session identifying information, to the server's network address.

2. The method of claim 1 wherein the data packet-based communications service is GPRS and the digital mobile network system is GSM.

3. The method of claim 1 wherein the server's network address is an IP address and the listening port is a TCP port.

4. The method of claim 1 wherein the page-mode messaging service is SMS.

5. The method of claim 1 wherein the unique identification number is a telephone number.

6. The method of claim 1 wherein the session identifying information includes a second listening port number generated by and opened at the server.

7. The method of claim 1 wherein the session identifying information is a session identification number generated by the server.

8. The method of claim 1 wherein the reliable session-based connection is a TCP connection.

9. A method of joining a conferencing session among mobile devices that support a data packet-based communications service over a digital mobile network system, the method comprising:

opening a listening port to receive invitation messages through a page-mode messaging service;

receiving, at the listening port and through the page-mode messaging service, an invitation message from an initiating mobile device to participate in the conferencing session, wherein such invitation message contains a server's network address and session identifying information;

transmitting a request to the server's network address to establish a reliable session-based connection;

establishing the reliable session-based connection with the server; and

participating in the conference session through the reliable session-based connection with the server with other mobile devices that have established their own reliable session-based connections with the server by transmitting their own request to the server's network address to establish their own reliable session-based connection.

10. The method of claim 9 wherein the data packet-based communications service is GPRS and the digital mobile network system is GSM.

11. The method of claim 9 wherein the server's network address is an IP address.

12. The method of claim 9 wherein the page-mode messaging service is SMS and the listening port is an SMS port.

13. The method of claim 9 wherein the session identifying information includes a second listening port number at the server and the request to the server's network address to establish a reliable session-based connection is transmitted to the second listening port number.

14. The method of claim 9 wherein the session identifying information is a session identification number generated by the server and the session identification number is transmitted to the server upon establishing the reliable session-based connection with the server.

15. The method of claim 9 wherein the reliable session-based connection is a TCP connection.

16. A method of managing a conferencing session at a server for mobile devices that support a data packet-based communications service over a digital mobile network system, the method comprising:

opening a listening port to receive invitation messages through the data packet-based communications service;

establishing a first reliable session-based connection with an initiating mobile device;

generating session identifying information associated with the conferencing session;

transmitting the session identifying information to the initiating mobile device through the reliable session based connection;

receiving a request to establish a second reliable session-based connection from a participating mobile device that has obtained the server's network address and the session identifying information from the initiating mobile device through a page-mode messaging service wherein the participating mobile device is located by providing to the page-mode messaging service a unique identification number that is used by the digital mobile network system to locate the participating mobile device.

establishing a second reliable session-based connection with the participating mobile device;

associating the first reliable session-based connection with the second reliable session-based connection through the session identifying information; and

establishing the conferencing session by forwarding messages received from the initiating mobile device or the participating mobile device to the participating mobile device or initiating mobile device, respectively,

through the first reliable session-based connection and second reliable session-based connection respectively.

17. The method of claim 16 wherein the data packet-based communications service is GPRS and the digital mobile network system is GSM.

18. The method of claim 16 wherein the server's network address is an IP address and the listening port is a TCP port.

19. The method of claim 16 wherein the page-mode messaging service is SMS.

20. The method of claim 16 wherein the session identifying information includes a second listening port number at the server and the method further comprises opening the second listening port at the server to receive requests from participating mobile devices to establish reliable session-based connections.

21. The method of claim 16 wherein the session identifying information is a session identification number which is transmitted to the server by the participating mobile device through the second reliable session-based

22. The method of claim 16 wherein the first reliable session-based connection and the second reliable session-based connection are TCP connections.

23. The method of claim 16 wherein the unique identification number is a telephone number.

24. A method of managing a conferencing session at a server for mobile devices that support a data packet-based communications service over a digital mobile network system, the method comprising:

opening a listening port to receive invitation messages through a page-mode messaging service;

receiving, at the listening port and through the page-mode messaging service, a first network address, a first port number and session identifying information from an initiating mobile device;

establishing a first reliable virtual connection with the initiating mobile device by connecting to the initiating mobile device through the first network address and the first port number;

receiving, at the listening port and through the page-mode messaging service, a second network address, a second port number and the session identifying information from a participating mobile device;

establishing a second reliable virtual connection with the participating mobile device by connecting to the participating mobile device through the second network address and the second port number;

associating the participating mobile device with the initiating mobile device through the session identifying information; and

establishing the conferencing session by forwarding messages received from the initiating mobile device or the participating mobile device to the participating mobile device or initiating mobile device, respectively, through the first reliable virtual connection and second reliable virtual connection respectively.

25. The method of claim 24 wherein the data packet-based communications service is GPRS and the digital mobile network system is GSM.

26. The method of claim 24 wherein the page-mode messaging service is SMS and the listening port is an SMS port.

27. The method of claim 24 wherein the unique identification number is a telephone number.

28. The method of claim 24 wherein the first network address and second network address are IP addresses and the first port number and second port number are TCP port numbers.

29. The method of claim 24 wherein the session identifying information includes a personal conference number and a PIN number.

30. The method of claim 24 wherein the first reliable session-based connection and the second reliable session based connection are TCP connections.

* * * * *