




US 20050138668A1

(19) **United States**(12) **Patent Application Publication**
Gray et al.(10) **Pub. No.: US 2005/0138668 A1**(43) **Pub. Date: Jun. 23, 2005**(54) **SYSTEM AND METHOD FOR ENHANCED
HOT KEY DELIVERY**(52) **U.S. Cl. 725/110; 725/60; 725/139**(75) **Inventors: James Harold Gray, Ellijay, GA (US);
Thomas Jefferson Brothers,
Gainesville, GA (US); William
Randolph Matz, Atlanta, GA (US)**(57) **ABSTRACT**

Correspondence Address:
BAMBI FAIVRE WALTERS
PO BOX 5743
WILLIAMSBURG, VA 23188 (US)

According to one embodiment, a service provider determines whether to inform one or more users of an interactive television service of available content. Responsive to determining to inform the one or more users of the available content, a hot key signal is generated. The hot key signal is sent to the users via a side channel out-of-band with one or more channels for content. The hot key signal from the out-of band side channel is received by a terminal device. The terminal device determines whether the hot key signal is relevant to a user currently viewing content from the service provider. Responsive to determining the hot key signal is relevant to the user, an indication that the hot key signal has been received is displayed. Responsive to receiving an indication that the hot key is accepted, the user is directed to the available content indicated by the hot key signal.

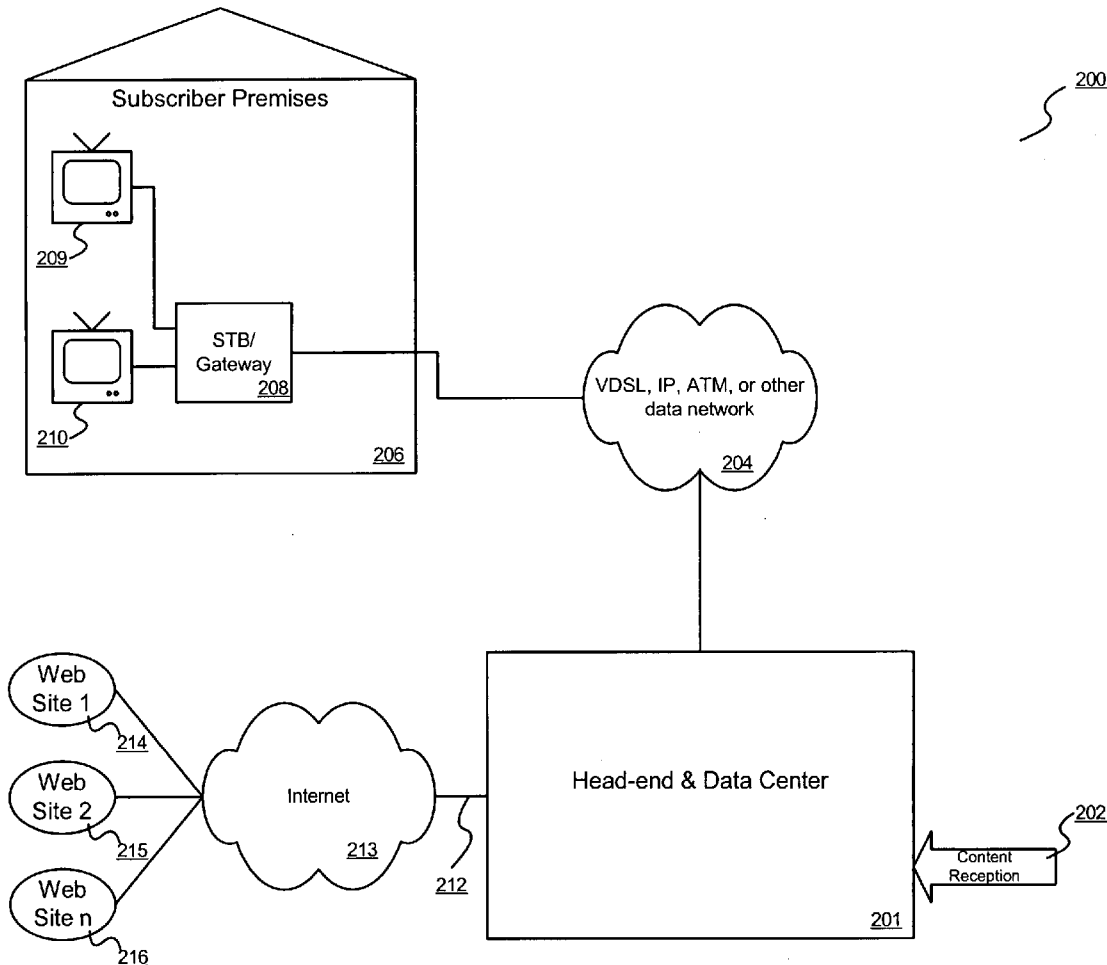(73) **Assignee: BellSouth Intellectual Property Corporation**(21) **Appl. No.: 10/742,700**(22) **Filed: Dec. 19, 2003****Publication Classification**(51) **Int. Cl.⁷ H04N 5/445; H04N 7/173;
H04N 7/16**

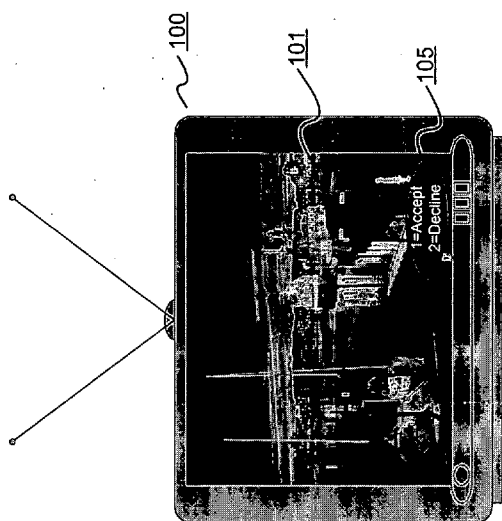


Figure 1C

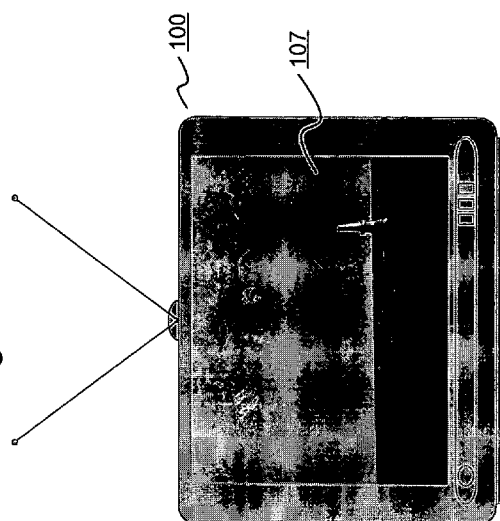


Figure 1D

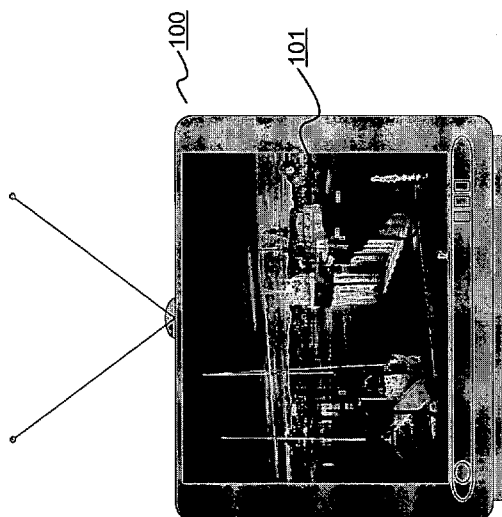


Figure 1A

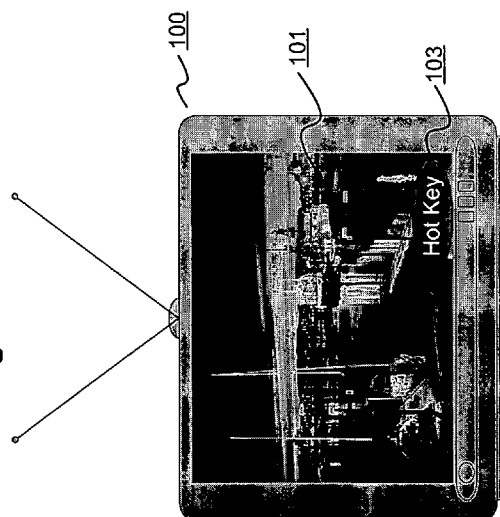


Figure 1B

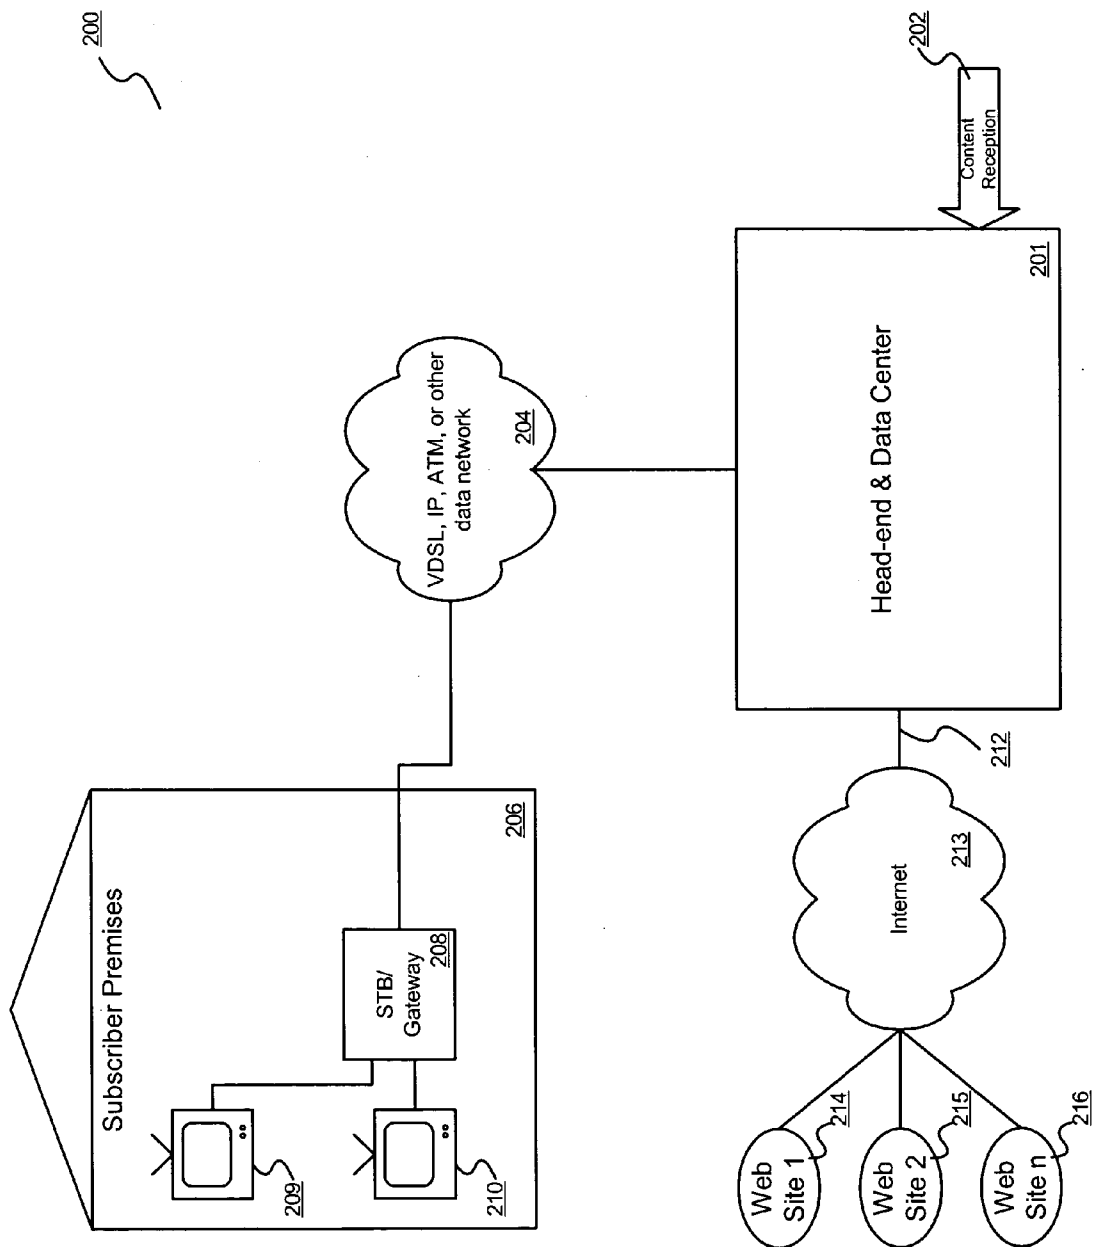


Figure 2

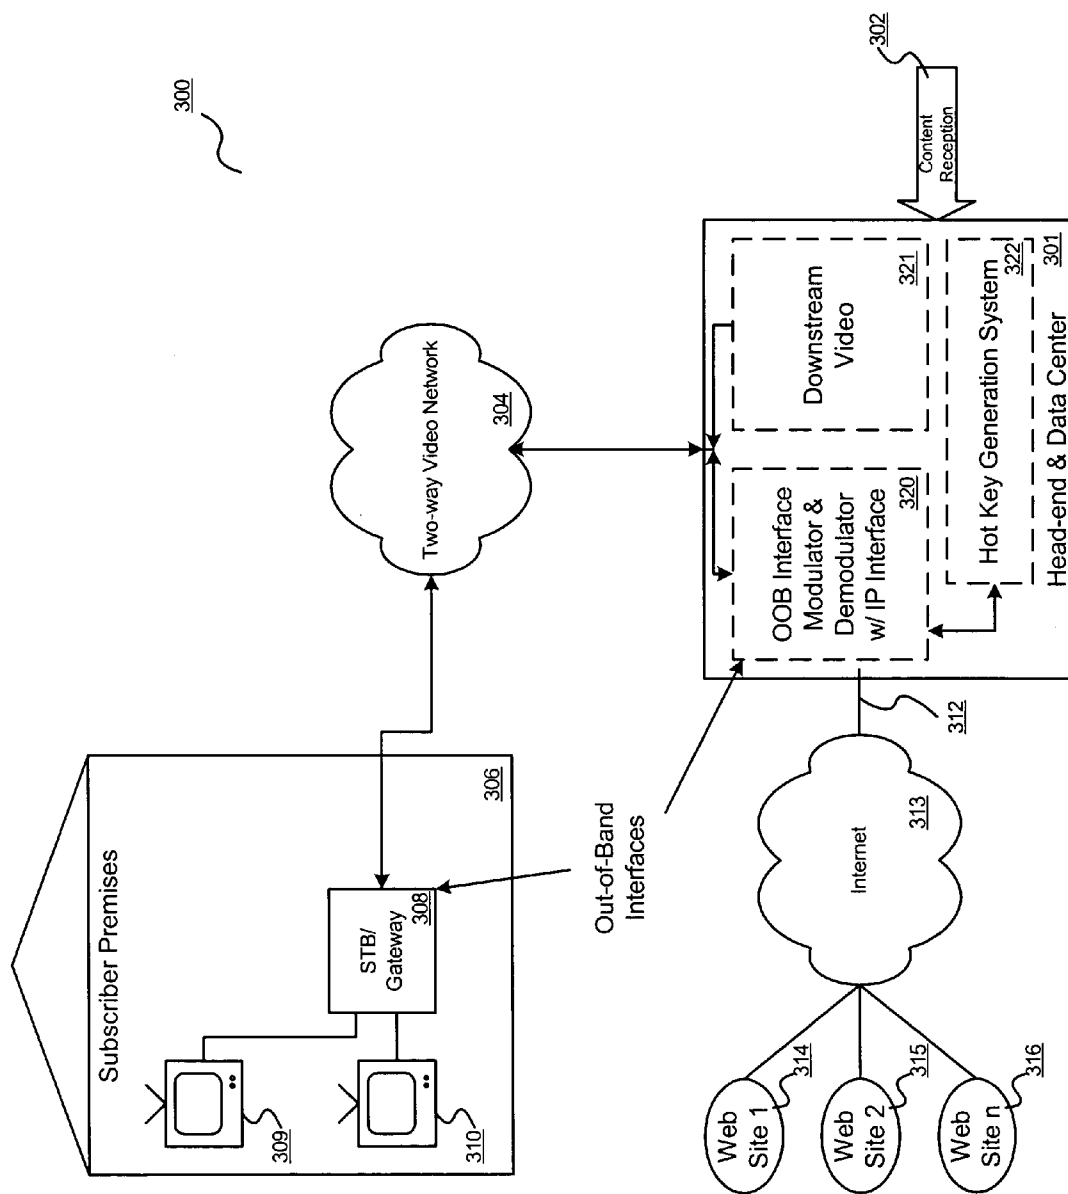


Figure 3

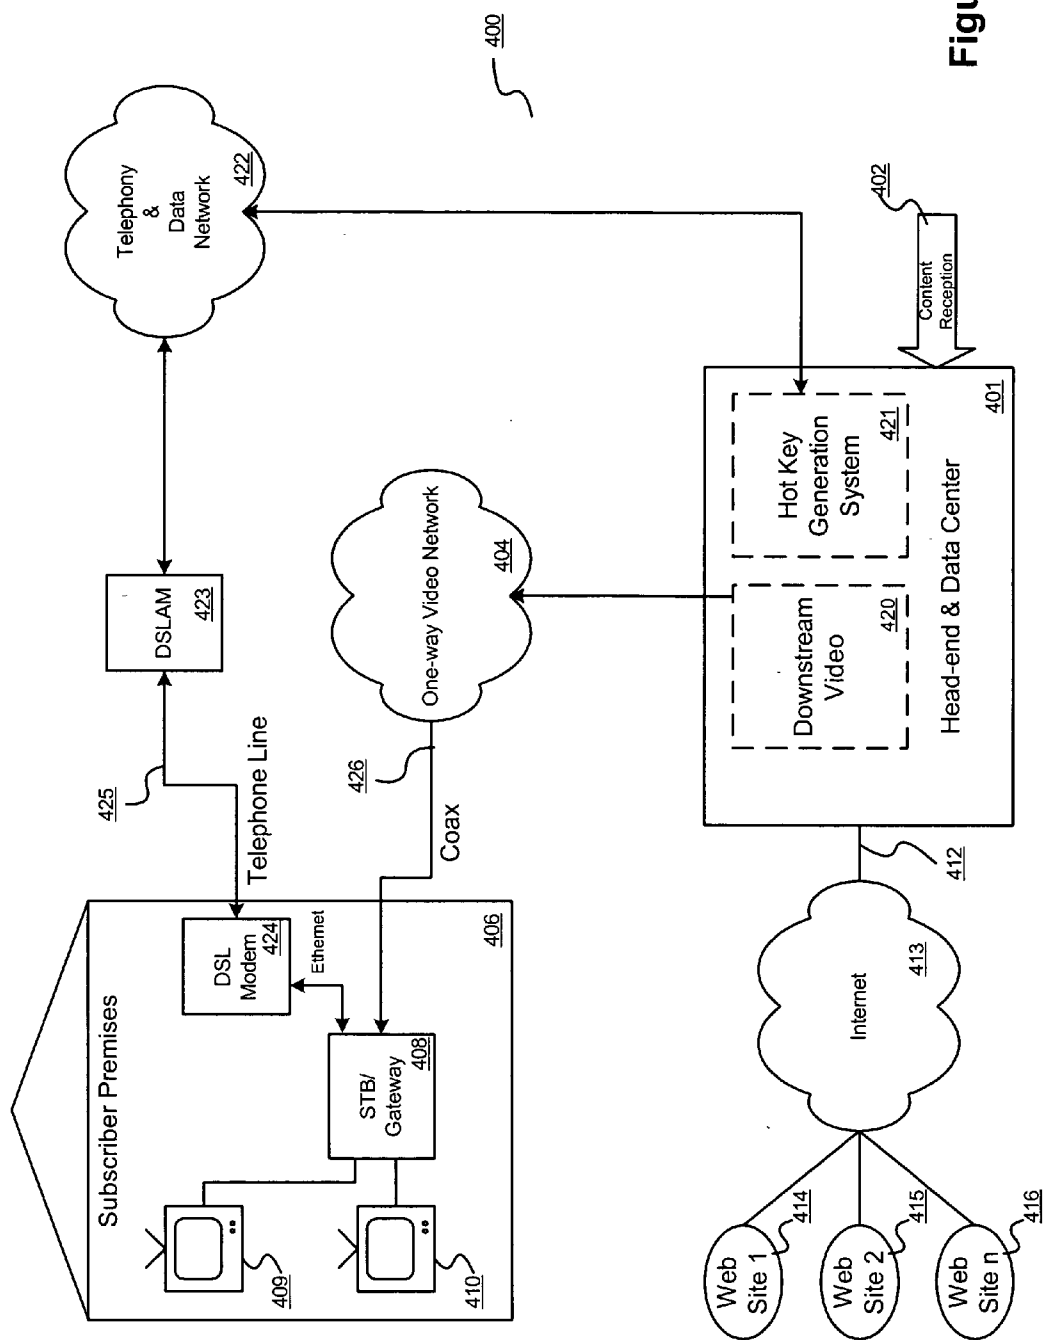


Figure 4

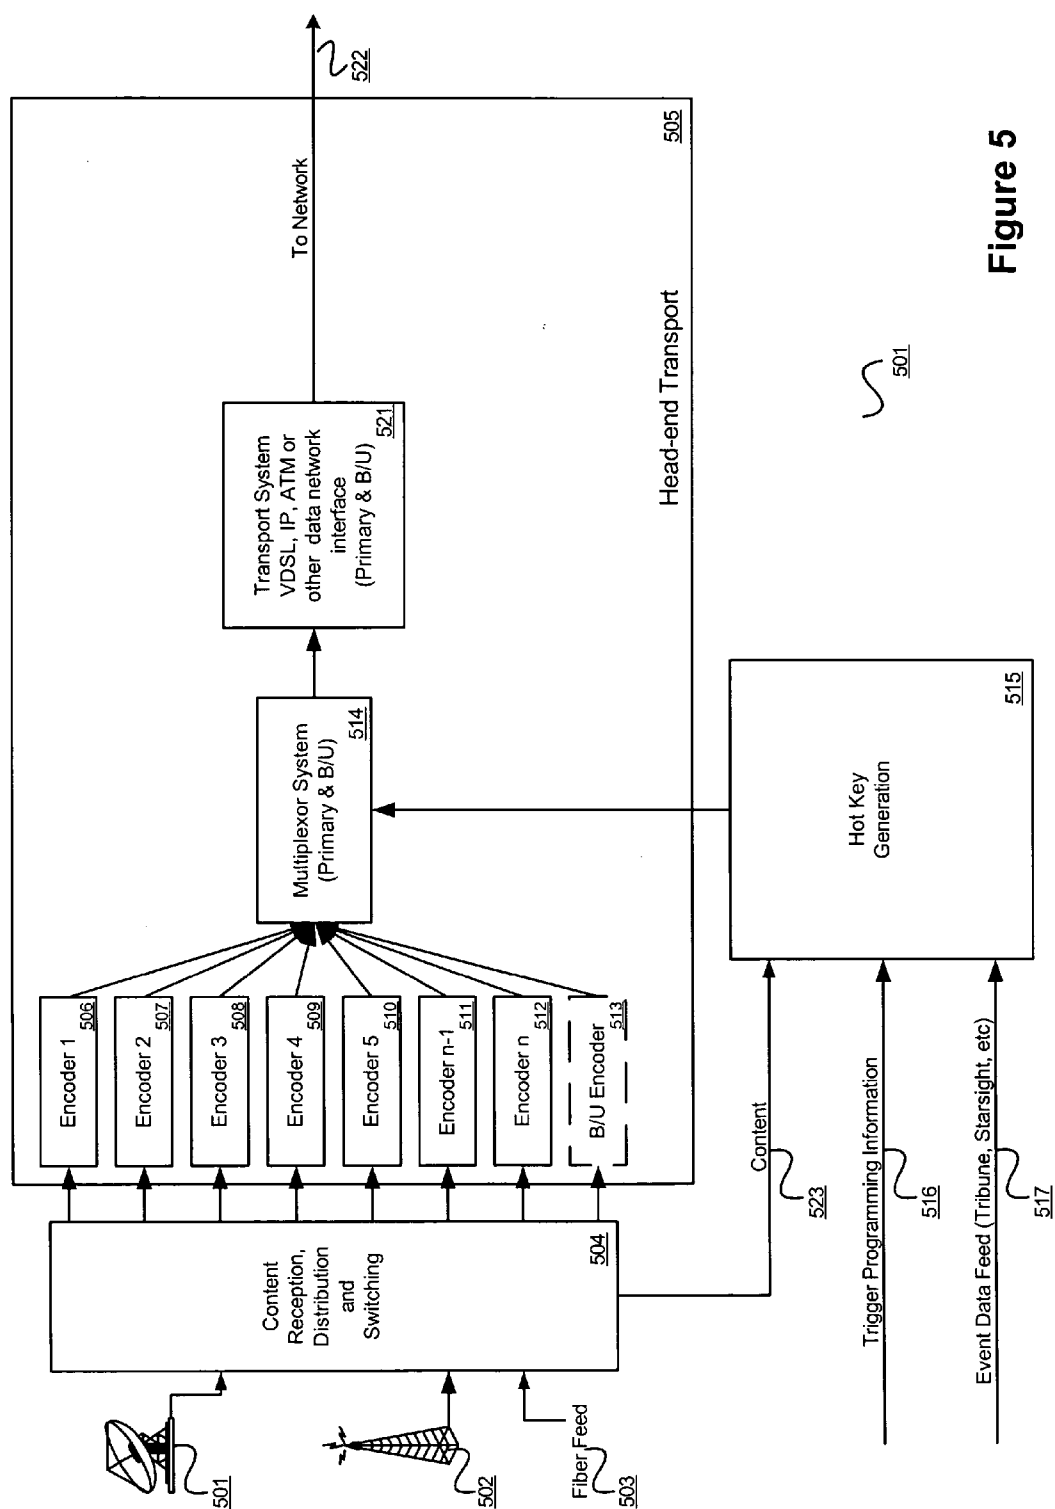


Figure 5

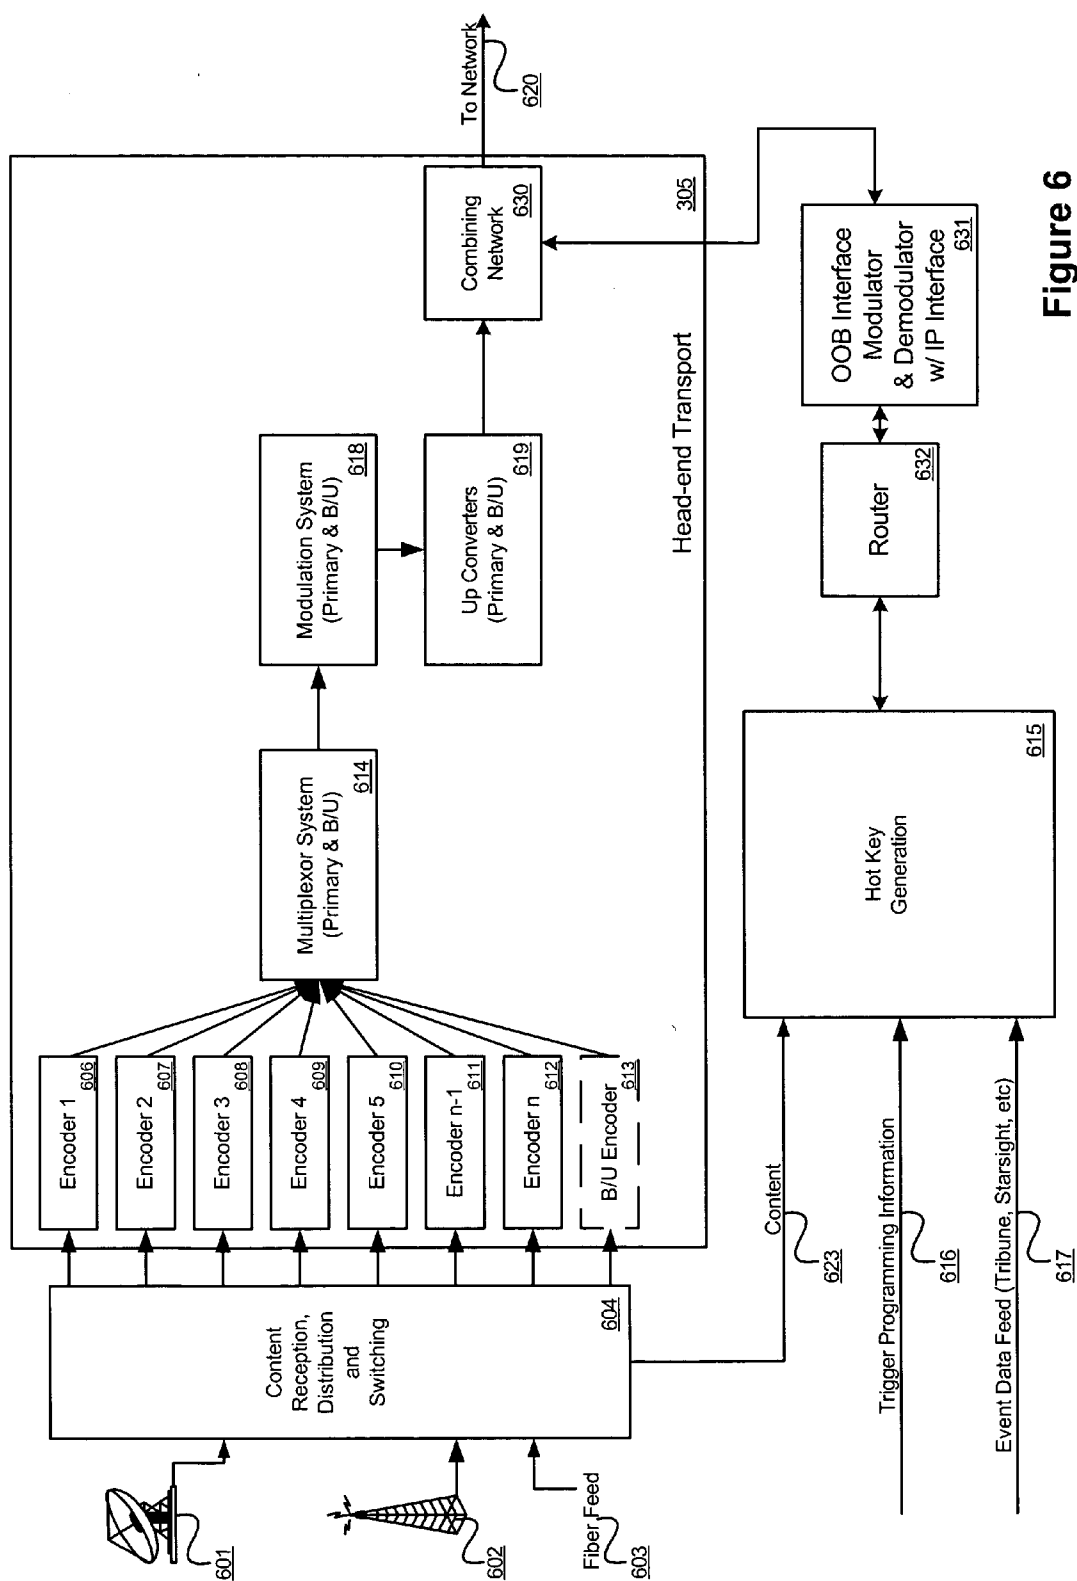


Figure 6

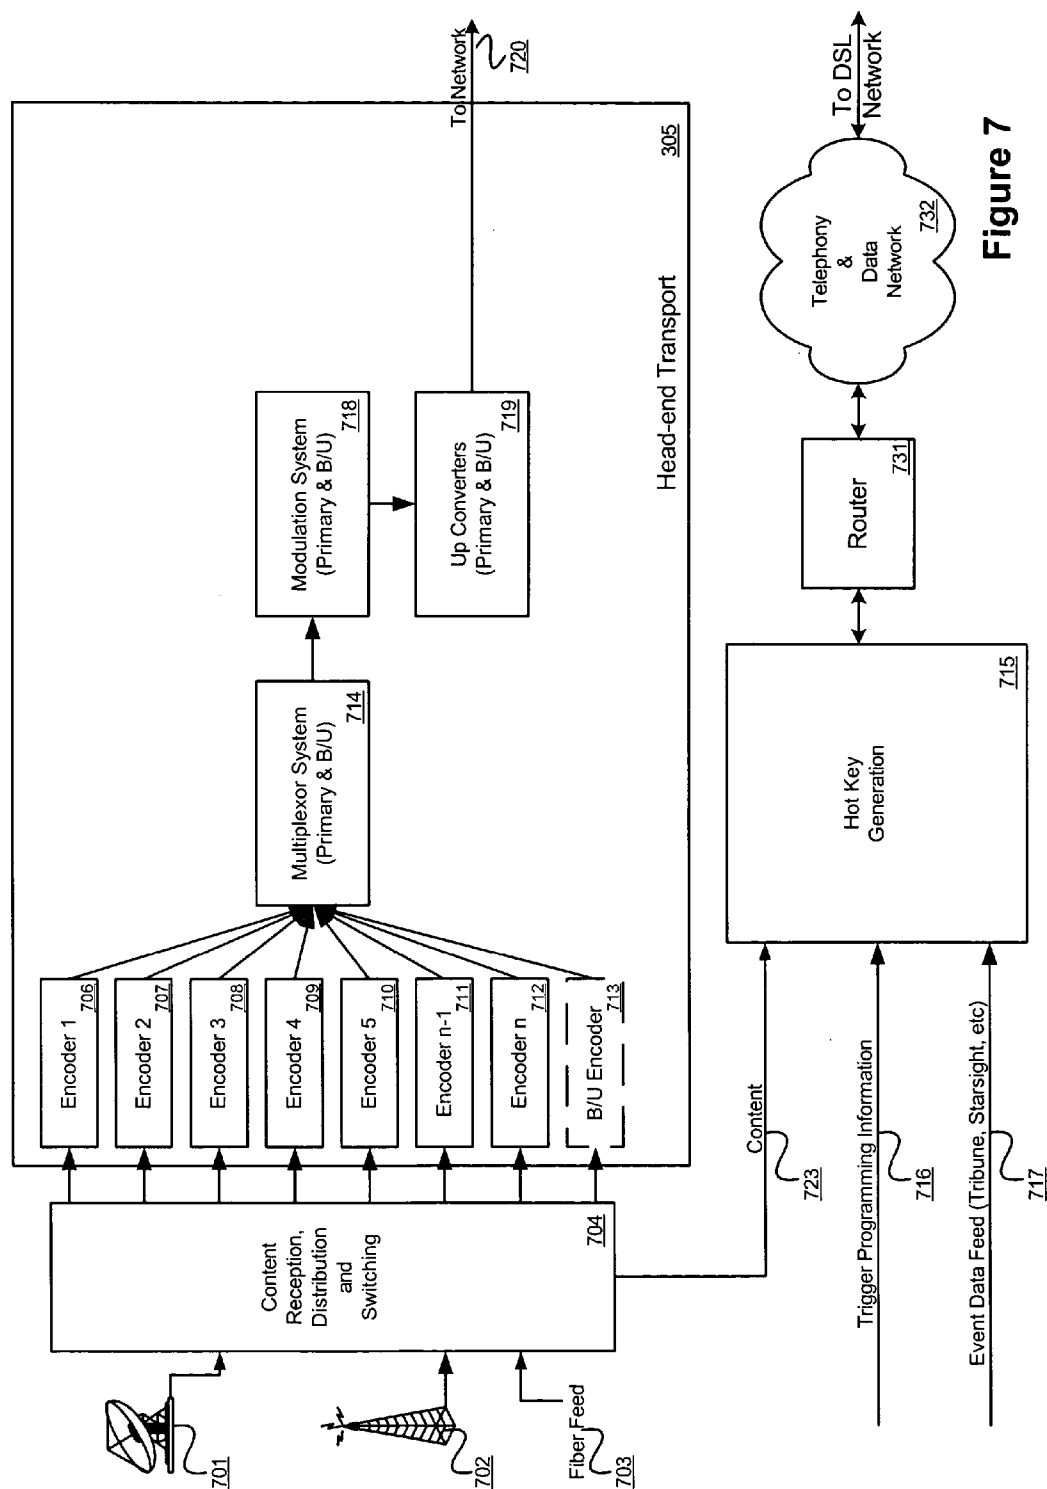


Figure 7

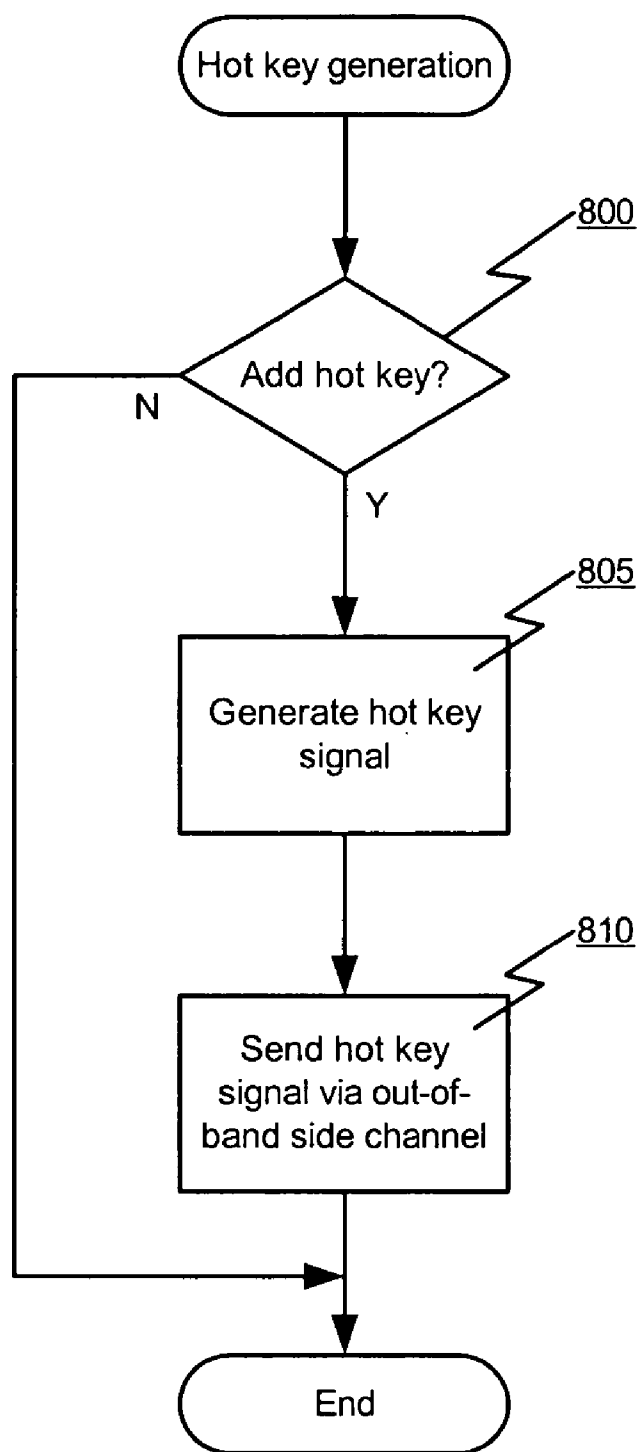


Figure 8

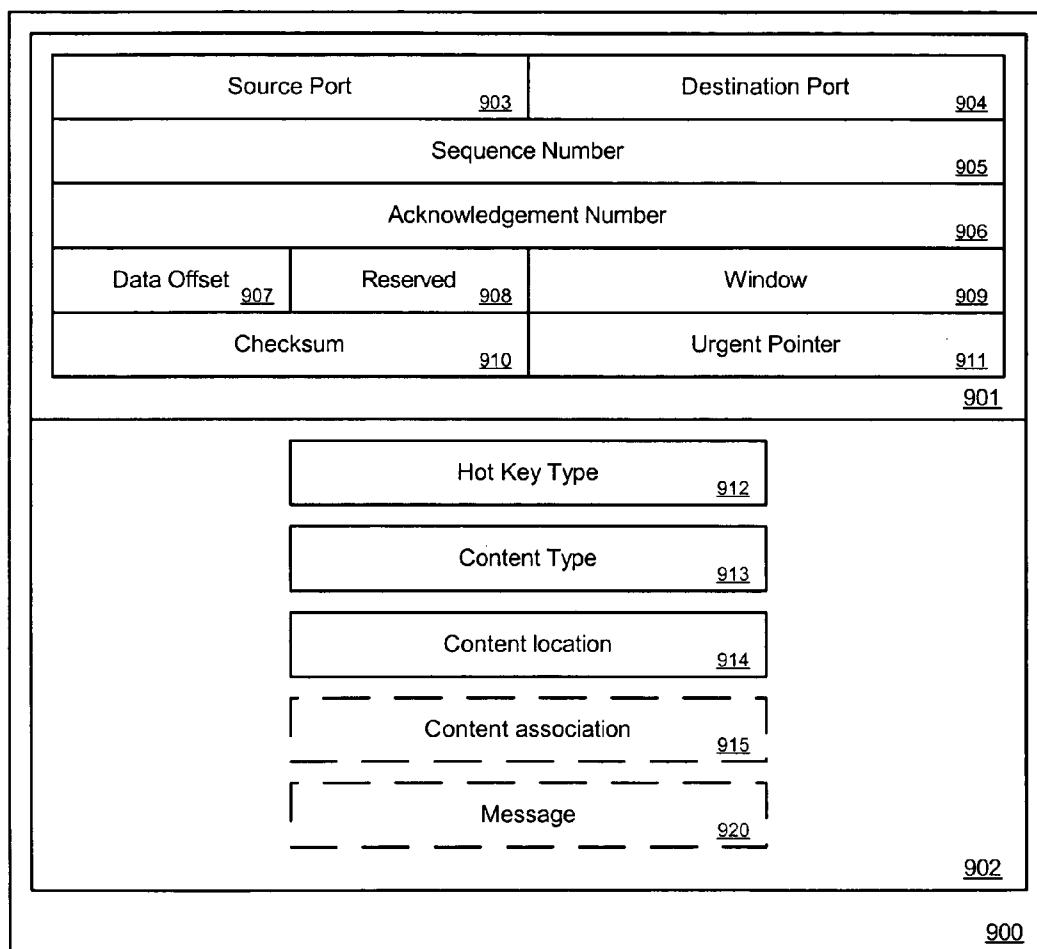


Figure 9

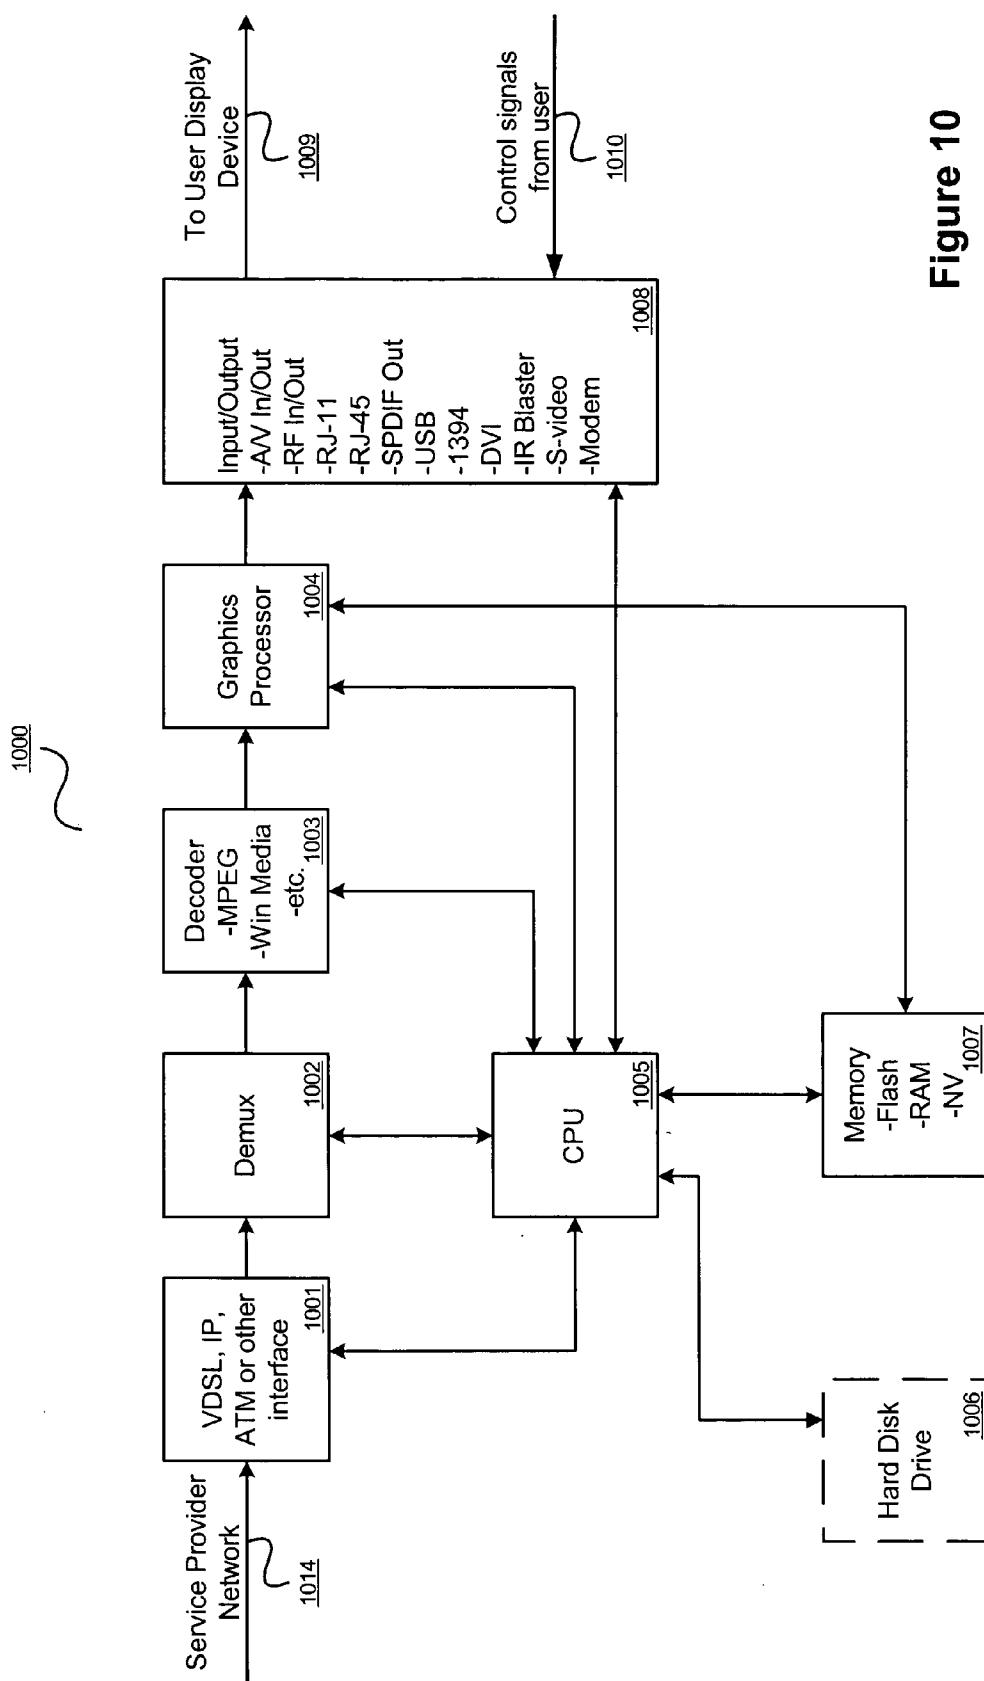


Figure 10

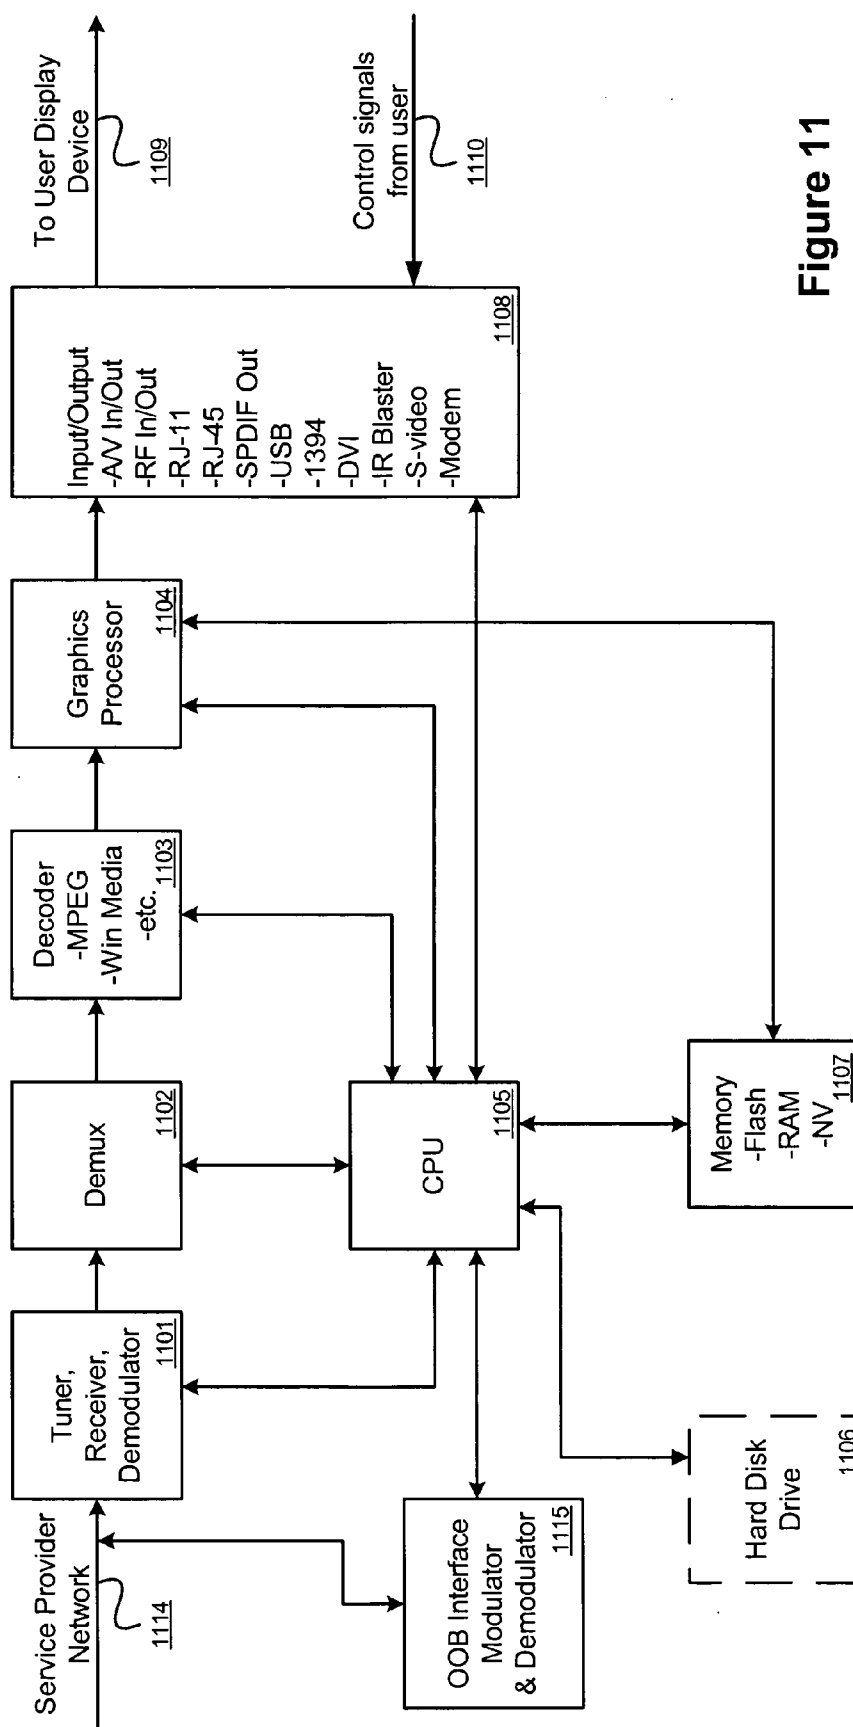


Figure 11

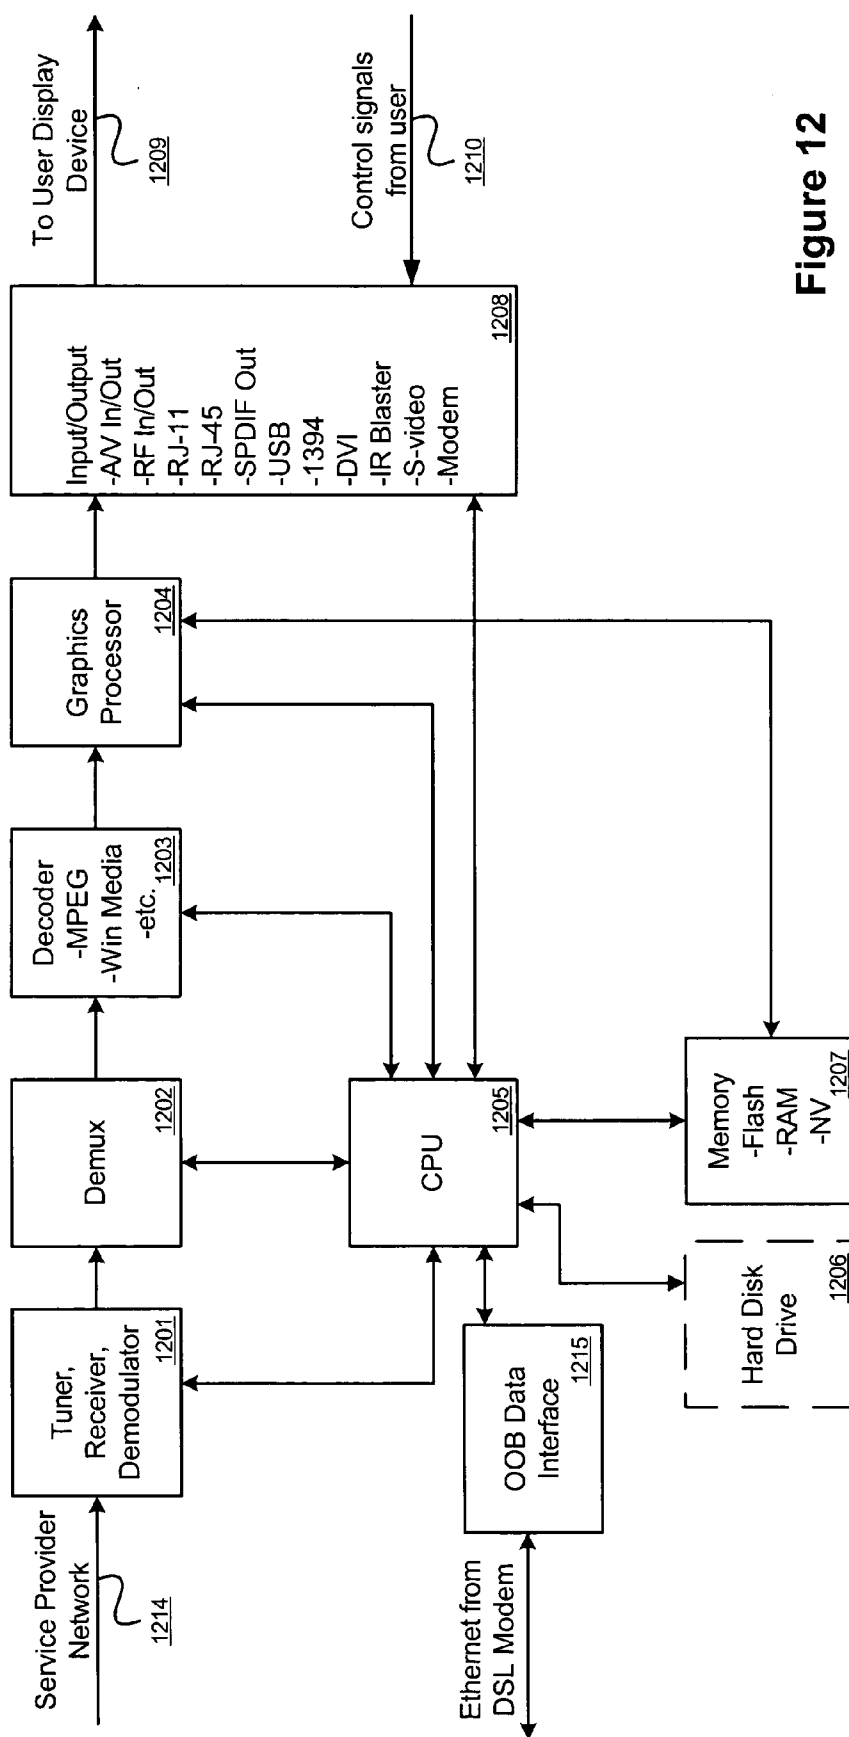


Figure 12

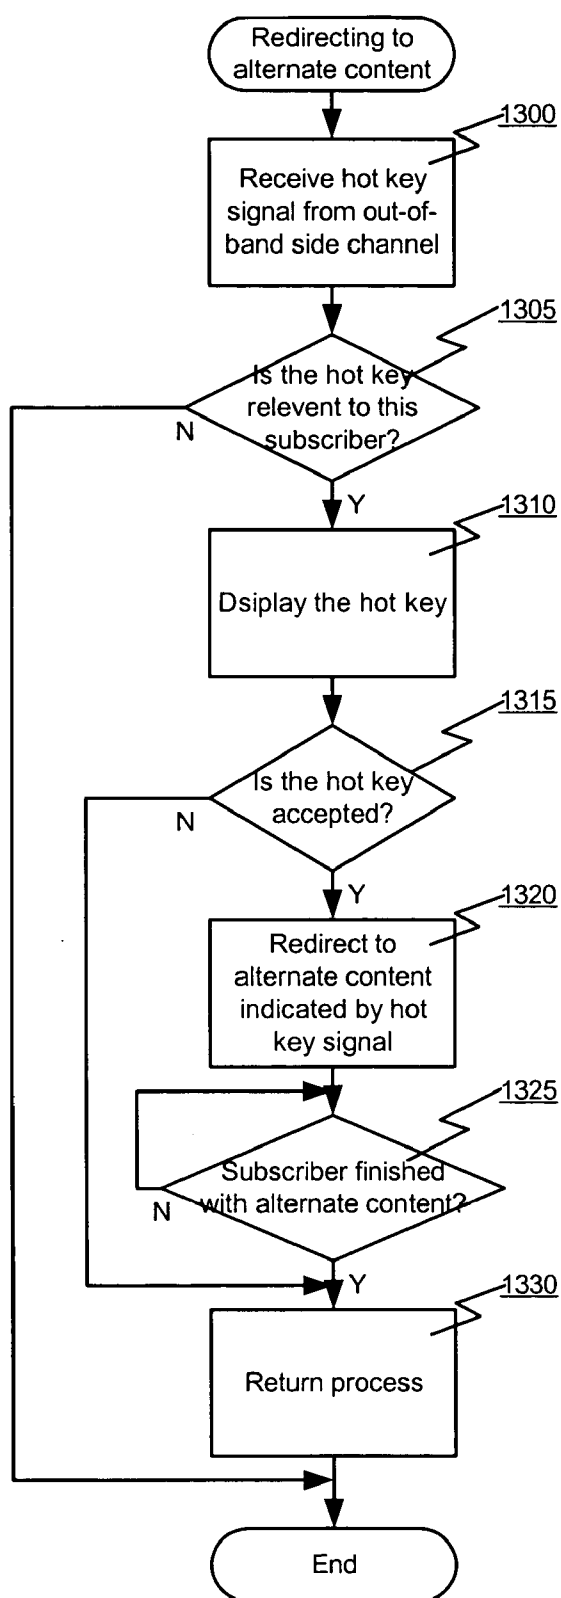


Figure 13

SYSTEM AND METHOD FOR ENHANCED HOT KEY DELIVERY

RELATED APPLICATIONS

[0001] This application is related to co-pending application Ser. No. 10/611,259 filed on Jun. 30, 2003.

FIELD OF THE INVENTION

[0002] The various embodiments of the invention disclosed herein relate generally to the field of interactive television. More particularly, these embodiments relate to providing enhanced delivery of content notification signals.

BACKGROUND OF THE INVENTION

[0003] Advances in telecommunications and computing technology have lead to the use of interactive television (TV) services on a large scale. Where such services are available, subscribers are not only able to access television content by passively receiving it, but are also able to interact with the service providers by communicating requests and/or commands to the service providers.

[0004] Generally, interactive TV service provides a subscriber or user a variety of options such as: traditional broadcast and cable television programming; video services, such as pay-per-view (PPV), near video-on-demand (NVOD), video-on-demand (VOD), promo channels, electronic program guides, etc.; cable delivered PC-based services; and interactive services through the use of a combination of compression and digital video technologies. Interactive TV services may also provide menuing capabilities and upstream signaling from subscribers to service providers.

[0005] In addition to various forms of video content, an interactive TV subscriber may be able to download video games or even play them interactively with an interactive server and/or with other subscribers. An interactive service subscriber may order "time shift TV," in which a particular program may be viewed at a time following its ordinary broadcast time. A subscriber may also selectively view desired parts of transactional, informational or advertising services. For example, a subscriber may view information on the weather predictions for a given location or at a given time, gather information relating to a particular sporting event or team, obtain news on demand, or query a system regarding a particular real estate market. Alternatively, a subscriber may participate in interactive entertainment programs, such as interactive game shows, interactive lottery or gambling, or request musical selections. Subscribers interested in educational programming, such as a school or a family residence, may invoke interactive "edutainment" or "how-to" programs.

[0006] The combination of broadcast and interactive applications over interactive TV (e.g., interactive content) creates a possible mode of communication in which a user, if informed of the availability of alternate interactive content relating to a subject matter of interest, may invoke the alternate content to investigate that subject matter more thoroughly and according to his or her own tastes. However, television viewers, who are accustomed to choosing at will between the available broadcast channels with instantaneous results, will expect to be informed of the alternate content in

a convenient and timely manner and to pass from one medium to another seamlessly.

SUMMARY OF THE INVENTION

[0007] A method and apparatus are described that provide enhanced hot key delivery. According to one embodiment, a service provider determines whether to inform one or more users of an interactive television service of available content. Responsive to determining to inform the one or more users of the available content, a hot key signal is generated indicating availability and a location of the alternate content. The hot key signal is sent to the one or more users via a side channel with which the one or more users and the interactive television service provider are connected. The side channel is out-of-band with one or more channels for content.

[0008] The hot key signal from the out-of band side channel is received by a terminal device. The terminal device determines whether the hot key signal is relevant to a user currently viewing content from the service provider. Responsive to determining the hot key signal is relevant to the user, an indication that the hot key signal has been received is displayed. Responsive to receiving an indication that the hot key is accepted, the user is directed to the available content indicated by the hot key signal.

[0009] Other features of the present invention will be apparent from the accompanying drawings and from the detailed description that follows.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIGS. 1A-1D illustrate a television displaying a picture containing a hot key for informing a subscriber of available alternate content and redirecting the subscriber to the alternate content responsive to selection of the hot key according to one embodiment of the present invention.

[0011] FIG. 2 is a block diagram illustrating an exemplary network over which interactive television signals and related hot key signals may be broadcast according to one embodiment of the present invention.

[0012] FIG. 3 is a block diagram illustrating an exemplary network over which interactive television signals and related hot key signals may be broadcast according to an alternative embodiment of the present invention.

[0013] FIG. 4 is a block diagram illustrating an exemplary network over which interactive television signals and related hot key signals may be broadcast according to another alternative embodiment of the present invention.

[0014] FIG. 5 is a block diagram of a head-end and data center system from which hot key signals may be generated and sent according to the embodiment illustrated in FIG. 2.

[0015] FIG. 6 is a block diagram of a head-end and data center system from which hot key signals may be generated and sent according to the embodiment illustrated in FIG. 3.

[0016] FIG. 7 is a block diagram of a head-end and data center system from which hot key signals may be generated and sent according to the embodiment illustrated in FIG. 4.

[0017] FIG. 8 is a flowchart illustrating head-end and data center processing for generating hot key signals according to another alternative embodiment of the present invention.

[0018] FIG. 9 is a diagram illustrating one possible format for a hot key data packet according to one embodiment of the present invention.

[0019] FIG. 10 is a block diagram of a subscriber side system to redirect a subscriber to alternate content responsive to selection of a hot key according to the embodiment illustrated in FIG. 2.

[0020] FIG. 11 is a block diagram of a subscriber side system to redirect a subscriber to alternate content responsive to selection of a hot key according to the embodiment illustrated in FIG. 3.

[0021] FIG. 12 is a block diagram of a subscriber side system to redirect a subscriber to alternate content responsive to selection of a hot key according to the embodiment illustrated in FIG. 4.

[0022] FIG. 13 is a flowchart illustrating processing on a subscriber side system for redirecting a subscriber to alternate content responsive to selection of a hot key according to one embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0023] In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding. It will be apparent, however, to one skilled in the art that embodiments of the present invention may be practiced without some of these specific details.

[0024] Embodiments of the present invention include various processes, which will be described below. The processes may be performed by hardware components or may be embodied in machine-executable instructions, which may be used to cause a general-purpose or special-purpose processor or logic circuits programmed with the instructions to perform the processes. Alternatively, the processes may be performed by a combination of hardware and software.

[0025] Embodiments of the present invention may be provided as a computer program product which may include a machine-readable medium having stored thereon instructions which may be used to program a computer (or other electronic devices) to perform a process. The machine-readable medium may include, but is not limited to, floppy diskettes, optical disks, Compact Disk Read-Only Memories (CD-ROMs), and magneto-optical disks, Read-Only Memories (ROMs), Random Access Memories (RAMs), Erasable Programmable Read-Only Memories (EPROMs), Electronically Erasable Programmable Read-Only Memories (EEPROMs), magnetic or optical cards, flash memory, or other type of media/machine-readable medium suitable for storing electronic instructions. Moreover, embodiments of the present invention may also be downloaded as a computer program product, wherein the program may be transferred from a remote computer to a requesting computer by way of data signals embodied in a carrier wave or other propagation medium via a communication link (e.g., a modem or network connection).

[0026] FIGS. 1A-1D illustrate a television displaying a picture containing a hot key for informing a subscriber of available alternate content and redirecting the subscriber to the alternate content responsive to selection of the hot key

according to one embodiment of the present invention. These figures represent respectively a process of viewing content, receiving a hot key, accepting a hot key, and redirecting to alternate content.

[0027] Specifically, FIG. 1A illustrates an example of viewing content. Here, a broadcast video program 101 is being displayed on television 100. Alternatively, a subscriber may be viewing other types of interactive TV content such as pay-per-view video content, interactive games, etc.

[0028] FIG. 1B illustrates an example of receiving a hot key. In this example, the subscriber is tuned to the same broadcast video program 101 on television 100 as in the previous example of FIG. 1A. However, in this example an icon 103 or other graphic has been displayed to indicate to the subscriber that a hot key has been received. The hot key indicates that alternate content is available for the subscriber's consumption. According to one embodiment of the present invention, the alternate content may be in the form of another broadcast video program with content related to the broadcast video program 101 being viewed by the subscriber.

[0029] FIG. 1C illustrates an example of accepting a hot key. In this example, the subscriber is tuned to the same broadcast video program 101 as in FIGS. 1A and 1B. Icon 105, displayed to indicate to the subscriber that a hot key has been received, now indicates a manner in which the subscriber may accept or decline the alternate content. In this example, icon 105 indicates that the subscriber may press 1 to accept the alternate content or 2 to decline the alternate content.

[0030] Of course, other methods of accepting or declining the alternate content may be used. For example, different single or even multiple buttons on a remote control may be pressed by the subscriber to accept or decline the alternate content. According to one embodiment, a single "hot key button" may be present on the subscriber's remote control that may be pressed by the subscriber whenever a hot key icon is present on the television display. Pressing the hot key button may be a manner in which the subscriber accepts the alternate content and is redirected to that content without further interaction from the subscriber. According to another embodiment, the user may decline the alternate content by taking no action at all. That is, after some time period during which no action is taken by the subscriber to accept the alternate content, the hot key may simply time out and expire. Various other methods of accepting or declining the alternate content may also be used.

[0031] Regardless of the exact operation used to accept the alternate content, FIG. 1D illustrates redirecting a subscriber to alternate content responsive to the hot key being accepted. According to one embodiment of the present invention, the alternate content may be another broadcast video program with content related to the broadcast video program 101 being viewed by the subscriber. Therefore, television 100 in FIG. 1D illustrates an alternate video program 107 being displayed. According to one embodiment of the present invention, the alternate video program 107 may present content related to the original content the subscriber was viewing. For example, if the subscriber was viewing a broadcast television program related to travel, the alternate video program may also be related to travel.

[0032] According to yet another embodiment of the present invention, the alternate video program may be

commercial in nature. For example, the broadcast television program may be related to sports. In such a case, the alternate video program may be a pay-per-view sporting event of the same type or an advertisement for an upcoming pay-per-view event. In another example, the alternate video program may be an "infomercial" selling merchandise related to some aspect of the original broadcast video.

[0033] Therefore, content providers and/or service providers may be able to sell hot keys just as they currently sell time for commercial spots. For example, a provider of pay-per-view video content may wish to purchase from a content provider a hot key that redirects subscribers to his content or an advertisement of upcoming events during a broadcast television program related to that content. Alternatively, content providers may charge subscribers to receive a hot key service or even to block some or all hot key signals. Content providers and/or service providers may thus be able to realize an additional source of revenue.

[0034] As will be described below, a system over which interactive television signals with associated hot key may be broadcast according to various embodiments of the present invention may be implemented over different types of networks. These different types of networks include, but are not limited to, cable, satellite, Fiber-to-the-Curb (FTTC), Fiber-to-the-House (FTTH), Very high speed Digital Subscriber Line (VDSL), and others. Also, if an out-of-band side channel used to transmit the hot key signal is through a network separate from the network transmitting the content, these networks may be of different types and use different mediums.

[0035] FIG. 2 is a block diagram illustrating an exemplary network over which interactive television signals and related hot key signals may be broadcast according to one embodiment of the present invention. This example illustrates, at a high-level, an architecture of a service provider's system 200 that includes head-end and data center 201, data network 204, and subscriber premises 206 that also contains cable modem 207, Set Top Box (STB)/Gateway 208, one or more televisions 209 and 210, and possibly other devices such as a personal computer (PC) (not shown here).

[0036] An interactive TV service provider typically operates and maintains a head-end and data center 201 equipped to receive signals 202 from one or more content providers. Content providers may be any original or secondary source of programming or information generally including, for example, interactive or non-interactive over-the-air programming such as commercial television stations, cable programming such as weather, travel and entertainment channels, game channels, and other interactive services of various types. Head-end and data center 201, after receiving content from one or more content providers, may then broadcast the interactive content to subscribers premises 206. Further details of the hardware comprising the head-end and data center 201 as well as the processing performed therein will be discussed below with reference to FIGS. 5 and 8.

[0037] According to one embodiment of the present invention, hot key signals indicating the availability of alternate content may be provided to head-end and data center 201 along with interactive TV signals 202 from the content providers. For example, the hot key signals may be generated at the content provider's location by an operations team

when preparing and scheduling content for transmission to various service providers. As will be discussed below, interactive TV signals with these associated hot key signals are transmitted from head-end and data center 201 and are received and used by STB/gateway 208 or PC 211 at subscriber premises 206 to inform the subscriber of the availability of alternate content and to guide the subscriber to this content if he chooses to accept it. Details of the hot key signals will be discussed below with reference to FIG. 9.

[0038] According to another embodiment of the present invention, hot key signals indicating the availability of alternate content may be generated at head-end and data center 201. For example, the hot key signals may be generated at head-end and data center 201 by an operations team when preparing and scheduling content for transmission to subscribers. As will be discussed below, these associated hot key signals are transmitted from head-end and data center 201 and are received and used by STB/gateway 208 at subscriber premises 206 to inform the subscriber of the availability of alternate content and to guide the subscriber to this content if he chooses to accept it.

[0039] In the example illustrated in FIG. 2, a signal carrying interactive TV content is transmitted from head-end and data center 201 through data network 204. Data network 204 may be any of a variety of possible network types such as Very high speed Digital Subscriber Line (VDSL), Internet Protocol (IP), Asynchronous Transfer Mode (ATM), or others. The content may be broadcast as a Motion Pictures Experts Group Standard 2 (MPEG-2) data stream using a network protocol such as Internet Protocol (IP). Therefore, the content may be transmitted from head-end and data center 201 as IP data packets or in another similar format. One possible example of such a packet will be discussed below with reference to FIG. 9.

[0040] Regardless of the format of the transmission, a signal carrying the interactive TV content is received at subscriber premises 206 via STB/Gateway 208. The STB/Gateway 208 performs functions such as exchanging messages (including video-related data) over a network with head-end and data center 201, receiving messages from a user input device, such as a hand-held remote control unit or keyboard, translating video signals from a network-native format into a format that can be used by televisions 209 and 210 or other display devices, and providing a video signal to televisions 209 and 210 or other display devices. STB/Gateway 208 may also be capable of performing other functions, such as inserting alphanumeric or graphical information into the video stream in order to "overlay" that information on the video image, providing graphic or audio feedback to a user, or routing a traditional broadcast signal to a viewing device to which another STB is connected. Additional details of the hardware of STB/Gateway 208 and the processing performed therein will be discussed below with reference to FIGS. 10 and 13.

[0041] In use, STB/Gateway 208 may receive hot key signals associated with the interactive TV signals by either the content providers or the service provider. STB/Gateway 208 may then notify the subscriber of available alternate content as discussed above with reference to FIG. 1. STB/Gateway 208 may then receive some form of subscriber feedback indicating that the subscriber accepts or declines

the alternate content. If the subscriber accepts the alternate content, STB/Gateway 208 may then redirect the subscriber to this alternate content as will be discussed further below with reference to FIG. 13.

[0042] According to one embodiment of the present invention, head-end and data center may also be connected with the Internet 213 or other network via a high-speed connection 212 such as a fiber optic connection to provide access to a number of web sites 214-216. Through this connection 212, head-end and data center 201 may supply alternate content to subscribers from one or more of the number of web sites 214-216.

[0043] FIG. 3 is a block diagram illustrating an exemplary network over which interactive television signals and related hot key signals may be broadcast according to an alternative embodiment of the present invention. As will be explained, this example uses a two-way video network with Out-of-Band (OOB) interfaces at both the head-end and at the STB to provide for the transfer of hot-key signals. FIG. 3 illustrates, at a high-level, an architecture of a service provider's system 300 that includes head-end and data center 301, two-way video network 304, and subscriber premises 306 that also contains Set Top Box (STB)/Gateway 308, one or more televisions 309 and 310, and possibly other devices such as personal computer (PC) (not shown here).

[0044] As explained above, an interactive TV service provider typically operates and maintains a head-end and data center 301 equipped to receive signals 302 from one or more content providers. Head-end and data center 301 receives the content from one or more content providers and may then broadcast the interactive content via downstream video module 321 to subscriber's premises 306.

[0045] According to one embodiment of the present invention, hot key signals indicating the availability of alternate content may be provided to head-end and data center 301 along with the content signals 302 from the content providers. For example, the hot key signals may be generated at the content provider's location by an operations team when preparing and scheduling content for transmission to various service providers. In such a case, the hot key generation system 322 detects the hot key signals from the content providers and the signals to the OOB interface 320 to send the hot key signals to the subscriber's premises via an out-of-band channel of the two-way video network 304. Alternatively, hot key generation system 322 may generate hot key signals at the head-end and data center 301 independently. Further details of the hardware comprising the head-end and data center 301 as well as the processing performed therein will be discussed below with reference to FIGS. 6 and 8.

[0046] As will be discussed below, interactive TV signals and the associated hot key signals are transmitted from head-end and data center 301 and are received and used by STB/gateway 308 at subscriber premises 306 to inform the subscriber of the availability of alternate content and to guide the subscriber to this content if he chooses to accept it. Details of the hot key signals will be discussed below with reference to FIG. 9.

[0047] In the example illustrated in FIG. 3, a signal carrying interactive TV content is transmitted from head-end and data center 301 over two-way video network 304.

Typically, transmissions over two-way video network 304 may be made in a digital form. For example, the content may be broadcast as a Motion Pictures Experts Group Standard 2 (MPEG-2) data stream using a network protocol such as Internet Protocol (IP). Therefore, the content and hot key signals may be transmitted from head-end and data center 301 as IP data packets or in another similar format. One possible example of such a packet will be discussed below with reference to FIG. 9.

[0048] Regardless of the format of the transmission, a signal carrying the interactive TV content is received at subscriber premises 306 via STB/Gateway 308. Additional details of the hardware of STB/Gateway 308 and the processing performed therein will be discussed below with reference to FIGS. 11 and 13.

[0049] In use, STB/Gateway 308, containing an out-of-band interface, may receive hot key signals from either the content providers or the service provider and transmitted to the STB/Gateway 308 from the head-end and data center 301 via an out-of-band side channel. STB/Gateway 308 may then notify the subscriber of available alternate content as discussed above with reference to FIG. 1. STB/Gateway 308 may then receive some form of subscriber feedback indicating that the subscriber accepts or declines the alternate content. If the subscriber accepts the alternate content, STB/Gateway 308 may then redirect the subscriber to this alternate content as will be discussed further below with reference to FIG. 13.

[0050] According to one embodiment of the present invention, head-end and data center 301 may also be connected with the Internet 313 or other network via a high-speed connection 312 such as a fiber optic connection to provide access to a number of web sites 314-316. Through this connection 312, head-end and data center 301 may supply alternate content to subscribers from one or more of the number of web sites 314-316.

[0051] FIG. 4 is a block diagram illustrating an exemplary network over which interactive television signals and related hot key signals may be broadcast according to another alternative embodiment of the present invention. As will be explained, this example uses a one-way video network and a separate Digital Subscriber Line (DSL) connection over a telephony network between the head-end and the subscriber's premises to provide for the transfer of hot-key signals. FIG. 4 illustrates, at a high-level, an architecture of a service provider's system 400 that includes head-end and data center 401, one-way video network 404, and subscriber premises 406 that also contains cable modem 407, Set Top Box (STB)/Gateway 408, one or more televisions 409 and 410.

[0052] Head-end and data center 401, after receiving content from one or more content providers, may then broadcast the interactive content to subscribers premises 406 from downstream video module 420 over one-way video network 404. According to one embodiment of the present invention, hot key signals indicating the availability of alternate content may be provided to head-end and data center 401 along with the content signals 402 from the content providers. In such a case, the hot key signals may be detected by hot key generation system 421. The hot key signals may then be transmitted from head-end and data center 401 over tele-

phony and data network **422**. These signals are received by DSL modem **424** connected with STB/gateway **408** at subscriber premises **406**.

[0053] Alternatively, hot key signals indicating the availability of alternate content may be independently generated by hot key generation system **421** at head-end and data center **401**. For example, the hot key signals may be generated at head-end and data center **401** by an operations team when preparing and scheduling content for transmission to subscribers. Further details of the hardware comprising the head-end and data center **401** as well as the processing performed therein will be discussed below with reference to FIGS. 7 and 8.

[0054] A signal carrying the video portion of the interactive TV content is received at subscriber premises **406** via STB/Gateway **408** over coax cable **426**. The hot key signals, whether generated by the content provider or the head-end and data center **401** are received by DSL modem **424** connected with telephone line **425** and Digital Subscriber Line Access Multiplexor (DSLAM) **423**.

[0055] DSLAM **423** is a device that is located in the central office or in the field and is operated by the entity providing the telephony and data network **422**. The DSLAM **423** provides communication between the subscribers DSL modem **424** and the telephony and data network **422**. The service provider may use ATM or some other wide area network protocol to transport the data from all users on a DSLAM to its destination. So one side of the DSLAM **423** accepts a wide area network protocol (that aggregates the data from all the users on the DSLAM), and the other side connects to a DSL modem in each home over the copper phone lines.

[0056] In use, STB/Gateway **408** receives hot key signals from the DSL modem **424** via a network connection such as an Ethernet connection. STB/Gateway **408** may then notify the subscriber of available alternate content as discussed above with reference to FIG. 1. STB/Gateway **408** may then receive some form of subscriber feedback indicating that the subscriber accepts or declines the alternate content. If the subscriber accepts the alternate content, STB/Gateway **408** may then redirect the subscriber to this alternate content. Additional details of the hardware of STB/Gateway **408** and the processing performed therein will be discussed below with reference to FIGS. 12 through 13.

[0057] According to one embodiment of the present invention, head-end and data center **401** may also be connected with the Internet **413** or other network via a high-speed connection **412** such as a fiber optic connection to provide access to a number of web sites **414-416**. Through this connection **412**, head-end and data center **401** may supply alternate content to subscribers from one or more of the number of web sites **414-416**.

[0058] FIG. 5 is a block diagram illustrating a head-end and data center system from which hot key signals may be generated and sent according to the embodiment illustrated in FIG. 2. This example illustrates head-end and data center system **501** comprising content reception, distribution, and switching portion **504**, head-end transport portion **505**, and hot key generation system **515**.

[0059] Content reception, distribution, and switching portion **504** is connected with one or more of satellite receiver

501, over the air broadcast receiver **502**, fiber optical feed **503**, and other types of links (not shown) to receive signals from one or more content providers. Content reception, distribution, and switching portion **504** comprises equipment that is commonly used to receive broadcast signals, demodulate the broadcast signals to separate the content signals from a carrier signal if necessary, distribute and arrange the content from the content providers to fit a programming schedule of the service provider, and provide switching of these signals between the various components of the head-end and data center **501**.

[0060] Head-end transport portion **505** comprises a plurality of encoders **506-512**, optional back-up encoder **513**, multiplexor system **514**, and transport system **521**. Encoders **505-512** and optional back-up encoder **513** receive interactive TV content signals from content reception, distribution, and switching portion **504** and encode the content signals into any of a variety of well known formats such as Motion Pictures Experts Group Standard 2 (MPEG-2), Motion Pictures Experts Group Standard 4 (MPEG-4), DivX, or any other format. Encoders **505-512** and optional back-up encoder **513** each provide an individual encoded data stream representing the content signal of a single channel to multiplexor system **514**.

[0061] Hot key generation system **515** is also connected with multiplexor system **514** of head-end transport **505**. Hot key generation system **515** receives content **523** from content reception, distribution, and switching portion **504**, trigger programming information **516**, and event data feed **517**. Trigger programming information **516** provides an indication of the time, date, etc. and an indication to generate a hot key signal. Event data feed **517** provides data related to content programming such as an Electronic Program Guide. Using content **523**, trigger programming information **516**, and event data feed **517** hot key generation system **515** generates hot key signals associated with content to be broadcast from head-end and data center **501** and outputs the hot key signals to multiplexor system **514**. Exemplary processes for generating hot key signals as may be performed by hot key generation system **515** will be discussed below with reference to FIG. 8.

[0062] Multiplexor system **514** may comprise a primary as well as an optional back-up multiplexor. Multiplexor system **514** combines the encoded content signals from encoders **505-512** and optional back-up encoder **513** and hot key signals from hot key generation system **515** to provide an output data stream. The output stream of multiplexor system **514** comprises the individual encoded data streams representing the content signals of the individual channels as well as any associated hot key signals.

[0063] The output of multiplexor system **514** may be applied to transport system **521** that may comprise a primary as well as an optional back-up transport system. The function of the transport system **521** is to prepare the output stream of multiplexor system **514** for transmission over network **522**. That is, transport system **521** place the output stream of multiplexor system **514** into a format and protocol appropriate for network **522**. The network may be any a variety of possible networks such as VDSL, IP, ATM, etc. For example, the output stream of multiplexor system may be placed into Internet Protocol (IP) packets or placed into an Asynchronous Transfer Mode (ATM) channel by transport system **521**.

[0064] FIG. 6 is a block diagram of a head-end and data center system from which hot key signals may be generated and sent according to the embodiment illustrated in FIG. 3. This example illustrates head-end and data center system 601 comprising content reception, distribution, and switching portion 604, head-end transport portion 605, and hot key generation system 615.

[0065] Content reception, distribution, and switching portion 604 is connected with one or more of satellite receiver 601, over the air broadcast receiver 602, fiber optical feed 603, and other types of links (not shown) to receive signals from one or more content providers. Content reception, distribution, and switching portion 604 comprises equipment that is commonly used to receive broadcast signals, demodulate the broadcast signals to separate the content signals from a carrier signal if necessary, distribute and arrange the content from the content providers to fit a programming schedule of the service provider, and provide switching of these signals between the various components of the head-end and data center 601.

[0066] Head-end transport portion 605 comprises a plurality of encoders 606-612, optional back-up encoder 613, multiplexor system 614, modulation system 618, up converters 619 and combining network 630. Encoders 605-612 and optional back-up encoder 613 receive interactive TV content signals from content reception, distribution, and switching portion 604 and encode the content signals into any of a variety of well known formats such as Motion Pictures Experts Group Standard 2 (MPEG-2), Motion Pictures Experts Group Standard 4 (MPEG-4), DivX, or any other format. Encoders 605-612 and optional back-up encoder 613 each provide an individual encoded data stream representing the content signal of a single channel to multiplexor system 614.

[0067] Multiplexor system 614 may comprise a primary as well as an optional back-up multiplexor. Multiplexor system 614 combines the encoded content signals from encoders 605-612 and optional back-up encoder 613 to provide an output data stream. The output stream of multiplexor system 614 comprises the individual encoded data streams representing the content signals of the individual channels.

[0068] The output stream of multiplexor system 614 may be applied to a modulation system 618. Modulation system 618 may comprise a primary as well as an optional back-up modulator. Modulation system 618 uses the output data stream of multiplexor system 614 to modulate a carrier frequency for transmission from the head-end system 601.

[0069] Modulation system 618 supplies the modulated carrier signal to up converters 619. Up converters 619 may comprise primary as well as optional back-up converters. Additionally, up converters 619 may comprise multiple stages of converters. The function of up converters 619 is to increase the modulated carrier frequency to a range that is suitable for broadcast. Up converters 619 then transmit the modulated carrier signal from head-end and data center 601 via network 620 to subscribers.

[0070] Hot key generation system 615 receives content 623 from content reception, distribution, and switching portion 604, trigger programming information 616, and event data feed 617. Trigger programming information 616 provides an indication of the time, date, etc. and an indication

to generate a hot key signal. Event data feed 617 provides data related to content programming such as an Electronic Program Guide. Using content 623, trigger programming information 616, and event data feed 617 hot key generation system 615 generates hot key signals associated with content to be broadcast from head-end and data center 601 and outputs the hot key signals to router 632. Exemplary processes for generating hot key signals as may be performed by hot key generation system 615 will be discussed below with reference to FIG. 8.

[0071] Router 632 directs the hot key signal to one or more subscribers connected with the head-end and data. That is, router 632 adds address or multicast information to the hot key signal indicating destinations for the hot key signal. Router 632 then sends the hot key signals to OOB interface 631. OOB interface 631 modulates the hot key signal for transmission over an out-of-band side channel to the two-way video network. For example, if the hot key signal is sent using an out-of-band signaling method such as STCE 55-1, SCTE 55-2, Digital Audio Visual Council (DAVIC), Data Over Cable Service Interface Specification (DOCSIS), or similar method, the OOB interface 631 may include a Quaternary Phase Shift Keying (QPSK) modulator and demodulator. OOB interface 631 sends the modulated signal to combining network 630. Combining network 630 combines the modulated video signals and the modulated hot key signals for transmission to one or more subscribers.

[0072] FIG. 7 is a block diagram of a head-end and data center system from which hot key signals may be generated and sent according to the embodiment illustrated in FIG. 4. This example illustrates head-end and data center system 701 comprising content reception, distribution, and switching portion 704, head-end transport portion 705, and hot key generation system 715.

[0073] Content reception, distribution, and switching portion 704 is connected with one or more of satellite receiver 701, over the air broadcast receiver 702, fiber optical feed 703, and other types of links (not shown) to receive signals from one or more content providers. Content reception, distribution, and switching portion 704 comprises equipment that is commonly used to receive broadcast signals, demodulate the broadcast signals to separate the content signals from a carrier signal if necessary, distribute and arrange the content from the content providers to fit a programming schedule of the service provider, and provide switching of these signals between the various components of the head-end and data center 701.

[0074] Head-end transport portion 705 comprises a plurality of encoders 706-712, optional back-up encoder 713, multiplexor system 714, modulation system 718, and up converters 719. Encoders 705-712 and optional back-up encoder 713 receive interactive TV content signals from content reception, distribution, and switching portion 704 and encode the content signals into any of a variety of well known formats such as Motion Pictures Experts Group Standard 2 (MPEG-2), Motion Pictures Experts Group Standard 4 (MPEG-4), DivX, or any other format. Encoders 705-712 and optional back-up encoder 713 each provide an individual encoded data stream representing the content signal of a single channel to multiplexor system 714.

[0075] Multiplexor system 714 may comprise a primary as well as an optional back-up multiplexor. Multiplexor system

714 combines the encoded content signals from encoders **705-712** and optional back-up encoder **713** to provide an output data stream. The output stream of multiplexor system **714** comprises the individual encoded data streams representing the content signals of the individual channels.

[0076] The output stream of multiplexor system **714** may be applied to a modulation system **718**. Modulation system **718** may comprise a primary as well as an optional back-up modulator. Modulation system **718** uses the output data stream of multiplexor system **714** to modulate a carrier frequency for transmission from the head-end system **701**.

[0077] Modulation system **718** supplies the modulated carrier signal to up converters **719**. Up converters **719** may comprise primary as well as optional back-up converters. Additionally, up converters **719** may comprise multiple stages of converters. The function of up converters **719** is to increase the modulated carrier frequency to a range that is suitable for broadcast. Up converters **719** then transmit the modulated carrier signal from head-end and data center **701** via network **720** to subscribers.

[0078] The one-way video network **720** may include a one-way cable network, a one-way satellite video network, or any other one-way network that may be used to deliver video content.

[0079] Hot key generation system **715** receives content **723** from content reception, distribution, and switching portion **704**, trigger programming information **716**, and event data feed **717**. Trigger programming information **516** provides an indication of the time, date, etc. and an indication to generate a hot key signal. Event data feed **517** provides data related to content programming such as an Electronic Program Guide. Using content **723**, trigger programming information **716**, and event data feed **717** hot key generation system **715** generates hot key signals associated with content to be broadcast from head-end and data center **701** and outputs the hot key signals to router **731**. Exemplary processes for generating hot key signals as may be performed by hot key generation system **715** will be discussed below with reference to **FIG. 8**.

[0080] Router **731** directs the hot key signal to one or more subscribers connected with the head-end and data via telephony and data network **732**. That is, router **731** adds address or multicast information to the hot key signal indicating destinations for the hot key signal. Router **731** then sends the hot key signals to subscribers via telephone and data network **732**.

[0081] **FIG. 8** is a flowchart illustrating head-end and data center processing for adding hot key signals to a broadcast signal according to one embodiment of the present invention. This process may be performed by a system such as the hot key generation system of the head-end and data center described above with reference to **FIGS. 5-7** or any other system with similar capabilities.

[0082] First, at decision block **800**, the system determines whether a hot key signal should be added to the current content. This determination may be made by a local television operator such as a decision to provide a hot key on a local advertisement that gives the subscriber the opportunity to find out more about a local product. Alternatively, this determination may be made by an original national content provider such as a national network to provide a hot key to

all subscribers or to subscribers living in a certain state or region. An indication upon which this decision may be based may be passed in trigger information from the content provider to the head-end. Alternatively, the determination may be made at the head-end based on programming information or other information supplied by an operations team.

[0083] If a hot key signal is to be added to the current content, the hot key signal may be generated at processing block **805**. As discussed below, the hot key signal may be in any of a variety of formats depending upon the system upon which the signals may be sent. An exemplary format is illustrated in **FIG. 9** below. Generally, generating the hot key signal comprises generating information indicating a destination to which the signal should be sent, data associating the hot key with the content, and other possible information. The destination information may be multicast information or specific addresses from a database. The information associating the hot key with the content may be based on the trigger information initiating the generation of the hot key signal.

[0084] Finally, at processing block **805**, the hot key signal is sent to one or more subscribers via an out-of-band side channel as described above. That is, the hot key IP packet or other signal is transmitted over a side-channel other than and out-of-band with the channel over which the content is transmitted as described above with reference to **FIGS. 2-7**. According to one embodiment of the present invention, the hot key signal may be generated and sent according to the out-of-band signaling methods described in the Society of Cable Telecommunications Engineers (STCE) standards STCE55-1, STCE55-2, or similar methods for out-of-band signaling.

[0085] **FIG. 9** is a diagram illustrating one possible format for a hot key data packet according to one embodiment of the present invention. This example illustrates an IP data packet **900**. The IP data packet includes a header **901** and a body **902**.

[0086] Header **901** includes a number of fields **903-911** that are typically found in IP data packets. These fields include a source port **903**, a destination port **904**, a sequence number **905**, an acknowledgement number **906**, a data offset **907**, a reserved field **908**, a window field **909**, checksum data **910**, and an urgent pointer **911**. It should be noted that such an IP data packet may be sent to multiple address using IP multicasting. Multicasting therefore allows efficient broadcasting of the hot key signals from the head-end and data center to subscribers.

[0087] Body **902** may also include a number of fields **912-920**. These fields may include a hot key type **912**, a content type **913**, a content location **914**, optional content association field **915** and optionally a message field **920**. In various applications, the number of fields used, size of the fields, type of data presented, format of the data, content of the fields, etc. may vary. For example, in some cases not all of the fields presented here may be used. In other cases, additional data may be presented such as additional graphical or textual information. Additionally, the data may be presented in a wide variety of formats such as plain American Standard Code for Information Interchange (ASCII) text, other binary representations or even encrypted.

[0088] Regardless of format, hot key type field **912** may represent the type of hot key signal being used. For example,

the hot key signal represented by IP data packet **900** may indicate that alternate content is available on another channel or on a web site. Alternatively, the hot key signal may indicate that alternate content is available to be cached on the subscriber's terminal device.

[0089] Content type field **913** may represent the type, genre, or other details about the alternate content. For example, this field **913** may be used to indicate that the alternate content is a sporting event or movie. Of course, additional details may also be included. For example, the field **913** may indicate that the alternate content is an action movie and name the actors and director. This information may be used by the subscriber's terminal device to judge the relevance of the hot key signal to the subscriber as will be discussed below.

[0090] Content location field **914** may indicate where the alternate content is located. For example, this field **914** may indicate another channel, a web site URL or indicate that the content has been cached on the subscriber's terminal device.

[0091] Optional content association field **915** may contain information relating the hot key signal to specific content. For example, the content association field **915** may indicate a channel to which the hot key signal is related and possibly a time during which the hot key signal is active. In this way, a hot key signal sent via an out-of-band side channel can be sent asynchronously with the content.

[0092] Optional message field **920** may include additional textual or graphical information regarding the hot key or the alternate content. For example, the message field **920** may contain a text message to be displayed to the subscriber providing details of the alternate content. This message may be presented to the subscriber automatically or at his option to help the subscriber decide whether to accept or decline the hot key.

[0093] Alternatively, the hot key signal may be generated in a variety of other formats for use in a variety of different systems. For example, rather than generating a specialized IP packet for the hot key signal, hot key information may be added to an MPEG data stream. In another example, the hot key signal may be added to an NTSC or HDTV signal prior to encoding.

[0094] **FIG. 10** is a block diagram illustrating a subscriber side system to redirect a subscriber to alternate content responsive to selection of a hot key according to the embodiment illustrated in **FIG. 2**. As discussed above, the subscriber side system may vary significantly. The subscriber side system comprising a terminal device, STB, Gateway or similar device, performs functions such as exchanging messages (including video-related data) over a network with head-end and data center, receiving messages from a user input device, such as a hand-held remote control unit, translating video signals from a network-native format into a format that can be used by televisions or other display devices, providing a video signal to televisions or other display devices, and other functions.

[0095] The functionality of the subscriber side system may reside in a stand-alone device, literally a box that can be placed on, or at least near, the television, that is similar in outward form to conventional devices for receiving cable programs. The subscriber side system functionality could alternatively be performed by hardware resident elsewhere,

such as within the television or display console, or by any suitably equipped terminal device. Since the hardware may be proprietary to the service provider and may generally be a physically independent device, the term set top box is used here, but any type of terminal device with similar functionality may be used.

[0096] In the example illustrated in **FIG. 10**, the subscriber side system comprises an STB. The STB comprises interface **1001**, demultiplexor **1002**, decoder **1003**, graphics processor **1004**, central processing unit (CPU) **1005**, optional hard disk drive **1006** or other mass storage device, memory **1007**, and various possible inputs and outputs **1008**.

[0097] Interface **1001** receives signals from the service provider network **1004** over any of a variety of media as discussed above. Interface **1001** is an interface suitable for communicating via the service provider's network **1014**. Since the service provider's network may be a variety of different types, the interface may be a VDSL, IP, ATM, or other type of interface depending upon the network type used.

[0098] Demultiplexor **1002** receives the content signals from interface **1001** and separates the content into multiple data streams representing various channels. The multiple data streams are then supplied as an input to decoder **1003**.

[0099] Decoder **1003** receives the multiple data streams from demultiplexor **1002** and decodes or decompresses the data streams using an appropriate algorithm. For example, if the head-end and data center compressed the video signals into an MPEG-2 data stream, decoder **1003** will decode the MPEG-2 data stream from demultiplexor **1002** to form a standard video signal. The video signal from decoder **1003** is then supplied to graphics processor **1004**.

[0100] Graphics processor **1004** receives the decoded video signals from decoder **1003** and processes the video signals to reduce noise, provide amplifications, etc. Processed video signals from graphics processor **1004** are supplied to input/output module **1008**. Input/output module **1008** may provide a variety of possible output types. For example, outputs may include but are not limited to Audio/Video (A/V), Radio Frequency (RF), Sony/Phillips Digital Interface (SPDIF), Universal Serial Bus (USB), and others.

[0101] Input/output module **1008** also receives control signals from the subscriber. These control signals are typically InfraRed (IR) or Radio Frequency (RF) signals from a remote control unit. Control signals from the subscriber are then fed back from input/output module **1008** to Central Processing Unit (CPU) **1005**.

[0102] CPU **1005** executes instructions stored in memory **1007**. Memory **1007** may comprise a Random Access Memory (RAM) such as flash memory, or other non-volatile memory. The instructions stored in memory **1007**, when executed by CPU **1005** cause CPU **1005** to perform various functions such as controlling the various elements of the STB, receiving hot key signals, and switching to alternate content as will be described below with reference to **FIG. 13**.

[0103] Generally, a hot key signal will be received at interface **1001** along with content signals from the head-end and data center and transmitted over service provider net-

work **1004**. CPU **1005** monitors the data streams passing through interface **1001** for the presence of relevant hot key signals.

[**0104**] The STB may also contain an optional hard disk drive **1006** or other mass storage device. Hard disk drive **1006** allows the STB to cache alternate content for later viewing by the subscriber. If CPU **1005** detects a hot key signals instructing content to be cached, the demultiplexed data stream from demultiplexor **1002** may be saved on hard disk drive **1006**. The still compressed content is stored on hard disk drive **1006** until the subscriber chooses to view it. Once the subscriber chooses to view the cached content, CPU **1005** may retrieve the content from hard disk drive **1006** and provide the compressed data stream to be decoded by decoder **1003**, processed by graphics processor **1004**, and output through input/output module **1008**.

[**0105**] FIG. 11 is a block diagram of a subscriber side system to redirect a subscriber to alternate content responsive to selection of a hot key according to the embodiment illustrated in FIG. 3. As discussed above, the subscriber side system may vary significantly. The subscriber side system comprising a terminal device, STB, Gateway or similar device, performs functions such as exchanging messages (including video-related data) over a network with head-end and data center, receiving messages from a user input device, such as a hand-held remote control unit, translating video signals from a network-native format into a format that can be used by televisions or other display devices, providing a video signal to televisions or other display devices, and other functions.

[**0106**] The functionality of the subscriber side system may reside in a stand-alone device, literally a box that can be placed on, or at least near, the television, that is similar in outward form to conventional devices for receiving cable programs. The subscriber side system functionality could alternatively be performed by hardware resident elsewhere, such as within the television or display console, or by any suitably equipped terminal device. Since the hardware may be proprietary to the service provider and may generally be a physically independent device, the term set top box is used here, but any type of terminal device with similar functionality may be used.

[**0107**] In the example illustrated in FIG. 11, the subscriber side system comprises an STB. The STB comprises tuner, receiver, demodulator **1101**, demultiplexor **1102**, decoder **1103**, graphics processor **1104**, central processing unit (CPU) **1105**, optional hard disk drive **1106** or other mass storage device, memory **1107**, OOB interface **1115**, and various possible inputs and outputs **1108**.

[**0108**] Tuner, receiver, demodulator **1101** receives signals from the service provider network **1114** over any of a variety of media as discussed above. Specifically, tuner, receiver, demodulator **1101** receives signals of a frequency band to which it is tuned and demodulates the signals to remove content signals from a carrier signal if any. Demodulated content signals are then supplied by tuner, receiver, demodulator **1101** to demultiplexor **1102**.

[**0109**] Demultiplexor **1102** receives the demodulated content signals from tuner, receiver, demodulator **1101** and separates the content into multiple data streams representing various channels. The multiple data streams are then supplied as an input to decoder **1103**.

[**0110**] Decoder **1103** receives the multiple data streams from demultiplexor **1102** and decodes or decompresses the data streams using an appropriate algorithm. For example, if the head-end and data center compressed the video signals into an MPEG-2 data stream, decoder **1103** will decode the MPEG-2 data stream from demultiplexor **1102** to form a standard video signal. The video signal from decoder **1103** is then supplied to graphics processor **1104**.

[**0111**] Graphics processor **1104** receives the decoded video signals from decoder **1103** and processes the video signals to reduce noise, provide amplifications, etc. Processed video signals from graphics processor **1104** are supplied to input/output module **1108**. Input/output module **1108** may provide a variety of possible output types. For example, outputs may include but are not limited to Audio/Video (A/V), Radio Frequency (RF), Sony/Phillips Digital Interface (SPDIF), Universal Serial Bus (USB), and others.

[**0112**] Input/output module **1108** also receives control signals from the subscriber. These control signals are typically InfraRed (IR) or Radio Frequency (RF) signals from a remote control unit. Control signals from the subscriber are then fed back from input/output module **1108** to Central Processing Unit (CPU) **1105**.

[**0113**] OOB interface modulator and demodulator **1115** is also connected with and receives signals from the service provider via a side channel out-of-band with the content. OOB interface **1115** contains modulators and demodulators appropriate for sending and receiving signals according to the standards used by the head-end and data center for sending hot key signals. For example, if the hot key signal is sent using an out-of-band signaling method such as STCE 55-1, SCTE 55-2, Digital Audio Visual Council (DAVIC), Data Over Cable Service Interface Specification (DOCSIS), or similar method, the OOB interface **1115** may include a Quaternary Phase Shift Keying (QPSK) modulator and demodulator. OOB interface modulator and demodulator **1115** receives, demodulates and detects any hot key signals sent to the STB via the out-of-band side channel of the service provider's network **1114**.

[**0114**] CPU **1105** executes instructions stored in memory **1107**. Memory **1107** may comprise a Random Access Memory (RAM) such as flash memory, or other non-volatile memory. The instructions stored in memory **1107**, when executed by CPU **1105** cause CPU **1105** to perform various functions such as controlling the various elements of the STB, receiving hot key signals, and switching to alternate content as will be described below with reference to FIG. 13.

[**0115**] The STB may also contain an optional hard disk drive **1106** or other mass storage device. Hard disk drive **1106** allows the STB to cache alternate content for later viewing by the subscriber. If CPU **1105** detects a hot key signals instructing content to be cached, the demultiplexed data stream from demultiplexor **1102** may be saved on hard disk drive **1106**. The still compressed content is stored on hard disk drive **1106** until the subscriber chooses to view it. Once the subscriber chooses to view the cached content, CPU **1105** may retrieve the content from hard disk drive **1106** and provide the compressed data stream to be decoded by decoder **1103**, processed by graphics processor **1104**, and output through input/output module **1108**.

[**0116**] FIG. 12 is a block diagram of a subscriber side system to redirect a subscriber to alternate content respon-

sive to selection of a hot key according to the embodiment illustrated in **FIG. 4**. As discussed above, the subscriber side system may vary significantly. The subscriber side system comprising a terminal device, STB, Gateway or similar device, performs functions such as exchanging messages (including video-related data) over a network with head-end and data center, receiving messages from a user input device, such as a hand-held remote control unit, translating video signals from a network-native format into a format that can be used by televisions or other display devices, providing a video signal to televisions or other display devices, and other functions.

[0117] The functionality of the subscriber side system may reside in a stand-alone device, literally a box that can be placed on, or at least near, the television, that is similar in outward form to conventional devices for receiving cable programs. The subscriber side system functionality could alternatively be performed by hardware resident elsewhere, such as within the television or display console, or by any suitably equipped terminal device. Since the hardware may be proprietary to the service provider and may generally be a physically independent device, the term set top box is used here, but any type of terminal device with similar functionality may be used.

[0118] In the example illustrated in **FIG. 12**, the subscriber side system comprises an STB. The STB comprises tuner, receiver, demodulator **1201**, demultiplexor **1202**, decoder **1203**, graphics processor **1204**, central processing unit (CPU) **1205**, OOB data interface **1215**, optional hard disk drive **1206** or other mass storage device, memory **1207**, and various possible inputs and outputs **1208**.

[0119] Tuner, receiver, demodulator **1201** receives signals from the service provider network **1204** over any of a variety of media as discussed above. Specifically, tuner, receiver, demodulator **1201** receives signals of a frequency band to which it is tuned and demodulates the signals to remove content signals from a carrier signal if any. Demodulated content signals are then supplied by tuner, receiver, demodulator **1201** to demultiplexor **1202**.

[0120] Demultiplexor **1202** receives the demodulated content signals from tuner, receiver, demodulator **1201** and separates the content into multiple data streams representing various channels. The multiple data streams are then supplied as an input to decoder **1203**.

[0121] Decoder **1203** receives the multiple data streams from demultiplexor **1202** and decodes or decompresses the data streams using an appropriate algorithm. For example, if the head-end and data center compressed the video signals into an MPEG-2 data stream, decoder **1203** will decode the MPEG-2 data stream from demultiplexor **1202** to form a standard video signal. The video signal from decoder **1203** is then supplied to graphics processor **1204**.

[0122] Graphics processor **1204** receives the decoded video signals from decoder **1203** and processes the video signals to reduce noise, provide amplifications, etc. Processed video signals from graphics processor **1204** are supplied to input/output module **1208**. Input/output module **1208** may provide a variety of possible output types. For example, outputs may include but are not limited to Audio/Video (A/V), Radio Frequency (RF), Sony/Phillips Digital Interface (SPDIF), Universal Serial Bus (USB), and others.

[0123] Input/output module **1208** also receives control signals from the subscriber. These control signals are typically InfraRed (IR) or Radio Frequency (RF) signals from a remote control unit. Control signals from the subscriber are then fed back from input/output module **1208** to Central Processing Unit (CPU) **1205**.

[0124] OOB data interface **1215** is connected with and receives signals from the service provider via a separate network such as the telephony network described above with reference to **FIG. 4**. OOB data interface **1215** receives and detects any hot key signals sent to the STB via the out-of-band side channel of the service provider's network.

[0125] CPU **1205** executes instructions stored in memory **1207**. Memory **1207** may comprise A Random Access Memory (RAM) such as flash memory, or other non-volatile memory. The instructions stored in memory **1207**, when executed by CPU **1205** cause CPU **1205** to perform various functions such as controlling the various elements of STB **1208**, receiving hot key signals, and switching to alternate content as will be described below with reference to **FIG. 13**. Generally, a hot key signal will be received by OOB data interface **1215** from the head-end and data center and transmitted over service provider network **1204**. CPU **1205** monitors the demultiplexed data streams from demultiplexor **1202** for the presence of relevant hot key signals.

[0126] STB **1208** may also contain an optional hard disk drive **1206** or other mass storage device. Hard disk drive **1206** allows STB **1208** to cache alternate content for later viewing by the subscriber. If CPU **1205** detects a hot key signals instructing content to be cached, the demultiplexed data stream from demultiplexor **1202** may be saved on hard disk drive **1206**. The still compressed content is stored on hard disk drive **1206** until the subscriber chooses to view it. Once the subscriber chooses to view the cached content, CPU **1205** may retrieve the content from hard disk drive **1206** and provide the compressed data stream to be decoded by decoder **1203**, processed by graphics processor **1204**, and output through input/output module **1208**.

[0127] **FIG. 13** is a flowchart illustrating processing on a subscriber side system for redirecting a subscriber to alternate content responsive to selection of a hot key according to one embodiment of the present invention. This process may be performed by a system such as described above with reference to **FIGS. 10 through 12** or any other system with similar capabilities.

[0128] First, at processing block **1300**, the system receives a hot key signal from the service provider via the out-of-band side channel. As discussed above, the hot key signal may be in the form of a specialized IP packet or another type of signal from the service provider. According to one embodiment of the present invention, the hot key signal may be sent from the head-end and data center according to the out-of-band signaling methods described in the Society of Cable Telecommunications Engineers (STCE) standards STCE55-1, STCE55-2, or similar methods for out-of-band signaling.

[0129] At decision block **1305** a determination is made as to whether the hot key signal is relevant to the particular subscriber. Since numerous hot key signals may be broadcast at any particular time, the signals may be filtered before being presented to the subscriber. Such filtering may be

based on any number of possible algorithms and criteria. For example, only hot key signals related to a channel that is presently being viewed may be considered relevant. As discussed above, a hot key signal may be related or associated with a given channel via a field in the hot key signal data. Another criteria for determining relevance of a hot key signal may be choices of content types or genres which have been selected by the subscriber. Regardless of the algorithm or criteria used to judge relevance, if the hot key signal is determined at decision block **1305** to not be relevant, no further processing is performed.

[0130] If the hot key signal is determined at decision block **1305** to be relevant to the subscriber, a hot key icon or other indication is displayed to the subscriber at processing block **1310**. As mentioned above, this indication may be in the form of an icon placed on the screen, a text message, a tone or even a verbal alert. Regardless of the exact form, some indication is given to the subscriber that a hot key has been received.

[0131] At decision block **1315** a determination is made as to whether the subscriber has accepted the hot key. As discussed above, the subscriber may use any of a variety of means to indicate acceptance of the hot key. For example, different single or even multiple buttons on a remote control may be pressed by the subscriber to accept or decline the alternate content. According to one embodiment, a single "hot key button" may be present on the subscriber's remote control that may be pressed by the subscriber whenever a hot key icon is present on the television display. Regardless of the exact means of accepting or declining the hot key, if it is determined at decision block **1315** the subscriber did not accept the hot key, no further processing is performed.

[0132] If, at decision block **1315**, the subscriber accepts the hot key, the subscriber is redirected to the alternate content at processing block **1320**.

[0133] At decision block **1325** a determination is made as to whether the subscriber has finished consuming the alternate content. This determination may be based on any of a variety of possible criteria. For example, the subscriber may press a button or series of buttons on a remote control to indicate that he has finished viewing the presented material. Alternatively, the subscriber may use a mouse or other pointing device of a remote control to select a graphic on the display to indicate that he has finished viewing the presented material.

[0134] Once a determination is made at decision block **1325** that the subscriber is finished with the alternate content, a return process is entered at processing block **1330**. This return process may include simply returning the subscriber to the previous content. Alternatively, the return process may comprise presenting to the subscriber other available content based on other hot key signals. Another alternative may include presenting a subscriber with a number of choices of how to proceed.

What is claimed is:

1. A method comprising:

determining whether to inform one or more users of an interactive television service of available content;

responsive to determining to inform the one or more users of the available content, generating a hot key signal indicating availability and a location of the alternate content; and

sending the hot key signal to the one or more users via a side channel with which the one or more users and the interactive television service provider are connected, wherein the side channel is out-of-band with one or more channels for content.

2. The method of claim 1, wherein determining whether to inform one or more users of an interactive television service of available content is based on information supplied by a content provider.

3. The method of claim 1, wherein determining whether to inform one or more users of an interactive television service of available content from is based on information generated by the interactive television service provider.

4. The method of claim 1, wherein the side channel comprises a Very high speed Digital Subscriber Line (VDSL) connection.

5. The method of claim 1, wherein the side channel comprises a channel of a two-way video network.

6. The method of claim 1, wherein the side channel comprises a Digital Subscriber Line (DSL) connection.

7. The method of claim 1, wherein the side channel comprises an Asynchronous Transfer Mode (ATM) connection.

8. A method comprising:

receiving a hot key signal from a side channel out-of-band with one or more channels for content indicating availability and a location of available content;

determining whether the hot key signal is relevant to a user currently viewing content from an interactive television (TV) provider;

responsive to determining the hot key signal is relevant to the user, displaying on a screen an indication that the hot key signal has been received; and

responsive to receiving an indication that the hot key is accepted, directing the user to the available content indicated by the hot key signal.

9. The method of claim 8, wherein the side channel comprises a Very high speed Digital Subscriber Line (VDSL) connection.

10. The method of claim 8, wherein the side channel comprises a channel of a two-way video network.

11. The method of claim 8, wherein the side channel comprises a Digital Subscriber Line (DSL) connection.

12. The method of claim 8, wherein the side channel comprises an Asynchronous Transfer Mode (ATM) connection.

13. A system comprising:

a content reception, distribution, and switching portion connected with one or more content providers to receive and redistribute interactive television (TV) content;

a head-end transport portion connected with the content reception, distribution, and switching portion to and encode, multiplex and transmitted content signals from the content reception, distribution, and switching portion over a network;

a hot key generation portion to determine whether to inform one or more users of an interactive television service of available content, and responsive to determining to inform the one or more users of the available content, generate a hot key signal indicating availability and a location of the alternate content and send the hot key signal to one or more users via a side channel out-of-band with one or more channels for content.

14. The system of claim 13, wherein the side channel comprises a Very high speed Digital Subscriber Line (VDSL) connection.

15. The system of claim 13, wherein the side channel comprises a channel of a two-way video network.

16. The system of claim 13, wherein the side channel comprises a Digital Subscriber Line (DSL) connection.

17. The system of claim 13, wherein the side channel comprises an Asynchronous Transfer Mode (ATM) connection.

18. A system comprising:

an out-of-band interface portion to receive a hot key signal indicating availability and a location of alternate content from a side channel out-of-band with one or more channels for content;

a processor to determine whether the hot key signal is relevant to a subscriber currently viewing content from an interactive television (TV) provider, responsive to determining the hot key signal is relevant to the subscriber, displaying on a screen via a graphics processor and an input/output portion connected with the processor an indication that the hot key signal has been received, and responsive to receiving an indication via the input output portion that the hot key is accepted, displaying the alternate content indicated by the hot key signal.

19. The system of claim 18, wherein the side channel comprises a Very high speed Digital Subscriber Line (VDSL) connection.

20. The system of claim 18, wherein the side channel comprises a channel of a two-way video network.

21. The system of claim 18, wherein the side channel comprises a Digital Subscriber Line (DSL) connection.

22. The system of claim 18, wherein the side channel comprises an Asynchronous Transfer Mode (ATM) connection.

23. A machine readable medium having stored thereon a series of instructions, the instructions, when executed by a processor, cause the processor to:

determine whether to inform one or more users of an interactive television service of available content;

responsive to determining to inform the one or more users of the available content, generate a hot key signal indicating availability and a location of the alternate content; and

send the hot key signal to the one or more users via a side channel with which the one or more users and the

interactive television service provider are connected, wherein the side channel is out-of-band with one or more channels for content.

24. The machine readable medium of claim 23, wherein determining whether to inform one or more users of an interactive television service of available content is based on information supplied by a content provider.

25. The machine readable medium of claim 23, wherein determining whether to inform one or more users of an interactive television service of available content from is based on information generated by the interactive television service provider.

26. The machine readable medium of claim 23, wherein the side channel comprises a Very high speed Digital Subscriber Line (VDSL) connection.

27. The machine readable medium of claim 23, wherein the side channel comprises a channel of a two-way video network.

28. The machine readable medium of claim 23, wherein the side channel comprises a Digital Subscriber Line (DSL) connection.

29. The machine readable medium of claim 23, wherein the side channel comprises an Asynchronous Transfer Mode (ATM) connection.

30. A machine readable medium having stored thereon a series of instructions, the instructions, when executed by a processor, cause the processor to:

receive a hot key signal from a side channel out-of band with one or more channels for content indicating availability and a location of available content;

determine whether the hot key signal is relevant to a user currently viewing content from an interactive television (TV) provider;

responsive to determining the hot key signal is relevant to the user, display on a screen an indication that the hot key signal has been received; and

responsive to receiving an indication that the hot key is accepted, direct the user to the available content indicated by the hot key signal.

31. The machine readable medium of claim 30, wherein the side channel comprises a Very high speed Digital Subscriber Line (VDSL) connection.

32. The machine readable medium of claim 30, wherein the side channel comprises a channel of a two-way video network.

33. The machine readable medium of claim 30, wherein the side channel comprises a Digital Subscriber Line (DSL) connection.

34. The machine readable medium of claim 30, wherein the side channel comprises an Asynchronous Transfer Mode (ATM) connection.

* * * * *