



US011437529B2

(12) **United States Patent**
Li et al.

(10) **Patent No.:** **US 11,437,529 B2**

(45) **Date of Patent:** **Sep. 6, 2022**

(54) **PHOTOVOLTAIC CELL, METHOD FOR
MANUFACTURING SAME, AND
PHOTOVOLTAIC MODULE**

(71) Applicants: **ZHEJIANG JINKO SOLAR CO.,
LTD.**, Zhejiang (CN); **JINKO SOLAR
CO., LTD.**, Jiangxi (CN)

(72) Inventors: **Ruifeng Li**, Zhejiang (CN); **Yankai
Qiu**, Zhejiang (CN); **Ning Zhang**,
Zhejiang (CN); **Bin Li**, Zhejiang (CN)

(73) Assignees: **ZHEJIANG JINKO SOLAR CO.,
LTD.**, Haining (CN); **JINKO SOLAR
CO., LTD.**, Jiangxi (CN)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/386,442**

(22) Filed: **Jul. 27, 2021**

(65) **Prior Publication Data**

US 2022/0209027 A1 Jun. 30, 2022

(30) **Foreign Application Priority Data**

Dec. 29, 2020 (CN) 202011591700.4

(51) **Int. Cl.**

H01L 31/0216 (2014.01)

H01L 31/18 (2006.01)

(52) **U.S. Cl.**

CPC .. **H01L 31/02168** (2013.01); **H01L 31/02167**
(2013.01); **H01L 31/1868** (2013.01)

(58) **Field of Classification Search**

CPC H01L 31/02167; H01L 31/02168; H01L
31/1868

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2009/0165855 A1 7/2009 Sun et al.
2013/0186464 A1* 7/2013 Sheng H01L 31/02168
438/57

(Continued)

FOREIGN PATENT DOCUMENTS

CN 103400868 A 11/2013
CN 109216473 A 1/2019

(Continued)

OTHER PUBLICATIONS

Machine translation of CN-110112243-A, Hu et al. (Year: 2019).*

(Continued)

Primary Examiner — Mayla Gonzalez Ramos


(74) *Attorney, Agent, or Firm* — USCH Law, PC

(57)

ABSTRACT

A photovoltaic cell is provided, which includes a substrate; a first passivation layer and a first anti-reflection layer disposed on a front surface of the substrate; and a second passivation layer, a PPW layer and at least one silicon nitride layer Si_xN_y ($1 < u/v < 4$) disposed on a rear surface of the substrate. The at least one silicon nitride layer has a refractive index and a thickness in respective ranges of 1.9 to 2.5 and 50 nm to 100 nm. The second passivation layer includes at least one aluminum oxide layer Al_xO_y ($0.8 < y/x < 1.6$), a refractive index and a thickness of which are respectively in ranges of 1.4 to 1.6 and 4 nm to 20 nm. The PPW layer includes at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$ ($r > s > t$), a refractive index and a thickness of which are respectively in ranges of 1.5 to 1.8 and 1 nm to 30 nm.

18 Claims, 5 Drawing Sheets

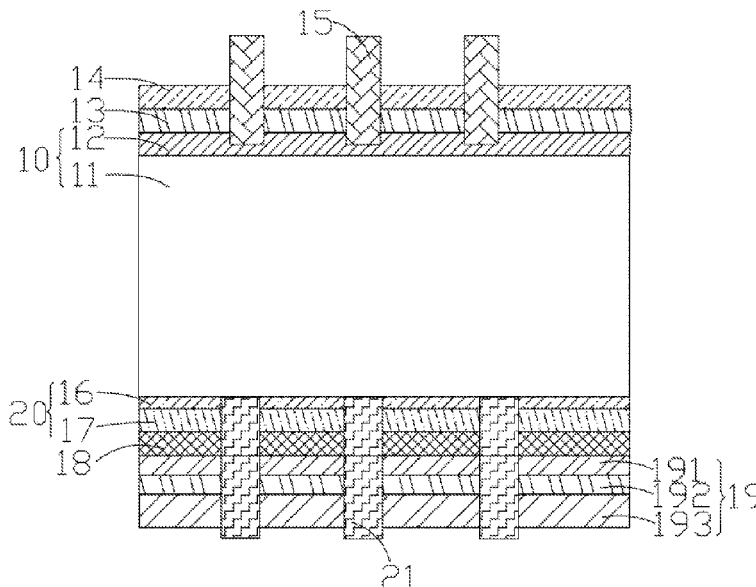

(56)

References Cited

U.S. PATENT DOCUMENTS

2013/0255777 A1 10/2013 Lee et al.
 2014/0000686 A1* 1/2014 Mungekar H01L 31/02167
 438/98
 2017/0069778 A1* 3/2017 Kwon H01L 31/0682
 2018/0102441 A1* 4/2018 Miura H01L 31/02363

FOREIGN PATENT DOCUMENTS

CN 110112243 A * 8/2019 C23C 16/308
 CN 110112243 A 8/2019
 CN 110459615 A 11/2019
 CN 110735130 A * 1/2020 C23C 16/308
 CN 110735130 A 1/2020
 CN 111029415 A 4/2020
 CN 111029436 A 4/2020
 CN 111106186 A 5/2020
 CN 210668401 U 6/2020

CN 111668317 A 9/2020
 CN 111668318 B 9/2021
 JP 2010539727 A 12/2010
 JP 5019397 B2 9/2012
 JP 2015073058 A 4/2015
 JP 2015122435 A 7/2015
 JP 2016039246 A 3/2016
 JP 2017028238 A 2/2017
 JP 2019129274 A 8/2019
 JP 2019165264 A 9/2019
 JP 2020506529 A 2/2020
 JP 6793274 B1 12/2020

OTHER PUBLICATIONS

Machine translation of CN-110735130-A, Zhao et al. (Year: 2020).
 Zhejiang Jinko Solar Co., Ltd., et al., Extended European Search
 Report, EP 21187345.0, dated Jan. 20, 2022, 71 pgs.

* cited by examiner

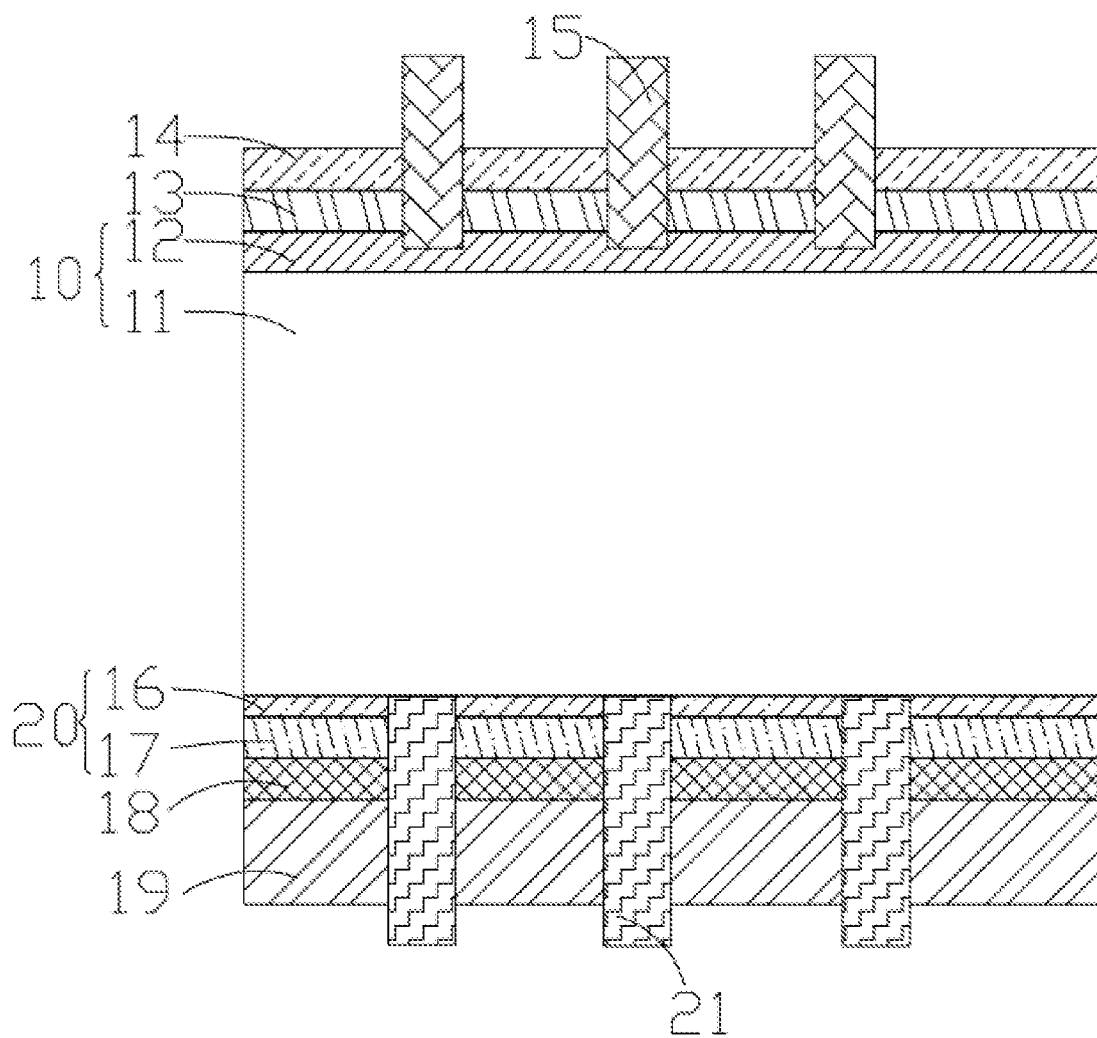


FIG. 1

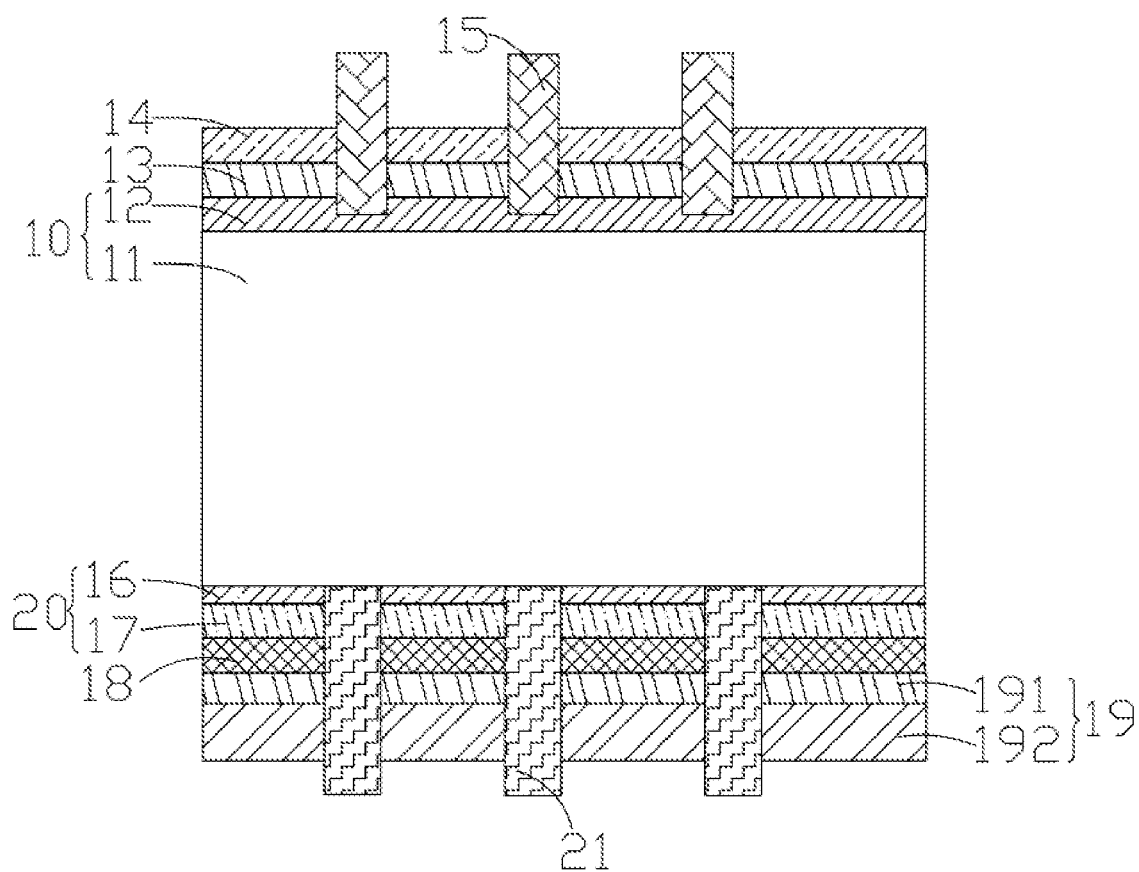


FIG. 3

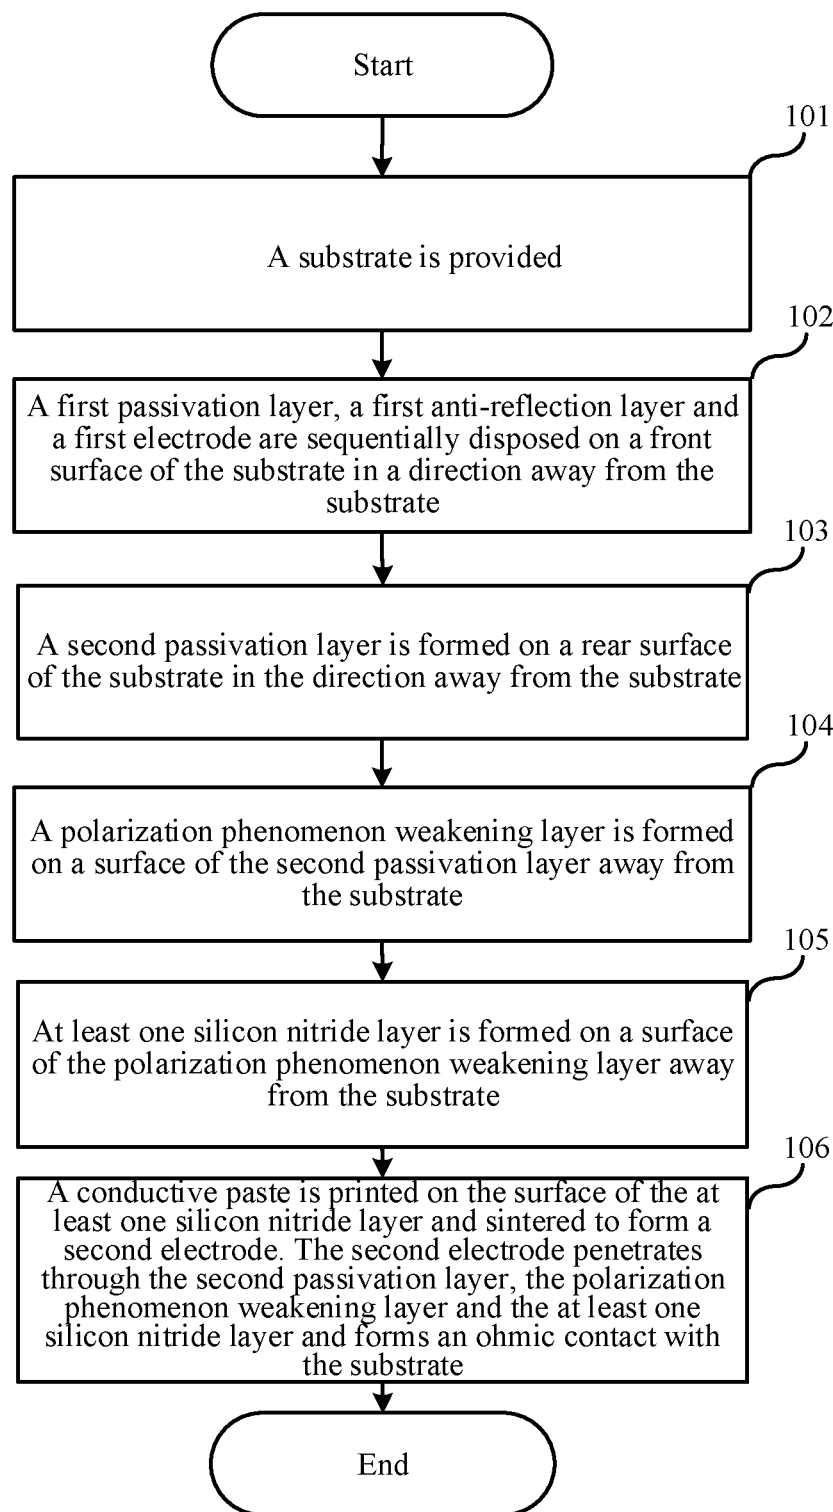


FIG. 4

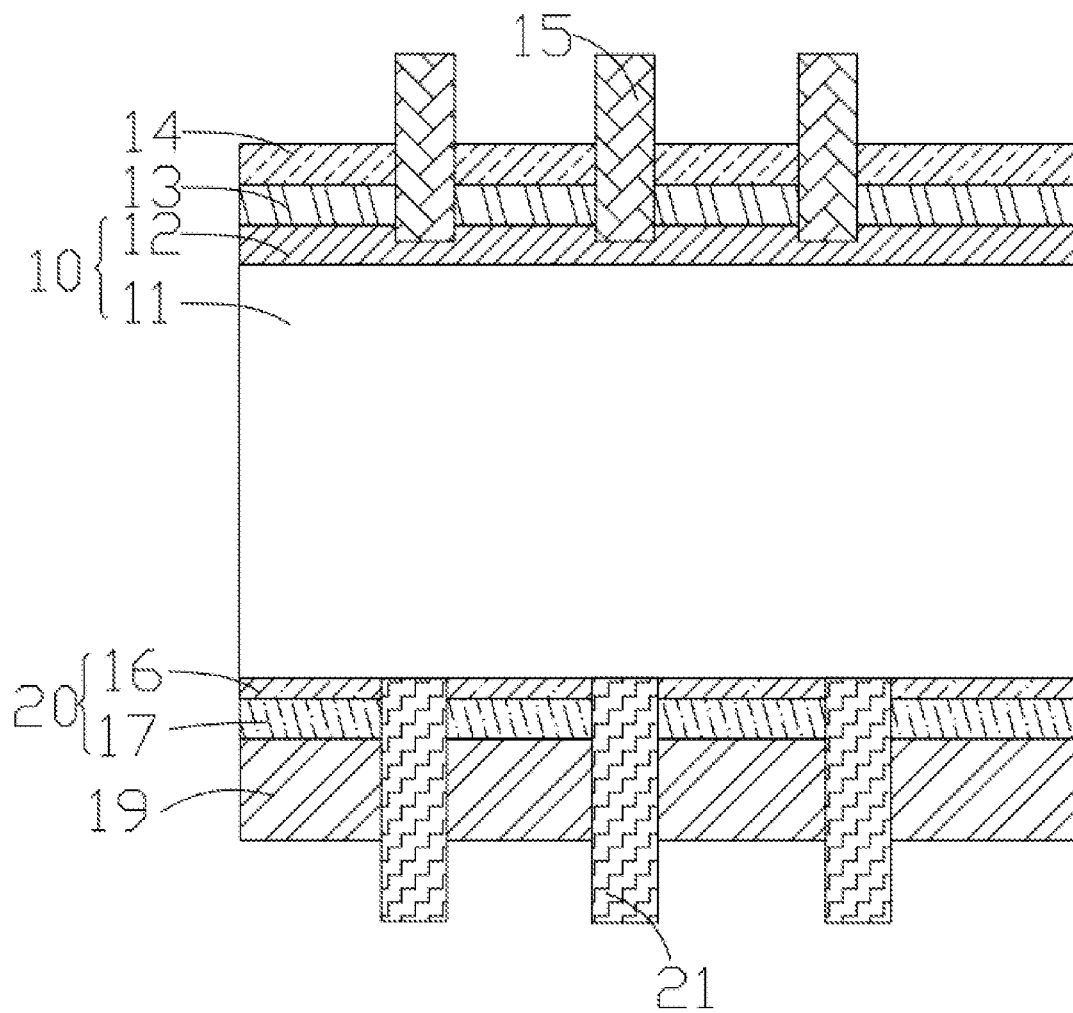


FIG. 5

1

PHOTOVOLTAIC CELL, METHOD FOR MANUFACTURING SAME, AND PHOTOVOLTAIC MODULE

CROSS-REFERENCE TO RELATED APPLICATION

The present application claims the benefit of priority to Chinese Patent Application No. 202011591700.4 filed on Dec. 29, 2020, which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

Generally, the present disclosure relates to a photovoltaic field, in particular to a photovoltaic cell, a method for manufacturing the photovoltaic cell and a photovoltaic module.

BACKGROUND

A typical passivated emitter and rear cell (PERC) uses stacked aluminum oxide/silicon nitride as a rear passivation layer. An aluminum oxide layer has a relatively high fixed negative charge density, and a large number of the fixed negative charges may shield electrons on a silicon substrate surface, thus reducing the electrons usable for recombination and achieving suppression of carrier recombination on the surface. The PERC has become a mainstream technology in the photovoltaic cell. However, for a PERC based photovoltaic module, a potential induced degradation (PID) effect may negatively affect the performance of the cell, thus resulting in lowered conversion efficiency. An important cause of the PID effect may be that a potential difference between the cells and other structures (such as a packaging material) of the photovoltaic module disturbs a normal current path in the cells during the power generation, then the photovoltaic cell presents undesirable situations such as power attenuation and lower power generation. Therefore, it is desirable to improve an anti-PID effect of the PERC and maintain high efficiency of the PERC.

SUMMARY

Some embodiments of the present disclosure provide a photovoltaic cell, a method for manufacturing the photovoltaic cell, and a photovoltaic module, which can improve anti-PID performance and power generation efficiency of the photovoltaic cell.

In order to solve the above problems, embodiments of the present disclosure provide a photovoltaic cell, including: a substrate; a first passivation layer and a first anti-reflection layer that are sequentially disposed on a front surface of the substrate in a direction away from the substrate; and a second passivation layer, a polarization phenomenon weakening (PPW) layer and at least one silicon nitride layer Si_uN_v , that are sequentially disposed on a rear surface of the substrate in a direction away from the substrate, where $1 < u/v < 4$. In some embodiments, the second passivation layer includes at least one aluminum oxide layer Al_xO_y , where $0.8 < y/x < 1.6$, a refractive index of the at least one aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm. In some embodiments, the PPW layer includes at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$, where $r > s > t$, a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8, and a thickness

2

of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm. In some embodiments, a refractive index of the at least one silicon nitride layer is in a range of 1.9 to 2.5, and a thickness of the at least one silicon nitride layer is in a range of 50 nm to 100 nm.

In some embodiments, the at least one silicon nitride layer includes a first silicon nitride layer, a second silicon nitride layer and a third silicon nitride layer stacked in the direction away from the substrate, wherein a thickness of the first silicon nitride layer is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer is in a range of 40 nm to 75 nm.

In some embodiments, refractive indexes of the first silicon nitride layer, the second silicon nitride layer and the third silicon nitride layer decrease layer by layer in the direction away from the substrate, a refractive index of the first silicon nitride layer is in a range of between 2.1 to 2.5, a refractive index of the second silicon nitride layer is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer is in a range of 1.9 to 2.1.

In some embodiments, a concentration of silicon atoms in the at least one silicon oxynitride layer is between $5 \times 10^{21}/\text{cm}^3$ and $2.5 \times 10^{22}/\text{cm}^3$.

In some embodiments, the second passivation layer further includes a silicon oxide layer, and the silicon oxide layer is disposed between the substrate and the at least one aluminum oxide layer.

In some embodiments, a thickness of the silicon oxide layer is in a range of 0.1 nm to 5 nm.

Embodiments of the present disclosure further provide a method for manufacturing a photovoltaic cell, including: providing a substrate; forming a first passivation layer and a first anti-reflection layer sequentially on a front surface of the substrate in a direction away from the substrate; and forming a second passivation layer, a polarization phenomenon weakening (PPW) layer and at least one silicon nitride layer Si_uN_v , sequentially on a rear surface of the substrate in a direction away from the substrate, wherein $1 < u/v < 4$; wherein the second passivation layer includes at least one aluminum oxide layer Al_xO_y , wherein $0.8 < y/x < 1.6$ and a refractive index of the at least one layer aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm; wherein the PPW layer includes at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$, wherein $r > s > t$ and a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8, and a thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm; wherein a refractive index of the at least one silicon nitride layer is in a range of 1.9 to 2.5, and a thickness of the at least one silicon nitride layer is in a range of 50 nm to 100 nm.

In some embodiments, where forming the second passivation layer includes: depositing the at least one aluminum oxide layer on the rear surface of the substrate, wherein precursors of the at least one aluminum oxide layer include argon, trimethylaluminum and nitrous oxide, wherein a gas flow ratio of the argon, the trimethylaluminum and the nitrous oxide is in a range of 1:1:1 to 1.5:1:2.

In some embodiments, forming the PPW layer includes: depositing the at least one silicon oxynitride layer on a surface of the at least one aluminum oxide layer, wherein precursors of the at least one silicon oxynitride include silanes, ammonia and nitrous oxide, wherein a gas flow ratio of the silanes, the ammonia and the nitrous oxide is in a range of 1:1:3 to 1:4:6.

3

In some embodiments, forming the PPW layer includes: depositing an intermediate silicon oxide layer on a surface of the at least one aluminum oxide layer first, wherein precursors of the intermediate silicon oxide layer include silanes and nitrous oxide, wherein a gas flow ratio of the silanes and the nitrous oxide is in a range of 1:3 to 1:6; and introducing nitrogen source gas to produce nitrogen plasmas to react with the intermediate silicon oxide layer, so as to form the at least one silicon oxynitride layer.

In some embodiments, forming the at least one silicon nitride layer includes: depositing the at least one silicon nitride layer on a surface of the silicon oxynitride layer, wherein precursors of the at least one silicon nitride layer include the silanes and ammonia, wherein a gas flow ratio of the silanes and the ammonia is in a range of 1:1.3 to 1:4.

In some embodiments, the at least one silicon nitride layer includes three silicon nitride layers, and forming the three silicon nitride layers includes: forming a first silicon nitride layer on the surface of the silicon oxynitride layer, wherein precursors of the first silicon nitride layer include the silanes and the ammonia, wherein the gas flow ratio of the silanes and the ammonia is in a range of 1:1.3 to 1:1.5; forming a second silicon nitride layer on a surface of the first silicon nitride layer, wherein precursors of the second silicon nitride layer include the silanes and the ammonia, wherein the gas flow ratio of the silanes and the ammonia is in a range of 1:1.5 to 1:2.2; and forming a third silicon nitride layer on a surface of the second silicon nitride layer, wherein precursors of the third silicon nitride layer include the silanes and the ammonia, wherein the gas flow ratio of the silanes and the ammonia is in a range of 1:2.2 to 1:4.

In some embodiments, a thickness of the first silicon nitride layer is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer is in a range of 40 nm to 75 nm.

In some embodiments, a refractive index of the first silicon nitride layer is in a range of 2.1 to 2.5, a refractive index of the second silicon nitride layer is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer is in a range of 1.9 to 2.1.

In some embodiments, forming the second passivation layer further includes: forming a silicon oxide layer between the substrate and the at least one aluminum oxide layer.

In some embodiments, a thickness of the silicon oxide layer is in a range of 0.1 nm to 5 nm.

Embodiments of the present disclosure further provide photovoltaic module, including at least one photovoltaic cell string, wherein each of the at least one photovoltaic cell string is composed of a plurality of photovoltaic cells electrically connected; wherein each of the plurality of photovoltaic cells includes: a substrate; a first passivation layer and a first anti-reflection layer that are sequentially disposed on a front surface of the substrate in a direction away from the substrate; and a second passivation layer, a polarization phenomenon weakening (PPW) layer and at least one silicon nitride layer Si_xN_y , that are sequentially disposed on a rear surface of the substrate in a direction away from the substrate, wherein $1 < u/v < 4$; wherein the second passivation layer includes at least one aluminum oxide layer Al_xO_y , wherein $0.8 < y/x < 1.6$ and a refractive index of the at least one aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm; wherein the PPW layer includes at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$, wherein $r > s > t$ and a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8, and a

4

thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm; wherein a refractive index of the at least one silicon nitride layer is in a range of 1.9 to 2.5, and a thickness of the at least one silicon nitride layer is in a range of 50 nm to 100 nm.

In some embodiments, the at least one silicon nitride layer includes a first silicon nitride layer, a second silicon nitride layer and a third silicon nitride layer stacked in the direction away from the substrate, wherein a thickness of the first silicon nitride layer is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer is in a range of 40 nm to 75 nm.

In some embodiments, refractive indexes of the first silicon nitride layer, the second silicon nitride layer and the third silicon nitride layer decrease layer by layer in the direction away from the substrate, a refractive index of the first silicon nitride layer is in a range of between 2.1 to 2.5, a refractive index of the second silicon nitride layer is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer is in a range of 1.9 to 2.1.

In some embodiments, a concentration of silicon atoms in the at least one silicon oxynitride layer is between $5 \times 10^{21}/\text{cm}^3$ and $2.5 \times 10^{22}/\text{cm}^3$.

BRIEF DESCRIPTION OF THE DRAWINGS

One or more embodiments are described as examples with reference to the corresponding figures in the accompanying drawings, and the examples do not constitute a limitation to the embodiments. Elements with the same reference numerals in the accompanying drawings represent similar elements. The figures in the accompanying drawings do not constitute a proportion limitation unless otherwise stated.

FIG. 1 is a schematic structural diagram of a photovoltaic cell according to some embodiments of the present disclosure;

FIG. 2 is another structural diagram of the photovoltaic cell according to some embodiments of the present disclosure;

FIG. 3 is yet another structural schematic diagram of the photovoltaic cell according to some embodiments of the present disclosure;

FIG. 4 is a schematic flow chart of a method for manufacturing a photovoltaic cell according to some embodiments of the present disclosure; and

FIG. 5 is a schematic structural diagram of a photovoltaic cell according to a comparative example provided in the present disclosure.

DETAILED DESCRIPTION

The embodiments of the present disclosure will be described in detail below with reference to the accompanying drawings in order to make the objectives, technical solutions and advantages of the present disclosure clearer. However, it will be appreciated by those of ordinary skill in the art that, in various embodiments of the present disclosure, numerous technical details are set forth in order to provide the reader with a better understanding of the present disclosure. However, the technical solutions claimed in the present disclosure may be implemented without these technical details and various changes and modifications based on the following embodiments.

The present disclosure provides a photovoltaic cell, which includes a substrate; a first passivation layer and a first anti-reflection layer that are sequentially disposed on a front

5

surface of the substrate in a direction away from the substrate; and a second passivation layer, a polarization phenomenon weakening (PPW) layer and at least one silicon nitride layer Si_xN_y , that are sequentially disposed on a rear surface of the substrate in a direction away from the substrate, where $1 < u/v < 4$. The second passivation layer includes at least one aluminum oxide layer Al_xO_y , where $0.8 < y/x < 1.6$ and a refractive index of the at least one aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm. The PPW layer includes at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$, where $r > s > t$ and a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8, and a thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm. A refractive index of the at least one silicon nitride layer is in a range of 1.9 to 2.5, and a thickness of the at least one silicon nitride layer is in a range of 50 nm to 100 nm.

By disposing the PPW layer including the at least one silicon oxynitride layer between the at least one aluminum oxide layer and the at least one silicon nitride layer, a potential difference between the at least one aluminum oxide layer and the at least one silicon nitride layer may be reduced, and the anti-PID performance of the photovoltaic cell may be improved, thus ensuring the high conversion efficiency of the photovoltaic cell. Furthermore, a refractive index of each layer on the rear surface of the photovoltaic cell is within a reasonable refractive index range by defining a relationship between the atom number of each kind of atoms in the silicon nitride layer, the aluminum oxide layer and the silicon oxynitride layer. When the refractive index of all the layers on the rear surface of the photovoltaic cell is within the reasonable refractive index range and each layer has a suitable thickness, the light utilization rate of the photovoltaic cell can be increased and the light conversion efficiency of the photovoltaic cell can be improved.

Some embodiments of the photovoltaic cell of the present disclosure will be described in detail below. The following contents are merely provided for convenience of understanding the implementation details, and are not necessary for the implementation of the technical solution of the present disclosure.

FIG. 1 is a schematic structural diagram of a photovoltaic cell according to some embodiments of the present disclosure.

As shown in FIG. 1, the photovoltaic cell includes a substrate 10. The substrate 10 includes an intrinsic silicon substrate 11 and an emitter 12. The intrinsic silicon substrate 11 and the emitter 12 form a PN junction of the photovoltaic cell. For example, the intrinsic silicon substrate 11 may be a P-type substrate, the emitter 12 may be an N-type doped layer, that is, the P-type substrate and the N-type doped layer form a PN junction. In some embodiments, the intrinsic silicon substrate 11 includes, but is not limited to, a monocrystalline silicon substrate, a polycrystalline silicon substrate, a monocrystalline silicon-like substrate, etc. It should be noted that a front surface of the substrate 10 is designated as a light-receiving surface, and a rear surface of the substrate 10 refers to a surface opposite to the front surface. In some embodiments, a surface close to the emitter 12 is referred to as the front surface, and a surface close to the intrinsic silicon substrate 11 is referred to as the rear surface.

The photovoltaic cell further includes a first passivation layer 13 and a first anti-reflection layer 14 that are sequentially disposed on the front surface of the substrate 10 in a direction away from the substrate 10. In some embodiments, the photovoltaic cell further includes a first electrode 15

6

penetrating through the first passivation layer 13 and the first anti-reflection layer 14 and forming an ohmic contact with the emitter 12 of the substrate 10.

Herein, the first passivation layer 13 includes, but is not limited to, an aluminum oxide layer, a silicon nitride layer, a silicon oxynitride layer, etc. The first passivation layer 13 is configured to reduce the recombination of carriers, thereby increasing an open circuit voltage and a short circuit current of the photovoltaic cell. The first anti-reflection layer 14 may be provided with a layer similar to or substantially the same as the first passivation layer 13, for example, including but not limited to the aluminum oxide layer, the silicon nitride layer, the silicon oxynitride layer, etc. The first anti-reflection layer 14 may not only reduce the reflectivity of lights incident on a surface of the photovoltaic cell, but also passivate the surface of the photovoltaic cell.

The photovoltaic cell further includes a second passivation layer 20, a polarization phenomenon weakening (PPW) layer 18 and a silicon nitride layer 19 that are sequentially disposed on the rear surface of the substrate 10 in a direction away from the substrate 10. In some embodiments, the photovoltaic cell further includes a second electrode 21 penetrating through the second passivation layer 20, the polarization phenomenon weakening layer 18 and the silicon nitride layer 19 and forming an ohmic contact with the substrate 10.

The second passivation layer 20 includes at least one aluminum oxide layer Al_xO_y , where $0.8 < y/x < 1.6$. Particularly, $0.8 < y/x \leq 1$, $1 < y/x < 1.5$, or $1.5 \leq y/x < 1.6$. When the at least one aluminum oxide layer is provided with a single layer (i.e., an aluminum oxide layer 17 shown in FIG. 1), a thickness of the aluminum oxide layer 17 is in a range of 4 nm to 20 nm. Particularly, the thickness of the aluminum oxide layer 17 is 5 nm, 10 nm, 15 nm or 20 nm. When forming the aluminum oxide layer 17 with a particular thickness, a ratio of y and x in the aluminum oxide layer 17 is controlled in a range of 0.8 to 1.6, and a refractive index of the aluminum oxide layer 17 is in a range of 1.4 to 1.6. Particularly, the refractive index of the aluminum oxide layer 17 is in a range of 1.55 to 1.59. It should be noted that, when the at least one aluminum oxide layer is provided with a plurality of layers (not shown), the refractive index mentioned here should be a refractive index of all the aluminum oxide layers, that is, the refractive index of all of the plurality of aluminum oxide layers is in a range of 1.4 to 1.6. Particularly, the refractive index of all of the plurality of aluminum oxide layers is in a range of 1.55 to 1.59.

As shown in FIG. 1, the second passivation layer 20 further includes a silicon oxide layer 16. The silicon oxide layer 16 is disposed between the substrate 10 and the aluminum oxide layer 17 to isolate the aluminum oxide layer 17 from the substrate 10, thereby avoiding a direct contact between the aluminum oxide layer 17 and the substrate 10. A dense silicon oxide layer 16 is chemically stable, which may chemically passivate a dangling bond on the surface of the substrate 10. Herein, a thickness of the silicon oxide layer 16 is in a range of 0.1 nm to 5 nm. Particularly, the thickness of the silicon oxide layer 16 is 2 nm, 3 nm or 4 nm.

It is found through an experimental verification that the PID may be improved by 21.2% to 27.7% via providing the silicon oxide layer 16 with a special design (for example, the thickness of the silicon oxide layer 16 is in a range of 0.1 nm to 5 nm) compared with providing a passivation layer without silicon oxide.

The polarization phenomenon weakening layer 18 includes at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$, where $r > s > t$. A concentration of silicon atoms in the at least one

silicon oxynitride layer is in a range of $5 \times 10^{21}/\text{cm}^3$ to $2.5 \times 10^{22}/\text{cm}^3$. The PPW layer **18** is configured to reduce a cell difference between layers on two sides of the PPW layer **18**, so as to improve the anti-PID effect. In some embodiments, a thickness of the at least one silicon oxynitride layer in the PPW layer **18** is in a range of 1 nm to 30 nm. Particularly, the thickness of the at least one silicon oxynitride layer is 6 nm, 11 nm, 16 nm, 21 nm, 25 nm or 30 nm. When forming the at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$ with a particular thickness, where $r > s > t$, a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8. It should be noted that when the at least one silicon oxynitride layer is provided with a plurality of layers (not shown), the refractive index mentioned here should be a refractive index of all the silicon oxynitride layers, that is, the refractive index of all of the plurality of silicon oxynitride layers is in a range of 1.5 to 1.8.

It is found through an experimental verification that the PID may be improved by 42.8% to 69.60% via providing the PPW layer **18** with a specific design (for example, a thickness of the PPW layer is in a range of 1 nm to 30 nm) compared with providing a passivation layer without the PPW layer.

It is found through an experimental verification that, in some embodiments, the PID may be improved by up to 81.6% to 99.00% when the rear surface of the photovoltaic cell is provided with both the silicon oxide layer **16** and the PPW layer **18** for isolation.

In an embodiment, the at least one silicon nitride layer Si_uN_v is provided with a single layer (i.e., the silicon nitride layer **19** shown in FIG. 1), where $1 < u/v < 4$. Particularly, $1 < u/v \leq 2$ or $2 < u/v < 4$. A thickness of the silicon nitride layer **19** is in a range of 50 nm to 100 nm. Particularly, the thickness of the silicon nitride layer **19** is 60 nm, 75 nm or 90 nm. When forming the silicon nitride layer **19** with a particular thickness, the ratio of u and v in the silicon nitride layer **19** may be controlled in a range of 1 to 4, and a refractive index of the silicon nitride layer **19** is in a range of 1.9 to 2.5. In some embodiments, the at least one silicon nitride layer is provided with a plurality of layers (shown in FIG. 2 and FIG. 3), for example, 2 to 5 layers. Refractive indexes of the plurality of silicon nitride layers decrease layer by layer in the direction away from the substrate **10**, but a refractive index of all the silicon nitride layers should be controlled in a range of 1.9 to 2.5. It should be noted that the number of the plurality of silicon nitride layers may be configured according to requirements on the thickness and refractive index of the deposited silicon nitride layer, which is not limited in the present disclosure.

In order to achieve a photovoltaic cell with high anti-PID effect and high efficiency, for example, the thicknesses of the second passivation layer **20**, the PPW layer **18** and the silicon nitride layer **19** on the rear surface of the photovoltaic cell and their corresponding refractive indexes are designed to be matched. The refractive index of all the layers on the rear surface of the photovoltaic cell is within a reasonable refractive index range by defining a relationship of the atom number of each kind of atoms in the aluminum oxide layer **17** included in the second passivation layer **20**, the polarization phenomenon weakening layer **18** and the silicon nitride layer **19**. When the refractive index of all the layers on the rear surface of the photovoltaic cell is within the reasonable refractive index range and each layer has a suitable thickness, which result in a relatively high anti-reflective property, the light utilization rate of the photovoltaic cell can be increased and the light conversion efficiency of the photovoltaic cell can be improved.

In some embodiments of the present disclosure, the aluminum oxide layer **17** is provided on the rear surface of the photovoltaic cell. Since the growth and annealing temperature of the aluminum oxide layer **17** is relatively low, octahedral structures of aluminum atoms in the aluminum oxide layer **17** will be transformed into tetrahedral structures after a high temperature heat treatment to generate interstitial oxygen atoms. The interstitial oxygen atoms capture valence electrons in the substrate **10** to form fixed negative charges, so that the aluminum oxide layer **17** shows an electronegativity and an interface electric field directed to the inside of the substrate **10** is generated at the interface, thus causing carriers to escape from the interface quickly, reducing an interface recombination rate and increasing a minority carrier lifetime of the substrate **10**. The PPW layer **18** disposed on the aluminum oxide layer **17** may effectively prevent subsequent products of sodium ions, $\sim\text{OH}$ and $\sim\text{CH}_3$ groups from migrating into the photovoltaic cell, block the movement and migration of mobile ions under an external electric field, temperature and humidity, and reduce the potential difference between layers and enhance the anti-PID effect, thus having better anti-PID performance and anti-aging/attenuation performance. The silicon nitride layer **19** disposed on the PPW layer **18** achieves the optimal anti-reflection effect by combining optical path matching, and protects the adjacent aluminum oxide layer **17** and polarization phenomenon weakening layer **18** from corrosion caused by the excessive paste. After annealing, an H passivation effect of the silicon nitride layer **19** is significant, which further improves the minority carrier lifetime of a silicon wafer and also prevents subsequent products of Na^+ , $\sim\text{OH}$ and $\sim\text{CH}_3$ groups from migrating into the photovoltaic cell to a certain extent, thus avoiding power attenuation caused by electric leakage of cell components. The combination of the aluminum oxide layer **17** and the polarization phenomenon weakening layer **18** reduces the power loss of the cell components, and improves light attenuation performance, heat-assisted light attenuation performance and anti-PID performance of the photovoltaic cell.

In an embodiment, as shown in FIG. 2, the at least one silicon nitride layer is provided with three silicon nitride layers, i.e., a first silicon nitride layer **191**, a second silicon nitride layer **192** and a third silicon nitride layer **193** that are stacked in the direction away from the substrate **10**. In this embodiment, a refractive index of the three and silicon nitride layers is in a range of 1.9 to 2.5. A thickness of the first silicon nitride layer **191** is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer **192** is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer **193** is in a range of 40 nm to 75 nm. A refractive index of the first silicon nitride layer **191** is in a range of 2.1 to 2.5, a refractive index of the second silicon nitride layer **192** is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer **193** is in a range of 1.9 to 2.1. It should be noted that although there are the same values in the refractive index ranges of every two silicon nitride layers in the above three silicon nitride layers, the refractive indexes of the three silicon nitride layers need to satisfy the condition that "the refractive indexes of the plurality of silicon nitride layers decrease layer by layer in the direction away from the substrate **10**" in practical applications. Therefore, a situation that every two silicon nitride layers in the three silicon nitride layers have the same refractive indexes may not happen.

In an embodiment, as shown in FIG. 3, the at least one silicon nitride layer is provided with two silicon nitride layers, i.e., a first silicon nitride layer **191** and a second

silicon nitride layer **192** that are stacked in the direction away from the substrate **10**. In this embodiment, a refractive index of the two silicon nitride layers is in a range of 1.9 to 2.5. A thickness of the first silicon nitride layer **191** is in a range of 15 nm to 40 nm, and a thickness of the second silicon nitride layer **192** is in a range of 35 nm to 110 nm. A refractive index of the first silicon nitride layer **191** is in a range of 2.3 to 2.5, and a refractive index of the second silicon nitride layer **192** is in a range of 1.9 to 2.2.

Some embodiments of the present disclosure provide a photovoltaic module, which includes at least one photovoltaic cell string. The photovoltaic cell string is composed of the above photovoltaic cells electrically connected, for example, the photovoltaic cells illustrated in FIGS. **1** to **3**. The photovoltaic cells are electrically connected in series and/or parallel in the photovoltaic cell string. The photovoltaic module includes, but is not limited to, a laminate module, a double-sided module, a multi-main grid module, etc. For example, the photovoltaic cells (e.g., FIG. **1**) described above can be obtained, and the cells can be electrically connected with adjacent ones via conductive materials to form the cell string. A back plate, an ethylene-vinyl acetate (EVA) copolymer and the cell string are stacked in a certain order through a lamination process. Then the stacked structure is installed with a frame to form the photovoltaic module. The photovoltaic cells may convert absorbed light energy into electric energy. The module may transfer the electric energy obtained by the cells to a load.

Some embodiments of the present disclosure provide a method for manufacturing the photovoltaic cell described in the above embodiments. A schematic flow chart of the method for manufacturing the photovoltaic cell is shown in FIG. **4**, which includes the following steps.

In step **101**, a substrate is provided.

Specifically, the substrate includes an intrinsic silicon substrate and an emitter. The intrinsic silicon substrate and the emitter form a PN junction of the photovoltaic cell. As shown in FIGS. **1** to **3**, the substrate **10** includes an intrinsic silicon substrate **11** and an emitter **12**. The intrinsic silicon substrate **11** and the emitter **12** form a PN junction. For example, the intrinsic silicon substrate **11** may be a P-type substrate, the emitter **12** may be an N-type doped layer, that is, the P-type substrate and the N-type doped layer form a PN junction. In some embodiments, the intrinsic silicon substrate **11** includes, but is not limited to, a monocrystalline silicon substrate, a polycrystalline silicon substrate, a monocrystalline silicon-like substrate, etc. It should be noted that a front surface of the substrate **10** is designated as a light-receiving surface, and a rear surface of the substrate **10** refers to a surface opposite to the front surface. In some embodiments, a surface close to the emitter **12** is referred to as the front surface, and a surface close to the intrinsic silicon substrate **11** is referred to as the rear surface.

In step **102**, a first passivation layer, a first anti-reflection layer and a first electrode are sequentially disposed on a front surface of the substrate in a direction away from the substrate.

As shown in FIGS. **1** to **3**, a first passivation layer **13** and a first anti-reflection layer **14** are sequentially stacked on the front surface of the substrate **10** in the direction away from the substrate **10**. Herein, the first passivation layer **13** includes, but is not limited to, an aluminum oxide layer, a silicon nitride layer, a silicon oxynitride layer, etc. The first passivation layer **13** is used to reduce the recombination of carriers, thereby increasing an open circuit voltage and a short circuit current of the photovoltaic cell. The first anti-reflection layer **14** may be provided with a layer similar

to or substantially the same as the passivation layer **13**, for example, including but not limited to, the aluminum oxide layer, the silicon nitride layer, the silicon oxynitride layer, etc. The first anti-reflection layer **14** may not only reduce the reflectivity of lights incident on a surface of the photovoltaic cell, but also passivate the surface of the photovoltaic cell.

The first passivation layer **13** or the first anti-reflection layer **14** may be formed by, including but not limited to, plasma enhanced chemical vapor deposition (PECVD), atomic layer deposition (ALD), chemical vapor deposition (CVD), physical vapour deposition (PVD), etc.

In an embodiment, a first electrode **15** is further formed on the front surface of the substrate **10**. The first electrode **15** penetrates through the first passivation layer **13** and the first anti-reflection layer **14**, and forms an ohmic contact with the emitter **12** of the substrate **10**. The first electrode **15** may be formed by a metallization process, for example, by screen printing the conductive paste.

In step **103**, a second passivation layer is formed on a rear surface of the substrate in the direction away from the substrate.

As shown in FIGS. **1** to **3**, a second passivation layer **20** is formed on the rear surface of the substrate **10**. The second passivation layer **20** includes at least one aluminum oxide layer Al_2O_3 , where $0.8 < y/x < 1.6$. Particularly, $0.8 < y/x \leq 1$, $1 < y/x < 1.5$ or $1.5 \leq y/x < 1.6$. When the at least one aluminum oxide layer is provided with a single layer (i.e., an aluminum oxide layer **17**), a thickness of the aluminum oxide layer **17** is in a range of 4 nm to 20 nm. Particularly, the thickness of the aluminum oxide layer **17** is 5 nm, 10 nm, 15 nm or 20 nm. When forming the aluminum oxide layer **17** with a particular thickness, a ratio of y and x in the aluminum oxide layer **17** is controlled in a range of 0.8 to 1.6, and a refractive index of the aluminum oxide layer **17** is in a range of 1.4 to 1.6. Particularly, the refractive index of the aluminum oxide layer **17** is in a range of 1.55 to 1.59. It should be noted that when the at least one aluminum oxide layer is provided with a plurality of layers (not shown), the refractive index mentioned here should be a refractive index of all the aluminum oxide layers, that is, the refractive index of all of the plurality of aluminum oxide layers is in a range of 1.4 to 1.6. Particularly, the refractive index of all of the plurality of aluminum oxide layers is in a range of 1.55 to 1.59.

In an embodiment, the aluminum oxide layer **17** in the second passivation layer **20** is prepared by the PECVD. Argon, trimethylaluminum and nitrous oxide may be used as precursors of the aluminum oxide layer **17**. Herein, a gas flow ratio of the argon, the trimethylaluminum and the nitrous oxide is in a range of 1:1:1 to 1.5:1:2. Particularly, the gas flow ratio is in a range of 1:1:1 to 1:1:2, and the pressure in a PECVD reaction chamber is 0.13 mbar. A thickness of the aluminum oxide layer **17** is in a range of 4 nm to 20 nm. A ratio of y and x in the aluminum oxide layer **17** may be controlled in a range of 0.8 to 1.6. A refractive index of the aluminum oxide layer **17** is in a range of 1.4 to 1.6.

In an embodiment, the second passivation layer **20** further includes a silicon oxide layer **16**. The silicon oxide layer **16** is disposed between the substrate **10** and the aluminum oxide layer **17**. The silicon oxide layer **16** is formed between the substrate **10** and the aluminum oxide layer **17** to isolate the aluminum oxide layer **17** from the substrate **10**. The silicon oxide layer **16** is formed by applying an ozone (O_3) process in a process of etching the substrate **10**. The dense silicon oxide layer **16** is chemically stable, which may chemically passivate a dangling bond on the surface of the substrate **10**. A thickness of the silicon oxide layer **16** is in

11

a range of 0.1 nm to 5 nm. Particularly, the thickness of the silicon oxide layer **16** is 2 nm, 3 nm or 4 nm.

In step **104**, a polarization phenomenon weakening (PPW) layer is formed on a surface of the second passivation layer away from the substrate.

The PPW layer may be configured as an intermediate layer to reduce a potential difference between its upper and lower layers, thus improving the anti-PID performance of the photovoltaic cell and further ensuring the high conversion efficiency of the photovoltaic cell. In some embodiments, as shown in FIGS. **1** to **3**, the PPW layer **18** includes at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$, where $r>s>t$. A concentration of silicon atoms in the at least one silicon oxynitride layer is in a range of $5 \times 10^{21}/\text{cm}^3$ to $2.5 \times 10^{22}/\text{cm}^3$.

In an embodiment, when depositing the at least one silicon oxynitride layer on the surface of the aluminum oxide layer **17**, silanes, ammonia and nitrous oxide are simultaneously introduced into a reaction chamber, where a gas flow ratio of the silanes, the ammonia and the nitrous oxide is in a range of 1:1:3 to 1:4:6, and the pressure in the reaction chamber is 0.25 mbar. A thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm, and a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8. It should be noted that when the at least one silicon oxynitride layer is provided with a plurality of layers, the refractive index mentioned here should be a refractive index of all the silicon oxynitride layers, that is, the refractive index of all of the plurality of silicon oxynitride layers is in a range of 1.5 to 1.8.

In an embodiment, an intermediate silicon oxide layer is deposited on the surface of the aluminum oxide layer **17**, and precursors of the intermediate silicon oxide layer are the silanes and the nitrous oxide, where a gas flow ratio of the silanes and the nitrous oxide is in a range of 1:3 to 1:6, and the pressure in the reaction chamber is 0.25 mbar. After the intermediate silicon oxide layer is formed, nitrogen source gas is introduced to produce nitrogen plasmas to react with the intermediate silicon oxide layer, so as to form the at least one silicon oxynitride layer. That is to say, an intermediate silicon dioxide layer is formed first by the reaction on the surface of the aluminum oxide layer **17**, and then the nitrogen source gas is introduced to produce nitrogen plasmas to react with the silicon dioxide layer, so as to form the at least one silicon oxynitride layer. A thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm, and the refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8.

In step **105**, at least one silicon nitride layer is formed on a surface of the polarization phenomenon weakening layer away from the substrate.

As shown in FIG. **1**, the at least one silicon nitride layer Si_uN_v is provided with a single layer (i.e., the silicon nitride layer **19**), where $1 < u/v < 4$, and the silicon nitride layer **19** is formed on the surface of the PPW layer **18**. A thickness of the silicon nitride layer **19** is in a range of 50 nm to 100 nm.

In an embodiment, the silicon nitride layer **19** is prepared by the PECVD, the silanes and the ammonia may be used as precursors of the silicon nitride layer **19**. The pressure in the reaction chamber is 0.25 mbar, and a gas flow ratio of the silanes and the ammonia is in a range of 1:1.3 to 1:4. A thickness of the silicon nitride layer **19** is in a range of 50 nm to 100 nm, and a refractive index of the silicon nitride layer **19** is in a range of 1.9 to 2.5. Particularly, the thickness of the silicon nitride layer **19** is 60 nm, 75 nm or 90 nm.

In an embodiment, the at least one silicon nitride layer is provided with a plurality of silicon nitride layers. Particu-

12

larly, the at least one silicon nitride layer is provided with 2 to 5 silicon nitride layers, such as 2 layers, 3 layers, etc. As shown in FIG. **2**, the at least one silicon nitride layer includes a first silicon nitride layer **191**, a second silicon nitride layer **192** and a third silicon nitride layer **193**. Specifically, precursors of the three silicon nitride layers are introduced into a first reaction chamber of a PECVD equipment, and the precursors are the silanes and the ammonia. A gas flow ratio of the silanes and the ammonia is in a range of 1:1.3 to 1:1.5, the pressure in the first reaction chamber is 0.25 mbar, and the first silicon nitride layer **191** is formed by the PECVD process. The same kind of precursors are continuously introduced into the first reaction chamber, a gas flow ratio of the silanes and the ammonia is in a range of 1:1.5 to 1:2.2, the pressure in the first reaction chamber is 0.25 mbar, and the second silicon nitride layer **192** is formed by the PECVD process. The same kind of precursors are introduced into a second reaction chamber of the PECVD equipment, a gas flow ratio of the silanes and the ammonia is in a range of 1:2.2 to 1:4, the pressure in the reaction chamber is 0.25 mbar, and the third silicon nitride layer **193** is formed by the PECVD process.

Based on the preparation processes, a thickness of the first silicon nitride layer **191** is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer **192** is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer **193** is in a range of 40 nm to 75 nm. A refractive index of the first silicon nitride layer **191** is in a range of 2.1 to 2.5, a refractive index of the second silicon nitride layer **192** is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer **193** is in a range of 1.9 to 2.1. A refractive index of the three silicon nitride layers is in a range of 1.9 to 2.5. It should be noted that although there are the same values in the refractive index ranges of every two silicon nitride layers in the above three silicon nitride layers, the refractive indexes of the three silicon nitride layers need to satisfy the condition that "the refractive indexes of the plurality of silicon nitride layers decrease layer by layer in the direction away from the substrate **10**" in practical applications. Therefore, a situation that every two silicon nitride layers in the three silicon nitride layers have the same refractive indexes may not happen.

In an embodiment, as shown in FIG. **3**, the at least one silicon nitride layer is provided with two silicon nitride layers, i.e., a first silicon nitride layer **191** and a second silicon nitride layer **192**. Specifically, precursors of the two silicon nitride layers are introduced into a first reaction chamber of a PECVD equipment, and the reactants are the silanes and the ammonia. A gas flow ratio of the silanes and the ammonia is 1:1.9, a reaction chamber pressure is 0.25 mbar, and the first silicon nitride layer **191** is formed by the PECVD process. The same kind of precursors are continuously introduced into the first reaction chamber, a gas flow ratio of the silanes and the ammonia is 1:2.8, a reaction chamber pressure is 0.25 mbar, and the second silicon nitride layer **192** is formed by the PECVD process.

Based on the above preparation processes, a thickness of the first silicon nitride layer **191** is in a range of 15 nm to 40 nm, and a thickness of the second silicon nitride layer **192** is in a range of 35 nm to 110 nm. A refractive index of the first silicon nitride layer **191** is in a range of 2.3 to 2.5, and a refractive index of the second silicon nitride layer **192** is in a range of 1.9 to 2.2.

In step **106**, a conductive paste is printed on the surface of the at least one silicon nitride layer and sintered to form a second electrode. The second electrode penetrates through

13

the second passivation layer, the PPW layer and the at least one silicon nitride layer, and forms an ohmic contact with the substrate.

In order to achieve a photovoltaic cell with high anti-PID effect and high efficiency, for example, the thicknesses of the second passivation layer **20**, the PPW layer **18** and the silicon nitride layer **19** on the rear surface of the photovoltaic cell and their corresponding refractive indexes are designed to be matched. A relationship of the atom number of each kind of atoms in the aluminum oxide layer **17** included in the second passivation layer **20**, the PPW layer **18** and the silicon nitride layer **19** is specified through a proper process, so that the refractive index of all the layers on the rear surface of the photovoltaic cell is within a reasonable refractive index range. When the refractive index of all the layers on the rear surface of the photovoltaic cell is within the reasonable refractive index range and each layer has a suitable thickness, which result in a relatively high anti-reflective property, the light utilization rate of the photovoltaic cell can be increased and the light conversion efficiency of the photovoltaic cell can be improved.

In some embodiments of the present disclosure, the aluminum oxide layer **17** is provided on the rear surface of the photovoltaic cell. Since the growth and annealing temperature of the aluminum oxide layer **17** is relatively low, octahedral structures of aluminum atoms in the aluminum oxide layer **17** will be transformed into tetrahedral structures after a high temperature heat treatment to generate interstitial oxygen atoms. The interstitial oxygen atoms capture valence electrons in the substrate **10** to form fixed negative charges, so that the aluminum oxide layer **17** shows an electronegativity and an interface electric field directed to the inside of the substrate **10** is generated at the interface, thus causing carriers to escape from the interface quickly, reducing an interface recombination rate and increasing a minority carrier lifetime of the substrate **10**. The PPW layer **18** disposed on the aluminum oxide layer **17** may effectively prevent subsequent products of sodium ions, $\sim\text{OH}$ and $\sim\text{CH}_3$ groups from migrating into the photovoltaic cell, block the movement and migration of mobile ions under an external electric field, temperature and humidity, and reduce the potential difference between layers and enhance the anti-PID effect, thus having better anti-PID performance and anti-aging/attenuation performance. The silicon nitride layer **19** disposed on the PPW layer **18** achieves the optimal anti-reflection effect by combining optical path matching, and protects the adjacent aluminum oxide layer **17** and polarization phenomenon weakening layer **18** from corrosion caused by the excessive paste. After annealing, an H passivation effect of the silicon nitride layer **19** is significant, which further improves the minority carrier lifetime of a silicon wafer and also prevents subsequent products of Na^+ , $\sim\text{OH}$ and $\sim\text{CH}_3$ groups from migrating into the photovoltaic cell to a certain extent, thus avoiding power attenuation caused by electric leakage of cell components. The combination of the aluminum oxide layer **17** and the polarization phenomenon weakening layer **18** reduces the power loss of the cell components, and improves light attenuation performance, heat-assisted light attenuation performance and anti-PID performance of the photovoltaic cell.

Comparative Example

A comparative example provides a back structure of a PERC cell. The specific structure is shown in FIG. 5, which includes: a substrate **10** having a PN junction; a first passivation layer **13**, a first anti-reflection layer **14** and a first

14

electrode **15** that are sequentially disposed on a front surface of the substrate **10** in a direction away from the substrate **10**; a second passivation layer **20**, a silicon nitride layer **19** Si_xN_y , and a second electrode **21** that are sequentially disposed on a rear surface of the substrate **10** in a direction away from the substrate **10**, where $1 < y/x < 4$. The second passivation layer **20** includes at least one aluminum oxide layer Al_xO_y , (shown as an aluminum oxide layer **17** in FIG. 5 when provided with a single layer), where $0.8 < y/x < 1.6$. A refractive index of the at least one aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm. A refractive index of the silicon nitride layer **19** is in a range of 1.9 to 2.5, and a thickness of the silicon nitride layer **19** is in a range of 50 nm to 100 nm. The second passivation layer **20** further includes a silicon oxide layer **16**. The silicon oxide layer **16** is disposed between the substrate **10** and the aluminum oxide layer **17** to isolate the aluminum oxide layer **17** from the substrate **10**, which may avoid a direct contact between the aluminum oxide layer **17** and the substrate **10**.

Compared with the photovoltaic cell in the present disclosure shown in FIG. 1, the difference is that the back structure of the comparative example does not have the PPW layer **18**, and other structures and preparation method are the same. Through a comparative experiment, the results are shown in the following table.

Parameter	Conversion efficiency Ncell/%	Open circuit voltage Uoc/mV	Short circuit current Isc/A	Parallel resistance Rs/mΩ	Fill factor FF/%
With $\text{Si}_x\text{O}_y\text{N}_z$	22.897	688.2	10.761	0.988	82.677
Without $\text{Si}_x\text{O}_y\text{N}_z$	22.779	685.6	10.752	0.955	82.626

Parameter	Thickness of layer	Minority carrier lifetime (before sintering)	Minority carrier lifetime (after sintering)
With $\text{Si}_x\text{O}_y\text{N}_z$	97	128.71	204.93
Without $\text{Si}_x\text{O}_y\text{N}_z$	84.8	93.91	168.3

Herein, the conversion efficiency of the photovoltaic cell = (open circuit voltage * short circuit current * fill factor) / (cell area * illumination amplitude) * 100%. It can be seen that the open circuit voltage, the short circuit current and the fill factor are proportional to the conversion efficiency. The longer the minority carrier lifetime, the higher the conversion efficiency. It can be seen from the data in the table that a conversion efficiency of a photovoltaic cell with the $\text{Si}_x\text{O}_y\text{N}_z$ on the rear surface is 0.118% higher than that of a photovoltaic cell without the $\text{Si}_x\text{O}_y\text{N}_z$ on the rear surface.

The steps in the above methods only aim to make the description clearer. In implementation, the steps may be combined into one or one step may be divided into multiple sub-steps, which, as long as the same logical relationship is included, all fall into the protection scope of the present disclosure. Such a trivial amendment or design added to an algorithm or procedure as not changing the algorithm or a core design of the procedure falls into the protection scope of the disclosure.

It is not difficult to find that this embodiment is a method embodiment related to the first embodiment, and this embodiment may be implemented in cooperation with the first embodiment. The relevant technical details mentioned

15

in the first embodiment are still valid in this embodiment, thus not repeated herein in order to reduce repetition. Accordingly, the relevant technical details mentioned in this embodiment may also be applied in the first embodiment.

Those skilled in the art should appreciate that the aforementioned embodiments are specific embodiments for implementing the present disclosure. In practice, however, various changes may be made in the forms and details of the specific embodiments without departing from the spirit and scope of the present disclosure.

What is claimed is:

1. A photovoltaic cell, comprising:

a substrate;

a first passivation layer and a first anti-reflection layer that are sequentially disposed on a front surface of the substrate in a direction away from the substrate; and
a second passivation layer, a polarization phenomenon weakening (PPW) layer and at least one silicon nitride layer Si_uN_v , that are sequentially disposed on a rear surface of the substrate in a direction away from the substrate, wherein $1 < u/v < 4$;

wherein the second passivation layer comprises at least one aluminum oxide layer Al_xO_y , wherein $0.8 < y/x < 1.6$, a refractive index of the at least one aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm; wherein the PPW layer comprises at least one silicon oxynitride layer $Si_rO_sN_t$, wherein $r > s > t$, a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8, and a thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm; wherein a refractive index of the at least one silicon nitride layer is in a range of 1.9 to 2.5, and a thickness of the at least one silicon nitride layer is in a range of 50 nm to 100 nm;

wherein concentration of silicon atoms in the at least one silicon oxynitride layer is between $5 \times 10^{21}/cm^3$ and $2.5 \times 10^{22}/cm^3$.

2. The photovoltaic cell according to claim 1, wherein the at least one silicon nitride layer comprises a first silicon nitride layer, a second silicon nitride layer and a third silicon nitride layer stacked in the direction away from the substrate, wherein a thickness of the first silicon nitride layer is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer is in a range of 40 nm to 75 nm.

3. The photovoltaic cell according to claim 2, wherein refractive indexes of the first silicon nitride layer, the second silicon nitride layer and the third silicon nitride layer decrease layer by layer in the direction away from the substrate, a refractive index of the first silicon nitride layer is in a range of between 2.1 to 2.5, a refractive index of the second silicon nitride layer is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer is in a range of 1.9 to 2.1.

4. The photovoltaic cell according to claim 1, wherein the second passivation layer further comprises a silicon oxide layer, and the silicon oxide layer is disposed between the substrate and the at least one aluminum oxide layer.

5. The photovoltaic cell according to claim 4, wherein a thickness of the silicon oxide layer is in a range of 0.1 nm to 5 nm.

16

6. A method for manufacturing a photovoltaic cell, comprising:

providing a substrate;

forming a first passivation layer and a first anti-reflection layer sequentially on a front surface of the substrate in a direction away from the substrate; and

forming a second passivation layer, a polarization phenomenon weakening (PPW) layer and at least one silicon nitride layer Si_uN_v , sequentially on a rear surface of the substrate in a direction away from the substrate, wherein $1 < u/v < 4$;

wherein the second passivation layer comprises at least one aluminum oxide layer Al_xO_y , wherein $0.8 < y/x < 1.6$, a refractive index of the at least one layer aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm; wherein the PPW layer comprises at least one silicon oxynitride layer $Si_rO_sN_t$, wherein $r > s > t$, a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8, and a thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm; wherein a refractive index of the at least one silicon nitride layer is in a range of 1.9 to 2.5, and a thickness of the at least one silicon nitride layer is in a range of 50 nm to 100 nm;

wherein concentration of silicon atoms in the at least one silicon oxynitride layer is between $5 \times 10^{21}/cm^3$ and $2.5 \times 10^{22}/cm^3$.

7. The method for manufacturing the photovoltaic cell according to claim 6, wherein the forming the second passivation layer comprises:

depositing the at least one aluminum oxide layer on the rear surface of the substrate, wherein precursors of the at least one aluminum oxide layer comprise argon, trimethylaluminum and nitrous oxide, wherein a gas flow ratio of the argon, the trimethylaluminum and the nitrous oxide is in a range of 1:1:1 to 1.5:1:2.

8. The method for manufacturing the photovoltaic cell according to claim 6, wherein the forming the PPW layer comprises:

depositing the at least one silicon oxynitride layer on a surface of the at least one aluminum oxide layer, wherein precursors of the at least one silicon oxynitride comprise silanes, ammonia and nitrous oxide, wherein a gas flow ratio of the silanes, the ammonia and the nitrous oxide is in a range of 1:1:3 to 1:4:6.

9. The method for manufacturing the photovoltaic cell according to claim 6, wherein the forming the PPW comprises:

depositing an intermediate silicon oxide layer on a surface of the at least one aluminum oxide layer first, wherein precursors of the intermediate silicon oxide layer comprise silanes and nitrous oxide, wherein a gas flow ratio of the silanes and the nitrous oxide is in a range of 1:3 to 1:6; and

introducing nitrogen source gas to produce nitrogen plasmas to react with the intermediate silicon oxide layer, so as to form the at least one silicon oxynitride layer.

10. The method for manufacturing the photovoltaic cell according to claim 9, wherein the forming the at least one silicon nitride layer comprises:

depositing the at least one silicon nitride layer on a surface of the silicon oxynitride layer, wherein precursors of the at least one silicon nitride layer comprise the silanes and ammonia, wherein a gas flow ratio of the silanes and the ammonia is in a range of 1:1.3 to 1:4.

17

11. The method for manufacturing the photovoltaic cell according to claim 10, wherein the at least one silicon nitride layer comprises three silicon nitride layers, and forming the three silicon nitride layers comprises:

forming a first silicon nitride layer on the surface of the silicon oxynitride layer, wherein precursors of the first silicon nitride layer comprise the silanes and the ammonia, wherein the gas flow ratio of the silanes and the ammonia is in a range of 1:1.3 to 1:1.5;

forming a second silicon nitride layer on a surface of the first silicon nitride layer, wherein precursors of the second silicon nitride layer comprise the silanes and the ammonia, wherein the gas flow ratio of the silanes and the ammonia is in a range of 1:1.5 to 1:2.2; and

forming a third silicon nitride layer on a surface of the second silicon nitride layer, wherein precursors of the third silicon nitride layer comprise the silanes and the ammonia, wherein the gas flow ratio of the silanes and the ammonia is in a range of 1:2.2 to 1:4.

12. The method for manufacturing the photovoltaic cell according to claim 11, wherein a thickness of the first silicon nitride layer is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer is in a range of 40 nm to 75 nm.

13. The method for manufacturing the photovoltaic cell according to claim 11, wherein a refractive index of the first silicon nitride layer is in a range of 2.1 to 2.5, a refractive index of the second silicon nitride layer is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer is in a range of 1.9 to 2.1.

14. The method for manufacturing the photovoltaic cell according to claim 6, wherein forming the second passivation layer further comprises:

forming a silicon oxide layer between the substrate and the at least one aluminum oxide layer.

15. The method for manufacturing the photovoltaic cell according to claim 14, wherein a thickness of the silicon oxide layer is in a range of 0.1 nm to 5 nm.

16. A photovoltaic module, comprising at least one photovoltaic cell string, wherein each of the at least one photovoltaic cell string is composed of a plurality of photovoltaic cells electrically connected; wherein each of the plurality of photovoltaic cells comprises:

18

a substrate;

a first passivation layer and a first anti-reflection layer that are sequentially disposed on a front surface of the substrate in a direction away from the substrate; and

a second passivation layer, a polarization phenomenon weakening (PPW) layer and at least one silicon nitride layer Si_xN_y , that are sequentially disposed on a rear surface of the substrate in a direction away from the substrate, wherein $1 < u/v < 4$;

wherein the second passivation layer comprises at least one aluminum oxide layer Al_xO_y , wherein $0.8 < y/x < 1.6$, a refractive index of the at least one aluminum oxide layer is in a range of 1.4 to 1.6, and a thickness of the at least one aluminum oxide layer is in a range of 4 nm to 20 nm; wherein the PPW layer comprises at least one silicon oxynitride layer $\text{Si}_r\text{O}_s\text{N}_t$, wherein $r > s > t$, a refractive index of the at least one silicon oxynitride layer is in a range of 1.5 to 1.8, and a thickness of the at least one silicon oxynitride layer is in a range of 1 nm to 30 nm; wherein a refractive index of the at least one silicon nitride layer is in a range of 1.9 to 2.5, and a thickness of the at least one silicon nitride layer is in a range of 50 nm to 100 nm;

wherein concentration of silicon atoms in the at least one silicon oxynitride layer is between $5 \times 10^{21}/\text{cm}^3$ and $2.5 \times 10^{22}/\text{cm}^3$.

17. The photovoltaic module according to claim 16, wherein the at least one silicon nitride layer comprises a first silicon nitride layer, a second silicon nitride layer and a third silicon nitride layer stacked in the direction away from the substrate, wherein a thickness of the first silicon nitride layer is in a range of 5 nm to 20 nm, a thickness of the second silicon nitride layer is in a range of 20 nm to 40 nm, and a thickness of the third silicon nitride layer is in a range of 40 nm to 75 nm.

18. The photovoltaic module according to claim 17, wherein refractive indexes of the first silicon nitride layer, the second silicon nitride layer and the third silicon nitride layer decrease layer by layer in the direction away from the substrate, a refractive index of the first silicon nitride layer is in a range of between 2.1 to 2.5, a refractive index of the second silicon nitride layer is in a range of 2 to 2.3, and a refractive index of the third silicon nitride layer is in a range of 1.9 to 2.1.

* * * * *