



US010009520B2

(12) **United States Patent**  
**Siminoff**

(10) **Patent No.:** **US 10,009,520 B2**  
(45) **Date of Patent:** **Jun. 26, 2018**

(54) **WIRELESS AUDIO/VIDEO RECORDING  
AND COMMUNICATION DOORBELLS  
WITH INTEGRATED IMAGE  
SENSOR/BUTTON**

(71) Applicant: **Ring Inc.**, Santa Monica, CA (US)

(72) Inventor: **James Siminoff**, Pacific Palisades, CA  
(US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days. days.

(21) Appl. No.: **15/148,981**

(22) Filed: **May 6, 2016**

(65) **Prior Publication Data**

US 2016/0330403 A1 Nov. 10, 2016

**Related U.S. Application Data**

(60) Provisional application No. 62/158,035, filed on May  
7, 2015.

(51) **Int. Cl.**  
**G08B 13/19** (2006.01)  
**H04N 5/225** (2006.01)  
**H04N 7/18** (2006.01)  
**H04N 5/77** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **H04N 5/2252** (2013.01); **H04N 5/2257**  
(2013.01); **H04N 5/77** (2013.01); **H04N 7/186**  
(2013.01)

(58) **Field of Classification Search**  
CPC combination set(s) only.  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

|               |         |                     |                       |
|---------------|---------|---------------------|-----------------------|
| 4,524,384 A * | 6/1985  | Lefkowitz .....     | G08B 13/00<br>348/156 |
| 4,764,953 A   | 8/1988  | Chern et al.        |                       |
| 5,428,388 A   | 6/1995  | von Bauer et al.    |                       |
| 5,760,848 A   | 6/1998  | Cho                 |                       |
| 6,072,402 A   | 6/2000  | Kniffin et al.      |                       |
| 6,192,257 B1  | 2/2001  | Ray                 |                       |
| 6,271,752 B1  | 8/2001  | Vaios               |                       |
| 6,429,893 B1  | 8/2002  | Xin                 |                       |
| 6,456,322 B1  | 9/2002  | Marinacci           |                       |
| 6,476,858 B1  | 11/2002 | Ramirez Diaz et al. |                       |
| 6,633,231 B1  | 10/2003 | Okamoto et al.      |                       |

(Continued)

**FOREIGN PATENT DOCUMENTS**

|    |           |         |
|----|-----------|---------|
| CN | 2585521 Y | 11/2003 |
| CN | 2792061 Y | 6/2006  |

(Continued)

**OTHER PUBLICATIONS**

Notificaiton of Transmittal of the International Search Report and  
the Written Opinion of the International Searching Authority from  
the International Searching Authority of corresponding Interna-  
tional Application, PCT/US16/31371, dated Aug. 29, 2016, pp. 1-8.


*Primary Examiner* — Joseph J Nguyen

(74) *Attorney, Agent, or Firm* — Chong IP Law, LLP

(57) **ABSTRACT**

Audio/video recording and communication doorbells, com-  
prising a housing and an image sensor or camera. The image  
sensor or camera may be located behind or integrated with  
an actuating button of the doorbell, and may serve the  
actuating function of the doorbell so that the doorbell does  
not require a discrete button separate from the image sensor  
or camera.

**15 Claims, 23 Drawing Sheets**

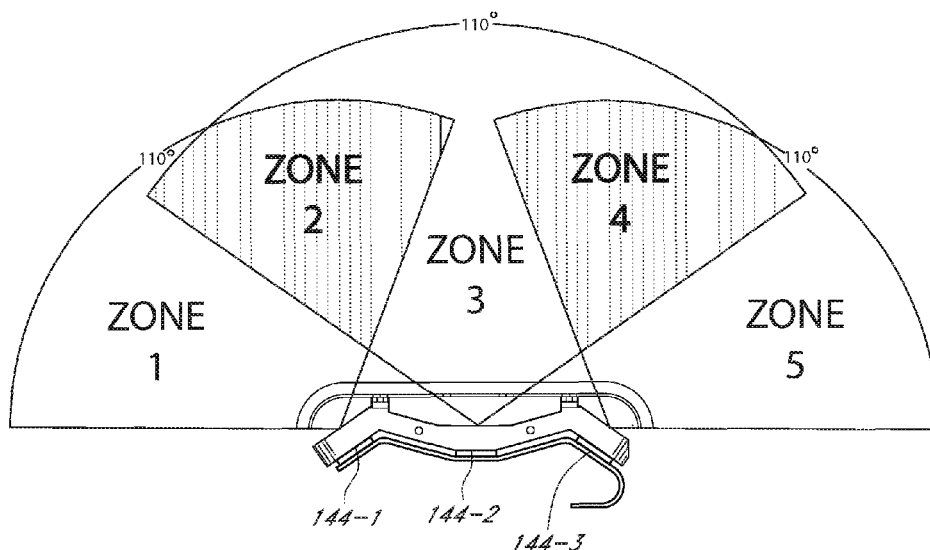

(56)

References Cited

U.S. PATENT DOCUMENTS

|                |         |                 |                             |
|----------------|---------|-----------------|-----------------------------|
| 6,658,091 B1   | 12/2003 | Naidoo et al.   |                             |
| 6,753,774 B2   | 6/2004  | Pan et al.      |                             |
| 6,912,299 B1 * | 6/2005  | Hoshino .....   | G06K 9/00013<br>340/5.53    |
| 6,970,183 B1   | 11/2005 | Monroe          |                             |
| 7,062,291 B2   | 6/2006  | Ryley et al.    |                             |
| 7,065,196 B2   | 6/2006  | Lee             |                             |
| 7,085,361 B2   | 8/2006  | Thomas          |                             |
| 7,109,860 B2   | 9/2006  | Wang            |                             |
| 7,193,644 B2   | 3/2007  | Carter          |                             |
| 7,304,572 B2   | 12/2007 | Sheynman et al. |                             |
| 7,382,249 B2   | 6/2008  | Fancella        |                             |
| 7,450,638 B2   | 11/2008 | Iwamura         |                             |
| 7,643,056 B2   | 1/2010  | Silsby          |                             |
| 7,683,924 B2   | 3/2010  | Oh et al.       |                             |
| 7,683,929 B2   | 3/2010  | Elazar et al.   |                             |
| 7,738,917 B2   | 6/2010  | Ryley et al.    |                             |
| 7,774,032 B2 * | 8/2010  | Swan .....      | G08B 13/19621<br>340/539.15 |
| 8,139,098 B2   | 3/2012  | Carter          |                             |
| 8,144,183 B2   | 3/2012  | Carter          |                             |
| 8,154,581 B2   | 4/2012  | Carter          |                             |
| 8,619,136 B2   | 12/2013 | Howarter et al. |                             |
| 8,872,915 B1   | 5/2014  | Scalisi et al.  |                             |
| 8,780,201 B1 * | 7/2014  | Scalisi .....   | H04N 7/186<br>348/143       |
| 8,823,795 B1   | 9/2014  | Scalisi et al.  |                             |
| 8,842,180 B1   | 9/2014  | Kasmir et al.   |                             |
| 8,937,659 B1   | 1/2015  | Scalisi et al.  |                             |
| 8,941,736 B1   | 1/2015  | Scalisi         |                             |
| 8,947,530 B1   | 2/2015  | Scalisi         |                             |
| 8,953,040 B1   | 2/2015  | Scalisi et al.  |                             |
| 9,013,575 B2   | 4/2015  | Scalisi         |                             |
| 9,049,352 B2   | 6/2015  | Scalisi et al.  |                             |
| 9,053,622 B2   | 6/2015  | Scalisi         |                             |
| 9,058,738 B1   | 6/2015  | Scalisi         |                             |
| 9,060,103 B2   | 6/2015  | Scalisi         |                             |
| 9,060,104 B2   | 6/2015  | Scalisi         |                             |
| 9,065,987 B2   | 6/2015  | Scalisi         |                             |
| 9,094,584 B2   | 7/2015  | Scalisi et al.  |                             |
| 9,113,051 B1   | 8/2015  | Scalisi         |                             |
| 9,113,052 B1   | 8/2015  | Scalisi et al.  |                             |
| 9,118,819 B1   | 8/2015  | Scalisi et al.  |                             |
| 9,142,214 B2   | 9/2015  | Scalisi         |                             |
| 9,160,987 B1   | 10/2015 | Kasmir et al.   |                             |
| 9,165,444 B2   | 10/2015 | Scalisi         |                             |
| 9,172,920 B1   | 10/2015 | Kasmir et al.   |                             |
| 9,172,921 B1   | 10/2015 | Scalisi et al.  |                             |
| 9,172,922 B1   | 10/2015 | Kasmir et al.   |                             |
| 9,179,107 B1   | 11/2015 | Scalisi         |                             |
| 9,179,108 B1   | 11/2015 | Scalisi         |                             |
| 9,179,109 B1   | 11/2015 | Kasmir et al.   |                             |
| 9,196,133 B2   | 11/2015 | Scalisi et al.  |                             |
| 9,197,867 B1   | 11/2015 | Scalisi et al.  |                             |
| 9,230,424 B1   | 1/2016  | Scalisi et al.  |                             |
| 9,237,318 B2   | 1/2016  | Kasmir et al.   |                             |
| 9,247,219 B2   | 1/2016  | Kasmir et al.   |                             |
| 9,253,455 B1   | 2/2016  | Harrison et al. |                             |
| 9,342,936 B2   | 5/2016  | Scalisi         |                             |
| 9,508,239 B1   | 11/2016 | Harrison et al. |                             |

|                   |         |                 |                          |
|-------------------|---------|-----------------|--------------------------|
| 9,736,284 B2      | 8/2017  | Scalisi et al.  |                          |
| 9,743,049 B2      | 8/2017  | Scalisi et al.  |                          |
| 9,769,435 B2      | 9/2017  | Scalisi et al.  |                          |
| 9,786,133 B2      | 10/2017 | Harrison et al. |                          |
| 9,799,183 B2      | 10/2017 | Harrison et al. |                          |
| 2002/0094111 A1   | 7/2002  | Puchek et al.   |                          |
| 2002/0147982 A1   | 10/2002 | Naidoo et al.   |                          |
| 2003/0043047 A1   | 3/2003  | Braun           |                          |
| 2004/0085205 A1   | 5/2004  | Yeh             |                          |
| 2004/0085450 A1   | 5/2004  | Stuart          |                          |
| 2004/0086093 A1   | 5/2004  | Schranz         |                          |
| 2004/0095254 A1   | 5/2004  | Maruszczak      |                          |
| 2004/0135686 A1   | 7/2004  | Parker          |                          |
| 2005/0007451 A1 * | 1/2005  | Chiang .....    | G08B 13/19634<br>348/143 |
| 2005/0111660 A1   | 5/2005  | Hosoda          |                          |
| 2006/0010199 A1   | 1/2006  | Brailean et al. |                          |
| 2006/0022816 A1   | 2/2006  | Yukawa          |                          |
| 2006/0139449 A1   | 6/2006  | Cheng et al.    |                          |
| 2006/0156361 A1   | 7/2006  | Wang et al.     |                          |
| 2010/0066841 A1 * | 3/2010  | Quail .....     | H04N 5/76<br>348/207.11  |
| 2014/0375835 A1 * | 12/2014 | Bos .....       | H04N 5/232<br>348/220.1  |
| 2015/0035987 A1 * | 2/2015  | Fernandez ..... | H04N 7/186<br>348/156    |
| 2015/0109128 A1 * | 4/2015  | Fadell .....    | G08B 27/003<br>340/540   |

FOREIGN PATENT DOCUMENTS

|    |                |         |
|----|----------------|---------|
| EP | 0944883 A1     | 6/1998  |
| EP | 1480462 A1     | 11/2004 |
| GB | 2286283 A      | 8/1995  |
| GB | 2354394 A      | 3/2001  |
| GB | 2357387 A      | 6/2001  |
| GB | 2400958 A      | 10/2004 |
| JP | 2001-103463 A  | 4/2001  |
| JP | 2002-033839 A  | 1/2002  |
| JP | 2002-125059 A  | 4/2002  |
| JP | 2002-342863 A  | 11/2002 |
| JP | 2002-344640 A  | 11/2002 |
| JP | 2002-354137 A  | 12/2002 |
| JP | 2002-368890 A  | 12/2002 |
| JP | 2003-283696 A  | 10/2003 |
| JP | 2004-128835 A  | 4/2004  |
| JP | 2005-341040 A  | 12/2005 |
| JP | 2006-147650 A  | 6/2006  |
| JP | 2006-262342 A  | 9/2006  |
| JP | 2009-008925 A  | 1/2009  |
| WO | 1998/39894 A1  | 9/1998  |
| WO | 2001/13638 A1  | 2/2001  |
| WO | 0129795 A1     | 4/2001  |
| WO | 2001/93220 A1  | 12/2001 |
| WO | 2002/085019 A1 | 10/2002 |
| WO | WO0129795 *    | 11/2002 |
| WO | 2003/028375 A1 | 4/2003  |
| WO | 2003/096696 A1 | 11/2003 |
| WO | 2006/038760 A1 | 4/2006  |
| WO | 2006/067782 A1 | 6/2006  |
| WO | 2007/125143 A1 | 8/2007  |

\* cited by examiner

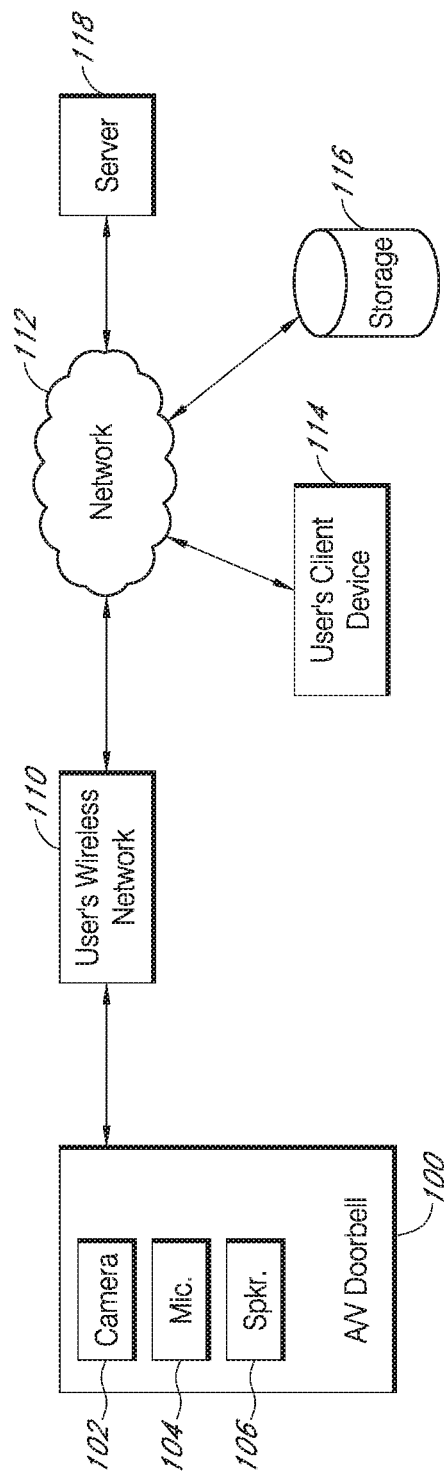


FIG. 1

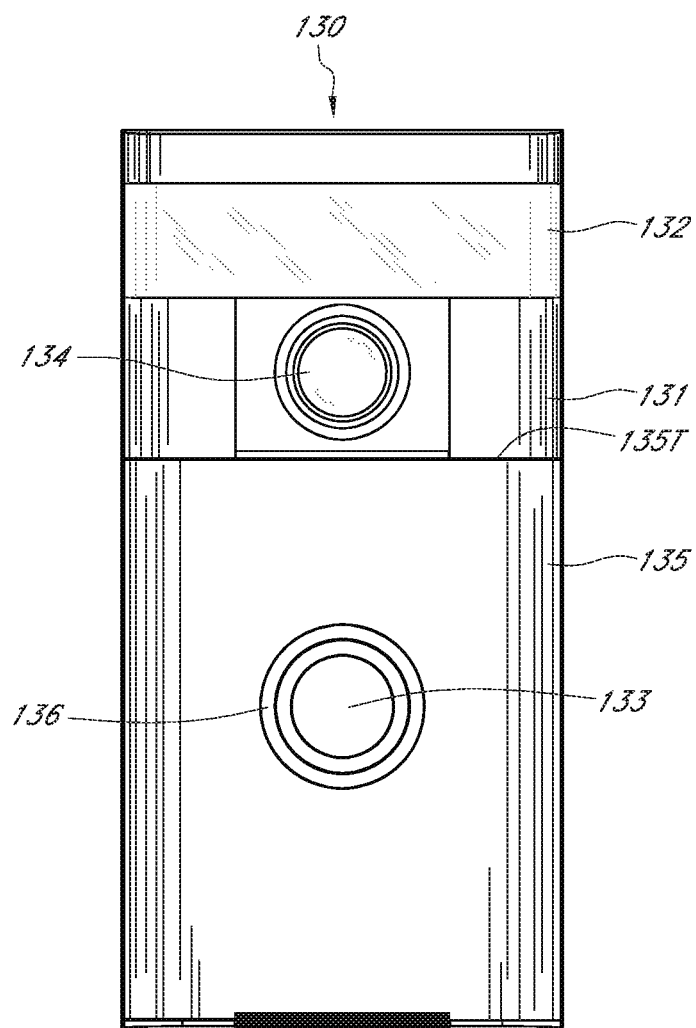


FIG. 2

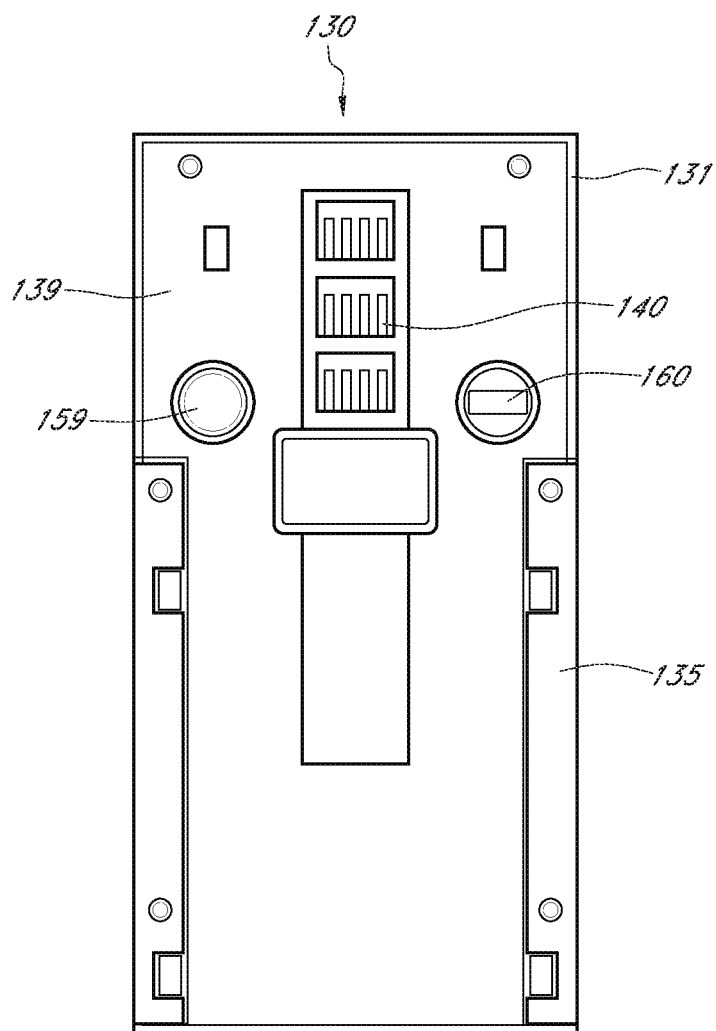


FIG. 3

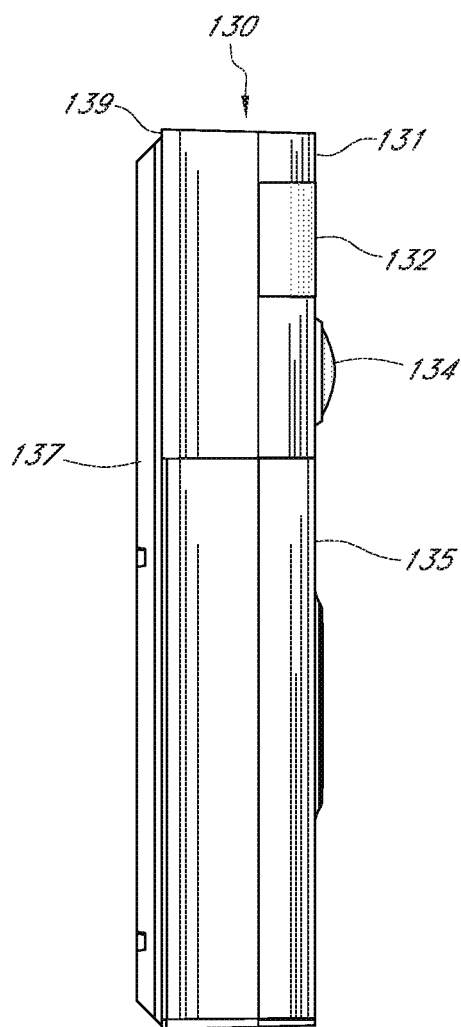


FIG. 4

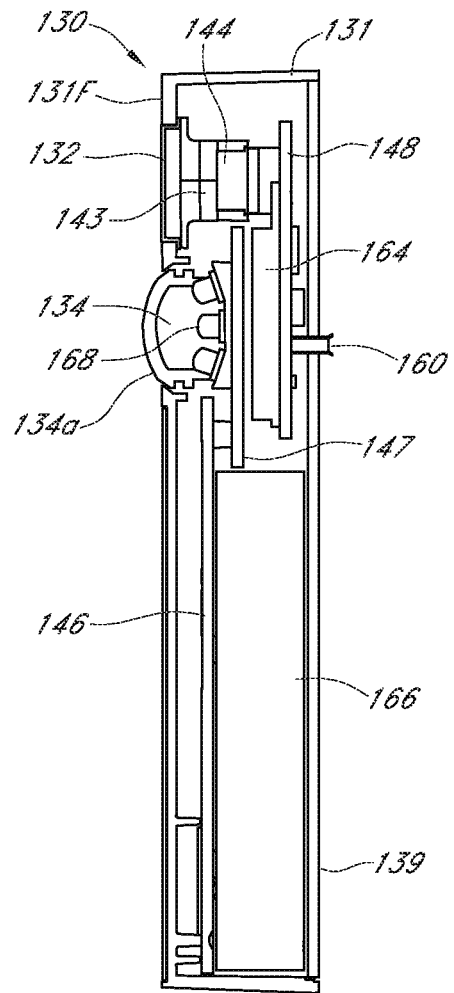


FIG. 5

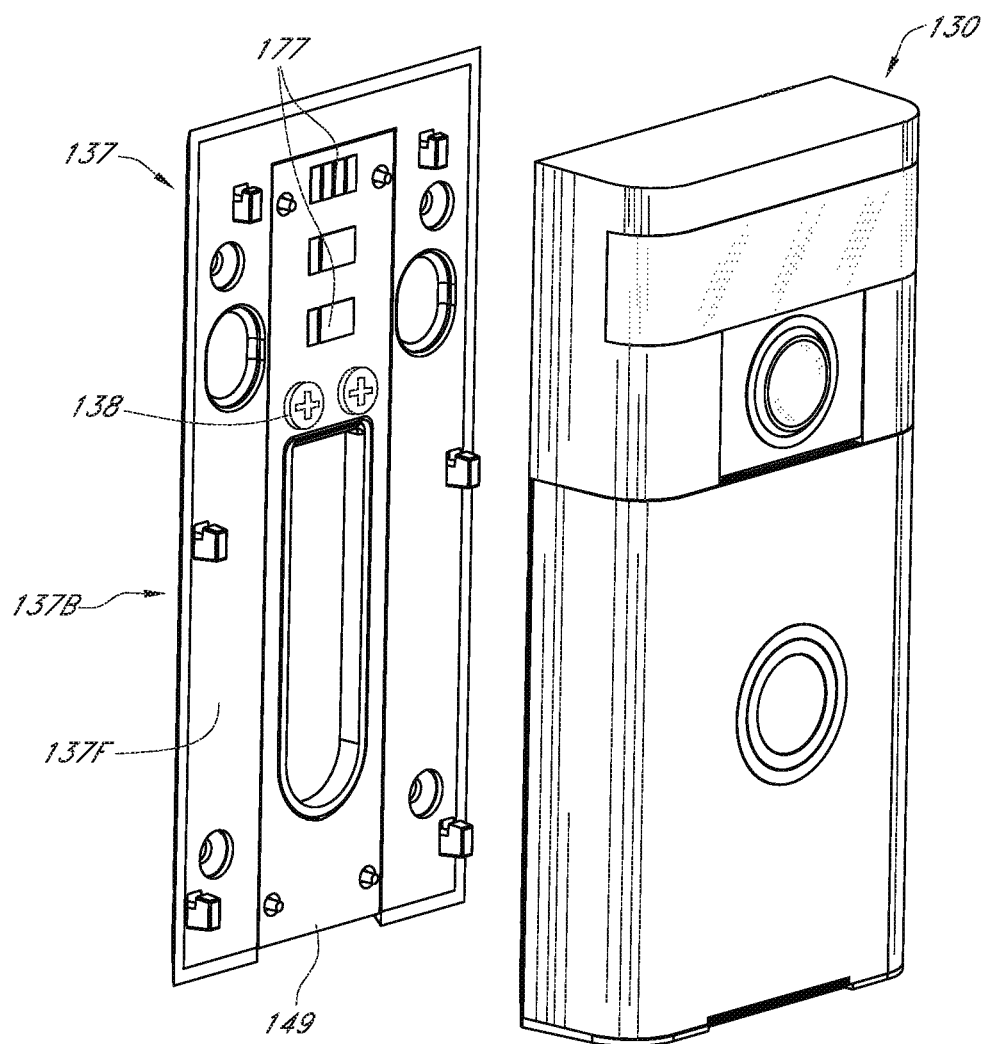


FIG. 6

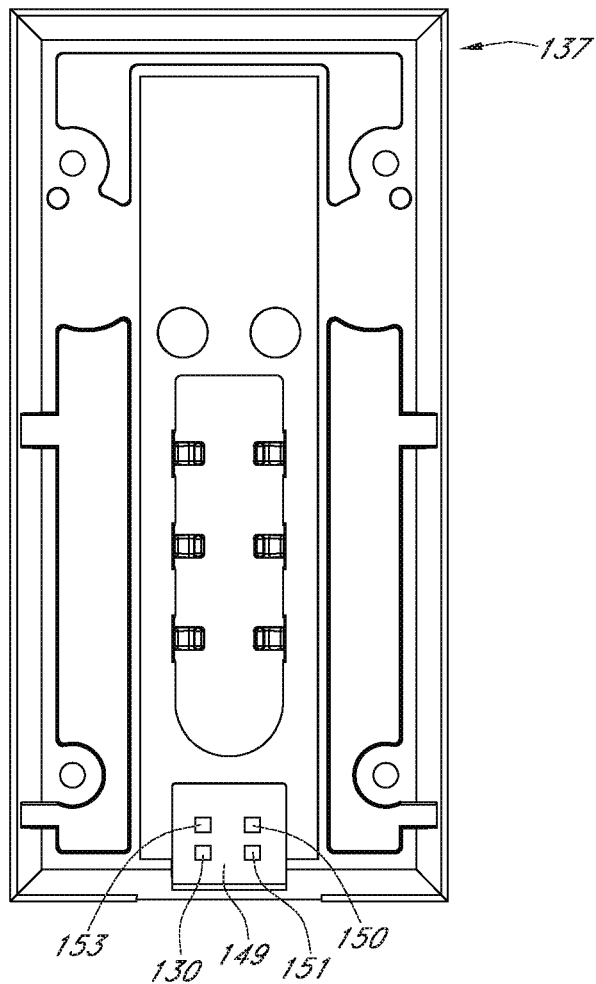


FIG. 7

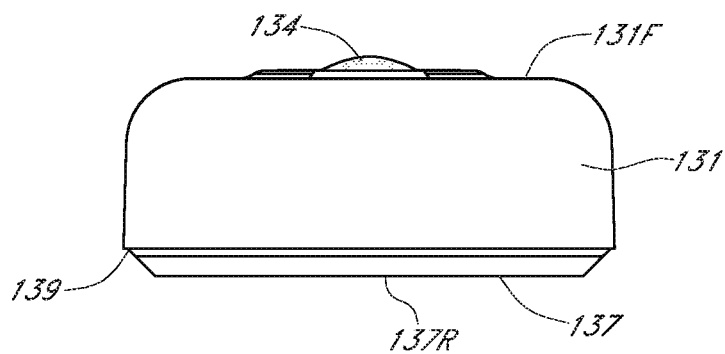


FIG. 8A

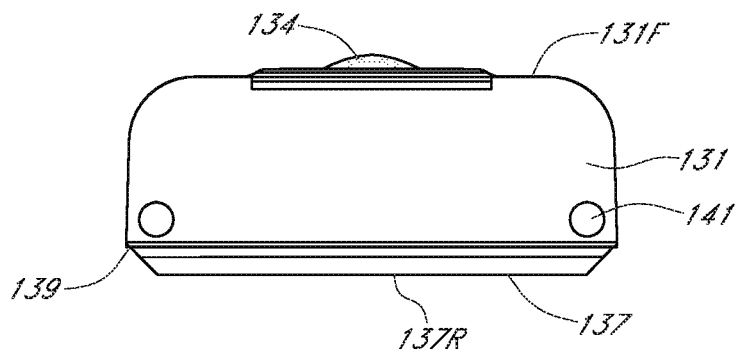


FIG. 8B

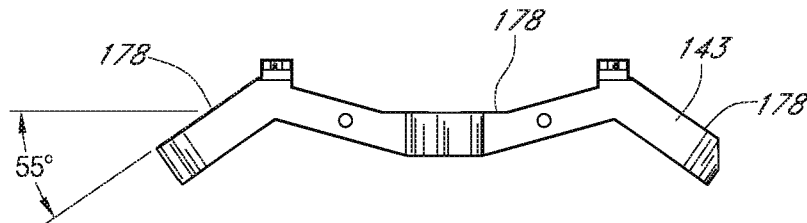


FIG. 9A

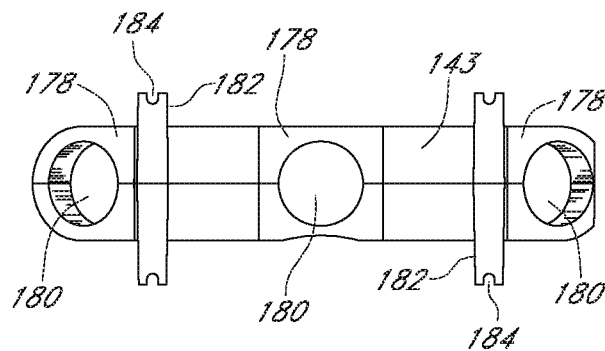


FIG. 9B

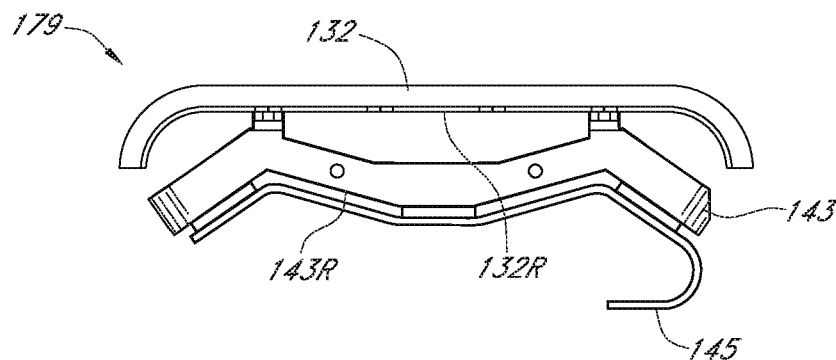


FIG. 10A

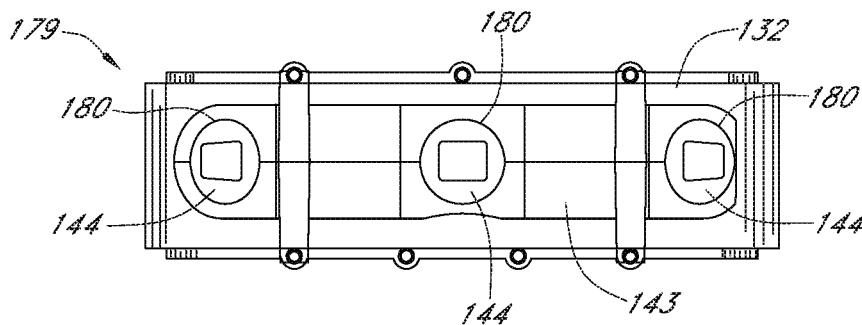


FIG. 10B

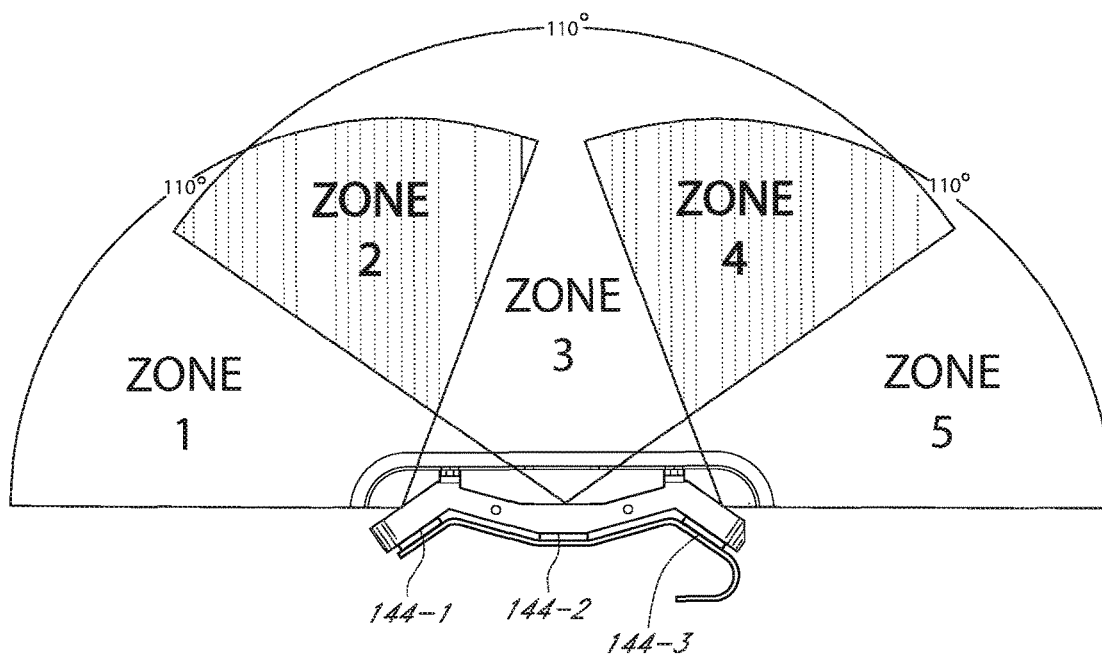


FIG. 11

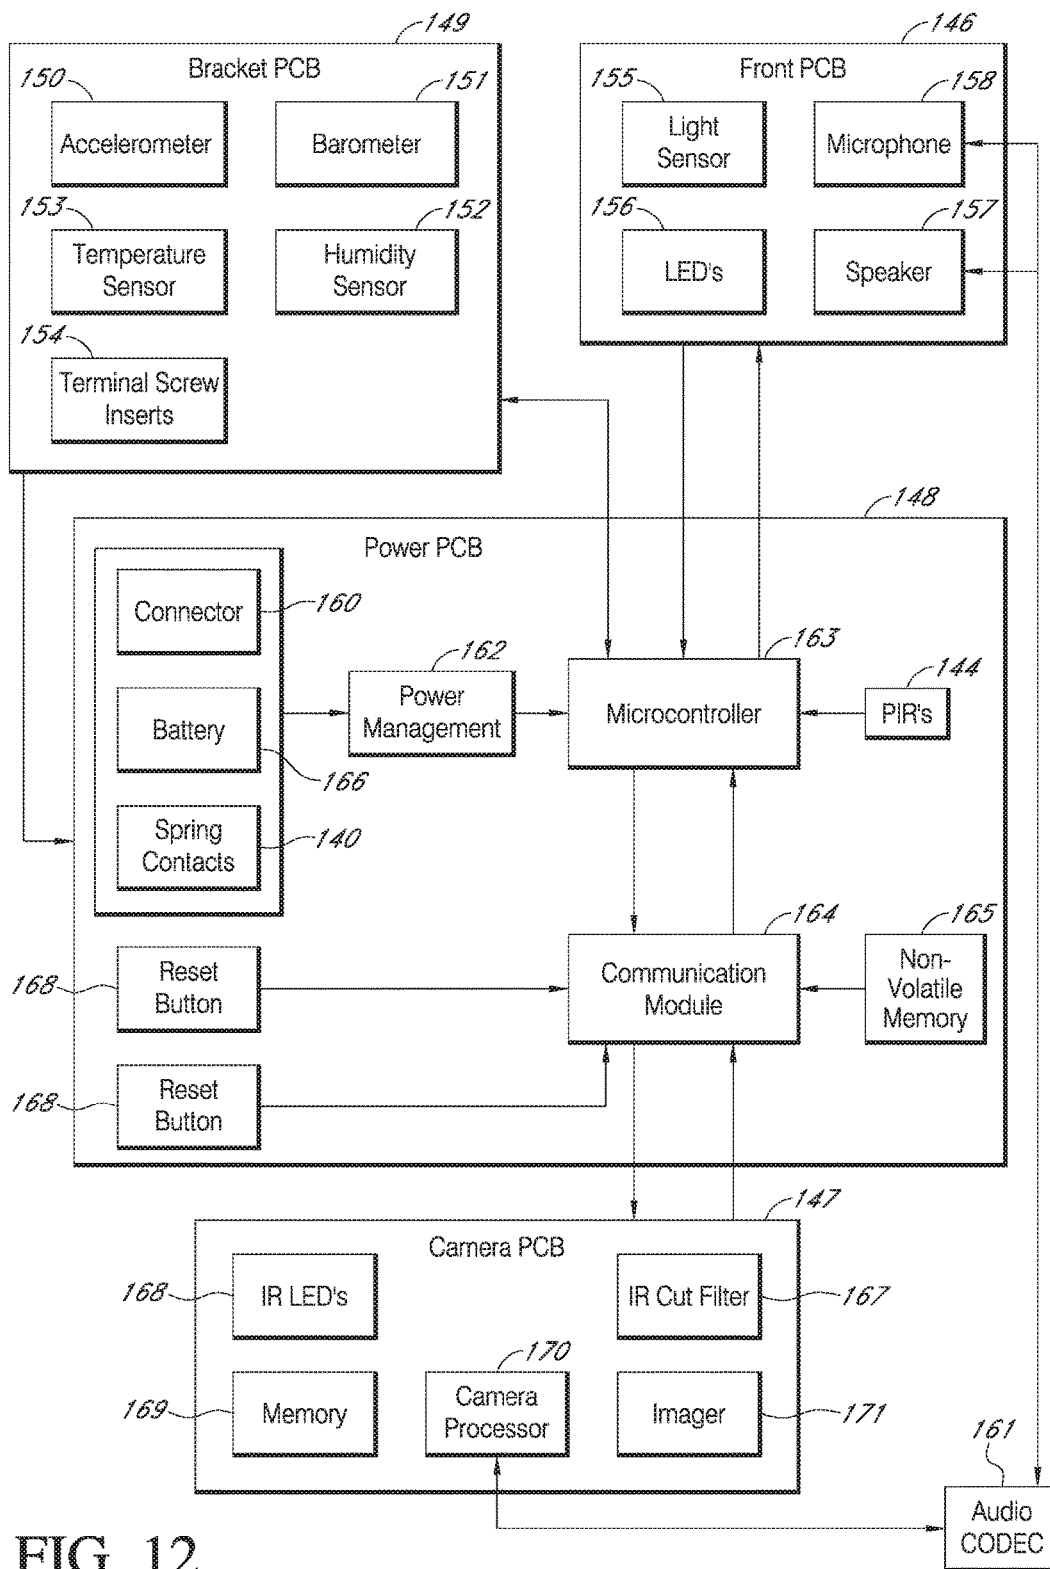


FIG. 12

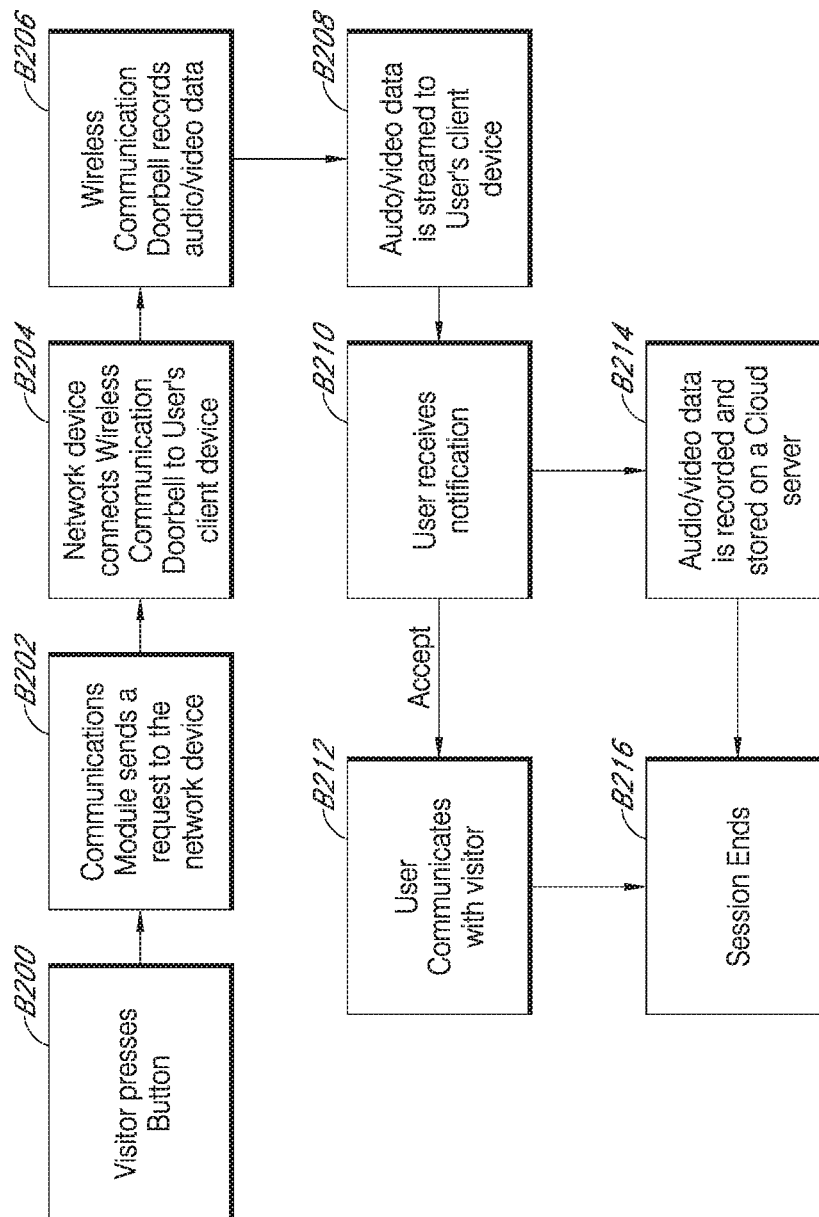


FIG. 13

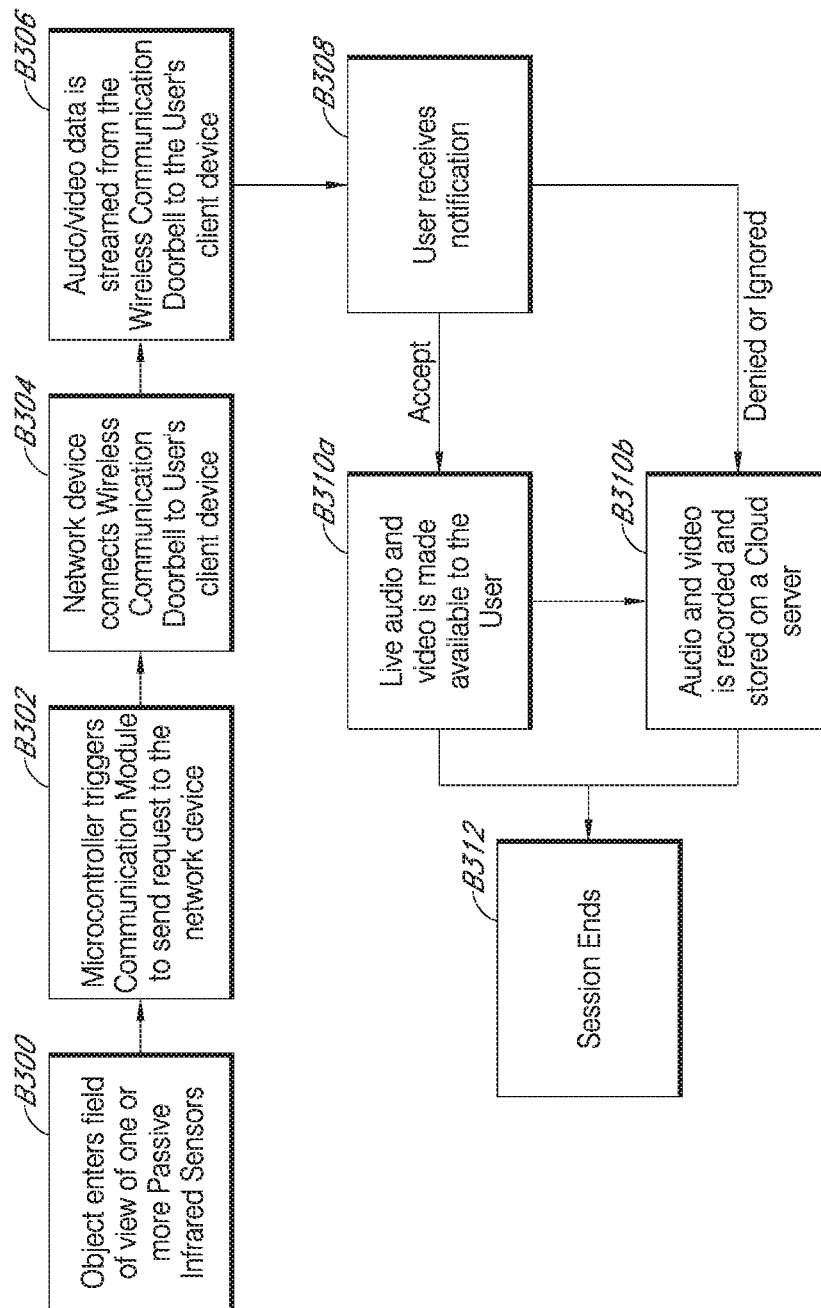


FIG. 14

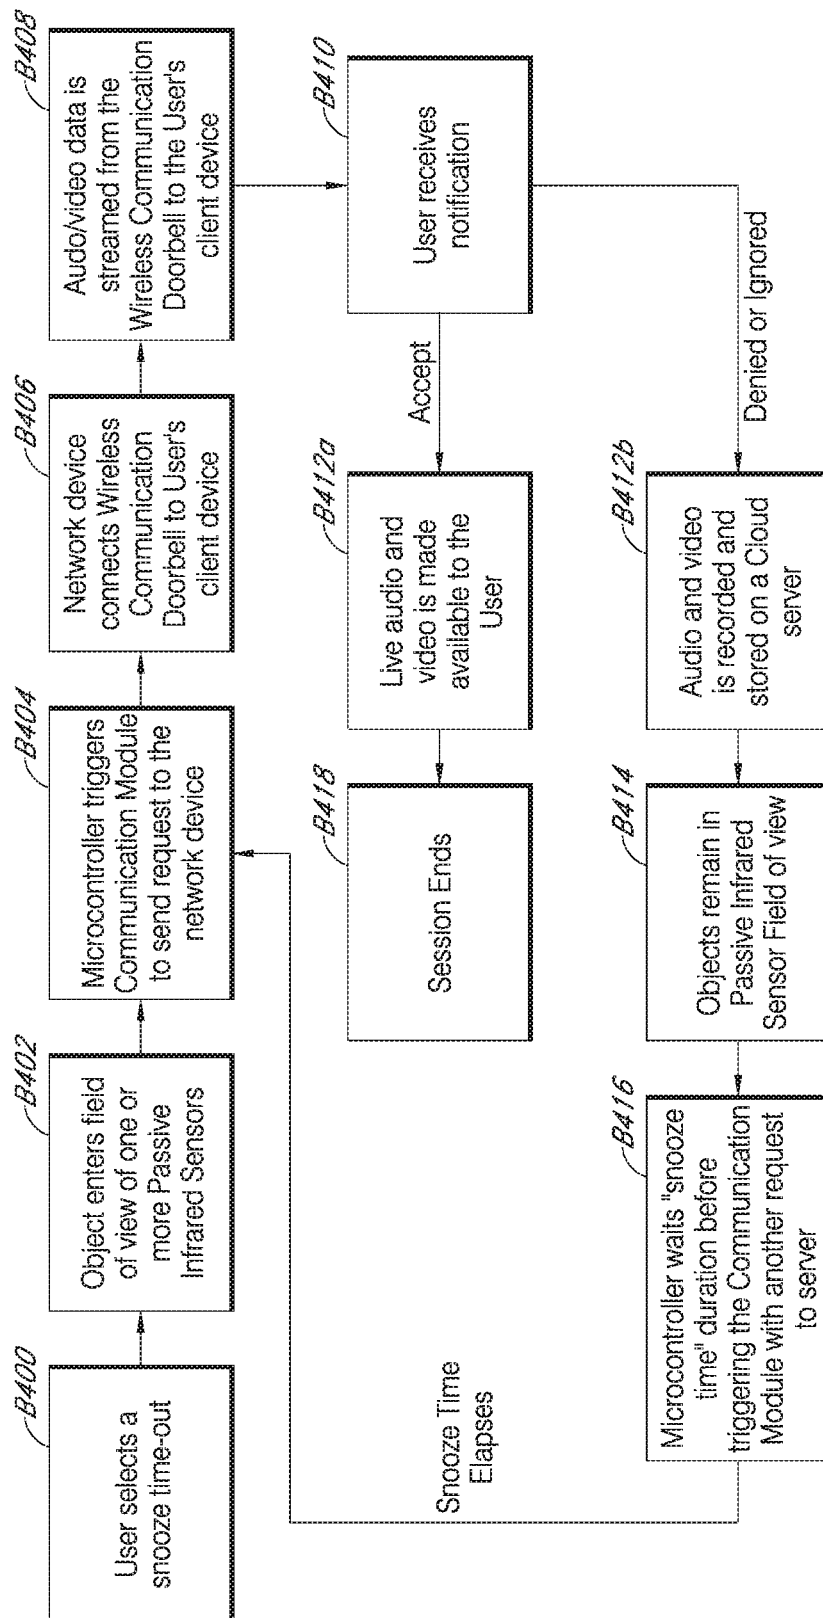


FIG. 15

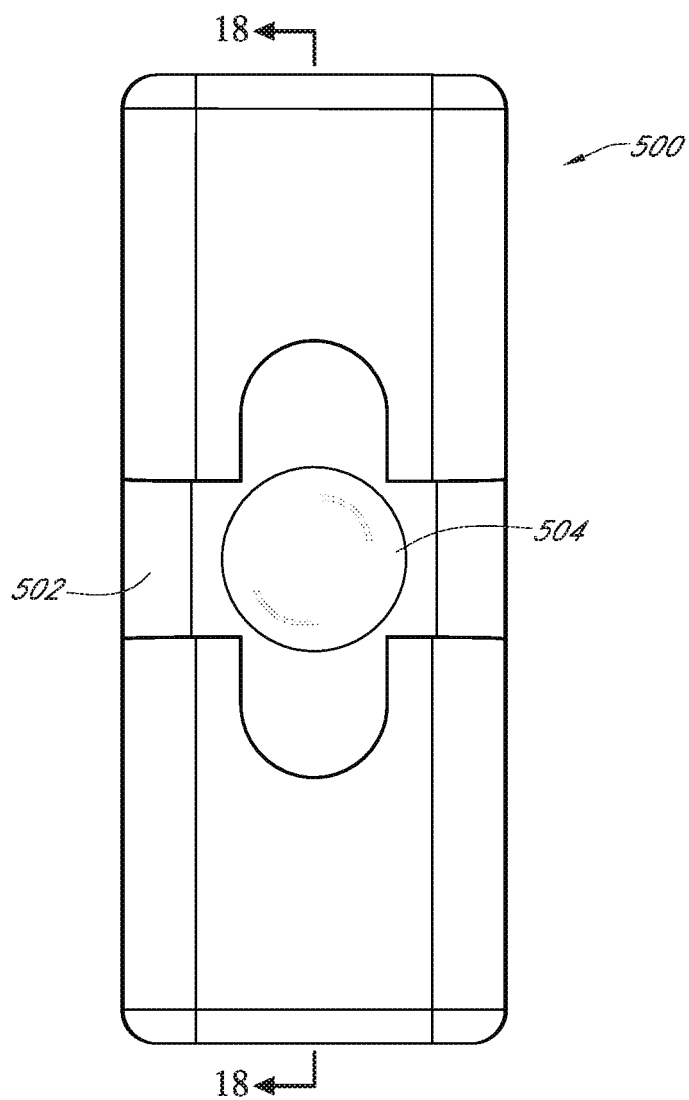


FIG. 16

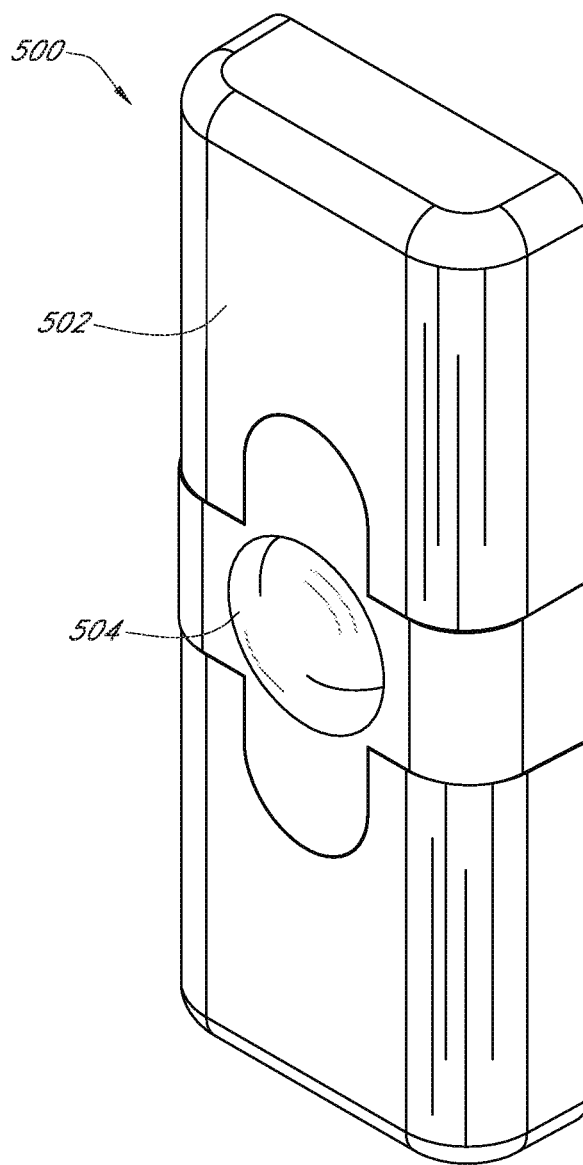


FIG. 17

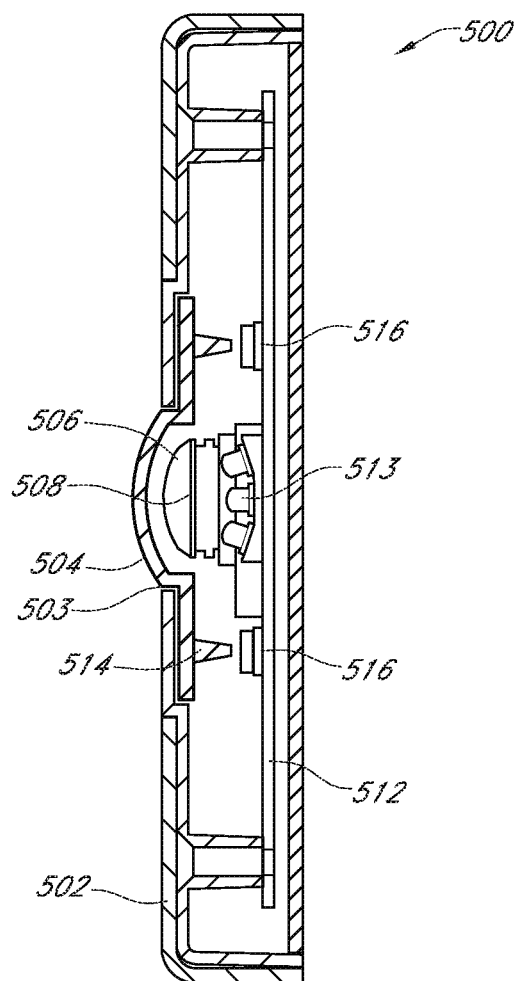


FIG. 18

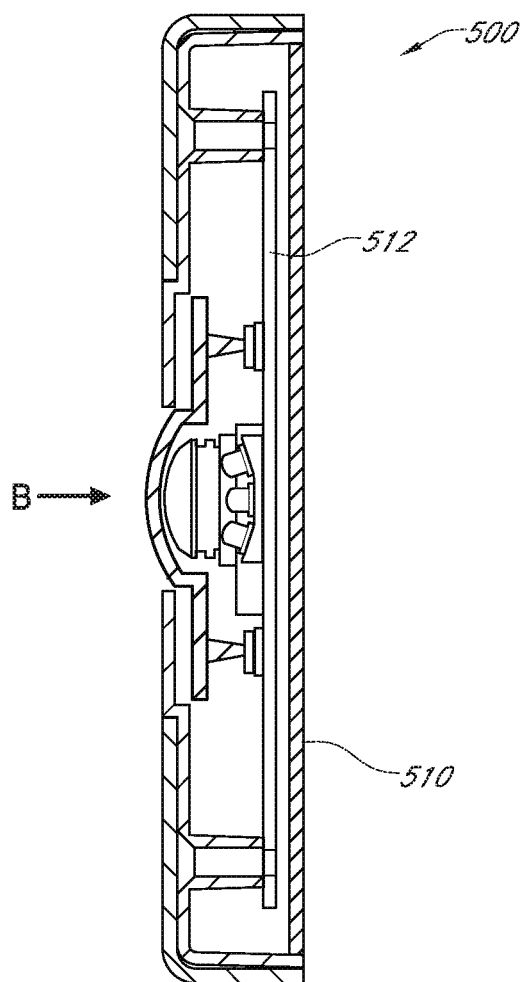


FIG. 19

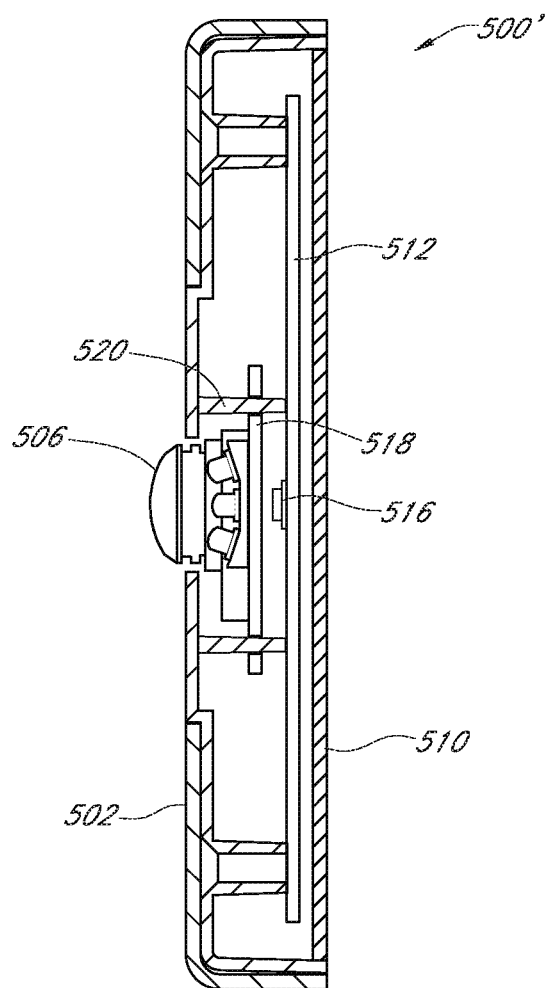


FIG. 20

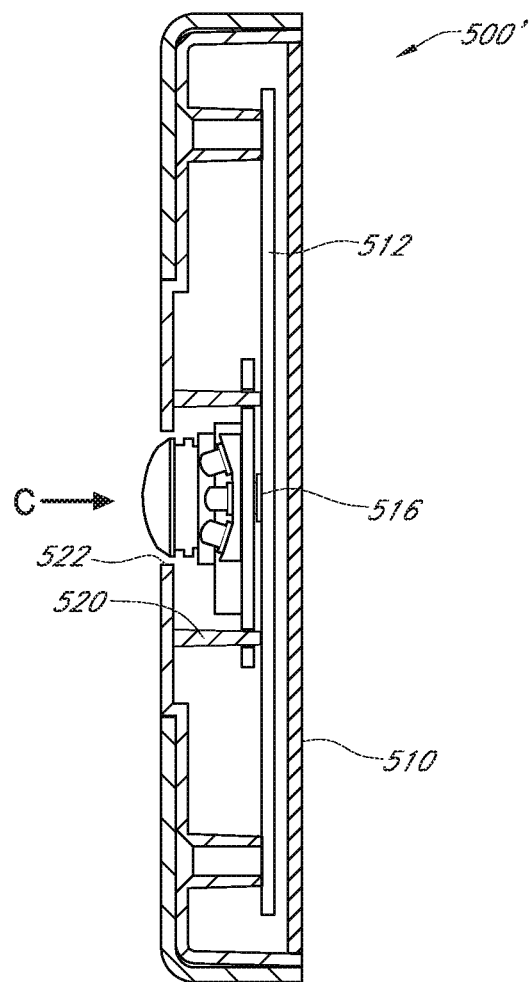


FIG. 21

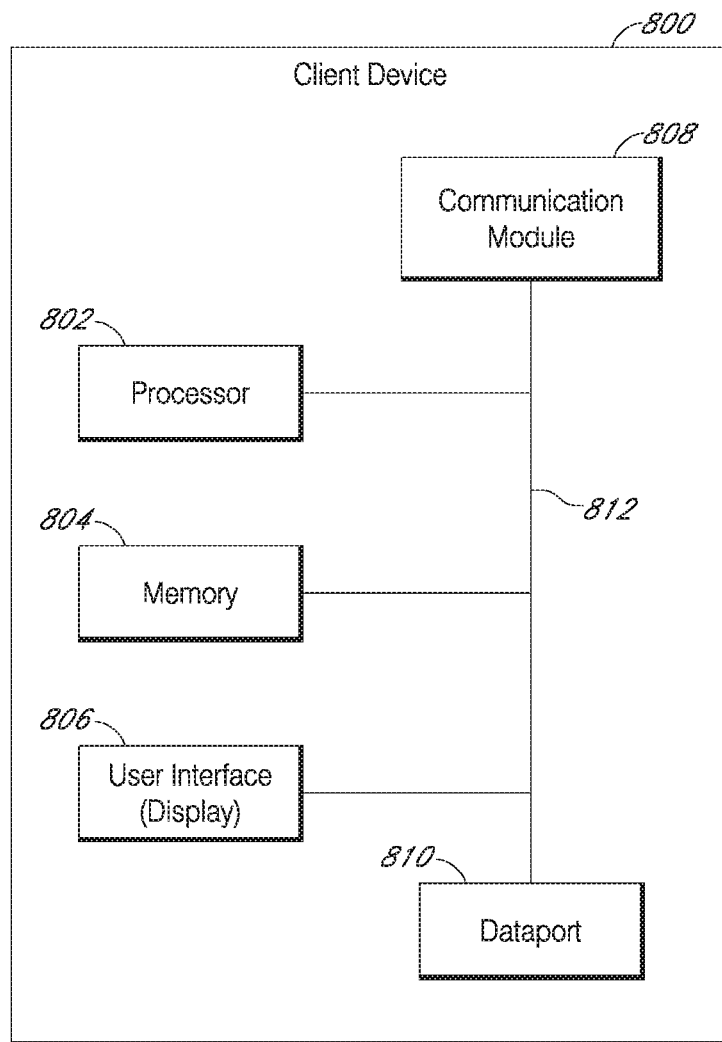


FIG. 22

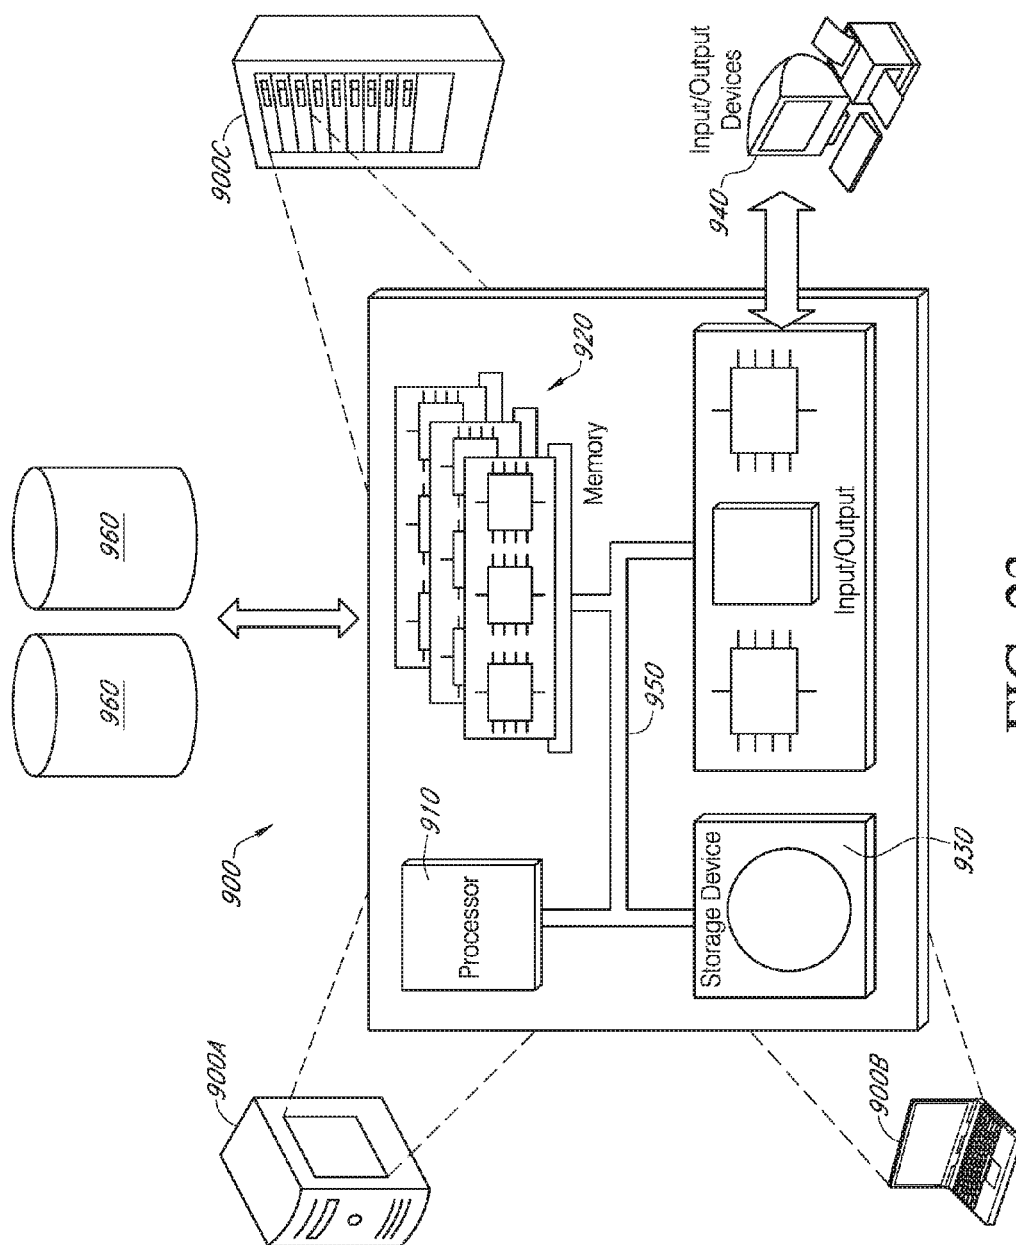


FIG. 23

1

# WIRELESS AUDIO/VIDEO RECORDING AND COMMUNICATION DOORBELLS WITH INTEGRATED IMAGE SENSOR/BUTTON

## CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Application Ser. No. 62/158,035, filed on May 7, 2015, the entire contents of which are hereby incorporated by reference.

## TECHNICAL FIELD

The present embodiments relate to wireless audio/video recording and communication doorbells.

## BACKGROUND

Home safety is a concern for many homeowners and renters. Those seeking to protect or monitor their homes often wish to have video and audio communications with visitors, for example, those visiting an external door or entryway. Audio/Video (A/V) doorbell systems provide this functionality, and can also aid in crime detection and prevention. For example, audio and/or video captured by an A/V doorbell unit can be uploaded to the cloud and recorded on a remote server. Subsequent review of the A/V footage can aid law enforcement in capturing perpetrators of home burglaries and other crimes. Further, the presence of an A/V doorbell unit at the entrance to a home acts as a powerful deterrent against would-be burglars.

## SUMMARY

The various embodiments of the present wireless audio/video recording and communication doorbells with integrated image sensor/button have several features, no single one of which is solely responsible for their desirable attributes. Without limiting the scope of the present embodiments as expressed by the claims that follow, their more prominent features now will be discussed briefly. After considering this discussion, and particularly after reading the section entitled "Detailed Description," one will understand how the features of the present embodiments provide the advantages described herein.

One aspect of the present embodiments includes the realization that it may be advantageous to locate an image sensor or camera of a wireless audio/video recording and communication doorbell behind, and/or integrate the image sensor or camera into, the doorbell button (e.g. the button used to actuate the doorbell's audible tone). Locating the image sensor or camera behind the button, and/or integrating the image sensor or camera into the button, may conserve space within the doorbell, thereby enabling the size of the outer envelope of the doorbell to be reduced, which in turn may give the doorbell a more streamlined and visually pleasing appearance. In some embodiments in which the image sensor or the camera is integrated into the doorbell button, the image sensor or the camera may comprise the doorbell button, e.g. the image sensor or the camera may be configured such that the visitor presses the image sensor or the camera in order to actuate the doorbell's audible tone.

In a first aspect, an audio/video recording and communication doorbell is provided, the doorbell comprising a housing, a button for actuating the doorbell, the button being located at a front of the housing and being configured to

2

move between a first, static position and a second, depressed position, and an image sensor located behind the button or integrated with the button, wherein the button comprises an optically transparent or translucent material such that ambient light may pass through the button to impinge upon the image sensor.

In an embodiment of the first aspect, the housing includes an aperture that exposes the button.

In another embodiment of the first aspect, the button protrudes from the housing through the aperture.

In another embodiment of the first aspect, actuating the doorbell comprises sounding an audible tone and/or initiating recording of audio and/or video and/or transmitting audio and/or video.

In another embodiment of the first aspect, the image sensor is located concentrically with the button.

In another embodiment of the first aspect, the image sensor comprises a video recording sensor or a camera chip.

Another embodiment of the first aspect further comprises infrared (IR) light-emitting components configured to enable the image sensor to clearly capture images under conditions of low ambient light.

In another embodiment of the first aspect, the IR light-emitting components are located behind or within the button.

In a second aspect, an audio/video recording and communication doorbell is provided, the doorbell comprising a housing, and a camera located at a front of the housing and being configured to move between a first, static position and a second, depressed position in order to actuate the doorbell.

In an embodiment of the second aspect, the housing includes an aperture that exposes the camera.

In another embodiment of the second aspect, the camera protrudes from the housing through the aperture.

In another embodiment of the second aspect, actuating the doorbell comprises sounding an audible tone and/or initiating recording of audio and/or video and/or transmitting audio and/or video.

In another embodiment of the second aspect, the camera comprises an image sensor.

In another embodiment of the second aspect, the image sensor comprises a video recording sensor or a camera chip.

Another embodiment of the second aspect further comprises infrared light-emitting components configured to enable the camera to clearly capture images under conditions of low ambient light.

In another embodiment of the second aspect, the camera comprises a camera printed circuit board (PCB).

In another embodiment of the second aspect, the camera PCB is configured to move with the camera between the first, static position and the second, depressed position.

Another embodiment of the second aspect further comprises tracking bosses, wherein the camera PCB includes through-holes that receive the tracking bosses to maintain alignment of the camera PCB as the camera PCB moves with the camera between the first, static position and the second, depressed position.

## BRIEF DESCRIPTION OF THE DRAWINGS

The various embodiments of the present wireless audio/video recording and communication doorbells with integrated image sensor/button now will be discussed in detail with an emphasis on highlighting the advantageous features. These embodiments depict the novel and non-obvious wireless audio/video recording and communication doorbells with integrated image sensor/button shown in the accompa-

3

nying drawings, which are for illustrative purposes only. These drawings include the following figures, in which like numerals indicate like parts:

FIG. 1 is a functional block diagram illustrating a system for streaming and storing audio/video (A/V) content captured by a wireless A/V recording and communication device according to the present embodiments;

FIG. 2 is a front view of a wireless A/V recording and communication doorbell according to an aspect of the present disclosure;

FIG. 3 is a rear view of the wireless A/V recording and communication doorbell of FIG. 2;

FIG. 4 is a left side view of the wireless A/V recording and communication doorbell of FIG. 2 attached to a mounting bracket according to an aspect of the present disclosure;

FIG. 5 is cross-sectional right side view of the wireless A/V recording and communication doorbell of FIG. 2;

FIG. 6 is an exploded view of the wireless A/V recording and communication doorbell and the mounting bracket of FIG. 4;

FIG. 7 is a rear view of the mounting bracket of FIG. 4;

FIGS. 8A and 8B are top and bottom views, respectively, of the wireless A/V recording and communication doorbell and the mounting bracket of FIG. 4;

FIGS. 9A and 9B are top and front views, respectively, of a passive infrared sensor holder of the wireless A/V recording and communication doorbell of FIG. 2;

FIGS. 10A and 10B are top and front views, respectively, of a passive infrared sensor holder assembly of the wireless A/V recording and communication doorbell of FIG. 2;

FIG. 11 is a top view of the passive infrared sensor assembly of FIG. 10A and a field of view thereof according to an aspect of the present disclosure;

FIG. 12 is a functional block diagram of the components of the wireless A/V recording and communication doorbell of FIG. 2;

FIG. 13 is a flowchart illustrating a process for a wireless A/V recording and communication doorbell according to an aspect of the present disclosure;

FIG. 14 is a flowchart illustrating another process for a wireless A/V recording and communication doorbell according to an aspect of the present disclosure;

FIG. 15 is a flowchart illustrating another process for a wireless A/V recording and communication doorbell according to an aspect of the present disclosure;

FIG. 16 is a front view of another embodiment of a wireless A/V recording and communication doorbell according to an aspect of the present disclosure;

FIG. 17 is a front perspective view of the wireless A/V recording and communication doorbell of FIG. 16;

FIGS. 18 and 19 are cross-sectional right side views of the wireless A/V recording and communication doorbell of FIG. 16, taken along the section line A-A in FIG. 16;

FIGS. 20 and 21 are cross-sectional right side views of another embodiment of the wireless A/V recording and communication doorbell of FIG. 16, taken along the section line A-A in FIG. 16;

FIG. 22 is a functional block diagram of a client device on which the present embodiments may be implemented according to various aspects of the present disclosure; and

FIG. 23 is a functional block diagram of a general-purpose computing system on which the present embodiments may be implemented according to various aspects of present disclosure.

#### DETAILED DESCRIPTION

The following detailed description describes the present embodiments with reference to the drawings. In the draw-

4

ings, reference numbers label elements of the present embodiments. These reference numbers are reproduced below in connection with the discussion of the corresponding drawing features.

The embodiments of the present wireless audio/video recording and communication doorbells with integrated image sensor/button are described below with reference to the figures. These figures, and their written descriptions, indicate that certain components of the apparatus are formed integrally, and certain other components are formed as separate pieces. Those of ordinary skill in the art will appreciate that components shown and described herein as being formed integrally may in alternative embodiments be formed as separate pieces. Those of ordinary skill in the art will further appreciate that components shown and described herein as being formed as separate pieces may in alternative embodiments be formed integrally. Further, as used herein the term integral describes a single unitary piece.

With reference to FIG. 1, the present embodiments include an audio/video (A/V) recording and communication doorbell. The A/V recording and communication doorbell 100 is typically located near the entrance to a structure (not shown), such as a dwelling, a business, a storage facility, etc. The A/V recording and communication doorbell 100 includes a camera 102, a microphone 104, and a speaker 106. The camera 102 may comprise, for example, a high definition (HD) video camera, such as one capable of capturing video images at an image display resolution of 1080p or better. While not shown, the AN recording and communication doorbell 100 may also include other hardware and/or components, such as a housing, one or more motion sensors (and/or other types of sensors), a button, etc. The A/V recording and communication doorbell 100 may further include similar componentry and/or functionality as the wireless communication doorbells described in US Patent Application Publication Nos. 2015/0022620 (application Ser. No. 14/499,828) and 2015/0022618 (application Ser. No. 14/334,922), both of which are incorporated herein by reference in their entireties as if fully set forth.

With further reference to FIG. 1, the A/V recording and communication doorbell 100 communicates with a user's home wireless network 110, which may be for example a Wi-Fi network compatible with the IEEE 802.11 standard and/or other wireless communication standard(s). The user's wireless network 110 is connected to another network 112, which may comprise, for example, the Internet and/or a public switched telephone network (PSTN). As described below, the A/V recording and communication doorbell 100 may communicate with the user's client device 114 via the home wireless network 110 and the network 112. The user's client device 114 may comprise, for example, a mobile telephone (may also be referred to as a cellular telephone), such as a smartphone, a personal digital assistant (PDA), or another communication device. The user's client device 114 comprises a display (not shown) and related components capable of displaying streaming and/or recorded video images. The user's client device 114 may also comprise a speaker and related components capable of broadcasting streaming and/or recorded audio, and may also comprise a microphone. The A/V recording and communication doorbell 100 may also communicate with one or more remote storage device(s) 116 (may be referred to interchangeably as "cloud storage device(s)") and/or one or more servers 118 via the home wireless network 110 and the network 112. While FIG. 1 illustrates the storage device 116 and the server 118 as components separate from the network 112, it is to be

5

understood that the storage device **116** and/or the server **118** may be considered to be components of the network **112**.

The network **112** may be any wireless network or any wired network, or a combination thereof, configured to operatively couple the above mentioned modules, devices, and systems as shown in FIG. 1. For example, the network **112** may include one or more of the following: a PSTN (public switched telephone network), the Internet, a local intranet, a PAN (Personal Area Network), a LAN (Local Area Network), a WAN (Wide Area Network), a MAN (Metropolitan Area Network), a virtual private network (VPN), a storage area network (SAN), a frame relay connection, an Advanced Intelligent Network (AIN) connection, a synchronous optical network (SONET) connection, a digital T1, T3, E1 or E3 line, a Digital Data Service (DDS) connection, a DSL (Digital Subscriber Line) connection, an Ethernet connection, an ISDN (Integrated Services Digital Network) line, a dial-up port such as a V.90, V.34, or V.34bis analog modem connection, a cable modem, an ATM (Asynchronous Transfer Mode) connection, or an FDDI (Fiber Distributed Data Interface) or CDDI (Copper Distributed Data Interface) connection. Furthermore, communications may also include links to any of a variety of wireless networks, including WAP (Wireless Application Protocol), GPRS (General Packet Radio Service), GSM (Global System for Mobile Communication), CDMA (Code Division Multiple Access), TDMA (Time Division Multiple Access), FDMA (Frequency Division Multiple Access), and/or OFDMA (Orthogonal Frequency Division Multiple Access) cellular phone networks, GPS, CDPD (cellular digital packet data), RIM (Research in Motion, Limited) duplex paging network, Bluetooth radio, or an IEEE 802.11-based radio frequency network. The network can further include or interface with any one or more of the following: RS-232 serial connection, IEEE-1394 (Firewire) connection, Fibre Channel connection, IrDA (infrared) port, SCSI (Small Computer Systems Interface) connection, USB (Universal Serial Bus) connection, or other wired or wireless, digital or analog, interface or connection, mesh or Digi® networking.

According to one or more aspects of the present embodiments, when a person (may be referred to interchangeably as "visitor") arrives at the A/V recording and communication doorbell **100**, the A/V recording and communication doorbell **100** detects the visitor's presence and begins capturing video images within a field of view of the camera **102**. The A/V recording and communication doorbell **100** may also capture audio through the microphone **104**. The A/V recording and communication doorbell **100** may detect the visitor's presence using a motion sensor, and/or by detecting that the visitor has depressed the button on the A/V recording and communication doorbell **100**.

In response to the detection of the visitor, the A/V recording and communication doorbell **100** sends an alert to the user's client device **114** (FIG. 1) via the user's home wireless network **110** and the network **112**. The A/V recording and communication doorbell **100** also sends streaming video, and may also send streaming audio, to the user's client device **114**. If the user answers the alert, two-way audio communication may then occur between the visitor and the user through the A/V recording and communication doorbell **100** and the user's client device **114**. The user may view the visitor throughout the duration of the call, but the visitor cannot see the user (unless the A/V recording and communication doorbell **100** includes a display, which it may in some embodiments).

The video images captured by the camera **102** of the A/V recording and communication doorbell **100** (and the audio

6

captured by the microphone **104**) may be uploaded to the cloud and recorded on the remote storage device **116** (FIG. 1). In some embodiments, the video and/or audio may be recorded on the remote storage device **116** even if the user chooses to ignore the alert sent to his or her client device **114**.

FIGS. 2-4 illustrate a wireless audio/video (A/V) communication doorbell **130** according to an aspect of present embodiments. FIG. 2 is a front view, FIG. 3 is a rear view, and FIG. 4 is a left side view of the doorbell **130** coupled with a mounting bracket **137**. The doorbell **130** includes a faceplate **135** mounted to a back plate **139** (FIG. 3). With reference to FIG. 4, the faceplate **135** has a substantially flat profile. The faceplate **135** may comprise any suitable material, including, without limitation, metals, such as brushed aluminum or stainless steel, metal alloys, or plastics. The faceplate **135** protects the internal contents of the doorbell **130** and serves as an exterior front surface of the doorbell **130**.

With reference to FIG. 2, the faceplate **135** includes a button **133** and a light pipe **136**. The button **133** and the light pipe **136** may have various profiles that may or may not match the profile of the faceplate **135**. The light pipe **136** may comprise any suitable material, including, without limitation, transparent plastic, that is capable of allowing light produced within the doorbell **130** to pass through. The light may be produced by one or more light-emitting components, such as light-emitting diodes (LED's), contained within the doorbell **130**, as further described below. The button **133** may make contact with a button actuator (not shown) located within the doorbell **130** when the button **133** is pressed by a visitor. When pressed, the button **133** may trigger one or more functions of the doorbell **130**, as further described below.

With reference to FIGS. 2 and 4, the doorbell **130** further includes an enclosure **131** that engages the faceplate **135**. In the illustrated embodiment, the enclosure **131** abuts an upper edge **135T** (FIG. 2) of the faceplate **135**, but in alternative embodiments one or more gaps between the enclosure **131** and the faceplate **135** may facilitate the passage of sound and/or light through the doorbell **130**. The enclosure **131** may comprise any suitable material, but in some embodiments the material of the enclosure **131** preferably permits infrared light to pass through from inside the doorbell **130** to the environment and vice versa. The doorbell **130** further includes a lens **132**. In some embodiments, the lens may comprise a Fresnel lens, which may be patterned to deflect incoming light into one or more infrared sensors located within the doorbell **130**. The doorbell **130** further includes a camera **134**, which captures video data when activated, as described below.

FIG. 3 is a rear view of the doorbell **130**, according to an aspect of the present embodiments. As illustrated, the enclosure **131** may extend from the front of the doorbell **130** around to the back thereof and may fit snugly around a lip of the back plate **139**. The back plate **139** may comprise any suitable material, including, without limitation, metals, such as brushed aluminum or stainless steel, metal alloys, or plastics. The back plate **139** protects the internal contents of the doorbell **130** and serves as an exterior rear surface of the doorbell **130**. The faceplate **135** may extend from the front of the doorbell **130** and at least partially wrap around the back plate **139**, thereby allowing a coupled connection between the faceplate **135** and the back plate **139**. The back plate **139** may have indentations in its structure to facilitate the coupling.

7

With further reference to FIG. 3, spring contacts **140** may provide power to the doorbell **130** when mated with other conductive contacts connected to a power source. The spring contacts **140** may comprise any suitable conductive material, including, without limitation, copper, and may be capable of deflecting when contacted by an inward force, for example the insertion of a mating element. The doorbell **130** further comprises a connector **160**, such as a micro-USB or other connector, whereby power and/or data may be supplied to and from the components within the doorbell **130**. A reset button **159** may be located on the back plate **139**, and may make contact with a button actuator (not shown) located within the doorbell **130** when the reset button **159** is pressed. When the reset button **159** is pressed, it may trigger one or more functions, as described below.

FIG. 4 is a left side profile view of the doorbell **130** coupled to the mounting bracket **137**, according to an aspect of the present embodiments. The mounting bracket **137** facilitates mounting the doorbell **130** to a surface, such as the exterior of a building, such as a home or office. As illustrated in FIG. 4, the faceplate **135** may extend from the bottom of the doorbell **130** up to just below the camera **134**, and connect to the back plate **139** as described above. The lens **132** may extend and curl partially around the side of the doorbell **130**. The enclosure **131** may extend and curl around the side and top of the doorbell **130**, and may be coupled to the back plate **139** as described above. The camera **134** may protrude slightly through the enclosure **131**, thereby giving it a wider field of view. The mounting bracket **137** may couple with the back plate **139** such that they contact each other at various points in a common plane of contact, thereby creating an assembly including the doorbell **130** and the mounting bracket **137**. The couplings described in this paragraph, and elsewhere, may be secured by, for example and without limitation, screws, interference fittings, adhesives, or other fasteners. Interference fittings may refer to a type of connection where a material relies on pressure and/or gravity coupled with the material's physical strength to support a connection to a different element.

FIG. 5 is a right side cross-sectional view of the doorbell **130** without the mounting bracket **137**. In the illustrated embodiment, the lens **132** is substantially coplanar with the front surface **131F** of the enclosure **131**. In alternative embodiments, the lens **132** may be recessed within the enclosure **131** or may protrude outward from the enclosure **131**. The camera **134** is coupled to a camera printed circuit board (PCB) **147**, and a lens **134a** of the camera **134** protrudes through an opening in the enclosure **131**. The camera lens **134a** may be a lens capable of focusing light into the camera **134** so that clear images may be taken.

The camera PCB **147** may be secured within the doorbell with any suitable fasteners, such as screws, or interference connections, adhesives, etc. The camera PCB **147** comprises various components that enable the functionality of the camera **134** of the doorbell **130**, as described below. Infrared light-emitting components, such as infrared LED's **168**, are coupled to the camera PCB **147** and may be triggered to activate when a light sensor detects a low level of ambient light. When activated, the infrared LED's **168** may emit infrared light through the enclosure **131** and/or the camera **134** out into the ambient environment. The camera **134**, which may be configured to detect infrared light, may then capture the light emitted by the infrared LED's **168** as it reflects off objects within the camera's **134** field of view, so that the doorbell **130** can clearly capture images at night (may be referred to as "night vision").

8

With continued reference to FIG. 5, the doorbell **130** further comprises a front PCB **146**, which in the illustrated embodiment resides in a lower portion of the doorbell **130** adjacent a battery **166**. The front PCB **146** may be secured within the doorbell **130** with any suitable fasteners, such as screws, or interference connections, adhesives, etc. The front PCB **146** comprises various components that enable the functionality of the audio and light components, as further described below. The battery **166** may provide power to the doorbell **130** components while receiving power from the spring contacts **140**, thereby engaging in a trickle-charge method of power consumption and supply. Alternatively, the doorbell **130** may draw power directly from the spring contacts **140** while relying on the battery **166** only when the spring contacts **140** are not providing the power necessary for all functions.

With continued reference to FIG. 5, the doorbell **130** further comprises a power PCB **148**, which in the illustrated embodiment resides behind the camera PCB **147**. The power PCB **148** may be secured within the doorbell **130** with any suitable fasteners, such as screws, or interference connections, adhesives, etc. The power PCB **148** comprises various components that enable the functionality of the power and device-control components, as further described below.

With continued reference to FIG. 5, the doorbell **130** further comprises a communication module **164** coupled to the power PCB **148**. The communication module **164** facilitates communication with client devices in one or more remote locations, as further described below. The connector **160** may protrude outward from the power PCB **148** and extend through a hole in the back plate **139**. The doorbell **130** further comprises passive infrared (PIR) sensors **144**, which are secured on or within a PIR sensor holder **143**, and the assembly resides behind the lens **132**. The PIR sensor holder **143** may be secured to the doorbell **130** with any suitable fasteners, such as screws, or interference connections, adhesives, etc. The PIR sensors **144** may be any type of sensor capable of detecting and communicating the presence of a heat source within their field of view. Further, alternative embodiments may comprise one or more motion sensors either in place of or in addition to the PIR sensors **144**. The motion sensors may be configured to detect motion using any methodology, such as a methodology that does not rely on detecting the presence of a heat source within a field of view.

FIG. 6 is an exploded view of the doorbell **130** and the mounting bracket **137** according to an aspect of the present embodiments. The mounting bracket **137** is configured to be mounted to a mounting surface (not shown) of a structure, such as a home or an office. FIG. 6 shows the front side **137F** of the mounting bracket **137**. The mounting bracket **137** is configured to be mounted to the mounting surface such that the back side **137B** thereof faces the mounting surface. In certain embodiments the mounting bracket **137** may be mounted to surfaces of various composition, including, without limitation, wood, concrete, stucco, brick, vinyl siding, aluminum siding, etc., with any suitable fasteners, such as screws, or interference connections, adhesives, etc. The doorbell **130** may be coupled to the mounting bracket **137** with any suitable fasteners, such as screws, or interference connections, adhesives, etc.

With continued reference to FIG. 6, the illustrated embodiment of the mounting bracket **137** includes the terminal screws **138**. The terminal screws **138** are configured to receive electrical wires adjacent the mounting surface of the structure upon which the mounting bracket **137** is mounted, so that the doorbell **130** may receive electrical

power from the structure's electrical system. The terminal screws **138** are electrically connected to electrical contacts **177** of the mounting bracket. If power is supplied to the terminal screws **138**, then the electrical contacts **177** also receive power through the terminal screws **138**. The electrical contacts **177** may comprise any suitable conductive material, including, without limitation, copper, and may protrude slightly from the face of the mounting bracket **137** so that they may mate with the spring contacts **140** located on the back plate **139**.

With reference to FIGS. **6** and **7** (which is a rear view of the mounting bracket **137**), the mounting bracket **137** further comprises a bracket PCB **149**. With reference to FIG. **7**, the bracket PCB **149** is situated outside the doorbell **130**, and is therefore configured for various sensors that measure ambient conditions, such as an accelerometer **150**, a barometer **151**, a humidity sensor **152**, and a temperature sensor **153**. The functions of these components are discussed in more detail below. The bracket PCB **149** may be secured to the mounting bracket **137** with any suitable fasteners, such as screws, or interference connections, adhesives, etc.

FIGS. **8A** and **8B** are top and bottom views, respectively, of the doorbell **130**. As described above, the enclosure **131** may extend from the front face **131F** of the doorbell **130** to the back, where it contacts and snugly surrounds the back plate **139**. The camera **134** may protrude slightly beyond the front face **131F** of the enclosure **131**, thereby giving the camera **134** a wider field of view. The mounting bracket **137** may include a substantially flat rear surface **137R**, such that the doorbell **130** and the mounting bracket **137** assembly may sit flush against the surface to which they are mounted. With reference to FIG. **8B**, the lower end of the enclosure **131** may include security screw apertures **141** configured to receive screws or other fasteners.

FIG. **9A** is a top view of the PIR sensor holder **143**. The PIR sensor holder **143** may comprise any suitable material, including, without limitation, metals, metal alloys, or plastics. The PIR sensor holder **143** is configured to mount the PIR sensors **144** behind the lens **132** such that the PIR sensors **144** face out through the lens **132** at varying angles, thereby creating a wide field of view for the PIR sensors **144**, and dividing the field of view into zones, as further described below. With further reference to FIG. **9A**, the PIR sensor holder **143** includes one or more faces **178** within or on which the PIR sensors **144** may be mounted. In the illustrated embodiment, the PIR sensor holder **143** includes three faces **178**, with each of two outer faces **178** angled at  $55^\circ$  with respect to a center one of the faces **178**. In alternative embodiments, the angle formed by adjacent ones of the faces **178** may be increased or decreased as desired to alter the field of view of the PIR sensors **144**.

FIG. **9B** is a front view of the PIR sensor holder **143**. In the illustrated embodiment, each of the faces **178** includes a through hole **180** in which the PIR sensors **144** may be mounted. First and second brackets **182**, spaced from one another, extend transversely across the PIR sensor holder **143**. Each of the brackets **182** includes notches **184** at either end. The brackets **182** may be used to secure the PIR sensor holder **143** within the doorbell **130**. In alternative embodiments, the through holes **180** in the faces **178** may be omitted. For example, the PIR sensors **144** may be mounted directly to the faces **178** without the through holes **180**. Generally, the faces **178** may comprise any structure configured to locate and secure the PIR sensors **144** in place.

FIGS. **10A** and **10B** are top and front views, respectively, of a PIR sensor assembly **179**, including the PIR sensor holder **143**, the lens **132**, and a flexible power circuit **145**.

The PIR sensor holder **143** may be secured to a rear face **132R** of the lens **132**, as shown, with the brackets **182** abutting the rear face **132R** of the lens **132**. The flexible power circuit **145**, which may be any material or component capable of delivering power and/or data to and from the PIR sensors **144**, is secured to a rear face **143R** of the PIR sensor holder **143**, and may be contoured to match the angular shape of the PIR sensor holder **143**. The flexible power circuit **145** may connect to, draw power from, and/or transmit data to and/or from, the power PCB **148** (FIG. **5**).

FIG. **11** is a top view of the PIR sensor assembly **179** illustrating the fields of view of the PIR sensors **144**. Each PIR sensor **144** includes a field of view, referred to as a "zone," that traces an angle extending outward from the respective PIR sensor **144**. Zone **1** is the area that is visible only to Passive Infrared Sensor **144-1**. Zone **2** is the area that is visible only to the PIR sensors **144-1** and **144-2**. Zone **3** is the area that is visible only to Passive Infrared Sensor **144-2**. Zone **4** is the area that is visible only to the PIR sensors **144-2** and **144-3**. Zone **5** is the area that is visible only to Passive Infrared Sensor **144-3**. The doorbell **130** may be capable of determining the direction that an object is moving based upon which zones are triggered in a time sequence. In the illustrated embodiment, each zone extends across an angle of  $110^\circ$ . In alternative embodiments, each zone may extend across a different angle, such as one greater than or less than  $110^\circ$ .

FIG. **12** is a functional block diagram of the components within or in communication with the doorbell **130**, according to an aspect of the present embodiments. As described above, the bracket PCB **149** may comprise an accelerometer **150**, a barometer **151**, a humidity sensor **152**, and a temperature sensor **153**. The accelerometer **150** may be one or more sensors capable of sensing motion and/or acceleration. The barometer **151** may be one or more sensors capable of determining the atmospheric pressure of the surrounding environment in which the bracket PCB **149** may be located. The humidity sensor **152** may be one or more sensors capable of determining the amount of moisture present in the atmospheric environment in which the bracket PCB **149** may be located. The temperature sensor **153** may be one or more sensors capable of determining the temperature of the ambient environment in which the bracket PCB **149** may be located. As described above, the bracket PCB **149** may be located outside the housing of the doorbell **130** so as to reduce interference from heat, pressure, moisture, and/or other stimuli generated by the internal components of the doorbell **130**.

With further reference to FIG. **12**, the bracket PCB **149** may further comprise terminal screw inserts **154**, which may be configured to receive the terminal screws **138** and transmit power to the electrical contacts **177** on the mounting bracket **137** (FIG. **6**). The bracket PCB **149** may be electrically and/or mechanically coupled to the power PCB **148** through the terminal screws **138**, the terminal screw inserts **154**, the spring contacts **140**, and the electrical contacts **177**. The terminal screws **138** may receive electrical wires located at the surface to which the doorbell **130** is mounted, such as the wall of a building, so that the doorbell can receive electrical power from the building's electrical system. Upon the terminal screws **138** being secured within the terminal screw inserts **154**, power may be transferred to the bracket PCB **149**, and to all of the components associated therewith, including the electrical contacts **177**. The electrical contacts **177** may transfer electrical power to the power PCB **148** by mating with the spring contacts **140**.

## 11

With further reference to FIG. 12, the front PCB 146 may comprise a light sensor 155, one or more light-emitting components, such as LED's 156, one or more speakers 157, and a microphone 158. The light sensor 155 may be one or more sensors capable of detecting the level of ambient light of the surrounding environment in which the doorbell 130 may be located. LED's 156 may be one or more light-emitting diodes capable of producing visible light when supplied with power. The speakers 157 may be any electro-mechanical device capable of producing sound in response to an electrical signal input. The microphone 158 may be an acoustic-to-electric transducer or sensor capable of converting sound waves into an electrical signal. When activated, the LED's 156 may illuminate the light pipe 136 (FIG. 2). The front PCB 146 and all components thereof may be electrically coupled to the power PCB 148, thereby allowing data and/or power to be transferred to and from the power PCB 148 and the front PCB 146.

The speakers 157 and the microphone 158 may be coupled to the camera processor 170 through an audio CODEC 161. For example, the transfer of digital audio from the user's client device 114 and the speakers 157 and the microphone 158 may be compressed and decompressed using the audio CODEC 161, coupled to the camera processor 170. Once compressed by audio CODEC 161, digital audio data may be sent through the communication module 164 to the network 112, routed by one or more servers 118, and delivered to the user's client device 114. When the user speaks, after being transferred through the network 112, digital audio data is decompressed by audio CODEC 161 and emitted to the visitor via the speakers 157.

With further reference to FIG. 12, the power PCB 148 may comprise a power management module 162, a microcontroller 163, the communication module 164, and power PCB non-volatile memory 165. In certain embodiments, the power management module 162 may comprise an integrated circuit capable of arbitrating between multiple voltage rails, thereby selecting the source of power for the doorbell 130. The battery 166, the spring contacts 140, and/or the connector 160 may each provide power to the power management module 162. The power management module 162 may have separate power rails dedicated to the battery 166, the spring contacts 140, and the connector 160. In one aspect of the present disclosure, the power management module 162 may continuously draw power from the battery 166 to power the doorbell 130, while at the same time routing power from the spring contacts 140 and/or the connector 160 to the battery 166, thereby allowing the battery 166 to maintain a substantially constant level of charge. Alternatively, the power management module 162 may continuously draw power from the spring contacts 140 and/or the connector 160 to power the doorbell 130, while only drawing from the battery 166 when the power from the spring contacts 140 and/or the connector 160 is low or insufficient. The power management module 162 may also serve as a conduit for data between the connector 160 and the microcontroller 163.

With further reference to FIG. 12, in certain embodiments the microcontroller 163 may comprise an integrated circuit including a processor core, memory, and programmable input/output peripherals. The microcontroller 163 may receive input signals, such as data and/or power, from the PIR sensors 144, the bracket PCB 149, the power management module 162, the light sensor 155, the microphone 158, and/or the communication module 164, and may perform various functions as further described below. When the microcontroller 163 is triggered by the PIR sensors 144, the microcontroller 163 may be triggered to perform one or

## 12

more functions, such as those described below with reference to FIG. 14. When the light sensor 155 detects a low level of ambient light, the light sensor 155 may trigger the microcontroller 163 to enable "night vision," as further described below. The microcontroller 163 may also act as a conduit for data communicated between various components and the communication module 164.

With further reference to FIG. 12, the communication module 164 may comprise an integrated circuit including a processor core, memory, and programmable input/output peripherals. The communication module 164 may also be configured to transmit data wirelessly to a remote network device, and may include one or more transceivers (not shown). The wireless communication may comprise one or more wireless networks, such as, without limitation, Wi-Fi, cellular, Bluetooth, and/or satellite networks. The communication module 164 may receive inputs, such as power and/or data, from the camera PCB 147, the microcontroller 163, the button 133, the reset button 159, and/or the power PCB non-volatile memory 165. When the button 133 is pressed, the communication module 164 may be triggered to perform one or more functions, such as those described below with reference to FIG. 13. When the reset button 159 is pressed, the communication module 164 may be triggered to erase any data stored at the power PCB non-volatile memory 165 and/or at the camera PCB memory 169. The communication module 164 may also act as a conduit for data communicated between various components and the microcontroller 163. The power PCB non-volatile memory 165 may comprise flash memory configured to store and/or transmit data. For example, in certain embodiments the power PCB non-volatile memory 165 may comprise serial peripheral interface (SPI) flash memory.

With further reference to FIG. 12, the camera PCB 147 may comprise components that facilitate the operation of the camera 134. For example, an imager 171 may comprise a video recording sensor and/or a camera chip. In one aspect of the present disclosure, the imager 171 may comprise a complementary metal-oxide semiconductor (CMOS) array, and may be capable of recording high definition (1080p or better) video files. A camera processor 170 may comprise an encoding and compression chip. In some embodiments, the camera processor 170 may comprise a bridge processor. The camera processor 170 may process video recorded by the imager 171 and audio recorded by the microphone 158, and may transform this data into a form suitable for wireless transfer by the communication module 164 to a network. The camera PCB memory 169 may comprise volatile memory that may be used when data is being buffered or encoded by the camera processor 170. For example, in certain embodiments the camera PCB memory 169 may comprise synchronous dynamic random access memory (SD RAM). IR LED's 168 may comprise light-emitting diodes capable of radiating infrared light. IR cut filter 167 may comprise a system that, when triggered, configures the imager 171 to see primarily infrared light as opposed to visible light. When the light sensor 155 detects a low level of ambient light (which may comprise a level that impedes the performance of the imager 171 in the visible spectrum), the IR LED's 168 may shine infrared light through the doorbell 130 enclosure out to the environment, and the IR cut filter 167 may enable the imager 171 to see this infrared light as it is reflected or refracted off of objects within the field of view of the doorbell. This process may provide the doorbell 130 with the "night vision" function mentioned above.

13

FIG. 13 is a flowchart illustrating one embodiment of a process according to an aspect of the present disclosure. At block B200, a visitor presses the button 133 on the doorbell 130. At block B202, the communication module 164 sends a request to a network device. Once the network device receives the request, at block B204 the network device may connect the doorbell 130 to the user's client device 114 through the user's wireless network 110 and the network 112. In block B206, the doorbell 130 may record available audio and/or video data using the camera 134, the microphone 158, and/or any other sensor available. At block B208, the audio and/or video data is transmitted to the user's client device 114. At block B210, the user may receive a notification on his or her client device 114 prompting him or her to either accept or deny. If the user denies the notification, then the process advances to block B214, where the audio and/or video data is recorded and stored at a cloud server. The session then ends at block B216 and the connection between the doorbell 130 and the user's client device 114 is terminated. If, however, the user elects to accept the notification, then at block B212 the user communicates with the visitor through the user's client device 114 while being provided audio and/or video data captured by the camera 134, the microphone 158, and/or other sensors. At the end of the call, the user may terminate the connection between the user's client device 114 and the doorbell 130 and the session ends at block B216. In some embodiments, the audio and/or video data may be recorded and stored at a cloud server (block B214) even if the user accepts the notification and communicates with the visitor through the user's client device 114.

FIG. 14 is a flowchart illustrating another embodiment of a process according to an aspect of the present disclosure. At block B300, an object may move into the field of view of one or more of the PIR sensors 144. At block B302, the PIR sensors 144 may trigger the microcontroller 163, which may then trigger the communication module 164 to send a request to a network device. At block B304, the network device may connect the doorbell 130 to the user's client device 114 through the user's wireless network 110 and the network 112. At block B306, the doorbell 130 may record available audio and/or video data using the camera 134, the microphone 158, and/or any other available sensor, and stream the data to the user's client device 114. At block B308, the user may receive a notification prompting the user to either accept or deny the notification. If the notification is accepted, then at block B310a the live audio/video data may be displayed on the user's client device 114, thereby allowing the user surveillance from the perspective of the doorbell 130. When the user is satisfied with this function, the user may sever the connection at block B312, whereby the session ends. If, however, at block B308 the user denies the notification, or ignores the notification and a specified time interval elapses, then the connection between the doorbell 130 and the user's client device 114 is terminated and the audio/video data is recorded and stored at a cloud server at block B310b, such that the user may view the audio/video data later at their convenience. The doorbell 130 may be configured to record for a specified period of time in the event the notification in block B308 is denied or ignored. If such a time period is set, the doorbell 130 may record data for that period of time before ceasing operation at block B312 thereby ending the session. In some embodiments, the audio and/or video data may be recorded and stored at a cloud server (block B310b) even if the user accepts the notification and communicates with the visitor through the user's client device 114.

14

FIG. 15 is a flowchart illustrating another embodiment of a process according to an aspect of the present disclosure. At block B400, the user may select a "snooze time-out," which is a time period during which the doorbell 130 may deactivate or otherwise not respond to stimuli (such as light, sound, or heat signatures) after an operation is performed, e.g. a notification is either accepted or denied/ignored. For example, the user may set a snooze time-out of 15 minutes. At block B402, an object moves into the field of view of one or more of the PIR sensors 144. At block B404, the microcontroller 163 may trigger the communication module 164 to send a request to a network device. In block B406, the network device may connect the doorbell 130 to the user's client device 114 through the user's wireless network 110 and the network 112. At block B408, audio/video data captured by the doorbell 130 may be streamed to the user's client device 114. At block B410, the user may receive a notification prompting the user to either accept or deny/ignore the request. If the request is denied or ignored, then at block B412b audio/video data may be recorded and stored at a cloud server. After the doorbell 130 finishes recording, the objects may remain in the PIR sensor 144 field of view at block B414. In block B416, the microcontroller 163 waits for the "snooze time" to elapse, e.g. 15 minutes, before triggering the communication module 164 to submit another request to the network device. After the snooze time, e.g. 15 minutes, elapses, the process moves back to block B402 and progresses as described above. The cycle may continue like this until the user accepts the notification request at block B410. The process then moves to block B412a, where live audio and/or video data is displayed on the user's client device 114, thereby allowing the user surveillance from the perspective of the doorbell 130. At the user's request, the connection may be severed and the session ends at block B418. At this point the user may elect for the process to revert back to block B416, whereby there may be no further response until the snooze time, e.g. 15 minutes, has elapsed from the end of the previous session, or the user may elect for the process to return to block B402 and receive a notification the next time an object is perceived by one or more of the PIR sensors 144. In some embodiments, the audio and/or video data may be recorded and stored at a cloud server (block B412b) even if the user accepts the notification and communicates with the visitor through the user's client device 114.

As described below, some of the present embodiments advantageously locate an image sensor or a camera of the wireless A/V recording and communication doorbell behind, and/or integrate the image sensor or camera into, the doorbell button (e.g. the button used to actuate the doorbell, including sounding an audible tone and/or initiating recording of audio and/or video and/or transmitting audio and/or video). Locating the image sensor or camera behind the button, and/or integrating the image sensor or camera into the button, may conserve space within the doorbell, thereby enabling the size of the outer envelope of the doorbell to be reduced, which in turn may give the doorbell a more streamlined and visually pleasing appearance. In some embodiments in which the image sensor or the camera is integrated into the doorbell button, the image sensor or the camera may comprise the doorbell button, e.g. the image sensor or the camera may be configured such that the visitor presses the image sensor or the camera in order to actuate the doorbell (e.g. to sound an audible tone and/or initiate recording of audio and/or video and/or initiate transmitting of audio and/or video).

15

FIG. 16 is a front view of another embodiment of a wireless A/V recording and communication device 500 according to an aspect of the present disclosure. In the illustrated embodiment, the wireless A/V recording and communication device 500 is a doorbell. Further examples of wireless A/V recording and communication devices may be found in U.S. patent application Ser. No. 14/099,828, filed on Sep. 29, 2014, and U.S. patent application Ser. No. 62/308,746, filed on Mar. 15, 2016, the contents of which are incorporated by reference herein in their entireties as if fully set forth.

The wireless A/V recording and communication device 500 may include a housing 502, which may include but is not limited to plastic, metal, or wood. The housing 502 may serve as an exterior surface of the wireless A/V recording and communication device 500 and protect components within. In one aspect of the present disclosure, the housing 502 may be IR transmissive, so as to allow infrared light to pass through. The housing 502 may contain an aperture 503 that allows a button 504 and/or a camera 506 to protrude through. The button 504 may act as a trigger to activate the wireless A/V recording and communication device 500. When the housing 502 and the button 504 are mechanically coupled, the wireless A/V recording and communication device 500 may be sealed hermetically. The button 504 may be any optically transparent or translucent material so as to allow light to pass through to an imager 508 located behind or within the button 504. The button 504 may have convex, concave, or flat geometry, but preferably the configuration of the button 504 does not significantly distort the way in which light passes through the button 504. In one aspect of the present disclosure, the button 504 may have a tinted surface, so as to appear opaque, yet still be capable of allowing light to pass through to the inside of the housing 502. Locating the camera 506 or the imager 508 behind the button 504, and/or integrating the camera 506 or the imager 508 into the button 504, may conserve space within the doorbell 500, thereby enabling the size of the outer envelope of the doorbell 500 to be reduced, which in turn may give the doorbell 500 a more streamlined and visually pleasing appearance.

FIG. 17 is a front perspective view of the wireless A/V recording and communication doorbell of FIG. 16. The perspective view of the housing 502 in FIG. 17 illustrates the depth of the housing 502. In one aspect of the present disclosure, the housing 502, and all components within, may be mounted to a wall or an exterior surface of a structure using mechanical features (not shown) built into a rear surface 510 (FIG. 19) of the housing 502 and/or mechanical fasteners or mechanical coupling features.

Embodiments of the present wireless A/V recording and communication device 500 may include components similar to the doorbells 100, 130 described above, such as components for wirelessly transmitting audio and/or video, one or more speakers, one or more microphones, one or more antennas, one or more rechargeable batteries, and/or one or more motion sensing peripherals, such as passive infrared (PIR) sensors. In one aspect of the present disclosure, the wireless A/V recording and communication device 500 may replace a doorbell and/or an outdoor camera on the exterior surface of a home, office, or property. In this aspect, after a visitor presses the button 504 or the camera 506, the wireless A/V recording and communication device 500 may stream audio and/or video to the owner's smartphone, tablet, or computer using wireless communication protocols such as but not limited to Wi-Fi, Bluetooth, or Zigbee technology. The owner may then communicate with the visitor using a smartphone, tablet, or computer via the on-board micro-

16

phones and speakers, which may be built into the wireless A/V recording and communication device 500.

FIGS. 18 and 19 are cross-sectional right side views of the wireless A/V recording and communication doorbell of FIG. 16, taken along the section line A-A in FIG. 16. FIG. 18 shows the button 504 in a static position, and FIG. 19 shows the button 504 in a depressed position. In the static position of FIG. 18, the housing 502 is cut away to show components within the wireless A/V recording and communication device 500, some of which may have been omitted for clarity. According to an aspect of the present disclosure, the button 504 may be movably mechanically coupled to the housing 502, allowing the button to travel when pressed by a human finger. After the button 504 is released, the button 504 may return to its original position. The housing 502 may contain mechanical features that secure a printed circuit board (PCB) 512 using fasteners, glue, or mechanical coupling features, for example. In one aspect of the present disclosure, the camera 506 sits behind and concentric to the button 504. The camera 506 is located on the surface of and is electrically coupled to the PCB 512. In this aspect, the button 504 may be transparent or translucent, and allows light to be directed into the camera 506 without significantly adversely affecting the images produced by the camera 506.

The camera 506 may include, or may communicate with, components integral to the operation of the camera 506, such as the imager 508 and/or a bridge processor (not shown in FIGS. 16-21, but may be similar to the microcontroller 163 described above). The imager 508 may be a video recording sensor or a camera chip, for example. In one aspect of the present disclosure, the imager 508 may include a CMOS (complementary metal-oxide-semiconductor) array, for example, and may be capable of recording high definition video files. The bridge processor may process video data recorded by the imager 508, and may transform this data into a form suitable for wireless transfer by a communication module (not shown in FIGS. 16-21, but may be similar to the communication module 164 described above).

Infrared (IR) light-emitting components, such as IR LED's 513, may be operatively connected to the PCB 512 and may be triggered to activate when a light sensor (not shown) or the camera 506 detects a low level of ambient light. When activated, the IR LED's 513 may emit infrared light out into the ambient environment. The camera 506, which may be configured to detect infrared light, may then capture the light emitted by the IR LED's 513 as it reflects off objects within the camera's 506 field of view, so that the doorbell 500 can clearly capture images at night (may be referred to as "night vision"). In the embodiment illustrated in FIGS. 18 and 19, the IR LED's 513 are located behind or within the button 504. Locating the IR LED's 513 behind or within the button 504 conserves space within the doorbell 500, thereby enabling the size of the outer envelope of the doorbell 500 to be reduced, which in turn may give the doorbell 500 a more streamlined and visually pleasing appearance.

With reference to FIG. 19, button stems 514 are protruding mechanical features designed into the button 504. When the button 504 is pressed, as shown in FIG. 19 in the direction of arrow B, the button stems 514 make contact with button actuators 516. The button actuators 516 are located on the surface of and are electrically coupled to the PCB 512. When one or more of the button actuators 516 are compressed as a result of the button 504 being pressed, the button actuators 516 may activate the camera 506 and/or

17

other components within the wireless A/V recording and communication device **500** used to transmit audio and/or video.

FIGS. **20** and **21** are cross-sectional right side views of another embodiment of the wireless A/V recording and communication doorbell **500'** of FIG. **16**, taken along the section line A-A in FIG. **16**. In this alternative embodiment, the button **504** is omitted, and the camera **506** also serves as a button that a visitor may depress to activate the doorbell **500'**. Omitting the button as a discrete component with respect to the camera further conserves space within the doorbell **500'**, thereby enabling the size of the outer envelope of the doorbell **500'** to be reduced even further in comparison to the embodiment of the doorbell **500** of FIGS. **16-19**.

Also in this alternative embodiment, a camera PCB **518** moves within the housing **502** when the camera **506** is pressed. FIG. **20** shows the camera PCB **518** in a static position, and FIG. **21** shows the camera PCB **518** in a depressed position. In the static position of FIG. **18**, the housing **502** is cut away to show components within the wireless A/V recording and communication device **500**, some of which may have been omitted for clarity. The housing **502** may contain mechanical features that secure the PCB **512** using fasteners, glue, or mechanical coupling features. The button actuators **516** may be located on the surface of and electrically coupled to the PCB **512**. When one or more button actuators **516** are compressed, they may activate the camera **506** and/or other components within the wireless A/V recording and communication device **500** used to transmit audio and/or video.

Still referencing FIG. **20**, the housing **502** may contain one or more tracking bosses **520** according to an aspect of the present disclosure. The tracking bosses **520** may be mechanical features built in to the housing **502** to help contain and guide moving components within the assembly, such as the camera PCB **518**. According to one aspect of the present disclosure, the camera PCB **518** may include through-holes that receive the tracking bosses **520** to maintain the alignment of the camera PCB **518**. The through-holes may comprise holes drilled through the camera PCB **518**. In this aspect, the through-holes may align concentrically with the tracking bosses **520**.

With reference to FIG. **21**, which shows the camera PCB **518** in a depressed position, the camera **506** may be located on the surface of and electrically coupled to the camera PCB **518**, according to one aspect of the present disclosure. The housing **502** may contain an aperture **522** through which the camera **506** may protrude. In this aspect of the present disclosure, the camera **506** may be used as a button that can be pressed by a user/visitor. When the camera **506** is depressed in the direction of the Arrow C, the camera PCB **518** may travel in the direction of the Arrow C, using the tracking bosses **520** to stay aligned and parallel to the PCB **512**. In this aspect, when the camera PCB **518** is fully depressed, the camera PCB **518**, or a part located on or within the camera PCB **518**, makes contact with one or more of the button actuators **516** located on the PCB **512**. When the button actuators **516** are compressed, they may activate the camera **506** and/or other components within the wireless A/V recording and communication device **500** used to transmit audio and/or video.

As described above, some of the present embodiments locate an image sensor or camera of the wireless A/V recording and communication doorbell behind, and/or integrate the image sensor or camera into, the doorbell button (e.g. the button used to actuate the doorbell, including sounding an audible tone and/or initiating recording of audio

18

and/or video and/or initiating transmitting of audio and/or video). Locating the image sensor or camera behind the button, and/or integrating the image sensor or camera into the button, may conserve space within the doorbell, thereby enabling the size of the outer envelope of the doorbell to be reduced, which in turn may give the doorbell a more streamlined and visually pleasing appearance. In some embodiments in which the image sensor or the camera is integrated into the doorbell button, the image sensor or the camera may comprise the doorbell button, e.g. the image sensor or the camera may be configured such that the visitor presses the image sensor or the camera in order to actuate the doorbell (e.g. to sound an audible tone and/or initiate recording of audio and/or video).

FIG. **22** is a functional block diagram of a client device **800** on which the present embodiments may be implemented according to various aspects of the present disclosure. The user's client device **114** described with reference to FIG. **1** may include some or all of the components and/or functionality of the client device **800**. The client device **800** may comprise, for example, a smartphone.

With reference to FIG. **22**, the client device **800** includes a processor **802**, a memory **804**, a user interface **806**, a communication module **808**, and a dataport **810**. These components are communicatively coupled together by an interconnect bus **812**. The processor **802** may include any processor used in smartphones and/or portable computing devices, such as an ARM processor (a processor based on the RISC (reduced instruction set computer) architecture developed by Advanced RISC Machines (ARM)). In some embodiments, the processor **802** may include one or more other processors, such as one or more conventional micro-processors, and/or one or more supplementary co-processors, such as math co-processors.

The memory **804** may include both operating memory, such as random access memory (RAM), as well as data storage, such as read-only memory (ROM), hard drives, flash memory, or any other suitable memory/storage element. The memory **804** may include removable memory elements, such as a CompactFlash card, a MultiMediaCard (MMC), and/or a Secure Digital (SD) card. In some embodiments, the memory **804** may comprise a combination of magnetic, optical, and/or semiconductor memory, and may include, for example, RAM, ROM, flash drive, and/or a hard disk or drive. The processor **802** and the memory **804** each may be, for example, located entirely within a single device, or may be connected to each other by a communication medium, such as a USB port, a serial port cable, a coaxial cable, an Ethernet-type cable, a telephone line, a radio frequency transceiver, or other similar wireless or wired medium or combination of the foregoing. For example, the processor **802** may be connected to the memory **804** via the dataport **810**.

The user interface **806** may include any user interface or presentation elements suitable for a smartphone and/or a portable computing device, such as a keypad, a display screen, a touchscreen, a microphone, and a speaker. The communication module **808** is configured to handle communication links between the client device **800** and other, external devices or receivers, and to route incoming/outgoing data appropriately. For example, inbound data from the dataport **810** may be routed through the communication module **808** before being directed to the processor **802**, and outbound data from the processor **802** may be routed through the communication module **808** before being directed to the dataport **810**. The communication module **808** may include one or more transceiver modules capable of

19

transmitting and receiving data, and using, for example, one or more protocols and/or technologies, such as GSM, UMTS (3GSM), IS-95 (CDMA one), IS-2000 (CDMA 2000), LTE, FDMA, TDMA, W-CDMA, CDMA, OFDMA, Wi-Fi, WiMAX, or any other protocol and/or technology.

The dataport **810** may be any type of connector used for physically interfacing with a smartphone and/or a portable computing device, such as a mini-USB port or an IPHONE®/IPOD® 30-pin connector or LIGHTNING® connector. In other embodiments, the dataport **810** may include multiple communication channels for simultaneous communication with, for example, other processors, servers, and/or client terminals.

The memory **804** may store instructions for communicating with other systems, such as a computer. The memory **804** may store, for example, a program (e.g., computer program code) adapted to direct the processor **802** in accordance with the present embodiments. The instructions also may include program elements, such as an operating system. While execution of sequences of instructions in the program causes the processor **802** to perform the process steps described herein, hard-wired circuitry may be used in place of, or in combination with, software/firmware instructions for implementation of the processes of the present embodiments. Thus, the present embodiments are not limited to any specific combination of hardware and software.

FIG. **23** is a functional block diagram of a general-purpose computing system on which the present embodiments may be implemented according to various aspects of the present disclosure. The computer system **900** may be embodied in at least one of a personal computer (also referred to as a desktop computer) **900A**, a portable computer (also referred to as a laptop or notebook computer) **900B**, and/or a server **900C**. A server is a computer program and/or a machine that waits for requests from other machines or software (clients) and responds to them. A server typically processes data. The purpose of a server is to share data and/or hardware and/or software resources among clients. This architecture is called the client-server model. The clients may run on the same computer or may connect to the server over a network. Examples of computing servers include database servers, file servers, mail servers, print servers, web servers, game servers, and application servers. The term server may be construed broadly to include any computerized process that shares a resource to one or more client processes.

The computer system **900** may execute at least some of the operations described above. The computer system **900** may include at least one processor **910**, memory **920**, at least one storage device **930**, and input/output (I/O) devices **940**. Some or all of the components **910**, **920**, **930**, **940** may be interconnected via a system bus **950**. The processor **910** may be single- or multi-threaded and may have one or more cores. The processor **910** may execute instructions, such as those stored in the memory **920** and/or in the storage device **930**. Information may be received and output using one or more I/O devices **940**.

The memory **920** may store information, and may be a computer-readable medium, such as volatile or non-volatile memory. The storage device(s) **930** may provide storage for the system **900**, and may be a computer-readable medium. In various aspects, the storage device(s) **930** may be a flash memory device, a hard disk device, an optical disk device, a tape device, or any other type of storage device.

The I/O devices **940** may provide input/output operations for the system **900**. The I/O devices **940** may include a keyboard, a pointing device, and/or a microphone. The I/O

20

devices **940** may further include a display unit for displaying graphical user interfaces, a speaker, and/or a printer. External data may be stored in one or more accessible external databases **960**.

The features of the present embodiments described herein may be implemented in digital electronic circuitry, and/or in computer hardware, firmware, software, and/or in combinations thereof. Features of the present embodiments may be implemented in a computer program product tangibly embodied in an information carrier, such as a machine-readable storage device, and/or in a propagated signal, for execution by a programmable processor. Embodiments of the present method steps may be performed by a programmable processor executing a program of instructions to perform functions of the described implementations by operating on input data and generating output.

The features of the present embodiments described herein may be implemented in one or more computer programs that are executable on a programmable system including at least one programmable processor coupled to receive data and/or instructions from, and to transmit data and/or instructions to, a data storage system, at least one input device, and at least one output device. A computer program may include a set of instructions that may be used, directly or indirectly, in a computer to perform a certain activity or bring about a certain result. A computer program may be written in any form of programming language, including compiled or interpreted languages, and it may be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit suitable for use in a computing environment.

Suitable processors for the execution of a program of instructions may include, for example, both general and special purpose processors, and/or the sole processor or one of multiple processors of any kind of computer. Generally, a processor may receive instructions and/or data from a read only memory (ROM), or a random access memory (RAM), or both. Such a computer may include a processor for executing instructions and one or more memories for storing instructions and/or data.

Generally, a computer may also include, or be operatively coupled to communicate with, one or more mass storage devices for storing data files. Such devices include magnetic disks, such as internal hard disks and/or removable disks, magneto-optical disks, and/or optical disks. Storage devices suitable for tangibly embodying computer program instructions and/or data may include all forms of non-volatile memory, including for example semiconductor memory devices, such as EPROM, EEPROM, and flash memory devices, magnetic disks such as internal hard disks and removable disks, magneto-optical disks, and CD-ROM and DVD-ROM disks. The processor and the memory may be supplemented by, or incorporated in, one or more ASICs (application-specific integrated circuits).

To provide for interaction with a user, the features of the present embodiments may be implemented on a computer having a display device, such as an LCD (liquid crystal display) monitor, for displaying information to the user. The computer may further include a keyboard, a pointing device, such as a mouse or a trackball, and/or a touchscreen by which the user may provide input to the computer.

The features of the present embodiments may be implemented in a computer system that includes a back-end component, such as a data server, and/or that includes a middleware component, such as an application server or an Internet server, and/or that includes a front-end component, such as a client computer having a graphical user interface

## 21

(GUI) and/or an Internet browser, or any combination of these. The components of the system may be connected by any form or medium of digital data communication, such as a communication network. Examples of communication networks may include, for example, a LAN (local area network), a WAN (wide area network), and/or the computers and networks forming the Internet.

The computer system may include clients and servers. A client and server may be remote from each other and interact through a network, such as those described herein. The relationship of client and server may arise by virtue of computer programs running on the respective computers and having a client-server relationship to each other.

The above description presents the best mode contemplated for carrying out the present embodiments, and of the manner and process of practicing them, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which they pertain to practice these embodiments. The present embodiments are, however, susceptible to modifications and alternate constructions from those discussed above that are fully equivalent. Consequently, the present invention is not limited to the particular embodiments disclosed. On the contrary, the present invention covers all modifications and alternate constructions coming within the spirit and scope of the present disclosure. For example, the steps in the processes described herein need not be performed in the same order as they have been presented, and may be performed in any order(s). Further, steps that have been presented as being performed separately may in alternative embodiments be performed concurrently. Likewise, steps that have been presented as being performed concurrently may in alternative embodiments be performed separately.

What is claimed is:

1. An audio/video recording and communication doorbell, comprising:
  - a housing;
  - a button for actuating the doorbell, the button being located at a front of the housing and being configured to move between a first, static position and a second, depressed position;
  - a video camera located directly behind the button, the video camera being configured for capturing a set of video images to be streamed to a client device, wherein the button comprises an optically transparent or trans-

## 22

- lucent material such that ambient light may pass through the button to reach the video camera behind the button; and
- a plurality of motion sensors configured to determine a direction of movement of an object in an area about the doorbell based upon which of the motion sensors are triggered in a time sequence.
2. The doorbell of claim 1, wherein the housing includes an aperture that exposes the button.
3. The doorbell of claim 2, wherein the button protrudes from the housing through the aperture.
4. The doorbell of claim 1, wherein actuating the doorbell comprises at least one of sounding an audible tone, initiating recording of audio and/or video, and transmitting audio and/or video.
5. The doorbell of claim 1, wherein the video camera is located concentrically with the button.
6. The doorbell of claim 1, wherein the video camera starts capturing video images when the button moves from the first position to the second position.
7. The doorbell of claim 1 further comprising infrared (IR) light-emitting components configured to enable the video camera to clearly capture images under low ambient light.
8. The doorbell of claim 7, wherein the IR light-emitting components are located behind the button.
9. The doorbell of claim 1, wherein the client device comprises a mobile device that wirelessly communicates with the doorbell.
10. The doorbell of claim 1, wherein at least one of the plurality of motions sensors comprises a passive infrared sensor.
11. The doorbell of claim 1 further comprising a microphone configured to capture audio.
12. The doorbell of claim 11, wherein the doorbell is configured to stream the captured audio to the client device when the doorbell is actuated.
13. The doorbell of claim 1 further comprising one or more speakers configured to emit sound.
14. The doorbell of claim 13, wherein the one or more speakers are configured to emit the sound when audio data is received from the client device.
15. The doorbell of claim 1, wherein the client device and the doorbell are configured to wirelessly communicate audio and/or video data with each other through one or more remote servers.

\* \* \* \* \*