US005596261A

United States Patent [19]

Suyama

[11] Patent Number: 5,596,261

[45] Date of Patent: Jan. 21, 1997

[54] **CHARGE-STATUS DISPLAY SYSTEM FOR AN ELECTRIC VEHICLE**

[75] Inventor: **Kouichi Suyama**, Wako, Japan

[73] Assignee: **Honda Giken Kogyo Kabushiki Kaisha**, Tokyo, Japan

[21] Appl. No.: **328,558**

[22] Filed: **Oct. 25, 1994**

Related U.S. Application Data

[63] Continuation of Ser. No. 9,642, Jan. 27, 1993, abandoned.

[30] **Foreign Application Priority Data**

Jan. 29, 1992 [JP] Japan 4-014366

[51] **Int. Cl.**[6] **H02J 7/00**; G01N 27/416; G08B 21/00

[52] **U.S. Cl.** **320/48**; 324/426; 340/636

[58] **Field of Search** 320/43, 44, 48, 320/2; 340/636; 324/426, 434

[56] **References Cited**

U.S. PATENT DOCUMENTS

3,090,871	5/1963	Gorman	307/10
3,740,636	6/1973	Hogrefe et al.	320/48
3,940,679	2/1976	Brandwein et al.	320/48
4,217,645	8/1980	Barry et al.	320/48 X
4,236,594	12/1980	Ramsperger	180/167
4,250,976	2/1981	Mochida	180/271
4,289,836	9/1981	Lemelson	429/61
4,671,111	6/1987	Lemelson	340/52 R
4,673,921	6/1987	Saito et al.	340/539
4,820,966	4/1989	Fridman	320/43 X
4,890,108	12/1989	Drori et al.	341/176
5,008,647	4/1991	Brunt et al.	340/432
5,111,127	5/1992	Johnson	320/2
5,206,097	4/1993	Burns et al.	320/48 X
5,254,996	10/1993	Claar et al.	341/176
5,352,982	10/1994	Nakazawa et al.	324/427

FOREIGN PATENT DOCUMENTS

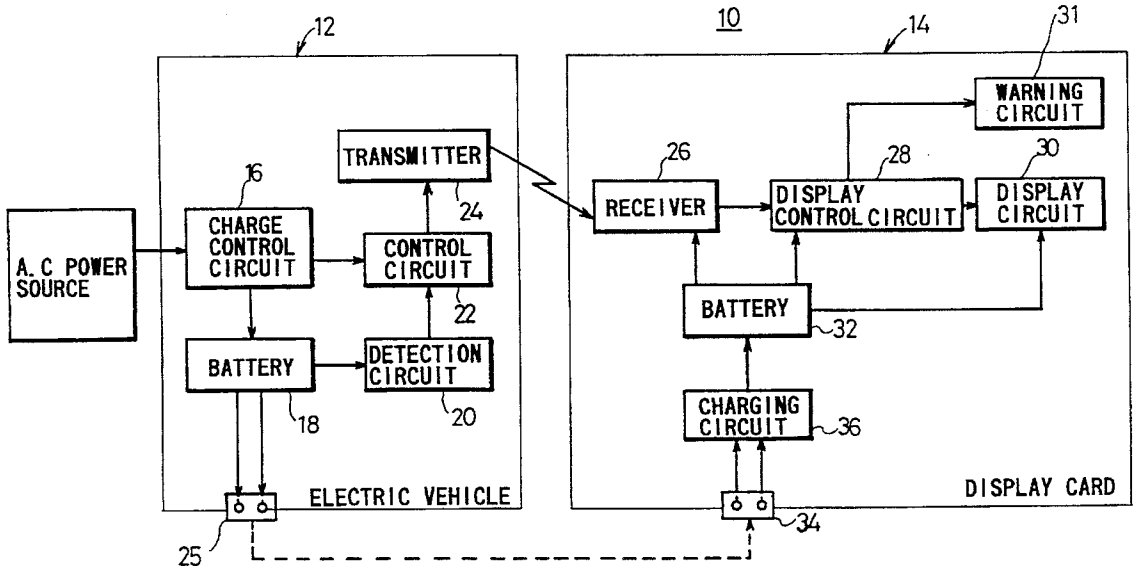
191801 12/1988 Japan .

Primary Examiner—Robert Nappi
Assistant Examiner—Patrick B. Law
Attorney, Agent, or Firm—Lyon & Lyon

[57] **ABSTRACT**

A charge-status display system which is suitable for use with an electric vehicle. In the charge-status display system, a plurality of detecting means detect the conditions of charging of the electric vehicle, and a determining means determines the results of that detection by the plurality of detecting means. A wireless transmitting means transmits the results of the detection and the results of the determination. Then, a receiving means in a portable remote unit receives therein the results of the detection and the results of the determination, which are transmitted from the transmitting means, and a display means displays the received information thereon. Thus, a charging operator can obtain information about the status of charging of the electric vehicle while at a location remote from the electric vehicle.

18 Claims, 21 Drawing Sheets



IPR2026-00381
Tesla EX1009 Page 1

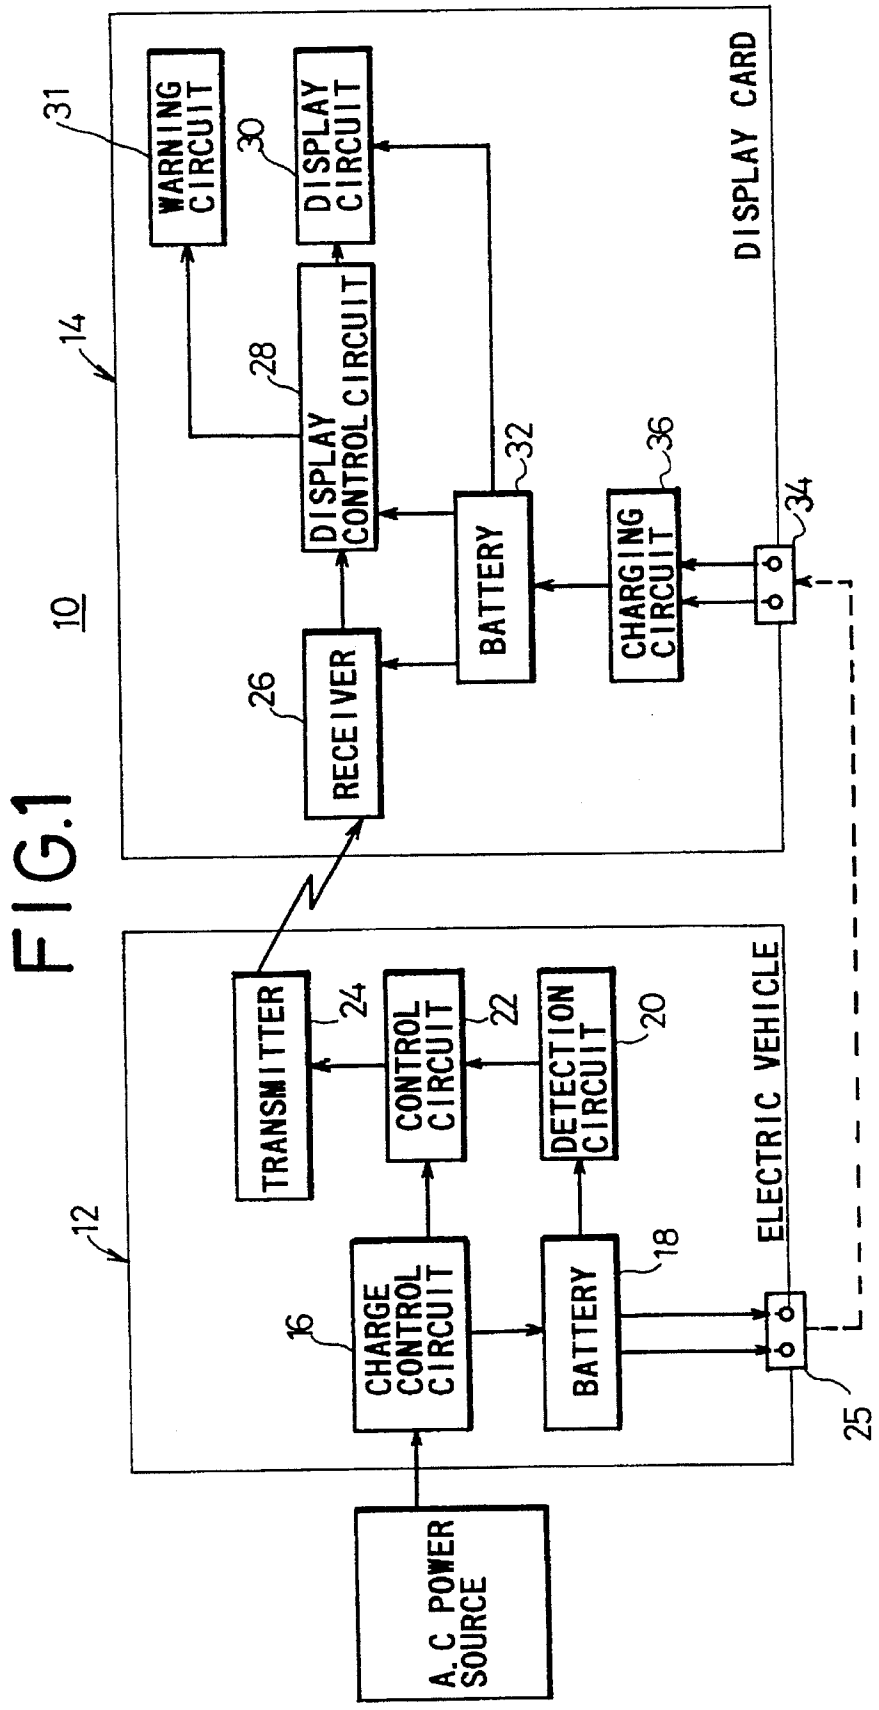
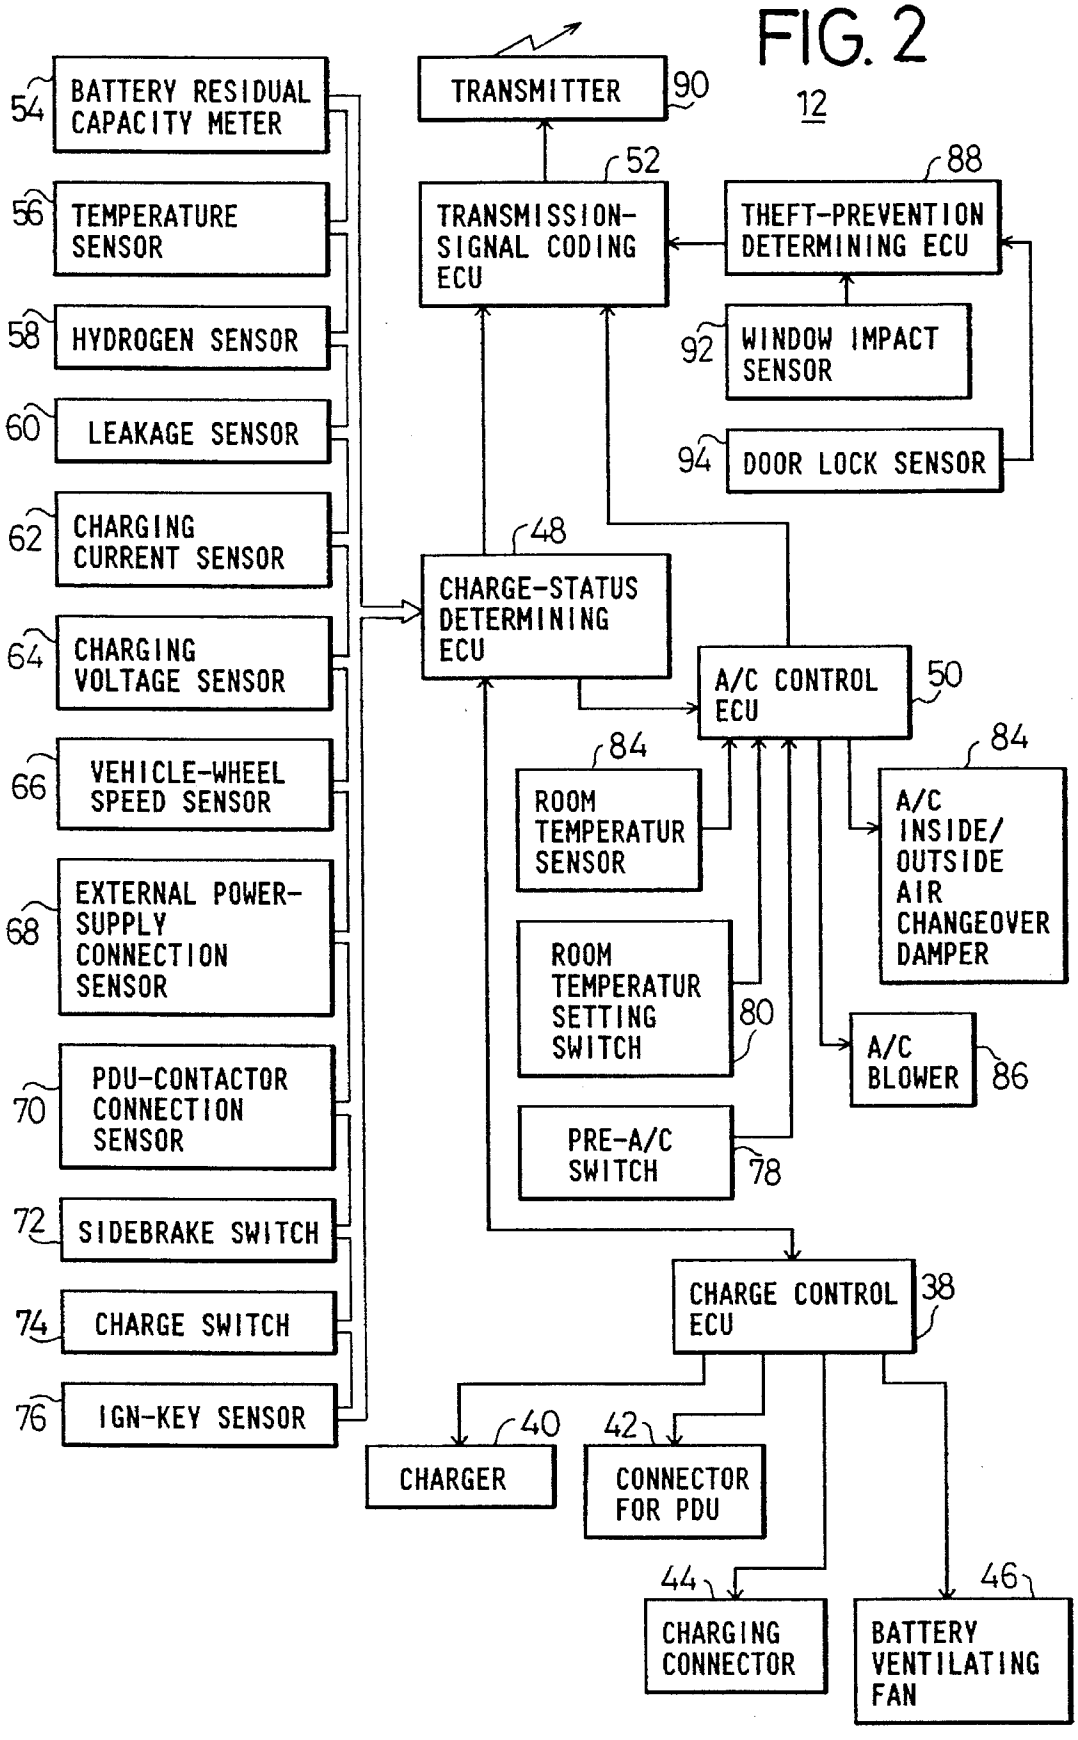

A.C POWER SOURCE
ELECTRIC VEHICLE
12
CHARGE CONTROL CIRCUIT
16
BATTERY
18
DETECTION CIRCUIT
20
CONTROL CIRCUIT
22
TRANSMITTER
24
25
10
DISPLAY CARD
14
RECEIVER
26
DISPLAY CONTROL CIRCUIT
28
WARNING CIRCUIT
31
DISPLAY CIRCUIT
30
BATTERY
32
CHARGING CIRCUIT
36
34

FIG.1

FIG. 2



IPR2026-00381
Tesla EX1009 Page 3

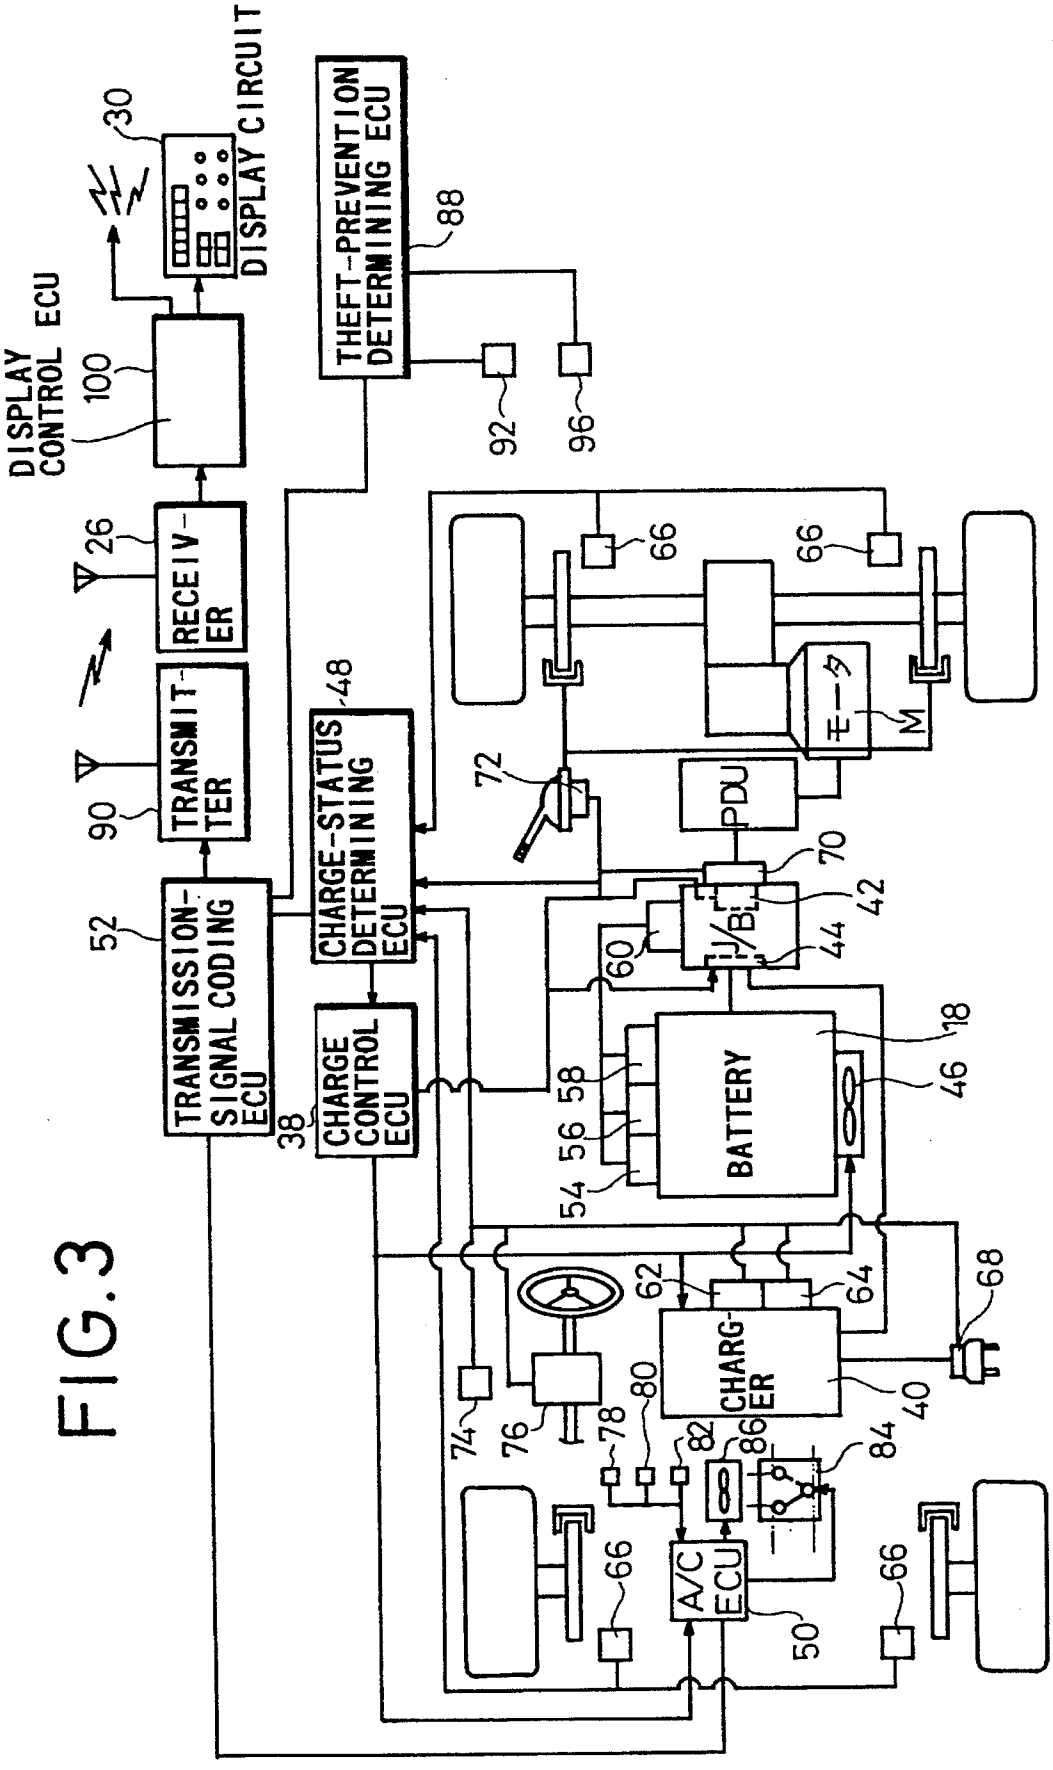

DISPLAY CIRCUIT
30
THEFT-PREVENTION DETERMINING ECU
88
DISPLAY CONTROL ECU
100
92
96
RECEIVER
26
TRANSMITTER
90
CHARGE-STATUS DETERMINING ECU
48
66
66
モータ
M
72
PDU
70
42
44
60
52
TRANSMISSION-SIGNAL CODING ECU
CHARGE CONTROL ECU
38
58
56
54
BATTERY
18
46
62
64
68
CHARGER
40
74
76
78
80
82
86
84
A/C ECU
50
66
66

FIG. 3

FIG. 4

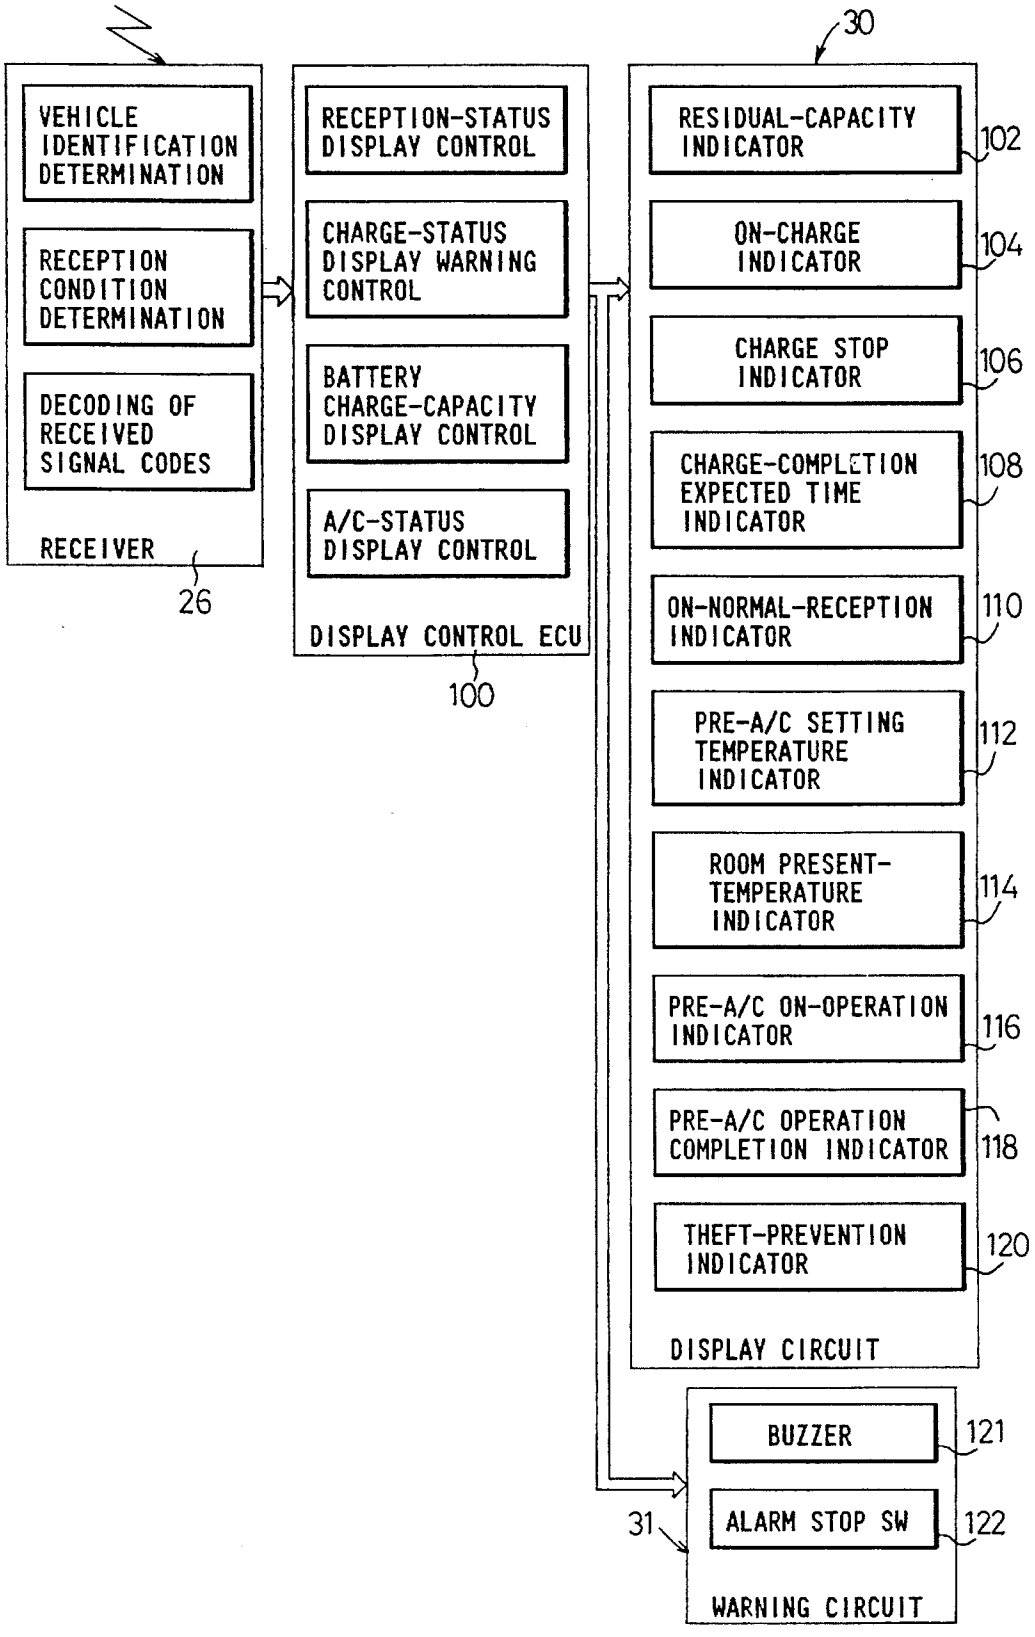

14
30
VEHICLE IDENTIFICATION DETERMINATION
RECEPTION CONDITION DETERMINATION
DECODING OF RECEIVED SIGNAL CODES
RECEIVER
26
RECEPTION-STATUS DISPLAY CONTROL
CHARGE-STATUS DISPLAY WARNING CONTROL
BATTERY CHARGE-CAPACITY DISPLAY CONTROL
A/C-STATUS DISPLAY CONTROL
DISPLAY CONTROL ECU
100
RESIDUAL-CAPACITY INDICATOR
102
ON-CHARGE INDICATOR
104
CHARGE STOP INDICATOR
106
CHARGE-COMPLETION EXPECTED TIME INDICATOR
108
ON-NORMAL-RECEPTION INDICATOR
110
PRE-A/C SETTING TEMPERATURE INDICATOR
112
ROOM PRESENT-TEMPERATURE INDICATOR
114
PRE-A/C ON-OPERATION INDICATOR
116
PRE-A/C OPERATION COMPLETION INDICATOR
118
THEFT-PREVENTION INDICATOR
120
DISPLAY CIRCUIT
BUZZER
121
ALARM STOP SW
122
31
WARNING CIRCUIT

FIG.5

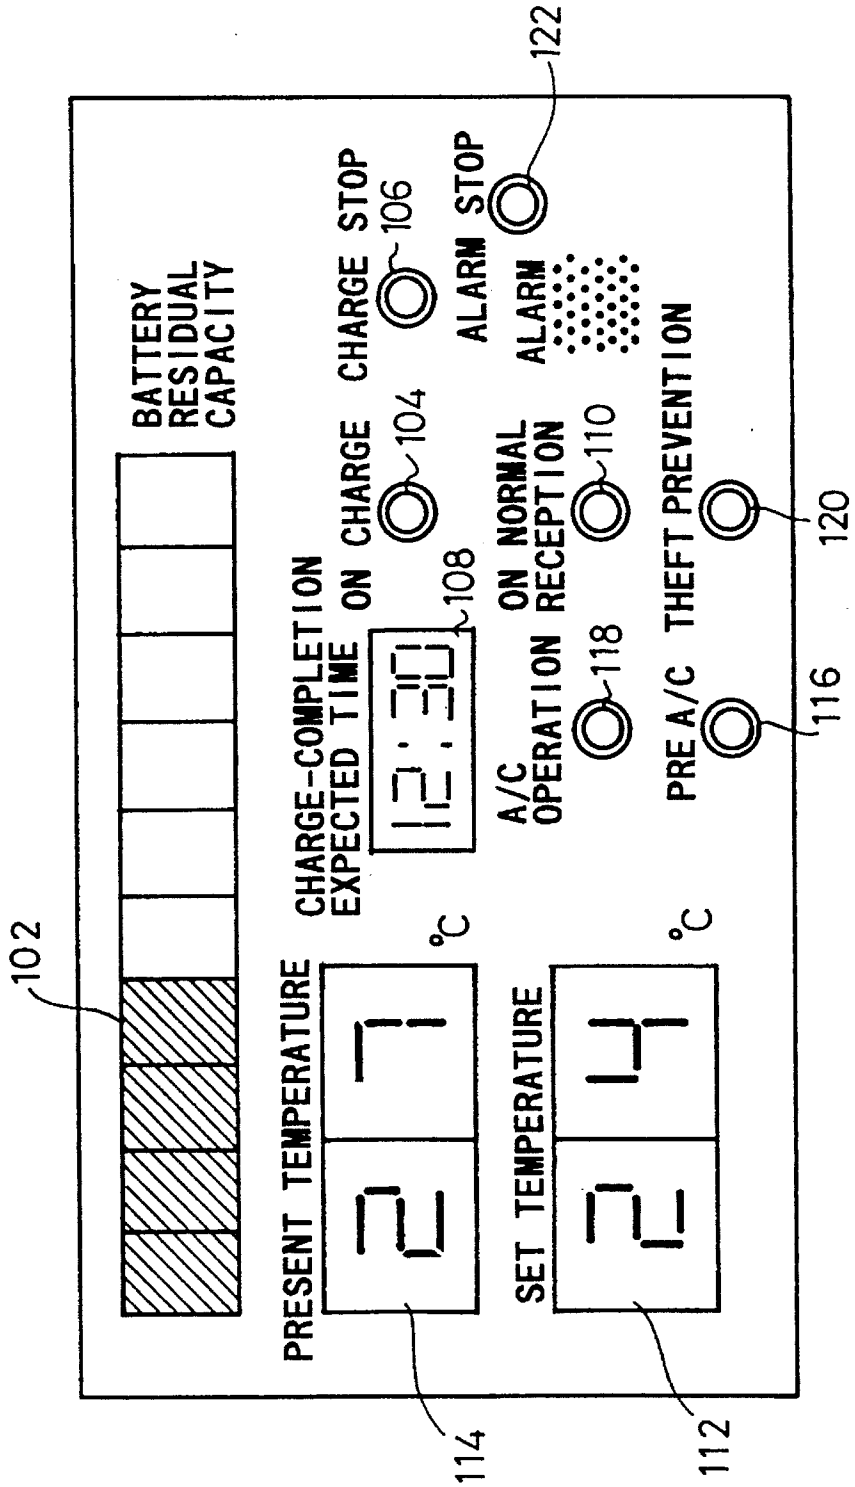

30
102
BATTERY RESIDUAL CAPACITY
CHARGE STOP
106
ALARM STOP
122
ON CHARGE
104
CHARGE-COMPLETION EXPECTED TIME
108
ON NORMAL RECEPTION
110
ALARM
A/C OPERATION
118
PRE A/C
THEFT PREVENTION
120
116
PRESENT TEMPERATURE
21 °C
SET TEMPERATURE
24 °C
114
112

FIG.6

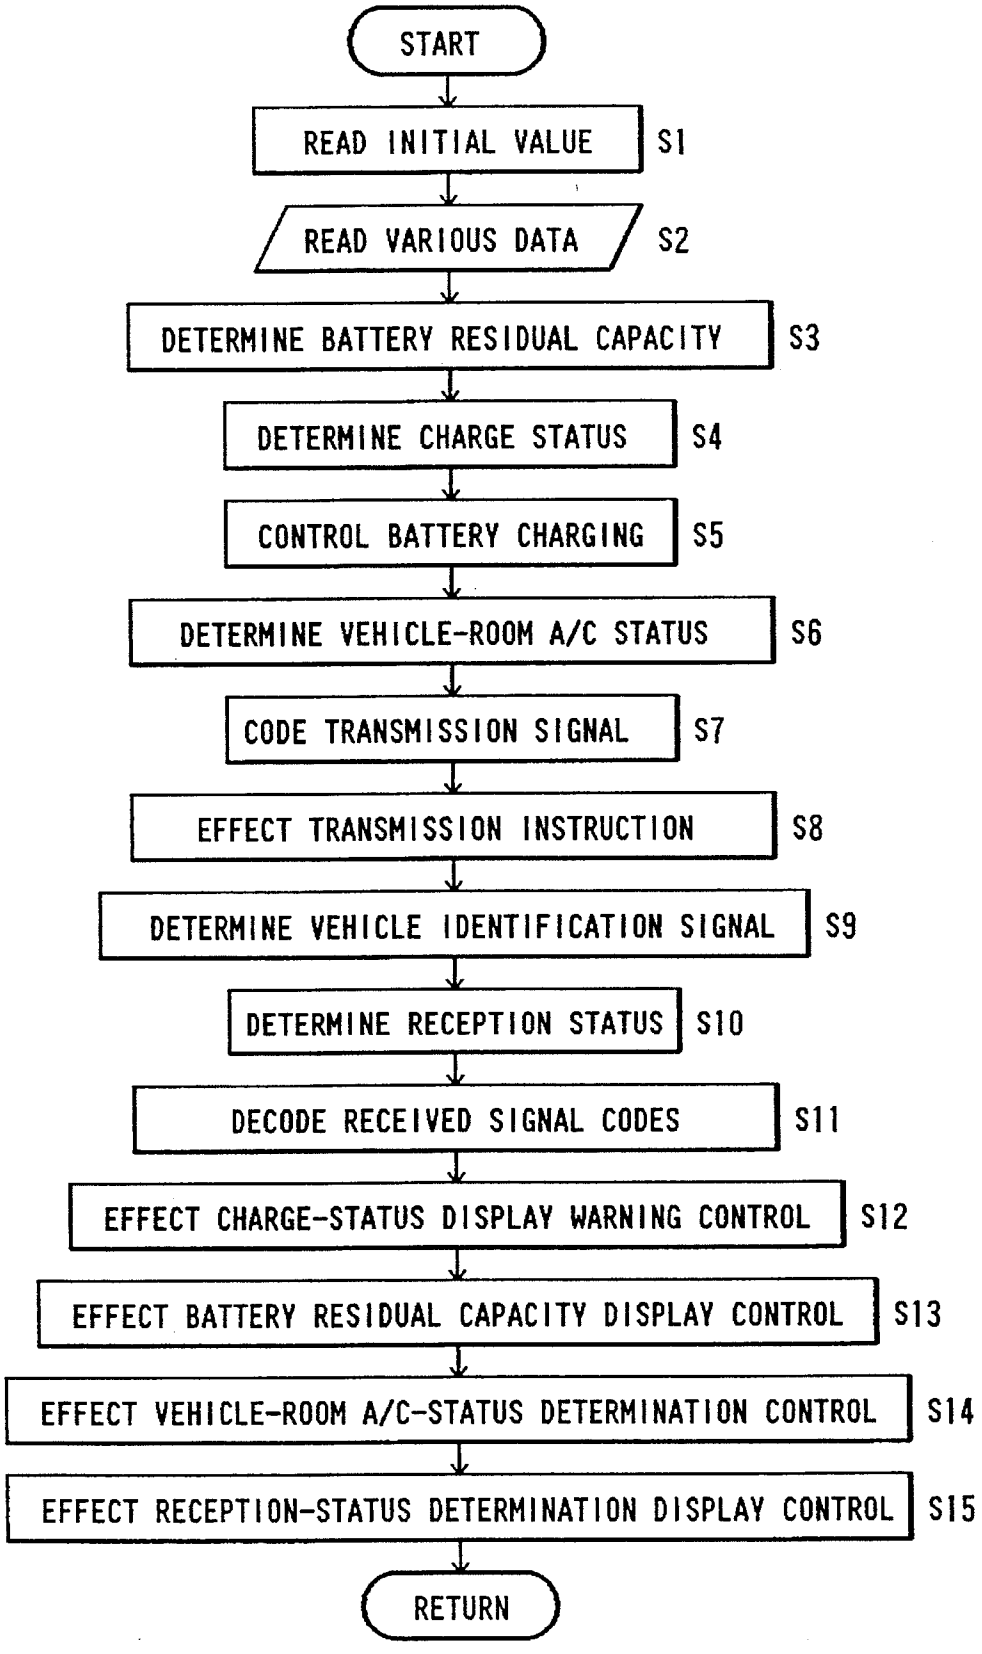

START
READ INITIAL VALUE
S1
READ VARIOUS DATA
S2
DETERMINE BATTERY RESIDUAL CAPACITY
S3
DETERMINE CHARGE STATUS
S4
CONTROL BATTERY CHARGING
S5
DETERMINE VEHICLE-ROOM A/C STATUS
S6
CODE TRANSMISSION SIGNAL
S7
EFFECT TRANSMISSION INSTRUCTION
S8
DETERMINE VEHICLE IDENTIFICATION SIGNAL
S9
DETERMINE RECEPTION STATUS
S10
DECODE RECEIVED SIGNAL CODES
S11
EFFECT CHARGE-STATUS DISPLAY WARNING CONTROL
S12
EFFECT BATTERY RESIDUAL CAPACITY DISPLAY CONTROL
S13
EFFECT VEHICLE-ROOM A/C-STATUS DETERMINATION CONTROL
S14
EFFECT RECEPTION-STATUS DETERMINATION DISPLAY CONTROL
S15
RETURN

FIG.7

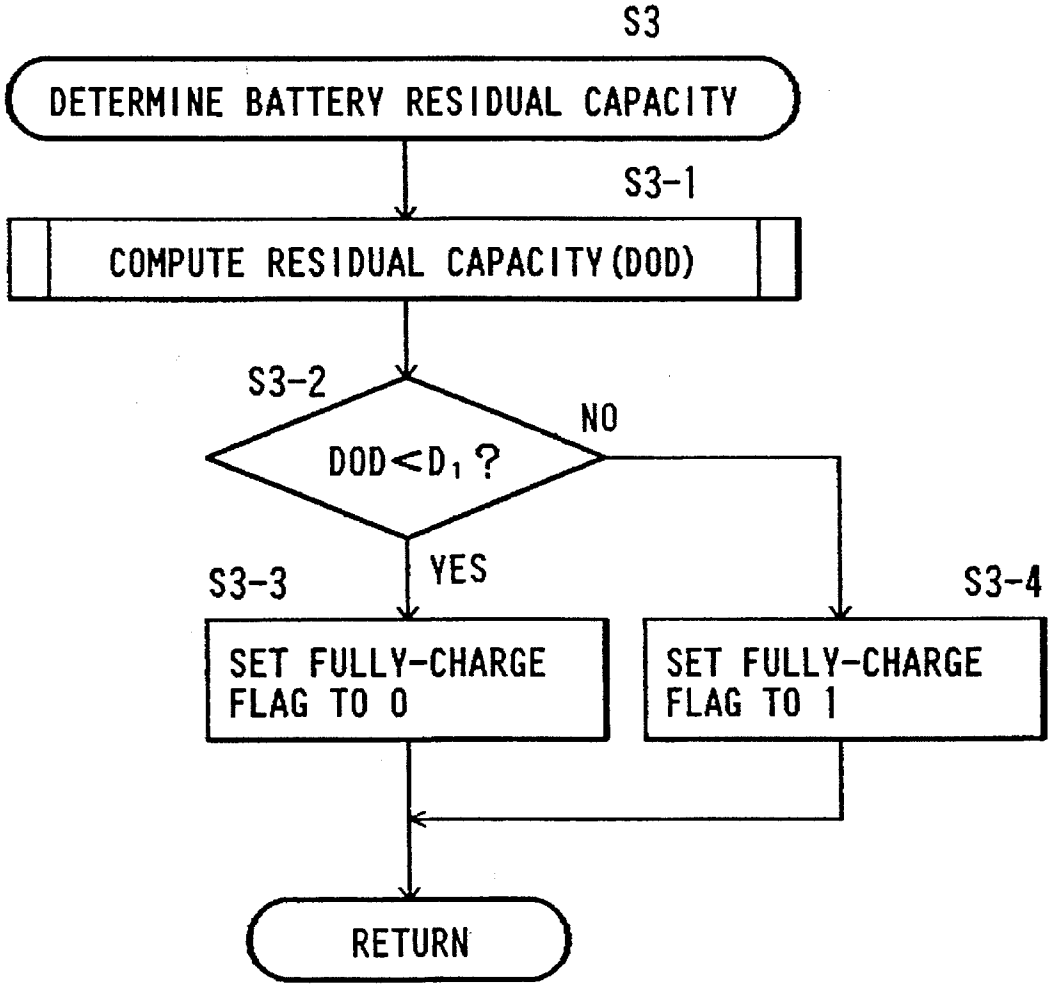

S3
DETERMINE BATTERY RESIDUAL CAPACITY
S3-1
COMPUTE RESIDUAL CAPACITY(DOD)
S3-2
DOD<D1 ?
NO
YES
S3-3
SET FULLY-CHARGE FLAG TO 0
S3-4
SET FULLY-CHARGE FLAG TO 1
RETURN

FIG. 8

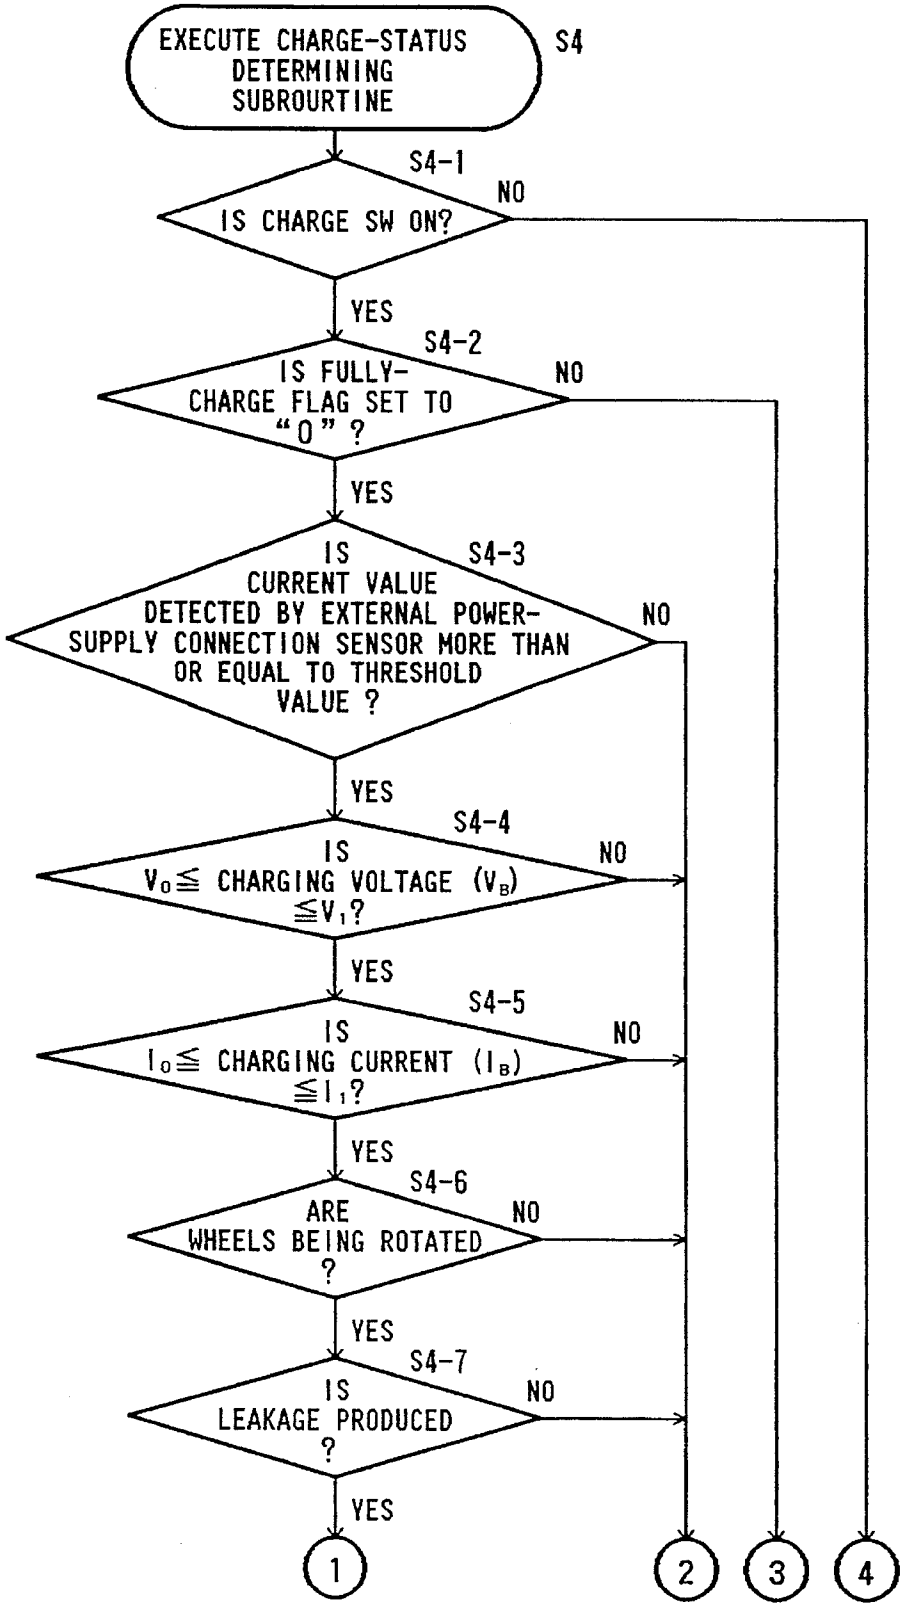

EXECUTE CHARGE-STATUS DETERMINING SUBROURTINE
S4
S4-1
IS CHARGE SW ON?
NO
YES
S4-2
IS FULLY-CHARGE FLAG SET TO "0" ?
NO
YES
S4-3
IS CURRENT VALUE DETECTED BY EXTERNAL POWER-SUPPLY CONNECTION SENSOR MORE THAN OR EQUAL TO THRESHOLD VALUE ?
NO
YES
S4-4
IS $V_0 \leqq$ CHARGING VOLTAGE (V_B) $\leqq V_1$?
NO
YES
S4-5
IS $I_0 \leqq$ CHARGING CURRENT (I_B) $\leqq I_1$?
NO
YES
S4-6
ARE WHEELS BEING ROTATED ?
NO
YES
S4-7
IS LEAKAGE PRODUCED ?
NO
YES
1
2
3
4

FIG.9

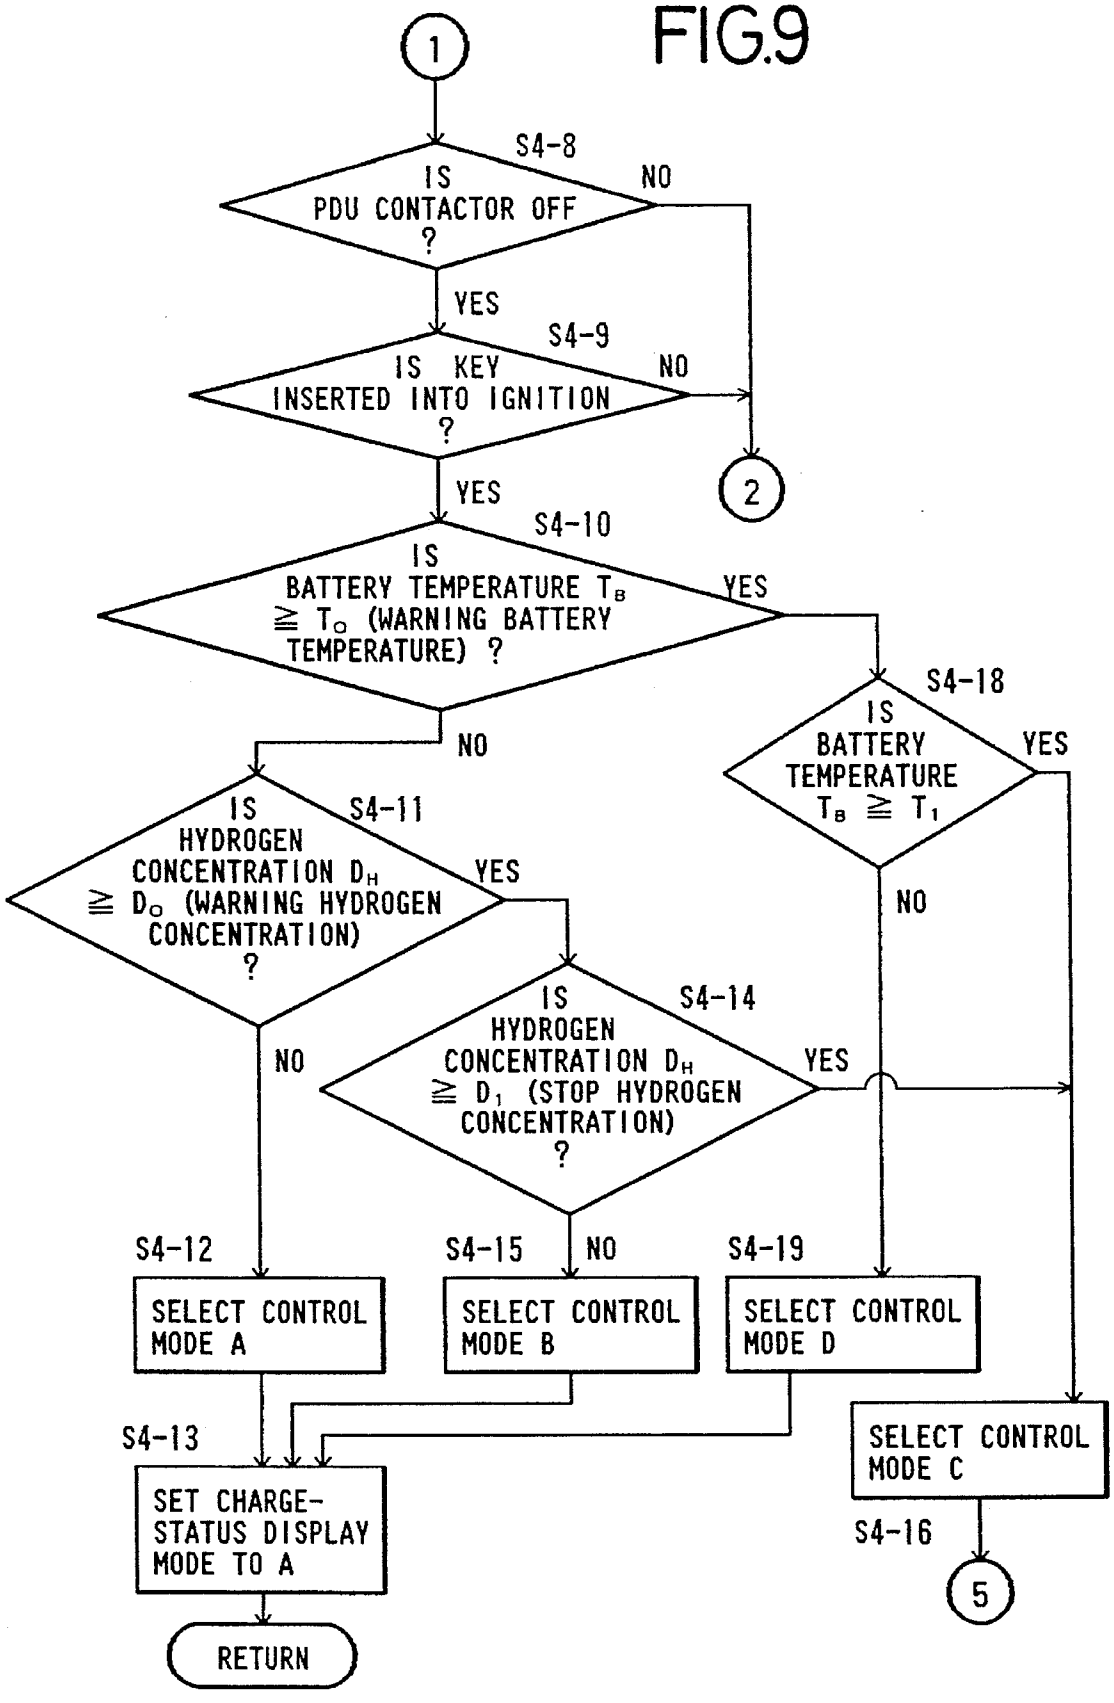

1
S4-8
IS PDU CONTACTOR OFF ?
NO
YES
S4-9
IS KEY INSERTED INTO IGNITION ?
NO
2
YES
S4-10
IS BATTERY TEMPERATURE T_B ≧ T_0 (WARNING BATTERY TEMPERATURE) ?
YES
NO
S4-18
IS BATTERY TEMPERATURE T_B ≧ T_1
YES
NO
S4-11
IS HYDROGEN CONCENTRATION D_H ≧ D_0 (WARNING HYDROGEN CONCENTRATION) ?
YES
NO
S4-14
IS HYDROGEN CONCENTRATION D_H ≧ D_1 (STOP HYDROGEN CONCENTRATION) ?
YES
NO
S4-12
SELECT CONTROL MODE A
S4-15
SELECT CONTROL MODE B
S4-19
SELECT CONTROL MODE D
S4-13
SET CHARGE-STATUS DISPLAY MODE TO A
SELECT CONTROL MODE C
S4-16
5
RETURN

FIG.10

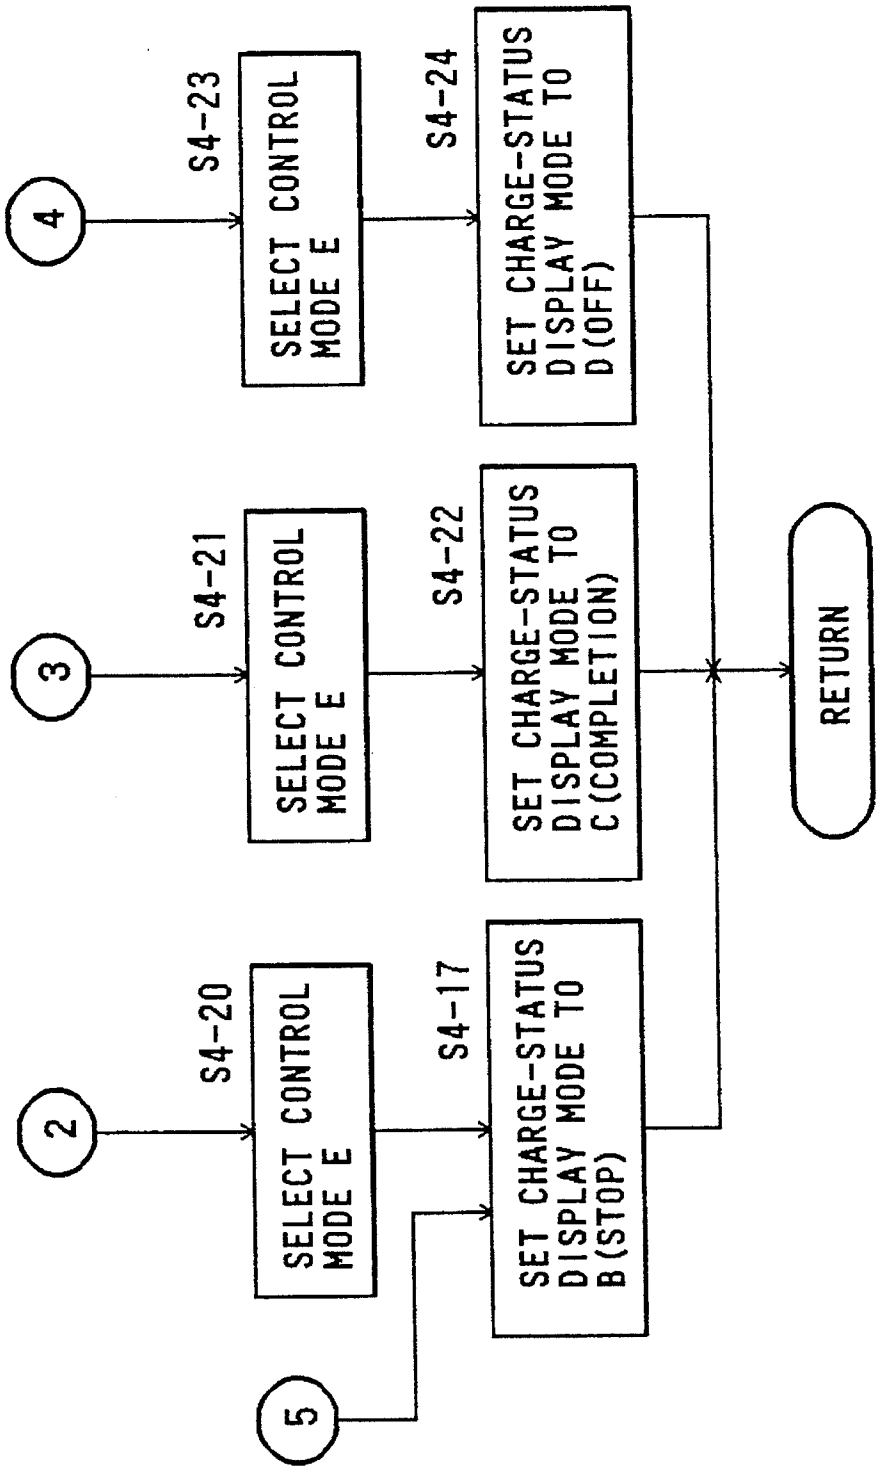

4
S4-23
SELECT CONTROL MODE E
S4-24
SET CHARGE-STATUS DISPLAY MODE TO D(OFF)
3
S4-21
SELECT CONTROL MODE E
S4-22
SET CHARGE-STATUS DISPLAY MODE TO C(COMPLETION)
RETURN
2
S4-20
SELECT CONTROL MODE E
S4-17
SET CHARGE-STATUS DISPLAY MODE TO B(STOP)
5

FIG11

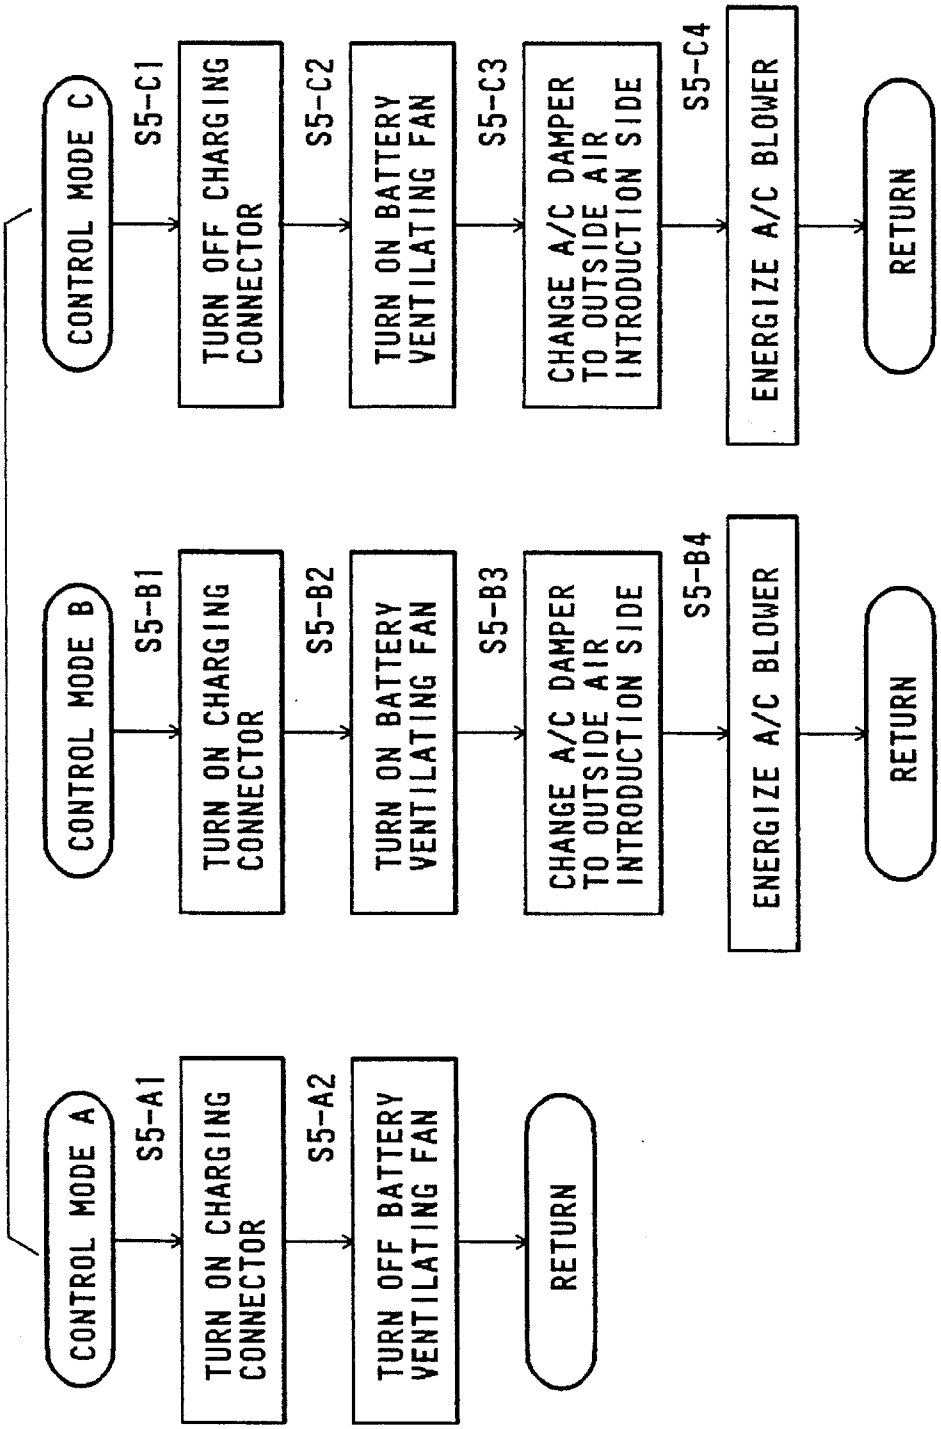

CONTROL MODE A
S5-A1
TURN ON CHARGING CONNECTOR
S5-A2
TURN OFF BATTERY VENTILATING FAN
RETURN
CONTROL MODE B
S5-B1
TURN ON CHARGING CONNECTOR
S5-B2
TURN ON BATTERY VENTILATING FAN
S5-B3
CHANGE A/C DAMPER TO OUTSIDE AIR INTRODUCTION SIDE
S5-B4
ENERGIZE A/C BLOWER
RETURN
CONTROL MODE C
S5-C1
TURN OFF CHARGING CONNECTOR
S5-C2
TURN ON BATTERY VENTILATING FAN
S5-C3
CHANGE A/C DAMPER TO OUTSIDE AIR INTRODUCTION SIDE
S5-C4
ENERGIZE A/C BLOWER
RETURN

FIG.12

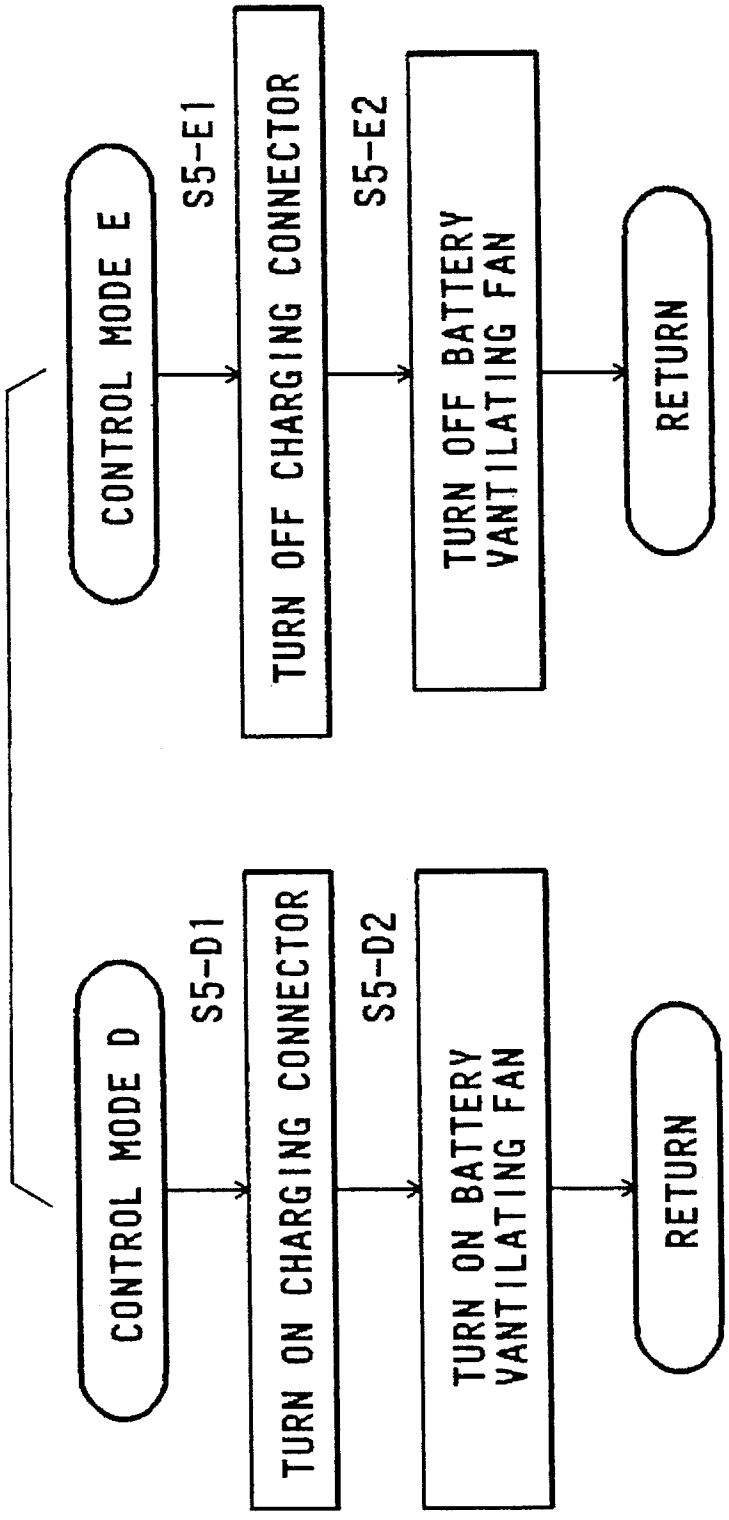

CONTROL MODE E
S5-E1
TURN OFF CHARGING CONNECTOR
S5-E2
TURN OFF BATTERY VANTILATING FAN
RETURN
CONTROL MODE D
S5-D1
TURN ON CHARGING CONNECTOR
S5-D2
TURN ON BATTERY VANTILATING FAN
RETURN

FIG.13

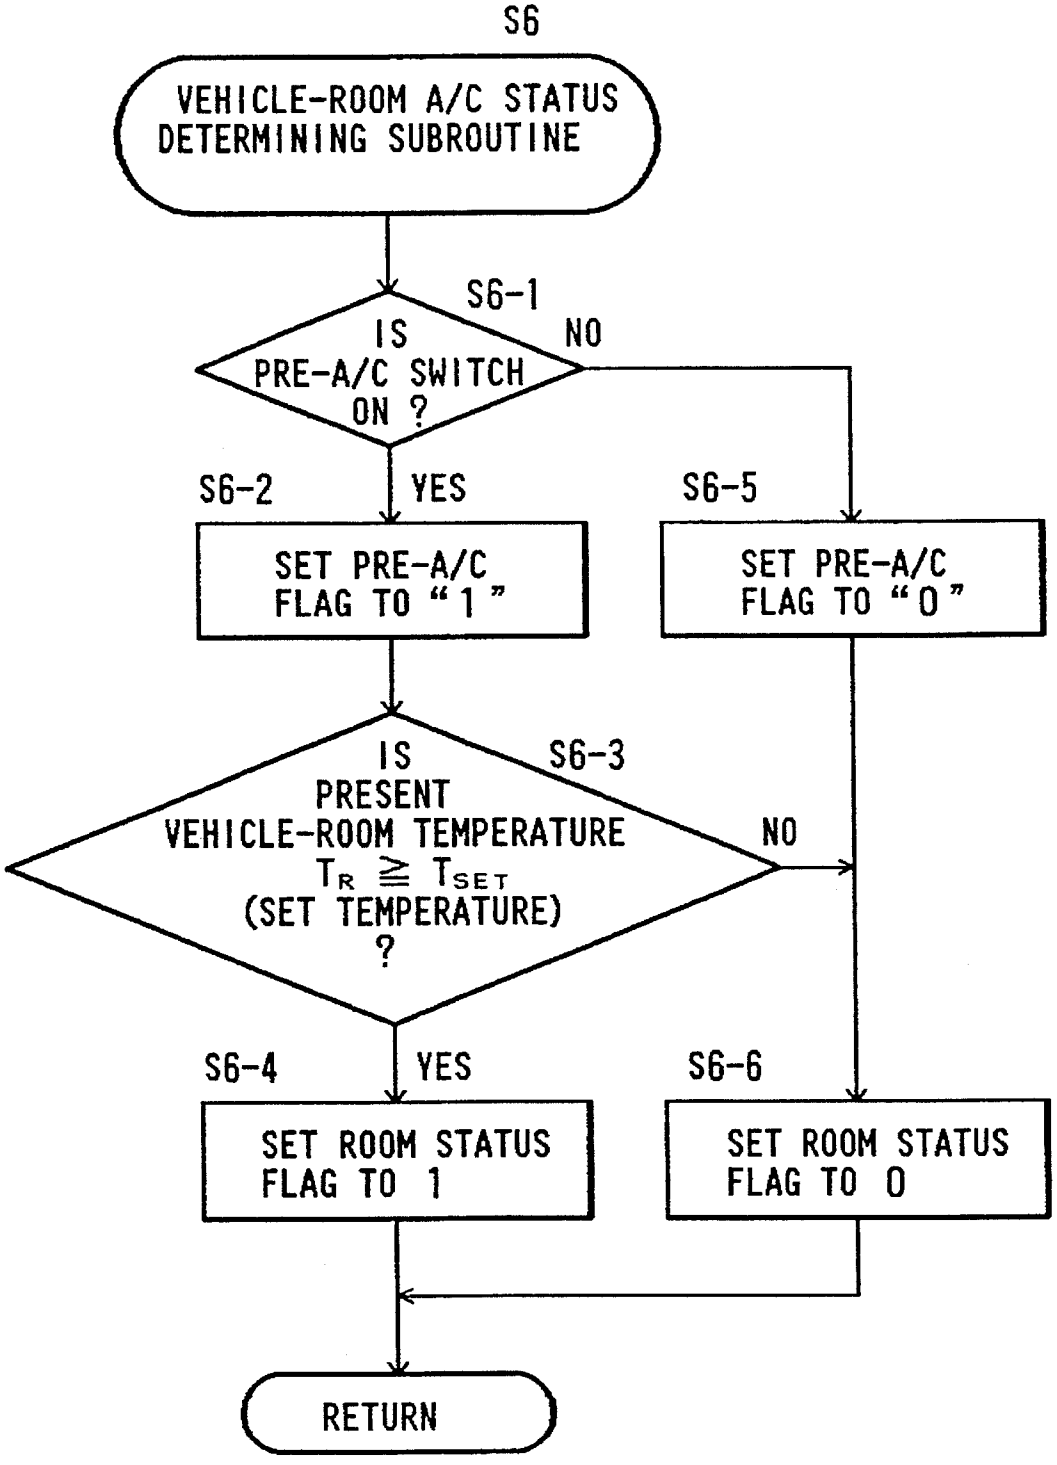

S6
VEHICLE-ROOM A/C STATUS DETERMINING SUBROUTINE
S6-1
IS PRE-A/C SWITCH ON ?
NO
YES
S6-2
SET PRE-A/C FLAG TO "1"
S6-5
SET PRE-A/C FLAG TO "0"
S6-3
IS PRESENT VEHICLE-ROOM TEMPERATURE $T_R \geqq T_{SET}$ (SET TEMPERATURE) ?
NO
YES
S6-4
SET ROOM STATUS FLAG TO 1
S6-6
SET ROOM STATUS FLAG TO 0
RETURN

FIG.14

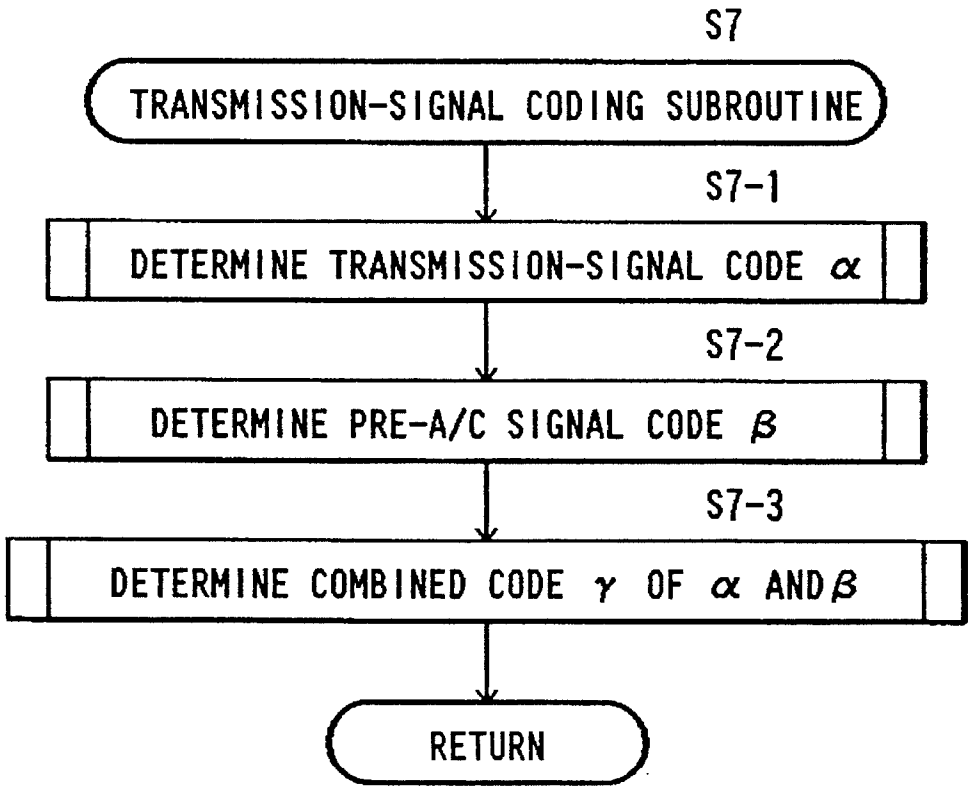

S7
TRANSMISSION-SIGNAL CODING SUBROUTINE
S7-1
DETERMINE TRANSMISSION-SIGNAL CODE α
S7-2
DETERMINE PRE-A/C SIGNAL CODE β
S7-3
DETERMINE COMBINED CODE γ OF α AND β
RETURN

FIG.15A

RESIDUAL CAPACITY / STATUS CODE	RESIDUAL CAPACITY(%) 0%	10	20	30	40	50	60	70	80	90	100
OFF	A0	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10
COMPLETION	B0	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10
ON CHARGE	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
STOP	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10

FIG.15B

PRE-A/C CONTROL FLAG	[0]	[1]
A/C ROOM STATUS FLAG [0]	E_0	E_1
A/C ROOM STATUS FLAG [1]	F_0	F_1

FIG.15C

α / β	A_0	A_1	...	A_{10}	B_0	B_1	...	B_{10}	C_0	C_1	...	C_{10}	D_0	D_1	...	D_{10}
E_0	γ_{a0}	γ_{a1}	...	γ_{a10}	γ_{a11}	γ_{a12}	...	γ_{a21}	γ_{a22}	γ_{a23}	...	γ_{a32}	γ_{a33}	γ_{a34}	...	γ_{a43}
E_1	γ_{b0}	γ_{b1}	...	γ_{b10}	γ_{b11}	γ_{b12}	...	γ_{b21}	γ_{b22}	γ_{b23}	...	γ_{b32}	γ_{b33}	γ_{b34}	...	γ_{b43}
F_0	γ_{c0}	γ_{c1}	...	γ_{c10}	γ_{c11}	γ_{c12}	...	γ_{c21}	γ_{c22}	γ_{c23}	...	γ_{c32}	γ_{c33}	γ_{c34}	...	γ_{c43}
F_1	γ_{d0}	γ_{d1}	...	γ_{d10}	γ_{d11}	γ_{d12}	...	γ_{d21}	γ_{d22}	γ_{d23}	...	γ_{d32}	γ_{d33}	γ_{d34}	...	γ_{d43}

IPR2026-00381
Tesla EX1009 Page 16

FIG.16

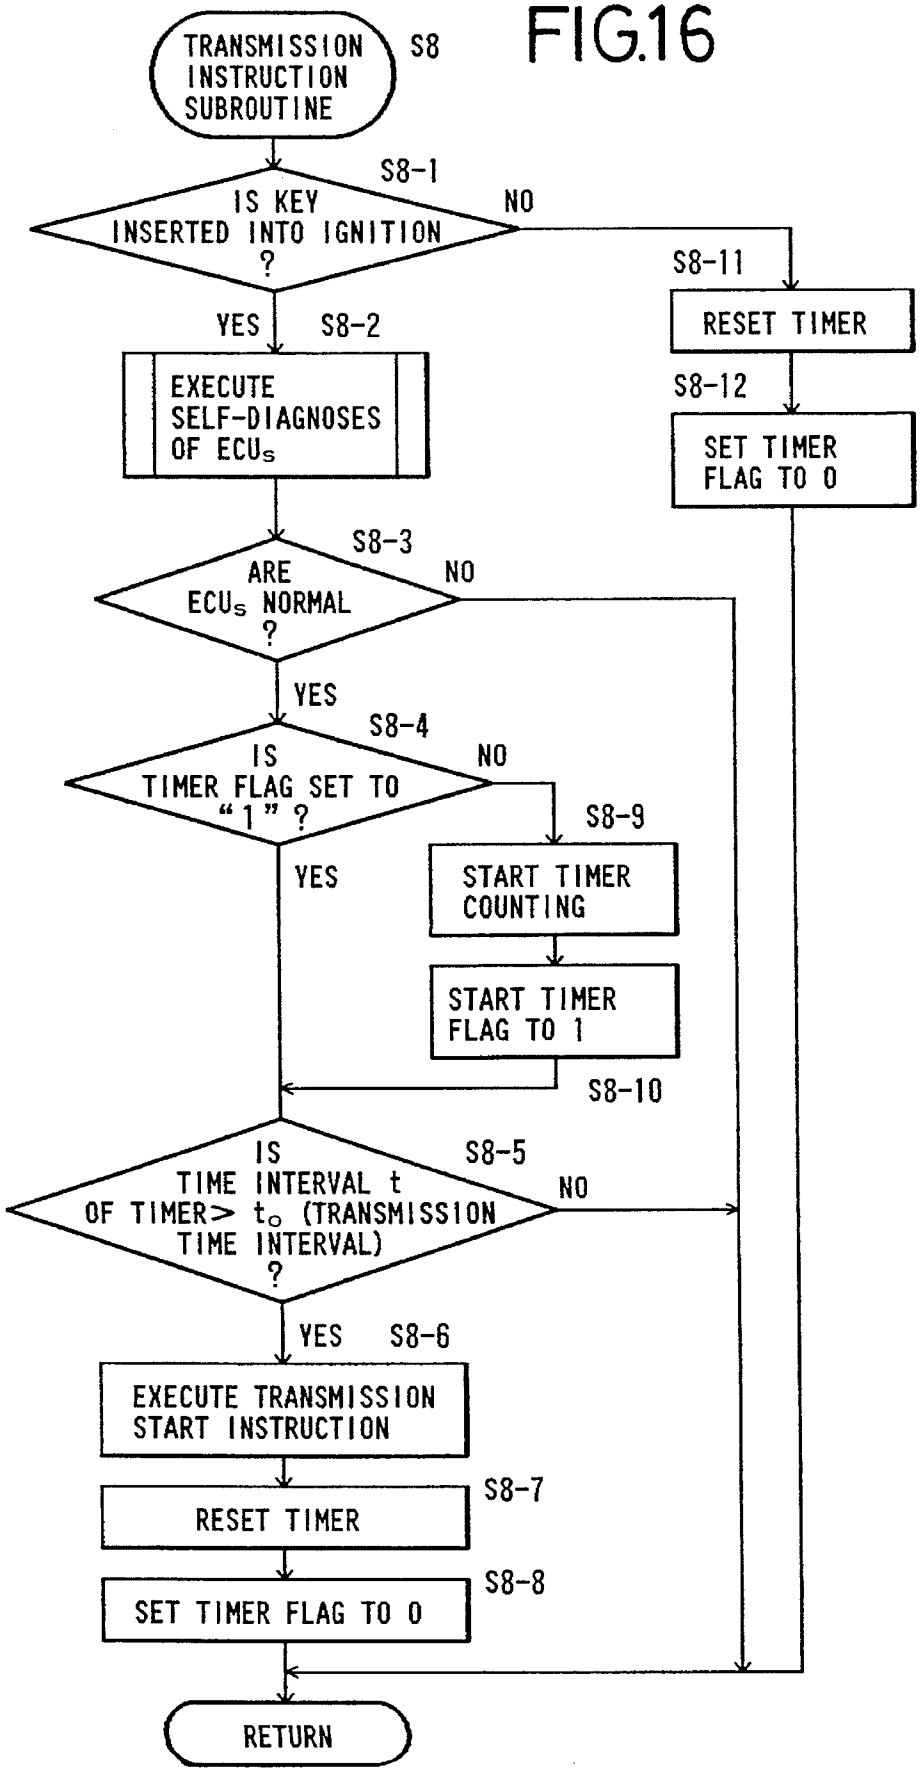

TRANSMISSION INSTRUCTION SUBROUTINE
S8
S8-1
IS KEY INSERTED INTO IGNITION ?
NO
YES
S8-2
EXECUTE SELF-DIAGNOSES OF ECUs
S8-3
ARE ECUs NORMAL ?
NO
YES
S8-4
IS TIMER FLAG SET TO "1" ?
NO
YES
S8-9
START TIMER COUNTING
START TIMER FLAG TO 1
S8-10
S8-5
IS TIME INTERVAL t OF TIMER> to (TRANSMISSION TIME INTERVAL) ?
NO
YES
S8-6
EXECUTE TRANSMISSION START INSTRUCTION
S8-7
RESET TIMER
S8-8
SET TIMER FLAG TO 0
S8-11
RESET TIMER
S8-12
SET TIMER FLAG TO 0
RETURN

FIG.17

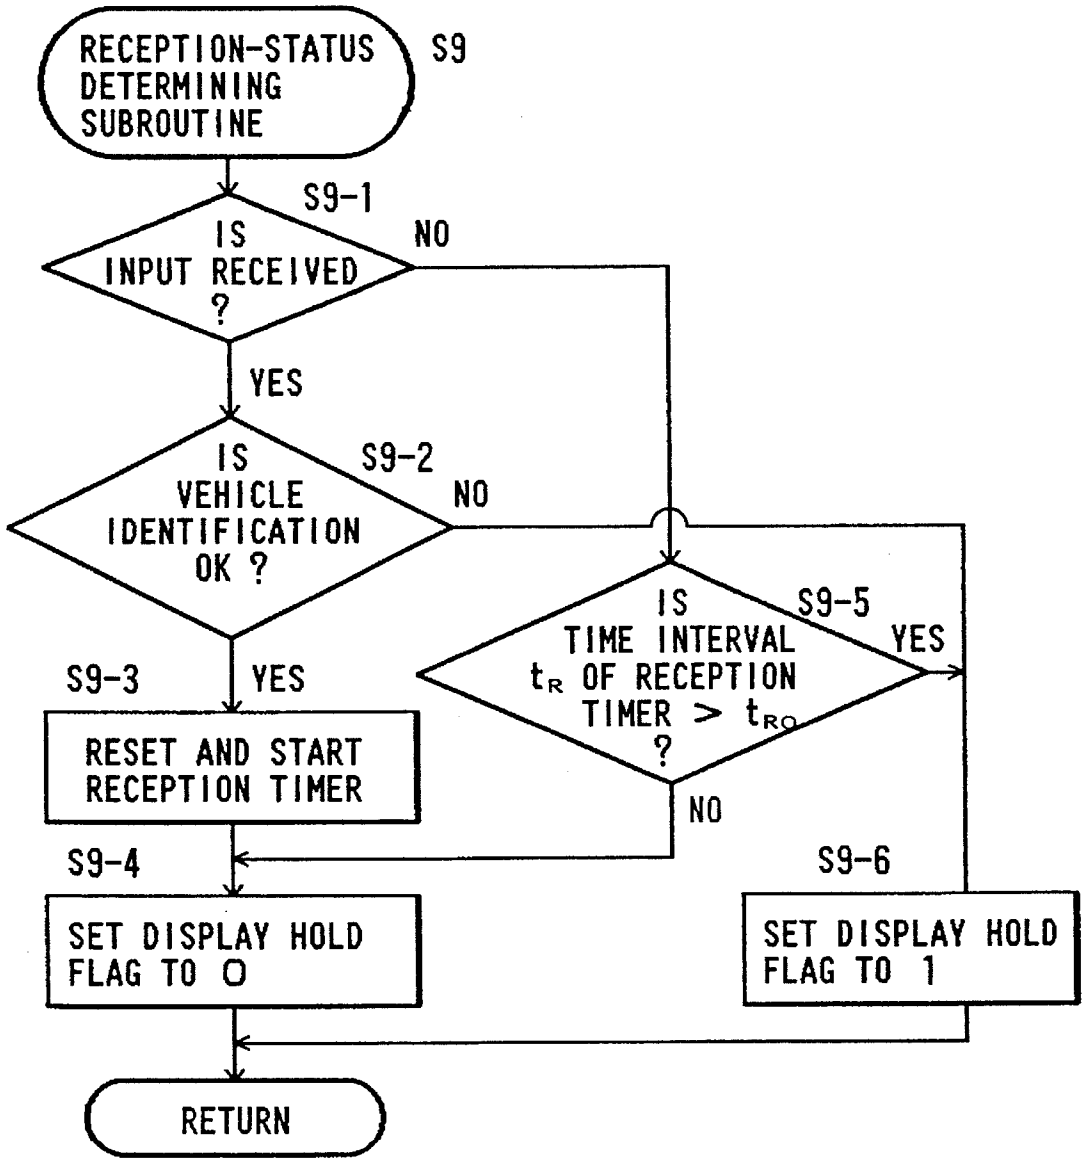

RECEPTION-STATUS DETERMINING SUBROUTINE
S9
S9-1
IS INPUT RECEIVED ?
NO
YES
IS VEHICLE IDENTIFICATION OK ?
S9-2
NO
YES
S9-3
RESET AND START RECEPTION TIMER
IS TIME INTERVAL t_R OF RECEPTION TIMER > t_{RO} ?
S9-5
YES
NO
S9-4
SET DISPLAY HOLD FLAG TO O
S9-6
SET DISPLAY HOLD FLAG TO 1
RETURN

FIG.18

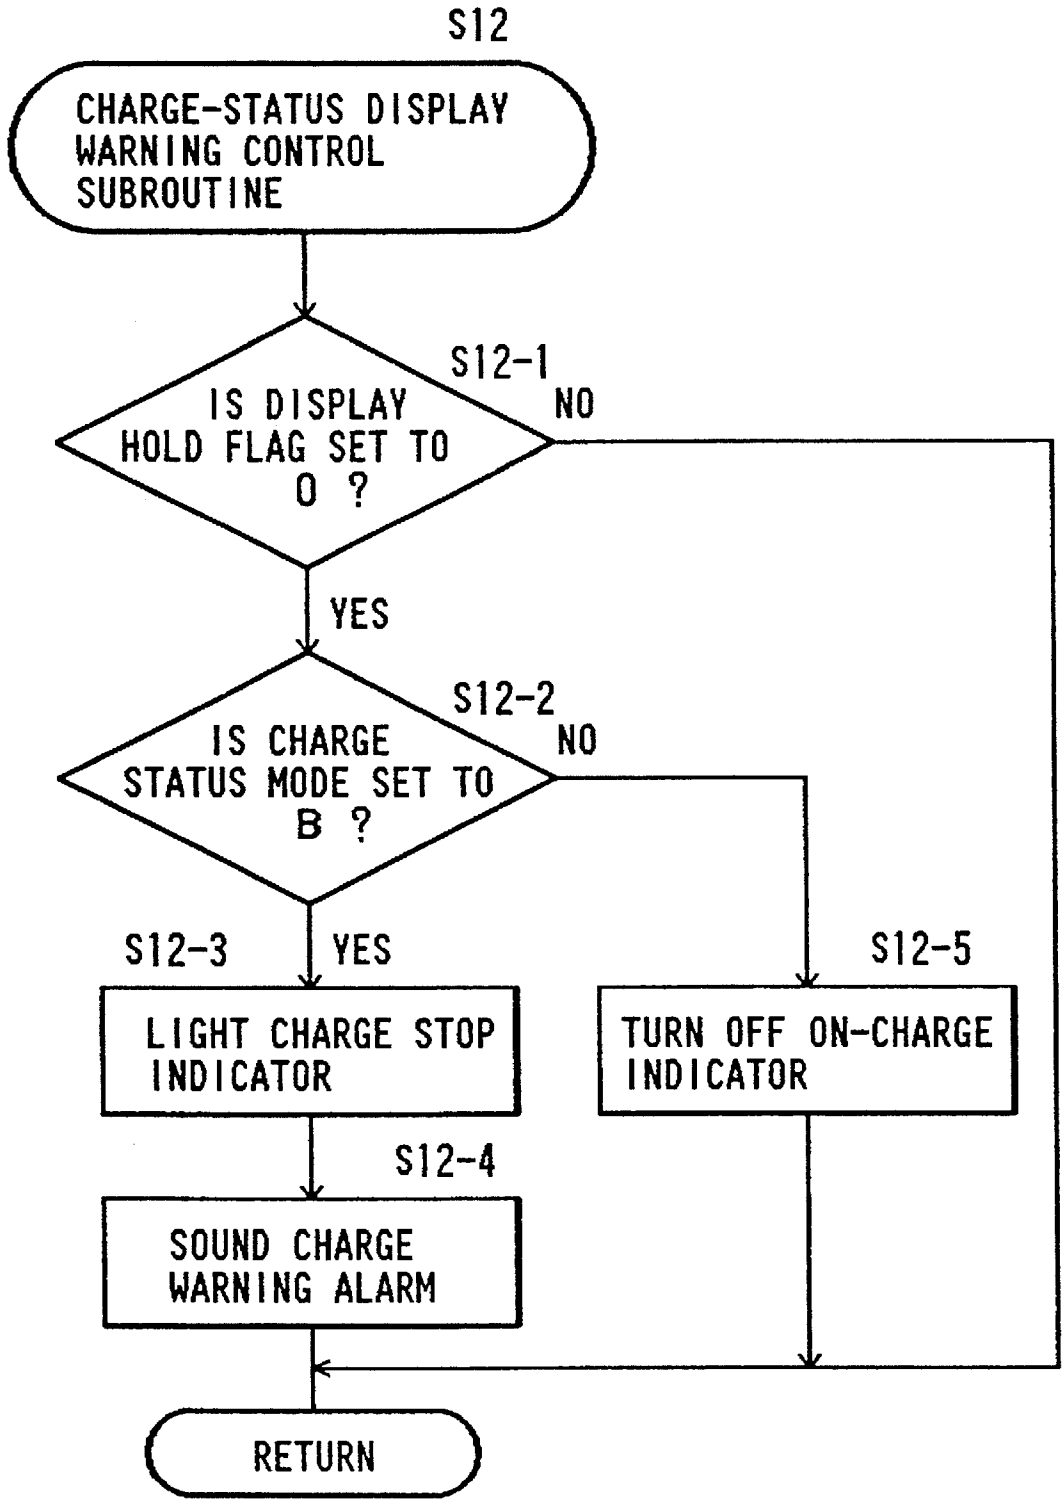

S12
CHARGE-STATUS DISPLAY WARNING CONTROL SUBROUTINE
S12-1
IS DISPLAY HOLD FLAG SET TO 0 ?
NO
YES
S12-2
IS CHARGE STATUS MODE SET TO B ?
NO
S12-3
YES
S12-5
LIGHT CHARGE STOP INDICATOR
TURN OFF ON-CHARGE INDICATOR
S12-4
SOUND CHARGE WARNING ALARM
RETURN

FIG.19

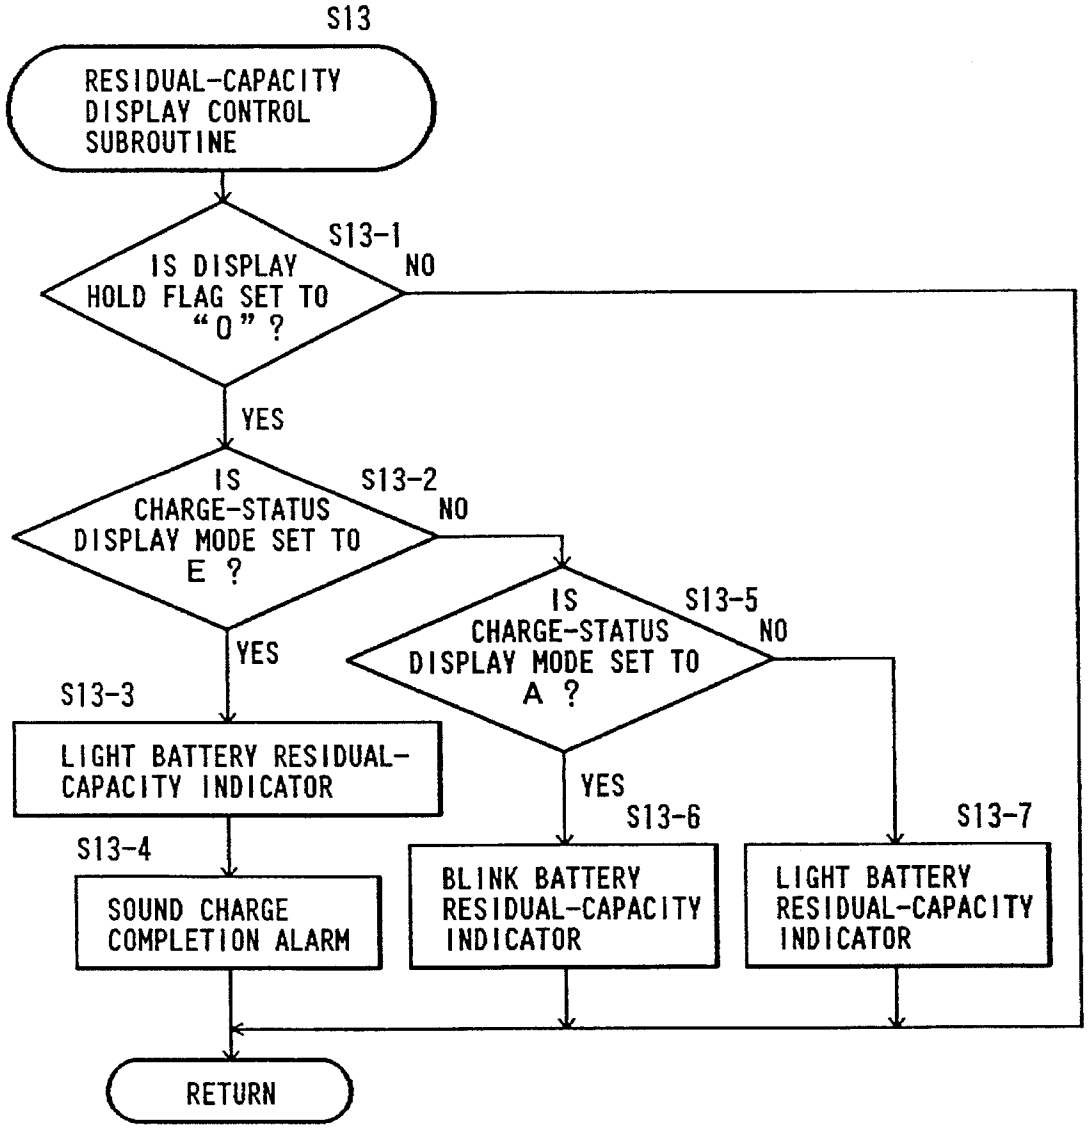

S13
RESIDUAL-CAPACITY DISPLAY CONTROL SUBROUTINE
S13-1
IS DISPLAY HOLD FLAG SET TO "0" ?
NO
YES
S13-2
IS CHARGE-STATUS DISPLAY MODE SET TO E ?
NO
YES
S13-5
IS CHARGE-STATUS DISPLAY MODE SET TO A ?
NO
YES
S13-3
LIGHT BATTERY RESIDUAL-CAPACITY INDICATOR
S13-4
SOUND CHARGE COMPLETION ALARM
S13-6
BLINK BATTERY RESIDUAL-CAPACITY INDICATOR
S13-7
LIGHT BATTERY RESIDUAL-CAPACITY INDICATOR
RETURN

FIG.20

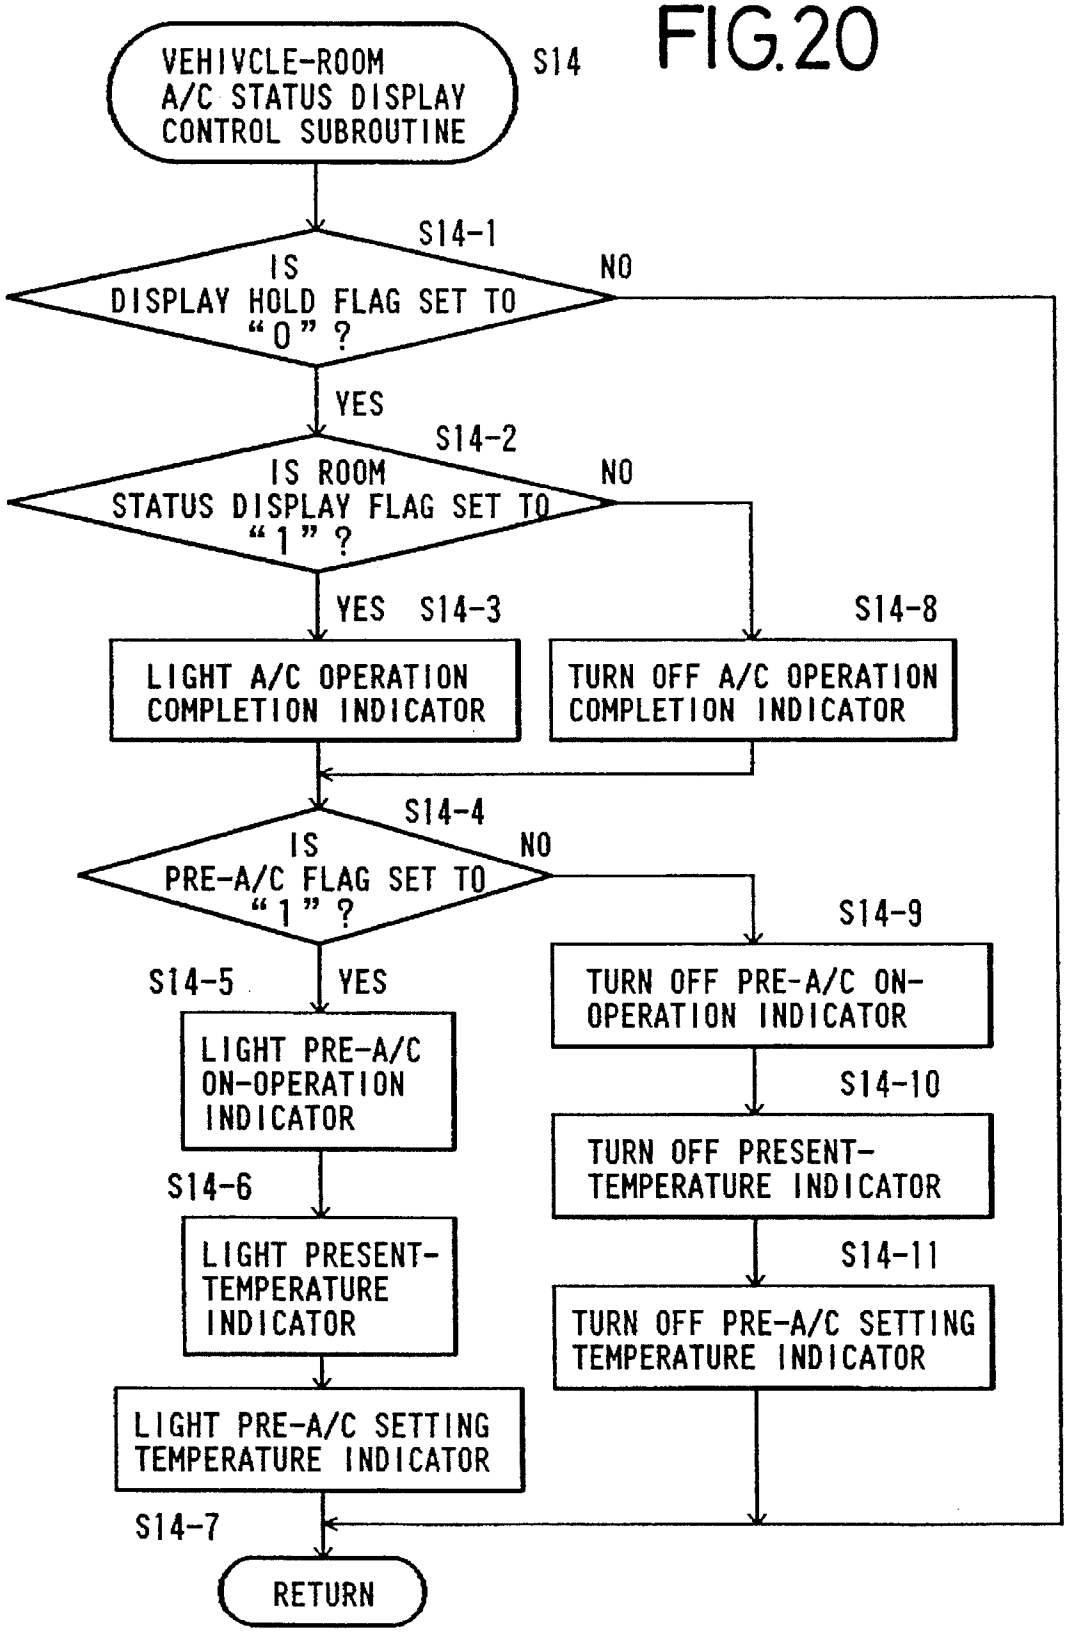
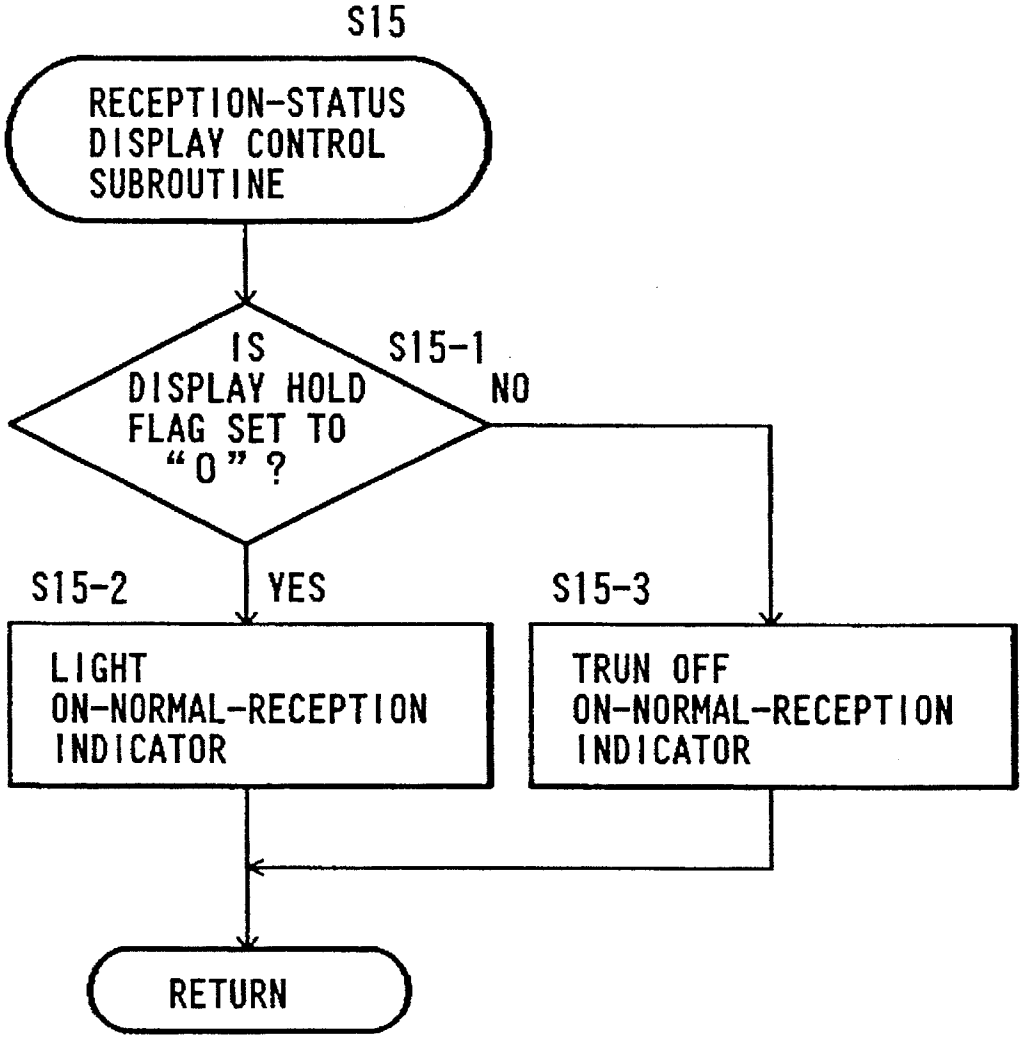

VEHIVCLE-ROOM A/C STATUS DISPLAY CONTROL SUBROUTINE
S14
S14-1
IS DISPLAY HOLD FLAG SET TO "0" ?
NO
YES
S14-2
IS ROOM STATUS DISPLAY FLAG SET TO "1" ?
NO
YES
S14-3
LIGHT A/C OPERATION COMPLETION INDICATOR
S14-8
TURN OFF A/C OPERATION COMPLETION INDICATOR
S14-4
IS PRE-A/C FLAG SET TO "1" ?
NO
S14-5
YES
LIGHT PRE-A/C ON-OPERATION INDICATOR
S14-6
LIGHT PRESENT-TEMPERATURE INDICATOR
LIGHT PRE-A/C SETTING TEMPERATURE INDICATOR
S14-7
RETURN
S14-9
TURN OFF PRE-A/C ON-OPERATION INDICATOR
S14-10
TURN OFF PRESENT-TEMPERATURE INDICATOR
S14-11
TURN OFF PRE-A/C SETTING TEMPERATURE INDICATOR

FIG.21


S15
RECEPTION-STATUS DISPLAY CONTROL SUBROUTINE
IS DISPLAY HOLD FLAG SET TO "0"?
S15-1
NO
S15-2
YES
S15-3
LIGHT ON-NORMAL-RECEPTION INDICATOR
TRUN OFF ON-NORMAL-RECEPTION INDICATOR
RETURN

CHARGE-STATUS DISPLAY SYSTEM FOR AN ELECTRIC VEHICLE

This application is a continuation application of application Ser. No. 08/009,642, filed on Jan. 27, 1993, now abandoned.

FIELD OF THE INVENTION

The present invention relates to a charge-status display system suitable for use with an electric vehicle, which system is capable of monitoring the status of charging of the electric vehicle being charged and the status of the electric vehicle at a location remote from the electric vehicle.

DESCRIPTION OF THE RELATED ART

A battery, which serves as a running drive source of an electric vehicle, is charged in a user's garage or the like during the night. In this connection, a technical idea that the state of charging of the battery is displayed on an upper panel of a dash board, has been disclosed in Japanese Utility Model Application Laid-Open Publication No. 63-191801.

The time required to charge the electric vehicle is normally between seven and ten hours. Therefore, a charging operator leaves his/her electric vehicle when the charging of the battery is initiated. However, the charging operator cannot detect for example, a situation in which the charging of the battery is disrupted due to the disconnection of a charge cable, an increase in the concentration of hydrogen gas in a battery accommodating box or a situation in which the charging of the battery has been completed.

Therefore, the charging operator should often proceed to the garage or the like to confirm the conditions of the electric vehicle being charged, thus inconveniencing the charging operator.

SUMMARY OF THE INVENTION

With the foregoing problem in view, it is an object of the present invention to provide a portable display system suitable for use in an electric vehicle, which is capable of monitoring the status of charging of an electric vehicle and the status of the electric vehicle in detail at a location remote from the electric vehicle being charged.

According to a first aspect of the present invention, for achieving the above object, there is provided a charge-status display system suitable for use with an electric vehicle, for receiving therein and displaying thereon information indicative of the status of charging of a main battery used as a running drive source at a location remote from the electric vehicle, the information being transmitted from the electric vehicle, with the system comprising: the a charge-status detection unit disposed in the electric vehicle, said detection unit comprising a plurality of detecting means for detecting a plurality of operating conditions of the main battery, determining means for determining a status of charging of said main battery based on the results of detection by the plurality of detecting means and outputting signals representing said status of charging, and wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting the same via wireless transmission and a display unit separated from said electric vehicle and disposed at a location remote from said electric vehicle, said display unit comprising, power supply means independent of said main battery for supplying power to said display unit, receiving means for receiving said signals transmitted by said wireless transmitting means and display means for displaying thereon said status of charging of said main battery based on said results of detection and said signals received by the receiving means.

The present invention also provides such a charge-status display system wherein the detecting means can include voltage and/or current detecting means for detecting a charging voltage and/or a charging current of said main battery, the determining means can include voltage and/or current determining means for determining whether said charging voltage and/or said charging current falls within a predetermined range, and the display unit can include display means for displaying thereon the result of the determination by said voltage and/or current determining means.

The present invention further provides such a charge-status display system wherein the detecting means can include a rotation sensor for detecting the rotation of each wheel.

The present invention still further provides such a charge-status display system wherein the detecting means can include leakage detecting means for detecting an undesired flow of electricity through a running-drive electric system and a control electric system, the determining means can include leakage determining means for determining whether the amount of said undesired flow of electricity falls within a predetermined range, and the display unit can include display means for displaying the result of the determination by said leakage determining means thereon.

The present invention still further provides such a charge-status display system wherein the detecting means can include connection detecting means for detecting the state of connection or non-connection between a power drive unit and said main battery, and the display unit can include display means for displaying the result of the detection by said connection detecting means thereon.

The present invention still further provides such a charge-status display system wherein the detecting means can include temperature detecting means for detecting the temperature of said main battery, the determining means can include temperature determining means for determining whether the temperature of said main battery is less than or more than a first predetermined value and less than or more than a second predetermined value, and the display unit can include display means for displaying thereon charge-stop information when it is determined that the temperature of said main battery is more than said second predetermined value and for displaying thereon on-charge information when it is determined that the temperature of said main battery is less than said second predetermined value.

The present invention still further provides such a charge-status display system wherein the detecting means can include hydrogen-gas concentration detecting means for detecting the concentration of hydrogen gas in a box for accommodating said main battery therein, the determining means can include hydrogen-gas concentration determining means for determining whether the concentration of the hydrogen gas is less than or more than a first predetermined value and less than or more than a second predetermined value, and the display unit can include display means for displaying power-reception stop information thereon when it is determined that the concentration of the hydrogen gas is more than said second predetermined value and for displaying on-charge information thereon when it is determined that the concentration of the hydrogen gas is less than said second predetermined value.

The present invention still further provides such a charge-status display system wherein the transmitting means can

IPR2026-00381
Tesla EX1009 Page 23

include timing-pulse generating means for intermittently transmitting information.

The present invention still further provides such a charge-status display system wherein the determining means can include self-diagnosing means.

The present invention still further provides such a charge-status display system wherein the determining means can determine whether the charging of said main battery is being effected, stopped and completed and said display means can effect different displays for every said determination.

The present invention still further provides such a charge-status display system wherein the transmitting means can include converting means for converting data about the status of charging of said main battery and data about the remaining capacity of said main battery into digital form and coding means for setting up new transmission data obtained by combining said digitized charge-status data and said digitized battery residual-capacity data together in code form so as to be represented in compact form, and said receiving means can include decoding means for decoding said coded transmission data in accordance with predetermined stored decoding codes.

The present invention still further provides such a charge-status display system wherein the receiving means can include display continuation signal generating means for producing a display continuation signal used to continue the present display unless new information is received within a predetermined period of time.

The present invention still further provides such a charge-status display system wherein the transmitting means can include storing means for storing vehicle-specifying information therein in advance and controlling means for reading the vehicle-specifying information stored in said storing means and transmitting said read vehicle-specifying information together with transmission information including charge-status information and battery residual-capacity information and the like.

The present invention still further provides such a charge-status display system wherein the electric vehicle can include a power transmission terminal for charging said display unit, and said display unit can include a power reception terminal electrically connected with said power transmission terminal, said display unit being capable of being charged under the action of the electric vehicle by electrically connecting said power reception terminal and said power transmission terminal to each other.

According to a second aspect of the present invention, there is provided a charge-status detecting device suitable for use in an electric vehicle, which can comprise a plurality of detecting means for detecting the operating conditions of a main battery used as a running drive source of the electric vehicle, determining means for determining a status of charging of said main battery based on the results of detection by said plurality of detecting means and outputting signals representing said status of charging, and wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission to a receiving means disposed at a location remote from said electric vehicle, said receiving means being powered by a power supply means independent of said main battery.

According to a third aspect of the present invention, there is provided a charge-status display device suitable for use in an electric vehicle, which can comprise receiving means for receiving from a wireless transmitting means disposed in an electric vehicle digitally coded signals representing a charge status of a main battery wherein said signals are transmitted via wireless transmission from said wireless transmission means, and displaying means for display means for displaying thereon said charge status of said main battery based on said results of detection and said signals received by said receiving means, and power supply means independent of said main battery for supplying power to said receiving means and said display means.

In the charge-status display system according to the present invention, which is suitable for use in the electric vehicle, the plurality of detecting means detect the conditions of charging of the electric vehicle, and the determining means determine the results of detection by the plurality of detecting means. The wireless transmitting means transmits the results of the detection and the results of the determination via wireless transmission. Then, the receiving means receives therein the results of the detection and the results of the determination, which, are transmitted from the wireless transmitting means, and the display means displays the received information thereon.

Thus, a charging operator can obtain information about the status of charging of the electric vehicle at a location remote from the electric vehicle.

The above and other objects, features and advantages of the present invention will become apparent from the following description and the appended claims, taken in conjunction with the accompanying drawings in which a preferred embodiment of the present invention is shown by way of illustrative example.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a schematic block diagram showing the functional relationships among the respective parts of a charge-status display system according to one embodiment of the present invention, which is suitable for use with an electric vehicle;

FIG. **2** is a block diagram showing the functional relationship of the components of the system that are provided in the electric vehicle shown in FIG. **1**;

FIG. **3** is a schematic view for describing the configuration of the components of the system in the electric vehicle shown in FIG. **2**;

FIG. **4** is a block diagram showing the functional relationship of the components of the system that are provided in a display card employed in the embodiment shown in FIG. **1**;

FIG. **5** is a view for describing the configuration of a display circuit employed in the embodiment shown in FIG. **1**;

FIG. **6** is a flowchart for describing, in general, a sequential routine for use in displaying information detected in accordance with the embodiment shown in FIG. **1**;

FIG. **7** is a flowchart for describing, in detail, a routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **8** is a flowchart for describing, in detail, another routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **9** is a flowchart for describing, in detail, a further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **10** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

IPR2026-00381
Tesla EX1009 Page 24

FIG. **11** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **12** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **13** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **14** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIGS. **15**(*a*), **15**(*b*) and **15**(*c*) are maps illustrating data to be used in operating the system of this invention in connection with the sequential routine shown in FIG. **6**;

FIG. **16** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **17** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **18** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **19** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**;

FIG. **20** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**; and

FIG. **21** is a flowchart for describing, in detail, a still further routine used in the sequential routine for displaying the detected information shown in FIG. **6**.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A charge-status display system according to the present invention, which is suitable for use with an electric vehicle, will hereinafter be described in detail with reference to the accompanying drawings in which a preferred embodiment is shown by way of illustrative example.

FIG. **1** is a block diagram showing the function of a charge-status display system **10** which embodies the present invention.

The charge-status display system **10** comprises an electric automobile or vehicle **12** and a portable display card **14** for displaying the state of charging of the electric vehicle **12**.

The electric vehicle **12** includes a charge control circuit **16** for effecting charge control, a main battery **18** charged by electric power supplied from an external a.c. power source, a detection circuit **20** comprised of a plurality of kinds of sensors, a control circuit **22** for determining the conditions or state of the electric vehicle **12** while being under the charge, based on respective signals outputted from the detection circuit **20** and for determining the state of pre-air-conditioning (i.e. when air-conditioning is started before or "pre" use of the vehicle while still charging the main battery) of the electric vehicle **12**, a wireless transmitter **24** for transmitting a signal indicative of the status of charging of the electric vehicle **12**, which is outputted from the control circuit **22**, and a power transmission terminal **25** for charging a battery of the display card **14** to be described later.

The display card **14** includes a receiver **26** for receiving therein the signal transmitted from the wireless transmitter **24**, a display control circuit **28** for converting the received signal into displayable data, a display circuit **30** for displaying data outputted from the display control circuit **28**, a warning circuit **31** for sounding a buzzer when various malfunctions or failures are developed, an independent battery **32** used as a power supply for the receiver **26**, the display control circuit **28** and the display circuit **30** or the like, a power reception terminal **34** plugged or fitted into the power transmission terminal **25**, a charging circuit **36** comprised of a DC/DC converter, for charging the battery **32** in response to the electric power supplied via the power reception terminal **34** from the power transmission terminal **25**.

FIG. **2** is a block diagram showing the functional relationship of the components of the system that are provided in the electric vehicle **12**. FIG. **3** is a typical layout drawing of the components of the system in the electric vehicle **12**.

A charge control electronic control unit (hereinafter called a "charge control ECU") **38** of the charge control circuit **16** is electrically connected to a charger **40**, a connector **42** for a power drive unit (hereinafter called a "PDU"), a connector **44** for charging, and a battery ventilating fan **46**. The charge control ECU **38** effects the control for energization or de-energization of these components as needed.

The control circuit **22** includes a charge-status determining ECU **48** having a residual-capacity determining function, for judging or determining whether or not the main battery **18** has been fully charged, an air-conditioning (hereinafter called an "A/C") control ECU **50** for determining the state of the vehicle room or interior air-conditioned by an air conditioner, and a transmission-signal coding ECU **52**.

The charge-status determining ECU **48** reads the remaining capacity of the main battery **18** from a battery residual capacity meter **54** and also reads the temperature of the main battery **18** using a temperature sensor **56**. Further, the charge-status determining ECU **48** detects or reads the concentration or density of hydrogen in a battery box containing the main battery **18** from the output of a hydrogen sensor **58**. Furthermore, the charge-status determining ECU **48** determines the state of leakage, i.e., undesired flow of electricity through both a drive electrical-equipment system such as a motor M and a control electrical-equipment system PDU from the output of a leakage sensor **60**, and reads both a charging current and a charging voltage from the outputs of a charging current sensor **62** and a charging voltage sensor **64**.

The charge-status determining ECU **48** determines, based on a signal outputted from a vehicle-wheel speed sensors **66**, whether or not the electric vehicle **12** while being charged is at a stop. Then, the charge-status determining ECU **48** monitors the state of electrical connection between an external power supply and the electric vehicle **12** based on a signal outputted from an external power-supply connection sensor **68** and the state of electrical connection between the main battery **18** and the PDU based on a signal outputted from a PDU-contactor connection sensor **70**. Further, the charge-status determining ECU **48** causes the charge control ECU **38** to energize or de-energize the connector **42**.

Moreover, the charge-status determining ECU **48** reads the output of a parking brake switch **72** and monitors whether or not the release of the parking brake takes place under the charge. Then, the charge-status determining ECU **48** reads the output of a charge switch **74**. Thus, the charge-status determining ECU **48** monitors whether a charging mode has been released before the completion of the charging, and effects a monitoring process based on the

IPR2026-00381
Tesla EX1009 Page 25

output of an ignition key (hereinafter called an "IGN-KEY") sensor **76** in such a manner that the IGN-KEY is not operated and the electric vehicle **12** is not maintained ready for running while the charging is being accomplished.

The A/C control ECU **50** reads set-up states of both a pre-A/C switch **78** and a room temperature setting switch **80**, and reads the room temperature detected by a room temperature sensor **82**. Thus, the A/C control ECU **50** determines, based on signals indicative of the read information, the status of air conditioning in the vehicle room under pre-air conditioning, and then makes an appropriate switching of an inside/outside air changeover damper **84** and controls an A/C blower **86**.

The transmission-signal coding ECU **52** reads signals transmitted from the charge-status determining ECU **48** and the A/C control ECU **50** and digitally codes these signals to data for transmission. Further, the transmission-signal coding ECU **52** sets up a theft-prevention signal read from a theft-prevention determining ECU **88** in code form. These coded signals are outputted to a wireless transmitter **90** from which they are transmitted.

The theft-prevention determining ECU **88** is electrically connected to a window impact sensor **92** and a door lock sensor **94** and determines based on signals detected from both sensors **92** and **94** whether or not an action toward stealing the vehicle has been effected.

FIG. **4** is a block diagram showing the functional relationship of the components of the system provided in the display card **14**. FIG. **5** is a view for describing the layout or configuration of components disposed in the display circuit **30**.

The receiver **26** of the display card **14** decodes received signal codes used for determinations of a vehicle identification signal and a reception condition, for example, and supplies the decoded codes to a display control ECU **100** of the display control circuit **28**. The display control ECU **100** controls display data used for displaying the state of the signal reception, the state of charging, the remaining capacity of the battery and the state of the pre-A/C, for example, and controls the display circuit **30** and the warning circuit **31** based on the display data.

The display circuit **30** includes indicators such as an indicator **102** for indicating the remaining capacity of the main battery **18**, an on-charge indicator **104**, a charge stop indicator **106**, a charge-completion expected time indicator **108**, an on-normal-reception indicator **110**, a pre-A/C setting temperature indicator **112**, a room or interior present-temperature indicator **114**, a pre-A/C on-operation indicator **116**, a pre-A/C operation completion indicator **118** and a theft-prevention indicator **120** and the like.

The warning circuit **31** has a buzzer **121** and activates an alarm stop switch **122** so as to stop sounding of the buzzer **121**.

The operation of the display system **10** constructed as described above, for receiving therein signals indicative of the state of the charging and the state of the electric vehicle **12** being charged, which have been detected and transmitted by the components located in the electric vehicle **12** and for displaying the same thereon, will now be described below with reference to FIGS. **6** through **21**.

FIG. **6** is a main flowchart illustrative of the above operation or sequential routine.

The control circuit **22** of the electric vehicle **12** reads an initial value such as a vehicle identification number or the like set or stored in an unillustrated storage circuit (Step S1) and reads the outputs of the respective sensors of the detection circuit **20** and the status set up by the setting switch (Step S2).

Next, the control circuit **22** computes a depth-of-discharge ("DOD") of the main battery **18** based on the output signal of the battery residual capacity meter **54**, which has been read in Step S2, and determines the fully-charged capacity of the main battery **18** from the value of the computed depth-of-discharge. Further, the control circuit **22** determines the present residual capacity DOD with respect to the fully-charged capacity (Step S3). When the charging of the main battery. **18** is initiated according to the residual capacity DOD, the charge-status determining ECU **48** judges or determines the state of charging of the main battery **18** (Step S4). Then, the charge control ECU **38** responds to emergency conditions which may occur during a battery charging period (Step S5). Then, the A/C control ECU **50** determines the state of air conditioning under the pre-A/C control (Step S6).

The transmission-signal coding ECU **52** sets up the signals outputted from the charge-status determining ECU **48** and the A/C control ECU **50** in code form (Step S7), and the wireless transmitter **24** transmits the coded signals in accordance with a transmission command or instruction (Step S8).

On the other hand, the receiver **26** of the display card **14** receives therein the signals transmitted from the wireless transmitter **24**. Further, the receiver **26** reads or selects a vehicle identification signal from these signals and determines whether or not the read identification signal represents a signal corresponding to the corresponding display card **14** (Step S9). After it has been judged from the strength of the received electric wave, i.e., the received signal, that the display card **14** falls within a receivable range (Step S10), the received signal codes are decoded (Step S11).

The display circuit **30** displays the state of charging of the main battery while being charged and the like based on the result of the decoding. When the contents of the signal relating to whether the operator is to be warned are decoded and indicate "yes", the warning circuit **31** is energized to sound the buzzer **121** (Step S12). Further, the remaining capacity of the main battery **18** is displayed on the residual-capacity indicator **102** (Step S13), and the status of the present air conditioning is displayed on the pre-A/C on-operation indicator **116** (Step S14).

Then, a the on-normal-reception indicator **110** visually displays whether or not the displayed contents are valid (Step S15). Next, the routine procedure is returned to START and the control and determination processes of Steps S1 through S15 are repeatedly executed.

The detected signals are displayed on the display card **14** in accordance with the Steps described above. On the other hand, a method of controlling the operations or routines to be executed in the respective steps illustrated in FIG. **6** will next be described below in detail with reference to FIGS. **7** through **21**.

A routine for determining the residual capacity of the main battery **18** is executed in Step S3. That is, the charge-status determining ECU **48** computes the remaining capacity DOD of the main battery **18** based on the signal read or detected from the battery residual capacity meter **54** (Step S3-1 in FIG. **7**). Then, the charge-status determining ECU **48** compares the residual capacity DOD with a capacity D1 produced when the main battery **18** is fully charged, and determines based on the result of that comparison whether or not DOD<D1 (Step S3-2). If the answer is determined to be

IPR2026-00381
Tesla EX1009 Page 26

YES (i.e., DOD<D1), then a fully-charged flag is set to "0" (Step S3-3). If the answer is determined to be NO in Step S3-2, then the fully-charged flag is set to "1" (Step S3-4) and the routine procedure is returned to the main routine (see FIG. 7).

When the fully-charged flag is set to "1" as a result of the above determination, i.e., when the residual capacity DOD of the main battery **18** is set equal to the fully-charged capacity D1, the battery residual-capacity indicator **102** of the display circuit **30** lights up and the present time is displayed on the charge-completion expected time indicator **108**. Further, the charge stop indicator **106** is lighted. When, on the other hand, the fully-charged flag is set to "0", the battery residual-capacity indicator **102** is lighted so as to correspond to the computed residual capacity DOD. Further, the charge-completion expected time determined by computation is represented by the charge-completion expected time indicator **108** and the on-charge indicator **104** will light up.

A charge-status determining subroutine of Step S4 will next be described. The charge-status determining subroutine is executed in accordance with respective conditions to be described below in such a manner that the charge-status determining ECU **48** selects any one of control modes A through E (see FIGS. **8** through **10**).

It is first determined whether or not the charge switch **74** is in an operated state (Step S4-1). If the answer is determined to be YES, it is then determined whether or not a fully-charged flag has been set to "0" (Step S4-2). If the answer is determined to be YES in Step S4-2, it is then determined whether or not the value of current detected by the external power-supply connection sensor **68** is more than or equal to a threshold value (Step S4-3).

If the answer is determined to be YES in Step S4-3, it is then determined whether or not a voltage V_B detected by the charging voltage sensor **64** falls between predetermined voltages V_O and V_1 (i.e., $V_O \leqq V_B \leqq V_1$) (Step S4-4). If the answer is determined to be YES in Step S4-4, it is then determined whether or not a current I_B detected by the charging current sensor **62** falls between predetermined currents I_O and I_1 (i.e., $I_O \leqq I_B \leqq I_1$) (Step S4-5).

If the answer is determined to be YES in Step S4-5, then the charge-status determining ECU **48** reads the output of the vehicle-wheel speed sensor **66** and determines whether or not the wheels are rotating (Step S4-6). If the answer is determined to be NO in Step S4-6, then the charge-status determining ECU **48** reads the output of the leakage sensor **60** and determines whether or not leakage current, i.e., undesired flow of electricity has been produced (Step S4-7). If the answer is determined to be NO in Step S4-7, it is judged based on the output of the PDU-contactor connection sensor **70** whether or not the contactor for the PDU is in a de-energized state (Step S4-8). If the answer is determined to be YES in Step S4-8, it is then determined that the electric power has not been supplied to the motor. The charge-status determining ECU **48** then reads the output of the IGN-KEY sensor **76** and determines whether or not a key has been inserted into the vehicle ignition (Step S4-9).

If the answer is determined to be NO in Step S4-9, it is then determined whether or not the main battery temperature T_B detected or read from the temperature sensor **56** is more than or equal to a set warning battery temperature T_O ($T_B \geqq T_O$) (Step S4-10). If the answer is determined to be NO in Step S4-10, then the charge-status determining ECU **48** reads or detects the output of the hydrogen sensor **58** and determines whether or not the detected hydrogen density or concentration D_H is more than or equal to a set warning hydrogen concentration D_O (i.e., $D_H \leqq D_O$) (Step S4-11). If the answer is determined to be NO in Step S4-11, then the charge-status determining ECU **48** selects control mode A (Step S4-12) and sets a charge-status display mode to A (Step S4-13). This charge-status display mode A represents a normal on-charge or charging state.

If the answer is determined to be YES in Step S4-11, it is then determined whether or not the detected hydrogen concentration D_H is more than or equal to a charge stop hydrogen concentration D_1 (Step S4-14). If the answer is determined to be NO in Step S4-14, then the control mode B to be described later is selected (step S4-15) and the charge-status display mode is set to A (Step S4-13). The control mode B represents that the detected hydrogen concentration D_H is higher than the warning hydrogen concentration D_O and lower than the charge stop hydrogen concentration D_1 (i.e., $D_O \leqq D_H \leqq D_1$). Therefore, the control for the ventilation of the vehicle room and the ventilation of the battery accommodating box or room is effected under control mode B.

If the answer is determined to be YES in Step S4-14 (i.e., $D_H \geqq D_1$), then control mode C is selected (Step S4-16) and the charge-status display mode is set to B (Step S4-17 in FIG. **10**). Charge-status display mode B represents a charge stop.

Further, if the answer is determined to be YES in Step S4-10 (i.e., $T_B \geqq T_O$), it is then determined whether or not the detected battery temperature T_B is more than or equal to a charge stop battery temperature T_1 (Step S4-18). If the answer is determined to be YES in Step S4-18 (i.e., $T_B \geqq T_1$), then control mode C is selected (Step S4-16). If the answer is determined to be NO in Step S4-18, then control mode D is selected (S4-19) and the charge-status display mode is brought to A (Step S4-13).

If, on the other hand, the results of the determinations in Steps S4-3, S4-4, S4-5 or S4-8 are selected as NO or Steps S4-6, S4-7 or S4-9 are selected as YES, then the control mode E is selected (Step S4-20 in FIG. **10**) and the charge-status display mode is set to B (Step S4-17) to stop or prevent charging.

When the fully-charged flag is represented as "1" as a result of the determination in Step S4-2, it is determined that the battery has been fully charged, and the control mode E for effecting the charge completion control is selected (Step S4-21 in FIG. **10**). The charge-status display mode is set to C which represents the completion of the battery charging (Step S4-22).

If the answer is determined to be NO in Step S4-1, then the control mode E indicative of the completion of the battery charging is selected (Step S4-23). The charge-status display mode is brought to D which represents "OFF" (Step S4-24).

The charge-status determining subroutine is executed in accordance with the above Steps. On the other hand, battery charging control is executed in Step S5 in accordance with the control modes A through E which have been determined in the charge-status determining subroutine. Therefore, the aforementioned respective charge control modes A through E will now be described with reference to FIGS. **11** and **12**.

Control mode A represents that the battery is being charged in a normal state. Under control mode A, contacts of the connector **44** are made conductive (Step S5-A1) and the battery ventilating fan **46** is de-energized (Step S5-A2).

Control mode B represents that the detected hydrogen density or concentration D_H in the battery accommodating

IPR2026-00381
Tesla EX1009 Page 27

room falls between the warning hydrogen concentration D_O and the charge stop hydrogen concentration D_1 (i.e., $D_O<D_H<D_D$). Thus, under control mode B, the hydrogen in the battery accommodating box or room is discharged to the outside of the vehicle and the room or interior of the vehicle is ventilated while the battery is being charged continuously.

More specifically, the contacts of the connector **44** are brought to the conducting state (Step **S5-B1**) and the battery ventilating fan **46** is energized (Step **S5-B2**). Further, the inside/outside air changeover damper **84** is switched to the outside air introduction side (Step **S5-B3**) and the A/C blower **86** is energized so as to provide the maximum exhaust capacity (Step **S5-B4**).

Control mode C represents that the detected battery temperature T_B is more than or equal to the charge stop battery temperature T_1 or the detected hydrogen concentration D_H in the battery accommodating box or room is more than or equal to the charge stop hydrogen concentration D_1.

Therefore, the contacts of the connector **44** are made non-conductive (Step **S5-C1**) to stop the charging of the main battery **18** and the battery ventilating fan **46** is energized (Step **S5-C2**). Further, the inside/outside air changeover damper **84** is changed over to the outside air introduction side (Step **S5-C3**) and the A/C blower **86** is energized to produce the maximum exhaust capacity (Step **S5-C4**), thereby ventilating the battery accommodating box or room and the vehicle interior.

Control mode D represents that the detected battery temperature T_B is more than the warning battery temperature T_O and less than the charge stop battery temperature T_1 (i.e., $T_O<T_B<T_1$). Control mode D is used to ventilate the battery accommodating room while the battery charging is being continuously effected and to lower the temperature of the main battery **18**. To this end, the contacts of the connector **44** are made conductive (Step **S5-D1**) and the battery ventilating fan **46** is energized (Step **S5-D2**).

Control mode E represents a charge completion mode. Therefore, the contacts of the connector **44** are rendered non-conductive (Step **S5-E1**) so as to stop the charging of the main battery **18**. Further, the battery ventilating fan **46** is deenergized to terminate the ventilation of the battery accommodating box or room (Step **S5-E2**).

Next, a vehicle-room A/C status determining subroutine to be executed in Step **S6** will be described with reference to FIG. **13**.

When the charging of the main battery **18** is started, the A/C control ECU **50** determines whether or not the pre-A/C switch **78** is in an operated state (Step **S6-1**) indicating whether the vehicle operator wishes to have the interior of the vehicle air-conditioned before (i.e. "pre") the anticipated time for driving the vehicle. If the answer is determined to be YES, then a pre-A/C flag is set to "1" (Step **S6-2**). It is then determined whether or not the room temperature T_R read by the room temperature sensor **82** is more than or equal to a temperature T_{SET} set by the room temperature setting switch **80** (Step **S6-3**). If $T_R \geqq T_{SET}$, then a room status flag is set to "1" (Step **S6-4**) and the routine procedure is returned to the main routine.

If the answer is determined to be NO in Step **S6-1**, then the pre-A/C flag is set to "0" (Step **S6-5**) and the room status flag is set to "0" (Step **S6-6**). Further, the routine procedure is returned to the main routine. If the answer is determined to be NO in Step **S6-3**, i.e., if the temperature of the vehicle interior is less than the set temperature T_{SET}, it is then unnecessary to cool the vehicle room by the air conditioner. Therefore, the room status flag is set to "0".

A subroutine for coding a transmission signal, which is executed in Step **S7**, will next be described with reference to FIGS. **14** and **15**.

FIG. **15**(*a*) shows a map produced by setting up the remaining capacity of the main battery **18** and the charge-status display modes representative of the on-charge, the charge completion, the charge stop and the OFF modes in code form. FIG. **15**(*b*) illustrates a map created by coding the room status flag under the A/C and the pre-A/C status flag. FIG. **15**(*c*) shows a map for obtaining transmission codes from the coded data produced from the maps shown in FIGS. **15**(*a*) and **15**(*b*).

The transmission-signal coding ECU **52** reads data indicative of the battery residual capacity DOD outputted from the charge-status determining ECU **48**, e.g. data corresponding to 10%, and data determined in Step **S4** and outputted from the charge control ECU **38**, e.g., data indicative of the on-charge defined by the charge-status display mode A. The transmission-signal coding ECU **52** determines data, for example, α="Cl" based on the data indicative of the residual capacity, i.e., the data corresponding to 10% and the data indicative of the on-charge by reference to the map shown in FIG. **15**(*a*) (Step **S7-1**).

On the other hand, the transmission-signal coding ECU **52** judges or determines the pre-A/C status by reference to the map shown in FIG. **15**(*b*) in accordance with the signals indicative of the pre-A/C status, which are outputted to the transmission signal coding ECU **52** from the A/C control ECU **50**, e.g., "1" set of the pre-A/C control flag and "0" set of the room status flag, thereby determining coded data β="El" (Step **S7-2**).

Then, data γ_{b23} is determined based on the data α="Cl" and the data β="El" by reference to the map shown in FIG. **15**(*c*), thereby producing coded data corresponding to the data γ_{b23} (Step **S7-3**).

A transmission command or instruction subroutine is next executed in Step **S8** as illustrated in FIG. **16**. That is, the output of the IGN-KEY sensor **76** is first read and it is determined whether or not the key has been inserted into the ignition (Step **S8-1**). If it is determined that the key is in a non-inserted state, i.e. NO, then the charge-status determining ECU **48** and the charge control ECU **38** make self-diagnoses (Step **S8-2**). It is then determined whether or not the two ECUs **48** and **38** are normal (Step **S8-3**). If the answer is determined to be YES, it is then determined whether or not a timer flag of a timer for transmission has been set to "1" (Step **S8-4**).

If the answer is determined to be YES in Step **S8-4**, then the timer is in operation. It is therefore determined whether or not an elapsed time interval t of the timer has reached a predetermined transmission time interval t_O (Step **S8-5**). If the answer is determined to be YES, then the digitized data γ referred to above is transmitted (Step **S8-6**) and the timer is reset (Step **S8-7**). Further, the timer flag is set to "0" (Step **S8-8**) and the routine procedure is returned to the main routine.

If the answer is determined to be NO in Step **S8-5**, then the routine procedure is returned to the main routine. If the answer is determined to be NO in Step **S8-4**, i.e., if it is determined that the timer is in non-operation, then the timer is energized to start counting (Step **S8-9**) and the timer flag is set to "1" (Step **S8-10**). Thereafter, Step **S8-5** and Steps subsequent to Step **S8-5** are executed.

If it is determined in Step **S8-1** that the key has been inserted into the ignition, then the timer is held in a reset state until the key is extracted from the ignition (Step **S8-11**).

IPR2026-00381
Tesla EX1009 Page 28

Thereafter, the timer flag is set to "0" (Step **S8-12**) and the routine procedure is returned to the main routine. In this case, the transmission data is intermittently transmitted in accordance with the transmission time interval t_O set by the transmission timer.

The signals indicative of the charge-status display mode, the control mode and the A/C status, which are set up in accordance with the above-described steps, are transmitted from the electric vehicle **12** to the display card **14** by wireless transmission.

Next, a method of receiving and reading the transmitted signals by the receiver **26** and processing the same with the display card **14** will be described in detail with reference to FIGS. **17** through **21**.

A reception-status determining subroutine and a vehicle identification signal determining subroutine are executed in Steps **9** and **10** respectively. That is, it is determined whether or not the receiver **26** has received a signal output transmitted as data (Step **S9-1**). If the answer is determined to be YES, then a vehicle identification signal of the received data is compared with the vehicle identification signal which has been stored in the display card **14** in advance. (Step **S9-2**).

If the answer is determined to be YES in Step **S9-2**, then a timer for reception is reset to an initial state and thereafter started (Step **S9-3**). Afterwards, a display hold flag is set to "0" to release a display hold (Step **S9-4**) and the routine procedure is returned to the main routine.

If the answer is determined to be NO in Step **S9-1**, it is then determined whether or not an elapsed time interval t_R of the reception timer when in operation exceeds a predetermined time-up time interval t_{RO} (Step **S9-5**). If the answer is determined to be NO, then the display hold flag is set to "0" in Step **S9-4**.

If the answer is determined to be YES in Step **S9-5** or if the answer is determined to be NO in Step **S9-2**, then the display hold flag is set to "1" (Step **S9-6**) and the routine procedure is returned to the main routine.

When reception is discontinued and the reception timer has timed out, the display is held or fixed. Even when the reception is being made and the vehicle identification signal does not match the stored vehicle identification signal, the display can be held, thereby making it possible to display a suitable charge status at all times.

A charge-status display warning control subroutine is executed in Step **S12** illustrated in FIG. **18** as follows. The display control ECU **100** determines whether or not the display hold flag has been brought to "0" (Step **S12-1**). If the answer is determined to be YES, it is then determined whether or not a charge status mode is of a charge status mode B for stopping the charging process in the course of the charging (Step **S12-2**). If the answer is determined to be YES in Step **S12-2**, then the display control ECU **100** turns off the on-charge indicator **104** and causes the charge stop indicator **106** to blink (Step **S12-3**). Further, the warning circuit **31** is energized to sound the buzzer **121** (Step **S12-4**) and the routine procedure is returned to the main routine.

If the answer is determined to be NO in Step **S12-2**, then the display control ECU **100** causes the on-charge indicator **104** to blink (Step **S12-5**). Thereafter, the routine procedure is returned to the main routine. If the answer is determined to be NO in Step **S12-1**, i.e., if the display is held, then the routine procedure is returned to the main routine (see FIG. **18**).

Next, a battery residual-capacity display control subroutine to be executed in Step **S13** will be described with reference to FIG. **19**.

Under the battery residual-capacity display control subroutine, the display control ECU **100** determines whether or not a display hold flag has been set to "0" (Step **S13-1**). If the answer is determined to be YES, it is then determined that the remaining capacity DOD has been displayed. It is then judged whether or not the charge-status display mode has been brought to E (Step **S13-2**). If the answer is determined to be YES in Step **S13-2**, it is then determined that a charging process has been completed. At this time, the residual capacity DOD is displayed on the residual-capacity indicator **102** (Step **S13-3**). Then, the warning circuit **31** is energized to sound the buzzer for informing an operator of the completion of battery charging (Step **S13-4**) and the routine procedure is returned to the main routine.

If the answer is determined to be NO in Step **S13-2**, it is then determined whether or not the charge-status display mode has been set to A (Step **S13-5**). If the answer is determined to be YES in Step **S13-5**, it is then determined that the battery charging is normally in progress. The residual-capacity indicator **102** for indicating the residual capacity DOD at this time is caused to blink (Step **S13-6**) and the routine procedure is returned to the main routine. If the answer is determined to be NO in Step **S13-5**, the residual-capacity indicator **102** for indicating the remaining capacity of the main battery **18** is lighted up (Step **S13-7**) and the routine procedure is returned to the main routine. If the answer is determined to be NO in Step **S13-1**, it is then determined that the residual capacity DOD has not been displayed. Hence, the routine procedure is returned to the main routine.

An interior or room status display control subroutine to be executed in Step **S14** will next be described with reference to FIG. **20**.

The display control ECU **100** determines whether or not a display hold flag has been set to "0" (Step **S14-1**). If the answer is determined to be YES, it is then determined whether or not a room status display flag has been set to "1" (Step **S14-2**). If the answer is determined to be YES in Step **S14-2**, it is then judged that the room status has been displayed and the pre-A/C operation completion indicator **118** is lighted (Step **S14-3**). It is then determined whether or not a pre-A/C flag has been set to "1" (Step **S14-4**). If the answer is determined to be YES in Step **S14-4**, then the pre-A/C on-operation indicator **116** is lighted up (Step **S14-5**).

Next, the present temperature of the vehicle room is indicated on the room present-temperature indicator **114** (Step **S14-6**) and the temperature of the pre-A/C is displayed on the pre-A/C setting temperature indicator **112** (Step **S14-7**). Thereafter, the routine procedure is returned to the main routine.

If the answer is determined to be NO in Step **S14-2**, then the display control ECU **100** turns off the pre-A/C operation completion indicator **118** (Step **S14-8**) and executes the Step **S14-4** in which the pre-A/C flag determining routine is executed and the steps subsequent to Step **S14-4**.

If the answer is determined to be NO in Step **S14-4**, then the display control ECU **100** turns off the pre-A/C on-operation indicator **116** (Step **S14-9**). Further, the display control ECU **100** turns off the room present-temperature indicator **114** (Step **S14-10**) and the pre-A/C setting temperature indicator **112** (Step **S14-11**). Thereafter, the routine procedure is returned to the main routine.

Further, if the answer is determined to be NO in Step **S14-1**, then the routine procedure is returned to the main routine.

IPR2026-00381
Tesla EX1009 Page 29

A reception-status display control subroutine will next be described with reference to FIG. **21**.

The reception-status display control subroutine is executed in the following manner. That is, the display control ECU **100** determines whether or not a display hold flag has been set to "0" (Step **S15-1**). If the answer is determined to be YES in Step **S15-1**, then the on-normal-reception indicator **110** is lighted (Step **S15-2**) and the routine procedure is returned to the main routine. If the answer is determined to be NO in Step **S15-1**, it has then been determined that one or more of the ECUs has been damaged or impaired or the receiver **26** cannot normally receive the desired data because the wireless transmitter **24** and the receiver **26** are spaced more than a communicable distance away from each other. Hence, the on-normal-reception indicator **110** is turned off (Step **S15-3**) and the routine procedure is returned to the main routine.

According to the present embodiment, as has been described above, the transmission signals indicative of both the residual capacity of the main battery **18** and the charge-status display mode, which have been detected by the detection circuit **20** of the electric vehicle **12**, and the transmission signal for specifying the vehicle are set up in code form, thereby making it possible to make these transmission signals very compact. The compacted code is transmitted by wireless transmitter **24**. Then, the transmitted code is received by the receiver **26** and displayed on the display circuit **30** under the control of the display control circuit **28**. Therefore, the charging operator can monitor the status of charging and the state of the vehicle while the main battery **18** is being charged at a location spaced from the electric vehicle **12**. The display card **14** can be returned to the electric vehicle **12** and terminal **34** can be plugged into power transmission terminal **25** for periodically recharging the independent battery **32** of the display card **14**. During such recharging of independent battery **32**, the operator can refer to the display card **14** for determining the status of the charging of the main battery **18**.

According to the charge-status display system of the present invention, which is suitable for use with the electric vehicle, information indicative of the state of the charging of the electric vehicle can be obtained at a location remote from the electric vehicle. Thus, the charging operator is no longer required to remain with the vehicle over the long period of time that the main battery is being charged.

Having now fully described the invention, it will be apparent to those skilled in the art that many changes and modifications can be made without departing from the spirit or scope of the invention as set forth herein.

What is claimed is:

1. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electrical vehicle information indicative of a status of charge of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

an external AC power supply source for recharging said main battery;

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

means for detachably connecting said main battery to said power supply source, said main battery being connected to said power supply source during charging of said main battery and disconnected from said power supply source while said main battery is under use as said running drive source of the electric vehicle,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in the electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a portable display unit removable from the electric vehicle to a location remote from the electric vehicle, said display unit comprising,

power supply means independent of said main battery for supplying power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means.

2. A charge-status display system according to claim **1**, wherein said detecting means includes voltage detecting means for detecting a charging voltage of said main battery, said determining means includes voltage determining means for determining whether said charging voltage falls within a predetermined range.

3. A charge-status display system according to claim **1**, wherein said detecting means includes current detecting means for detecting a charging current of said main battery, said determining means includes current determining means for determining whether said charging current falls within a predetermined range.

4. A charge-status display system according to claim **1**, wherein said detecting means includes temperature detecting means for detecting the temperature of said main battery, said determining means includes temperature determining means for determining whether the temperature of said main battery is more than a first predetermined value and less than a second predetermined value, and said display unit includes displaying means for displaying thereon information indicating a charge-stop state when it is determined that the temperature of said main battery is more than said second predetermined value and for displaying thereon information indicating an on-charge state when it is determined that the temperature of said main battery is less than said second predetermined value.

5. A charge-status display system according to claim **1**, wherein said determining means includes self-diagnosing means.

6. A charge-status display system according to claim **1**, wherein said determining means determines whether the charging of said main battery is being effected, stopped and completed and said display means effects different displays for each said determination.

7. A charge-status display system according to claim **1**, wherein said wireless transmitting means includes storing means for storing vehicle-specifying information therein in advance and controlling means for reading the vehicle-specifying information stored in said storing means and transmitting said read vehicle-specifying information

IPR2026-00381
Tesla EX1009 Page 30

together with transmission information including charge-status information and battery residual-capacity information.

8. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electric vehicle information indicative of a status of charging of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from said electric vehicle and disposed at a location remote from said electric vehicle, said display unit comprising,

power supply means independent of said main battery for supply power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

wherein said detecting means includes a rotation sensor for detecting the rotation of at least one wheel of the electric vehicle.

9. A charge-status display system, for use with an electric vehicle for transmitting via wireless transmission from the electrical vehicle information indicative of a status of charge of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

an external AC power supply source for recharging said main battery;

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

means for detachably connecting said main battery to said power supply source, said main battery being connected to said power supply source during charging of said main battery and disconnected from said power supply source while said main battery is under use as said running drive source of the electric vehicle,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in the electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from the electric vehicle and disposed at a location remote from the electric vehicle, said display unit comprising,

power supply means independent of said main battery for supplying power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

wherein said detecting means includes leakage detecting means for detecting undesired flow of electricity through a running-drive electric system and a control electric system, said determining means includes leakage determining means for determining whether the amount of said undesired flow of electricity falls within a predetermined range.

10. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electrical vehicle information indicative of a status of charge of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

an external AC power supply source for recharging said main battery;

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

means for detachably connecting said main battery to said power supply source, said main battery being connected to said power supply source during charging of said main battery and disconnected from said power supply source while said main battery is under use as said running drive source of the electric vehicle,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in the electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from the electric vehicle and disposed at a location remote from the electric vehicle, said display unit comprising,

power supply means independent of said main battery for supplying power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

IPR2026-00381
Tesla EX1009 Page 31

wherein said detecting means includes connection detecting means for detecting the state of connection or non-connection between a power drive unit and said main battery.

11. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electric vehicle information indicative of a status of charging of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from said electric vehicle and disposed at a location remote from said electric vehicle, said display unit comprising,

power supply means independent of said main battery for supply power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

wherein said detecting means includes hydrogen-gas concentration detecting means for detecting the concentration of hydrogen gas in a box for accommodating said main battery therein, said determining means includes hydrogen-gas concentration determining means for determining whether the concentration of the hydrogen gas is more than a first predetermined value and less than a second predetermined value, and said display unit includes display means for displaying information indicative of a power-reception stop state thereon when it is determined that the concentration of the hydrogen gas is more than said second predetermined value and for displaying information indicative of charging state when it is determined that the concentration of the hydrogen gas is less than said second predetermined value.

12. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electric vehicle information indicative of a status of charging of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from said electric vehicle and disposed at a location remote from said electric vehicle, said display unit comprising,

power supply means independent of said main battery for supply power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

wherein said transmitting means has a timer for intermittently transmitting information.

13. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electric vehicle information indicative of a status of charging of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from said electric vehicle and disposed at a location remote from said electric vehicle, said display unit comprising,

power supply means independent of said main battery for supply power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

wherein said wireless transmitting means includes converting means for converting data about the status of charging of said main battery and data about the remaining capacity of said main battery into digital form and coding means for setting up new transmission data obtained by combining said digitized charge-status data and said digitized battery residual-capacity data together in code form so as to be represented in compact form, and said receiving means includes decoding means for decoding said coded transmission

IPR2026-00381
Tesla EX1009 Page 32

data in accordance with predetermined stored decoding codes.

14. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electric vehicle information indicative of a status of charging of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from said electric vehicle and disposed at a location remote from said electric vehicle, said display unit comprising,

power supply means independent of said main battery for supply power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

wherein said receiving means includes display continuation signal generating means for producing a display continuation signal used to continue the present display unless new information is received within a predetermined period of time.

15. A charge-status display system for use with an electric vehicle for transmitting via wireless transmission from the electric vehicle information indicative of a status of charging of a main battery used as a running drive source of the electric vehicle and receiving and displaying the information at a location remote from the electric vehicle, said system comprising:

a charge-status detection unit disposed in the electric vehicle, said detection unit comprising,

a plurality of detecting means for detecting a plurality of operating conditions of said main battery during charging,

determining means for repeatedly determining a present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging, and

wireless transmitting means disposed in said electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission during battery charging from said detection unit; and

a display unit separated from said electric vehicle and disposed at a location remote from said electric vehicle, said display unit comprising,

power supply means independent of said main battery for supply power to said display unit,

receiving means for receiving therein said signals transmitting by said wireless transmitting means, and

display means for displaying thereon said present status of charging of said main battery based on the plurality of operating conditions detected by said plurality of detecting means and said signals received by said receiving means,

wherein said electric vehicle has a power transmission terminal for charging said display unit, and said display unit has a power reception terminal for electrically connecting with said power transmission terminal, said display unit being charged with the charging of the electric vehicle by electrically connecting said power reception terminal and said power transmission terminal to each other.

16. A charge-status detecting device for use with an electric vehicle comprising:

a plurality of detecting means for detecting respective operating conditions of a main battery used as a running drive source of the electric vehicle during charging of said main battery;

means for detachably connecting said main battery to an external AC power supply source, said main battery being connected to said power supply source during charging of said main battery and disconnected from said power supply source while said main battery is under use as said running drive source of the electric vehicle;

determining means for repeatedly determining a present status of charging of said main battery based on operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging;

wireless transmitting means disposed in the electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission to a portable receiving means removable from the electric vehicle to a location remote from the electric vehicle, said receiving means being powered by a power supply means independent of said main battery.

17. A charge-status detecting device for use with an electric vehicle comprising:

a plurality of detecting means for detecting a plurality of operating conditions of a main battery used as a running drive source of the electric vehicle;

means for detachably connecting said main battery to an external AC power supply source, said main battery being connected to said power supply source during charging of said main battery and disconnected from said power supply source while said main battery is under use as said running drive source of the electric vehicle;

determining means for repeatedly determining a present status of charging of said main battery based on plurality of operating conditions detected by said plurality of detecting means and outputting signals representing said present status of charging;

wireless transmitting means disposed in the electric vehicle for digitally coding said signals and for transmitting said signals via wireless transmission;

portable receiving means removable from the electric vehicle to a location remote from the electric vehicle for receiving said signals and displaying said present

IPR2026-00381
Tesla EX1009 Page 33

status of charging said main battery based on the plurality of detecting means; and

power supply means independent of said main battery for supplying power to said receiving means at a location remote from the electric vehicle.

18. A charge-status display device for use with an electric vehicle comprising:

means for detecting and determining a present charging status of a main battery of the electric vehicle and transmitting via wireless transmission said present charging status;

means for detachably connecting said main battery to an external AC power supply source, said main battery being connected to said power supply source during charging of said main battery and disconnected from said power supply source while said main battery is under use as a running drive source of the electric vehicle;

portable receiving means removable from the electric vehicle to a location remote from the electric vehicle for receiving said present charging status transmitted from said detecting and determining means;

display means for displaying said present charging status received by said receiving means; and

power supply means independent of said main battery for supplying power to said receiving means and said display means at a location remote from the electric vehicle.

* * * * *