

DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:	PCT/EP2016/082876
International filing date:	29 December 2016 (29.12.2016)
Document type:	Certified copy of priority document
Document details:	Country/Office: EP
	Number: 15202962.5
	Filing date: 29 December 2015 (29.12.2015)
Date of receipt at the International Bureau:	14 January 2017 (14.01.2017)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-bis)

Bescheinigung

Certificate

Attestation

Die angehefteten
Unterlagen stimmen mit der
als ursprünglich eingereicht
geltenden Fassung der auf
dem nächsten Blatt
bezeichneten europäischen
Patentanmeldung überein.

The attached documents are
exact copies of the text in
which the European patent
application described on the
following page is deemed to
have been filed.

Les documents joints à la
présente attestation sont
conformes au texte,
considéré comme
initialement déposé, de la
demande de brevet
européen qui est spécifiée à
la page suivante.

Patentanmeldung Nr.

Patent application No.

Demande de brevet n°

15202962.5 / EP15202962

The organization code and number of your priority application, to be used for filing abroad under the Paris Convention, is EP15202962.

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.



V. Joseph

Anmeldung Nr:
Application no.: 15202962.5
Demande no :

Anmeldetag:
Date of filing: 29.12.15
Date de dépôt :

Anmelder / Applicant(s) / Demandeur(s):

Danapak Flexibles A/S
Strudsbergsvej 3
4200 Slagelse/DK

Bezeichnung der Erfindung / Title of the invention / Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, oder falls die Anmeldung in einer Nicht-Amtssprache des EPA eingereicht wurde, siehe Beschreibung bezüglich ursprünglicher Bezeichnung.

If no title is shown, or if the application has been filed in a non-EPO language, please refer to the description for the original title.

Si aucun titre n'est indiqué, ou si la demande a été déposée dans une langue autre qu'une langue officielle de l'OEB, se référer à la description pour le titre original.)

A method for providing an extreme chemical resistant film

In Anspruch genommene Priorität(en) / Priority(Priorities) claimed / Priorité(s) revendiquée(s)

Staat/Tag/Aktenzeichen / State/Date/File no. / Pays/Date/Numéro de dépôt:

Am Anmeldetag benannte Vertragsstaaten / Contracting States designated at date of filing / Etats contractants désignées lors du dépôt:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO RS SE SI SK SM TR

The present invention relates to a method for providing an extreme chemical resistant film whereby a tie layer and a contact layer are coextruded with a base layer, such as a metal foil, as well as films and laminates obtained by the method and uses of the films and laminates to wrap aggressive chemical substances such as lidocaine and rivastigmine.

Background of the invention

In the pharmaceutical industry substances, including highly aggressive substances such as Rivastigmine and Lidocaine, are packed as tablets in inhalers, patches etc. resulting in special requirements for the packing, laminate, or film for sealing these substances in order to ensure that no adverse degradation takes place.

One common example is the problem relating to the packaging of nicotine, in particular as nicotine patches, because nicotine is highly aggressive towards its environment and highly volatile. These properties are problematic for the consumer safety and product durability if not addressed, because it is important that the amount of nicotine in, for example a tablet, gum or a patch is stable and complies with the product specification. Further, it is important to avoid adverse reactions between the packaging and the pharmaceutical substance. Additionally, from a business perspective a long stable shelf time is highly desirable. Thus, the chemical requirements of a packaging, film or laminate are typically:

- Resistance towards highly aggressive substances such as nicotine.
- Inert properties for ensuring that chemical compounds do not migrate from the exterior environment of for example a laminate, through the laminate getting into contact with a sealed substance;
- Possibly ensuring that the packaging is child proof to increase safety of potentially hazardous compounds.

A known polymer that fulfils the requirements of extreme chemical resistance and inert properties is a polyacrylonitrile (PAN) based film, which is sold for example as resins under the trademark Barex®, which is manufactured *i.a.* by the company Ineos. Barex® is widely used and approved for drugs and food applications and is used because it is a good barrier towards oxygen, nitrogen and carbon dioxide compared to other common polymers, and because it has excellent chemical resistance towards different functional

groups such as hydrocarbons, ketones, esters, alcohols, bases and acids and/or pharmaceuticals such as nicotine. Furthermore, extruded Barex® resin is heat stable and therefore weldable at a temperature around 160 - 220°C, which makes it possible to use in flexible packagings. However, Barex® is sold at a high prize due to the difficulties in the production and subsequent extrusion to film resulting in a high loss of material. Furthermore, the water and oxygen resistance of Barex® is not satisfactory for all purposes.

Another solution can be found in WO 00/44559 disclosing a material for packaging nicotine containing products (e.g. patches, tablets, lozenges, nasal spray), wherein the material comprises a polymer based on dimethyl-2,6-naphthalene dicarboxynate and/or 2,6-naphthalene dicarboxylic acid monomers. Further, it is disclosed that a polymeric film is combined with other barrier materials in a laminate to further improve the barrier characteristic of the laminate. The preferred material for a laminate is aluminium due to its good oxygen and water barrier properties.

In addition to the barrier properties, in particular for pharmaceuticals, it is important that the concentration of the substances is stable and reliable, which also poses requirements of the packaging and laminates in terms of inertness and permeability.

Hence, given the increased market and demands for packagings, there is an instant need for finding solutions for packaging, of in particular highly aggressive substances and pharmaceuticals, which fulfil all the requirements while still being economical.

25

Summary of the invention

With this background it is an object of the present invention to provide solutions that meet one or more of the needs described above, that is, *i.a.* provide impermeability and inertness to a packaging. Furthermore, it is an object to provide a laminate that is weldable at temperatures suitable for the manufacture of flexible wrappings, such as for use in preparing packagings for patches. It is a further object to provide methods and products that are cost efficient without compromising the quality of the products.

Accordingly, in a first aspect this is solved by a method for providing an aggressive chemical resistant film, said method comprising the steps of:

- i) providing a base layer, which is water and/or oxygen resistant;
- ii) coextruding a layer comprising a tie layer and a contact layer to provide a coextrusion layer;
- iii) coating the coextrusion layer to the base layer;
- 5 iv) allowing the coextrusion layer coated to the base layer to adhere to the base layer to provide the aggressive chemical resistant film comprising the tie layer and the contact layer formed as a coextrusion layer coated to the base layer, wherein the tie layer comprises at least one layer and wherein the contact layer comprises a polymer having a RED value based on Hansens
- 10 Solubility parameter (HSP) towards an aggressive chemical of > 0.8 , more preferred a RED value in the range of 0.8 to 10, even more preferred 0.8 to 5, and most preferred between 1 to 2.

It has surprisingly been found that when coextruding the tie layer and the contact layer according to the invention, the respective layers can be

15 thinner while maintaining the overall mechanical and chemical robustness of the final film and laminates and wrappings made with the film. The coextrusion also results in a better adherence of the various layers resulting in a homogenous film in which the layers do not separate.

While it was previously believed that usable polymers should be hydrophobic (in order to repel water from the surroundings), the present inventors have found that by providing the film according to the invention where the coextrusion layer comprises a tie layer and a contact layer, and where the contact layer comprises a polymer having a relative energy difference (RED) value in the range 0.8 to 10 relative to the aggressive substance, it

20 has surprisingly turned out that the desired effect of the laminate being impermeable to aggressive compounds, such as nicotine, rivastigmine and lidocaine, while still providing a barrier to external factors such as water/moist and oxygen, is obtained.

A polymer candidate for use as a contact layer in the present invention is selected by calculating the RED value, which is a value used to predict the solubility of one material in another and form a solution. In the present invention the RED values for various polymer/solvent systems have been calculated, wherein the polymer is the polymer forming the contact layer, and the solvent is an aggressive chemical substance such as nicotine, rivastigmine and lidocaine etc.

30

35

The RED value for the polymer and the aggressive chemical substance is calculated by using the theory of the Hansen solubility Parameters (HSP), which is described in C.M. Hansen: "Hansen Solubility Parameters, A User's Handbook", CRC Press, Boca Raton, 1999.

- 5 The HSP system between the polymer and the aggressive chemical substance is described by parameters set up in a 3 dimensional coordinate system:
- δ_D for dispersion cohesion energy
 - δ_P for dipolar cohesion energy
 - 10 — δ_H for hydrogen bonding cohesion energy

The HSP distance, R_a , between polymer and the aggressive chemical substance is given by:

$$R_a^2 = 4(\Delta \delta_D)^2 + \Delta \delta_P^2 + \Delta \delta_H^2$$

- 15 The Δ indicates the difference in the given parameter for the aggressive substance and the polymer.

The relation between the HSP distance, R_a and RED is given as:

$$RED = R_a/R_o$$

- Where R_o is the interaction radius, which determines the radius of
- 20 the sphere in Hansen space, and the center are the three Hansen parameters. All values are calculated or determined with empiric data and it is known to the person skilled in the art how to calculate the values. The obtained RED value indicates whether or not the polymer is likely to dissolve in the aggressive chemical substance or not:

- 25 RED < 1 the polymer and the aggressive chemical substance will dissolve
 RED = 1 the polymer and the aggressive chemical substance will partially dissolve
 RED > 1 the polymer and the aggressive chemical substance will not dissolve

- 30 The resulting RED value is used to give an indication of the likelihood of dissolution or not.

All values can be calculated using the Hansen Solubility Parameter in Practice by (HSPiP) Software, commercially available at <http://hansen-solubility.com>.

- 35 Contact layer polymers according to the invention surprisingly turned

out to have a RED value in the range from 0.8 and higher, preferably, 0.8 to 10 and more preferred 0.8 to 5 and most preferred 1 to 2. It is highly unexpected that polymers which in theory range from being soluble to insoluble with an aggressive substance to be packed fulfill the requirements set for
5 films according to the invention as is supported by the examples provided here with.

The base layer, which is water and/or oxygen resistant, is selected from the group consisting of a metal foil, preferably aluminum foil, a polymer, such as a polymer made from polyamide, polyvinylidene chloride, silicon or
10 aluminium oxide coated polyesters, and/or fluoro polymers. According to the invention water and/or oxygen resistant is preferably encompassing materials having an oxygen transfer rate (OTR) equal to or below $1 \text{ cm}^3/\text{m}^2/24\text{hr}/\text{bar}$ according to ASTM standard D3985 at 23°C and 0% RH and/or water (or moisture) vapor transfer rate (WVTR) equal to or below $1 \text{ g}/\text{m}^2/24\text{hr}$ accord-
15 ing to ASTM standard F1249 at 38°C and 90%RH, preferably both the WVTR and the OTR are below 0.01.

According to the invention, the base layer of the film is selected to provide a number of properties to the film and a laminate and packaging comprising the film. The base layer may give desired barrier and support
20 properties to the final laminate. Furthermore, the base layer may in one embodiment be a gas and water impermeable base layer, more preferably a water and/or oxygen resistant base layer.

In embodiments where the contact layer is hygroscopic the base layer is preferably made of a metal foil, preferably aluminum.

25 Aluminum is price competitive, a superior barrier of all gases and moisture and furthermore similar to other metal-like materials aluminium has good dead-fold properties, i.e. it does not unfold once folded, it reflects radiant heat, and gives a decorative appeal to laminates and packages.

According to the invention the tie layer is selected to provide sufficient
30 adhesion between the base layer and the coextrusion layer. The tie layer may give melt strength and support the coextrusion coating of both the tie layer and the contact layer. It is preferred that the melting profile of the tie layer polymers and the contact layer polymers are in the same range to provide optimal films that do not separate. Preferably both layers comprise pol-
35 ymers that melt at the operating temperature of the process of the invention

and even more preferred the melting profiles (i.e. melting points) should differ with less than 30°C, preferably with 0-15°C, such as 5-15°C.

In one embodiment the tie layer is made of 1, 2, 3, 4 or 5 layers. In this way, the properties of the film and resulting laminates and packagings
5 may be improved to accommodate the specific chemical and physical properties of the contact layer and/or the base layer.

In a further embodiment all the layers are coextruded with the contact layer for a simplified processing and for ensuring homogeneity of the layers.

10 In a further embodiment the tie layer is constituted of one layer where the layer is made of a copolymer made of a material selected from a copolymer of ethylene and acrylic acid, ethylene and methacrylic acid and a terpolymer comprising ethylene, acrylic ester and a third polymer, which third polymer is preferably a glycidyl methacrylate, and more preferably a maleic
15 anhydride. Most preferably the tie layer has a melting profile similar to that of the contact layer.

According to the invention the contact layer must be chemically resistant to the aggressive substance and excipient if present ultimately to be packed. Further it must show an extreme low absorption of the aggressive
20 substances migrating through the film or laminate. The degree of absorption for a given substances is typically dictated by the manufacturer of the substance but often the accepted values lie in the range of 0 to 1 % (w/w). For some products up to 10 % (W/W) is acceptable typically for products with a low initial API content. The absorption is calculated as the weight of API in
25 packaging relative to the initial weight of the API in the commercial product.

Hence, in the context of the present invention aggressive chemical resistant film means that no more than 1% (or sometimes no more than 10%) is transferred to the packaging material after 24 weeks. Typically, the uptake is complete after 12 weeks or less.

30 In one preferred embodiment the contact layer comprises a polymer selected from the group consisting of a cyclic olefin copolymer (COC), a polyamide (PA), or, an ethylene vinyl alcohol (EVOH). The HSP and RED Values calculated using <http://hansen-solubility.com>, mentioned above resulted in the following values for the preferred polymers according to the invention
35 using lidocaine/rivastigmine as solvent (API):

Table 1: HSP and RED values for preferred polymers according to the invention

Polymer	D	P	H	RED value (chi)
Lidocaine/ Rivastigmine	18.1	8.2	6.1	-
PA 66	16	11	24	1.72
COC	18	3	2	1.32
EVOH	20.5	10.5	12.3	1.12

It has surprisingly been shown that when the contact layer comprises any of the polymers from the group above, having a relatively low RED (i.e. close to 1) value a chemical resistant film and also laminate may be obtained even though the mentioned polymers represent different polymer types. Tests have shown that the resistance of laminates in which the film is coated with the preferred polymers shows results unexpectedly superior to those of laminates coated/laminated with Barex®.

EVOH is normally used in laminates due to the superior oxygen barrier properties of EVOH. However, EVOH is known to be very hydrophilic and hydroscopic (i.e. has a high WVTR), hence it is surprising that a EVOH polymer is usable in the context of the present invention where water resistance is a desired property. Also, PA has typically been used in laminates due to the superior mechanical properties like tear strength or as a barrier. As for EVOH it is a surprise that PA may be used as a contact layer for providing a chemical resistant film due to the hydrophilic nature of PA.

Because of the hydrophilic nature of PA and EVOH, in a preferred embodiment, the film obtained according to the invention may be tightly packed in a moisture barrier in particular if it has to be stored. The film or laminate according to the invention may packed immediately after manufacture of the chemical resistant film or laminate and should be kept safely packed until further use, for example in a packing line.

COC has not previously been recognized as being suitable for extrusion coating and for the production of heat sealable laminates. Without the wish to be bound by any theory this is believed to be due to the stress which the polymer is subjected to during an extrusion process. The stress causes irregular heating and melting within the COC, resulting in the final film or

laminate to be unacceptable from a visual point of view for use in various packaging industries. Hence, it is very surprising that the inventors of the present invention have succeeded in providing a coextrusion layer comprising COC as a contact layer for sealing aggressive substances.

5 To obtain a satisfactory coextrusion layer it is important that the polymer for providing a contact layer and a copolymer for providing a tie layer is compatible with respect to the melting characteristic of the polymers and the copolymer. As an effect of having been able to process a chemical resistant laminate with a coextrusion layer laminated to a base layer, thin laminates
10 may be obtained, and generally improved process ability during the manufacture of the laminates or wrappings are achieved.

Consequently, in one embodiment the tie layer or plurality of layers constituting the tie layer, has a thickness in the range of 7 to 20 g/m² and/or the contact layer has a thickness in the range of 4 to 20 g/m² and the thick-
15 ness of the laminate is not more than 40 g/m².

In a particular embodiment the contact layer of the coextrusion layer is made from a blend of at least two polymers. Using blends can be a means for reducing the costs and for adapting the physical and chemical properties of the co-extrusion process, such as reducing or increasing the melting tem-
20 perature to comply with the profile of the tie layer(s) and the polarity of the blend to improve the adhesion properties of the layers and hence the robustness of the final product. In a preferred embodiment the contact layer consists of one polymer type. Experiments showed that using one type of polymer resulted in improved resistance of the film and laminate towards the
25 chemical substance to be packed.

In any of the blends or homo layers at least one of or the polymer(s) forming the contact layer of the coextrusion layer is a cyclic olefin copolymer, a polyamide, or, an ethylene vinyl alcohol. Each of the polymers are commercial available for example under the tradenames EVAL® C109B sold by Ku-
30 raray, Sellar PA 3426 R sold by Dupont®, 6013M-07 sold by Topas®.

In one embodiment the cyclic olefin copolymer, a polyamide, or, an ethylene vinyl alcohol makes up at least 50% of the blend, preferably at least 60%, more preferably at least 80%, most preferably at least 95.

The adhering of step iv) occurs instantly by cooling the co-extrudate
35 in cooling cylinders during the lamination process.

In a further aspect of the invention an aggressive chemical resistant film comprising at least a base layer, which is water and/or oxygen resistant, and a coextrusion layer, wherein the coextrusion layer comprises a tie layer and a contact layer, and whereby the tie layer comprises at least one layer
5 and wherein the contact layer comprises a polymer having a RED value of > 0.8, more preferred a RED value in the range of 0.8 to 10, even more preferred 0.8 to 5, and most preferred 1 to 2. Films according to the invention are resistant to aggressive chemical substances.

In one embodiment the base layer, which is water and/or oxygen resistant, is selected from the group consisting of metal foil, preferably aluminum foil, polymers, polyamide, polyvinylidene chloride, silicon oxide coated polyesters, and/or fluoropolymers.
10

In a further embodiment the tie layer is constituted of one layer and wherein the layer is a copolymer made of a material selected from a copolymer of ethylene and acrylic acid, ethylene and methacrylic acid and a
15 terpolymer comprising ethylene, acrylic ester and a third polymer, which third polymer is preferably a glycidyl methacrylate, and more preferably a maleic anhydride.

In a particular embodiment the contact layer comprises or is a polymer selected from the group consisting of a cyclic olefin copolymer, a polyamide, or, an ethylene vinyl alcohol.
20

In a further embodiment the film is heat sealable. A heat sealable film or laminate is a laminate that is capable of sealing to itself during heat sealing. Deformation of films or laminates is highly undesired especially during the final wrapping of the product.
25

In yet another aspect the invention relates to a laminate for packing an aggressive chemical substance said laminate comprising at least

- a first outer layer made of a mechanically wear resistant material;
- an aggressive chemical resistant film as described above comprising
30 ing a base layer, which is water and/or oxygen resistant and a coextrusion layer said coextrusion layer comprising a tie layer wherein the base layer side of the film is facing the first outer layer;

In one embodiment the first outer layer may be made from a material selected from but not limited to paper, polyethylene or polyamide based sheets, ortho-phthalaldehyde based sheets, or polyester based sheets, or
35

combinations. It is preferred that the first outer layer is a combination when polyester based sheets are used.

In an embodiment the first outer layer and the laminate are laminated to provide the packaging in one piece. Laminating the outer layer to the first laminate provides a strong laminated, which is easy to wrap, and, it is ensured that the individual parts of the laminate do not fall apart.

In another embodiment the laminate further comprises a second outer layer facing the exterior side of the first outer layer, preferably the second outer layer is a paper layer. The paper layer is typically printed with the name, color and/or logo of the product and manufacturer of the product. It is also contemplated that the first outer layer is printed.

It is also contemplated that an adhesive agent is applied between the second and first outer layers. The adhesive layer may be the same or different from the tie layer. Additional suitable adhesives are adhesives approved for use in packaging products for human use and are well known to the skilled person. A suitable adhesive may be selected from but is not limited to polyurethane based adhesives, epoxy based adhesives, or acrylic based adhesives.

In one embodiment the laminate encloses a compound selected from the group consisting of nicotine, rivastigmine, fentanyl and lidocaine. These compounds are known as aggressive chemicals/compounds and require specialized packaging.

Hence, the invention also contemplates an aggressive chemical substance packed in a laminate or packaging as explained above and a method for providing the packaging the chemical substance, said method comprising the steps of:

- a) providing a base layer
- b) coextruding a layer comprising a tie layer and a contact layer to provide a coextrusion layer;
- c) coating the coextrusion layer to the base layer;
- d) allowing the coextrusion layer coated to the base layer to adhere to the base layer to provide a chemical resistant film comprising the tie layer and the contact layer formed as an coextrusion layer coated to the base layer;
- e) providing a highly aggressive substance to the contact layer side

of the film; and

f) sealing the chemical resistant film, preferably by heat sealing, in such way to provide a hollow interior space for sealing the highly aggressive substance, said hollow space having an interior side and an exterior side, wherein the interior side of the film is the contact layer of the coextrusion layer and the exterior side of the film is the base layer.

In a preferred embodiment the highly aggressive substance is selected from the group consisting of nicotine, lidocaine, and rivastigmine

It is also contemplated that a first outer layer may be applied to the film; the first outer layer is made of a mechanically wear resistant material and typically serves to protect from children being able to break the sealed film, laminate or wrapping.

The packaging should preferably comply with International standards such as 16 CFR §1700.20 (for USA) and ISO 8317 (2003) corresponding to DIN EN ISO 8317 (2004) (for Europe).

It is also contemplated that a second outer layer may be applied to the film; the second outer layer is typically a paper layer. The paper layer is typically printed with the logo or colors etc. of the supplier of the product.

It is contemplated that the first and/or second outer layer is laminated to the film before steps e) and f) for example in one combined coextrusion and laminating step.

In yet another aspect, the invention provides the use of a polymer having a RED value of > 0.8 , preferably having a RED value in the range of 0.8 to 10, more preferred 0.8 to 5, and most preferred 1 to 2 as a contact layer for providing chemical resistance to a film, wherein the film comprises a base layer which is water and/or oxygen resistant coated to a, optionally co-extruded, layer comprising a tie layer and the contact layer.

In a further embodiment the polymer is selected from the group consisting of a cyclic olefin copolymer, a polyamide, or, an ethylene vinyl alcohol.

Specific films according to the invention comprise but are not limited to base layer/tie-layer/contact-layer (the latter two coextruded) EAA/PE/COC, EAA/EMA/COC, EAA/terpolymer/COC, terpolymer/PE/COC, EAA/terpolymer/EVOH, EAA/terpolymer/PA, or EAA/PA.

Figures

Figures 1 is a cross section of an embodiment of a chemical resistant film according to the invention

Figure 2 is a cross section of an embodiment of the chemical resistant film according to the invention.

Figure 3 is a cross section of a laminate according to the invention.

Figure 4 shows the results of an absorption study of rivastigmine as API wrapped in a laminate according to the invention as compared to and a commercial available laminate with the commercial available polymer film Barex® after storing for 2, 4, 8 and 12 weeks at 40°C.

Figure 5 shows the amount of lidocaine remaining in a patch after 7 days at 40°C for embodiments of the laminate according to the invention and a commercial available Barex® laminate.

Detailed description

The invention will now be described in greater details. Each specific embodiment and variation of features applies equally to each aspect of the invention unless specifically stated otherwise.

The film, laminate and packaging according to the present invention is intended to be used in packaging highly aggressive substances such as nicotine, rivastigmine or lidocaine, however, the invention should not be limited to these specific substances.

The term film according to the invention contemplates a product comprising a base layer coated with a coextrusion layer comprising a tie layer and a contact layer or a base layer laminated with a tie layer and a contact layer. Where the contact layer is laminated, for example using an EVOH film, the contact layer and tie layer may be either coextruded, or, the contact film layer may be laminated to the base layer optionally with an intermediate tie layer.

The term laminate according to the invention contemplates the film to which a further layer is laminated, such as a first outer layer.

A packaging is in the context of the invention intended to mean a film or laminate used to pack a substance. Packaging may be used interchangeably for film or laminate.

The term highly aggressive substance should be understood as a

substance which is both very reactive with metals, acids, bases or functional groups such as ketones, alcohols, hydro carbons and/or esters, and/or, volatile but also easily migrates through barriers. Therefore, the films, laminates or packagings applicable for packing highly aggressive substances should have both chemical-resistant properties but also limit the migration of the aggressive substance through the film, laminate or packaging. The aggressive substance according to the invention is also or alternatively susceptible to degradation when exposed to ambient conditions, such as oxygen and water, is volatile and able to migrate or a combination. Specifically, the aggressive substance is selected from but not limited to nicotine, oils, such as spearmint and peppermint oil, licodaine or rivastigmine.

The term oxygen and water resistant as used in the context of the present invention contemplates material for which the oxygen transfer rate (OTR) and/or water vapor transfer rate (WVTR) is no more than 1 preferably no more than 0.1 as also indicated above. The term WVTR may also be referred to as the moisture vapor transfer rate (MVTR). WVTR and MVTR are equivalent.

The term mechanically wear resistant layer as used for the first outer layer in the context of the present invention should be suitable for the manufacture of a flexible packaging. The mechanically wear resistant layer may be chosen from materials such as polyethylene or polyamide based sheets, ortho-phthalaldehyde based sheets, or polyester based sheets or combinations.

Further, the mechanically wear resistant material can be provided in a film that is biaxially oriented to give the film higher seal strength. The term biaxial oriented should be understood such that the provided polymer film has been stretched in both a longitudinal and a transverse direction during manufacturing.

The term exterior side should be understood in its broadest term. The term exterior environment is used for defining the direction opposite of the side that is facing the highly aggressive substance to be sealed by a laminate or packaging of the present invention. This means that the term exterior environment is independent on whether additional layers are coated, laminated or otherwise attached to the film. Thus, the word is used for specifying which direction a side of a layer is facing.

The various embodiments of the invention will now be illustrated with

references to the figures and examples.

With reference to figure 1 the film of the invention will now be described in greater detail. The extreme chemical resistant film, 1, is obtained by providing a base layer, 2. A coextrusion layer, 5, comprising a tie layer, 3, and a contact layer, 4, is coated to one side of the base layer, 2, according to the method of the invention and is allowed to adhere. The base layer, 2, and the coextrusion layer, 5, define the film according to all the aspects of the invention. Consequently, the film is provided with a base layer side, 2, and a coextrusion layer side 5, wherein the base layer side, 2, is intended for facing the exterior environment and the coextrusion layer side, 5, is intended for facing the highly aggressive substance to be sealed.

The coextrusion layer may be coated to the aluminium layer by a coextrusion system generally known in the art to provide the coextrusion layer coated on the first side of the aluminum layer. The coextrusion layer may be applied in an amount of 7-40 g/m³. Subsequently, the aluminum layer coated with the coextrusion layer is adhered. The coextrusion is preferably performed at a temperature of 240-330°C, more preferred 270 - 300°C and the speed of the application/coating is in the range of 150 to 600 m/min. The equipment suitable for extruding and laminating films and laminates according to the invention may be obtained from Bobst.

When using coextrusion, it is possible to obtain a multi layer which is thinner than multilayer layers provided by sequential film applications techniques without compromising the extreme chemical resistance ability of the first laminate. Hence, the present invention does not only provide an extreme chemical resistance laminate, and packaging comprising the same but at the same time the manufacturing process is more cost effective since less polymer, forming the contact layer, has to be used.

Another embodiment of the film in which the tie layer comprises two layers is illustrated in figure 2. The extreme chemical resistant film, 1, is obtained by providing a base layer, 2. The coextrusion layer, 5, comprises a tie layer, 3, comprising a first layer, 3a, and a second layer, 3b, and a contact layer 4. The coextrusion layer is coated to one side of the base layer, 2, according to the method of the invention and is allowed to dry.

In the embodiment illustrated the tie layer, 3, comprises two layers. These layers may be made of EAA as the first layer, 3a, and polyethylene

(PE) as the second layer, 3b, where the first layer of EAA faces the base layer and second layer of the PE faces the contact layer, 4.

The extreme chemical resistant film according to the invention is intended for use as a component of a packaging suitable for sealing a highly aggressive substance. The film may constitute the packing itself.

To further improve the mechanical wear resistance a first outer layer may be laminated to the base layer side of the film or simply be wrapped around the film. Hence, in figure 3 is illustrated a cross section of an embodiment of a laminate according to the invention, 12, comprising a first outer layer, 21, a base layer, 22, and a coextrusion layer, 25. The first outer layer, 21 and the base layer side, 22, may be laminated together before, during or after the coextrusion layer 25 is applied/coated to the base layer.

The first outer layer, 21, is a mechanically wear resistant layer which adds safety properties to the wrapping ensuring that the wrapping is not inadvertently opened. Hence, the outer layer can also be seen as a child proof layer meaning that the layer is made of a material and sealable in such a way that it is difficult for children to open. Additionally, the outer layer may be provided with a second outer layer, 20.

The second outer layer, 20, is typically a paper layer, wherein the paper layer is facing the exterior environment; the exterior facing side of the second layer may be printed as desired. The second outer layer, such as the paper layer is added to improve the stiffness of the packaging in addition to providing a printing platform.

Furthermore, it is within the inventive concept of the present invention that an adhesive agent is applied between the first outer layer and the base layer and/or between the first outer layer and the second outer layer. The obtained packaging may then be assembled in such a way that the various layers do not part during handling, printing and/or packaging of the substance to be packed.

After production the film, laminate or packaging may be stored as rolls ready for use in further lamination or packaging of the aggressive substance to be packed.

In use, the packaging is sealed around the substance to be packed so that the contact layer of the coextrusion layer faces the interior side and the substance, and, the base layer, first outer layer or second outer layer, as

applicable, face the exterior side, so as to create a hollow interior for containing the, substance, such as the aggressive substance.

The sealing of the packaging is achieved in such way that the contact layer of the coextrusion layer is facing the aggressive substance so that the remaining part of the package is protected by the contact layer of the coextrusion layer. In this way, the aggressive substance is encompassed by the inner side of packaging and will therefore only have direct contact with the contact layer of the coextrusion layer.

In general, the order in which the different layers of the packaging according to the invention are applied to the base layer is flexible. Hence, the first outer layer may be applied before the coextrusion layer and the other way around. The order depends on which production line is suitable in a specific situation.

In more details the packaging according to the present invention may in one embodiment be manufactured by obtaining a laminate comprising a base layer, such as an aluminum layer and a coextrusion layer comprising a biopolymer of ethylene and acrylic acid as a tie layer and EVOH as the contact layer coated to the aluminium as described above. The base layer side of the first laminate may then be provided with an adhesive agent and subsequently laminated to a biaxial orientated PET-film which is the first outer layer, i.e. the mechanically wear resistant layer. The PET-film is further provided with an adhesive agent on the exterior side of the mechanically wear resistant layer and is subsequently laminated to a paper layer for providing the final packaging.

An aggressive substance, such as but not limited to lidocaine, is placed on the contact layer side of the laminate which is welded around the substance, such as to form a pouch with an inner side and an outer side. Accordingly, the interior of the pouch consists of the coextrusion layer, where the contact layer of EVOH facing the aggressive substance thereby protects the rest of the provided packaging and the exterior side is the paper layer.

In general, the lamination procedure for laminating the mechanically wear resistant or paper layer to each other or to the base layer is routine procedure for the person skilled in the art.

According to all aspects of the invention the base layer may be selected from but not limited to a metal foil, preferably aluminum foil, a poly-

mer, such as a polymer made from polyamide, polyvinylidene chloride, silicium or aluminium oxide coated polyesters, and/or fluoro polymers, such as commercial Alu foil from e.g. Hydro, or AlOx coated PET films obtainable from e.g. Toray Films Europe, or SiOx coated PET films obtainable from e.g.

5 Celplast under the tradename Ceramis.

According to all aspects of the invention the tie layer may be made of a material selected from but not limited to a copolymer made of a material selected from a copolymer of ethylene and acrylic acid, ethylene and methacrylic acid and a terpolymer comprising ethylene, acrylic ester and a
10 third polymer, which third polymer is preferably a glycidyl methacrylate, and more preferably a maleic anhydride, such as the commercial product Lotader® 3410 sold by Arkema or Nuclel® 0609HSA sold by Dupont®

According to all aspects of the invention the contact layer may be made of a material selected from cyclic olefin copolymer, a polyamide, or, an
15 ethylene vinyl alcohol or mixtures thereof, such as the commercial products EVAL® C109B sold by Kuraray, Sellar PA 3426 R sold by Dupont® or COC 6013M-07, COC 6007F-600, or 9506-600 sold by Topas® or EVOH obtainable from Nippon Gohsei under the tradename Soarnel.

According to all aspects of the invention the first outer layer may be
20 made of a material selected from paper, polyethylene or polyamide based sheets, ortho-phthalaldehyde based sheets, or polyester based sheets, or combinations, such as the commercial product F-PAP sold by Flexpet.

The invention will now be illustrated in more details with reference to the following non limiting examples.

25

Example 1- performance of a laminate according to the invention compared to a commercially used laminate

A study was conducted to evaluate the performance of four laminates according to the present invention as compared to the commercial
30 available product comprising Barex® as the contact layer.

The wrappings according to the invention were compared to the performance of a Barex® laminate currently used in the field.

The test is a resistance test, wherein the transfer of a rivastigmine to the laminate is evaluated.

35

Table 2: The composition of the 6 wrappings was as follows, laminates 1 to 5 are laminates according to the invention

	Adhesive/Polymer layer Coextrusion layer	Base layer	First outer layer	Second Outer layer
Commercially used Barex® laminate (prior art)	Adhesive/ Barex® film	Al	PET	Paper
Laminate 1	Tie layer: Bipolymer of ethylene and acrylic acid (Nucrel 0609 HAS) Contact layer: PA (Selar PA 3426R)	Al	PET	
Laminate 2	Tie layer: Terpolymer of ethylene, acrylic ester and maleic anhydride (Lotader 3410) Contact layer: EVOH 60% (EVAL C109B) and PE 40%	Al	PET	
Laminate 3	EVOH film	Al	PET	
Laminate 4	Tie layer: Terpolymer of ethylene, acrylic ester and maleic anhydride (Lotader 3410) Contact layer: EVOH 100% (EVAL C109B)	Al	PE	PET
Laminate 5	Tie layer: Terpolymer of ethylene, acrylic ester and maleic anhydride (Lotader 3410) Contact layer: COC	Al	PE	PET

*Between the paper/PET, PET/Al, and Al/EVOH film layers an adhesive was applied.

Laminates 1 to 5 were obtained according to the method of the invention, wherein for laminates 1, 2, 4 and 5 a coextrusion layer was coated to the base layer and in laminate 3 where the contact layer was laminated to the base layer. The thickness of the tie layers were between 4-18 g/m² and the thickness of the contact layer was 8-12 g/m².

The resulting laminates were wrapped with rivastigmine as API and the transfer of the API to the packaging material/wrapping) was measured after 2, 4, 8 and 12 weeks at 40 °C. The API in the wrapping was measured by extracting the packaging and analysis the amount of API using Mass spectrometry

The Rivastigmine patches tested were commercially available patches containing 9.5 mg API/patch.

The results are shown in figure 4 illustrating the resulting transfer of rivastigmine (weight API extracted from the packaging) to the laminate in percentage of the content of the original patches of 9.5 mg.

The columns are denoted 1, 2, 3 and 4 respectively to the order they are shown from left to right in figure 4. Hence column 1 (furthest to the left) for each contact layer polymer used shows the results for the 6 laminates after two weeks. Column 2 shows the results for the 6 laminates after four weeks. Column 3 shows the results for the 6 laminates after 8 weeks, and column 4 shows the results for the 6 laminates after 12 weeks.

The Barex® laminate is a reference known for applicability in the art and comparison were made for evaluating the properties of the laminates according to present invention.

From the figure it is clear that the results for laminates according to the invention obtained by coextrusion of either of EVOH, PA, or COC as well as laminating EVOH provides for an improved chemical resistant laminate compared to the commercially used Barex® laminate.

Also, a contact layer, illustrated as laminate 2, of a blend of EVOH and PE was prepared and tested. Though the properties of this blend with rivastigmine as API resulted in a higher transfer than Barex®, the rate is still below the demanded limit and hence, it illustrates that blends are usable alternatives to Barex® as well. Surprisingly though the contact layer made of 100% EVOH was markedly superior to the blend.

Also, a contact layer, illustrated as laminate 3, a film of EVOH laminated to aluminum was prepared and tested. Surprisingly, it was shown that the use of EVOH in the form of a film laminated to aluminum provided a chemical resistant laminate.

5

Example 2 - stability test of a chemical substance wrapped in laminates according to the invention and wrapped in a prior art product using Barex®

Similar to the test described in example 1, laminates according to the invention were prepared as outlines in table 3 below. A lidocaine patch containing 40 mg lidocaine was wrapped in the pouch, packaged and stored at 40°C for seven days.

10

Table 3: Packagings for lidocaine stability test.

	Barex Commercially used Barex® laminate (prior art)	COC coex same as laminate 5 of example 1	Coex EVOH same as laminate 4 of exam- ple 1
--	---	--	---

15

Stability of the API is important to ensure that the dose indicated on the packaging is correct. A value of 90% - 110% of the original dose after one week when stored at 40°C using Barex® as index 100 is considered acceptable. Figure 5 illustrates the results of the test where the y-axis indicates the weight decrease of the two laminates according to the invention using Barex as index 100.

20

As can be seen from figure 5, both inventive laminates have a lower value than the index 100 Barex® comparative product, however with at a value within the acceptable limits. The lower value of the laminates according to the invention indicates that more lidocaine has disappeared from the patch.

25

C L A I M S

1. A method for providing an aggressive chemical resistant film, said method comprising the steps of:

- i) providing a base layer, which is water and/or oxygen resistant;
- 5 ii) coextruding a layer comprising a tie layer and a contact layer to provide a coextrusion layer;
- iii) coating the coextrusion layer to the base layer;
- iv) allowing the coextrusion layer coated to the base layer to adhere to provide the aggressive chemical resistant film comprising the tie layer and
- 10 the contact layer formed as a coextrusion layer coated to the base layer, wherein the tie layer comprises at least one layer and wherein the contact layer comprises a polymer having a RED value based on Hansens Solubility parameter (HSP) towards an aggressive chemical of > 0.8 , more preferred a RED value in the range of 0.8 to 10, even more preferred 0.8 to 5, and most
- 15 preferred 1 to 2.

2. A method according to claim 1, wherein the base layer, which is water and/or oxygen resistant, is selected from the group consisting of a metal foil, preferably aluminum foil, a polymer, such as a polymer made from polyamide, polyvinylidene chloride, silicium or aluminium oxide coated poly-
20 esters, and/or fluoro polymers.

3. A method according to any one of the claims 1 to 2, wherein the tie layer is made of 1, 2, 3, 4 or 5 layers.

4. A method according to claim 3, wherein all the layers of the tie layer are coextruded with the contact layer.

25 5. A method according any one of the preceding claims, wherein the tie layer is constituted of one layer and wherein the layer is a copolymer made of a material selected from a copolymer of ethylene and acrylic acid, ethylene and methacrylic acid and a terpolymer comprising ethylene, acrylic ester and a third polymer, which third polymer is preferably a glycidyl meth-
30 acrylate, and more preferably a maleic anhydride.

6. A method according to any one of the claims 1 to 4, wherein the tie layer comprises at least two layers, and wherein the first layer comprises a copolymer according to claim 5 and the at least second or more layer(s) comprises a material selected from EEA, PE, EMA, EAA or a combination.

35 7. A method according to any one of the preceding claims, wherein

the contact layer comprises a polymer selected from the group consisting of a cyclic olefin copolymer, a polyamide, or, an ethylene vinyl alcohol.

8. A method according to anyone of the preceding claims wherein the contact layer is a polymer selected from the group consisting of a cyclic
5 olefin copolymer, a polyamide, or, an ethylene vinyl alcohol.

9. A method according to anyone of the preceding claims, wherein the tie layer or plurality of layers constituting the tie layer, has a thickness in the range of 7 to 20 g/m² and/or the contact layer has a thickness in the range of 4 to 20 g/m² and the thickness of the film is not more than 40 g/m².

10. An aggressive chemical resistant film comprising at least a base layer, which is water and/or oxygen resistant, and a coextrusion layer, wherein the coextrusion layer comprises a tie layer and a contact layer, and whereby the tie layer comprises at least one layer and wherein the contact layer comprises a polymer having a RED value based on Hansens Solubility
15 parameter (HSP) of > 0.8, more preferred a RED value in the range of 0.8 to 10, even more preferred 0.8 to 5, and most preferred 1 to 2.

11. A film according to claim 10, wherein the base layer, which is water and/or oxygen resistant, is selected from the group consisting of metal foil, preferably aluminum foil, polymers, such as polyamide, polyvinylidene
20 chloride, silicium or aluminium oxide coated polyesters, and/or fluoropolymers; and/or

the tie layer is constituted of one layer and wherein the layer is made of a copolymer, said copolymer comprising a material selected from a copolymer of ethylene and acrylic acid, ethylene and methacrylic acid and a
25 third polymer, which third polymer is preferably made of a material selected from glycidyl methacrylate, and more preferably maleic anhydride; and/or

wherein the contact layer comprises or is a polymer selected from the group consisting of a cyclic olefin copolymer, a polyamide, or, an ethylene vinyl alcohol.

12. A film according to claims 10 or 11, wherein the tie layer or plurality of layers constituting the tie layer, has a thickness in the range of 7 to 20 g/m² and/or the contact layer has a thickness in the range of 4 to 20 g/m² and the thickness of the film is not more than 40 g/m².

13. A laminate for packing an aggressive chemical substance said
35 heat sealable laminate comprising at least

- a first outer layer made of a mechanically wear resistant material;
- an aggressive chemical resistant film according to claims 10 to 12 comprising a base layer, which is water and/or oxygen resistant and a coextrusion layer said coextrusion layer comprising a tie layer and a contact
- 5 layer, where the contact layer comprises a polymer having a RED value of > 0.8, more preferred a RED value based on Hansens Solubility parameter (HSP) in the range of 0.8 to 10, even more preferred 0.8 to 5, and most preferred 1 to 2 and where the base layer side of the film is facing the first outer layer.
- 10 14. A laminate according to claim 13, wherein the heat sealable laminate further comprises a second outer layer facing the exterior side of the outer layer, preferably the second outer layer is a paper layer.
- 15 15. A laminate according to any of the claims 13 to 14, wherein the heat sealable laminate encloses a compound selected from the group consisting of nicotine, rivastigmine and lidocaine.
- 16. A laminate according to claim 13, 14, and 15, wherein the laminate is heat sealable.
- 17. An aggressive chemical substance packed in a heat sealable laminate, said heat sealable laminate comprising
- 20 - a first outer layer made of a mechanically wear resistant material;
- an aggressive chemical resistant film comprising a base layer, which is water and/or oxygen resistant and a coextrusion layer said coextrusion layer comprising a tie layer wherein the base layer side of the film is facing the outer layer and wherein the contact layer comprises a poly-
- 25 mer having a RED value of > 0.8, more preferred a RED value based on Hansens Solubility parameter (HSP) in the range of 0.8 to 10, even more preferred 0.8 to 5, and most preferred 1 to 2.
- 18. Use of a polymer having a RED value based on Hansens Solubility parameter (HSP) of > 0.8, preferably having a RED value in the range of
- 30 0.8 to 10, more preferred 0.8 to 5, and most preferred 1 to 2 as a contact layer for providing chemical resistance to a film, wherein the film comprises a base layer which is water and/or oxygen resistant coated to a, optionally co-extruded, layer comprising a tie layer and the contact layer.
- 19. Use according to claim 18, wherein the polymer is selected from
- 35 the group consisting of a cyclic olefin copolymer, a polyamide, or, an ethylene

vinyl alcohol.

Awapatent A/S

A method for providing an extreme chemical resistant film




A B S T R A C T

5

The present invention relates to a method for providing an extreme chemical resistant film whereby a tie layer and a contact layer are coextruded with a base layer, such as a metal foil, as well as films and laminates obtained by the method and uses of the films and laminates to pack aggressive chemical substances such as lidocaine and rivastigmine.

10

(Fig. 1)

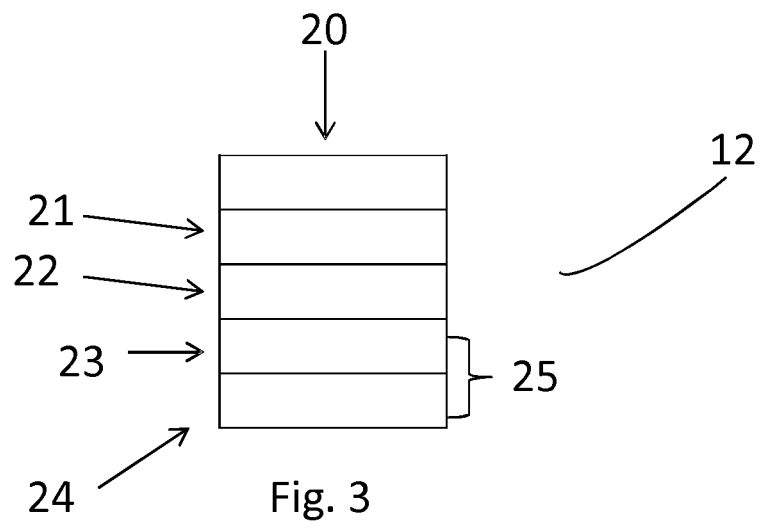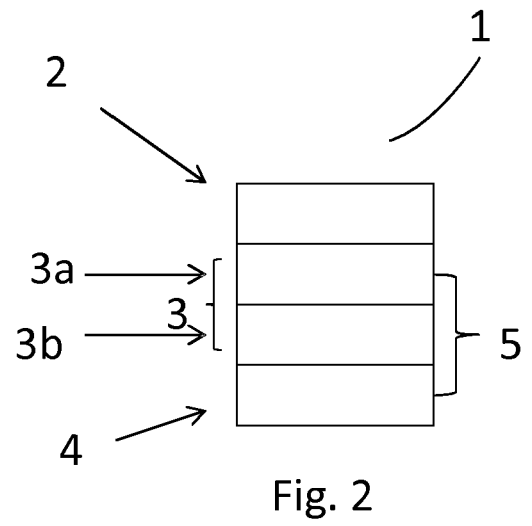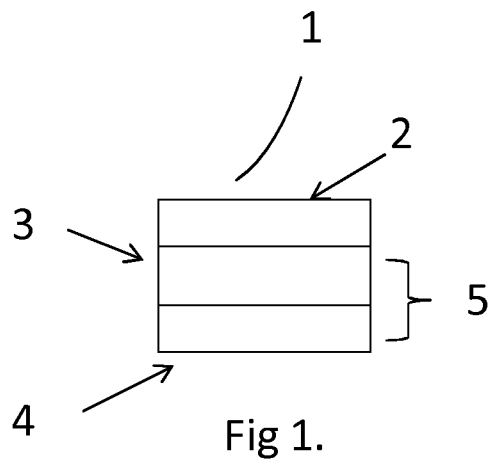

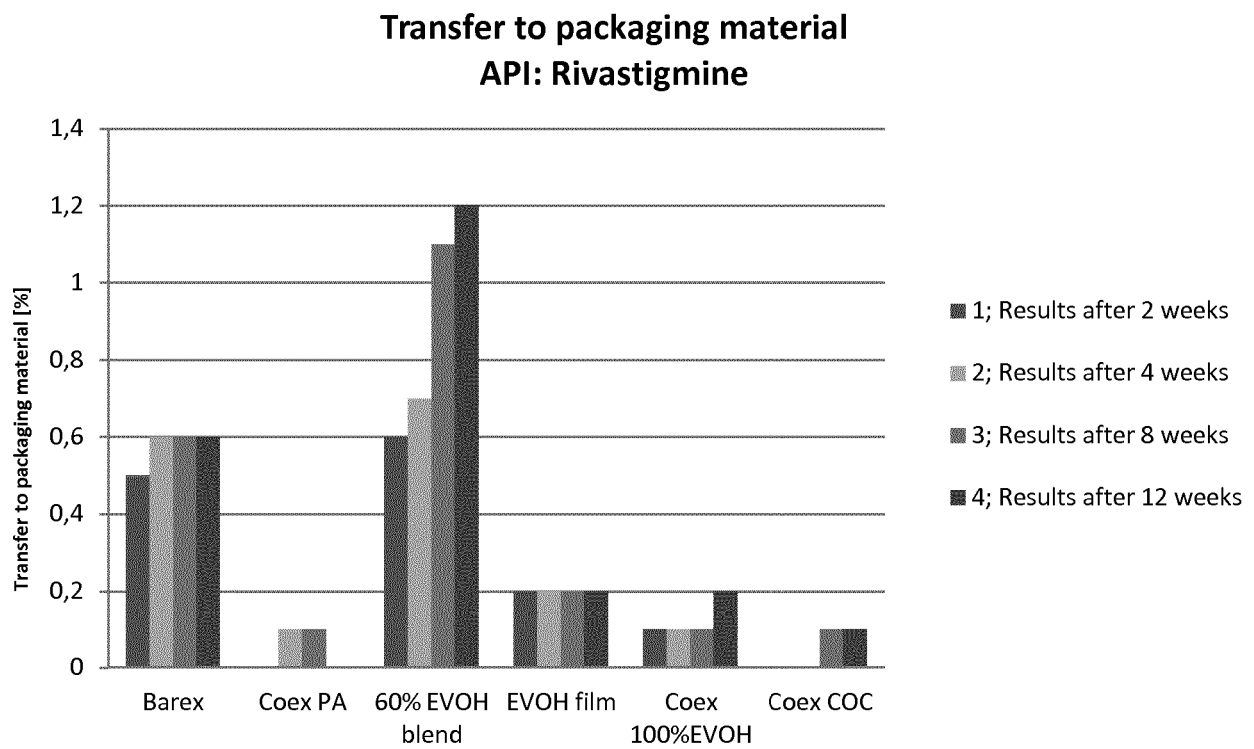


Fig. 4

Index on remaining API % in patch
API: Lidocaine

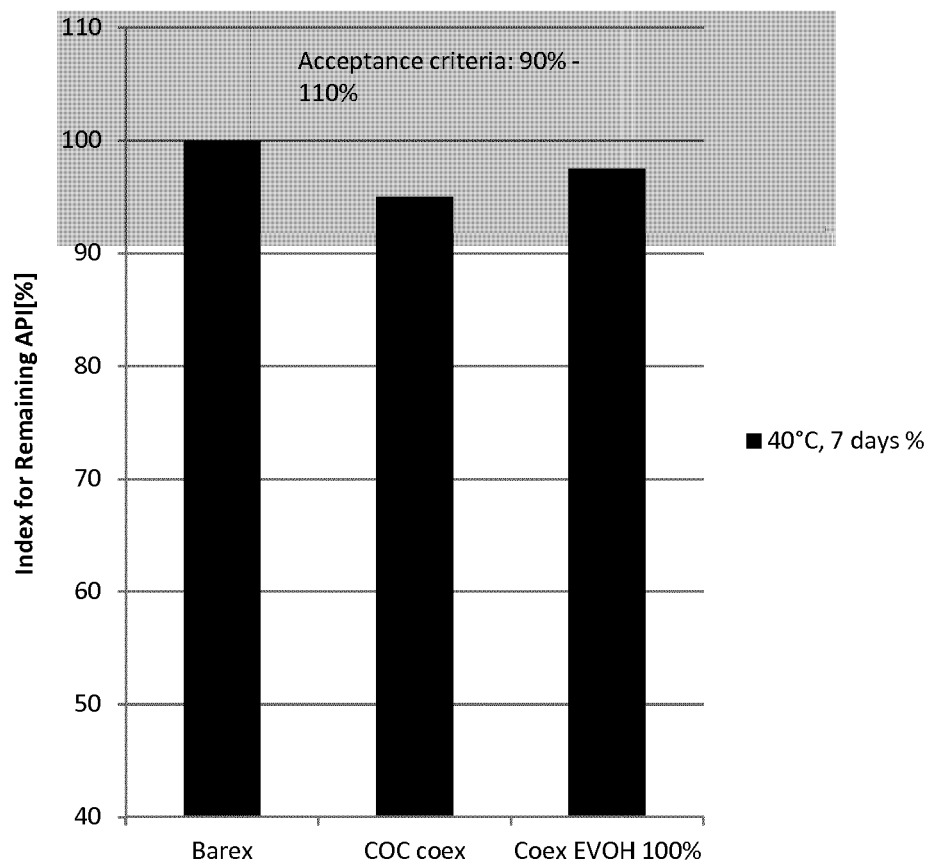


Fig. 5