



(19) **United States**

(12) **Patent Application Publication**
Mozzicato et al.

(10) **Pub. No.: US 2021/0106412 A1**

(43) **Pub. Date:** Apr. 15, 2021

(54) **DETACHABLE RECYCLING CONTAINER**

which is a continuation-in-part of application No. 15/703,823, filed on Sep. 13, 2017, now Pat. No. 10,592,508.

(71) Applicant: **Solmetex LLC**, Northborough, MA
(US)

Publication Classification

(72) Inventors: **Nicholas Mozzicato**, Acton, MA (US);
Richard Goulston, Stuart, FL (US);
Robin Schofield, Lancaster, MA (US);
Michael Toole, Norton, MA (US)

(51) **Int. Cl.**
A61C 17/06 (2006.01)
B65D 43/02 (2006.01)
B01D 21/24 (2006.01)

(21) Appl. No.: 16/941,522

(52) **U.S. Cl.**
CPC **A61C 17/065** (2019.05); **B65D 43/0231**
(2013.01); **A61M 1/0001** (2013.01); **B65D**
2543/00092 (2013.01); **B01D 21/2444**
(2013.01)


(22) Filed: **Jul. 28, 2020**

Related U.S. Application Data

(63) Continuation-in-part of application No. 16/033,823, filed on Jul. 12, 2018, now Pat. No. 10,779,923,

(57) **ABSTRACT**

The present invention provides dental amalgam recycling systems, useful for recycling particles from a dental liquid effluent drawn, for example, from a suctioning device.

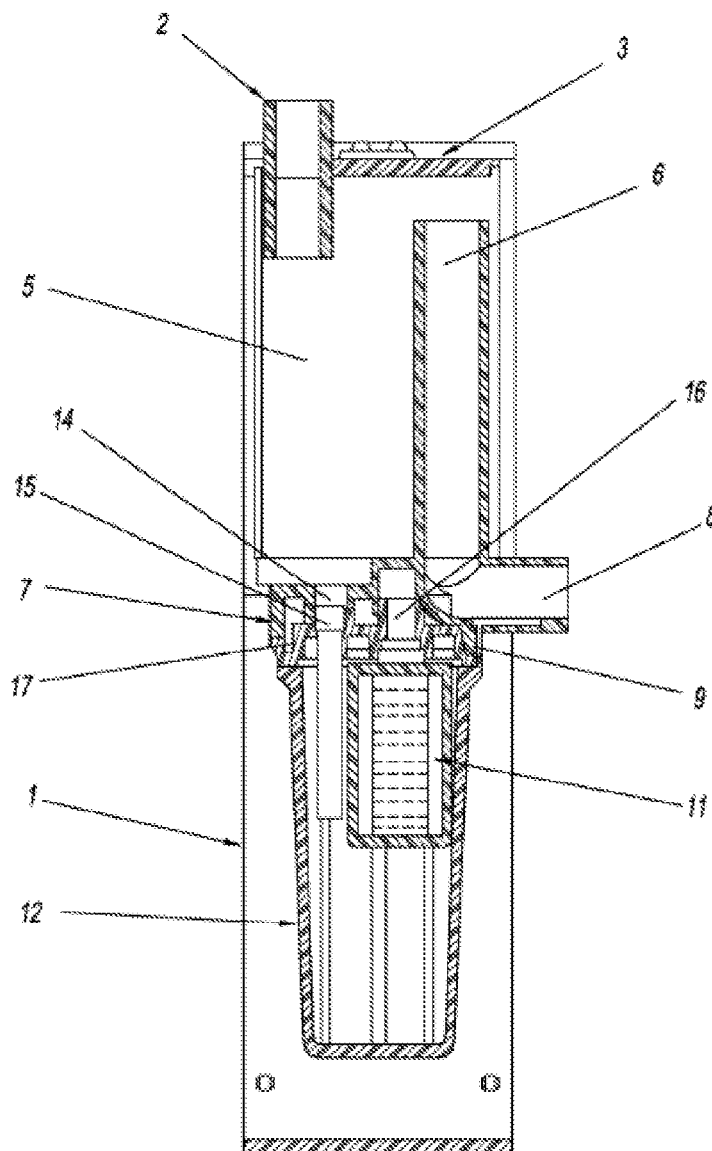

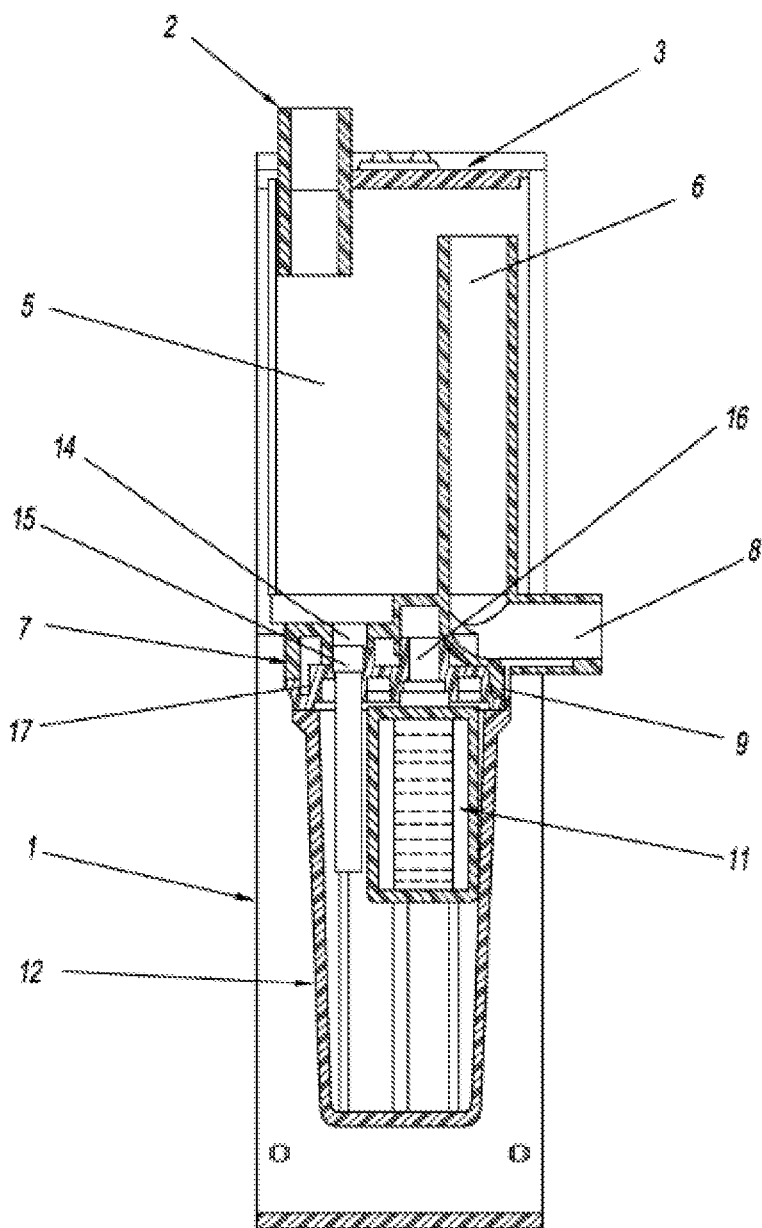


FIGURE 1

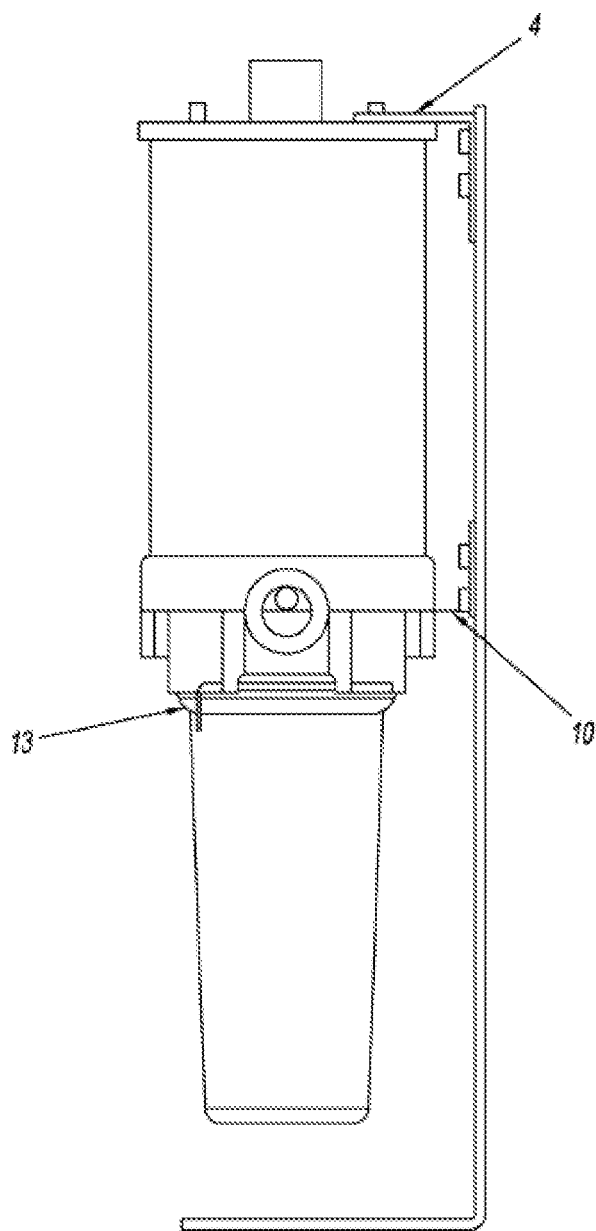


FIGURE 2

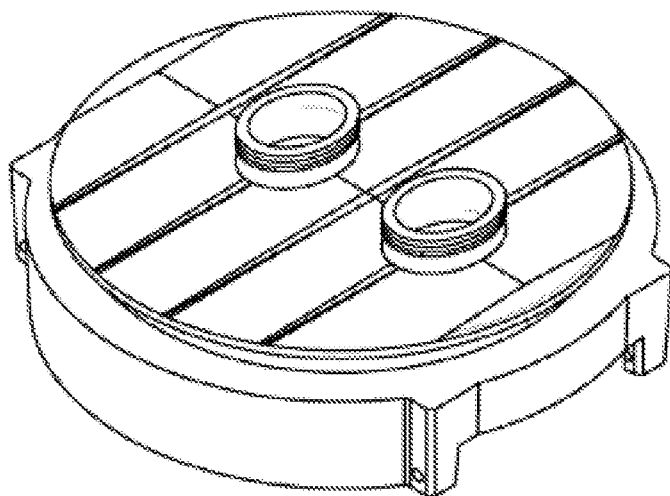


FIGURE 3A

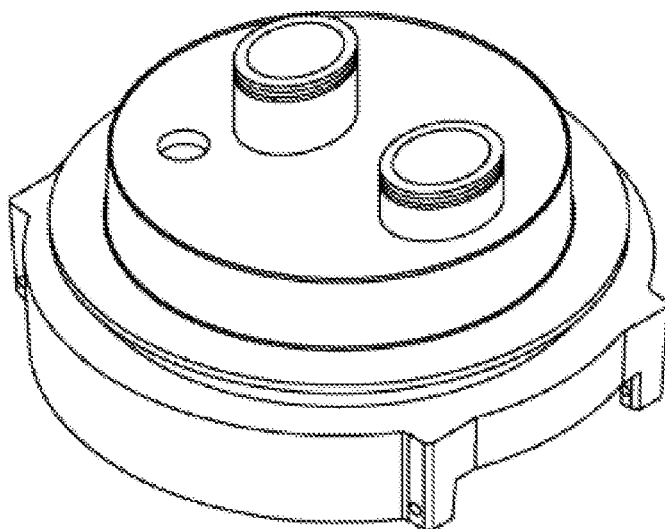


FIGURE 3B

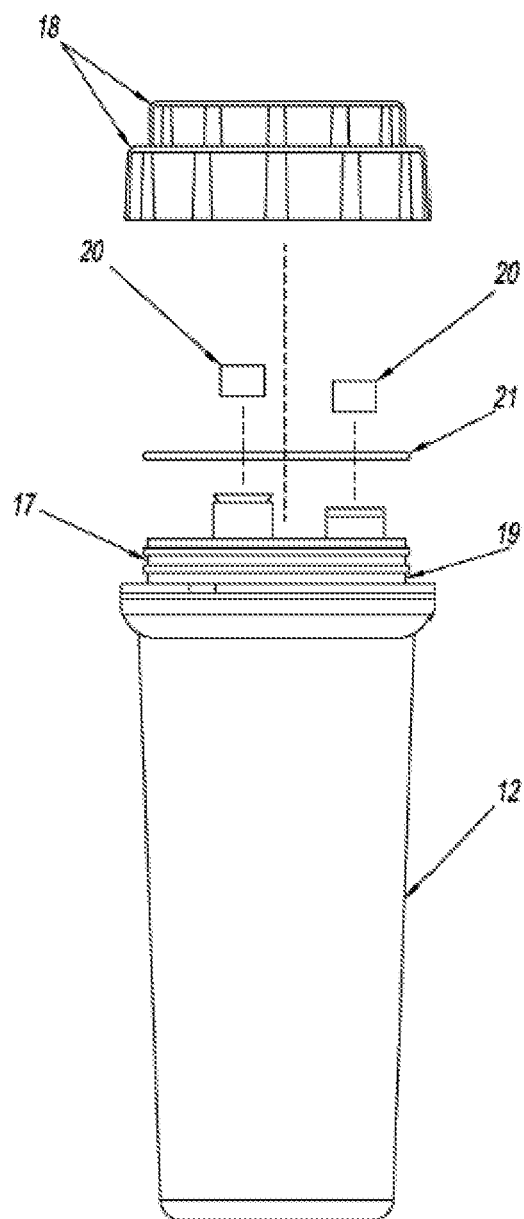


FIGURE 4A

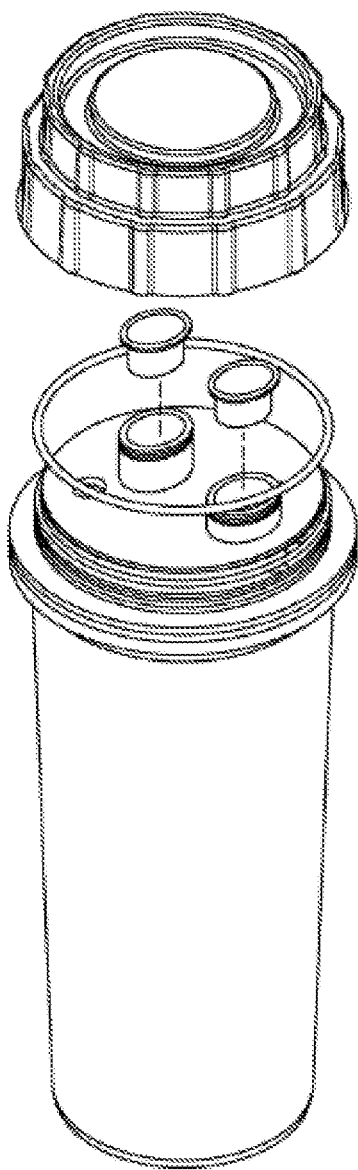


FIGURE 4B

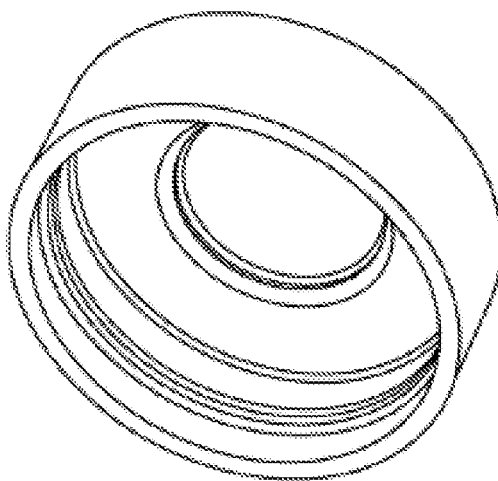


FIGURE 5A

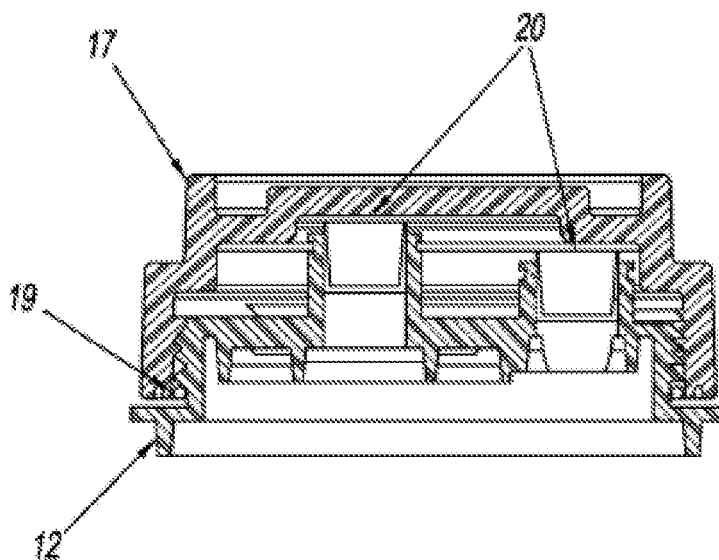


FIGURE 5B

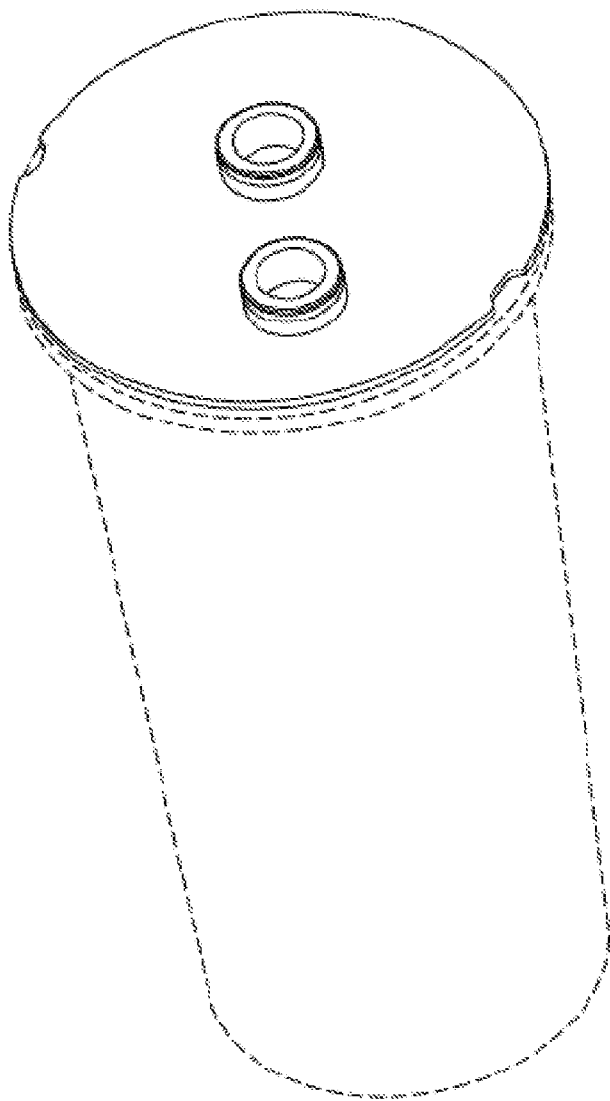


FIGURE 6A

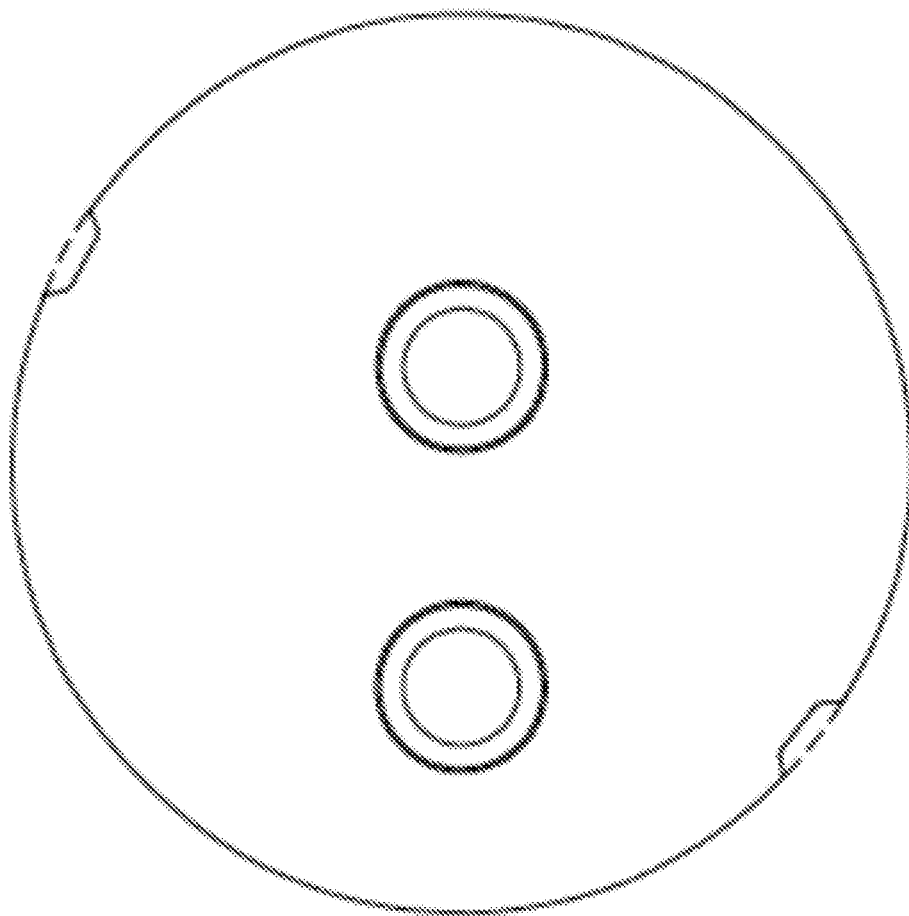


FIGURE 6B

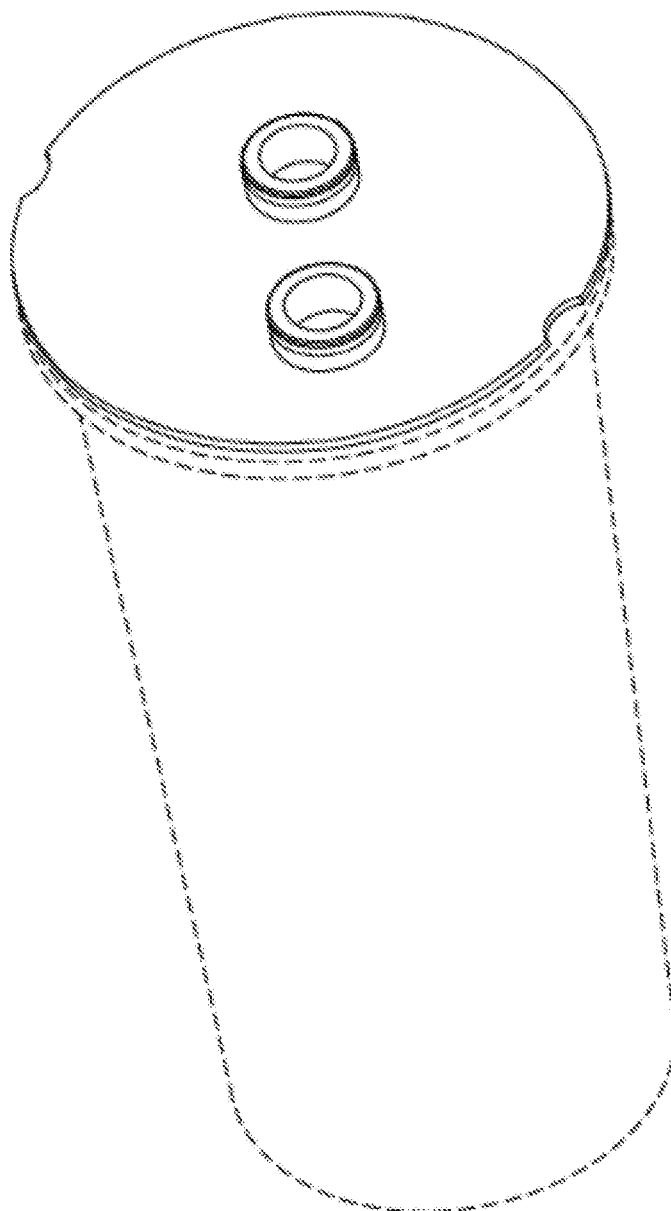


FIGURE 7A

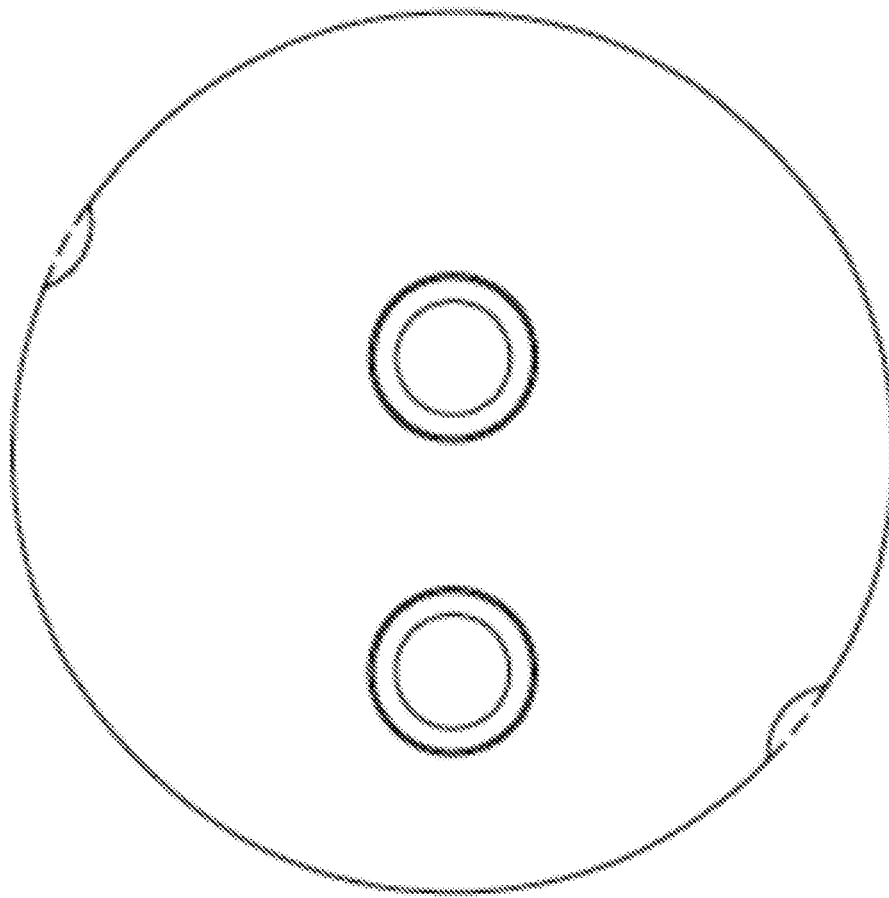


FIGURE 7B

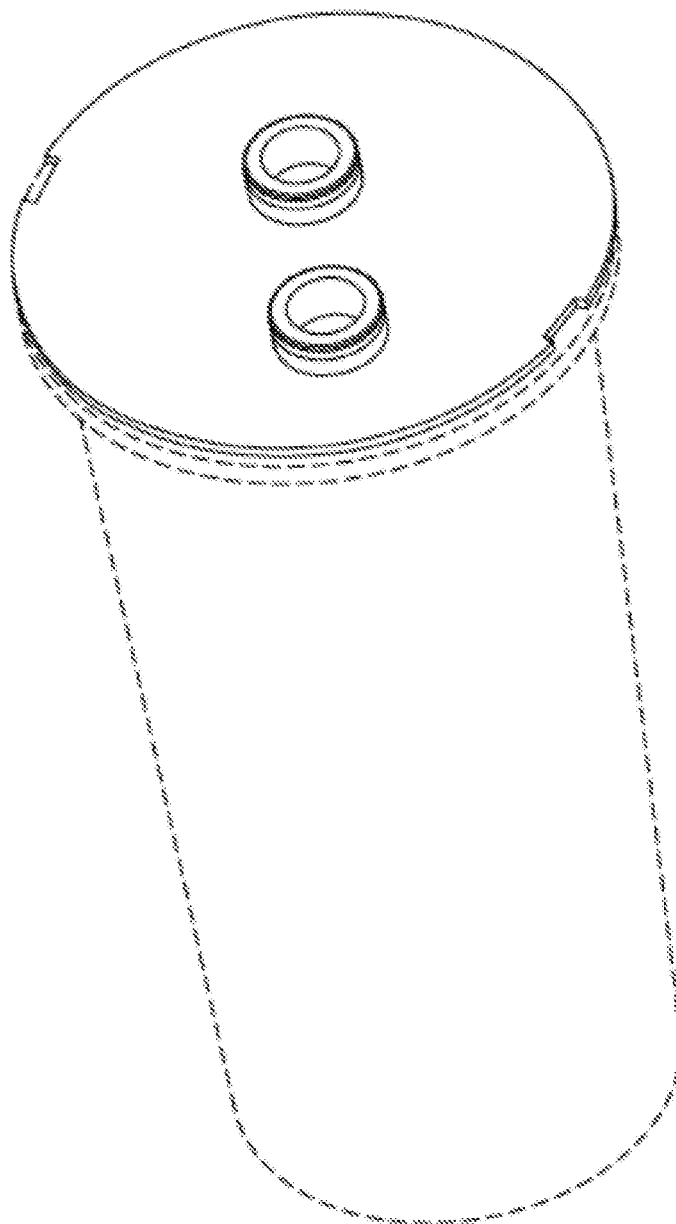


FIGURE 8A

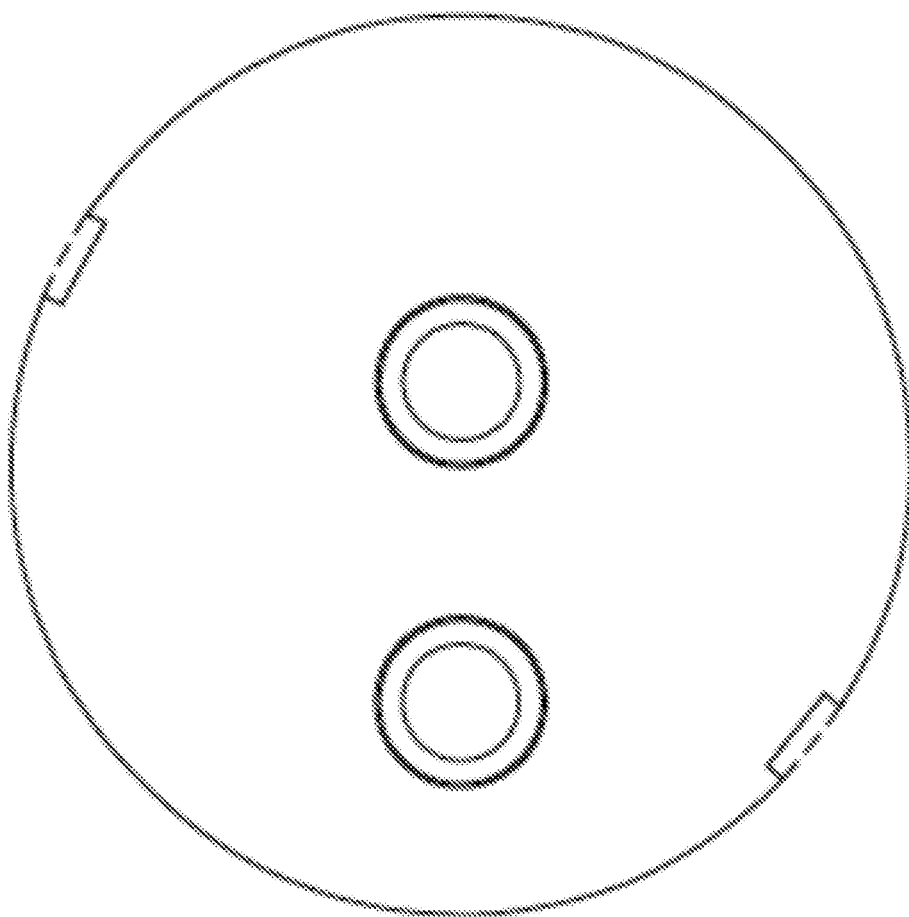


FIGURE 8B

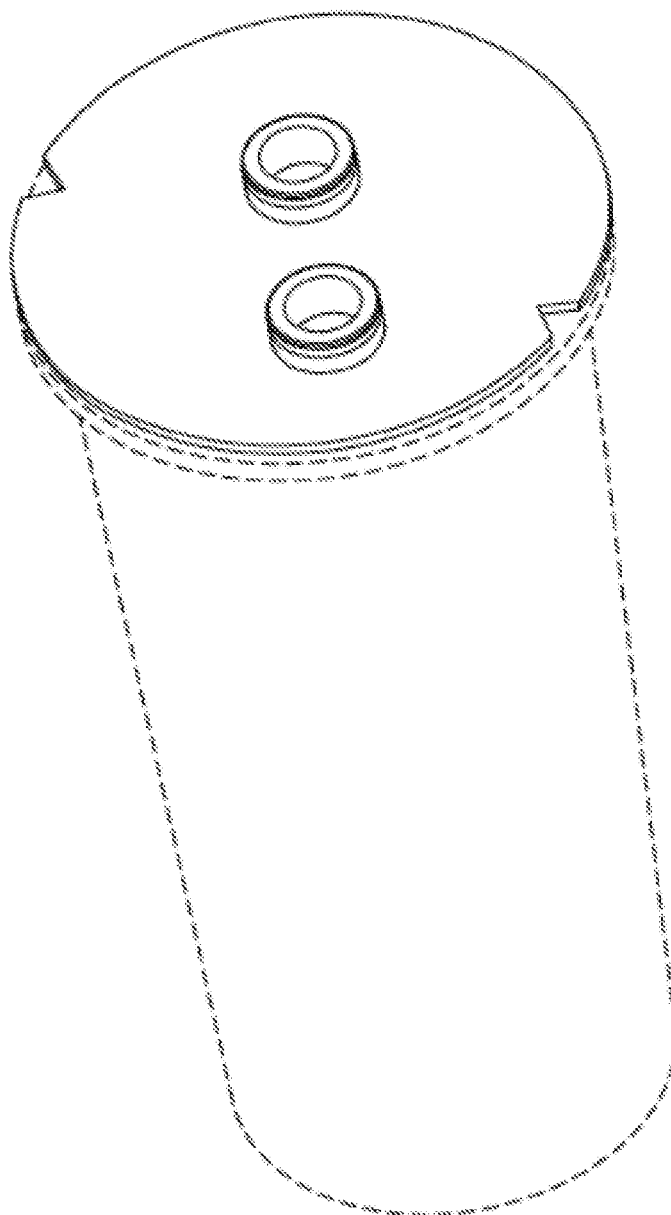


FIGURE 9A

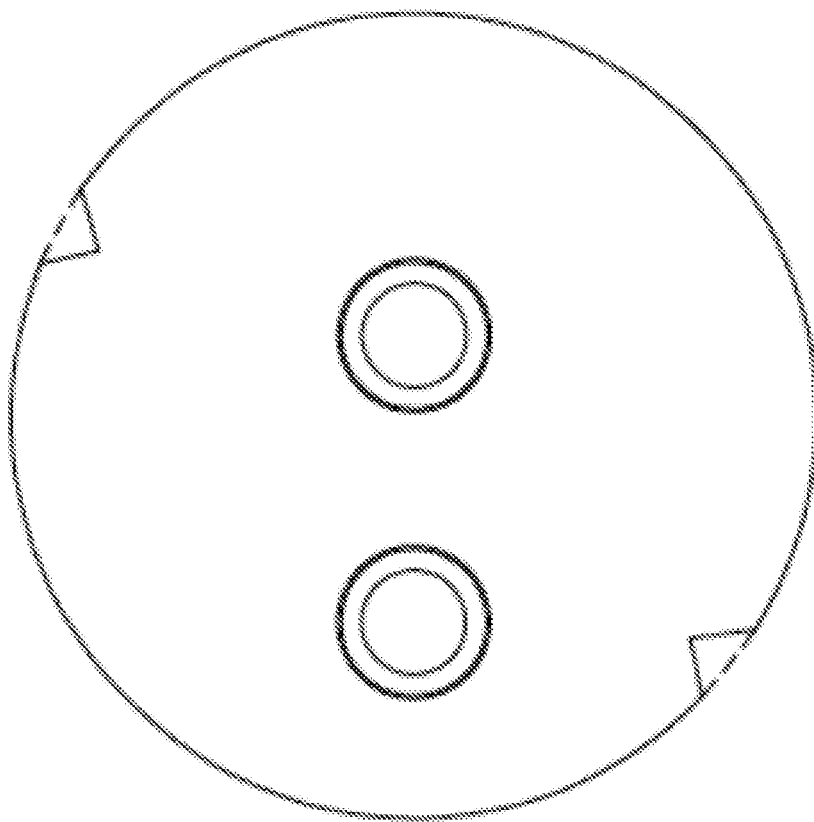


FIGURE 9B

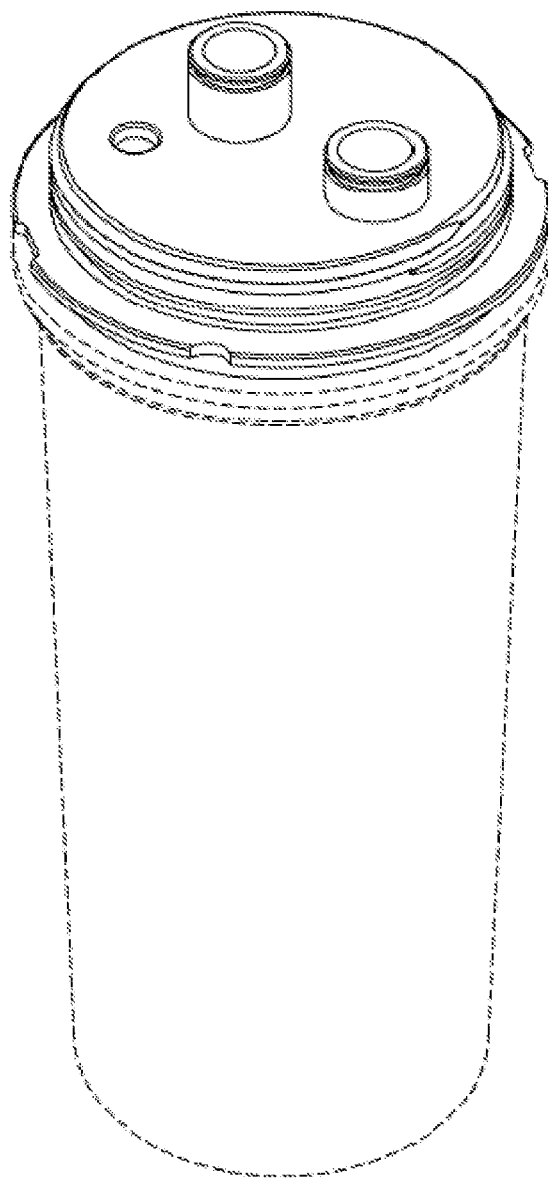


FIGURE 10A

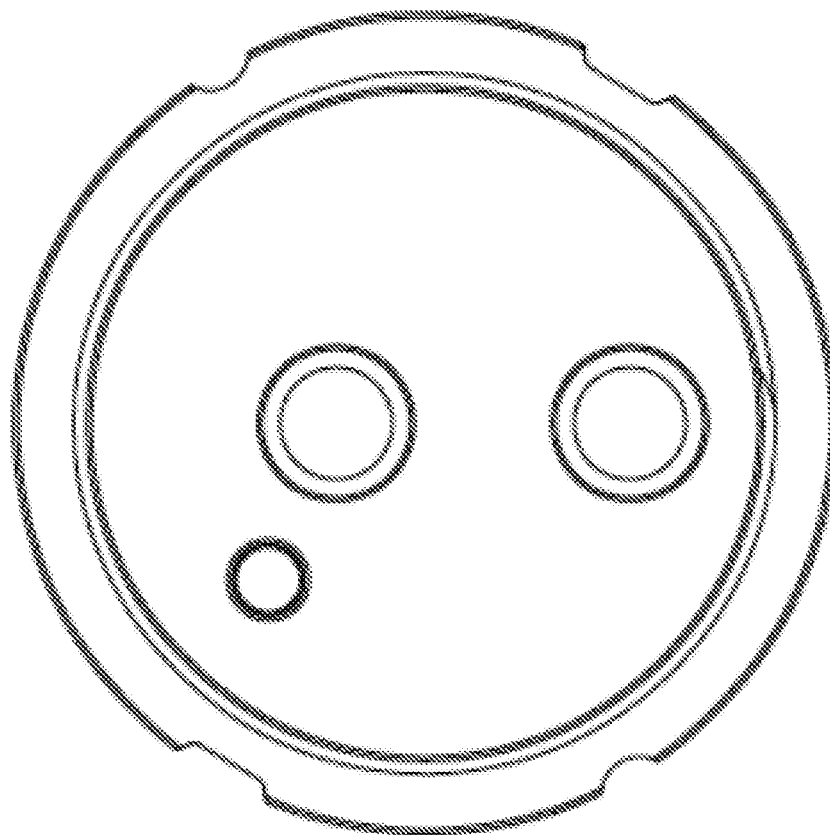


FIGURE 10B

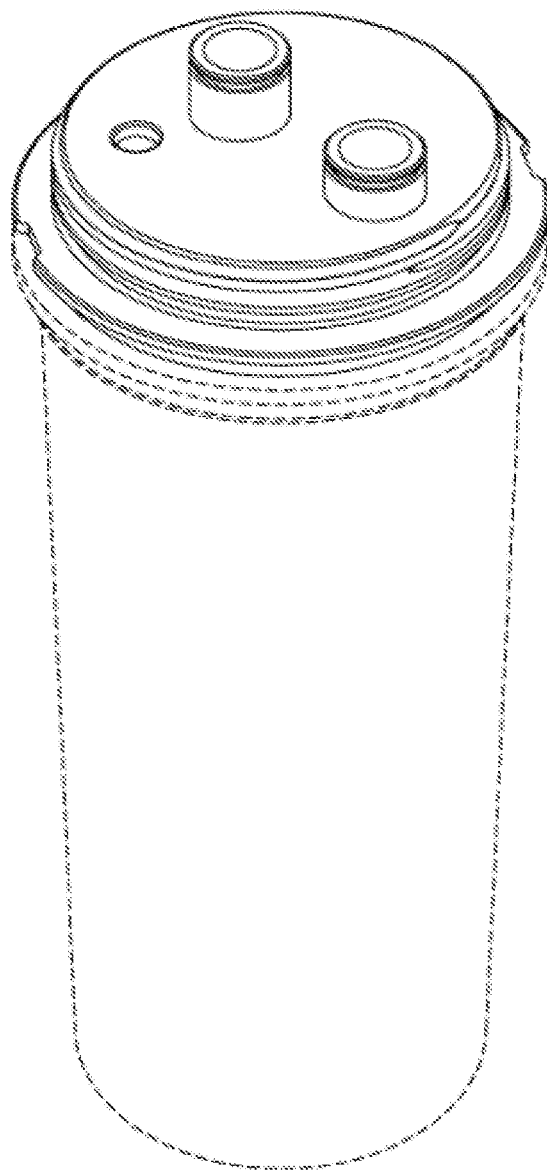


FIGURE 11A

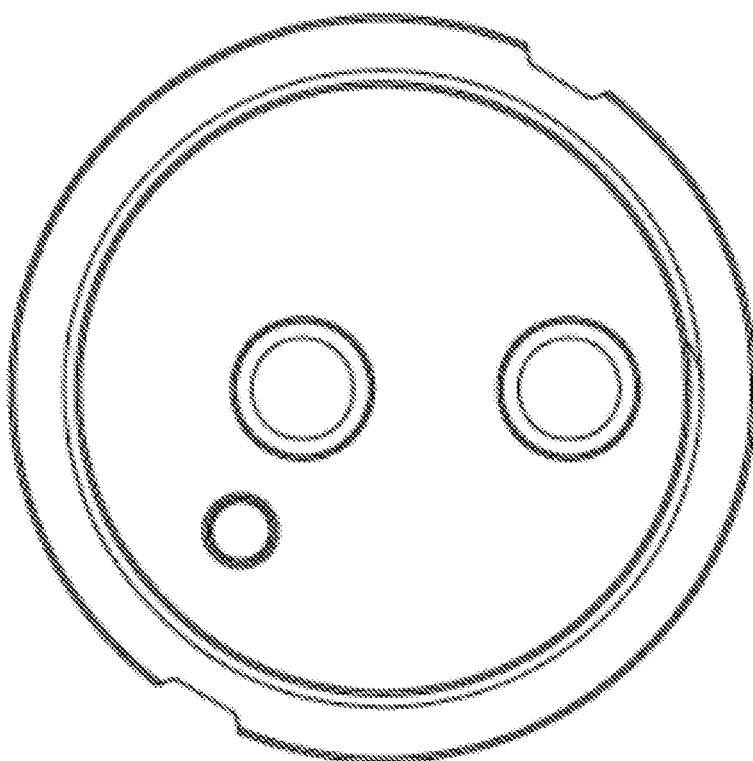


FIGURE 11B

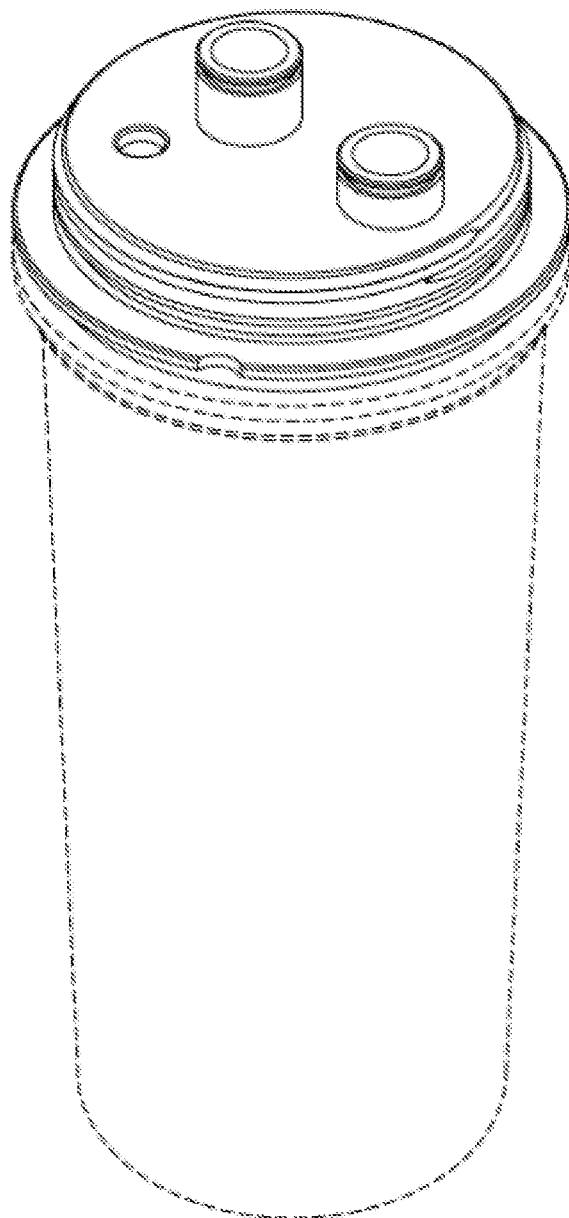


FIGURE 12A

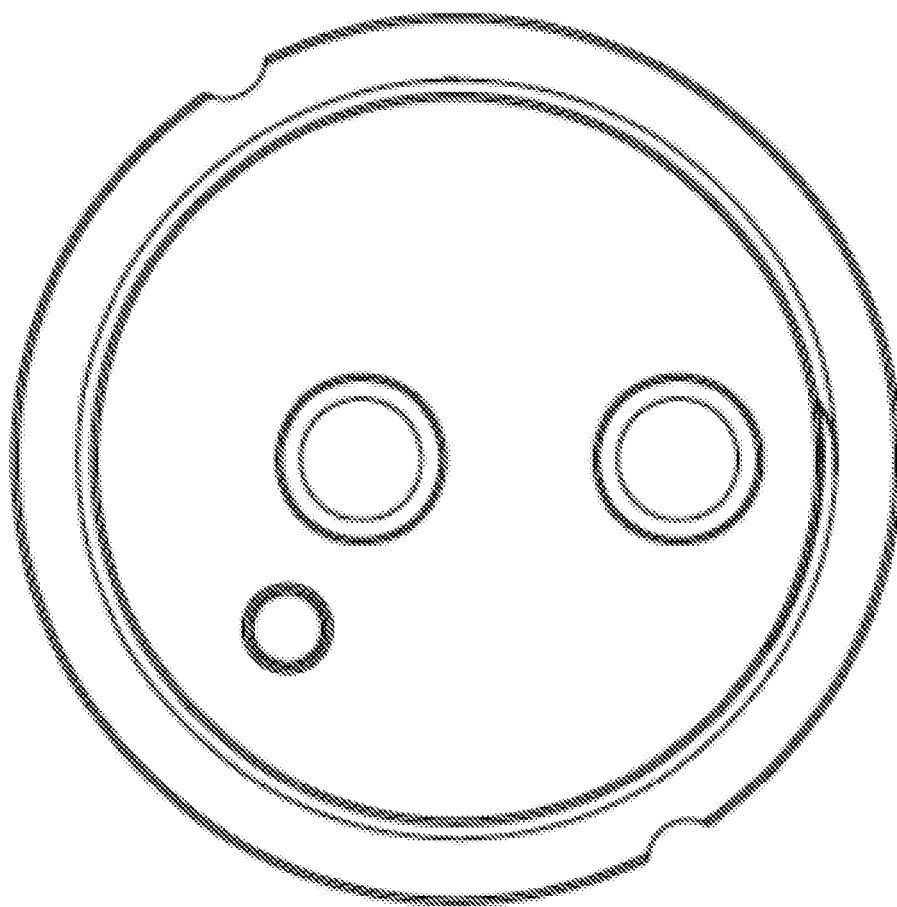


FIGURE 12B

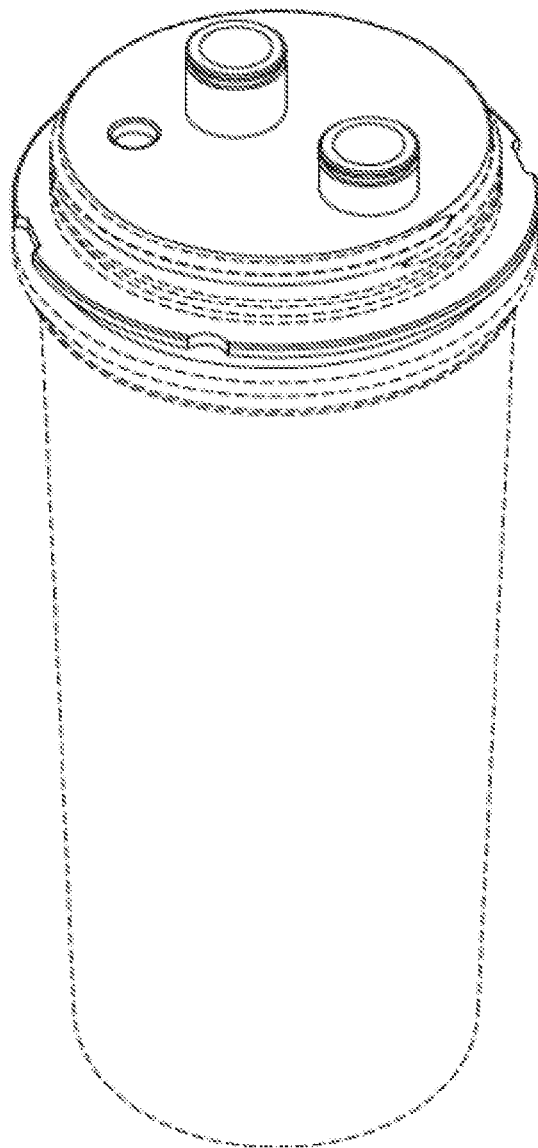


FIGURE 13A

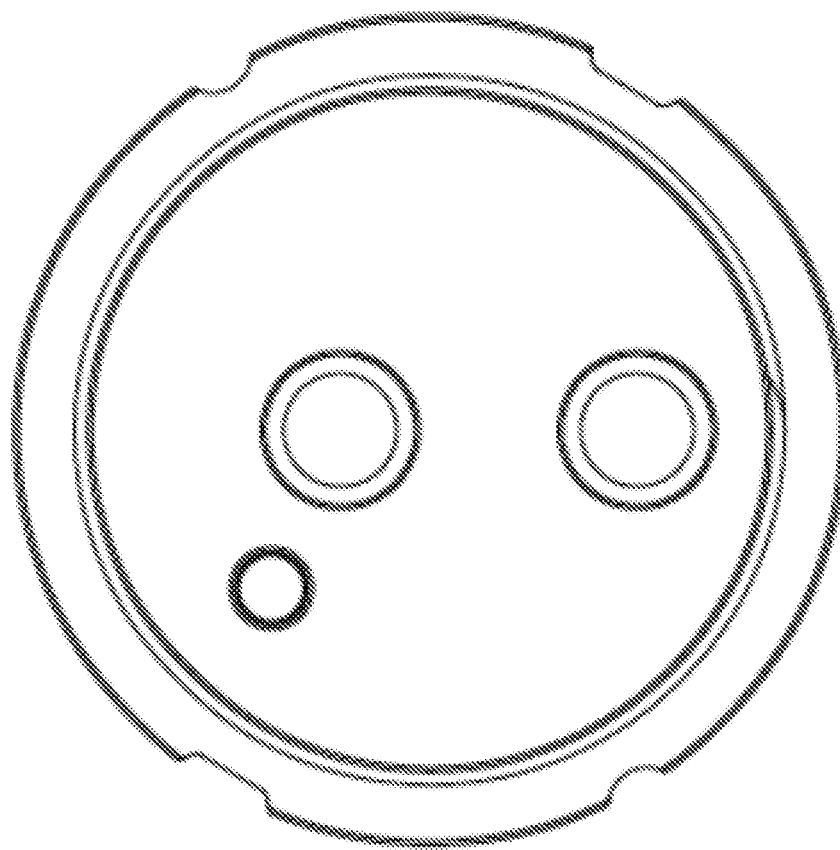


FIGURE 13B

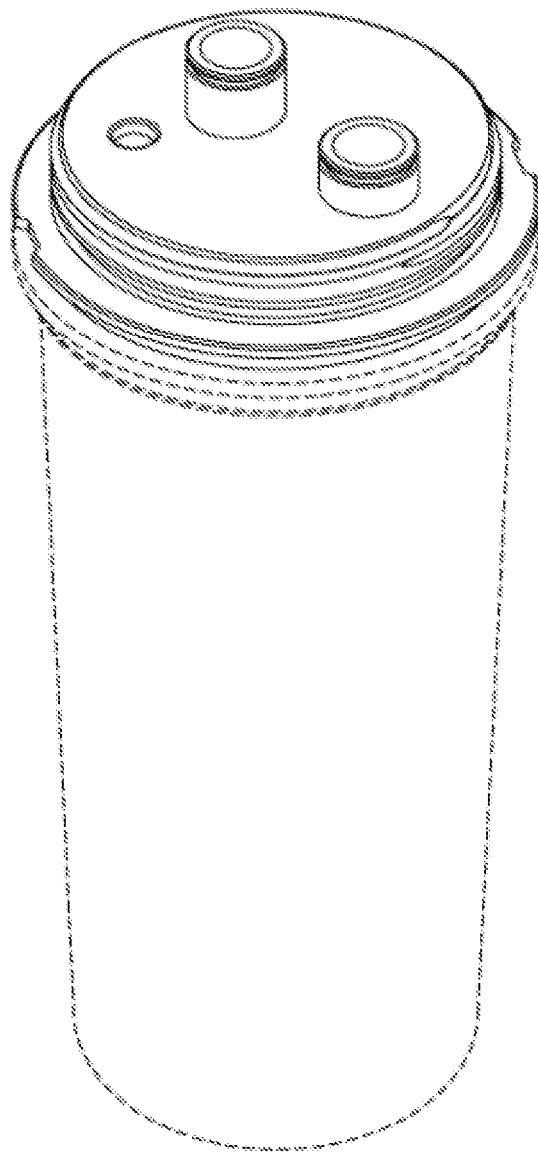


FIGURE 14A

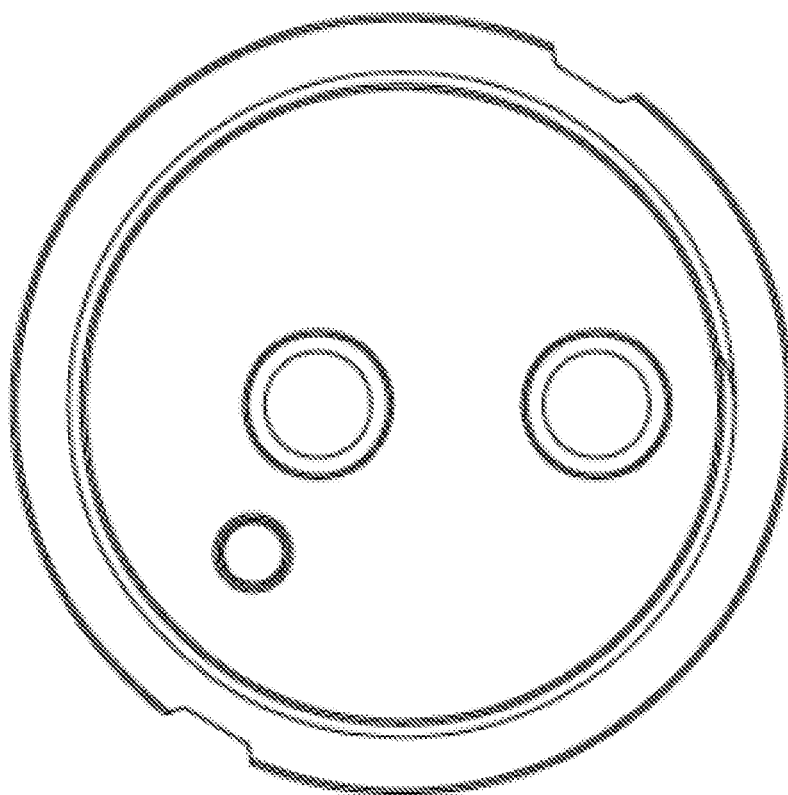


FIGURE 14B

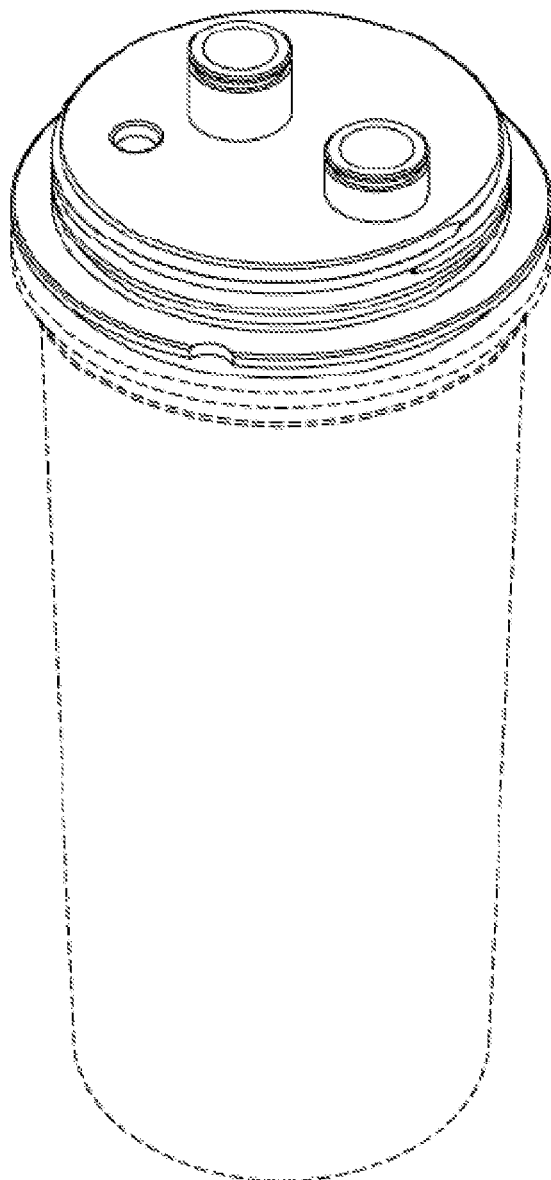


FIGURE 15A

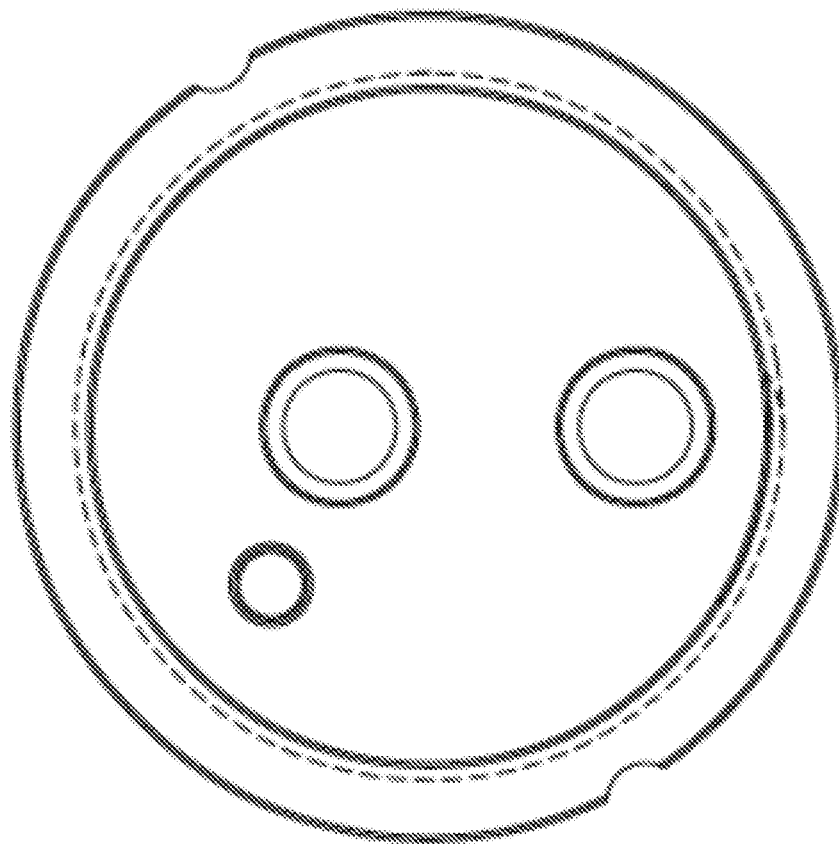


FIGURE 15B

DETACHABLE RECYCLING CONTAINER**RELATED APPLICATIONS**

[0001] This patent application claims priority from provisional patent application Ser. No. 62/414,712, filed on Oct. 29, 2016; and provisional patent application Ser. No. 62/406,990, filed on Oct. 12, 2016. This application further claims priority from patent application Ser. No. 29/667,212, filed Oct. 19, 2018, which is a continuation of Ser. No. 29/585,659, filed on Nov. 28, 2016, now patent number D835,778. This patent application further claims priority from patent application Ser. No. 29/585,674, filed on Nov. 28, 2016. This patent application further claims priority from patent application Ser. No. 29/672,887, filed on Dec. 10, 2018, which is a continuation of patent application Ser. No. 29/585,668, filed on Nov. 28, 2016, now patent number D835,779. This patent application further claims priority from patent application Ser. No. 29/577,701, filed on Sep. 14, 2016. This patent application further claims priority from patent application Ser. No. 29/567,544, filed on Jun. 9, 2016. This patent application further claims priority from patent application Ser. No. 29/671,943, filed on Nov. 30, 2018, which is a continuation of patent application Ser. No. 29/565,622, filed on May 23, 2016, now issued U.S. Pat. No. D835,264.

FIELD OF THE INVENTION

[0002] This invention relates to systems and apparatus suitable to remove particles from effluent waste, and particularly, to remove amalgam and other metallic particles and other abrasive solids from dental office suction effluent. The system also comprises a self contained recycling container to facilitate customer regulatory compliance and environmental safeguards.

BACKGROUND OF THE INVENTION

[0003] Dental amalgam is a dental filling material used to fill cavities caused by tooth decay. It has been used for more than 150 years in hundreds of millions of patients around the world.

[0004] Dental amalgam is a mixture of metals, consisting of liquid (elemental) mercury and a powdered alloy composed of silver, tin, and copper. Approximately 50% of dental amalgam is elemental mercury by weight. The chemical properties of elemental mercury allow it to react with and bind together the silver/copper/tin alloy particles to form an amalgam. See <http://www.fda.gov/MedicalDevices/ProductsandMedicalProcedures/DentalProducts/DentalAmalgam/ucml171094.htm>, accessed Sep. 9, 2016.

[0005] Amalgam is used less often than in the past, mostly because tooth-colored materials now can be used. However, the newer materials can't be used for all dental situations, amalgam is less costly than newer materials and it lasts longer, especially in teeth that undergo a lot of pressure and wear from chewing.

[0006] Better dental health overall coupled with increased demand for more modern alternatives such as resin composite fillings (which match the tooth color), as well as public concern about the mercury content of dental amalgam, have resulted in a steady decline in dental amalgam use in developed countries, though overall amalgam use continues to rise worldwide. Stein, P S; Sullivan, J; Haubenreich, J E; Osborne, P B (2005). "Composite resin in medicine and

dentistry". Journal of long-term effects of medical implants, 15 (6):641-54, doi:10.1615/jlongtermeffmedimplants. v15.i6.70. PMID 16393132.

[0007] Although amalgams are less frequently used in developed countries for new dental fillings than in the past, amalgams continue to make up a portion of the particle component of dental office effluent mainly because of the fact that old fillings made of amalgams are drilled out and removed in the effluent waste when new fillings are effected to replace the old. Further, as noted above, even under current dental practice, an amalgam is preferred for some tooth filling situations.

[0008] Because mercury is a poison that can accumulate in living tissues and can pose a health hazard to species in a food chain exposed to mercury-containing compounds, and since humans are inevitably at the end of the food chain, it follows that effluent containing amalgams can pose a health hazard to the community at large. Also, certain metals such as silver are commercially valuable if recovered in quantity. For those reasons, it is desirable to devise systems, apparatus and processes for removing amalgams from dental office effluent and efficiently recycling those amalgams.

[0009] In addition to removing amalgams, other matter disposed into dental office suction effluent includes aluminum oxides used in air abrasion treatments and other solid waste material. These solid materials tend to wear out or damage vacuum pumps and other equipment downstream of the dental chair suction apparatus, and also constitute effluent water contaminants. Therefore, it is desirable for the apparatus to remove solid abrasive material and other particulate waste from the dental office suction effluent.

[0010] The World Health Organization also points out that amalgam separators, installed in the waste water lines of many dental offices, dramatically decrease the release of mercury into the public sewer system. However, critics say that the separators are still not mandatory in some states of the United States. "Purchasing, installing and operating dental amalgam separators: Practical issues". The Journal of the American Dental Association. 134 (8):1054-65. doi:10.14219/jada.archive.2003.0319. PMID 12956345. Recently, the EPA has enacted nation-wide regulations requiring amalgam separators in dental offices.

[0011] Previously known apparatus for removing amalgam particles from dental office suction effluent are known to include a collecting tank for collecting a day's accumulation of suction effluent from one or more sources of such waste. The waste is sucked from the dental chair suction apparatus and into the collecting tank by a vacuum pump. When the vacuum pump is turned off, an outlet valve is opened and the accumulated waste is deposited into a separation device intended to separate metal particles from the effluent liquid. Flow into the separation device is induced by the head of fluid in the collecting tank. Particles passing through the separation device are separated from the waste by gravity and settle to the bottom of the separation device. The flow rate is dependent on the head inside the collecting tank; as the head diminishes, the flow rate also diminishes. The changes in flow rate are undesirable because the particle separation rate is affected, and the system becomes prone to plugging when the flow rate decreases. Also, since the waste can be deposited only when the vacuum pump is off, waste is usually moved to the separation device at the end of the

day. As a result, the collecting tank and separation device tend to be undesirably large and the whole process is time consuming.

[0012] Another known apparatus is a centrifuge type system that separates heavier metal particles from effluent liquid by collecting the particles at the peripheral wall of the centrifuge. This apparatus does not effectively separate lighter particles, and is expensive to purchase and operate due to the complexity of its mechanical parts.

[0013] Yet another known apparatus uses a dedicated mechanical pump to suction waste liquids through a separator device. Again, a dedicated pump can be expensive to purchase and to maintain, and can be undesirably space-consuming.

[0014] Such known systems can become quite complex, unwieldy and expensive, as for example that disclosed in U.S. Pat. No. 5,885,076 granted 23 Mar. 1999. It teaches the use of sedimentation, co-precipitation and filtration in an expensive complicated apparatus that is probably economical, if at all, only for relatively large installations such as a military base dental complex.

[0015] U.S. Pat. Nos. 6,692,636 and 6,596,754 are patents that disclose systems for removing amalgam from dental office suction effluent.

[0016] After collecting the amalgam and other solid waste the dentist is left with the problem of what to do with the waste. Either the dentist has to deal with his own hazardous waste or he can send his collected material to a recycler. In either case, the "collection container" needs to be disposable and easily replaceable.

[0017] Existing recycling programs generally require the provision of bulky shipping materials and the delivery of those materials to the dentist for every full container. If such materials are not provided and the materials are not properly recycled a large part of the benefit of collecting the amalgam waste can be lost. It is important that the waste is recycled under federal guidelines in order to make sure the full benefits of amalgam separation are achieved.

[0018] Additionally, containers for collection, such as dental amalgam recycling systems, can be compromised by incorrect installation or misalignment, which can cause O-rings to deform and/or seal irregularly, and result in leakage.

SUMMARY OF THE INVENTION

[0019] The present invention overcomes many of the shortcomings of the prior technology and achieves further advantages that will be apparent after reviewing the following detailed description.

[0020] In one aspect, the invention comprises a dental amalgam recycling system for recycling particles from a dental liquid effluent drawn from a suctioning device. In certain embodiments, the dental amalgam recycling system of the invention comprises:

[0021] (a) an air-water separator tank for receiving said effluent, said air-water separator tank having an air-water separator tank inlet in fluid communication with said suctioning device, an air-water separator tank liquid effluent outlet and an air-water separator tank air outlet;

[0022] (b) a detachable recycling container, said recycling container acting primarily under the influence of gravity to cause settlement of said particles; said recycling container having a recycling container effluent inlet port connected to

said air-water separator tank liquid effluent outlet and said recycling container further having an effluent outlet port;

[0023] (c) wherein the air-water separator tank also includes an internal suction conduit;

[0024] (d) wherein the recycling container comprises threads;

[0025] (e) wherein the recycling container effluent inlet port and the recycling container outlet port are not the same height.

[0026] In certain embodiments, the dental amalgam recycling system further comprises (f) a threaded shipping cap, wherein the threads of the shipping cap and the threads of the recycling container are complementary such that, when the shipping cap is fitted in place, the shipping cap forms a tight seal with said recycling container.

[0027] While in use, the dental amalgam recycling system is functionally associated with a vacuum pump having a vacuum pump inlet. The vacuum pump is typically a pre-existing part of the dental office facility. In particular embodiments, the dental amalgam recycling system is physically connected with a vacuum pump via a suction conduit in the air-water separator. In certain preferred embodiments, the suction conduit is an internal suction conduit within the air-water separator.

[0028] In certain embodiments, the dental amalgam recycling system of the invention further comprise a first plug for said recycling container inlet port and a second plug for said recycling container effluent outlet port. Said first and second plugs may be held tightly in place by said threaded shipping cap when said shipping cap is fitted in place.

[0029] In certain embodiments, the dental amalgam recycling system of the invention further comprise an O-ring that provides an air and effluent tight seal when said shipping cap is fitted in place.

[0030] In certain embodiments, the invention comprises a container, useful as a dental amalgam recycling container, comprising threads for attachment of a shipping cap. In certain embodiments, the dental amalgam recycling container further comprises two plugs held in place by said shipping cap and an O-ring fitted in an O-ring groove to prevent leaks. The dental amalgam recycling containers of the present invention may further comprise a two tier cap that enables people with hands of different sizes to grip the cap and tighten to achieve a very tight seal.

[0031] In certain embodiments, the invention comprises an adapter for an air-water separator tank, wherein the adapter enables a recycling container without compatible effluent ports to attach to an air-water separator tank. Said air-water separator tank may comprise, for example, a component of a dental amalgam recycling system, as described above. In certain embodiments, the adapter may comprise threads. In alternative embodiments, the adapter may be without threads.

[0032] As described above, the potential for leakage exists in a collection canister such as a recycling container used in the dental amalgam recycling systems described herein. Such leakage may occur, for example, due to incorrect installation, or due to misalignment of a container and its intended mating partner, such as the air-water separation tank or its intended cap, such as a threaded shipping cap, which may cause O-rings to deform and/or seal irregularly. In order to address this problem and/or reduce the potential for leakage, a collection canister, such as a recycling container used in a dental amalgam recycling system, may have

one or more irregular ‘keyways’ cast into its outside top mating surface, and the intended mating partner, such as the air-water separation tank, or the shipping cap, may have one or more corresponding ‘key(s)’ be cast into its mating surface, such that the key(s) and keyway(s) must be aligned in order for the collection canister (e.g., the recycling container) and its mating partner (e.g., the air-water separation tank; or the shipping cap) to mate properly. This key/keyway system can help ensure even pressure across the entire circumference of the O-ring surface on each port. Similarly, such key(s) and keyway(s) may be used to ensure proper replacement of the container and/or the air-water separation tank, such that incorrect replacement can be avoided or minimized.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] FIG. 1 is a schematic front view of an embodiment of particle removal and recycling apparatus according to the invention, for particular use in a dental office.

[0034] FIG. 2 is a schematic side view of an embodiment of particle removal and recycling apparatus according to the invention, for particular use in a dental office.

[0035] FIG. 3 *a* is a schematic view of an embodiment of a universal adapter for fitting various different sized recycling containers to the air-water separator of the present invention.

[0036] FIG. 3 *b* is a schematic view of an alternative embodiment of a universal adapter for fitting various different sized recycling containers to the air-water separator of the present invention.

[0037] FIG. 4 *a* is a schematic view of an embodiment of a recycling container and cap system of the invention.

[0038] FIG. 4 *b* is a schematic perspective depiction of an embodiment of a recycling container and cap system of the invention.

[0039] FIG. 5 *a* is a schematic inside view of an embodiment of a recycling cap for the recycling containers of the invention.

[0040] FIG. 5 *b* is a schematic depiction of a recycling cap according to the invention fitting on a partial view of a recycling container according to the invention.

- [0041] 1—Backplate
- [0042] 2—Waste Inlet (from dental practice)
- [0043] 3—Air/water Separator Top
- [0044] 4—Top Support Bracket
- [0045] 5—Air/Water Separation Tank
- [0046] 6—Suction tube
- [0047] 7—Air/Water Separator Base
- [0048] 8—Outlet Tube (to vacuum system)
- [0049] 9—Recycling Container Top
- [0050] 10—Lower Support Bracket
- [0051] 11—Restrictor
- [0052] 12—Detachable Recycling Container
- [0053] 13—Retaining Pins (2)
- [0054] 14—air-water separator tank effluent outlet port
- [0055] 15—recycling container inlet port
- [0056] 16—recycling container outlet port
- [0057] 17—recycling container threads
- [0058] 18—two tier recycling cap
- [0059] 19—O-ring groove
- [0060] 20—cap plugs
- [0061] 21—O-ring

[0062] FIG. 6A is a schematic view of a first embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0063] FIG. 6B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0064] FIG. 7A is a schematic view of a second embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0065] FIG. 7B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0066] FIG. 8A is a schematic view of a third embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0067] FIG. 8B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0068] FIG. 9A is a schematic view of a fourth embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0069] FIG. 9B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0070] FIG. 10A is a schematic view of a fourth embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0071] FIG. 10B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0072] FIG. 11A is a schematic view of a fifth embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0073] FIG. 11B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0074] FIG. 12A is a schematic view of a sixth embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0075] FIG. 12B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0076] FIG. 13A is a schematic view of a seventh embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0077] FIG. 13B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0078] FIG. 14A is a schematic view of a eighth embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0079] FIG. 14B is a schematic view of the same embodiment, viewing the top of the container from directly above.

[0080] FIG. 15A is a schematic view of a ninth embodiment of a detachable container according to the present invention, viewing the top of the container at an angle.

[0081] FIG. 15B is a schematic view of the same embodiment, viewing the top of the container from directly above.

DETAILED DESCRIPTION WITH REFERENCE TO THE DRAWINGS

[0082] According to one aspect of the instant invention, an apparatus is provided for removing and recycling metal-containing particles and other waste particles from effluent, particularly effluent from a dental office. While herein the term “metal particles” may frequently be employed, it is contemplated that the apparatus is capable of separating other solid particles from effluent liquid.

[0083] According to one aspect of the invention, an apparatus for removing metal particles and other solid particles from liquid suction effluent can be installed in a dental office using a pre-existing suction/vacuum pump system. The

apparatus may share a common vacuum pump with conventional dental chair suction apparatus, without interrupting the use of suction equipment at the dental chairs.

[0084] Removal of solid particles from liquid suction effluent is effected by sedimentation.

[0085] In accordance with a one embodiment of the invention, the dental office suction effluent is passed from dental chair suction equipment outlets to an air water separator tank via a suitable inlet port for the tank. The air-water separator tank in turn passes effluent into a sedimentary deposit tank, closed on all sides when in use and preferably readily detachable for emptying or replacement.

[0086] In certain aspects of the instant invention the sedimentary deposit tank has a secondary function as a recycling container. In another aspect of the invention this recycling container can have features built in to make recycling easier and to reduce the amount of packaging and waste in the recycling system.

[0087] In another embodiment of the invention designed to minimize the space required to install the amalgam recycling system the air-water suction tube is internalized—within the air-water separator tank.

[0088] FIG. 1 and FIG. 2 shows two views of the separation apparatus according to the present invention in detail. Effluent from the dental chairs and a quantity of air are sucked through a suction apparatus exhaust conduit, through an air-water separator tank inlet 2, and thence into an air-water separator tank 5. The liquid effluent passes out of the air-water separator tank 5 via air-water separator tank outlet port 14, while air passes downstream via the air suction tube 6 while maintaining constant vacuum upstream of amalgam separator.

[0089] The air-water separator tank effluent outlet port 14 passes effluent by gravity out of the air-water separator tank 5 and into the detachable recycling container 12 through the recycling container inlet port 15 for target particle separation by sedimentation. Solids settle and accumulate in the bottom of Recycle container 12. Liquid content of waste flows primarily by gravity, although intermittently assisted by vacuum through Restrictor 11 which slows the flow rate of liquid to assist in sedimentation process and ultimately “clean” effluent discharge through the recycling container outlet port 16.

[0090] Outlet ports 16 and inlet port 15 can be a variety of shapes and sizes, square, oval (as depicted), round or even more unusual shapes like a star. Preferred ports are those that provide a tight seal, allow for easy removal, and do not break. Oval or round are preferred embodiments. Round are most preferred.

[0091] A vacuum at the outlet tube 8 is generated when the vacuum pump is operating, thereby sucking air out of the air-water separator tank 5 via suction tube 6 while maintaining vacuum upstream of amalgam separator apparatus. Effluent from the recycling container 12 passes through the restrictor 11 where remaining non-settable fine particles are removed from the effluent and into the recycling container outlet port 16 to be discharged from the apparatus via common outlet tube 8. Matter sucked by the vacuum pump, generally free of removed solids, is discharged via vacuum pump into a municipal drain of the public sewage system.

[0092] The system is provided with a simple back plate 1 for easy dental office placement as well as removable

retaining pins 13 to ensure the recycling container does not detach from the air-water separation tank 5 when there is no vacuum in the system.

[0093] In certain embodiments, the recycling container ports 16 and 15 may be different heights in order to aid in alignment of the detachable recycling container 12 in the air-water separator base 7. In a preferred embodiment, the outlet port 16 engages before the inlet port 15 while during removal the inlet port 15 disengages first. This causes a small volume of fluid to be pulled out of the collection container back into air-water separator tank 5 creating head space and eliminating upward force of vacuum which eases removal of recycle container 12 by operator. Existing devices require rocking, wiggling or applying extensive down force for removal of recycle container 12.

[0094] In one preferred embodiment of the invention designed to minimize recycling costs and waste, the recycling container/sedimentary deposit tank has threads 17 built into the container to enable the addition of a liquid tight top for shipping.

[0095] FIG. 3 shows a schematic diagram of an adapter according to the invention to enable the use of recycling containers from a variety of sources that are lacking in correctly shaped ports 16 and 15 or otherwise are unable to fit the air-water separator tank 5 according to the invention due to shape differences.

[0096] FIG. 4 a shows a schematic diagram of the recycling container and cap system (see FIG. 5 for more cap 18 detail) according to the present invention. The cap 18 is a two tier shape to allow for a tight grip by both a big and smaller hand in order to achieve a strong seal as required by the invention. An O-ring 21 is provided and fits into an O-ring groove on the recycling container 12. Plugs 20 are used to provide a first leak proof seal for the recycling container 12. These plugs 20 are held in place by the cap 18 when the cap is threaded onto the recycling container as depicted in FIG. 5b.

[0097] FIG. 6 through FIG. 15 show several embodiments of a recycling container of the present invention, which include the inlet port and outlet port on the top mating surface, and irregular keyways cast into the outer top mating surface.

[0098] Generally, under present practice, the dental staff will not be able to remove deposited sediment from the recycle container nor remove accumulated particle residues from the restrictor unit themselves. Thus, it is desirable that such removal be done by a competent effluent residue processing facility. Therefore, under present practice, it is expected to be preferred that the recycling container with its enclosed restrictor unit be removed when full, or periodically replaced by fresh tanks from time to time as required. The spent tank with an accumulation of metallic and other particles can then be sent to a processing facility for proper disposal of the targeted metallic particles, such as mercury, and recovery of precious metals such as silver.

[0099] Although the sedimentary deposit process is effective to remove a satisfactorily high proportion of the target particles desired to be removed from the effluent, the recycling container desirably includes an outlet restrictor right in the chamber to catch any floating materials as well as any other materials that did not settle out.

[0100] If the recycle container is not changed as required or filled beyond normal capacity, waste liquid from dental practice may back up into air water separator tank. Should

this occur, effluent overflows through the air suction tube and into the outlet port and is discharged into the vacuum pump draw line and thence eventually into the municipal drain. However, it is desirable that the system should operate in such a manner as to avoid having the air-water separator tank become completely full, since effluent exiting through the air outlet port will contain particles that will not be separated by the separator, if, however, such a by-pass condition occurs at no time will the suction generated by the vacuum pump be lost or interrupted at the dental office.

[0101] In a further embodiment of the invention oriented towards large-scale institutional applications, in which many dental chairs or other sources of effluent are connected to the same suction and drain services, several parallel-connected recycling containers and associated apparatus, each such composite apparatus including a air-water separator tank and preferably one, or alternatively two attached recycling containers, may be operated in parallel to provide sufficient treatment capacity for large effluent volumes.

[0102] All publications, web-sites, patents and patent applications cited in the specification are hereby incorporated herein by reference in their entirety for the disclosure for which they are cited.

[0103] Having read the above specification, other alternatives and variants of the above described methods and apparatus suitable for practicing the methods will occur to those skilled in the technology. Such alternatives, modifications and variants fall within the scope of the present invention.

[0104] The invention as described above also includes the following non-limiting claims, which describe particular embodiments of the invention.

1-12. (canceled)

13. A detachable container suitable for mating securely with a corresponding air-water separation tank having one or more keys; said detachable container having an outside top mating surface, said top mating surface having an outside perimeter, said detachable container further comprising an inlet port and an outlet port projecting upward from the top mating surface; said detachable container further comprising one or more corresponding keyways cast into said outside perimeter of said top mating surface; such that, when said one or more corresponding keyways of the detachable container are aligned with the one or more keys of the air-water separation tank, said detachable container is capable of mating securely with said air-water separation tank.

14. The detachable container of claim 13, wherein said inlet port and said outlet port are of the same height.

15. The detachable container of claim 13, wherein, when said detachable container is mated securely with a corresponding air-water separation tank, said inlet port is securely connected to a liquid effluent outlet from the corresponding air-water separation tank, and said outlet port is securely connected to an outlet tube.

16. The detachable container of claim 13, further comprising a cap for covering the outside top mating surface and having an inside surface with a first circular wall and a second circular wall, the first circular wall placed so as to engage an upper surface of the inlet port and the second circular wall placed so as to engage an upper surface of the outlet port; wherein said cap prevents spillage or leaking during storage or shipping of the detachable container.

17. A detachable container comprising one or more container keyways suitable for attachment with a dental amalgam separation system comprising one or more corresponding keys,

said detachable container having an outside top mating surface comprising a container effluent inlet port and a container effluent outlet port projecting upward from the outside top mating surface; and wherein said detachable container further comprises one or more container keyways cast into the outside perimeter of said top mating surface; wherein, upon alignment of the one or more container keyways with one or more corresponding keys present on the dental amalgam separation system, the detachable container will detachably engage with the dental amalgam separation system, allowing for a leak-proof detachable connection.

18. The detachable container of claim 17, wherein said container effluent inlet port and said container effluent outlet port are of the same height.

19. The detachable container of claim 17, wherein, when said detachable container is mated securely with a corresponding air-water separation tank, said container effluent inlet port is securely connected to an effluent outlet from the corresponding air-water separation tank, and said container effluent outlet port is securely connected to an outlet tube.

20. The detachable container of claim 17, further comprising a cap for covering the outside top mating surface and having an inside surface with a first circular wall and a second circular wall, the first circular wall placed so as to engage an upper surface of the inlet port and the second circular wall placed so as to engage an upper surface of the outlet port; wherein said cap prevents spillage or leaking during storage or shipping of the detachable container.

* * * * *