US006608548B1

(12) **United States Patent**
Pellaton et al.

(10) **Patent No.: US 6,608,548 B1**
(45) **Date of Patent: Aug. 19, 2003**

(54) **CONTROL DEVICE WITH REDUNDANCY FOR FITTING TO A LOCK**

(75) Inventors: **Pierre Pellaton**, Le Locle (CH); **Didier Dominé**, La Chaux-de-Fonds (CH)

(73) Assignee: **Ilco-Unican S.A./Rehlor Division** (CH)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/424,217**

(22) PCT Filed: **May 22, 1998**

(86) PCT No.: **PCT/CH98/00214**

§ 371 (c)(1),
(2), (4) Date: **Nov. 19, 1999**

(87) PCT Pub. No.: **WO98/54428**

PCT Pub. Date: **Dec. 3, 1998**

(30) **Foreign Application Priority Data**

May 30, 1997 (EP) 97108687

(51) **Int. Cl.**[7] **G05B 19/00**

(52) **U.S. Cl.** **340/5.54**; 340/5.51; 340/5.1; 340/5.2; 361/171; 70/278.1

(58) **Field of Search** 340/5.54, 5.51, 340/5.1, 5.2; 361/171, 191; 70/277, 278.1

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,136,704 A 8/1992 Danielsen et al. 395/575
5,307,655 A 5/1994 Boltz et al.
5,410,444 A * 4/1995 Juds 361/191
6,359,547 B1 * 3/2002 Denison et al. 340/5.73

FOREIGN PATENT DOCUMENTS

BE 874 278 A 6/1979
FR 2 661 938 11/1991

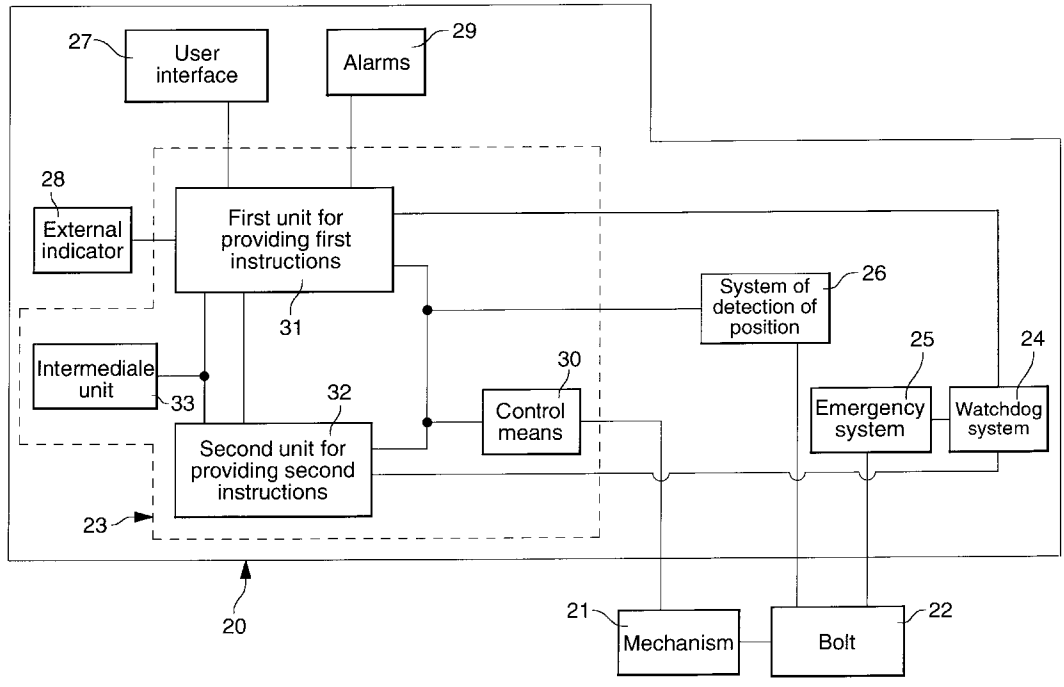
* cited by examiner

Primary Examiner—Julie Lieu
(74) *Attorney, Agent, or Firm*—Griffin & Szipl, P.C.

(57) **ABSTRACT**

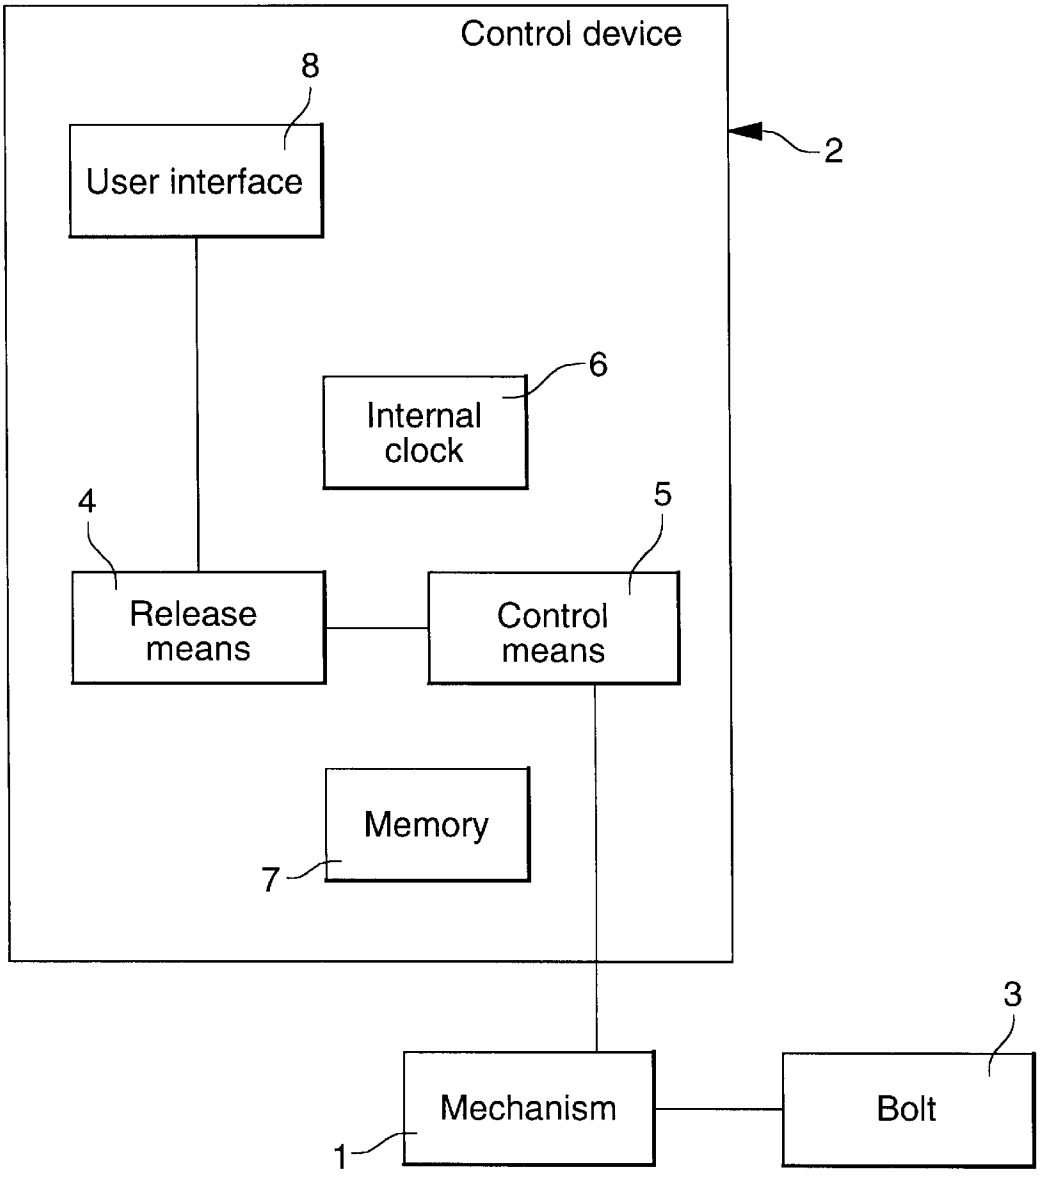
The present invention relates to a control device **(20)** with redundancy for fitting to a lock having a mechanism **(21)** for locking an unlocking an access door, the device **(20)** being adapted to manage a change of state of this lock under predetermined conditions and to ensure that this state current is kept current up until the next change of state. This device **(20)** comprises means **(30)** for controlling the mechanism **(21)** and two units **(31; 32)** for providing like instructions to the control means. This device **(20)** is characterized in that the first unit **(31)** has a structure different from that of the second unit **(32)**, while effecting common functions, and in that the control means behave functionally as an AND gate to the inputs of which are applied the instructions from the units respectively, when the device is functioning in a normal situation.

17 Claims, 6 Drawing Sheets



Be Smarter EX-1019-001

Fig. 1
(PRIOR ART)



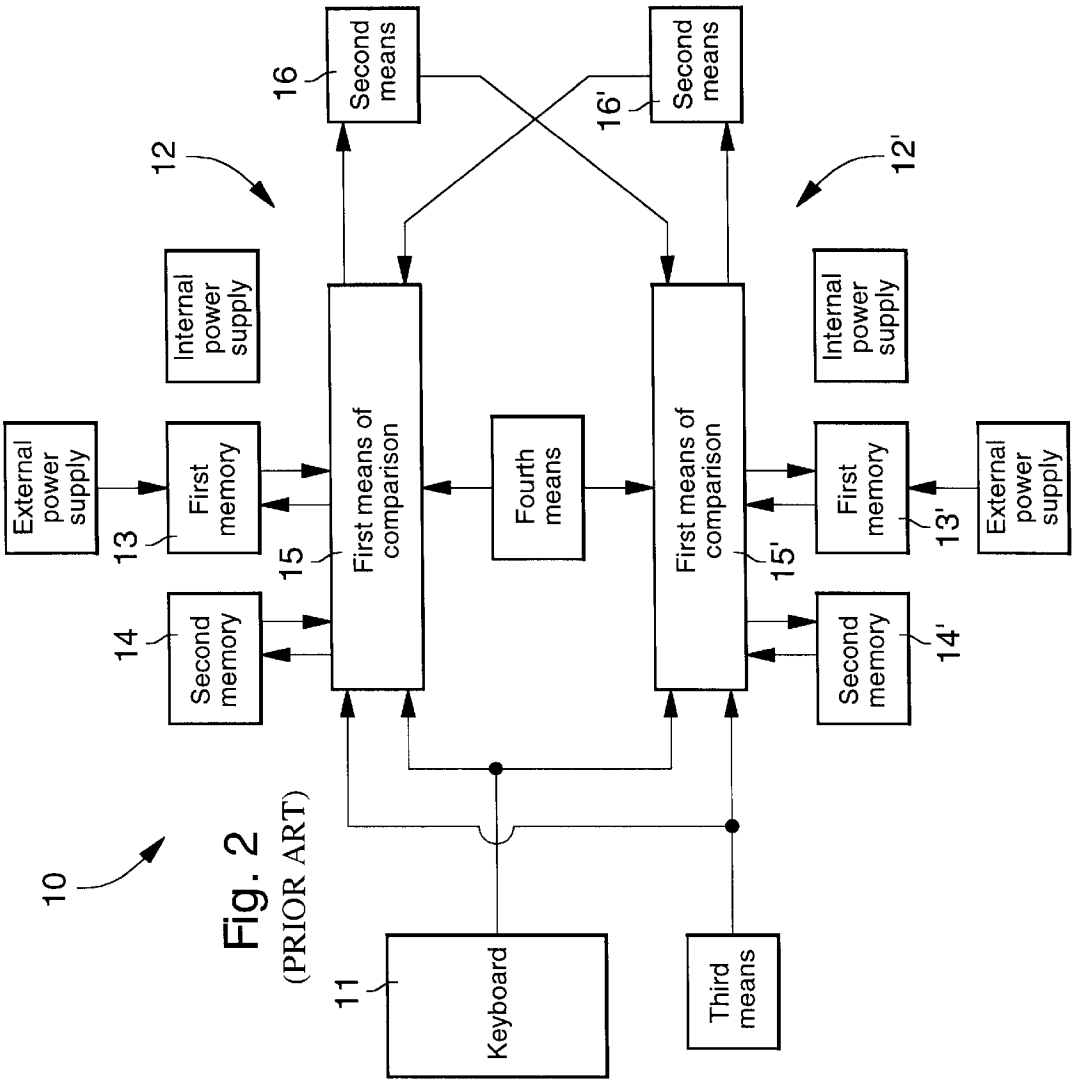


Fig. 2
(PRIOR ART)

Fig. 3

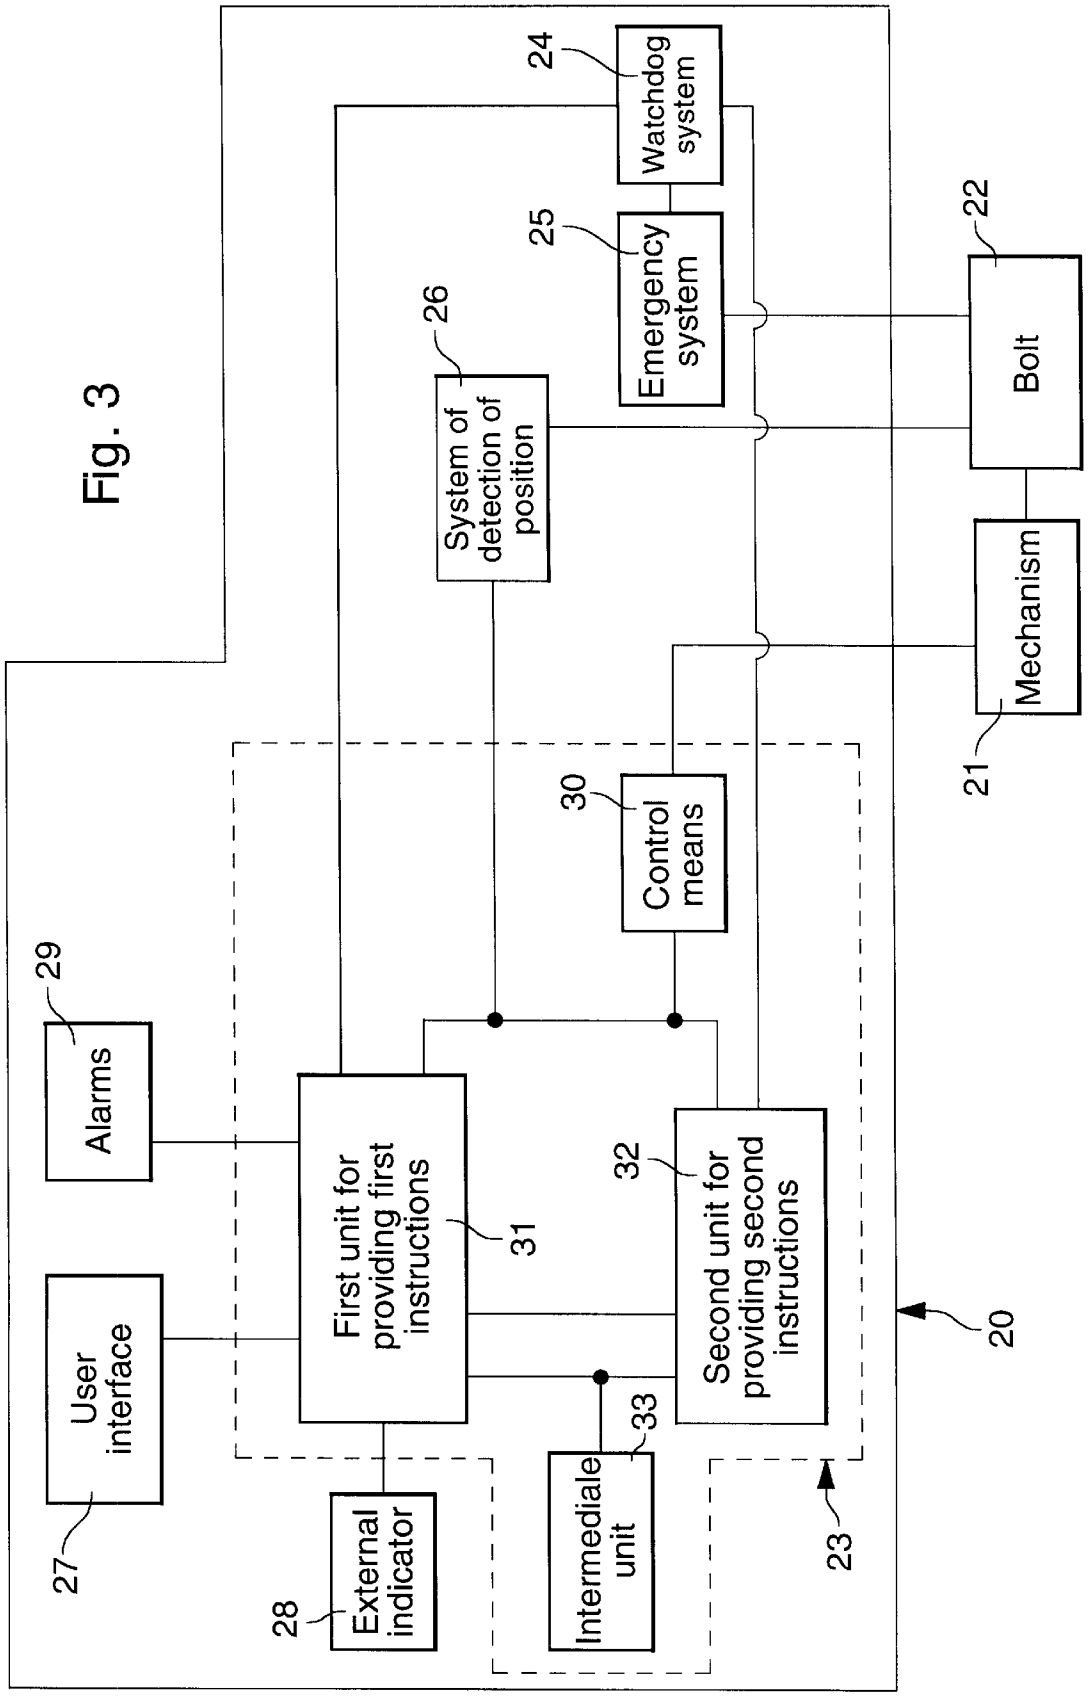
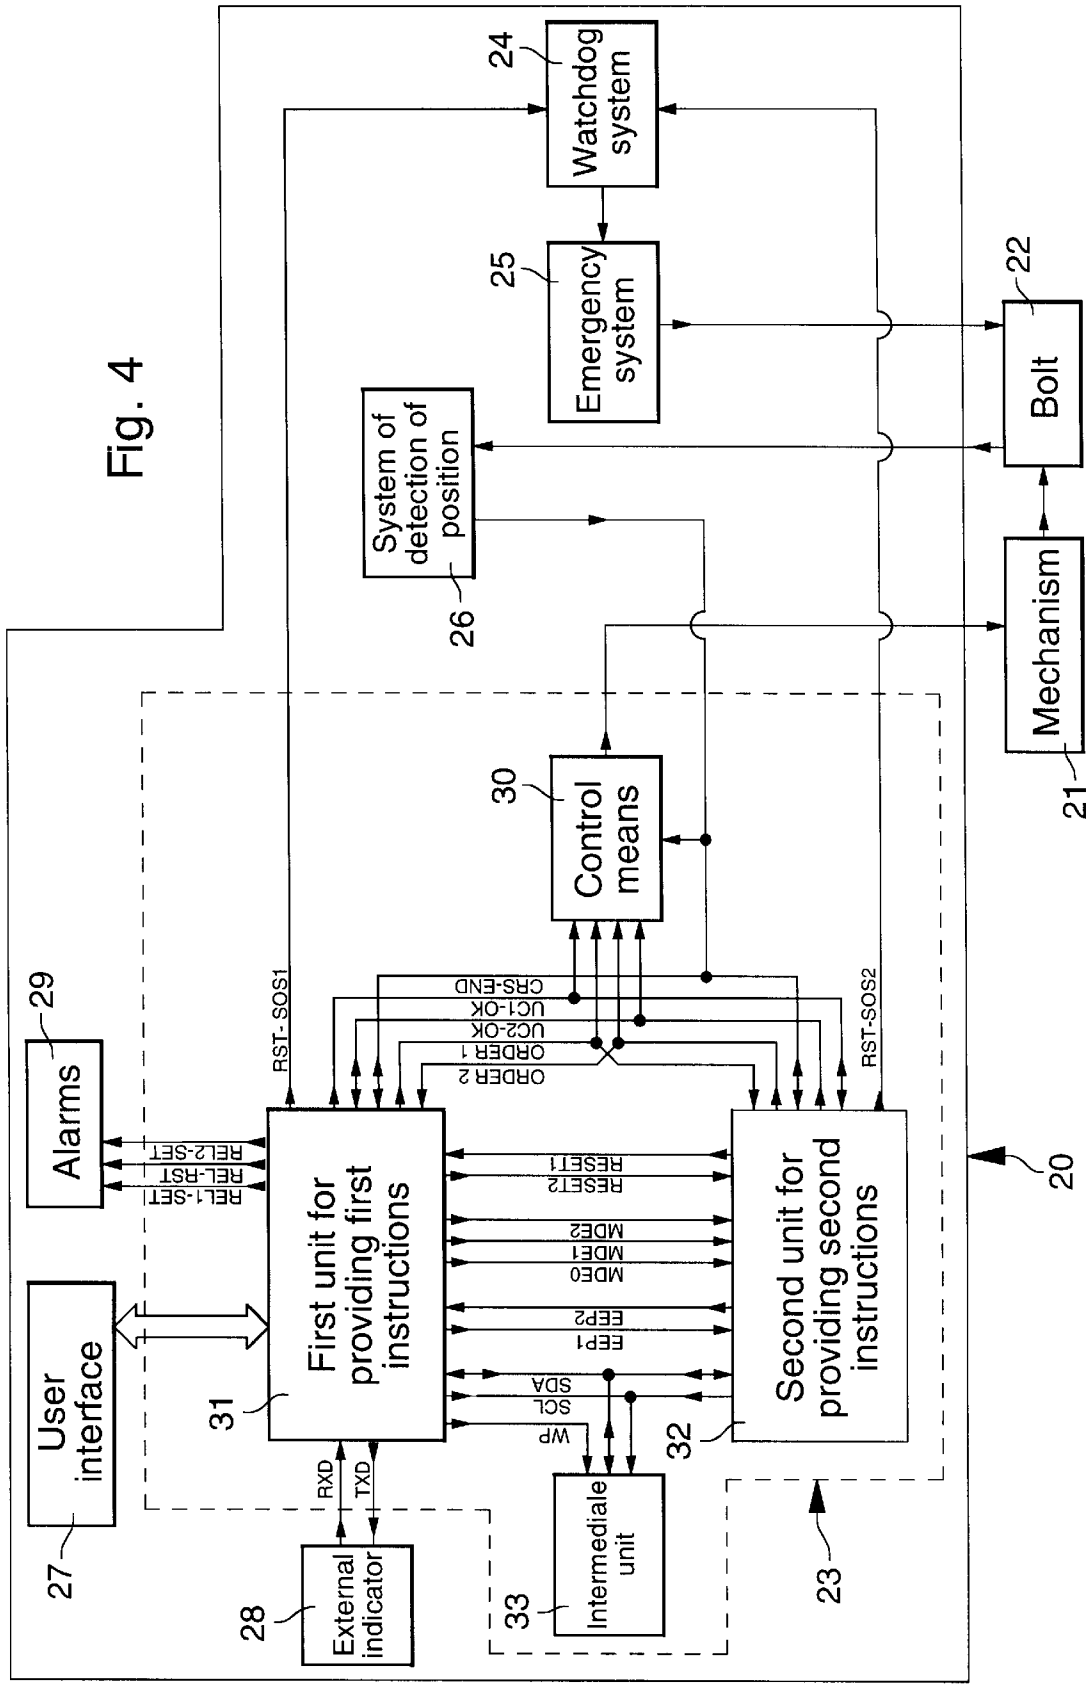

24
Watchdog system
25
Emergency system
26
System of detection of position
22
Bolt
Mechanism
21
30
Control means
29
Alarms
First unit for providing first instructions
31
32
Second unit for providing second instructions
User interface
27
28
External indicator
Intermediale unit
33
23
20

Fig. 4


24
Watchdog system
25
Emergency system
22
Bolt
System of detection of position
26
Mechanism
21
30
Control means
29
Alarms
RST- SOS1
RST-SOS2
CRS-END
UC1-OK
UC2-OK
ORDER 1
ORDER 2
REL2-SET
REL-RST
REL1-SET
RESET1
RESET2
MDE2
MDE1
MDE0
EEP2
EEP1
SDA
SCL
WP
First unit for providing first instructions
Second unit for providing second instructions
20
User interface
31
32
RXD
TXD
27
28
External indicator
33
Intermediale unit
23

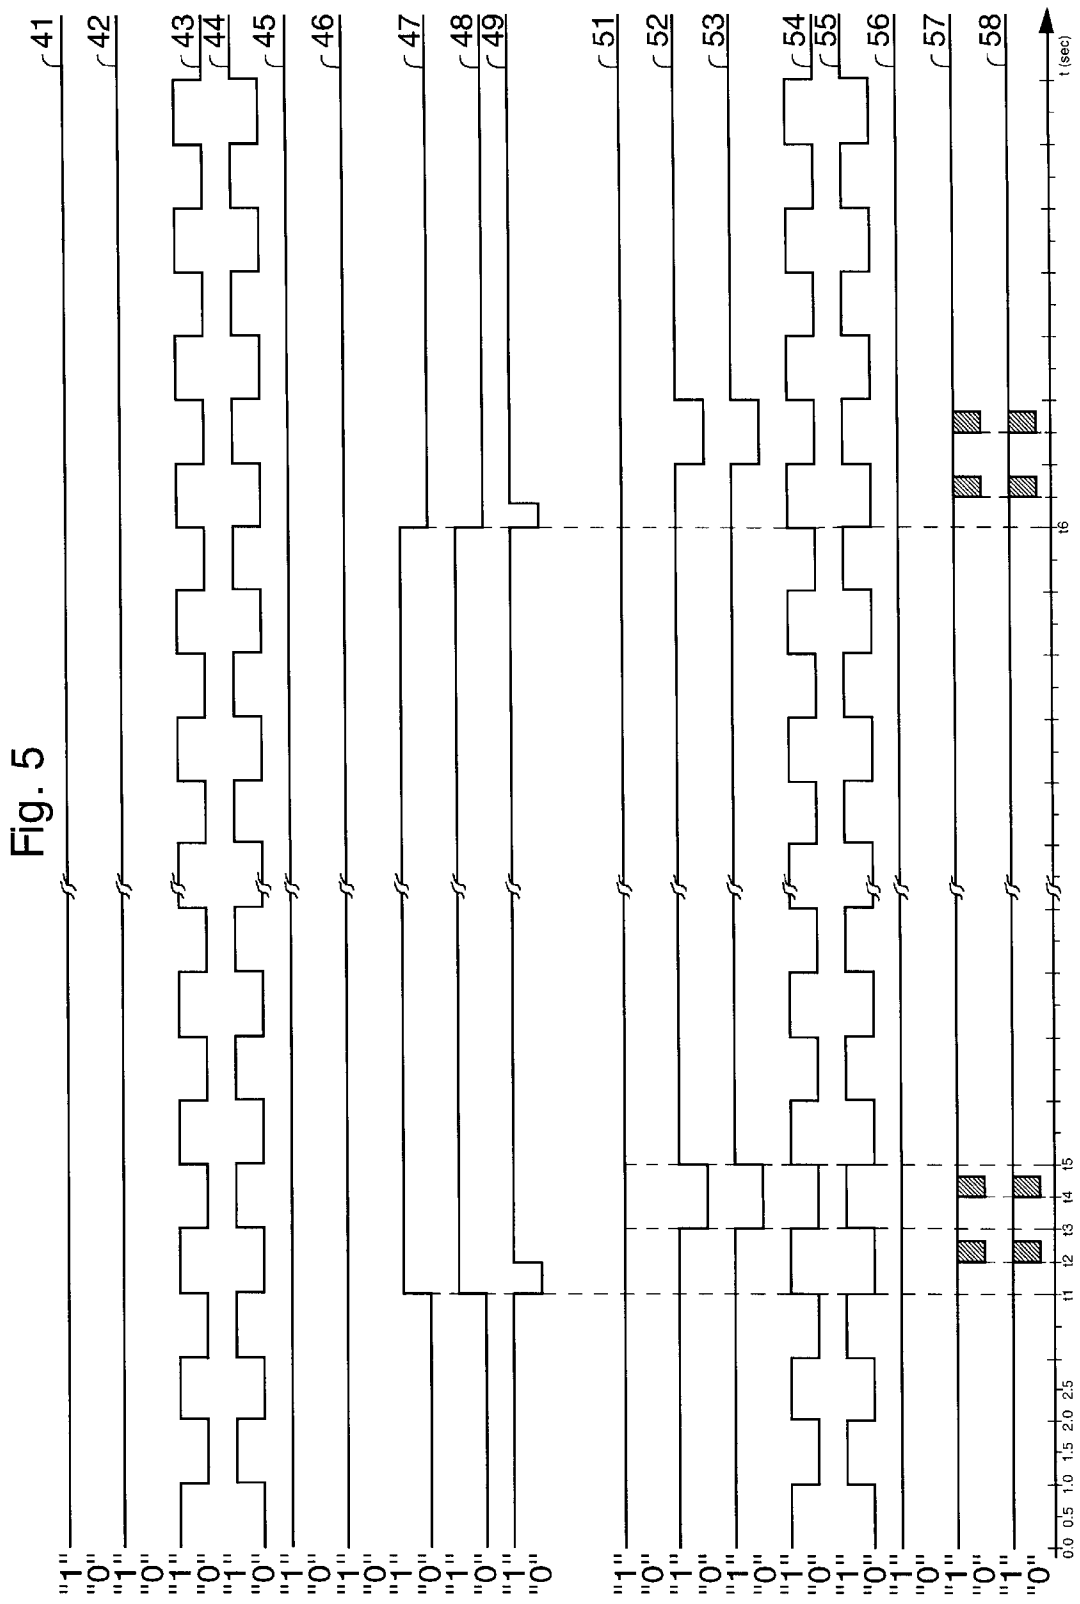

41
42
43
44
45
46
47
48
49
51
52
53
54
55
56
57
58
"1"
"0"
t (sec)
0.0 0.5 1.0 1.5 2.0 2.5
t1
t2
t3
t4
t5
t6

Fig. 5

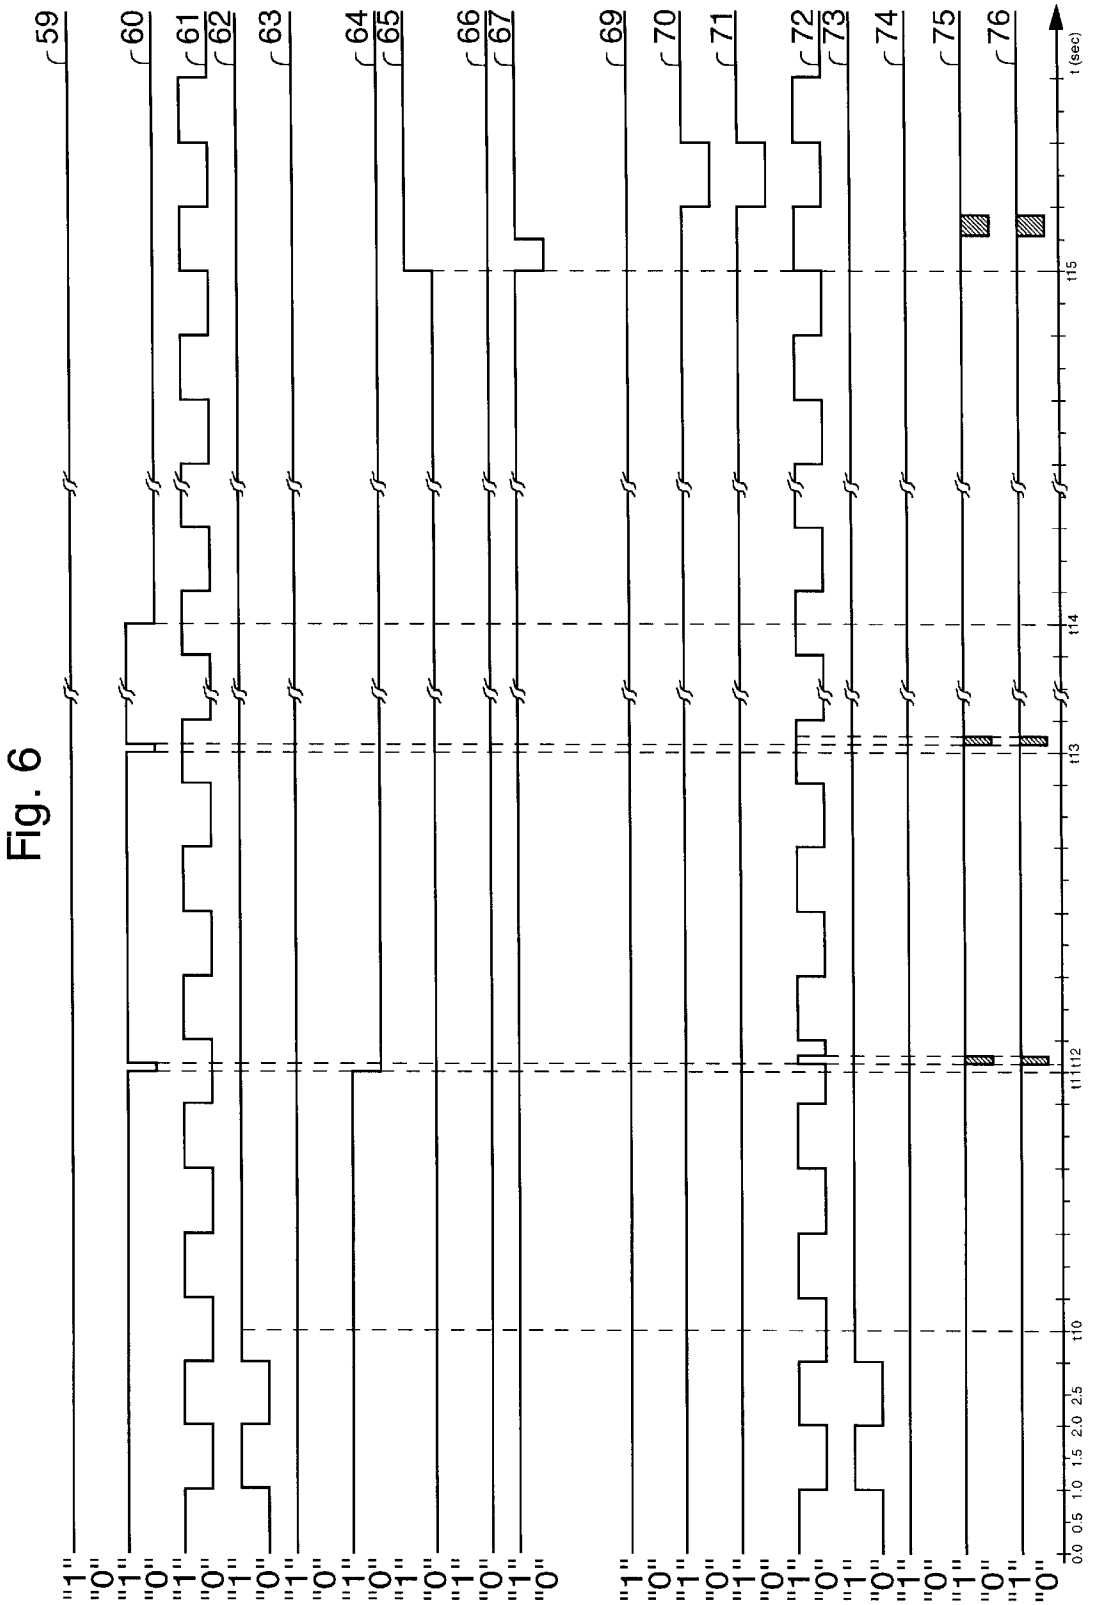

59
60
61
62
63
64
65
66
67
69
70
71
72
73
74
75
76
t (sec)
0.0 0.5 1.0 1.5 2.0 2.5
t10
t11 t12
t13
t14
t15

Fig. 6

CONTROL DEVICE WITH REDUNDANCY FOR FITTING TO A LOCK

FIELD OF THE INVENTION

The present invention relates to the field of locks and more particularly to a control device with redundancy for fitting to a lock of an access door to a protected place, the device being adapted to manage a change of state of the lock and to maintain this state current.

BACKGROUND OF THE INVENTION

In general terms there are three types of locks for fitting to an access door of a place protected by an enclosure, such as a strong box and a strongroom: time locks, combination locks and delayed action locks. There are furthermore locks arranged to implement the functions of time locks, combination locks and delayed action locks.

By way of example, FIG. **1** shows a conventional electromagnetic lock comprising a mechanism **1** for locking and unlocking an access door of the type mentioned above, by way of a bolt **3** of this lock. The mechanism **1** is controlled by an electronic control device **2** and is connected mechanically to the bolt **3**. The mechanism **1** is designed to block the bolt **3** in a certain position (typically in the locking position) for a predetermined duration defined by the control device **2**. The control device **2** comprises release means **4** for instructing a change of state of the lock and control means **5** for effecting this change of state. To this end, the release means **4** are electrically connected to the control means **5**, which are mechanically connected to the mechanism **1** in such a way that the release means **4** can provide a request for a change of state of the lock to the control means **5** and that the control means **5** can command the mechanism **1** to make this change, i.e. the locking or unlocking of the access door. The control device **2** further comprises a clock mechanism formed essentially by an internal clock **6** for defining the elapse of real time and by a memory **7** for storing information provided by an external user by way of a user interface **8**. Furthermore the user interface **8** comprises display means (not shown in FIG. **1**) for providing the external user with information relating to the operation of the control device **2**.

A fair number of electronic control devices have been proposed to ensure optimum security of places to be protected. The control devices used most often rely on the principle of redundancy applied to the electronic components which they employ, so that, in the case of failure of one of the electronic components, the other electronic component can ensure unlocking and locking of the access door, in order to avoid destructive external intervention on the door or its lock, and to maintain the protection of the assets.

The patent BE 874 278 describes a combination control device for opening an access door of the type referred to. FIG. **2** of the present description shows such a device which will be denoted by the reference **10**.

The device **10** comprises a keyboard **11** allowing combinations to be entered and two identical assemblies **12** and **12'**. The assembly **12** comprises a first memory **13** containing the combination which allows the lock to be released, a second memory **14** arranged to receive the combination entered by way of the keyboard **11** by the person desiring to release the lock, first means **15** arranged to compare the combination contained in the first memory **13** with the combination entered in the second memory **14**, and second means **16** arranged to cause the lock to be released when it receives an appropriate signal from the first means **15**. The

elements of the electronic assembly **12'** are identical to the corresponding elements of the assembly **12** and carry the same references as the latter, supplemented with a prime.

The principle of redundancy has also been applied to mechanical components, for example in time locks. By way of example, French patent application published under the No. 2 661 938 in the name of CIPOSA MICROTECHNIQUES describes a lock fitted with a control device comprising two similar mechanical time movements. Typically the same duration of locking the access door is given to these two movements in the evening, so that at least one of the movements controls the unlocking of the access door the following morning.

However, the applicant of the present invention has appreciated that such duplication of equipment does not provide a satisfactory solution to guaranteeing the unlocking and locking of the access door under predetermined conditions.

Thus, consider the case in which the lock of a strong box fitted with the device **10** of FIG. **2** is subject to a disturbance, which may be a change in temperature or humidity for example, resulting from an adjacent industrial activity or an atmospheric effect. Such a disturbance then has the same effect on the assembly **12'** as on the assembly **12**. In other words, simple duplication of the components of the device **10** does not enable a very high reliability of the device to be achieved.

Consider now the case in which the assemblies **12** and **12'** are formed by electronic components which come from the same batch of faulty components. Thus these two components provide identical signals but these are not necessarily representative of a behaviour initially desired by the programmer. Once again, simple duplication of the components of the device does not enable a very high reliability of the device to be achieved.

Consider finally the case in which duplicated assemblies such as the assemblies **12** and **12'** comprise processing units programmed according to the same program. Thus the two units have identical behaviour, in particular in the case in which the said program includes programming errors. Once again the simple duplication of the components of the device **10** does not enable a very high reliability of the device to be achieved.

One object of the present invention is to provide a control device with redundancy for fitting to a lock, which device alleviates the problems mentioned above.

Another object of the present invention is to provide such a control device which can be adapted to different types of lock.

Another object of the present invention is to provide such a control device which has optimum immunity to disturbances.

Another object of the present invention is to provide such a control device meeting the needs of expense, simplicity and size.

SUMMARY OF THE INVENTION

These objects as well as others are met by the control device with redundancy according to claim **1**.

One advantage of the two units lies in that these two units have two different structures and two different modes of functioning and that each electronic unit can detect faulty function of the other unit and initiate, under certain conditions, a procedure for reestablishing functioning in a normal situation of the disturbed control device, which gives the control device an optimum immunity to the disturbances.

Be Smarter EX-1019-008

Thanks to other characteristics of the control device with redundancy according to the present invention, one advantage of the two electronic units is that they can be programmed in accordance with two different programs respectively, which prevents the occurrence of an undesired unlocking or locking, in contrast to the conventional devices referred to above, in which the two units are provided with the same program, yielding the same command under the same conditions of execution of this program.

Thanks to other characteristics of the control device with redundancy according to the present invention, an advantage of the intermediate unit of this control device is acting as an intermediary during a transfer of data between the said electronic units, each electronic unit being able to access the intermediate unit selectively, which ensures excellent immunity from disturbances for this control device.

Thanks to other characteristics of the control device with redundancy according to the present invention, an advantage of the static supervisory signals of this control device is to provide for precision checking of the level of each static signal, which allows the activity to be checked at the time and thus gives this control device a high level of immunity to noise compared operation on the basis of dynamic signals.

Thanks to other characteristics of the control device with redundancy according to the present invention, an advantage of the control system with redundancy of this control device is avoidance of needless triggering of the emergency system, when the control system is capable of reestablishing itself in the normal functional situation of the control device.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects, characteristics and advantages, as well as others, of the present invention will appear more clearly from a reading of the detailed description of a preferred embodiment of the invention, given solely by way of example, with reference to the accompanying drawings, in which:

FIG. **1** already referred to shows a lock fitted with an electronic control device according to the prior art;

FIG. **2** already referred to represents a control device with redundancy according to the prior art;

FIG. **3** shows a block diagram of a preferred embodiment of a control device with redundancy according to the present invention;

FIG. **4** shows the control device of FIG. **3** in detail;

FIG. **5** shows waveforms of operation of the control device with redundancy according to the present invention, in the case of a normal situation; and

FIG. **6** shows waveforms of operation of the control device with redundancy according to the present invention, in the case of an exception situation.

DETAILED DESCRIPTION OF THE INVENTION

FIG. **3** shows a block diagram of a preferred embodiment of a control device **20** with redundancy according to the present invention. The control device **20** is intended to be fitted to a lock of an access door to a protected place, this lock comprising a mechanism **21** for locking and unlocking the access door. The mechanism **21** is mechanically connected to a bolt **22** of the said lock, through a motor (not shown) adapted to change the position of the bolt **22**, to effect locking or unlocking of the access door. The control device **20** comprises a control system **23** with redundancy for controlling the mechanism **21**. The control device **20** also comprises a watchdog system **24** adapted to trigger an emergency system **25** which can control unlocking of the access door, when no activity is detected in the control system **23**.

The control device **20** can also advantageously comprise a system **26** for detecting a change in the position of the bolt, a user interface **27**, an external indicator **28** and alarms **29**.

As shown in FIG. **3**, the bolt **22** comprises first and second connecting means mechanically connected to the mechanism **21** and to the emergency system **25** respectively, as will be described in detail. Thus the bolt **22** can be operated by the mechanism **21** or by the emergency system **25**. The bolt **22** also comprises third connecting means connected mechanically to the system **26** for detecting a change in the position of the bolt, as will also be described in detail. The bolt is preferably implemented conventionally, as is known to the man skilled in the art.

The system **26** for detecting a change in the position of the bolt comprises first and second connecting means. These first connecting means are mechanically connected to the third connecting means of the bolt **22**. The second connecting means of the system **26** of change in the position of the bolt are connected electrically to the control system **23**, as will be described in more detail. The system **26** for detecting a change in the position of the bolt comprises means for providing signals so arranged that they provided signals to the control system **23** when a change in the position of the bolt **22** has taken place. To this end, the system **26** for detecting a change in the position of the bolt is preferably formed by a mechanical circuit breaker known per se.

The mechanism **21** comprises first, second and third connecting means. These first connecting means are mechanically connected to the first connecting means of the bolt **22**. The second and third connecting means of the mechanism **21** are electrically connected to the control system **23**, as will be described in more detail. The mechanism **21** is preferably implemented conventionally, as is known to the man skilled in the art.

The control system **23** comprises control means **30** adapted to control the mechanism **21**, first and second units denoted **31** and **32** respectively, to provide first and second instructions respectively to the control means **30**, and an intermediate unit **33** electrically connected to the units **31** and **32**.

The control means **30** comprise first and second connecting means. These first connecting means are electrically connected to the second connecting means of the mechanism **21**, so that the control means **30** can control the mechanism **21** to operate the bolt **22** under certain conditions, as is also described below. The second connecting means of the control means **30** are electrically connected to the units **31** and **32**, as will be described in more detail. The control means **30** are preferably formed by a component marketed by National under the designation 74251.

As is essential, the unit **31** has a first structure and a first mode of functioning and the unit **32** has a second structure and a second mode of functioning. These two units are so arranged that the first and second structures are substantially different and that the first and second modes of functioning are also substantially different, while effecting common functions. These common functions are typically ensuring maintenance of the timekeeping, locking and unlocking of the access door according to predetermined time conditions, checking the presence of activity of the other unit, and/or checking the validity of access codes.

Thus each unit **31**, **32** comprises a quartz resonator and means for ensuring the maintenance of timekeeping. Each

unit **31, 32** also comprises means for providing check signals to be provided to the other unit **32, 31**, representing the current activity of the said unit **31, 32**, this unit **31, 32** being adapted to implement a plurality of activities.

Each unit **31, 32** also comprises first, second, third and fourth connecting means, as will be described in more detail. What is essential is that the first connecting means of the units **31** and **32** are electrically connected to each other, as well as to the second connecting means of the control means **30** and to the third connecting means of the mechanism **21**. The second connecting means of the units **31** and **32** are electrically connected to each other and the third connecting means of the units **31** and **32** are also connected to each other, as well as to the intermediate unit **33**, as will be described in more detail. The fourth connecting means of the units **31** and **32** are electrically connected to the watchdog system **24**, as will also be described in more detail.

The unit **31** also comprises measuring means for measuring the electric power supply levels, means for providing alarm control signals in order to provide alarm control signals when a disturbance or anomalous situation is detected, and control means for controlling a display on display means, for example the external indicator **28**. To this end, the unit **31** comprises fifth, sixth and seventh connecting means, as will be described in more detail.

The unit **31** thus has a more complex architecture that the unit **32**. The unit **31** is preferably formed by a component marketed by Hitachi under the designation H8/3834 and the unit **32** is formed by a component marketed by NEC under the designation μPD75P0016.

By virtue of its more complex structure, the unit **31** performs more complex functions than the unit **32**. Thus the unit **31** manages the user interface **27** and the communication port with peripheral systems, such as the external indicator **28** and the alarms **29**.

The intermediate unit **33** comprises connecting means connected electrically to the third connecting means of the units **31** and **32**. The intermediate unit **33** is formed by memory means with dual access, in which each unit **31, 32** can store data to be provided subsequently to the other unit **32, 31**. These memory means are preferably formed by a non-volatile memory and, again for preference, by an EEPROM memory.

The EEPROM memory has a shared zone for storing data emanating from one of the units **31** and **32** and intended to be provided subsequently to the other unit. The EEPROM memory is so arranged that the two units **31** and **32** can access the shared zone in alternate manner, so as to protect the coherence of the data exchanged with the EEPROM memory, especially in the case in which one of the units **31** and **32** is suffering from a disturbance or an anomalous situation. In other words, the EEPROM memory functions as an intermediary during a transfer of data between the units **31** and **32**. Furthermore, the EEPROM memory takes care of keeping the log of events relating to the transactions effected on the lock, the changes of state of the lock, the detection of disturbances and anomalous situations.

The EEPROM memory further comprises a reserved protected zone to which write access is restricted to the unit **31**. This reserved protected zone is for storing parameters programmed by the user and operating variables. By way of example, the programmed parameters comprise the access codes, variables of the identity of the lock, the time data relative to unlocking and/or locking of the access door, and the operating variables comprise the nominal voltage thresholds, the absolute error value of the frequency of oscillation of the quartz crystal, and parameters relating to the quality standards.

The EEPROM memory is preferably formed by a component marketed by XICOR under the designation X24325S.

The watchdog system **24** comprises first, second and third connecting means. These first and second connecting means are electrically connected to the fourth connecting means of the units **31** and **32** respectively. The third connecting means of the watchdog system **24** are electrically connected to the emergency system **25**, as will be described in more detail. The watchdog system **24** is described in European patent 0 256 430. As to essentials, the watchdog system **24** is formed by detecting means for detecting the presence of activity of the units **31** and **32** and trigger means for triggering the emergency system **25** when the two units **31** and **32** no longer function for a period greater than a predetermined duration of typically 5 s.

The emergency system **25** comprises first and second connecting means. These first and second connecting means are electrically connected to the third connecting means of the watchdog system **24** and mechanically to the second connecting means of the bolt **22**. The emergency system **25** further comprises a supplementary motor and control means so arranged that they can control the motor to effect a change in the position of the bolt **22** when no presence of activity is detected in the control system **23** by the watchdog system **24**.

The user interface **27** comprises connecting means connected electrically to the fifth connecting means of the unit **31**. The user interface **27** typically comprises a liquid crystal display and a keyboard.

The external indicator **28** comprises connecting means connected electrically to the sixth connecting means of the unit **31**. The external indicator **28** typically comprises display means, a computer and a keyboard. These various components are located outside the protected place and are so arranged that a user present outside this place can provide the access codes to the unit **31**, determine the state of the lock and lock the access door by way of the external indicator **28**. It is obvious that these various functions are given only by way of illustration.

The alarms **29** comprise connecting means connected electrically to the seventh connecting means of the unit **31**. The alarms **29** further comprise means for providing alarm signals, these means being so arranged that they provide alarm signals when they receive alarm control signals from the unit **31**. In this embodiment, the alarms **29** are formed by first and second bistable relays known per se, to which are connected a telephone transmitter and a sound emitter respectively, for example.

Furthermore electric resistances (not shown) can advantageously be provided as protection means, these resistances being connected in series with the second connecting means of the unit **31**.

Obviously all the components described above with reference to FIG. **3** are connected to electric power supplies (not shown) known per se to the man skilled in the art.

FIG. **4** shows in more detail the connecting means which connect the various components described above with reference to FIG. **3**.

FIG. **4** shows the same components as those described with reference to FIG. **3** and these components are denoted by the same reference numerals as in FIGS. **2** and **3**.

All the signals present in the control device **20** are processed by the unit **31**, since this unit manages the said

more complex functions, as well as the said functions common to the two units **31** and **32**, as has been mentioned above.

The practical implementation of the connecting means between the various components will not be described, this implementation being assumed to be known per se to the man skilled in the art and shown in FIG. **4** solely by way of example.

As to the essentials, each connecting means of the unit **31** provides and/or receives specific signals, as is described in more detail below.

The first connecting means of the unit **31** provide signals denoted UC1_OK, UC2_OK, ORDER1 and CRS_END and receive the signals UC2_OK and CRS_END and a signal denoted ORDER2.

If the signal UC1_OK is at the high level, it indicates that the unit **31** is operational and the unit **32** is then informed that the unit **31** is confirming its state of proper functionality. If the signal UC1_OK is at the low level it indicates that the unit **31** is carrying out re-initialisation. Moreover the unit **32** can decree that the unit **31** is no longer operational and impose the low state on the signal UC1_OK. The control means **30** then no longer take account of the instruction provided by the unit **31**.

The signal ORDER1 is provided as an instruction by the unit **31** and allows the unit **32** to check the validity of the instruction provided by the unit **31**. The unit **32** can determine if the signal ORDER1 is correct when the access door is locked or when the lock functions as a time lock.

If the unit **31** sets the signal CRS_END to the low level, the motor for changing the position of the bolt **22** can start up in the sense defined by the control means **30**. When the cam of this motor leaves its end of run position, this cam keeps the signal CRS_END at low level, which allows this cam to run its course. When the cam reaches the end of run position, the signal CRS_END is set to high level and the motor is stopped again. Thus, if the unit **31** wishes to apply the signals ORDER1 and ORDER 2, it sets the signal CRS_END at low level for 100 ms. The signal CRS_END also allows the detector unit **31** to detect if the cam has effected its movement. The unit **31** can thus detect a problem with the motor, if the signal CRS_END initially at the high level is held at the low level for a predetermined duration, typically less than 200 ms or greater than 5 s.

If the signal UC2_OK is at the high level, it indicates that the unit **32** is operational. If the unit **32** is re-initialised, it sets the signal UC2_OK at the low level and this signal then reverts to the high level when this re-initialisation procedure has finished. The unit **31** can impose a low level on the signal UC2_OK and, in this case, the control means **30** do not take account of the signal ORDER2.

The signal ORDER2 is provided as an instruction by the unit **32**. This signal is redefined every half second and corresponds to a "request to unlock" when the signal is at the high level and to a "request to lock" when this signal is at the low level.

The second connecting means of the unit **31** provide signals denoted EEP1, MDE0, MDE1, MDE2 and RESET2 and receive signals denoted EEP2 and RESET1.

The signal EEP1 provided by the unit **31** is used to indicate to the unit **32** that the unit **32** can access the EEPROM memory without risk of conflict with the unit **31**. In other words, the signal EEP1 is used to indicate to the unit **32** the period during which access to the EEPROM memory is reserved to the unit **31**. Every second, the unit **31** sets the signal EEP1 to the high level or the low level. Thus the signal EEP1 at the high level indicates that access is reserved to the unit **31** and thus that the unit **32** cannot have access to the EEPROM memory.

Likewise, the signal EEP2 provided by the unit **32** is used to indicate to the unit **31** that the unit **31** can access the EEPROM memory without risk of conflict with the unit **32**.

The signals MDE0, MDE1 and MDE2 provided by the unit **31** to the unit **32** represent the current activity of the unit **31**. Table 1 shows eight different activities of the unit **31**, as well as the predetermined values of the signals MDE0, MDE1 and MDE2 associated with these activities.

TABLE 1

Activity	MDE2	MDE1	MDE0
A	0	0	0
B	0	0	1
C	0	1	0
D	0	1	1
E	1	0	0
F	1	0	1
G	1	1	0
H	1	1	1

The activity A corresponds to a current fault of a component of the control device **20**, for example a lack of coherence in the contents of the EEPROM memory. The activity B corresponds to making a new event available in the EEPROM memory. The activity C corresponds to current occupation with the user access. The activity D corresponds to synchronisation of the unit **32** by the unit **31**. The activity E corresponds to locking commanded remotely from the said access door. The activity F corresponds to activation of the emergency system **25**. The activity G corresponds to checking the reliability given by the components of the lock. The activity H corresponds to operation in the normal situation of the unit **31** and is provided by default to the unit **32**, such functioning being defined below in more detail. Thus the signals MDE0, MDE1 and MDE2 pass through the state "111" when the unit **31** passes from one state to the other. Such changes can take place at the passage of the next second.

The signal RESET1 allows the unit **32** to re-initialise the unit **31**, when the unit **32** sets this signal to the low level for at least 40 μs. This procedure takes place when the unit **32** detects that the unit **31** is not functioning in the normal situation. In the case of prolonged malfunction, the unit **32** keeps the signal RESET1 at the low level and the unit **31** is thus disconnected.

Likewise the signal RESET2 is used by the unit **31** to re-initialise or disconnect the unit **32**.

The man skilled in the art will note that the control signals of the control device **20** are static during the functioning of this control device **20**. In other words, the signals EEP1, EEP2, MDE0, MDE1, MDE2, RESET1 and RESET2 are equal to low and high levels. Such operation advantageously allows the level of each signal to be checked with precision, which allow the current activity to be checked with precision. Thus this functioning ensures that the control device **20** has high immunity from noise, in contrast to operation based on dynamic signals.

The third connecting means of the unit **31** provide signals denoted WP, SCL and SDA to the EEPROM memory and receive the signal SDA from the EEPROM memory.

The signal WP allows the unit **31** to have write access to the said reserved protected zone of the EEPROM memory.

The signal SCL is the clock signal which allows the transfers of data from and to the EEPROM memory to be synchronised.

The signal SDA provides serial data between the EEPROM memory and the unit **31**, **32**.

The fourth connecting means of the unit **31** provide a signal denoted RST_SOS1.

The signal RST_SOS1 allows the watchdog system **24** to be re-initialised. When the unit **31** is functioning in the normal situation, the unit **31** re-initialises the watchdog system **24** by inverting the level of this signal every second. When the unit **31** is no longer active or if it wants to activate the emergency system **25**, the unit **31** no longer re-initialises the watchdog system **24**.

Likewise, the fourth connecting means of the unit **32** provide a signal denoted RST_SOS2 which allows the unit **32** to re-initialise the watchdog system **24** and to activate the emergency system **25**.

The sixth connecting means of the unit **31** provide a signal denoted TXD and receive a signal denoted RXD.

The signal TXD provides data from the unit **31** in asynchronous manner to the external indicator **28**, as is known to the man skilled in the art.

The signal RXD provides data from the external indicator **28** in asynchronous manner to the unit **31**, as is also known to the man skilled in the art.

The seventh connecting means of the unit **31** provide signals denoted REL1_SET, REL2_SET and REL_RST, these signals being used as alarm control signals.

The signal REL_SET activates the first bistable relay of the alarms **29**.

The signal REL2_SET activates the second bistable relay of the alarms **29**.

The signal REL_RST de-activates the first and second bistable relays of the alarms **29**.

The operation of the control device **20** with redundancy according to the present invention will be described below. As explained in detail above with reference to FIGS. **2** and **3**, the control system **23** with redundancy of the control device **20** comprises two units **31** and **32** which effect common functions relative to management of a change of state of the lock under predetermined conditions and to ensuring that the current state is maintained until the next change of state. In consequence only the operation of the unit **31** will be described, this unit being thus selected arbitrarily.

A normal situation is defined as a situation in which the two units **31** and **32** provide the same instruction to the control means **30**. An anomalous situation is equally defined as a situation during which an internal or external effect on the control device **20** modifies the functioning of this device compared with its functioning in the normal situation. Such an effect is generally caused by a disturbance whose nature may be voluntary, for example a change in the position of the bolt **22** or picking the lock, or involuntary, for example a fault in a component, an adjacent industrial activity or an atmospheric activity such as a sunburst or electromagnetic discharges of high intensity.

In contrast to a normal situation, an exception situation is defined as a situation produced following detection of a disturbance or an anomalous situation resulting in: provision of two different instructions by the two units **31** and **32**, for example one requesting the mechanism **21** to unlock the access door and the other requesting it to be locked; or the absence of activity in at least one of the units **31** and **32**. The control device **20** then initiates a specific procedure to re-establish operation corresponding to operation in the normal situation prior to the said detection.

Thus there are essentially two modes of operation of the control device **20**: operation in the normal situation and operation in an exception situation.

Solely by way of example, FIG. **5** shows waveforms of operation of the control device **20** with redundancy according to the present invention in the case of a normal situation in which the control device **20** is to unlock the access door and then lock it again.

Referring to the signals described with reference to FIG. **4**, the references **41** to **49** and **51** to **58** of FIG. **5** denote the waveforms of the signals RESET1, RESET2, RST_SOS1, RST_SOS2, UC1_OK, UC2_OK, ORDER1, ORDER2, CRS_END, MDE0, MDE1, MDE2, EEP1, EEP2, WP, SDA, SCL respectively, these signals being capable of being set to a low level denoted "0" or a high level denoted "1".

During operation in the normal situation, the two units **31** and **32** are operational and are thus not re-initialised. In consequence the signal UC1_OK (curve **45**) and the signal UC2_OK (curve **46**) are at the high level, as well as the signal RESET1 (curve **41**) and the signal RESET2 (curve **42**).

Furthermore, the two units **31** and **32** re-initialise the watchdog system **24** periodically, in such a manner that the emergency system **25** is not activated. As a result, every second, the signal RST_SOS1 (curve **43**) and the signal RST_SOS2 (curve **44**) are inverted in such a way that the signal RST_SOS1 (curve **43**) is set to high level when the signal RST_SOS2 (curve **44**) is set to low level and conversely.

During operation in the normal situation, the units **31** and **32** equally provide the same instruction. Thus the signal ORDER1 (curve **47**) and the signal ORDER2 (curve **48**) are at the same level. Furthermore the control means **30** function as an AND gate to whose inputs are applied the signals ORDER1 and ORDER2 respectively. Furthermore the unit **31** indicates to the unit **32** that it is functioning in the normal situation, which allows the unit **32** to confirm this. Thus the signal EEP1 (curve **54**) is inverted every second. In a similar manner, the unit **32** indicates to the unit **31** that it is functioning in the normal situation. Thus the signal EEP2 (curve **55**) is inverted every second, so that the signal EEP1 (curve **54**) is set to high level when the signal EEP2 (curve **55**) is set to low level, and conversely.

Solely by way of example, consider that the access door is initially locked, i.e. the signal ORDER1 (curve **47**) and the signal ORDER2 (curve **48**) are at the low level. As a result, the control means **30** receive as input these two instructions as well as the signal CRS_END (curve **49**) which emanates from the system for detecting a change in the position of the bolt **26**. The control means **30** then provide as output to the mechanism **21** the order to maintain the current state of the lock, i.e. that the motor should not be started and that the bolt **22** will not change position. Thus the signal CRS_END (curve **49**) is at the high level.

At an instant t**1**, the signal ORDER1 (curve **47**) and the signal ORDER2 (curve **48**) pass simultaneously to the high level so as to unlock the access door. As a result, the control means **30** receive this change of state of the instructions at its input and, after validation by the signal CRS_END (curve **49**), provide as output to the mechanism **21** the order to change the current state of the lock, i.e. to start the motor to change the position of the bolt **22**. Thus the signal CRS_END (curve **49**) is set to the low level so that the cam

of the motor leaves its end of run position. This cam then holds the signal CRS_END (curve **49**) at the low level so that is continues its course. When the cam is at the end of the run, it sets the signal CRS_END (curve **49**) to the high level, which stops the motor.

The access door is then unlocked. In other words, the bolt **22** has changed position, which is detected by the detection system **26** for change in the position of the bolt. Then, when the signal EEP1 (curve **54**) is at the high level, at an instant t**2**, the unit **31** has write access to the EEPROM memory and writes a new event in the reserved shared zone of this memory, by way of the signal SDA (curve **57**) and of the signal SCL (curve **58**). By way of example, this event is the locking of the access door at an instant t**6**.

At an instant t**3**, the unit **31** informs the unit **32** that a new event is available in the EEPROM memory, which corresponds to the activity B described above with reference to Table 1. Thus, at the instant t**3**, the signal MDE**0** (curve **51**) is kept at the high level, and the signal MDE**1** (curve **52**) and the signal MDE**2** (curve **53**) are set to the low level.

At an instant t**4**, the signal EEP**2** (curve **55**) being at the high level, the unit **32** has access to read the shared zone of the EEPROM memory and reads the new event available in this zone, by means of the signal SDA (curve **57**) and of the signal SCL (curve **58**).

At an instant t**5**, the unit **31** informs the unit **32** that it is functioning in the normal situation, which corresponds to the activity H described above with reference to Table 1. Thus the signal MDE**0** (curve **51**) is kept at the high level and the signal MDE**1** (curve **52**) and the signal MDE**2** (curve **53**) are set to the high level. The situation is then like the initial situation and repeats itself, except that the signal ORDER**1** (curve **47**) and the signal ORDER**2** (curve **48**) which are at the high level, so as to maintain the current state of the lock, i.e. locking of the access door.

At the instant t**6**, the situation is like that at the instant t**1** and recurs, except that the signal ORDER**1** (curve **47**) and the signal ORDER**2** (curve **48**) are set to the low level to change the state of the lock, i.e. to lock the access door.

Solely by way of example, FIG. **6** shows waveforms of operation of the control device according to the present invention in the case of an exception situation involving, in this case, an absence of activity of the unit **32**.

Referring to the signals described with reference to FIG. **4**, the references **59** to **67** and **69** to **76** of FIG. **6** denote the waveforms of the signals RESET**1**, RESET**2**, RST_SOS**1**, RST_SOS**2**, UC**1**_OK, UC**2**_OK, ORDER**1**, ORDER**2**, CRS_END, MDE**0**, MDE**1**, MDE**2**, EEP**1**, EEP**2**, WP, SDA, SCL respectively, these signals being capable of being set to a low level denoted "0" or a high level denoted "1".

As shown in FIG. **6**, the initial situation is like the initial situation described with reference to FIG. **5**.

At an instant t**10**, there is a disturbance which causes absence of activity of the unit **32**. This results in the unit **32** no longer inverting the signal RST_SOS**2** (curve **62**) nor the signal EEP**2** (curve **73**) every second, the course of the other signals being unchanged in relation to the initial situation, prior to the instant t**10**.

At an instant t**11**, the unit **31** observes that the unit **32** is no longer inverting the signal EEP**2** (curve **73**) and attempts to re-initialise it by setting the signal RESET**2** (curve **60**) to the low level for 1 ms. At the instant t**11**, the unit **31** also sets the signal UC**2**_OK to the low level, so that the control means **30** no longer take account of the signal ORDER**2** (curve **66**). Then, at an instant t**12**, when the signal EEP**1** (curve **72**) is set to the high level, the unit **31** has write access to the EEPROM memory and writes its own time value in the protected shared zone of this memory, by way of the signal SDA (curve **75**) and of the signal SCL (curve **76**). Then, the signal EEP**2** (curve **73**) being at the high level, the unit **32** reads the value written in this reserved protected zone.

At an instant t**13**, the unit (curve **76**) **31** observes that the unit **32** is still not active and attempts a renewed re-initialisation of the unit **32** by the signal RESET**2** (curve **60**). The situation is like that described at the instant t**11** and repeats this.

At an instant t**14**, after several attempts at re-initialisation, the unit **31** decides to "disconnect" the unit **32** by keeping the signal RESET**2** (curve **60**) at the low level. In consequence, the control device **20** functions solely on the basis of the unit **31**. Thus, at an instant t**15**, the access door is unlocked following the sole provision of the signal ORDER**1** (curve **65**), which is set to the high level, which effects the change of state of the lock at the instant previously programmed. In other words, the control system **23** has made use of its function of redundancy to manage a change of state of the lock in accordance with predetermined conditions and to ensure the state is maintained current up until the next change of state.

However, from the instant t**15**, the unit **31** no longer provides the instruction to re-lock the access door unless external technical intervention has taken place, which avoids making a destructive intervention on this door or on its lock.

It is obvious to the man skilled in the art that the detailed description above can undergo various modifications without departing from the scope of the present invention. For example, by way of one variant implementation, other types of unit can be provided in a control device with redundancy according to the present invention, this control device comprising control means for controlling a mechanism for locking and unlocking an access door to a protected place, these units having two different structures and two different modes of functioning, and being capable of providing like instructions to the said control means, and the said control means being so arranged that they behave functionally as an AND gate, to the inputs of which are applied the instructions from the units respectively, in the course of functioning in a normal situation of the said control device.

What is claimed is:

1. A control device with redundancy for fitting to a lock having a mechanism for locking and unlocking a door, the control device being adapted to manage at least one change of state of the lock under predetermined conditions and to ensure that this state is kept current up until the next change of state, the control device comprising:

a control system with redundancy comprising control means for controlling the mechanism and at least first and second electronic units for providing identical instructions to the control means, wherein the first electronic unit and the second electronic unit are connected in parallel to the control means; and

a user interface between the control device and a user; wherein the first electronic unit has a first structure and a first mode of functioning and the second electronic unit has a second structure and a second mode of functioning, these two electronic units being so arranged that the first and second structures are different and that the first and second modes of functioning are different, while effecting common functions; and

the control means behave functionally as an AND gate to the inputs of which are respectively applied the instruc-

tions from the first and second electronic units, when the control device is functioning in a normal situation.

2. A control device according to claim **1**, wherein the common functions are the checking of the validity of access codes, checking the presence of activity of the other electronic unit, ensuring that the passage of time and the unlocking and locking of the door according to predetermined time conditions are maintained.

3. A control device according to claim **2**, wherein each electronic unit further comprises means for providing check signals in order to provide the other electronic unit with check signals representing the current activity of the electronic unit, this electronic unit being adapted to implement a plurality of activities, and connecting means for connecting the electronic units together electrically, these means being so arranged that each electronic unit provides the check signals to the other electronic unit.

4. A control device according to claim **3**, further comprising electrical resistances as protection means, these resistances being connected in series with the said connecting means.

5. A control device according to claim **2**, further comprising a watchdog system formed by detecting means for detecting the presence of activity of the electronic units, and trigger means for triggering an emergency system when the two electronic units no longer function over a period greater than a predetermined time.

6. A control device according to claim **2**, wherein the control system further comprises an intermediate unit connected electrically to the electronic units, for acting as an intermediary during a transfer of data between the electronic units and to maintain a log of events relating to the transactions effected on the lock, changes of state of the lock and detection of disturbances and anomalous situations.

7. A control device) according to claim **6**, characterized in that the intermediate unit is formed by memory means with at least dual access, in which each electronic unit stores data for later provision to the other electronic unit, so as to implement the function of an intermediary.

8. A control device according to claim **7**, wherein the memory means are formed by a non-volatile memory.

9. A control device according to claim **7**, wherein the memory means are formed by an EEPROM memory.

10. A control device according to claim **9**, wherein the EEPROM memory comprises:

a shared zone for storing data provided by one of the electronic units and destined to be fed later to the other electronic unit; and

a protected reserved zone whose write access is reserved to the first electronic unit, this zone being for storing parameters programmed by the user and operating variables.

11. A control device according to claim **10**, wherein the programmed parameters comprise access codes and identity variables of the lock, and time data relating to unlocking and optionally to locking the door.

12. A control device according to claim **10**, wherein the operating variables are the nominal voltage thresholds, the absolute error value of the frequency of oscillation of the quartz crystal, and parameters relating to the quality standards.

13. A control device according to claim **10**, wherein the EEPROM is further so arranged that the two electronic units access the shared zone alternately, so as to protect the coherence of the data exchanged with the EEPROM memory, especially in the case in which one of the electronic units is the seat of a disturbance or an anomalous situation.

14. A control device according to claim **2**, wherein the first electronic unit comprises:

measuring means for measuring the level of the electric power supply;

means for providing alarm control signals when a disturbance or an anomalous situation is detected; and

means for controlling a display on display means.

15. A control device according to claim **1**, further comprising means for providing alarm signals being arranged to provide alarm signals when the means for providing alarm signals receive the alarm control signals from the first electronic unit.

16. A control device according to claim **1**, further comprising a detection system so arranged as to provide detection signals when a change of state of the bolt of the lock has taken place.

17. A control device according to claim **16**, wherein the detection system is formed by a mechanical circuit breaker.

* * * * *