



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2771324 C 2016/06/21

(11)(21) **2 771 324**


(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) **Date de dépôt PCT/PCT Filing Date:** 2010/08/20
(87) **Date publication PCT/PCT Publication Date:** 2011/02/24
(45) **Date de délivrance/Issue Date:** 2016/06/21
(85) **Entrée phase nationale/National Entry:** 2012/02/16
(86) **N° demande PCT/PCT Application No.:** US 2010/046215
(87) **N° publication PCT/PCT Publication No.:** 2011/022686
(30) **Priorité/Priority:** 2009/08/20 (US61/235,608)

(51) **Cl.Int./Int.Cl. G01N 15/10** (2006.01)
(72) **Inventeur/Inventor:**
PATT, PAUL, US
(73) **Propriétaire/Owner:**
BIO-RAD LABORATORIES, INC., US
(74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre : SYSTEME D'IMAGERIE TRANSVERSALE CELLULAIRE A HAUTE VITESSE**
(54) **Title: HIGH-SPEED CELLULAR CROSS SECTIONAL IMAGING**

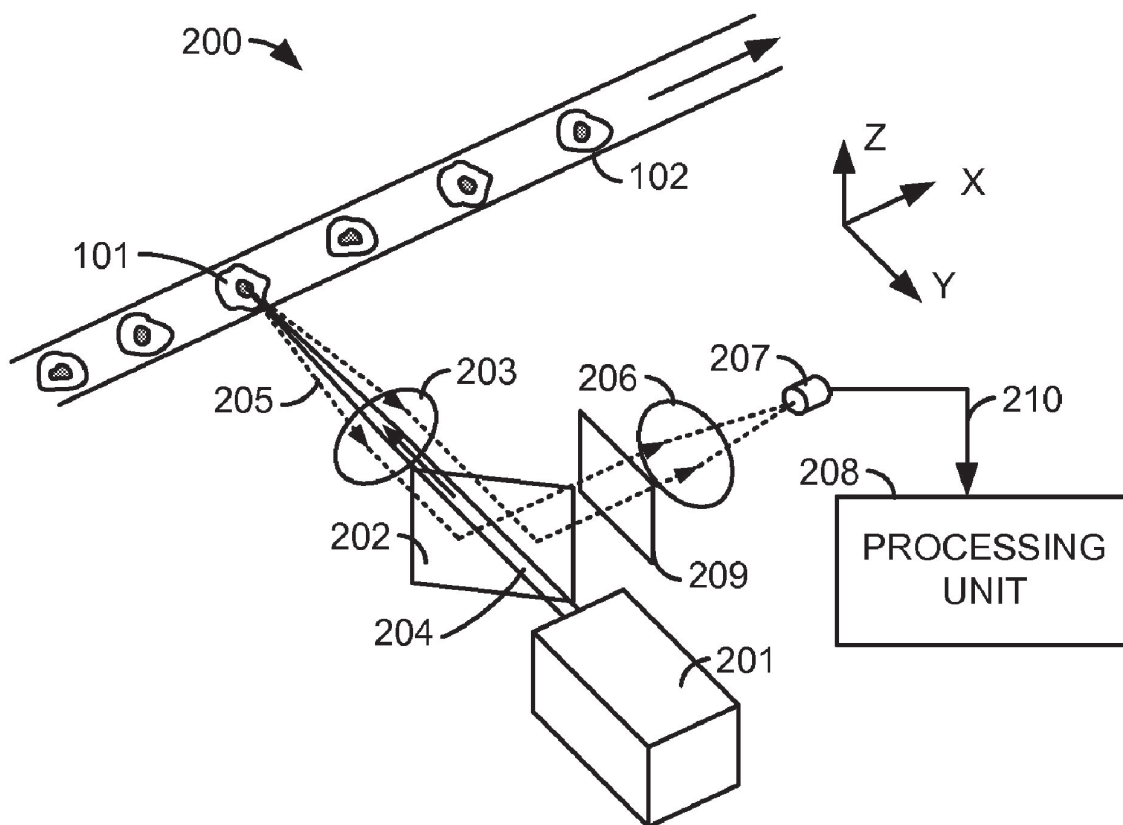

(57) **Abrégé/Abstract:**

A cross sectional imaging system performs high-resolution, high-speed partial imaging of cells. Such a system may provide much of the information available from full imaging cytometry, but can be performed much more quickly, in part because the data analysis

Canada

<http://opic.gc.ca> • Ottawa-Hull K1A 0C9 • <http://cipo.gc.ca>

OPIC • CIPO 191



Cytek Exhibit No. 1041
Page 001

(57) **Abrégé(suite)/Abstract(continued):**

is greatly reduced in comparison with full image cytometry. The system includes a light source and a lens that focuses light from the light source onto a small spot in a scanning location. A transport mechanism causes relative motion between a cell in the scanning location and the spot. A sensor generates a signal indicating the intensity of light emanating from the cell as a result of illumination by the light source. The system repeatedly takes readings of the light intensity signal and characterizes the light intensity along a substantially linear path across the cell.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 February 2011 (24.02.2011)(10) International Publication Number
WO 2011/022686 A1(51) International Patent Classification:
G06K 9/00 (2006.01)(21) International Application Number:
PCT/US2010/046215(22) International Filing Date:
20 August 2010 (20.08.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/235,608 20 August 2009 (20.08.2009) US(71) Applicant (for all designated States except US): **BIO-RAD LABORATORIES, INC.** [US/US]; 1000 Alfred Nobel Drive, Hercules, California 94547 (US).

(72) Inventor; and

(71) Applicant : **PATT, Paul** [US/US]; 1000 Alfred Nobel Drive, Hercules, California 94547 (US).(74) Agents: **BOYD, David, W.** et al.; Townsend and Townsend and Crew LLP, 1400 Wewatta Street, Suite 600, Denver, Colorado 80202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HIGH-SPEED CELLULAR CROSS SECTIONAL IMAGING

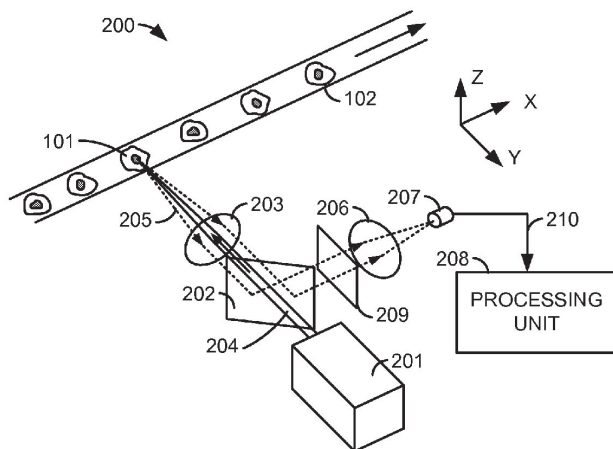


FIG. 2

(57) Abstract: A cross sectional imaging system performs high-resolution, high-speed partial imaging of cells. Such a system may provide much of the information available from full imaging cytometry, but can be performed much more quickly, in part because the data analysis is greatly reduced in comparison with full image cytometry. The system includes a light source and a lens that focuses light from the light source onto a small spot in a scanning location. A transport mechanism causes relative motion between a cell in the scanning location and the spot. A sensor generates a signal indicating the intensity of light emanating from the cell as a result of illumination by the light source. The system repeatedly takes readings of the light intensity signal and characterizes the light intensity along a substantially linear path across the cell.

WO 2011/022686 A1

HIGH-SPEED CELLULAR CROSS SECTIONAL IMAGING

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit of U.S. Provisional Application No. 61/235,608, filed on August 20, 2009 and titled "High-speed Cellular Cross Sectional Imaging".

BACKGROUND OF THE INVENTION

[0002] Cytometry is a technical specialty concerned with the counting and characterization of biological cells. **Figure 1** shows a simplified diagram of one technique known as flow cytometry. In a basic form of flow cytometry, cells **101** are suspended in a fluid and entrained single-file in a narrow transparent tube **102**. The entrainment can be accomplished by any of several methods, including hydrodynamic focusing. A light source **103** illuminates each cell **101** as it passes a measurement location **104**. Light source **103** may be, for example, a laser. Light from light source **103** is scattered by the cell **101** being measured. Some light **105** is scattered generally in the same direction as it traveled to reach the cell **101**. Light **105** is sometimes called "forward scatter", and may be collected by a forward sensor **106**. Some light may be scattered in other directions as well. This light may be called "side scatter", and some of the side scattered light **107** may be collected by one or more other sensors **108**. Output signals from sensors **106** and **108** are sent to a computer **109**, which may store and analyze the signals. By analyzing the amount and distribution of the scattered light, it is possible to discern information about each cell, for example its size and some limited information about its internal structure.

[0003] Flow cytometry may measure the scattered light directly, or may make use of fluorescence. In fluorescence cytometry, the cells may be marked with one or more fluorophores, which are excited by light from source **103** to produce light by fluorescence. The nature of the emitted light may reveal additional information about the cells.

[0004] The technique shown in **Figure 1** relies entirely on measurements of scattered light to infer information about the cell structure, but does not produce an image of any particular cell. In another technique, called "image cytometry", an image of an individual cell may be recorded by a camera or scanning microscope. Image cytometry may provide detailed information about the cell's structure, but results in much more data than techniques that use

only scattered light. Consequently, image cytometry may be relatively slow, and require the storage and analysis of large quantities of data.

BRIEF SUMMARY OF THE INVENTION

5 [0005] A cross sectional imaging system performs high-resolution, high-speed partial imaging of cells. Such a system may provide much of the information available from full imaging cytometry, but can be performed much more quickly, in part because the data analysis is greatly reduced in comparison with full image cytometry.

BRIEF DESCRIPTION OF THE DRAWINGS

10

[0006] Figure 1 shows a simplified diagram of a technique known as flow cytometry.

[0007] Figure 2 shows a simplified conceptual diagram of a high-speed cross sectional cell imaging system in accordance with an embodiment.

15 [0008] Figure 3 illustrates an example data set representing the readings taken from one cell.

[0009] Figure 4 illustrates a system for performing simultaneous multicolor cross section cytometry, in accordance with an embodiment.

[0010] Figure 5 illustrates semi-confocal imaging.

20 [0011] Figure 6 shows an example system that provides rotational movement of the cells being studied, and a translational movement of the sensing system.

[0012] Figure 7 illustrates a system for performing simultaneous multi-line cross sectional imaging, in accordance with another embodiment.

[0013] Figure 8 illustrates a system for performing multi-line cross sectional imaging, in accordance with another embodiment.

25

DETAILED DESCRIPTION OF THE INVENTION

30 [0014] Some applications for cytometry require more information than may be available from techniques based purely on scattered light, but may not require all of the information available from full image cytometry. For example, a researcher may wish to investigate whether specific biological activity occurs at the surface or nucleus of a cell, or in the cell's cytoplasm. Certain molecules may be labeled with fluorescent tags and incorporated into the

cells to be studied. Many different tagging compounds, sometimes called fluorophores, are available, including the ALEXA FLUOR™ series of fluorophores available from Life Technologies Corporation of Carlsbad, California, USA.

5 [0015] **Figure 2** shows a simplified conceptual diagram of a high-speed cross sectional cell imaging system **200** in accordance with an embodiment. The system of Figure 2 is a flow cytometry system, although one of skill in the art will recognize that embodiments of the invention may be utilized in other kinds of cytometry as well, including embodiments described below.

10 [0016] In system **200**, cells **101** are entrained in fluid to progress through tube **102** in single file. The system may be used to characterize cells of many different kinds, but in a typical application, cells **101** may be, for example, about 10 to 20 micrometers across, and may progress through tube **102** at a speed of, for example, 5 to 50 millimeters per second. A light source **201** illuminates a cell through partially-reflective mirror **202** and a first lens **203**. Light source **201** may be a laser that emits coherent light, or may be another kind of light
15 source, for example a light emitting diode (LED), an arc lamp, an incandescent lamp, or another kind of light source. Light source **201** may emit coherent or non-coherent light, and may produce light continuously or may be pulsed. Partially-reflective mirror **202** may be configured, for example, to reflect the majority of light falling on it, but to transmit a portion as well. The partial reflectivity may be neutral density, in that all wavelengths are affected
20 generally equally. Alternatively, mirror **202** may be a dichroic mirror configured to pass substantially all light at the wavelength of light source **201**, and to reflect substantially all light of other wavelengths. In another embodiment, mirror **202** may simply have a hole through it to allow light from light source **201** to pass through.

[0017] Light source **201** produces a beam **204**, a portion of which passes through partially-reflective mirror **202** and is focused by first lens **203** onto a small area of cell **101**. (Some of the light may be reflected away from mirror **202**, but is not indicated in Figure 2.) The illuminated area of cell **101** may be, for example, only a few microns across, as compared with the unfocused diameter of beam **204**, which may be hundreds or thousands of microns in diameter.

30 [0018] Some of the light from light source **201** may be reflected from cell **101**. Additionally, a one or more fluorophore markers in cell **101** may be excited by beam **204**, and may emanate light by fluorescence. Typically, the light emitted by fluorescence will be at longer wavelengths than the laser excitation light. The light **205** emanating from cell **101**,

whether by reflection or fluorescence, is shown in broken line in Figure 2. Some of the emanated light **205** is gathered by first lens **203** and at least partially collimated. After passing through first lens **203**, the emanated light encounters partially-reflective mirror **202**, where most of it is reflected toward second lens **206**. (Some of the emanated light may also pass through mirror **202**, but this is not indicated in Figure 2). An optional filter **209** may further condition light **205**, for example by preferentially excluding the reflected light in favor of passing the light wavelengths emanated by fluorescence from cell **101**. Second lens **206** redirects the emanated light toward a light sensor **207**. Lenses **203** and **206** may form an infinity corrected optical system, allowing for the insertion of other components such as mirror **202** and filter **209** into the optical path between the lenses. Light sensor **207** converts the received light into an electrical signal **210** representing the intensity of light falling on sensor **207**. The signal may be digitized and sent to a processing unit **208** for recording an analysis. In some applications, sensor **207** may be sampled, for example, at a rate of 20 to 200 kHz, resulting in a large number of samples per cell. Processing unit **208** may be a computer system, and may be stand-alone or integrated in to a testing station including the other system components.

[0019] The resolution of the system depends on the sample rate, the speed of transport of the cells past the scan location, and the light spot size on cell **101**. The nominal resolution in the X direction is equal to $v \cdot dt$, where v is the sample delivery speed and dt is the sampling frequency. The resolution may be more limited if the light spot size is large in relation to the nominal resolution. Preferably, v is a known parameter, either pre-determined before a particular flow experiment or measured during the course of a cell's passage through the system. Ideally, a cell being scanned should be rotation-free and jittering-free during its passage of the scan line.

[0020] Light sensor **207** may be, for example, a photodiode, a photomultiplier tube, an avalanche photodiode, a silicon photodiode, or any other suitable kind of sensor. When signal **210** is repeatedly sampled and correlated with the movement of cell **101**, the resulting data provides a high-resolution view of the light emanated from locations on or in cell **101** along a single substantially linear path. **Figure 3** illustrates an example data set representing the readings taken from one cell, along path **301**, as compared with the readings that might be taken using conventional scattering-base cytometry. As is evident, the readings taken according to an embodiment of the invention, labeled "cross section imaging" in Figure 3, provide a much more detailed view of the activity within cell **101** than is available from the data based on scattering alone.

[0021] In some experiments, the data shown in Figure 3 may be sufficient to enable the researcher to answer the question of interest. Cross section imaging according to an embodiment of the invention may be performed very rapidly, for example at a rate of thousands of cells per second. In other experiments, the cross section image data may be useful for
5 sorting cells so that some of particular interest may be further analyzed using full imaging cytometry. The trace of Figure 3 may be thought of as a single row of pixels from a full image scan. Such a single-row image may provide much of the information available from a full two-dimensional image of a cell, and can be acquired and processed much more quickly.

[0022] In other embodiments, the system may be configured to perform multi-color
10 cytometry, either using multiple excitation sources having different wavelengths, by sensing different wavelength bands of reflected or fluorescent light, or both. **Figure 4** illustrates a system **400** for performing simultaneous multicolor cross-section cytometry, in accordance with an embodiment.

[0023] In system **400**, three different light sources **401a**, **401b**, **401c** produce beams **402a**,
15 **402b**, **402c**, each in a narrow band of light wavelengths different from the others. For example, light sources **401a**, **401b**, and **401c** may be different lasers. Beams **402a**, **402b**, and **402c** reflect respectively from mirrors **403a**, **403b**, and **403c**. In one embodiment, mirror **403c** is a simple reflective mirror, while mirrors **403a** and **403b** are dichroic mirrors, configured to reflect substantially all of the light wavelengths produced by their respective
20 light sources **401a** and **401b**, while passing substantially all of the wavelengths produced by the other light sources. The resulting composite laser beam **404** thus contains three narrow bands of wavelengths produced by the three light sources, **401a**, **401b**, and **401c**. Composite beam **404** passes substantially through mirror **202**, and is focused by lens **203** onto cell **101**. The system thus has a light source that includes multiple wavelength bands. Light **205**
25 emanating from cell **101**, whether by reflection from cell **101** or as the result of fluorescence, is collected by lens **203** and at least partially collimated. The emanated light **205** mostly reflects from mirror **202** toward mirrors **405a**, **405b**, **405c**. One or more optional filters **209** may be placed in the optical path as shown, or in another location.

[0024] Mirrors **405a** and **405b** are preferably dichroic mirrors, configured to preferentially
30 reflect certain wavelength components of emanated light **205**. For example, mirror **405a** may reflect light in wavelengths produced by fluorescence of a first fluorophore excited by light source **401a**, while mirror **405b** may reflect light in wavelengths produced by fluorescence of a second fluorophore excited by light source **401b**. The light reflected by mirrors **405a**, **405b**, and **405c** passes through lenses **406a**, **406b**, and **406c**, and reaches sensors **407a**, **407b**,

and **407c** respectively. The sensors **407a**, **407b**, and **407c** thus receive light in different wavelength bands. For the purposes of this disclosure, wavelength bands that are different may overlap, so that some wavelengths are contained in both bands. The outputs of sensors **407a**, **407b**, **407c** are preferably digitized and sent to processing unit **208** for storage, analysis, and display. For the purposes of this disclosure, a particular sensor and its associated components will be referred to as a “channel”.

[0025] While example system **400** has been shown having three light sources **401a**, **401b**, **401c** and three sensors **407a**, **407b**, **407c**, one of skill in the art will recognize that other numbers of light sources, sensors, or both may be used. A system such as system **400** may be configured in many different ways. For example, mirrors **405a**, **405b**, and **405c** may be configured to reflect light in the wavelength bands of light sources **401a**, **401b**, **401c**, so that light reflected from cell **101** is measured. Or one or more of mirrors **405a**, **405b**, **405c** may be configured to reflect light in the wavelength bands of respective light sources, while one or more other mirrors may be configured to preferentially reflect light in wavelengths emitted by fluorophores excited by respective light sources, so that fluorescence cross section imaging is performed. Or all three mirrors **405a**, **405b**, **405c** may be configured to preferentially reflect light emanated from cell **101** by fluorescence. Any combination is possible. For example, one channel sensing reflected light may be used to measure the geometric limits of a particular cell, and data from channels reading light produced by fluorescence may be correlated with the geometry data to indicate where specific biologic activity is occurring. In another example, a single light source may be used to excite multiple fluorophores, so that fewer light sources are used than sensors. Other embodiments may be envisioned that include fewer sensors than light sources.

[0026] Any or all of the channels may optionally be configured to be confocal or semi-confocal. A confocal optical system uses an aperture placed near the sensor to preferentially exclude light emanating from locations other than in the focal plane of the system. Apertures **408a**, **408b**, and **408c** are shown in Figure 4, and **Figure 5** illustrates their function, in the context of a simplified optical system **500**. In system **500**, a first pencil of rays **501**, illustrated in solid lines, emanates from focal plane **502** at cell **101**. The rays are gathered by lens **504** and focused at sensor **505**, after passing through aperture **506**. A second pencil of rays **503**, illustrated in broken lines, emanates from a point **507**, removed from focal plane **502** and farther from lens **504**. The rays in pencil **503** will focus at a point **508** in front of sensor **505**, so that by the time the rays reach aperture **506**, they are already diverged and a significant portion of the rays in pencil **503** are excluded by aperture **506** from reaching

sensor **505**. In this way, the system preferentially excludes rays that emanate from other than the focal plane of the system. This kind of system may produce images with higher contrast than a system without an aperture such as aperture **506**. Aperture **506** may be sized or shaped in any of a variety of ways. The larger the aperture, the fewer rays are excluded, and the
5 system may be considered to be “semi-confocal”. The aperture need not be circular. For example, it could be oblong, so that its performance is different between two orthogonal axes.

[0027] In the embodiments shown thus far, relative motion is provided between the cell being evaluated and the sensing system by moving the cell past a fixed scanning location. In alternative embodiments, relative motion may be provided by moving the sensing system and
10 holding the cell fixed, or both the sensing system and the cell may be moving, so long as relative motion between them is occurring.

[0028] In another embodiment, the relative motion is provided by a rotational scanning system. **Figure 6** shows an example system **600** that provides rotational movement of the cells being studied, and a translational movement of the sensing system. In system **600**, cells
15 such as cell **101** are adhered to a rotating platen or substrate **601**. Platen **601** may be, for example, a disk about 100 to 150 millimeters in diameter and made of a polymer such as polycarbonate or acrylic. Other sizes and materials may also be used. Platen **601** may be clear.

[0029] Platen **601** is rotated so that the cells are passed under an optical system such as
20 optical system **200** shown in Figure 2, although an optical system according to any embodiment could be used. Optical system **200** is also translatable along a generally radial path **602**, so that a large portion of the surface of platen **601** is accessible for scanning by optical system **200**. In this embodiment, the scanning path across any particular cell will be an arc of a circle. However, the radius of the arc is very large in comparison with the
25 dimensions of any particular cell, and the path across a single cell may be considered essentially linear. Using a system such as system **600**, a large number of cells may be characterized by systematically scanning the platen with coordinated translation of the optical system and rotation of the platen, in much the same way that a compact disc (CD) or digital versatile disc (DVD) is read by an audio or video system. The platen **601** may be “read”
30 from the top, as by optical system **200**, or from the bottom by alternate optical system **200a**.

[0030] In some embodiments, platen **601** may be scanned or otherwise accessed from both sides in a coordinated manner. For example, optical systems **200** and **200a** may both scan the

cells adhered to plate **601**. The two optical systems may scan using different excitation wavelengths, different filtration of the light emanated from the cells being measured, or both.

[0031] In another embodiment, if a measurement of a particular cell made from the top of platen **601** indicates that the cell may exhibit an activity or characteristic that warrants further study, the cell may be liberated from the platen **601** by a burst of light delivered from the bottom of platen **601**. As is shown in the detail view in Figure 6, the top surface of platen **601** may include a wavelength-selective fusible surface **602**, that releases a cell adhered to it when subjected to light in a particular wavelength. The liberated cells may be washed from the surface of platen **601** and collected for more detailed analysis, for example by full imaging cytometry or microscopic examination.

[0032] **Figure 7** illustrates a system for performing simultaneous multi-line cross sectional imaging, in accordance with another embodiment. In some applications, it may be helpful to scan multiple traces across each cell. For example, one cross section image may be gathered across the approximate center of each cell, and another image gathered near the periphery of the cell. If the two images are gathered with the same resolution, this nominally doubles the amount of information gathered from each cell, but still results in much less data than full imaging cytometry. Other numbers of traces may be gathered, for example, three, four, or any another number, but preferably five or fewer. Similarly, the traces need not all be of the same resolution.

[0033] In the example of Figure 7, a light source **201** generates a collimated beam **204**, which passes substantially through partially reflective mirror **202** and encounters lens **701**. In contrast to previous embodiments, lens **701** is a multifaceted “fly’s eye” lens, a diffractive lens, a holographic lens, or another kind of optical system that splits beam **204**, focusing portions of beam **204** on two different spots at cell **101**. The two spots are displaced from each other, so that they trace displaced parallel paths **702**, **703** across cell **101** as cell **101** is transported by the scanning area. The displacement of the spots is in a direction oriented at an angle θ from the direction of travel of cell **101**. Preferably, θ is greater than zero degrees, and may be about 90 degrees. (If $\theta=0$, no additional information is gathered about cell **101** as compared with single line cross sectional image, but cell **101** may be double sampled, enabling construction of a cross section image with reduced noise.)

[0034] Light **205** emanates from the illuminated spots on cell **101**, whether by reflection or fluorescence or both, and is gathered and at least partially collimated by lens **701**. The light substantially reflects from mirror **202**, may encounter a filter **209** and mirrors such as mirrors

704 and 705, and eventually reaches lenses 706 and 707. (The path of light 205 between lens 701 and lenses 705 and 707 is simplified in Figure 7.) Mirrors 704 and 705 may be, for example, dichroic mirrors that preferentially separate different bands of wavelengths from light 205 to be directed to lenses 706 and 707. Lenses 706 and 707 preferably cooperate with
5 lens 701 to form an infinity corrected optical system, allowing for the insertion of mirrors, filters, or other components between them. Like lens 701, lenses 706 and 707 may be multifaceted “fly’s eye” lenses, diffractive lenses, holographic lenses, or other optical systems that displace portions of the light reaching them, directing images to two sets of sensors 708a and 708b, and 709a and 709b. The respective images correspond to the two
10 spots illuminated on cell 101. The signals produced by sensors 708a, 708b, 709a, and 709b are passed to processing unit 208 for storage, analysis, display or the like.

[0035] The system of Figure 7 thus scans cross section images along two separated paths 702, 703 on cell 101. For each path, images are scanned in two wavelength bands. One of skill in the art will recognize that system 700 could be adapted to use multiple sources of
15 illumination, such as multiple lasers emitting light in different wavelength bands, and could be adapted to scan pairs of images in fewer or more wavelength bands.

[0036] Figure 8 shows a system 800 for performing multi-line cross sectional imaging, in accordance with another embodiment. In this embodiment, rather than using optical means to split the illumination light and light emanating from the measured cell, two cross section
20 imaging systems are placed along the flow path with a lateral displacement, so that one path across a cell is imaged by the first optical system at a first time, and a different path across the cell is imaged by a different optical system at a later time. In system 800, two optical systems like those of Figure 2 are shown providing signals to a processing unit 208 for storage, analysis, display, or the like. More than two systems could be used. While the
25 system of Figure 2 utilizes only one excitation source 201 and one sensor 207, one of skill in the art will recognize that system 800 could easily be adapted to use more excitation sources, sensors, or both. For example, system 800 could be adapted to use two or more of the optical system of Figure 4.

[0037] The first optical system in system 800 illuminates cell 101 with light source 201, eventually resulting in light that is sensed by sensor 207. The system is aligned to scan cell
30 101 along a path 801, which in this example is near the center of the cell. The second optical system (denoted with primed reference numbers) illuminates passing cells in a second scanning location with light source 201’, resulting in light that is sensed by sensor 207’. The second optical system is aligned to scan cells along path 802, which in this example is near

the edge of each passing cell. Any particular cell **101** is scanned by both optical systems, but not simultaneously. Processing unit **208** may store the results the first cross sectional imaging and correlate them with the results of the second imaging, to create a set of cross section images of each cell.

5 **[0038]** While embodiments of the invention have been illustrated as scanning cells confined in a linear tube or adhered to a rotating substrate, one of skill in the art will recognize that embodiments of the invention may be utilized in systems using any of a wide range of cell delivery techniques, including electrophoresis, pressure driven flow, optical tweezers, motorized translation stage, and others. Cells may be conveyed as a payload in an
10 oil emulsion, in an electrowetting-actuated droplet, or via magnetic transport assisted by magnetic bead tagging. It is intended that the claims not be limited by the cell delivery method utilized.

[0039] In the claims appended hereto, the term “a” or “an” is intended to mean “one or more.” The term “comprise” and variations thereof such as “comprises” and “comprising,”
15 when preceding the recitation of a step or an element, are intended to mean that the addition of further steps or elements is optional and not excluded. The invention has now been described in detail for the purposes of clarity and understanding. However, those skilled in the art will appreciate that certain changes and modifications may be practiced within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A system for performing cytometry, the system comprising:
a light source;
a lens that focuses light from the light source onto a spot in a scanning location;
a transport mechanism that causes relative motion between a cell in the scanning location and the spot;
a sensor that indicates an intensity of light emanating from the cell as a result of illumination by the light source, wherein the lens gathers light emanating from the cell for direction to the sensor; and
a processing unit that repeatedly takes readings of the light intensity indication and characterizes the light intensity along a substantially linear path across the cell, wherein a resolution of the system is dependent on a size of the spot.
2. The system of claim 1, wherein the light source comprises at least one laser.
3. The system of claim 1, wherein the light source comprises at least one light source selected from the group consisting of a coherent light source, a non-coherent light source, a continuous light source, and a pulsed light source.
4. The system of claim 1, wherein the sensor indicates at least in part the intensity of light emanating from the cell by reflection of light from the light source.
5. The system of claim 1, wherein the sensor indicates at least in part the intensity of light emanating from the cell as a result of fluorescence excited by the light source.
6. The system of claim 1, wherein the cell is suspended in a fluid and the transport mechanism transports the cell past the scanning location by flow of the fluid.
7. The system of claim 1, further comprising a rotating substrate on which the cell is adhered.

8. The system of claim 1, further comprising an aperture proximate the sensor, such that the system performs semi-confocal imaging.

9. The system of claim 1, wherein the light source produces light in at least first and second wavelength bands.

10. The system of claim 1, wherein the light sensor is a first light sensor, the system further comprising a second sensor, and wherein the first and second sensors receive light in different wavelength bands.

11. A system for performing cytometry, the system comprising:
a light source;
an optical system that focuses light from the light source onto at least two spots in a scanning location, the spots being displaced from each other;
a transport mechanism that causes relative motion between a cell in the scanning location and the at least two spots;
a set of at least two sensors, each sensor indicating an intensity of light emanating from the cell as a result of illumination by the light source at a respective one of the spots, wherein the optical system at least in part gathers light emanation from the cell for direction to at least one of the sensors; and
a processing unit that repeatedly takes readings of the light intensity indications from the at least two sensors and characterizes the light intensity along at least two displaced substantially linear paths across the cell traced by the at least two spots, wherein a resolution of the system is dependent on sizes of the spots.

12. The system of claim 11, wherein the optical system comprises at least one member selected from the group consisting of a multi-faceted lens, a diffractive lens, and a holographic lens.

13. The system of claim 11, wherein the set of at least two sensors is a first set, the system further comprising a second set of at least two sensors each indicating the intensity of light emanating from the cell as a result of illumination by the light source at a

respective one of the spots, wherein the two sets of sensors receive light in different wavelength bands.

14. The system of claim 11, wherein the light source comprises at least one laser.

15. The system of claim 11, wherein the light source comprises at least one light source selected from the group consisting of a coherent light source, a non-coherent light source, a continuous light source, and a pulsed light source.

16. The system of claim 11, wherein at least one of the sensors indicates at least in part the intensity of light emanating from the cell by reflection of light from the light source.

17. The system of claim 11, wherein at least one of the sensors indicates at least in part the intensity of light emanating from the cell as a result of fluorescence excited by the light source.

18. A system for performing cytometry, the system comprising:
at least two light sources;
at least two optical systems, each optical system focusing light from one of the light sources onto a respective spot in one of at least two respective scanning locations;
a transport mechanism that causes relative motion between a cell and the scanning locations, such that the cell passes sequentially through the at least two scanning locations; and
at least two sensors, each sensor indicating an intensity of light emanating from a cell as a result of illumination by the light sources as the cell passes each respective scanning location, wherein the optical systems at least in part gather light emanating from the cell for direction to the sensors;

wherein the optical systems are aligned such that each spot traces a different substantially linear path across the cell, and the system further comprises a processing unit that repeatedly takes readings of the light intensity indications from the at least two sensors and characterizes the light intensity along the respective substantially linear paths, and wherein a resolution of the system is dependent on sizes of the spots.

19. The system of claim 18, wherein at least one of the two light sources comprises at least one laser.

20. The system of claim 18, wherein at least one of the two light sources comprises at least one light source selected from the group consisting of a coherent light source, a non-coherent light source, a continuous light source, and a pulsed light source.

21. The system of claim 18, wherein at least one of the sensors indicates at least in part the intensity of light emanating from the cell by reflection of light from one of the light sources.

22. The system of claim 18, wherein at least one of the sensors indicates at least in part the intensity of light emanating from the cell as a result of fluorescence excited by one of the light sources.

23. A method of performing cytometry, the method comprising:
focusing, using an optical system comprising a lens, light from a light source onto a spot in a scanning location;
creating, via a transport mechanism, relative motion between a cell in the scanning location and the spot;
gathering, using the lens, light emanating from the cell as a result of illumination by the light source;
directing the gathered light to a sensor;
sensing an intensity of the light reaching the sensor; and
using a computerized processing unit, repeatedly taking readings of the light intensity indication and characterizing the light intensity along a substantially linear path across the cell, wherein a resolution of the system employing the method is dependent on a size of the spot.

24. The method of claim 23, wherein focusing light from a light source comprises focusing light generated by at least one laser.

25. The method of claim 23, wherein focusing light from a light source comprises focusing light generated by at least one light source selected from the group consisting

of a coherent light source, a non-coherent light source, a continuous light source, and a pulsed light source.



26. The method of claim 23, wherein sensing the intensity of light emanating from the cell comprises sensing the intensity of light reflected from the cell.

27. The method of claim 23, wherein sensing the intensity of light emanating from the cell comprises sensing the intensity of light emanating from the cell as a result of fluorescence excited by the light source.

28. The method of claim 23, further comprising:
suspending the cell in a fluid; and
transporting the cell past the scanning location by flow of the fluid.

29. The method of claim 23, wherein sensing the intensity of light emanating from the cell comprises sensing the intensity of light in at least two wavelength bands.

1/6

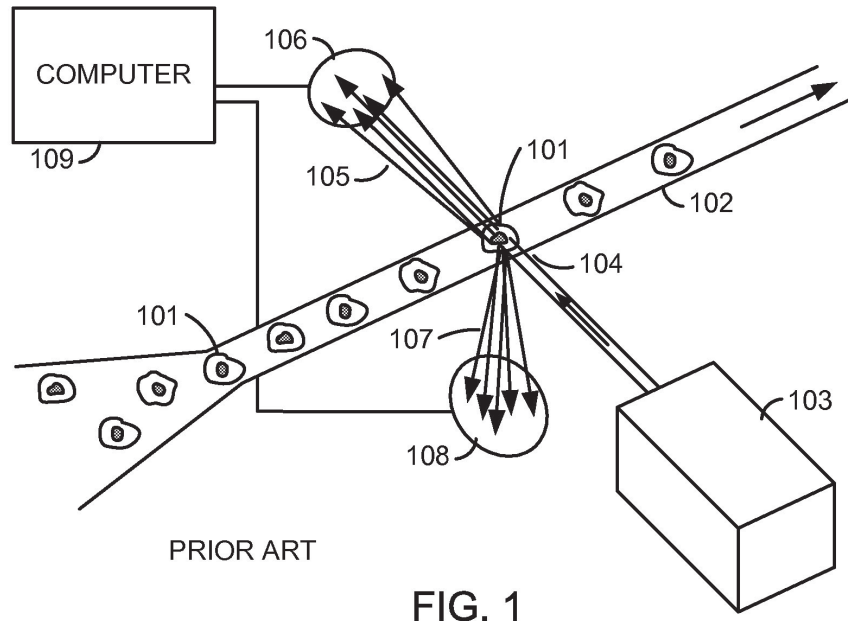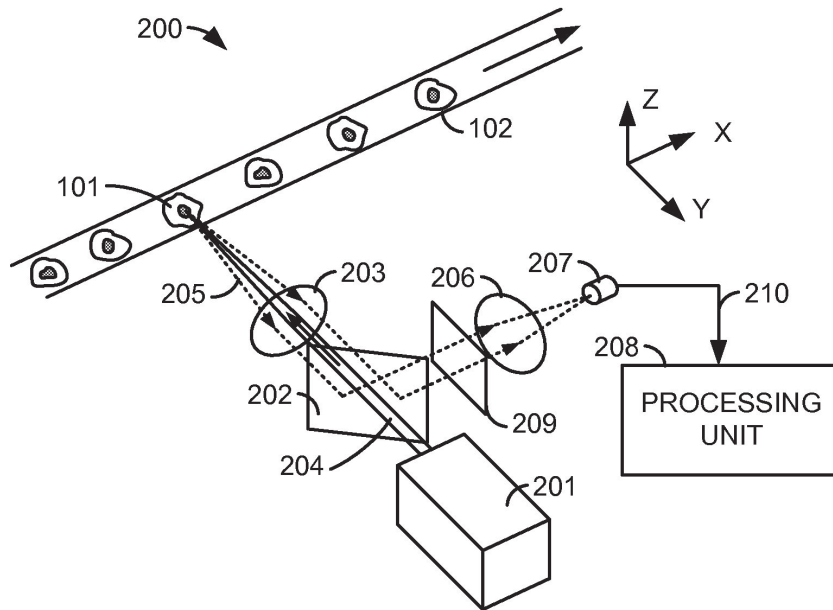

2/6

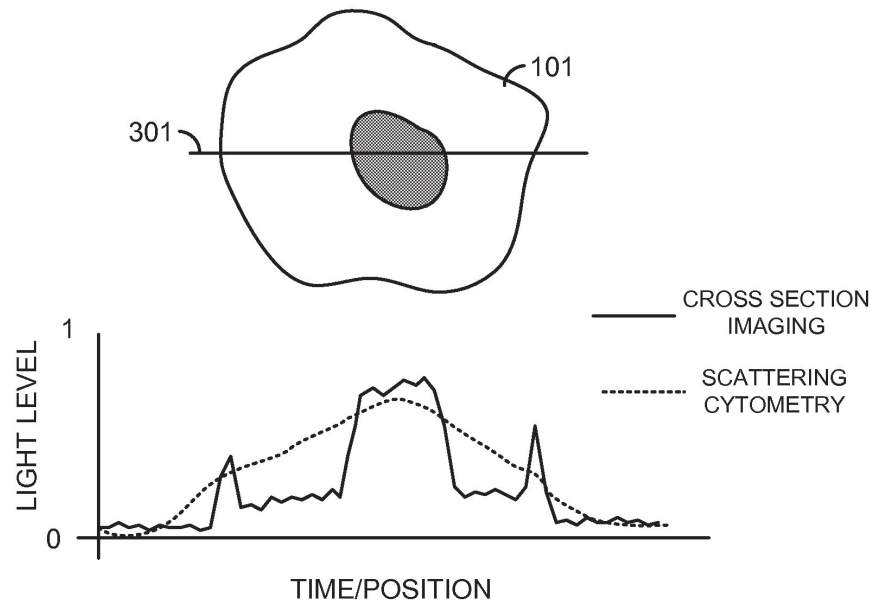


FIG. 3

3/6

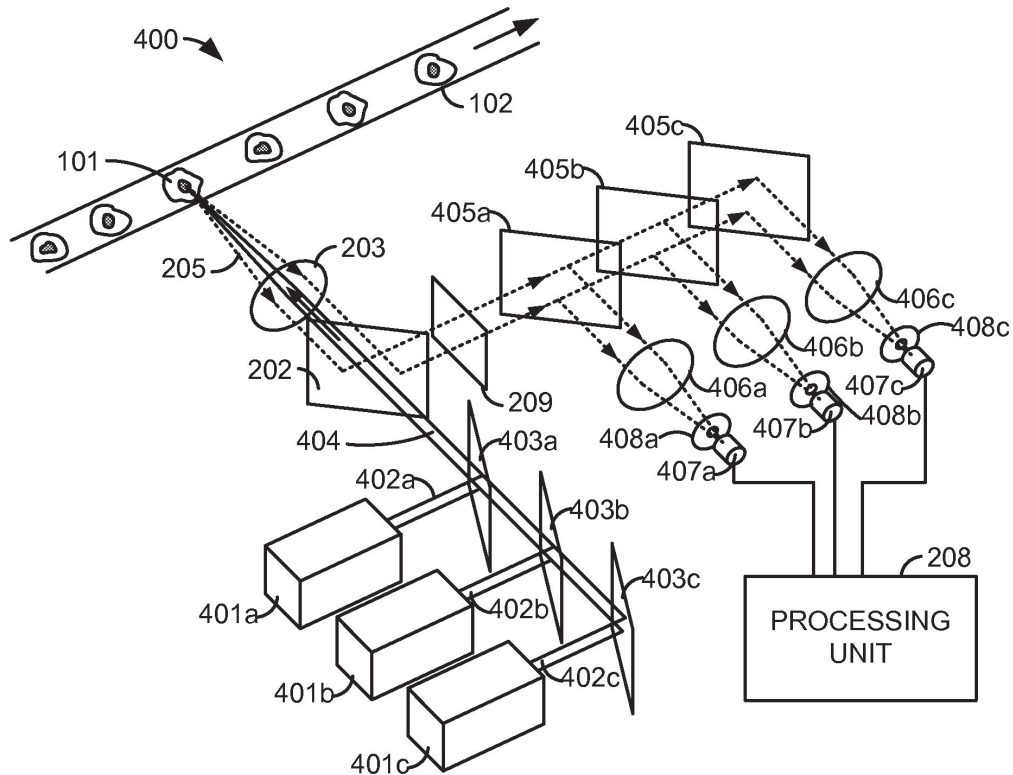


FIG. 4

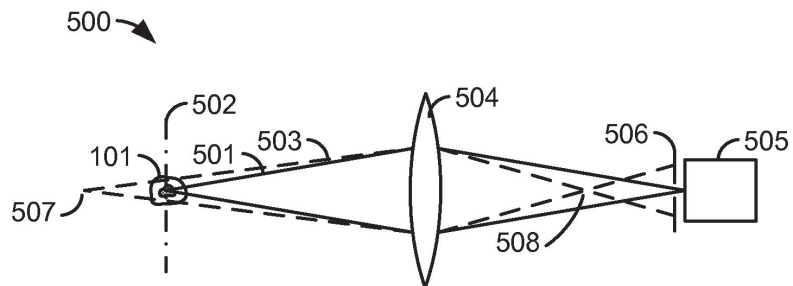


FIG. 5

4/6

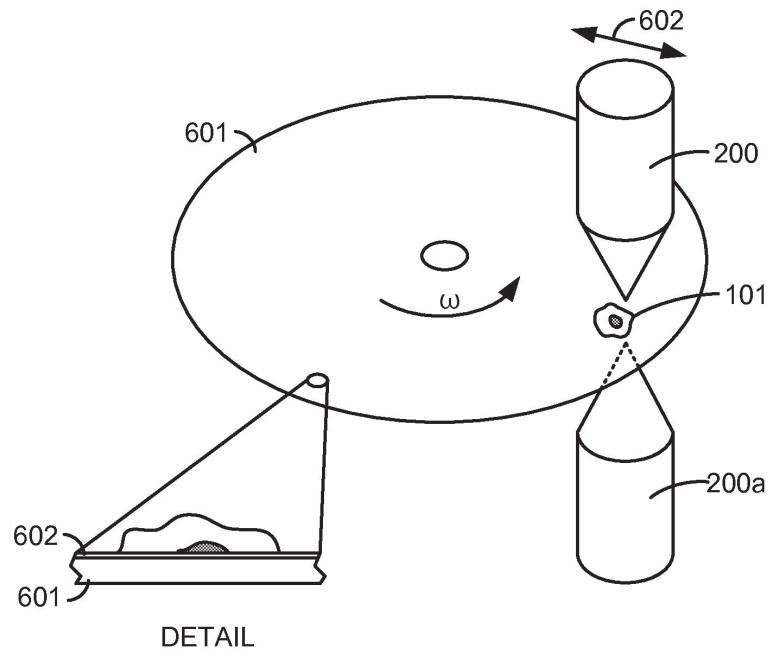


FIG. 6

5/6

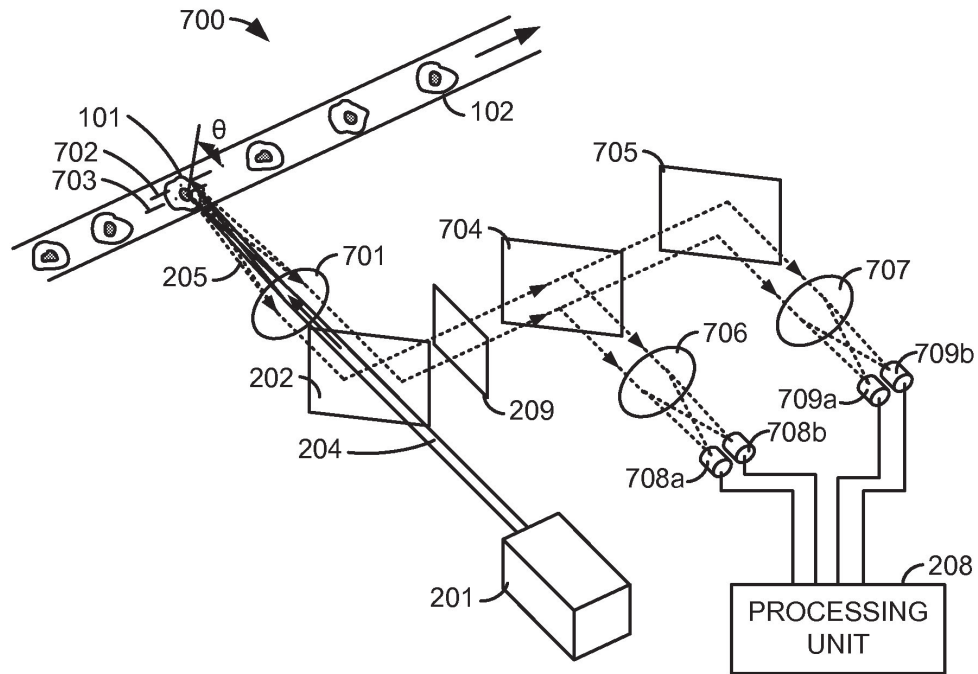


FIG. 7

6/6

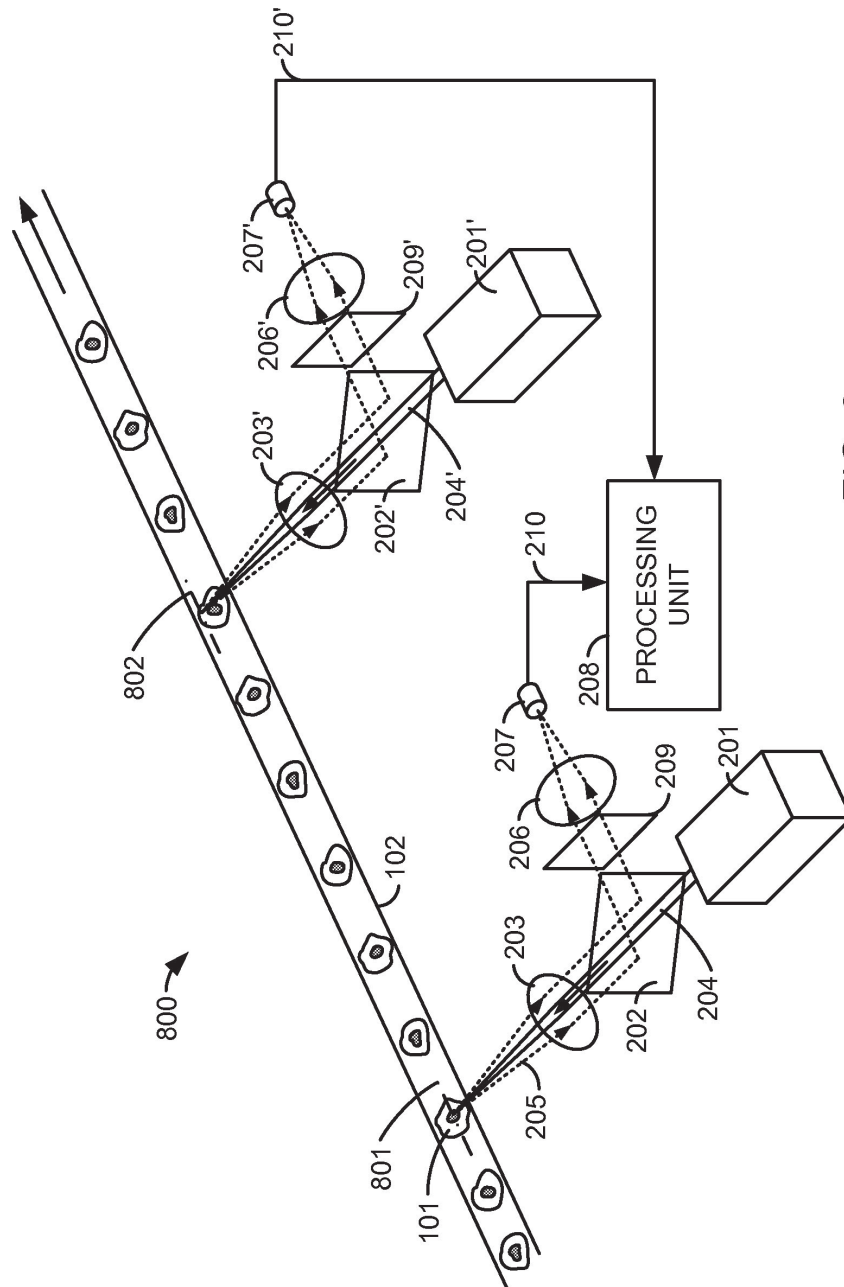


FIG. 8

