



US008328806B2

(12) **United States Patent**
Tyber et al.

(10) **Patent No.:** **US 8,328,806 B2**
(45) **Date of Patent:** **Dec. 11, 2012**

(54) **FIXATION SYSTEM, AN INTRAMEDULLARY
FIXATION ASSEMBLY AND METHOD OF
USE**

(75) Inventors: **Jeff Tyber**, Bethlehem, PA (US); **Jamy
Gannoe**, West Milford, NJ (US); **Chris
Digiovanni**, Barrington, RI (US)

(73) Assignee: **Extremity Medical, LLC**, Parsippany,
NJ (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 332 days.

(21) Appl. No.: **12/460,069**

(22) Filed: **Jul. 13, 2009**

(65) **Prior Publication Data**

US 2010/0324556 A1 Dec. 23, 2010

Related U.S. Application Data

(63) Continuation-in-part of application No. 12/456,808,
filed on Jun. 23, 2009.

(60) Provisional application No. 61/132,932, filed on Jun.
24, 2008.

(51) **Int. Cl.**
A61B 17/56 (2006.01)

(52) **U.S. Cl.** **606/62**

(58) **Field of Classification Search** 606/54,
606/62, 64, 65, 80, 96
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

928,997 A 7/1909 Muller
2,398,220 A 4/1946 Gelpcke

2,580,821 A	1/1952	Nicola
3,019,686 A	2/1962	Behrle
3,200,694 A	8/1965	Rapata
3,411,398 A	11/1968	Blakeley et al.
3,474,537 A	10/1969	Christensen
3,924,276 A	12/1975	Eaton
4,152,533 A	5/1979	Gazda
4,381,770 A	5/1983	Neufeld
4,465,065 A	8/1984	Gotfried et al.
4,760,843 A	8/1988	Fischer et al.
4,795,294 A	1/1989	Takada et al.
4,854,797 A	8/1989	Gourd
4,930,963 A	6/1990	Rockenfeller et al.
4,940,467 A	7/1990	Tronzo
4,947,502 A	8/1990	Engelhardt
4,987,714 A	1/1991	Lemke
5,084,050 A	1/1992	Draenert
5,112,333 A	5/1992	Fixel
5,163,940 A	11/1992	Bourque
5,209,753 A	5/1993	Biedermann
5,350,380 A	9/1994	Goble et al.
5,403,321 A	4/1995	DiMarco

(Continued)

FOREIGN PATENT DOCUMENTS

WO WO 2006116164 11/2006

(Continued)

Primary Examiner — Alvin Stewart

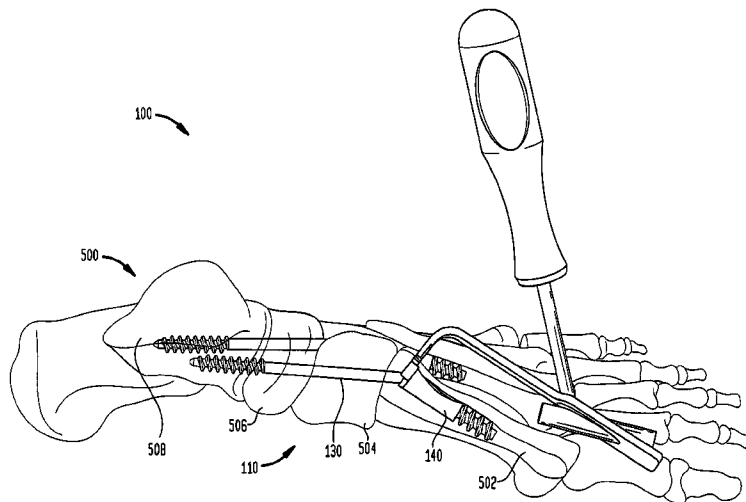
Assistant Examiner — Stuart S Bray

(74) *Attorney, Agent, or Firm* — Ward & Zinna, LLC

(57) **ABSTRACT**

An intramedullary fixation assembly for bone fusion includes a first member positioned at a proximal end of the intramedullary fixation assembly, and a second member positioned at a distal end of the intramedullary fixation assembly. The first member is slideably coupled to the second member and provides for an interference fit with the second member. The intramedullary fixation assembly includes an optional cannulated threaded screw member having a plurality of threads on an external surface of the threaded screw member.

65 Claims, 19 Drawing Sheets



Paragon 28 v. Treace Medical Concepts
PGR2026-00020
Paragon Ex. 1008

U.S. PATENT DOCUMENTS							
5,454,267	A	10/1995	Moreau et al.	6,849,093	B2	2/2005	Michelson
5,456,267	A *	10/1995	Stark	6,875,216	B2	4/2005	Wolf
5,478,341	A	12/1995	Cook et al.	6,908,271	B2	6/2005	Breslin et al.
5,501,557	A	3/1996	Wakai	6,951,538	B2	10/2005	Ritland
5,505,731	A	4/1996	Tornier	6,951,561	B2	10/2005	Warren et al.
5,531,748	A	7/1996	de la Caffiniere	6,981,974	B2	1/2006	Berger
5,540,694	A	7/1996	DeCarlo, Jr. et al.	7,018,380	B2	3/2006	Cole
5,573,538	A *	11/1996	Laboureau	7,037,309	B2	5/2006	Weil et al.
5,601,550	A *	2/1997	Esser	7,041,104	B1	5/2006	Cole et al.
5,613,971	A	3/1997	Lower et al.	7,063,724	B2	6/2006	Re et al.
5,620,449	A	4/1997	Faccioli et al.	7,074,221	B2	7/2006	Michelson
5,702,470	A	12/1997	Menon	7,144,399	B2	12/2006	Hayes et al.
5,718,705	A	2/1998	Sammarco	7,160,302	B2	1/2007	Warburton
5,718,706	A	2/1998	Roger	7,175,632	B2	2/2007	Singhatat et al.
5,741,266	A *	4/1998	Moran et al.	7,229,448	B2	6/2007	Goble et al.
5,766,221	A	6/1998	Benderev et al.	7,232,442	B2	6/2007	Sohngen et al.
5,779,704	A	7/1998	Kim	7,247,156	B2	7/2007	Ekholm et al.
5,857,816	A	1/1999	Assmundson	7,267,678	B2	9/2007	Medoff
5,865,559	A	2/1999	Yang	7,326,248	B2	2/2008	Michelson
5,888,203	A	3/1999	Goldberg	7,331,962	B2	2/2008	Bränemark
5,891,150	A	4/1999	Chan	7,341,588	B2	3/2008	Swanson
5,968,050	A	10/1999	Torrie	7,344,538	B2	3/2008	Myerson et al.
5,984,681	A	11/1999	Huang	7,410,488	B2	8/2008	Janna et al.
5,997,541	A	12/1999	Schenk	7,524,326	B2	4/2009	Dierks
D420,132	S	2/2000	Bucholz et al.	7,527,627	B2	5/2009	Ferrante et al.
6,019,761	A	2/2000	Gustilo	7,582,107	B2	9/2009	Trail et al.
6,030,162	A	2/2000	Huebner	7,588,577	B2	9/2009	Fencel et al.
6,048,343	A	4/2000	Mathis et al.	7,591,819	B2	9/2009	Zander
6,106,528	A	8/2000	Durham et al.	7,601,153	B2	10/2009	Shinjo et al.
6,120,511	A	9/2000	Chan	7,608,097	B2	10/2009	Kyle
6,123,709	A	9/2000	Jones	7,632,272	B2	12/2009	Munro et al.
6,123,711	A	9/2000	Winters	7,655,009	B2	2/2010	Grusin
6,126,661	A *	10/2000	Faccioli et al.	7,666,212	B2	2/2010	Pathak
6,168,595	B1	1/2001	Durham et al.	7,670,340	B2	3/2010	Brivio et al.
6,168,597	B1	1/2001	Biedermann et al.	7,713,271	B2	5/2010	Warburton
6,174,119	B1	1/2001	Orr	7,717,947	B1	5/2010	Wilberg et al.
6,214,007	B1	4/2001	Anderson	7,731,721	B2	6/2010	Rathbun et al.
6,214,012	B1	4/2001	Karpman et al.	7,731,738	B2	6/2010	Jackson et al.
6,221,074	B1	4/2001	Cole et al.	7,763,021	B2	7/2010	Cole et al.
6,235,031	B1	5/2001	Hodgeman et al.	7,763,022	B2	7/2010	Speitling et al.
6,247,883	B1	6/2001	Monseratt	7,763,023	B2	7/2010	Gotfried
6,254,605	B1	7/2001	Howell	7,771,428	B2	8/2010	Siravo et al.
6,254,606	B1	7/2001	Carney et al.	7,785,326	B2	8/2010	Green et al.
6,261,039	B1	7/2001	Reed	7,794,483	B2	9/2010	Capanni
6,261,290	B1	7/2001	Friedl	7,799,061	B2	9/2010	Kay et al.
6,270,499	B1	8/2001	Leu et al.	7,815,646	B2	10/2010	Hart
6,280,442	B1	8/2001	Barker et al.	7,842,036	B2	11/2010	Phillips
6,287,313	B1	9/2001	Sasso	7,867,231	B2	1/2011	Cole
6,379,362	B1	4/2002	Birk et al.	7,892,234	B2	2/2011	Schlienger et al.
6,402,753	B1	6/2002	Cole et al.	7,892,264	B2	2/2011	Sanders et al.
6,402,757	B1	6/2002	Moore et al.	7,909,825	B2	3/2011	Saravia et al.
6,423,064	B1	7/2002	Kluger	7,914,532	B2	3/2011	Shaver et al.
6,435,788	B2	8/2002	Reed	7,918,853	B2	4/2011	Watanabe et al.
6,443,954	B1	9/2002	Bramlet et al.	7,922,748	B2 *	4/2011	Hoffman
6,458,134	B1	10/2002	Songer et al.	7,927,340	B2	4/2011	Hart
6,517,541	B1	2/2003	Sesic	7,938,848	B2 *	5/2011	Sweeney
6,527,775	B1	3/2003	Warburton	7,947,043	B2	5/2011	Mutchler
6,562,046	B2	5/2003	Sasso	8,034,056	B2	10/2011	Fencel et al.
6,569,165	B2	5/2003	Wahl et al.	8,034,082	B2	10/2011	Lee et al.
6,589,245	B1	7/2003	Weiler et al.	8,057,476	B2	11/2011	Ekholm et al.
6,596,008	B1	7/2003	Kambin	8,092,453	B2	1/2012	Warburton
6,626,916	B1	9/2003	Yeung et al.	8,100,910	B2	1/2012	Warburton
6,629,976	B1	10/2003	Gnos et al.	8,100,946	B2	1/2012	Strausbaugh et al.
6,632,057	B1	10/2003	Fauchet	8,206,424	B2	6/2012	Biedermann et al.
6,634,844	B2	10/2003	Huber	2001/0021852	A1	9/2001	Chappius
6,648,889	B2	11/2003	Bramlet et al.	2002/0052605	A1	5/2002	Grooms et al.
6,669,700	B1 *	12/2003	Farris et al.	2002/0128712	A1	9/2002	Michelson
6,679,888	B2	1/2004	Green et al.	2002/0143333	A1	10/2002	von Hoffmann et al.
6,685,706	B2	2/2004	Padget et al.	2002/0169453	A1 *	11/2002	Berger
6,692,496	B1	2/2004	Wardlaw	2002/0197134	A1	12/2002	Huber
6,692,503	B2	2/2004	Foley et al.	2003/0028193	A1	2/2003	Weil et al.
6,695,844	B2	2/2004	Bramlet et al.	2003/0060827	A1	3/2003	Coughlin
6,709,436	B1	3/2004	Hover et al.	2003/0065391	A1	4/2003	Re et al.
6,712,849	B2	3/2004	Re et al.	2003/0083667	A1	5/2003	Ralph et al.
6,743,018	B1	6/2004	Morrow	2003/0147716	A1	8/2003	Nagawa
6,778,861	B1	8/2004	Leibrecht et al.	2003/0158555	A1	8/2003	Sanders
6,793,659	B2	9/2004	Putnam	2003/0229346	A1	12/2003	Oribe et al.
6,808,527	B2	10/2004	Lower et al.	2004/0006345	A1	1/2004	Vlahos et al.
				2004/0082959	A1 *	4/2004	Hayes et al.

US 8,328,806 B2

Page 3

2004/0097945	A1	5/2004	Wolf	2009/0062797	A1 *	3/2009	Huebner et al.	606/62
2004/0172031	A1	9/2004	Rubecamp et al.	2009/0088767	A1	4/2009	Leyden et al.	
2004/0181234	A1	9/2004	McDevitt et al.	2009/0088804	A1	4/2009	Kyle et al.	
2004/0220570	A1	11/2004	Frigg	2009/0088806	A1	4/2009	Leyden et al.	
2005/0015092	A1	1/2005	Rathbun et al.	2009/0093813	A1	4/2009	Elghazaly	
2005/0069397	A1	3/2005	Shavit et al.	2009/0093849	A1	4/2009	Grabowski	
2005/0107791	A1	5/2005	Manderson	2009/0093851	A1	4/2009	Osman	
2005/0125070	A1	6/2005	Reiley	2009/0099571	A1 *	4/2009	Cresina et al.	606/96
2005/0149030	A1	7/2005	Serhan et al.	2009/0149857	A1 *	6/2009	Culbert et al.	606/80
2005/0171544	A1	8/2005	Falkner, Jr.	2009/0157077	A1	6/2009	Larsen et al.	
2005/0171546	A1	8/2005	Wolf	2009/0157078	A1	6/2009	Mikol	
2005/0192580	A1	9/2005	Dalton	2009/0157079	A1	6/2009	Warburton et al.	
2005/0251147	A1	11/2005	Novak	2009/0157080	A1	6/2009	Warburton	
2005/0273101	A1	12/2005	Schumacher	2009/0177203	A1	7/2009	Reiley	
2005/0277940	A1	12/2005	Neff	2009/0198289	A1	8/2009	Manderson	
2005/0283159	A1	12/2005	Amara	2009/0209961	A1	8/2009	Ferrante et al.	
2006/0009774	A1	1/2006	Goble et al.	2009/0240252	A1 *	9/2009	Chang	606/96
2006/0009846	A1	1/2006	Trieu et al.	2009/0248025	A1 *	10/2009	Haidukewych et al.	606/67
2006/0015101	A1	1/2006	Warburton et al.	2009/0264885	A1	10/2009	Grant et al.	
2006/0052787	A1	3/2006	Re et al.	2009/0281580	A1	11/2009	Emanuel	
2006/0095039	A1	5/2006	Mutchler	2009/0292292	A1 *	11/2009	Fencel et al.	606/104
2006/0122600	A1	6/2006	Cole	2009/0306666	A1 *	12/2009	Czartoski et al.	606/64
2006/0122612	A1	6/2006	Justin et al.	2009/0326534	A1	12/2009	Yamazaki et al.	
2006/0142770	A1	6/2006	Capanni	2010/0023011	A1 *	1/2010	Nakamura	606/64
2006/0149244	A1	7/2006	Amrein et al.	2010/0023064	A1	1/2010	Brunger et al.	
2006/0173461	A1	8/2006	Kay et al.	2010/0030280	A1	2/2010	Jackson	
2006/0189991	A1	8/2006	Bickley	2010/0042164	A1	2/2010	Lee et al.	
2006/0200143	A1	9/2006	Warburton	2010/0042167	A1	2/2010	Nebosky et al.	
2006/0200144	A1	9/2006	Warburton	2010/0057141	A1	3/2010	Abdelgany et al.	
2006/0200160	A1	9/2006	Border et al.	2010/0069970	A1	3/2010	Lewis et al.	
2006/0206044	A1	9/2006	Simon	2010/0076499	A1	3/2010	McNamara et al.	
2006/0235396	A1	10/2006	Sanders et al.	2010/0174284	A1	7/2010	Schwammberger et al.	
2006/0241608	A1	10/2006	Myerson et al.	2010/0179551	A1	7/2010	Keller et al.	
2006/0241777	A1	10/2006	Partin et al.	2010/0234846	A1	9/2010	Eglseder	
2006/0264954	A1	11/2006	Sweeney, II et al.	2010/0256638	A1 *	10/2010	Tyber et al.	606/62
2007/0021839	A1	1/2007	Lowe	2010/0312279	A1 *	12/2010	Gephart et al.	606/264
2007/0038306	A1	2/2007	O'Gara	2010/0324556	A1 *	12/2010	Tyber et al.	606/62
2007/0055286	A1	3/2007	Ralph et al.	2011/0004255	A1	1/2011	Weiner et al.	
2007/0066977	A1	3/2007	Assell et al.	2011/0022066	A1	1/2011	Sevrain	
2007/0073290	A1	3/2007	Boehm, Jr.	2011/0046681	A1	2/2011	Prandi et al.	
2007/0093841	A1	4/2007	Hoogland	2011/0060337	A1	3/2011	Ferrante et al.	
2007/0112432	A1	5/2007	Reiley	2011/0137313	A1	6/2011	Jensen et al.	
2007/0173835	A1	7/2007	Medoff	2011/0144645	A1	6/2011	Saravia et al.	
2007/0233114	A1	10/2007	Bouman	2011/0160729	A1	6/2011	Overes et al.	
2007/0270848	A1	11/2007	Lin	2011/0218580	A1	9/2011	Schwager et al.	
2007/0270855	A1	11/2007	Partin	2011/0282398	A1	11/2011	Overes et al.	
2008/0065224	A1	3/2008	Reigstad et al.	2011/0301651	A1	12/2011	Kirschman	
2008/0091203	A1	4/2008	Warburton et al.	2012/0004690	A1	1/2012	Gonzalez-Hernandez	
2008/0154271	A1	6/2008	Berberich et al.	2012/0010669	A1	1/2012	O'Neil et al.	
2008/0208261	A1	8/2008	Medoff	2012/0016424	A1	1/2012	Kave	
2008/0221623	A1	9/2008	Gooch	2012/0022603	A1	1/2012	Kirschman	
2008/0269908	A1	10/2008	Warburton	2012/0095516	A1	4/2012	Dikeman	
2008/0279654	A1	11/2008	Deschamps	2012/0109213	A1	5/2012	Appenzeller et al.	
2008/0294164	A1	11/2008	Frank et al.					
2008/0306487	A1 *	12/2008	Hart					
2008/0306537	A1	12/2008	Culbert					
2009/0018542	A1	1/2009	Saravia et al.					
2009/0048600	A1	2/2009	Matityahu et al.					

FOREIGN PATENT DOCUMENTS

WO WO 2007131287 11/2007

* cited by examiner

FIG. 1

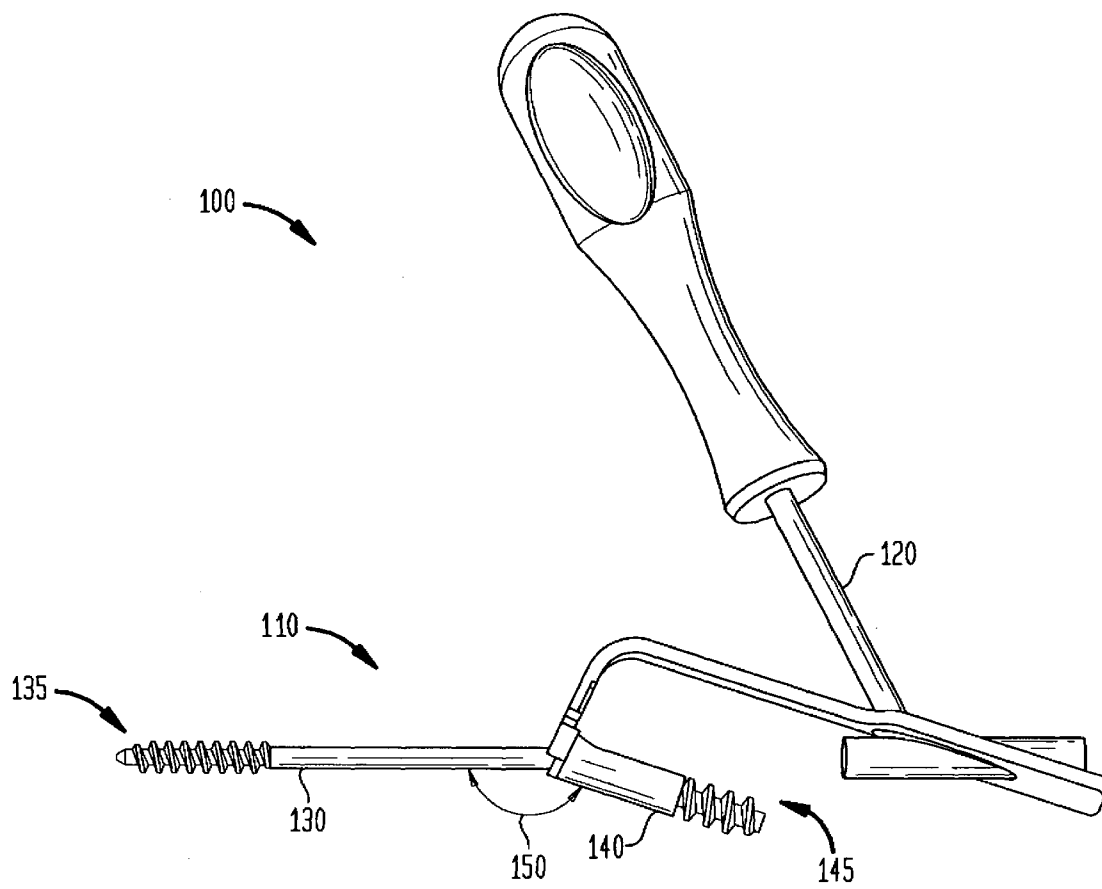


FIG. 2

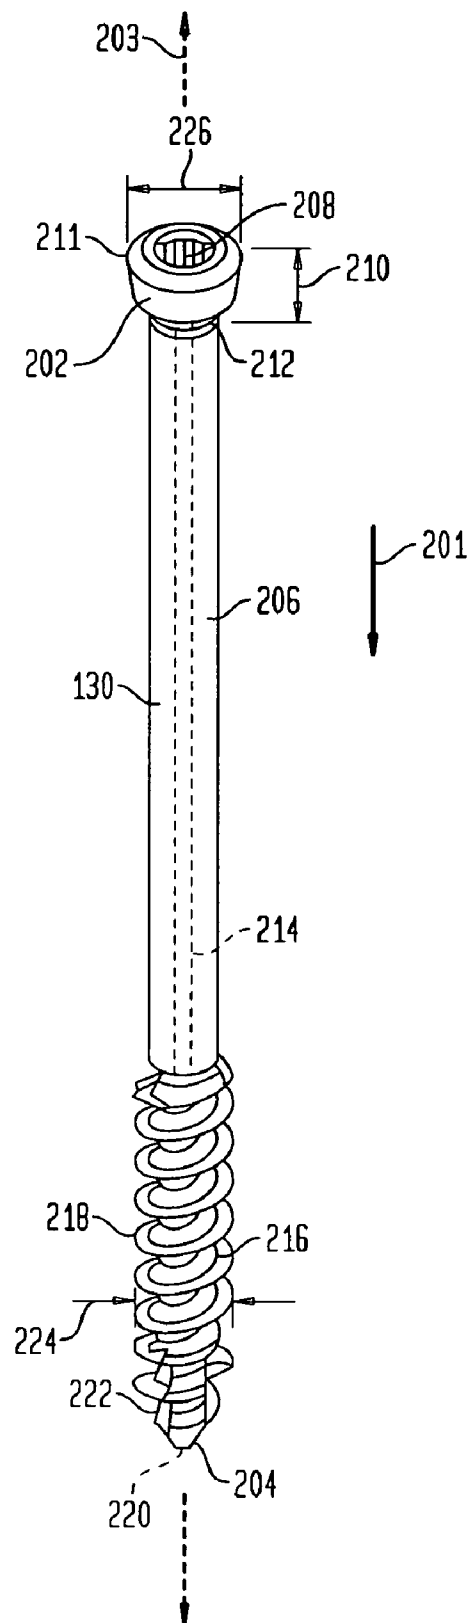


FIG. 3A

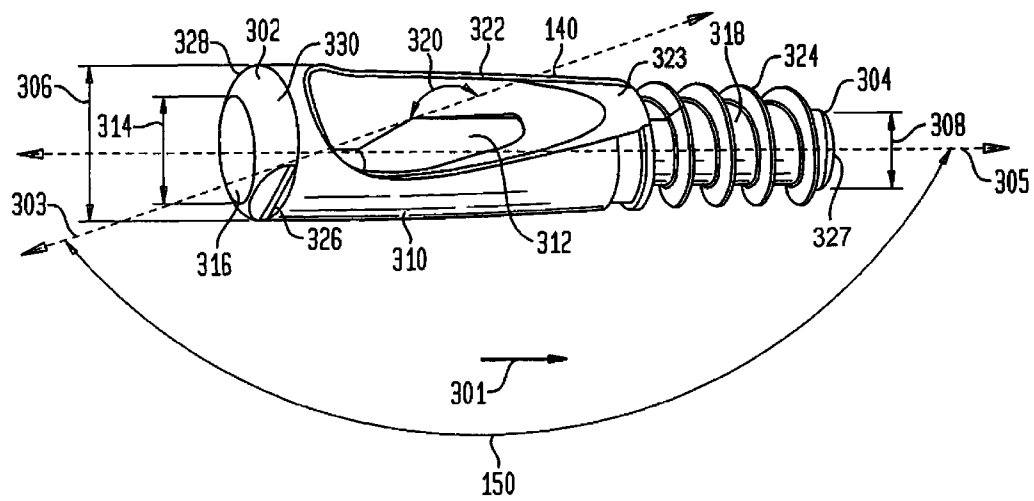


FIG. 3B

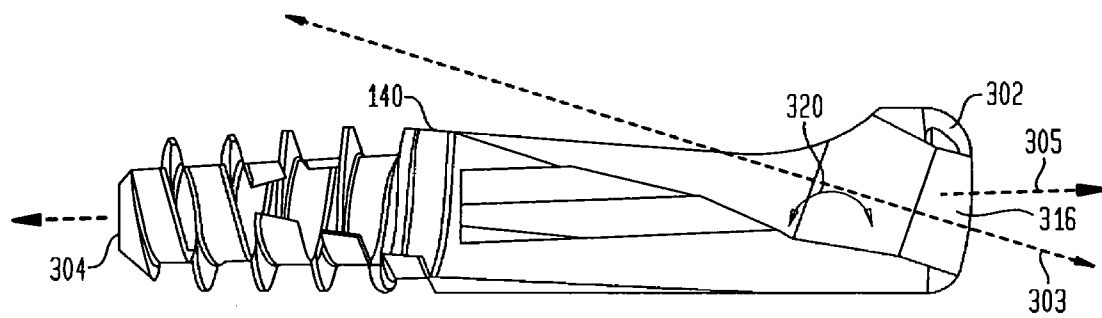
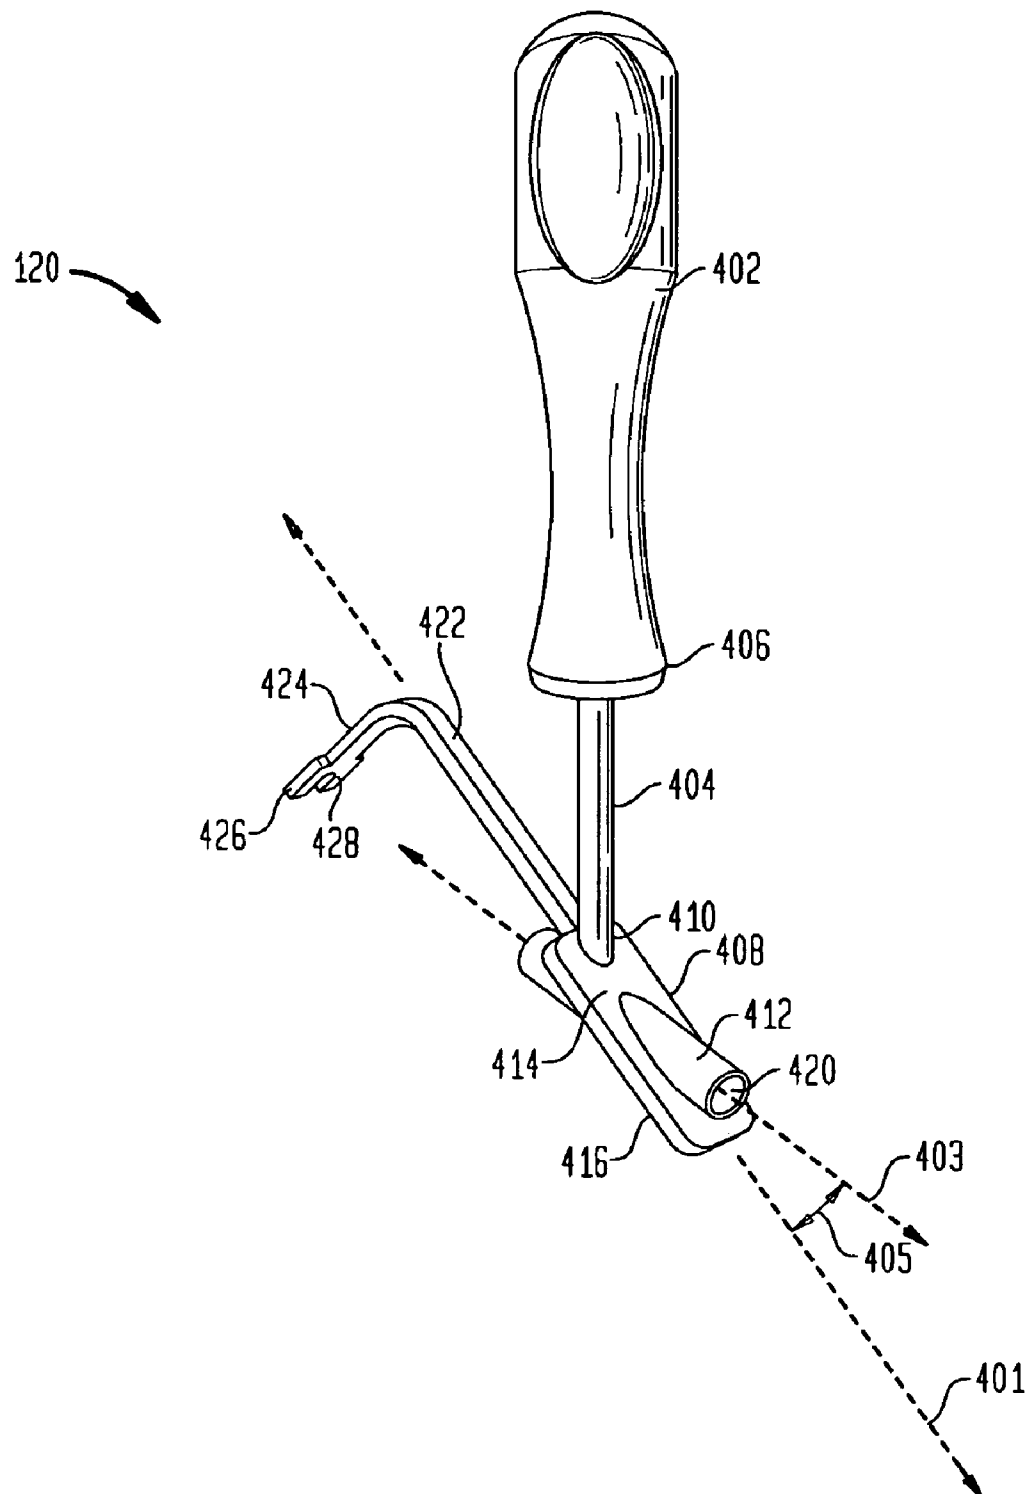


FIG. 4

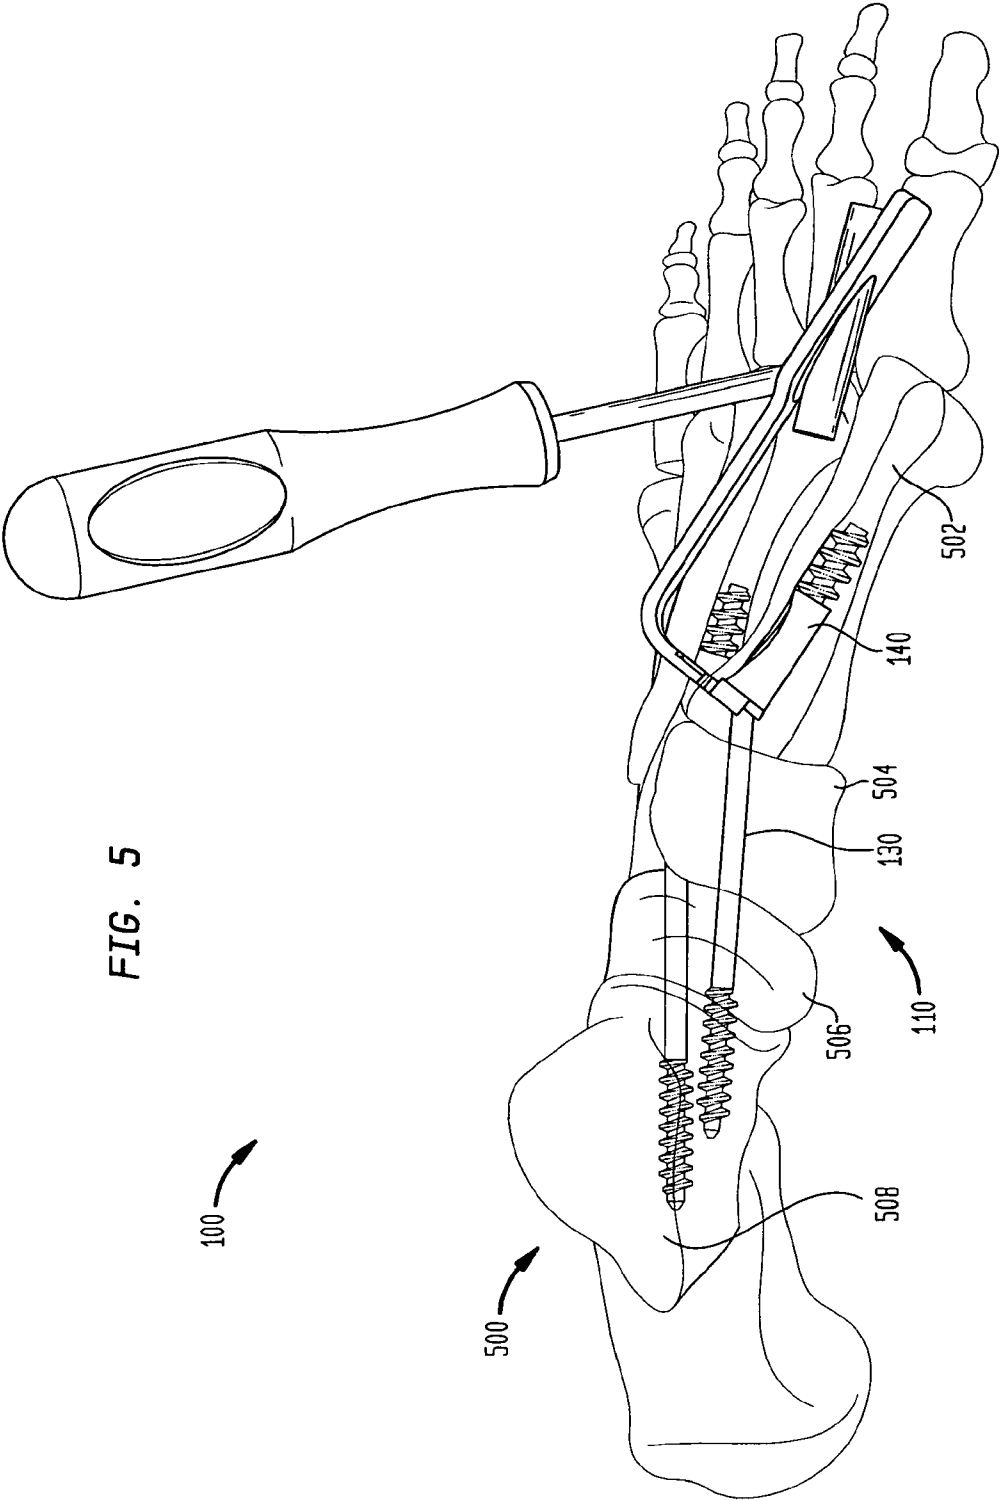


FIG. 5

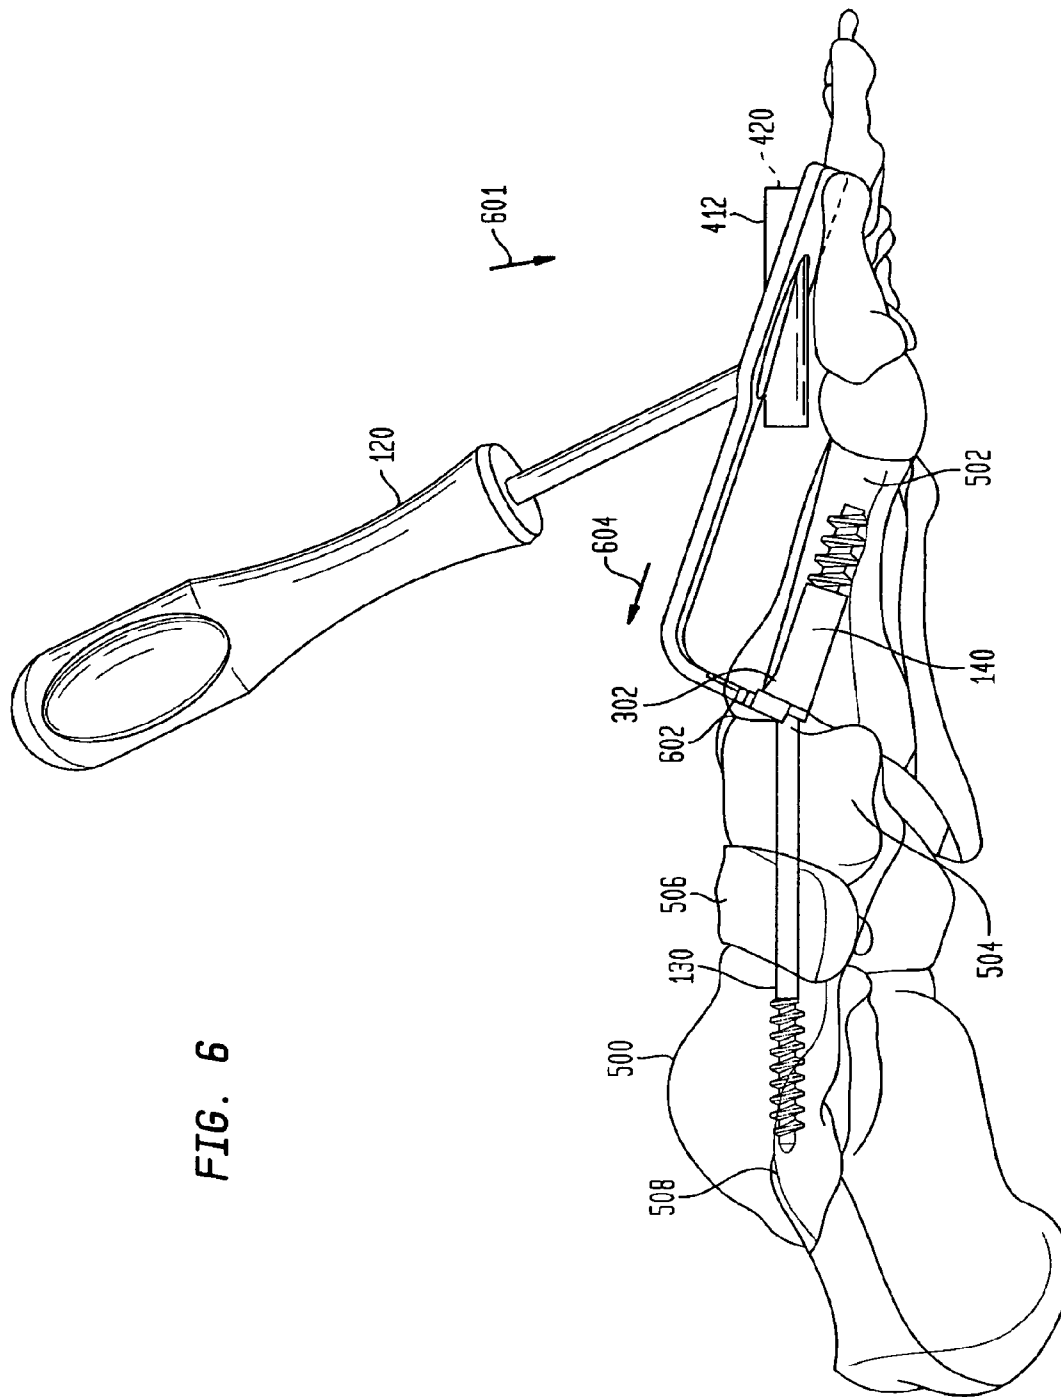


FIG. 6

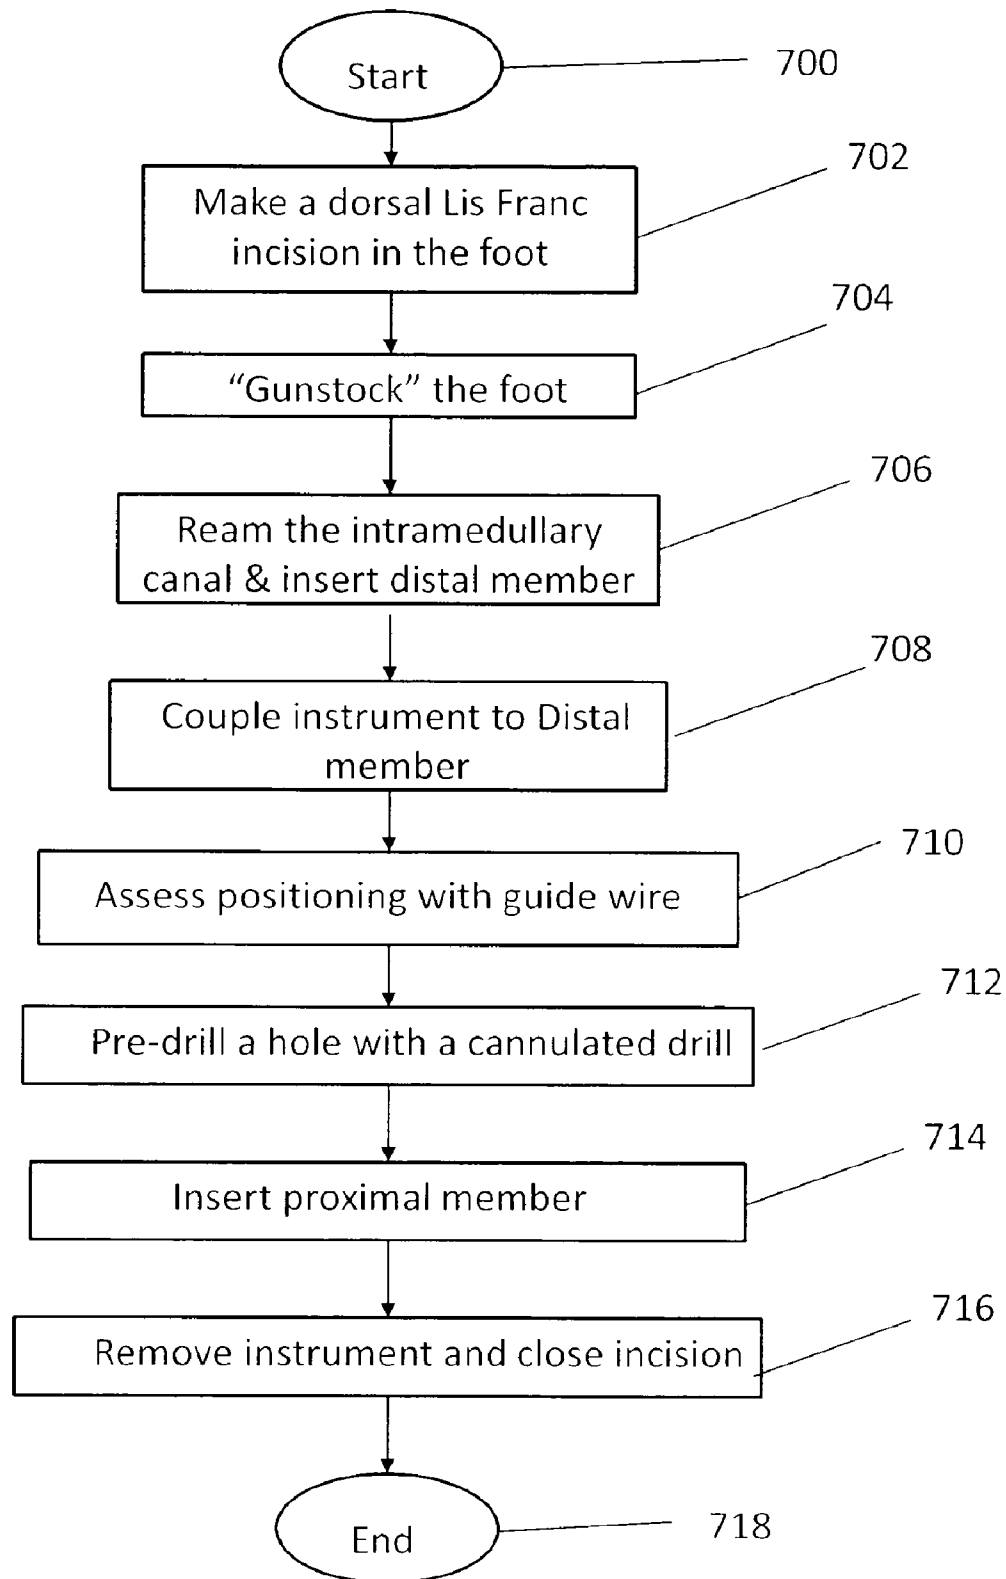
**FIG. 7**

FIG. 8

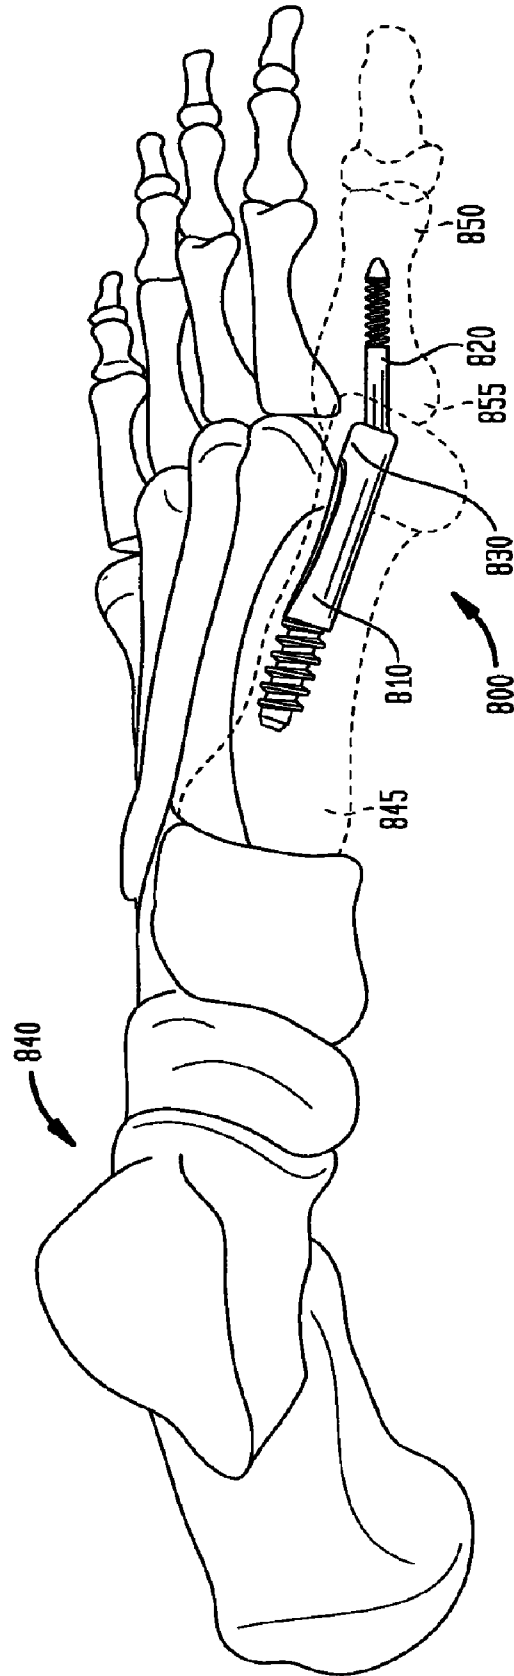


FIG. 9

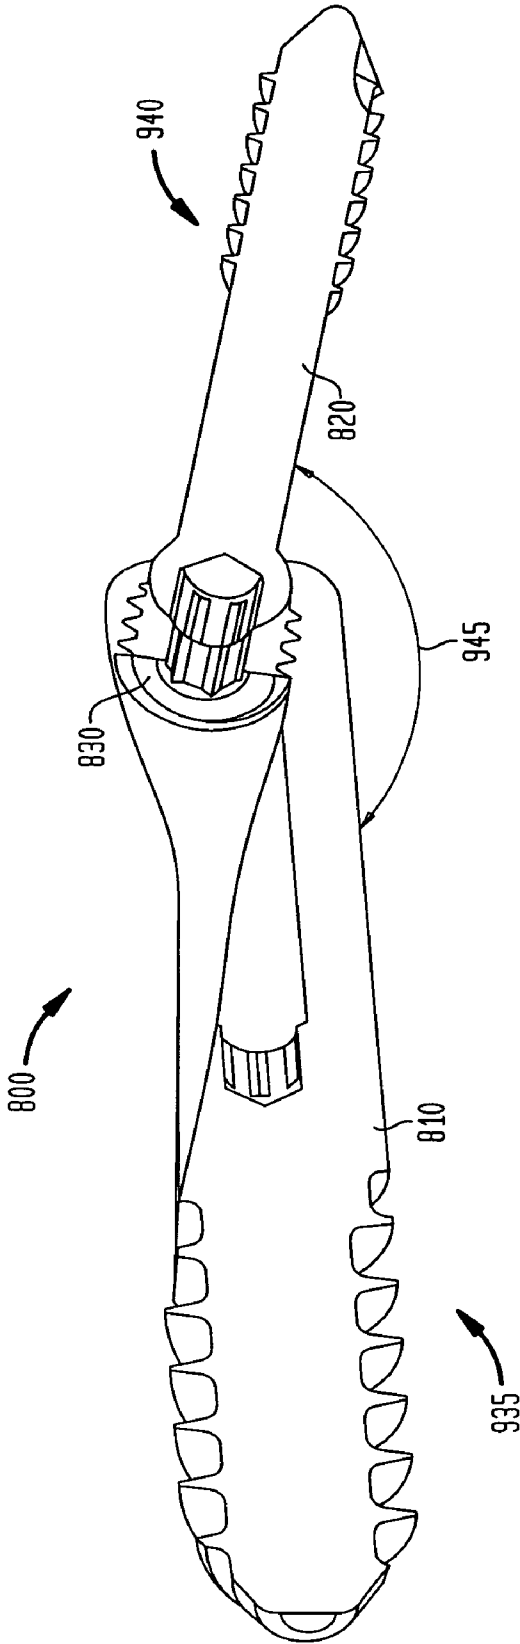


FIG. 10A

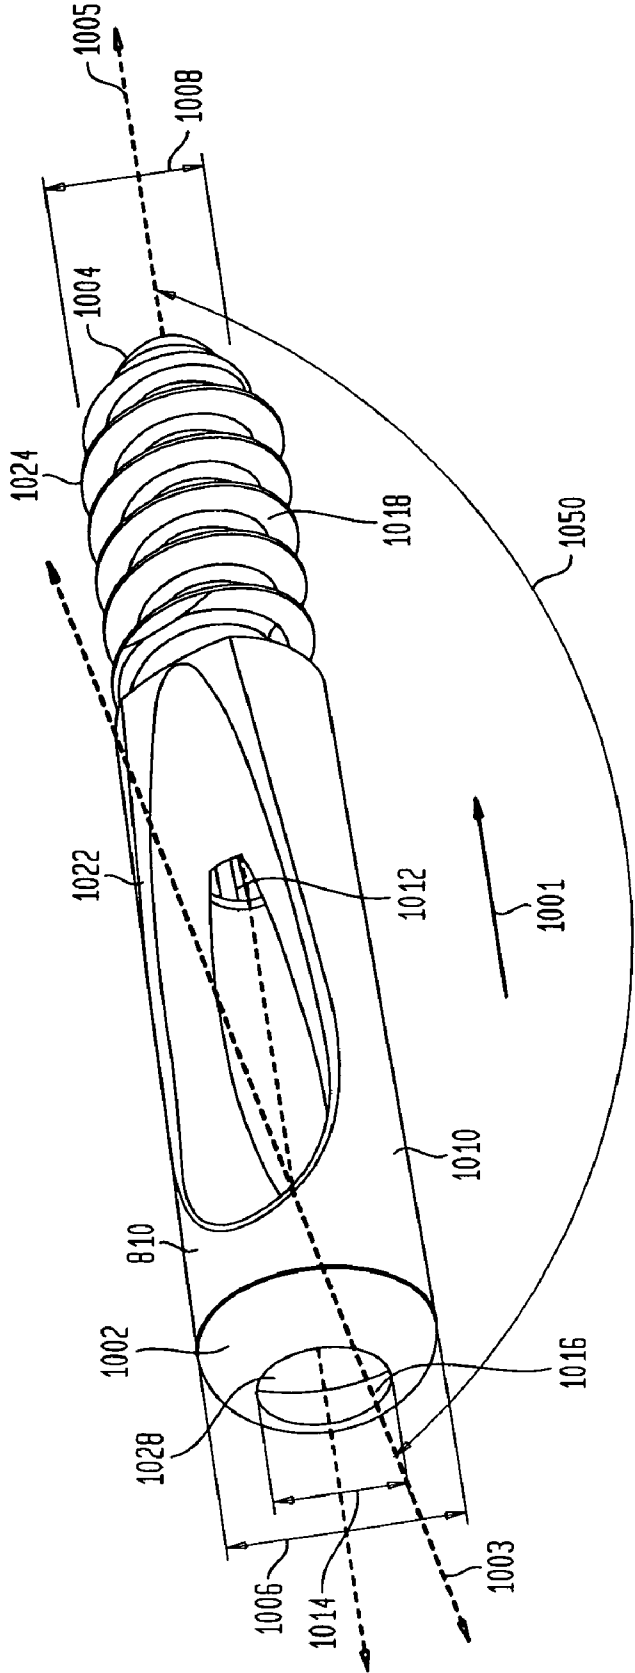


FIG. 10B

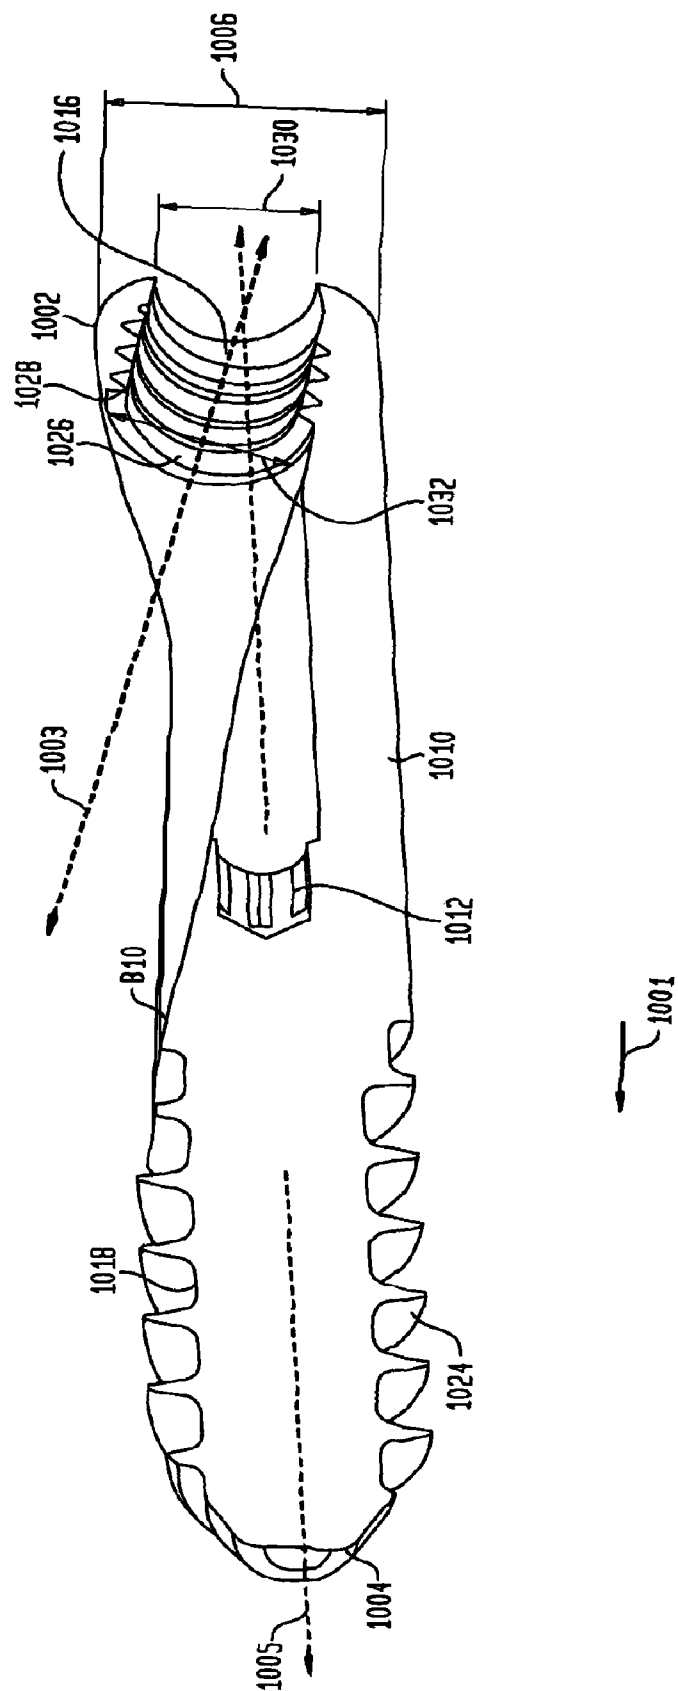


FIG. 11

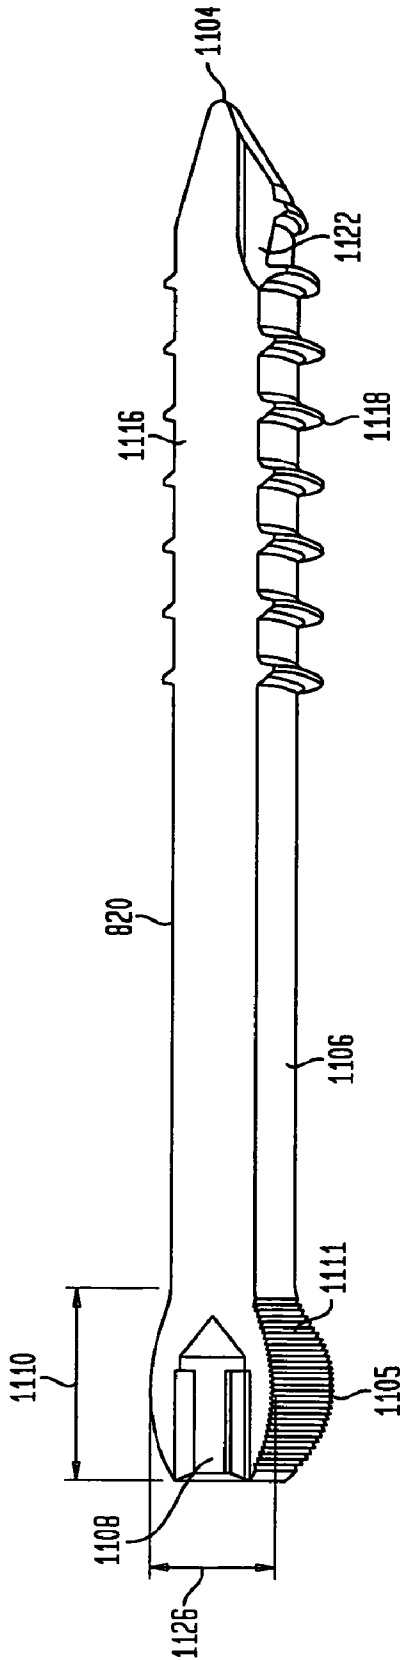
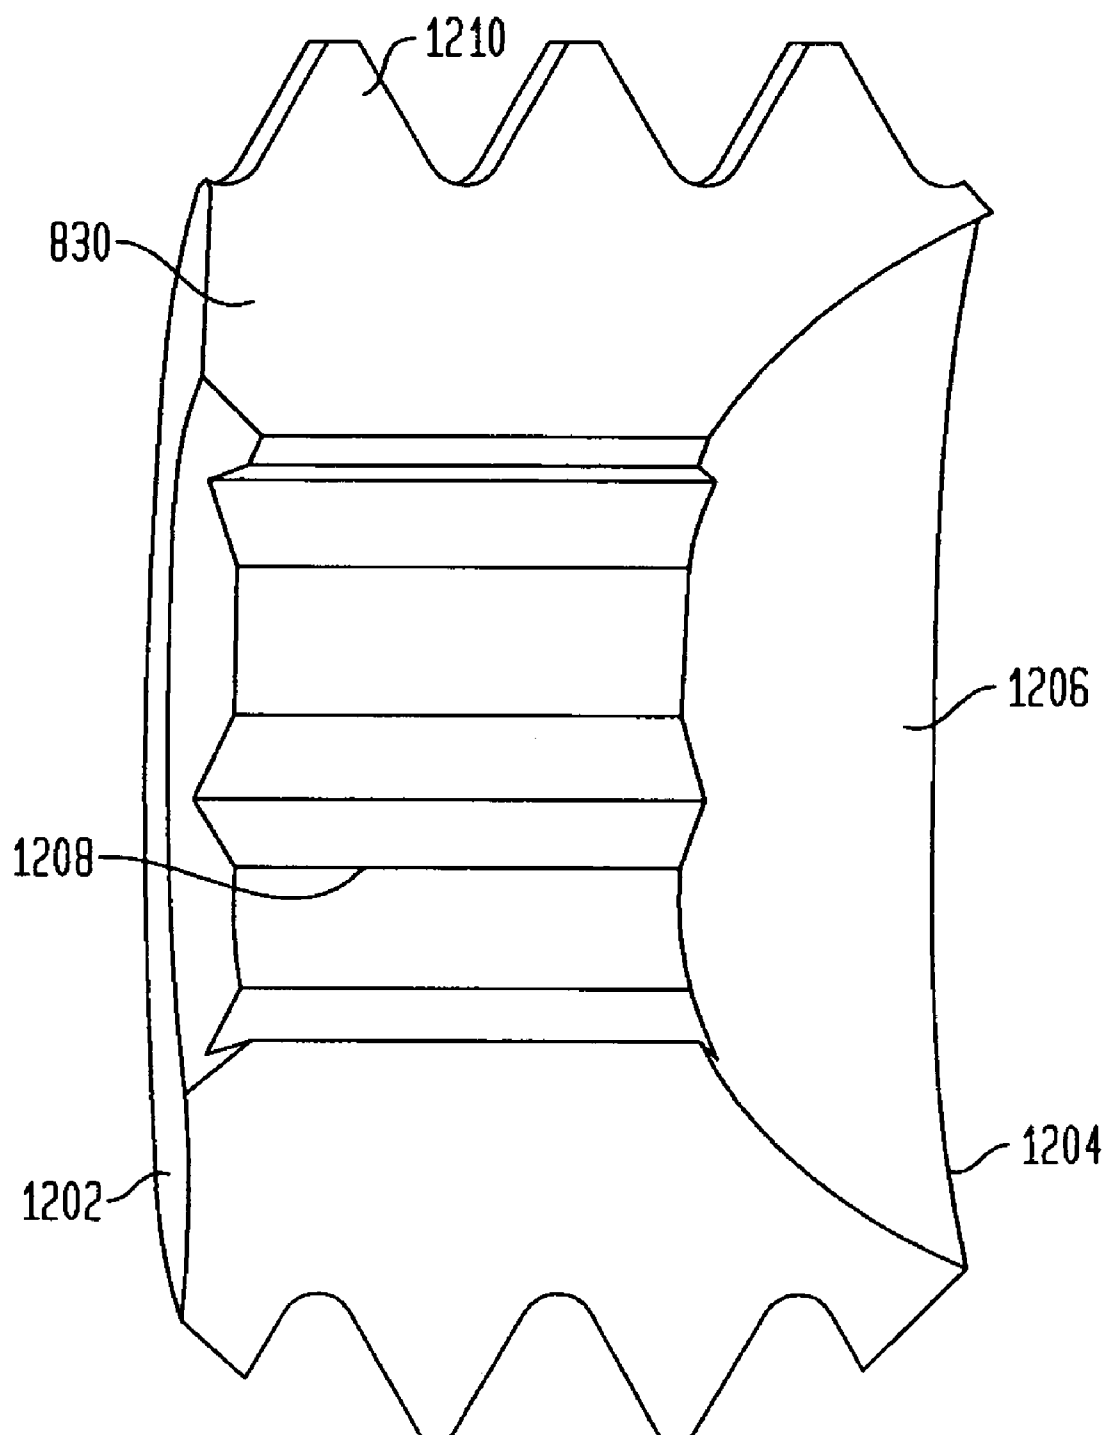


FIG. 12

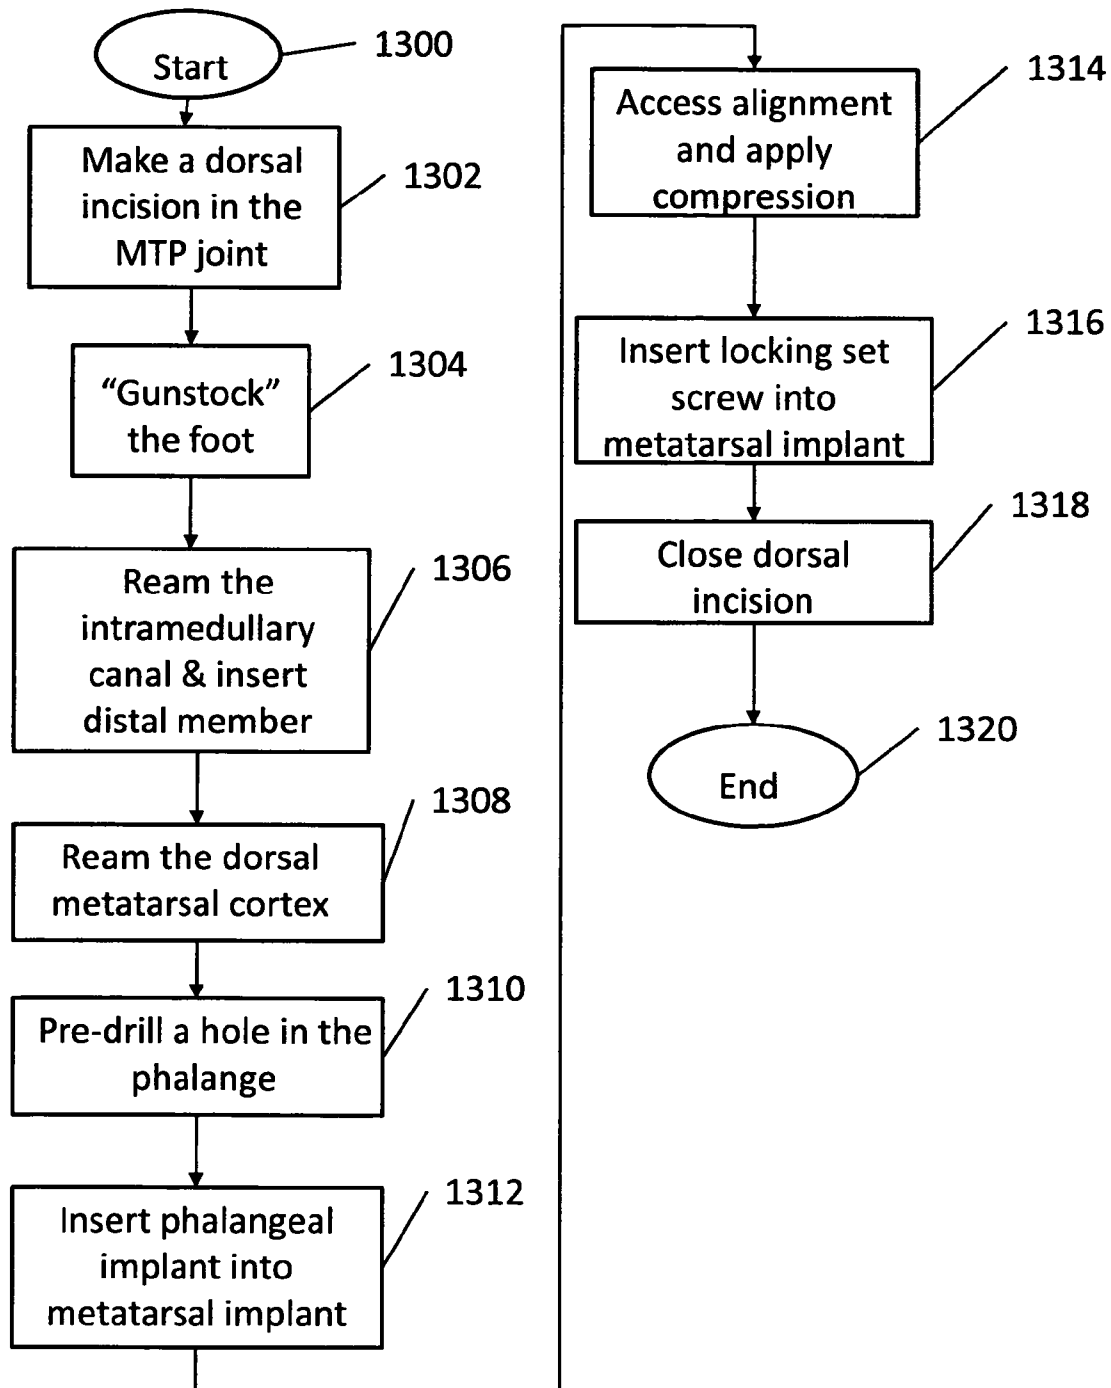
**FIG. 13**

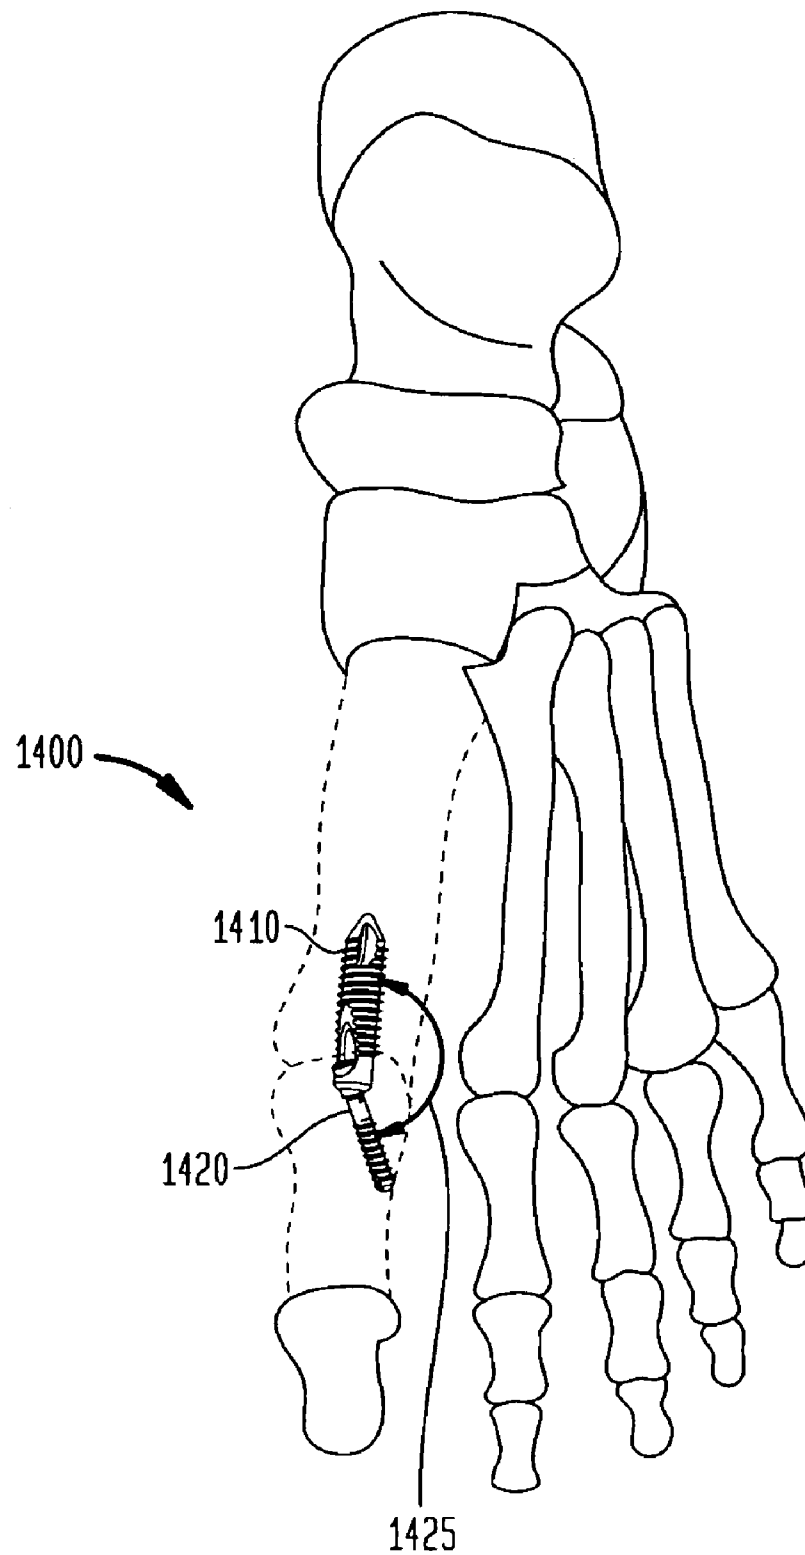
FIG. 14

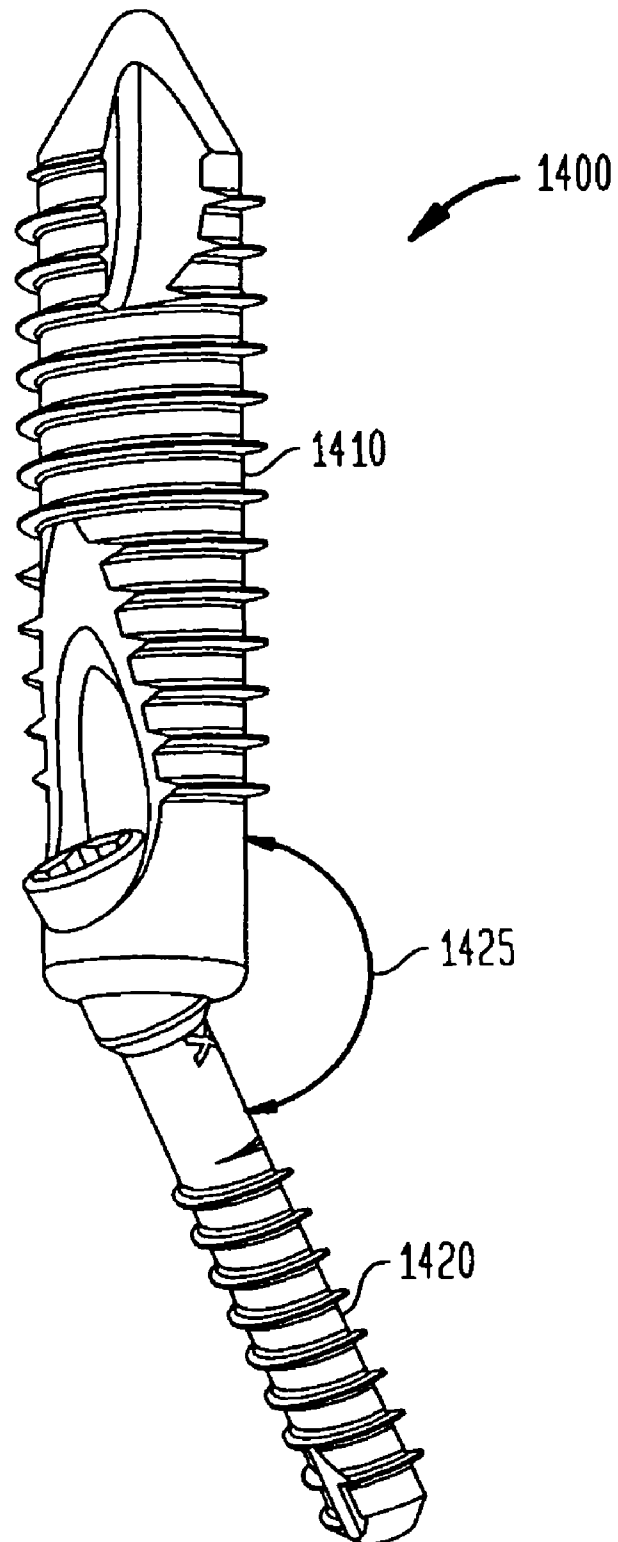
FIG. 15

FIG. 16

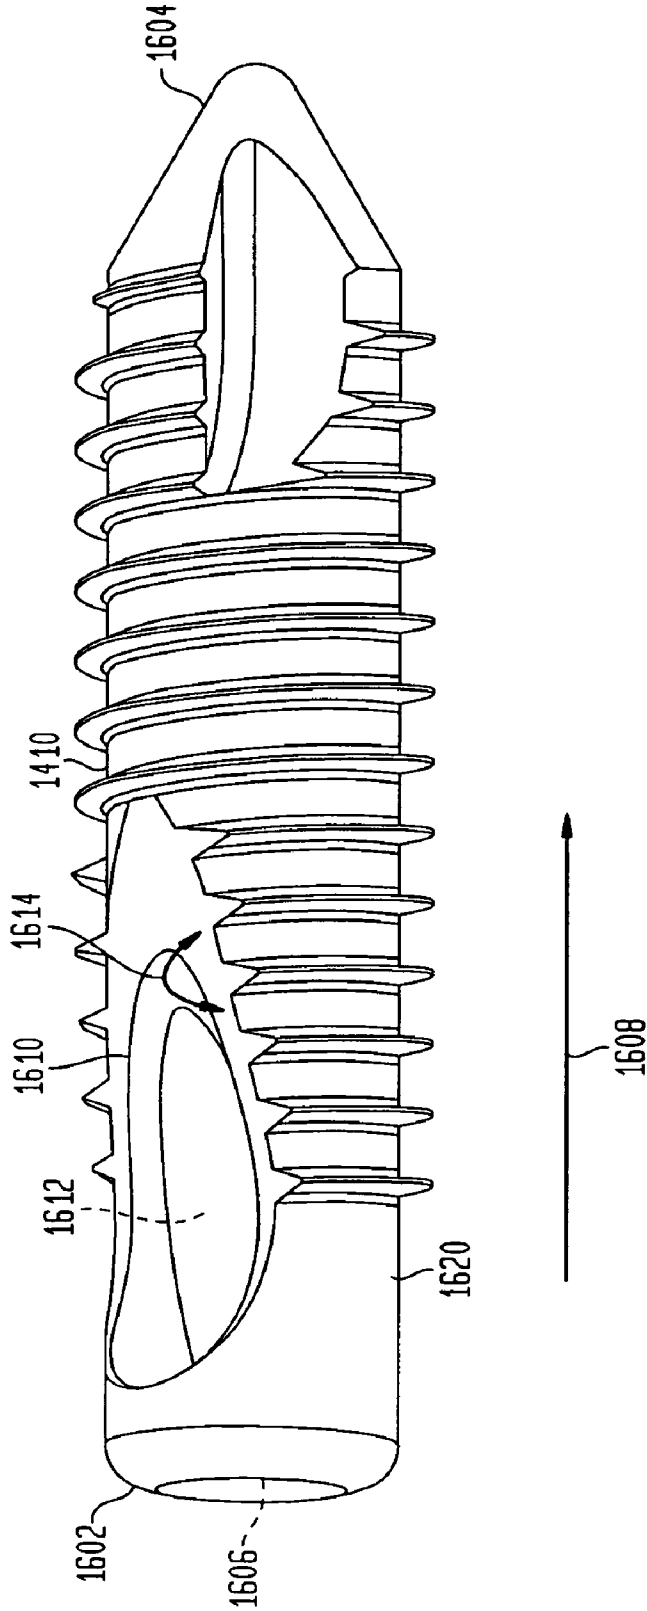
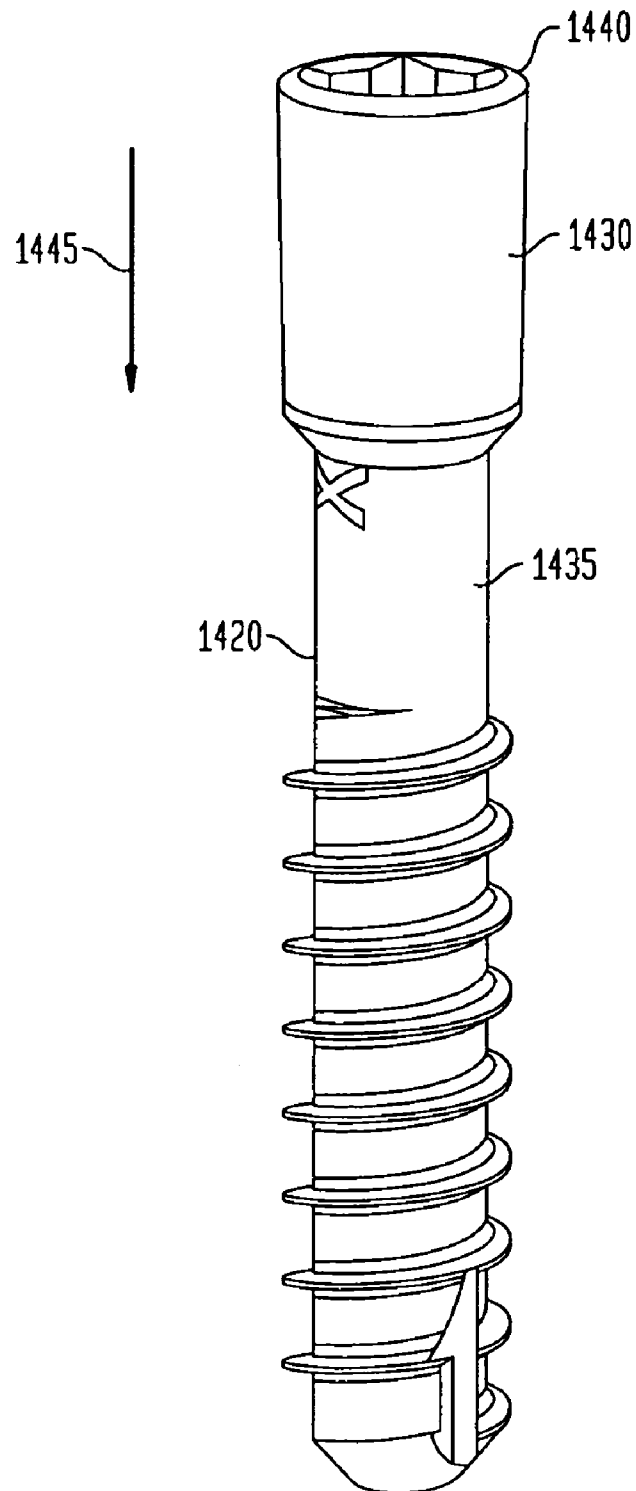


FIG. 17

1

FIXATION SYSTEM, AN INTRAMEDULLARY FIXATION ASSEMBLY AND METHOD OF USE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part application of Non-Provisional application Ser. No. 12/456,808, filed Jun. 23, 2009, which claims the benefit of Provisional Application No. 61/132,932, filed Jun. 24, 2008, the entire contents of which is herein incorporated by reference.

FIELD OF THE INVENTION

This invention relates to the field of orthopedic implant devices, and more particularly, to an intramedullary fixation assembly used for fusion of the angled joints, bones and deformity correction, such as the metatarsal and phalangeal bones in the foot.

BACKGROUND OF THE INVENTION

Orthopedic implant devices, such as intramedullary nails, plates, rods and screws are often used to repair or reconstruct bones and joints affected by trauma, degeneration, deformity and disease, such as Charcot arthropathy caused by diabetes in some patients, Hallux Valgus deformities, failed Keller Bunionectomies, Rheumatoid Arthritis, and severe deformities. Charcot arthropathy (or Charcot foot) is a destructive process affecting many regions including joints of the foot and ankle in diabetics. This condition causes bony fragmentation, dislocation, and fractures that eventually progresses to foot deformity, bony prominences, ulceration and instability of the foot. Charcot arthropathy can affect any joint in the body but is often seen in the feet affecting the metatarsal, tarsometatarsal and tarsal joints and frequently causes the foot to lose its arch or curvature, thus resulting in "flat foot- edness" in the mid-foot region.

Early treatment for Charcot foot includes the use of therapeutic footwear, immobilization of the foot and/or non-weight bearing treatment. Surgical treatments include orthopedic fixation devices that fixate the bones in order to fuse them into a stable mass. These orthopedic implant devices realign bone segments and hold them together in compression until healing occurs, resulting in a stable mass.

In order to restore an arch in a Charcot foot, the physician must estimate the arch and manually align the bones and deliver the screws to hold the bones in place, while reducing bone purchase. Intramedullary nails and/or a plate with a lag screw too have deficiencies. These intramedullary nails also do not reconstruct an arch that is lost due to Charcot foot disease.

Moreover, infections and wound complications are a major concern in the aforementioned procedures. Wound closure is technically demanding for the surgeon, and devices that add surface prominence, such as plates or exposed screws, add to the difficulty by requiring greater tissue tension during incision reapproximation. This increases the risk of postoperative wound infections and dehiscence that may ultimately result in limb amputation.

Various implants have been utilized for surgical treatment of these bones and joints, including bone screws. Implants have also been utilized to treat severe deformities in the metatarsal and phalangeal bones, including multiple screws and plates. These multiple screws and plate implants have been commonly used in a first metatarsal-phalangeal fusion

2

procedure to fuse the first metatarsal to the first phalangeal bone in hallux valgus deformities, failed keller bunionectomies, rheumatoid arthritis, and other types of severe deformities in the metatarsal and phalange bones. While these devices allow fixation and promote fusion, they do not deliver restoration of the arch in a Charcot foot nor are they effective in metatarsal-phalangeal (MTP) fusion procedures.

Particularly, screw implants in MTP procedures are ineffective in delivering sufficient compression to the bones in the foot, preventing screw head break out, or delivering effective bending resistance. Moreover, hard to control dorsiflexion and valgus angles as well skin irritation from proximity to the skin prevents these screw implants from being readily utilized for surgical treatment. Yet further, plate implants used with bone screws too have the same drawbacks as fixed varus and valgus angles, lack of direct compression across the MTP joint, and skin irritations from proximity to the skin reduce the effectiveness of these implants.

There is therefore a need for an intramedullary fixation assembly and method of use that overcomes some or all of the previously delineated drawbacks of prior fixation assemblies.

SUMMARY OF THE INVENTION

An object of the invention is to overcome the drawbacks of previous inventions.

Another object of the invention is to provide a novel and useful intramedullary fixation assembly that may be utilized to treat bones in a mid-foot and forefoot regions.

Another object of the invention is to restore the arch by utilizing an intramedullary assembly.

Another object of the invention is to provide a system for treating deteriorating bones in a mid-foot region.

Another object of the invention is to provide a method for restoring the arch of the foot by delivering a fixator that can be coupled in a patient's foot.

Another object of the invention is to fuse the metatarsal phalangeal joint by utilizing an intramedullary assembly.

In a first non-limiting aspect of the invention, a fixation assembly comprising two members is provided. A first member, positioned at a proximal end of the fixation assembly, has an elongated portion and a tapered bulbous end. A second member, positioned at a distal end of the fixation assembly, has an internal tapered aperture, wherein the elongated portion resides within the internal tapered aperture. The first member forms a fixed angle with the second member, thereby selectively coupling the first member to the second member.

In a second non-limiting aspect of the invention, a method for reconstructing an arch in a mid-foot region comprises eight steps. Step one includes making an incision in the mid-foot region of a patient's foot. Step two includes gunstocking the foot to expose the articular surface. Step three includes reaming the intramedullary canal and inserting a distal member. Step four includes coupling the instrument to the distal member. Step five includes assessing the position of the proximal member with a guide wire. Step six includes pre-drilling a hole through the joints selected for fusion. The seventh step includes inserting the proximal member over the guide wire until rigid connection with the tapered aperture is made that compresses the joint and wherein the proximal member is at an angle to the distal member. The eighth step includes removing the instrument and closing the incision, thereby causing the arch to be formed in the mid-foot region.

In a third non-limiting aspect of the invention, an instrument is combined with a fixation assembly for reconstructing an arch in a mid-foot region. The instrument has a handle, a "U-shaped" recess having two sides and a tapered bore. The

3

intramedullary fixation assembly has a first member and a second member. The first member is positioned at a proximal end of the intramedullary fixation assembly. The first member has an elongated portion and a bulbous portion. The second member is positioned at a distal end of the intramedullary fixation assembly. The second member has an internal tapered aperture, a plurality of grooves and a threaded portion. The elongated portion resides within the internal tapered aperture, and a "U-shaped" recess having two sides that couple the first member to the second member, and further coupling the instrument to the intramedullary fixation assembly for reconstructing the arch in the mid-foot region.

In a fourth non-limiting aspect of the invention, an intramedullary fixation assembly for bone fusion includes a first member positioned at a proximal end of the intramedullary fixation assembly, and a second member positioned at a distal end of the intramedullary fixation assembly. The first member is slideably coupled to the second member and provides for an interference fit with the second member.

In a fifth non-limiting aspect of the invention, a method for fusing a metatarsal phalangeal joint comprises seven steps. Step one includes providing a fixation assembly, where the fixation assembly includes a metatarsal implant member for connecting to a metatarsal bone and a phalangeal implant member for connecting to a phalanx bone. Step two includes drilling the metatarsal medullary canal and drilling the phalangeal medullary canal. Step three includes inserting the metatarsal implant member into the metatarsal medullary canal. Step four includes inserting the phalangeal implant member into the internal aperture of the metatarsal implant member. Step six includes inserting the phalangeal implant member into the phalangeal medullary canal. Step seven includes applying compression to the phalangeal implant member to lock the metatarsal implant member to the phalangeal implant member, thereby fusing the metatarsal phalangeal joint.

In a sixth non-limiting aspect of the invention, a fixation assembly for a metatarsal-phalangeal fusion in a human foot includes a metatarsal implant member for connecting to a metatarsal bone, where the metatarsal implant member is positioned at a proximal end of the fixation assembly, and a phalangeal implant member for connecting to a phalanx bone, where the phalangeal implant member is positioned at a distal end of the fixation assembly. The phalangeal implant member is slideably coupled to the metatarsal implant member and provides for an interference fit with the metatarsal implant member.

BRIEF DESCRIPTION OF THE DRAWINGS

A further understanding of the invention can be obtained by reference to a preferred embodiment set forth in the illustrations of the accompanying drawings. Although the illustrated embodiment is merely exemplary of systems and methods for carrying out the invention, both the organization and method of operation of the invention, in general, together with further objectives and advantages thereof, may be more easily understood by reference to the drawings and the following description. The drawings are not intended to limit the scope of this invention, which is set forth with particularity in the claims as appended or as subsequently amended, but merely to clarify and exemplify the invention.

For a more complete understanding of the invention, reference is now made to the following drawings in which:

FIG. 1 is a perspective view of a fixation system according to a preferred embodiment of the invention.

4

FIG. 2 is a perspective view of a proximal screw member used in the fixation system shown in FIG. 1 according to the preferred embodiment of the invention.

FIG. 3A is a perspective view of a distal member used in the fixation system shown in FIG. 1 according to the preferred embodiment of the invention.

FIG. 3B is a perspective cross-sectional view of the distal member shown in FIG. 3A according to the preferred embodiment of the invention.

FIG. 4 is a perspective view of the instrument member used in the fixation system shown in FIG. 1 according to the preferred embodiment of the invention.

FIG. 5 is a perspective view of the assembled intramedullary fixation assembly inserted into the bones of a patient's foot according to the preferred embodiment of the invention.

FIG. 6 is a side view of the assembled intramedullary fixation assembly shown in FIG. 5 according to the preferred embodiment of the invention.

FIG. 7 is a flow chart illustrating the method of coupling the intramedullary fixation assembly shown in FIGS. 1-6 to tarsal and metatarsal bones in a patient's foot according to the preferred embodiment of the invention.

FIG. 8 is a perspective view of an assembled intramedullary fixation assembly inserted into the metatarsal and trapezoid bones of a patient's foot according to an alternate embodiment of the invention.

FIG. 9 is a perspective cross-sectional view of the intramedullary fixation assembly according to the alternate embodiment of the invention.

FIG. 10A is a perspective view of a metatarsal implant member used in the intramedullary fixation assembly shown in FIG. 8 according to the alternate embodiment of the invention.

FIG. 10B is a perspective cross-sectional view of the metatarsal implant member used in the intramedullary fixation assembly shown in FIG. 10A according to the alternate embodiment of the invention.

FIG. 11 is a perspective cross-sectional view of a phalangeal implant member used in the intramedullary fixation assembly shown in FIG. 8 according to the alternate embodiment of the invention.

FIG. 12 is a perspective cross-sectional view of a locking set screw used in the intramedullary fixation assembly shown in FIG. 8 according to the alternate embodiment of the invention.

FIG. 13 is a flow chart illustrating the method of coupling the intramedullary fixation assembly shown in FIGS. 8-12 to metatarsal and phalangeal bones in a patient's foot according to the alternate embodiment of the invention.

FIG. 14 is a perspective view of the assembled intramedullary fixation assembly inserted into the bones of a patient's foot according to an alternate embodiment of the invention.

FIG. 15 is a perspective view of the intramedullary fixation assembly shown in FIG. 14 according to the alternate embodiment of the invention.

FIG. 16 is a perspective view of a metatarsal implant member used in the intramedullary fixation assembly shown in FIGS. 14-15 according to the alternate embodiment of the invention.

FIG. 17 is a perspective view of a phalangeal implant member used in the intramedullary fixation assembly shown in FIGS. 14-15 according to the alternate embodiment of the invention.

DETAILED DESCRIPTION

The invention may be understood more readily by reference to the following detailed description of preferred

5

embodiment of the invention. However, techniques, systems and operating structures in accordance with the invention may be embodied in a wide variety of forms and modes, some of which may be quite different from those in the disclosed embodiment. Consequently, the specific structural and functional details disclosed herein are merely representative, yet in that regard, they are deemed to afford the best embodiment for purposes of disclosure and to provide a basis for the claims herein, which define the scope of the invention. It must be noted that, as used in the specification and the appended claims, the singular forms “a”, “an”, and “the” include plural referents unless the context clearly indicates otherwise.

Referring now to FIG. 1, there is shown a fixation system 100 which is made in accordance with the teachings of the preferred embodiment of the invention. As shown, the fixation system 100 includes an intramedullary fixation assembly 110, comprising a proximal screw member 130 and a distal member 140. Proximal screw member 130 is provided on proximal end 135 of assembly 110 and is coupled to a distal member 140 that is provided on the distal end 145 of the fixation assembly 110. Also, proximal screw member 130 makes a fixed angle 150 with distal member 140 and this angle 150 determines the angle for arch restoration. Moreover, fixation system 100 includes instrument 120 that is utilized to couple intramedullary fixation assembly 110 to the bones in the mid-foot region (not shown). It should be appreciated that in one non-limiting embodiment, intramedullary fixation assembly 110 may be made from a Titanium material, although, in other non-limiting embodiments, intramedullary fixation assembly 110 may be made from SST, PEEK, NiTi, Cobalt chrome or other similar types of materials.

As shown in FIG. 2, proximal screw member 130 is generally cylindrical in shape and extends from first bulbous portion 202 to second tapered end 204. End 204 has a diameter that is slightly smaller than diameter 226 of bulbous portion 202. Additionally, bulbous portion 202 has a taper, such as a Morse taper, with a width that decreases from end 211 to end 212. The taper allows for a locked interference fit with tapered aperture 316 when tapered bulbous portion 202 is combined with tapered aperture 316, shown and described below. Moreover, bulbous portion 202 is generally circular and has a generally hexagonal torque transmitting aperture 208 that traverses length 210 of bulbous portion 202. However, a star-shaped aperture, a square-shaped aperture, or any other shaped aperture may be utilized without departing from the scope of the invention. Torque transmitting aperture 208 is utilized to transmit a torque from bulbous portion 202 to tapered end 204 by rotating bulbous portion 202.

Further, proximal screw member 130 has a first smooth exterior portion 206 extending from end 212 of bulbous portion 202. Portion 206 comprises an internal aperture 214 that longitudinally traverses portion 206 in direction 201. Portion 206 terminates into a second generally tubular portion 216. Portion 216 may comprise internal circular aperture 220 that longitudinally traverses inside portion 216. Internal circular aperture 220 is aligned with apertures 214 and 208 along axis 203 to form a continuous opening (i.e., a cannula) from bulbous portion 202 to end 204. The continuous opening or cannula is provided to interact with a guide wire (not shown) by receiving the guide wire within the continuous opening thereby positioning and locating the proximal member 130. In other non-limiting embodiments, the proximal member 130 may be provided without apertures 220 and 214 (i.e., the proximal member is solid).

Furthermore, tubular portion 216 has a plurality of circular threads, such as threads 218, which are circumferentially disposed on the external surface of portion 216 and, with

6

threads 218 having an external diameter 224. Portion 216 may also be provided with a self-tapping leading edge 222 to provide portion 216 with the ability to remove bone material during insertion of proximal screw member 130 into bone. It should be appreciated that the length of the proximal member 130 may be selected of varying lengths to allow a surgeon to fuse different joints in a foot (not shown).

As shown in FIGS. 3A-3B, distal member 140 of the preferred embodiment is generally tubular in shape and tapers from a first end 302 to a second end 304 (i.e. end 302 has a diameter 306 that is slightly larger than diameter 308 of end 304). However, in another non-limiting embodiment, distal member 140 has a constant width from first end 302 to second end 304. Further, first end 302 is generally semi-spherical in shape and has an internal circular aperture 316, which traverses end 302 along direction 301 (i.e. end 302 is generally “donut” shaped). Additionally, circular aperture 316 emanates from surface 322, such that portion 310 has a generally tapered aperture 316 provided in portion 310. Circular aperture 316 comprises slope 320 from first end 302 to end 323 of portion 310. Further, aperture 316 is aligned along axis 303, which is offset from horizontal axis 305 of distal member 140. Axis 303 forms an angle 150 with horizontal axis 305 that determines the angle for arch restoration, as shown in FIG. 3A. Angle 150 may be any angle greater than 90 degrees and less than 180 degrees. Tapered aperture 316 when combined with tapered bulbous portion 202, shown in FIG. 2, creates a locked interference fit between proximal member 130 and distal member 140. First end 302 has a plurality of substantially similar grooves 326 and 328, which form an “L-shape” with surface 330 of end 302. Grooves 326 and 328 are provided to receive instrument 120 of fixation system 100, which is later described. In other non-limiting embodiments, other similar instruments may be provided to be received within grooves 326 and 328.

Distal member 140 further comprises a generally smooth portion 310 coupled to end 302. Portion 310 has a generally hexagonal shaped aperture 312, which opens into aperture 316 and which longitudinally traverses through portion 310 in direction 301. In other non-limiting embodiments, a star-shaped aperture, a square-shaped aperture, or any other shaped aperture may be utilized. Circular aperture 316 has a diameter 314 that is slightly larger than external diameter 224 of portion 216 and 206 of proximal screw member 130, with portions 216 and 206 being slidably received within aperture 316 of portion 310. Aperture 316 has a diameter that is smaller than diameter 226 of bulbous portion 202.

Portion 310 of distal member 140 terminates into a second generally cylindrical portion 318 which has a plurality of threads 324, which are circumferentially disposed on the external surface of portion 318. Portion 318 has an internal circular aperture 327 which is longitudinally coextensive with portion 318 in direction 301. Circular aperture 327 aligns with aperture 312 to form a continuous opening from end 302 to end 304.

As shown in FIG. 4, instrument 120 is illustrated for coupling proximal screw member 130 to distal member 140. Particularly, instrument 120 includes a handle portion 402 coupled to a rod portion 404. Rod portion 404 emanates from handle portion 402 at end 406 and terminates into a rectangular planar portion 408 at end 410. Planar portion 408 is aligned along axis 401 and is fixably coupled to a generally cylindrical tubular portion 412 (i.e., an aiming device). Portion 412 traverses portion 408 from top surface 414 to bottom surface 416. Further, tubular portion 412 is aligned along dissimilar axis 403, forming an angle 405 with axis 401. Also,

tubular portion **412** has a through aperture **420** that longitudinally traverses portion **412** along axis **403**.

Planar portion **408** is coupled to planar portion **422**, with portion **422** having a width slightly smaller than width of portion **408**. Portion **422** terminates into a generally “U-shaped” portion **424** with portion **424** being orthogonal to portion **422**. Further, portion **424** has a plurality of substantially similar sides **426** and **428** which are provided to be slidably coupled to grooves **326** and **328** of distal member **140**.

In operation, sides **426** and **428** of instrument **120** are received in respective grooves **326** and **328** of distal member **140**, of FIGS. 3A-3B, thereby slidably coupling distal member **140** to instrument **120**. In this position, axis **303** of aperture **316** is aligned along substantially the same axis as axis **403** of instrument **120**. Proximal screw member **130** is coupled to distal member **140** by slidably coupling portions **206** and **216** through aperture **420** of tubular portion **412**. Tubular portion **412** guides proximal screw member **130** through internal aperture **420** and into aperture **316** on surface **322** and may also guide a Kirschner wire (K wire) or a drill. Proximal screw member **130**, of FIG. 2, travels into bone as portions **216** and **206** travel further through aperture **316** at end **302** until bulbous portion **202** is restrained by surface **322** and end **302**. Aperture **316**, being tapered along axis **303**, causes proximal screw member **130** to form an angle **150** with distal member **140**, with proximal member **130** being aligned along an axis **303**, which is substantially the same axis as axis **403** of tubular portion **412** of instrument **120**.

In operation, and as best shown in FIGS. 5, 6 and 7, the fixation system **100** utilizes the intramedullary fixation assembly **110** for treating and fixating the deteriorated and damaged or fractured bones in the human foot **500**. This restores the arch in a human foot **500** by coupling the intramedullary fixation assembly **110** to the human foot **500** of a left leg. In one non-limiting example, and as shown in FIG. 5, the intramedullary assembly **110** is coupled to the medullary canals of the first metatarsal **502**, medial cuneiform **504**, navicular **506** and talus bone **508**. Talus bone **508** makes up part of the ankle joint where the threaded portion **216** of the proximal screw member **130** of the intramedullary assembly **110** is threadably coupled. The medial cuneiform **504** and navicular **506** bones are most affected by Diabetic Charcot foot disorder that causes, deterioration and collapse of the arch of the foot **500**. It should be appreciated that the intramedullary assembly **110** may be used within each of the five rays, with a ray representing a line drawn from each metatarsal bone to the talus. The angulation in the smaller rays will be smaller than the two rays (i.e., a line from the first and second metatarsal bones to the talus bone). Also, the diameter of distal member **140** will decrease from the large ray to the small ray. In one non-limiting example, the angulation may be any angle greater than 90 degrees and less than 180 degrees. For example, the angle for the first ray may be 150-170 degrees and the angles for the other rays may be 160-175 degrees.

As shown in FIGS. 6 and 7, the intramedullary fixation assembly **110** may be utilized to reconstruct an arch in a mid-foot region of a human foot **500**. As shown, the method starts in step **700** and proceeds to step **702**, whereby a Dorsal Lis Franc incision (i.e., mid-foot incision) (not shown) is made in foot **500** in order to gain access to the joint. In step **704**, the joint capsule is separated by “Gunstocking” foot **500** in direction **601** (i.e., the foot **500** is bent mid-foot) to expose the articular surface **602** and the articulating cartilage is removed. Next, in step **706**, the intramedullary canal is reamed and the distal member **140** is inserted into the

intramedullary canal (not shown) of the metatarsal **502**. In other non-limiting embodiments, the distal member **140** may be inserted by impaction, by press fit, by reaming a hole in the intramedullary canal (not shown) or substantially any other similar strategy or technique.

Next, in step **708**, the instrument **120** is coupled to the distal member **140** by coupling sides **426** and **428** of instrument **120** to respective grooves **326** and **328**. In step **710**, initial positioning of the proximal member **130** is assessed with the use of a guide wire through portion **412** (i.e., aiming device). Next, in step **712**, a countersink drill is inserted through portion **412** and the proximal cortex is penetrated. In this step, a cannulated drill or guide wire is used to pre-drill the hole through the joints selected for fusion. In step **714**, the proximal screw member **130** is inserted over the guide wire and into the distal member **140**. Particularly, the proximal member **130** is inserted through tubular portion **412** (i.e., aiming device), causing proximal member **130** to travel through internal longitudinal aperture **420**, into distal member **140** and further into bones **504**, **506** and **508** until rigid connection with the tapered aperture **316** is made, thereby compressing the joint. In one non-limiting embodiment, a locking element (not shown) such as a plate or a washer is coupled to end **302** of the intramedullary fixation assembly **110** to further secure proximal threaded member **130** to distal member **140**. Next, in step **716** the instrument **120** is removed and the dorsal Lis Franc (i.e., mid-foot) incision is closed. The method ends in step **718**.

It should be appreciated that a plurality of intramedullary fixation assemblies, such as intramedullary fixation assembly **110**, may be inserted into any of the bones of a foot **500** such as, but not limited to the Metatarsal, cuneiform, calcaneus, cuboid, talus and navicular bones, in order to restore the natural anatomical shape of the arch of the foot **500**. Thus, the fixation system **100**, in one non-limiting embodiment, is utilized to couple the intramedullary fixation assembly **110** to the foot **500**, which causes the metatarsal **504**, medial cuneiform **504**, navicular **506** and talus **508** bones to be aligned to the proper anatomical shape of an arch when assembled within foot **500**. It should be appreciated that the intramedullary fixation assembly **110** is delivered through a dorsal midfoot incision, thereby reducing the disruption to the plantar tissues and/or the metatarsal heads while at the same time minimizing the tension on the skin. This allows for improved wound closure, reduced operating room time, reduction in the number of incisions required and reduction in the total length of incisions. It should also be appreciated that in other non-limiting embodiments, the intramedullary assembly **110** may be utilized with graft material (i.e., autograft, allograft or other biologic agent).

In an alternate embodiment, as shown in FIG. 8, an intramedullary fixation assembly **800** may comprise three interconnected members for the internal fixation of the first metatarsal **845** to the first proximal phalange **850** in the human foot **840** or any other appropriate use for the internal fixation of the other bones in the human foot **840**. The interconnected members of the intramedullary fixation assembly **800** may be inserted into the medullary canals of the first metatarsal **845** and the first proximal phalange **850** in order to restore the angle in the toes of a human foot **840**. Particularly, the intramedullary fixation assembly **800** may comprise a metatarsal implant member **810**, a phalangeal implant member **820** and an optional locking set screw **830**.

As shown in FIG. 9, the intramedullary fixation assembly **800** comprises the metatarsal implant member **810**, which is provided on the proximal end **935** of the intramedullary fixation assembly **800**, the phalangeal implant member **820** pro-

vided on the distal end **940** and the optional locking set screw **830** provided to threadably couple to the metatarsal implant member **810**, thereby pressure coupling the metatarsal implant member **810** to the phalangeal implant member **820**. Optional locking set screw **830** thereby locks the metatarsal implant member **810** to the phalangeal implant member **820** and allows for incremental adjustment of the position of phalangeal implant member **820** within the metatarsal implant member **810** as will be shown and described.

In its implanted position, metatarsal implant member **810** is at a fixed angle **945** with phalangeal implant member **820** and this angle **945** may be adjusted in order to set the angle for restoration. It should be appreciated that in one non-limiting embodiment, intramedullary fixation assembly **800** may be made from a Titanium material, although, in other non-limiting embodiments, intramedullary fixation assembly **800** may be made from SST, PEEK, NiTi, Cobalt chrome or other similar types of materials.

As shown in FIGS. **10A-10B**, metatarsal implant member **810** of the embodiment is generally tubular in shape and tapers from a first end **1002** to a second end **1004** (i.e. end **1002** has a diameter **1006** that is slightly larger than diameter **1008** of end **1004**). However, in another non-limiting embodiment, metatarsal implant member **810** has a constant width from first end **1002** to second end **1004**. Further, first end **1002** is generally semi-spherical in shape and has an internal circular aperture **1016**, which traverses end **1002** along direction **1001** (i.e. end **1002** is generally "donut" shaped). Additionally, circular aperture **1016** is aligned along axis **1003**, which is offset from horizontal axis **1005** at an angle **1050**. Angle **1050** causes circular aperture **1016** to emanate from surface **1022**, such that circular aperture **1016** on cylindrical portion **1010** is generally tapered with the diameter **1030** being slightly smaller than diameter **1032**.

It should be appreciated that angle **1050** initially determines the angle for restoration, as shown in FIG. **10A**. Angle **1050** may be any angle greater than 90 degrees and less than 180 degrees. Circular aperture **1016** also includes a plurality of substantially similar threads **1028** that are provided on interior surface **1026** of metatarsal implant member **810**. The plurality of substantially similar threads **1028** when combined with head portion **1105** of phalangeal implant member **820**, shown in FIG. **11**, creates a locked interference fit between metatarsal implant member **810** and phalangeal implant member **820**. Circular aperture **1016** has a diameter **1014** that is provided to receive head portion **1105** of phalangeal implant member **820**, which will be shown in FIG. **11**.

Also, metatarsal implant member **810** further comprises a generally smooth portion **1010** coupled to end **1002**. Portion **1010** has a generally hexagonal shaped aperture **1012** aligned along axis **1005**.

In other non-limiting embodiments, a star-shaped aperture, a square-shaped aperture, or any other shaped aperture may be utilized. Aperture **1012** emanates from circular aperture **1016**, traverses through portion **1010** in direction **1001** and terminates into a generally cylindrical portion **1018**. In other non-limiting embodiments, aperture **1012** is longitudinally coextensive with portion **1018** in direction **1001** and emanates from second end **1004**. In this manner, a continuous, opening from end **1002** to end **1004** may be formed to receive a Kirschner wire (K wire) or a drill.

Further, portion **1018** has a plurality of substantially similar circumferential threads, such as threads **1024**, which are circumferentially disposed on the external surface of portion **1018**. It should be appreciated that plurality of circumferential threads, such as threads **1024**, are provided so that rotating metatarsal implant member **810** causes the plurality of cir-

cumferential threads **1024** to grip or catch the medullary canal of first metatarsal **845** (shown in FIG. **8**) causing metatarsal implant member **810** to travel into the first metatarsal **845**. It should be appreciated that metatarsal implant member **810** may be utilized in any metatarsal for restoration of the angle in the human foot. It should also be appreciated that the metatarsal implant member may be utilized for fusion of other joints in the human body.

As shown in FIG. **11**, phalangeal implant member **820** is generally cylindrical in shape, has a generally solid body and extends from a spherical head portion **1105** to tapered end **1104**. Spherical head portion **1105** is generally spherical in shape and has a generally hexagonal torque transmitting aperture **1108** traversing length **1110** of head portion **1105**. In other non-limiting embodiments, a star-shaped aperture, a square-shaped aperture, or any other shaped aperture of any length may be utilized without departing from the scope of the invention. Torque transmitting aperture **1108** is utilized to transmit a torque from head portion **1105** to tapered end **1104** when head portion **1105** is rotated. The largest diameter **1126** of head portion **1105** is slightly larger than diameter **1032** of circular aperture **1016** on metatarsal implant member **810**, which was shown previously in FIGS. **10A-B**.

Head portion **1105** further has a plurality of generally flat edges **1111** (i.e., head portion **1105** has a plurality of step-like protrusions) which are provided to engage circular aperture **1016**. The flat edges **1111** allow for the phalangeal implant member **820** to be coupled at a plurality of angles to metatarsal implant member **810**. Each of the plurality of edges **1111** allows for a unique angle in a locked interference fit to be created by head portion **1105** within circular aperture **1016**, shown in FIGS. **10A-B**, as head portion **1105** of phalangeal implant member **820** is positioned within circular aperture **1016** of metatarsal implant member **810**, which will be shown and described below.

Further, phalangeal implant member **820** has a first smooth exterior portion **1106** extending from head portion **1105**. Portion **1106** is generally cylindrical and terminates into a second generally cylindrical portion **1116**, with exterior portion **1106** and cylindrical **1116** having a uniform diameter. Furthermore, cylindrical portion **1116** has a plurality of circular threads, such as threads **1118**, which are circumferentially disposed on the external surface of portion **1116**. Cylindrical portion **1116** may also be provided with a self-tapping leading edge **1122** to provide portion **1116** with the ability to remove bone material during insertion of the phalangeal implant member **820** into bone or other matter. It should be appreciated that the length of the phalangeal implant member **820** may be selected of varying lengths to allow a surgeon to fuse different joints (not shown). In other non-limiting embodiments, the phalangeal implant member **820** may have a continuous opening (i.e., a cannula) from torque transmitting aperture **1108** to tapered end **1104**. The continuous opening or cannula may be provided to interact with a guide wire (not shown), such as a Kirschner wire, by receiving the guide wire within the continuous opening thereby positioning and locating the phalangeal implant **820**.

As shown in FIG. **12**, intramedullary fixation assembly **800** may comprise an optional locking set screw **830** to couple the metatarsal implant member **810** to the phalangeal implant member **820**. Locking set screw **830** is generally tubular in shape and extends from open first end **1202** to an open second end **1204**. First end **1202** has a generally flat surface while second end **1204** has a semi-spherical groove **1206**. The semi-spherical groove **1206** is provided to receive head portion **1105** of the phalangeal implant member **820** in an assembled intramedullary fixation assembly **800**. Further, locking set

screw **830** has a generally hexagonal torque-transmitting aperture **1208** that traverses from first end **1202** to second end **1204**. In other non-limiting embodiments, a star-shaped aperture, a square-shaped aperture, or any other shaped aperture of any length may be utilized without departing from the scope of the invention.

Torque transmitting aperture **1208** is utilized to receive a torque shaped tool in order to rotate and couple locking set screw **830** to first metatarsal implant member **810** (not shown). Locking set screw **830** is also provided with a plurality of substantially similar circumferential threads **1210** in order to engage the plurality of threads **1028** on the interior surface **1026** of the metatarsal implant member **810** (shown in FIGS. **10A** and **10B**) and threadably couple (i.e., mechanically couple) the locking set screw **830** to the metatarsal implant member **810**, thereby preventing the phalangeal implant member **820** from backing out of circular aperture **1016** on metatarsal implant member **810** and losing compression.

In operation, and as shown in FIGS. **8** and **13**, the intramedullary fixation assembly **800** may be utilized to reconstruct an arch and/or angle in a metatarsal phalangeal joint of a human foot **840**. As shown, the method starts in step **1300** and proceeds to step **1302**, whereby a dorsal incision is made in the metatarsal phalangeal (MTP) joint **855** of foot **840** in order to gain access to the MTP joint **855**. In step **1304**, the joint capsule is separated by "Gunstocking" foot **840** (i.e., the foot **840** is bent at MTP joint **855**) to expose the articular surfaces of the metatarsal **845** and first proximal phalange **850**. The articulating cartilage is removed by denuding the cartilage in the MTP joint **855**. Next, in step **1306**, the intramedullary canal of the metatarsal **845** is reamed by drilling the metatarsal intramedullary canal and the metatarsal implant member **810** is inserted. The cylindrical portion **1018** of the metatarsal implant member **810** is inserted first into the intramedullary canal (of the metatarsal **845** to a predetermined depth until end **1002** is oriented at the opening of the MTP joint **855**. In other non-limiting embodiments, the metatarsal implant member **810** may be inserted by impaction, by press fit, by reaming a hole in the intramedullary canal (not shown) or any other similar strategy or technique.

Next, in step **1308**, the dorsal metatarsal cortex (not shown) is drilled and reamed to allow access to metatarsal implant member **810** from an anterior grade access. In step **1310**, a cannulated drill or guide wire is used to pre-drill a pilot hole through the articular surface of the phalange **850**. In step **1312**, the phalangeal implant member **820** is inserted into the metatarsal implant member **810** and into the pre-drilled pilot hole by inserting the tapered end **1104** (shown in FIG. **11**) into the circular aperture **1016** (shown in FIG. **10A-B**) at surface **1022** and until the tapered end **1104** emanates from circular aperture **1016**. Further, the phalangeal implant member **820** is inserted into the phalange **850** (shown in FIG. **8**). Next in step **1314**, the phalangeal implant member **820** is aligned and angle **845** (shown in FIG. **9**) is formed and compression is applied to the intramedullary fixation assembly **800** by rotating the phalangeal implant member **820**. The phalangeal implant member **820** is fixed at angle **845** (shown in FIG. **9**). In optional step **1316**, the locking set screw **830** is inserted into metatarsal implant member **810** to lock angle **845** (shown in FIG. **9**) in place. Next, in step **1318**, the dorsal incision is closed. The method ends in step **1320**.

In an alternate embodiment, as shown in FIGS. **14** and **15**, intramedullary fixation assembly **1400** is provided so that metatarsal implant member **1410** resides at a constant and fixed angle **1425** with phalangeal implant member **1420**. The fixed angle **1425** may be any angle greater than 90 degrees

and less than 180 degrees and may be selected by, in one example, a surgeon to provide for the internal fixation of the bones in the human foot.

The metatarsal implant member **1410**, shown in FIG. **16**, is substantially similar to the distal member **140** shown and described in a previous embodiment in FIGS. **3A** and **3B**, and is generally tubular in shape and tapers from a first end **1602** to a second end **1604** (i.e. end **1602** has a diameter that is slightly larger than diameter of end **1604**). However, in another non-limiting embodiment, metatarsal implant member **1410** has a constant width from first end **1602** to second end **1604**. Further, first end **1602** has an internal circular aperture **1606** partially traversing metatarsal implant member **1410** along direction **301**. Additionally, metatarsal implant member **1410** has a longitudinal aperture **1612** emanating from surface **1610**, such that aperture **1612** forms a slope **1614** from in portion **1620**. Slope **1614** determines the angle for restoration of the bones in a foot when phalangeal implant member **1420** (not shown) is coupled to metatarsal implant member **1410** and locks the phalangeal implant member at the fixed angle.

Also, the phalangeal implant member **1420**, shown in FIG. **17**, is substantially similar to the proximal screw member **130** that was shown in a previous embodiment, however, phalangeal implant member **1420** includes bulbous portion **1430** having a constant diameter. In other non-limiting embodiments, bulbous portion **1430** may include a morse taper (i.e., the diameter decreases from end **1440** in direction **1445**). The bulbous portion **1430** is provided to be received inside aperture **1606** so that phalangeal implant member **1420** resides at a fixed angle with respect to metatarsal implant member **1410**.

It should be appreciated that a plurality of intramedullary fixation assemblies, such as intramedullary fixation assembly **800**, may be inserted into any of the metatarsal and phalangeal bones of a foot **840** in order to restore the natural anatomical shape of the foot **840**. It should also be appreciated that the intramedullary fixation assembly **800** is delivered through a dorsal incision, thereby reducing the disruption to the plantar tissues and/or the metatarsal heads while at the same time minimizing the tension on the skin. This allows for improved wound closure, reduced operating room time, reduction in the number of incisions required and reduction in the total length of incisions. It should also be appreciated that the intramedullary fixation assembly **800** may also be utilized to restore any of the other bones in the human body. It should also be appreciated that in other non-limiting embodiments, the intramedullary assembly **800** may be utilized with graft material (i.e., autograft, allograft or other biologic agent).

It should also be understood that this invention is not limited to the disclosed features and other similar method and system may be utilized without departing from the spirit and the scope of the invention.

While the invention has been described with reference to the preferred embodiment and alternative embodiments, which embodiments have been set forth in considerable detail for the purposes of making a complete disclosure of the invention, such embodiments are merely exemplary and are not intended to be limiting or represent an exhaustive enumeration of all aspects of the invention. The scope of the invention, therefore, shall be defined solely by the following claims. Further, it will be apparent to those of skill in the art that numerous changes may be made in such details without departing from the spirit and the principles of the invention. It should be appreciated that the invention is capable of being embodied in other forms without departing from its essential characteristics.

13

The invention claimed is:

1. An intramedullary fixation assembly for bone fusion, comprising:

a first member comprising a head portion and a first shaft extending along a first longitudinal axis;

a second member comprising a second shaft extending along a second longitudinal axis and a bore extending therethrough along a bore axis; and

a third member comprising a ring-shaped body;

wherein said second longitudinal axis and said bore axis define an angle that determines an angle for arch restoration,

wherein said third member is adapted for coupling to said first member and to said second member, and

wherein each of said first member, said second member, and said third member is adapted for residing substantially within at least one bone.

2. The intramedullary fixation assembly of claim 1, wherein said second member comprises an aperture in said second shaft extending along said second longitudinal axis.

3. The intramedullary fixation assembly of claim 2, wherein said aperture comprises a hexagonally shaped recess, a star-shaped recess, or a square-shaped recess.

4. The intramedullary fixation assembly of claim 3, wherein each of said hexagonally shaped recess, said star-shaped recess, or said square-shaped recess is adapted for receiving a complementary shaped end of an instrument.

5. The intramedullary fixation assembly of claim 1, wherein said second shaft comprises a threaded portion at a first end and an aperture at a second end, said aperture being diametrically opposed to said first end.

6. The intramedullary fixation assembly of claim 5, wherein said threaded portion comprises a plurality of bone threads located on an outer surface of said threaded portion.

7. The intramedullary fixation assembly of claim 5, wherein said threaded portion comprises a self-tapping edge adapted for removing bone material.

8. The intramedullary fixation assembly of claim 5, wherein said second member comprises first and second circumferentially spaced recesses adapted for coupling to an instrument, wherein said first and second recesses are disposed at said second end of said second shaft.

9. The intramedullary fixation assembly of claim 5, wherein said bore extends from said aperture to an exterior surface on said second member.

10. The intramedullary fixation assembly of claim 5, wherein said aperture is adapted for containing said head portion.

11. The intramedullary fixation assembly of claim 1, wherein said first member comprises a threaded portion diametrically opposed to said head portion.

12. The intramedullary fixation assembly of claim 11, wherein said threaded portion comprises a plurality of bone threads located on an outer surface of said threaded portion.

13. The intramedullary fixation assembly of claim 11, wherein said threaded portion comprises a self-tapping edge adapted for removing bone material.

14. The intramedullary fixation assembly of claim 1, wherein said head portion comprises an aperture adapted for receiving a complementary shaped end of an instrument.

15. The intramedullary fixation assembly of claim 14, wherein said aperture comprises a hexagonal shape, a star shape, or a square shape.

16. The intramedullary fixation assembly of claim 1, wherein said head portion comprises a taper adapted for providing an interference fit with said second member.

14

17. The intramedullary fixation assembly of claim 1, wherein said head portion comprises a taper adapted for providing an interference lock with said second member.

18. The intramedullary fixation assembly of claim 1, wherein said first shaft is cannulated.

19. The intramedullary fixation assembly of claim 1, wherein said first shaft is adapted for residing within said bore along said bore axis.

20. The intramedullary fixation assembly of claim 1, wherein said first member is adapted for inserting into a first medullary canal of a first bone.

21. The intramedullary fixation assembly of claim 1, wherein said second member is adapted for inserting into a second medullary canal of a second bone.

22. The intramedullary fixation assembly of claim 1, wherein said angle is in a range of about 90 degrees to about 180 degrees.

23. A method for compressing bone, comprising the steps of:

providing a first screw member, the first screw member comprising a head portion and a first shaft extending along a first longitudinal axis; and

providing a second member, the second member comprising a second shaft extending along a second longitudinal axis, a threaded portion at a first end, a first aperture at a second end, diametrically opposite the first end, and a bore extending through the second shaft along a bore axis, wherein the bore extends from the first aperture to an exterior surface on the second member;

forming a first bore hole in a first bone and forming a second bore hole in a second bone;

inserting the second member into the first bore hole;

coupling the first screw member to the second member;

inserting the first screw member into the second bore hole;

applying torque to the head portion to lock the second member to the first screw member, thereby compressing the first bone to the second bone; and

inserting a third member into the second member to lock the second member to the first screw member, wherein the second longitudinal axis and the bore axis define an angle,

wherein the first screw member is adapted for coupling to the second member at the angle, and

wherein the first screw member is adapted for residing substantially within the second bone and the second member is adapted for residing substantially within the first bone.

24. The method of claim 23, wherein the second member comprises a second aperture extending internally through the second shaft along the second longitudinal axis.

25. The method of claim 24, wherein the second aperture comprises a hexagonally shaped recess, a star-shaped recess, or a square-shaped recess extending along a partial length of the second aperture.

26. The method of claim 25, wherein each of the hexagonally shaped recess, the star-shaped recess, or the square-shaped recess is adapted for receiving a complementary shaped end of an instrument.

27. The method of claim 23, wherein the first screw member comprises a threaded portion diametrically opposed to the head portion.

28. The method of claim 27, wherein the threaded portion of the first screw member comprises a plurality of bone threads located on an outer surface of the threaded portion of the first screw member.

15

29. The method of claim 27, further comprising removing bone material with a self-tapping edge provided on the threaded portion of the first screw member.

30. The method of claim 23, further comprising coupling a complementary shaped end of an instrument in an aperture of the head portion.

31. The method of claim 30, wherein the aperture of the head portion includes a hexagonal shape, a star shape, or a square shape.

32. The method of claim 23, further comprising forming an interference fit with a taper provided on the head portion and the second member.

33. The method of claim 23, further comprising forming an interference lock with a taper provided on the head portion and the second member.

34. The method of claim 23, wherein the first shaft is cannulated along the first longitudinal axis.

35. The method of claim 23, wherein the threaded portion of the second member comprises a plurality of bone threads located on an outer surface of the threaded portion of the second member.

36. The method of claim 23, further comprising removing bone material with a self-tapping edge provided on the threaded portion of the second member.

37. The method of claim 23, further comprising inserting the head portion in the first aperture.

38. The method of claim 23, further comprising inserting the first shaft within the bore along the bore axis.

39. The method of claim 23, wherein the angle is in a range of about 90 degrees to about 180 degrees.

40. A fixation system for compressing bone, comprising: a first screw member comprising a head portion and a first shaft extending along a first longitudinal axis;

a second member comprising a second shaft extending along a second longitudinal axis and a bore extending through said second shaft along a bore axis;

a third member adapted for connecting to said first member and to said second member; and

an instrument adapted for coupling said first screw member to said second member;

wherein said second longitudinal axis and said bore axis define an angle,

wherein said angle determines an angle for arch restoration,

wherein said first screw member is adapted for coupling to said second member at said angle, and

wherein each of said first screw member and said second member is adapted for residing substantially within at least one bone.

41. The fixation system of claim 40, wherein said second member comprises an aperture extending internally through said second shaft along said second longitudinal axis.

42. The fixation system of claim 41, wherein said aperture comprises a hexagonally shaped recess, a star-shaped recess, or a square-shaped recess, wherein each of said hexagonally shaped recess, said star-shaped recess, or said square-shaped recess extends along a partial length of said aperture.

43. The fixation system of claim 42, wherein each of said hexagonally shaped recess, said star-shaped recess, or said square-shaped recess is adapted for receiving a complementary shaped end of a second instrument.

44. The fixation system of claim 40, wherein said second shaft comprises a threaded portion at a first end and an aperture at a second end, said aperture being diametrically opposed to said first end.

16

45. The fixation system of claim 44, wherein said threaded portion of said second member comprises a plurality of bone threads located on an outer surface of said threaded portion of said second member.

46. The fixation system of claim 44, wherein said threaded portion of said second member comprises a self-tapping edge adapted for removing bone material.

47. The fixation system of claim 44, wherein said bore extends from said aperture to an exterior surface on said second member.

48. The fixation system of claim 44, wherein said aperture is adapted for containing said head portion.

49. The fixation system of claim 40, wherein said first screw member comprises a threaded portion diametrically opposed to said head portion.

50. The fixation system of claim 49, wherein said threaded portion of said first screw member comprises a plurality of bone threads located on an outer surface of said threaded portion of said first screw member.

51. The fixation system of claim 49, wherein said threaded portion of said first screw member comprises a self-tapping edge adapted for removing bone material.

52. The fixation system of claim 40, wherein said first screw member is adapted for inserting into a bore hole of a bone.

53. The fixation system of claim 52, wherein said bore hole is located in a cuneiform bone, a navicular bone, or a talus bone in a foot.

54. The fixation system of claim 40, wherein said second member is adapted for inserting into a bore hole of a bone.

55. The fixation system of claim 54, wherein said bore hole is located in a metatarsal bone in a foot.

56. The fixation system of claim 40, wherein said head portion comprises an aperture adapted for receiving a complementary shaped end of an instrument.

57. The fixation system of claim 56, wherein said aperture of said head portion comprises a hexagonal shape, a star shape, or a square shape.

58. The fixation system of claim 40, wherein said head portion comprises a taper adapted for providing an interference fit with said second member.

59. The fixation system of claim 40, wherein said head portion comprises a taper adapted for providing an interference lock with said second member.

60. The fixation system of claim 40, wherein said first shaft is cannulated.

61. The fixation system of claim 40, wherein said second member comprises first and second circumferentially spaced recesses adapted for coupling to said instrument.

62. The fixation system of claim 40, wherein said first shaft is adapted for residing within said bore along said bore axis.

63. The fixation system of claim 40, wherein said angle is in a range of about 90 degrees to about 180 degrees.

64. A method for compressing bone, comprising the steps of:

providing a first screw member, the first screw member comprising a head portion and a first shaft extending along a first longitudinal axis; and

providing a second member, the second member comprising a second shaft extending along a second longitudinal axis and a bore extending through the second shaft along a bore axis;

forming a first bore hole in a first bone and forming a second bore hole in a second bone;

inserting the second member into the first bore hole; coupling an instrument to first and second circumferentially spaced recesses on the second member;

17

coupling the first screw member to the second member;
 inserting the first screw member into the second bore hole;
 applying torque to the head portion to lock the second
 member to the first screw member, thereby compressing
 the first bone to the second bone; and
 inserting a third member into the second member to lock
 the second member to the first screw member,
 wherein the second longitudinal axis and the bore axis
 define an angle,
 wherein the first screw member is adapted for coupling to
 the second member at the angle, and
 wherein the first screw member is adapted for residing
 substantially within the second bone and the second
 member is adapted for residing substantially within the
 first bone.

65. A method for compressing bone, comprising the steps
 of:

providing a first screw member, the first screw member
 comprising a head portion and a first shaft extending
 along a first longitudinal axis; and
 providing a second member, the second member compris-
 ing a second shaft extending along a second longitudinal
 axis and a bore extending through the second shaft along
 a bore axis;

18

forming a first bore hole in a first bone and forming a
 second bore hole in a second bone;
 inserting the second member into the first bore hole;
 coupling the first screw member to the second member;
 inserting the first screw member into the second bore hole;
 applying torque to the head portion to lock the second
 member to the first screw member, thereby compressing
 the first bone to the second bone; and
 inserting a third member into the second member to lock
 the second member to the first screw member,
 wherein the second longitudinal axis and the bore axis
 define an angle,
 wherein the first screw member is adapted for coupling to
 the second member at the angle, and wherein the angle
 determines an angle for arch restoration, and
 wherein the first screw member is adapted for residing
 substantially within the second bone and the second
 member is adapted for residing substantially within the
 first bone.

* * * * *