

SCORE Placeholder Sheet for IFW Content

Application Number: 18131383

Document Date: 04/06/2023

The presence of this form in the IFW record indicates that the following document type was received in electronic format on the date identified above. This content is stored in the SCORE database.

Since this was an electronic submission, there is no physical artifact folder, no artifact folder is recorded in PALM, and no paper documents or physical media exist. The TIFF images in the IFW record were created from the original documents that are stored in SCORE.

- Drawing

At the time of document entry (noted above):

- USPTO employees may access SCORE content via DAV or via the SCORE web page.
- External customers may access SCORE content via PAIR using the Supplemental Content tab.

Under the Paperwork Reduction Act of 1995 no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i>	Attorney Docket No.	16255M3
	First Named Inventor	Christopher Michael YOUNG
	Title	Soft Sanitary Tissue Products Comprising Non-wood Fibers
	Priority Mail Express® Label No.	

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i>	Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450
1. ☐ Fee Transmittal Form (PTO/SB/17 or equivalent) 2. ☐ Applicant asserts small entity status. See 37 CFR 1.27 3. ☐ Applicant certifies micro entity status. See 37 CFR 1.29. Applicant must attach form PTO/SB/15A or B or equivalent. 4. ☒ Specification [Total Pages <u>165</u>] Both the claims and abstract must start on a new page. (See MPEP § 608.01(a) for information on the preferred arrangement) 5. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets <u>43</u>] 6. Inventor's Oath or Declaration [Total Pages _____] (including substitute statements under 37 CFR 1.64 and assignments serving as an oath or declaration under 37 CFR 1.63(e)) a. ☐ Newly executed (original or copy) b. ☐ A copy from a prior application (37 CFR 1.63(d)) 7. ☒ Application Data Sheet * See note below. See 37 CFR 1.76 (PTO/AIA/14 or equivalent) 8. CD-ROM or CD-R in duplicate, large table, or Computer Program (Appendix) ☐ Landscape Table on CD 9. Nucleotide and/or Amino Acid Sequence Submission (if applicable, items a. – c. are required) a. ☐ Computer Readable Form (CRF) b. ☐ Specification Sequence Listing on: i. ☐ CD-ROM or CD-R (2 copies); or ii. ☐ Paper c. ☐ Statements verifying identity of above copies	ACCOMPANYING APPLICATION PAPERS 10. ☐ Assignment Papers (cover sheet & document(s)) Name of Assignee _____ 11. ☐ 37 CFR 3.73(c) Statement ☒ Power of Attorney (when there is an assignee) 12. ☐ English Translation Document (if applicable) 13. ☐ Information Disclosure Statement (PTO/SB/08 or PTO-1449) ☐ Copies of citations attached 14. ☐ Preliminary Amendment 15. ☐ Return Receipt Postcard (MPEP § 503) (Should be specifically itemized) 16. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed) 17. ☐ Nonpublication Request Under 35 U.S.C. 122(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or equivalent. 18. ☐ Other: _____ _____ _____ _____
*Note: (1) Benefit claims under 37 CFR 1.78 and foreign priority claims under 1.55 must be included in an Application Data Sheet (ADS). (2) For applications filed under 35 U.S.C. 111, the application must contain an ADS specifying the applicant if the applicant is an assignee, person to whom the inventor is under an obligation to assign, or person who otherwise shows sufficient proprietary interest in the matter. See 37 CFR 1.46(b).	

19. CORRESPONDENCE ADDRESS				
☒ The address associated with Customer Number: <u>27752</u> OR ☐ Correspondence address below				
Name				
Address				
City	State	Zip Code		
Country	Telephone	Email		
Signature	/RLA/	Date	April 5, 2023	
Name (Print/Type)	Richard L. Alexander	Registration No. (Attorney/Agent)	52463	

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

SOFT SANITARY TISSUE PRODUCTS COMPRISING NON-WOOD FIBERS

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 63/329,222, filed April 8, 2022, U.S. Provisional Application No. 63/329,718, filed April 11, 2022, U.S. Provisional Application No. 63/330,077, filed April 12, 2022, U.S. Provisional Application No. 63/353,183, filed June 17, 2022, and U.S. Provisional Application No. 63/456,020, filed March 31, 2023, the entire disclosures of which are fully incorporated by reference herein.

FIELD

The present disclosure generally relates to fibrous structures and, more particularly, to fibrous structures comprising non-wood fibers, including sanitary tissue products comprising non-wood fibers.

BACKGROUND

Of particular interest is the softness of sanitary tissue products. But, this is where so many sustainable sanitary tissue products comprising non-woods fail. The art does not disclose how to achieve soft fibrous structures comprising bamboo, abaca, or other sustainable non-wood fibers; incorporation of non-woods into sanitary tissue products is a real challenge, even for experienced papermakers. This becomes truer as non-wood fiber inclusion increases. The inventors of the present disclosure have, however, found that adding coarse bamboo fibers (bamboo is especially coarse versus eucalyptus) into the fibrous structure, even at high inclusion levels, and/or even disposed at a consumer-facing side of a sheet, can result in sanitary tissue products with good softness, even with premium softness. There are a number of ways the inventors have accomplished this, including creation of differential densities, utilizing unique layering, and/or fiber mixes, as well as other ways disclosed herein.

The inventors of the present disclosure have found that they are able to deliver soft sustainable fibrous structures that also have low lint values. Typically, higher lint values accompany greater softness values (e.g., TS7, TS750). Beyond the difficulties of processing fibrous structures that are linty, lint can cause unwanted debris at the point of use, which can be messy and can be aesthetically undesirable. Thus, it is a real benefit to achieve greater softness while maintaining lower lint values. The inventors of the present disclosure have not only improved sustainable fibrous structures, but have improved the general offering of fibrous

structures beyond what is otherwise available today, even versus what is available on the shelf today as high-tier offerings consisting only of wood fibers.

Related to softness, another consumer-desired characteristic is surface smoothness/glide. Slip-stick is a good metric for quantifying how much “glide” a substrate has. Low slip-stick values in a fibrous structure are consumer preferred. Typical design levers for improving the slip stick of a substrate include calendaring and/or to replace coarser softwood fibers with shorter, thinner, and lower coarseness hardwood fibers, such as eucalyptus. Conventionally, eucalyptus is used to balance softwood incorporation, such as NSK, which provides strength characteristics. However, upon experimentation, the inventors of the present disclosure have shown that the introduction of coarse, non-wood fibers such as bamboo (even at high inclusion amounts) can still create low slip stick substrates while still maintaining acceptable strength characteristics.

So, despite the shortcomings of so many manufacturers and the poorly performing non-wood products that they market, which are not soft and/or have higher lint values, the inventive sustainable offerings as disclosed herein may be used to offer the public the soft and/or low lint sanitary tissue products they desire. And, the inventive sanitary tissue products disclosed herein may, in many instances, be considered high-tier due to the properties (including improved TS7, TS750, slip stick, etc.) the inventors of the present disclosure have achieved.

SUMMARY

In a first aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS7 of less than about 14 dB V^2 rms.

In a second aspect of the present disclosure, a sanitary tissue product may comprise bamboo fibers and may have a TS750 less than about 20 dB V^2 rms.

In a third aspect of the present disclosure, a sanitary tissue product may be structured and may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS750 less than about 45 dB V^2 rms.

In a fourth aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 435.

In a fifth aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 605.

BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other features and advantages of this disclosure, and the manner of attaining them, will become more apparent and the disclosure itself will be better understood by reference to the following description of non-limiting examples of the disclosure taken in conjunction with the accompanying drawings, wherein:

FIG. 1A is a TS7 (y-axis) graph illustrating inventive and comparative non-wood tissue (bath) samples of Table 3.

FIG. 1B is a graph illustrating slip stick (y-axis) and dry caliper (x-axis) values of inventive and comparative non-wood tissue (bath) samples of Table 3.

FIG. 1C is a graph illustrating TS7 (y-axis) and lint (x-axis) values of inventive and comparative non-wood tissue (bath) samples of Table 3.

FIG. 1D is a graph illustrating TS7 (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood tissue (bath) samples of Table 3.

FIG. 1E is a graph illustrating TS7 (y-axis) and TS750 (x-axis) values of inventive and comparative non-wood tissue (bath) samples of Table 3.

FIG. 2A is a TS7 (y-axis) graph illustrating inventive and comparative non-wood (paper) towel samples of Table 3a.

FIG. 2B is a graph illustrating TS7 (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel samples of Table 3a.

FIG. 2C is a graph illustrating CD modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of Tables 3 and 3a.

FIG. 2D is a graph illustrating MD modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of Tables 3 and 3a.

FIG. 2E is a graph illustrating geometric mean (GM) dry modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of Tables 3 and 3a.

FIG. 2F is a graph illustrating TS7 (y-axis) and wet burst strength (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of Table 3 and 3a.

FIG. 2G is a graph illustrating TS7 (y-axis) and total wet tensile (x-axis) values of inventive and comparative non-wood (paper) towel samples of Table 3a.

FIG. 2H is a graph illustrating TS7 (y-axis) and Wet Bust Strength/Total Dry Tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of Tables 3 and 3a.

FIG. 3A is a photograph of a portion of a fibrous structure, particularly a paper towel,
5 comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 3B is a photograph of a portion of a fibrous structure, particularly a WSO bath tissue, comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 3C is a photograph of a portion of a fibrous structure, particularly a FSO bath tissue, comprising non-wood fiber(s) and comprising knuckles and pillows.

10 FIG. 4A is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A. In FIG. 4A, each ply 53 is fabric side out (FSO).

FIG. 4B is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C – this sanitary tissue product
15 does not have distinct knuckle and pillow regions or zones.

FIG. 4C is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A. In FIG. 4C, ply 53 is wire side out (WSO) and ply 53' is FSO.

FIG. 4D is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C– this sanitary tissue product
20 does not have distinct knuckle and pillow regions or zones.

FIG. 4E is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C– this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

25 FIG. 4F is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A.

FIG. 4G is a cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C – this sanitary tissue product does not have
30 distinct knuckle and pillow regions or zones.

FIG. 4H is a representative cross-section view of a sanitary tissue product made according to a conventional wet press process – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

FIG. 4I is a representative cross-section view of a sanitary tissue product made according to a conventional wet press process – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

5 FIG. 5 is a plan view of a portion of a mask pattern used to make the papermaking belt that produced the fibrous structure of FIG. 3A.

FIG. 6A is a schematic representation of one method for making the new fibrous structures detailed herein. Specific details of the process and equipment represented by FIG. 6A can be found in U.S. Patent Nos. 5,714,041; 9,217,226; 9,435,081; 9,631,323; 9,752,281; 10,240,296; and U.S. Publication Nos. 2013-0048239; 2022-0010497.

10 FIG. 6B is a schematic representation of one method for making the new fibrous structures detailed herein. Specific details of the process and equipment represented by FIG. 6B can be found in U.S. Patent No. 7,972,474.

FIG. 6C is a schematic representation of one method for making the new fibrous structures detailed herein.

15 FIG. 7 is a perspective view of a test stand for measuring roll compressibility properties as detailed herein.

FIG. 8 is perspective view of the testing device used in the roll firmness measurement detailed herein.

FIG. 9 is a diagram of an SST Test Method set up as detailed herein.

20 FIG. 10 is a schematic illustrating the Position of Gocator camera to a testing surface relating to the Moist Towel Surface Structure Method.

FIG. 11 is an enlarged view of a cell group overlapped by a quadrilateral related to the Continuous Region Density Difference Measurement.

25 FIG. 12 is a density image for use in the Micro-CT Intensive Property Measurement Method.

FIG. 13 is a binary image for use in the Micro-CT Intensive Property Measurement Method.

FIG. 14 is an example of a sample support rack used in the HFS and VFS Test Methods.

FIG. 14A is a cross-sectional view of the sample support rack of FIG. 14.

30 FIG. 15 is an example of a sample support rack cover used in the HFS and VFS Test Methods.

FIG. 15A is a cross-sectional view of the sample support rack cover of Fig. 15.

FIG. 16A is a portion of a fibrous structure of the present disclosure comprising an emboss pattern.

FIG. 16B is a portion of a fibrous structure of the present disclosure comprising an emboss pattern.

FIG. 17 is a representative papermaking belt of the kind useful to make fibrous structures comprising non-wood fibers of the present disclosure.

Beyond the figures of the present application and their descriptions disclosed above, the figures and their descriptions, including FIGS. 1A – 2JJ, disclosed in U.S. Provisional Patent Application Serial No. 63/456,020, titled “Fibrous Structures Comprising Non-wood Fibers,” filed on March 31, 2023, Young as the first-named inventor, are herein incorporated by reference.

DETAILED DESCRIPTION

Various non-limiting examples of the present disclosure will now be described to provide an overall understanding of the principles of the structure, function, manufacture, and use of the fibrous structures comprising non-woods disclosed herein. One or more non-limiting examples are illustrated in the accompanying drawings. Those of ordinary skill in the art will understand that the fibrous structures described herein and illustrated in the accompanying drawings are non-limiting examples. The features illustrated and/or described in connection with one non-limiting example can be combined with the features of other non-limiting examples. Such modifications and variations are intended to be included within the scope of the present disclosure.

MAKING FIBROUS STRUCTURES OF THE PRESENT DISCLOSURE

“Machine Direction” or “MD” as used herein means the direction parallel to the flow of the fibrous structure through the papermaking machine and/or product manufacturing equipment.

“Cross Machine Direction” or “CD” as used herein means the direction perpendicular to the machine direction in the same plane of the fibrous structure.

Generally, fibrous structures of the present disclosure are typically made in “wet-laid” papermaking processes. In such papermaking processes, a fiber slurry, usually wood pulp fibers, is deposited onto a forming wire and/or one or more papermaking belts such that an embryonic fibrous structure is formed. After drying and/or bonding the fibers of the embryonic fibrous structure together, a fibrous structure is formed. Further processing of the fibrous structure can then be carried out after the papermaking process. For example, the fibrous structure can be wound on the reel and/or ply-bonded and/or embossed. As further discussed herein, visually distinct features may be imparted to the fibrous structures in different ways. In a first method, the fibrous

structures can have visually distinct features added during the papermaking process. In a second method, the fibrous structures can have visually distinct features added during the converting process (*i.e.*, after the papermaking process). Some fibrous structure examples disclosed herein may have visually distinct features added only during the papermaking process, and some fibrous structure examples may have visually distinct features added both during the papermaking process and the converting process.

Regarding the first method, a wet-laid papermaking process can be designed such that the fibrous structure has visually distinct features “wet-formed” during the papermaking process. Any of the various forming wires and papermaking belts utilized can be designed to leave physical, three-dimensional features within the fibrous structure. Such three-dimensional features are well known in the art, particularly in the art of “through air drying” (TAD) papermaking processes, with such features often being referred to in terms of “knuckles” and “pillows.” “Knuckles” or “knuckle regions” or “knuckle zones” are typically relatively high-density regions that are wet-formed within the fibrous structure (extending from a pillow surface of the fibrous structure) and correspond to the knuckles of a papermaking belt, *i.e.*, the filaments or resinous structures that are raised at a higher elevation than other portions of the belt. “Relatively high density” as used herein means a portion of a fibrous structure having a density that is higher than a relatively low-density portion of the fibrous structure. Relatively high density zones or regions can be about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60, or about 65% higher than relatively low density regions or zones. For instance, discrete knuckles, measured according to Micro-CT Intensive Property Measurement Method, may have a density greater than about (“greater than about” used interchangeably with “at least about” herein) 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60, or about 65% higher than pillows. Whether one is substituting short or long wood fibers with non-wood fibers, there are not direct non-wood substitutions available for several reasons, such as morphology differences between wood and non-wood fibers. For instance, even when fiber length is matched by the non-wood replacing the wood fiber, said non-wood fiber likely has important differences such as fiber width, stiffness, etc. For some of these reasons, generally speaking, knuckles and pillows comprising non-wood fibers will be different (*e.g.*, less dense) than knuckles and pillows consisting of non-wood fibers. These are some of the reasons that incorporation of non-wood fibers into established sanitary tissue products is not straightforward and creates unexpected outcomes. This is especially true as one tries to achieve parity (when using non-wood fibers) for multiple key parameters of sanitary tissue products.

Likewise, “pillows” or “pillow regions” or “pillow zones” are typically relatively low-density regions that are wet-formed within the fibrous structure and correspond to the relatively open regions between or around the knuckles of the papermaking belt. The pillow regions form a pillow surface of the fibrous structure from which the knuckle regions extend. “Relatively low density” as used herein means a portion of a fibrous structure having a density that is lower than a relatively high-density portion of the fibrous structure. Further, the knuckles and pillows wet-formed within a fibrous structure can exhibit a range of basis weights and/or densities relative to one another, as varying the size of the knuckles or pillows on a papermaking belt can alter such basis weights and/or densities. A fibrous structure (*e.g.*, sanitary tissue products) made through a TAD papermaking process as detailed herein is known in the art as “TAD paper.”

Thus, in the description herein, the terms “knuckles” or “knuckle regions” or “knuckle zones” or the like can be used to reference either the raised portions of a papermaking belt or the densified, raised portions wet-formed within the fibrous structure made on the papermaking belt (*i.e.*, the raised portions that extend from a surface of the fibrous structure), and the meaning should be clear from the context of the description herein. Likewise “pillows” or “pillow regions” or “pillow zones” or the like can be used to reference either the portion of the papermaking belt between or around knuckles (also referred to in the art as “deflection conduits” or “pockets”), or the relatively uncompressed regions wet-formed between or around the knuckles within the fibrous structure made on the papermaking belt, and the meaning should be clear from the context of the description herein. Knuckles or pillows can each be either continuous or discrete, as described herein. As shown in FIGS. 5, such illustrated masks may be used in producing papermaking belts that would create fibrous structures that have discrete knuckles and continuous/substantially continuous pillows. Like masks may be used in producing papermaking belts that would create fibrous structures that have discrete pillows and continuous/substantially continuous knuckles. The term “discrete” as used herein with respect to knuckles and/or pillows means a portion of a papermaking belt or fibrous structure that is defined or surrounded by, or at least mostly defined or surrounded by, a continuous/substantially continuous knuckle or pillow. The term “continuous/substantially continuous” as used herein with respect to knuckles and/or pillows means a portion of a papermaking belt or fibrous structure network that fully, or at least mostly, defines or surrounds a discrete knuckle or pillow. Further, the substantially continuous member can be interrupted by macro patterns formed in the papermaking belt, as disclosed in US Pat. No. 5,820,730 issued to Phan et al. on October 13, 1998.

Knuckles and pillows in paper towels (also referred to as “towel”) and bath tissue (also referred to as “toilet tissue,” “bath,” or “toilet paper”) can be visible to the retail consumer of such products. The knuckles and pillows can be imparted to a fibrous structure from a papermaking belt at various stages of the papermaking process (*i.e.*, at various consistencies and at various unit operations during the drying process) and the visual pattern generated by the pattern of knuckles and pillows can be designed for functional performance enhancement as well as to be visually appealing. Such patterns of knuckles and pillows can be made according to the methods and processes described in US. Pat. No. 6,610,173, issued to Lindsay et al. on August 26, 2003, or US Pat. No. 4,514,345 issued to Trokhan on April 30, 1985, or US Pat. No. 6,398,910 issued to Burazin et al. on June 4, 2002, or US Pub. No. 2013/0199741; published in the name of Stage et al. on August 8, 2013. The Lindsay, Trokhan, Burazin and Stage disclosures describe belts that are representative of papermaking belts made with cured resin on a woven reinforcing member, of which aspects of the present disclosure are an improvement. But in addition, the improvements detailed herein can be utilized as a fabric crepe belt as disclosed in US Pat. No. 7,494,563, issued to Edwards et al. on Feb. 24, 2009 or US 8,152,958, issued to Super et al. on April 10, 2012, as well as belt crepe belts, as described in US Pat. No. 8,293,072, issued to Super et al on October 23, 2012. When utilized as a fabric crepe belt, a papermaking belt of the present disclosure can provide the relatively large, recessed pockets and sufficient knuckle dimensions to redistribute the fiber upon high impact creping in a creping nip between a backing roll and the fabric to form additional bulk in conventional wet-laid press processes. Likewise, when utilized as a belt in a belt crepe method, a papermaking belt of the present disclosure can provide the fiber enriched dome regions arranged in a repeating pattern corresponding to the pattern of the papermaking belt, as well as the interconnected plurality of surrounding areas to form additional bulk and local basis weight distribution in a conventional wet-laid process. In addition, the improvements detailed herein, can be utilized as an uncreped through air dried (UCTAD) belt. UCTAD (un-creped through air drying) is a variation of the TAD process in which the sheet is not creped, but rather dried up to 99% solids using thermal drying, removed from the structured fabric, and then optionally calendered and reeled. U.S. Pat. No. 6,808,599 describes an uncreped through air dried process. U.S. Pat. No. 10,610,063 describes an uncreped through air dried product made using a belt. In addition, the improvements herein can be utilized as an ATMOS belt. The ATMOS process has been developed by the Voith company and marketed under the name ATMOS. The process/method and paper machine system has several variations, but all involve the use of a structured fabric in conjunction with a belt press. This process is described in numerous patent

publications including U.S. Pat. Nos. 7,510,631, 7,686,923, 7,931,781, 8,075,739, and 8,092,652. In addition, the improvements herein can be utilized as an NTT belt. The NTT process has been developed by the Metso company and marketed under the name NTT. The NTT process includes an extended press nip where the sheet is transferred from a press felt onto a texturing belt.

5 Examples of texturing belts used in the NTT process can be viewed in International Publication Number WO 2009/067079 A1 and US Patent Application Publication No. 2010/0065234 A1. An example of a papermaking belt structure of the general type useful in the present disclosure and made according to the disclosure of US Pat. No. 4,514,345 is shown in FIG. 17. As shown, the papermaking belt 17 can include cured resin elements 4 forming knuckles 20 on a woven

10 reinforcing member 6. The reinforcing member 6 can be made of woven filaments 8 as is known in the art of papermaking belts, for example resin coated papermaking belts. The papermaking belt structure shown in FIG. 17 includes discrete knuckles 20 and a continuous deflection conduit, or pillow region (pillow zone). The discrete knuckles 20 can wet-form densified knuckles within the fibrous structure made thereon; and, likewise, the continuous deflection conduit, *i.e.*, pillow

15 region, can wet-form a continuous pillow region within the fibrous structure made thereon. The knuckles can be arranged in a pattern described with reference to an X-Y coordinate plane, and the distance between knuckles 20 in at least one of the X or Y directions can vary according to the examples disclosed herein. For clarity, a fibrous structure's visually distinct knuckle(s) and pillow(s) that are wet-formed in a wet-laid papermaking process are different from, and

20 independent of, any further structure added to the fibrous structure during later, optional, converting processes (e.g., one or more embossing process). For certain embodiments of the present disclosure, it may be desirable to use the belts disclosed in U.S. Patent Nos. 9,435,081; 9,631,323; 9,752,281; 10,240,296; and U.S. Publication Nos. 2022-0010497; and 2021-0140114 as some of these belts create sinusoidal and/or serpentine pillow and/or knuckle regions or zones;

25 in some embodiments, these pillow and/or knuckle zones or regions may be continuous and/or semi-continuous. These patterns referenced in the patents and publication of the previous sentence can be particularly useful for achieving the most desirable properties from webs comprising non-woods, even including high non-wood (e.g., bamboo) inclusion.

After completion of the papermaking process, a second way to provide visually distinct

30 features to a fibrous structure is through embossing. Embossing is a well-known converting process in which at least one embossing roll having a plurality of discrete embossing elements extending radially outwardly from a surface thereof can be mated with a backing, or anvil, roll to form a nip in which the fibrous structure can pass such that the discrete embossing elements

compress the fibrous structure to form relatively high density discrete elements (“embossed regions”) in the fibrous structure while leaving an uncompressed, or substantially uncompressed, relatively low density continuous, or substantially continuous, network (“non-embossed regions”) at least partially defining or surrounding the relatively high density discrete elements.

5 As illustrated in FIGS. 6B and 6C, beyond creating knuckles and pillows with resinous belts described above, and beyond the various types of creping, paper may be transformed in other ways, such that beneficial properties are created, especially as the speed of a belt or a wire transfers the web to a belt or a wire of a different speed, such as, for example, the upstream belt or wire moving faster than the downstream belt or wire. It may be desirable to have multiple such transfers
10 in the same papermaking process. Further, it may be desirable to have different speed differentials at different transfers in such a process. As a more specific example, referring to FIG. 6B, in a first rush transfer 175, the speed of the forming fabric 154 can be travelling at a first rate, while the transfer fabric 174 travels at a second rate (slower than the first rate, but faster than 2,000 feet per minute (fpm), 2,050 fpm, 2,100 fpm, 2,150 fpm, 2,200 fpm, 2,250 fpm, 2,300 fpm, 2,350 fpm,
15 2,400 fpm, 2,450 fpm, 2,500 fpm, 2,600 fpm, 2,700 fpm, 2,800 fpm, 2,900 fpm, or greater than 3,000 fpm); further, a second rush transfer 175' may occur where the transfer fabric is travelling at the second rate, while the TAD fabric 164 travels at a third rate, which may be the faster or slower (e.g., about 10%, about 15%, about 20%, about 25%, about 30%, about 40, about 50% faster or slower) than the second rate. While the UCTAD process does not form traditional density
20 differentials (e.g., such as knuckles and pillows), said rush transfers can, depending on the speed differentials of the transfers, create fiber orientations within the web such that performance of the fibrous structure is improved, such as, for example, stretch, tensile ratio, tensile, modulus, caliper, bulk.

Embossed features in paper towels and bath tissues can be visible to the retail consumer of
25 such products. Emboss designs as disclosed in U.S. Design. Pat. App. Nos. 29/673,106; 29/673,105; and 29/673,107 may be used to make fibrous structures of the present disclosure. Emboss patterns can be made according to the methods and processes described in US Pub. No. US 2010-0028621 A1 in the name of Byrne et al. or US 2010-0297395 A1 in the name of Mellin, or US Pat. No. 8,753,737 issued to McNeil et al. on June 17, 2014. For clarity, such embossed
30 features originate during the converting process, and are different from, and independent of, the pillow and knuckle features that are wet-formed on a papermaking belt during a wet-laid papermaking process.

More particular papermaking processes are disclosed below and illustrated in FIGS. 6A and 6B, versus the more general description above. FIGS. 6A and 6B are simplified, schematic representations of continuous fibrous structure making processes and machines useful in the practice of the present disclosure. The following description of the process and machine include
5 non-limiting examples of process parameters useful for making a fibrous structure of the present invention.

As shown in FIG. 6A, process and equipment 150 for making fibrous structures according to the present disclosure comprises supplying an aqueous dispersion of fibers (a fibrous furnish) to a headbox 152 which can be of any design known to those of skill in the art. The aqueous
10 dispersion of fibers can include wood and non-wood fibers, northern softwood kraft fibers (“NSK”), eucalyptus fibers, southern softwood kraft (SSK) fibers, Northern Hardwood Kraft (NHK) fibers, acacia, bamboo, straw and bast fibers (wheat, flax, rice, barley, etc.), corn stalks, bagasse, abaca, kenaf, reed, synthetic fibers (PP, PET, PE, bico version of such fibers), regenerated cellulose fibers (viscose, lyocell, etc.), and other fibers known in the papermaking
15 art, including short fibers having an average length less than 1.0 mm (Average Short Fiber Length-ASFL) and including long fibers having an average length greater than 1.0 mm, from about 1.2 mm to about 3.5 mm, or from about 3 mm to about 10 mm (Average Long Fiber Length-ALFL). Depending on the non-wood fibers being used, they may be in the long fiber range of length. For instance, bamboo can have a length from 1.1 to 2.0 mm and sunn hemp is even longer, it can have a length from 2.8 to 3.0 mm and sisal hemp can have a length from 2.5
20 to 2.7 mm. Kenaf can have a length from 2.7 to 3.0 mm, abaca can have a length from 4.0 to 4.3 mm. This becomes significant when short fibers like eucalyptus are replaced with longer non-wood fibers.

From the headbox 152, the aqueous dispersion of fibers can be delivered to a foraminous
25 member 154, which can be a Fourdrinier wire, to produce an embryonic fibrous web 156. Furnish mixes may be useful in the present disclosure may be from about 20% to about 50% short fibers and from about 40% to about 100% long fibers, specifically including all 1% increments between the recited ranges.

The foraminous member 154 can be supported by a breast roll 158 and a plurality of return
30 rolls 160 of which only two are illustrated. The foraminous member 154 can be propelled in the direction indicated by directional arrow 162 by a drive means, not illustrated, at a predetermined velocity, V_1 . Optional auxiliary units and/or devices commonly associated with fibrous structure making machines and with the foraminous member 154, but not illustrated, comprise forming

boards, hydrofoils, vacuum boxes, tension rolls, support rolls, wire cleaning showers, and other various components known to those of skill in the art.

After the aqueous dispersion of fibers is deposited onto the foraminous member 154, the embryonic fibrous web 156 is formed, typically by the removal of a portion of the aqueous dispersing medium by techniques known to those skilled in the art. Vacuum boxes, forming boards, hydrofoils, and other various equipment known to those of skill in the art are useful in effectuating water removal. The embryonic fibrous web 156 can travel with the foraminous member 154 about return roll 160 and can be brought into contact with a papermaking belt 164 in a transfer zone 136, after which the embryonic fibrous web travels on the papermaking belt 164. While in contact with the papermaking belt 164, the embryonic fibrous web 156 can be deflected, rearranged, and/or further dewatered. Depending on the process, mechanical and fluid pressure differential, alone or in combination, can be utilized to deflect a portion of fibers into the deflection conduits of the papermaking belt. For example, in a through-air drying process a vacuum apparatus 176 can apply a fluid pressure differential to the embryonic web 156 disposed on the papermaking belt 164, thereby deflecting fibers into the deflection conduits of the deflection member. The process of deflection may be continued with additional vacuum pressure 186, if necessary, to even further deflect and dewater the fibers of the web 184 into the deflection conduits of the papermaking belt 164.

The papermaking belt 164 can be in the form of an endless belt. In this simplified representation, the papermaking belt 164 passes around and about papermaking belt return rolls 166 and impression nip roll 168 and can travel in the direction indicated by directional arrow 170, at a papermaking belt velocity V_2 , which can be less than, equal to, or greater than, the foraminous member velocity V_1 . In the present disclosure, the papermaking belt velocity V_2 is less than foraminous member velocity V_1 such that the partially-dried fibrous web is foreshortened in the transfer zone 136 by a percentage determined by the relative velocity differential between the foraminous member and the papermaking belt. Associated with the papermaking belt 164, but not illustrated, can be various support rolls, other return rolls, cleaning means, drive means, and other various equipment known to those of skill in the art that may be commonly used in fibrous structure making machines.

The papermaking belts 164 of the present disclosure can be made, or partially made, according to the process described in U.S. Patent No. 4,637,859, issued Jan. 20, 1987, to Trokhan, and having the patterns of cells as disclosed herein.

The fibrous web 192 can then be creped with a creping blade 194 to remove the web 192 from the surface of the Yankee dryer 190 resulting in the production of a creped fibrous structure 196 in accordance with the present disclosure. As used herein, creping refers to the reduction in length of a dry (having a consistency of at least about 90% and/or at least about 95%) fibrous web which occurs when energy is applied to the dry fibrous web in such a way that the length of the fibrous web is reduced and the fibers in the fibrous web are rearranged with an accompanying disruption of fiber-fiber bonds. Creping can be accomplished in any of several ways as is well known in the art, as the doctor blades can be set at various angles. The creped fibrous structure 196 is wound on a reel, commonly referred to as a parent roll, and can be subjected to post processing steps such as calendaring, tuft generating operations, embossing, and/or converting. The reel winds the creped fibrous structure at a reel surface velocity, V_4 .

The papermaking belts of the present disclosure can be utilized to form discrete elements and a continuous/substantially continuous network (*i.e.*, knuckles and pillows) into a fibrous structure during a through-air-drying operation. The discrete elements can be knuckles and can be relatively high density relative to the continuous/substantially continuous network, which can be a continuous/substantially pillow having a relatively lower density. In other examples, the discrete elements can be pillows and can be relatively low density relative to the continuous/substantially continuous network, which can be a continuous/substantially continuous knuckle having a relatively higher density. In the example detailed above, the fibrous structure is a homogenous fibrous structure, but such papermaking process may also be adapted to manufacture layered fibrous structures, as is known in the art. As discussed above, the fibrous structure can be embossed during a converting operating to produce the embossed fibrous structures of the present disclosure.

Formation

An area of particular interest is formation of the fibrous structure. This is an area where, as evidenced in the detailed description, so many sustainable sanitary tissue products fail and the art does not disclose how to achieve well-formed fibrous structures comprising bamboo and/or other sustainable non-wood fibers. Formation of non-wood fibers can be challenging due to their morphology, which differs from wood fibers. For instance, bamboo fibers, which may be considered flexible (relative to their length/width ratio versus certain wood fibers and versus their length/width ratio versus certain non-wood fibers such as straw fibers (e.g., wheat straw)) often flocculate in the headbox, which can result in a heterogeneously formed sheet. The inventors of the present disclosure have found ways of overcoming these challenges so that adding bamboo

fibers into the fibrous structure, even at high(er) inclusion levels, can result in products having good formation as evidenced by inventive formation index values, as well as by tensile ratio values disclosed herein. It should also be appreciated that the better a sheet's formation, the better its coverage. Such is important, of course, because formation and coverage directly impact hand protection for sanitary tissue products. Details are in the specification below.

As described above, in part, fibers are delivered to and diluted in the headbox. All other things being constant, increasing the dilution of the headbox (decreasing headbox consistency) results in improved formation. Without being bound by theory, one reason for this could be that as the headbox consistency decreases, the fibrous particles in the headbox have less interactions with each other as they flow through the headbox. Because fibers (wood and non-wood) are generally ribbon-like in cross section, if that fiber is allowed to rotate in all three axes then it creates a sphere. This sphere of fibers can be referred to as the swept volume of the fiber. As the headbox consistency increases, assuming perfectly homogenous distribution of fibers in the solution, the spheres of swept volume begin to come closer together, eventually overlapping. As the spheres overlap more and more, the fibers have a higher probability of interacting with each other, creating flocculation, which results in a more heterogeneously formed sheet. This is also referred to as poor formation.

The jet-to-wire ("jet/wire") ratio is known in the art as a velocity ratio between the speed of the jet exiting the headbox and the speed of the wire(s) upon which the jet impinges. The main ways to adjust the jet/wire ratio are (1) to increase the flow rate through the headbox in a fixed headbox geometry, while keeping wire speed constant, (2) to increase the wire speed while keeping the headbox flow and geometry constant, (3) to decrease the flow rate through the headbox in a fixed headbox geometry, while keeping the wire speed constant, or (4) to decrease the wire speed while keeping the headbox flow and geometry constant. Method (1) observes the incompressible fluid dynamic concept of continuity, which says that if the volumetric flow through a fixed area increases, the velocity must increase – the opposite is true for Method (3). For Methods (2) and (4), again via continuity, results in the jet velocity being constant while the wire velocity increases or decreases, respectively. This jet/wire ratio also affects the tensile ratio of the subsequently formed sheet. This mechanism is via fiber orientation on the wire as the fibers are deposited. It is generally known that the higher the speed difference is between the jet/wire (either a jet much faster or a jet much slower), the higher the tensile ratio will be, and that there will be a minimum tensile ratio between the extremes. For this reason, it may be desirable that fibrous structures of

the present disclosure have certain tensile ratios, described in more detail below. Fiber orientation can also impact the formation of the sheet through increased heterogeneity of the substrate.

Finally, one of the major costs of papermaking is energy. Pumps, especially fan pumps, consume large amounts of power via the work of increasing the pressure of a volumetric flow (known as PV work). Lowering the flow through the headbox (thereby increasing the consistency and decreasing the jet/wire at constant throughput and headbox geometry) will lower the production costs for the papermaker. Additionally, all other things being equal, less headbox dilution would result in less drying energy and overall water consumption, which are significant cost elements in an increasingly resource constrained world.

Therefore, the papermaker strives to balance these competing priorities. Upon recent experimentation, it has surprisingly been found that the relationships between jet/wire, tensile ratio, and formation are different for non-wood fibers than they are for wood fibers. More specifically, the tensile ratios disclosed below may be achieved by, at least in part, by a jet flow that is slower than a forming wire speed.

As discussed previously in this section, creating premium levels of quality (softness, absorption, strength, bulk characteristics, etc.) toilet tissue by using high coarseness bamboo in the furnish mix is a challenge. It is generally known that substrates with a very even fiber distribution (good formation) are consumer preferred. One reason is that the even distribution of fibers is pleasing to the eye. Another reason is that the even distribution of fibers means that, at a given basis weight, there is a higher minimum fiber coverage area of the sheet, as there are less heavy and light spots of the sheet, contributing to better hand protection. Better formation also equates to better absorbency characteristics through better pore connectivity and pore volume distributions. In most conventional wet press processes, having an even formation lends to better tensile efficiency, allowing for a stronger sheet at a given basis weight. In through-air-drying, sheets are produced that have higher bulk properties. Through conservation of volume, at a given basis weight, a through-air-dried sheet with higher bulk would tend to have a lower formation index than a conventional wet press sheet at similar basis weights and fiber compositions.

Another way to improve formation index is to choose fibers that allow for high coverage (i.e., fibers with low coarseness and wide fiber widths). Bamboo, for instance, is known in the art as a fiber with potential for tissue making use. However, the morphology of the bamboo fiber (high levels of fines, broad fiber length distribution, high coarseness, high fibrillation, etc.) make for a fiber that drains poorly, making it particularly unsuited for through-air-drying machines due to high energy costs associated with the drying of the nascent fiber web. The high coarseness of

bamboo, as well as its wide fiber width, make for poorer fiber coverage than sheets that are comprised mainly of eucalyptus. This also leads to a lower formation index than eucalyptus or other high fiber coverage sheets. Thus, toilet tissue sheets that are comprised mostly of eucalyptus fibers, which are short, narrow, and exhibit low coarseness have improved fiber coverage in the sheet and a higher formation index. As the papermaker uses higher levels of bamboo inclusion, one is necessarily replacing the eucalyptus fibers with longer, wider, and coarser bamboo fibers. The fiber coverage in the substrate decreases, and the formation index decreases as well. This is not only true for bamboo, but many of the other non-woods. Surprisingly, the inventors of the present disclosure have discovered that decreasing the tensile ratio of structured fibrous structures comprising non-woods improves the formation index of said fibrous structures. This is the exact opposite of non-structured fibrous structures, in which increasing the tensile ratio improves the formation index. Without being bound by theory, it is thought that the interplay of fiber distribution on the wire, deformation of the sheet into a patterned fabric, and subsequent differential drying and creping of the resultant sheet, at least in part, results in this counterintuitive relationship.

A majority of webs comprising bamboo are made on conventional wet press machines. These machines generate webs of low caliper, and when converted into finished product rolls result in either low bulk and hard rolls or high bulk and extremely soft rolls. A few instances of products can be found comprising bamboo that are made on through-air-dried machines. These examples exhibit a lower formation index and also exhibit other non-consumer preferred characteristics, like low volumetric PVD absorption in the 2.5-160 um range. It is therefore surprising that a low formation index substrate can be made with a coarse non-wood fiber, such as bamboo, and still be able to meet standards for premium quality tissue.

The inventors of the present disclosure have surprisingly shown that substrates comprising non-woods (e.g., bamboo, abaca, etc.) can be created that still maintain strong consumer appeal despite their lower formation indices. As described in greater detail herein, non-wood fibers may be run in a continuous papermaking process at high percentage inclusions of non-wood to form webs. These webs may then be pressed on a structured fabric, creating zones of differential density, which may, in part, contribute to the preferred characteristics of the resulting "structured" fibrous structures. Structured fibrous structures may be achieved using various papermaking processes such as, for example, TAD, fabric crepe, NTT, QRT, creped TAD and UCTAD.

Additionally, preferred characteristics may be achieved, at least in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface wire/belt interface

and at creping, through creping geometry changes, and the judicious placement of high and low density zones in the substrate.

Fractionation

5 It is generally known that substrates comprised of virgin wood pulps are consumer preferred. The substrate developer undergoes a very deliberate process when choosing the fibers that they want to include in their substrate. Generally, for soft and strong tissue products, a blend of low coarseness, low length eucalyptus fibers are included for softness, while low coarseness softwood fibers, for example, NSK fibers, are included for strength, but still permitting good
10 flexibility. In order to maintain the correct ratios of strength, softness, and flexibility, the substrate developer will vary chemistry inclusion, fiber composition by layers, and refining of the wood pulp. Choices in any of these variables (and more) will affect the resultant substrate characteristics, making the substrate more or less consumer desirable.

 It is also generally known that non-wood fibers often have different characteristics than
15 wood fibers. Fiber morphology characteristics such as length, cell wall thickness, width, Runkle Ratio, kink, curl, fibrillation, and other characteristics can vary significantly from non-wood to non-wood, as well as compared to wood pulps. It is, therefore, a current problem to develop sanitary tissue products having premium characteristics when utilizing non-wood fibers that have non-premium morphologies.

20 In order to address this problem, non-wood fibers may be passed through a hydrocyclone and separated in to two different streams and described as “accepts” and “rejects.” Despite this nomenclature, both outgoing streams can still be used by the substrate developer via different layering schemes. When passing non-woods through a fractionation unit, one important way that the unit separates the fibers is by degree of fibrillation. Since many non-woods are more
25 fibrillated than wood fibers, choosing to place the less fibrillated non-wood stream close to the consumer may result in a more premium, wood fiber-like experience. Furthermore, it has been observed that less the fibrillated non-wood fraction ends up located in the reject stream, which is usually reserved for longer, denser, and more coarse fibers. Traditional thinking would be to place this reject stream away from the consumer-facing layer, but the inventors of the present
30 disclosure have surprising found that the better option is to place the reject stream to the consumer-facing layer. Without being bound by theory, it is believed that the hydrodynamic differences of fiber fibrillation overcome the hydrodynamic differences of fiber density and length. With fiber fibrillation being dominant, the more fibrillated fibers will follow the majority

of the fluid and be carried to the accept portion of the cyclone. The coarser, longer, and less fibrillated fibers will concentrate on the peripheral wall of the cyclone and preferentially go towards the reject stream at the bottom of the cyclone. Yet, these “reject” fibers have better mobility, lower bonding, and are more wood-like due to their lower degree of fibrillation. Using non-wood rejects in the consumer-facing layer can, thus, result in a sanitary tissue product that has premium characteristics (e.g. softness).

Once-dried Non-wood Fibers

The challenges associated with non-wood fiber morphology are further complicated by using once-dried (versus never-dried, which comprise greater than about 45% water content) fibers in the paper-making process. Although never-dried and once-dried fibers are chemically similar, they differ greatly in their physical properties. Never-dried fiber walls contain much more water per unit dry mass than those of dried fibers after reslushing. Being more swollen, the never-dried walls are more flexible or conformable. In contrast, the walls of once-dried (and rewetted or reslushed or repulped) fibers are stiff (compared to never-dried fibers). Significant changes in the papermaking properties of fibers occur with water removal as the walls become progressively more rigid and less conformable. Table 6 shows the fiber characteristic differences between non-wood fibers that are never-dried and that have been once-dried; see also, for example: A.M.Scallan and G.V.Laivins, The mechanism of hornification of wood pulps in Products of Papermaking, Trans. of the Xth Fund. Res. Symp. Oxford, 1993, (C.F.Baker, ed.), pp 1235–1260, FRC, Manchester, 2018. DOI: 10.15376/frc.1993.2.1235, at page 1242 (Effect of Temperature) states: “Drying-and-reslushing at 25 C dropped the breaking length from 7.3 km for the virgin sheet down to 2.7 km. Raising the drying temperature to 105° and to 150°C further lowered the breaking length to 1.6 and 0.6 km. From this study it is apparent that the major reduction in sheet strength is due to water removal and that heat causes an additional reduction which is much smaller in magnitude.” The same article further states: “Only a few investigations have been carried out, designed to separate the effects of temperature and water removal during drying. Lyne and Gallay avoided this problem by heating without drying; in their experiments wet handsheets were heated to 95 °C for three minutes in an atmosphere saturated with water vapour before air drying (19). The tensile strength of the sheet was lowered by 14% when compared to that of an unheated control. The result shows that the heat treatment led to a reduction in the extent of interfibre bonding which they attributed to a loss of swelling of the pulp upon heating.” Table 6 also illustrates that never-dried fibers bond to each other better than

once-dried fibers. To overcome the effects of temperature and water removal, strength in the web (e.g., sanitary tissue product) may be achieved by temporary and/or permanent wet strength, dry strength additives, furnish blend ratios (e.g., softwood-to-hardwood ratios), process manipulations (refining, formation, calendaring, creping, etc.), etc.

5 While it may be desirable to use never-dried fibers (see, for example, the following publications assigned to Essity Hygiene and Health Aktiebolag: WO2023282811A1, WO2023282812A1, WO2023282813A1, WO2023282818A1), such requires the pulping facility to be close to the paper-making facility as wet fibers are too expensive to ship. Because this proximity is often impractical, the inventors of the present application used non-wood fibers that
10 were at least once-dried and overcame not only the challenges associated with non-wood fibers, but also overcame the challenges of the non-wood fibers having been at least once-dried at the pulping facility and then shipped as dried sheets before incorporating the fibers into the paper-making process. That is, the non-wood fibers disclosed herein were reslushed from dried sheets before they were sent to a headbox in the paper-making process. Further, on a single fiber basis,
15 the fiber length of once-dried non-wood fibers in the finished product (e.g., sanitary tissue product) will normally be shorter than never-dried non-wood fibers due to the extra processing necessary to rewet once-dried non-wood fibers. These shorter fibers have a materially different characteristics, which, among other things, will impact the strength of the final product.

 When using once-dried non-wood pulp, the unit of pulp is typically in a bale, a sheet, or a
20 block, which comprises less than about 45%, 40%, 35%, 25%, 15%, 10%, 5%, or 2% of water (water content). Water content (% moisture) of pulp is measured using an Ohaus MB45 moisture balance, or an equivalent instrument, set to a drying temperature of 130°C, with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time). The unit of once-fired non-wood pulp may then be placed into a repulping unit to be repulped (also called
25 reslushed or rewetted). The repulped non-wood fibers may then be further refined or may be sent directly to a headbox. As referenced above, the reslushed non-wood fibers will likely be stiffer (versus like fibers that were never-dried) due to hornification.

 Another benefit of using once-dried fibers instead of never-dried fibers is that once-dried fibers bond less during the paper-making process and are thus less connected, which results in a
30 softer sanitary tissue product, which allows the sanitary tissue product to be more cloth-like and more desirable. For instance, once-dried fibers of the present disclosure may have a breaking length of less than about 2700 m, less than about 2000 m, less than about 1700 m, less than about 1600 m, less than about 1400 m, less than about 1250 m, less than about 1100 m, less than about

900 m, less than about 750 m, or less than about 450 m, while never-dried fibers tend to have higher breaking lengths, such as greater than about 2700 m, greater than about 2800 m, greater than about 3000 m, greater than about 3200 m, or greater than about 3500 m, specifically reciting all 1 m increments within the above-recited ranges of this paragraph and all ranges formed
5 therein or thereby.

Further, once-dried fibers of the present disclosure may have a breaking length ratio (which is the breaking length (m) according to the Breaking Length Test Method divided by the length weighted fiber length (microns) according to the Fiber Length, Width, Coarseness, and Fiber Count Test Method) of less than about 3.25 m/micron, less than about 2.7 m/micron, less
10 than about 2.5 m/micron, less than about 2.0 m/micron, less than about 1.8 m/micron, less than about 1.6 m/micron, less than about 1.5 m/micron, less than about 1.0 m/micron, less than about 0.6 m/micron, or less than about 0.5 m/micron, while never-dried fibers tend to have higher breaking length ratios, such as greater than about 3.0 m/micron, greater than about 3.5 m/micron, greater than about 4.0 m/micron, greater than about 5.0 m/micron, or greater than about 6.0
15 m/micron, specifically reciting all 0.1 m/micron increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

In light of the paragraphs of this Section (Once-dried Non-wood Fibers), a desirable process for making sanitary tissue products of the present disclosure may comprise: re-slushing pulp comprising non-wood fibers prior to sending the pulp to a headbox; forming a web
20 comprising the non-wood fibers; creating zones of differential densities in the web; and creping the web. The once-dried non-wood pulp may be introduced into a repulping unit prior to the step of re-slushing the pulp. The once-dried non-wood pulp comprises non-wood fibers having a water content of less than about 10%, 20%, or 40%. The once-dried non-wood pulp may be in the form of a bale, a sheet, or a block. The non-wood fibers may be selected from the group
25 consisting of bamboo, abaca, and mixtures thereof. The web may be treated with permanent or temporary wet strength. This process of making sanitary tissue products of the present disclosure may further include harvesting non-wood fibers and pulping the non-wood fibers and drying the non-wood fibers. The non-wood fibers may be dried (using, for example a pulp drier (e.g., from Andritz, Valmet, etc.)) at a facility other than a destination paper-making facility (i.e., where the
30 pulp will be used to make the sanitary tissue products, including paper towels, toilet tissue, and/or facial tissue. The dried non-wood fibers may then be shipped to a destination paper-making facility. The shipping distance may be greater than: about 25, about 50, about 75, about 100, about 200, about 500, about 1,000 miles to reach the destination paper-making facility. In

some instances, the dried non-wood fibers may be shipped as far as from Asia (e.g., China) to North America (e.g., US).

STRUCTURES OF THE PRESENT DISCLOSURE

5 “Fiber” as used herein means an elongate physical structure having an apparent length greatly exceeding its apparent diameter, i.e., a length to diameter ratio of at least about 10. Fibers having a non-circular cross-section and/or tubular shape are common; the “diameter” in this case may be considered to be the diameter of a circle having cross-sectional area equal to the cross-sectional area of the fiber. More specifically, as used herein, “fiber” refers to fibrous structure-
10 making fibers. The present disclosure contemplates the use of a variety of fibrous structure-making fibers, such as, for example, naturally-occurring fibers (wood and non-wood), synthetic (human-made) fibers, and/or any other suitable fibers, and any combination thereof.

 “Fibrous structure” as used herein means a structure that comprises a plurality of fibers. In one example, a fibrous structure according to the present disclosure means an orderly arrangement
15 of fibers within a structure in order to perform a function. A bag of loose fibers is not a fibrous structure in accordance with the present disclosure. The terms “web,” “fibrous web,” “embryonic web,” and “embryonic fibrous web” are used to describe the web that is in the process of becoming the fibrous structure. Further, fibrous structures may be rolled, interleaved, perforated, and/or packaged to form final product(s), such as a sanitary tissue product.

20 “Non-woven fibrous structure” as used herein means a fibrous structure wherein fibers forming the fibrous structure are not orderly arranged by weaving and/or knitting the fibers together. In other words, non-woven fibrous structures do not include textiles, garments, and/or apparel. The non-woven fibrous structures of the present disclosure are disposable (i.e., typically thrown away after one or two uses—unlike clothes, rags, cloths, etc.).

25 “Ply” or “Plies” as used herein means an individual fibrous structure optionally to be disposed in a substantially contiguous, face-to-face relationship with other plies, forming a multiple ply fibrous structure. It is also contemplated that a single fibrous structure can effectively form two “plies” or multiple “plies”, for example, by being folded on itself. A ply may comprise multiple layers. Multiple plies may, for example be formed as follows: fibrous structure of the
30 present disclosure may be combined with one or more additional fibrous structures, which is the same or different from the fibrous structures of the present disclosure to form a multi-ply sanitary tissue product; said additional fibrous structure may be combined with the fibrous structure of the present disclosure by any suitable means.

“Sanitary tissue product” as used herein means a soft, low density (i.e., $\leq$ about 0.25 g/cm^3) fibrous structure useful as a wiping implement for post-urinary and post-bowel movement cleaning (toilet tissue), for otorhinolaryngological discharges (facial tissue), and multi-functional absorbent and cleaning uses (absorbent towels and napkins). The sanitary tissue product may be convolutedly wound upon itself about a core or without a core to form a roll of sanitary tissue product. Further, the fibrous structure making up the sanitary tissue product may be perforated to form interconnected sheets. Sanitary tissue products may consist of fibers having an average length of less than about 1 inch; further sanitary tissue products may not comprise any fibers (or filaments) having a length greater than 1 inch. Sanitary tissue products may be formed according to a wet-laid process as illustrated in FIGS. 6A-C.

“Clothlike” as used herein relates to the feel of the non-woven fibrous structure to a consumer, the appearance of the non-woven fibrous structure to a consumer, and/or the performance (e.g., absorbency, strength, durability, etc.) of the non-woven fibrous structure during use by a consumer.

“Lint” as used herein means any material that originated from a fibrous structure according to the present disclosure that remains on a surface after which the fibrous structure and/or sanitary tissue product has come into contact. The lint value of a fibrous structure and/or sanitary tissue product comprising such fibrous structure is determined according to the Lint Test Method described herein.

“Differential density,” as used herein, means a fibrous structure and/or sanitary tissue product that comprises one or more regions of relatively low fiber density, which are referred to as pillow regions, and one or more regions of relatively high fiber density, which are referred to as knuckle regions. In one example, a fibrous structure of the present disclosure comprises a surface comprising a surface pattern comprising a continuous knuckle region and a plurality of discrete pillow regions that exhibit different densities, for example, one or more of the discrete pillow regions may exhibit a density that is different (e.g., 30% different) than the density of the continuous knuckle region.

“Densified,” as used herein means a portion of a fibrous structure and/or sanitary tissue product that is characterized by regions of relatively high fiber density (knuckle regions).

“Non-densified,” as used herein, means a portion of a fibrous structure and/or sanitary tissue product that exhibits a lesser density (one or more regions of relatively lower fiber density) (pillow regions) than another portion (for example a knuckle region) of the fibrous structure and/or sanitary tissue product.

“Dry fibrous structure” as used herein means that the fibrous structure exhibits a water content (% moisture) of less than 20% and/or less than 15% and/or less than 10% and/or less than 7% and/or less than 5% and/or less than 3% and/or less than 1% to 0% and or to greater than 0%. Water content (% moisture) of a fibrous structure is measured using an Ohaus MB45 moisture
5 balance, or an equivalent instrument, set to a drying temperature of 130°C, with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time). Dry fibrous structures of the present disclosure may exhibit a water content (% moisture) of from about 0.0001% to about 20% and/or from about 0.001% to about 15% and/or from about 0.001% to about 12% and/or from about 0.001% to about 10% and/or from about 0.001% to about 7% and/or from
10 about 0.001% to about 5%, by weight of the dry fibrous structure.

“Stacked product(s)” as used herein include fibrous structures, paper, and sanitary tissue products that are in the form of a web and cut into distinct separate sheets, where the sheets are folded (e.g., z-folded or c-folded) and may be interleaved with each other, such that a trailing edge of one is connected with a leading edge of another. Common examples of stacks of folded and/or
15 interleaved sheets include facial tissues and napkins.

“Percent (%) difference,” “X% difference,” or “X% different” is calculated by: subtracting the lower value (e.g., common intensive property value) from the higher value (e.g., common intensive property value) and then dividing that value by the average of the lower and higher values, and then multiplying the result by 100.

20 “Within X%” or “within X percent” is calculated by the following non-limiting example: If first and second sanitary tissue products have a common intensive property (e.g., lint), and if a second lint value of the second sanitary tissue product is 10, then “within 25%” of the second lint value is calculated as follows for this example: multiplying 10 (the second lint value) by 25%, which equals 2.5, and then adding 2.5 to 10 (the second lint value) and subtracting 2.5 from 10 (the
25 second lint value) to get a range, so that “within 25%” of the second lint value for this example means a lint value of or between 12.5 and 7.5). The absolute value of “X% change” can be used to determine if “within X%” is satisfied; for example can also be determined by using the absolute For example, if “X% change” is -25%, then a “within 25%” is satisfied, but if “X% change” is -25%, a “within 20%” is not satisfied.

30 “Percent (%) change,” “X% change,” or “X% change” is calculated by: subtracting the reference value (e.g., common intensive property value of a sustainable sanitary tissue product) from the comparative value (e.g., common intensive property value of a sanitary tissue product) and then dividing by the reference value, and then multiplying the result by 100. For example, if a

reference value is 18 (e.g., a basis weight of a sustainable sanitary tissue product) and the comparative value is 31 (e.g., a basis weight of a soft sanitary tissue product), then 18 should be subtracted from 31, which equals 13, which should be divided by 18, which equals 0.722, which should be multiplied by 100, which equals 72.2% change.

5 Fibrous structures of the present disclosure may be used to make sanitary tissue products, including paper towels, bath tissues, napkins, and facial tissues. The fibrous structures can be single-ply or multi-ply and may comprise cellulosic pulp fibers.

 Fibrous structures of the present disclosure may be selected from the group consisting of: through-air-dried fibrous structures, differential density fibrous structures, differential basis weight
10 fibrous structures, wet laid fibrous structures, air laid fibrous structures, conventional dried fibrous structures, creped or uncreped fibrous structures, patterned-densified or non-patterned-densified fibrous structures, compacted or uncompacted, especially high bulk uncompacted, fibrous structures, other nonwoven fibrous structures comprising synthetic or multicomponent fibers, homogeneous or multilayered fibrous structures, double re-creped fibrous structures, uncreped
15 fibrous structures, co-form fibrous structures and combinations thereof.

 As shown in FIGS. 3A-3C, fibrous structures and/or sanitary tissue products of the present disclosure may comprise a surface that comprises undulations (e.g., knuckles 20 and pillows 22) and/or embossments (e.g., 32, 34). FIGS. 16A and 16B illustrate embossments 32 (where each line and dot illustrated in FIGS. 16A and 16B is an embossment) that may be desirable for use with
20 fibrous structures 10 of the present disclosure.

 Fibrous structures of the present disclosure may be air laid and may be selected from the group consisting of thermal bonded air laid (TBAL) fibrous structures, latex bonded air laid (LBAL) fibrous structures and mixed bonded air laid (MBAL) fibrous structures.

 Fibrous structures of the present disclosure may exhibit a substantially uniform density or
25 may exhibit differential density regions; in other words, regions of high density compared to other regions within the patterned fibrous structure. Typically, when a fibrous structure is not pressed against a cylindrical dryer, such as a Yankee dryer, while the fibrous structure is still wet and supported by a through-air-drying fabric or by another fabric or when an air laid fibrous structure is not spot bonded, the fibrous structure typically exhibits a substantially uniform density.
30 Differential density regions may contribute to the softness of the fibrous structures of the present disclosure (especially when compared to conventional wet press). As a particular example, the fibrous structures of the present disclosure may comprise knuckles and pillows, which can contribute to softness. Softness may be further enhanced when pillows are disposed on a consumer-

facing surface of the fibrous structure, such as a consumer-facing surface of a sanitary tissue product.

As shown in FIGS. 4A, C, and E, fibrous structures of the present disclosure may comprise knuckles 20 and pillows 22, which is one way of achieving differential density. FIG. 5 shows a portion of the pattern on the mask 14 used to make a papermaking belt (not particularly shown, but of the type shown in FIG. 17) that is capable of making the sanitary tissue 12 shown in FIG. 3A. The sanitary tissue 12 of FIG. 3A exhibits a pattern of knuckles 20 and pillows 22 that were formed by discrete cured resin knuckles 20 on a papermaking belt, and which correspond to the white areas, *i.e.*, the cells 24, of the mask 14 shown in FIG. 5.

As depicted in the exemplary fibrous structure shown in FIG. 3A, and more clearly depicted through the masks shown in FIG. 5, the fibrous structures of the present disclosure may have a pattern of discrete knuckles and a continuous/substantially continuous pillow region. However, in other examples the fibrous structures may also have a pattern of discrete pillows and a continuous/substantially continuous knuckle regions.

As shown in FIGS. 4A-F, the fibrous structure may have first and second consumer-facing sides 50. It may be desirable that pillow regions face outwardly, indicated by directional arrow 51, such that the user of the fibrous structure feels the pillows with their skin. It should be understood, that depending on the type of process used to make the fibrous structure, for multi-ply fibrous structures, the consumer-facing side may be the either fabric-side-out (“FSO”) or wire-side-out (WSO). For typical TAD, such as illustrated in FIG. 6A, “fabric side” means the side that touches the TAD fabric (164) and “wire side” means the side that touches the forming wire/forming fabric (154); for UCTAD, such as illustrated in FIG. 6B, “sides” are determined in the TAD section, where the “fabric” side touches the TAD fabric (164) and the “air” side does not. For a process like the one illustrated by FIG. 6A, the relevance of whether the consumer-facing side of the fibrous structure is wire side (WSO) or is fabric side (FSO) is whether a flatter surface (non-pillow-facing-outward surface) is desired, or whether a pillow-facing-outward surface is desired. When pillows face outwardly, TS7 values decrease (versus when knuckles are on the consumer-facing surface).

The fibrous structures of the present disclosure may be pattern densified. A pattern densified fibrous structure is characterized by having a relatively high-bulk field of relatively low fiber density and an array of densified zones (regions) of relatively high fiber density. The high-bulk field is alternatively characterized as a field of pillow zones (regions). The densified zones (regions) are alternatively referred to as knuckle zones (regions). The densified zones (regions)

may be discretely spaced within the high-bulk field or may be interconnected, either fully or partially, within the high-bulk field.

The fibrous structures of the present disclosure may be uncompacted, non-pattern-densified. The fibrous structure may be of a homogenous or multi-layered construction. The fibrous structure may be made with a fibrous furnish that produces a single layer embryonic fibrous web or a fibrous furnish that produces a multi-layer embryonic fibrous web.

The fibrous structures of the present disclosure may comprise any suitable ingredients known in the art. Nonlimiting examples of suitable ingredients that may be included in the fibrous structures include permanent and/or temporary wet strength resins, dry strength resins (e.g., Carboxy Methyl Cellulose (CMC)), softening agents, wetting agents, lint resisting agents, absorbency-enhancing agents, immobilizing agents, especially in combination with emollient lotion compositions, antiviral agents including organic acids, antibacterial agents, polyol polyesters, antimigration agents, polyhydroxy plasticizers, opacifying agents, bonding agents, debonding agents, colorants, and mixtures thereof. Such ingredients, when present in the fibrous structure of the present disclosure, may be present at any level based on the dry weight of the fibrous structure. Such ingredients, when present, may be present at a level of from about 0.001 to about 50%, and/or from about 0.001 to about 20%, and/or from about 0.01 to about 5%, and/or from about 0.03 to about 3%, and/or from about 0.1 to about 1.0% by weight, on a dry fibrous structure basis. It may be desirable to use one or a combination of said suitable ingredients on a fibrous structure comprising non-wood fibers, such as, for example, certain lotion(s) on a fibrous structures comprising bamboo, where the lotion improves softness or at least improves the perception of softness and may further decrease lint.

Non-wood Fibers

As used herein the term “non-wood fiber(s)” or “non-wood content” means naturally-occurring fibers derived from non-wood plants, including animal fibers, mineral fibers, plant fibers and mixtures thereof, and specifically excluding non-naturally-occurring fibers (e.g., synthetic fibers). Animal fibers may, for example, be selected from the group consisting of: wool, silk and other naturally-occurring protein fibers and mixtures thereof. The plant fibers may, for example, be obtained directly from a plant. Nonlimiting examples of suitable plants include cotton, cotton linters, flax, sisal, abaca, hemp, hesperaloe, jute, bamboo, bagasse, kudzu, corn, sorghum, gourd, agave, loofah, trichomes, seed-hairs, wheat, and mixtures thereof.

Non-wood fibers of the present disclosure may be derived from one or more non-wood plants of the family Asparagaceae. Suitable non-wood plants may include, but are limited to, one or more plants of the genus *Agave* such as *A. tequilana*, *A. sisalana* and *A. fourcroyde*, and one or more plants of the genus *Hesperaloe* such as *H. funifera*, *H. parviflora*, *H. nocturna*, *H.*

5 *Changi*, *H. tenuifolia*, *H. engelmannii*, and *H. malacophylla*. Further, the non-wood fibers of the present disclosure may be prepared from one or more plants of the of the genus *Hesperaloe* such as *H. funifera*, *H. parviflora*, *H. nocturna*, *H. changii*, *H. tenuifolia*, *H. engelmannii*, and *H. malacophylla*.

As used herein the term “wood fiber(s)” or “wood content” means fibers derived from both
10 deciduous trees (hereinafter, also referred to as “hardwood”) and coniferous trees (hereinafter, also referred to as “softwood”) may be utilized. Wood fibers may be short (typical of hardwood fibers) or long (typical of softwood fibers). Nonlimiting examples of short fibers include fibers derived from a fiber source selected from the group consisting of *Acacia*, *Eucalyptus*, *Maple*, *Oak*, *Aspen*, *Birch*, *Cottonwood*, *Alder*, *Ash*, *Cherry*, *Elm*, *Hickory*, *Poplar*, *Gum*, *Walnut*, *Locust*, *Sycamore*,
15 *Beech*, *Catalpa*, *Sassafras*, *Gmelina*, *Albizia*, *Anthocephalus*, and *Magnolia*. Nonlimiting examples of long fibers include fibers derived from *Pine*, *Spruce*, *Fir*, *Tamarack*, *Hemlock*, *Cypress*, and *Cedar*.

As used herein the term “synthetic fiber(s)” or “synthetic content” means fibers human-made fibers, and specifically excludes “wood fibers” and “non-wood fibers.” Synthetic fibers can
20 be used, in combination with non-wood fibers (e.g., bamboo) in the fibrous structures of the present disclosure. Synthetic fibers may be polymeric fibers. Synthetic fibers may comprise elastomeric polymers, polypropylene, polyethylene, polyester, polyolefin, polyvinyl alcohol and nylon, which are obtained from petroleum sources. Additionally, synthetic fibers may be polymeric fibers comprising natural polymers, which are obtained from natural sources, such as starch sources,
25 protein sources and/or cellulose sources may be used in the fibrous structures of the present disclosure. The synthetic fibers may be produced by any suitable methods known in the art.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about
30 30%, about 35% about 40%, about 50%, about 75%, about 80%, or about 100% non-wood content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 55% to about 95%, from about 65% to about 85%, from about 60% to about 80%, from about

70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% non-wood content (e.g., bamboo, abaca, hemp, etc.), specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

5

Bamboo

Generally, the “bamboo,” “bamboo fibers,” “bamboo content,” or “bamboo fiber content” incorporated into fibrous structure(s) of the present disclosure are fibrous materials derived from any bamboo species. More particularly, the bamboo fiber species may be selected from the group consisting of: *Acidosasa* sp., *Ampleocalamus* sp., *Arundinaria* sp., *Bambusa* sp., *Bashania* sp., *Borinda* sp., *Brachystachyum* sp., *Cephalostachyum* sp., *Chimonobambusa* sp., *Chusquea* sp., *Dendrocalamus* sp., *Dinochloa* sp., *Drepanostachyum* sp., *Eremitis* sp., *Fargesia* sp., *Gaoligongshania* sp., *Gelidocalamus* sp., *Gigantocloa* sp., *Guadua* sp., *Hibanobambusa* sp., *Himalayacalamus* sp., *Indocalamus* sp., *Indosasa* sp., *Luthachne* sp., *Melocanna* sp., *Menstruocalamus* sp., *Nastus* sp., *Neohouzeaua* sp., *Neomicrocalamus* sp., *Ochlandra* sp., *Oligostachyum* sp., *Olmea* sp., *Oatea* sp., *Oxytenanthera* sp., *Phyllostachys* sp., *Pleiblastus* sp., *Pseudosasa* sp., *Raddia* sp., *Rhipidocladum* sp., *Sasa* sp., *Sasaella* sp., *Sasamorpha* sp., *Schizostachyum* sp., *Semiarundinaria* sp., *Shibatea* sp., *Sinobambusa* sp., *Thamnocalamus* sp., *Thyrsostachys* sp., *Yushania* sp. and mixtures thereof.

The bamboo fibers may be from temperate bamboos of the *Phyllostachys* species, for example *Phyllostachys heterocycla pubescens*, also known as Moso Bamboo. However, it is to be understood that the compositions disclosed herein, unless otherwise stated, are not limited to containing any one bamboo fiber and may comprise a plurality of fibers of different species. For example, the composition may comprise a bamboo from a *Phyllostachys heterocycla pubescens* and a bamboo from a different species such as, for example, *Phyllostachys bambusoides*.

Bamboo fibers for use in the webs, fibrous structures, and products of the present disclosure may be produced by any appropriate methods known in the art. The bamboo fibers may be pulped bamboo fibers, produced by chemical processing of crushed bamboo stalk. The chemical processing may comprise treating the crushed bamboo stalk with an appropriate alkaline solution. The skilled artisan will be capable of selecting an appropriate alkaline solution. Bamboo fiber may also be produced by mechanical processing of crushed bamboo stalk, which may involve enzymatic digestion of the crushed bamboo stalk. Although bamboo fiber may be produced by any appropriate

methods known in the art, a desirable method for manufacturing the bamboo pulp may be as a chemical pulping method such as, but not limited to, kraft, sulfite or soda/AQ pulping techniques.

Bamboo fibers of the present disclosure may be bamboo pulp fibers and may have an average fiber length of at least about 0.8 mm. When blends of fibers from various bamboo species are employed, it is noted that blends may comprise two or more species of bamboo, or may comprise three or more species of bamboo, such that the average fiber length is at least about 1.1 mm, at least about 1.5 mm, or from about 1.1 to about 2 mm. Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 35%, about 40%, about 50%, about 75%, about 80%, or about 100% bamboo content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% bamboo content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Bamboo fibers may be more desirable to use than other non-wood fibers, such as various straws (e.g., wheat straw) for multiple reasons, one being that bamboo fibers are generally longer than straw fibers, which results in fibrous structures comprising bamboo fibers being stronger (without using strength enhancing chemistry or process manipulations) than like fibrous structures comprising shorter straw fibers.

Abaca

Generally, the “abaca,” “abaca fibers,” “abaca content,” or “abaca fiber content” incorporated into fibrous structure(s) of the present disclosure are fibrous materials derived from *Musa textilis* (a species of banana native to the Philippines). Abaca may also be referred to as Manilla hemp, Cebu hemp, Davao hemp, Banana hemp or Musa hemp and can be used to derive abaca cellulose fibers.

Abaca may have a fiber coarseness of greater than 16 mg/100 m (or less than 20 mg/100 m) and a fiber length of 2.5 mm, 2.6 mm, 2.7 mm, 2.8 mm or more. Beyond abaca, sunn hemp, kenaf, and sisal hemp may have these characteristics.

Abaca comprises characteristics that can make it challenging (especially at higher incorporation levels) for incorporating into sanitary tissue products of the present invention as it is better known for being used to produce thin, strong, and porous paper capable of withstanding hard use.

5 Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30%
10 to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% abaca content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

15 Abaca fibers may be more desirable to use than other non-wood fibers, such as various straws (e.g., wheat straw) for multiple reasons, one being that abaca fibers are generally longer than straw fibers, which results in fibrous structures comprising abaca fibers being stronger (without using strength enhancing chemistry or process manipulations) than like fibrous structures comprising shorter straw fibers. Further, abaca's length, width, and coarseness make it a more
20 suitable softwood replacement, its higher fibrillation increases specific surface area of the fiber and its carboxyl groups make it better for attaching strength chemistries.

Hemp

 Generally, the "hemp," "hemp fibers," "hemp content," or "hemp fiber content"
25 incorporated into fibrous structure(s) of the present disclosure may be made up of hemp cellulose fibers derived from the plants cannabis sativa or cannabis sativa indica. The hemp cellulose fibers may be processed to a particulate fiber pulp.

Hemp cellulose fibers may be derived from one or more of the plant sources cannabis, cannabis sativa, cannabis sativa indica, Agave Sisalana (i.e., Sisal hemp).

30 Cannabis is a genus of flowering plants that includes three different species, Cannabis sativa, Cannabis indica, and Cannabis ruderalis. The cannabis stalk (or stem) consists of an open cavity surrounded by an inner layer of core fiber, often referred to as hurd, and an outer layer referred to as the bast. Bast fibers are roughly 20% of the stalk mass and the hurd 80% of the

mass. Cannabis bast fibers have a large range in length and diameter, but on average are very long with medium coarseness; suitable for making textiles, paper, and nonwovens. The hurd consists of very short, bulky fibers, typically 0.2-0.65 mm in length.

5 Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to
10 about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% hemp content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

15 Bagasse

 Generally, the “bagasse,” “bagasse fibers,” “bagasse content,” or “bagasse fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of “sugar cane bagasse” - the dry pulpy residue left after the extraction of juice from sugar cane or sorghum stalks to extract their juice. Agave bagasse is similar, but is the material remnants after extracting
20 blue agave sap.

 Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about
25 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% bagasse content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all
30 ranges formed therein or thereby.

Flax

Generally, the “flax,” “flax fibers,” “flax content,” or “flax fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of *Linum usitatissimum*, in the family Linaceae. Flax fiber is extracted from the bast beneath the surface of the stem of the flax plant.

5 Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30%
10 to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% flax content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

15

Cotton

Generally, the “cotton,” “cotton fibers,” “cotton content,” or “cotton fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of cotton linters, which are fine, silky fibers that adhere to the seeds of the cotton plant after ginning. These curly
20 fibers typically are less than 1/8 inch (3.2 mm) long. The term also may apply to the longer textile fiber staple lint, as well as the shorter fuzzy fibers from some upland species.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about
25 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% cotton content,
30 specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Morphology

Because non-wood fibers can have high coarseness, they may have poor surface feel and might not mold very well, thus may not have desirable caliper and bulk. Part of this dynamic is that certain non-woods, like bamboo, for instance, is often wider than the wood fibers it is used to replace. Further, bamboo also has a smaller lumen and thicker cell wall versus woods of same fiber width (i.e., a higher Runkel Ratio (i.e., ratio of twice the cell wall thickness to the diameter of the lumen), even greater than 1.0), so non-wood (e.g., bamboo) fibers can behave more stiffly, especially when using wood fiber knowledge. For these reasons, it may be desirable to spread apart knuckles and/or increase molding forces (pick-up shoe (molding vacuum)) and/or increase speed differential at transfer. With these differences, if nothing is done (i.e., if no adjustments are made for incorporating non-woods), caliper drops, and/or roll bulk drops, and/or the sheet is less compressible, and/or the sheet get stiffer (in-plane and/or bending).

Layers

As shown in FIGS. 4A-4F, and as described in Table A, a ply of fibrous structures of the present disclosure may be homogeneous or may be layered. If layered, a ply of the fibrous structures may comprise at least two, at least three, least four, and/or at least five layers. The fibrous structures may comprise a single ply, or two, three plies, four, or five plies.

As used herein, the term “layer” means a plurality of strata of fibers, chemical treatments, or the like, within a ply. As used herein, the terms “layered,” “multi-layered,” and the like, refer to fibrous sheets prepared from two or more layers of aqueous papermaking furnish which may be comprised of different fiber types. The layers may be formed from the deposition of separate streams of dilute fiber slurries, upon one or more endless foraminous screens. If the individual layers are initially formed on separate foraminous screens, the layers may be subsequently combined (while wet) to form a layered composite web. Naturally-occurring (e.g., wood and certain non-woods) and/or non-naturally (e.g., synthetic) occurring fibers can also be present in the fibrous structures, as will be disclosed in greater detail below. FIG. 4A illustrates a first ply 53 and a second ply 53 of a fibrous structure 10. Each of the plies may comprise 2 layers 55. The plies may be joined together 57 via adhesive, an emboss, or the like. The pillows 22 may face outwardly 51 toward the consumer-facing side 50 of the fibrous structure 10. Knuckles 20 may face inwardly toward the product-facing side 52 of the fibrous structure 10, which is more commonly associated with process and equipment such as disclosed in FIG. 6A. As illustrated in FIG. 4A, both plies 53 are FSO. FIG. 4B is similar to FIG. 4A, except that the fibrous structure 10 does not have distinct

knuckle 20 and pillow 22 regions or zones, which is more commonly associated with process and equipment such as disclosed in FIGS. 6A and 6B. FIGS. 4B and 4C are much like FIGS. 4A and 4B, respectively, except that each ply comprises 3 layers 55. FIG. 4E illustrates a single ply comprising 3 layers and is representative of a fibrous structure resulting from process and equipment such as disclosed in FIGS. 6B and 6C; as such, the fibrous structure 10 does not have distinct knuckle 20 and pillow 22 regions or zones. FIG. 4F is like FIG. 4A, except that it comprises 3 plies and, ply 53''' is FSO and has outwardly-facing 51 pillows 22, while ply 53 is WSO and has outwardly-facing 51 knuckles. FIG. 4F may, alternatively, have both plies 53 and 53''' FSO or both plies WSO; and both plies 53 and 53''' may have outwardly-facing 51 pillows 22 or both plies may have outwardly-facing 51 knuckles 20 - these FSO/WSO alternatives and pillow/knuckle alternatives are also true for FIG. 4A and 4C.

It may be desirable to dispose the highest fiber count (million fibers/g) in a most consumer-facing layer of a ply comprising non-wood fibers. A higher fiber count (versus other layer(s) in a ply) may be done in combination with outwardly facing pillows of a consumer-facing side of a fibrous structure of a sanitary tissue product. The outwardly-facing pillow region of a layer (e.g., 55a) may comprise a higher fiber count than an adjacent region of an adjacent layer (e.g., 55b). Further, a pillow may have a greater basis weight than an adjacent knuckle. Alternatively, a knuckle may have a greater basis weight than an adjacent pillow.

20 PROPERTIES OF FIBROUS STRUCTURE(S)

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure(s) as disclosed herein, particularly including various inventive non-wood inclusions, even including greater than 80% non-woods by weight of the fibrous structure, and even including 100% non-woods by weight of the fibrous structure, may have one or a combination of the following properties: a VFS of greater than about 5.5 g/g, greater than about 6.0 g/g, greater than about 7.0 g/g, from about 3 g/g to about 20 g/g, from about 4 g/g to about 18 g/g, from about 5 g/g to about 16 g/g, from about 6 g/g to about 14 g/g, from about 8 g/g to about 12 g/g, or from about 5 g/g to about 6 g/g, specifically reciting all increments of 0.01 g/g within the above-recited ranges and all ranges formed therein or thereby;

an HFS of greater than about 13 g/g, or greater than about 14 g/g, or greater than about 15 g/g, or greater than about 16 g/g, or greater than about 16.5 g/g, or greater than about 17 g/g, or greater than about 17.5 g/g, or greater than about 18 g/g, or greater than about 18.5 g/g or greater

than about 19 g/g, or greater than about 20 g/g, or greater than about 21 g/g, or from about 4 g/g to about 30 g/g, from about 6 g/g to about 28 g/g, from about 8 g/g to about 26 g/g, from about 10 g/g to about 24 g/g, from about 12 g/g to about 22 g/g, from about 13 g/g to about 20, from about 14 g/g to about 18 g/g, from about 13 g/g to about 15 g/g, or from about 13 g/g to about 14 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a stack compressibility of greater than about 40 mils/(log(g/in²)), greater than about 41 mils/(log(g/in²)), greater than about 45 mils/(log(g/in²)), greater than about 50 mils/(log(g/in²)), from about 25 mils/(log(g/in²)) to about 100 mils/(log(g/in²)), from about 30 mils/(log(g/in²)) to about 75 mils/(log(g/in²)), from about 40 mils/(log(g/in²)) to about 50 mils/(log(g/in²)), from about 41 mils/(log(g/in²)) to about 48, or from about mils/(log(g/in²)) to about 48 mils/(log(g/in²)), specifically reciting all increments of 0.1 mils/(log(g/in²)) within the above-recited ranges and all ranges formed therein or thereby;

an MD wet peak elongation of greater than about 18%, greater than about 20%, from about 10% to about 30%, from about 14% to about 25%, from about 18% to about 22%, or from about 18% to about 20%, specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed therein or thereby;

a CD wet peak elongation of greater than about 12%, from about 5% to about 30%, from about 10% to about 25%, from about 12% to about 20%, or from about 12% to about 15%, specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed therein or thereby;

an MD wet peak TEA of greater than about 21 g*in/in², greater than about 22 g*in/in², from about 15 g*in/in² to about 50 g*in/in², from about 20 g*in/in² to about 40 g*in/in², from about 21 g*in/in² to about 30 g*in/in², or from about 21 g*in/in² to about 25 g*in/in², specifically reciting all increments of 1 g*in/in² within the above-recited ranges and all ranges formed therein or thereby;

a CD wet peak TEA of greater than about 7 g*in/in², from about 6 g*in/in² to about 40 g*in/in², from about 6.5 g*in/in² to about 30 g*in/in², from about 7 g*in/in² to about 20 g*in/in², or from about 7.5 g*in/in² to about 15 g*in/in², or from about 8 g*in/in² to about 12 g*in/in², specifically reciting all increments of 0.5 g*in/in² within the above-recited ranges and all ranges formed therein or thereby;

a CD elongation (dry) of greater than about 5%, of greater than about 8%, of greater than about 12%, of greater than about 13.5%, or from about 5% to about 25%, from about 10% to about

20%, from about 12 % to about 18%, from about 13% to about 17%, or from about 14% to about 16%, specifically reciting all increments of 0.5% within the above-recited ranges and all ranges formed therein or thereby;

5 a CD TEA of greater than about 35 in-g/in², of greater than about 32 in-g/in², or from about 5 in-g/in² to about 100 in-g/in², from about 15 in-g/in² to about 75 in-g/in², from about 25 in-g/in² to about 50 in-g/in², from about 32 in-g/in² to about 45 in-g/in², from about 33 in-g/in² to about 40 in-g/in², from about 34 in-g/in² to about 38 in-g/in², specifically reciting all increments of 1 in-g/in² within the above-recited ranges and all ranges formed therein or thereby;

a dry CD tensile modulus / dry CD tensile peak load (derived from the appropriate of: 1) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper, 2) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels, or 3) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue) less than about 5.0 g/g, less than about 4.5 g/g, less than about 4.0 g/g, less than about 3.5 g/g, less than about 3.0 g/g, from about 5.0 g/g to about 2.5 g/g, from about 4.0 g/g to about 2.0 g/g, or from about 3.5 g/g to about 1.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a wet CD tensile modulus / wet CD tensile peak load less than about 5.0 g/g, less than about 4.5 g/g, less than about 4.25 g/g, less than about 4.0 g/g, less than about 3.75 g/g, less than about 3.5 g/g, less than about 3.25 g/g, less than about 3.0 g/g, less than about 2.5 g/g, less than about 2 g/g, from about 5.0 g/g to about 2.5 g/g, from about 4.0 g/g to about 2.0 g/g, or from about 3.5 g/g to about 1.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

10 a CD modulus (dry) of less than about 2000 g/cm, of less than about 2400 g/cm, of less than about 2500 g/cm, of less than about 3270 g/cm, or from about 200 g/cm to about 5000 g/cm, or from about 1000 g/cm to about 4500 g/cm, or from about 2000 g/cm to about 4000 g/cm, or from about 3000 g/cm to about 4000 g/cm, or from about 3270 g/cm to about 3800 g/cm, or from about 3300 g/cm to about 3700 g/cm, or from about 3350 g/cm to about 3600 g/cm, or from about 3400 g/cm to about 3500 g/cm, specifically reciting all increments of 1 g/cm within the above-recited ranges and all ranges formed therein or thereby;

15 an MD modulus (dry) of less than about 3360 g/cm, or less than about 1750 g/cm or from about 500 g/cm to about 6000 g/cm, or from about 1000 g/cm to about 5000 g/cm, or from about 2000 g/cm to about 4000 g/cm, or from about 3000 g/cm to about 4000 g/cm, or from about 3360 g/cm to about 3800 g/cm, or from about 3400 g/cm to about 3700 g/cm, or from about 3450 g/cm

to about 3600 g/cm, or from about 3500 g/cm to about 3600 g/cm, specifically reciting all increments of 1 g/cm within the above-recited ranges and all ranges formed therein or thereby;

a TS7 of less than about 40.00 dB V² rms, or less than about 30.00 dB V² rms, or less than about 22.00 dB V² rms, or less than about 20.00 dB V² rms, or less than about 24.00 dB V² rms, or less than about 15.00 dB V² rms, or less than about 14.00 dB V² rms, or less than about 10.00 dB V² rms, or less than about 8.00 dB V² rms, or greater than about 5.00 dB V² rms, or between about 3.00 dB V² rms and about 40.00 dB V² rms (“between about ‘X’ and about ‘X’” is used interchangeably with “from about ‘X’ to about ‘X’”), or between about 3.00 dB V² rms and about 20.00 dB V² rms, or between about 4.00 dB V² rms and about 30 dB V² rms, or between about 15.00 dB V² rms and about 30.00 dB V² rms, or between about 5.00 dB V² rms and about 20.00 dB V² rms, or between about 6.00 dB V² rms and about 14 dB V² rms, or between about 7.00 dB V² rms and about 12.00 dB V² rms, or between about 8.00 dB V² rms and about 11.50 dB V² rms, or between about 9.0 dB V² rms and about 11.00 dB V² rms, or between about 9.50 dB V² rms and about 10.50 dB V² rms, between about 9.50 dB V² rms and about 10.00 dB V² rms, between about 15 dB V² rms and about 17 dB V² rms, or between about 15 dB V² rms and about 16 dB V² rms, specifically reciting all increments of 0.01 dB V² rms within the above-recited ranges and all ranges formed therein or thereby;

a compressive slope of less than about 14.0 mil/g, or less than about 3.0 mil/g, or less than about 4.0 mil/g, or less than about 5.0 mil/g, or less than about 6.0 mil/g, or less than about 7.0 mil/g, or less than about 8.0 mil/g, or less than about 9.0 mil/g, or greater than about 12.0 mil/g, or greater than about 11.0 mil/g, or greater than about 12.0 mil/g, or between about 4.0 mil/g and about 10.0 mil/g, or between about 8.0 mil/g and about 12.0 mil/g, or between about 6 mil/g and about 14.0 mil/g, or between about 8.0 mil/g and about 14 mil/g, or between about 7.5 mil/g and about 11 mil/g, or between about 12.0 mil/g and about 3.0 mil/g, or between about 11.0 mil/g and about 5.0 mil/g, or between about 10.0 mil/g and about 4.0 mil/g, or between about 8.0 mil/g and about 5.0 mil/g, specifically reciting all increments of 0.01 mil/g within the above-recited ranges and all ranges formed therein or thereby;

a formation index of less than about 170, or less than about 90, or less than about 65, or greater than about 30, or greater than about 50, or between about 55 and about 165, or between about 55 and about 85, or between about 60 and about 80, or between about 65 and about 75, specifically reciting all increments of 0.1 within the above-recited ranges and all ranges formed therein or thereby;

a coverage of less than about 10 fiber layers (making up a layer 55 of a ply 53), or less than about 9 fiber layers, or less than about 8 fiber layers, or less than about 7 fiber layers, or less than about 6 fiber layers, or less than about 5 fiber layers, or less than about 4 fiber layers, or greater than about 2 fiber layers, or greater than about 4.75 fiber layers, or greater than about 5 fiber layers, or greater than about 5.25 fiber layers, or greater than about 5.5 fiber layers, or greater than about 5.75 fiber layers, or greater than about 6 fiber layers, or greater than about 6.25 fiber layers, or greater than about 6.5 fiber layers, or greater than about 7 fiber layers, or greater than about 7.25 fiber layers, or greater than about 7.5 fiber layers, or greater than about 7.75 fiber layers, or greater than about 8 fiber layers, or greater than about 8.25 fiber layers, or greater than about 8.5 fiber layers, or greater than about 9 fiber layers, or between about 2 and about 10 fiber layers, or between about 4 and about fiber 9 fiber layers, or between about 5 and about fiber 8 fiber layers, or between about 4 and about fiber 7 fiber layers, specifically reciting all increments of 1 fiber layer within the above-recited ranges and all ranges formed therein or thereby;

a coarseness (according to the Coverage and Fiber Count Test Method) of less than about 0.35 mg/m, or less than about 0.30 mg/m, or less than about 0.25 mg/m, or less than about 0.20 mg/m, or greater than about 0.13 mg/m, or greater than about 0.14 mg/m, or greater than about 0.15 mg/m, or greater than about 0.16 mg/m, or greater than about 0.17 mg/m, or between about 0.15 mg/m and about 0.35 mg/m, or between about 0.15 mg/m and about 0.30 mg/m, or between about 0.16 mg/m and about 1.7 mg/m, or between about 0.15 mg/m and about 0.17 mg/m, or between about 0.15 mg/m and about 0.20 mg/m, or between about 0.25 mg/m and about 0.26 mg/m, or between about 0.22 mg/m and about 0.3 mg/m, or between about 0.19 mg/m and about 0.32 mg/m, specifically reciting all increments of 0.01 mg/m within the above-recited ranges and all ranges formed therein or thereby;

a lint value of less than about 11, or less than about 10, or less than about 9, or less than about 8, or less than about 7, or less than about 6, or less than about 5, or greater than about 0.5, greater than about 4.1, greater than about 6, or between about 0.5 and about 11, or between about 0.7 and about 11, or between about 7.5 and about 10.5, or between about 4 and about 5.5, or between about 6.3 and about 7.7, or between about 3 and about 10, or between about 4 and about 9, or between about 5 and about 8, or between about 6 and about 8, specifically reciting all increments of 0.01 (Hunter L value) within the above-recited ranges and all ranges formed therein or thereby;

a fiber length of less than about 4 mm, of less than about 3 mm, of less than about 2.3 mm, or less than about 2.2 mm, or less than about 2.1 mm, or less than about 2.0 mm, or less than about

1.9 mm, or less than about 1.5 mm, or less than about 1.4, or greater than about 0.7, or greater than about 1, or greater than about 2 mm or between about 0.6 mm and about 2.4 mm, or between about 0.7 mm and about 2.2 mm, or between about 0.8 mm and about 2 mm, or between 2.5 mm and 3.7 mm, or between about 0.9 mm and about 1.8 mm, or between about 1 mm and about 1.6 mm, or
5 between about 1.1 mm and about 1.5 mm, or between about 1.1 mm and about 1.4 mm, or between about 1.1 mm and about 1.3 mm, specifically reciting all increments of 0.01 mm within the above-recited ranges and all ranges formed therein or thereby;

a fiber width of less than about 31 um, or less than about 28 um, or less than about 25 um, or less than about 22 um, or less than about 20 um, or greater than about 8 um, or between about 7
10 um and about 32 um, or between about 8 um and about 31 um, or between about 10 um and about 28 um, or between about 12 um and about 26 um, or between about 14 um and about 24 um, or between about 16 um and about 22 um, or between about 22 um and about 27 um, or between about 25 um and about 31 um, or between about 15 um and about 19 um, or between about 18 um and about 20 um, or between about 7.5 um and about 9.5 um, specifically reciting all increments
15 of 0.1 um within the above-recited ranges and all ranges formed therein or thereby;

a fiber length/width ratio (according to the Fiber Length, Width, Coarseness, and Fiber Count Test Method) of less than about 190, or less than about 180, or less than about 170, or less than about 160, or less than about 150, or less than about 140, or less than about 130, or less than about 120, or less than about 110, or less than about 106, or less than about 100, or less than about
20 75, or less than about 50, or greater than about 40, or between about 190 and about 35, or between about 185 and about 40, or between about 175 and about 50, or between about 150 and about 75, or between about 125 and about 100, specifically reciting all increments of 1 within the above-recited ranges and all ranges formed therein or thereby;

a fiber count (length average) of less than about 30 fibers/g, or less than about 25 fibers/g, or less than about 20 fibers/g, or less than about 16 fibers/g, or less than about 15 fibers/g, or less than about 14 fibers/g, or less than about 13 fibers/g, or less than about 10 fibers/g, or greater than about 3 fibers/g, or between about 2.75 fibers/g and about 5 fibers/g, or between about 3 fibers/g and about 35 fibers/g, or between about 3.5 fibers/g and about 30 fibers/g, or between about 5 fibers/g and about 25 fibers/g, or between about 10 fibers/g and about 20 fibers/g, or between about
25 10 fibers/g and about 15 fibers/g, specifically reciting all increments of 0.1 fibers/g within the above-recited ranges and all ranges formed therein or thereby;

a fiber count (number average) of less than about 30 fibers/g, or less than about 25 fibers/g, or less than about 20 fibers/g, or less than about 16 fibers/g, or less than about 15 fibers/g, or less

than about 14 fibers/g, or less than about 13 fibers/g, or less than about 10 fibers/g, or greater than about 3 fibers/g, or greater than about 8.9 fibers/g, or between about 3 fibers/g and about 35 fibers/g, or between about 3.5 fibers/g and about 30 fibers/g, or between about 5 fibers/g and about 25 fibers/g, or between about 10 fibers/g and about 20 fibers/g, or between about 10 fibers/g and about 15 fibers/g, specifically reciting all increments of 0.1 fibers/g within the above-recited ranges and all ranges formed therein or thereby;

fiber count-area (C(n)) of greater than about 800 million/m², greater than about 830 million/m², greater than about 850 million/m², greater than about 900 million/m², greater than about 950 million/m², greater than about 1,000 million/m², or less than about 1,050 million/m², less than about 950 million/m², or from about 800 million/m² to about 1,000 million/m², from about 850 million/m² to about 975 million/m², specifically reciting all increments of 1 million/m² within the above-recited ranges and all ranges formed therein or thereby;

fiber count-area (C(l)) of greater than about 260 million/m², greater than about 280 million/m², greater than about 300 million/m², greater than about 350 million/m², greater than about 400 million/m², greater than about 450 million/m², greater than about 500 million/m², greater than about 525 million/m², or less than about 530 million/m², less than about 500 million/m², less than about 400 million/m², or from about 260 million/m² to about 530 million/m², from about 260 million/m² to about 400 million/m², from about 260 million/m² to about 400 million/m², specifically reciting all increments of 1 million/m² within the above-recited ranges and all ranges formed therein or thereby;

a tensile ratio (also called "dry tensile ratio," see the Dry Elongation, Tensile Strength, TEA and Modulus Test Methods below) of less than about 4.5, or less than about 4, or less than about 3.5, or less than about 3, or less than about 2.5, or less than about 2.1, or less than about 2, or less than about 1.9, or less than about 1.7, or greater than about 0.5, or greater than about 1.3, or greater than about 1.6, or greater than about 2, or greater than about 2.5, or between about 0.4 and about 0.5, or between about 0.5 and about 4.5, or between about 1.1 and about 1.6, or between about 1.25 and about 3, or between about 1.8 and about 2.4, or between about 1 and about 3, or between about 1.2 and about 2.1, or between about 1.5 and about 2, or between about 1.7 and about 2, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby;

an Emtec TS750 of greater than about 10 dB V² rms, or greater than about 20 dB V² rms, or greater than about 40 dB V² rms, or greater than about 47.7 dB V² rms, or greater than about 50

dB V² rms, or greater than about 75 dB V² rms, or less than about 115 dB V² rms, or less than about 20 dB V² rms, or less than about 40 dB V² rms, or less than about 45 dB V² rms, or less than about 60 dB V² rms, or less than about 80 dB V² rms, or between about 10 dB V² rms and about 120 dB V² rms, or between about 14 dB V² rms and about 113 dB V² rms, or between about 14 dB V² rms and about 75 dB V² rms, or between about 50 dB V² rms and about 112 dB V² rms, or between about 15 dB V² rms and about 50 dB V², or between about 16 dB V² rms and about 40 dB V², or between about 20 dB V² rms and about 30 dB V², or between about 25 dB V² rms and about 35 dB V², or between about 40 dB V² rms and about 55 dB V², specifically reciting all increments of 1 dB V² rms within the above-recited ranges and all ranges formed therein or thereby;

10 a slip stick of greater than about 235, or greater than about 270 greater than about 300, or greater than about 350, or greater than about 400, or greater than about 500, or greater than about 600, or greater than about 700, greater than about 800, or greater than about 900, or less than about 435, or less than about 605, or less than about 1000, or between about 230 and about 1400, or between about 235 and about 435, or between about 235 and about 605, or between about 280 and about 965, or between about 300 and about 800, or between about 350 and about 500, or between about 400 and about 600, specifically reciting all increments of 10 within the above-recited ranges and all ranges formed therein or thereby;

15 a density of a first zone (a first region) or a pillow zone may be different than a density of a second zone (a second region or a knuckle zone), which is adjacent to the first zone, such that the density of a second zone (a second region or a knuckle zone) may be 5%, 10%, 15%, 20%, 30%, 40%, 50%, 75%, 100%, 125%, 150%, 175%, or 200% greater than the first zone (first region or pillow zone), specifically reciting all increments of 0.01% within the above-recited ranges and all ranges formed therein or thereby (the Micro-CT Intensive Property Measurement Method can be used to determine density of an area of interest);

25 a Runkel Ratio of greater than about 1, or greater than about 2, or greater than about 3, or greater than about 5, or greater than about 6, or greater than about 7, or less than about 10, between about 0.5 and about 10, or between about 1 and about 8, or between about 1.5 and about 6.5, specifically reciting all increments of 0.1 within the above-recited ranges and all ranges formed therein or thereby;

30 a 2.5-160 micron PVD desorption of less than about 1600 mg, or less than about 1550 mg, or less than about 1500 mg, or less than about 1400 mg, or less than about 1300 mg, or less than about 1200 mg, or less than about 1100 mg, or less than about 1000 mg, or less than about 900 mg, or less than about 800 mg, or less than about 700 mg, or less than about 600 mg, or greater than

about 550 mg, or between about 550 mg and about 1600 mg, or between about 600 mg and about 1550 mg, or between about 700 mg and about 1550 mg, or between about 825 mg and about 1550 mg, or between about 850 mg and about 1500 mg, or between about 900 mg and about 1400 mg, or between about 1000 mg and about 1200 mg, specifically reciting all increments of 1 mg within
5 the above-recited ranges and all ranges formed therein or thereby;

a 2.5-160 micron PVD absorption of less than about 1200 mg, or less than about 1100 mg, or less than about 1000 mg, or less than about 900 mg, or greater than about 400 mg, or greater than about 800 mg, or greater than about 825 mg, or between about 400 mg and about 1200 mg, or between about 500 mg and about 1200 mg, or between about 600 mg and about 1200 mg, or
10 between about 700 mg and about 1200 mg, or between about 800 mg and about 1200 mg, or between about 900 mg and about 1100 mg, specifically reciting all increments of 1 mg within the above-recited ranges and all ranges formed therein or thereby;

a VFS of greater than about 4 g/g, or greater than about 5.5 g/g, or greater than about 6.0 g/g, or greater than about 7.0 g/g, or greater than about 7.3 g/g, or greater than about 7.5 g/g, or
15 greater than about 8 mg, or greater than about 8.5 g/g, or greater than about 9 g/g, or greater than about 9.5 g/g, or greater than about 10 g/g, or greater than about 10.5 g/g, or greater than about 11 g/g, or greater than about 11.5 g/g, or greater than about 12 g/g, or greater than about 12.5 g/g, or less than about 13 g/g, or between about 4 g/g and about 15 g/g, or between about 5 g/g and about 11 g/g, or between about 10 g/g and about 15 g/g, or between about 7 g/g and about 13 g/g, or
20 between about 7.5 g/g and about 13 g/g, or between about 8 g/g and about 13 g/g, or between about 9 g/g and about 13 g/g, or between about 10 g/g and about 13 g/g, or between about 10.5 g/g and about 12.5 g/g, or between about 10 g/g and about 12 g/g, or between about 10.5 g/g and about 11.5 g/g, reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a residual water of less than about 10%, less than about 9%, less than about 7%, less than about 5%, less than about 4%, less than about 3.5%, from about 1% to about 20%, from about 2% to about 18%, from about 3% to about 16%, from about 4% to about 14%, from about 5% to about 12%, from about 6% to about 10%, from about 1% to about 3%, or from about 1% to about 2%, specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed
30 therein or thereby;

a basis weight of at least about 48 g/m² (i.e., gsm), of between about 10 g/m² and about 100 g/m², or between about 10 g/m² and about 45 g/m², between about 20 g/m² and about 40 g/m², or between about 24 g/m² and about 40 g/m², or between about 30 g/m² and about 32 g/m², or between

about 40 g/m² and about 65 g/m², or between about 45 g/m² and about 60 g/m², or between about 50 g/m² and about 58 g/m², or between about 50 g/m² and about 55 g/m², or between about 50 g/m² and about 75 g/m², specifically reciting all increments of 0.1 g/m² within the above-recited ranges and all ranges formed therein or thereby;

5 a density (based on measuring caliper at 95 g/in²) of less than about 0.60 g/cm³ and/or less than about 0.30 g/cm³ and/or less than about 0.20 g/cm³ and/or less than about 0.10 g/cm³ and/or less than about 0.07 g/cm³ and/or less than about 0.05 g/cm³ and/or from about 0.01 g/cm³ to about 0.20 g/cm³ and/or from about 0.02 g/cm³ to about 0.10 g/cm³, specifically reciting all increments of 0.001 g/cm³ within the above-recited ranges and all ranges formed
10 therein or thereby;

a bulk (also called “dry bulk,” based on measuring caliper at 95 g/in²) of greater than about 1.67 cm³/g and/or greater than about 3.33 cm³/g and/or greater than about 5.00 cm³/g and/or greater than about 10.00 cm³/g and/or greater than about 14.29 cm³/g and/or greater than about 15.0 cm³/g and/or greater than about 18.0 cm³/g and/or greater than about 20.00 cm³/g
15 and/or from about 100.00 cm³/g to about 5.00 cm³/g and/or from about 50.00 cm³/g to about 10.00 cm³/g, specifically reciting all increments of 0.01 cm³/g within the above-recited ranges and all ranges formed therein or thereby (Note: This is distinct from “Dry Bulk Ratio” and “Resilient Bulk.”);

an SST (absorbency rate) of greater than about 0.3 g/sec^{0.5}, or greater than about 0.4 g/sec^{0.5},
20 or greater than about 0.45 g/sec^{0.5}, or greater than about 0.5 g/sec^{0.5}, or greater than about 0.75 g/sec^{0.5}, or greater than about 1.0 g/sec^{0.5}, or greater than about 1.60 g/sec^{0.5}, or greater than about 1.65 g/sec^{0.5}, or greater than about 1.70 g/sec^{0.5}, or greater than about 1.75 g/sec^{0.5}, or greater than about 1.80 g/sec^{0.5}, or greater than about 1.82 g/sec^{0.5}, or greater than about 1.85 g/sec^{0.5}, or greater than about 1.88 g/sec^{0.5}, or greater than about 1.90 g/sec^{0.5}, or greater than about 1.95 g/sec^{0.5}, or
25 greater than about 2.00 g/sec^{0.5}, or between about 1.60 g/sec^{0.5} and about 2.50 g/sec^{0.5}, between about 1.0 g/sec^{0.5} and about 2.0 g/sec^{0.5}, or between about 2.0 g/sec^{0.5} and about 2.50 g/sec^{0.5}, or between about 0.3 g/sec^{0.5} and about 0.7 g/sec^{0.5}, or between about 1.0 g/sec^{0.5} and about 1.50 g/sec^{0.5}, or between about 0.3 g/sec^{0.5} and about 0.9 g/sec^{0.5}, or between about 1.65 g/sec^{0.5} and about 2.50 g/sec^{0.5}, or between about 1.70 g/sec^{0.5} and about 2.40 g/sec^{0.5}, or between about 1.75
30 g/sec^{0.5} and about 2.30 g/sec^{0.5}, or between about 1.80 g/sec^{0.5} and about 2.20 g/sec^{0.5}, or between about 1.82 g/sec^{0.5} and about 2.10 g/sec^{0.5}, or between about 1.85 g/sec^{0.5} and about 2.00 g/sec^{0.5}, specifically reciting all increments of 0.1 g/sec^{0.5} within the above-recited ranges and all ranges formed therein or thereby;

a plate stiffness of greater than about 0.3 N*mm, or greater than about 0.5 N*mm, or greater than about 1.0 N*mm, or greater than about 2.0 N*mm, or greater than about 4.0 N*mm, or greater than about 6.0 N*mm, or greater than about 8.0 N*mm, or greater than about 12.0 N*mm, or greater than about 12.5 N*mm, or greater than about 13.0 N*mm, or greater than about 13.5 N*mm, or greater than about 14 N*mm, or greater than about 14.5 N*mm, or greater than about 15 N*mm, or greater than about 15.5 N*mm, or greater than about 16 N*mm, or greater than about 16.5 N*mm, or greater than about 17 N*mm, or between about 0.3 N*mm and about 20 N*mm, or between about 1 N*mm and about 20 N*mm, or between about 2 N*mm and about 20 N*mm, or between about 4 N*mm and about 20 N*mm, or between about 6 N*mm and about 20 N*mm, or between about 8 N*mm and about 20 N*mm, or between about 10 N*mm and about 20 N*mm, or between about 12 N*mm and about 20 N*mm, or between about 12.5 N*mm and about 20 N*mm, or between about 13 N*mm and about 20 N*mm, or between about 13.5 N*mm and about 20 N*mm, or between about 14 N*mm and about 20 N*mm, or between about 14.5 N*mm and about 20 N*mm, or between about 15 N*mm and about 20 N*mm, or between about 15.5 N*mm and about 20 N*mm, or between about 16 N*mm and about 20 N*mm, or between about 16.5 N*mm and about 20 N*mm, or between about 17 N*mm and about 20 N*mm, specifically reciting all increments of 0.1 N*mm within the above-recited ranges and all ranges formed therein or thereby;

a resilient bulk of greater than about 25 cm³/g, or greater than about 29 cm³/g, or greater than about 40 cm³/g, or greater than about 50 cm³/g, or greater than about 60 cm³/g, or greater than about 62 cm³/g, or greater than about 75 cm³/g, or greater than about 85 cm³/g, or greater than about 90 cm³/g, or greater than about 95 cm³/g, or greater than about 100 cm³/g, or greater than about 102 cm³/g, or greater than about 105 cm³/g, or between about 29 cm³/g and about 112 cm³/g, or between about 29 cm³/g and about 103 cm³/g, or between about 40 cm³/g and about 100 cm³/g, or between about 50 cm³/g and about 75 cm³/g, or between about 55 cm³/g and 70 cm³/g, or between about 85 cm³/g and about 110 cm³/g, or between about 90 cm³/g and about 110 cm³/g, or between about 95 cm³/g and about 110 cm³/g, or between about 100 cm³/g and about 110 cm³/g, specifically reciting all increments of 1 cm³/g within the above-recited ranges and all ranges formed therein or thereby;

a total wet tensile of greater than about 50 g/in, or greater than about 75 g/in, or greater than about 100 g/in, or greater than about 200 g/in, or greater than about 300 g/in, or greater than about 400 g/in, or greater than about 450 g/in, or greater than about 470 g/in, or greater than about 500 g/in, or greater than about 550 g/in, or greater than about 600 g/in, or greater than about 650

g/in, or greater than about 700 g/in, or greater than about 750 g/in, or greater than about 758 g/in, or greater than about 800 g/in, or greater than about 850 g/in, or greater than about 900 g/in, or greater than about 2278. or between about 350 g/in and about 475 g/in, or between about 420 g/in and about 440 g/in, or between about 100 g/in and about 640 g/in, or between about 300 g/in and about 1000 g/in, or between about 400 g/in and about 900 g/in, or between about 500 g/in and about 900 g/in, or between about 550 g/in and about 900 g/in, or between about 600 g/in and about 900 g/in, or between about 650 g/in and about 900 g/in, or between about 700 g/in and about 900 g/in, specifically reciting all increments of 10 g/in within the above-recited ranges and all ranges formed therein or thereby;

10 a total wet tensile (Finch) of greater than about between about 10 g/in and about 125 g/in, or between about 20 g/in and about 55 g/in, or between about 30 g/in and about 100 g/in, or between about 10 g/in and about 65 g/in, specifically reciting all increments of 1 g/in within the above-recited ranges and all ranges formed therein or thereby;

a dry burst (peak load) strength of greater than about 250 g, or greater than about 400 g, or greater than about 600 g, or greater than about 800 g, or greater than about 1000 g, or greater than about 1200 g, or greater than about 1300 g, or greater than about 1400 g, or between about 250 g and about 1500 g, or between about 400 g and about 1500 g, or between about 600 g and about 1500 g, or between about 800 g and about 1450 g, or between about 1000 g and about 1400 g;

a wet burst (peak load) strength of greater than about 3 g, greater than about 5 g, or greater than about 10 g, or greater than about 20 g, or greater than about 50 g, or greater than about 55 g, or greater than about 75 g, or greater than about 100 g, or greater than about 115 g, or greater than about 150 g, or greater than about 177 g, or greater than about 200 g, or greater than about 300 g, or greater than about 350 g, or greater than about 400 g, or greater than about 450 g, or greater than about 478 g, or greater than about 500 g, or greater than about 550 g, or greater than about 600 g, or between about 20 g and about 530 g, or between about 3 g and about 22 g, or between about 25 g and about 52 g, or between about 230 g and about 525 g, or between about 180 g and about 525 g, or between about 200 g and about 700 g, or between about 350 g and about 600 g, or between about 350 g and about 550 g, or between about 400 g and about 550 g, or between about 400 g and about 525 g, or between about 50 g and about 220 g, or between about 50 g and about 60 g, or between about 50 g and 55 g, specifically reciting all increments of 10 g within the above-recited ranges and all ranges formed therein or thereby;

a flexural rigidity (avg.) of greater than about 40 mg-cm, greater than about 75 mg-cm, greater than about 175 mg-cm, 100, greater than about 125 mg-cm, greater than about 150 mg-cm,

greater than about 175 mg-cm, greater than about 200 mg-cm, or greater than about 700 mg-cm, or greater than about 800 mg-cm, or greater than about 900 mg-cm, or greater than about 1000 mg-cm, or greater than about 1100 mg-cm, or greater than about 1200 mg-cm, or greater than about 1300 mg-cm, or greater than about 1400 mg-cm, or greater than about 1500 mg-cm, or greater than
5 about 1600 mg-cm, or greater than about 1700 mg-cm, or between about 40 mg-cm and about 200 mg-cm, or between about 60 mg-cm and about 150 mg-cm, or between about 80 mg-cm and about 125 mg-cm, or between about 80 mg-cm and about 100 mg-cm, or between about 700 mg-cm and about 1800 mg-cm, or between about 800 mg-cm and about 1600 mg-cm, or between about 900 mg-cm and about 1400 mg-cm, or between about 1000 mg-cm and about 1350 mg-cm, or between
10 about 1050 mg-cm and about 1350 mg-cm, or between about 1100 mg-cm and about 1350 mg-cm, or between about 1100 mg-cm and about 1300 mg-cm, specifically reciting all increments of 10 mg-cm within the above-recited ranges and all ranges formed therein or thereby;

a dry caliper of greater than about 4.0 mils, or greater than about 10.0 mils, or greater than about 15.0 mils, or greater than about 20.0 mils, or than about 26.0 mils, or than about 28.0 mils,
15 or greater than about 40 mils, or greater than about 55 mils, or between about 4.0 mils and about 27.0 mils, or between about 18.0 mils and about 24.0 mils, or between about 45.0 mils and about 51.0 mils, or between about 29 mils and about 33.0 mils, or between about 19.0 mils and about 43.0 mils, or about 26.0 mils and about 80.0 mils, or between 40.0 mils and 60.0 mils, or between about 50 and about 60 mils, specifically reciting all increments of 0.10 mils within the above-
20 recited ranges and all ranges formed therein or thereby;

a wet caliper of greater than about 8.0 mils, or greater than about 10.0 mils, or greater than about 15.0 mils, or greater than about 17.0 mils, or greater than about 26 mils, or between about 10.0 mils and about 33.0 mils, or between about 15.0 mils and about 25.0 mils, or between about 8.0 mils and about 20.0 mils, or between about 26.0 mils and about 70.0 mils, or between about
25 26.0 mils and about 40.0 mils, specifically reciting all increments of 0.10 mils within the above-recited ranges and all ranges formed therein or thereby;

a total dry tensile (total tensile) of greater than about 250 g/in, or greater than about 400 g/in, or greater than about 500 g/in, or greater than about 700 g/in, or greater than about 800 g/in, or greater than about 1000 g/in, or greater than about 1200 g/in, or greater than about 1300 g/in, or
30 greater than about 1700 g/in, or greater than about 2278 g/in, or between about 880 g/in and about 2570 g/in, or between about 1800 g/in and about 2485 g/in, or between about 1900 g/in and about 2300 g/in, or between about 250 g/in and about 1000 g/in, or between about 400 g/in and about 580 g/in, or between about 700 g/in and about 800 g/in, or between about 275 g/in and about 1310

g/in, or about 1300 g/in and about 4000 g/in, or between about 1800 g/in and about 2800 g/in, specifically reciting all increments of 10 g/in within the above-recited ranges and all ranges formed therein or thereby;

5 a geometric mean (GM) dry modulus of greater than about 1000 g/cm, or greater than about 1700 g/cm, or less than about 3320 g/cm, or less than about 2500 g/cm, or less than about 2400 g/cm, or less than about 2300 g/cm, or less than about 2000 g/cm, or less than about 1500 g/cm, or less than about 1000 g/cm, or between about 1800 g/cm and about 4000 g/cm, or between about 1800 g/cm and about 3500 g/cm, or between about 3300 g/cm and about 3350 g/cm, specifically reciting all increments of 10 g/cm within the above-recited ranges and all ranges formed therein or
10 thereby;

a wet tensile geometric mean (GM) modulus of greater than about 250 g/cm, or greater than about 375 g/cm, or between about 250 g/cm and about 700 g/cm, or between about 250 g/cm and about 525 g/cm, or between about 375 g/cm and 525 g/cm, specifically reciting all increments of 10 g/cm within the above-recited ranges and all ranges formed therein or thereby;

15 a CRT rate of greater than about 0.30 g/sec, or greater than about 0.5 g/sec, or greater than about 0.55 g/sec, or greater than about 0.6 g/sec, or greater than about 0.61 g/sec, or greater than about 0.65 g/sec, or greater than about 0.7 g/sec, or greater than about 0.75 g/sec, or greater than about 0.8 g/sec, or between about 0.30 g/sec and about 1.00 g/sec, or between about 0.61 g/sec and about 0.85 g/sec, specifically reciting all increments of 0.05 g/sec within the above-recited ranges
20 and all ranges formed therein or thereby;

a CRT capacity of greater than about 10.0 g/g, or greater than about 12.5 g/g, or between about 12.5 g/g and about 23.0 g/g, or between about 16.5 g/g and about 21.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby; a kinetic CoF of greater than about 0.75, or greater than about 0.85, or between about 0.85
25 and about 1.30, or between about 0.77 and about 1.7, or between about 0.85 and about 1.20, specifically reciting all increments of 0.05 within the above-recited ranges and all ranges formed therein or thereby;

a dry depth of more negative than -240 um, or more negative than -255um, or more negative than -265um, or more negative than -275um, or more negative than -285um, or more negative than -295um, or more negative than -300um, or between about -240um and about -310 um, or between
30 about -245 um and about -305 um, or between about -255 um and about -303 um, or between about -265 um and about -302 um, or between about -275 um and about -300 um, specifically reciting all increments of 20 um within the above-recited ranges and all ranges formed therein or thereby;

a moist depth of more negative than -275um, or more negative than -285 um, or more negative than -295 um, or more negative than -300 um, or more negative than -310 um, or more negative than -320 um, or more negative than -330 um, or between about -275 um and about -340 um, or between about -285 um and about -335 um, or between about -295 um and about -332 um, or between about -300 um and about -330 um, or between about -305um and about -328 um, specifically reciting all increments of 20 um within the above-recited ranges and all ranges formed therein or thereby;

a moist contact area of greater than 25%, or greater than 27%, or greater than 29%, or greater than 31%, or greater than 32%, or greater than 34%, or greater than 36%, or between about 25% and about 38%, or between about 27% and about 37%, or between about 29% and about 36%, or between about 30% and about 35%, or between about 31% and about 34%, specifically reciting all increments of 1% within the above-recited ranges and all ranges formed therein or thereby;

a dry contact area of greater than 17%, or greater than 20%, or greater than 22%, or greater than 24%, or greater than 26%, or greater than 28%, or greater than 30%, or between about 17% and about 33%, or between about 20% and about 31%, or between about 22% and about 30%, or between about 23% and about 30%, or between about 24% and about 29%, specifically reciting all increments of 1% within the above-recited ranges and all ranges formed therein or thereby;

a dry compression (at 10 g force in mils) of greater than about 30 mils, or greater than about 45 mils, or greater than about 50 mils, or greater than about 55 mils, or greater than about 60 mils, or greater than about 65 mils, or greater than about 70, or greater than about 85 mils, or between about 40 mils and about 100 mils, or between about 50 mils and about 80 mils, or between about 50 mils and about 65 mils, or between about 50 mils and about 60 mils, or between about 55 mils and about 60 mils, specifically reciting all increments of 5 mil within the above-recited ranges and all ranges formed therein or thereby;

a wet compression (at 10g force value) in mils of greater than about 30 mils, or greater than about 20 mils, or greater than about 30 mils, or greater than about 40 mils, or greater than about 50 mils, or greater than about 55, or greater than about 60 mils, or greater than about 70 mils, or between about 30 mils and about 100 mils, or between about 40 mils and about 70 mils, or between about 45 mils and about 60 mils, or between about 47 mils and about 58 mils, or between about 50 mils and about 55 mils, specifically reciting all increments of 5 mils within the above-recited ranges and all ranges formed therein or thereby;

a dry bulk ratio of greater than about 15, or greater than about 18, or greater than about 22, or greater than about 25, or greater than about 27, or greater than about 33, or greater than about

35, or greater than about 40, or greater than about 50, or between about 15 and about 60, or between about 22 and about 50, or between about 25 and about 35, or between about 27 and about 35, or between about 27 and about 33, specifically reciting all increments of 0.5 within the above-recited ranges and all ranges formed therein or thereby;

5 a wet bulk ratio of greater than about 20, or greater than about 22, or greater than about 25, or greater than about 28, or greater than about 30, or greater than about 34, or greater than about 40, or greater than about 45, or greater than about 50, or greater than about 55, or between about 22 and about 50, or between about 20 and about 50, or between about 25 and about 45, or between about 28 and about 40, or between about 30 and about 34, specifically reciting all increments of
10 0.5 inches within the above-recited ranges and all ranges formed therein or thereby;

 a wet burst strength to dry tensile ratio ("wet burst/dry tensile ratio" which is wet burst strength divided by dry tensile) of greater than about 0.05, greater than about 0.09, greater than about 0.1, greater than about 0.15, greater than about 0.18, greater than about 0.20, greater than about 0.24, or greater than about 0.26, or between about 0.05 and about 0.27, or between about 0.15 and about 0.26, or between about 0.20 and about 0.26;

 a wet burst strength to dry burst strength ratio ("wet/dry burst strength ratio" which is wet burst strength divided by dry burst strength) of greater than about 0.09, or greater than about 0.10, or greater than about 0.18, or greater than about 0.19, or greater than about 0.20, or greater than about 0.30, or greater than about 0.40, or between about 0.10 and about 0.50, or between about
15 0.20 and about 0.48, or between about 0.30 and about 0.46, or between about 0.40 and about 0.46; a concavity ratio measurement of greater than about 0.1, or greater than about 0.15, or greater than about 0.20, or greater than about 0.25, or greater than about 0.30, or greater than about 0.35, or greater than about 0.40, or greater than about 0.45, or greater than about 0.50, or greater than about 0.55, or greater than about 1.0, or greater than about 1.25, or greater than about 1.5, or
20 between about 0.10 and about 0.95, or between about 0.15 and about 0.90, or between about 0.20 and about 0.85, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby; and/or

 a packing fraction measurement of greater than about 0.05, or greater than about 0.08, or greater than about 0.10, or greater than about 0.12, or greater than about 0.15, or greater than about
25 0.17, or between about 0.05 and about 0.75, or between about 0.10 and about 0.80, or between about 0.15 and about 0.85, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby.

Fibrous structure(s) of the present disclosure comprising non-wood fibers may have one or a combination of the above properties (disclosed in this Properties of Fibrous Structure(s) Section).

Softness

5 Of particular interest is softness of the fibrous structure. This is where so many sustainable sanitary tissue products fail and the art does not disclose how to achieve soft fibrous structures comprising bamboo and/or other sustainable non-wood fibers. This becomes truer as non-wood fiber inclusion increases. Surprisingly, the inventors have found that adding coarse bamboo fibers (bamboo is especially coarse versus eucalyptus) into the fibrous structure, even at high inclusion
10 levels, and/or even disposed at a consumer-facing side of a sheet, can result in products with good softness. There are a number of ways the inventors have accomplished this, including creation of differential densities, utilizing unique layering, and/or fiber mixes. Details of such are in the specification below.

 Also, surprisingly, the inventors of the present disclosure have found that they are able to
15 deliver soft fibrous structures that have low lint values. Typically, higher lint values accompany greater softness values (e.g., TS7, TS750). Beyond the difficulties of processing fibrous structures that are linty, lint can cause unwanted debris at the point of use, which can be messy and can be aesthetically undesirable. Thus, it is of great benefit to achieve greater softness while maintaining lower lint values. Thus, the inventors have not only improved sustainable fibrous structures, but
20 have improved the general offering of fibrous structures beyond what is otherwise available today, even including what is available on the shelf today as a high-tier offerings consisting only of wood fibers. FIG. 1A illustrates TS7 values of a sanitary tissue products of the present disclosure and FIG. 1C illustrates TS7 and lint values of sanitary tissue products of the present disclosure.

Coverage

25 Sanitary tissue products (e.g., bath tissue sheets) are often comprised of substantial portions of eucalyptus fibers, especially at a consumer-facing layer. Thus, as one incorporates higher levels of bamboo, one is necessarily replacing the short, narrow, and low coarseness eucalyptus fibers with longer, wider, and coarser bamboo fibers.

30 It is known in the art that fiber coverage is an important consideration when making premium sanitary tissue products. Fiber coverage can be thought of as the average number of fibers that would be encountered as one travels normal to the surface of the product (i.e., travels in the z-direction). Included in the calculation of fiber coverage are fiber coarseness (mg/m), fiber

width (mm), and basis weight (gsm). A contradiction that paper (fibrous structures and, more particularly, sanitary tissue products) makers contend with is how to design a strong, yet soft substrate. This has previously been achieved through the judicious choice and layering of wood-based fibers. Long and easily bonded fibers such as softwoods are used in a sheet for strength, while short, thin, and low coarseness fibers such as eucalyptus are used for softness. These short, thin, and low coarseness eucalyptus fibers also provide a high level of fiber coverage in the sheet, aiding in hand protection and other aspects of absorbency.

While the art has disclosed that low coarseness bamboo can be used in toilet tissue, the inventors of the present disclosure have, surprisingly, found that adding much higher coarseness bamboo into the sheet, even at high inclusion levels, and against the consumer (i.e., on a consumer-facing surface), can result in products with good softness and low levels of lint. The bamboo fibers tested are also wider (18.9 μm) than in previous examples. These coarse and wide bamboo fibers create substrates with lower fiber coverage at a given basis weight. Further, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo, which create lower fiber coverage substrates, can still create products that can successfully balance the traditional strength-softness contradiction. These improvements may be achieved, at least in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface and at creping, and through creping geometry changes.

As indicated in this section above, one key part of consumer acceptance is hand protection. One way to improve hand protection is via increased fiber coverage in the sheet. This can be done by increasing basis weight or by choosing fibers that have a high specific surface area per weight. Fiber attributes that are tied to specific surface area are length, width, and coarseness. These characteristics can be used to create a stochastic model that projects fibers as rectangles laid out as bricks. Knowing the length, width, and weight of each brick then allows one to determine how much area a given weight of fibers would cover if they were arranged perfectly flat next to each other. Dividing the coarseness by fiber width results in the g/m^2 -layer value. By comparing that weight per area (g/m^2) versus the actual weight per area of a sheet can give one the number of fiber layers (coverage) expected in the sheet. Of interest, when replacing eucalyptus with bamboo, the number of fiber layers (coverage) present at a given total sheet weight decreases.

Another way to address hand protection is to have a lower density sheet. At a given basis weight, lowering the density will increase the caliper of the sheet. This higher caliper will result in the hand being farther away from the material being removed, improving hand protection.

The papermaker is always conscious of manufacturing costs while striving to make superior products. Thus, the contradiction of increased weight versus fiber choice versus density is a consideration that should be kept in mind. It has surprisingly been found that the judicious layering of non-wood and/or wood fibers in a low-density sheet will allow for good hand protection.

5 Further relating to judicious layering, from a product quality perspective, there is a positive correlation between softness and lint. More lint generally means that the product is perceived as softer, but too much lint is not preferred by the consumer. One or two layer sanitary tissue products may be desirable because they require less equipment (fan pumps, stock chests, etc.) and simpler (single or dual layer headboxes versus a 3 layered headbox). In a one layer embodiment, and often
10 in a two layer non-wood containing sanitary tissue product, the non-wood will be consumer facing – so, getting the right balance of softness, as characterized by lint, is critical. Adding a third layer gives another degree of freedom to the product designer, such that they could sequester part or all of the less desirable non-wood fibers in the center or non-consumer layers. A third layer also allows the Yankee contacting layer to have lower or no non-wood fibers contacting the
15 surface. This results in a process which is easier to run, as the non-wood fibers have less interaction with the complex chemical and physical interactions with the glue coating and creping process. So, a three layered non-wood sanitary tissue product has more degrees of freedom from a design standpoint, is easier to run from a Yankee coating standpoint, and is more complex from an equipment standpoint. A one or two layer sanitary tissue product is more difficult to properly
20 design to meet the consumer needs and more difficult to run from a Yankee coating standpoint. However, if these hurdles of a one or two layer embodiment can be overcome, they are desirable because they are made by a less complex process.

Absorption

25 In the design of fibrous structures, particularly sanitary tissue products, such as paper towels, bath tissue, and facial tissue, there are many characteristics that must be met in order to make a consumer desirable product. A couple of those consumer-desired characteristics are good absorbency and hand protection.

It is believed that having high volumetric absorption capacity at relatively small pore radii
30 is consumer preferred, especially for multi-ply products, as the water that is absorbed at those small pore sizes is tenaciously held onto by the absorbent material in the product. In multi-ply constructions, these “functional” pore sizes can be between 2.5 and 200 microns. When fluid is

absorbed into these pores it tends to remain in the substrate more than fluid that is taken up by larger pores.

One typical way to increase smaller pores is replacement of coarse softwood fibers with shorter, thinner, and lower coarseness hardwoods like eucalyptus. The increase in eucalyptus may be desirably balanced with the addition of softwoods such as NSK in order to maintain acceptable strength characteristics.

Upon experimentation, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo can still create a high level of 2.5-200 micron (and ranges therebetween) volumetric capacity while still maintaining acceptable strength characteristics.

Desorption

Continuing with the discussion in the previous section (Absorption), without being bound by theory, regarding desorption, it is believed that having a high volumetric desorption capacity at relatively small pore radii is consumer preferred, especially for multiply products, as the water that is desorbed at those small pore sizes is water that was initially absorbed in the functional structure itself. When a wetting fluid is absorbed into a substrate, the mechanically imparted features (those imposed while the substrate is substantially dry, such as creping or embossing) relax, partially collapsing the structure. While these mechanically imparted features are important in the consumer experience, they are not resilient after fluid insult. Desorption curves can therefore be interpreted as a good characterization of the wet structure of the material. Maximizing the 2.5-200 micron (and ranges therebetween) desorption volume will result in a sheet that has a greater “functional” absorbent volume. This is a good indicator of consumer-preferred absorbency, as water that is absorbed in the structure will be less likely to come back out of the material, better protecting the consumer from the mess.

As said in the Absorption Section above, upon experimentation, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo can still create a high level of 2.5-200 micron (and ranges therebetween) volumetric capacity while still maintaining acceptable strength characteristics.

VFS

Continuing with the discussion in the three previous sections (Absorption, Desorption, and Desorption-Absorption Hysteresis), it is believed that having high vertical full sheet (“VFS”) absorbent capacity in a substrate is consumer preferred for absorption and hand protection. By its nature, the VFS measurement is believed to accurately characterize how much fluid is tightly held

within plies of a substrate, as fluid that is in between plies, or loosely held within a ply, will drain out when the sheet goes to the (near) vertical position. This remaining tightly held fluid is thought to be fluid that would more slowly reach the hand of a consumer, resulting in improved hand protection.

5 One typical way to increase the VFS of a substrate is to create structures of low coarseness fibers, which are more prone to tightly holding onto water via a finer fiber network and pore structure. Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-wood fibers such as bamboo can still create high VFS capacity substrates while still maintaining acceptable strength characteristics.

10 Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-wood fibers such as bamboo can still create high VFS capacity substrates while still maintaining acceptable strength characteristics.

Slip-Stick

15 Continuing with the discussion in the four previous sections (Absorption, Desorption, Desorption-Absorption Hysteresis, and VFS), related to softness, another consumer-desired characteristic is surface smoothness/glide. It is thought that having low slip-stick values in a fibrous structure is consumer preferred, as the test is a good metric for quantifying how much “glide” a substrate has. Typical design levers for improving the slip stick of a substrate is to increase
20 smoothness via calendaring, or to replace coarser softwood fibers with shorter, thinner, and lower coarseness hardwood fibers such as eucalyptus. The increase in eucalyptus may desirably be balanced with the addition of softwoods such as NSK in order to maintain acceptable strength characteristics.

 Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-
25 wood fibers such as bamboo can still create low slip stick substrates while still maintaining acceptable strength characteristics. FIG. 1B illustrates slip-stick values of a sanitary tissue products of the present disclosure.

Absorbent and Strong (Wet)

30 It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being absorbent. This combination is often a contradiction due to the underlying physics. In order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been

treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not absorb quickly or to a high capacity, as the aforementioned structure would also have minimal interplay voids, retarding water absorption into the substrate. Softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and width. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, lower coarseness, fibers that still exhibit superior strength when wet and absorbency. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of absorbency and wet strength in a non-wood containing substrate – see, for example, FIG. 2F.

Bidirectional Strength

Given the different nature of the wetlaid papermaking process to that of a woven substrate, there are many differences in the characteristics between durable substrates and sanitary tissue products. One difference in particular is the strength and durability of durable substrates vs. sanitary tissue products: the former, being comprised of woven filaments that are ostensibly continuous, exhibit very high strength when compared to the latter, which are comprised of hydrogen bonded cellulosic fibers. Directional differences in wetlaid structures are present due to the hydrodynamics of continuous forming, the use of discrete fibers, and the nonisometric forces that are imparted on the substrate during making. Often, the weaker direction of a substrate is the CD, and improving strength and stretch characteristics in that direction improves the overall consumer experience by making the paper towel less prone to failure while in use. Ways to improve CD strength and stretch characteristics include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid substrates with weaker, shorter, or lower coarseness fibers that can still be implemented in structures that exhibit high levels of bidirectional strength. It has surprisingly been found that, despite the lower coarseness, shorter fiber length, and/or narrower width of non-wood fibers, it is still possible to achieve high

levels of bidirectional strength in a non-wood containing substrate– see, for example, FIGS. 2J, 2K, and 2L.

Bulky and Strong (Wet)

5 It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being bulky when dry. Being strong when wet facilitates easy cleanup of messes, while having a high bulk sheet signals clothlike durability, spongelike absorbency, and other characteristics typical of durable substrates. However, this combination is often a contradiction due to the underlying physics. Typically, in order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not be bulky. A monoplanar layer of tightly bonded cellulose fibers would result in a flat, dense sheet that, while strong when wet, would have a very low bulk when dry. Typically, ways to improve dry bulk include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are often desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and bulk when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of wet strength and dry bulk in a non-wood containing sanitary tissue product.

Durable and Strong (Wet)

30 It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being durable (i.e., being able to maintain integrity during cyclic stressing of the substrate, for example during scrubbing). This combination is often a contradiction due to the underlying physics. In order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been

treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not be durable, as a sheet that is comprised of tightly bonded, millimeter sized fibers will pick up load quickly in a tensile test and fail at relatively low percentages of stretch, contributing to low durability. Ways to improve the wet durability include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and durability. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood fibers have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of durability in a non-wood containing substrate.

Soft (Dry) and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be soft when dry, yet strong when wet. Being strong when wet facilitates easy cleanup of messes, yet due to the strong fibers, dense fiber network, and high levels of fiber bonding needed, the resultant substrate will be very rough when dry. Conversely, a substrate that is soft when dry will have lower strength, lower coarseness fibers that are lightly bonded together with much interstitial space inside the ply. While cushiony and soft to the touch, such a substrate would be very weak when wet due to the aforementioned structure and low levels of bonding. Ways to improve softness when dry include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Combinations of hardwood and softwood fibers are often used to strike an appropriate balance. Refined softwood fibers, for example, are desirous for creating strength when wet, due to their high fiber coarseness, long length, and high strength. Hardwood fibers are desirous for improving softness when dry, due to their low coarseness and length. These sources of fiber, however, are coming under increasing environmental pressures. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be

implemented in a structure that exhibits superior wet strength and softness when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of wet strength and dry softness in a non-wood (e.g., abaca) containing substrate— see, for example, FIG. 2G.

Strong and Durable

Given the different nature of the wetlaid papermaking process to that of a woven substrate, there are many differences in the characteristics between durable substrates and sanitary tissue products. One difference in particular is the strength and durability of durable substrates vs. sanitary tissue products: the former, being comprised of woven filaments that are ostensibly continuous, exhibit very high strength when compared to the latter, which are comprised of hydrogen bonded cellulosic fibers. Directional differences in wetlaid structures are present due to the hydrodynamics of continuous forming, the use of discrete fibers, and the nonisometric forces that are imparted on the substrate during making. Often, the weaker direction of a substrate is the CD, and improving strength and stretch characteristics in that direction improves the overall consumer experience by making the paper towel less prone to failure while in use. Ways to improve dry durability include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior strength and durability when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of strength and durability in a non-wood containing substrate.

Soft and Strong

Given the different nature of the wetlaid papermaking process to that of created a woven substrate, there are many differences in the characteristics between durable substrates and

sanitary tissue products. One difference is the relationship between strength and softness. Since wetlaid materials are comprised of fibers of approximately 5mm or less, network strength is a function of both the fiber itself as well as the bonding between the fibers. Fiber to fiber bonding is typically improved through refining, a mechanical process that modifies the fibers. Without
5 being bound by theory, it is believed that the mechanical energy from refining delaminates cell walls, externally fibrillates the fibers, and releases hemicellulose based gels, which improve the relative bonded area between fibers and the overall strength of the substrate. This increase in strength, however, is often at the cost of decreased softness, which can be described via tensile modulus. High tensile moduli are associated with lower softness sheets. Additionally, the
10 strength of the fiber itself is typically a function of fiber cell wall thickness and fiber diameter. Non-woods have been found to typically have a higher degree of external fibrillation, shorter fiber lengths, and/or lower coarseness than softwoods. A substrate comprised of these fibers would therefore be expected to exhibit a lower strength, less soft sheet. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics
15 versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to create a substrate that has high levels of strength and is soft— see, for example, FIGS. 1D, 2B, 2C, 2D, and 2E.

Surprisingly, the inventors of the present disclosure have discovered that many of the above-referenced properties and characteristics can be achieved by replacing conventional wood
20 fibers with non-wood fibers. For example, replacing refined long fiber northern and southern softwood kraft with abaca can help to achieve the desired strength of the fibrous structure. It may be desirable to combine abaca with a sustainable hardwood (e.g., eucalyptus) that is short and coarse (i.e. stiff, capable of preventing collapse). Particularly regarding using abaca for its strength characteristics as described in this paragraph, it is desirable to keep it from collapsing into a tightly
25 bonded, rough, thin network with little variation in pore size. It may be further desirable to form such fibrous structures with fiber in patterns comprising higher degrees of pillow modulation; such fiber mixes and belt patterns can result in surprisingly high dry strength, wet strength, caliper, and surface texture with surface softness and absorbency. This surprising result may be increased by increasing molding conditions such as structuring belt pattern, belt overburden, crepe and/or wire
30 to press draw. The inventors hypothesize that the long, high carboxyl abaca readily bonds around the short, coarse fibers, thus maintaining strength but building caliper, porosity, absorbency, and softness. In this way, the non-wood (e.g., abaca) helps to maximize diversity in pore size to enhance softness and absorbency while maintaining strength. More particularly, structuring belt

patterns with low density regions of at least 10 mils width, or at least 20 mils width, or at least 30 mils width, and patterns that combined different sizes of low density regions may exploit the benefit more. Structuring belt fiber molding depths, also known as overburden, that capitalizes on the fiber length of the non-wood inclusive fiber mixture also may increase the benefit. Without
5 being bound by theory, it may be desirable to have the distance between belt structuring pattern protrusions be equal or greater than the average fiber length of the fiber mixture to increase diverse pore formation when using non-woods. Additionally, without being bound by theory, crepe impact angle and reel draw can be used to create regions of micro-disturbance to increase the variation of bonds, pores and sheet structure. Wet transfer or rush transfer can induce multiple planes and
10 orientations of fiber as well, and may contribute to increasing the benefit of the non-wood inclusive mixtures. Moreover, combinations of one or all of these molding factors can enhance the surprising combination of substrate properties.

Roll Properties

15 Large rolls have a consumer perceived benefit on the shelf. A larger diameter roll at a given price is normally preferred by the consumer. When the consumer unpackages that roll and uses it, the consumer also wants that same large roll to have just the right level of firmness. Overly soft rolls connote inferiority, and overly firm rolls connote roughness and lack of absorbency. From a manufacturing perspective, however, a roll of toilet tissue can be most cost effectively
20 produced with a minimum amount of fiber mass, while effectively distributing that mass in such a way that the substrate still has superior strength, absorbency, and softness attributes.

The morphology of the bamboo fiber (high levels of fines, broad fiber length distribution, high coarseness, high fibrillation), as well as many other non-wood fibers, make for a fiber that drains poorly and makes it particularly unsuited for through-air-drying machines due to high
25 energy costs associated with the drying of the nascent fiber web. Therefore, the majority of webs comprising bamboo are made on conventional wet press machines. These machines generate webs of low caliper and, when converted into finished product rolls, result in either low bulk and hard rolls or high bulk and extremely soft rolls. A few instances of products can be found comprising bamboo that are made on through-air-dried machines. These examples, however, when converted
30 into a roll format, suffer from a non-consumer preferred roll structure that is high in bulk, yet still extremely soft.

The underlying cause of this roll bulk-roll firmness contradiction may be due to the compression/relaxation characteristics of the substrate. It is therefore an unmet consumer need to

design a substrate that comprises bamboo fiber, yet can be wound into finished product rolls that are both bulky and firm.

As indicated in other parts of this disclosure, fibrous structures, such as sanitary tissue products, may be comprised of substantial amounts of eucalyptus fibers (especially at the consumer-facing layer of a sheet), which are short, narrow, and low exhibit low coarseness. These attributes allow for improved molding into a structured fabric, impacting density and compressibility/resiliency characteristics of the web. As one incorporates higher levels of non-wood (e.g., bamboo), one is replacing eucalyptus fibers with longer, wider, and coarser non-wood (e.g., bamboo) fibers. These attributes cause non-woods such as bamboo to be much less susceptible to molding into a structured fabric, resulting in less desirable properties, including, for instance, compression and resiliency characteristics.

The inventors of the present disclosure have surprisingly shown that substrates and rolls comprising non-woods (e.g., bamboo) can be created with good roll bulk and roll compression characteristics, despite the fact that introduction of non-woods (e.g., bamboo) results in substrates comprised of coarser, more fibrillated fibers, which are less prone to molding due to their morphological characteristics. These improvements may be achieved, in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface and at creping, through creping geometry changes, and the judicious placement of high and low density zones in the substrate.

In addition to the beneficial properties as detailed in the disclosure above, the new fibrous structures detailed herein permit the fibrous structure manufacturer to wind rolls with high roll bulk (for example greater than 4 cm³/g), and/or greater roll firmness (for example between about 2.5 mm to about 15 mm), and/or lower roll percent compressibility (low percent compressibility, for example less than 10% compressibility).

“Roll Bulk” as used herein is the result of measuring finished product rolls. The rolls are placed into a controlled temperature and Humidity room (TAPPI conditions, about 23 °C ± 2 C° and about 50% ± 2% relative humidity) for at least 24 hours to equilibrate (equilibration can be monitored by measuring roll weight every 4 hours until the mass stabilizes;). If rolls have been stored in greater than 50% relative humidity conditions, then said rolls should first be equilibrated at conditions lower than 50% relative humidity and then equilibrated at TAPPI conditions – see T-402. The rolls are weighed with the weight recorded to the hundredths of grams. The width of the rolls are measured with a ruler that shows millimeters, width recorded to the tenths of centimeter. Roll Diameter is measured according to the Percent Roll Compressibility test method

included herein. Roll Bulk (cm³/g) is then calculated by: multiplying the square of the radius of the roll (roll diameter (cm) / 2) by 3.14159 and by the roll width (cm), then dividing that by the mass of the roll (g):

$$5 \quad \text{Roll Bulk} \left(\frac{\text{cc}}{\text{g}} \right) = \frac{3.14159 * \left(\frac{\text{roll diameter (cm)}}{2} \right)^2 * \text{roll width (cm)}}{\text{roll weight (g)}}$$

The measurements are done with the roll core in place. The units “cc/g” are used interchangeably herein with “cm³/g.”

The new rolled fibrous structures (e.g., sanitary tissue products) of the present disclosure may exhibit a roll bulk of greater than about 4 cm³/g, greater than about 5 cm³/g, greater than about 6 cm³/g, greater than about 7 cm³/g, greater than about 8 cm³/g, greater than about 9 cm³/g, greater than about 10 cm³/g, greater than about 12 cm³/g, greater than about 13 cm³/g, greater than about 14 cm³/g, greater than about 15 cm³/g, greater than about 16 cm³/g, greater than about 17 cm³/g, and/or less than about 30 cm³/g, less than about 25 cm³/g, less than about 22 cm³/g, less than about 20 cm³/g, and/or from about 10 cm³/g to about 25 cm³/g, specifically including all 0.1 increments between the recited ranges.

10 Additionally, examples of the new rolled fibrous structures detailed herein may exhibit a roll firmness less than about 10.5 mm, less than about 9.5 mm, less than 8.5 mm, less than about 7 mm, or from about 2.5 mm to about 15 mm and/or from about 3 mm to about 13 mm, from about 4 mm to about 10 mm, and/or from about 6 to about 9 mm, specifically including all 0.1 increments between the recited ranges.

Additionally, examples of the new fibrous structures detailed herein may be in the form of a rolled tissue products (single-ply or multi-ply), for example a dry fibrous structure roll, and may have a percent compressibility of less than about 10%, less than about 8%, less than about 7%, less than about 6%, less than about 5%, less than about 4.5%, less than about 4%, less than about 3%, about 0%, greater than about 0.25%, greater than about 1%, from about 2.5% to about 5%, from about 3% to about 5.5%, from about 4% to about 10%, from about 4% to about 8%, from about 4% to about 7%, and/or from about 4% to about 6%, as measured according to the Percent Compressibility Test Method described herein.

15 Additionally, examples of the new rolled tissue products as detailed herein can be individually packaged to protect the fibrous structure from environmental factors during shipment, storage, and shelving for retail sale. Any of known methods and materials for wrapping bath tissue

or paper towels can be utilized. Further, the plurality of individual packages, whether individually wrapped or not, can be wrapped together to form a package having inside a plurality of the new rolled tissue products as detailed herein. The package can have 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16 or more rolls. In such packages, the roll bulk and percent compressibility can be important factors in package integrity during shipping, storage, and shelving for retail sale. Further, the plurality of individual packages, or the packages having a plurality of the new rolled tissue products as detailed herein, can be palletized (i.e., organized and/or transported on a pallet). In such pallets of the new rolled tissue products as detailed herein, the roll bulk and percent compressibility can be important factors in package integrity during shipping, storage, and shelving for retail sale.

Further, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue products exhibits a roll bulk of greater than about 4 cm³/g or a percent compressibility of less than about 10%, or less than about 8%, is contemplated. In one example, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue products exhibits a roll bulk of greater than about 4 cm³/g and a percent compressibility of less than about 10%, or less than about 8%, is contemplated. In another example, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue products exhibits a roll bulk of greater than about 6 cm³/g and a percent compressibility of less than about 8%, or less than about 5%, is contemplated.

U.S. Publication No. 2022-0031531 discloses the packages that may be desirable for containing the rolled fibrous structures of the present disclosure, including sanitary tissue products (e.g., bath tissue). Said packages may comprise non-wood fibers, just like the rolled fibrous structures the package is used contained.

FIBROUS STRUCTURE EXAMPLES

Further nonlimiting examples of the new fibrous structures that include the various inventive non-wood fiber inclusion(s), as detailed herein, may have the properties disclosed in the tables below and as illustrated in FIGS. 1A- 2H and may be used to form sanitary tissue products of the present disclosure. It should be noted that wheat straw fibers in the tables below are never dried. The other fibers in the tables are once dried.

Tables 1 and 1a below details multiple inventive embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies:

Substrate	Type	Sample ID	Fractionation	# Unique Layers	Non-wood	Fabric Layer			Center Layer			Wire Layer			% of total Sheet			FSO/ WSO
						Euc	NSK/SW	Non-wood	Euc	NSK/SW	Non-wood	Euc	NSK/SW	Non-wood	Euc	Softwood	Non-wood	
Bath tissue	Inventive	1	Accepts to fabric	2	Bamboo	84%	0%	16%	32%	54%	14%	32%	54%	14%	52%	33%	15%	FSO
Bath tissue	Inventive	2	Accepts to fabric	2	Bamboo	68%	0%	31%	32%	39%	29%	32%	39%	29%	46%	24%	30%	FSO
Bath tissue	Inventive	3	Rejects to fabric	2	Bamboo	77%	0%	23%	32%	59%	10%	32%	59%	10%	49%	36%	15%	FSO
Bath tissue	Inventive	4	Rejects to fabric	2	Bamboo	53%	0%	47%	32%	49%	19%	32%	49%	19%	40%	30%	30%	FSO
Bath tissue	Inventive	5	Accepts to C/W, some rejects	2	Bamboo	100%	0%	0%	27%	49%	24%	27%	49%	24%	55%	30%	15%	FSO
Bath tissue	Inventive	6	Accepts to C/W, some rejects	2	Bamboo	100%	0%	0%	13%	39%	48%	13%	39%	48%	46%	24%	30%	FSO
Bath tissue	Inventive	7	No fractionation	2	Bamboo	100%	0%	0%	27%	49%	24%	27%	49%	24%	55%	30%	15%	FSO
Bath tissue	Inventive	8	No fractionation	2	Bamboo	100%	0%	0%	13%	39%	48%	13%	39%	48%	46%	24%	30%	FSO
Bath tissue	Inventive	15	No fractionation	2	Bamboo	100%	0%	0%	13%	39%	48%	13%	39%	48%	46%	24%	30%	FSO
Bath tissue	Inventive	16	Rejects to fabric	2	Bamboo	53%	0%	47%	32%	49%	19%	32%	49%	19%	40%	30%	30%	FSO
Bath tissue	Inventive	17	Rejects to fabric	2	Bamboo	53%	0%	47%	32%	49%	19%	32%	49%	19%	40%	30%	30%	FSO
Bath tissue	Inventive	18	Rejects to fabric	2	Bamboo	21%	0%	79%	32%	36%	32%	32%	36%	32%	28%	22%	50%	FSO
Bath tissue	Inventive	19	Rejects to fabric	2	Bamboo	0%	0%	100%	0%	0%	100%	0%	0%	100%	0%	0%	100%	FSO
Bath tissue	Inventive	20	Rejects to wire	2	Bamboo	47%	35%	18%	47%	35%	18%	47%	0%	53%	47%	23%	30%	WSO
Bath tissue	Inventive	21	No frac, C/F only	2	Bamboo	20%	35%	45%	20%	35%	45%	100%	0%	0%	47%	23%	30%	WSO
Bath tissue	Inventive	22	No frac, both layers	2	Bamboo	47%	35%	18%	47%	35%	18%	47%	0%	53%	47%	23%	30%	WSO
Bath tissue	Inventive	23	Rejects to wire	2	Bamboo	0%	0%	100%	0%	0%	100%	0%	0%	100%	0%	0%	100%	WSO
Bath tissue	Inventive	24	No fractionation	1	Bamboo										0%	0%	100%	WSO
Bath tissue	Inventive	25		1	Bamboo										0%	0%	100%	WSO
Bath tissue	Inventive	26		1	Bamboo										0%	0%	100%	WSO
Bath tissue	Inventive	27		1	Bamboo										0%	0%	100%	WSO
Bath tissue	Inventive	28		2	Abaca	100%	0%	0%	67%	33%	0%	67%	33%	0%	55%	37%	8.0%	FSO
Bath tissue	Inventive	29		2	Abaca	100%	0%	0%	33%	50%	17%	33%	50%	17%	55%	22.5%	22.5%	FSO
Bath tissue	Inventive	30		2	Abaca	100%	0%	0%	25%	38%	38%	25%	38%	38%	55%	22.5%	22.5%	FSO
Bath tissue	Inventive	31		2	Abaca	100%	0%	0%	25%	0%	75%	25%	0%	75%	55%	0%	45%	FSO
Bath tissue	Inventive	32		2	Abaca	100%	0%	0%	25%	0%	75%	25%	0%	75%	55%	0%	45%	FSO
Bath tissue	Inventive	33		2	Abaca	100%	0%	0%	25%	0%	75%	25%	0%	75%	55%	0%	45%	FSO

Table 1: Bath Tissue

Substrate	Type	Sample ID	Fractionation	# Unique Layers	Non-wood	Fabric Layer			Center Layer			Wire Layer			% of total Sheet			F50/ W50
						Euc	NSK/SW	Non-wood	Euc	NSK/SW	Non-wood	Euc	NSK/SW	Non-wood	Euc	Softwood	non-wood	
Bath tissue	Inventive	34		2	Abaca	23%	65%	12%	23%	65%	12%	100%	0%	0%	50%	42.5%	7.5%	W50
Bath tissue	Inventive	35		2	Abaca	23%	54%	23%	23%	54%	23%	100%	0%	0%	50%	35%	15%	W50
Bath tissue	Inventive	36		2	Abaca	23%	38%	38%	23%	38%	38%	100%	0%	0%	50%	25%	25%	W50
Bath tissue	Inventive	37		2	Abaca	23%	38%	8%	23%	38%	8%	100%	0%	0%	50%	25%	25%	W50
Bath tissue	Inventive	38		2	Abaca	23%	0%	77%	23%	0%	77%	100%	0%	0%	50%	0%	50%	W50
Bath tissue	Inventive	39		2	Abaca	23%	0%	77%	23%	0%	77%	100%	0%	0%	50%	0%	50%	W50
Bath tissue	Inventive	40		2	Untleached Bamboo	67%	33%	0%	67%	33%	0%	0%	0%	100%	43%	21%	36%	W50
Bath tissue	Inventive	41		2	Hemp	67%	33%	0%	67%	33%	0%	0%	0%	100%	44%	22%	34%	W50
Bath tissue	Inventive	42		2	Bagasse	75%	25%	0%	75%	25%	0%	0%	0%	100%	47%	16%	37%	W50
Bath tissue	Inventive	43		2	Cotton	67%	33%	0%	67%	33%	0%	0%	0%	100%	34%	17%	49%	W50
Bath tissue	Inventive	44		3	Bleached Bamboo	0%	0%	100%	0%	0%	0%	0%	0%	100%	0%	11%	89%	W50
Bath tissue	Inventive	50		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	W50
Bath tissue	Inventive	51		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	W50
Bath tissue	Inventive	52		1	Bamboo										0%	0%	100%	W50
Bath tissue	Inventive	53		1	Bamboo										0%	0%	100%	W50
Bath tissue	Inventive	54		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	W50
Bath tissue	Inventive	55		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	W50
Bath tissue	Traditional	Z01		2		100%	0%	0%	32%	68%	0%	32%	68%	0%	58%	42%	0%	F50
Bath tissue	Traditional	Z03		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	55%	35%	0%	W50
Bath tissue	Traditional	Z04		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	55%	35%	0%	W50
Bath tissue	Traditional	Z05		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	55%	35%	0%	W50
Bath tissue	Traditional	Z06		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	55%	35%	0%	W50
Bath tissue	Traditional	Z07		2		100%	0%	0%	25%	75%	0%	25%	75%	0%	55%	45%	0%	F50
Bath tissue	Traditional	Z08		2		23%	77%	0%	23%	77%	0%	100%	0%	0%	50%	50%	0%	W50
Bath tissue	Traditional	Z09		2		68%	32%	0%	68%	32%	0%	100%	0%	0%	79%	21%	0%	W50
Bath tissue	Traditional	Z10		2		66%	34%	0%	66%	34%	0%	100%	0%	0%	78%	22%	0%	W50
Bath tissue	Traditional	Z11		3		100%	0%	0%	0%	100%	0%	100%	0%	0%	80%	20%	0%	W50
Bath tissue	Traditional	Z13		2		100%	0%	0%	32%	68%	0%	32%	68%	0%	58%	42%	0%	F50

Table 1 (continued): Bath Tissue

					% of total Sheet			
Substrate	Type	Sample ID	# Unique Layers	Non-wood	Euc	Softwood	non-wood	FSO/ WSO
Towel	Inventive	9	1	Bamboo	37%	53%	10%	FSO
Towel	Inventive	10	1	Bamboo	42%	48%	10%	FSO
Towel	Inventive	11	1	Bamboo	34%	46%	20%	FSO
Towel	Inventive	12	1	Bamboo	44%	36%	20%	FSO
Towel	Inventive	13	1	Bamboo	31%	40%	30%	FSO
Towel	Inventive	14	1	Bamboo	46%	24%	30%	FSO
Towel	Inventive	45	1	Bagasse	40%	25%	35%	WSO
Towel	Inventive	46	1	Flax	40%	25%	35%	WSO
Towel	Inventive	47	1	Hemp	40%	25%	35%	WSO
Towel	Inventive	48	1	Unbleached Bamboo	40%	25%	35%	WSO
Towel	Inventive	49	1	Abaca	40%	25%	35%	WSO
Towel	Inventive	56	1	Abaca	35%	0%	65%	FSO
Towel	Inventive	57	1	Abaca	34%	36%	30%	FSO
Towel	Inventive	58	1	Abaca	36%	33%	31%	FSO
Towel	Inventive	59	1	Abaca	36%	33%	31%	FSO
Towel	Inventive	60	1	Abaca	36%	33%	31%	FSO
Towel	Inventive	61	1	Abaca	35%	0%	65%	FSO
Towel	Inventive	62	1	Abaca	40%	0%	60%	FSO
Towel	Inventive	63	1	Abaca	45%	0%	55%	FSO
Towel	Inventive	64	1	Abaca	35%	0%	65%	FSO
Towel	Traditional	Z02	1		40%	60%	0%	FSO
Towel	Traditional	Z12	1		40%	60%	0%	WSO
Towel	Traditional	Z14	1		35%	65%	0%	FSO
Towel	Traditional	Z15	1		35%	65%	0%	FSO
Towel	Traditional	Z16	1		35%	65%	0%	FSO

Table 1a: Towel

Table 2 below details multiple inventive and comparative embodiments, specifically detailing multiple properties for the purpose of comparing inventive versus comparative embodiments (note: common numbers between the tables indicate the same sample):

5

Substrate	Type	Non-wood	Sample Id	Ply Count	Process	Crepe	Differential Density	Dry Tensile Ratio	PVD		
									2.5-100 micron PVD Hysteresis	2.5-160 micron PVD Absorption	2.5-160 micron PVD Desorption
Bath tissue	Comparative	Bamboo	A	2	CWP	Y	N	3.9	236	621	702
Bath tissue	Comparative	Bamboo	B	2	CWP	Y	N	4.4	110	791	814
Bath tissue	Comparative	Bamboo	C	2	CWP	Y	N	2.2	139	449	561
Bath tissue	Comparative	Bamboo	D	3	CWP	Y	N	2.2	50	797	828
Bath tissue	Comparative	Bamboo	E	3	CWP	Y	N	2.8	47	633	671
Bath tissue	Comparative	Bamboo	F	1	UCTAD	N	N	1.1	42	656	667
Bath tissue	Comparative	Bamboo	G	2	CWP	Y	N	3.4	79	402	536
Bath tissue	Comparative	Bamboo/ Sugarcane	H	2	CWP	Y	N	4.1	82	439	573
Bath tissue	Comparative	Wheat Straw	AA	3	CWP	Y	N	2.7	92	725	691
Bath tissue	Comparative	Wheat Straw	BB	4	CWP	Y	N	2.4	292	993	1062
Bath tissue	Inventive	Bamboo	16	2	TAD	Y	Y	1.5	492	1095	1411
Bath tissue	Inventive	Bamboo	18	2	TAD	Y	Y	1.5	545	1034	1373
Bath tissue	Inventive	Bamboo	19	2	TAD	Y	Y	1.4	573	933	1453
Bath tissue	Inventive	Bamboo	22	2	TAD	Y	Y	2	517	1173	1372
Bath tissue	Inventive	Bamboo	25	2	TAD	Y	Y	1.2	645	1177	1444
Bath tissue	Inventive	Bamboo	26	2	TAD	Y	Y	1.3	629	1192	1490
Bath tissue	Traditional		26	2	TAD	Y	Y	1.7	390	1132	1279
Bath tissue	Inventive	Bamboo	27	2	TAD	Y	Y	1.4	765	967	1526
Bath tissue	Inventive	Bamboo	20	2	TAD	Y	Y	2.1	587	1037	1352
Bath tissue	Inventive	Bamboo	21	2	TAD	Y	Y	1.9	512	1024	1296
Bath tissue	Inventive	Bamboo	21	2	TAD	Y	Y	1.9	482	1036	1262
Bath tissue	Inventive	Bamboo	23	2	TAD	Y	Y	1.7	720	956	1433
Bath tissue	Inventive	Bamboo	24	2	TAD	Y	Y	1.6	816	896	1557
Towel	Inventive	Abaca	59	2	TAD	Y	Y		292	785	1496
Towel	Inventive	Abaca	56	2	TAD	Y	Y		435	874	1618
Towel	Inventive	Abaca	57	2	TAD	Y	Y		362	787	1631
Towel	Inventive	Abaca	61	2	TAD	Y	Y	1.35	421	1060	1599
Towel	Inventive	Abaca	64	2	TAD	Y	Y	1.38	423	1023	1551
Towel	Inventive	Bamboo	10	2	TAD	Y	Y	1.44	552	885	1611
Towel	Inventive	Bamboo	12	2	TAD	Y	Y	1.41	519	835	1583
Towel	Inventive	Bamboo	14	2	TAD	Y	Y	1.68	430	835	1561
Bath tissue	Inventive	Abaca	31	2	TAD	Y	Y	1.51	473	1296	1487
Bath tissue	Traditional		28	2	TAD	Y	Y	1.73	405	812	1088
Bath tissue	Inventive	Abaca	39	2	TAD	Y	Y	1.83	383	844	1075
Towel	Comparative	Bamboo/ Sugarcane	U	2	CWP	Y	N		147	582	735
Towel	Comparative	Bamboo	V	2	CWP	Y	N		138	466	696
Towel	Comparative	Bamboo	W	2	CWP	Y	N		17	482	745
Towel	Comparative	Bamboo/ Sugarcane	X	2	CWP	Y	N		133	524	689
Towel	Comparative	Bamboo	Y	2	CWP	Y	N		130	502	679

Table 2

Substrate	Type	Non-wood	Sample Id	Roll Bulk	Percent Roll Compressibility	Roll Firmness	Formation Index Outside	Formation Index Inside	Formation Index Average	Coverage (Fiber Layers)	Fiber Count -area (C(n))	Fiber Count -area (C(l))
Bath tissue	Comparative	Bamboo	A	7.1	1.24	3.38	157	171	164	4.21	714	265
Bath tissue	Comparative	Bamboo	B	8.3	4.81	7.52	141	130	136	4.67	779	294
Bath tissue	Comparative	Bamboo	C	8.4	3.07	7.03	115	113	114	3.22	550	200
Bath tissue	Comparative	Bamboo	D	6.1	1.54	3.09	123	116	120	6.59	762	534
Bath tissue	Comparative	Bamboo	E	7.7	2.22	4.50	98	103	101	4.71	805	289
Bath tissue	Comparative	Bamboo	F	12.5	6.36	10.55	73	67	70	4.94	815	256
Bath tissue	Comparative	Bamboo	G	8.0	3.76	6.15	148	142	145	2.88	502	177
Bath tissue	Comparative	Bamboo/ Sugarcane	H	8.3	3.32	5.65	142	136	139	2.80	374	162
Bath tissue	Comparative	Wheat Straw	AA	10.0	2.82	8.14	111.5	110	111	6.38	714	367
Bath tissue	Comparative	Wheat Straw	BB	9.0	3.46	9.25	113	94	104	6.84	723	374
Bath tissue	Inventive	Bamboo	16	9.0	3.88	7.83	72	72	72	8.34	885	457
Bath tissue	Inventive	Bamboo	18	9.3	3.90	8.22	68	68	68	7.27	872	391
Bath tissue	Inventive	Bamboo	19	9.3	4.07	7.21	64	66	65	6.89	1027	367
Bath tissue	Inventive	Bamboo	22	9.4	2.88	5.27	56	57	57	8.23	923	491
Bath tissue	Inventive	Bamboo	25	8.9	2.58	5.54	74	67	71	5.60	779	281
Bath tissue	Inventive	Bamboo	26	10.0	3.27	6.54	69	67	68	6.07	850	291
Bath tissue	Traditional		26	9.7	3.20	6.14	78	79	79	8.93	834	527
Bath tissue	Inventive	Bamboo	27	9.8	2.99	6.23	67	65	66	5.74	806	285
Bath tissue	Inventive	Bamboo	28				60	56	58			
Bath tissue	Inventive	Bamboo	21									
Bath tissue	Inventive	Bamboo	21				64	62	63			
Bath tissue	Inventive	Bamboo	23				69	63	66			
Bath tissue	Inventive	Bamboo	24				52	50	51			
Towel	Inventive	Abaca	56									
Towel	Inventive	Abaca	56	19.2	4.13	10.12	47	47	47			
Towel	Inventive	Abaca	57	19.3	4.13	10.07	48	47	48			
Towel	Inventive	Abaca	61	17.4	3.66	7.97	38	38	38			
Towel	Inventive	Abaca	64	18.0	3.78	8.87	37	36	37			
Towel	Inventive	Bamboo	10	18.9	3.70	8.68	51	50	51			
Towel	Inventive	Bamboo	12									
Towel	Inventive	Bamboo	14	20.9	4.03	9.70	47	43	45			
Bath tissue	Inventive	Abaca	31	9.3	3.33	6.83	76	76	76			
Bath tissue	Traditional		28	12.4	4.55	8.97	74	72	73			
Bath tissue	Inventive	Abaca	39	12.1	4.36	8.19	55	53	54			
Towel	Comparative	Bamboo/ Sugarcane	U	8.3	4.48	6.88	120	115.5	118			
Towel	Comparative	Bamboo	V	10.1	4.12	6.22	99	102	100			
Towel	Comparative	Bamboo	W	8.8	3.02	5.67	67.5	71	69			
Towel	Comparative	Bamboo/ Sugarcane	X	7.7	2.28	4.77	121	118	120			
Towel	Comparative	Bamboo	Y	7.8	1.98	3.81	102	101	102			

Table 2 (continued)

5

Tables 3 and 3a below details multiple inventive and comparative embodiments, specifically detailing multiple inventive and comparative embodiment properties, beyond the properties of Table 2 (note: common numbers and letters between the tables indicate the same sample):

10

Sample ID	Type	Non-wood	Substrate	Basis Weight	Compressive Modulus slope	Dry Caliper	Wet Caliper	Peak Load CD Tensile	CD Elongation (dry)	CD TEA	CD Modulus
1	Inventive	Bamboo	Bath tissue	33.3	-7.8	22.6		190	11.4	13.2	784
2	Inventive	Bamboo	Bath tissue	32.9	-7.8	22.2		188	11.4	13.0	769
3	Inventive	Bamboo	Bath tissue	33.0	-8.1	22.6		212	11.1	14.0	900
4	Inventive	Bamboo	Bath tissue	33.7	-8.6	22.3		256	11.4	17.7	1120
5	Inventive	Bamboo	Bath tissue	33.0	-8.8	23.0		180	11.6	12.7	705
6	Inventive	Bamboo	Bath tissue	33.7	-8.6	22.6		181	11.9	13.3	739
7	Inventive	Bamboo	Bath tissue	33.3	-9.0	22.4		184	11.6	13.0	756
8	Inventive	Bamboo	Bath tissue	33.0	-8.8	22.2		182	11.8	13.3	746
15	Inventive	Bamboo	Bath tissue	31.2	-9.4	20.7		206	14.2	16.7	697
16	Inventive	Bamboo	Bath tissue	32.7	-9.7	20.6		233	12.9	17.0	870
17	Inventive	Bamboo	Bath tissue	32.7	-9.4	21.0		229	12.3	15.9	886
18	Inventive	Bamboo	Bath tissue	32.0	-8.4	20.1		194	12.2	13.4	755
19	Inventive	Bamboo	Bath tissue	32.8	-9.1	20.9		260	11.4	17.1	1135
20	Inventive	Bamboo	Bath tissue	28.7	-6.0	22.8		166	14.5	13.7	549
21	Inventive	Bamboo	Bath tissue	31.1	-5.5	23.1		179	11.8	12.0	732
22	Inventive	Bamboo	Bath tissue	31.0	-5.5	23.1		171	14.4	14.1	561
23	Inventive	Bamboo	Bath tissue	31.5	-5.6	23.7		223	11.3	14.1	945
24	Inventive	Bamboo	Bath tissue	32.3	-5.9	24.7		177	15.2	15.6	589
25	Inventive	Bamboo	Bath tissue	34.7	-5.4	23.4		247	15.0	20.8	751
26	Inventive	Bamboo	Bath tissue	30.2	-4.8	21.6		225	14.9	18.8	703
27	Inventive	Bamboo	Bath tissue	29.9	-6.1	21.5		194	12.5	13.6	761
28	Inventive	Abaca	Bath tissue	34.7	-9.0	24.3		264	9.6	15.2	1220
29	Inventive	Abaca	Bath tissue	33.6	-9.0	23.5		246	9.7	14.3	1149
30	Inventive	Abaca	Bath tissue	33.1	-8.7	24.1		235	11.1	15.3	897
31	Inventive	Abaca	Bath tissue	34.3	-7.7	24.1		257	10.5	16.6	1170
32	Inventive	Abaca	Bath tissue	33.0	-7.3	23.8		234	10.9	15.7	1003
33	Inventive	Abaca	Bath tissue	32.6	-9.0	24.7		234	10.3	15.2	1081
34	Inventive	Abaca	Bath tissue	24.7	-7.9	20.7		307	9.7	17.2	1261
35	Inventive	Abaca	Bath tissue	24.8	-8.0	20.9		295	9.6	16.5	1240
36	Inventive	Abaca	Bath tissue	25.1	-7.2	23.1		293	9.2	15.7	1283
37	Inventive	Abaca	Bath tissue	24.5	-8.1	22.5		254	10.4	15.7	1035
38	Inventive	Abaca	Bath tissue	24.5	-6.5	20.0		297	9.0	15.9	1396
39	Inventive	Abaca	Bath tissue	24.8	-5.7	21.6		283	10.0	17.1	1250
40	Inventive	Unbleached Bamboo	Bath tissue	29.0	-4.87	21.1		149			
41	Inventive	Hemp	Bath tissue	28.9	-5.17	20.7		310			
42	Inventive	Bagasse	Bath tissue	28.6	-4.27	20.8		198			
43	Inventive	Cotton	Bath tissue	29.6	-6.10	21.4		128			
44	Inventive	Bleached Bamboo	Bath tissue	29.8	-5.03	23.5		385	10.5	22.4	1874

Table 3: Bath Tissue

Sample ID	Peak Load MD Tensile	MD Elongation (dry)	MD TEA	MD Modulus	Total Dry Tensile	Geometric Mean (GM) Dry Modulus	Tensile Ratio	Flexural Rigidity- MD mg-cm	Flexural Rigidity - CD mg-cm	Flexural Rigidity - Avg mg-cm
1	297	21.5	35.9	747	487	765	1.57			
2	259	19.2	29.9	747	447	758	1.38			
3	293	20.7	35.3	770	505	832	1.38			
4	340	20.9	41.9	897	596	1002	1.33			
5	262	20.4	31.1	673	443	689	1.45			
6	250	20.5	30.6	656	431	696	1.38			
7	263	20.4	30.9	628	446	689	1.43			
8	251	19.0	28.5	691	433	718	1.38			
15	294	18.7	31.7	842	500	766	1.43	42.4	46.3	44.3
16	339	18.2	35.7	962	572	914	1.46	45.6	52.3	49.0
17	345	19.9	38.5	875	573	880	1.51	48.9	57.2	53.0
18	299	17.6	29.5	845	493	797	1.55	44.2	50.0	47.1
19	354	23.1	45.1	777	614	939	1.36	51.9	71.5	61.7
20	346	24.1	49.0	1044	512	756	2.09	225.6	94.2	159.9
21	345	22.8	43.3	877	523	801	1.93	201.9	117.8	159.9
22	339	25.8	52.5	1002	509	750	1.99	263.7	121.8	192.7
23	370	26.1	53.2	907	593	915	1.66	256.9	186.3	221.6
24	281	20.5	39.0	1310	458	878	1.59	338.1	150.2	244.1
25	295	19.5	38.4	1012	541	872		207.2	139.9	173.5
26	287	20.4	39.4	1000	512	837		221.7	138.0	179.8
27	269	29.0	45.2	636	463	693	1.39			
28	363	25.5	54.3	866	627	1028	1.37	64.8	98.0	81.4
29	345	24.9	51.0	861	591	994	1.40	58.7	80.1	69.4
30	338	24.1	48.4	892	573	893	1.44	57.5	70.7	64.1
31	387	27.2	59.6	842	645	992	1.51	58.5	82.5	70.5
32	378	25.8	55.8	918	612	959	1.62	56.4	66.8	61.6
33	344	25.1	49.7	843	579	954	1.47	52.2	68.7	60.5
34	537	19.4	56.7	1348	844	1303	1.75	248.0	201.2	224.6
35	515	19.3	54.2	1320	810	1279	1.74	243.3	201.4	222.3
36	504	19.7	54.7	1298	797	1290	1.72	273.9	226.5	250.2
37	463	18.9	48.7	1272	717	1146	1.82	249.0	208.2	228.6
38	530	18.6	54.5	1447	827	1420	1.79	251.1	207.5	229.3
39	519	19.5	55.3	1335	802	1291	1.83	273.8	199.3	236.5
40	254				403	195	1.71			
41	421				731	361	1.36			
42	302				500	245	1.53			
43	265				393	184	2.08			
44	491	19.0	49.3	1236	876	435	1.28			

Table 3: Bath Tissue (continued)

Sample ID	L	A	B	Lint-outside	Lint - Average	HFS g/sht	HFS g/g	VFS g/sht	VFS g/g	CRT capacity g/g	CRT capacity g/in	CRT rate g/s	Residual Water (%)	Wet Burst Strength	Wet Burst Strength/ Total Dry Tensile
1	97.0	-0.8	3.6	9.6	9.1	11.1	19.5	6.2	11.0						
2	96.9	-0.9	3.7	7.9	7.9	10.8	18.7	6.0	10.3						
3	96.9	-0.7	3.4	9.1	9.3	10.7	18.4	6.0	10.3						
4	96.9	-0.8	3.6	7.5	8.0	10.5	17.6	5.7	9.6						
5	96.8	-0.7	3.5	9.6	9.4	11.5	19.8	6.4	11.0						
6	96.8	-0.7	3.5	9.6	9.4	11.5	19.4	6.5	11.0						
7	96.8	-0.8	3.6	9.5	9.0	11.1	18.5	6.4	10.6						
8	96.8	-0.8	3.6	9.2	9.2	11.3	19.3	6.3	10.8						
15	96.7	-0.9	3.8	10.1	10.0	10.2	19.8	5.8	11.2					33	0.065
16	96.9	-0.9	3.8	8.8	8.7	9.6	17.9	5.5	10.3					39	0.058
17	96.7	-0.7	3.5	9.4	9.4	9.7	17.9	5.5	10.2					36	0.063
18	96.8	-0.9	3.7	10.3	10.1	9.4	17.8	5.3	10.1					31	0.063
19	96.5	-0.9	3.7	4.7	4.9	8.9	16.1	5.1	9.2					36	0.058
20	96.7	-0.8	3.0	6.1	7.1	11.0	17.5	6.2	9.8					40	0.078
21	96.7	-0.6	2.6	7.1	7.3	10.5	16.6	5.8	9.2					45	0.086
22	96.7	-0.8	3.1	6.8	6.5	11.7	18.3	6.6	10.3					41	0.080
23	96.5	-0.9	2.6	5.1	4.4	10.5	15.6	5.8	8.6					33	0.056
24	96.3	-0.7	2.3	3.5	3.5	11.3	17.4	6.5	10.1					25	0.054
25	96.7	-0.9	4.1			11.8	20.8	6.7	11.8					34	0.063
26	96.5	-1.1	4.0			10.6	21.2	6.4	12.6					34	0.066
27				5.2	5.1	9.7	18.9	5.5	10.7					38	0.083
28	96.5	-0.8	4.3	10.2	10.8	11.6	20.1	6.4	11.2					34	0.054
29	96.0	-0.6	4.6	8.4	8.6	11.8	20.9	6.3	11.2					37	0.062
30	95.8	-0.6	4.6	9.8	8.7	12.5	22.6	6.6	12.0					37	0.054
31	95.2	-0.6	5.4	7.9	8.0	12.2	20.6	6.7	11.3					38	0.059
32	95.2	-0.5	5.4	8.3	8.4	12.1	21.9	6.5	11.8					40	0.065
33	95.3	-0.6	5.2	8.2	8.4	12.6	23.0	6.6	12.0					39	0.058
34	95.8	-0.4	3.3	3.3	3.1	10.5	25.4	5.3	12.9					47	0.056
35	95.5	-0.4	3.7	2.9	3.0	10.4	25.1	5.3	12.7					44	0.054
36	95.1	-0.2	4.1	3.0	3.1	10.4	24.3	5.4	12.6					43	0.054
37	95.1	-0.6	4.3	4.6	4.6	10.7	25.2	5.4	12.8					52	0.073
38	94.6	-0.1	5.0	3.0	3.1	9.6	23.2	4.9	12.0					41	0.049
39	94.6	-0.1	4.9	3.0	3.1	9.9	23.7	5.1	12.1					39	0.049
40				7.5	7.2	11.1	21.2	6.5	12.5					27	0.067
41				2.5	2.7	11.3	21.7	6.2	11.9					43	0.058
42				2.9	2.9	11.4	22.2	6.5	12.6					30	0.060
43				8.0	7.8	12.5	24.0	6.8	13.0					28	0.072
44				2.8		11.5	20.8	6.4	11.5					37	0.042

5

Table 3: Bath Tissue (continued)

Sample ID	CD Wet Tensile Strength - Finch	CD Wet Peak Elongation - Finch	CD Wet Peak TEA - Finch	MD Wet Tensile Strength - Finch	MD Wet Peak Elongation - Finch	MD Wet Peak TEA - Finch	Total Wet Tensile - Finch	Total Wet Tensile Decay - Finch	SST
1	19.0	12.9	1.9	30.3	13.9	2.7	49.3		0.38
2	17.7	12.0	1.7	25.3	12.7	2.1	43.0		0.38
3	20	12.3	1.9	30	14.7	2.8	50.7		0.41
4	23	12.5	2.1	34	15.1	3.1	57.7		0.38
5	17	12.0	1.7	27	13.6	2.4	44.0		0.43
6	16	12.5	1.7	24	12.5	2.1	40.3		0.41
7	18	12.3	1.8	28	13.1	2.4	46.3		0.42
8	18	12.9	1.8	26	14.2	2.4	44.3		0.45
15	19	12.3	1.8	28	13.8	2.7	46.8	21.0	0.42
16	22	12.2	2.0	34	15.0	3.3	56.5	24.5	0.37
17	22	12.6	2.2	33	14.6	3.0	55.0	23.0	0.36
18	18	12.3	1.9	27	13.4	2.4	45.0	20.8	0.36
19	25	12.1	2.2	34	14.6	3.2	58.0	28.0	0.34
20	15	12.1	1.6	31	14.1	2.9	45.3	15.8	0.57
21	19	11.8	1.8	35	12.1	2.7	53.8	18.8	0.52
22	18	13.4	2.0	36	15.2	3.3	53.5	19.3	0.59
23	17	9.6	1.4	27	9.7	1.9	43.8	22.3	0.71
24	13	11.1	1.4	23	14.1	2.4	35.5	20.5	0.70
25	20	12.9	2.0	32	18.0	3.6			
26	23	13.9	2.4	35	19.9	4.2			
27	21	12.6	2.0	32	13.3	2.6	52.7		
28	27	11.9	2.2	40	15.9	3.5	66.3	21.8	0.39
29	24	11.1	1.9	38	16.2	3.5	61.3	20.0	0.41
30	22	11.7	2.0	35	14.8	3.0	56.8	18.8	0.43
31	23	11.5	2.0	41	15.0	3.3	63.5	22.5	0.40
32	23	13.6	2.3	41	15.9	3.4	63.5	22.3	0.47
33	23	12.1	2.1	38	16.0	3.2	60.8	22.0	0.43
34	36	12.8	2.9	58	16.1	4.9	93.5	26.0	0.65
35	35	13.0	2.9	56	15.6	4.7	90.5	23.5	0.66
36	33	12.7	2.8	55	16.0	4.7	88.0	24.3	0.61
37	28	12.4	2.4	45	14.3	3.6	72.3	24.5	0.68
38	31	11.6	2.4	53	14.5	4.2	84.0	25.3	0.53
39	28	12.2	2.4	52	15.0	4.2	79.8	23.0	0.52
40							52	12.7	
41							66	16.0	
42							56	15.7	
43							53	13.0	
44	32	10.8	2.2	39	12.7	2.7	71	26.7	

Table 3: Bath Tissue (continued)

5

Sample ID	Stack Compressibility	Resilient Bulk	Stack Compressibility x Resilient Bulk	TS7 Avg	TS750 Avg	Plate Stiffness	Slip Stick CoF Avg	Kinetic CoF Avg	Bulk (cc/g)
1	37.0	50.8	1881	5.2	36.4	1.9	346	0.96	10.6
2	36.0	50.2	1806	5.9	38.9	2.1	353	1.01	10.5
3	40.0	51.5	2063	5.6	37.8	2.1	333	1.02	10.7
4	35.9	49.3	1771	5.9	36.0	2.2	325	0.98	10.3
5	38.5	52.5	2020	5.3	36.8	1.9	387	1.07	10.9
6	38.9	51.3	1997	5.0	35.9	2.1	290	1.00	10.5
7	39.9	52.0	2074	5.3	34.9	2.1	282	0.98	10.5
8	37.2	51.6	1918	5.0	33.5	2.0	301	1.04	10.5
15	33.8	53.0	1792	5.1	31.0	1.8	331	1.00	10.3
16	34.2	51.2	1748	5.7	35.7	1.9	373	0.94	9.9
17	33.8	51.6	1743	5.5	32.5	2.1	388	1.04	10.0
18	33.9	51.4	1742	6.0	31.2	2.0	410	1.03	9.8
19	34.9	50.7	1770	7.9	34.0	2.1	537	1.03	9.9
20	30.3	65.9	1993	9.4	19.4	3.2	404	0.94	12.4
21	30.0	62.0	1859	9.3	26.1	3.1	371	0.90	11.6
22	29.0	63.0	1828	9.6	19.9	3.6	417	0.95	11.6
23	32.1	62.9	2016	9.3	17.6	3.9	491	0.99	11.7
24	31.9	65.4	2082	10.4	15.9	4.4	534	0.96	11.9
25	29.2	58.2	1697	9.3	23.5	3.2	465	1.06	10.5
26	28.2	60.1	1695	9.4	16.2	3.3	462	1.01	11.1
27	30.1	61.4	1847	10.0	18.9	3.2	463	1.02	11.2
28	33.4	56.2	1876	6.0	41.7	2.2	391	0.95	10.9
29	33.1	56.8	1882	5.9	39.6	2.1	373	0.96	10.9
30	37.6	57.5	2159	5.4	36.8	2.3	407	1.03	11.3
31	32.2	58.3	1878	5.8	39.6	2.5	410	0.99	10.9
32	34.1	59.1	2014	5.5	35.5	2.2	437	0.99	11.2
33	34.4	60.5	2081	5.2	34.8	2.1	378	1.02	11.8
34	43.0	67.2	2887	12.6	26.3	4.9	472	0.88	13.0
35	40.6	67.9	2756	12.1	26.6	4.8	452	0.93	13.2
36	41.4	68.6	2841	12.0	27.1	5.3	443	0.87	14.3
37	35.2	64.9	2283	10.7	23.3	5.2	450	0.89	14.3
38	36.4	66.7	2427	11.4	23.9	5.0	489	0.90	12.7
39	39.1	67.6	2640	11.4	22.7	4.7	464	0.87	13.6
40									11.4
41									11.2
42									11.4
43									11.3
44									12.3

Table 3: Bath Tissue (continued)

10

5

Sample ID	Type	Non-wood	Substrate	Basis Weight	Compressive Modulus slope	Dry Caliper	Wet Caliper	Peak Load CD Tensile	CD Elongation (dry)	CD TEA	CD Modulus
A.1	Comparative	Bamboo	Bath tissue	17.2	-4.0	8.9		251	7.6	12.2	2119
A.2	Comparative	Bamboo	Bath tissue	16.4				232	9.0	14.2	1953
B.1	Comparative	Bamboo	Bath tissue	27.1				185	8.6	10.0	1308
B.2	Comparative	Bamboo	Bath tissue	26.3		14.4		178	8.5	9.5	1285
E.1	Comparative	Bamboo	Bath tissue	26.2				218	11.5	15.7	1188
F.1	Comparative	Bamboo	Bath tissue	23.7	-9.8	24.4		226	11.3	9.8	534
H.1	Comparative	Bamboo/Sugar Cane	Bath tissue	20.5		11.8		151	3.4	5.8	1394
I	Comparative	Bamboo	Bath tissue	18.1	-4.1	12.7		172	6.8	7.1	1561
I.1	Comparative	Bamboo	Bath tissue	18.2				213	5.5	7.4	2148
I.2	Comparative	Bamboo	Bath tissue	18.1	-4.6			148	8.3	8.0	1128
I.3	Comparative	Bamboo	Bath tissue	19.1		11.9		199	9.8	12.3	1322
J	Comparative	Bamboo	Bath tissue	18.0				180	5.1	5.3	1903
K	Comparative	Bamboo/Sugar Cane	Bath tissue	28.4		17.2		212	9.3	12.2	1428
M	Comparative	Bamboo/Sugar Cane	Bath tissue	27.0		17.2		411	4.8	11.6	3729
N	Comparative	Bamboo	Bath tissue	27.2	-4.3	15.0		285	9.0	16.8	2056
O	Comparative	Bamboo/Sugar Cane	Bath tissue	17.3		11.1		151	7.3	6.8	1193
P	Comparative	Bamboo/Sugar Cane	Bath tissue	27.3		23.2		340	12.0	21.7	1134
Q	Comparative	Bamboo/Sugar Cane	Bath tissue	25.7		14.0		162	6.8	6.4	1288
Q.1	Comparative	Bamboo	Bath tissue	27.4				217	10.1	13.9	1392
Q.2	Comparative	Bamboo/Sugar Cane	Bath tissue	23.3		14.8		210	7.7	10.1	1587
AA	Comparative	Wheat Straw	Bath tissue	29.6	-5.2	17.8		407	7.9	18.3	2289.8
BB	Comparative	Wheat Straw	Bath tissue	30.2	-3.4	19.0		555	6.5	20.2	3232.9
Z01	Traditional		Bath tissue	32.9	-7.8	23.0		216	11.8	15.4	847
Z03	Traditional		Bath tissue	30.4	-5.9	22.6		189	10.5	11.3	860
Z06	Traditional		Bath tissue	31.3	-5.1	22.1		198	9.4	10.6	994
Z07	Traditional		Bath tissue	33.2	-7.9	23.4		221	10.2	13.4	964
Z08	Traditional		Bath tissue	24.4	-8.6	20.3		298	10.6	18.2	1157
Z09	Traditional		Bath tissue	28.6	-4.37	21.8		227			
Z10	Traditional		Bath tissue	29.4	-4.53	20.8		251			
Z11	Traditional		Bath tissue	29.8	-6.43	23.5		215	10.5	13.3	1176
Z13	Traditional		Bath tissue	31.9	-8.7	21.1		242	12.1	16.0	914

Table 3: Bath Tissue (continued)

10

15

20

5

Sample ID	Peak Load MD Tensile	MD Elongation (dry)	MD TEA	MD Modulus	Total Dry Tensile	Geometric Mean (GM) Dry Modulus	Tensile Ratio	Flexural Rigidity- MD mg-cm	Flexural Rigidity - CD mg-cm	Flexural Rigidity - Avg mg-cm
A.1	687	63.3	233.4	1011	937	1460	2.74	44.2	59.3	51.8
A.2	648	72.6	236.4	720	881	1186	2.79			
B.1	817	22.0	96.3	1735	992	1487	4.41			
B.2	792	22.9	105.3	1919	970	375	4.46	79.2	68.4	73.8
E.1	708	57.0	203.1	778	926	960	3.25			
F.1	248	19.4	25.8	622	475	576	1.10	112.8	40.3	76.6
H.1	617	19.7	64.7	1425	768	1409	4.10	26.7	44.7	35.7
I	445	19.6	44.0	1004	618	1252	2.58	58.9	50.9	54.9
I.1	359	22.4	51.0	1190	572	1599	1.68			
I.2	332	19.4	35.8	853	480	979	2.24	30.5	46.2	38.4
I.3	659	22.4	85.3	1719	858	1497	3.31	57.2	44.8	51.0
J	722	33.7	114.5	1030	902	1389	4.02			
K	935	39.2	169.6	1274	1147	1349	4.42	84.0	79.0	81.0
M	688	33.9	112.1	839	1099	1769	1.67	37.0	243.0	140.0
N	699	18.1	78.9	2444	984	2239	2.45	114.7	83.0	98.9
O	421	33.0	76.9	943	572	1061	2.79	30.0	49.0	40.0
P								194.2	76.4	135.3
Q	660	19.1	64.9	1574	822	1424	4.07	30.5	56.7	43.6
Q.1										
Q.2	368	23.6	46.2	727	578	1074	1.75	65.0	89.6	77.3
AA	1111.0	14.4	83	2426	1518	2357	2.7	206.1	314.8	260.5
BB	1325.5	17.0	114	2638	1880	2920	2.4	238.4	391.8	315.1
Z01	316	22.9	40.2	698	532	769	1.46			
Z03	306	22.4	39.9	892	495	875	1.62	205.8	128.7	167.3
Z06	340	25.4	46.2	741	538	858	1.72	170.5	164.9	167.7
Z07	301	23.3	42.6	816	521	886	1.36	56.5	75.3	65.9
Z08	516	19.5	54.4	1281	814	1217	1.73	234.4	183.2	208.8
Z09	336				562	276	1.48			
Z10	315				566	281	1.25			
Z11	344	18.8	32.0	772	559	272	1.60			
Z13	331	17.4	33.3	992	572	952	1.37	46.9	59.9	53.4

Table 3: Bath Tissue (continued)

10

15

5

Sample ID	L	A	B	Lint-outside	Lint - Average	HFS g/sht	HFS g/g	VFS g/sht	VFS g/g	CRT capacity g/g	CRT capacity g/in	CRT rate g/s	Residual Water (%)	Wet Burst Strength	Wet Burst Strength/ Total Dry Tensile
A.1	95.1	-0.9	4.4	1.1	1.1	6.7	24.3	2.7	9.7					16	0.017
A.2															
B.1															
B.2				2.0										16	0.010
E.1															
F.1				5.4	4.9	7.4	14.5	3.4	8.7					16	0.033
H.1				1.0	1.0	5.0	17.6	2.3	8.1					9	0.011
I	93.9	-0.9	5.6	1.3	1.3	6.4	20.9	2.5	8.3					4	0.007
I.1															
I.2				1.2	1.2	7.2	23.6	2.9	9.6					3	0.006
I.3				1.1	1.1	6.3	18.6	2.9	8.5					4	0.005
J															
K				1.4	1.4	8.7	4.2	17.5	8.5					9	0.008
M				1.0	1.0	7.8	16.9	3.6	7.7					13	0.012
N	96.2	-0.8	3.7	1.5	1.7	6.3	13.8	3.7	8.0					6	0.006
O				1.0	1.0	6.8	22.6	2.6	8.7					5	0.009
P				0.9	0.9	9.0	18.7	4.0	8.4					22	
Q				2.3	2.3	6.7	15.7	3.4	8.1					9	0.011
Q.1															
Q.2				3.7	3.7	8.4	19.8	3.7	8.7					3	0.005
AA	94.3	-1.4	6.9	0.9	1.4									9.4	0.006
BB	94.3	-1.4	7.2	0.2	0.5									7.2	0.004
Z01	96.9	-0.8	3.6	10.3	9.8	11.8	21.2	6.4	11.4						0.000
Z03	96.7	-0.8	3.5	9.6	10.5	11.0	20.3	6.3	11.6					30	0.060
Z06	96.8	-0.9	3.4			11.0	20.6	6.1	11.5					29	0.053
Z07	96.8	-0.8	4.1	11.8	11.2	11.8	21.3	6.4	11.5					28	0.053
Z08	96.1	-0.5	3.0	3.5	3.4	11.0	26.8	5.5	13.4					45	0.056
Z09				7.7	7.6	10.9	20.9	6.6	12.7					30	0.053
Z10				7.3	7.6	11.8	22.3	6.4	12.0					26	0.046
Z11				7.1		12.3	22.3	6.9	12.7					28	0.049
Z13	96.8	-0.7	3.3	9.7	10.1	10.4	19.5	5.9	11.1					34	0.059

Table 3: Bath Tissue (continued)

10

5

Sample ID	CD Wet Tensile Strength - Finch	CD Wet Peak Elongation - Finch	CD Wet Peak TEA - Finch	MD Wet Tensile Strength - Finch	MD Wet Peak Elongation - Finch	MD Wet Peak TEA - Finch	Total Wet Tensile - Finch	Total Wet Tensile Decay - Finch	SST
A.1	11	5.1	0.73	43	15.1	3.6	53.7		
A.2	10	5.6	0.63	38	15.3	3.5	48.0		
B.1	8	2.8	0.37	32	5.9	1.3	39.7		
B.2	7.3	2.6	0.40	21.3	5.1	0.9	28.6		
E.1	6	2.4	0.40	20	8.1	1.3	26.0		
F.1	13	5.1	0.77	14	12.4	1.6	27.3	19.0	
H.1	6	1.6	0.37	16	5.8	0.8	21.7		
I	8	3.4	0.43	13	4.4	0.7	21.3		
I.1	7	2.1	0.33	13	4.2	0.6	19.7		
I.2	3		0.15	8	2.0	0.4	10.5		
I.3	4		0.23	11	3.5	0.5	15.0		
J	8	2.1	0.27	26	5.3	1.0	34.0		
K	7	2.6	0.40	25	5.9	1.1	31.3		
M	18	4.3	0.67	31	6.9	1.4	48.7		
N	7	3.2	0.28	17	4.0	0.6	23.8	20.3	
O	5		0.30	16	6.3	0.9	21.3		
P	15	7.6	1.00	48	10.6	3.1	63.3		
Q	5		0.20	21	4.4	0.7	25.5		
Q.1	6	2.6	0.20	22	4.8	0.9	27.3		
Q.2	3	13.8	0.20	9	17.7	0.6	11.5		
AA	7.4	2.5	0.3	20.3	5.3	1.0	27.7		
BB	7.1	2.6	0.3	14.3	5.1	0.7	21.4		
Z01	22.0	12.9	2.1	33.0	14.5	2.9	55.0	22.0	0.44
Z03	13	8.9	1.2	21	11.0	1.9	34.5	9.8	0.47
Z06	21	10.3	1.7	37	11.6	2.6	57.3	17.0	
Z07	21	11.7	1.9	31	16.3	3.0	52.3	17.0	0.35
Z08	35	13.4	3.0	53	16.1	4.7	88.5	25.0	0.73
Z09							60	16.7	
Z10							57	14.7	
Z11	21	11.5	1.6	30	13.5	2.1	52	15.3	
Z13	23	11.7	2.0	34	14.5	3.1	56.5	22.8	0.38

Table 3: Bath Tissue (continued)

10

Sample ID	Stack Compressibility	Resilient Bulk	Stack Compressibility x Resilient Bulk	TS7 Avg	TS750 Avg	Plate Stiffness	Slip Stick CoF Avg	Kinetic CoF Avg	Bulk (cc/g)
A.1									8.1
A.2									
B.1									
B.2	16.5	45.9		16.7	22.2	1.49	647		8.5
E.1									
F.1	44.8	59.0	2647	14.7	51.7	3.5	675	1.00	15.1
H.1	15.6	47.5	741	15.0	25.2	1.4	587		9.0
I									11.0
I.1									
I.2									
I.3									9.7
J									
K	23.1	64.6	1492	19.8	58.3	2.3	907		9.4
M	16.3	49.8	812	15.0	25.0	1.5	625		10.0
N	17.67	45.85	810	22.2	66.9	4.12	940	1.01	8.6
O	13.3	52.6	700	26.6	30.2	1.2	741		10.0
P	31.5	53.7	1692	25.7	100.1	3.6	920		13.3
Q	10.8	34.6	374	18.5	22.4	1.1	486		8.5
Q.1									
Q.2	13.6	46.1	627	15.2	23.1	1.2	543		9.9
AA	10.2	50.8	518	21.8	51.6	7.0	529	0.69	9.4
BB	17.0	47.1	807	19.9	48.1	6.2	636	0.82	9.8
Z01	35.8	52.0	1860	5.6	38.1	2.3	305	1.03	10.9
Z03	28.9	63.9	1848	8.1	21.9	2.8	327	0.92	11.6
Z06	28.2	60.5	1708	7.8	22.5	2.9	333	0.96	11.0
Z07	34.2	57.3	1958	5.8	40.8	2.2	325	0.95	11.0
Z08	44.3	68.6	3039	12.3	24.5	4.7	487	0.91	13.0
Z09									11.9
Z10									11.0
Z11									12.3
Z13	31.9	53.9	1719	5.4	35.8	2.0	303	0.92	10.3

5 Table 3: Bath Tissue (continued)

10

15

5

Sample ID	Type	Non-wood	Substrate	Basis Weight	Compressive Modulus slope	Dry Caliper	Wet Caliper	Peak Load CD Tensile	CD Elongation (dry)
9	Inventive	Bamboo	Towel	35.0	-10.8	45.9	35.2	855	12.3
10	Inventive	Bamboo	Towel	35.2	-11.3	47.0	34.0	871	12.2
11	Inventive	Bamboo	Towel	35.1	-10.9	51.2	35.2	904	12.9
12	Inventive	Bamboo	Towel	35.0	-10.8	49.9	33.8	800	14.9
13	Inventive	Bamboo	Towel	34.5	-10.7	48.3	31.3	794	12.2
14	Inventive	Bamboo	Towel	35.0	-11.3	50.2	34.7	723	16.3
45	Inventive	Bagasse	Towel	33.2	-8.07	32.3	29.6	644	13.5
46	Inventive	Flax	Towel	33.2	-7.17	30.7	27.3	480	13.7
47	Inventive	Hemp	Towel	32.7	-8.60	30.8	28.2	563	13.3
48	Inventive	Unbleached Bamboo	Towel	32.6	-8.17	30.8	28.1	478	14.8
49	Inventive	Abaca	Towel	34.3	-7.67	29.5	24.6	499	10.3
56	Inventive	Abaca	Towel	34.6	-12.1	43.9	32.4	978	11.5
57	Inventive	Abaca	Towel	34.1	-12.4	44.3	32.3	871	10.8
58	Inventive	Abaca	Towel	34.3	-10.6	44.9	32.2	799	13.2
59	Inventive	Abaca	Towel	34.8	-10.5	44.3	33.4	1081	12.2
60	Inventive	Abaca	Towel	34.6	-10.8	44.4	32.6	1110	11.3
61	Inventive	Abaca	Towel	38.9	-11.8	49.2	30.6	1061	9.1
62	Inventive	Abaca	Towel	38.8	-12.4	49.0	32.0	961	9.9
63	Inventive	Abaca	Towel	39.2	-12.1	49.4	32.5	961	9.9
64	Inventive	Abaca	Towel	38.2	-13.4	49.9	34.3	998	10.2
R	Comparative		Towel	28.9	-4.6	24.3	8.93	311	7.2
S	Comparative	Bamboo	Towel	31.3	-6.9	24.1667	13.6	442	6.2
T	Comparative	Bamboo	Towel	27.2	-4.8	16.1667	8.3	1057	4.8
U	Comparative	Bamboo/Sugar Cane	Towel	32.7	-5.7	20.9	11.2	720	4.7
V	Comparative	Bamboo	Towel	27.7	-5.7	21.8	11.5	699	6.0
W	Comparative	Bamboo	Towel	34.2	-5.4	25.6	13.4	509	6.3
X	Comparative	Bamboo/Sugar Cane	Towel	30.4	-5.3	19.1	10.6	672	6.0
Y	Comparative	Bamboo	Towel	28.0	5.8	17.7	11.5	836	5.1
Z02	Traditional		Towel	35.5	-11.3	46.4	35.9	935	12.7
Z12	Traditional		Towel	33.4	-8.3	28.0	26.6	616	14.5
Z14	Traditional		Towel	34.1	-11.5	45.2	30.6	1034	10.7
Z15	Traditional		Towel	34.8	-11.3	47.0	34.6	1144	11.9
Z16	Traditional		Towel	39.0	-14.2	50.3	35.2	840	11.2

Table 3a: Towel

10

Sample ID	CD TEA	CD Modulus	Peak Load MD Tensile	MD Elongation (dry)	MD TEA	MD Modulus	Total Dry Tensile	Geometric Mean (GM) Dry Modulus	Tensile Ratio
9	55.3	2289	1250	14.8	94.4	2043	2105	2163	1.46
10	56.3	2460	1250	16.3	104.3	1949	2121	2189	1.44
11	62.2	2434	1272	16.6	106.7	1893	2176	2146	1.41
12	66.0	2305	1131	16.0	94.4	2020	1931	2157	1.41
13	51.3	2349	1129	15.8	90.9	1866	1923	2093	1.42
14	65.0	1998	1218	15.5	98.8	2247	1942	2118	1.68
45	44.9	1970	587	18.7	56.7	1190	1231	615	0.91
46	33.8	1266	639	17.9	57.1	1116	1119	554	1.33
47	38.5	1605	733	18.8	68.5	1281	1295	642	1.30
48	38.5	1526	570	17.6	54.0	1311	1047	522	1.19
49	28.7	1982	813	16.1	65.3	1490	1312	637	1.63
56	65.7	3500	1705	15.2	131.7	2470	2683	2941	1.74
57	53.0	3229	1418	13.4	96.8	2482	2289	2831	1.63
58	60.5	2273	1292	17.8	112.9	1446	2090	1812	1.62
59	75.7	3234	1720	18.4	152.9	1868	2800	2457	1.59
60	70.9	3442	1600	18.2	144.7	1883	2771	2545	1.44
61	47.1	2842	1428	13.0	90.2	2269	2489	2539	1.35
62	47.0	2511	1338	13.1	88.4	2433	2300	2472	1.39
63	48.4	2601	1277	13.6	86.8	2226	2238	2407	1.33
64	51.1	2403	1377	13.4	92.1	2227	2375	2313	1.38
R	14.3	2653	773	12.6	51.1	2782	1084	2717	2.49
S	16.5	3280	1731	17.8	154.5	3367	2174	3323	3.9
T	30.8	9159	2062	22.7	244.9	4301	3119	6276	2.0
U	21.0	6481	1384	28.7	200.3	2248	2104	3808.6	1.9
V	24.3	4333	1786	35.9	284.3	1949	2485	2876.0	2.6
W	18.6	2876	1797	20.0	167.3	2654	2306	2762.7	3.5
X	22.5	4313	1535	30.1	252.6	2540	2207	3289.2	2.3
Y	25.0	6121	2291	27.7	286.9	3184	3127	4409.6	2.7
Z02	63.1	2553	1373	14.7	102.5	2069	2308	2295	1.47
Z12	46.3	1727	767	19.7	76.6	1285	1383	687	1.24
Z14	60.1	3439	1368	12.9	86.1	2305	2401	1189	1.32
Z15	73.6	3034	1525	18.6	136.8	1653	2669	1321	1.33
Z16	46.8	1936	1309	12.9	84.2	2535	2149	2215	1.56

5

Table 3a: Towel (continued)

10

Sample ID	Flexural Rigidity- MD mg-cm	Flexural Rigidity- CD mg-cm	Flexural Rigidity- Avg mg-cm	L	A	B	Lint- outside	Lint - Average	HFS g/sht	HFS g/g
9	922.9	1356.5	1139.7						55.4	23.9
10	902.2	1447.7	1174.9						56.5	23.7
11	1091.1	1616.1	1353.6						52.5	22.0
12	1382.6	1478.7	1430.6						56.4	25.0
13	964.7	1438.3	1201.5						55.9	25.4
14	1361.6	1420.2	1390.9						54.7	24.8
45							1.5		92.3	23.6
46							1.7		88.8	23.5
47							1.5		90.7	24.3
48							1.6		95.0	25.3
49							2.6		81.5	20.9
56	744.1	1209.5	977						52.4	22.8
57	727.1	1003.3	865						53.7	23.7
58			717						51.2	22.4
59			1091						51.5	22.0
60			1073						49.2	21.5
61	845.7	1259.7	1052.7	92.0	-0.5	5.8			57.5	22.2
62	865.8	1077.4	971.6	92.2	-0.6	5.8			58.3	22.9
63	817.6	1162.2	989.9	92.6	-0.6	5.6			59.6	22.7
64	755.7	1004.8	880.2	92.0	-0.6	5.8			56.5	22.2
R									32.0	10.6
S	670.9	693.5	682.2						23.0	12.4
T	242.0	617.0	429.5						20.8	11.3
U	167.0	591.1	379.0						40.6	12.8
V	213.3	754.2	483.7						27.8	15.1
W	350.7	486.6	418.6						23.7	11.5
X	280.5	575.4	427.9						26.7	12.6
Y	279.5	692.6	486.1						23.3	12.3
Z02	966.5	1683.6	1325.0						58.6	24.0
Z12							1.8		85.0	22.9
Z14	678.5	1203.8	941.2						54.6	24.5
Z15			1342						52.9	23.4
Z16	765.8	824.4	795.1	94.17	-0.83	3.1			59.9	23.0

Table 3a: Towel (continued)

Sample ID	VFS g/sht	VFS g/g	CRT capacity g/g	CRT capacity g/in	CRT rate g/s	Residual Water (%)	Wet Burst Strength	Wet Burst Strength/ Total Dry Tensile	SST
9	22.1	9.6	22.0	0.8	0.93	2.7	488	0.232	2.06
10	21.1	8.9	21.8	0.8	0.87	2.8	455	0.214	2.09
11	21.1	8.8	22.2	0.8	0.89	3.4	521	0.239	2.19
12	21.7	9.6	22.9	0.8	0.93	3.1	506	0.262	2.35
13	21.1	9.6	22.1	0.8	0.83	3.3	443	0.231	2.10
14	21.0	9.5	23.4	0.9	0.84	3.8	503	0.259	2.40
45	37.9	9.7	21.1		0.51		273	0.222	
46	36.6	9.7	21.0		0.38		292	0.261	
47	37.0	9.9	20.2		0.44		320	0.247	
48	39.1	10.4	21.6		0.47		233	0.223	
49	40.2	10.3	17.2		0.38		307	0.234	
56	21.2	9.2	19.0	0.67	0.58	2.5	692	0.258	1.69
57	19.9	8.8	19.6	0.69	0.62	2.6	553	0.242	1.80
58	20.9	9.1	18.9	0.67	0.60	2.5	481	0.230	1.58
59	20.6	8.8	18.6	0.67	0.58	2.7	634	0.226	1.67
60	20.0	8.7	18.3	0.65	0.57	2.7	533	0.192	1.61
61	24.0	9.2		0.8	0.7	1.6	580	0.233	2.01
62	23.6	9.3		0.8	0.7	1.7	539	0.234	2.06
63	24.6	9.4		0.8	0.7	1.8	558	0.249	1.98
64	23.7	9.3		0.8	0.8	1.7	565	0.238	1.99
R	14.1	4.7					50	0.046	
S	9.5	5.2	7.1	0.23	0.24	5.33	176.7	0.081	
T	9.0	4.9	5.4	0.15	0.13	12.1	98.3	0.032	
U	18.4	5.8	7.2	0.2	0.2	5.1	64.2	0.031	0.26
V	12.1	6.6	8.4	0.2	0.2	3.8	105.9	0.043	0.29
W	9.5	4.6	6.3	0.2	0.3	3.8	172.9	0.075	0.38
X	12.1	5.7	8.0	0.3	0.2	3.8	60.6	0.027	0.27
Y	11.4	6.0	7.7	0.2	0.2	6.4	93.4	0.030	0.27
Z02	22.6	9.3	22.3	0.8	0.89	2.5	497	0.215	2.07
Z12	37.9	10.2	19.6		0.39		282	0.204	
Z14	21.0	9.4	18.5	0.64	0.66	2.8	488	0.203	1.73
Z15	20.3	8.9	19.2	0.68	0.68	2.8	492	0.184	1.72
Z16	24.1	9.3		0.84	0.94	2.19	414	0.193	2.34

Table 3a: Towel (continued)

Sample ID	Stack Compressibility	Resilient Bulk	Stack Compressibility x Resilient Bulk	TS7 Avg	TS750 Avg	Plate Stiffness	Slip Stick CoF Avg	Kinetic CoF Avg	Bulk (cc/g)
9	70.6	100.4	7086	18.3	43.6	12.5	964	0.99	20.5
10	71.6	100.8	7218	17.8	43.0	13.8	812	0.94	20.8
11	76.9	108.6	8354	19.3	41.5	15.9	810	0.94	22.8
12	75.4	107.9	8140	19.9	45.0	15.2	766	0.91	22.3
13	69.8	97.6	6812	20.2	43.3	13.5	827	0.94	21.9
14	71.6	105.0	7514	20.3	49.7	15.2	808	0.90	22.4
45									15.2
46									14.4
47									14.7
48									14.8
49									13.4
56	73.4	96.7	7098	16.6	49.3	11.3	1329	1.311	19.8
57	72.3	99.9	7223	18.1	49.8	11.2	1034	1.129	20.3
58	68.8	97.1	6680	17.9	43.95	10.2	1227	1.181	20.4
59	66.6	99	6593	20.52	52.89	13.2	872	1.06	19.9
60	67.3	96.9	6521	19.53	50.82	13.5	1117	1.059	20.0
61	80.2	92.4	7415	12.50	47.46	14.0	932	1.247	19.7
62	80.6	91.5	7375	11.94	45.20	13.5	990	1.240	19.7
63	74.1	91.7	6792	12.66	50.83	13.2	910	1.140	19.7
64	79.9	92.5	7388	12.97	44.31	13.1	892	1.154	20.4
R									13.1
S									12.0
T									9.3
U	35.1	43.6	1533	25.86	95.12	6.6	573	0.732	
V	30.9	51.4	1588	32.97	132.16	7.0	808	0.754	
W	40.6	56.2	2282	30.51	242.26	11.1	711	0.728	
X	27.3	42.4	1158	34.39	113.71	6.8	679	0.741	
Y	22.5	47.0	1057	24.74	87.06	7.6	764	0.749	
Z02	72.7	97.8	7115	17.3	45.9	14.3	812	0.95	20.4
Z12									13.1
Z14	68.3	101.2	6913	15.7	62.2	11.6	899.0	1.17	20.7
Z15	71	106.3	7547	19.5	53.67	14.0	1071	1.023	21.1
Z16	80.3	86.2	6918	13.62	41.17	11.7	845	1.053	20.2

5 Table 3a: Towel (continued)

5

Sample ID	Total Wet Tensile	Wet Tensile Geometric Mean Modulus (38.1g/in)	MD Wet Tensile Strength	CD Wet Tensile Strength	MD Wet Peak Elongation	CD Wet Peak Elongation	MD Wet Peak TEA	CD Wet Peak TEA	MD Wet Modulus (38.1g/in)	CD Wet Modulus (38.1g/in)
9	723	401	424	299	23.2	18.4	37.5	22.9	380	423
10	730	404	419	311	23.0	19.3	37.4	25.3	389	420
11	770	395	451	319	24.0	19.2	40.6	25.7	372	420
12	738	370	428	310	23.5	22.6	38.5	29.8	375	364
13	713	390	423	290	22.9	19.3	36.0	23.9	374	406
14	774	347	472	302	24.6	24.8	43.5	32.2	359	335
45										
46										
47										
48										
49										
56	854	464	555	299	21.7	17.6	45.6	24.5	428	502
57	782	440	491	291	21.3	18.9	38.4	26.2	420	460
58	704	390	440	263	24.7	21.7	38.5	28.7	363	420
59	979	442	606	373	24.1	19.3	48.9	34.4	382	512
60	914	459	526	388	24.6	17.2	46.9	29.7	380	554
61	936	569	534	402	18.8	13.8	37.5	24.5	502	646
62	858	525	489	370	19.0	15.7	34.9	26.6	477	578
63	838	521	481	357	20.0	15.4	36.5	24.7	473	574
64	826	522	474	352	18.7	15.3	33.4	23.8	484	563
R										
S										
T										
U	232	421	144.8	87.6	14.1	8.8	8.5	3.9	325.5	544.4
V	295	385	194.0	101.1	17.8	11.4	14.2	6.4	306.9	481.8
W	426	494	332.0	93.8	15.4	10.8	20.0	5.7	519.8	470.2
X	205	336	135.5	69.5	16.6	8.2	9.9	3.0	255.3	443.0
Y	303	498	196.4	107.1	15.1	9.6	12.8	5.7	405.3	611.2
Z02	733	420	431	303	21.6	18.9	36.2	24.8	416	424
Z12										
Z14										
Z15	791	425	450	341	21.5	17.1	33.7	26.0	362	500
Z16	660	450	390	270	18.0	16.3	25.9	18.7	452	447

Table 3a: Towel (continued)

10

15

Table 4 below details fiber morphology of the fibers used in fibrous structures of the present disclosure (note: common numbers between the tables indicate the same sample).

In Table 4, fiber count (length average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where L(l) has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(l) \times \text{coarseness})$. And, fiber count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where L(n) has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(n) \times \text{coarseness})$.

10

Fiber	Description	Sample IDs	Length-weighted Fiber Length (l)	Fiber Width (microns)	Cell Wall Thickness (microns)	Coarseness mg/m	L/W	Fiber Count (million/g) number average	Fiber Count (million/g) length average	Instrument
Bamboo	Bleached	1-19	1.42	18.7		0.170	76	11.5	4.14	Valmet F55
Bamboo	Bleached	20-24	1.51	19.0		0.200	80	14.0	3.31	Valmet F55
Bamboo	Bleached	25-27, 50-55	1.54	19.4		0.210	80	13.5	3.09	Valmet F55
Bamboo	Unbleached		1.51	19.1		0.204	79	12.5	3.25	Valmet F55
Hemp	Bleached		1.25	23.9	5.65	0.216	53	10.1	3.67	Valmet F55
Hemp	Unbleached		1.25	25.5	5.09	0.211	49	10.4	3.76	Valmet F55
Bagasse	Bleached		0.92	18.5	3.27	0.094	50	30.2	11.51	Valmet F55
Abaca	Bleached	28-39	2.55	22.5	5.46	0.170	114	7.5	2.31	Valmet F55
NSK		1-39, 50-55	2.21	22.9	4.2	0.153	96	5.6	2.96	Valmet F55
SSK			2.38	27.5	5.2	0.246	87	4.3	1.71	Valmet F55
Euc		1-39, 50-55	0.72	15.7	3.0	0.060	46	39.4	23.31	Valmet F55
Wheat Straw	Never dried		0.839	20.69			41	14.3	5.30	Valmet F55
Bamboo	Unbleached	40, 48	0.88	16.7	7.3		53			Kajaani FiberLab
Bamboo	Unbleached		0.88	16.4	7.3	0.099	54	18.1	11.48	Kajaani FiberLab
Bamboo	Bleached	44	0.93	19.8	7.7		47			Kajaani FiberLab
NSK			2.24	24.7	6.9	0.162	91		2.75	Kajaani FiberLab
SSK			2.29	29.1	8.2	0.250	78		1.75	Kajaani FiberLab
SSK			2.40	28.3	11.9	0.308	85	3.7	1.35	Kajaani FiberLab
Hemp		41	0.95	19.0	7.1	0.101	51	17.7	10.21	Kajaani FiberLab
Abaca		49	3.13	19.3	7.8	0.185	162	4.5	1.73	Kajaani FiberLab
Bagasse		42, 45	0.95	19.0	7.1	0.101	51	15.4	10.31	Kajaani FiberLab
Bamboo (edulis)	Bamboo		1.23	8.4		0.105	146		7.72	Kajaani FS-100 or FS-200
Bamboo (vulgaris)	Bamboo		2.09	10.9		0.104	192		4.61	Kajaani FS-100 or FS-200
Bamboo (nigra)	Bamboo		1.55	9.0		0.109	183		5.59	Kajaani FS-100 or FS-200
Bamboo			1.3			0.092			8.39	FQA

Table 4

15

Table 5 below details PVD data of fibrous structures of the present disclosure (common numbers between the tables indicate the same sample):

	Sample ID	26		27		16		18		19	
Effective Radius	Direction	weight (mg)	147	weight (mg)	149	weight (mg)	163	weight (mg)	156.2	weight (mg)	162.2
μm		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	13	645	17.9	677	18.9	654	16.9	616	15.9	653
5		19	652	23	686	23	663	21	624	21	663
10		28	660	33	698	28	670	25	629	25	671
15		61	672	66	717	139.9	707	29	634	100.9	719
20		121.7	684	120.9	732	195.5	707	137.5	664	156.5	722
30		196.9	684	191.9	734	279.1	707	221.9	664	236.9	722
40		252.9	682	243.9	734	362.9	705	290.9	662	303.6	722
50		289.9	680	276.9	733	422.8	703	342.8	659	346.8	721
60		337	678	321.2	731	495.8	699	403.8	656	395.8	720
70		402.8	675	386.8	730	572.8	697	483	654	461.8	719
80		467.9	673	451.9	728	653.8	694	566.9	651	528.8	717
90		534.9	671	520.9	727	723.8	692	639	649	588.8	716
100		598.9	669	586.9	725	788.8	690	712.8	646	647.8	715
120		724.9	666	720.8	722	909.7	687	837.7	643	755.7	712
140		858.8	663	856	719	1013.7	685	953.7	640	857.7	710
160		998.8	658	984.8	716	1113.6	683	1050.9	638	948.8	709
180		1136.8	655	1109.7	714	1196.6	682	1143.6	637	1035.8	708
200		1265.9	653	1220.7	712	1273.6	681	1221.6	636	1122.6	707
225		1402.7	650	1341.7	710	1355.5	680	1306.5	635	1220.5	706
250		1474.7	650	1421.6	710	1413.5	680	1382.9	635	1311.5	705
275		1522.7	650	1484.6	710	1453.5	680	1427.5	635	1387.4	705
300		1549.6	650	1533.6	710	1483.5	681	1460.5	635	1449.4	705
350		1575	651	1602.6	710	1523.4	681	1502.4	636	1544.3	705
400		1594.6	652	1647.5	710	1553.4	682	1523.4	637	1610.3	705
500		1609.6	654	1705.5	712	1584.4	684	1544.4	639	1670.3	707
600		1619.7	655	1739.6	713	1602.5	685	1554.5	640	1692.4	707
800		1628.7	657	1771.6	714	1615.5	687	1564.5	642	1707.4	709
1000		1639.3	659	1784.2	715	1623.1	689	1570.1	644	1716	710
1000	Receding	1639.3	659	1784.2	715	1623.1	689	1570.1	644	1716	710
800		1635.7	658	1781.6	715	1623.5	689	1569.5	643	1714.4	710
600		1629.7	658	1776.5	715	1620.5	688	1565.5	642	1708.4	709
500		1625.6	657	1769.5	714	1616.9	687	1562.5	642	1703.3	708
400		1618	655	1757.5	712	1610.4	686	1554.4	640	1695.3	707
350		1611.6	654	1746.5	711	1604.4	685	1549.4	639	1687.3	706
300		1602	652	1733.5	709	1596.4	683	1541.4	638	1677.3	704
275		1595.6	650	1720.5	707	1589.4	682	1535.4	636	1668.3	703
250		1586.6	648	1709.5	705	1580.4	681	1528.4	635	1656.3	701
225		1576.6	646	1690.5	702	1570.4	679	1518.4	633	1644.3	699
200		1563.7	643	1667.2	699	1553.5	676	1506.5	630	1624.4	697
180		1548.7	640	1643.5	695	1537.5	674	1494.5	628	1595	694
160		1524.2	634	1618.5	691	1515.5	670	1474.3	624	1557.3	690
140		1495.6	628	1579.5	685	1475.4	665	1447.4	619	1506.3	686
120		1455.6	618	1523.5	677	1432.4	658	1405	612	1430.1	681
100		1395.6	606	1426.5	667	1366.4	648	1342.4	602	1309.5	674
90		1337.6	599	1335.4	663	1317.4	642	1292.4	595	1218.3	672
80		1199.5	594	1208.4	658	1258.8	635	1249.4	590	1110.2	671
70		1006.5	594	1055.4	657	1173.9	631	1140.3	585	1004.2	671
60		839.5	594	862.3	658	1057.3	627	1013.3	583	897.2	670
50		697.4	595	726.3	659	919.3	627	885.3	582	773.2	670
40		577.4	594	598.3	659	779.3	627	746.3	582	656.2	670
30		459.4	594	471.3	659	635.2	627	601.3	581	538.1	670
20		316.5	595	322.4	660	437.3	627	405.3	581	378.2	670
15		237.5	595	241.4	660	319.3	627	296.3	582	283.2	670
10		167.5	595	169.4	660	213.5	627	200.3	582	196.2	670
5		115.5	594	114.3	660	132.3	626	127.3	581	128.2	659
2.5		94.4	592	92.3	656	103.9	623	101.3	578	104.2	656

Table 5

	Sample ID	22		A		H		C		D	
Effective Radius	Direction	weight (mg)	154.8	weight (mg)	95	weight (mg)	91	weight (mg)	81	weight (mg)	135
μm		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	11.9	620	12	248	17	331	11.9	364	12.9	498
5		17	630	23	287	28.4	352	23	372	34	560
10		51	658	71	338	57	371	66	382	114	609
15		138.9	682	92	341	94	373	84	382	159	613
20		186.5	683	108.6	343	110.6	373	100.6	382	192.5	613
30		266.9	683	137	343	137	373	129	381	247.9	613
40		342.1	681	157	343	156.9	373	153	380	301.9	611
50		395.9	679	161.9	343	160.9	371	156.9	379	348.9	608
60		456.8	676	178.9	342	173.9	370	169.9	378	406.9	606
70		534.6	673	220.9	341	206.9	370	200.9	376	479.3	606
80		610.9	671	270	340	241	369	235	376	544	605
90		685.9	668	319	340	273	369	267	375	592.9	605
100		757.9	666	366	339	302	368	297	374	636.1	605
120		909.8	662	459	339	358	368	353	374	706.9	605
140		1055.8	658	547.9	338	409	368	406	373	761.9	605
160		1184.8	656	632.9	337	456	368	461	372	809.5	605
180		1296.7	654	683.9	337	502.9	368	512.9	372	848.9	605
200		1363.7	653	716.9	337	545.9	368	558.9	372	885.9	605
225		1416.7	653	746.9	338	602.9	368	607.9	372	932.4	605
250		1447.7	654	759.9	338	660.9	368	650.9	372	974.8	605
275		1468.7	654	785.9	339	736.9	368	693.9	372	1013.8	605
300		1487.6	655	795.8	339	820.8	368	726.9	372	1056.2	605
350		1509.6	657	806.8	340	888.8	368	755.9	373	1212.8	606
400	Receding	1523	658	813.8	341	905.8	368	764.9	374	1350.7	606
500		1539.6	660	822.8	342	914.8	369	773.9	375	1446.7	607
600		1550.7	662	827.9	343	917.9	370	779.9	376	1479.8	608
800		1563.7	664	833.7	345	920.9	371	785.9	377	1491.8	610
1000		1573.3	667	837.5	346	922.5	371	791.5	378	1502.4	611
1000		1573.3	667	837.5	346	922.5	371	791.5	378	1502.4	611
800		1570.7	667	835.9	346	921.9	372	788.9	379	1498.8	611
600		1565.6	666	833.9	346	921.9	372	783.9	378	1492.7	611
500		1561.6	665	830.9	345	919.9	371	780.9	378	1485.7	610
400		1553.6	664	827.8	344	917.8	371	773.9	377	1475.7	609
350		1547.6	662	823.8	344	913.8	370	768.9	376	1465.5	608
300		1540.6	661	819.8	343	908.8	369	760.9	375	1438.7	607
275		1533.6	659	814.8	343	901.8	368	752.9	374	1388.7	606
250		1524.6	658	809.8	342	892.8	367	738.8	373	1326.7	605
225		1516.6	656	804.8	342	866.8	366	716.8	372	1227.7	605
200		1504.7	653	795.9	341	815.9	365	685.9	370	1127.7	604
180		1488.7	650	785.9	340	739.9	364	654.9	369	1015.7	603
160		1470.6	646	767.9	339	644	363	614.9	368	932.7	603
140		1450.6	642	740.9	337	556.8	362	568.9	366	883.7	602
120		1407.6	633	701.6	335	498.8	362	532.9	364	827.7	602
100		1361.6	623	555.8	332	437.8	362	477.9	361	777.7	602
90		1322.6	615	617.8	331	414.8	361	450.8	360	754.6	601
80		1276.5	607	568.8	330	385.8	361	421.8	359	730.6	601
70		1180.5	600	466.8	331	354.8	361	372.8	359	698.6	600
60		1028.5	598	393.8	332	320.7	361	316.8	359	667.6	600
50		826.5	599	310.8	333	272.7	361	265.8	359	631.6	599
40		690.4	599	242.7	333	233.7	361	222.8	360	578.6	598
30		563.4	600	199.7	333	204.7	360	192.8	360	469.6	597
20		400.5	600	157.8	334	163.8	361	151.9	360	315.6	597
15		298.5	600	133.8	334	138.8	360	122.9	360	248.6	597
10		203.5	600	109.8	334	113.8	360	95.8	360	192.6	597
5		128.5	600	82.8	333	87.8	360	69.8	359	136.6	597
2.5		98.4	597	65.8	330	70.8	357	53.8	356	104.6	594

Table 5 (continued)

	Sample ID	F		G		E		B		25	
Effective Radius	Direction	weight (mg)	120.5	weight (mg)	75.4	weight (mg)	123	weight (mg)	134	weight (mg)	166
μm		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	10.9	704	15.9	357	11.9	563	10.9	397	16.5	699
5		16	709	24	366	23	578	18	412	21	707
10		38	717	75	377	102	620	80	458	28	717
15		121.9	726	95	378	132	620	125	461	70	738
20		158.5	725	114.4	378	161.6	621	159.5	461	152.9	750
30		227.9	724	147	376	210.9	620	211.9	461	226.5	750
40		298.9	722	175	374	257.9	619	261.9	458	290.9	749
50		344.9	720	182.9	373	285.9	618	301.9	455	332.8	748
60		385.9	717	195.9	372	320.9	617	353.9	453	381.8	746
70		432.8	714	225.9	371	370.9	616	427.9	451	457.9	743
80		473.9	712	254	371	418	615	497.9	449	539.9	741
90		508.9	710	280	370	460	614	558.5	448	624.9	738
100		539.9	709	303	370	497	614	605.9	448	707.8	735
120		589.9	707	344	370	557	614	690.9	447	870.8	730
140		630.9	706	382	369	604.9	613	755.9	447	1036.8	725
160		666.9	705	418	369	644.9	613	801.9	447	1193.7	721
180		698.9	704	455.5	369	679.9	613	833.9	447	1314.9	719
200		726.9	703	495.3	369	715.7	613	858.9	447	1406.7	718
225		761.8	702	548.9	369	759.5	613	883.8	448	1471.7	717
250		792.8	702	623.9	369	799.9	612	909.8	449	1509.6	718
275		823.8	702	725.9	369	840.9	612	924.8	449	1530.6	718
300		854.8	701	792.9	369	894.9	612	939	450	1548.6	718
350	Receding	913.8	701	833.8	369	1012.8	612	954.8	451	1564.6	719
400		977.6	701	845.8	370	1151.2	612	961.8	452	1577.6	720
500		1487.7	694	854.8	370	1370.8	612	971.8	453	1592.7	722
600		1974.7	692	861.5	371	1397.9	612	979.9	455	1604.1	724
800		2093.7	692	866.9	372	1416.9	613	989.9	457	1615.6	726
1000		2098.3	693	870.9	373	1424.4	614	999.5	459	1626.6	728
1000		2098.3	693	870.9	373	1424.4	614	999.5	459	1626.6	728
800		2093.7	692	866.9	373	1420.8	614	995.8	459	1626.6	729
600		2080.7	691	865.9	373	1410.8	613	990.8	458	1623.6	728
500		2055.5	689	861.9	372	1401.4	612	985.8	458	1618.2	727
400		2005.6	683	852.9	371	1364.8	610	979.8	456	1611.6	725
350		1908.6	680	847.8	371	1323.6	609	975.2	456	1605.6	724
300		1443.6	678	838.8	370	1246.4	607	969.8	455	1596.6	722
275		1146.5	679	831.8	369	1167.7	606	964.8	454	1589.7	721
250		992.5	679	817.8	368	1079.7	605	958.8	453	1583.7	720
225		846.5	679	799.2	367	988.7	604	951.8	452	1575.6	718
200		805.6	679	767.9	366	897.8	603	937.9	451	1564.6	715
180		779.6	679	717.9	365	836.8	602	920.8	450	1553.6	712
160		752.6	678	597.9	365	770.8	602	899.8	448	1538.4	708
140		723.6	678	497.8	364	716.8	602	870.8	446	1512.6	703
120		691.5	678	456.8	363	667.8	602	840.8	443	1480.4	695
100		656.5	677	427.8	362	631.7	601	791	439	1430.6	682
90		635.5	677	408.8	361	613.7	601	758.8	437	1388.5	673
80		613.5	676	387.8	360	589.7	601	721.8	436	1337.3	666
70		587.5	676	347.8	360	561.7	601	669.7	435	1242.5	657
60		559.5	675	312.8	360	524.7	600	622.7	434	1002.1	657
50		524.5	675	269.8	360	465.7	600	544.7	435	815.4	658
40		487.1	675	238.8	360	403.7	600	476.7	435	675.4	658
30		434.5	674	212.8	360	337.7	600	389.7	435	531.5	658
20		318.5	674	169.8	360	250.4	600	275.8	435	352.5	659
15		234.5	674	139.8	360	201.7	600	218.8	436	262.5	659
10		162.5	674	110.8	360	157.7	600	165.7	436	181.5	659
5		107.5	673	79.8	359	118.9	599	112.7	435	118.5	659
2.5		85.5	670	61.8	357	99.7	596	85.7	432	94.4	656

Table 5 (continued)

	Sample ID	20		23		24		21		59	
Effective Radius	Direction	weight (mg)	145	weight (mg)	156.5	weight (mg)	154	weight (mg)	151.2	weight (mg)	167.7
μm		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	9.9	661	10.9	629	12.9	728	10.9	597	12.8	1155
5		15	668	17	636	18	738	16	604	17	1154
10		21	675	29	648	31	754	55	626	25.8	1154
15		86	701	68	667	59	767	131.9	641	134.7	1155
20		148.9	705	129.1	683	118.3	788	180.9	641	193.7	1155
30		223.9	704	194.9	684	193.9	789	257.9	641	260.7	1154
40		290.9	702	252.9	684	254.9	789	328.9	640	310.8	1153
50		334	699	288.8	682	290.8	787	372.8	638	344.6	1152
60		375.8	696	321.8	681	322.8	785	419	635	361.6	1151
70		438.9	694	377.9	679	375.9	784	480.9	633	397.6	1149
80		507.9	692	439.9	678	433.9	783	547.3	631	443.7	1147
90		575.9	689	504.3	676	491.9	781	615.9	629	489.7	1146
100		642.8	686	569.8	674	551.8	780	680	627	535.7	1145
120		780.8	682	702.8	671	670.8	777	805.8	624	623.6	1143
140		920.8	678	828.8	669	785.8	775	929.8	620	711.6	1140
160		1046.7	674	966.7	666	908.7	772	1046.7	617	797.6	1139
180		1170.7	671	1094.7	664	1040.7	769	1145.7	616	884	1136
200		1279.7	669	1213.7	661	1165.1	767	1216.7	615	972.6	1134
225		1346.8	669	1329.6	660	1315.6	765	1273.6	615	1080.6	1132
250		1392	669	1392.6	660	1439.6	763	1305.6	615	1197.7	1131
275		1425.6	670	1439.6	660	1523.5	763	1334.6	615	1331.5	1128
300		1447.6	670	1479.6	660	1571.5	763	1355.6	616	1463.7	1127
350		1477.6	671	1533.5	661	1642.5	764	1382.6	617	1736.5	1125
400		1502.6	672	1567.5	662	1699.4	764	1402.6	618	1918	1124
500		1533.6	674	1619.6	664	1779.5	765	1422.7	620	2100.5	1124
600	Receding	1549.6	676	1639.6	665	1815.5	766	1435.6	622	2214.3	1125
800		1567.6	678	1657.6	667	1848.5	768	1448.6	624	2319.5	1127
1000		1580.6	680	1671.6	668	1868.5	769	1461.6	626	2339.4	1128
1000		1580.6	680	1671.6	668	1868.5	769	1461.6	626	2339.4	1128
800		1576.6	680	1667.6	668	1861.5	769	1459.6	626	2325.4	1128
600		1569.6	679	1660.5	667	1850.5	768	1456.6	625	2302.8	1126
500		1563.6	678	1653.5	666	1840.4	766	1451.6	624	2265.4	1124
400		1553.6	676	1642.5	664	1824.4	765	1443.6	623	2184.4	1121
350		1545.6	675	1634.5	663	1810.4	764	1436.6	622	2133.4	1119
300		1534.5	673	1622.5	661	1793.4	762	1426.6	620	2021.4	1116
275		1524.6	671	1613.6	660	1780.5	760	1418.7	619	1969.3	1113
250		1514.6	670	1602.6	658	1762.5	758	1411.6	618	1934.4	1110
225		1502.6	668	1588.6	656	1737.5	755	1401.6	616	1883.2	1105
200		1485.6	665	1568.6	652	1713.5	752	1388.6	613	1817.4	1101
180		1466.6	661	1549.5	648	1687.4	747	1375.6	611	1733	1097
160		1442	656	1527.3	644	1650.2	742	1357.4	607	1598.4	1093
140		1408.6	650	1495.5	639	1607.4	736	1328.6	602	1284.3	1093
120		1367.3	642	1450.3	630	1554.2	727	1299.4	596	1198.3	1092
100		1309.5	631	1373.5	620	1448	717	1246.5	584	917.3	1093
90		1269.5	623	1320.5	613	1341.3	711	1214.5	578	848.3	1093
80		1217.5	616	1231.4	606	1159.1	711	1166.5	569	777.9	1093
70		1143.4	607	1085.4	603	973.3	712	1079.5	563	798.3	1093
60		965.4	604	865.4	605	823.3	713	915	561	635.3	1094
50		773.4	607	710.1	606	697.2	713	756.4	563	556.2	1094
40		650.4	607	591.3	606	589.2	713	644.4	564	481.2	1094
30		533.5	608	474.4	606	478.3	713	538.5	564	407.3	1094
20		368.3	608	322.4	607	326.3	713	380.5	565	300.3	1095
15		272.5	608	244.4	607	246.3	713	288.5	565	240.3	1095
10		185.4	609	173.4	607	172.7	714	198.5	565	178.3	1095
5		116.4	608	116.4	607	116.3	712	124.4	565	121.3	1094
2.5		89.4	604	94.3	604	93.2	709	95.4	562	102.2	1091

Table 5 (continued)

	Sample ID	61		10		12		14		39	
Effective Radius	Direction	weight (mg)	195	weight (mg)	175	weight (mg)	171.5	weight (mg)	169.2	weight (mg)	125.4
μm		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	12.2	1347	12.2	1309	14.2	1341	12.3	1325	12.2	573
5		16.4	1346	16.4	1310	18.4	1341	16.4	1327	16.4	578
10		22.2	1346	26.2	1311	32.2	1345	36.2	1337	42.2	586
15		117.1	1347	150.7	1329	154.1	1358	189.1	1356	114.2	600
20		217.5	1346	209.1	1329	219.7	1358	241.1	1356	156.1	600
30		312	1345	281.1	1329	293.1	1358	311.1	1355	226.1	588
40		391	1343	333.1	1328	345	1357	359.1	1354	293.7	596
50		455	1341	366	1328	376	1356	388	1354	346.3	584
60		499	1339	382	1327	387	1355	398	1353	380.1	592
70		555	1337	418	1326	418	1354	427	1352	432	589
80		626	1335	466.1	1324	461.1	1353	469.1	1351	488.1	587
90		690	1333	517.1	1322	506.1	1351	513.1	1349	541.1	585
100		750	1330	569.1	1320	554.1	1348	558.1	1347	591.1	583
120		865	1327	681.1	1317	653	1346	655.1	1344	685.1	581
140		971	1324	792	1314	755	1343	756.1	1342	774	579
160		1072	1322	897	1311	849	1341	847	1340	856	577
180		1170.9	1319	991	1310	934	1339	930	1338	941	575
200		1270.9	1316	1080.4	1308	1012	1338	1006	1337	1015	574
225		1387.9	1314	1183	1306	1103	1336	1096	1336	1077.9	574
250		1503.9	1311	1284.6	1305	1191	1335	1184.6	1335	1129.7	574
275		1617.9	1310	1385.9	1304	1278.9	1334	1278	1333	1161.9	574
300		1728.2	1308	1487.9	1303	1371.9	1333	1367.9	1332	1182.9	574
350		1951.8	1306	1748.9	1301	1592.9	1331	1592.3	1331	1211.9	575
400		2153.8	1305	2087.8	1298	1892.8	1329	1920.8	1329	1230.3	576
500		2448.6	1305	2597.9	1298	2651.9	1325	2648.9	1327	1253.9	578
600		2536.6	1306	2703.7	1298	2943.6	1325	2840.5	1327	1261.7	579
800		2598.8	1309	2741.9	1300	3117.8	1326	2886.9	1328	1273.9	581
1000		2633.8	1311	2765.8	1302	3139.8	1328	2910.8	1330	1282.9	583
1000	Retceding	2633.8	1311	2765.8	1302	3139.8	1328	2910.8	1330	1282.9	583
800		2614.8	1311	2744.8	1301	3119.8	1327	2888.8	1329	1280.9	583
600		2583.8	1308	2716.8	1299	3081.8	1325	2856.8	1327	1278.9	582
500		2548.7	1305	2687.8	1297	3046.7	1322	2829.8	1325	1275.7	582
400		2470.7	1301	2623.8	1293	2896.7	1318	2766.8	1321	1267.9	580
350		2408.7	1297	2571.8	1290	2776.7	1314	2714.8	1318	1260.9	579
300		2329.7	1291	2496.7	1285	2656.7	1309	2580.7	1314	1250.8	577
275		2261.6	1286	2445.7	1281	2562.7	1307	2494.7	1310	1242.8	576
250		2170.7	1282	2393.8	1278	2415.7	1304	2425.4	1307	1231.9	574
225		2061.7	1277	2154.8	1275	2294.7	1300	2117.8	1307	1216.9	572
200		1932.7	1274	1880.8	1273	1905.7	1300	1934.8	1305	1198.9	569
180		1810.7	1270	1793.7	1271	1796.7	1298	1795.3	1303	1181.9	567
160		1710.4	1267	1711.7	1268	1691.7	1296	1680.7	1301	1156.9	563
140		1540.6	1263	1609.7	1264	1580.6	1293	1546.7	1299	1128.9	558
120		1408.6	1260	1429.7	1261	1433.6	1289	1364.7	1296	1095.8	552
100		1270.6	1258	1209.7	1259	1167.6	1288	1095.7	1296	1043.6	542
90		1183.6	1257	1075.6	1259	1029	1288	955.7	1296	1013.4	537
80		1091.5	1257	933.6	1258	869.1	1289	822.6	1298	972.8	532
70		1002.5	1257	781.6	1260	752.5	1290	719.6	1299	892.8	529
60		907.5	1257	687.6	1260	653.5	1291	638.6	1299	782.6	528
50		801.5	1257	589.6	1261	568.5	1291	561.6	1300	662.7	529
40		695.5	1257	505.6	1261	496.5	1292	497.6	1300	561.7	530
30		574.6	1257	428.7	1262	432.6	1292	440.7	1301	472.8	530
20		399.6	1258	319.1	1262	331.6	1293	345.7	1301	333.8	531
15		305.6	1258	256.6	1262	271.6	1293	286.7	1301	247.8	531
10		216.5	1258	190.6	1262	203.6	1293	218.7	1301	166.8	531
5		140.5	1258	124.6	1262	132.5	1292	144.6	1300	104.8	530
2.5		111.5	1254	100.4	1259	108.5	1289	119.6	1287	81.7	528

Table 5 (continued)

	Sample ID	64		56		57		31		V	
Effective Radius	Direction	weight (mg)	184	weight (mg)	172.2	weight (mg)	166.5	weight (mg)	167	weight (mg)	133
μm		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	9.9	1352	10.9	1147	12.9	1151	10.4	685	11.9	570
5		15	1350	16	1144	18	1149	15.4	691	33	624
10		20	1348	21	1142	22	1148	19.4	696	110.2	674
15		126.9	1345	66	1143	69.4	1148	80.4	729	140	674
20		206.9	1342	152.9	1137	160.3	1144	164.3	735	157	674
30		289.8	1340	226.9	1135	227.9	1143	260.5	734	181.9	675
40		360.8	1338	277.8	1134	274.3	1141	356.3	732	198.9	674
50		406.8	1337	305.8	1132	295.8	1140	440.2	729	194.9	674
60		456.8	1335	339.8	1130	322.8	1138	525.2	726	199.9	672
70		521.8	1332	392.8	1128	367.8	1137	630.2	721	223.9	671
80		586.8	1330	449.9	1126	415.9	1135	727.2	718	250	671
90		648.8	1327	506.9	1124	464.9	1133	816.2	715	280	670
100		708.8	1325	563.9	1122	512.9	1132	904.2	712	309	669
120		821.8	1322	674.8	1119	610.8	1129	1061.1	707	364	668
140		928.8	1319	778.8	1116	704.8	1127	1188.1	705	421.9	667
160		1032.8	1316	884.8	1113	799.8	1124	1306	703	477.9	667
180		1131.8	1313	989.8	1110	894.8	1121	1396.2	702	538.9	666
200		1227.7	1311	1093.8	1108	991.8	1118	1469.9	701	603.9	666
225		1343.7	1309	1233.7	1104	1119.7	1115	1529.9	701	692.9	665
250		1461.7	1306	1374.7	1102	1249.7	1113	1563.9	701	782.9	665
275		1590.7	1303	1518.7	1100	1393.7	1110	1589.9	702	869.8	664
300		1725.6	1300	1662.7	1098	1563.7	1107	1606.3	703	948.4	664
350		1957.6	1298	1889.6	1097	1863.6	1104	1631.8	704	1091	664
400		2171.6	1297	2001.6	1097	2039.6	1104	1650.8	705	1226.8	664
500		2391.1	1298	2128.6	1097	2218.1	1104	1675.8	707	1374.9	665
600		2484.6	1293	2190.7	1099	2308.6	1105	1687.9	709	1407.8	665
800		2547.6	1301	2226.7	1101	2378.6	1107	1703.9	712	1433.8	667
1000		2576.6	1304	2238.7	1102	2393.6	1108	1713.9	714	1447.8	668
800	Receding	2576.6	1304	2238.7	1102	2393.6	1108	1713.9	714	1447.8	668
600		2560.6	1303	2228.6	1102	2382.6	1108	1711.9	714	1436.4	668
500		2532.6	1301	2209.6	1101	2362.6	1106	1709.8	713	1420.8	667
400		2502.6	1298	2189.6	1099	2331.6	1104	1705.8	712	1406.8	666
350		2422.3	1294	2151.4	1096	2256.4	1101	1698.6	711	1369.6	664
300		2372.1	1290	2102.6	1093	2194.5	1098	1690.8	709	1316.7	663
275		2246.5	1285	2061.4	1089	2101.5	1094	1681.8	708	1235.7	661
250		2206.5	1281	2018.6	1086	2057.5	1091	1674.8	706	1189.7	660
225		2143.4	1276	1967.5	1082	2019.5	1088	1665.8	705	1139.7	658
200		2063.5	1271	1922.6	1078	1954.6	1083	1655.1	703	1098.8	657
180		1943.5	1266	1878.6	1073	1899.5	1079	1639.9	700	925.8	656
160		1828.5	1263	1807.6	1068	1824.5	1074	1623.9	698	868.7	655
140		1659.9	1260	1719.4	1061	1732.9	1068	1598.2	693	800.1	654
120		1512.2	1257	1592.5	1056	1638.5	1067	1572.8	689	738.7	653
100		1354.4	1255	1275.5	1056	1159.4	1067	1535.8	682	668.7	652
90		1231.4	1252	1089.5	1056	964.4	1067	1478.8	672	539.3	653
80		1140.4	1251	992.5	1056	893.2	1067	1444.4	666	494.7	653
70		1040.4	1251	893.5	1056	798.4	1067	1397.8	659	458.7	653
60		952.4	1251	804.5	1056	720.4	1067	1342.7	651	405.6	653
50		864.3	1251	715.4	1056	636.4	1067	1254.7	642	352.6	653
40		761.3	1251	617.4	1056	547.4	1068	1083.7	642	279.6	654
30		662.3	1251	524.4	1056	469.4	1068	924.7	641	253.6	654
20		544.3	1251	422.4	1057	387.3	1068	727.6	641	238.6	655
15		379.4	1252	293.5	1057	280.4	1068	477.7	641	200.7	655
10		291.4	1252	228.5	1057	222.4	1068	342.7	641	178.7	656
5		208.4	1252	167.5	1057	168.4	1068	226.7	641	155.7	656
2.5		133.3	1251	117.4	1057	118.4	1068	140.7	640	126.6	655
		109.3	1248	101.4	1054	102.4	1065	111.7	638	104.6	653

Table 5 (continued)

Sample ID	U	Y	W	X	AA	BB
Effective Radius	weight (mg)	weight (mg)	weight (mg)	weight (mg)	weight (mg)	weight (mg)
μm	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
2.5	10.9	456	10.9	444	11.5	673
5	43	523	46	514	47	684
10	130	556	126	544	153	684
15	161	557	147	545	187	684
20	182.9	558	163.9	546	204.9	683
30	212.9	558	187.9	546	231.9	682
40	232.9	558	205.5	546	248.9	680
50	232.5	558	202.9	546	243.9	679
60	241.9	557	208.9	545	243.9	677
70	272.9	557	233.9	544	263.9	676
80	308	556	263	543	286	675
90	347	555	292	543	310	674
100	382.9	554	323	542	334	673
120	457.9	554	384.9	541	384.9	672
140	524.9	553	446.9	540	437.9	670
160	592.9	552	512.9	540	493.9	669
180	662.9	552	584.9	539	555.9	668
200	730.9	551	649.9	539	618.9	667
225	803.9	551	729.9	539	699.9	666
250	865.8	551	805.9	539	781.8	665
275	911.8	551	869.8	539	870.8	664
300	965.8	552	934.8	539	936.8	663
350	1049.8	552	1058.8	539	1029.8	663
400	1098.8	553	1111.8	539	1096.8	663
500	1124.8	554	1136.8	540	1211.7	663
600	1134.9	555	1148.8	541	1231.8	664
800	1148.8	557	1161.8	543	1254.8	665
1000	1156.8	558	1167.8	544	1265.8	665
1000	1156.8	558	1167.8	544	1265.8	665
800	1151.8	558	1162.8	544	1253.8	664
600	1147.8	557	1157.8	543	1242.8	663
500	1141.8	557	1151.8	542	1228.8	661
400	1131.6	556	1140.6	541	1201.6	658
350	1120.8	555	1125.4	540	1169.7	656
300	1097.8	553	1099.8	538	1115.7	654
275	1075.8	552	1075.7	537	1088.7	653
250	1037.7	551	1041.1	536	1042.5	651
225	993.8	550	976.8	535	1003.8	649
200	953.4	548	917.8	534	960.8	646
180	902.2	546	851.8	533	917.2	643
160	848.2	545	788.2	532	858.1	640
140	794.8	543	726.8	530	785.7	638
120	724.7	541	640.7	530	626.7	639
100	632.3	541	551.7	530	462.7	641
90	584.7	541	505.7	530	421.7	641
80	532.7	541	455.7	530	382.7	641
70	467.7	542	398.7	530	348.7	641
60	417.7	542	341.7	530	315.6	642
50	365.7	543	283.7	531	280.6	642
40	311.7	544	256.7	531	275.6	643
30	278.6	544	237.6	532	276.6	643
20	234.7	545	202.7	532	249.7	644
15	210.7	545	183.7	533	228.3	644
10	141.7	545	162.7	533	201.7	644
5	140.7	544	132.7	532	158.7	643
2.5	113.7	541	109.7	529	123.6	640

Table 5 (continued)

		BWCT		Breaking Length	Fiber Length [L(l)]--FS5		Breaking Length/ Fiber Length (Breaking Length Ratio)
Fiber	Never Dried?	g/in	kN/m	m	mm	micron	m/micron
Wheat Straw	Y	1857	0.717	2725	0.839	839	3.25
Bagasse	N	1132	0.437	1661	0.924	924	1.80
Hemp	N	915	0.353	1343	1.26	1260	1.07
Abaca	N	712	0.275	1045	2.55	2550	0.41
Bamboo	N	461	0.178	676	1.51	1510	0.45
Acacia	N	558	0.215	819	0.722	722	1.13
SSK	N	485	0.187	712	2.38	2380	0.30
NSK	N	821	0.317	1205	2.205	2205	0.55
Euc	N	428	0.165	628	0.715	715	0.88

Table 6

5 Papermaking Example 1:

An example of fibrous structures in accordance with the present disclosure can be prepared using a papermaking machine as described above with respect to FIG. 6A, and according to the method described below:

A 3% by weight aqueous slurry of northern softwood kraft (NSK) pulp is made up in a conventional re-pulper. The NSK slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e., Cymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the NSK stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to NSK is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e., FinnFix 700 marketed by C.P. Kelco U.S. Inc. of Atlanta, GA) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 3% by weight aqueous slurry of non-wood (e.g., bamboo, abaca, etc.) pulp is made up in a conventional re-pulper. The non-wood slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e., Kymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the non-wood stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to non-wood is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e., FinnFix 700 marketed by C.P. Kelco U.S. Inc. of Atlanta, GA) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 3% by weight aqueous slurry of hardwood Eucalyptus fibers is made up

in a conventional re-pulper. A 1% solution of defoamer (i.e., BuBreak 4330 marketed by Buckman Labs, Memphis TS) is added to the Eucalyptus stock pipe at a rate of 0.25% by weight of the dry fibers and its adsorption is enhanced by an in-line mixer.

5 The NSK, non-wood, and eucalyptus fibers are combined in the head box at various ratios and deposited onto a Fourdrinier wire, running at a first velocity V_1 , homogenously to form an embryonic web. The web is then transferred at the transfer zone from the Fourdrinier forming wire at a fiber consistency of about 15% to the papermaking belt, the papermaking belt moving at a second velocity, V_2 . The papermaking belt has a pattern of raised portions (i.e., knuckles) extending from a reinforcing member, the raised portions defining either a plurality of discrete or
10 a continuous/substantially continuous deflection conduit portion, as described herein, particularly with reference to a mask such as FIG. 5. The transfer occurs in the transfer zone without precipitating substantial densification of the web. The web is then forwarded, at the second velocity, V_2 , on the papermaking belt along a looped path in contacting relation with a transfer head disposed at the transfer zone, the second velocity being from about 1% to about 40% slower
15 than the first velocity, V_1 . Since the Fourdrinier wire speed is faster than the papermaking belt, wet shortening, i.e., foreshortening, of the web occurs at the transfer point. In an example, the second velocity V_2 can be from about 0% to about 5% faster than the first velocity V_1 .

Further de-watering is accomplished by vacuum assisted drainage until the web has a fiber consistency of about 15% to about 30%. The patterned web is pre-dried by air blow-through, i.e.,
20 through-air-drying (TAD), to a fiber consistency of about 65% by weight. The web is then adhered to the surface of a Yankee dryer with a sprayed creping adhesive comprising 0.25% aqueous solution of polyvinyl alcohol (PVA). The fiber consistency is increased to an estimated 95% - 97% before dry creping the web with a doctor blade. The doctor blade has a bevel angle of about 45 degrees and is positioned with respect to the Yankee dryer to provide an impact angle of about
25 101 degrees. This doctor blade position permits the adequate amount of force to be applied to the substrate to remove it off the Yankee while minimally disturbing the previously generated web structure. The dried web is reeled onto a take up roll (known as a parent roll), the surface of the take up roll moving at a fourth velocity, V_4 , that is faster than the third velocity, V_3 , of the Yankee dryer. By reeling at a fourth velocity, V_4 , that is about 1% to 20% faster than the third velocity,
30 V_3 , some of the foreshortening provided by the creping step is "pulled out," sometimes referred to as a "positive draw," so that the paper can be more stable for any further converting operations. In other examples, a "negative draw" as is known in the art is also contemplated.

Two plies of the web can be formed into paper towel products by embossing and laminating them together using PVA adhesive. The paper towel has about 53 g/m² basis weight and contains 0-65% by weight Northern Softwood Kraft, 0-100% non-wood fiber, and 0-50% by weight Eucalyptus furnish. The sanitary tissue product is soft, flexible, and absorbent.

5

Papermaking Example 2

An example of fibrous structures in accordance with the present disclosure can be prepared using a papermaking machine as described above with respect to FIG. 6A, and according to the method described below:

10 An aqueous slurry of eucalyptus (Suzano Papel e Celulose Brazilian bleached hardwood kraft pulp) pulp fibers is prepared at about 3% fiber by weight using a conventional repulper, then transferred to a hardwood fiber stock chest. The eucalyptus fiber slurry of the hardwood stock chest is pumped through a stock pipe to a hardwood fan pump where the slurry consistency is reduced from about 3% by fiber weight to about 0.15% by fiber weight. The
15 0.15% eucalyptus slurry is then pumped and distributed in the top chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

Additionally, an aqueous slurry of eucalyptus (Suzano Papel e Celulose Brazilian bleached hardwood kraft pulp) pulp fibers is prepared at about 3% fiber by weight using a conventional repulper, then transferred to a hardwood fiber stock chest. The eucalyptus fiber slurry
20 of the hardwood stock chest is pumped through a stock pipe and mixed with the aqueous slurry of Northern Softwood Kraft (NSK), described in the next paragraph, to a fan pump where the slurry consistency is reduced from about 1.5% by fiber weight to about 0.15% by fiber weight. The 0.15% eucalyptus/NSK slurry is then pumped and distributed in the center and bottom chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

25 Additionally, an aqueous slurry of NSK (Northern Softwood Kraft) pulp fibers is prepared at about 3% fiber by weight using a conventional repulper, then transferred to the softwood fiber stock chest. The NSK fiber slurry of the softwood stock chest is pumped through a stock pipe to be refined to a Canadian Standard Freeness (CSF) of about 630. The refined NSK fiber slurry is then mixed with the 1.5% aqueous slurry of Eucalyptus fibers (described in the preceding
30 paragraph) and directed to a fan pump where the NSK slurry consistency is reduced from about 3% by fiber weight to about 0.15% by fiber weight. The 0.15% Eucalyptus/NSK slurry is then directed and distributed to the center and bottom chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

Additionally, an aqueous slurry of non-wood (e.g., bamboo, abaca, etc.) pulp fibers is prepared at about 1.5-3% fiber by weight using a conventional repulper, then transferred to a non-wood fiber stock chest. The non-wood fiber slurry of the non-wood stock chest is pumped through a stock pipe to a refiner, where it is gently refined to a degree that is commensurate with the desired strength at the reel of the paper machine. The non-wood solution is then transported through a stock pipe to a fan pump where the slurry consistency is reduced from about 3% by fiber weight to about 0.15% by fiber weight. The 0.15% non-wood slurry is then pumped and distributed in the top and or middle and or bottom chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

In order to impart temporary wet strength to the finished fibrous structure, a 1% dispersion of temporary wet strengthening additive (e.g., Fennorez[®]91 commercially available from Kemira) is prepared and is added to the NSK or non-wood or Eucalyptus fiber stock pipe at a rate sufficient to deliver 0.25% temporary wet strengthening additive based on the dry weight of the fibers. The absorption of the temporary wet strengthening additive is enhanced by passing the treated slurry through an in-line mixer.

The wet-laid papermaking machine has a layered headbox having a top chamber, a center chamber, and a bottom chamber where the chambers feed directly onto the forming wire (Fourdrinier wire). The eucalyptus fiber slurry of 0.15% consistency is directed to the top headbox chamber. Alternatively, a non-wood fiber slurry can be directed to the top headbox chamber. The NSK/Eucalyptus, NSK/non-wood, non-wood/eucalyptus, or non-wood fiber slurry is directed to the center and bottom headbox chambers. All three fiber layers are delivered simultaneously in superposed relation onto the Fourdrinier wire to form thereon a three-layer embryonic fibrous structure (web), of which about 40% of the top side is made up of the eucalyptus and or non-wood fibers, and about 60% of the sheet can be made of various blends of non-wood, NSK, and eucalyptus fibers, directed towards the center and bottom layers. Dewatering occurs through the Fourdrinier wire and is assisted by a deflector and wire table vacuum boxes. The Fourdrinier wire is a Legent 866A Dual Layer (0.11 mm x 0.18 mm, Asten Johnson). The speed of the Fourdrinier wire is about 800 feet per minute (fpm).

The embryonic wet fibrous structure is transferred from the Fourdrinier wire, at a fiber consistency of about 18-22% at the point of transfer, to a 3D patterned, continuous knuckle, through-air-drying belt as shown in Fig. 3. The speed of the 3D patterned through-air-drying belt is 800 feet per minute (fpm), which is the same speed of the Fourdrinier wire. The 3D patterned through-air-drying belt is designed to yield a fibrous structure comprising a pattern

of continuous high density knuckle region oriented approximately 75 Degrees relative to the cross direction. Each continuous high density knuckle region oriented approximately 75 Degrees relative to the cross direction is separated by a low-density discrete pillow region oriented approximately 75 Degrees relative to the cross direction. This 3D patterned through-air-drying belt is formed by casting a layer of an impervious resin surface of a continuous knuckle onto a fiber mesh supporting fabric. The supporting fabric is a 98 x 52 filament, dual layer mesh. The thickness of the resin cast is about 12.0 mils above the supporting fabric. Alternatively, the drying fabric is designed to yield a pattern of substantially machine direction oriented linear channels having a continuous network of high density (knuckle) areas. This drying fabric is formed by casting an impervious resin surface onto a fiber mesh supporting fabric. The supporting fabric is a 98 x 52 filament, dual layer mesh. The thickness of the resin cast is about 12 mils above the supporting fabric. The area of the continuous network is about 40 percent of the surface area of the drying fabric.

Further de-watering of the fibrous structure is accomplished by vacuum assisted drainage until the fibrous structure has a fiber consistency of about 20% to 30%.

While remaining in contact with the 3D patterned through-air-drying belt, the fibrous structure is pre-dried by air blow-through pre-dryers to a fiber consistency of about 50-65% by weight.

After the pre-dryers, the semi-dry fibrous structure is transferred to a Yankee dryer and adhered to the surface of the Yankee dryer with a sprayed creping adhesive. The creping adhesive is an aqueous dispersion with the actives consisting of about 80% polyvinyl alcohol (PVA 88-44), about 20% CREPETROL® 5688. CREPETROL® 5688 is commercially available from Solenis. The creping adhesive is delivered to the Yankee surface at a rate of about 0.10-0.20% adhesive solids based on the dry weight of the fibrous structure. The fiber consistency is increased to about 96-98% before the fibrous structure is dry-creped from the Yankee with a doctor blade.

The doctor blade has a bevel angle of about 15-25° and is positioned with respect to the Yankee dryer to provide an impact angle of about 71-81°. The Yankee dryer is operated at a temperature of about 275-350°F and a speed of about 800 fpm. The fibrous structure is wound in a roll (parent roll) using a surface driven reel drum having a surface speed of about 550-700 fpm.

Two parent rolls of the fibrous structure are then converted into a sanitary tissue product by loading the roll of fibrous structure into an unwind stand. The two parent rolls are converted with the low-density pillow side out. Alternatively, they can be converted with the high-density knuckle side out. The line speed is 550 ft/min. One parent roll of the fibrous structure is unwound

and transported to an emboss stand where the fibrous structure is strained to form the emboss pattern in the fibrous structure via a 0.56" Pressure Roll Nip and then combined with the fibrous structure from the other parent roll to make a multi-ply (2-ply) sanitary tissue product. Approximately 0.5% of a proprietary quaternary amine softener is added to the top side of the multi-ply sanitary tissue product. Approximately 0.5% of a proprietary quaternary amine softener may also be added to the bottom side of the multi-ply sanitary tissue product. The multi-ply sanitary tissue product is then transported to a winder where it is wound onto a core to form a log. The log of multi-ply sanitary tissue product is then transported to a log saw where the log is cut into finished multi-ply sanitary tissue product rolls. The molding member used to make the multi-ply sanitary tissue product of this example exhibits the dimensions shown in Table 4 of U.S. Serial No. 17/238,527 filed April 23, 2021, and assigned to The Procter & Gamble Company.

Papermaking Example 3

Abaca and Eucalyptus are individually repulped at ~3% consistency with 2 min repulping time. The Abaca slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e. Kymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the softwood stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to Abaca is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e. FinnFix 700 marketed by C. P. Kelco U.S. Inc. of Atlanta, Ga.) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 1% solution of defoamer (i.e. Wicket 1285 marketed by Ivanhoe Industries, of Zion, IL) is added to the Eucalyptus stock pipe at a rate of 0.25% by weight of the dry fibers and its adsorption is enhanced by an in-line mixer.

The Abaca and the Eucalyptus fibers are combined in the headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire running 10% faster than successive structuring papermaking belt. The web is transferred at the transfer nip with approximately 14 in Hg vacuum to the structuring papermaking belt at approximately 20% solids. The web is then forwarded on the papermaking belt along a looped path, passing through a pre-dryer and drying the web to a consistency 75%. The web is then pressed & adhered via nip and chemistry on to the Yankee drier that is sprayed with creping adhesive comprising 0.25% aqueous solution of polyvinyl alcohol (PVA). The fiber consistency is increased to an estimated 97% before dry creping the web with a doctor blade. The doctor blade has a bevel

angle of about 45 degrees and is positioned with respect to the Yankee dryer to provide an impact angle of about 101 degrees. This doctor blade position permits the adequate amount of force to be applied to the substrate to remove it off the Yankee while minimally disturbing the previously generated web structure. The web travels through a gapped calendar stack to smooth the web, reducing caliper by approximately 10% before the dried web is reeled onto a take up roll (known as a parent roll), the surface of the take up roll moving approximately the same speed as the Yankee dryer.

Papermaking Example 4

Same as Papermaking Example 3, except: Abaca is not refined (vs. “refined gently”).

Papermaking Example 5

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits 40% Eucalyptus and 60% Abaca composition to the wire (vs. “headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire...”).

Papermaking Example 6

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits 45% Eucalyptus and 55% Abaca composition to the wire (vs. “headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire...”).

Papermaking Example 7

Same as Papermaking Example 3, except: NSK and SSK in a ratio of 75%NSK/25%SSK are repulped at 3%, gently refined and have kymene & CMC added at similar weight percent as the Abaca stream; and the headbox deposits a 40% Eucalyptus, 50% Abaca, and 10% NSK/SSK composition to the wire.

Papermaking Example 8

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits a 40% Eucalyptus, 20% Abaca, and 40% NSK/SSK composition to the wire.

Papermaking Example 9

Each of Papermaking Examples 3-8, further using the papermaking belt(s) described in U.S. Pub. No. 2021-0140115.

Papermaking Example 10

Each of Papermaking Examples 3-8, further using the papermaking belt(s) described in U.S. Pub. No. 2020-0181848.

5

Papermaking Example 11

Each of Papermaking Examples 3-10, where the wire moves 21% faster than the successive papermaking structuring belt.

10 Papermaking Example 12

Each of Papermaking Examples 3-11, where the structuring belt has a fiber forming depth of 30 mils.

Papermaking Example 13

15 Each of Papermaking Examples 3-11, where the structuring belt has a fiber forming depth of 25 mils.

Papermaking Example 14

20 Each of Papermaking Examples 3-13, where the substrate is embossed and laminated into a 2-ply finished fibrous structure, perforated to create sheets and rolled onto a core.

Papermaking Example 15

Each of Papermaking Examples 1 and 2, except: the headbox deposits 100% bamboo composition to the wire.

25

ARRAYS OF THE PRESENT DISCLOSURE

Sanitary tissue products within the scope of the present disclosure may be packaged in packages comprising sustainable materials (e.g., paper, recycled(able) plastic, corrugated cardboard, plant-based plastic, etc.) and displayed with other package(s) comprising sanitary tissue product(s) as an array(s) – see for example, U.S. Provisional Patent Application Serial Nos. 63/353,167 and 63/375,858, both titled “Sanitary Tissue Products and Arrays Comprising Non-wood Fibers,” filed on June 17, 2022 under Attorney Docket No. 16297P and filed on September 16, 2022 under Attorney Docket No. 16297P2, both by The Procter & Gamble Company and both naming Katherine Schwerdtfeger as the first-named inventor, and which are herein

incorporated by reference, for details regarding the different arrays that sanitary tissue products of the present disclosure may be used to form and for packages that sanitary tissue products of the present disclosure may be contained in; further, packages comprising sanitary tissue products of the present disclosure may convey or connote sustainability as disclosed in Attorney Docket
5 Nos. 16297P and 16297P2.

ASPECTS OF THE PRESENT DISCLOSURE

The following aspects of the disclosure are exemplary only and not intended to limit the scope of the disclosure:

10

Aspect 1:

1. A sanitary tissue product, comprising:
 - non-wood fibers; and
 - a compressive slope (dry) of greater than about 8.0 mil/g.
2. The sanitary tissue product of claim 1, wherein the sanitary tissue product is a paper towel.
3. The sanitary tissue product of claim 1, wherein the compressive slope (dry) is greater than about 11.0 mil/g.
4. The sanitary tissue product of claim 3, wherein the sanitary tissue product is toilet paper.
5. A sanitary tissue product, comprising:
 - non-wood fibers;
 - a bulk (dry) greater than about 15 cm³/g.
6. The sanitary tissue product of claim 5, wherein the sanitary tissue product is a paper towel.
7. The sanitary tissue product of claim 1, wherein the bulk (dry) is greater than about 18.0 cm³/g.
8. The sanitary tissue product of claim 7, wherein the sanitary tissue product is toilet paper.

Beyond the “Aspects Of The Present Disclosure” disclosed above, the “Aspects Of The Present Disclosure,” including Aspects 1 – 20, disclosed in U.S. Provisional Patent Application Serial No. 63/456,020, titled “Fibrous Structures Comprising Non-wood Fibers,” filed on March 31, 2023, Young as the first-named inventor, are herein incorporated by reference.

5

TEST METHODS OF THE PRESENT DISCLOSURE

Unless otherwise specified, all tests described herein including those described under the Definitions section and the following test methods are conducted on samples that have been conditioned in a conditioned room at a temperature of $23^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$ and a relative humidity of $50\% \pm 2\%$ for a minimum of 2 hours prior to the test. The samples tested are “usable units.” “Usable units” as used herein means sheets, flats from roll stock, pre-converted flats, and/or single or multiply products. All tests are conducted in such conditioned room. Do not test samples that have defects such as wrinkles, tears, holes, and like. All instruments are calibrated according to manufacturer’s specifications.

15

Coverage and Fiber Count-Area Test Method:

Coverage and Fiber Count are calculated using measurements acquired by analyzing fibers obtained from fibrous structures, such as sanitary tissue products, with a Fiber Quality Analyzer (FQA), available from OpTest Equipment Inc., Ontario, Canada. Prior to analysis in the FQA fibers from a finished product specimen must be dispersed and diluted to get an accurate measurement of the oven dry fiber mass in an aliquot of very dilute fiber and distilled water, which is utilized during the FQA analysis to determine specimen coarseness and fiber width. The resultant FQA values, in conjunction with basis weight, are then used to calculate fiber coverage and fiber count in a specimen.

25

Sample Preparation

Allow the fibrous structure finished product to be tested to equilibrate in a temperature-controlled room at a temperature of $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) and a relative humidity of $50\% \pm 2\%$ for at least 24 hours. Further prepare the finished product for testing by removing and discarding any product which might have been abraded in handling, e.g., on the outside of the roll.

30

Determine the percent oven dry solids of the equilibrated test product. This is done on a moisture balance using least a 0.5 gram specimen from a selected usable unit of the test product.

An exemplary balance is the Ohaus MB45 balance set to a drying temperature of 130°C, with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time).

Using another usable unit from the same equilibrated finished product, gently pull approximately 0.03 grams of fiber specimen from the center. The specimen should be equally
5 pulled from all plies and layers of the substrate. Place the collected fibers into a 27mm diameter, 70mm tall clear glass vial, or similar. Record the net weight of collected fibers to the nearest 0.001 gram as M_0 . The intent of this step is to get an even sampling across all plies and layers in the usable unit, pulled from the center of the usable unit so that no cutting of fibers at the end of the sheet or perforations is included.

10 The oven dry weight of the fiber specimen (M_1) is then calculated by multiplying the fiber specimen weight (M_0) by the previously determined percent oven dry solids.

$$M_1 = M_0 \times \% \text{ oven dry solids}$$

To fully disperse the fiber specimen, begin by pouring DI or distilled water into the vial
15 until approximately ½ full, adding about ten 5mm diameter glass beads, and then closing the vial with a cap. Next, allow the specimen to sit for at least two hours with occasional shaking. Lastly, stir the vial with a Fisher Scientific vortex genie, or similar, until fiber clusters are dispersed, and the fibers appear fully individualized.

To quantitatively dilute the dispersed fiber sample, begin by transferring the entire vial
20 contents into a 5L plastic beaker that has been weighed to the nearest 0.1g. To accomplish this, slowly pour the contents of vial through a #6 US Standard Sieve (3.35mm), trying to keep the glass beads in the vial as long as possible. Then rinse the vial and cap at least three times with DI or distilled water and continue to pour the liquid slowly through the #6 sieve. Once the vial has been at least triple rinsed, pour the glass beads into the sieve and wash thoroughly with a DI
25 water squeeze bottle, being sure to collect all water used to rinse the beads.

Continue with the dilution procedure by filling the 5L plastic beaker to approximately the 1.75L mark with DI or distilled water. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as $M_{2.1}$. Using a second clean 5L beaker, transfer the 1.75L of solution back and forth at least 3 times from beaker to beaker to ensure that the suspension is
30 homogenously mixed. Next, transfer approximately 150g of the solution into a third clean 5L beaker that has been weighed to the nearest 0.1g. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as $M_{2.2}$. Then add approximately 1600g of DI or distilled water to the third 5L beaker. Weigh the beaker and record the net weight of the contents to the nearest

0.1g as $M_{2.3}$. With a fourth clean 5L beaker, transfer the approximately 1.75L of solution back and forth at least 3 times from beaker to beaker to ensure that the suspension is homogeneously mixed. Lastly, immediately after mixing, pour a 500mL aliquot of the diluted fiber solution into a 600mL plastic beaker that has been weighed to the nearest 0.1g. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as M_3 .

Upon completion of the dilution procedure, calculate the oven dry weight of fibers present in the testing beaker (M_4) according to the following equation:

$$M_4 = M_1 \times \left(\frac{M_{2.2}}{M_{2.1}} \right) \times \left(\frac{M_3}{M_{2.3}} \right)$$

Measurement of samples

Set up, calibrate, and operate the Fiber Quality Analyzer (FQA) instrument according to the manufacturer's instructions. Place the beaker containing the diluted fiber suspension on carousel of the FQA, select the "Optest default" for coarseness method, and when prompted, enter M_4 (the oven dry weight of fibers present in the testing beaker) in the cell for "sample mass" to determine coarseness.

Calculations

Once the analysis has been performed, open the report file and record each of the following measurements: Arithmetic Mean Width, Coarseness, Arithmetic Mean Length, and Length Weighted Mean Length.

Calculate Coverage, which has the units of fiber layers, using the following equation:

$$\text{Coverage} = \frac{\text{Basis Weight of product tested}}{\frac{\text{Coarseness}}{\text{Arithmetic mean width}}}$$

Where basis weight has units of grams/m², Coarseness has units of mg/m, and Arithmetic Mean Width has the units of mm.

Calculate Fiber Count-Area, which has the units of millions fibers/m², using one of these two equations:

$$\text{Fiber Count} - \text{Area} (C(n)) = \frac{\text{Basis Weight of product tested}}{\text{Coarseness} \times \text{Arithmetic Mean Length}}$$

Where basis weight has the units of g/m², Coarseness has the units of mg/m, and Arithmetic Mean Length has the units of mm.

$$\text{Fiber Count} - \text{Area} (C(l)) = \frac{\text{Basis Weight of product tested}}{\text{Coarseness} \times \text{Length Weighted Mean Length}}$$

Where basis weight has the units of g/m^2 , Coarseness has the units of mg/m , and Length Weighted Mean Length has the units of mm .

Pore Volume Distribution Test Method:

5 The Pore Volume Distribution (PVD) Test Method is used to determine the average amount of fluid (mg) retained by a specimen within an effective pore radius range of 2.5 to 160 microns. This method makes use of stepped, controlled differential pressure and measurement of associated fluid movement into and out of a porous specimen, where the radius of a pore is related to the differential pressure required to fill or empty the pore. The fluid retained (mg) by each
10 specimen during its first absorption cycle of decreasing differential pressures is measured, this is followed by measurement of fluid retained (mg) by the specimen during its first drainage or desorption cycle of increasing differential pressures. The sum of fluid retained (mg) by the specimen within the effective pore radius range of 2.5 to 160 microns for the absorption and desorption cycles, as well as a calculated hysteresis (difference of fluid retained during the
15 absorption and desorption cycles) in the effective pore radius range of 2.5 to 100 microns are reported.

Method principle

For uniform cylindrical pores, the radius of a pore is related to the differential pressure required to fill or empty the pore by the equation

20
$$\text{Differential pressure} = (2 \gamma \cos \Theta) / r,$$

where γ = liquid surface tension, Θ = contact angle, and r = effective pore radius.

Pores contained in natural and manufactured porous materials are often thought of in terms such as voids, holes or conduits, and these pores are generally not perfectly cylindrical nor all uniform. One can nonetheless use the above equation to relate differential pressure to an effective
25 pore radius, and by monitoring liquid movement into or out of the material as a function of differential pressure characterize the effective pore radius distribution in a porous material. (Because nonuniform pores are approximated as uniform by the use of an effective pore radius, this general methodology may not produce results precisely in agreement with measurements of void dimensions obtained by other methods such as microscopy.)

30 The Pore Volume Distribution Test Method uses the above principle and is reduced to practice using the apparatus and approach described in "Liquid Porosimetry: New Methodology

and Applications" by B. Miller and I. Tyomkin published in The Journal of Colloid and Interface Science (1994), volume 162, pages 163-170, incorporated herein by reference. This method relies on measuring the increment of liquid volume that enters or leaves a porous material as the differential air pressure is changed between ambient ("lab") air pressure and a slightly elevated air pressure (positive differential pressure) surrounding the specimen in a sample test chamber. The specimen is introduced to the sample chamber dry, and the sample chamber is controlled at a positive differential pressure (relative to the lab) sufficient to prevent fluid uptake into the specimen after the fluid bridge is opened. After opening the fluid bridge, the differential air pressure is decreased in steps to 0, and in this process subpopulations of pores acquire liquid according to their effective pore radius. After reaching a minimal differential pressure at which the mass of fluid within the specimen is at a maximum, differential pressure is increased stepwise again toward the starting pressure, and the liquid is drained from the specimen. It is during this latter draining sequence (from minimal differential pressure, or largest corresponding effective pore radius, to the largest differential pressure, or smallest corresponding effective pore radius), that the fluid retention by the sample (mg) at each differential pressure is determined in this method. After correcting for any fluid movement for each particular pressure step measured on the chamber while empty, the fluid retention by the sample (mg) for each pressure step is determined. The fluid retained may be normalized by dividing the equilibrium quantity of retained liquid (mg) associated with this particular step by the dry weight of the sample (mg).

Sample conditioning and specimen preparation

The Pore Volume Distribution Test Method is conducted on samples that have been conditioned in a room at a temperature of $23^{\circ}\text{C} \pm 2.0^{\circ}\text{C}$ and a relative humidity of $50\% \pm 5\%$, all tests are conducted under the same environmental conditions and in such conditioned room. Any damaged product or samples that have defects such as wrinkles, tears, holes, and similar are not tested. Samples conditioned as described herein are considered dry samples for purposes of this invention. A 5.5cm square specimen to be tested is die cut from the conditioned product or sample. The dry specimen weight is measured and recorded.

Apparatus

Apparatus suitable for this method is described in: "Liquid Porosimetry: New Methodology and Applications" by B. Miller and I. Tyomkin published in The Journal of Colloid and Interface Science (1994), volume 162, pages 163-170. Further, any pressure control scheme capable of

achieving the required pressures and controlling the sample chamber differential pressure may be used in place of the pressure-control subsystem described in this reference. One example of suitable overall instrumentation and software is the TRI/Autoporosimeter (Textile Research Institute (TRI) / Princeton Inc. of Princeton, N.J., U.S.A.). The TRI/Autoporosimeter is an automated computer-controlled instrument for measuring pore volume distributions in porous materials (e.g., the volumes of different size pores within the range from 1 to 1000 μm effective pore radii). Computer programs such as Automated Instrument Software Releases 2000.1 or 2003.1/2005.1 or 2006.2; or Data Treatment Software Release 2000.1 (available from TRI Princeton Inc.), and spreadsheet programs may be used to capture and analyse the measured data.

Method procedure

The wetting liquid used is a degassed 0.2 weight % solution of octylphenoxy polyethoxy ethanol (Triton X-100 from Sigma-Aldrich) in distilled water. The instrument calculation constants are as follows: ρ (density) = 1 g/cm^3 ; γ (surface tension) = 31 dynes/cm; $\cos\Theta = 1$. A 90-mm diameter mixed-cellulose-ester filter membrane with a characteristic pore size of 1.2 μm (such Millipore Corporation of Bedford, MA, Catalogue #RAWP09025) is affixed to the porous frit (Monel plates with diameter of 90mm, 6.4mm thickness from Mott Corp., Farmington, CT, or equivalent) of the sample chamber. A plexiglass plate weighing about 34 g (supplied with the instrument) is placed on the sample to ensure the sample rests flat on the membrane/frit assembly.

No additional weight is placed on the sample.

Someone skilled in the art knows that it is critical to degas the test fluid as well as the frit/membrane/tubing system such that the system is free from air bubbles.

The sequence of pore sizes (differential pressures) for this application is as follows (effective pore radius in μm): 2.5, 5, 10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100, 120, 140, 160, 180, 200, 225, 250, 275, 300, 350, 400, 500, 600, 800, 1000. This sequence is then replicated in reverse order. The criterion for moving from one pressure step to the next is that fluid uptake/drainage from the specimen is measured to be less than 10mg/min for 10s.

A separate “blank” measurement is performed by following this method procedure on an empty sample chamber with no specimen or weight present on the membrane/frit assembly. Any fluid movement observed is recorded (mg) at each of the pressure steps. Fluid retention data for a specimen are corrected for any fluid movement associated with the empty sample chamber by subtracting fluid retention values of this “blank” measurement from corresponding values in the measurement of the specimen.

Determination of Parameters

Data from the PVD instrument can be presented in a cumulative fashion, so that the cumulative mass absorbed is tabulated alongside the diameter of pore, which allow the following parameters to be calculated:

2.5-160 micron PVD Absorption (mg) = [mg at 160micron absorbed] – [mg at 2.5micron absorbed] from the advancing curve,

2.5-160 micron PVD Desorption (mg) = [mg at 160micron desorbed] – [mg at 2.5 micron desorbed] from the receding curve, and

2.5-100 micron hysteresis (mg) = [mg at 100 micron desorbed – mg at 2.5 micron desorbed] – [mg at 100 micron absorbed – mg at 2.5 micron absorbed]

Horizontal Full Sheet (HFS) Test Method:

The Horizontal Full Sheet (HFS) test method determines the amount of distilled water absorbed and retained by a fibrous structure of the present invention. This method is performed by first weighing a sample of the fibrous structure to be tested (referred to herein as the "dry weight of the sample"), then thoroughly wetting the sample, draining the wetted sample in a horizontal position and then reweighing (referred to herein as "wet weight of the sample"). The absorptive capacity of the sample is then computed as the amount of water retained in units of grams of water absorbed by the sample. When evaluating different fibrous structure samples, the same size of fibrous structure is used for all samples tested.

The apparatus for determining the HFS capacity of fibrous structures comprises the following:

An electronic balance with a sensitivity of at least ± 0.01 grams and a minimum capacity of 1200 grams. The balance should have a special balance pan to be able to handle the size of the sample tested (i.e.; a fibrous structure sample of about 27.9 cm by 27.9 cm).

A sample support rack (Figs. 14 and 14A) and sample support rack cover (Figs. 15 and 15A) is also required. Both the support rack (Figs. 14 and 14A) and support rack cover (Figs. 15 and 15A) are comprised of a lightweight metal frame, strung with 0.305 cm diameter monofilament so as to form a grid as shown in Fig. 14. The size of the support rack (Figs. 14 and 14A) and support rack cover (Figs. 15 and 15A) is such that the sample size can be conveniently placed between the two.

The HFS test is performed in an environment maintained at $23 \pm 1^\circ \text{C}$ and $50 \pm 2\%$ relative humidity. A water reservoir or tub is filled with distilled water at $23 \pm 1^\circ \text{C}$ to a depth of 3 inches (7.6 cm).

Samples are tested in duplicate. The dry weight of each sample is reported to the nearest
5 0.01 grams. The empty sample support rack (FIGS. 14 and 14A) is placed on the balance with the special balance pan described above. The balance is then zeroed (tared). One sample is carefully placed on the sample support rack (FIGS. 14 and 14A), “face up” or with the outside of the sample facing up, away from the sample support rack (FIGS. 14 and 14A). The support rack cover (FIGS. 15 and 15A) is placed on top of the support rack (FIGS. 14 and 14A). The sample (now sandwiched
10 between the rack and cover) is submerged in the water reservoir. After the sample is submerged for 30 ± 3 seconds, the sample support rack (FIGS. 14 and 14A) and support rack cover (FIGS. 15 and 15A) are gently raised out of the reservoir.

The sample, support rack (FIGS. 14 and 14A) and support rack cover (FIGS. 15 and 15A) are allowed to drain horizontally for 120 ± 5 seconds, taking care not to excessively shake or vibrate
15 the sample. While the sample is draining, the support rack cover (FIGS. 15 and 15A) is carefully removed and all excess water is wiped from the support rack (FIGS. 15 and 15A). The wet sample and the support rack (FIGS. 14 and 14A) are weighed on the previously tared balance. The weight is recorded to the nearest 0.01 g. This is the wet weight of the sample after horizontal drainage.

The HFS gram per gram fibrous structure sample absorptive capacity is defined as:
20 absorbent capacity = (wet weight of the sample after horizontal drainage - dry weight of the sample) / (dry weight of the sample) and has a unit of gram/gram.

The HFS gram per sheet fibrous structure sample absorptive capacity is defined as (wet weight of the sample after horizontal drainage minus dry weight of the sample) and has a unit of gram/sheet.

25 Vertical Full Sheet (VFS) Test Method:

The Vertical Full Sheet (VFS) test method is similar to the HFS method described previously, and determines the amount of distilled water absorbed and retained by a fibrous structure when held at an angle of 75° .

After setting up the apparatus, preparing the sample, taking the initial weights, and
30 submerging the sample, according to the HFS method, the support rack (FIGS. 14 and 14A) and sample are removed from the reservoir and inclined at an angle of 75° and allowed to drain for 60 ± 5 seconds. Care should be taken so that the sample does not slide or move relative to the support

rack (FIGS. 14 and 14A). If there is difficulty keeping the sample from sliding down the support rack (FIGS. 14 and 14A) sample can be held with the fingers.

At the end of this time frame (60 ± 5 seconds), carefully bring the sample and support rack (FIGS. 14 and 14A) to the horizontal position and wipe the bottom edge of the sample support rack (FIGS. 14 and 14A) that water dripped onto during vertical drainage. Return the sample and support rack (FIGS. 14 and 14A) to the balance and take the weight to the nearest 0.01 g. This value represents the wet weight of the sample after vertical drainage.

The VFS gram per gram fibrous structure sample absorptive capacity is defined as the wet weight of the sample after vertical drainage minus the dry weight of the sample divided by the dry weight of the sample, and has a unit of gram/gram (g/g).

The VFS gram per sheet fibrous structure sample absorptive capacity is defined as the wet weight of the sample after vertical drainage minus the dry weight of the sample, and has a unit of gram/sheet.

The calculated VFS is the average of the absorptive capacities of the two samples of the fibrous structure.

Dry Bulk Ratio Method:

“Dry Bulk Ratio” may be calculated as follows: (Dry Compression x Flexural Rigidity (avg))/TDT.

Wet Bulk Ratio Method:

“Wet Bulk Ratio” may be calculated as follows: (Wet Compression x Geometric Mean Wet Modulus)/Total Wet Tensile.

Fiber Length, Width, Coarseness, and Fiber Count Test Method:

Fiber Length values are generated by running the test procedure as defined in U.S. Patent Application No. 2004-0163782 and informs the following procedure:

The length, width, and coarseness of the-fibers (which are averages of the plurality of fibers being analyzed in a sample), as well as the fiber count (number and/or length average), may be determined using a Valmet FS5 Fiber Image Analyzer commercially available from Valmet, Kajaani Finland (as the Kajaani Fiber Lab is less available) following the procedures outlined in the manual. If in-going or raw pulp is not accessible, samples may be taken from commercially

available product (e.g., a roll of sanitary tissue product) to determine length, width, coarseness and fiber count (number and/or length average) using the FS5 by obtaining samples as outlined in the “Sample Preparation” section of the Coverage and Fiber Count Test Method in the Test Methods Section. As used herein, fiber length is defined as the “length weighted average fiber length”. The instructions supplied with the unit detail the formula used to arrive at this average. The length can be reported in units of millimeters (mm) or in inches (in). As used herein, fiber width is defined as the “width weighted average fiber width” and can be reported in units of micrometers (μm) or in millimeters (mm). The instructions supplied with the unit detail the formula used to arrive at this average. The width can be reported in units of millimeters (mm) or in inches (in). The instructions supplied with the unit detail the formula used to arrive at this average. Fiber count (number and/or length average) can be reported in units of million fibers/g. As used herein, fiber length/width ratio is defined as the “length weighted average fiber length (mm) / width weighted average fiber width (mm).”

Fiber count (length average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(l)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(l) \times \text{coarseness})$. And, fiber count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(n)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(n) \times \text{coarseness})$. ($L(l)$) means length weighted averaged and ($L(n)$) means number weighted averaged.

It should be understood that the values from different fiber image analyzers can differ significantly, even as much as 59% – see “Fiber Quality Analysis: OpTest Fiber Quality Analyzer versus L&W Fiber Tester,” Bin Li, Rohan Bandekar, Quanqing Zha, Ahmed Alsaggaf, and Yonghao Ni, *Industrial & Engineering Chemistry Research* 2011 50 (22), 12572-12578, DOI: 10.1021/ie201631q, which compares values from the FQA fiber analyzer to the FT fiber analyzer, stating: “These new instruments, such as PQM (pulp quality monitor), Galai CIS-100, Fiberlab, MorFi, FiberMaster, FQA (fiber quality analyzer), and L&W Fiber Tester (FT), provide fast measurements with the capability of both laboratory and online analysis. However, the measurement differences among these instruments are expected due to the different designs of hardware and software.”

Percent Roll Compressibility Method:

Percent Roll Compressibility (Percent Compressibility) is determined using the Roll Diameter Tester 1000 as shown in FIG. 7. It is comprised of a support stand made of two aluminum plates, a base plate 1001 and a vertical plate 1002 mounted perpendicular to the base, a sample shaft 1003 to mount the test roll, and a bar 1004 used to suspend a precision diameter tape 1005 that wraps around the circumference of the test roll. Two different weights 1006 and 1007 are suspended from the diameter tape to apply a confining force during the uncompressed and compressed measurement. All testing is performed in a conditioned room maintained at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about $50\% \pm 2\%$ relative humidity.

The diameter of the test roll is measured directly using a Pi[®] tape or equivalent precision diameter tape (e.g., an Executive Diameter tape available from Apex Tool Group, LLC, Apex, NC, Model No. W606PD) which converts the circumferential distance into a diameter measurement, so the roll diameter is directly read from the scale. The diameter tape is graduated to 0.01 inch increments with accuracy certified to 0.001 inch and traceable to NIST. The tape is 0.25 in wide and is made of flexible metal that conforms to the curvature of the test roll but is not elongated under the 1100 g loading used for this test. If necessary, the diameter tape is shortened from its original length to a length that allows both of the attached weights to hang freely during the test, yet is still long enough to wrap completely around the test roll being measured. The cut end of the tape is modified to allow for hanging of a weight (e.g., a loop). All weights used are calibrated, Class F hooked weights, traceable to NIST.

The aluminum support stand is approximately 600 mm tall and stable enough to support the test roll horizontally throughout the test. The sample shaft 1003 is a smooth aluminum cylinder that is mounted perpendicularly to the vertical plate 1002 approximately 485 mm from the base. The shaft has a diameter that is at least 90% of the inner diameter of the roll and longer than the width of the roll. A small steel bar 1004 approximately 6.3 mm diameter is mounted perpendicular to the vertical plate 1002 approximately 570 mm from the base and vertically aligned with the sample shaft. The diameter tape is suspended from a point along the length of the bar corresponding to the midpoint of a mounted test roll. The height of the tape is adjusted such that the zero mark is vertically aligned with the horizontal midline of the sample shaft when a test roll is not present.

Condition the samples at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about $50\% \pm 2\%$ relative humidity for 2 hours prior to testing. Rolls with cores that are crushed, bent, or damaged should not be tested. Place the test roll on the sample shaft 1003 such that the direction the paper was rolled onto its core is the same direction the diameter tape will be wrapped around the test roll. Align the midpoint of

the roll's width with the suspended diameter tape. Loosely loop the diameter tape 1004 around the circumference of the roll, placing the tape edges directly adjacent to each other with the surface of the tape lying flat against the test sample. Carefully, without applying any additional force, hang the 100 g weight 1006 from the free end of the tape, letting the weighted end hang freely without swinging. Wait 3 seconds. At the intersection of the diameter tape 1008, read the diameter aligned with the zero mark of the diameter tape and record as the Original Roll Diameter to the nearest 0.01 inches. With the diameter tape still in place, and without any undue delay, carefully hang the 1000 g weight 1007 from the bottom of the 100 g weight, for a total weight of 1100 g. Wait 3 seconds. Again read the roll diameter from the tape and record as the Compressed Roll Diameter to the nearest 0.01 inch. Calculate percent compressibility to the according to the following equation and record to the nearest 0.1%:

$$\% \text{ Compressibility} = \frac{(\text{Original Roll Diameter}) - (\text{Compressed Roll Diameter})}{\text{Original Roll Diameter}} \times 100$$

Repeat the testing on 10 replicate rolls and record the separate results to the nearest 0.1%. Average the 10 results and report as the Percent Compressibility to the nearest 0.1%.

Roll Firmness Method:

Roll Firmness is measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the MTS Alliance using Testworks 4.0 Software, as available from MTS Systems Corp., Eden Prairie, MN) using a load cell for which the forces measured are within 10% to 90% of the limit of the cell. The roll product is held horizontally, a cylindrical probe is pressed into the test roll, and the compressive force is measured versus the depth of penetration. All testing is performed in a conditioned room maintained at 23°C ± 2C° and 50% ± 2% relative humidity.

Referring to FIG. 8, the upper movable fixture 2000 consist of a cylindrical probe 2001 made of machined aluminum with a 19.00 ± 0.05 mm diameter and a length of 38 mm. The end of the cylindrical probe 2002 is hemispheric (radius of 9.50 ± 0.05 mm) with the opposing end 2003 machined to fit the crosshead of the tensile tester. The fixture includes a locking collar 2004 to stabilize the probe and maintain alignment orthogonal to the lower fixture. The lower stationary fixture 2100 is an aluminum fork with vertical prongs 2101 that supports a smooth aluminum sample shaft 2101 in a horizontal position perpendicular to the probe. The lower fixture has a

vertical post 2102 machined to fit its base of the tensile tester and also uses a locking collar 2103 to stabilize the fixture orthogonal to the upper fixture.

The sample shaft 2101 has a diameter that is 85% to 95% of the inner diameter of the roll and longer than the width of the roll. The ends of sample shaft are secured on the vertical prongs with a screw cap 2104 to prevent rotation of the shaft during testing. The height of the vertical prongs 2101 should be sufficient to assure that the test roll does not contact the horizontal base of the fork during testing. The horizontal distance between the prongs must exceed the length of the test roll.

Program the tensile tester to perform a compression test, collecting force and crosshead extension data at an acquisition rate of 100 Hz. Lower the crosshead at a rate of 10 mm/min until 5.00 g is detected at the load cell. Set the current crosshead position as the corrected gage length and zero the crosshead position. Begin data collection and lower the crosshead at a rate of 50 mm/min until the force reaches 10 N. Return the crosshead to the original gage length.

Remove all of the test rolls from their packaging and allow them to condition at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about $50\% \pm 2\%$ relative humidity for 2 hours prior to testing. Rolls with cores that are crushed, bent, or damaged should not be tested. Insert sample shaft through the test roll's core and then mount the roll and shaft onto the lower stationary fixture. Secure the sample shaft to the vertical prongs then align the midpoint of the roll's width with the probe. Orient the test roll's tail seal so that it faces upward toward the probe. Rotate the roll 90 degrees toward the operator to align it for the initial compression.

Position the tip of the probe approximately 2 cm above the surface of the sample roll. Zero the crosshead position and load cell and start the tensile program. After the crosshead has returned to its starting position, rotate the roll toward the operator 120 degrees and in like fashion acquire a second measurement on the same sample roll.

From the resulting Force (N) verses Distance (mm) curves, read the penetration at 7.00 N as the Roll Firmness and record to the nearest 0.1 mm. In like fashion analyze a total of ten (10) replicate sample rolls. Calculate the arithmetic mean of the 20 values and report Roll Firmness to the nearest 0.1 mm.

Slip Stick Coefficient of Friction and Kinetic Coefficient of Friction Method:

The Kinetic Coefficient of Friction values (actual measurements) and Slip Stick Coefficient of Friction (based on standard deviation from the mean Kinetic Coefficient of Friction) are generated by running the test procedure as defined in U.S. Patent No. 9,896,806.

Lint Value Test Method:

The amount of lint generated from a finished fibrous structure is determined with a Sutherland Rub Tester (available from Danilee Co., Medina, Ohio) and a color spectrophotometer (a suitable instrument is the HunterLab LabScan XE, as available from Hunter Associates Laboratory Inc., Reston, VA, or equivalent). such as the Hunter LabScan XE. The rub tester is a motor-driven instrument for moving a weighted felt test strip over a finished fibrous structure specimen (referred to throughout this method as the “web”) along an arc path. The Hunter Color L value is measured on the felt test strip before and after the rub test. The difference between these two Hunter Color L values is then used to calculate a lint value. This lint method is designed to be used with white or substantially white fibrous structures and/or sanitary toilet tissue products. Therefore, if testing of a non-white tissue, such as blue-colored or peach-colored tissue is desired, the same formulation should be used to make a sample without the colored dye, pigment, etc., using bleached kraft pulps.

15

i. Sample preparation

Prior to the lint rub testing, the samples to be tested should be conditioned according to Tappi Method T402OM-88. Here, samples are preconditioned for 24 hours at a relative humidity level of 10 to 35% and within a temperature range of 22°C to 40°C. After this preconditioning step, samples should be conditioned for 24 hours at a relative humidity of 48 to 52% and within a temperature range of 22°C to 24°C. This rub testing should also take place within the confines of the constant temperature and humidity room.

20

The web is first prepared by removing and discarding any product which might have been abraded in handling, e.g., on the outside of the roll. For products formed from multiple plies of webs, this test can be used to make a lint measurement on the multi-ply product, or, if the plies can be separated without damaging the specimen, a measurement can be taken on the individual plies making up the product. If a given sample differs from surface to surface, it is necessary to test both surfaces and average the values in order to arrive at a composite lint value. In some cases, products are made from multiple-ply webs such that the facing-out surfaces are identical, in which case it is only necessary to test one surface. If both surfaces are to be tested, it is necessary to obtain six specimens for testing (Single surface testing only requires three specimens). Each specimen should measure approximately 9.5 by 4.5 in. (241.3mm by 114mm) with the 9.5 in. (241.3 mm) dimension running in the machine direction (MD). Specimens can be obtained directly

25

30

from a finished product roll, if the appropriate width, or cut to size using a paper cutter. Each specimen should be folded in half such that the crease is running along the cross direction (CD) of the web sample. For two-surface testing, make up 3 samples with a first surface "out" and 3 with the second-side surface "out". Keep track of which samples are first surface "out" and which are second surface out.

Obtain a 30 in. by 40 in. piece of Crescent #300 cardboard. Using a paper cutter, cut out six pieces of cardboard to dimensions of 2.5 in. by 6 in. Puncture two holes into each of the six cards by forcing the cardboard onto the hold down pins of the Sutherland Rub tester.

Center and carefully place each of the 2.5 in. by 6 in. cardboard pieces on top of the six previously folded samples. Make sure the 6 in. dimension of the cardboard is running parallel to the machine direction (MD) of each of the tissue samples. Center and carefully place each of the cardboard pieces on top of the three previously folded samples. Once again, make sure the 6 in. dimension of the cardboard is running parallel to the machine direction (MD) of each of the web samples.

Fold one edge of the exposed portion of the web specimen onto the back of the cardboard. Secure this edge to the cardboard with adhesive tape obtained from 3M Inc. (3/4 in. wide Scotch Brand, St. Paul, Minn.). Carefully grasp the other over-hanging tissue edge and snugly fold it over onto the back of the cardboard. While maintaining a snug fit of the web specimen onto the board, tape this second edge to the back of the cardboard. Repeat this procedure for each sample.

Turn over each sample and tape the cross-direction edge of the web specimen to the cardboard. One half of the adhesive tape should contact the web specimen while the other half is adhering to the cardboard. Repeat this procedure for each of the samples. If the tissue sample breaks, tears, or becomes frayed at any time during the course of this sample preparation procedure, discard and make up a new sample with a new tissue sample strip.

There will now be 3 first-side surface "out" samples on cardboard and (optionally) 3 second-side surface "out" samples on cardboard.

ii. Felt preparation

Obtain a 30 in. by 40 in. piece of Crescent #300 cardboard. Using a paper cutter, cut out six pieces of cardboard to dimensions of 2.25 in. by 7.25 in. Draw two lines parallel to the short dimension and down 1.125 in. from the top and bottom most edges on the white side of the cardboard. Carefully score the length of the line with a razor blade using a straight edge as a guide. Score it to a depth about halfway through the thickness of the sheet. This scoring allows the

cardboard/felt combination to fit tightly around and rest flat against the weight of the Sutherland Rub tester. Draw an arrow running parallel to the long dimension of the cardboard on this scored side of the cardboard.

Cut six pieces of black felt (F-55, or equivalent) to the dimensions of 2.25 in. by 8.5 in.

- 5 Place a felt piece on top of the unscored, green side of the cardboard such that the long edges of both the felt and cardboard are parallel and in alignment. Make sure the fluffy side of the felt is facing up. Also allow about 0.5" to overhang the top and bottom most edges of the cardboard. Snugly fold over both overhanging felt edges onto the backside of the cardboard and attach with Scotch brand tape. Prepare a total of six of these felt/cardboard combinations. For best
10 reproducibility, all samples should be run with the same lot of felt.

iii. Care of 4-pound weight

- The four-pound weight has four square inches of effective contact area providing a contact pressure of one pound per square inch. Since the contact pressure can be changed by alteration of
15 the rubber pads mounted on the face of the weight, it is important to use only the rubber pads supplied by the instrument manufacturer and mounted according to their instructions. These pads must be replaced if they become hard, abraded, or chipped off. When not in use, the weight must be positioned such that the pads are not supporting the full weight of the weight. It is best to store the weight on its side.

20

iv. Rub tester instrument calibration

Set up and calibrate the Sutherland Rub Tester according to the manufacturer's instructions. For this method, the tester is preset to run for five strokes (one stroke is a full forward and reverse cycle of the movable arm) and operates at 42 cycles per minute.

25

v. Color spectrophotometer calibration

- Setup and standardize the color instrument using a 2 in. measurement area port size utilizing the manufacturer supplied black tile, then white tile. Calibrate the instrument according to
30 manufacturer's specifications using their supplied standard tiles and configure it to measure Hunter L, a, b values.

vi. Measurement of samples

The first step in the measurement of lint is to measure the Hunter color values of the black felt/cardboard samples prior to being rubbed on the web sample. Center a felt covered cardboard, with the arrow pointing to the back of the color meter, over the measurement port backing it with a standard white plate. Since the felt width is only slightly larger than the viewing area diameter, make sure the felt completely covers the measurement area. After confirming complete coverage, take a reading and record the Hunter L value.

Measure the Hunter Color L values for all the felt covered cardboards using this technique. If the Hunter Color L values are all within 0.3 units of one another, take the average to obtain the initial L reading. If the Hunter Color L values are not within the 0.3 units, discard those felt/cardboard combinations outside the limit. Prepare new samples and repeat the Hunter Color L measurement until all samples are within 0.3 units of one another.

For the rubbing of the web sample/cardboard combinations, secure a prepared web sample card on the base plate of the rub tester by slipping the holes in the board over the hold-down pins. Clip a prepared felt covered card (with established initial “L” reading) onto the four-pound weight by pressing the card ends evenly under the clips on the sides of the weight. Make certain the card is centered score bend to score bend on the weight, positioned flat against the rubber pads, with the felt side facing away from the rubber pads. Hook the weight onto the tester arm and gently lower onto the prepared web sample card. It is important to check that the felt is resting flat on the web sample and that the weight does not bind on the arm.

Next, activate the tester allowing the weighted felt test strip to complete five full rubbing strokes against the web sample surface. At the end of the five strokes the tester will automatically stop. Remove the weight with the felt covered cardboard. Inspect the web sample. If torn, discard the felt and web sample and start over. If the web sample is intact, remove the felt covered cardboard from the weight. Measure the Hunter Color L value on the felt covered cardboard in the same location as described above for the blank felts. Record the Hunter Color L readings for the felt after rubbing. Rub, measure, and record the Hunter Color L values for all remaining samples. After all web specimens have been measured, remove and discard all felt. Felts strips are not used again. Cardboards are used until they are bent, torn, limp, or no longer have a smooth surface.

vii. Calculations

For samples measured on both surfaces, subtract the average initial L reading found for the unused felts from each of the three first-side surface L readings and each of the three second-side

surface L readings. Calculate the average delta for the three first-side surface values. Calculate the average delta for the three second-side surface values. Finally, calculate the average of the lint value on the first-side surface and the second-side surface, and record as the lint value to the nearest whole unit.

- 5 For samples measured on only one surface, subtract the average initial L reading found for the unused felts from each of the three L readings. Calculate the average delta L for the three surface values and record as the lint value to the nearest whole unit.

Formation Index Test Method:

- 10 The formation index is a ratio of the contrast and size distribution components of the nonwoven substrate. The higher the formation index, the better the formation uniformity. Conversely, the lower the formation index, the worse the formation uniformity. The “formation index” is measured using a commercially available PAPRICAN Micro-Scanner Code LAD94, manufactured by OpTest Equipment, Incorporated, utilizing the software developed by
15 PAPRICAN & OpTest, Version 9.0, both commercially available from OpTest Equipment Inc., Ontario, Canada. The PAPRICAN Micro-Scanner Code LAD94 uses a video camera system for image input and a light box for illuminating the sample. The camera is a CCD camera with 65 µm/pixel resolution.

- The video camera system views a nonwoven sample placed on the center of a light box
20 having a diffuser plate. To illuminate the sample for imaging, the light box contains a diffused quartz halogen lamp of 82V/250 W that is used to provide a field of illumination. A uniform field of illumination of adjustable intensity is provided. Specifically, samples for the formation index testing are cut from a cross direction width strip of the nonwoven substrate. The samples are cut into 101.6 mm (4 inches) by 101.6 mm (4 inches) squares, with one side aligned with the machine
25 direction of the test material. The side aligned with the machine direction of the test material is placed onto the testing area and held in place by the specimen plate with the machine direction pointed towards the instrument support arm that holds the camera. Each specimen is placed on the light box such that the side of the web to be measured for uniformity is facing up, away from the diffuser plate. To determine the formation index, the light level must be adjusted to indicate MEAN
30 LCU GRAY LEVEL of 128±1.

 The specimen is set on the light box between the specimen plate so that the center of the specimen is aligned with the center of the illumination field. All other natural or artificial room light is extinguished. The camera is adjusted so that its optical axis is perpendicular to the plane of

the specimen and so that its video field is centered on the center of the specimen. The specimen is then scanned and calculated with the OpTest Software.

Fifteen specimens of the nonwoven substrate were tested for each sample and the values were averaged to determine the formation index.

5

Density and Bulk (Dry) Test Method:

The density of a fibrous structure and/or sanitary tissue product is calculated as the quotient of the Basis Weight of a fibrous structure or sanitary tissue product expressed in lbs/3000 ft² divided by the Caliper (at 95 g/in²) of the fibrous structure or sanitary tissue product expressed in mils. The final Density value is calculated in lbs/ft³ and/or g/cm³, by using the appropriate converting factors. The bulk of a fibrous structure and/or sanitary tissue product is the reciprocal of the density method (i.e., Bulk = 1 / Density).

Dry Thick Compression and Recovery Test Method (“Dry Compression” or “Compressive Slope (Dry)”):

10 Dry Thick Compression and Dry Thick Compressive Recovery are measured using a constant rate of extension tensile tester (a suitable instrument is the EJA Vantage, Thwing-Albert, West Berlin NJ, or equivalent) fitted with compression fixtures, a circular compression foot having an area of 1.0 in² and a circular anvil having an area of at least 4.9 in². The thickness (caliper in mils) is measured at varying pressure values ranging from 10-1500 g/in² in both the compression and relaxation directions.

15 Four (4) samples are prepared by the cutting of a usable unit obtained from the outermost sheets of a finished product roll after removing at least the leading five sheets by unwinding and tearing off via the closest line of weakness, such that each cut sample is 2.5×2.5 inches, avoiding creases, folds, and obvious defects.

20 The compression foot and anvil surfaces are aligned parallel to each other, and the crosshead zeroed at the point where they are in contact with each other. The tensile tester is programmed to perform a compression cycle, immediately followed by an extension (recovery) cycle. Force and extension data are collected at a rate of 50 Hz, with a crosshead speed of 0.10 in/min. Force data is converted to pressure (g/in², or gsi). The compression cycle continues until a pressure of 1500 gsi is reached, at which point the crosshead stops and immediately begins the
25 extension (recovery) cycle with the data collection and crosshead speed remaining the same.

The sample is placed flat on the anvil fixture, ensuring the sample is centered beneath the foot so that when contact is made the edges of the sample will be avoided. Start the tensile tester and data collection. Testing is repeated in like fashion for all four samples.

The thickness (mils) vs. pressure (g/in², or gsi) data is used to calculate the sample's compressibility, near-zero load caliper, and compressive modulus. A least-squares linear regressions is performed on the thickness vs. the logarithm (base10) of the applied pressure data using nine discrete data points at pressures of 10, 25, 50, 75, 100, 125, 150, 200, 300 gsi and their respective thickness readings. Compressibility (m) equals the slope of the linear regression line, with units of mils/log (gsi). The higher the magnitude of the negative value the more "compressible" the sample is. Near-zero load caliper (b) equals the y-intercept of the linear regression line, with units of mils. This is the extrapolated thickness at log (1 gsi pressure). Compressive Modulus is calculated as the y-intercept divided by the negative slope (-b/m) with units of log (gsi).

Dry Thick Compression is defined as:

$$\text{Dry Thick Compression (mils} \cdot \text{mils} / \log (\text{gsi}) = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)}$$

Compression Slope is defined as -1 x Compressibility (m).

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied. Calculate the arithmetic mean of the four replicate values and report Dry Thick Compression to the nearest integer value mils* mils / log (gsi).

Dry Thick Compressive Recovery is defined as:

$$\begin{aligned} \text{Dry Thick Compressive Recovery (mils} \cdot \text{mils} / \log (\text{gsi}) \\ = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)} \times \frac{\text{Recovered Thickness at 10 gsi}}{\text{Compressed Thickness at 10 gsi}} \end{aligned}$$

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied and maintain fraction recovery at 10 g/in². Compressed thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the compressive portion of the test. Recovered thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the recovery portion of the test. Calculate the arithmetic mean of the four replicate values and report Dry Thick Compressive Recovery to the nearest integer value mils* mils /

log (gsi).

Wet Thick Compression and Recovery Test Method (Wet Compression):

5 Wet Thick Compression and Wet Thick Compressive Recovery are measured using a constant rate of extension tensile tester (a suitable instrument is the EJA Vantage, Thwing-Albert, West Berlin NJ, or equivalent) fitted with compression fixtures, a circular compression foot having an area of 1.0 in² and a circular anvil having an area of at least 4.9 in². The thickness (caliper in mils) is measured at varying pressure values ranging from 10-1500 g/in² in both the compression and relaxation directions.

10 Four (4) samples are prepared by the cutting of a usable unit obtained from the outermost sheets of a finished product roll after removing at least the leading five sheets by unwinding and tearing off via the closest line of weakness, such that each cut sample is 2.5×2.5 inches, avoiding creases, folds, and obvious defects.

15 The compression foot and anvil surfaces are aligned parallel to each other, and the crosshead zeroed at the point where they are in contact with each other. The tensile tester is programmed to perform a compression cycle, immediately followed by an extension (recovery) cycle. Force and extension data are collected at a rate of 50 Hz, with a crosshead speed of 0.10 in/min. Force data is converted to pressure (g/in², or gsi). The compression cycle continues until a pressure of 1500 gsi is reached, at which point the crosshead stops and immediately begins the
20 extension (recovery) cycle with the data collection and crosshead speed remaining the same.

The sample is placed flat on the anvil fixture, ensuring the sample is centered beneath the foot so that when contact is made the edges of the sample will be avoided. Using a pipette, fully saturate the entire sample with distilled or deionized water until there is no observable dry area remaining and water begins to run out of the edges. Start the tensile tester and data collection.
25 Testing is repeated in like fashion for all four samples.

The thickness (mils) vs. pressure (g/in², or gsi) data is used to calculate the sample's compressibility, "near-zero load caliper", and compressive modulus. A least-squares linear regressions is performed on the thickness vs. the logarithm (base10) of the applied pressure data using nine discrete data points at pressures of 10, 25, 50, 75, 100, 125, 150, 200, 300 gsi and their
30 respective thickness readings. Compressibility (m) equals the slope of the linear regression line, with units of mils/log (gsi). The higher the magnitude of the negative value the more "compressible" the sample is. Near-zero load caliper (b) equals the y-intercept of the linear regression line, with units of mils. This is the extrapolated thickness at log (1 gsi pressure).

Compressive Modulus is calculated as the y-intercept divided by the negative slope (-b/m) with units of log (gsi).

Wet Thick Compression is defined as:

$$5 \quad \text{Dry Thick Compression (mils} \cdot \text{mils} / \log (\text{gsi}) = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)}$$

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied. Calculate the arithmetic mean of the four replicate values and report Wet Thick Compression to the nearest integer value mils* mils / log (gsi).

10 Wet Thick Compressive Recovery is defined as:

$$\begin{aligned} &\text{Dry Thick Compressive Recovery (mils} \cdot \text{mils} / \log (\text{gsi}) \\ &= -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)} \times \frac{\text{Recovered Thickness at 10 gsi}}{\text{Compressed Thickness at 10 gsi}} \end{aligned}$$

15 Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied and maintain fraction recovery at 10 g/in². Compressed thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the compressive portion of the test. Recovered thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the recovery portion of the test. Calculate the arithmetic mean of the four replicate values and report Wet Thick Compressive Recovery to the nearest integer value mils* mils / log (gsi).

20

Moist Towel Surface Structure Test Method:

This test method measures the surface topography of a towel surface, both in a dry and moist state, and calculates the % contact area and the median depth of the lowest 10% of the projected measured area, with the test sample under a specified pressure using a smooth and rigid transparent plate with an anti-reflective coating (to minimize and/or eliminate invalid image pixels).

25

Condition the samples or useable units of product, with wrapper or packaging materials removed, in a room conditioned at 50 ± 2% relative humidity and 23°C ± 1°C (73° ± 2°F) for a minimum of two hours prior to testing. Do not test useable units with defects such as wrinkles, tears, holes, effects of tail seal or core adhesive, etc., and when necessary, replace with other useable units free of such defects. Test sample dimensions shall be of the size of the usable unit,

30

removed carefully at the perforations if they are present. If perforations are not present, or for samples larger than 8 inches MD by 11 inches CD, cut the sample to a length of approximately 6 inches in the MD and 11 inches in the CD. In this test only the inside surface of the usable unit(s) is analyzed. The inside surface is identified as the surface oriented toward the interior core when wound on a product roll (i.e., the opposite side of the surface visible on the outside roll as presented to a consumer).

The instrument used in this method is a Gocator 3210 Snapshot System (LMI Technologies, Inc., 9200 Glenlyon Parkway, Burnaby, BC V5J 5J8 Canada), or equivalent. This instrument is an optical 3D surface topography measurement system that measures the surface height of a sample using a projected structured light pattern technique. The result of the measurement is a topography map of surface height (z-directional or z-axis) versus displacement in the x-y plane. This particular system has a field of view of approximately 100 x 154 mm, however the captured images are cropped to 80 x 130 mm (from the center) prior to analysis. The system has an x-y pixel resolution of 86 microns. The clearance distance from the camera to the testing surface (which is smooth and flat, and perpendicular to the camera view) is 23.5 (+/- 0.2) cm – see FIG. 10. Calibration plates can be used to verify that the system is accurate to manufacturer's specifications. The system is set to a Brightness value of 7, and a Dynamic value of 3, in order to most accurately capture the surface topography and minimize non-measured pixels and noise. Other camera settings may be used, with the objective of most accurately measuring the surface topography, while minimizing the number of invalid and non-measurable points.

Test samples are handled only at their corners. The test sample is first weighted on a scale with at least 0.001 gram accuracy, and its dry weight recorded to the nearest 0.01 gram. It is then placed on the testing surface, with its inside face oriented towards the Gocator camera, and centered with respect to the imaging view. A smooth and rigid transparent plate (8 x 10 inches) is gently placed on top of the test sample, centered with respect to its x-y dimensions. Equal size weights are placed on the four corners of the transparent plate such that they are close to the four corners of the projected imaged area, but do not interfere in any way with the measurement image. The size of each equal sized weight is such that the total weight of transparent plate and the four weights delivers a total pressure of 25 (+/- 1) grams per square inch (gsi) to the test sample under the plate. Within 15 seconds of placing the four weights in their proper position, the Gocator system is then initiated to acquire the topography image of the test sample in its 'dry' state.

Immediately after saving the Gocator image of the 'dry' state image, the weights and plate are removed from the test sample. The test sample is then moved to a smooth, clean countertop

surface, with its inside face still up. Using a pipette, 15-30 ml of deionized water is distributed evenly across the entire surface of the test sample until it is visibly apparent that the water has fully wetted the entire test sample, and no unwetted area is observed. The wetting process is to be completed in less than a minute. The wet test sample is then gently picked up by two adjacent
5 corners, so that it hangs freely (dripping may occur), and carefully placed on a sheet of blotter paper (Whatman cellulose blotting paper, grade GB003, cut to dimensions larger than the test sample). The wet test sample must be placed flat on the blotting paper without wrinkles or folds present. A smooth, 304 stainless steel cylindrical rod (density of $\sim 8 \text{ g/cm}^3$), with dimensions of 1.75 inch diameter and 12 inches long, is then rolled over the entire test sample at a speed of 1.5 –
10 2.0 inches per second, in the direction of the shorter of the two dimensions of the test sample. If creases or folds are created during the rolling process, and are inside the central area of the sample to be measured (i.e., if they cannot slightly adjusted or avoided in the topography measurement), then the test sample is to be discarded for a new test sample, and the measurement process started over. Otherwise, the moist sample is picked up by two adjacent corners and weighed on the scale
15 to the nearest 0.01 gram (i.e., its moist weight). At this point, the moist test paper towel test sample will have a moisture level between 1.25 and 2.00 grams H_2O per gram of initial dry material.

The moist test sample is then placed flat on the Gocator testing surface (handling it carefully, only touching its corners), with its inside surface pointing towards the Gocator camera, and centered with respect to the imaging view (as close to the same position it was for the ‘dry’
20 state image). After ensuring that the sample is flat, and no folds or creases are present in the imaging area, the smooth and rigid transparent plate (8 x 10 inches) is gently placed on top of the test sample, centered with respect to its x-y dimensions. The equal size weights are placed on the four corners of the transparent plate (i.e., the same weights that were used in the dry sample testing) such that they are close to the four corners of the projected imaged area, but do not interfere in any
25 way with the measurement image. Within 15 seconds of placing the four weights in their proper position, the Gocator system is then initiated to acquire the topography image of the test sample in its ‘moist’ state.

At this point, the test sample has both ‘dry’ and ‘moist’ surface topography (3D) images. These are processed using surface texture analysis software such as MountainsMap® (available
30 from Digital Surf, France) or equivalent, as follows: 1) The first step is to crop the image. As stated previously, this particular system has a field of view of approximately 100 x 154 mm, however the image is cropped to 80 x 130 mm (from the center). 2) Remove ‘invalid’ and non-measured points. 3) Apply a 3x3 median filter (to reduce effects of noise). 4) Apply an ‘Align’

filter, which subtracts a least squares plane to level the surface (to create an overall average of heights centered at zero). 5) Apply a Gaussian filter (according to ISO 16610-61) with a nesting index (cut-off wavelength) of 25 mm (to flatten out large scale waviness, while preserving finer structure).

- 5 From these processed 3D images of the surface, the following parameters are calculated, using software such as MountainsMap® or equivalent: Dry Depth (um), Dry Contact Area (%), Moist Depth (um), and Moist Contact Area (%).

Height measurements are derived from the Areal Material Ratio (Abbott-Firestone) curve described in the ISO 13565-2:1996 standard extrapolated to surfaces. This curve is the cumulative
10 curve of the surface height distribution histogram versus the range of surface heights measured. A material ratio is the ratio, expressed as a percent, of the area corresponding to points with heights equal to or above an intersecting plane passing through the surface at a given height, or cut depth, to the cross-sectional area of the evaluation region (field of view area). For calculating contact area, the height at a material ratio of 2% is first identified. A cut depth of 100 µm below this height
15 is then identified, and the material ratio at this depth is recorded as the “Dry Contact Area” and “Moist Contact Area”, respectively, to the nearest 0.1%.

In order to calculate “Depth” (Dry and Moist, respectively), the depth at the 95% material ratio relative to the mean plane (centered height data) of the specimen surface is identified. This corresponds to a depth equal to the median of the lowest 10% of the projected area (valleys) of the
20 specimen surface and is recorded as the “Dry Depth” and “Moist Depth”, respectively, to the nearest 1 micron (um). These values will be negative as they represent depths below the mean plane of the surface heights having a value of zero.

Three replicate samples are prepared and measured in this way, to produce an average for each of the four parameters: Dry Depth (um), Dry Contact Area (%), Moist Depth (um), and Moist
25 Contact Area (%). Additionally, from these parameters, the difference between the dry and moist depths can be calculated to demonstrate the change in depth from the dry to the moist state.

Micro-CT Intensive Property Measurement Method:

The micro-CT intensive property measurement method measures the basis weight,
30 thickness and density values within visually discernable zones or regions of a substrate sample. It is based on analysis of a 3D x-ray sample image obtained on a micro-CT instrument (a suitable instrument is the Scanco µCT 50 available from Scanco Medical AG, Switzerland, or equivalent). The micro-CT instrument is a cone beam microtomograph with a shielded cabinet. A maintenance

free x-ray tube is used as the source with an adjustable diameter focal spot. The x-ray beam passes through the sample, where some of the x-rays are attenuated by the sample. The extent of attenuation correlates to the mass of material the x-rays have to pass through. The transmitted x-rays continue on to the digital detector array and generate a 2D projection image of the sample. A
5 3D image of the sample is generated by collecting several individual projection images of the sample as it is rotated, which are then reconstructed into a single 3D image. The instrument is interfaced with a computer running software to control the image acquisition and save the raw data. The 3D image is then analyzed using image analysis software (a suitable image analysis software is MATLAB available from The Mathworks, Inc., Natick, MA, or equivalent) to measure the basis
10 weight, thickness and density intensive properties of regions within the sample.

Sample Preparation

To obtain a sample for measurement, lay a single layer of the dry substrate material out flat and die cut a circular piece with a diameter of 16 mm. If the sample being measured is a 2 (or
15 more) ply finished product, carefully separate an individual ply of the finished product prior to die cutting. The sample weight is recorded. A sample may be cut from any location containing the region or cells to be analyzed. Regions, zones, or cells within different samples taken from the same substrate material can be analyzed and compared to each other. Care should be taken to avoid embossed regions, folds, wrinkles, or tears when selecting a location for sampling.

20

Image Acquisition

Set up and calibrate the micro-CT instrument according to the manufacturer's specifications. Place the sample into the appropriate holder, between two rings of low-density material, which have an inner diameter of 12 mm. This will allow the central portion of the sample
25 to lay horizontal and be scanned without having any other materials directly adjacent to its upper and lower surfaces. Measurements should be taken in this region. The 3D image field of view is approximately 20 mm on each side in the xy-plane with a resolution of approximately 3400 by 3400 pixels, and with a sufficient number of 6 micron thick slices collected to fully include the z-direction of the sample. The reconstructed 3D image contains isotropic voxels of 6 microns.
30 Images were acquired with the source at 45 kVp and 133 μ A with no additional low energy filter. These current and voltage settings should be optimized to produce the maximum contrast in the projection data with sufficient x-ray penetration through the sample, but once optimized held constant for all substantially similar samples. A total of 1700 projections images are obtained with

an integration time of 500 ms and 4 averages. The projection images are reconstructed into the 3D image and saved in 16-bit format to preserve the full detector output signal for analysis.

Image Processing

5 Load the 3D image into the image analysis software. The largest cross-sectional area of the sample should be nearly parallel with the x-y plane, with the z-axis being perpendicular. Threshold the 3D image at a value which separates, and removes, the background signal due to air, but maintains the signal from the sample fibers within the substrate.

10 Five 2D intensive property images are generated from the thresholded 3D image. The first is the Basis Weight Image, which is a projection image. Each x-y pixel in this image represents the summation of the intensity values along voxels in the z-direction. This results in a 2D image where each pixel now has a value equal to the cumulative signal through the entire sample.

15 The weight of the sample divided by the z-direction projected area of the punched sample provides the actual average basis weight of the sample. This correlates with the average signal intensity from the Basis Weight image described above, allowing it to be represented in units of g/m^2 (gsm).

20 The second intensive property 2D image is the Thickness Image. To generate this image the upper and lower surfaces of the sample are identified, and the distance between these surfaces is calculated giving the sample thickness. The upper surface of the sample is identified by starting at the uppermost z-direction slice and evaluating each slice going through the sample to locate the z-direction voxel for all pixel positions in the xy-plane where sample signal was first detected. The same procedure is followed for identifying the lower surface of the sample, except the z-direction voxels located are all the positions in the xy-plane where sample signal was last detected. Once the upper and lower surfaces have been identified they are smoothed with a 15x15 median filter to
25 remove signal from stray fibers. The 2D Thickness Image is then generated by counting the number of voxels that exist between the upper and lower surfaces for each of the pixel positions in the xy-plane. This raw thickness value is then converted to actual distance, in microns, by multiplying the voxel count by the 6 μm slice thickness resolution.

30 The third intensive property 2D image is the Density Image (see for example FIG. 12). To generate this image, divide each xy-plane pixel value in the Basis Weight Image, in units of gsm, by the corresponding pixel in the Thickness Image, in units of microns. The units of the Density Image are grams per cubic centimeter (g/cc).

For each x-y location, the first and last occurrence of a thresholded voxel position in the z-direction is recorded. This provides two sets of points representing the Top Layer and Bottom Layer of the sample. Each set of points are fit to a second-order polynomial to provide smooth top and bottom surfaces. These surfaces define fourth and fifth 2D intensive property images, the top-layer and bottom-layer of the sample. These surfaces are saved as images with the gray values of each pixel representing the z-value of the surface point.

Micro-CT Basis Weight, Thickness and Density Intensive Properties

This sub-section of the method may be used to measure zones or regions generally. Begin by identifying the zone or region to be analyzed. Next, identify the boundary of the identified region to be analyzed. The boundary of a region is identified by visual discernment of differences in intensive properties when compared to other regions within the sample. For example, a region boundary can be identified based by visually discerning a thickness difference when compared to another region in the sample. Any of the intensive properties can be used to discern region boundaries on either on the physical sample itself or any of the micro-CT intensive property images. Once the boundary of a zone or region has been identified draw the largest circular region of interest that can be inscribed within the region. From each of the first three intensive property images calculate the average basis weight, thickness, and density within the region of interest. Record these values as the region's micro-CT basis weight to the nearest 0.01 gsm, micro-CT thickness to the nearest 0.1 micron and micro-CT density to the nearest 0.0001 g/cc.

To calculate the percent difference between zones or regions may be calculated according to the "Percent (%) difference" definition above.

Concavity Ratio and Packing Fraction Measurements

As outlined above, five different types of 2D intensive property images are created. These images include: (1) a basis weight image, (2) a thickness image, (3) a density image, (4) a top-layer image, and (5) a bottom-layer image.

To measure discrete pillow and knuckle Concavity Ratio and Packing Fraction, begin by identifying the boundary of the selected discrete pillow or knuckle cells. The boundary of a cell is identified by visual discernment of differences in intensive properties when compared to other cells within the sample. For example, a cell boundary can be identified based by visually discerning a density difference when compared to another cell in the sample. Any of the intensive properties (basis weight, thickness, density, top-layer, and bottom-layer) can be used to discern cell

boundaries on either the physical sample itself or any of the micro-CT 2D intensive property images.

Using the image analysis software, manually draw a line tracing the identified boundary of each individual whole and partial discrete knuckle or discrete pillow cell 24 visible within the sample boundary 100, and generate a new binary image containing only the closed filled in shapes of all the identified discrete cells (see for example FIG. 13). Analyze all the individual discrete cell shapes in the binary image and record the following measurements for each: 1) Area and 2) Convex Hull Area.

The Concavity Ratio is a measure of the presence and extent of concavity within the shapes of the discrete knuckle or pillow cells. Using the recorded measurements calculate the Concavity Ratio for each of the analyzed discrete cells as the ratio of the shape area to its convex hull area. Identify ten substantially similar replicate discrete knuckle or pillow cells and average together their individual Concavity Ratio values and report the average Concavity Ratio as a unitless value to the nearest 0.01. If ten replicate cells cannot be identified in a single sample, then a sufficient number of replicate samples are to be analyzed according to the described procedure. If the sample contains discrete knuckle or pillow cells of differing size or shape, identify ten substantially similar replicates of each of the different shapes and sizes, calculate an average Concavity Ratio for each and report the minimum average Concavity Ratio value.

The Packing Fraction is the fraction of the sample area filled by the discrete knuckle and pillow shapes. The Packing Fraction value for the sample is calculated by summing all the recorded whole and partial identified shape areas, regardless of shape or size, and dividing that total by the sample area within the sample boundary 100. The Packing Fraction is reported as a unitless value to the nearest 0.01.

Continuous Region Density Difference Measurement

This sub-section of the method may be used when a continuous region is present. To measure the Continuous Region Density Difference, first identify a Cell Group 40 of four adjacent and nearest-neighboring discrete knuckle (e.g., FIG. 11, 20-A through 20-D) or pillow cells and their boundaries as described above, such that when the centroids of each of the four cells are connected a quadrilateral will be formed having four edges 90 and two diagonals 92 (see for example FIG. 11). Avoid analyzing any Cells Groups containing embossing. Within this Cell Group identify the continuous pillow or knuckle region. Select five locations to analyze within the identified continuous region: One will be located on each of the cell centroid connecting lines

forming the four edges of the quadrilateral, and one located in the middle where the quadrilateral diagonals intersect. At each of the selected locations draw the largest circular region of interest that can be inscribed within the continuous region, with the center of each of the four edge regions of interest lying on the centroid connecting line (e.g., pillow regions **22-1, 22-3, 22-8, 22-9**) and the middle region of interest centered at the location where the diagonals intersect (e.g., **22-2**). From the density intensive property image calculate and record the average density within each of the five regions of interest. Calculate and record the percent difference between the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100. Perform this analysis for three substantially similar replicate Cell Groups of four discrete knuckle or pillow locations within the sample and report the average percent difference value to the nearest whole percent.

Continuous Region Density Difference Measurement

This sub-section of the method may be used when a continuous region is present. To measure the Continuous Region Density Difference, first identify a Cell Group 40 of four adjacent and nearest-neighboring discrete knuckle (e.g., FIG. 11, 20-A through 20-D) or pillow cells and their boundaries as described above, such that when the centroids of each of the four cells are connected a quadrilateral will be formed having four edges 90 and two diagonals 92 (see for example FIG. 11). Avoid analyzing any Cells Groups containing embossing. Within this Cell Group identify the continuous pillow or knuckle region. Select five locations to analyze within the identified continuous region: One will be located on each of the cell centroid connecting lines forming the four edges of the quadrilateral, and one located in the middle where the quadrilateral diagonals intersect. At each of the selected locations draw the largest circular region of interest that can be inscribed within the continuous region, with the center of each of the four edge regions of interest lying on the centroid connecting line (e.g., pillow regions 22-1, 22-3, 22-8, 22-9) and the middle region of interest centered at the location where the diagonals intersect (e.g., 22-2). From the density intensive property image calculate and record the average density within each of the five regions of interest. Calculate and record the percent difference between the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100. Perform this analysis for three substantially

similar replicate Cell Groups of four discrete knuckle or pillow locations within the sample and report the average percent difference value to the nearest whole percent.

Micro-CT Basis Weight, Thickness and Density Intensive Properties

5 This sub-section of the method may be used to measure zones or regions generally. Once the boundary of a zone or region has been identified draw the largest circular region of interest that can be inscribed within the region. From each of the first three intensive property images calculate the average basis weight, thickness and density within the region of interest. Record these values as the region's micro-CT basis weight to the nearest 0.01 gsm, micro-CT thickness to the nearest 10 0.1 micron and micro-CT density to the nearest 0.0001 g/cc. To calculate and record the percent difference between ZONES OR REGIONS: the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100.

15

Basis Weigh- Method:

Basis weight of a fibrous structure and/or sanitary tissue product (TAPPI conditioned as follows: Temperature is controlled from $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$ and Relative Humidity is controlled from $50\% \pm 2\%$) is measured on stacks of twelve usable units using a top loading analytical balance 20 with a resolution of ± 0.001 g. The balance is protected from air drafts and other disturbances using a draft shield. A precision cutting die, measuring 3.500 in ± 0.0035 in by 3.500 in ± 0.0035 in is used to prepare all samples.

With a precision cutting die, cut the samples into squares. Combine the cut squares to form a stack twelve samples thick. Measure the mass of the sample stack and record the result to the 25 nearest 0.001 g.

The Basis Weight is calculated in lbs/3000 ft² or g/m² as follows:

$$\text{Basis Weight} = (\text{Mass of stack}) / [(\text{Area of 1 square in stack}) \times (\text{No. of squares in stack})]$$

For example:

$$\text{Basis Weight (lbs/3000 ft}^2\text{)} = \frac{[\text{Mass of stack (g)} / 453.6 \text{ (g/lbs)}]}{[\text{12.25 (in}^2\text{)} / 144 \text{ (in}^2\text{/ft}^2\text{)} \times 12]} \times 3000$$

30

or,

$$\text{Basis Weight (g/m}^2\text{)} = \text{Mass of stack (g)} / [79.032 \text{ (cm}^2\text{)} / 10,000 \text{ (cm}^2\text{/m}^2\text{)} \times 12].$$

Report the numerical result to the nearest 0.1 lbs/3000 ft² or 0.1 g/m² or “gsm.” Sample dimensions can be changed or varied using a similar precision cutter as mentioned above, so as at least 100 square inches of sample area in stack.

5 Emtec Test Method:

TS7 and TS750 values are measured using an EMTEC Tissue Softness Analyzer ("Emtec TSA") (Emtec Electronic GmbH, Leipzig, Germany) interfaced with a computer running Emtec TSA software (version 3.19 or equivalent). According to Emtec, the TS7 value correlates with the real material softness, while the TS750 value correlates with the felt smoothness/roughness of the material. The Emtec TSA comprises a rotor with vertical blades which rotate on the test sample at a defined and calibrated rotational speed (set by manufacturer) and contact force of 100 mN. Contact between the vertical blades and the test piece creates vibrations, which create sound that is recorded by a microphone within the instrument. The recorded sound file is then analyzed by the Emtec TSA software. The sample preparation, instrument operation and testing procedures are performed according the instrument manufacture's specifications.

Sample Preparation

Test samples are prepared by cutting square or circular samples from a finished product. Test samples are cut to a length and width (or diameter if circular) of no less than about 90 mm, and no greater than about (“no greater than about” used interchangeably with “less than about” herein) 120 mm, in any of these dimensions, to ensure the sample can be clamped into the TSA instrument properly. Test samples are selected to avoid perforations, creases or folds within the testing region. Prepare 8 substantially similar replicate samples for testing. Equilibrate all samples at TAPPI standard temperature and relative humidity conditions (23 °C ± 2 C° and 50 % ± 2 %) for at least 1 hour prior to conducting the TSA testing, which is also conducted under TAPPI conditions.

Testing Procedure

Calibrate the instrument according to the manufacturer's instructions using the 1-point calibration method with Emtec reference standards (“ref.2 samples”). If these reference samples are no longer available, use the appropriate reference samples provided by the manufacturer. Calibrate the instrument according to the manufacturer's recommendation and instruction, so that

the results will be comparable to those obtained when using the 1-point calibration method with Emtec reference standards (“ref.2 samples”).

Mount the test sample into the instrument and perform the test according to the manufacturer’s instructions. When complete, the software displays values for TS7 and TS750.

- 5 Record each of these values to the nearest 0.01 dB V² rms. The test piece is then removed from the instrument and discarded. This testing is performed individually on the top surface (outer facing surface of a rolled product) of four of the replicate samples, and on the bottom surface (inner facing surface of a rolled product) of the other four replicate samples.

- 10 The four test result values for TS7 and TS750 from the top surface are averaged (using a simple numerical average); the same is done for the four test result values for TS7 and TS750 from the bottom surface. Report the individual average values of TS7 and TS750 for both the top and bottom surfaces on a particular test sample to the nearest 0.01 dB V² rms. Additionally, average together all eight test value results for TS7 and TS750, and report the overall average values for TS7 and TS750 on a particular test sample to the nearest 0.01 dB V² rms. Unless otherwise
15 specified, the reported values for TS7 and TS750 will be the overall average of the eight test values from the top and bottom surfaces.

SST Absorbency Rate Method:

- 20 This test incorporates the Slope of the Square Root of Time (SST) Test Method. The SST method measures rate over a wide spectrum of time to capture a view of the product pick-up rate over the useful lifetime. In particular, the method measures the absorbency rate via the slope of the mass versus the square root of time from 2-15 seconds.

Overview

- 25 The absorption (wicking) of water by a fibrous sample is measured over time. A sample is placed horizontally in the instrument and is supported with minimal contact during testing (without allowing the sample to droop) by an open weave net structure that rests on a balance. The test is initiated when a tube connected to a water reservoir is raised and the meniscus makes contact with the center of the sample from beneath, at a small negative pressure. Absorption is controlled by
30 the ability of the sample to pull the water from the instrument for approximately 20 seconds. Rate is determined as the slope of the regression line of the outputted weight vs sqrt(time) from 2 to 15 seconds.

Apparatus

Conditioned Room - Temperature is controlled from $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$). Relative Humidity is controlled from $50\% \pm 2\%$

Sample Preparation – Product samples are cut using hydraulic/pneumatic precision cutter
5 into 3.375 inch diameter circles.

Capacity Rate Tester (CRT) - The CRT is an absorbency tester capable of measuring capacity and rate. The CRT consists of a balance (0.001g), on which rests on a woven grid (using nylon monofilament line having a 0.014" diameter) placed over a small reservoir with a delivery tube in the center. This reservoir is filled by the action of solenoid valves, which help to connect
10 the sample supply reservoir to an intermediate reservoir, the water level of which is monitored by an optical sensor. The CRT is run with a -2mm water column, controlled by adjusting the height of water in the supply reservoir.

A diagram of the testing apparatus set up is shown in FIG. 9.

Software - LabView based custom software specific to CRT Version 4.2 or later.

15 Water - Distilled water with conductivity $< 10 \mu\text{S}/\text{cm}$ (target $< 5 \mu\text{S}/\text{cm}$) @ 25°C

Sample Preparation

For this method, a usable unit is described as one finished product unit regardless of the number of plies. Condition all samples with packaging materials removed for a minimum of 2
20 hours prior to testing. Discard at least the first ten usable units from the roll. Remove two usable units and cut one 3.375-inch circular sample from the center of each usable unit for a total of 2 replicates for each test result. Do not test samples with defects such as wrinkles, tears, holes, etc. Replace with another usable unit which is free of such defects

25 **Sample Testing**

Pre-test set-up

1. The water height in the reservoir tank is set -2.0 mm below the top of the support rack (where the towel sample will be placed).
2. The supply tube (8mm I.D.) is centered with respect to the support net.
- 30 3. Test samples are cut into circles of 3-3/8" diameter and equilibrated at Tappi environment conditions for a minimum of 2 hours.

Test Description

1. After pressing the start button on the software application, the supply tube moves to 0.33 mm below the water height in the reserve tank. This creates a small meniscus of water above the supply tube to ensure test initiation. A valve between the tank and the supply tube closes, and the scale is zeroed.
2. The software prompts you to “load a sample”. A sample is placed on the support net, centering it over the supply tube, and with the side facing the outside of the roll placed downward.
3. Close the balance windows and press the “OK” button -- the software records the dry weight of the circle.
4. The software prompts you to “place cover on sample”. The plastic cover is placed on top of the sample, on top of the support net. The plastic cover has a center pin (which is flush with the outside rim) to ensure that the sample is in the proper position to establish hydraulic connection. Four other pins, 1 mm shorter in depth, are positioned 1.25-1.5 inches radially away from the center pin to ensure the sample is flat during the test. The sample cover rim should not contact the sheet. Close the top balance window and click “OK”.
5. The software re-zeroes the scale and then moves the supply tube towards the sample. When the supply tube reaches its destination, which is 0.33 mm below the support net, the valve opens (i.e., the valve between the reserve tank and the supply tube), and hydraulic connection is established between the supply tube and the sample. Data acquisition occurs at a rate of 5 Hz and is started about 0.4 seconds before water contacts the sample.
6. The test runs for at least 20 seconds. After this, the supply tube pulls away from the sample to break the hydraulic connection.
7. The wet sample is removed from the support net. Residual water on the support net and cover are dried with a paper towel.
8. Repeat until all samples are tested.
9. After each test is run, a *.txt file is created (typically stored in the CRT/data/rate directory) with a file name as typed at the start of the test. The file contains all the test set-up parameters, dry sample weight, and cumulative water absorbed (g) vs. time (sec) data collected from the test.

Calculation of Rate of Uptake

Take the raw data file that includes time and weight data.

First, create a new time column that subtracts 0.4 seconds from the raw time data to adjust the raw time data to correspond to when initiation actually occurs (about 0.4 seconds after data collection begins).

Second, create a column of data that converts the adjusted time data to square root of time data (e.g., using a formula such as SQRT() within Excel).

Third, calculate the slope of the weight data vs the square root of time data (e.g., using the SLOPE() function within Excel, using the weight data as the y-data and the sqrt(time) data as the x-data, etc.). The slope should be calculated for the data points from 2 to 15 seconds, inclusive (or 1.41 to 3.87 in the sqrt(time) data column).

10

Calculation of Slope of the Square Root of Time (SST)

The start time of water contact with the sample is estimated to be 0.4 seconds after the start of hydraulic connection is established between the supply tube and the sample (CRT Time). This is because data acquisition begins while the tube is still moving towards the sample and incorporates the small delay in scale response. Thus, “time zero” is actually at 0.4 seconds in CRT Time as recorded in the *.txt file.

The slope of the square root of time (SST) from 2-15 seconds is calculated from the slope of a linear regression line from the square root of time between (and including) 2 to 15 seconds (x-axis) versus the cumulative grams of water absorbed. The units are g/sec^{0.5}.

20

Reporting Results

Report the average slope to the nearest 0.01 g/s^{0.5}.

Plate Stiffness Test Method:

As used herein, the “Plate Stiffness” test is a measure of stiffness of a flat sample as it is deformed downward into a hole beneath the sample. For the test, the sample is modeled as an infinite plate with thickness “t” that resides on a flat surface where it is centered over a hole with radius “R”. A central force “F” applied to the tissue directly over the center of the hole deflects the tissue down into the hole by a distance “w”. For a linear elastic material, the deflection can be predicted by:

30

$$w = \frac{3F}{4\pi Et^3} (1-\nu)(3+\nu)R^2$$

where “E” is the effective linear elastic modulus, “v” is the Poisson's ratio, “R” is the radius of the hole, and “t” is the thickness of the tissue, taken as the caliper in millimeters measured on a stack of 5 tissues under a load of about 0.29 psi. Taking Poisson's ratio as 0.1 (the solution is not highly sensitive to this parameter, so the inaccuracy due to the assumed value is likely to be minor), the previous equation can be rewritten for “w” to estimate the effective modulus as a function of the flexibility test results:

$$E \approx \frac{3R^2}{4t^3} \frac{F}{w}$$

The test results are carried out using an MTS Alliance RT/1, Insight Renew, or similar model testing machine (MTS Systems Corp., Eden Prairie, Minn.), with a 50 newton load cell, and data acquisition rate of at least 25 force points per second. As a stack of five tissue sheets (created without any bending, pressing, or straining) at least 2.5-inches by 2.5 inches, but no more than 5.0 inches by 5.0 inches, oriented in the same direction, sits centered over a hole of radius 15.75 mm on a support plate, a blunt probe of 3.15 mm radius descends at a speed of 20 mm/min. For typical perforated rolled bath tissue, sample preparation consists of removing five (5) connected usable units, and carefully forming a 5 sheet stack, accordion style, by bending only at the perforation lines. When the probe tip descends to 1 mm below the plane of the support plate, the test is terminated. The maximum slope (using least squares regression) in grams of force/mm over any 0.5 mm span during the test is recorded (this maximum slope generally occurs at the end of the stroke). The load cell monitors the applied force and the position of the probe tip relative to the plane of the support plate is also monitored. The peak load is recorded, and “E” is estimated using the above equation.

The Plate Stiffness “S” per unit width can then be calculated as:

$$S = \frac{Et^3}{12}$$

and is expressed in units of Newtons*millimeters. The Testworks program uses the following formula to calculate stiffness (or can be calculated manually from the raw data output):

$$S = \left(\frac{F}{w} \right) \left[\frac{(3+v)R^2}{16t^3} \right]$$

wherein “F/w” is max slope (force divided by deflection), “v” is Poisson's ratio taken as 0.1, and “R” is the ring radius.

The same sample stack (as used above) is then flipped upside down and retested in the same manner as previously described. This test is run three more times (with different sample stacks). Thus, eight S values are calculated from four 5-sheet stacks of the same sample. The numerical average of these eight S values is reported as Plate Stiffness for the sample.

5

Stack Compressibility and Resilient Bulk Test Method:

Stack thickness (measured in mils, 0.001 inch) is measured as a function of confining pressure (g/in^2) using a Thwing-Albert (14 W. Collings Ave., West Berlin, NJ) Vantage Compression/Softness Tester (model 1750-2005 or similar) or equivalent instrument, equipped with a 2500 g load cell (force accuracy is $\pm 0.25\%$ when measuring value is between 10%-100% of load cell capacity, and 0.025% when measuring value is less than 10% of load cell capacity), a 1.128 inch diameter steel pressure foot (one square inch cross sectional area) which is aligned parallel to the steel anvil (2.5 inch diameter). The pressure foot and anvil surfaces must be clean and dust free, particularly when performing the steel-to-steel test. Thwing-Albert software (MAP) controls the motion and data acquisition of the instrument.

The instrument and software are set-up to acquire crosshead position and force data at a rate of 50 points/sec. The crosshead speed (which moves the pressure foot) for testing samples is set to 0.20 inches/min (the steel-to-steel test speed is set to 0.05 inches/min). Crosshead position and force data are recorded between the load cell range of approximately 5 and 1500 grams during compression. The crosshead is programmed to stop immediately after surpassing 1500 grams, record the thickness at this pressure (termed $T_{\max}$), and immediately reverse direction at the same speed as performed in compression. Data is collected during this decompression portion of the test (also termed recovery) between approximately 1500 and 5 grams. Since the foot area is one square inch, the force data recorded corresponds to pressure in units of g/in^2 . The MAP software is programmed to select 15 crosshead position values (for both compression and recovery) at specific pressure trap points of 10, 25, 50, 75, 100, 125, 150, 200, 300, 400, 500, 600, 750, 1000, and 1250 g/in^2 (i.e., recording the crosshead position of very next acquired data point after the each pressure point trap is surpassed). In addition to these 30 collected trap points, $T_{\max}$ is also recorded, which is the thickness at the maximum pressure applied during the test (approximately 1500 g/in^2).

Since the overall test system, including the load cell, is not perfectly rigid, a steel-to-steel test is performed (i.e., nothing in between the pressure foot and anvil) at least twice for each batch of testing, to obtain an average set of steel-to-steel crosshead positions at each of the 31 trap points described above. This steel-to-steel crosshead position data is subtracted from the corresponding

crosshead position data at each trap point for each tested stacked sample, thereby resulting in the stack thickness (mils) at each pressure trap point during the compression, maximum pressure, and recovery portions of the test.

5 $\text{StackT (trap)} = \text{StackCP (trap)} - \text{SteelCP (trap)}$

Where:

trap = trap point pressure at either compression, recovery, or max

StackT = Thickness of Stack (at trap pressure)

StackCP = Crosshead position of Stack in test (at trap pressure)

10 $\text{SteelCP} = \text{Crosshead position of steel-to-steel test (at trap pressure)}$

A stack of five (5) usable units thick is prepared for testing as follows. The minimum usable unit size is 2.5 inch by 2.5 inch; however a larger sheet size is preferable for testing, since it allows for easier handling without touching the central region where compression testing takes place. For typical perforated rolled bath tissue, this consists of removing five (5) sets of 3 connected usable units. In this case, testing is performed on the middle usable unit, and the outer 2 usable units are used for handling while removing from the roll and stacking. For other product formats, it is advisable, when possible, to create a test sheet size (each one usable unit thick) that is large enough such that the inner testing region of the created 5 usable unit thick stack is never physically touched, stretched, or strained, but with dimensions that do not exceed 14 inches by 6 inches.

The 5 sheets (one usable unit thick each) of the same approximate dimensions, are placed one on top the other, with their MD aligned in the same direction, their outer face all pointing in the same direction, and their edges aligned +/- 3 mm of each other. The central portion of the stack, where compression testing will take place, is never to be physically touched, stretched, and/or strained (this includes never to 'smooth out' the surface with a hand or other apparatus prior to testing).

The 5 sheet stack is placed on the anvil, positioning it such that the pressure foot will contact the central region of the stack (for the first compression test) in a physically untouched spot, leaving space for a subsequent (second) compression test, also in the central region of the stack, but separated by 1/4 inch or more from the first compression test, such that both tests are in untouched, and separated spots in the central region of the stack. From these two tests, an average crosshead position of the stack at each trap pressure (i.e., StackCP(trap)) is calculated for compression,

maximum pressure, and recovery portions of the tests. Then, using the average steel-to-steel crosshead trap points (i.e., SteelCP(trap)), the average stack thickness at each trap (i.e., StackT(trap) is calculated (mils).

Stack Compressibility is defined here as the absolute value of the linear slope of the stack thickness (mils) as a function of the log(10) of the confining pressure (grams/in²), by using the 15 compression trap points discussed previously (i.e., compression from 10 to 1250 g/in²), in a least squares regression. The units for Stack Compressibility are [mils/(log(g/in²))], and is reported to the nearest 0.1 [mils/(log(g/in²))].

Resilient Bulk is calculated from the stack weight per unit area and the sum of 8 StackT(trap) thickness values from the maximum pressure and recovery portion of the tests: i.e., at maximum pressure (T_{max}) and recovery trap points at R1250, R1000, R750, R500, R300, R100, and R10 g/in² (a prefix of "R" denotes these traps come from recovery portion of the test). Stack weight per unit area is measured from the same region of the stack contacted by the compression foot, after the compression testing is complete, by cutting a 3.50 inch square (typically) with a precision die cutter, and weighing on a calibrated 3-place balance, to the nearest 0.001 gram. The weight of the precisely cut stack, along with the StackT(trap) data at each required trap pressure (each point being an average from the two compression/recovery tests discussed previously), are used in the following equation to calculate Resilient Bulk, reported in units of cm³/g, to the nearest 0.1 cm³/g.

$$\text{Resilient Bulk} = \frac{\text{SUM}(\text{StackT}(T_{\text{max}}, R1250, R1000, R750, R500, R300, R100, R10)) * 0.00254}{M/A}$$

Where:

StackT = Thickness of Stack (at trap pressures of T_{max} and recovery pressures listed above), (mils)

M = weight of precisely cut stack, (grams)

A = area of the precisely cut stack, (cm²)

Wet Burst Method:

"Wet Burst Strength" as used herein is a measure of the ability of a fibrous structure and/or a fibrous structure product incorporating a fibrous structure to absorb energy, when wet and subjected to deformation normal to the plane of the fibrous structure and/or fibrous structure

product. The Wet Burst Test is run according to ISO 12625-9:2005, except for any deviations or modifications described below.

Wet burst strength may be measured using a Thwing-Albert Burst Tester Cat. No. 177 equipped with a 2000 g load cell commercially available from Thwing-Albert Instrument
5 Company, Philadelphia, Pa, or an equivalent instrument.

Wet burst strength is measured by preparing four (4) multi-ply fibrous structure product samples for testing. First, condition the samples for two (2) hours at a temperature of $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) and a relative humidity of 50% ($\pm 2\%$). Take one sample and horizontally dip the center of the sample into a pan filled with about 25 mm of room temperature distilled water. Leave
10 the sample in the water four (4) (± 0.5) seconds. Remove and drain for three (3) (± 0.5) seconds holding the sample vertically so the water runs off in the cross-machine direction. Proceed with the test immediately after the drain step.

Place the wet sample on the lower ring of the sample holding device of the Burst Tester with the outer surface of the sample facing up so that the wet part of the sample completely covers
15 the open surface of the sample holding ring. If wrinkles are present, discard the samples and repeat with a new sample. After the sample is properly in place on the lower sample holding ring, turn the switch that lowers the upper ring on the Burst Tester. The sample to be tested is now securely gripped in the sample holding unit. Start the burst test immediately at this point by pressing the start button on the Burst Tester. A plunger will begin to rise (or lower) toward the wet surface of
20 the sample. At the point when the sample tears or ruptures, report the maximum reading. The plunger will automatically reverse and return to its original starting position. Repeat this procedure on three (3) more samples for a total of four (4) tests, i.e., four (4) replicates. Report the results as an average of the four (4) replicates, to the nearest gram.

25 Wet Tensile Method:

Wet Elongation, Tensile Strength, and TEA are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. West Berlin, NJ) using a load cell for which the forces measured are within
30 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 3.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

Program the tensile tester to perform an extension test (described below), collecting force and extension data at an acquisition rate of 100 Hz as the crosshead raises at a rate of 2.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops below 50% of the maximum peak force, after which the crosshead is returned to its original position.

Set the gage length to 2.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align the specimen vertically within the upper and lower jaws, then close the upper grip. Verify the specimen is hanging freely and aligned with the lower grip, then close the lower grip. Initiate the first portion of the test, which pulls the specimen at a rate of 0.5 in/min, then stops immediately after a load of 10 grams is achieved. Using a pipet, thoroughly wet the specimen with DI water to the point where excess water can be seen pooling on the top of the lower closed grip. Immediately after achieving this wetting status, initiate the second portion of the test, which pulls the wetted strip at 2.0 in/min until break status is achieved. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Wet Tensile Strength (g/in) is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 0.1 g/in.

Adjusted Gage Length (in) is calculated as the extension measured (from original 2.00 inch gage length) at 3 g of force during the test following the wetting of the specimen (or the next data point after 3 g force) added to the original gage length (in). If the load does not fall below 3 g force during the wetting procedure, then the adjusted gage length will be the extension measured at the point the test is resumed following wetting added to the original gage length (in).

Wet Peak Elongation (%) is calculated as the additional extension (in) from the Adjusted Gage Length (in) at the maximum peak force point (more specifically, at the last maximum peak force point, if there is more than one) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

5 Wet Peak Tensile Energy Absorption (TEA, $\text{g}\cdot\text{in}/\text{in}^2$) is calculated as the area under the force curve ($\text{g}\cdot\text{in}^2$) integrated from zero extension (i.e., the Adjusted Gage Length) to the extension at the maximum peak force elongation point (more specifically, at the last maximum peak force point, if there is more than one) (in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as $\text{g}\cdot\text{in}/\text{in}^2$ to the nearest 0.01 $\text{g}\cdot\text{in}/\text{in}^2$.

10 The Wet Tensile Strength (g/in), Wet Peak Elongation (%), Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

Calculations

15 Geometric Mean Initial Wet Tensile Strength = Square Root of [MD Wet Tensile Strength (g/in) x CD Wet Tensile Strength (g/in)]

Geometric Mean Wet Peak Elongation = Square Root of [MD Wet Peak Elongation (%) x CD Wet Peak Elongation (%)]

20 Geometric Mean Wet Peak TEA = Square Root of [MD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) x CD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$)]

Total Wet Tensile (TWT) = MD Wet Tensile Strength (g/in) + CD Wet Tensile Strength (g/in)

Total Wet Peak TEA = MD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) + CD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$)

25 Wet Tensile Ratio = MD Wet Peak Tensile Strength (g/in) / CD Wet Peak Tensile Strength (g/in)

Wet Tensile Geometric Mean (GM) Modulus = Square Root of [MD Modulus (at 38 g/cm) x CD Modulus (at 38 g/cm)]

30 This method is typically used for sanitary tissue products in the form of a paper towel. In the present application, unless the term “Finch” or “Finch cup” is coupled with wet tensile terminology, this is the method being referred to. If “Finch” or “Finch cup” is coupled with wet tensile terminology, the Finch Cup Wet Tensile Test Method should be referred to.

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper (for Paper Towels, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels;” for Facial Tissue, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue”):

- 5 Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design
10 suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

- Twenty usable units of fibrous structures are divided into four stacks of five usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). Two of the stacks are designated for testing in the MD and two
15 for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut two, 1.00 in $\pm$ 0.01 in wide by at least 3.0 in long strips from each CD stack (long dimension in CD). Each strip is five usable unit layers thick and will be treated as a unitary specimen for testing. In like fashion cut the remaining CD stack and the two MD stacks (long dimension in MD) to give a total of 8 specimens (five layers each), four CD and four MD.

- 20 Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 4.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

- 25 Set the gage length to 2.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile
30 tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

 Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the product of the specimen width (1 in) and the number of usable units in the specimen (5), and then reported as g/in to the nearest 1 g/in.

Adjusted Gage Length is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

Tensile Energy Absorption (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of the adjusted Gage Length (in), specimen width (in), and number of usable units in the specimen (5). This is reported as g*in/in² to the nearest 1 g*in/in².

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

Program the software to calculate the following from the constructed force (g) verses strain curve:

Tangent Modulus is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 190.5 g (38.1 g x 5 layers) force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the product of the specimen width (2.54 cm) and the number of usable units in the specimen (5), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA (g*in/in²) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

25 Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

30 Geometric Mean TEA = Square Root of [MD TEA (g*in/in²) x CD TEA (g*in/in²)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA (g*in/in²) + CD TEA (g*in/in²)

Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue (for Paper

- 5 Towels, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels;” for Toilet Paper, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper”):

10 Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

- 15 Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 5.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

- 25 Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 6.00 in/min (15.24 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

- 30 Set the gage length to 4.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

- 5 **Adjusted Gage Length** is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

- 10 **Tensile Energy Absorption** (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as g*in/in² to the nearest 1 g*in/in².

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

- 15 Program the software to calculate the following from the constructed force (g) verses strain curve:

- 20 **Tangent Modulus** is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 38.1 g force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the specimen width (2.54 cm), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA (g*in/in²) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

25 Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

- 30 Geometric Mean TEA = Square Root of [MD TEA (g*in/in²) x CD TEA (g*in/in²)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA (g*in/in²) + CD TEA (g*in/in²)

Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels (for Facial

5 Tissue, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue;” for Toilet Paper, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper”):

10 Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

15 Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 5.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

25 Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 4.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

30 Set the gage length to 4.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

- 5 **Adjusted Gage Length** is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

- 10 **Tensile Energy Absorption** (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as g*in/in² to the nearest 1 g*in/in².

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

- 15 Program the software to calculate the following from the constructed force (g) verses strain curve:

- 20 **Tangent Modulus** is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 38.1 g force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the specimen width (2.54 cm), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA (g*in/in²) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

25 Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

- 30 Geometric Mean TEA = Square Root of [MD TEA (g*in/in²) x CD TEA (g*in/in²)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA (g*in/in²) + CD TEA (g*in/in²)

Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Flexural Rigidity Method:

5 This test is based on the cantilever beam principle. A Cantilever Bending Tester such as described in ASTM Standard D1388 is used to measure the distance a strip of sample can be extended beyond a horizontal flat platform before it bends to a ramp angle of $41.5 \pm 0.5^\circ$. The measured Bend Length, in addition to the Basis Weight and Caliper, of the sample is used to calculate Flexural Rigidity.

10 Using a 1 inch (2.54 cm) JDC Cutter (available from Thwing-Albert Instrument Company, Philadelphia, PA), carefully cut eight (8) 1 inch (2.54 cm) wide test strips from a fibrous structure sample oriented in the MD direction. From a second fibrous structure sample from the same sample set, carefully cut eight (8) 1 inch (2.54 cm) wide strips of the fibrous structure in the CD direction.

15 The sample strip must be adjusted to 4.0 ± 0.1 in (101.5 ± 2.5 mm), or 6.0 ± 0.1 in (152 ± 2.5 mm) in length. Towel samples and those products which are perforated into usable units 6 inches (152mm) or greater in both dimensions without folds or perforations are tested as 6 in (152mm) strips. Toilet tissue samples and facial tissue samples are tested as 4 in (101.5mm) long strips. To adjust the strips to length, carefully make a cut exactly perpendicular to the long dimension of the strip near one end using a paper cutter. It is important that the cut be exactly perpendicular to the long dimension of the strip. Make a second cut exactly 4.0 ± 0.1 in (101.5mm), or 6.0 ± 0.1 in (152 ± 2.5 mm) along the strip, again being careful that the cut is exactly perpendicular to the long dimension of the strip. In the case of perforated or folded products, be sure that all cuts are made in such a way that perforations and/or folds are excluded from the 4.0 (101.5mm) or 6.0 in (152mm) strip which will be used for the test. All sample strips should be cut individually with minimal mechanical manipulation. No fibrous structure sample which is creased, bent, folded, perforated, or in any other way weakened should be tested using this test.

20 Mark the direction (MD or CD) very lightly on one end of the strip, keeping the same surface of the sample up for all strips. Later, half of the strips will be turned over for testing, thus it is important that one surface of the strip be clearly identified, however, it makes no difference which surface of the sample is designated as the upper surface.

30 Using other portions of the fibrous structure sample (not the cut strips), determine the basis weight of the fibrous structure sample in lbs/3000 ft² and the caliper of the fibrous structure in mils

(thousandths of an inch) using the standard procedures disclosed herein. Place the Cantilever Bending Tester level on a bench or table that is relatively free of vibration, excessive heat and most importantly air drafts. Adjust the platform of the Tester to horizontal as indicated by the leveling bubble and verify that the ramp angle is at $41.5 \pm 0.5^\circ$. Remove the sample slide bar from the top of the platform of the Tester. Lay one of the strips flat on the horizontal platform using care to align the strip to be parallel with the movable sample slide. Align the end of the strip exactly even with the vertical edge of the Tester where the angular ramp is attached or where the zero mark line is scribed on the Tester. Carefully place the sample slide bar on top of the sample strip in the Tester. The sample slide bar must be carefully placed so that the strip is not wrinkled or moved from its initial position.

Using the sample slide bar, move the strip at a rate of approximately 0.5 ± 0.2 in/second (1.3 ± 0.5 cm/second) toward the end of the Tester to which the angular ramp is attached. This can be accomplished with either a manual or automatic Tester. Ensure that no slippage between the strip and movable sample slide occurs. As the sample slide bar and strip project over the edge of the Tester, the strip will begin to bend, or drape downward. Stop moving the sample slide bar the instant the leading edge of the strip falls level with the ramp edge. Read and record the overhang length from the linear scale to the nearest 0.5 mm. Record the distance the sample slide bar has moved in cm as overhang length. This test sequence is performed a total of eight (8) times for each fibrous structure in each direction (MD and CD). The first four strips are tested with the upper surface as the fibrous structure was cut facing up. The last four strips are inverted so that the upper surface as the fibrous structure was cut is facing down as the strip is placed on the horizontal platform of the Tester.

The average Overhang Lengths (MD, CD, and Avg) and Bend Lengths (MD, CD, and Avg) are determined by the following calculations:

$$\text{Overhang Length MD} = \frac{\text{Sum of 8 MD readings}}{8}$$

$$\text{Overhang Length CD} = \frac{\text{Sum of 8 CD readings}}{8}$$

$$\text{Overhang Length Average (Avg)} = \frac{\text{Sum of all 16 readings}}{16}$$

$$\text{Bend Length MD} = \frac{\text{Overhang Length MD}}{2}$$

$$\text{Bend Length CD} = \frac{\text{Overhang Length CD}}{2}$$

2

$$\text{Bend Length Average (Avg)} = \frac{\text{Overhang Length Total}}{2}$$

2

$$\text{Flexural Rigidity} = 0.1629 \times W \times C^3$$

- 5 Where W is the basis weight of the fibrous structure in lbs/3000 ft²; C is the Bend Length (MD, CD, or Avg) in cm; and the constant 0.1629 is used to convert the basis weight from English to metric units. The results are expressed in mg-cm to the nearest 0.1 mg-cm.

$$\text{GM Flexural Rigidity} = \text{Square root of (MD Flexural Rigidity} \times \text{CD Flexural Rigidity)}$$

10 CRT Rate and Capacity Method:

CRT Rate and Capacity values are generated by running the test procedure as defined in U.S. Patent Application No. US 2017-0183824.

Dry and Wet Caliper Test Methods:

- 15 Dry and Wet Caliper values are generated by running the test procedure as defined in U.S. Patent No. US 7,744,723 and states, in relevant part:

Dry Caliper Method:

- 20 Samples are conditioned at 23+/-1° C. and 50%+/-2% relative humidity for two hours prior to testing.

- Dry Caliper of a sample of fibrous structure product is determined by cutting a sample of the fibrous structure product such that it is larger in size than a load foot loading surface where the load foot loading surface has a circular surface area of about 3.14 in². The sample is confined between a horizontal flat surface and the load foot loading surface. The load foot loading surface applies a confining pressure to the sample of 14.7 g/cm² (about 0.21 psi). The caliper is the resulting gap between the flat surface and the load foot loading surface. Such measurements can be obtained on a VIR Electronic Thickness Tester Model II available from Thwing-Albert Instrument Company, Philadelphia, Pa. The caliper measurement is repeated and recorded at least five (5) times so that an average caliper can be calculated. The result is reported in mils.

30

Wet Caliper Method:

Samples are conditioned at 23+/-1° C. and 50% relative humidity for two hours prior to testing.

Wet Caliper of a sample of fibrous structure product is determined by cutting a sample of the fibrous structure product such that it is larger in size than a load foot loading surface where the load foot loading surface has a circular surface area of about 3.14 in². Each sample is wetted by submerging the sample in a distilled water bath for 30 seconds. The caliper of the wet sample is measured within 30 seconds of removing the sample from the bath. The sample is then confined between a horizontal flat surface and the load foot loading surface. The load foot loading surface applies a confining pressure to the sample of 14.7 g/cm² (about 0.21 psi). The caliper is the resulting gap between the flat surface and the load foot loading surface. Such measurements can be obtained on a VIR Electronic Thickness Tester Model II available from Thwing-Albert Instrument Company, Philadelphia, Pa. The caliper measurement is repeated and recorded at least five (5) times so that an average caliper can be calculated. The result is reported in mils.

Finch Cup Wet Tensile Test Method:

The Wet Tensile Strength test method is utilized for the determination of the wet tensile strength of a sanitary tissue product or web strip after soaking with water, using a tensile-strength-testing apparatus operating with a constant rate of elongation. The Wet Tensile Strength test is run according to ISO 12625-5:2005, except for any deviations or modifications described below. This method uses a vertical tensile-strength tester, in which a device that is held in the lower grip of the tensile-strength tester, called a Finch Cup, is used to achieve the wetting.

Using a one inch JDC precision sample cutter (Thwing Albert) cut six 1.00 in±0.01 in wide strips from a sanitary tissue product sheet or web sheet in the machine direction (MD), and six strips in the cross machine direction (CD). An electronic tensile tester (Model 1122, Instron Corp., or equivalent) is used and operated at a crosshead speed of 1.0 inch (about 1.3 cm) per minute and a gauge length of 1.0 inch (about 2.5 cm). The two ends of the strip are placed in the upper jaws of the machine, and the center of the strip is placed around a stainless steel peg. The strip is soaked in distilled water at about 20° C. for the identified soak time, and then measured for peak tensile strength. Reference to a machine direction means that the sample being tested is prepared such that the length of the strip is cut parallel to the machine direction of manufacture of the product.

The MD and CD wet peak tensile strengths are determined using the above equipment and calculations in the conventional manner. The reported value is the arithmetic average of the six strips tested for each directional strength to the nearest 0.1 grams force. The total wet tensile strength for a given soak time is the arithmetic total of the MD and CD tensile strengths for that

soak time. Initial total wet tensile strength ("ITWT") is measured when the paper has been submerged for 5 ± 0.5 seconds. Decayed total wet tensile ("DTWT") is measured after the paper has been submerged for 30 ± 0.5 minutes.

5 This method is typically used for sanitary tissue products in the form of toilet (or bath) tissue.

Wet Decay Test Method:

10 Wet decay (loss of wet tensile) for a sanitary tissue product or web is measured according to the Wet Tensile Test Method described herein and is the wet tensile of the sanitary tissue product or web after it has been standing in the soaked condition in the Finch Cup for 30 minutes. Wet decay is reported in units of "%". Wet decay is the % loss of Initial Total Wet Tensile after the 30 minute soaking.

Dry Burst ("Dry Burst Strength" or "Dry Burst (Peak Load) Strength") Test Method:

15 The Dry Burst Test is run according to ISO 12625-9:2005, except for any deviations described below. Sanitary tissue product samples or web samples for each condition to be tested are cut to a size appropriate for testing, a minimum of five (5) samples for each condition to be tested are prepared.

20 A burst tester (Burst Tester Intellect-II-STD Tensile Test Instrument, Cat. No. 1451-24PGB available from Thwing-Albert Instrument Co., Philadelphia, Pa., or equivalent) is set up according to the manufacturer's instructions and the following conditions: Speed: 12.7 centimeters per minute; Break Sensitivity: 20 grams; and Peak Load: 2000 grams. The load cell is calibrated according to the expected burst strength.

25 A sanitary tissue product sample or web sample to be tested is clamped and held between the annular clamps of the burst tester and is subjected to increasing force that is applied by a 0.625 inch diameter, polished stainless steel ball upon operation of the burst tester according to the manufacturer's instructions. The burst strength is that force that causes the sample to fail.

The burst strength for each sanitary tissue product sample or web sample is recorded. An average and a standard deviation for the burst strength for each condition is calculated.

30 The Dry Burst is reported as the average and standard deviation for each condition to the nearest gram.

Residual Water (R_w) Test Method:

This method measures the amount of distilled water absorbed by a paper product. In general a finite amount of distilled water is deposited to a standard surface. A paper towel is then placed over the water for a given amount of time. After the elapsed time the towel is removed and the amount of water left behind and amount of water absorbed are calculated.

The temperature and humidity are controlled within the following limits:

- Temperature: $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$)

- Relative humidity: $50\% \pm 2\%$

The following equipment is used in this test method. A top loading balance is used with sensitivity: ± 0.01 grams or better having the capacity of grams minimum A pipette is used having a capacity of 5 mL and a Sensitivity ± 1 mL. A Formica™ Tile 6 in x 7 in is used. A stop watch or digital timer capable of measuring time in seconds to the nearest 0.1 seconds is also used.

Sample and Solution Preparation

For this test method, distilled water is used, controlled to a temperature of $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$). For this method, a usable unit is described as one finished product unit regardless of the number of plies. Condition the rolls or usable units of products, with wrapper or packaging materials removed in a room conditioned at $50\% \pm 2\%$ relative humidity, $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$) for a minimum of two hours. Do not test usable units with defects such as wrinkles, tears, holes etc.

Paper Samples

Remove and discard at least the four outermost usable units from the roll. For testing remove usable units from each roll of product submitted as indicated below. For Paper Towel products, select five (5) usable units from the roll. For Paper Napkins that are folded, cut and stacked, select five (5) usable units from the sample stack submitted for testing. For all napkins, either double or triple folded, unfold the usable units to their largest square state. One-ply napkins will have one 1-ply layer; 2-ply napkins will have one 2-ply layer. With 2-ply napkins, the plies may be either embossed (just pressed) together, or embossed and laminated (pressed and glued) together. Care must be taken when unfolding 2-ply usable units to keep the plies together. If the unfolded usable unit dimensions exceed 279 mm (11 inches) in either direction, cut the usable unit down to 279 mm (11 inches). Record the original usable unit size if over 279 mm (11 inches). If the unfolded usable unit dimensions are less than 279 mm (11 inches) in either direction, record the usable unit dimensions.

- Place the Formica Tile (standard surface) in the center of the cleaned balance surface. Wipe the Formica Tile to ensure that it is dry and free of any debris. Tare the balance to get a zero reading. Slowly dispense 2.5 mL of distilled water onto the center of the standard surface using the pipette. Record the weight of the water to the nearest 0.001 g. Drop 1 usable unit of the
- 5 paper towel onto the spot of water with the outside ply down. Immediately start the stop watch. The sample should be dropped on the spot such that the spot is in the center of the sample once it is dropped. Allow the paper towel to absorb the distilled water for 30 seconds after hitting the stop watch. Remove the paper from the spot after the 30 seconds has elapsed. The towel must be removed when the stop watch reads 30 seconds ± 0.1 sec. The paper towel should be removed
- 10 using a quick vertical motion. Record the weight of the remaining water on the surface to the nearest 0.001 g.

Calculations

where:

- 15 n = the number of replicates which for this method is 5.
- Record the RWV to the nearest 0.001 g.

Breaking Length Test Method:

Handsheet Preparation

- 20 Low Density handsheets are made essentially according to TAPPI standard T205, with the following modifications which are believed to more accurately reflect the tissue manufacturing process.
- (1) tap water, with no pH adjustment, is used;
- (2) the embryonic web is formed in a 12 in. by 12 in. handsheet making apparatus on a
- 25 monofilament polyester wire supplied by Appelton Wire Co., Appelton, Wis. with the following specifications:

Size:	13.5 inch x 13.5 inch
Machine direction Warp Count:	84 $\pm$ 1.5 fibers/inch
Cross direction Warp Count:	76 $\pm$ 3.0 fibers/inch
Warp size/type:	0.17 millimeters/9FU
Shute size/type:	0.17 millimeters/WP-110
Caliper:	0.016 $\pm$ 0.0005 inch
Air permeability:	720 $\pm$ 25 cubic feet/minute

(3) the embryonic web is transferred by vacuum from the monofilament polyester wire to a monofilament polyester papermaking fabric supplied by Appelton Wire Co., Appelton, Wis. and dewatered by vacuum suction instead of pressing; Fabric specifications:

Size:	16 inch x 14 inch
Machine direction Warp Count:	36 $\pm$ 1 fibers/inch
Cross direction Warp Count:	30 $\pm$ 3 fibers/inch
Warp size/type: Shute size/type:	0.40 millimeters/WP-87-12A-W
0.40 millimeters/WP-801-12A-W	
Caliper:	0.0270 $\pm$ 0.001 inch
Air permeability:	397 $\pm$ 25 cubic feet/minute

Sheet side to be monoplane

- 5 Transfer and dewatering details: The embryonic web and papermaking wire are placed on top of the fabric such that the embryonic web contacts the fabric. The trilayer (wire, web, fabric with fabric side down) is then passed lengthwise across a 13 in.x1/16 in. wide vacuum slot box with a 90 degree flare set at a peak gauge reading of approximately 4.0 in. of mercury vacuum. The rate of the trilayer passing across the vacuum slot should be uniform at a velocity of 16 $\pm$ 5 in./sec.
- 10 The vacuum is then increased to achieve a peak gauge reading of approximately 9 in. of mercury vacuum and the trilayer is passed lengthwise across the same vacuum slot at the same rate of 16 $\pm$ 5 in./sec 2 more times. Note that the peak gauge reading is the amount of vacuum measured as the trilayer passes across the slot. The web is carefully removed from the wire to ensure that no fibers stick to the wire.
- 15 (4) the sheet is then dried on a rotary drum drier with a drying felt by passing the web and fabric between the felt and drum with the fabric against the drum surface and again with a second pass with the web against the drum surface.

Dryer specifications:	Stainless steel polished finish cylinder with internal steam heating, horizontally mounted.
External dimensions:	17 inches length x 13 inches diameter
Temperature:	230 $\pm$ 5 degrees Fahrenheit.
Rotation speed:	0.90 $\pm$ 0.05 revolutions/minute
Dryer felt: Endless, 80 inches circumference by 16 inches	wide, No. 11614, style X225, all wool. Noble and Wood Lab Machine Company, Hoosick Falls, NY.
Felt tension:	As low and even as possible without any slippage occurring between the felt and dryer drum and uniform tracking.

(5) the resulting handsheet is 12 in. x 12 in. with a resulting target basis weight of 16.5 ± 1.5 pounds per 3,000 ft² and a target density of 0.15 ± 0.06 g/cc, unless otherwise noted.

Sample Preparation

- 5 Condition the handsheet to be tested for a minimum of 2 hours in a room controlled to $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) $50 \pm 2\%$ relative humidity. After conditioning the handsheet for at least the minimum time period, measure and record the Basis Weight of the handsheet. The Basis Weight should be within the range 15.0 – 18.0 pounds per 3000 square feet, if the Basis Weight of the handsheet falls outside of this range the handsheet should be discarded and a new one made.
- 10 From the handsheet, cut eight sample strips 1.00 inch wide and at least 6 - 7 inches long in the cross direction (only) using a precision 1" cutter or an appropriate die.

Measurement

- Using an electronic tensile tester (Thwing Albert EJA or Intellect II-STD, Corp., Philadelphia, Pa., or equivalent) measure the Tensile Strength of each of the eight sample strips. To perform
- 15 the test, set the gage length to 4.00 inches, properly secure the sample strip into the upper and lower grips, and perform an extension test, collecting force and extension data as the crosshead raises at a rate of 0.5 in/min until the sample breaks. The resulting Tensile Strength values for each of the eight individual sample strips are recorded in g/in. The Tensile Strength is the
 - 20 maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

Calculations

Calculate the Average Tensile Strength of the eight test strips using the following formula:

25

$$\text{Average Tensile Strength} = \frac{\text{Sum of tensile strengths measured}}{\text{number of strips tested}}$$

Basis weight corrected tensile (BWCT) is calculated via the following formula:

30

$$\text{BWCT} = \text{Average Tensile Strength} \times \frac{10.5}{(\text{Basis Weight} - 6.0)}$$

Where Basis Weight has the units of pounds per 3000 ft² and Average Tensile Strength and BWCT have the units of g/in. This equation has the effect of normalizing the strength of the tensile strip to a standard 16.5 pound/3000 ft² weight when the handsheet is in the specified 15-18 pound/3000 ft² range.

5

Breaking Length is then calculated by the following formula:

$$\text{Breaking Length} = \text{BWCT} \times 1.4673$$

10 Where Breaking Length has the units of meters reported to the nearest whole meter.

REGARDING THE PRESENT DISCLOSURE

In the interests of brevity and conciseness, any ranges of values set forth in this specification are to be construed as written description support for Claims reciting any sub-
15 ranges having endpoints which are whole number values within the specified range in question. By way of a hypothetical illustrative example, a disclosure in this specification of a range of 1-5 shall be considered to support Claims to any of the following sub-ranges: 1-4; 1-3; 1-2; 2-5; 2-4; 2-3; 3-5; 3-4; and 4-5.

The dimensions and values disclosed herein in this application are not to be understood as
20 being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "40 mm" is intended to mean "about 40 mm."

Every document cited herein, including any cross referenced or related patent or application
25 is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise limited. The citation of any document is not an admission that it is prior art with respect to any example disclosed or claimed herein or that it alone, or in any combination with any other reference or references, teaches, suggests or discloses any such example. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the
30 same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

While particular examples of the present disclosure have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be

made without departing from the spirit and scope of the present disclosure. It is therefore intended to cover in the appended Claims all such changes and modifications that are within the scope of this disclosure.

CLAIMS

What is Claimed is:

1. A sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a TS7 of less than about 14 dB V² rms.
2. The sanitary tissue product of claim 1, wherein the non-wood fibers consist of bamboo fibers.
3. The sanitary tissue product of claim 1, wherein the sanitary tissue product is toilet tissue.
4. The sanitary tissue product of claim 1, comprising non-wood fibers greater than about 30%.
5. A sanitary tissue product, comprising:
 - bamboo fibers; and
 - a TS750 less than about 20 dB V² rms.
6. The sanitary tissue product of claim 5, wherein the sanitary tissue product is toilet tissue.
7. The sanitary tissue product of claim 5, wherein the bamboo fibers are greater than about 30% of the sanitary tissue product.
8. The sanitary tissue product of claim 5, wherein the bamboo fibers are greater than about 75% of the sanitary tissue product.
9. A structured sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a TS750 less than about 45 dB V² rms.
10. The sanitary tissue product of claim 9, wherein the non-wood fibers consist of bamboo fibers.
11. The sanitary tissue product of claim 9, wherein the sanitary tissue product is toilet tissue.

12. The sanitary tissue product of claim 9, comprising non-wood fibers greater than about 30%.
13. The sanitary tissue product of claim 9, wherein the TS750 is less than 40 dB V² rms.
14. The sanitary tissue product of claim 9, wherein the TS750 is from about 25 to about 35 dB V² rms.
15. A sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a slip stick less than about 435.
16. The sanitary tissue product of claim 15, wherein the non-wood fibers consist of bamboo fibers.
17. The sanitary tissue product of claim 15, wherein the slip stick is from about 235 to about 435.
18. A structured sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a slip stick less than about 605.
19. The sanitary tissue product of claim 18, wherein the slip stick is from about 235 to about 605.
20. The sanitary tissue product of claim 18, wherein the slip stick is from about 350 to about 500.
21. The sanitary tissue product of claim 18, wherein the sanitary tissue product comprises a through-air-dried (TAD) and uncreped web.

ABSTRACT

Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS7 of less than about 14 dB V^2 rms. Sanitary tissue products of the present disclosure may comprise bamboo fibers and may have a TS750 less than about 20 dB V^2 rms. Sanitary tissue products of the present disclosure may be structured and may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS750 less than about 45 dB V^2 rms. Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 435. Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 605.





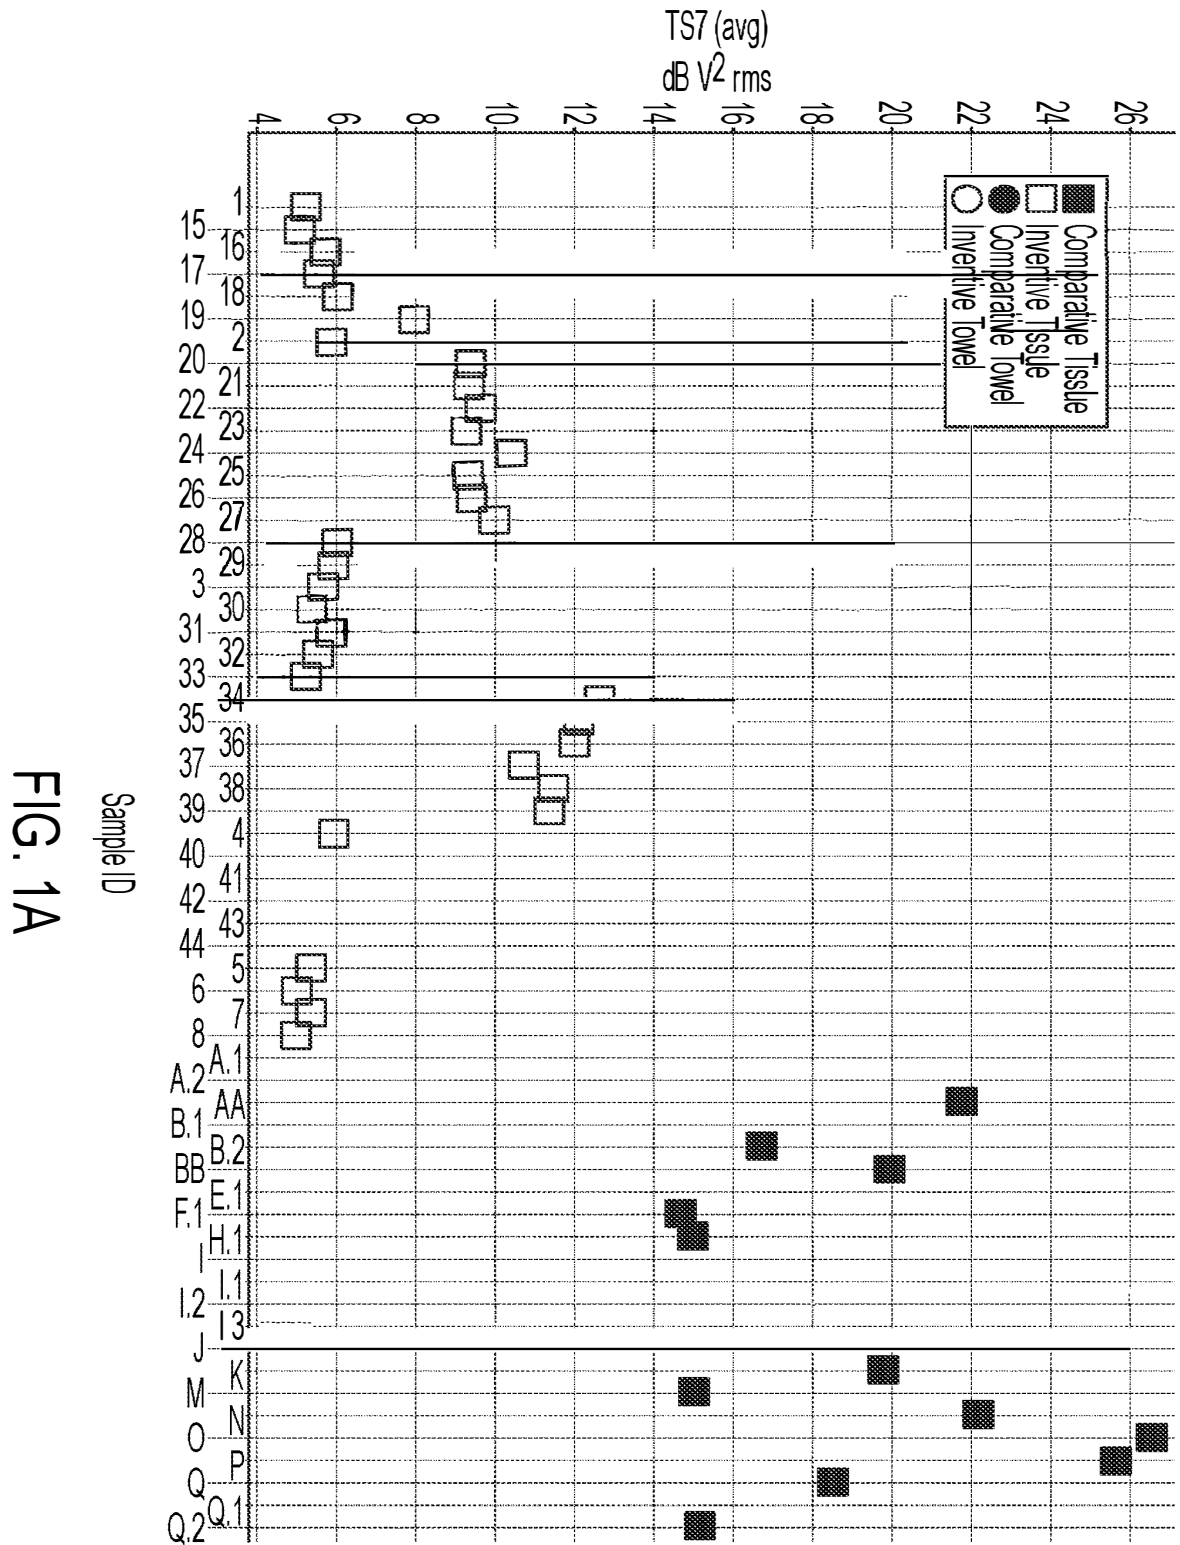



FIG. 1A

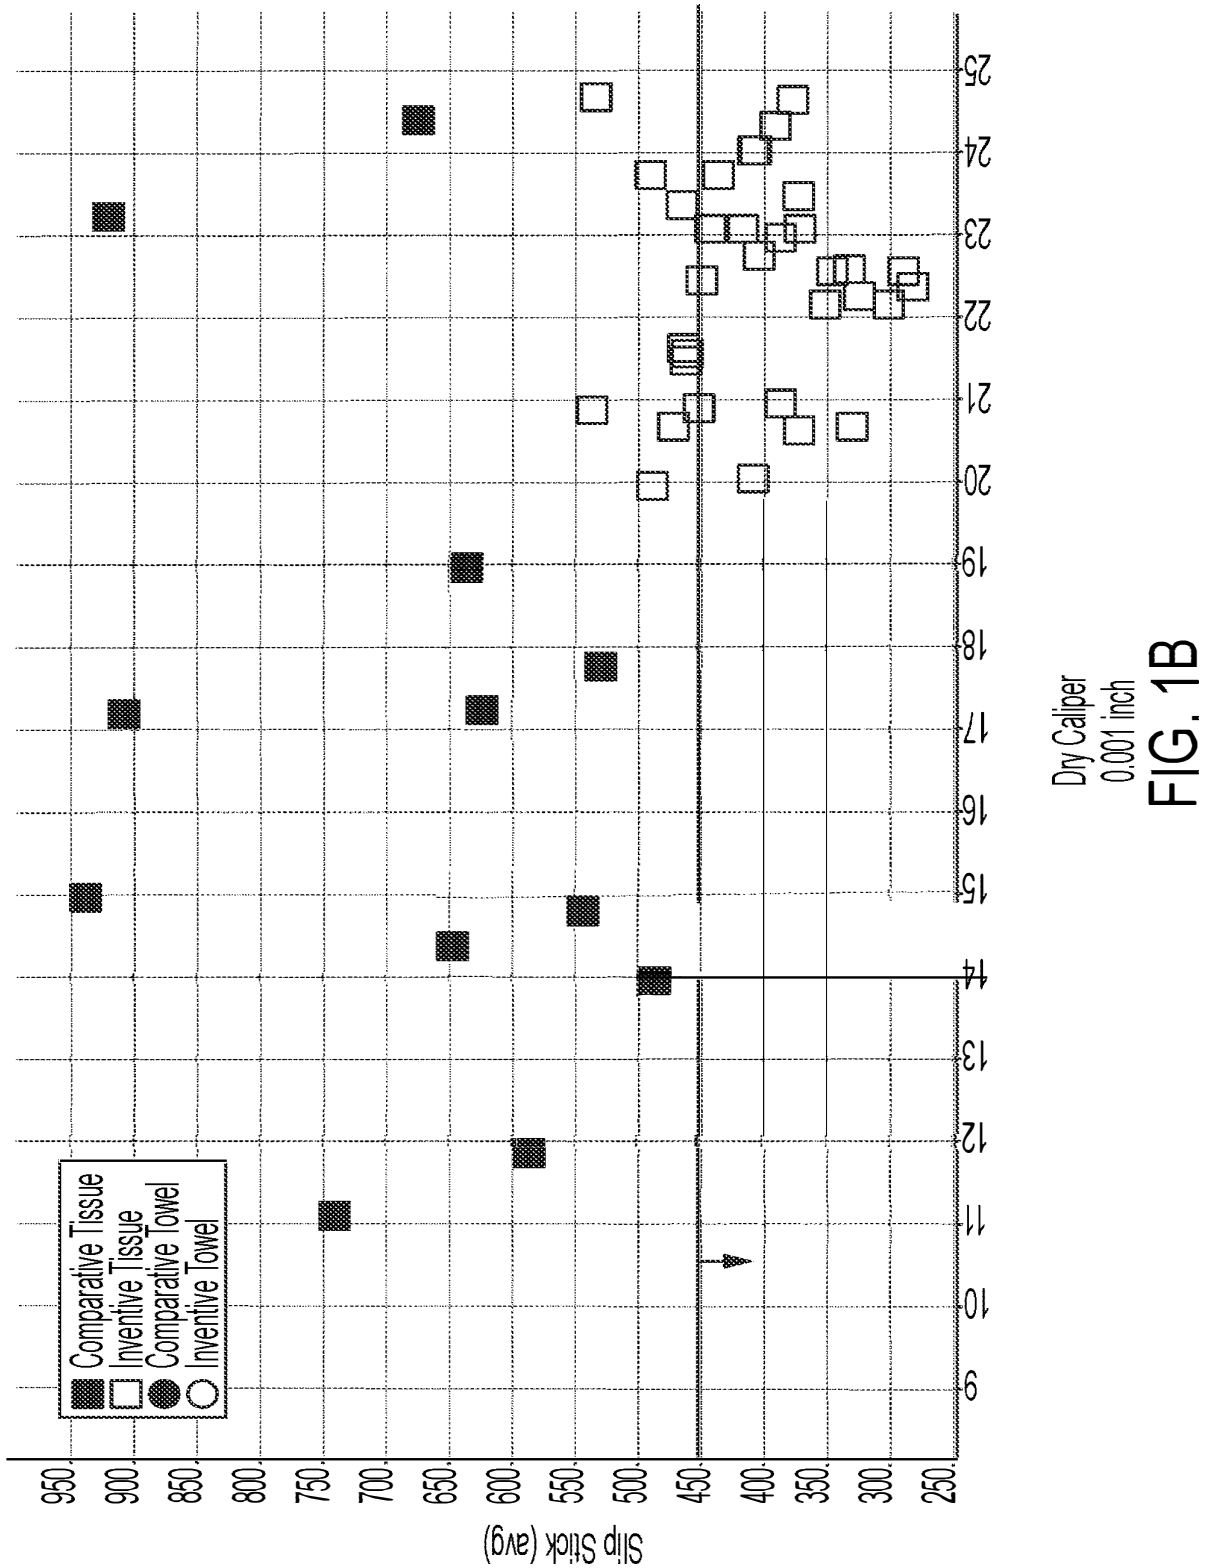

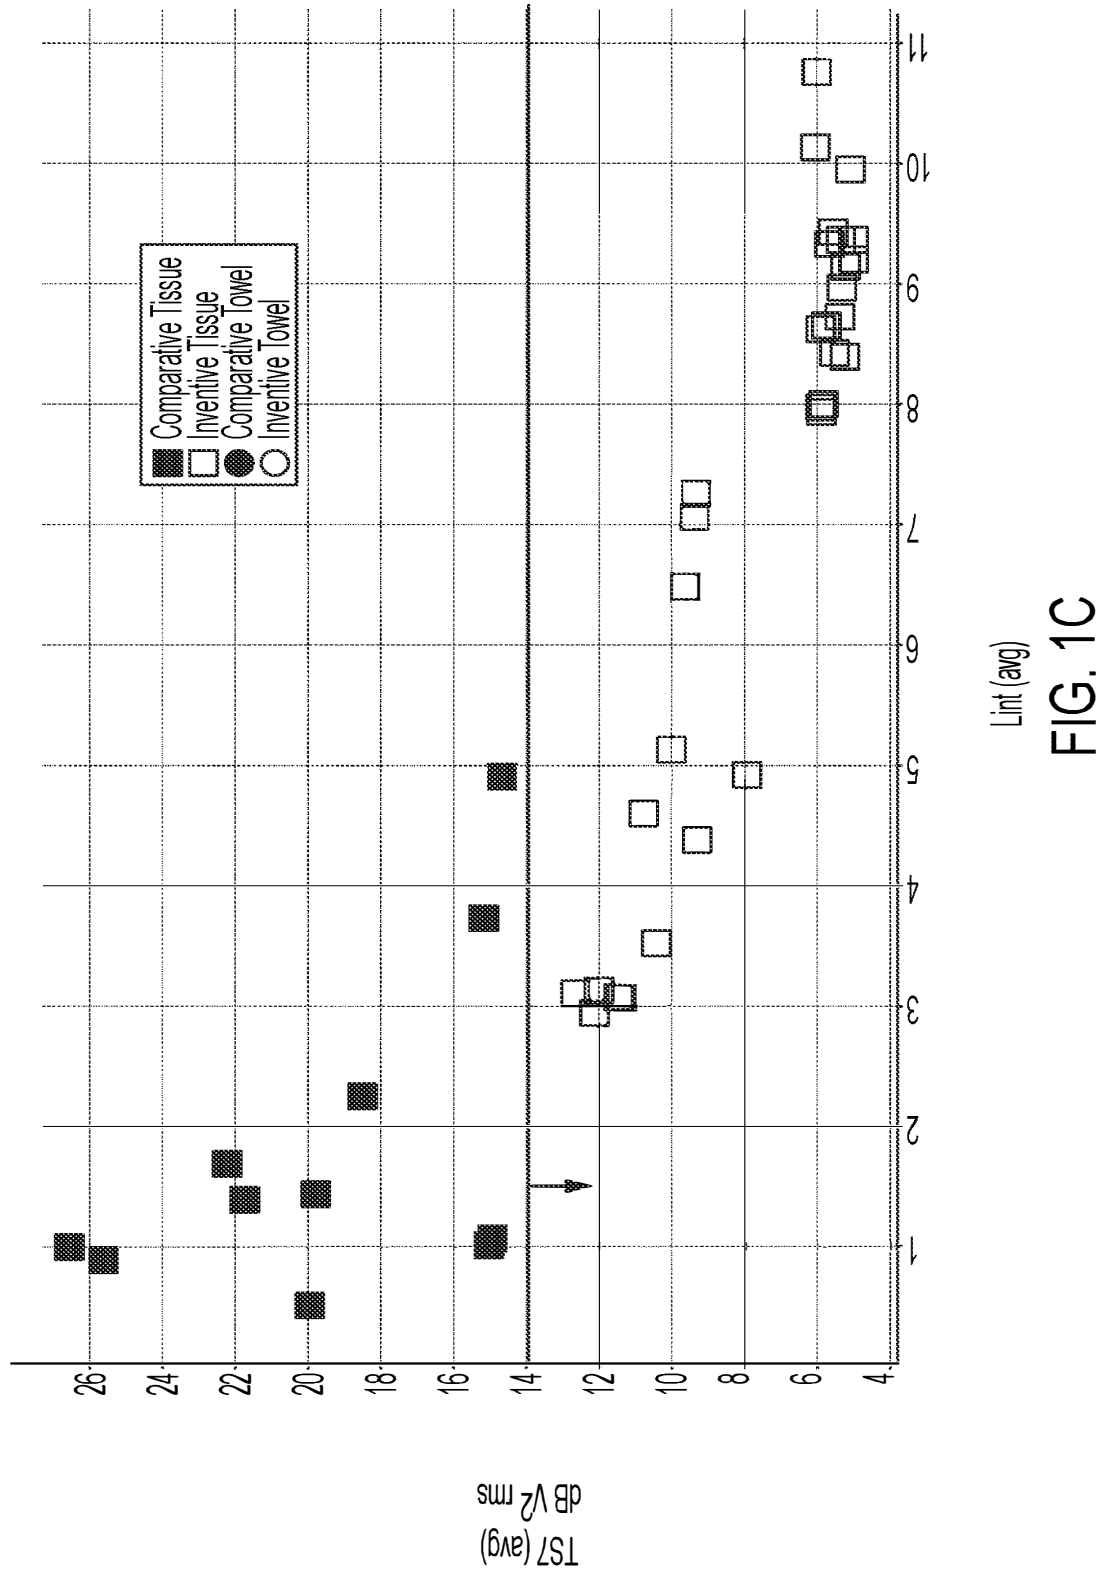

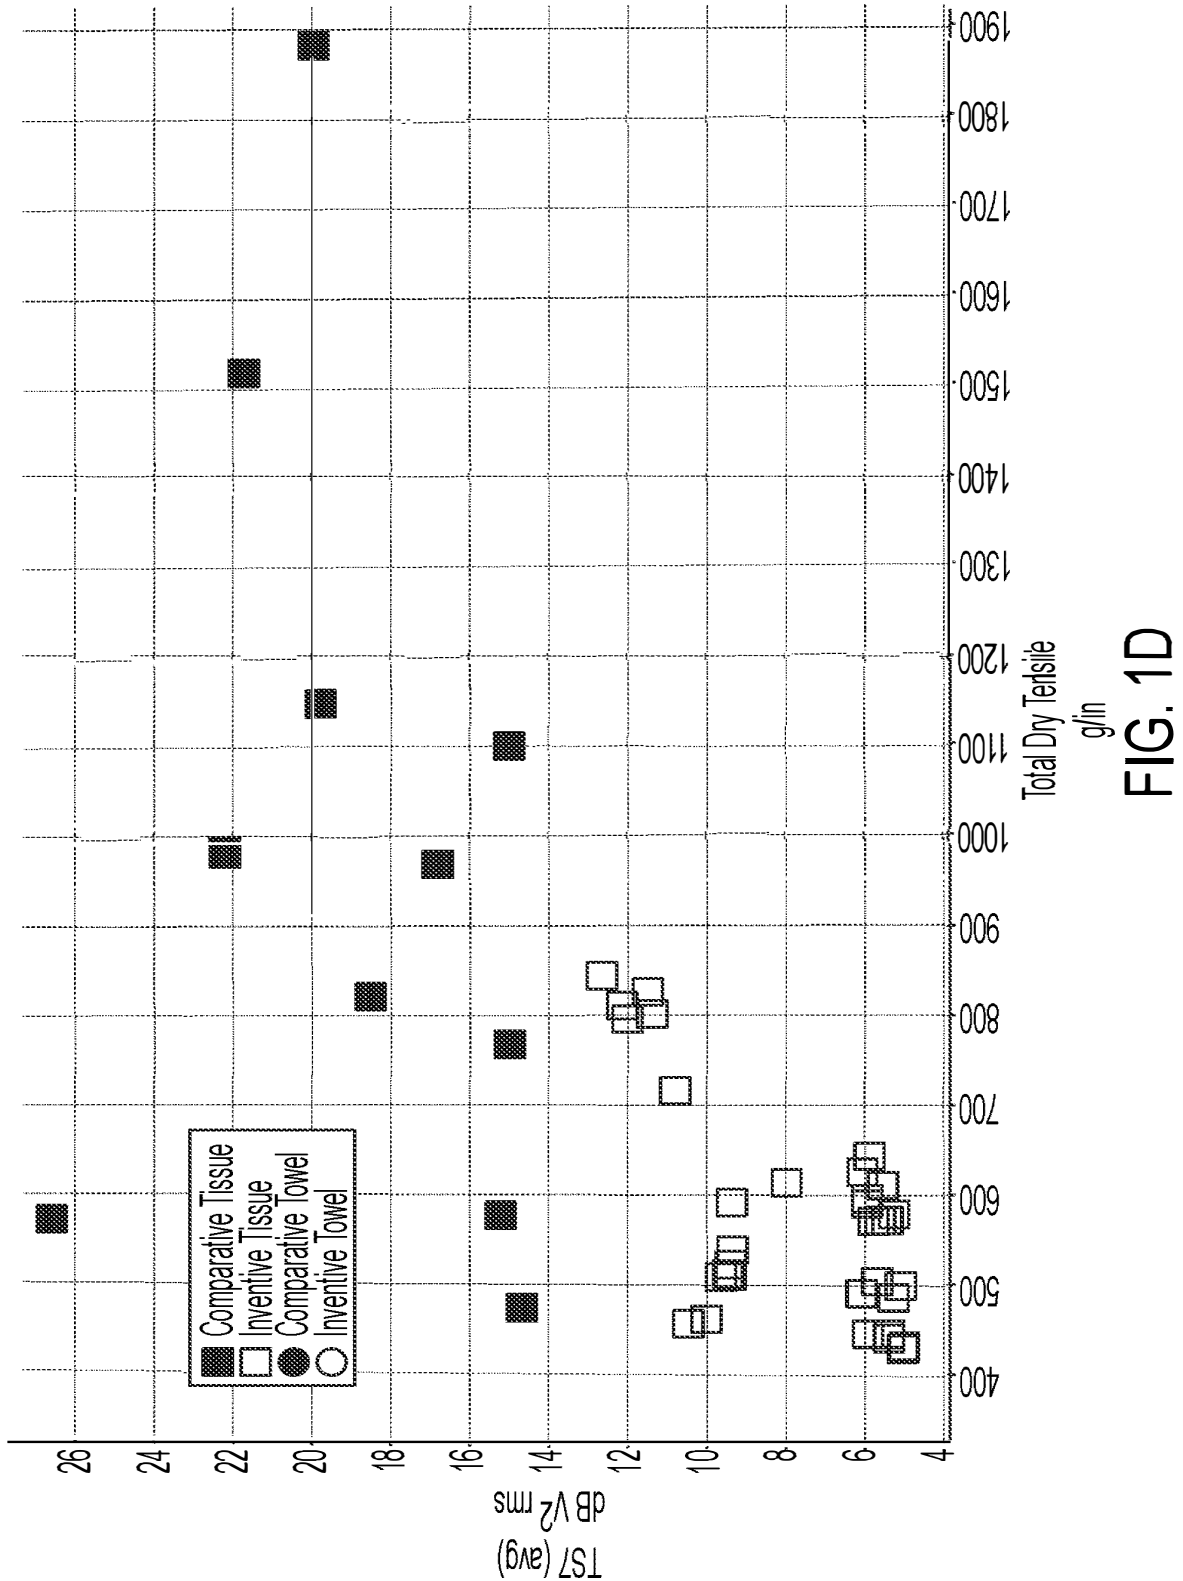

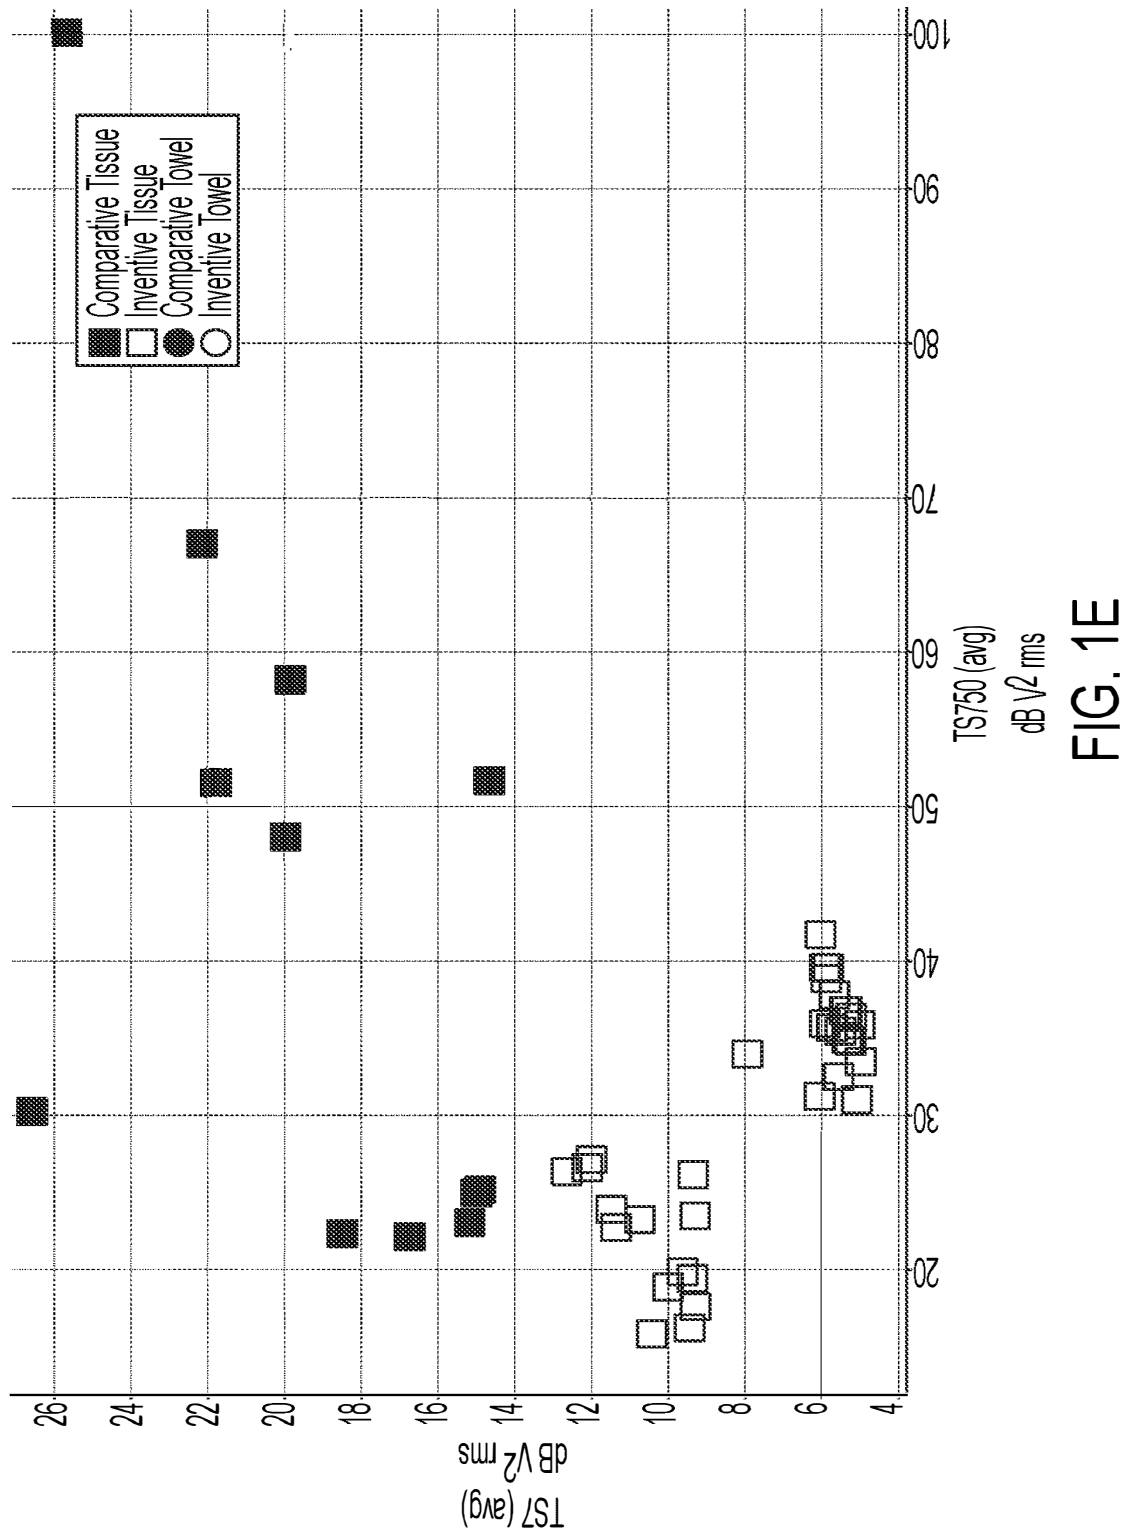

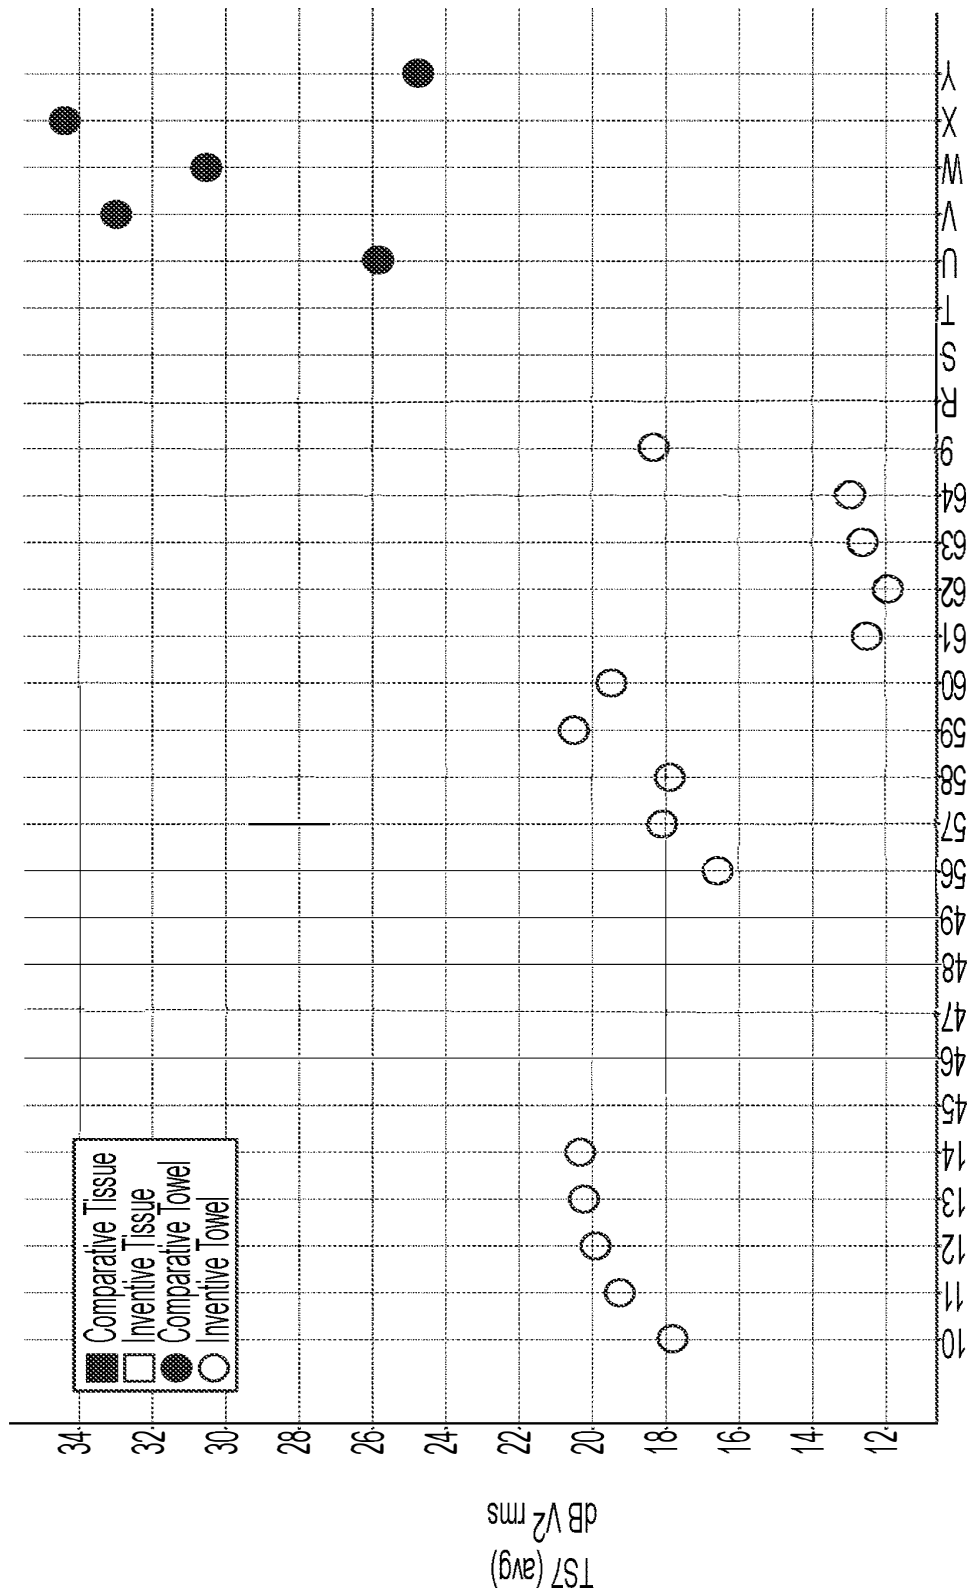

Sample ID
FIG. 2A

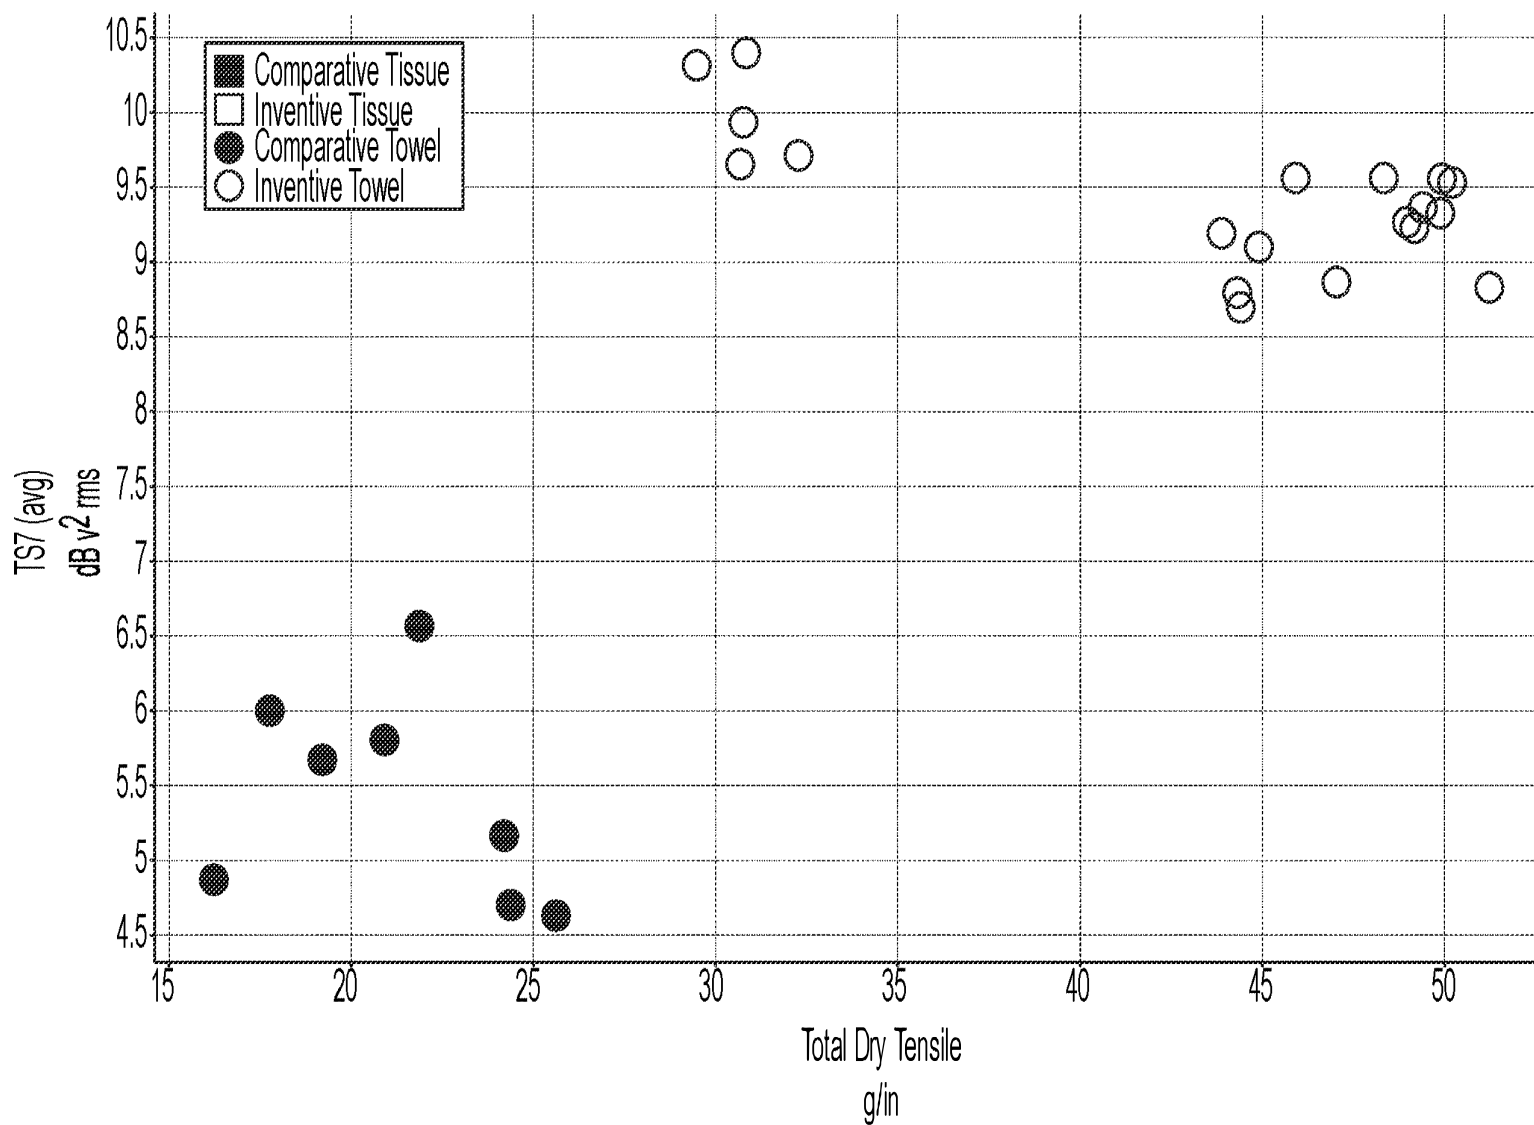


FIG. 2B

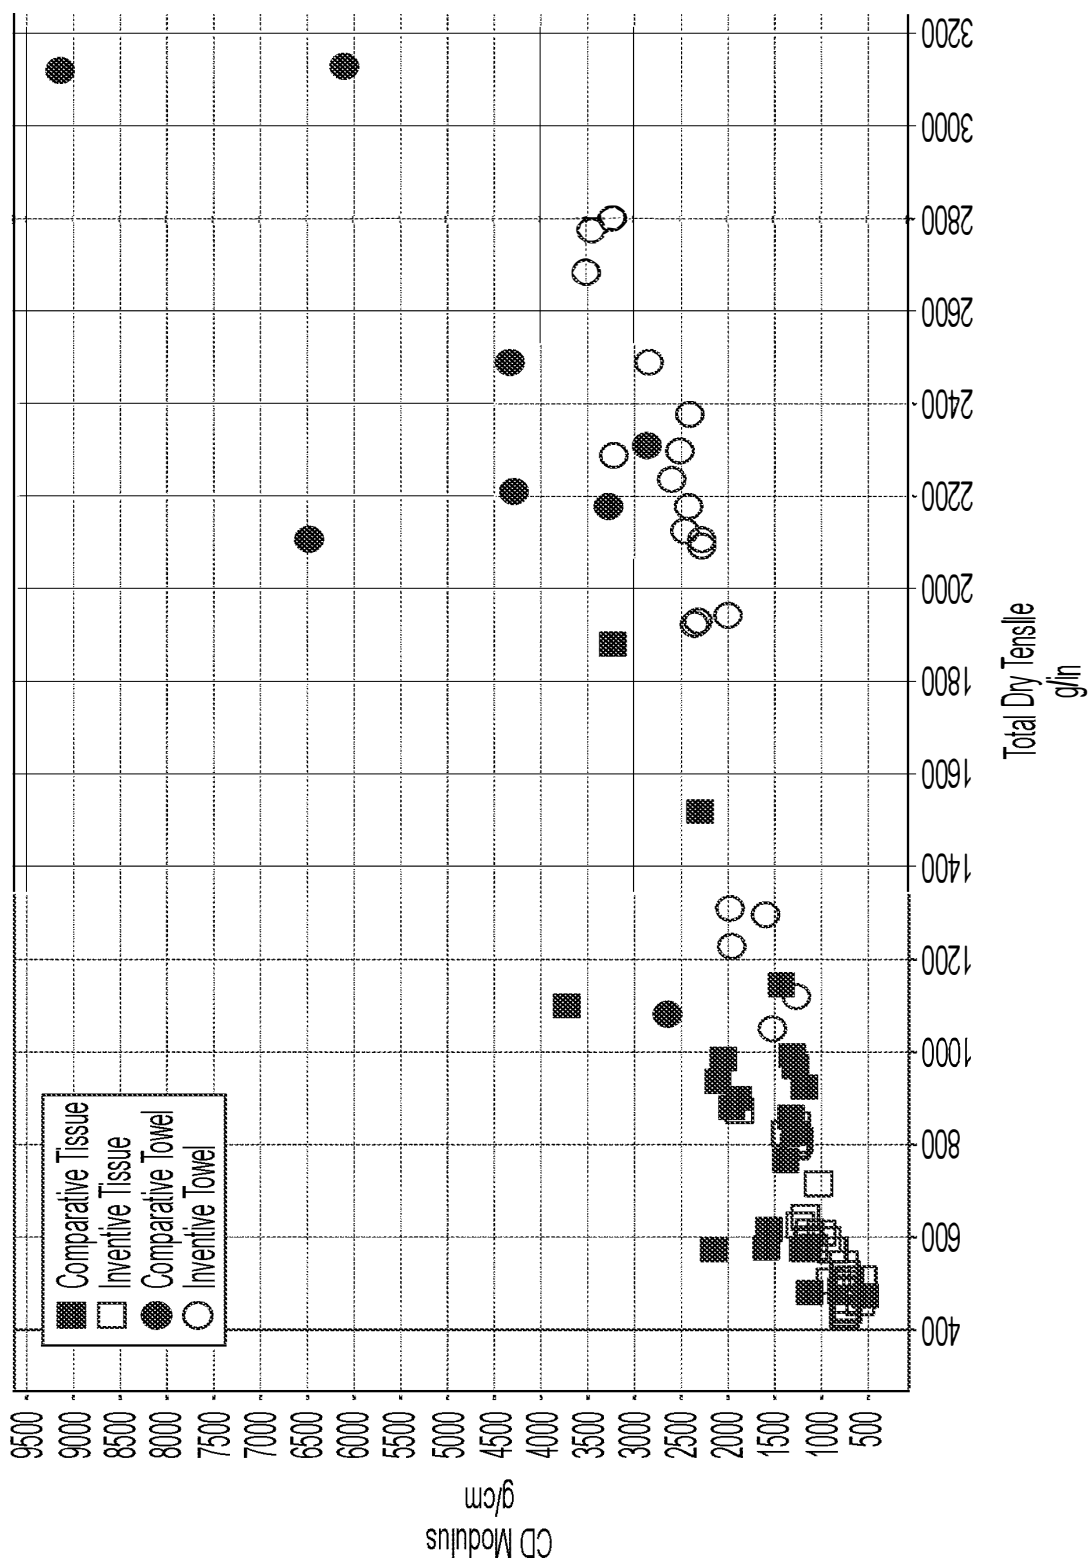
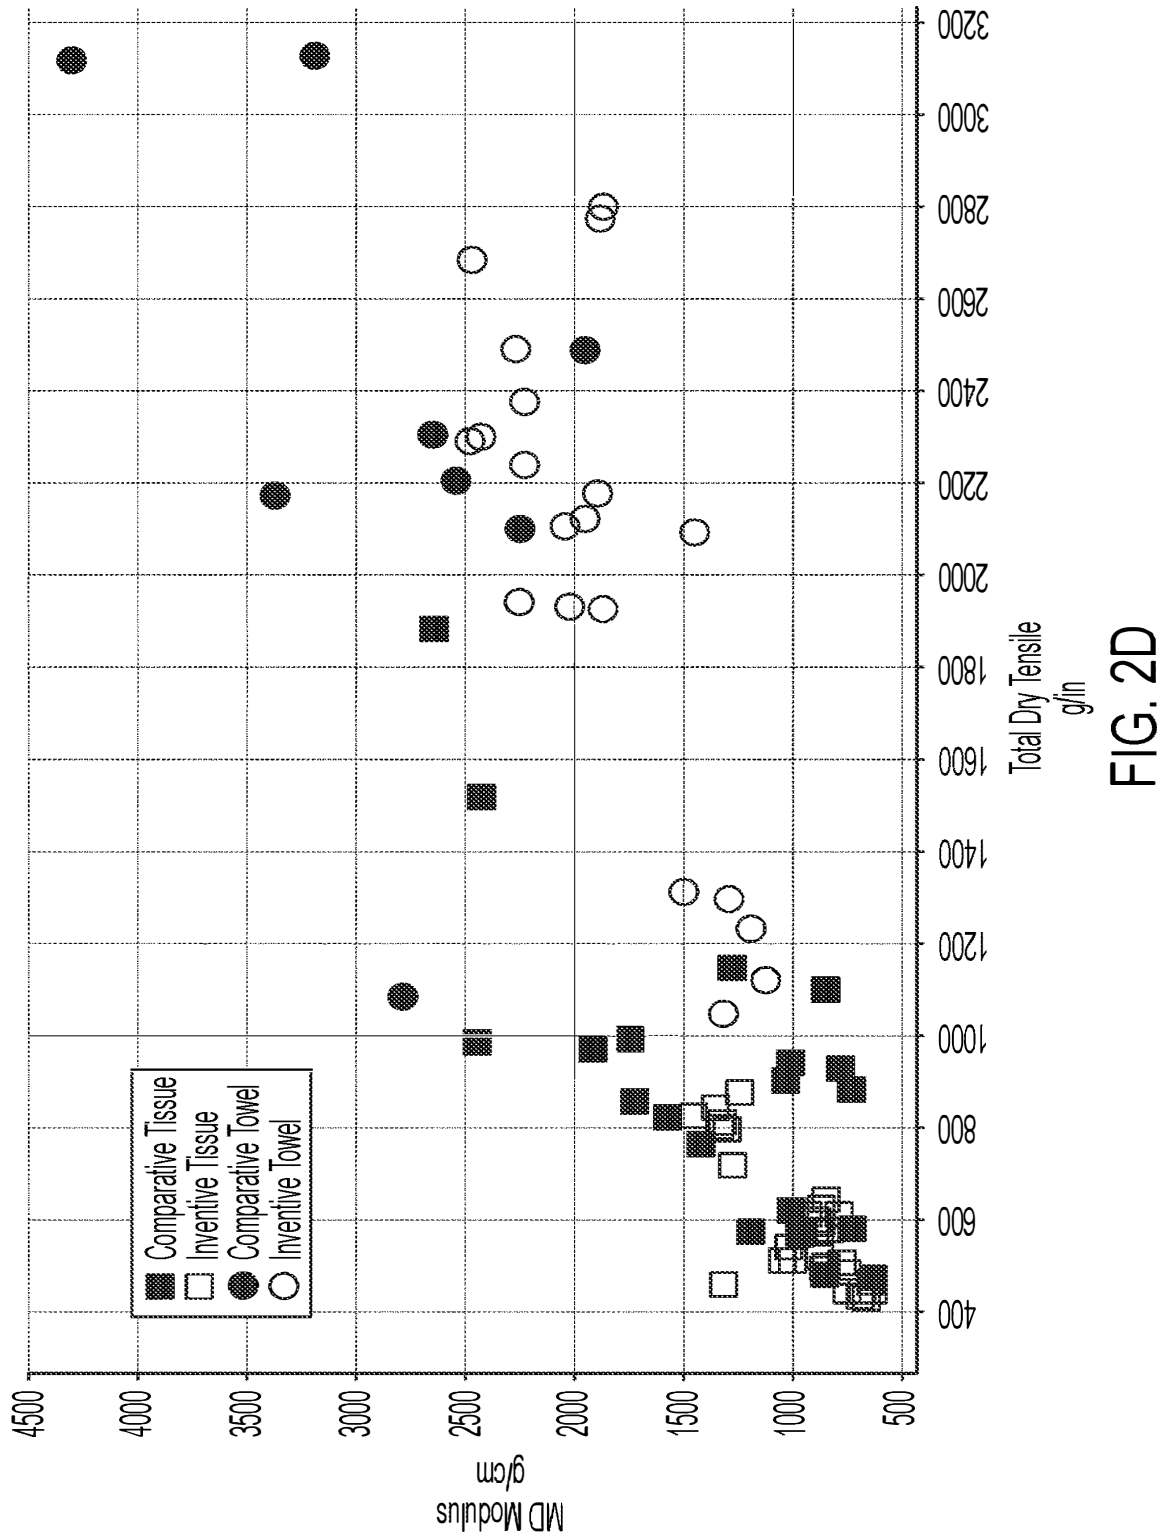



FIG. 2C





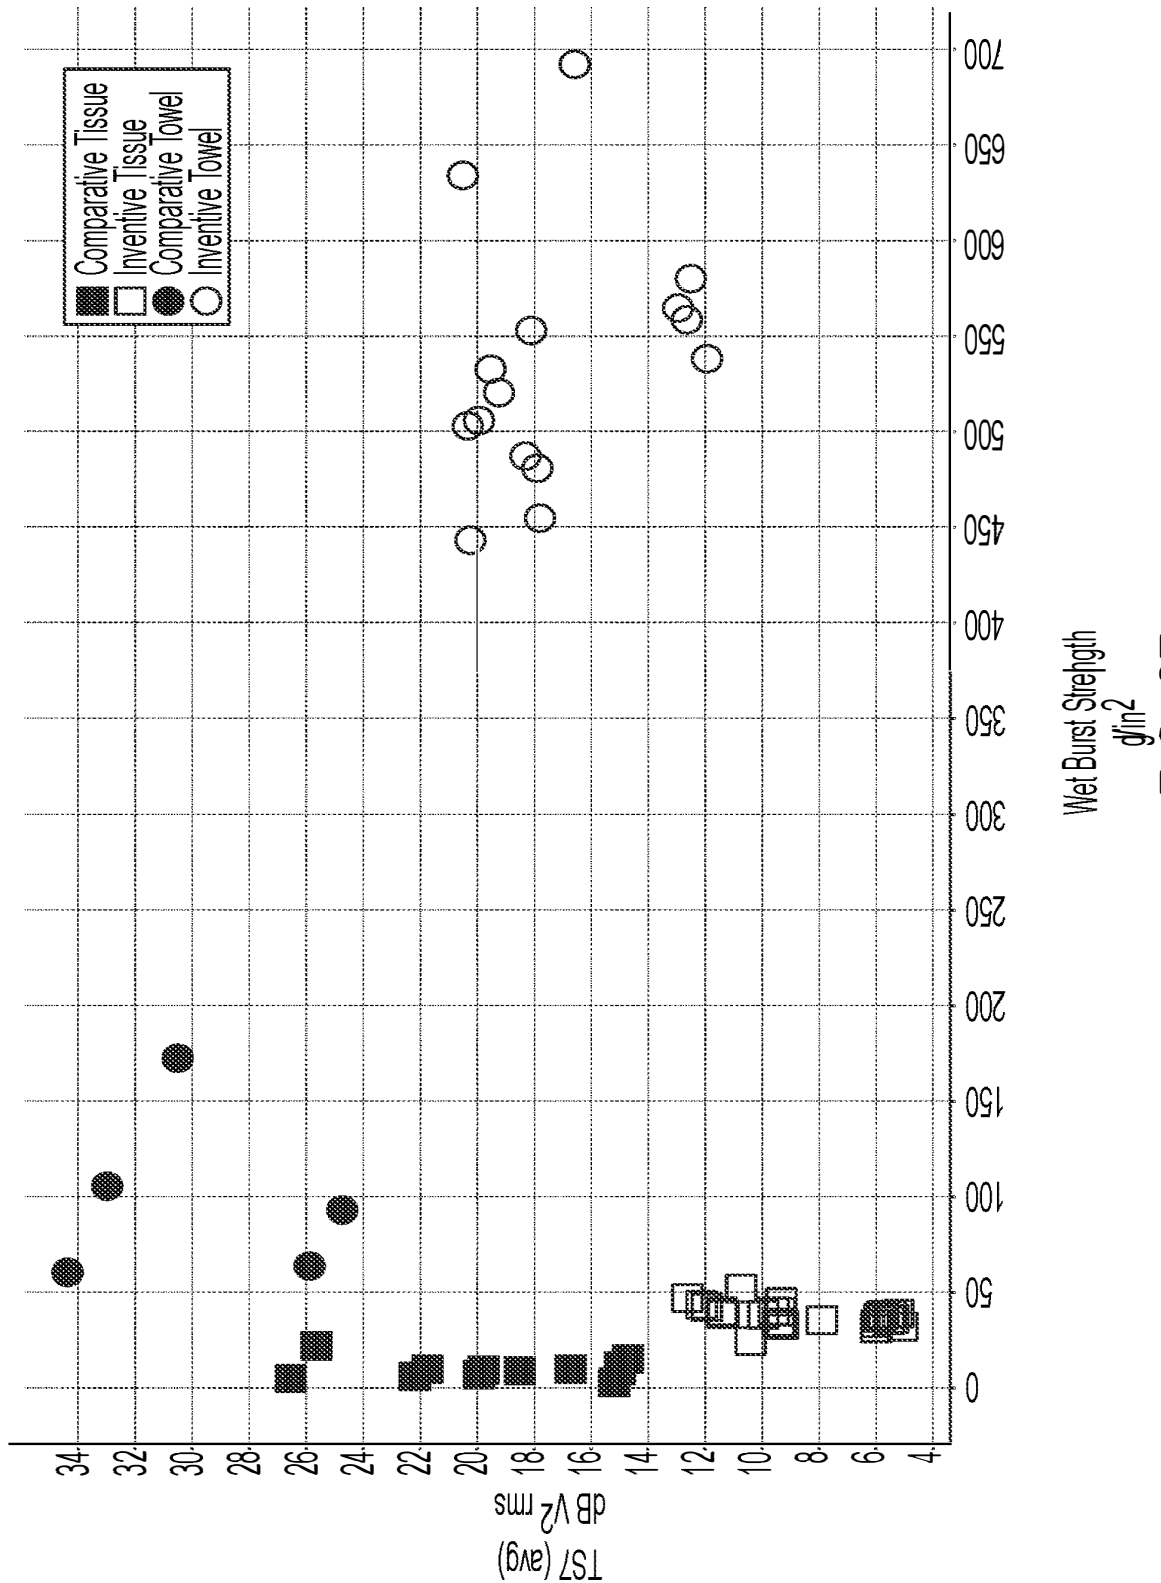
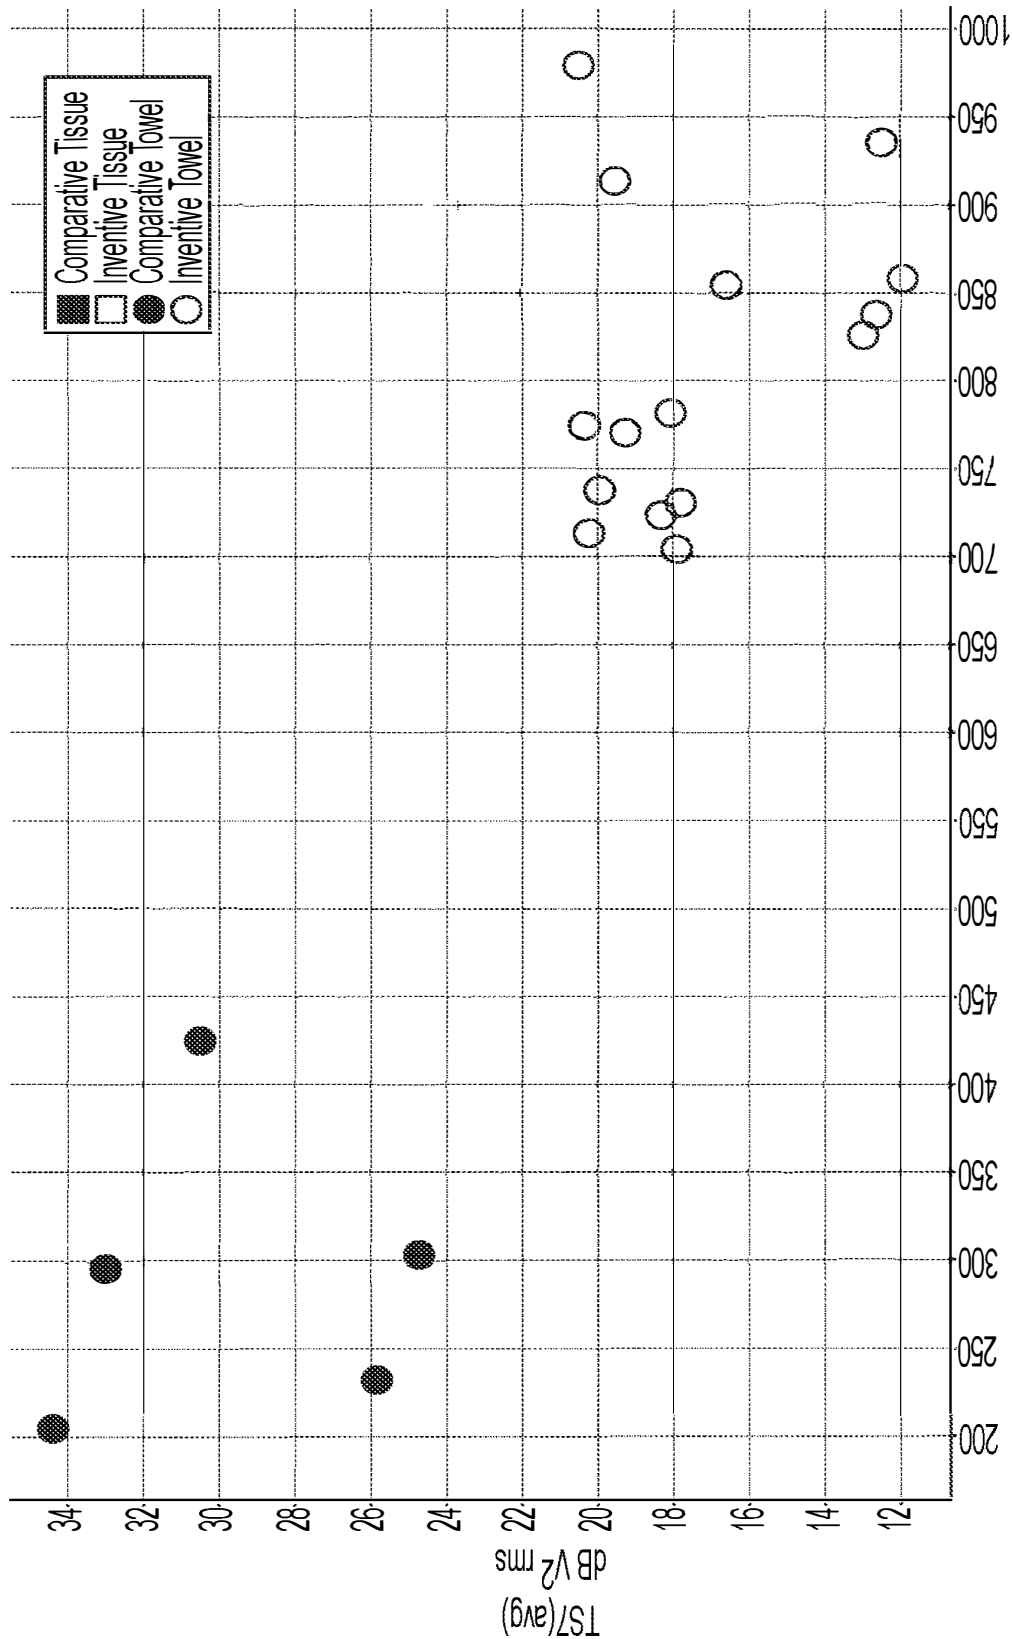
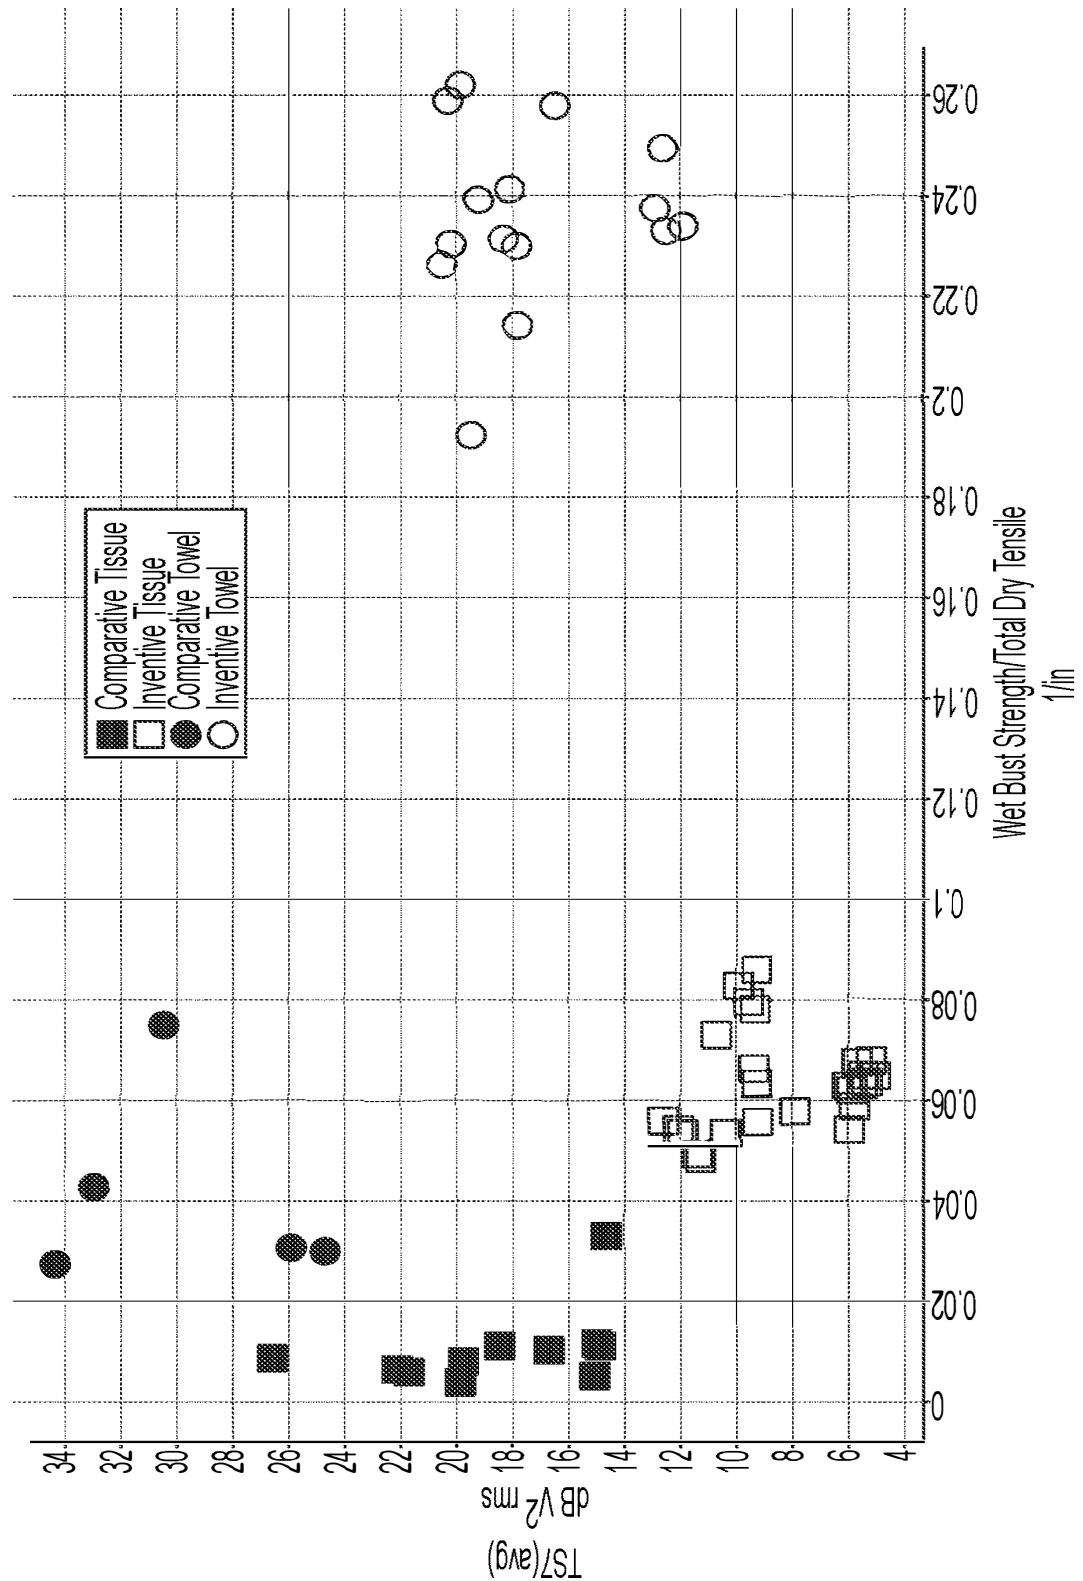


FIG. 2F





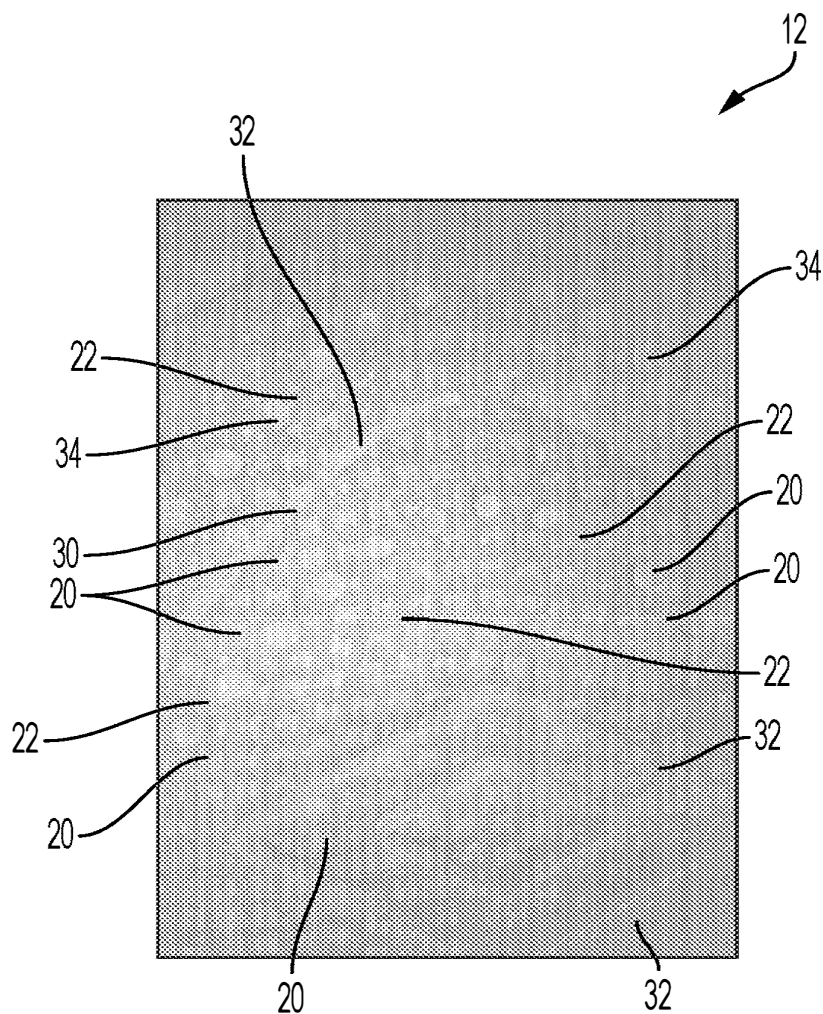


FIG. 3A

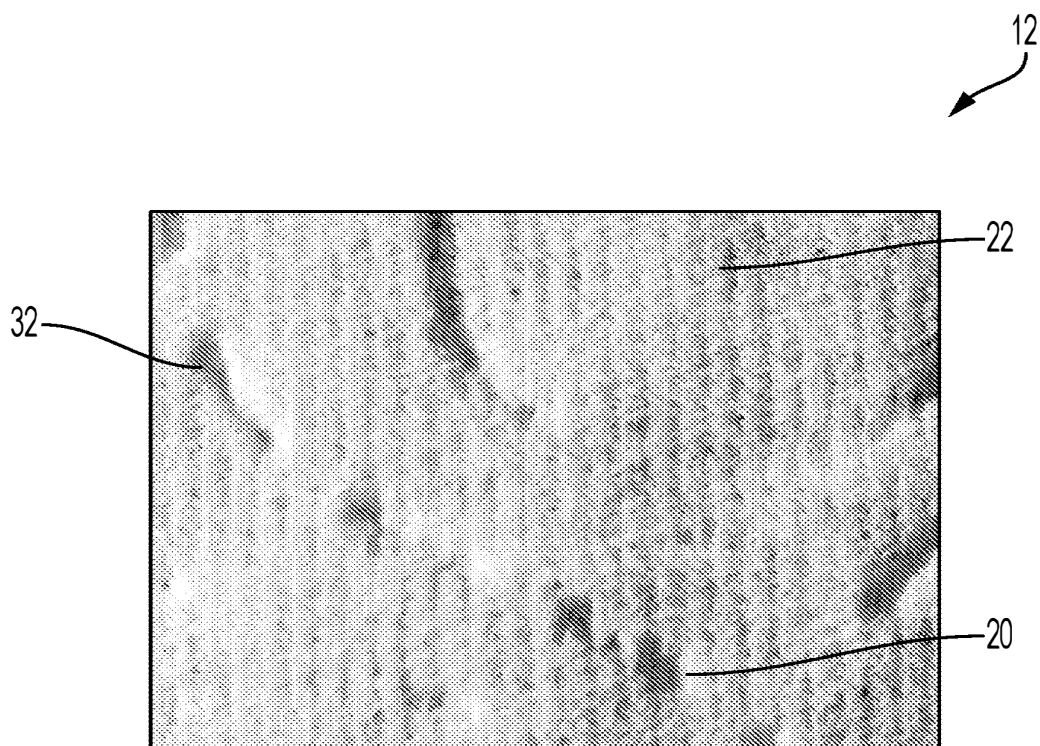


FIG. 3B

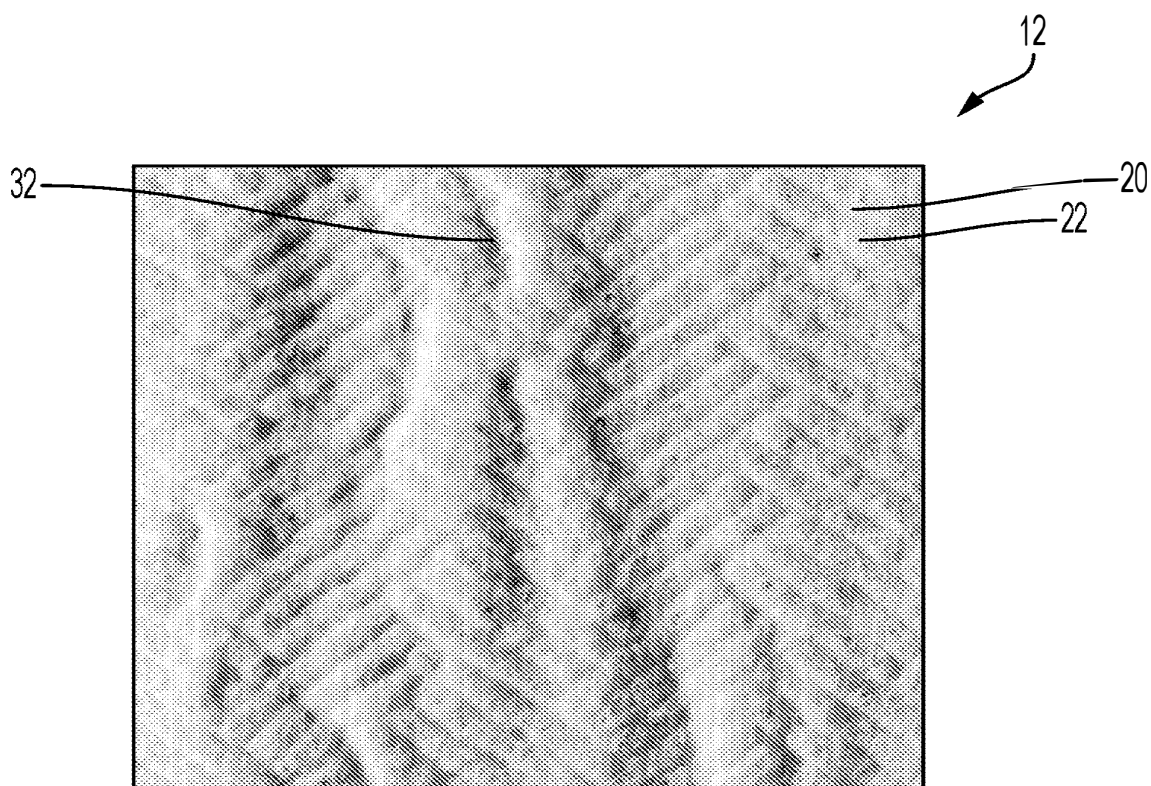


FIG. 3C



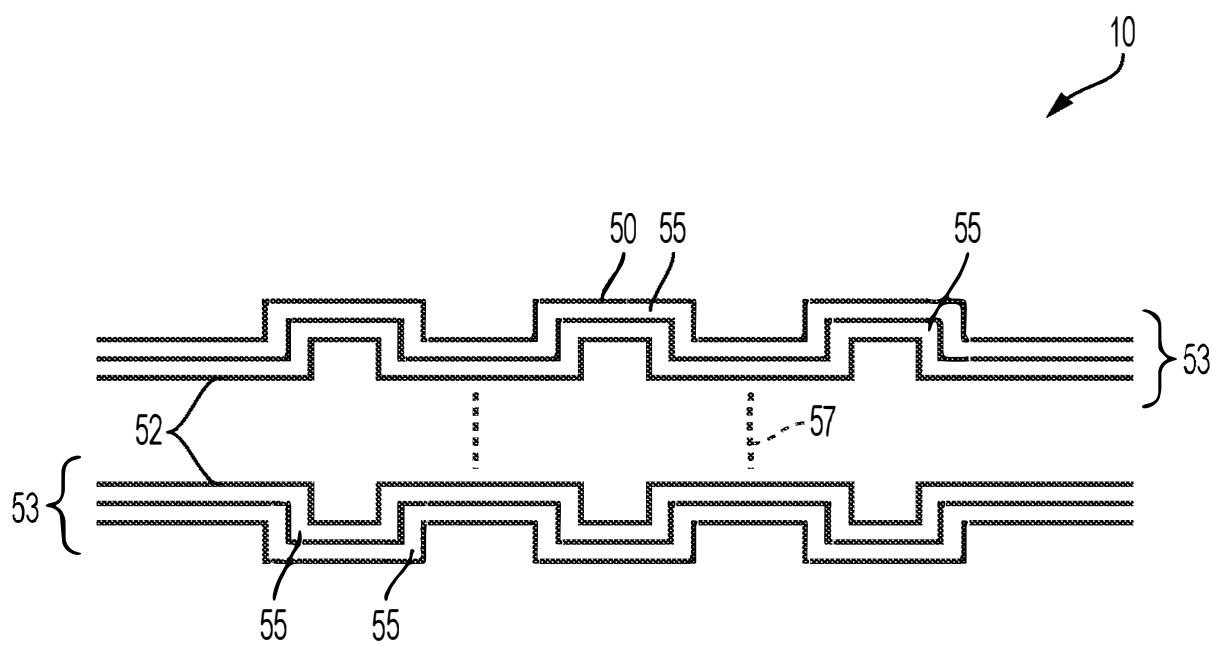


FIG. 4B

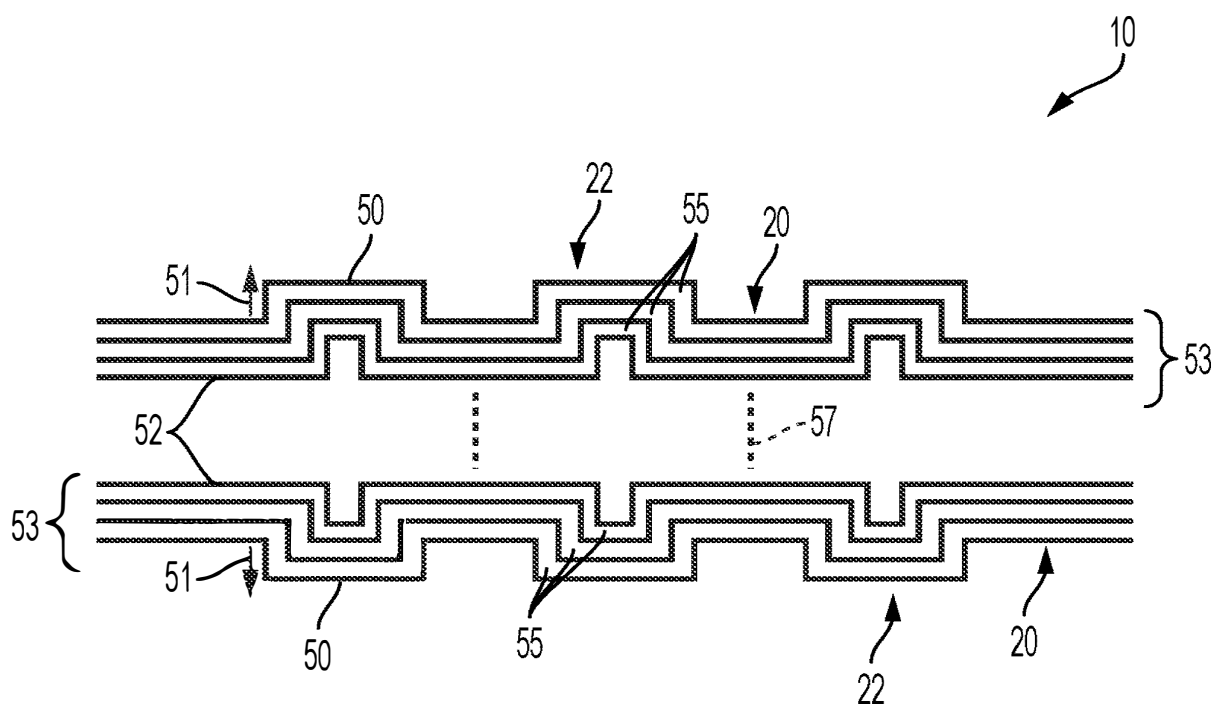


FIG. 4C

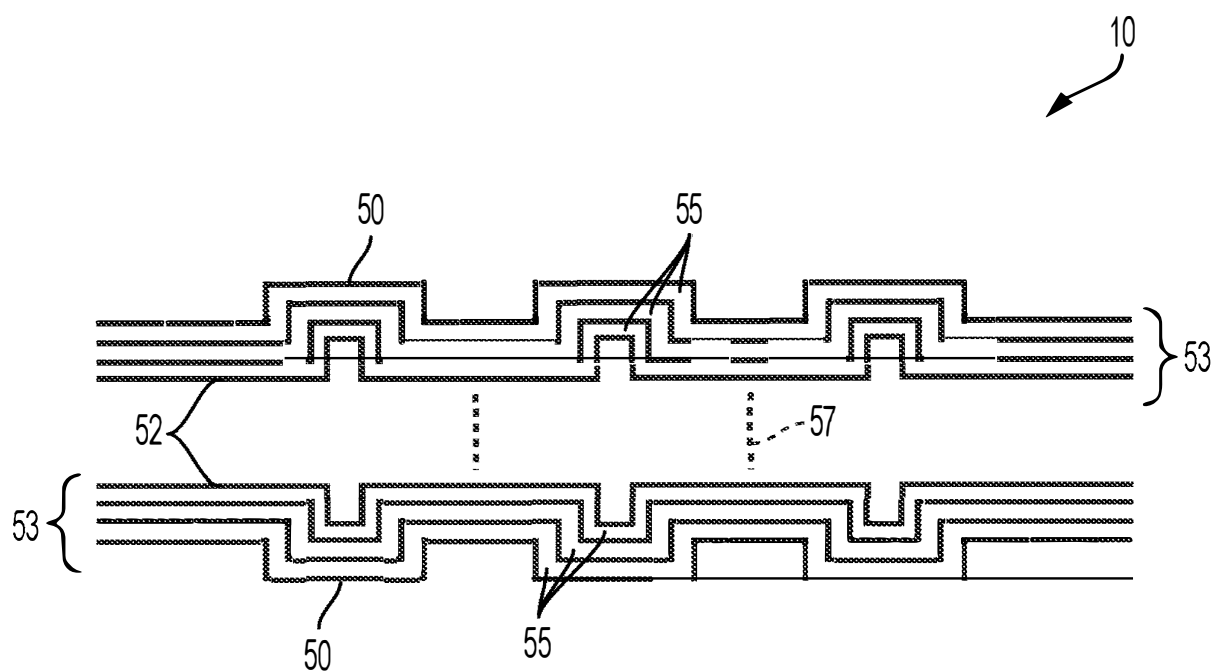


FIG. 4D

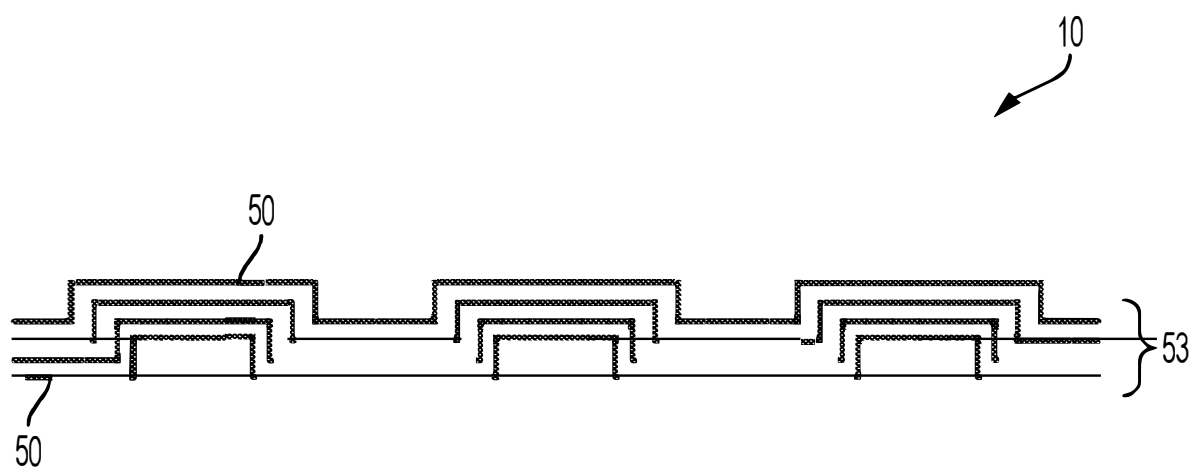


FIG. 4E

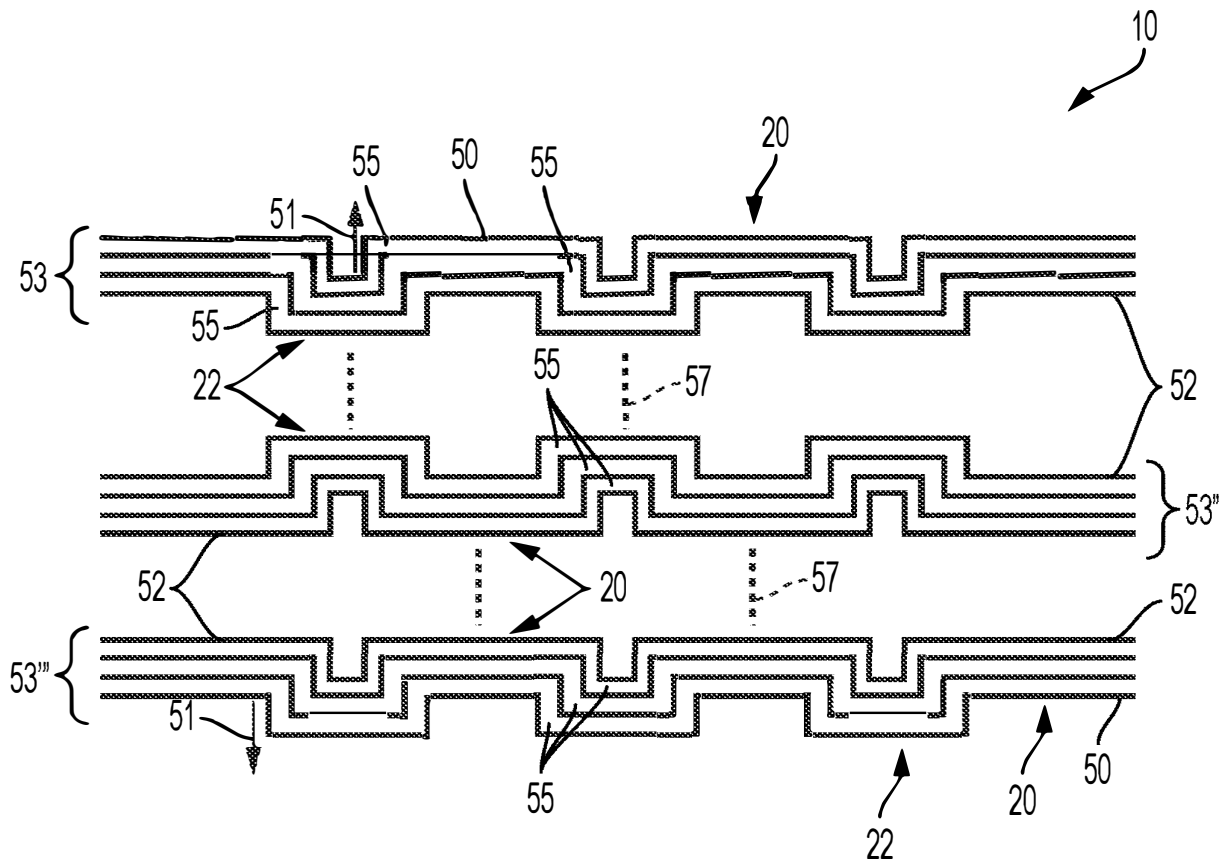


FIG. 4F

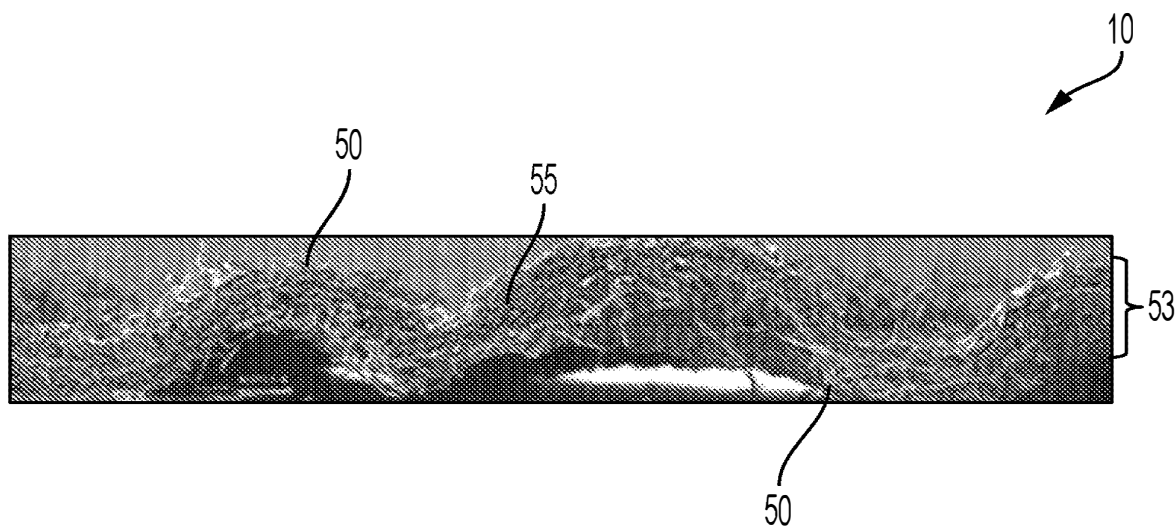


FIG. 4G

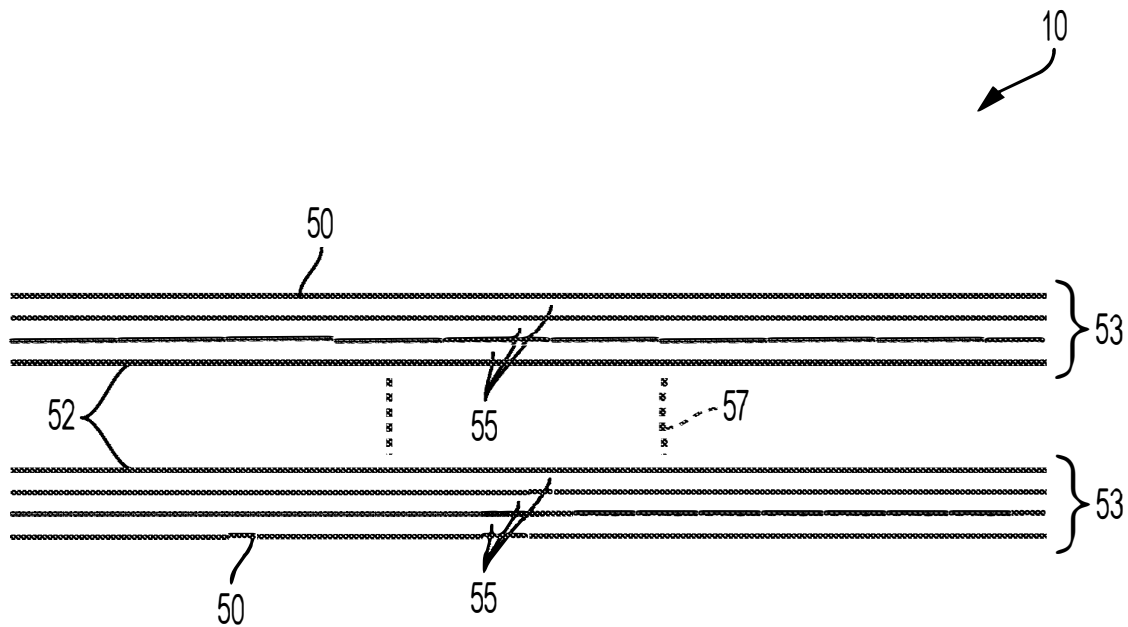


FIG. 4H

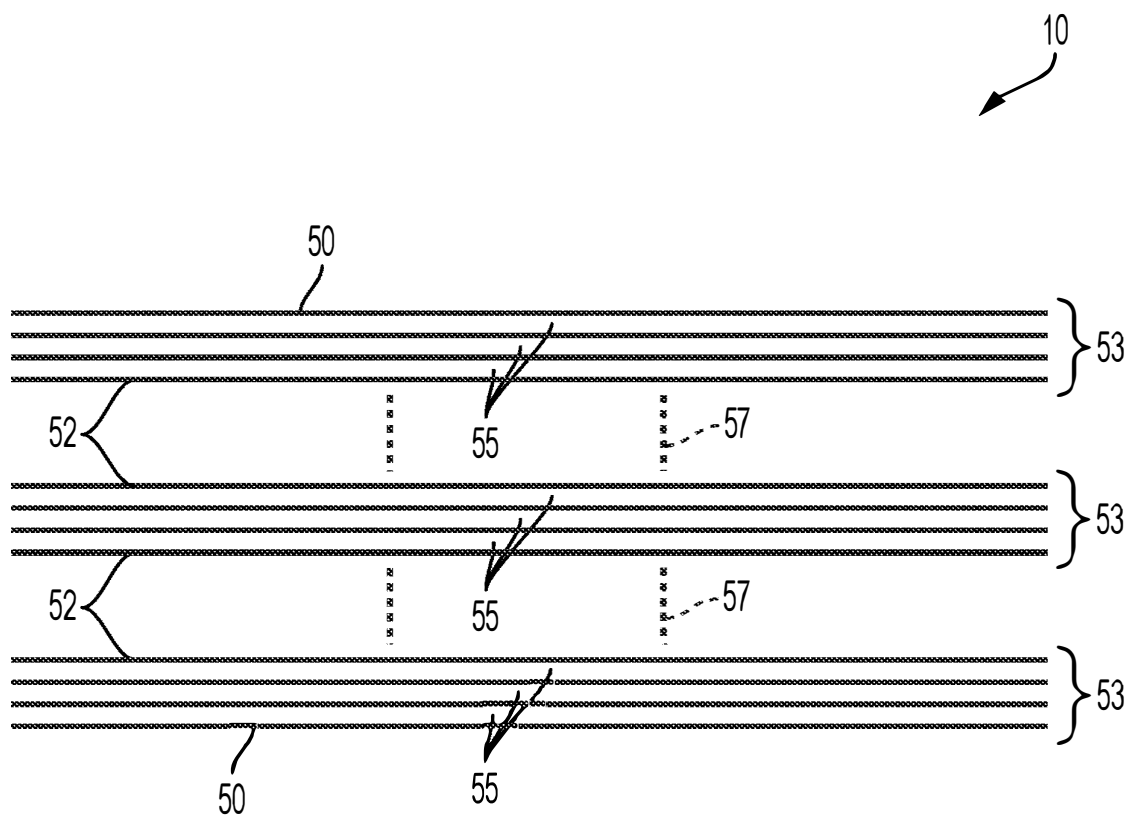


FIG. 41

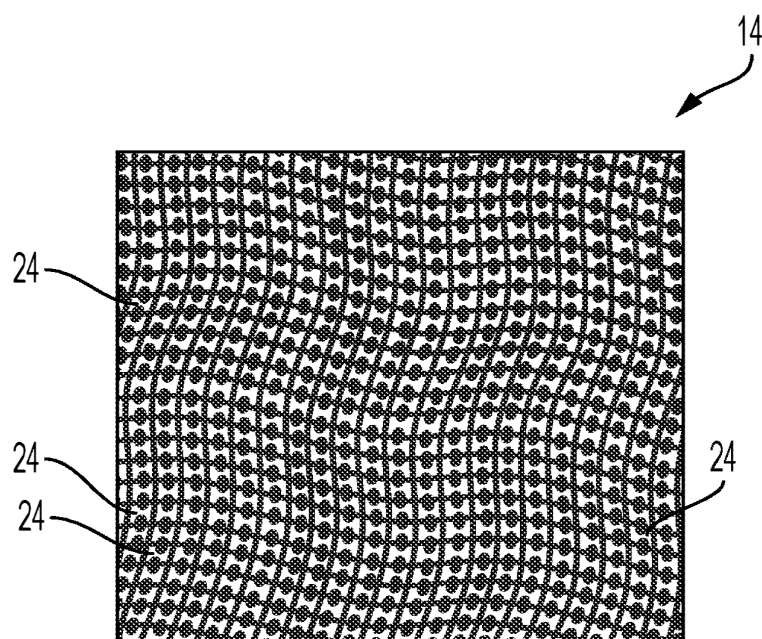


FIG. 5

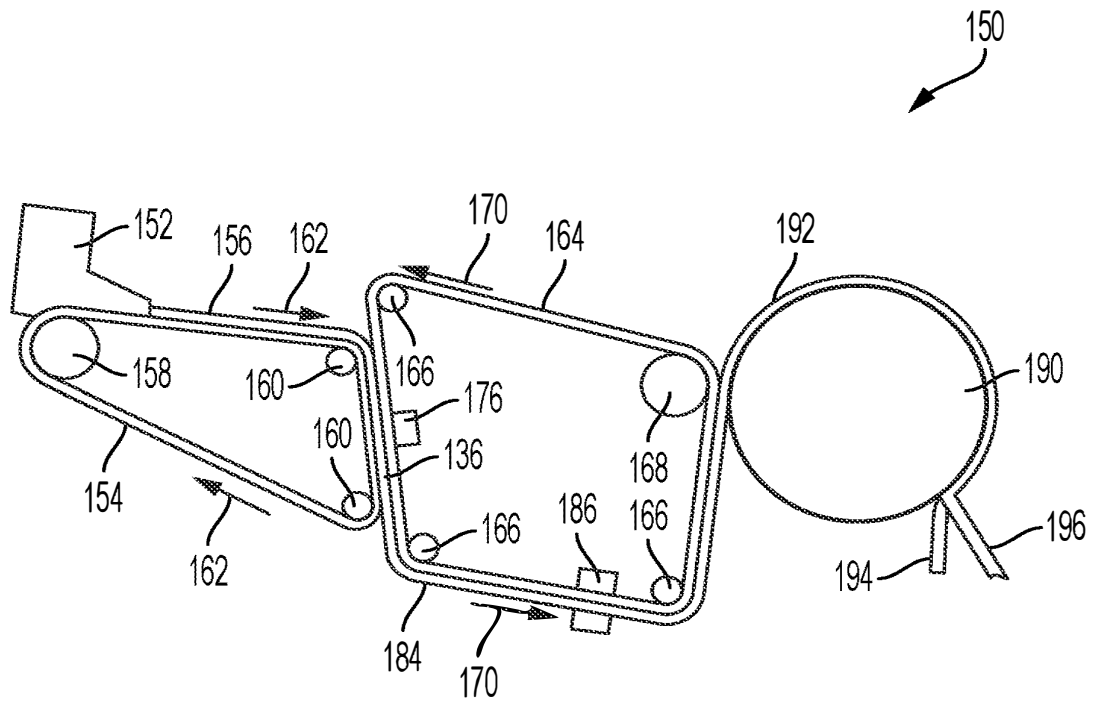


FIG. 6A

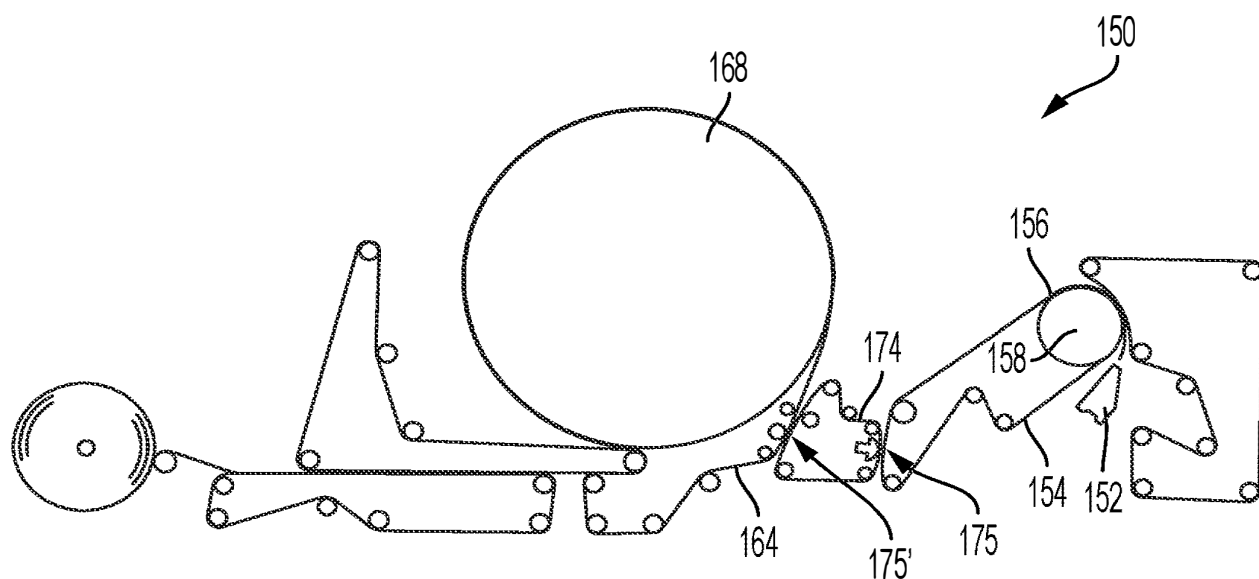


FIG. 6B

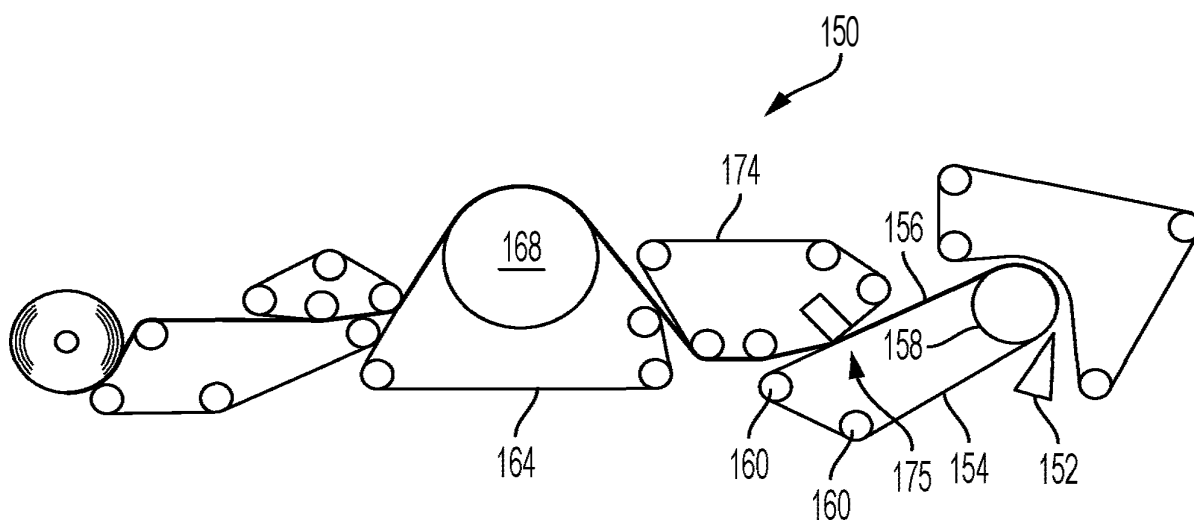


FIG. 6C

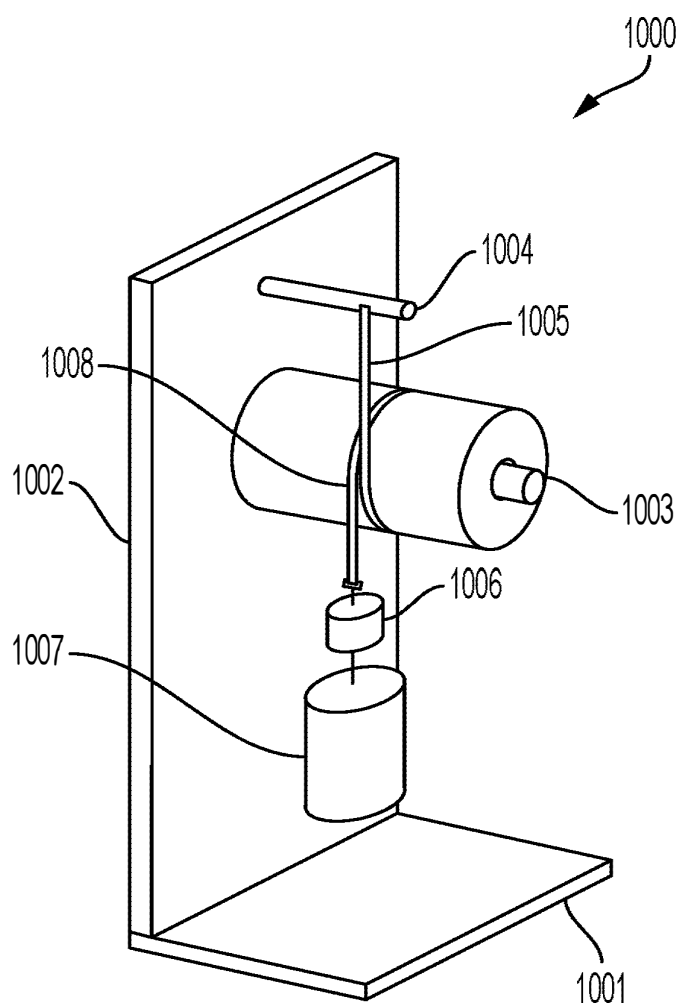


FIG. 7

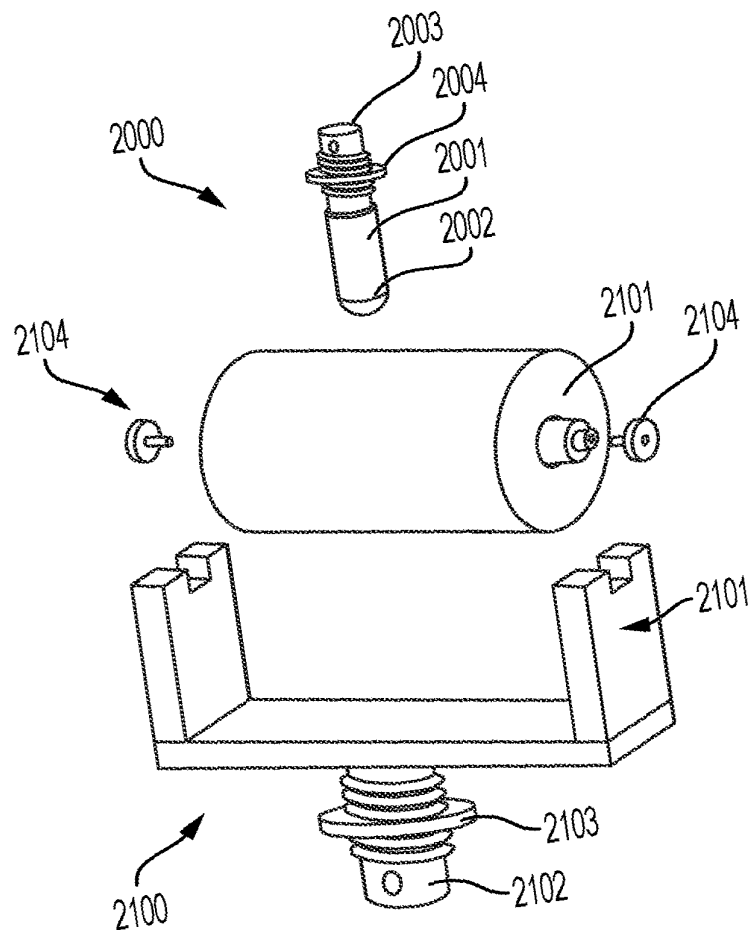


FIG. 8

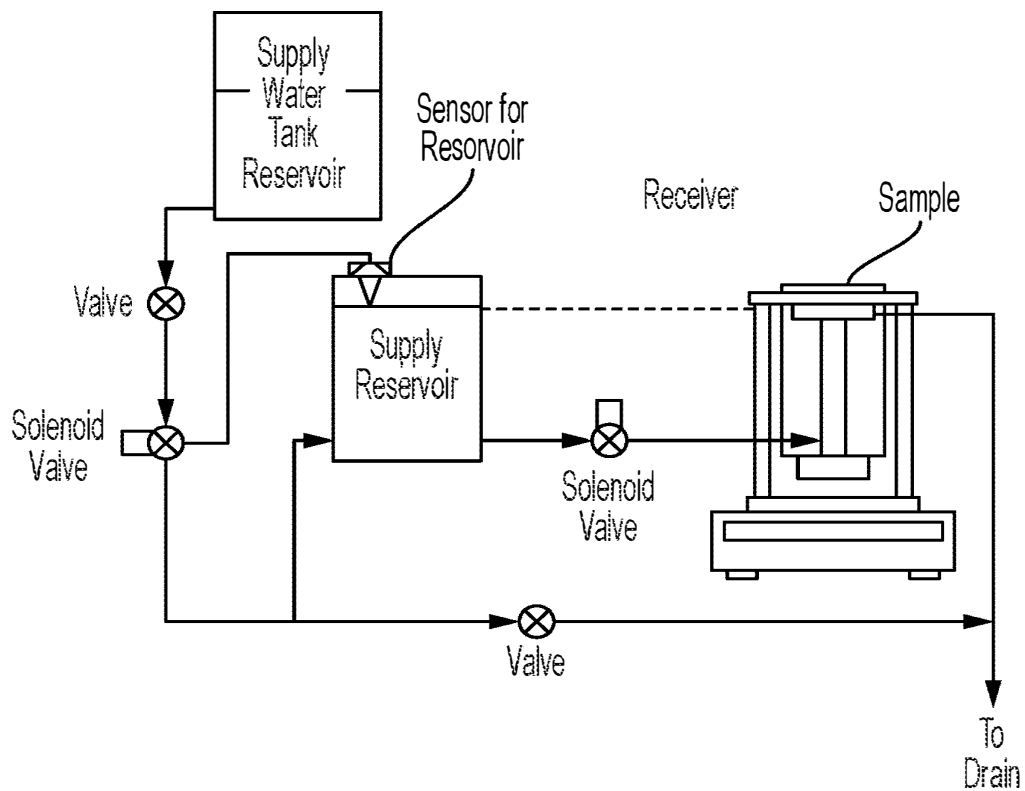


FIG. 9

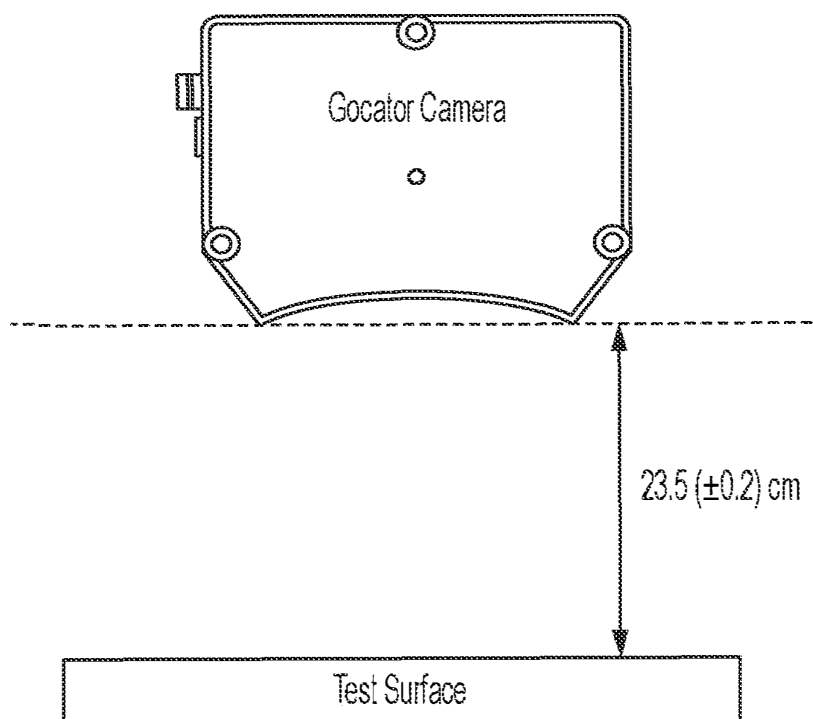


FIG. 10



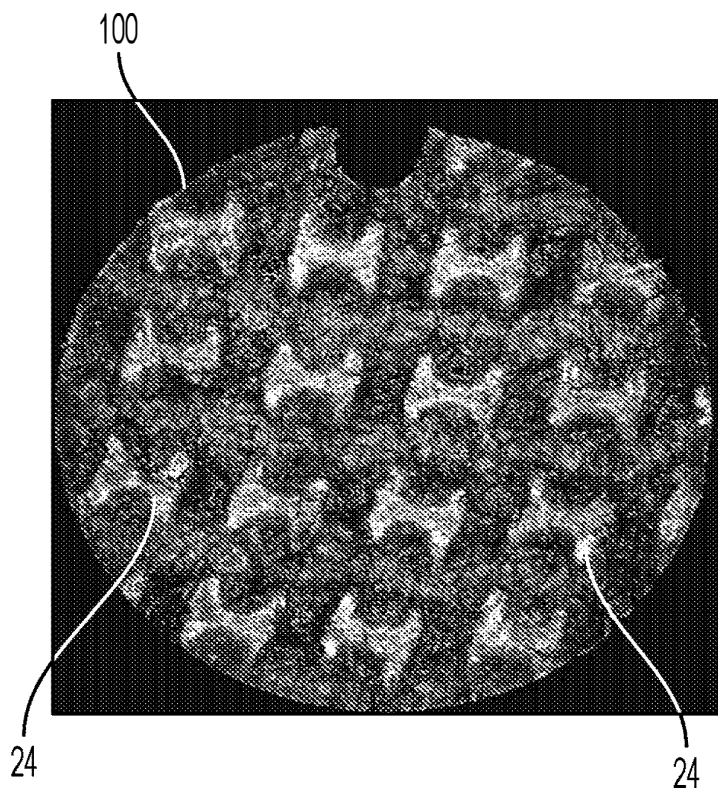


FIG. 12

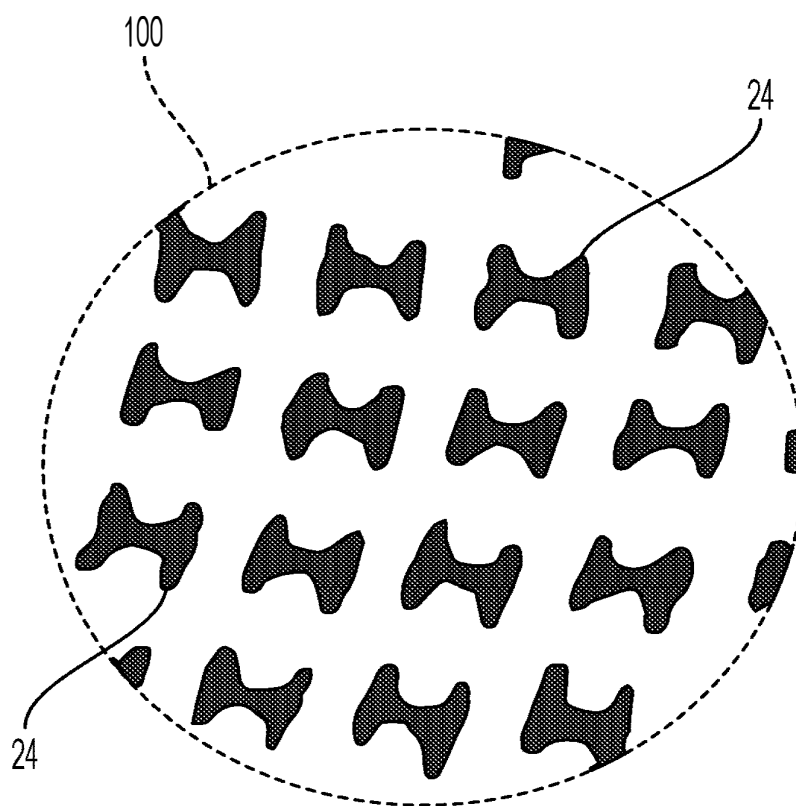


FIG. 13

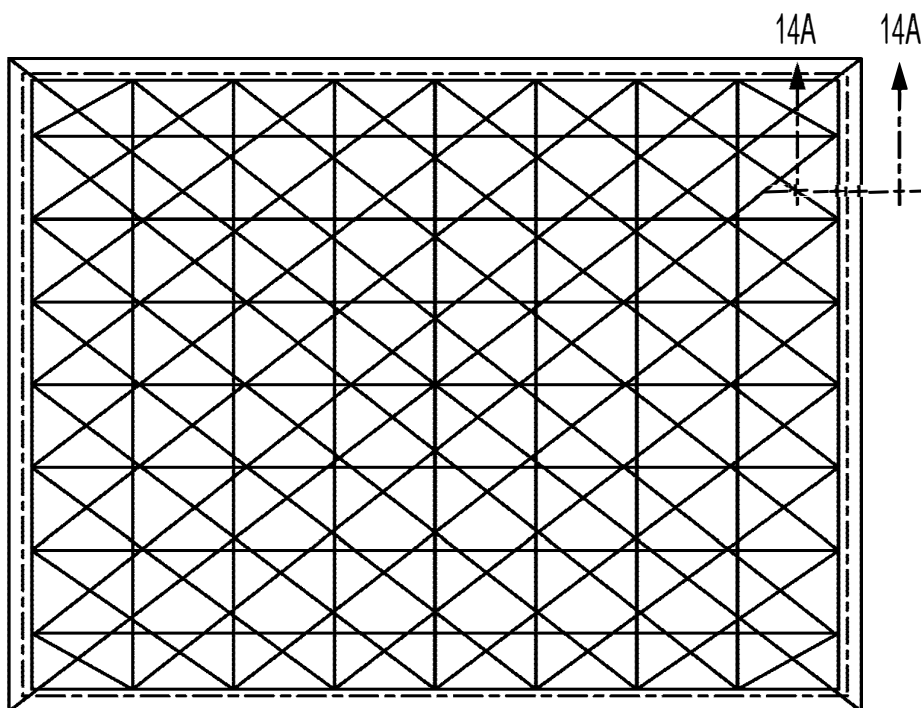


FIG. 14

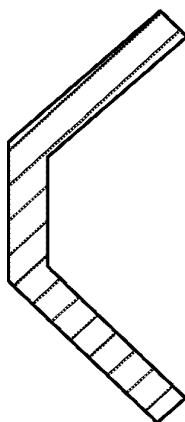


FIG. 14A

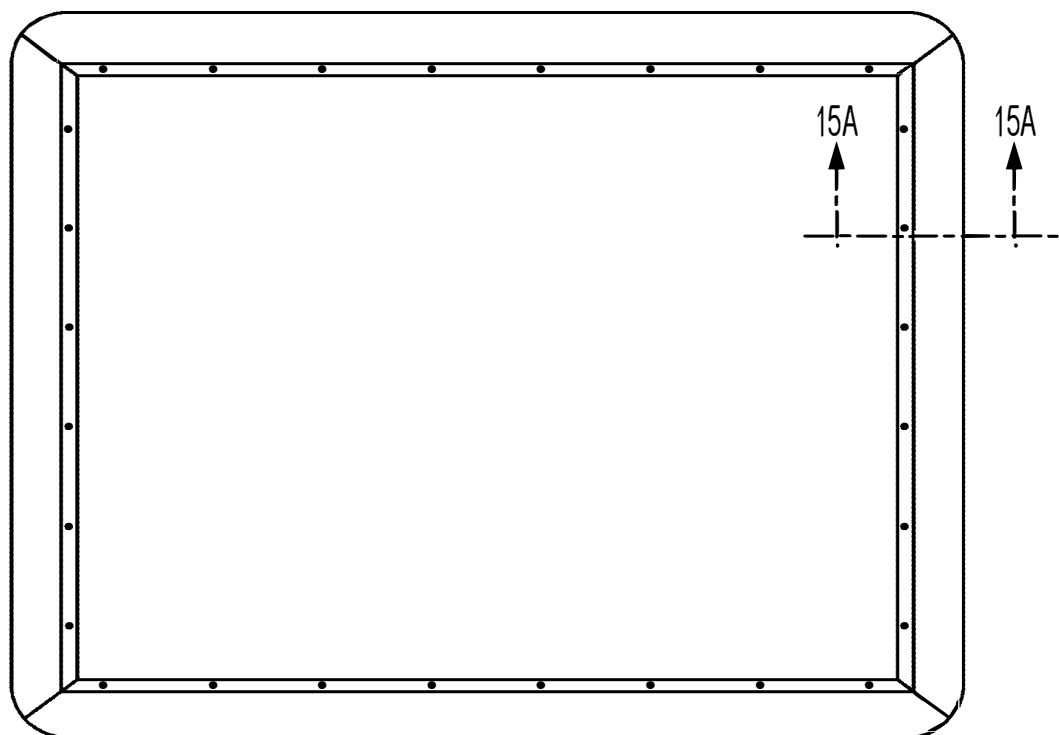


FIG. 15

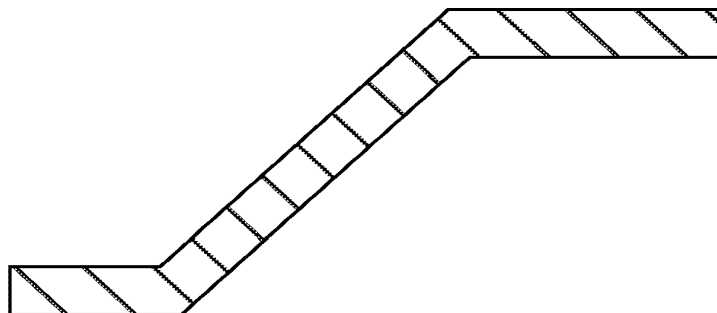


FIG. 15A

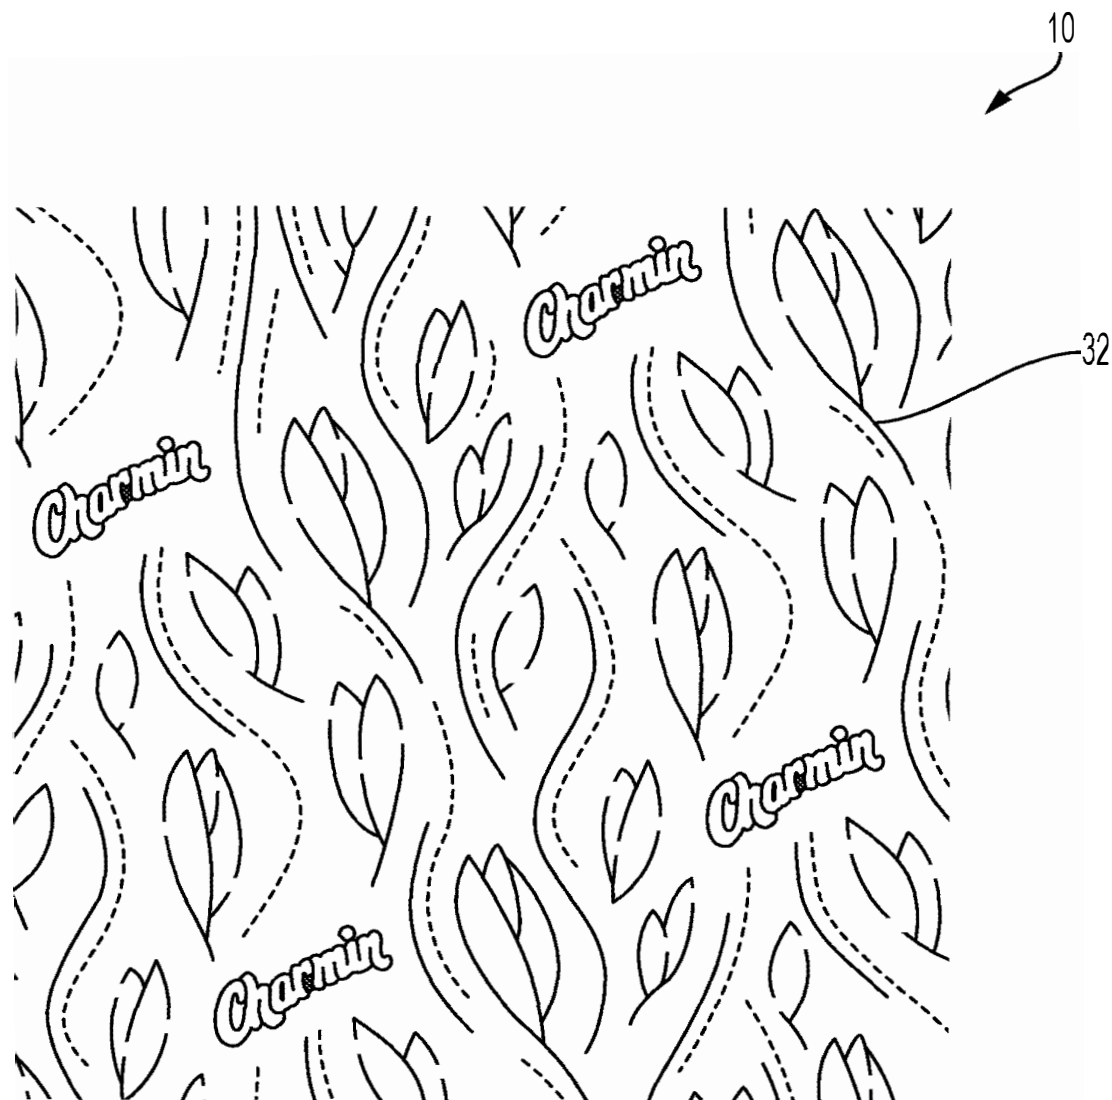


FIG. 16A

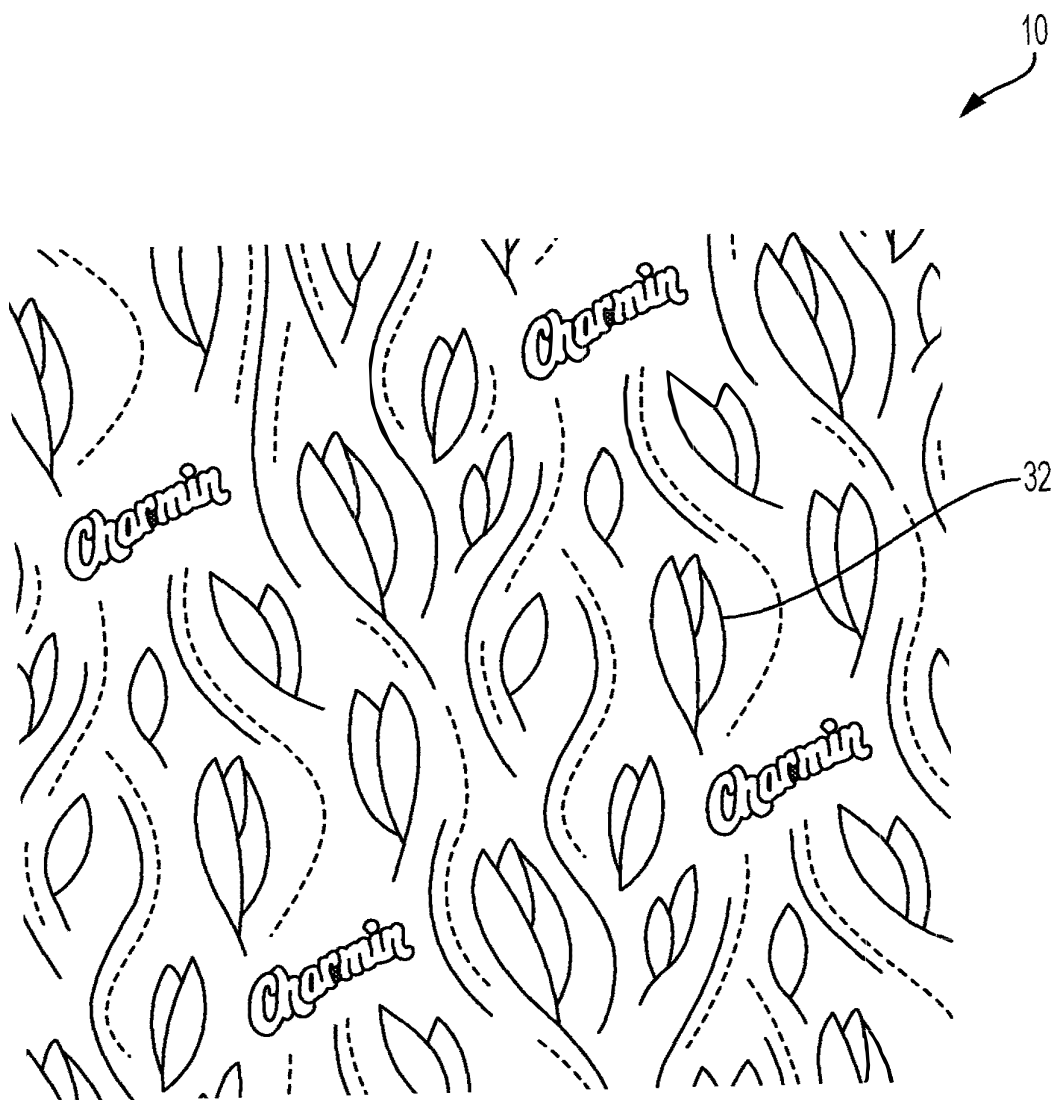


FIG. 16B

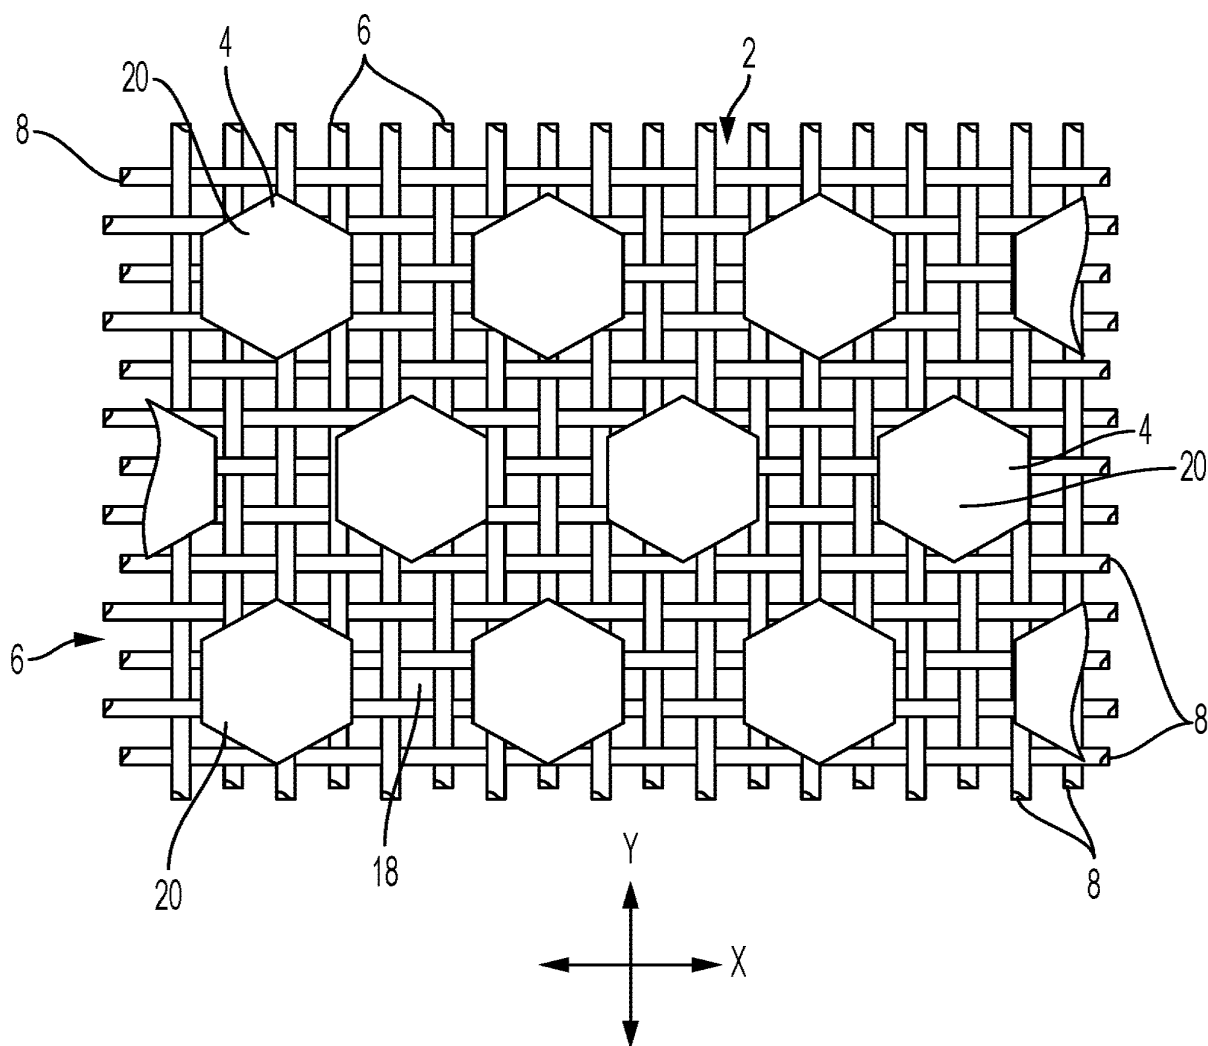


FIG. 17

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		
<p>The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76.</p> <p>This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.</p>			

Secrecy Order 37 CFR 5.2:

☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Inventor Information:

Inventor	1				<input type="button" value="Remove"/>	
Legal Name						
Prefix	Given Name	Middle Name	Family Name	Suffix		
	Christopher	Michael	YOUNG			
Residence Information (Select One) ☐ US Residency ☐ Non US Residency ☐ Active US Military Service						
City	Loveland	State/Province	OH	Country of Residence	US	
Mailing Address of Inventor:						
Address 1	One Procter & Gamble Plaza					
Address 2						
City	Cincinnati	State/Province	OH			
Postal Code	45202	Country	US			
Inventor	2				<input type="button" value="Remove"/>	
Legal Name						
Prefix	Given Name	Middle Name	Family Name	Suffix		
	Jeffrey	Glen	SHEEHAN			
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service						
City	Symmes Township	State/Province	OH	Country of Residence	US	
Mailing Address of Inventor:						
Address 1	One Procter & Gamble Plaza					
Address 2						
City	Cincinnati	State/Province	OH			
Postal Code	45202	Country	US			
Inventor	3				<input type="button" value="Remove"/>	
Legal Name						
Prefix	Given Name	Middle Name	Family Name	Suffix		
	Kathryn	Christian	KIEN			
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service						

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		

City	Cincinnati	State/Province	OH	Country of Residence	US
------	------------	----------------	----	----------------------	----

Mailing Address of Inventor:

Address 1	One Procter & Gamble Plaza				
Address 2					
City	Cincinnati	State/Province	OH		
Postal Code	45202	Country	US		
Inventor	4				<input type="button" value="Remove"/>
Legal Name					

Prefix	Given Name	Middle Name	Family Name	Suffix
	Ward	William	OSTENDORF	

Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service

City	West Chester	State/Province	OH	Country of Residence	US
------	--------------	----------------	----	----------------------	----

Mailing Address of Inventor:

Address 1	One Procter & Gamble Plaza				
Address 2					
City	Cincinnati	State/Province	OH		
Postal Code	45202	Country	US		

All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.

Correspondence Information:Enter either Customer Number or complete the Correspondence Information section below.
For further information see 37 CFR 1.33(a).☐ An Address is being provided for the correspondence information of this application.

Customer Number	27752		
Email Address	alexander.r@pg.com	<input type="button" value="Add Email"/>	<input type="button" value="Remove Email"/>

Application Information:

Title of the Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		
Attorney Docket Number	16255M3	Small Entity Status Claimed	☐
Application Type	Nonprovisional		
Subject Matter	Utility		
Total Number of Drawing Sheets (if any)		Suggested Figure for Publication (if any)	

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		

Filing By Reference:

Only complete this section when filing an application by reference under 35 U.S.C. 111(c) and 37 CFR 1.57(a). Do not complete this section if application papers including a specification and any drawings are being filed. Any domestic benefit or foreign priority information must be provided in the appropriate section(s) below (i.e., "Domestic Benefit/National Stage Information" and "Foreign Priority Information").

For the purposes of a filing date under 37 CFR 1.53(b), the description and any drawings of the present application are replaced by this reference to the previously filed application, subject to conditions and requirements of 37 CFR 1.57(a).

Application number of the previously filed application	Filing date (YYYY-MM-DD)	Intellectual Property Authority or Country

Publication Information:

☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)

☐ **Request Not to Publish.** I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application **has not and will not** be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.

Please Select One:	☒ Customer Number	☐ US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)
Customer Number	27752		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, 365(c), or 386(c) or indicate National Stage entry from a PCT application. Providing benefit claim information in the Application Data Sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78.

When referring to the current application, please leave the "Application Number" field blank.

Prior Application Status	Pending	Remove	
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
	Claims benefit of provisional	63329222	2022-04-08

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		

Prior Application Status	Pending	<input type="button" value="Remove"/>	
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
	Claims benefit of provisional	63329718	2022-04-11
Prior Application Status	Pending	<input type="button" value="Remove"/>	
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
	Claims benefit of provisional	63330077	2022-04-12
Prior Application Status	Pending	<input type="button" value="Remove"/>	
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
	Claims benefit of provisional	63353183	2022-06-17
Prior Application Status	Pending	<input type="button" value="Remove"/>	
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
	Claims benefit of provisional	63456020	2023-03-31
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.			<input type="button" value="Add"/>

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55. When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX)ⁱ the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(i)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

			<input type="button" value="Remove"/>
Application Number	Country ⁱ	Filing Date (YYYY-MM-DD)	Access Code ^j (if applicable)
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			<input type="button" value="Add"/>

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013.

NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	16255M3
	Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers	

Authorization or Opt-Out of Authorization to Permit Access:

When this Application Data Sheet is properly signed and filed with the application, applicant has provided written authority to permit a participating foreign intellectual property (IP) office access to the instant application-as-filed (see paragraph A in subsection 1 below) and the European Patent Office (EPO) access to any search results from the instant application (see paragraph B in subsection 1 below).

Should applicant choose not to provide an authorization identified in subsection 1 below, applicant **must opt-out** of the authorization by checking the corresponding box A or B or both in subsection 2 below.

NOTE: This section of the Application Data Sheet is **ONLY** reviewed and processed with the **INITIAL** filing of an application. After the initial filing of an application, an Application Data Sheet cannot be used to provide or rescind authorization for access by a foreign IP office(s). Instead, Form PTO/SB/39 or PTO/SB/69 must be used as appropriate.

1. Authorization to Permit Access by a Foreign Intellectual Property Office(s)

A. Priority Document Exchange (PDX) - Unless box A in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the State Intellectual Property Office of the People's Republic of China (SIPO), the World Intellectual Property Organization (WIPO), and any other foreign intellectual property office participating with the USPTO in a bilateral or multilateral priority document exchange agreement in which a foreign application claiming priority to the instant patent application is filed, access to: (1) the instant patent application-as-filed and its related bibliographic data, (2) any foreign or domestic application to which priority or benefit is claimed by the instant application and its related bibliographic data, and (3) the date of filing of this Authorization. See 37 CFR 1.14(h)(1).

B. Search Results from U.S. Application to EPO - Unless box B in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the EPO access to the bibliographic data and search results from the instant patent application when a European patent application claiming priority to the instant patent application is filed. See 37 CFR 1.14(h)(2).

The applicant is reminded that the EPO's Rule 141(1) EPC (European Patent Convention) requires applicants to submit a copy of search results from the instant application without delay in a European patent application that claims priority to the instant application.

2. Opt-Out of Authorizations to Permit Access by a Foreign Intellectual Property Office(s)

☐ A. Applicant **DOES NOT** authorize the USPTO to permit a participating foreign IP office access to the instant application-as-filed. If this box is checked, the USPTO will not be providing a participating foreign IP office with any documents and information identified in subsection 1A above.

☐ B. Applicant **DOES NOT** authorize the USPTO to transmit to the EPO any search results from the instant patent application. If this box is checked, the USPTO will not be providing the EPO with search results from the instant application.

NOTE: Once the application has published or is otherwise publicly available, the USPTO may provide access to the application in accordance with 37 CFR 1.14.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.			
Applicant	1		<input type="button" value="Remove"/>
<p>If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.</p>			
<input type="button" value="Clear"/>			
☒ Assignee	Legal Representative under 35 U.S.C. 117		Joint Inventor
Person to whom the inventor is obligated to assign.		Person who shows sufficient proprietary interest	
If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:			
<div style="border: 1px solid black; height: 20px; width: 100%;"></div>			
Name of the Deceased or Legally Incapacitated Inventor: <div style="border: 1px solid black; height: 20px; width: 100%;"></div>			
If the Applicant is an Organization check here. ☒			
Organization Name	The Procter & Gamble Company		
Mailing Address Information For Applicant:			
Address 1	Attention: Chief Patent Counsel		
Address 2	One Procter & Gamble Plaza		
City	Cincinnati	State/Province	OH
Country	US	Postal Code	45202
Phone Number	513-983-7631	Fax Number	513-945-6789
Email Address	alexander.r@pg.com		
Additional Applicant Data may be generated within this form by selecting the Add button. <input type="button" value="Add"/>			

Assignee Information including Non-Applicant Assignee Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		

Assignee	1			
Complete this section if assignee information, including non-applicant assignee information, is desired to be included on the patent application publication. An assignee-applicant identified in the "Applicant Information" section will appear on the patent application publication as an applicant. For an assignee-applicant, complete this section only if identification as an assignee is also desired on the patent application publication.				
<input type="button" value="Remove"/>				
If the Assignee or Non-Applicant Assignee is an Organization check here. ☐				
Prefix	Given Name	Middle Name	Family Name	Suffix
Mailing Address Information For Assignee including Non-Applicant Assignee:				
Address 1				
Address 2				
City		State/Province		
Country i		Postal Code		
Phone Number		Fax Number		
Email Address				
Additional Assignee or Non-Applicant Assignee Data may be generated within this form by selecting the Add button. <input type="button" value="Add"/>				

Signature:

NOTE: This Application Data Sheet must be signed in accordance with 37 CFR 1.33(b). However, if this Application Data Sheet is submitted with the **INITIAL** filing of the application and either box A or B is **not** checked in subsection 2 of the "Authorization or Opt-Out of Authorization to Permit Access" section, then this form must also be signed in accordance with 37 CFR 1.14(c).

This Application Data Sheet must be signed by a patent practitioner if one or more of the applicants is a **juristic entity** (e.g., corporation or association). If the applicant is two or more joint inventors, this form must be signed by a patent practitioner, all joint inventors who are the applicant, or one or more joint inventor-applicants who have been given power of attorney (e.g., see USPTO Form PTO/AIA/81) on behalf of all joint inventor-applicants.

See 37 CFR 1.4(d) for the manner of making signatures and certifications.

Signature	/RLA/		Date (YYYY-MM-DD)	2023-04-05
First Name	Richard L.	Last Name	Alexander	Registration Number 52463
Additional Signature may be generated within this form by selecting the Add button. <input type="button" value="Add"/>				

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	16255M3
		Application Number	
Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers		

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

- 1 The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
- 3 A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

TRANSMITTAL FOR POWER OF ATTORNEY TO ONE OR MORE REGISTERED PRACTITIONERS

NOTE: This form is to be submitted with the Power of Attorney by Applicant form (PTO/AIA/82B) to identify the application to which the Power of Attorney is directed, in accordance with 37 CFR 1.5, unless the application number and filing date are identified in the Power of Attorney by Applicant form. If neither form PTO/AIA/82A nor form PTO/AIA82B identifies the application to which the Power of Attorney is directed, the Power of Attorney will not be recognized in the application.

Application Number

Filing Date

First Named Inventor

Christopher Michael YOUNG

Title

Soft Sanitary Tissue Products Comprising Non-wood Fibers

Art Unit

Examiner Name

Attorney Docket Number

16255M3

SIGNATURE of Applicant or Patent Practitioner

Signature

/RLA/

Date (Optional)

April 5, 2023

Name

Richard L. Alexander

Registration
Number

52463

Title (if Applicant is a
juristic entity)

Attorney for Applicant

Applicant Name (if Applicant is a juristic entity)

The Procter & Gamble Company

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4(d) for signature requirements and certifications. If more than one applicant, use multiple forms.



*Total of 1 forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Kimberly Clark EX1002, p. 222
PGR2026-00078

POWER OF ATTORNEY BY APPLICANT

I hereby revoke all previous powers of attorney given in the application identified in either the attached transmittal letter or the boxes below.

Application Number	Filing Date

(Note: The boxes above may be left blank if information is provided on form PTO/AIA/82A.)



I hereby appoint the Patent Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above:

27752

OR



I hereby appoint Practitioner(s) named in the attached list (form PTO/AIA/82C) as my/our attorney(s) or agent(s), and to transact all business in the United States Patent and Trademark Office connected therewith for the patent application referenced in the attached transmittal letter (form PTO/AIA/82A) or identified above. (Note: Complete form PTO/AIA/82C.)

Please recognize or change the correspondence address for the application identified in the attached transmittal letter or the boxes above to:



The address associated with the above-mentioned Customer Number

OR



The address associated with Customer Number:

OR



Firm or
Individual Name

Address

City

State

Zip

Country

Telephone

Email

I am the Applicant (if the Applicant is a juristic entity, list the Applicant name in the box):

The Procter & Gamble Company



Inventor or Joint Inventor (title not required below)



Legal Representative of a Deceased or Legally Incapacitated Inventor (title not required below)



Assignee or Person to Whom the Inventor is Under an Obligation to Assign (provide signer's title if applicant is a juristic entity)



Person Who Otherwise Shows Sufficient Proprietary Interest (e.g., a petition under 37 CFR 1.46(b)(2) was granted in the application or is concurrently being filed with this document) (provide signer's title if applicant is a juristic entity)

SIGNATURE of Applicant for Patent

The undersigned (whose title is supplied below) is authorized to act on behalf of the applicant (e.g., where the applicant is a juristic entity).

Signature

/Jay A Krebs/

Date (Optional)

Name

Jay A. Krebs

Title

Director and Assistant Secretary - Global IP Services, The Procter & Gamble Company

NOTE: Signature - This form must be signed by the applicant in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. If more than one applicant, use multiple forms.



Total of

forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

POWER OF ATTORNEY BY APPLICANT

No more than ten (10) patent practitioners total may be appointed as set forth below by name and registration number. This page need not be submitted if appointing the Patent Practitioner(s) associated with a Customer Number (see form PTO/AIA/82B):

Name	Registration Number

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

Electronic Patent Application Fee Transmittal				
Application Number:				
Filing Date:				
Title of Invention:		Soft Sanitary Tissue Products Comprising Non-wood Fibers		
First Named Inventor/Applicant Name:		Christopher Michael YOUNG		
Filer:		Richard Lee Alexander/Bonnie Combs		
Attorney Docket Number:		16255M3		
Filed as Large Entity				
Filing Fees for Utility under 35 USC 111(a)				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
UTILITY APPLICATION FILING	1011	1	320	320
UTILITY SEARCH FEE	1111	1	700	700
UTILITY EXAMINATION FEE	1311	1	800	800
Pages:				
UTILITY APPL SIZE FEE PER 50 SHEETS >100	1081	2	420	840
Claims:				
CLAIMS IN EXCESS OF 20	1202	1	100	100
INDEPENDENT CLAIMS IN EXCESS OF 3	1201	2	480	960

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				3720

Electronic Acknowledgement Receipt	
EFS ID:	47800164
Application Number:	18131383
International Application Number:	
Confirmation Number:	7685
Title of Invention:	Soft Sanitary Tissue Products Comprising Non-wood Fibers
First Named Inventor/Applicant Name:	Christopher Michael YOUNG
Customer Number:	27752
Filer:	Richard Lee Alexander/Bonnie Combs
Filer Authorized By:	Richard Lee Alexander
Attorney Docket Number:	16255M3
Receipt Date:	06-APR-2023
Filing Date:	
Time Stamp:	07:28:37
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	DA
Payment was successfully received in RAM	\$3720
RAM confirmation Number	E202346829316500
Deposit Account	162480
Authorized User	Bonnie Combs
<p>The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:</p> <p>37 CFR 1.16 (National application filing, search, and examination fees)</p> <p>37 CFR 1.17 (Patent application and reexamination processing fees)</p>	

37 CFR 1.19 (Document supply fees)					
37 CFR 1.20 (Post Issuance fees)					
37 CFR 1.21 (Miscellaneous fees and charges)					
File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Transmittal of New Application	16255M3-Utility_Transmittal_Nonprovisional.pdf	279564	no	2
			e97c38ed0f3086e9a152dbd103acb683b6a4fcc0		
Warnings:					
Information:					
2		16255M3-PATENT-APP-US-.pdf	2830113	yes	165
			af8021f643fd220395cf0f4d60bd55368bdb98778		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	162	
	Claims		163	164	
	Abstract		165	165	
Warnings:					
Information:					
3	Drawings-only black and white line drawings	16255M3-FIGS.pdf	5663310	no	43
			c48e0be72d5d72f702f9121ce022cfb340ee106d		
Warnings:					
Information:					
4	Application Data Sheet	16255M3-ADS.pdf	1256515	no	10
			8c9ae74fe8b60abc6dfdc03c1ccae4385156dd19		
Warnings:					
Information:					
5	Power of Attorney	16255M3-Power_of_Attorney_and_Transmittal.pdf	196520	no	4
			c7a090ba3f6daf7470d90f5fdfe9631111643e8		

Warnings:					
Information:					
6	Fee Worksheet (SB06)	fee-info.pdf	51122	no	2
			c754a9287e5eda18114785ed02a51d6307c69214		
Warnings:					
Information:					
Total Files Size (in bytes):				10277144	
<p>This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.</p> <p><u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.</p> <p><u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.</p> <p><u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.</p>					



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
18/131,383	04/06/2023		3720	16255M3	21	5

CONFIRMATION NO. 7685

27752

THE PROCTER & GAMBLE COMPANY
GLOBAL IP SERVICES
CENTRAL BUILDING, C9
ONE PROCTER AND GAMBLE PLAZA
CINCINNATI, OH 45202

FILING RECEIPT



0000000056275696

Date Mailed: 04/26/2023

Receipt is acknowledged of this non-provisional utility patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF FIRST INVENTOR, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection.

Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please submit a written request for a corrected Filing Receipt, including a properly marked-up ADS showing the changes with strike-through for deletions and underlining for additions. If you received a "Notice to File Missing Parts" or other Notice requiring a response for this application, please submit any request for correction to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections provided that the request is grantable.

Inventor(s)

Christopher Michael YOUNG, Loveland, OH;
Jeffrey Glen SHEEHAN, Symmes Township, OH;
Kathryn Christian KIEN, Cincinnati, OH;
Ward William OSTENDORF, West Chester, OH;

Applicant(s)

The Procter & Gamble Company, Cincinnati, OH;

Power of Attorney: The patent practitioners associated with Customer Number 27752

Domestic Priority data as claimed by applicant

This appln claims benefit of 63/329,222 04/08/2022
and claims benefit of 63/329,718 04/11/2022
and claims benefit of 63/330,077 04/12/2022
and claims benefit of 63/353,183 06/17/2022
and claims benefit of 63/456,020 03/31/2023

Foreign Applications for which priority is claimed (You may be eligible to benefit from the **Patent Prosecution Highway** program at the USPTO. Please see <http://www.uspto.gov> for more information.) - None.

Foreign application information must be provided in an Application Data Sheet in order to constitute a claim to foreign priority. See 37 CFR 1.55 and 1.76.

Permission to Access Application via Priority Document Exchange: Yes

Permission to Access Search Results: Yes

Applicant may provide or rescind an authorization for access using Form PTO/SB/39 or Form PTO/SB/69 as appropriate.

If Required, Foreign Filing License Granted: 04/21/2023

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 18/131,383**

Projected Publication Date: PPUB

Non-Publication Request: No

Early Publication Request: No

Title

Soft Sanitary Tissue Products Comprising Non-wood Fibers

Preliminary Class

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications: No

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific

countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4258).

LICENSE FOR FOREIGN FILING UNDER
Title 35, United States Code, Section 184
Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The U.S. offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to promote and facilitate business investment. SelectUSA provides information assistance to the international investor community; serves as an ombudsman for existing and potential investors; advocates on behalf of U.S. cities, states, and regions competing for global investment; and counsels U.S. economic development organizations on investment attraction best practices. To learn more about why the United States is the best country in the world to develop

technology, manufacture products, deliver services, and grow your business, visit <http://www.SelectUSA.gov> or call +1-202-482-6800.

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875						Application or Docket Number 18/131,383				
APPLICATION AS FILED - PART I										
(Column 1)		(Column 2)		SMALL ENTITY		OTHER THAN SMALL ENTITY				
FOR	NUMBER FILED	NUMBER EXTRA	RATE(\$)	FEE(\$)		RATE(\$)	FEE(\$)			
BASIC FEE <small>(37 CFR 1.16(a), (b), or (c))</small>	N/A	N/A	N/A			N/A	320			
SEARCH FEE <small>(37 CFR 1.16(k), (l), or (m))</small>	N/A	N/A	N/A			N/A	700			
EXAMINATION FEE <small>(37 CFR 1.16(o), (p), or (q))</small>	N/A	N/A	N/A			N/A	800			
TOTAL CLAIMS <small>(37 CFR 1.16(i))</small>	21	minus 20 = 1				x 100 =	100			
INDEPENDENT CLAIMS <small>(37 CFR 1.16(h))</small>	5	minus 3 = 2				x 480 =	960			
APPLICATION SIZE FEE <small>(37 CFR 1.16(s))</small>	If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$310 (\$155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).						840			
MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))							0			
			TOTAL			TOTAL	3620			
* If the difference in column 1 is less than zero, enter "0" in column 2.										
APPLICATION AS AMENDED - PART II										
(Column 1)		(Column 2)		(Column 3)		SMALL ENTITY		OTHER THAN SMALL ENTITY		
AMENDMENT A		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA	RATE(\$)	ADDITIONAL FEE(\$)		RATE(\$)	ADDITIONAL FEE(\$)
	Total <small>(37 CFR 1.16(i))</small>	*	Minus	**	=	x	=		x	=
	Independent <small>(37 CFR 1.16(h))</small>	*	Minus	***	=	x	=		x	=
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))									
						TOTAL ADD'L FEE			TOTAL ADD'L FEE	
(Column 1)		(Column 2)		(Column 3)		SMALL ENTITY		OTHER THAN SMALL ENTITY		
AMENDMENT B		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA	RATE(\$)	ADDITIONAL FEE(\$)		RATE(\$)	ADDITIONAL FEE(\$)
	Total <small>(37 CFR 1.16(i))</small>	*	Minus	**	=	x	=		x	=
	Independent <small>(37 CFR 1.16(h))</small>	*	Minus	***	=	x	=		x	=
	Application Size Fee (37 CFR 1.16(s))									
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))									
						TOTAL ADD'L FEE			TOTAL ADD'L FEE	
* If the entry in column 1 is less than the entry in column 2, write "0" in column 3. ** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20". *** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3". The "Highest Number Previously Paid For" (Total or Independent) is the highest found in the appropriate box in column 1.										





UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
18/131,383	04/06/2023	Christopher Michael YOUNG	16255M3

CONFIRMATION NO. 7685

27752
THE PROCTER & GAMBLE COMPANY
GLOBAL IP SERVICES
CENTRAL BUILDING, C9
ONE PROCTER AND GAMBLE PLAZA
CINCINNATI, OH 45202

FORMALITIES LETTER



OC000000056275699

Date Mailed: 04/26/2023

NOTICE TO FILE CORRECTED APPLICATION PAPERS

Filing Date Granted

An application number and filing date have been accorded to the above-identified nonprovisional application. The application is informal since it does not comply with the regulations for the reason(s) indicated below. Applicant is given **TWO MONTHS** from the date of this Notice within which to file all required items below to avoid abandonment. Extensions of time may be obtained by filing a petition accompanied by the extension fee under the provisions of 37 CFR 1.136(a).

• Specification Items

The specification, claims, and/or abstract page(s) submitted is not acceptable because:

- The application papers (including any electronically submitted papers) are not in compliance with 37 CFR 1.52 because pages 87-93 contain text that is unreadable or of insufficient clarity.

Application papers (including any electronically submitted papers) must be presented in a form having sufficient clarity and contrast between the background of the paper and the writing thereon to permit the Office to electronically reproduce the papers by use of digital imaging and optical character recognition. See 37 CFR 1.52(a)(1)(v). A proper substitute specification in compliance with 37 CFR 1.52, 1.121(b)(3), and 1.125 (without adding subject matter that would constitute new matter) is required to satisfy this requirement. A statement that the substitute specification contains no new matter is required. However, a marked up version of the specification is not required for this correction.

- Surcharge as set forth in 37 CFR 1.16(f) has not been received.

The surcharge is due for any one of:

- late submission of the basic filing fee, search fee, or examination fee,
- late submission of inventor's oath or declaration,
- filing an application that does not contain at least one claim on filing, or
- submission of an application filed by reference to a previously filed application.

SUMMARY OF FEES DUE:

The fee(s) required (including the fees noted above) are as follows. No entity status discount is in effect. If applicant is qualified for small entity status, a written assertion of small entity status must be submitted to establish small entity status. (See 37 CFR 1.27). If applicant is qualified for micro entity status, an acceptable

Certification of Micro Entity Status must be submitted to establish micro entity status. (See 37 CFR 1.29 and forms PTO/SB/15A and 15B.)

- **\$160** surcharge.
- **\$(0) previous unapplied payment amount.**
- **\$160** TOTAL FEE BALANCE DUE.

Applicant is notified that the above-identified application contains the deficiencies noted below. No period for reply is set forth in this Notice for correction of these deficiencies. However, if a deficiency relates to the inventor's oath or declaration, the applicant must file an oath or declaration in compliance with 37 CFR 1.63, or a substitute statement in compliance with 37 CFR 1.64, executed by or with respect to each actual inventor no later than the expiration of the time period set in the "Notice of Allowability" to avoid abandonment. See 37 CFR 1.53(f).

Items Required To Avoid Processing Delays:

The deficiencies indicated below should be addressed promptly to avoid further processing delays.

- A properly executed inventor's oath or declaration has not been received for the following inventor(s):
Christopher Michael YOUNG
Jeffrey Glen SHEEHAN
Kathryn Christian KIEN
Ward William OSTENDORF

An inventor's oath or declaration in compliance with 37 CFR 1.63 or 1.64 executed by or with respect to each inventor must be submitted no later than the date on which the issue fee is paid in response to a notice requiring such fee. See 37 CFR 1.53(f).

Replies must be received in the USPTO within the set time period or must include a proper Certificate of Mailing or Transmission under 37 CFR 1.8 with a mailing or transmission date within the set time period. For more information and a suggested format, see Form PTO/SB/92 and MPEP 512.

Replies should be addressed to:

Mail Stop Missing Parts
Commissioner for Patents
P.O. Box 1450
Alexandria VA 22313-1450

REPLY VIA ELECTRONIC FILING

A reply may be submitted via electronic filing only by registered users of the appropriate USPTO patent electronic filing system and must include:

- A separate document having the document description, "**Applicant response to Pre-Exam Formalities Notice**"; and
- the item(s) for which a reply period is set forth above.

For more information about electronic filing, contact the Patent Electronic Business Center (EBC) 1-866-217-9197 or visit <https://www.uspto.gov/ebc>

NOTE: If the reply is not being submitted electronically, a copy of this notice must be included.

Questions about the contents of this notice and the requirements it sets forth should be directed to the Office of Data Management, Application Assistance Unit, at (571) 272-4000 or (571) 272-4200 or 1-888-786-0101.

/ptnguyen/

SOFT SANITARY TISSUE PRODUCTS COMPRISING NON-WOOD FIBERS

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 63/329,222, filed April 8, 2022, U.S. Provisional Application No. 63/329,718, filed April 11, 2022, U.S. Provisional Application No. 63/330,077, filed April 12, 2022, U.S. Provisional Application No. 63/353,183, filed June 17, 2022, and U.S. Provisional Application No. 63/456,020, filed March 31, 2023, the entire disclosures of which are fully incorporated by reference herein.

FIELD

The present disclosure generally relates to fibrous structures and, more particularly, to fibrous structures comprising non-wood fibers, including sanitary tissue products comprising non-wood fibers.

BACKGROUND

Of particular interest is the softness of sanitary tissue products. But, this is where so many sustainable sanitary tissue products comprising non-woods fail. The art does not disclose how to achieve soft fibrous structures comprising bamboo, abaca, or other sustainable non-wood fibers; incorporation of non-woods into sanitary tissue products is a real challenge, even for experienced papermakers. This becomes truer as non-wood fiber inclusion increases. The inventors of the present disclosure have, however, found that adding coarse bamboo fibers (bamboo is especially coarse versus eucalyptus) into the fibrous structure, even at high inclusion levels, and/or even disposed at a consumer-facing side of a sheet, can result in sanitary tissue products with good softness, even with premium softness. There are a number of ways the inventors have accomplished this, including creation of differential densities, utilizing unique layering, and/or fiber mixes, as well as other ways disclosed herein.

The inventors of the present disclosure have found that they are able to deliver soft sustainable fibrous structures that also have low lint values. Typically, higher lint values accompany greater softness values (e.g., TS7, TS750). Beyond the difficulties of processing fibrous structures that are linty, lint can cause unwanted debris at the point of use, which can be messy and can be aesthetically undesirable. Thus, it is a real benefit to achieve greater softness while maintaining lower lint values. The inventors of the present disclosure have not only improved sustainable fibrous structures, but have improved the general offering of fibrous

structures beyond what is otherwise available today, even versus what is available on the shelf today as high-tier offerings consisting only of wood fibers.

Related to softness, another consumer-desired characteristic is surface smoothness/glide. Slip-stick is a good metric for quantifying how much “glide” a substrate has. Low slip-stick values in a fibrous structure are consumer preferred. Typical design levers for improving the slip stick of a substrate include calendaring and/or to replace coarser softwood fibers with shorter, thinner, and lower coarseness hardwood fibers, such as eucalyptus. Conventionally, eucalyptus is used to balance softwood incorporation, such as NSK, which provides strength characteristics. However, upon experimentation, the inventors of the present disclosure have shown that the introduction of coarse, non-wood fibers such as bamboo (even at high inclusion amounts) can still create low slip stick substrates while still maintaining acceptable strength characteristics.

So, despite the shortcomings of so many manufacturers and the poorly performing non-wood products that they market, which are not soft and/or have higher lint values, the inventive sustainable offerings as disclosed herein may be used to offer the public the soft and/or low lint sanitary tissue products they desire. And, the inventive sanitary tissue products disclosed herein may, in many instances, be considered high-tier due to the properties (including improved TS7, TS750, slip stick, etc.) the inventors of the present disclosure have achieved.

SUMMARY

In a first aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS7 of less than about 14 dB V^2 rms.

In a second aspect of the present disclosure, a sanitary tissue product may comprise bamboo fibers and may have a TS750 less than about 20 dB V^2 rms.

In a third aspect of the present disclosure, a sanitary tissue product may be structured and may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS750 less than about 45 dB V^2 rms.

In a fourth aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 435.

In a fifth aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 605.

BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other features and advantages of this disclosure, and the manner of attaining them, will become more apparent and the disclosure itself will be better understood by reference to the following description of non-limiting examples of the disclosure taken in conjunction with the accompanying drawings, wherein:

FIG. 1A is a TS7 (y-axis) graph illustrating inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.~~Table 3.~~

FIG. 1B is a graph illustrating slip stick (y-axis) and dry caliper (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.~~Table 3.~~

FIG. 1C is a graph illustrating TS7 (y-axis) and lint (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.~~Table 3.~~

FIG. 1D is a graph illustrating TS7 (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.~~Table 3.~~

FIG. 1E is a graph illustrating TS7 (y-axis) and TS750 (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.~~Table 3.~~

FIG. 2A is a TS7 (y-axis) graph illustrating inventive and comparative non-wood (paper) towel samples of FIGS. 22A, 22B, 22C, 22D, 22E, 22F.~~Table 3a.~~

FIG. 2B is a graph illustrating TS7 (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel samples of FIGS. 22A, 22B, 22C, 22D, 22E, 22F.~~Table 3a.~~

FIG. 2C is a graph illustrating CD modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-

1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F. Tables 3 and 3a.

FIG. 2D is a graph illustrating MD modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F. Tables 3 and 3a.

FIG. 2E is a graph illustrating geometric mean (GM) dry modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F. Tables 3 and 3a.

FIG. 2F is a graph illustrating TS7 (y-axis) and wet burst strength (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F. Tables 3 and 3a.

FIG. 2G is a graph illustrating TS7 (y-axis) and total wet tensile (x-axis) values of inventive and comparative non-wood (paper) towel samples of FIGS. 22A, 22B, 22C, 22D, 22E, 22F. Table 3a.

FIG. 2H is a graph illustrating TS7 (y-axis) and Wet Bust Strength/Total Dry Tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F. Tables 3 and 3a.

FIG. 3A is a photograph of a portion of a fibrous structure, particularly a paper towel, comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 3B is a photograph of a portion of a fibrous structure, particularly a WSO bath tissue, comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 3C is a photograph of a portion of a fibrous structure, particularly a FSO bath tissue, comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 4A is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A. In FIG. 4A, each ply 53 is fabric side out (FSO).

FIG. 4B is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

5 FIG. 4C is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A. In FIG. 4C, ply 53 is wire side out (WSO) and ply 53' is FSO.

FIG. 4D is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C– this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

10 FIG. 4E is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C– this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

FIG. 4F is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in
15 FIG. 6A.

FIG. 4G is a cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

20 FIG. 4H is a representative cross-section view of a sanitary tissue product made according to a conventional wet press process – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

FIG. 4I is a representative cross-section view of a sanitary tissue product made according to a conventional wet press process – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

25 FIG. 5 is a plan view of a portion of a mask pattern used to make the papermaking belt that produced the fibrous structure of FIG. 3A.

FIG. 6A is a schematic representation of one method for making the new fibrous structures detailed herein. Specific details of the process and equipment represented by FIG. 6A can be found in U.S. Patent Nos. 5,714,041; 9,217,226; 9,435,081; 9,631,323; 9,752,281; 10,240,296; and U.S.
30 Publication Nos. 2013-0048239; 2022-0010497.

FIG. 6B is a schematic representation of one method for making the new fibrous structures detailed herein. Specific details of the process and equipment represented by FIG. 6B can be found in U.S. Patent No. 7,972,474.

FIG. 6C is a schematic representation of one method for making the new fibrous structures detailed herein.

FIG. 7 is a perspective view of a test stand for measuring roll compressibility properties as detailed herein.

5 FIG. 8 is perspective view of the testing device used in the roll firmness measurement detailed herein.

FIG. 9 is a diagram of an SST Test Method set up as detailed herein.

FIG. 10 is a schematic illustrating the Position of Gocator camera to a testing surface relating to the Moist Towel Surface Structure Method.

10 FIG. 11 is an enlarged view of a cell group overlapped by a quadrilateral related to the Continuous Region Density Difference Measurement.

FIG. 12 is a density image for use in the Micro-CT Intensive Property Measurement Method.

FIG. 13 is a binary image for use in the Micro-CT Intensive Property Measurement Method.

15 FIG. 14 is an example of a sample support rack used in the HFS and VFS Test Methods.

FIG. 14A is a cross-sectional view of the sample support rack of FIG. 14.

FIG. 15 is an example of a sample support rack cover used in the HFS and VFS Test Methods.

FIG. 15A is a cross-sectional view of the sample support rack cover of Fig. 15.

20 FIG. 16A is a portion of a fibrous structure of the present disclosure comprising an emboss pattern.

FIG. 16B is a portion of a fibrous structure of the present disclosure comprising an emboss pattern.

FIG. 17 is a representative papermaking belt of the kind useful to make fibrous structures comprising non-wood fibers of the present disclosure.

25 FIGS. 18A-1 and 18A-2 are two segments of a table that details multiple inventive sanitary tissue product embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies of the sanitary tissue product.

30 FIGS. 18B-1 and 18B-2 are two segments of a table that details multiple inventive sanitary tissue product embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies of the sanitary tissue product.

FIG. 19 is a table that details multiple inventive sanitary tissue product embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies of the sanitary tissue product.

FIG. 20A is a table that details multiple inventive and comparative sanitary tissue product
5 embodiments comprising non-wood fibers, specifically detailing multiple properties (note:
common numbers between the tables indicate the same sample).

FIG. 20B is a table that details multiple inventive and comparative sanitary tissue product
embodiments comprising non-wood fibers, specifically detailing multiple properties (note:
common numbers between the tables indicate the same sample).

10 FIG. 21A is a table that details multiple inventive and comparative sanitary tissue product
embodiments comprising non-wood fibers, specifically detailing multiple properties (note:
common numbers between the tables indicate the same sample).

FIGS. 21B-1, 21B-2, and 21B-3 are three segments of a table that details multiple inventive
and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically
15 detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIGS. 21C-1, 21C-2, and 21C-3 are three segments of a table that details multiple inventive
and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically
detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIGS. 21D-1, 21D-2, and 21D-3 are three segments of a table that details multiple inventive
and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically
20 detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIGS. 21E-1, 21E-2, and 21E-3 are three segments of a table that details multiple inventive
and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically
detailing multiple properties (note: common numbers between the tables indicate the same sample).

25 FIGS. 21F-1 and 21F-2 are two segments of a table that details multiple inventive and
comparative sanitary tissue product embodiments comprising non-wood fibers, specifically
detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIGS. 21G-1 and 21G-2 are two segments of a table that details multiple inventive and
comparative sanitary tissue product embodiments comprising non-wood fibers, specifically
30 detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIGS. 21H-1 and 21H-2 are two segments of a table that details multiple inventive and
comparative sanitary tissue product embodiments comprising non-wood fibers, specifically
detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 21I is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 21J is a table that details multiple inventive and comparative sanitary tissue product
5 embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22A is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22B is a table that details multiple inventive and comparative sanitary tissue product
10 embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22C is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note:
15 common numbers between the tables indicate the same sample).

FIG. 22D is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22E is a table that details multiple inventive and comparative sanitary tissue product
20 embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22F is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 23 is a table that details fiber morphology of the fibers used in sanitary tissue
25 products comprising non-wood fibers (note: common numbers between the tables indicate the same sample). In FIG. 23, fiber count (length average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(l)$ has the units of mm/fiber and coarseness has the units of mg/m): $\text{Fiber count} = 1/(L(l) \times \text{coarseness})$. And, fiber
30 count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(n)$ has the units of mm/fiber and coarseness has the units of mg/m): $\text{Fiber count} = 1/(L(n) \times \text{coarseness})$.

FIGS. 24A-1 and 24A-2 are two segments of a table that details PVD data of sanitary tissue products comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24B-1 and 24B-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24C-1 and 24C-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24D-1 and 24D-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24E-1 and 24E-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24F-1 and 24F-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24G-1 and 24G-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIG. 25 is a table that details the fiber characteristic differences between non-wood fibers that are never-dried and that have been once-dried.

Beyond the figures of the present application and their descriptions disclosed above, the figures and their descriptions, including FIGS. 1A – 2JJ, disclosed in U.S. Provisional Patent Application Serial No. 63/456,020, titled “Fibrous Structures Comprising Non-wood Fibers,” filed on March 31, 2023, Young as the first-named inventor, are herein incorporated by reference.

DETAILED DESCRIPTION

Various non-limiting examples of the present disclosure will now be described to provide an overall understanding of the principles of the structure, function, manufacture, and use of the fibrous structures comprising non-woods disclosed herein. One or more non-limiting examples

are illustrated in the accompanying drawings. Those of ordinary skill in the art will understand that the fibrous structures described herein and illustrated in the accompanying drawings are non-limiting examples. The features illustrated and/or described in connection with one non-limiting example can be combined with the features of other non-limiting examples. Such modifications and variations are intended to be included within the scope of the present disclosure.

MAKING FIBROUS STRUCTURES OF THE PRESENT DISCLOSURE

“Machine Direction” or “MD” as used herein means the direction parallel to the flow of the fibrous structure through the papermaking machine and/or product manufacturing equipment.

“Cross Machine Direction” or “CD” as used herein means the direction perpendicular to the machine direction in the same plane of the fibrous structure.

Generally, fibrous structures of the present disclosure are typically made in “wet-laid” papermaking processes. In such papermaking processes, a fiber slurry, usually wood pulp fibers, is deposited onto a forming wire and/or one or more papermaking belts such that an embryonic fibrous structure is formed. After drying and/or bonding the fibers of the embryonic fibrous structure together, a fibrous structure is formed. Further processing of the fibrous structure can then be carried out after the papermaking process. For example, the fibrous structure can be wound on the reel and/or ply-bonded and/or embossed. As further discussed herein, visually distinct features may be imparted to the fibrous structures in different ways. In a first method, the fibrous structures can have visually distinct features added during the papermaking process. In a second method, the fibrous structures can have visually distinct features added during the converting process (*i.e.*, after the papermaking process). Some fibrous structure examples disclosed herein may have visually distinct features added only during the papermaking process, and some fibrous structure examples may have visually distinct features added both during the papermaking process and the converting process.

Regarding the first method, a wet-laid papermaking process can be designed such that the fibrous structure has visually distinct features “wet-formed” during the papermaking process. Any of the various forming wires and papermaking belts utilized can be designed to leave physical, three-dimensional features within the fibrous structure. Such three-dimensional features are well known in the art, particularly in the art of “through air drying” (TAD) papermaking processes, with such features often being referred to in terms of “knuckles” and “pillows.” “Knuckles” or “knuckle regions” or “knuckle zones” are typically relatively high-density regions that are wet-formed within the fibrous structure (extending from a pillow surface of the fibrous structure) and

correspond to the knuckles of a papermaking belt, *i.e.*, the filaments or resinous structures that are raised at a higher elevation than other portions of the belt. “Relatively high density” as used herein means a portion of a fibrous structure having a density that is higher than a relatively low-density portion of the fibrous structure. Relatively high density zones or regions can be about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60, or about 65% higher than relatively low density regions or zones. For instance, discrete knuckles, measured according to Micro-CT Intensive Property Measurement Method, may have a density greater than about (“greater than about” used interchangeably with “at least about” herein) 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60, or about 65% higher than pillows. Whether one is substituting short or long wood fibers with non-wood fibers, there are not direct non-wood substitutions available for several reasons, such as morphology differences between wood and non-wood fibers. For instance, even when fiber length is matched by the non-wood replacing the wood fiber, said non-wood fiber likely has important differences such as fiber width, stiffness, etc. For some of these reasons, generally speaking, knuckles and pillows comprising non-wood fibers will be different (e.g., less dense) than knuckles and pillows consisting of non-wood fibers. These are some of the reasons that incorporation of non-wood fibers into established sanitary tissue products is not straightforward and creates unexpected outcomes. This is especially true as one tries to achieve parity (when using non-wood fibers) for multiple key parameters of sanitary tissue products.

Likewise, “pillows” or “pillow regions” or “pillow zones” are typically relatively low-density regions that are wet-formed within the fibrous structure and correspond to the relatively open regions between or around the knuckles of the papermaking belt. The pillow regions form a pillow surface of the fibrous structure from which the knuckle regions extend. “Relatively low density” as used herein means a portion of a fibrous structure having a density that is lower than a relatively high-density portion of the fibrous structure. Further, the knuckles and pillows wet-formed within a fibrous structure can exhibit a range of basis weights and/or densities relative to one another, as varying the size of the knuckles or pillows on a papermaking belt can alter such basis weights and/or densities. A fibrous structure (*e.g.*, sanitary tissue products) made through a TAD papermaking process as detailed herein is known in the art as “TAD paper.”

Thus, in the description herein, the terms “knuckles” or “knuckle regions” or “knuckle zones” or the like can be used to reference either the raised portions of a papermaking belt or the densified, raised portions wet-formed within the fibrous structure made on the papermaking belt (*i.e.*, the raised portions that extend from a surface of the fibrous structure), and the meaning should be clear from the context of the description herein. Likewise “pillows” or “pillow regions” or

“pillow zones” or the like can be used to reference either the portion of the papermaking belt between or around knuckles (also referred to in the art as “deflection conduits” or “pockets”), or the relatively uncompressed regions wet-formed between or around the knuckles within the fibrous structure made on the papermaking belt, and the meaning should be clear from the context of the description herein. Knuckles or pillows can each be either continuous or discrete, as described herein. As shown in FIGS. 5, such illustrated masks may be used in producing papermaking belts that would create fibrous structures that have discrete knuckles and continuous/substantially continuous pillows. Like masks may be used in producing papermaking belts that would create fibrous structures that have discrete pillows and continuous/substantially continuous knuckles. The term “discrete” as used herein with respect to knuckles and/or pillows means a portion of a papermaking belt or fibrous structure that is defined or surrounded by, or at least mostly defined or surrounded by, a continuous/substantially continuous knuckle or pillow. The term “continuous/substantially continuous” as used herein with respect to knuckles and/or pillows means a portion of a papermaking belt or fibrous structure network that fully, or at least mostly, defines or surrounds a discrete knuckle or pillow. Further, the substantially continuous member can be interrupted by macro patterns formed in the papermaking belt, as disclosed in US Pat. No. 5,820,730 issued to Phan et al. on October 13, 1998.

Knuckles and pillows in paper towels (also referred to as “towel”) and bath tissue (also referred to as “toilet tissue,” “bath,” or “toilet paper”) can be visible to the retail consumer of such products. The knuckles and pillows can be imparted to a fibrous structure from a papermaking belt at various stages of the papermaking process (*i.e.*, at various consistencies and at various unit operations during the drying process) and the visual pattern generated by the pattern of knuckles and pillows can be designed for functional performance enhancement as well as to be visually appealing. Such patterns of knuckles and pillows can be made according to the methods and processes described in US. Pat. No. 6,610,173, issued to Lindsay et al. on August 26, 2003, or US Pat. No. 4,514,345 issued to Trokhan on April 30, 1985, or US Pat. No. 6,398,910 issued to Burazin et al. on June 4, 2002, or US Pub. No. 2013/0199741; published in the name of Stage et al. on August 8, 2013. The Lindsay, Trokhan, Burazin and Stage disclosures describe belts that are representative of papermaking belts made with cured resin on a woven reinforcing member, of which aspects of the present disclosure are an improvement. But in addition, the improvements detailed herein can be utilized as a fabric crepe belt as disclosed in US Pat. No. 7,494,563, issued to Edwards et al. on Feb. 24, 2009 or US 8,152,958, issued to Super et al. on April 10, 2012, as well as belt crepe belts, as described in US Pat. No. 8,293,072, issued to Super et al on October 23,

2012. When utilized as a fabric crepe belt, a papermaking belt of the present disclosure can provide the relatively large, recessed pockets and sufficient knuckle dimensions to redistribute the fiber upon high impact creping in a creping nip between a backing roll and the fabric to form additional bulk in conventional wet-laid press processes. Likewise, when utilized as a belt in a belt crepe method, a papermaking belt of the present disclosure can provide the fiber enriched dome regions arranged in a repeating pattern corresponding to the pattern of the papermaking belt, as well as the interconnected plurality of surrounding areas to form additional bulk and local basis weight distribution in a conventional wet-laid process. In addition, the improvements detailed herein, can be utilized as an uncreped through air dried (UCTAD) belt. UCTAD (un-creped through air drying) is a variation of the TAD process in which the sheet is not creped, but rather dried up to 99% solids using thermal drying, removed from the structured fabric, and then optionally calendered and reeled. U.S. Pat. No. 6,808,599 describes an uncreped through air dried process. U.S. Pat. No. 10,610,063 describes an uncreped through air dried product made using a belt. In addition, the improvements herein can be utilized as an ATMOS belt. The ATMOS process has been developed by the Voith company and marketed under the name ATMOS. The process/method and paper machine system has several variations, but all involve the use of a structured fabric in conjunction with a belt press. This process is described in numerous patent publications including U.S. Pat. Nos. 7,510,631, 7,686,923, 7,931,781, 8,075,739, and 8,092,652. In addition, the improvements herein can be utilized as an NTT belt. The NTT process has been developed by the Metso company and marketed under the name NTT. The NTT process includes an extended press nip where the sheet is transferred from a press felt onto a texturing belt. Examples of texturing belts used in the NTT process can be viewed in International Publication Number WO 2009/067079 A1 and US Patent Application Publication No. 2010/0065234 A1. An example of a papermaking belt structure of the general type useful in the present disclosure and made according to the disclosure of US Pat. No. 4,514,345 is shown in FIG. 17. As shown, the papermaking belt 17 can include cured resin elements 4 forming knuckles 20 on a woven reinforcing member 6. The reinforcing member 6 can be made of woven filaments 8 as is known in the art of papermaking belts, for example resin coated papermaking belts. The papermaking belt structure shown in FIG. 17 includes discrete knuckles 20 and a continuous deflection conduit, or pillow region (pillow zone). The discrete knuckles 20 can wet-form densified knuckles within the fibrous structure made thereon; and, likewise, the continuous deflection conduit, *i.e.*, pillow region, can wet-form a continuous pillow region within the fibrous structure made thereon. The knuckles can be arranged in a pattern described with reference to an X-Y coordinate plane, and the

distance between knuckles 20 in at least one of the X or Y directions can vary according to the examples disclosed herein. For clarity, a fibrous structure's visually distinct knuckle(s) and pillow(s) that are wet-formed in a wet-laid papermaking process are different from, and independent of, any further structure added to the fibrous structure during later, optional, converting processes (e.g., one or more embossing process). For certain embodiments of the present disclosure, it may be desirable to use the belts disclosed in U.S. Patent Nos. 9,435,081; 9,631,323; 9,752,281; 10,240,296; and U.S. Publication Nos. 2022-0010497; and 2021-0140114 as some of these belts create sinusoidal and/or serpentine pillow and/or knuckle regions or zones; in some embodiments, these pillow and/or knuckle zones or regions may be continuous and/or semi-continuous. These patterns referenced in the patents and publication of the previous sentence can be particularly useful for achieving the most desirable properties from webs comprising non-woods, even including high non-wood (e.g., bamboo) inclusion.

After completion of the papermaking process, a second way to provide visually distinct features to a fibrous structure is through embossing. Embossing is a well-known converting process in which at least one embossing roll having a plurality of discrete embossing elements extending radially outwardly from a surface thereof can be mated with a backing, or anvil, roll to form a nip in which the fibrous structure can pass such that the discrete embossing elements compress the fibrous structure to form relatively high density discrete elements ("embossed regions") in the fibrous structure while leaving an uncompressed, or substantially uncompressed, relatively low density continuous, or substantially continuous, network ("non-embossed regions") at least partially defining or surrounding the relatively high density discrete elements.

As illustrated in FIGS. 6B and 6C, beyond creating knuckles and pillows with resinous belts described above, and beyond the various types of creping, paper may be transformed in other ways, such that beneficial properties are created, especially as the speed of a belt or a wire transfers the web to a belt or a wire of a different speed, such as, for example, the upstream belt or wire moving faster than the downstream belt or wire. It may be desirable to have multiple such transfers in the same papermaking process. Further, it may be desirable to have different speed differentials at different transfers in such a process. As a more specific example, referring to FIG. 6B, in a first rush transfer 175, the speed of the forming fabric 154 can be travelling at a first rate, while the transfer fabric 174 travels at a second rate (slower than the first rate, but faster than 2,000 feet per minute (fpm), 2,050 fpm, 2,100 fpm, 2,150 fpm, 2,200 fpm, 2,250 fpm, 2,300 fpm, 2,350 fpm, 2,400 fpm, 2,450 fpm, 2,500 fpm, 2,600 fpm, 2,700 fpm, 2,800 fpm, 2,900 fpm, or greater than 3,000 fpm); further, a second rush transfer 175' may occur where the transfer fabric is travelling

at the second rate, while the TAD fabric 164 travels at a third rate, which may be the faster or slower (e.g., about 10%, about 15%, about 20%, about 25%, about 30%, about 40, about 50% faster or slower) than the second rate. While the UCTAD process does not form traditional density differentials (e.g., such as knuckles and pillows), said rush transfers can, depending on the speed
5 differentials of the transfers, create fiber orientations within the web such that performance of the fibrous structure is improved, such as, for example, stretch, tensile ratio, tensile, modulus, caliper, bulk.

Embossed features in paper towels and bath tissues can be visible to the retail consumer of such products. Emboss designs as disclosed in U.S. Design. Pat. App. Nos. 29/673,106;
10 29/673,105; and 29/673,107 may be used to make fibrous structures of the present disclosure. Emboss patterns can be made according to the methods and processes described in US Pub. No. US 2010-0028621 A1 in the name of Byrne et al. or US 2010-0297395 A1 in the name of Mellin, or US Pat. No. 8,753,737 issued to McNeil et al. on June 17, 2014. For clarity, such embossed features originate during the converting process, and are different from, and independent of, the
15 pillow and knuckle features that are wet-formed on a papermaking belt during a wet-laid papermaking process.

More particular papermaking processes are disclosed below and illustrated in FIGS. 6A and 6B, versus the more general description above. FIGS. 6A and 6B are simplified, schematic representations of continuous fibrous structure making processes and machines useful in the
20 practice of the present disclosure. The following description of the process and machine include non-limiting examples of process parameters useful for making a fibrous structure of the present invention.

As shown in FIG. 6A, process and equipment 150 for making fibrous structures according to the present disclosure comprises supplying an aqueous dispersion of fibers (a fibrous furnish)
25 to a headbox 152 which can be of any design known to those of skill in the art. The aqueous dispersion of fibers can include wood and non-wood fibers, northern softwood kraft fibers (“NSK”), eucalyptus fibers, southern softwood kraft (SSK) fibers, Northern Hardwood Kraft (NHK) fibers, acacia, bamboo, straw and bast fibers (wheat, flax, rice, barley, etc.), corn stalks, bagasse, abaca, kenaf, reed, synthetic fibers (PP, PET, PE, bico version of such fibers),
30 regenerated cellulose fibers (viscose, lyocell, etc.), and other fibers known in the papermaking art, including short fibers having an average length less than 1.0 mm (Average Short Fiber Length-ASFL) and including long fibers having an average length greater than 1.0 mm, from about 1.2 mm to about 3.5 mm, or from about 3 mm to about 10 mm (Average Long Fiber

Length-ALFL). Depending on the non-wood fibers being used, they may be in the long fiber range of length. For instance, bamboo can have a length from 1.1 to 2.0 mm and sunn hemp is even longer, it can have a length from 2.8 to 3.0 mm and sisal hemp can have a length from 2.5 to 2.7 mm. Kenaf can have a length from 2.7 to 3.0 mm, abaca can have a length from 4.0 to 4.3 mm. This becomes significant when short fibers like eucalyptus are replaced with longer non-wood fibers.

From the headbox 152, the aqueous dispersion of fibers can be delivered to a foraminous member 154, which can be a Fourdrinier wire, to produce an embryonic fibrous web 156. Furnish mixes may be useful in the present disclosure may be from about 20% to about 50% short fibers and from about 40% to about 100% long fibers, specifically including all 1% increments between the recited ranges.

The foraminous member 154 can be supported by a breast roll 158 and a plurality of return rolls 160 of which only two are illustrated. The foraminous member 154 can be propelled in the direction indicated by directional arrow 162 by a drive means, not illustrated, at a predetermined velocity, V_1 . Optional auxiliary units and/or devices commonly associated with fibrous structure making machines and with the foraminous member 154, but not illustrated, comprise forming boards, hydrofoils, vacuum boxes, tension rolls, support rolls, wire cleaning showers, and other various components known to those of skill in the art.

After the aqueous dispersion of fibers is deposited onto the foraminous member 154, the embryonic fibrous web 156 is formed, typically by the removal of a portion of the aqueous dispersing medium by techniques known to those skilled in the art. Vacuum boxes, forming boards, hydrofoils, and other various equipment known to those of skill in the art are useful in effectuating water removal. The embryonic fibrous web 156 can travel with the foraminous member 154 about return roll 160 and can be brought into contact with a papermaking belt 164 in a transfer zone 136, after which the embryonic fibrous web travels on the papermaking belt 164. While in contact with the papermaking belt 164, the embryonic fibrous web 156 can be deflected, rearranged, and/or further dewatered. Depending on the process, mechanical and fluid pressure differential, alone or in combination, can be utilized to deflect a portion of fibers into the deflection conduits of the papermaking belt. For example, in a through-air drying process a vacuum apparatus 176 can apply a fluid pressure differential to the embryonic web 156 disposed on the papermaking belt 164, thereby deflecting fibers into the deflection conduits of the deflection member. The process of deflection may be continued with additional vacuum pressure 186, if necessary, to even

further deflect and dewater the fibers of the web 184 into the deflection conduits of the papermaking belt 164.

The papermaking belt 164 can be in the form of an endless belt. In this simplified representation, the papermaking belt 164 passes around and about papermaking belt return rolls 166 and impression nip roll 168 and can travel in the direction indicated by directional arrow 170, at a papermaking belt velocity V_2 , which can be less than, equal to, or greater than, the foraminous member velocity V_1 . In the present disclosure, the papermaking belt velocity V_2 is less than foraminous member velocity V_1 such that the partially-dried fibrous web is foreshortened in the transfer zone 136 by a percentage determined by the relative velocity differential between the foraminous member and the papermaking belt. Associated with the papermaking belt 164, but not illustrated, can be various support rolls, other return rolls, cleaning means, drive means, and other various equipment known to those of skill in the art that may be commonly used in fibrous structure making machines.

The papermaking belts 164 of the present disclosure can be made, or partially made, according to the process described in U.S. Patent No. 4,637,859, issued Jan. 20, 1987, to Trokhan, and having the patterns of cells as disclosed herein.

The fibrous web 192 can then be creped with a creping blade 194 to remove the web 192 from the surface of the Yankee dryer 190 resulting in the production of a creped fibrous structure 196 in accordance with the present disclosure. As used herein, creping refers to the reduction in length of a dry (having a consistency of at least about 90% and/or at least about 95%) fibrous web which occurs when energy is applied to the dry fibrous web in such a way that the length of the fibrous web is reduced and the fibers in the fibrous web are rearranged with an accompanying disruption of fiber-fiber bonds. Creping can be accomplished in any of several ways as is well known in the art, as the doctor blades can be set at various angles. The creped fibrous structure 196 is wound on a reel, commonly referred to as a parent roll, and can be subjected to post processing steps such as calendaring, tuft generating operations, embossing, and/or converting. The reel winds the creped fibrous structure at a reel surface velocity, V_4 .

The papermaking belts of the present disclosure can be utilized to form discrete elements and a continuous/substantially continuous network (*i.e.*, knuckles and pillows) into a fibrous structure during a through-air-drying operation. The discrete elements can be knuckles and can be relatively high density relative to the continuous/substantially continuous network, which can be a continuous/substantially pillow having a relatively lower density. In other examples, the discrete elements can be pillows and can be relatively low density relative to the continuous/substantially

continuous network, which can be a continuous/substantially continuous knuckle having a relatively higher density. In the example detailed above, the fibrous structure is a homogenous fibrous structure, but such papermaking process may also be adapted to manufacture layered fibrous structures, as is known in the art. As discussed above, the fibrous structure can be embossed
5 during a converting operation to produce the embossed fibrous structures of the present disclosure.

Formation

An area of particular interest is formation of the fibrous structure. This is an area where, as evidenced in the detailed description, so many sustainable sanitary tissue products fail and the art
10 does not disclose how to achieve well-formed fibrous structures comprising bamboo and/or other sustainable non-wood fibers. Formation of non-wood fibers can be challenging due to their morphology, which differs from wood fibers. For instance, bamboo fibers, which may be considered flexible (relative to their length/width ratio versus certain wood fibers and versus their length/width ratio versus certain non-wood fibers such as straw fibers (e.g., wheat straw)) often
15 flocculate in the headbox, which can result in a heterogeneously formed sheet. The inventors of the present disclosure have found ways of overcoming these challenges so that adding bamboo fibers into the fibrous structure, even at high(er) inclusion levels, can result in products having good formation as evidenced by inventive formation index values, as well as by tensile ratio values disclosed herein. It should also be appreciated that the better a sheet's formation, the better its
20 coverage. Such is important, of course, because formation and coverage directly impact hand protection for sanitary tissue products. Details are in the specification below.

As described above, in part, fibers are delivered to and diluted in the headbox. All other things being constant, increasing the dilution of the headbox (decreasing headbox consistency) results in improved formation. Without being bound by theory, one reason for this could be that
25 as the headbox consistency decreases, the fibrous particles in the headbox have less interactions with each other as they flow through the headbox. Because fibers (wood and non-wood) are generally ribbon-like in cross section, if that fiber is allowed to rotate in all three axes then it creates a sphere. This sphere of fibers can be referred to as the swept volume of the fiber. As the headbox consistency increases, assuming perfectly homogenous distribution of fibers in the solution, the
30 spheres of swept volume begin to come closer together, eventually overlapping. As the spheres overlap more and more, the fibers have a higher probability of interacting with each other, creating flocculation, which results in a more heterogeneously formed sheet. This is also referred to as poor formation.

The jet-to-wire (“jet/wire”) ratio is known in the art as a velocity ratio between the speed of the jet exiting the headbox and the speed of the wire(s) upon which the jet impinges. The main ways to adjust the jet/wire ratio are (1) to increase the flow rate through the headbox in a fixed headbox geometry, while keeping wire speed constant, (2) to increase the wire speed while keeping the headbox flow and geometry constant, (3) to decrease the flow rate through the headbox in a fixed headbox geometry, while keeping the wire speed constant, or (4) to decrease the wire speed while keeping the headbox flow and geometry constant. Method (1) observes the incompressible fluid dynamic concept of continuity, which says that if the volumetric flow through a fixed area increases, the velocity must increase – the opposite is true for Method (3). For Methods (2) and (4), again via continuity, results in the jet velocity being constant while the wire velocity increases or decreases, respectively. This jet/wire ratio also affects the tensile ratio of the subsequently formed sheet. This mechanism is via fiber orientation on the wire as the fibers are deposited. It is generally known that the higher the speed difference is between the jet/wire (either a jet much faster or a jet much slower), the higher the tensile ratio will be, and that there will be a minimum tensile ratio between the extremes. For this reason, it may be desirable that fibrous structures of the present disclosure have certain tensile ratios, described in more detail below. Fiber orientation can also impact the formation of the sheet through increased heterogeneity of the substrate.

Finally, one of the major costs of papermaking is energy. Pumps, especially fan pumps, consume large amounts of power via the work of increasing the pressure of a volumetric flow (known as PV work). Lowering the flow through the headbox (thereby increasing the consistency and decreasing the jet/wire at constant throughput and headbox geometry) will lower the production costs for the papermaker. Additionally, all other things being equal, less headbox dilution would result in less drying energy and overall water consumption, which are significant cost elements in an increasingly resource constrained world.

Therefore, the papermaker strives to balance these competing priorities. Upon recent experimentation, it has surprisingly been found that the relationships between jet/wire, tensile ratio, and formation are different for non-wood fibers than they are for wood fibers. More specifically, the tensile ratios disclosed below may be achieved by, at least in part, by a jet flow that is slower than a forming wire speed.

As discussed previously in this section, creating premium levels of quality (softness, absorption, strength, bulk characteristics, etc.) toilet tissue by using high coarseness bamboo in the furnish mix is a challenge. It is generally known that substrates with a very even fiber distribution (good formation) are consumer preferred. One reason is that the even distribution of fibers is

pleasing to the eye. Another reason is that the even distribution of fibers means that, at a given basis weight, there is a higher minimum fiber coverage area of the sheet, as there are less heavy and light spots of the sheet, contributing to better hand protection. Better formation also equates to better absorbency characteristics through better pore connectivity and pore volume distributions.

5 In most conventional wet press processes, having an even formation lends to better tensile efficiency, allowing for a stronger sheet at a given basis weight. In through-air-drying, sheets are produced that have higher bulk properties. Through conservation of volume, at a given basis weight, a through-air-dried sheet with higher bulk would tend to have a lower formation index than a conventional wet press sheet at similar basis weights and fiber compositions.

10 Another way to improve formation index is to choose fibers that allow for high coverage (i.e., fibers with low coarseness and wide fiber widths). Bamboo, for instance, is known in the art as a fiber with potential for tissue making use. However, the morphology of the bamboo fiber (high levels of fines, broad fiber length distribution, high coarseness, high fibrillation, etc.) make for a fiber that drains poorly, making it particularly unsuited for through-air-drying machines due to high energy costs associated with the drying of the nascent fiber web. The high coarseness of bamboo, as well as its wide fiber width, make for poorer fiber coverage than sheets that are comprised mainly of eucalyptus. This also leads to a lower formation index than eucalyptus or other high fiber coverage sheets. Thus, toilet tissue sheets that are comprised mostly of eucalyptus fibers, which are short, narrow, and exhibit low coarseness have improved fiber coverage in the sheet and a higher formation index. As the papermaker uses higher levels of bamboo inclusion, one is necessarily replacing the eucalyptus fibers with longer, wider, and coarser bamboo fibers. The fiber coverage in the substrate decreases, and the formation index decreases as well. This is not only true for bamboo, but many of the other non-woods. Surprisingly, the inventors of the present disclosure have discovered that decreasing the tensile ratio of structured fibrous structures comprising non-woods improves the formation index of said fibrous structures. This is the exact opposite of non-structured fibrous structures, in which increasing the tensile ratio improves the formation index. Without being bound by theory, it is thought that the interplay of fiber distribution on the wire, deformation of the sheet into a patterned fabric, and subsequent differential drying and creping of the resultant sheet, at least in part, results in this counterintuitive relationship.

30 A majority of webs comprising bamboo are made on conventional wet press machines. These machines generate webs of low caliper, and when converted into finished product rolls result in either low bulk and hard rolls or high bulk and extremely soft rolls. A few instances of products can be found comprising bamboo that are made on through-air-dried machines. These examples

exhibit a lower formation index and also exhibit other non-consumer preferred characteristics, like low volumetric PVD absorption in the 2.5-160 um range. It is therefore surprising that a low formation index substrate can be made with a coarse non-wood fiber, such as bamboo, and still be able to meet standards for premium quality tissue.

5 The inventors of the present disclosure have surprisingly shown that substrates comprising non-woods (e.g., bamboo, abaca, etc.) can be created that still maintain strong consumer appeal despite their lower formation indices. As described in greater detail herein, non-wood fibers may be run in a continuous papermaking process at high percentage inclusions of non-wood to form webs. These webs may then be pressed on a structured fabric, creating
10 zones of differential density, which may, in part, contribute to the preferred characteristics of the resulting “structured” fibrous structures. Structured fibrous structures may be achieved using various papermaking processes such as, for example, TAD, fabric crepe, NTT, QRT, creped TAD and UCTAD.

 Additionally, preferred characteristics may be achieved, at least in part, through jet/wire
15 velocity adjustments, varying levels of foreshortening at the wire/belt interface wire/belt interface and at creping, through creping geometry changes, and the judicious placement of high and low density zones in the substrate.

Fractionation

20 It is generally known that substrates comprised of virgin wood pulps are consumer preferred. The substrate developer undergoes a very deliberate process when choosing the fibers that they want to include in their substrate. Generally, for soft and strong tissue products, a blend of low coarseness, low length eucalyptus fibers are included for softness, while low coarseness softwood fibers, for example, NSK fibers, are included for strength, but still permitting good
25 flexibility. In order to maintain the correct ratios of strength, softness, and flexibility, the substrate developer will vary chemistry inclusion, fiber composition by layers, and refining of the wood pulp. Choices in any of these variables (and more) will affect the resultant substrate characteristics, making the substrate more or less consumer desirable.

 It is also generally known that non-wood fibers often have different characteristics than
30 wood fibers. Fiber morphology characteristics such as length, cell wall thickness, width, Runkle Ratio, kink, curl, fibrillation, and other characteristics can vary significantly from non-wood to non-wood, as well as compared to wood pulps. It is, therefore, a current problem to develop

sanitary tissue products having premium characteristics when utilizing non-wood fibers that have non-premium morphologies.

In order to address this problem, non-wood fibers may be passed through a hydrocyclone and separated in to two different streams and described as “accepts” and “rejects.” Despite this
5 nomenclature, both outgoing streams can still be used by the substrate developer via different layering schemes. When passing non-woods through a fractionation unit, one important way that the unit separates the fibers is by degree of fibrillation. Since many non-woods are more fibrillated than wood fibers, choosing to place the less fibrillated non-wood stream close to the consumer may result in a more premium, wood fiber-like experience. Furthermore, it has been
10 observed that less the fibrillated non-wood fraction ends up located in the reject stream, which is usually reserved for longer, denser, and more coarse fibers. Traditional thinking would be to place this reject stream away from the consumer-facing layer, but the inventors of the present disclosure have surprising found that the better option is to place the reject stream to the consumer-facing layer. Without being bound by theory, it is believed that the hydrodynamic
15 differences of fiber fibrillation overcome the hydrodynamic differences of fiber density and length. With fiber fibrillation being dominant, the more fibrillated fibers will follow the majority of the fluid and be carried to the accept portion of the cyclone. The coarser, longer, and less fibrillated fibers will concentrate on the peripheral wall of the cyclone and preferentially go towards the reject stream at the bottom of the cyclone. Yet, these “reject” fibers have better
20 mobility, lower bonding, and are more wood-like due to their lower degree of fibrillation. Using non-wood rejects in the consumer-facing layer can, thus, result in a sanitary tissue product that has premium characteristics (e.g. softness).

Once-dried Non-wood Fibers

25 The challenges associated with non-wood fiber morphology are further complicated by using once-dried (versus never-dried, which comprise greater than about 45% water content) fibers in the paper-making process. Although never-dried and once-dried fibers are chemically similar, they differ greatly in their physical properties. Never-dried fiber walls contain much more water per unit dry mass than those of dried fibers after reslushing. Being more swollen, the
30 never-dried walls are more flexible or conformable. In contrast, the walls of once-dried (and rewetted or reslushed or repulped) fibers are stiff (compared to never-dried fibers). Significant changes in the papermaking properties of fibers occur with water removal as the walls become progressively more rigid and less conformable. ~~Table 6~~ FIG. 25 shows the fiber characteristic

differences between non-wood fibers that are never-dried and that have been once-dried; see also, for example: A.M.Scallan and G.V.Laivins, The mechanism of hornification of wood pulps in Products of Papermaking, Trans. of the Xth Fund. Res. Symp. Oxford, 1993, (C.F.Baker, ed.), pp 1235–1260, FRC, Manchester, 2018. DOI: 10.15376/frc.1993.2.1235, at page 1242 (Effect of

5 Temperature) states: “Drying-and-reslushing at 25 C dropped the breaking length from 7.3 km for the virgin sheet down to 2.7 km. Raising the drying temperature to 105° and to 150°C further lowered the breaking length to 1.6 and 0.6 km. From this study it is apparent that the major reduction in sheet strength is due to water removal and that heat causes an additional reduction which is much smaller in magnitude.” The same article further states: “Only a few

10 investigations have been carried out, designed to separate the effects of temperature and water removal during drying. Lyne and Gallay avoided this problem by heating without drying; in their experiments wet handsheets were heated to 95 °C for three minutes in an atmosphere saturated with water vapour before air drying (19). The tensile strength of the sheet was lowered by 14% when compared to that of an unheated control. The result shows that the heat treatment led to a

15 reduction in the extent of interfibre bonding which they attributed to a loss of swelling of the pulp upon heating.” ~~Table 6~~FIG. 25 also illustrates that never-dried fibers bond to each other better than once-dried fibers. To overcome the effects of temperature and water removal, strength in the web (e.g., sanitary tissue product) may be achieved by temporary and/or permanent wet strength, dry strength additives, furnish blend ratios (e.g., softwood-to-hardwood ratios), process

20 manipulations (refining, formation, calendaring, creping, etc.), etc.

While it may be desirable to use never-dried fibers (see, for example, the following publications assigned to Essity Hygiene and Health Aktiebolag: WO2023282811A1, WO2023282812A1, WO2023282813A1, WO2023282818A1), such requires the pulping facility to be close to the paper-making facility as wet fibers are too expensive to ship. Because this

25 proximity is often impractical, the inventors of the present application used non-wood fibers that were at least once-dried and overcame not only the challenges associated with non-wood fibers, but also overcame the challenges of the non-wood fibers having been at least once-dried at the pulping facility and then shipped as dried sheets before incorporating the fibers into the paper-making process. That is, the non-wood fibers disclosed herein were reslushed from dried sheets

30 before they were sent to a headbox in the paper-making process. Further, on a single fiber basis, the fiber length of once-dried non-wood fibers in the finished product (e.g., sanitary tissue product) will normally be shorter than never-dried non-wood fibers due to the extra processing

necessary to rewet once-dried non-wood fibers. These shorter fibers have a materially different characteristics, which, among other things, will impact the strength of the final product.

When using once-dried non-wood pulp, the unit of pulp is typically in a bale, a sheet, or a block, which comprises less than about 45%, 40%, 35%, 25%, 15%, 10%, 5%, or 2% of water (water content). Water content (% moisture) of pulp is measured using an Ohaus MB45 moisture balance, or an equivalent instrument, set to a drying temperature of 130°C, with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time). The unit of once-fired non-wood pulp may then be placed into a repulping unit to be repulped (also called reslushed or rewetted). The repulped non-wood fibers may then be further refined or may be sent directly to a headbox. As referenced above, the reslushed non-wood fibers will likely be stiffer (versus like fibers that were never-dried) due to hornification.

Another benefit of using once-dried fibers instead of never-dried fibers is that once-dried fibers bond less during the paper-making process and are thus less connected, which results in a softer sanitary tissue product, which allows the sanitary tissue product to be more cloth-like and more desirable. For instance, once-dried fibers of the present disclosure may have a breaking length of less than about 2700 m, less than about 2000 m, less than about 1700 m, less than about 1600 m, less than about 1400 m, less than about 1250 m, less than about 1100 m, less than about 900 m, less than about 750 m, or less than about 450 m, while never-dried fibers tend to have higher breaking lengths, such as greater than about 2700 m, greater than about 2800 m, greater than about 3000 m, greater than about 3200 m, or greater than about 3500 m, specifically reciting all 1 m increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Further, once-dried fibers of the present disclosure may have a breaking length ratio (which is the breaking length (m) according to the Breaking Length Test Method divided by the length weighted fiber length (microns) according to the Fiber Length, Width, Coarseness, and Fiber Count Test Method) of less than about 3.25 m/micron, less than about 2.7 m/micron, less than about 2.5 m/micron, less than about 2.0 m/micron, less than about 1.8 m/micron, less than about 1.6 m/micron, less than about 1.5 m/micron, less than about 1.0 m/micron, less than about 0.6 m/micron, or less than about 0.5 m/micron, while never-dried fibers tend to have higher breaking length ratios, such as greater than about 3.0 m/micron, greater than about 3.5 m/micron, greater than about 4.0 m/micron, greater than about 5.0 m/micron, or greater than about 6.0 m/micron, specifically reciting all 0.1 m/micron increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

In light of the paragraphs of this Section (Once-dried Non-wood Fibers), a desirable process for making sanitary tissue products of the present disclosure may comprise: re-slushing pulp comprising non-wood fibers prior to sending the pulp to a headbox; forming a web comprising the non-wood fibers; creating zones of differential densities in the web; and
5 creping the web. The once-dried non-wood pulp may be introduced into a repulping unit prior to the step of re-slushing the pulp. The once-dried non-wood pulp comprises non-wood fibers having a water content of less than about 10%, 20%, or 40%. The once-dried non-wood pulp may be in the form of a bale, a sheet, or a block. The non-wood fibers may be selected from the group consisting of bamboo, abaca, and mixtures thereof. The web may be treated with permanent or
10 temporary wet strength. This process of making sanitary tissue products of the present disclosure may further include harvesting non-wood fibers and pulping the non-wood fibers and drying the non-wood fibers. The non-wood fibers may be dried (using, for example a pulp drier (e.g., from Andritz, Valmet, etc.)) at a facility other than a destination paper-making facility (i.e., where the pulp will be used to make the sanitary tissue products, including paper towels, toilet tissue,
15 and/or facial tissue. The dried non-wood fibers may then be shipped to a destination paper-making facility. The shipping distance may be greater than: about 25, about 50, about 75, about 100, about 200, about 500, about 1,000 miles to reach the destination paper-making facility. In some instances, the dried non-wood fibers may be shipped as far as from Asia (e.g., China) to North America (e.g., US).

20

STRUCTURES OF THE PRESENT DISCLOSURE

“Fiber” as used herein means an elongate physical structure having an apparent length greatly exceeding its apparent diameter, i.e., a length to diameter ratio of at least about 10. Fibers having a non-circular cross-section and/or tubular shape are common; the “diameter” in this case
25 may be considered to be the diameter of a circle having cross-sectional area equal to the cross-sectional area of the fiber. More specifically, as used herein, “fiber” refers to fibrous structure-making fibers. The present disclosure contemplates the use of a variety of fibrous structure-making fibers, such as, for example, naturally-occurring fibers (wood and non-wood), synthetic (human-made) fibers, and/or any other suitable fibers, and any combination thereof.

30 “Fibrous structure” as used herein means a structure that comprises a plurality of fibers. In one example, a fibrous structure according to the present disclosure means an orderly arrangement of fibers within a structure in order to perform a function. A bag of loose fibers is not a fibrous structure in accordance with the present disclosure. The terms “web,” “fibrous web,” “embryonic

web,” and “embryonic fibrous web” are used to describe the web that is in the process of becoming the fibrous structure. Further, fibrous structures may be rolled, interleaved, perforated, and/or packaged to form final product(s), such as a sanitary tissue product.

“Non-woven fibrous structure” as used herein means a fibrous structure wherein fibers
5 forming the fibrous structure are not orderly arranged by weaving and/or knitting the fibers together. In other words, non-woven fibrous structures do not include textiles, garments, and/or apparel. The non-woven fibrous structures of the present disclosure are disposable (i.e., typically thrown away after one or two uses—unlike clothes, rags, cloths, etc.).

“Ply” or “Plies” as used herein means an individual fibrous structure optionally to be
10 disposed in a substantially contiguous, face-to-face relationship with other plies, forming a multiple ply fibrous structure. It is also contemplated that a single fibrous structure can effectively form two “plies” or multiple “plies”, for example, by being folded on itself. A ply may comprise multiple layers. Multiple plies may, for example be formed as follows: fibrous structure of the present disclosure may be combined with one or more additional fibrous structures, which is the
15 same or different from the fibrous structures of the present disclosure to form a multi-ply sanitary tissue product; said additional fibrous structure may be combined with the fibrous structure of the present disclosure by any suitable means.

“Sanitary tissue product” as used herein means a soft, low density (i.e., $< \text{about } 0.25 \text{ g/cm}^3$)
fibrous structure useful as a wiping implement for post-urinary and post-bowel movement cleaning
20 (toilet tissue), for otorhinolaryngological discharges (facial tissue), and multi-functional absorbent and cleaning uses (absorbent towels and napkins). The sanitary tissue product may be convolutedly wound upon itself about a core or without a core to form a roll of sanitary tissue product. Further, the fibrous structure making up the sanitary tissue product may be perforated to form interconnected sheets. Sanitary tissue products may consist of fibers having an average length of
25 less than about 1 inch; further sanitary tissue products may not comprise any fibers (or filaments) having a length greater than 1 inch. Sanitary tissue products may be formed according to a wet-laid process as illustrated in FIGS. 6A-C.

“Clothlike” as used herein relates to the feel of the non-woven fibrous structure to a consumer, the appearance of the non-woven fibrous structure to a consumer, and/or the
30 performance (e.g., absorbency, strength, durability, etc.) of the non-woven fibrous structure during use by a consumer.

“Lint” as used herein means any material that originated from a fibrous structure according to the present disclosure that remains on a surface after which the fibrous structure and/or sanitary

tissue product has come into contact. The lint value of a fibrous structure and/or sanitary tissue product comprising such fibrous structure is determined according to the Lint Test Method described herein.

“Differential density,” as used herein, means a fibrous structure and/or sanitary tissue product that comprises one or more regions of relatively low fiber density, which are referred to as pillow regions, and one or more regions of relatively high fiber density, which are referred to as knuckle regions. In one example, a fibrous structure of the present disclosure comprises a surface comprising a surface pattern comprising a continuous knuckle region and a plurality of discrete pillow regions that exhibit different densities, for example, one or more of the discrete pillow regions may exhibit a density that is different (e.g., 30% different) than the density of the continuous knuckle region.

“Densified,” as used herein means a portion of a fibrous structure and/or sanitary tissue product that is characterized by regions of relatively high fiber density (knuckle regions).

“Non-densified,” as used herein, means a portion of a fibrous structure and/or sanitary tissue product that exhibits a lesser density (one or more regions of relatively lower fiber density) (pillow regions) than another portion (for example a knuckle region) of the fibrous structure and/or sanitary tissue product.

“Dry fibrous structure” as used herein means that the fibrous structure exhibits a water content (% moisture) of less than 20% and/or less than 15% and/or less than 10% and/or less than 7% and/or less than 5% and/or less than 3% and/or less than 1% to 0% and or to greater than 0%. Water content (% moisture) of a fibrous structure is measured using an Ohaus MB45 moisture balance, or an equivalent instrument, set to a drying temperature of 130°C, with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time). Dry fibrous structures of the present disclosure may exhibit a water content (% moisture) of from about 0.0001% to about 20% and/or from about 0.001% to about 15% and/or from about 0.001% to about 12% and/or from about 0.001% to about 10% and/or from about 0.001% to about 7% and/or from about 0.001% to about 5%, by weight of the dry fibrous structure.

“Stacked product(s)” as used herein include fibrous structures, paper, and sanitary tissue products that are in the form of a web and cut into distinct separate sheets, where the sheets are folded (e.g., z-folded or c-folded) and may be interleaved with each other, such that a trailing edge of one is connected with a leading edge of another. Common examples of stacks of folded and/or interleaved sheets include facial tissues and napkins.

“Percent (%) difference,” “X% difference,” or “X% different” is calculated by: subtracting the lower value (e.g., common intensive property value) from the higher value (e.g., common intensive property value) and then dividing that value by the average of the lower and higher values, and then multiplying the result by 100.

5 “Within X%” or “within X percent” is calculated by the following non-limiting example: If first and second sanitary tissue products have a common intensive property (e.g., lint), and if a second lint value of the second sanitary tissue product is 10, then “within 25%” of the second lint value is calculated as follows for this example: multiplying 10 (the second lint value) by 25%, which equals 2.5, and then adding 2.5 to 10 (the second lint value) and subtracting 2.5 from 10 (the
10 second lint value) to get a range, so that “within 25%” of the second lint value for this example means a lint value of or between 12.5 and 7.5). The absolute value of “X% change” can be used to determine if “within X%” is satisfied; for example can also be determined by using the absolute For example, if “X% change” is -25%, then a “within 25%” is satisfied, but if “X% change” is -25%, a “within 20%” is not satisfied.

15 “Percent (%) change,” “X% change,” or “X% change” is calculated by: subtracting the reference value (e.g., common intensive property value of a sustainable sanitary tissue product) from the comparative value (e.g., common intensive property value of a sanitary tissue product) and then dividing by the reference value, and then multiplying the result by 100. For example, if a reference value is 18 (e.g., a basis weight of a sustainable sanitary tissue product) and the
20 comparative value is 31 (e.g., a basis weight of a soft sanitary tissue product), then 18 should be subtracted from 31, which equals 13, which should be divided by 18, which equals 0.722, which should be multiplied by 100, which equals 72.2% change.

Fibrous structures of the present disclosure may be used to make sanitary tissue products, including paper towels, bath tissues, napkins, and facial tissues. The fibrous structures can be
25 single-ply or multi-ply and may comprise cellulosic pulp fibers.

Fibrous structures of the present disclosure may be selected from the group consisting of: through-air-dried fibrous structures, differential density fibrous structures, differential basis weight fibrous structures, wet laid fibrous structures, air laid fibrous structures, conventional dried fibrous structures, creped or uncreped fibrous structures, patterned-densified or non-patterned-densified
30 fibrous structures, compacted or uncompacted, especially high bulk uncompacted, fibrous structures, other nonwoven fibrous structures comprising synthetic or multicomponent fibers, homogeneous or multilayered fibrous structures, double re-creped fibrous structures, uncreped fibrous structures, co-form fibrous structures and combinations thereof.

As shown in FIGS. 3A-3C, fibrous structures and/or sanitary tissue products of the present disclosure may comprise a surface that comprises undulations (e.g., knuckles 20 and pillows 22) and/or embossments (e.g., 32, 34). FIGS. 16A and 16B illustrate embossments 32 (where each line and dot illustrated in FIGS. 16A and 16B is an embossment) that may be desirable for use with
5 fibrous structures 10 of the present disclosure.

Fibrous structures of the present disclosure may be air laid and may be selected from the group consisting of thermal bonded air laid (TBAL) fibrous structures, latex bonded air laid (LBAL) fibrous structures and mixed bonded air laid (MBAL) fibrous structures.

Fibrous structures of the present disclosure may exhibit a substantially uniform density or
10 may exhibit differential density regions; in other words, regions of high density compared to other regions within the patterned fibrous structure. Typically, when a fibrous structure is not pressed against a cylindrical dryer, such as a Yankee dryer, while the fibrous structure is still wet and supported by a through-air-drying fabric or by another fabric or when an air laid fibrous structure is not spot bonded, the fibrous structure typically exhibits a substantially uniform density.
15 Differential density regions may contribute to the softness of the fibrous structures of the present disclosure (especially when compared to conventional wet press). As a particular example, the fibrous structures of the present disclosure may comprise knuckles and pillows, which can contribute to softness. Softness may be further enhanced when pillows are disposed on a consumer-facing surface of the fibrous structure, such as a consumer-facing surface of a sanitary tissue
20 product.

As shown in FIGS. 4A, C, and E, fibrous structures of the present disclosure may comprise knuckles 20 and pillows 22, which is one way of achieving differential density. FIG. 5 shows a portion of the pattern on the mask 14 used to make a papermaking belt (not particularly shown, but of the type shown in FIG. 17) that is capable of making the sanitary tissue 12 shown in FIG. 3A.
25 The sanitary tissue 12 of FIG. 3A exhibits a pattern of knuckles 20 and pillows 22 that were formed by discrete cured resin knuckles 20 on a papermaking belt, and which correspond to the white areas, *i.e.*, the cells 24, of the mask 14 shown in FIG. 5.

As depicted in the exemplary fibrous structure shown in FIG. 3A, and more clearly depicted through the masks shown in FIG. 5, the fibrous structures of the present disclosure may have a
30 pattern of discrete knuckles and a continuous/substantially continuous pillow region. However, in other examples the fibrous structures may also have a pattern of discrete pillows and a continuous/substantially continuous knuckle regions.

As shown in FIGS. 4A-F, the fibrous structure may have first and second consumer-facing sides 50. It may be desirable that pillow regions face outwardly, indicated by directional arrow 51, such that the user of the fibrous structure feels the pillows with their skin. It should be understood, that depending on the type of process used to make the fibrous structure, for multi-ply fibrous structures, the consumer-facing side may be the either fabric-side-out (“FSO”) or wire-side-out (WSO). For typical TAD, such as illustrated in FIG. 6A, “fabric side” means the side that touches the TAD fabric (164) and “wire side” means the side that touches the forming wire/forming fabric (154); for UCTAD, such as illustrated in FIG. 6B, “sides” are determined in the TAD section, where the “fabric” side touches the TAD fabric (164) and the “air” side does not. For a process like the one illustrated by FIG. 6A, the relevance of whether the consumer-facing side of the fibrous structure is wire side (WSO) or is fabric side (FSO) is whether a flatter surface (non-pillow-facing-outward surface) is desired, or whether a pillow-facing-outward surface is desired. When pillows face outwardly, TS7 values decrease (versus when knuckles are on the consumer-facing surface).

The fibrous structures of the present disclosure may be pattern densified. A pattern densified fibrous structure is characterized by having a relatively high-bulk field of relatively low fiber density and an array of densified zones (regions) of relatively high fiber density. The high-bulk field is alternatively characterized as a field of pillow zones (regions). The densified zones (regions) are alternatively referred to as knuckle zones (regions). The densified zones (regions) may be discretely spaced within the high-bulk field or may be interconnected, either fully or partially, within the high-bulk field.

The fibrous structures of the present disclosure may be uncompacted, non-pattern-densified. The fibrous structure may be of a homogenous or multi-layered construction. The fibrous structure may be made with a fibrous furnish that produces a single layer embryonic fibrous web or a fibrous furnish that produces a multi-layer embryonic fibrous web.

The fibrous structures of the present disclosure may comprise any suitable ingredients known in the art. Nonlimiting examples of suitable ingredients that may be included in the fibrous structures include permanent and/or temporary wet strength resins, dry strength resins (e.g., Carboxy Methyl Cellulose (CMC)), softening agents, wetting agents, lint resisting agents, absorbency-enhancing agents, immobilizing agents, especially in combination with emollient lotion compositions, antiviral agents including organic acids, antibacterial agents, polyol polyesters, antimigration agents, polyhydroxy plasticizers, opacifying agents, bonding agents, debonding agents, colorants, and mixtures thereof. Such ingredients, when present in the fibrous structure of the present disclosure, may be present at any level based on the dry weight of the

fibrous structure. Such ingredients, when present, may be present at a level of from about 0.001 to about 50%, and/or from about 0.001 to about 20%, and/or from about 0.01 to about 5%, and/or from about 0.03 to about 3%, and/or from about 0.1 to about 1.0% by weight, on a dry fibrous structure basis. It may be desirable to use one or a combination of said suitable ingredients on a fibrous structure comprising non-wood fibers, such as, for example, certain lotion(s) on a fibrous structures comprising bamboo, where the lotion improves softness or at least improves the perception of softness and may further decrease lint.

Non-wood Fibers

As used herein the term “non-wood fiber(s)” or “non-wood content” means naturally-occurring fibers derived from non-wood plants, including animal fibers, mineral fibers, plant fibers and mixtures thereof, and specifically excluding non-naturally-occurring fibers (e.g., synthetic fibers). Animal fibers may, for example, be selected from the group consisting of: wool, silk and other naturally-occurring protein fibers and mixtures thereof. The plant fibers may, for example, be obtained directly from a plant. Nonlimiting examples of suitable plants include cotton, cotton linters, flax, sisal, abaca, hemp, hesperaloe, jute, bamboo, bagasse, kudzu, corn, sorghum, gourd, agave, loofah, trichomes, seed-hairs, wheat, and mixtures thereof.

Non-wood fibers of the present disclosure may be derived from one or more non-wood plants of the family Asparagaceae. Suitable non-wood plants may include, but are limited to, one or more plants of the genus *Agave* such as *A. tequilana*, *A. sisalana* and *A. fourcroyde*, and one or more plants of the genus *Hesperaloe* such as *H. funifera*, *H. parviflora*, *H. nocturna*, *H. Changi*, *H. tenuifolia*, *H. engelmannii*, and *H. malacophylla*. Further, the non-wood fibers of the present disclosure may be prepared from one or more plants of the of the genus *Hesperaloe* such as *H. funifera*, *H. parviflora*, *H. nocturna*, *H. chiangii*, *H. tenuifolia*, *H. engelmannii*, and *H. malacophylla*.

As used herein the term “wood fiber(s)” or “wood content” means fibers derived from both deciduous trees (hereinafter, also referred to as “hardwood”) and coniferous trees (hereinafter, also referred to as “softwood”) may be utilized. Wood fibers may be short (typical of hardwood fibers) or long (typical of softwood fibers). Nonlimiting examples of short fibers include fibers derived from a fiber source selected from the group consisting of *Acacia*, *Eucalyptus*, *Maple*, *Oak*, *Aspen*, *Birch*, *Cottonwood*, *Alder*, *Ash*, *Cherry*, *Elm*, *Hickory*, *Poplar*, *Gum*, *Walnut*, *Locust*, *Sycamore*, *Beech*, *Catalpa*, *Sassafras*, *Gmelina*, *Albizia*, *Anthocephalus*, and *Magnolia*. Nonlimiting examples

of long fibers include fibers derived from Pine, Spruce, Fir, Tamarack, Hemlock, Cypress, and Cedar.

As used herein the term “synthetic fiber(s)” or “synthetic content” means fibers human-made fibers, and specifically excludes “wood fibers” and “non-wood fibers.” Synthetic fibers can be used, in combination with non-wood fibers (e.g., bamboo) in the fibrous structures of the present disclosure. Synthetic fibers may be polymeric fibers. Synthetic fibers may comprise elastomeric polymers, polypropylene, polyethylene, polyester, polyolefin, polyvinyl alcohol and nylon, which are obtained from petroleum sources. Additionally, synthetic fibers may be polymeric fibers comprising natural polymers, which are obtained from natural sources, such as starch sources, protein sources and/or cellulose sources may be used in the fibrous structures of the present disclosure. The synthetic fibers may be produced by any suitable methods known in the art.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 35% about 40%, about 50%, about 75%, about 80%, or about 100% non-wood content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 55% to about 95%, from about 65% to about 85%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% non-wood content (e.g., bamboo, abaca, hemp, etc.), specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Bamboo

Generally, the “bamboo,” “bamboo fibers,” “bamboo content,” or “bamboo fiber content” incorporated into fibrous structure(s) of the present disclosure are fibrous materials derived from any bamboo species. More particularly, the bamboo fiber species may be selected from the group consisting of: *Acidosasa* sp., *Ampleocalamus* sp., *Arundinaria* sp., *Bambusa* sp., *Bashania* sp., *Borinda* sp., *Brachystachyum* sp., *Cephalostachyum* sp., *Chimonobambusa* sp., *Chusquea* sp., *Dendrocalamus* sp., *Dinochloa* sp., *Drepanostachyum* sp., *Eremitis* sp., *Fargesia* sp., *Gaoligongshania* sp., *Gelidocalamus* sp., *Gigantocloa* sp., *Guadua* sp., *Hibanobambusa* sp., *Himalayacalamus* sp., *Indocalamus* sp., *Indosasa* sp., *Luhachne* sp., *Melocanna* sp., *Menstruocalamus* sp., *Nastus* sp., *Neohouzeaua* sp., *Neomicrocalamus* sp., *Ochlandra* sp.,

Oligostachyum sp., *Olmea* sp., *Oatea* sp., *Oxytenanthera* sp., *Phyllostachys* sp., *Pleioblastus* sp., *Pseudosasa* sp., *Raddia* sp., *Rhipidocladum* sp., *Sasa* sp., *Sasaella* sp., *Sasamorpha* sp., *Schizostachyum* sp., *Semiarundinaria* sp., *Shibatea* sp., *Sinobambusa* sp., *Thamnocalamus* sp., *Thyrsostachys* sp., *Yushania* sp. and mixtures thereof.

5 The bamboo fibers may be from temperate bamboos of the *Phyllostachys* species, for example *Phyllostachys heterocycla pubescens*, also known as Moso Bamboo. However, it is to be understood that the compositions disclosed herein, unless otherwise stated, are not limited to containing any one bamboo fiber and may comprise a plurality of fibers of different species. For example, the composition may comprise a bamboo from a *Phyllostachys heterocycla pubescens*
10 and a bamboo from a different species such as, for example, *Phyllostachys bambusoides*.

Bamboo fibers for use in the webs, fibrous structures, and products of the present disclosure may be produced by any appropriate methods known in the art. The bamboo fibers may be pulped bamboo fibers, produced by chemical processing of crushed bamboo stalk. The chemical processing may comprise treating the crushed bamboo stalk with an appropriate alkaline solution.
15 The skilled artisan will be capable of selecting an appropriate alkaline solution. Bamboo fiber may also be produced by mechanical processing of crushed bamboo stalk, which may involve enzymatic digestion of the crushed bamboo stalk. Although bamboo fiber may be produced by any appropriate methods known in the art, a desirable method for manufacturing the bamboo pulp may be as a chemical pulping method such as, but not limited to, kraft, sulfite or soda/AQ pulping techniques.

20 Bamboo fibers of the present disclosure may be bamboo pulp fibers and may have an average fiber length of at least about 0.8 mm. When blends of fibers from various bamboo species are employed, it is noted that blends may comprise two or more species of bamboo, or may comprise three or more species of bamboo, such that the average fiber length is at least about 1.1 mm, at least about 1.5 mm, or from about 1.1 to about 2 mm. Fibrous structure(s), web(s) that
25 form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 35%, about 40%, about 50%, about 75%, about 80%, or about 100% bamboo content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about
30 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% bamboo content, specifically reciting all 0.1%

increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Bamboo fibers may be more desirable to use than other non-wood fibers, such as various straws (e.g., wheat straw) for multiple reasons, one being that bamboo fibers are generally longer than straw fibers, which results in fibrous structures comprising bamboo fibers being stronger (without using strength enhancing chemistry or process manipulations) than like fibrous structures comprising shorter straw fibers.

Abaca

Generally, the “abaca,” “abaca fibers,” “abaca content,” or “abaca fiber content” incorporated into fibrous structure(s) of the present disclosure are fibrous materials derived from *Musa textilis* (a species of banana native to the Philippines). Abaca may also be referred to as Manilla hemp, Cebu hemp, Davao hemp, Banana hemp or Musa hemp and can be used to derive abaca cellulose fibers.

Abaca may have a fiber coarseness of greater than 16 mg/100 m (or less than 20 mg/100 m) and a fiber length of 2.5 mm, 2.6 mm, 2.7 mm, 2.8 mm or more. Beyond abaca, sunn hemp, kenaf, and sisal hemp may have these characteristics.

Abaca comprises characteristics that can make it challenging (especially at higher incorporation levels) for incorporating into sanitary tissue products of the present invention as it is better known for being used to produce thin, strong, and porous paper capable of withstanding hard use.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% abaca content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Abaca fibers may be more desirable to use than other non-wood fibers, such as various straws (e.g., wheat straw) for multiple reasons, one being that abaca fibers are generally longer

than straw fibers, which results in fibrous structures comprising abaca fibers being stronger (without using strength enhancing chemistry or process manipulations) than like fibrous structures comprising shorter straw fibers. Further, abaca's length, width, and coarseness make it a more suitable softwood replacement, its higher fibrillation increases specific surface area of the fiber and its carboxyl groups make it better for attaching strength chemistries.

Hemp

Generally, the "hemp," "hemp fibers," "hemp content," or "hemp fiber content" incorporated into fibrous structure(s) of the present disclosure may be made up of hemp cellulose fibers derived from the plants *cannabis sativa* or *cannabis sativa indica*. The hemp cellulose fibers may be processed to a particulate fiber pulp.

Hemp cellulose fibers may be derived from one or more of the plant sources *cannabis*, *cannabis sativa*, *cannabis sativa indica*, *Agave Sisalana* (i.e., Sisal hemp).

Cannabis is a genus of flowering plants that includes three different species, *Cannabis sativa*, *Cannabis indica*, and *Cannabis ruderalis*. The *cannabis* stalk (or stem) consists of an open cavity surrounded by an inner layer of core fiber, often referred to as hurd, and an outer layer referred to as the bast. Bast fibers are roughly 20% of the stalk mass and the hurd 80% of the mass. *Cannabis* bast fibers have a large range in length and diameter, but on average are very long with medium coarseness; suitable for making textiles, paper, and nonwovens. The hurd consists of very short, bulky fibers, typically 0.2-0.65 mm in length.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% hemp content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Bagasse

Generally, the “bagasse,” “bagasse fibers,” “bagasse content,” or “bagasse fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of “sugar cane bagasse” - the dry pulpy residue left after the extraction of juice from sugar cane or sorghum stalks to extract their juice. Agave bagasse is similar, but is the material remnants after extracting blue agave sap.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% bagasse content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Flax

Generally, the “flax,” “flax fibers,” “flax content,” or “flax fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of *Linum usitatissimum*, in the family Linaceae. Flax fiber is extracted from the bast beneath the surface of the stem of the flax plant.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% flax content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Cotton

Generally, the “cotton,” “cotton fibers,” “cotton content,” or “cotton fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of cotton linters, which are fine, silky fibers that adhere to the seeds of the cotton plant after ginning. These curly fibers typically are less than 1/8 inch (3.2 mm) long. The term also may apply to the longer textile fiber staple lint, as well as the shorter fuzzy fibers from some upland species.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% cotton content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Morphology

Because non-wood fibers can have high coarseness, they may have poor surface feel and might not mold very well, thus may not have desirable caliper and bulk. Part of this dynamic is that certain non-woods, like bamboo, for instance, is often wider than the wood fibers it is used to replace. Further, bamboo also has a smaller lumen and thicker cell wall versus woods of same fiber width (i.e., a higher Runkel Ratio (i.e., ratio of twice the cell wall thickness to the diameter of the lumen), even greater than 1.0), so non-wood (e.g., bamboo) fibers can behave more stiffly, especially when using wood fiber knowledge. For these reasons, it may be desirable to spread apart knuckles and/or increase molding forces (pick-up shoe (molding vacuum)) and/or increase speed differential at transfer. With these differences, if nothing is done (i.e., if no adjustments are made for incorporating non-woods), caliper drops, and/or roll bulk drops, and/or the sheet is less compressible, and/or the sheet get stiffer (in-plane and/or bending).

Layers

As shown in FIGS. 4A-4F, and as described in FIGS. 18B-1, 18B-2, and 19Table A, a ply of fibrous structures of the present disclosure may be homogeneous or may be layered. If layered,

a ply of the fibrous structures may comprise at least two, at least three, least four, and/or at least five layers. The fibrous structures may comprise a single ply, or two, three plies, four, or five plies.

As used herein, the term “layer” means a plurality of strata of fibers, chemical treatments, or the like, within a ply. As used herein, the terms “layered,” “multi-layered,” and the like, refer to
5 fibrous sheets prepared from two or more layers of aqueous papermaking furnish which may be comprised of different fiber types. The layers may be formed from the deposition of separate streams of dilute fiber slurries, upon one or more endless foraminous screens. If the individual layers are initially formed on separate foraminous screens, the layers may be subsequently combined (while wet) to form a layered composite web. Naturally-occurring (e.g., wood and
10 certain non-woods) and/or non-naturally (e.g., synthetic) occurring fibers can also be present in the fibrous structures, as will be disclosed in greater detail below. FIG. 4A illustrates a first ply 53 and a second ply 53 of a fibrous structure 10. Each of the plies may comprise 2 layers 55. The plies may be joined together 57 via adhesive, an emboss, or the like. The pillows 22 may face outwardly 51 toward the consumer-facing side 50 of the fibrous structure 10. Knuckles 20 may face inwardly
15 toward the product-facing side 52 of the fibrous structure 10, which is more commonly associated with process and equipment such as disclosed in FIG. 6A. As illustrated in FIG. 4A, both plies 53 are FSO. FIG. 4B is similar to FIG. 4A, except that the fibrous structure 10 does not have distinct knuckle 20 and pillow 22 regions or zones, which is more commonly associated with process and equipment such as disclosed in FIGS. 6A and 6B. FIGS. 4B and 4C are much like FIGS. 4A and
20 4B, respectively, except that each ply comprises 3 layers 55. FIG. 4E illustrates a single ply comprising 3 layers and is representative of a fibrous structure resulting from process and equipment such as disclosed in FIGS. 6B and 6C; as such, the fibrous structure 10 does not have distinct knuckle 20 and pillow 22 regions or zones. FIG. 4F is like FIG. 4A, except that it comprises 3 plies and, ply 53''' is FSO and has outwardly-facing 51 pillows 22, while ply 53 is WSO and has outwardly-facing 51 knuckles. FIG. 4F may, alternatively, have both plies 53 and 53''' FSO or both plies WSO; and both plies 53 and 53''' may have outwardly-facing 51 pillows 22 or both plies may have outwardly-facing 51 knuckles 20 - these FSO/WSO alternatives and pillow/knuckle alternatives are also true for FIG. 4A and 4C.

It may be desirable to dispose the highest fiber count (million fibers/g) in a most consumer-
30 facing layer of a ply comprising non-wood fibers. A higher fiber count (versus other layer(s) in a ply) may be done in combination with outwardly facing pillows of a consumer-facing side of a fibrous structure of a sanitary tissue product. The outwardly-facing pillow region of a layer (e.g., 55a) may comprise a higher fiber count than an adjacent region of an adjacent layer (e.g., 55b).

Further, a pillow may have a greater basis weight than an adjacent knuckle. Alternatively, a knuckle may have a greater basis weight than an adjacent pillow.

PROPERTIES OF FIBROUS STRUCTURE(S)

5 Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure(s) as disclosed herein, particularly including various inventive non-wood inclusions, even including greater than 80% non-woods by weight of the fibrous structure, and even including 100% non-woods by weight of the fibrous structure, may have one or a combination
10 of the following properties: a VFS of greater than about 5.5 g/g, greater than about 6.0 g/g, greater than about 7.0 g/g, from about 3 g/g to about 20 g/g, from about 4 g/g to about 18 g/g, from about 5 g/g to about 16 g/g, from about 6 g/g to about 14 g/g, from about 8 g/g to about 12 g/g, or from about 5 g/g to about 6 g/g, specifically reciting all increments of 0.01 g/g within the above-recited ranges and all ranges formed therein or thereby;

15 an HFS of greater than about 13 g/g, or greater than about 14 g/g, or greater than about 15 g/g, or greater than about 16 g/g, or greater than about 16.5 g/g, or greater than about 17 g/g, or greater than about 17.5 g/g, or greater than about 18 g/g, or greater than about 18.5 g/g or greater than about 19 g/g, or greater than about 20 g/g, or greater than about 21 g/g, or from about 4 g/g to about 30 g/g, from about 6 g/g to about 28 g/g, from about 8 g/g to about 26 g/g, from about 10 g/g
20 to about 24 g/g, from about 12 g/g to about 22 g/g, from about 13 g/g to about 20, from about 14 g/g to about 18 g/g, from about 13 g/g to about 15 g/g, or from about 13 g/g to about 14 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

 a stack compressibility of greater than about 40 mils/(log(g/in²)), greater than about 41
25 mils/(log(g/in²)), greater than about 45 mils/(log(g/in²)), greater than about 50 mils/(log(g/in²)), from about 25 mils/(log(g/in²)) to about 100 mils/(log(g/in²)), from about 30 mils/(log(g/in²)) to about 75 mils/(log(g/in²)), from about 40 mils/(log(g/in²)) to about 50 mils/(log(g/in²)), from about 41 mils/(log(g/in²)) to about 48, or from about mils/(log(g/in²)) to about 48 mils/(log(g/in²)), specifically reciting all increments of 0.1 mils/(log(g/in²)) within the above-recited ranges and all
30 ranges formed therein or thereby;

 an MD wet peak elongation of greater than about 18%, greater than about 20%, from about 10% to about 30%, from about 14% to about 25%, from about 18% to about 22%, or from about

18% to about 20%, specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed therein or thereby;

a CD wet peak elongation of greater than about 12%, from about 5% to about 30%, from about 10% to about 25%, from about 12% to about 20%, or from about 12% to about 15%,
5 specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed therein or thereby;

an MD wet peak TEA of greater than about 21 g*in/in², greater than about 22 g*in/in², from about 15 g*in/in² to about 50 g*in/in², from about 20 g*in/in² to about 40 g*in/in², from about 21 g*in/in² to about 30 g*in/in², or from about 21 g*in/in² to about 25 g*in/in², specifically reciting
10 all increments of 1 g*in/in² within the above-recited ranges and all ranges formed therein or thereby;

a CD wet peak TEA of greater than about 7 g*in/in², from about 6 g*in/in² to about 40 g*in/in², from about 6.5 g*in/in² to about 30 g*in/in², from about 7 g*in/in² to about 20 g*in/in², or from about 7.5 g*in/in² to about 15 g*in/in², or from about 8 g*in/in² to about 12 g*in/in²,
15 specifically reciting all increments of 0.5 g*in/in² within the above-recited ranges and all ranges formed therein or thereby;

a CD elongation (dry) of greater than about 5%, of greater than about 8%, of greater than about 12%, of greater than about 13.5%, or from about 5% to about 25%, from about 10% to about 20%, from about 12 % to about 18%, from about 13% to about 17%, or from about 14% to about
20 16%, specifically reciting all increments of 0.5% within the above-recited ranges and all ranges formed therein or thereby;

a CD TEA of greater than about 35 in-g/in², of greater than about 32 in-g/in², or from about 5 in-g/in² to about 100 in-g/in², from about 15 in-g/in² to about 75 in-g/in², from about 25 in-g/in² to about 50 in-g/in², from about 32 in-g/in² to about 45 in-g/in², from about 33 in-g/in² to about 40
25 in-g/in², from about 34 in-g/in² to about 38 in-g/in², specifically reciting all increments of 1 in-g/in² within the above-recited ranges and all ranges formed therein or thereby;

a dry CD tensile modulus / dry CD tensile peak load (derived from the appropriate of: 1) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper, 2) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels, or 3) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue) less than about 5.0 g/g, less than about 4.5 g/g, less than about 4.0 g/g, less than about 3.5 g/g, less than about 3.0 g/g, from about 5.0 g/g to about 2.5 g/g, from about 4.0 g/g to about 2.0 g/g, or from about 3.5 g/g

to about 1.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a wet CD tensile modulus / wet CD tensile peak load less than about 5.0 g/g, less than about 4.5 g/g, less than about 4.25 g/g, less than about 4.0 g/g, less than about 3.75 g/g, less than about 3.5 g/g, less than about 3.25 g/g, less than about 3.0 g/g, less than about 2.5 g/g, less than about 2 g/g, from about 5.0 g/g to about 2.5 g/g, from about 4.0 g/g to about 2.0 g/g, or from about 3.5 g/g to about 1.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a CD modulus (dry) of less than about 2000 g/cm, of less than about 2400 g/cm, of less than about 2500 g/cm, of less than about 3270 g/cm, or from about 200 g/cm to about 5000 g/cm, or from about 1000 g/cm to about 4500 g/cm, or from about 2000 g/cm to about 4000 g/cm, or from about 3000 g/cm to about 4000 g/cm, or from about 3270 g/cm to about 3800 g/cm, or from
5 about 3300 g/cm to about 3700 g/cm, or from about 3350 g/cm to about 3600 g/cm, or from about 3400 g/cm to about 3500 g/cm, specifically reciting all increments of 1 g/cm within the above-recited ranges and all ranges formed therein or thereby;

an MD modulus (dry) of less than about 3360 g/cm, or less than about 1750 g/cm or from about 500 g/cm to about 6000 g/cm, or from about 1000 g/cm to about 5000 g/cm, or from about
10 2000 g/cm to about 4000 g/cm, or from about 3000 g/cm to about 4000 g/cm, or from about 3360 g/cm to about 3800 g/cm, or from about 3400 g/cm to about 3700 g/cm, or from about 3450 g/cm to about 3600 g/cm, or from about 3500 g/cm to about 3600 g/cm, specifically reciting all increments of 1 g/cm within the above-recited ranges and all ranges formed therein or thereby;

a TS7 of less than about 40.00 dB V² rms, or less than about 30.00 dB V² rms, or less than
15 about 22.00 dB V² rms, or less than about 20.00 dB V² rms, or less than about 24.00 dB V² rms, or less than about 15.00 dB V² rms, or less than about 14.00 dB V² rms, or less than about 10.00 dB V² rms, or less than about 8.00 dB V² rms, or greater than about 5.00 dB V² rms, or between about 3.00 dB V² rms and about 40.00 dB V² rms (“between about ‘X’ and about ‘X’” is used interchangeably with “from about ‘X’ to about ‘X’”), or between about 3.00 dB V² rms and about
20 20.00 dB V² rms, or between about 4.00 dB V² rms and about 30 dB V² rms, or between about 15.00 dB V² rms and about 30.00 dB V² rms, or between about 5.00 dB V² rms and about 20.00 dB V² rms, or between about 6.00 dB V² rms and about 14 dB V² rms, or between about 7.00 dB V² rms and about 12.00 dB V² rms, or between about 8.00 dB V² rms and about 11.50 dB V² rms, or between about 9.0 dB V² rms and about 11.00 dB V² rms, or between about 9.50 dB V² rms and
25 about 10.50 dB V² rms, between about 9.50 dB V² rms and about 10.00 dB V² rms, between about

15 dB V^2 rms and about 17 dB V^2 rms, or between about 15 dB V^2 rms and about 16 dB V^2 rms, specifically reciting all increments of 0.01 dB V^2 rms within the above-recited ranges and all ranges formed therein or thereby;

5 a compressive slope of less than about 14.0 mil/g, or less than about 3.0 mil/g, or less than about 4.0 mil/g, or less than about 5.0 mil/g, or less than about 6.0 mil/g, or less than about 7.0 mil/g, or less than about 8.0 mil/g, or less than about 9.0 mil/g, or greater than about 12.0 mil/g 8, or greater than about 11.0 mil/g, or greater than about 12.0 mil/g, or between about 4.0 mil/g and about 10.0 mil/g, or between about 8.0 mil/g and about 12.0 mil/g, or between about 6 mil/g and about 14.0 mil/g, or between about 8.0 mil/g and about 14 mil/g, or between about 7.5 mil/g and about 11 mil/g, or between about 12.0 mil/g and about 3.0 mil/g, or between about 11.0 mil/g and about 5.0 mil/g ,or between about 10.0 mil/g and about 4.0 mil/g, or between about 8.0 mil/g and about 5.0 mil/g, specifically reciting all increments of 0.01 mil/g within the above-recited ranges and all ranges formed therein or thereby;

15 a formation index of less than about 170, or less than about 90, or less than about 65, or greater than about 30, or greater than about 50, or between about 55 and about 165, or between about 55 and about 85, or between about 60 and about 80, or between about 65 and about 75, specifically reciting all increments of 0.1 within the above-recited ranges and all ranges formed therein or thereby;

20 a coverage of less than about 10 fiber layers (making up a layer 55 of a ply 53), or less than about 9 fiber layers, or less than about 8 fiber layers, or less than about 7 fiber layers, or less than about 6 fiber layers, or less than about 5 fiber layers, or less than about 4 fiber layers, or greater than about 2 fiber layers, or greater than about 4.75 fiber layers, or greater than about 5 fiber layers, or greater than about 5,25 fiber layers, or greater than about 5.5 fiber layers, or greater than about 5.75 fiber layers, or greater than about 6 fiber layers, or greater than about 6.25 fiber layers, 25 greater than about 6.5 fiber layers, or greater than about 7 fiber layers, or greater than about 7.25 fiber layers, or greater than about 7.5 fiber layers, or greater than about 7.75 fiber layers, or greater than about 8 fiber layers, or greater than about 8.25 fiber layers, or greater than about 8.5 fiber layers, or greater than about 9 fiber layers, or between about 2 and about 10 fiber layers, or between about 4 and about fiber 9 fiber layers, or between about 5 and about fiber 8 fiber layers, or between 30 about 4 and about fiber 7 fiber layers, specifically reciting all increments of 1 fiber layer within the above-recited ranges and all ranges formed therein or thereby;

a coarseness (according to the Coverage and Fiber Count Test Method) of less than about 0.35 mg/m, or less than about 0.30 mg/m, or less than about 0.25 mg/m, or less than about 0.20

mg/m, or greater than about 0.13 mg/m, or greater than about 0.14 mg/m, or greater than about 0.15 mg/m, or greater than about 0.16 mg/m, or greater than about 0.17 mg/m, or between about 0.15 mg/m and about 0.35 mg/m, or between about 0.15 mg/m and about 0.30 mg/m, or between about 0.16 mg/m and about 1.7 mg/m, or between about 0.15 mg/m and about 0.17 mg/m, or
5 between about 0.15 mg/m and about 0.20 mg/m, or between about 0.25 mg/m and about 0.26 mg/m, or between about 0.22 mg/m and about 0.3 mg/m, or between about 0.19 mg/m and about 0.32 mg/m, specifically reciting all increments of 0.01 mg/m within the above-recited ranges and all ranges formed therein or thereby;

a lint value of less than about 11, or less than about 10, or less than about 9, or less than
10 about 8, or less than about 7, or less than about 6, or less than about 5, or greater than about 0.5, greater than about 4.1, greater than about 6, or between about 0.5 and about 11, or between about 0.7 and about 11, or between about 7.5 and about 10.5, or between about 4 and about 5.5, or between about 6.3 and about 7.7, or between about 3 and about 10, or between about 4 and about 9, or between about 5 and about 8, or between about 6 and about 8, specifically reciting all
15 increments of 0.01 (Hunter L value) within the above-recited ranges and all ranges formed therein or thereby;

a fiber length of less than about 4 mm, of less than about 3 mm, of less than about 2.3 mm, or less than about 2.2 mm, or less than about 2.1 mm, or less than about 2.0 mm, or less than about 1.9 mm, or less than about 1.5 mm, or less than about 1.4, or greater than about 0.7, or greater than
20 about 1, or greater than about 2 mm or between about 0.6 mm and about 2.4 mm, or between about 0.7 mm and about 2.2 mm, or between about 0.8 mm and about 2 mm, or between 2.5 mm and 3.7 mm, or between about 0.9 mm and about 1.8 mm, or between about 1 mm and about 1.6 mm, or between about 1.1 mm and about 1.5 mm, or between about 1.1 mm and about 1.4 mm, or between about 1.1 mm and about 1.3 mm, specifically reciting all increments of 0.01 mm within the above-
25 recited ranges and all ranges formed therein or thereby;

a fiber width of less than about 31 um, or less than about 28 um, or less than about 25 um, or less than about 22 um, or less than about 20 um, or greater than about 8 um, or between about 7 um and about 32 um, or between about 8 um and about 31 um, or between about 10 um and about 28 um, or between about 12 um and about 26 um, or between about 14 um and about 24 um, or
30 between about 16 um and about 22 um, or between about 22 um and about 27 um, or between about 25 um and about 31 um, or between about 15 um and about 19 um, or between about 18 um and about 20 um, or between about 7.5 um and about 9.5 um, specifically reciting all increments of 0.1 um within the above-recited ranges and all ranges formed therein or thereby;

a fiber length/width ratio (according to the Fiber Length, Width, Coarseness, and Fiber Count Test Method) of less than about 190, or less than about 180, or less than about 170, or less than about 160, or less than about 150, or less than about 140, or less than about 130, or less than about 120, or less than about 110, or less than about 106, or less than about 100, or less than about 75, or less than about 50, or greater than about 40, or between about 190 and about 35, or between about 185 and about 40, or between about 175 and about 50, or between about 150 and about 75, or between about 125 and about 100, specifically reciting all increments of 1 within the above-recited ranges and all ranges formed therein or thereby;

a fiber count (length average) of less than about 30 fibers/g, or less than about 25 fibers/g, or less than about 20 fibers/g, or less than about 16 fibers/g, or less than about 15 fibers/g, or less than about 14 fibers/g, or less than about 13 fibers/g, or less than about 10 fibers/g, or greater than about 3 fibers/g, or between about 2.75 fibers/g and about 5 fibers/g, or between about 3 fibers/g and about 35 fibers/g, or between about 3.5 fibers/g and about 30 fibers/g, or between about 5 fibers/g and about 25 fibers/g, or between about 10 fibers/g and about 20 fibers/g, or between about 10 fibers/g and about 15 fibers/g, specifically reciting all increments of 0.1 fibers/g within the above-recited ranges and all ranges formed therein or thereby;

a fiber count (number average) of less than about 30 fibers/g, or less than about 25 fibers/g, or less than about 20 fibers/g, or less than about 16 fibers/g, or less than about 15 fibers/g, or less than about 14 fibers/g, or less than about 13 fibers/g, or less than about 10 fibers/g, or greater than about 3 fibers/g, or greater than about 8.9 fibers/g, or between about 3 fibers/g and about 35 fibers/g, or between about 3.5 fibers/g and about 30 fibers/g, or between about 5 fibers/g and about 25 fibers/g, or between about 10 fibers/g and about 20 fibers/g, or between about 10 fibers/g and about 15 fibers/g, specifically reciting all increments of 0.1 fibers/g within the above-recited ranges and all ranges formed therein or thereby;

fiber count-area ($C(n)$) of greater than about 800 million/m², greater than about 830 million/m², greater than about 850 million/m², greater than about 900 million/m², greater than about 950 million/m², greater than about 1,000 million/m², or less than about 1,050 million/m², less than about 950 million/m², or from about 800 million/m² to about 1,000 million/m², from about 850 million/m² to about 975 million/m², specifically reciting all increments of 1 million/m² within the above-recited ranges and all ranges formed therein or thereby;

fiber count-area ($C(l)$) of greater than about 260 million/m², greater than about 280 million/m², greater than about 300 million/m², greater than about 350 million/m², greater than

about 400 million/m², greater than about 450 million/m², greater than about 500 million/m², greater than about 525 million/m², or less than about 530 million/m², less than about 500 million/m², less than about 400 million/m², or from about 260 million/m² to about 530 million/m², from about 260 million/m² to about 400 million/m², from about 260 million/m² to about 400 million/m², specifically reciting all increments of 1 million/m² within the above-recited ranges and all ranges formed therein or thereby;

a tensile ratio (also called “dry tensile ratio,” see the Dry Elongation, Tensile Strength, TEA and Modulus Test Methods below) of less than about 4.5, or less than about 4, or less than about 3.5, or less than about 3, or less than about 2.5, or less than about 2.1, or less than about 2, or less than about 1.9, or less than about 1.7, or greater than about 0.5, or greater than about 1.3, or greater than about 1.6, or greater than about 2, or greater than about 2.5, or between about 0.4 and about 0.5, or between about 0.5 and about 4.5, or between about 1.1 and about 1.6, or between about 1.25 and about 3, or between about 1.8 and about 2.4, or between about 1 and about 3, or between about 1.2 and about 2.1, or between about 1.5 and about 2, or between about 1.7 and about 2, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby;

an Emtec TS750 of greater than about 10 dB V² rms, or greater than about 20 dB V² rms, or greater than about 40 dB V² rms, or greater than about 47.7 dB V² rms, or greater than about 50 dB V² rms, or greater than about 75 dB V² rms, or less than about 115 dB V² rms, or less than about 20 dB V² rms, or less than about 40 dB V² rms, or less than about 45 dB V² rms, or less than about 60 dB V² rms, or less than about 80 dB V² rms, or between about 10 dB V² rms and about 120 dB V² rms, or between about 14 dB V² rms and about 113 dB V² rms, or between about 14 dB V² rms and about 75 dB V² rms, or between about 50 dB V² rms and about 112 dB V² rms, or between about 15 dB V² rms and about 50 dB V², or between about 16 dB V² rms and about 40 dB V², or between about 20 dB V² rms and about 30 dB V², or between about 25 dB V² rms and about 35 dB V², or between about 40 dB V² rms and about 55 dB V², specifically reciting all increments of 1 dB V² rms within the above-recited ranges and all ranges formed therein or thereby;

a slip stick of greater than about 235, or greater than about 270 greater than about 300, or greater than about 350, or greater than about 400, or greater than about 500, or greater than about 600, or greater than about 700, greater than about 800, or greater than about 900, or less than about 435, or less than about 605, or less than about 1000, or between about 230 and about 1400, or between about 235 and about 435, or between about 235 and about 605, or between about 280 and about 965, or between about 300 and about 800, or between about 350 and about 500, or between

about 400 and about 600, specifically reciting all increments of 10 within the above-recited ranges and all ranges formed therein or thereby;

a density of a first zone (a first region) or a pillow zone may be different than a density of a second zone (a second region or a knuckle zone), which is adjacent to the first zone, such that the density of a second zone (a second region or a knuckle zone) may be 5%, 10%, 15%, 20%, 30%, 40%, 50%, 75%, 100%, 125%, 150%, 175%, or 200% greater than the first zone (first region or pillow zone), specifically reciting all increments of 0.01% within the above-recited ranges and all ranges formed therein or thereby (the Micro-CT Intensive Property Measurement Method can be used to determine density of an area of interest);

a Runkel Ratio of greater than about 1, or greater than about 2, or greater than about 3, or greater than about 5, or greater than about 6, or greater than about 7, or less than about 10, between about 0.5 and about 10, or between about 1 and about 8, or between about 1.5 and about 6.5, specifically reciting all increments of 0.1 within the above-recited ranges and all ranges formed therein or thereby;

a 2.5-160 micron PVD desorption of less than about 1600 mg, or less than about 1550 mg, or less than about 1500 mg, or less than about 1400 mg, or less than about 1300 mg, or less than about 1200 mg, or less than about 1100 mg, or less than about 1000 mg, or less than about 900 mg, or less than about 800 mg, or less than about 700 mg, or less than about 600 mg, or greater than about 550 mg, or between about 550 mg and about 1600 mg, or between about 600 mg and about 1550 mg, or between about 700 mg and about 1550 mg, or between about 825 mg and about 1550 mg, or between about 850 mg and about 1500 mg, or between about 900 mg and about 1400 mg, or between about 1000 mg and about 1200 mg, specifically reciting all increments of 1 mg within the above-recited ranges and all ranges formed therein or thereby;

a 2.5-160 micron PVD absorption of less than about 1200 mg, or less than about 1100 mg, or less than about 1000 mg, or less than about 900 mg, or greater than about 400 mg, or greater than about 800 mg, or greater than about 825 mg, or between about 400 mg and about 1200 mg, or between about 500 mg and about 1200 mg, or between about 600 mg and about 1200 mg, or between about 700 mg and about 1200 mg, or between about 800 mg and about 1200 mg, or between about 900 mg and about 1100 mg, specifically reciting all increments of 1 mg within the above-recited ranges and all ranges formed therein or thereby;

a VFS of greater than about 4 g/g, or greater than about 5.5 g/g, or greater than about 6.0 g/g, or greater than about 7.0 g/g, or greater than about 7.3 g/g, or greater than about 7.5 g/g, or greater than about 8 mg, or greater than about 8.5 g/g, or greater than about 9 g/g, or greater than

about 9.5 g/g, or greater than about 10 g/g, or greater than about 10.5 g/g, or greater than about 11 g/g, or greater than about 11.5 g/g, or greater than about 12 g/g, or greater than about 12.5 g/g, or less than about 13 g/g, or between about 4 g/g and about 15 g/g, or between about 5 g/g and about 11 g/g, or between about 10 g/g and about 15 g/g, or between about 7 g/g and about 13 g/g, or between about 7.5 g/g and about 13 g/g, or between about 8 g/g and about 13 g/g, or between about 9 g/g and about 13 g/g, or between about 10 g/g and about 13 g/g, or between about 10.5 g/g and about 12.5 g/g, or between about 10 g/g and about 12 g/g, or between about 10.5 g/g and about 11.5 g/g, reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

10 a residual water of less than about 10%, less than about 9%, less than about 7%, less than about 5%, less than about 4%, less than about 3.5%, from about 1% to about 20%, from about 2% to about 18%, from about 3% to about 16%, from about 4% to about 14%, from about 5% to about 12%, from about 6% to about 10%, from about 1% to about 3%, or from about 1% to about 2%, specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed
15 therein or thereby;

a basis weight of at least about 48 g/m² (i.e., gsm), of between about 10 g/m² and about 100 g/m², or between about 10 g/m² and about 45 g/m², between about 20 g/m² and about 40 g/m², or between about 24 g/m² and about 40 g/m², or between about 30 g/m² and about 32 g/m², or between about 40 g/m² and about 65 g/m², or between about 45 g/m² and about 60 g/m², or between about
20 50 g/m² and about 58 g/m², or between about 50 g/m² and about 55 g/m², or between about 50 g/m² and about 75 g/m², specifically reciting all increments of 0.1 g/m² within the above-recited ranges and all ranges formed therein or thereby;

a density (based on measuring caliper at 95 g/in²) of less than about 0.60 g/cm³ and/or less than about 0.30 g/cm³ and/or less than about 0.20 g/cm³ and/or less than about 0.10 g/cm³
25 and/or less than about 0.07 g/cm³ and/or less than about 0.05 g/cm³ and/or from about 0.01 g/cm³ to about 0.20 g/cm³ and/or from about 0.02 g/cm³ to about 0.10 g/cm³, specifically reciting all increments of 0.001 g/cm³ within the above-recited ranges and all ranges formed therein or thereby;

a bulk (also called "dry bulk," based on measuring caliper at 95 g/in²) of greater than
30 about 1.67 cm³/g and/or greater than about 3.33 cm³/g and/or greater than about 5.00 cm³/g and/or greater than about 10.00 cm³/g and/or greater than about 14.29 cm³/g and/or greater than about 15.0 cm³/g and/or greater than about 18.0 cm³/g and/or greater than about 20.00 cm³/g and/or from about 100.00 cm³/g to about 5.00 cm³/g and/or from about 50.00 cm³/g to about

10.00 cm³/g, specifically reciting all increments of 0.01 cm³/g within the above-recited ranges and all ranges formed therein or thereby (Note: This is distinct from “Dry Bulk Ratio” and “Resilient Bulk.”);

an SST (absorbency rate) of greater than about 0.3 g/sec^{0.5}, or greater than about 0.4 g/sec^{0.5},
 5 or greater than about 0.45 g/sec^{0.5}, or greater than about 0.5 g/sec^{0.5}, or greater than about 0.75 g/sec^{0.5}, or greater than about 1.0 g/sec^{0.5}, or greater than about 1.60 g/sec^{0.5}, or greater than about 1.65 g/sec^{0.5}, or greater than about 1.70 g/sec^{0.5}, or greater than about 1.75 g/sec^{0.5}, or greater than about 1.80 g/sec^{0.5}, or greater than about 1.82 g/sec^{0.5}, or greater than about 1.85 g/sec^{0.5}, or greater than about 1.88 g/sec^{0.5}, or greater than about 1.90 g/sec^{0.5}, or greater than about 1.95 g/sec^{0.5}, or
 10 greater than about 2.00 g/sec^{0.5}, or between about 1.60 g/sec^{0.5} and about 2.50 g/sec^{0.5}, between about 1.0 g/sec^{0.5} and about 2.0 g/sec^{0.5}, or between about 2.0 g/sec^{0.5} and about 2.50 g/sec^{0.5}, or between about 0.3 g/sec^{0.5} and about 0.7 g/sec^{0.5}, or between about 1.0 g/sec^{0.5} and about 1.50 g/sec^{0.5}, or between about 0.3 g/sec^{0.5} and about 0.9 g/sec^{0.5}, or between about 1.65 g/sec^{0.5} and about 2.50 g/sec^{0.5}, or between about 1.70 g/sec^{0.5} and about 2.40 g/sec^{0.5}, or between about 1.75 g/sec^{0.5} and about 2.30 g/sec^{0.5}, or between about 1.80 g/sec^{0.5} and about 2.20 g/sec^{0.5}, or between about 1.82 g/sec^{0.5} and about 2.10 g/sec^{0.5}, or between about 1.85 g/sec^{0.5} and about 2.00 g/sec^{0.5}, specifically reciting all increments of 0.1 g/sec^{0.5} within the above-recited ranges and all ranges formed therein or thereby;

a plate stiffness of greater than about 0.3 N*mm, or greater than about 0.5 N*mm, or greater
 20 than about 1.0 N*mm, or greater than about 2.0 N*mm, or greater than about 4.0 N*mm, or greater than about 6.0 N*mm, or greater than about 8.0 N*mm, or greater than about 12.0 N*mm, or greater than about 12.5 N*mm, or greater than about 13.0 N*mm, or greater than about 13.5 N*mm, or greater than about 14 N*mm, or greater than about 14.5 N*mm, or greater than about 15 N*mm, or greater than about 15.5 N*mm, or greater than about 16 N*mm, or greater than about
 25 16.5 N*mm, or greater than about 17 N*mm, or between about 0.3 N*mm and about 20 N*mm, or between about 1 N*mm and about 20 N*mm, or between about 2 N*mm and about 20 N*mm, or between about 4 N*mm and about 20 N*mm, or between about 6 N*mm and about 20 N*mm, or between about 8 N*mm and about 20 N*mm, or between about 10 N*mm and about 20 N*mm, or between about 12 N*mm and about 20 N*mm, or between about 12.5 N*mm and about 20
 30 N*mm, or between about 13 N*mm and about 20 N*mm, or between about 13.5 N*mm and about 20 N*mm, or between about 14 N*mm and about 20 N*mm, or between about 14.5 N*mm and about 20 N*mm, or between about 15 N*mm and about 20 N*mm, or between about 15.5 N*mm and about 20 N*mm, or between about 16 N*mm and about 20 N*mm, or between about

16.5 N*mm and about 20 N*mm, or between about 17 N*mm and about 20 N*mm, specifically reciting all increments of 0.1 N*mm within the above-recited ranges and all ranges formed therein or thereby;

5 a resilient bulk of greater than about 25 cm³/g, or greater than about 29 cm³/g, or greater than about 40 cm³/g, or greater than about 50 cm³/g, or greater than about 60 cm³/g, or greater than about 62 cm³/g, or greater than about 75 cm³/g, or greater than about 85 cm³/g, or greater than about 90 cm³/g, or greater than about 95 cm³/g, or greater than about 100 cm³/g, or greater than about 102 cm³/g, or greater than about 105 cm³/g, or between about 29 cm³/g and about 112 cm³/g, or between about 29 cm³/g and about 103 cm³/g, or between about 40 cm³/g and about 100 cm³/g, 10 or between about 50 cm³/g and about 75 cm³/g, or between about 55 cm³/g and 70 cm³/g, or between about 85 cm³/g and about 110 cm³/g, or between about 90 cm³/g and about 110 cm³/g, or between about 95 cm³/g and about 110 cm³/g, or between about 100 cm³/g and about 110 cm³/g, specifically reciting all increments of 1 cm³/g within the above-recited ranges and all ranges formed therein or thereby;

15 a total wet tensile of greater than about 50 g/in, or greater than about 75 g/in, or greater than about 100 g/in, or greater than about 200 g/in, or greater than about 300 g/in, or greater than about 400 g/in, or greater than about 450 g/in, or greater than about 470 g/in, or greater than about 500 g/in, or greater than about 550 g/in, or greater than about 600 g/in, or greater than about 650 g/in, or greater than about 700 g/in, or greater than about 750 g/in, or greater than about 758 g/in, 20 or greater than about 800 g/in, or greater than about 850 g/in, or greater than about 900 g/in, or greater than about 2278. or between about 350 g/in and about 475 g/in, or between about 420 g/in and about 440 g/in, or between about 100 g/in and about 640 g/in, or between about 300 g/in and about 1000 g/in, or between about 400 g/in and about 900 g/in, or between about 500 g/in and about 900 g/in, or between about 550 g/in and about 900 g/in, or between about 600 g/in and about 25 900 g/in, or between about 650 g/in and about 900 g/in, or between about 700 g/in and about 900 g/in, specifically reciting all increments of 10 g/in within the above-recited ranges and all ranges formed therein or thereby;

a total wet tensile (Finch) of greater than about between about 10 g/in and about 125 g/in, or between about 20 g/in and about 55 g/in, or between about 30 g/in and about 100 g/in, or between 30 about 10 g/in and about 65 g/in, specifically reciting all increments of 1 g/in within the above-recited ranges and all ranges formed therein or thereby;

a dry burst (peak load) strength of greater than about 250 g, or greater than about 400 g, or greater than about 600 g, or greater than about 800 g, or greater than about 1000 g, or greater than

about 1200 g, or greater than about 1300 g, or greater than about 1400 g, or between about 250 g and about 1500 g, or between about 400 g and about 1500 g, or between about 600 g and about 1500 g, or between about 800 g and about 1450 g, or between about 1000 g and about 1400 g;

a wet burst (peak load) strength of greater than about 3 g, greater than about 5 g, or greater than about 10 g, or greater than about 20 g, or greater than about 50 g, or greater than about 55 g, or greater than about 75 g, or greater than about 100 g, or greater than about 115 g, or greater than about 150 g, or greater than about 177 g, or greater than about 200 g, or greater than about 300 g, or greater than about 350 g, or greater than about 400 g, or greater than about 450 g, or greater than about 478 g, or greater than about 500 g, or greater than about 550 g, or greater than about 600 g, or between about 20 g and about 530 g, or between about 3 g and about 22 g, or between about 25 g and about 52 g, or between about 230 g and about 525 g, or between about 180 g and about 525 g, or between about 200 g and about 700 g, or between about 350 g and about 600 g, or between about 350 g and about 550 g, or between about 400 g and about 550 g, or between about 400 g and about 525 g, or between about 50 g and about 220 g, or between about 50 g and about 60 g, or between about 50 g and 55 g, specifically reciting all increments of 10 g within the above-recited ranges and all ranges formed therein or thereby;

a flexural rigidity (avg.) of greater than about 40 mg-cm, greater than about 75 mg-cm, greater than about 175 mg-cm, 100, greater than about 125 mg-cm, greater than about 150 mg-cm, greater than about 175 mg-cm, greater than about 200 mg-cm, or greater than about 700 mg-cm, or greater than about 800 mg-cm, or greater than about 900 mg-cm, or greater than about 1000 mg-cm, or greater than about 1100 mg-cm, or greater than about 1200 mg-cm, or greater than about 1300 mg-cm, or greater than about 1400 mg-cm, or greater than about 1500 mg-cm, or greater than about 1600 mg-cm, or greater than about 1700 mg-cm, or between about 40 mg-cm and about 200 mg-cm, or between about 60 mg-cm and about 150 mg-cm, or between about 80 mg-cm and about 125 mg-cm, or between about 80 mg-cm and about 100 mg-cm, or between about 700 mg-cm and about 1800 mg-cm, or between about 800 mg-cm and about 1600 mg-cm, or between about 900 mg-cm and about 1400 mg-cm, or between about 1000 mg-cm and about 1350 mg-cm, or between about 1050 mg-cm and about 1350 mg-cm, or between about 1100 mg-cm and about 1350 mg-cm, or between about 1100 mg-cm and about 1300 mg-cm, specifically reciting all increments of 10 mg-cm within the above-recited ranges and all ranges formed therein or thereby;

a dry caliper of greater than about 4.0 mils, or greater than about 10.0 mils, or greater than about 15.0 mils, or greater than about 20.0 mils, or than about 26.0 mils, or than about 28.0 mils, or greater than about 40 mils, or greater than about 55 mils, or between about 4.0 mils and about

27.0 mils, or between about 18.0 mils and about 24.0 mils, or between about 45.0 mils and about 51.0 mils, or between about 29 mils and about 33.0 mils, or between about 19.0 mils and about 43.0 mils, or about 26.0 mils and about 80.0 mils, or between 40.0 mils and 60.0 mils, or between about 50 and about 60 mils, specifically reciting all increments of 0.10 mils within the above-recited ranges and all ranges formed therein or thereby;

5 a wet caliper of greater than about 8.0 mils, or greater than about 10.0 mils, or greater than about 15.0 mils, or greater than about 17.0 mils, or greater than about 26 mils, or between about 10.0 mils and about 33.0 mils, or between about 15.0 mils and about 25.0 mils, or between about 8.0 mils and about 20.0 mils, or between about 26.0 mils and about 70.0 mils, or between about 10 26.0 mils and about 40.0 mils, specifically reciting all increments of 0.10 mils within the above-recited ranges and all ranges formed therein or thereby;

a total dry tensile (total tensile) of greater than about 250 g/in, or greater than about 400 g/in, or greater than about 500 g/in, or greater than about 700 g/in, or greater than about 800 g/in, or greater than about 1000 g/in, or greater than about 1200 g/in, or greater than about 1300 g/in, or greater than about 1700 g/in, or greater than about 2278 g/in, or between about 880 g/in and about 15 2570 g/in, or between about 1800 g/in and about 2485 g/in, or between about 1900 g/in and about 2300 g/in, or between about 250 g/in and about 1000 g/in, or between about 400 g/in and about 580 g/in, or between about 700 g/in and about 800 g/in, or between about 275 g/in and about 1310 g/in, or about 1300 g/in and about 4000 g/in, or between about 1800 g/in and about 2800 g/in, 20 specifically reciting all increments of 10 g/in within the above-recited ranges and all ranges formed therein or thereby;

a geometric mean (GM) dry modulus of greater than about 1000 g/cm, or greater than about 1700 g/cm, or less than about 3320 g/cm, or less than about 2500 g/cm, or less than about 2400 g/cm, or less than about 2300 g/cm, or less than about 2000 g/cm, or less than about 1500 g/cm, or 25 less than about 1000 g/cm, or between about 1800 g/cm and about 4000 g/cm, or between about 1800 g/cm and about 3500 g/cm, or between about 3300 g/cm and about 3350 g/cm, specifically reciting all increments of 10 g/cm within the above-recited ranges and all ranges formed therein or thereby;

a wet tensile geometric mean (GM) modulus of greater than about 250 g/cm, or greater than 30 about 375 g/cm, or between about 250 g/cm and about 700 g/cm, or between about 250 g/cm and about 525 g/cm, or between about 375 g/cm and 525 g/cm, specifically reciting all increments of 10 g/cm within the above-recited ranges and all ranges formed therein or thereby;

a CRT rate of greater than about 0.30 g/sec, or greater than about 0.5 g/sec, or greater than about 0.55 g/sec, or greater than about 0.6 g/sec, or greater than about 0.61 g/sec, or greater than about 0.65 g/sec, or greater than about 0.7 g/sec, or greater than about 0.75 g/sec, or greater than about 0.8 g/sec, or between about 0.30 g/sec and about 1.00 g/sec, or between about 0.61 g/sec and about 0.85 g/sec, specifically reciting all increments of 0.05 g/sec within the above-recited ranges and all ranges formed therein or thereby;

a CRT capacity of greater than about 10.0 g/g, or greater than about 12.5 g/g, or between about 12.5 g/g and about 23.0 g/g, or between about 16.5 g/g and about 21.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby; a kinetic CoF of greater than about 0.75, or greater than about 0.85, or between about 0.85 and about 1.30, or between about 0.77 and about 1.7, or between about 0.85 and about 1.20, specifically reciting all increments of 0.05 within the above-recited ranges and all ranges formed therein or thereby;

a dry depth of more negative than -240 um, or more negative than -255um, or more negative than -265um, or more negative than -275um, or more negative than -285um, or more negative than -295um, or more negative than -300um, or between about -240um and about -310 um, or between about -245 um and about -305 um, or between about -255 um and about -303 um, or between about -265 um and about -302 um, or between about -275 um and about -300 um, specifically reciting all increments of 20 um within the above-recited ranges and all ranges formed therein or thereby;

a moist depth of more negative than -275um, or more negative than -285 um, or more negative than -295 um, or more negative than -300 um, or more negative than -310 um, or more negative than -320 um, or more negative than -330 um, or between about -275 um and about -340 um, or between about -285 um and about -335 um, or between about -295 um and about -332 um, or between about -300 um and about -330 um, or between about -305um and about -328 um, specifically reciting all increments of 20 um within the above-recited ranges and all ranges formed therein or thereby;

a moist contact area of greater than 25%, or greater than 27%, or greater than 29%, or greater than 31%, or greater than 32%, or greater than 34%, or greater than 36%, or between about 25% and about 38%, or between about 27% and about 37%, or between about 29% and about 36%, or between about 30% and about 35%, or between about 31% and about 34%, specifically reciting all increments of 1% within the above-recited ranges and all ranges formed therein or thereby;

a dry contact area of greater than 17%, or greater than 20%, or greater than 22%, or greater than 24%, or greater than 26%, or greater than 28%, or greater than 30%, or between about 17%

and about 33%, or between about 20% and about 31%, or between about 22% and about 30%, or between about 23% and about 30%, or between about 24% and about 29%, specifically reciting all increments of 1% within the above-recited ranges and all ranges formed therein or thereby;

5 a dry compression (at 10 g force in mils) of greater than about 30 mils, or greater than about 45 mils, or greater than about 50 mils, or greater than about 55 mils, or greater than about 60 mils, or greater than about 65 mils, or greater than about 70, or greater than about 85 mils, or between about 40 mils and about 100 mils, or between about 50 mils and about 80 mils, or between about 50 mils and about 65 mils, or between about 50 mils and about 60 mils, or between about 55 mils and about 60 mils, specifically reciting all increments of 5 mil within the above-recited ranges and
10 all ranges formed therein or thereby;

a wet compression (at 10g force value) in mils of greater than about 30 mils, or greater than about 20 mils, or greater than about 30 mils, or greater than about 40 mils, or greater than about 50 mils, or greater than about 55, or greater than about 60 mils, or greater than about 70 mils, or between about 30 mils and about 100 mils, or between about 40 mils and about 70 mils, or between
15 about 45 mils and about 60 mils, or between about 47 mils and about 58 mils, or between about 50 mils and about 55 mils, specifically reciting all increments of 5 mils within the above-recited ranges and all ranges formed therein or thereby;

a dry bulk ratio of greater than about 15, or greater than about 18, or greater than about 22, or greater than about 25, or greater than about 27, or greater than about 33, or greater than about
20 35, or greater than about 40, or greater than about 50, or between about 15 and about 60, or between about 22 and about 50, or between about 25 and about 35, or between about 27 and about 35, or between about 27 and about 33, specifically reciting all increments of 0.5 within the above-recited ranges and all ranges formed therein or thereby;

a wet bulk ratio of greater than about 20, or greater than about 22, or greater than about 25,
25 or greater than about 28, or greater than about 30, or greater than about 34, or greater than about 40, or greater than about 45, or greater than about 50, or greater than about 55, or between about 22 and about 50, or between about 20 and about 50, or between about 25 and about 45, or between about 28 and about 40, or between about 30 and about 34, specifically reciting all increments of 0.5 inches within the above-recited ranges and all ranges formed therein or thereby;

a wet burst strength to dry tensile ratio ("wet burst/dry tensile ratio" which is wet burst strength divided by dry tensile) of greater than about 0.05, greater than about 0.09, greater than about 0.1, greater than about 0.15, greater than about 0.18, greater than about 0.20, greater than

about 0.24, or greater than about 0.26, or between about 0.05 and about 0.27, or between about 0.15 and about 0.26, or between about 0.20 and about 0.26;

a wet burst strength to dry burst strength ratio (“wet/dry burst strength ratio” which is wet burst strength divided by dry burst strength) of greater than about 0.09, or greater than about 0.10, or greater than about 0.18, or greater than about 0.19, or greater than about 0.20, or greater than about 0.30, or greater than about 0.40, or between about 0.10 and about 0.50, or between about 0.20 and about 0.48, or between about 0.30 and about 0.46, or between about 0.40 and about 0.46; a concavity ratio measurement of greater than about 0.1, or greater than about 0.15, or greater than about 0.20, or greater than about 0.25, or greater than about 0.30, or greater than about 0.35, or greater than about 0.40, or greater than about 0.45, or greater than about 0.50, or greater than about 0.55, or greater than about 1.0, or greater than about 1.25, or greater than about 1.5, or between about 0.10 and about 0.95, or between about 0.15 and about 0.90, or between about 0.20 and about 0.85, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby; and/or

a packing fraction measurement of greater than about 0.05, or greater than about 0.08, or greater than about 0.10, or greater than about 0.12, or greater than about 0.15, or greater than about 0.17, or between about 0.05 and about 0.75, or between about 0.10 and about 0.80, or between about 0.15 and about 0.85, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby.

Fibrous structure(s) of the present disclosure comprising non-wood fibers may have one or a combination of the above properties (disclosed in this Properties of Fibrous Structure(s) Section).

20

Softness

Of particular interest is softness of the fibrous structure. This is where so many sustainable sanitary tissue products fail and the art does not disclose how to achieve soft fibrous structures comprising bamboo and/or other sustainable non-wood fibers. This becomes truer as non-wood fiber inclusion increases. Surprisingly, the inventors have found that adding coarse bamboo fibers (bamboo is especially coarse versus eucalyptus) into the fibrous structure, even at high inclusion levels, and/or even disposed at a consumer-facing side of a sheet, can result in products with good softness. There are a number of ways the inventors have accomplished this, including creation of differential densities, utilizing unique layering, and/or fiber mixes. Details of such are in the specification below.

30

Also, surprisingly, the inventors of the present disclosure have found that they are able to deliver soft fibrous structures that have low lint values. Typically, higher lint values accompany greater softness values (e.g., TS7, TS750). Beyond the difficulties of processing fibrous structures that are linty, lint can cause unwanted debris at the point of use, which can be messy and can be aesthetically undesirable. Thus, it is of great benefit to achieve greater softness while maintaining lower lint values. Thus, the inventors have not only improved sustainable fibrous structures, but have improved the general offering of fibrous structures beyond what is otherwise available today, even including what is available on the shelf today as a high-tier offerings consisting only of wood fibers. FIG. 1A illustrates TS7 values of a sanitary tissue products of the present disclosure and FIG. 1C illustrates TS7 and lint values of sanitary tissue products of the present disclosure.

Coverage

Sanitary tissue products (e.g., bath tissue sheets) are often comprised of substantial portions of eucalyptus fibers, especially at a consumer-facing layer. Thus, as one incorporates higher levels of bamboo, one is necessarily replacing the short, narrow, and low coarseness eucalyptus fibers with longer, wider, and coarser bamboo fibers.

It is known in the art that fiber coverage is an important consideration when making premium sanitary tissue products. Fiber coverage can be thought of as the average number of fibers that would be encountered as one travels normal to the surface of the product (i.e., travels in the z-direction). Included in the calculation of fiber coverage are fiber coarseness (mg/m), fiber width (mm), and basis weight (gsm). A contradiction that paper (fibrous structures and, more particularly, sanitary tissue products) makers contend with is how to design a strong, yet soft substrate. This has previously been achieved through the judicious choice and layering of wood-based fibers. Long and easily bonded fibers such as softwoods are used in a sheet for strength, while short, thin, and low coarseness fibers such as eucalyptus are used for softness. These short, thin, and low coarseness eucalyptus fibers also provide a high level of fiber coverage in the sheet, aiding in hand protection and other aspects of absorbency.

While the art has disclosed that low coarseness bamboo can be used in toilet tissue, the inventors of the present disclosure have, surprisingly, found that adding much higher coarseness bamboo into the sheet, even at high inclusion levels, and against the consumer (i.e., on a consumer-facing surface), can result in products with good softness and low levels of lint. The bamboo fibers tested are also wider (18.9 μm) than in previous examples. These coarse and wide bamboo fibers create substrates with lower fiber coverage at a given basis weight. Further, it has been surprisingly

shown that the introduction of coarser, non-wood fibers such as bamboo, which create lower fiber coverage substates, can still create products that can successfully balance the traditional strength-softness contradiction. These improvements may be achieved, at least in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface and at creping, and through creping geometry changes.

As indicated in this section above, one key part of consumer acceptance is hand protection. One way to improve hand protection is via increased fiber coverage in the sheet. This can be done by increasing basis weight or by choosing fibers that have a high specific surface area per weight. Fiber attributes that are tied to specific surface area are length, width, and coarseness. These characteristics can be used to create a stochastic model that projects fibers as rectangles laid out as bricks. Knowing the length, width, and weight of each brick then allows one to determine how much area a given weight of fibers would cover if they were arranged perfectly flat next to each other. Dividing the coarseness by fiber width results in the g/m^2 -layer value. By comparing that weight per area (g/m^2) versus the actual weight per area of a sheet can give one the number of fiber layers (coverage) expected in the sheet. Of interest, when replacing eucalyptus with bamboo, the number of fiber layers (coverage) present at a given total sheet weight decreases.

Another way to address hand protection is to have a lower density sheet. At a given basis weight, lowering the density will increase the caliper of the sheet. This higher caliper will result in the hand being farther away from the material being removed, improving hand protection.

The papermaker is always conscious of manufacturing costs while striving to make superior products. Thus, the contradiction of increased weight versus fiber choice versus density is a consideration that should be kept in mind. It has surprisingly been found that the judicious layering of non-wood and/or wood fibers in a low-density sheet will allow for good hand protection.

Further relating to judicious layering, from a product quality perspective, there is a positive correlation between softness and lint. More lint generally means that the product is perceived as softer, but too much lint is not preferred by the consumer. One or two layer sanitary tissue products may be desirable because they require less equipment (fan pumps, stock chests, etc.) and simpler (single or dual layer headboxes versus a 3 layered headbox). In a one layer embodiment, and often in a two layer non-wood containing sanitary tissue product, the non-wood will be consumer facing – so, getting the right balance of softness, as characterized by lint, is critical. Adding a third layer gives another degree of freedom to the product designer, such that they could sequester part or all of the less desirable non-wood fibers in the center or non-consumer layers. A third layer also allows the Yankee contacting layer to have lower or no non-wood fibers contacting the

surface. This results in a process which is easier to run, as the non-wood fibers have less interaction with the complex chemical and physical interactions with the glue coating and creping process. So, a three layered non-wood sanitary tissue product has more degrees of freedom from a design standpoint, is easier to run from a Yankee coating standpoint, and is more complex from an equipment standpoint. A one or two layer sanitary tissue product is more difficult to properly design to meet the consumer needs and more difficult to run from a Yankee coating standpoint. However, if these hurdles of a one or two layer embodiment can be overcome, they are desirable because they are made by a less complex process.

10 Absorption

In the design of fibrous structures, particularly sanitary tissue products, such as paper towels, bath tissue, and facial tissue, there are many characteristics that must be met in order to make a consumer desirable product. A couple of those consumer-desired characteristics are good absorbency and hand protection.

15 It is believed that having high volumetric absorption capacity at relatively small pore radii is consumer preferred, especially for multi-ply products, as the water that is absorbed at those small pore sizes is tenaciously held onto by the absorbent material in the product. In multi-ply constructions, these “functional” pore sizes can be between 2.5 and 200 microns. When fluid is absorbed into these pores it tends to remain in the substrate more than fluid that is taken up by larger pores.

20 One typical way to increase smaller pores is replacement of coarse softwood fibers with shorter, thinner, and lower coarseness hardwoods like eucalyptus. The increase in eucalyptus may be desirably balanced with the addition of softwoods such as NSK in order to maintain acceptable strength characteristics.

25 Upon experimentation, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo can still create a high level of 2.5-200 micron (and ranges therebetween) volumetric capacity while still maintaining acceptable strength characteristics.

Desorption

30 Continuing with the discussion in the previous section (Absorption), without being bound by theory, regarding desorption, it is believed that having a high volumetric desorption capacity at relatively small pore radii is consumer preferred, especially for multiply products, as the water that is desorbed at those small pore sizes is water that was initially absorbed in the functional structure

itself. When a wetting fluid is absorbed into a substrate, the mechanically imparted features (those imposed while the substrate is substantially dry, such as creping or embossing) relax, partially collapsing the structure. While these mechanically imparted features are important in the consumer experience, they are not resilient after fluid insult. Desorption curves can therefore be interpreted as a good characterization of the wet structure of the material. Maximizing the 2.5-200 micron (and ranges therebetween) desorption volume will result in a sheet that has a greater “functional” absorbent volume. This is a good indicator of consumer-preferred absorbency, as water that is absorbed in the structure will be less likely to come back out of the material, better protecting the consumer from the mess.

As said in the Absorption Section above, upon experimentation, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo can still create a high level of 2.5-200 micron (and ranges therebetween) volumetric capacity while still maintaining acceptable strength characteristics.

VFS

Continuing with the discussion in the three previous sections (Absorption, Desorption, and Desorption-Absorption Hysteresis), it is believed that having high vertical full sheet (“VFS”) absorbent capacity in a substrate is consumer preferred for absorption and hand protection. By its nature, the VFS measurement is believed to accurately characterize how much fluid is tightly held within plies of a substrate, as fluid that is in between plies, or loosely held within a ply, will drain out when the sheet goes to the (near) vertical position. This remaining tightly held fluid is thought to be fluid that would more slowly reach the hand of a consumer, resulting in improved hand protection.

One typical way to increase the VFS of a substrate is to create structures of low coarseness fibers, which are more prone to tightly holding onto water via a finer fiber network and pore structure. Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-wood fibers such as bamboo can still create high VFS capacity substrates while still maintaining acceptable strength characteristics.

Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-wood fibers such as bamboo can still create high VFS capacity substrates while still maintaining acceptable strength characteristics.

Slip-Stick

Continuing with the discussion in the four previous sections (Absorption, Desorption, Desorption-Absorption Hysteresis, and VFS), related to softness, another consumer-desired characteristic is surface smoothness/glide. It is thought that having low slip-stick values in a fibrous structure is consumer preferred, as the test is a good metric for quantifying how much “glide” a substrate has. Typical design levers for improving the slip stick of a substrate is to increase smoothness via calendaring, or to replace coarser softwood fibers with shorter, thinner, and lower coarseness hardwood fibers such as eucalyptus. The increase in eucalyptus may desirably be balanced with the addition of softwoods such as NSK in order to maintain acceptable strength characteristics.

Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-wood fibers such as bamboo can still create low slip stick substrates while still maintaining acceptable strength characteristics. FIG. 1B illustrates slip-stick values of a sanitary tissue products of the present disclosure.

Absorbent and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being absorbent. This combination is often a contradiction due to the underlying physics. In order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not absorb quickly or to a high capacity, as the aforementioned structure would also have minimal interplay voids, retarding water absorption into the substrate. Softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and width. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, lower coarseness, fibers that still exhibit superior strength when wet and absorbency. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of absorbency and wet strength in a non-wood containing substrate – see, for example, FIG. 2F.

Bidirectional Strength

Given the different nature of the wetlaid papermaking process to that of a woven substrate, there are many differences in the characteristics between durable substrates and sanitary tissue products. One difference in particular is the strength and durability of durable substrates vs. sanitary tissue products: the former, being comprised of woven filaments that are ostensibly continuous, exhibit very high strength when compared to the latter, which are comprised of hydrogen bonded cellulosic fibers. Directional differences in wetlaid structures are present due to the hydrodynamics of continuous forming, the use of discrete fibers, and the nonisometric forces that are imparted on the substrate during making. Often, the weaker direction of a substrate is the CD, and improving strength and stretch characteristics in that direction improves the overall consumer experience by making the paper towel less prone to failure while in use. Ways to improve CD strength and stretch characteristics include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid substrates with weaker, shorter, or lower coarseness fibers that can still be implemented in structures that exhibit high levels of bidirectional strength. It has surprisingly been found that, despite the lower coarseness, shorter fiber length, and/or narrower width of non-wood fibers, it is still possible to achieve high levels of bidirectional strength in a non-wood containing substrate— see, for example, FIGS. 2J, 2K, and 2L.

Bulky and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being bulky when dry. Being strong when wet facilitates easy cleanup of messes, while having a high bulk sheet signals clothlike durability, spongelike absorbency, and other characteristics typical of durable substrates. However, this combination is often a contradiction due to the underlying physics. Typically, in order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not be bulky. A monoplanar layer of tightly bonded cellulose fibers would result in a flat, dense sheet

that, while strong when wet, would have a very low bulk when dry. Typically, ways to improve dry bulk include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are often desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and bulk when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of wet strength and dry bulk in a non-wood containing sanitary tissue product.

15 Durable and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being durable (i.e., being able to maintain integrity during cyclic stressing of the substrate, for example during scrubbing). This combination is often a contradiction due to the underlying physics. In order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not be durable, as a sheet that is comprised of tightly bonded, millimeter sized fibers will pick up load quickly in a tensile test and fail at relatively low percentages of stretch, contributing to low durability. Ways to improve the wet durability include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and durability. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood fibers have much different characteristics versus

conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of durability in a non-wood containing substrate.

Soft (Dry) and Strong (Wet)

5 It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be soft when dry, yet strong when wet. Being strong when wet facilitates easy cleanup of messes, yet due to the strong fibers, dense fiber network, and high levels of fiber bonding needed, the resultant substrate will be very rough when dry. Conversely, a substrate that is soft when dry will have lower strength, lower coarseness fibers that are lightly bonded together with
10 much interstitial space inside the ply. While cushiony and soft to the touch, such a substrate would be very weak when wet due to the aforementioned structure and low levels of bonding. Ways to improve softness when dry include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density
15 zones in the sheet. Combinations of hardwood and softwood fibers are often used to strike an appropriate balance. Refined softwood fibers, for example, are desirous for creating strength when wet, due to their high fiber coarseness, long length, and high strength. Hardwood fibers are desirous for improving softness when dry, due to their low coarseness and length. These sources of fiber, however, are coming under increasing environmental pressures. It is therefore desirable
20 to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and softness when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of wet strength and dry softness in a non-
25 wood (e.g., abaca) containing substrate— see, for example, FIG. 2G.

Strong and Durable

 Given the different nature of the wetlaid papermaking process to that of a woven substrate, there are many differences in the characteristics between durable substrates and
30 sanitary tissue products. One difference in particular is the strength and durability of durable substrates vs. sanitary tissue products: the former, being comprised of woven filaments that are ostensibly continuous, exhibit very high strength when compared to the latter, which are comprised of hydrogen bonded cellulosic fibers. Directional differences in wetlaid structures are

present due to the hydrodynamics of continuous forming, the use of discrete fibers, and the nonisometric forces that are imparted on the substrate during making. Often, the weaker direction of a substrate is the CD, and improving strength and stretch characteristics in that direction improves the overall consumer experience by making the paper towel less prone to failure while in use. Ways to improve dry durability include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior strength and durability when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of strength and durability in a non-wood containing substrate.

Soft and Strong

Given the different nature of the wetlaid papermaking process to that of created a woven substrate, there are many differences in the characteristics between durable substrates and sanitary tissue products. One difference is the relationship between strength and softness. Since wetlaid materials are comprised of fibers of approximately 5mm or less, network strength is a function of both the fiber itself as well as the bonding between the fibers. Fiber to fiber bonding is typically improved through refining, a mechanical process that modifies the fibers. Without being bound by theory, it is believed that the mechanical energy from refining delaminates cell walls, externally fibrillates the fibers, and releases hemicellulose based gels, which improve the relative bonded area between fibers and the overall strength of the substrate. This increase in strength, however, is often at the cost of decreased softness, which can be described via tensile modulus. High tensile moduli are associated with lower softness sheets. Additionally, the strength of the fiber itself is typically a function of fiber cell wall thickness and fiber diameter. Non-woods have been found to typically have a higher degree of external fibrillation, shorter fiber lengths, and/or lower coarseness than softwoods. A substrate comprised of these fibers would therefore be expected to exhibit a lower strength, less soft sheet. It has surprisingly been

found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to create a substrate that has high levels of strength and is soft— see, for example, FIGS. 1D, 2B, 2C, 2D, and 2E.

5 Surprisingly, the inventors of the present disclosure have discovered that many of the above-referenced properties and characteristics can be achieved by replacing conventional wood fibers with non-wood fibers. For example, replacing refined long fiber northern and southern softwood kraft with abaca can help to achieve the desired strength of the fibrous structure. It may be desirable to combine abaca with a sustainable hardwood (e.g., eucalyptus) that is short and
10 coarse (i.e. stiff, capable of preventing collapse). Particularly regarding using abaca for its strength characteristics as described in this paragraph, it is desirable to keep it from collapsing into a tightly bonded, rough, thin network with little variation in pore size. It may be further desirable to form such fibrous structures with fiber in patterns comprising higher degrees of pillow modulation; such fiber mixes and belt patterns can result in surprisingly high dry strength, wet strength, caliper, and
15 surface texture with surface softness and absorbency. This surprising result may be increased by increasing molding conditions such as structuring belt pattern, belt overburden, crepe and/or wire to press draw. The inventors hypothesize that the long, high carboxyl abaca readily bonds around the short, coarse fibers, thus maintaining strength but building caliper, porosity, absorbency, and softness. In this way, the non-wood (e.g., abaca) helps to maximize diversity in pore size to
20 enhance softness and absorbency while maintaining strength. More particularly, structuring belt patterns with low density regions of at least 10 mils width, or at least 20 mils width, or at least 30 mils width, and patterns that combined different sizes of low density regions may exploit the benefit more. Structuring belt fiber molding depths, also known as overburden, that capitalizes on the fiber length of the non-wood inclusive fiber mixture also may increase the benefit. Without
25 being bound by theory, it may be desirable to have the distance between belt structuring pattern protrusions be equal or greater than the average fiber length of the fiber mixture to increase diverse pore formation when using non-woods. Additionally, without being bound by theory, crepe impact angle and reel draw can be used to create regions of micro-disturbance to increase the variation of bonds, pores and sheet structure. Wet transfer or rush transfer can induce multiple planes and
30 orientations of fiber as well, and may contribute to increasing the benefit of the non-wood inclusive mixtures. Moreover, combinations of one or all of these molding factors can enhance the surprising combination of substrate properties.

Roll Properties

Large rolls have a consumer perceived benefit on the shelf. A larger diameter roll at a given price is normally preferred by the consumer. When the consumer unpackages that roll and uses it, the consumer also wants that same large roll to have just the right level of firmness. Overly soft rolls connote inferiority, and overly firm rolls connote roughness and lack of absorbency. From a manufacturing perspective, however, a roll of toilet tissue can be most cost effectively produced with a minimum amount of fiber mass, while effectively distributing that mass in such a way that the substrate still has superior strength, absorbency, and softness attributes.

The morphology of the bamboo fiber (high levels of fines, broad fiber length distribution, high coarseness, high fibrillation), as well as many other non-wood fibers, make for a fiber that drains poorly and makes it particularly unsuited for through-air-drying machines due to high energy costs associated with the drying of the nascent fiber web. Therefore, the majority of webs comprising bamboo are made on conventional wet press machines. These machines generate webs of low caliper and, when converted into finished product rolls, result in either low bulk and hard rolls or high bulk and extremely soft rolls. A few instances of products can be found comprising bamboo that are made on through-air-dried machines. These examples, however, when converted into a roll format, suffer from a non-consumer preferred roll structure that is high in bulk, yet still extremely soft.

The underlying cause of this roll bulk-roll firmness contradiction may be due to the compression/relaxation characteristics of the substrate. It is therefore an unmet consumer need to design a substrate that comprises bamboo fiber, yet can be wound into finished product rolls that are both bulky and firm.

As indicated in other parts of this disclosure, fibrous structures, such as sanitary tissue products, may be comprised of substantial amounts of eucalyptus fibers (especially at the consumer-facing layer of a sheet), which are short, narrow, and low exhibit low coarseness. These attributes allow for improved molding into a structured fabric, impacting density and compressibility/resiliency characteristics of the web. As one incorporates higher levels of non-wood (e.g., bamboo), one is replacing eucalyptus fibers with longer, wider, and coarser non-wood (e.g., bamboo) fibers. These attributes cause non-woods such as bamboo to be much less susceptible to molding into a structured fabric, resulting in less desirable properties, including, for instance, compression and resiliency characteristics.

The inventors of the present disclosure have surprisingly shown that substrates and rolls comprising non-woods (e.g., bamboo) can be created with good roll bulk and roll compression

characteristics, despite the fact that introduction of non-woods (e.g., bamboo) results in substrates comprised of coarser, more fibrillated fibers, which are less prone to molding due to their morphological characteristics. These improvements may be achieved, in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface and at creping, through creping geometry changes, and the judicious placement of high and low density zones in the substrate.

In addition to the beneficial properties as detailed in the disclosure above, the new fibrous structures detailed herein permit the fibrous structure manufacturer to wind rolls with high roll bulk (for example greater than 4 cm³/g), and/or greater roll firmness (for example between about 2.5 mm to about 15 mm), and/or lower roll percent compressibility (low percent compressibility, for example less than 10% compressibility).

“Roll Bulk” as used herein is the result of measuring finished product rolls. The rolls are placed into a controlled temperature and Humidity room (TAPPI conditions, about 23 °C ± 2 C° and about 50% ± 2% relative humidity) for at least 24 hours to equilibrate (equilibration can be monitored by measuring roll weight every 4 hours until the mass stabilizes;). If rolls have been stored in greater than 50% relative humidity conditions, then said rolls should first be equilibrated at conditions lower than 50% relative humidity and then equilibrated at TAPPI conditions – see T-402. The rolls are weighed with the weight recorded to the hundredths of grams. The width of the rolls are measured with a ruler that shows millimeters, width recorded to the tenths of centimeter. Roll Diameter is measured according to the Percent Roll Compressibility test method included herein. Roll Bulk (cm³/g) is then calculated by: multiplying the square of the radius of the roll (roll diameter (cm) / 2) by 3.14159 and by the roll width (cm), then dividing that by the mass of the roll (g):

$$Roll\ Bulk\ \left(\frac{cc}{g}\right) = \frac{3.14159 * \left(\frac{roll\ diameter(cm)}{2}\right)^2 * roll\ width\ (cm)}{roll\ weight\ (g)}$$

The measurements are done with the roll core in place. The units “cc/g” are used interchangeably herein with “cm³/g.”

The new rolled fibrous structures (e.g., sanitary tissue products) of the present disclosure may exhibit a roll bulk of greater than about 4 cm³/g, greater than about 5 cm³/g, greater than about 6 cm³/g, greater than about 7 cm³/g, greater than about 8 cm³/g, greater than about 9 cm³/g, greater than about 10 cm³/g, greater than about 12 cm³/g, greater than about 13 cm³/g, greater than about

14 cm³/g, greater than about 15 cm³/g, greater than about 16 cm³/g, greater than about 17 cm³/g, and/or less than about 30 cm³/g, less than about 25 cm³/g, less than about 22 cm³/g, less than about 20 cm³/g, and/or from about 10 cm³/g to about 25 cm³/g, specifically including all 0.1 increments between the recited ranges.

Additionally, examples of the new rolled fibrous structures detailed herein may exhibit a roll firmness less than about 10.5 mm, less than about 9.5 mm, less than 8.5 mm, less than about 7 mm, or from about 2.5 mm to about 15 mm and/or from about 3 mm to about 13 mm, from about 4 mm to about 10 mm, and/or from about 6 to about 9 mm, specifically including all 0.1 increments
5 between the recited ranges.

Additionally, examples of the new fibrous structures detailed herein may be in the form of a rolled tissue products (single-ply or multi-ply), for example a dry fibrous structure roll, and may have a percent compressibility of less than about 10%, less than about 8%, less than about 7%, less than about 6%, less than about 5%, less than about 4.5%, less than about 4%, less than about 3%, about 0%, greater than about 0.25%, greater than about 1%, from about 2.5% to about 5%, from about 3% to about 5.5%, from about 4% to about 10%, from about 4% to about 8%, from about 4% to about 7%, and/or from about 4% to about 6%, as measured according to the Percent Compressibility Test Method described herein.

Additionally, examples of the new rolled tissue products as detailed herein can be individually packaged to protect the fibrous structure from environmental factors during shipment, storage, and shelving for retail sale. Any of known methods and materials for wrapping bath tissue or paper towels can be utilized. Further, the plurality of individual packages, whether individually
10 wrapped or not, can be wrapped together to form a package having inside a plurality of the new rolled tissue products as detailed herein. The package can have 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16 or more rolls. In such packages, the roll bulk and percent compressibility can be important factors in package integrity during shipping, storage, and shelving for retail sale. Further, the plurality of individual packages, or the packages having a plurality of the new rolled tissue products as detailed
15 herein, can be palletized (i.e., organized and/or transported on a pallet). In such pallets of the new rolled tissue products as detailed herein, the roll bulk and percent compressibility can be important factors in package integrity during shipping, storage, and shelving for retail sale.

Further, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue products exhibits a roll bulk of greater than about 4 cm³/g or a percent
20 compressibility of less than about 10%, or less than about 8%, is contemplated. In one example, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue

products exhibits a roll bulk of greater than about 4 cm³/g and a percent compressibility of less than about 10%, or less than about 8%, is contemplated. In another example, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue products exhibits a roll bulk of greater than about 6 cm³/g and a percent compressibility of less than about 8%, or less than about 5%, is contemplated.

U.S. Publication No. 2022-0031531 discloses the packages that may be desirable for containing the rolled fibrous structures of the present disclosure, including sanitary tissue products (e.g., bath tissue). Said packages may comprise non-wood fibers, just like the rolled fibrous structures the package is used contained.

FIBROUS STRUCTURE EXAMPLES

Further nonlimiting examples of the new fibrous structures that include the various inventive non-wood fiber inclusion(s), as detailed herein, may have the properties disclosed in the tables of FIGS. 18A-1 through FIG. 25 below and as illustrated in FIGS. 1 and 2 and may be used to form sanitary tissue products of the present disclosure. It should be noted that wheat straw fibers in the tables of FIGS. 18A-1 through FIG. 25 below are never dried. The other fibers in the tables of FIGS. 18A-1 through FIG. 25 are once dried.

~~Tables 1 and 1a below details~~ FIGS. 18A-1, 18A-2, 18B-1, 18B-2, and 19 are tables illustrating multiple inventive embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies (note: common numbers between the tables indicate the same sample).

~~Table 1 below details~~ FIGS. 20A and 20B are tables illustrating multiple inventive and comparative embodiments, specifically detailing multiple properties for the purpose of comparing inventive versus comparative embodiments (note: common numbers between the tables indicate the same sample).

~~Tables 3 and 3a below details~~ FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, and 22F are tables illustrating multiple inventive and comparative embodiments, specifically detailing multiple inventive and comparative embodiment properties, beyond the properties of Table 2 illustrated in FIGS. 20A and 20B (note: common numbers and letters between the tables indicate the same sample).

~~Table 4 below details~~ FIG. 23 is a table illustrating fiber morphology of the fibers used in fibrous structures of the present disclosure (note: common numbers between the tables indicate the

same sample). In ~~Table 4~~FIG. 23, fiber count (length average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(l)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(l) \times \text{coarseness})$. And, fiber count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(n)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(n) \times \text{coarseness})$.

~~Table 5 below details~~FIGS. 24A-1, 24A-2, 24B-1, 24B-2, 24C-1, 24C-2, 24D-1, 24D-2, 24E-1, 24E-2, 24F-1, 24F-2, 24G-1, 24G-2 are tables illustrating PVD data of fibrous structures of the present disclosure (common numbers between the tables indicate the same sample).

~~Table 6~~FIG. 25 is a table that details the fiber characteristic differences between non-wood fibers that are never-dried and that have been once-dried.

Papermaking Example 1:

An example of fibrous structures in accordance with the present disclosure can be prepared using a papermaking machine as described above with respect to FIG. 6A, and according to the method described below:

A 3% by weight aqueous slurry of northern softwood kraft (NSK) pulp is made up in a conventional re-pulper. The NSK slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e., Cymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the NSK stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to NSK is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e., FinnFix 700 marketed by C.P. Kelco U.S. Inc. of Atlanta, GA) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 3% by weight aqueous slurry of non-wood (e.g., bamboo, abaca, etc.) pulp is made up in a conventional re-pulper. The non-wood slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e., Kymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the non-wood stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to non-wood is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e., FinnFix 700 marketed by C.P. Kelco U.S. Inc. of Atlanta, GA) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 3% by weight aqueous slurry of hardwood Eucalyptus fibers is made up in a conventional re-pulper. A 1% solution of defoamer (i.e., BuBreak 4330 marketed by Buckman

Labs, Memphis TS) is added to the Eucalyptus stock pipe at a rate of 0.25% by weight of the dry fibers and its adsorption is enhanced by an in-line mixer.

The NSK, non-wood, and eucalyptus fibers are combined in the head box at various ratios and deposited onto a Fourdrinier wire, running at a first velocity V_1 , homogenously to form an embryonic web. The web is then transferred at the transfer zone from the Fourdrinier forming wire at a fiber consistency of about 15% to the papermaking belt, the papermaking belt moving at a second velocity, V_2 . The papermaking belt has a pattern of raised portions (*i.e.*, knuckles) extending from a reinforcing member, the raised portions defining either a plurality of discrete or a continuous/substantially continuous deflection conduit portion, as described herein, particularly with reference to a mask such as FIG. 5. The transfer occurs in the transfer zone without precipitating substantial densification of the web. The web is then forwarded, at the second velocity, V_2 , on the papermaking belt along a looped path in contacting relation with a transfer head disposed at the transfer zone, the second velocity being from about 1% to about 40% slower than the first velocity, V_1 . Since the Fourdrinier wire speed is faster than the papermaking belt, wet shortening, *i.e.*, foreshortening, of the web occurs at the transfer point. In an example, the second velocity V_2 can be from about 0% to about 5% faster than the first velocity V_1 .

Further de-watering is accomplished by vacuum assisted drainage until the web has a fiber consistency of about 15% to about 30%. The patterned web is pre-dried by air blow-through, *i.e.*, through-air-drying (TAD), to a fiber consistency of about 65% by weight. The web is then adhered to the surface of a Yankee dryer with a sprayed creping adhesive comprising 0.25% aqueous solution of polyvinyl alcohol (PVA). The fiber consistency is increased to an estimated 95% - 97% before dry creping the web with a doctor blade. The doctor blade has a bevel angle of about 45 degrees and is positioned with respect to the Yankee dryer to provide an impact angle of about 101 degrees. This doctor blade position permits the adequate amount of force to be applied to the substrate to remove it off the Yankee while minimally disturbing the previously generated web structure. The dried web is reeled onto a take up roll (known as a parent roll), the surface of the take up roll moving at a fourth velocity, V_4 , that is faster than the third velocity, V_3 , of the Yankee dryer. By reeling at a fourth velocity, V_4 , that is about 1% to 20% faster than the third velocity, V_3 , some of the foreshortening provided by the creping step is "pulled out," sometimes referred to as a "positive draw," so that the paper can be more stable for any further converting operations. In other examples, a "negative draw" as is known in the art is also contemplated.

Two plies of the web can be formed into paper towel products by embossing and laminating them together using PVA adhesive. The paper towel has about 53 g/m² basis weight and contains

0-65% by weight Northern Softwood Kraft, 0-100% non-wood fiber, and 0-50% by weight Eucalyptus furnish. The sanitary tissue product is soft, flexible, and absorbent.

Papermaking Example 2

5 An example of fibrous structures in accordance with the present disclosure can be prepared using a papermaking machine as described above with respect to FIG. 6A, and according to the method described below:

 An aqueous slurry of eucalyptus (Suzano Papel e Celulose Brazilian bleached
10 hardwood kraft pulp) pulp fibers is prepared at about 3% fiber by weight using a
conventional repulper, then transferred to a hardwood fiber stock chest. The eucalyptus fiber slurry
of the hardwood stock chest is pumped through a stock pipe to a hardwood fan pump where the
slurry consistency is reduced from about 3% by fiber weight to about 0.15% by fiber weight. The
0.15% eucalyptus slurry is then pumped and distributed in the top chamber of a multi-layered,
three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

15 Additionally, an aqueous slurry of eucalyptus (Suzano Papel e Celulose Brazilian bleached
hardwood kraft pulp) pulp fibers is prepared at about 3% fiber by weight using a
conventional repulper, then transferred to a hardwood fiber stock chest. The eucalyptus fiber slurry
of the hardwood stock chest is pumped through a stock pipe and mixed with the aqueous slurry of
Northern Softwood Kraft (NSK), described in the next paragraph, to a fan pump where the slurry
20 consistency is reduced from about 1.5% by fiber weight to about 0.15% by fiber weight. The 0.15%
eucalyptus/NSK slurry is then pumped and distributed in the center and bottom chamber of a
multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

 Additionally, an aqueous slurry of NSK (Northern Softwood Kraft) pulp fibers is prepared
at about 3% fiber by weight using a conventional repulper, then transferred to the softwood fiber
25 stock chest. The NSK fiber slurry of the softwood stock chest is pumped through a stock pipe to
be refined to a Canadian Standard Freeness (CSF) of about 630. The refined NSK fiber slurry is
then mixed with the 1.5% aqueous slurry of Eucalyptus fibers (described in the preceding
paragraph) and directed to a fan pump where the NSK slurry consistency is reduced from about
3% by fiber weight to about 0.15% by fiber weight. The 0.15% Eucalyptus/NSK slurry is then
30 directed and distributed to the center and bottom chamber of a multi-layered, three-chambered
headbox of a Fourdrinier wet-laid papermaking machine.

 Additionally, an aqueous slurry of non-wood (e.g., bamboo, abaca, etc.) pulp fibers is
prepared at about 1.5-3% fiber by weight using a conventional repulper, then transferred to a non-

wood fiber stock chest. The non-wood fiber slurry of the non-wood stock chest is pumped through a stock pipe to a refiner, where it is gently refined to a degree that is commensurate with the desired strength at the reel of the paper machine. The non-wood solution is then transported through a stock pipe to a fan pump where the slurry consistency is reduced from about 3% by fiber weight to about 0.15% by fiber weight. The 0.15% non-wood slurry is then pumped and distributed in the top and or middle and or bottom chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

In order to impart temporary wet strength to the finished fibrous structure, a 1% dispersion of temporary wet strengthening additive (e.g., Fennorez[®]91 commercially available from Kemira) is prepared and is added to the NSK or non-wood or Eucalyptus fiber stock pipe at a rate sufficient to deliver 0.25% temporary wet strengthening additive based on the dry weight of the fibers. The absorption of the temporary wet strengthening additive is enhanced by passing the treated slurry through an in-line mixer.

The wet-laid papermaking machine has a layered headbox having a top chamber, a center chamber, and a bottom chamber where the chambers feed directly onto the forming wire (Fourdrinier wire). The eucalyptus fiber slurry of 0.15% consistency is directed to the top headbox chamber. Alternatively, a non-wood fiber slurry can be directed to the top headbox chamber. The NSK/Eucalyptus, NSK/non-wood, non-wood/eucalyptus, or non-wood fiber slurry is directed to the center and bottom headbox chambers. All three fiber layers are delivered simultaneously in superposed relation onto the Fourdrinier wire to form thereon a three-layer embryonic fibrous structure (web), of which about 40% of the top side is made up of the eucalyptus and or non-wood fibers, and about 60% of the sheet can be made of various blends of non-wood, NSK, and eucalyptus fibers, directed towards the center and bottom layers. Dewatering occurs through the Fourdrinier wire and is assisted by a deflector and wire table vacuum boxes. The Fourdrinier wire is a Legent 866A Dual Layer (0.11 mm x 0.18 mm, Asten Johnson). The speed of the Fourdrinier wire is about 800 feet per minute (fpm).

The embryonic wet fibrous structure is transferred from the Fourdrinier wire, at a fiber consistency of about 18-22% at the point of transfer, to a 3D patterned, continuous knuckle, through-air-drying belt as shown in Fig. 3. The speed of the 3D patterned through-air-drying belt is 800 feet per minute (fpm), which is the same speed of the Fourdrinier wire. The 3D patterned through-air-drying belt is designed to yield a fibrous structure comprising a pattern of continuous high density knuckle region oriented approximately 75 Degrees relative to the cross direction. Each continuous high density knuckle region oriented approximately 75 Degrees

relative to the cross direction is separated by a low-density discrete pillow region oriented approximately 75 Degrees relative to the cross direction. This 3D patterned through-air-drying belt is formed by casting a layer of an impervious resin surface of a continuous knuckle onto a fiber mesh supporting fabric. The supporting fabric is a 98 x 52 filament, dual layer mesh. The thickness of the resin cast is about 12.0 mils above the supporting fabric. Alternatively, the drying fabric is designed to yield a pattern of substantially machine direction oriented linear channels having a continuous network of high density (knuckle) areas. This drying fabric is formed by casting an impervious resin surface onto a fiber mesh supporting fabric. The supporting fabric is a 98 x 52 filament, dual layer mesh. The thickness of the resin cast is about 12 mils above the supporting fabric. The area of the continuous network is about 40 percent of the surface area of the drying fabric.

Further de-watering of the fibrous structure is accomplished by vacuum assisted drainage until the fibrous structure has a fiber consistency of about 20% to 30%.

While remaining in contact with the 3D patterned through-air-drying belt, the fibrous structure is pre-dried by air blow-through pre-dryers to a fiber consistency of about 50-65% by weight.

After the pre-dryers, the semi-dry fibrous structure is transferred to a Yankee dryer and adhered to the surface of the Yankee dryer with a sprayed creping adhesive. The creping adhesive is an aqueous dispersion with the actives consisting of about 80% polyvinyl alcohol (PVA 88-44), about 20% CREPETROL® 5688. CREPETROL® 5688 is commercially available from Solenis. The creping adhesive is delivered to the Yankee surface at a rate of about 0.10-0.20% adhesive solids based on the dry weight of the fibrous structure. The fiber consistency is increased to about 96-98% before the fibrous structure is dry-creped from the Yankee with a doctor blade.

The doctor blade has a bevel angle of about 15-25° and is positioned with respect to the Yankee dryer to provide an impact angle of about 71-81°. The Yankee dryer is operated at a temperature of about 275-350°F and a speed of about 800 fpm. The fibrous structure is wound in a roll (parent roll) using a surface driven reel drum having a surface speed of about 550-700 fpm.

Two parent rolls of the fibrous structure are then converted into a sanitary tissue product by loading the roll of fibrous structure into an unwind stand. The two parent rolls are converted with the low-density pillow side out. Alternatively, they can be converted with the high-density knuckle side out. The line speed is 550 ft/min. One parent roll of the fibrous structure is unwound and transported to an emboss stand where the fibrous structure is strained to form the emboss pattern in the fibrous structure via a 0.56" Pressure Roll Nip and then combined with the fibrous

structure from the other parent roll to make a multi-ply (2-ply) sanitary tissue product. Approximately 0.5% of a proprietary quaternary amine softener is added to the top side of the multi-ply sanitary tissue product. Approximately 0.5% of a proprietary quaternary amine softener may also be added to the bottom side of the multi-ply sanitary tissue product. The multi-ply sanitary tissue product is then transported to a winder where it is wound onto a core to form a log. The log of multi-ply sanitary tissue product is then transported to a log saw where the log is cut into finished multi-ply sanitary tissue product rolls. The molding member used to make the multi-ply sanitary tissue product of this example exhibits the dimensions shown in Table 4 of U.S. Serial No. 17/238,527 filed April 23, 2021, and assigned to The Procter & Gamble Company.

Papermaking Example 3

Abaca and Eucalyptus are individually repulped at ~3% consistency with 2 min repulping time. The Abaca slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e. Kymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the softwood stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to Abaca is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e. FinnFix 700 marketed by C. P. Kelco U.S. Inc. of Atlanta, Ga.) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 1% solution of defoamer (i.e. Wicket 1285 marketed by Ivanhoe Industries, of Zion, IL) is added to the Eucalyptus stock pipe at a rate of 0.25% by weight of the dry fibers and its adsorption is enhanced by an in-line mixer.

The Abaca and the Eucalyptus fibers are combined in the headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire running 10% faster than successive structuring papermaking belt. The web is transferred at the transfer nip with approximately 14 in Hg vacuum to the structuring papermaking belt at approximately 20% solids. The web is then forwarded on the papermaking belt along a looped path, passing through a pre-dryer and drying the web to a consistency 75%. The web is then pressed & adhered via nip and chemistry on to the Yankee drier that is sprayed with creping adhesive comprising 0.25% aqueous solution of polyvinyl alcohol (PVA). The fiber consistency is increased to an estimated 97% before dry creping the web with a doctor blade. The doctor blade has a bevel angle of about 45 degrees and is positioned with respect to the Yankee dryer to provide an impact angle of about 101 degrees. This doctor blade position permits the adequate amount of

force to be applied to the substrate to remove it off the Yankee while minimally disturbing the previously generated web structure. The web travels through a gapped calendar stack to smooth the web, reducing caliper by approximately 10% before the dried web is reeled onto a take up roll (known as a parent roll), the surface of the take up roll moving approximately the same speed as the Yankee dryer.

Papermaking Example 4

Same as Papermaking Example 3, except: Abaca is not refined (vs. “refined gently”).

10 Papermaking Example 5

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits 40% Eucalyptus and 60% Abaca composition to the wire (vs. “headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire...”).

15 Papermaking Example 6

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits 45% Eucalyptus and 55% Abaca composition to the wire (vs. “headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire...”).

20 Papermaking Example 7

Same as Papermaking Example 3, except: NSK and SSK in a ratio of 75%NSK/25%SSK are repulped at 3%, gently refined and have kymene & CMC added at similar weight percent as the Abaca stream; and the headbox deposits a 40% Eucalyptus, 50% Abaca, and 10% NSK/SSK composition to the wire.

25

Papermaking Example 8

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits a 40% Eucalyptus, 20% Abaca, and 40% NSK/SSK composition to the wire.

30 Papermaking Example 9

Each of Papermaking Examples 3-8, further using the papermaking belt(s) described in U.S. Pub. No. 2021-0140115.

Papermaking Example 10

Each of Papermaking Examples 3-8, further using the papermaking belt(s) described in U.S. Pub. No. 2020-0181848.

Papermaking Example 11

5 Each of Papermaking Examples 3-10, where the wire moves 21% faster than the successive papermaking structuring belt.

Papermaking Example 12

10 Each of Papermaking Examples 3-11, where the structuring belt has a fiber forming depth of 30 mils.

Papermaking Example 13

15 Each of Papermaking Examples 3-11, where the structuring belt has a fiber forming depth of 25 mils.

Papermaking Example 14

Each of Papermaking Examples 3-13, where the substrate is embossed and laminated into a 2-ply finished fibrous structure, perforated to create sheets and rolled onto a core.

20 Papermaking Example 15

Each of Papermaking Examples 1 and 2, except: the headbox deposits 100% bamboo composition to the wire.

ARRAYS OF THE PRESENT DISCLOSURE

25 Sanitary tissue products within the scope of the present disclosure may be packaged in packages comprising sustainable materials (e.g., paper, recycled(able) plastic, corrugated cardboard, plant-based plastic, etc.) and displayed with other package(s) comprising sanitary tissue product(s) as an array(s) – see for example, U.S. Provisional Patent Application Serial Nos. 63/353,167 and 63/375,858, both titled “Sanitary Tissue Products and Arrays Comprising Non-wood Fibers,” filed on June 17, 2022 under Attorney Docket No. 16297P and filed on September 30 16, 2022 under Attorney Docket No. 16297P2, both by The Procter & Gamble Company and both naming Katherine Schwerdtfeger as the first-named inventor, and which are herein incorporated by reference, for details regarding the different arrays that sanitary tissue products of the present disclosure may be used to form and for packages that sanitary tissue products of

the present disclosure may be contained in; further, packages comprising sanitary tissue products of the present disclosure may convey or connote sustainability as disclosed in Attorney Docket Nos. 16297P and 16297P2.

5 ASPECTS OF THE PRESENT DISCLOSURE

The following aspects of the disclosure are exemplary only and not intended to limit the scope of the disclosure:

Aspect 1:

- 10 1. A sanitary tissue product, comprising:
 - non-wood fibers; and
 - a compressive slope (dry) of greater than about 8.0 mil/g.
2. The sanitary tissue product of claim 1, wherein the sanitary tissue product is a paper towel.
3. The sanitary tissue product of claim 1, wherein the compressive slope (dry) is greater than about 11.0 mil/g.
4. The sanitary tissue product of claim 3, wherein the sanitary tissue product is toilet paper.
5. A sanitary tissue product, comprising:
 - non-wood fibers;
 - a bulk (dry) greater than about 15 cm³/g.
6. The sanitary tissue product of claim 5, wherein the sanitary tissue product is a paper towel.
7. The sanitary tissue product of claim 1, wherein the bulk (dry) is greater than about 18.0 cm³/g.
8. The sanitary tissue product of claim 7, wherein the sanitary tissue product is toilet paper.

Beyond the “Aspects Of The Present Disclosure” disclosed above, the “Aspects Of The Present Disclosure,” including Aspects 1 – 20, disclosed in U.S. Provisional Patent Application

Serial No. 63/456,020, titled “Fibrous Structures Comprising Non-wood Fibers,” filed on March 31, 2023, Young as the first-named inventor, are herein incorporated by reference.

TEST METHODS OF THE PRESENT DISCLOSURE

5 Unless otherwise specified, all tests described herein including those described under the Definitions section and the following test methods are conducted on samples that have been conditioned in a conditioned room at a temperature of $23^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$ and a relative humidity of $50\% \pm 2\%$ for a minimum of 2 hours prior to the test. The samples tested are “usable units.” “Usable units” as used herein means sheets, flats from roll stock, pre-converted flats, and/or single or multi-
10 ply products. All tests are conducted in such conditioned room. Do not test samples that have defects such as wrinkles, tears, holes, and like. All instruments are calibrated according to manufacturer’s specifications.

Coverage and Fiber Count-Area Test Method:

15 Coverage and Fiber Count are calculated using measurements acquired by analyzing fibers obtained from fibrous structures, such as sanitary tissue products, with a Fiber Quality Analyzer (FQA), available from OpTest Equipment Inc., Ontario, Canada. Prior to analysis in the FQA fibers from a finished product specimen must be dispersed and diluted to get an accurate measurement of the oven dry fiber mass in an aliquot of very dilute fiber and distilled water,
20 which is utilized during the FQA analysis to determine specimen coarseness and fiber width. The resultant FQA values, in conjunction with basis weight, are then used to calculate fiber coverage and fiber count in a specimen.

Sample Preparation

25 Allow the fibrous structure finished product to be tested to equilibrate in a temperature-controlled room at a temperature of $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) and a relative humidity of $50\% \pm 2\%$ for at least 24 hours. Further prepare the finished product for testing by removing and discarding any product which might have been abraded in handling, e.g., on the outside of the roll.

30 Determine the percent oven dry solids of the equilibrated test product. This is done on a moisture balance using least a 0.5 gram specimen from a selected usable unit of the test product. An exemplary balance is the Ohaus MB45 balance set to a drying temperature of 130°C , with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time).

Using another usable unit from the same equilibrated finished product, gently pull approximately 0.03 grams of fiber specimen from the center. The specimen should be equally pulled from all plies and layers of the substrate. Place the collected fibers into a 27mm diameter, 70mm tall clear glass vial, or similar. Record the net weight of collected fibers to the nearest 5 0.001 gram as M_0 . The intent of this step is to get an even sampling across all plies and layers in the usable unit, pulled from the center of the usable unit so that no cutting of fibers at the end of the sheet or perforations is included.

The oven dry weight of the fiber specimen (M_1) is then calculated by multiplying the fiber specimen weight (M_0) by the previously determined percent oven dry solids.

10
$$M_1 = M_0 \times \% \text{ oven dry solids}$$

To fully disperse the fiber specimen, begin by pouring DI or distilled water into the vial until approximately ½ full, adding about ten 5mm diameter glass beads, and then closing the vial with a cap. Next, allow the specimen to sit for at least two hours with occasional shaking. Lastly, 15 stir the vial with a Fisher Scientific vortex genie, or similar, until fiber clusters are dispersed, and the fibers appear fully individualized.

To quantitatively dilute the dispersed fiber sample, begin by transferring the entire vial contents into a 5L plastic beaker that has been weighed to the nearest 0.1g. To accomplish this, slowly pour the contents of vial through a #6 US Standard Sieve (3.35mm), trying to keep the 20 glass beads in the vial as long as possible. Then rinse the vial and cap at least three times with DI or distilled water and continue to pour the liquid slowly through the #6 sieve. Once the vial has been at least triple rinsed, pour the glass beads into the sieve and wash thoroughly with a DI water squeeze bottle, being sure to collect all water used to rinse the beads.

Continue with the dilution procedure by filling the 5L plastic beaker to approximately the 25 1.75L mark with DI or distilled water. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as $M_{2.1}$. Using a second clean 5L beaker, transfer the 1.75L of solution back and forth at least 3 times from beaker to beaker to ensure that the suspension is homogenously mixed. Next, transfer approximately 150g of the solution into a third clean 5L beaker that has been weighed to the nearest 0.1g. Weigh the beaker and record the net weight of 30 the contents to the nearest 0.1g as $M_{2.2}$. Then add approximately 1600g of DI or distilled water to the third 5L beaker. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as $M_{2.3}$. With a fourth clean 5L beaker, transfer the approximately 1.75L of solution back and forth at least 3 times from beaker to beaker to ensure that the suspension is homogenously

mixed. Lastly, immediately after mixing, pour a 500mL aliquot of the diluted fiber solution into a 600mL plastic beaker that has been weighed to the nearest 0.1g. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as M_3 .

- Upon completion of the dilution procedure, calculate the oven dry weight of fibers present in the testing beaker (M_4) according to the following equation:

$$M_4 = M_1 \times \left(\frac{M_{2.2}}{M_{2.1}} \right) \times \left(\frac{M_3}{M_{2.3}} \right)$$

Measurement of samples

- Set up, calibrate, and operate the Fiber Quality Analyzer (FQA) instrument according to the manufacturer's instructions. Place the beaker containing the diluted fiber suspension on carrousel of the FQA, select the "Optest default" for coarseness method, and when prompted, enter M_4 (the oven dry weight of fibers present in the testing beaker) in the cell for "sample mass" to determine coarseness.

Calculations

- Once the analysis has been performed, open the report file and record each of the following measurements: Arithmetic Mean Width, Coarseness, Arithmetic Mean Length, and Length Weighted Mean Length.

Calculate Coverage, which has the units of fiber layers, using the following equation:

$$\text{Coverage} = \frac{\text{Basis Weight of product tested}}{\frac{\text{Coarseness}}{\text{Arithmetic mean width}}}$$

- Where basis weight has units of grams/m², Coarseness has units of mg/m, and Arithmetic Mean Width has the units of mm.

Calculate Fiber Count-Area, which has the units of millions fibers/m², using one of these two equations:

$$\text{Fiber Count} - \text{Area} (C(n)) = \frac{\text{Basis Weight of product tested}}{\text{Coarseness} \times \text{Arithmetic Mean Length}}$$

- Where basis weight has the units of g/m², Coarseness has the units of mg/m, and Arithmetic Mean Length has the units of mm.

$$\text{Fiber Count} - \text{Area} (C(l)) = \frac{\text{Basis Weight of product tested}}{\text{Coarseness} \times \text{Length Weighted Mean Length}}$$

Where basis weight has the units of g/m², Coarseness has the units of mg/m, and Length Weighted Mean Length has the units of mm.

Pore Volume Distribution Test Method:

The Pore Volume Distribution (PVD) Test Method is used to determine the average amount of fluid (mg) retained by a specimen within an effective pore radius range of 2.5 to 160 microns. This method makes use of stepped, controlled differential pressure and measurement of associated fluid movement into and out of a porous specimen, where the radius of a pore is related to the differential pressure required to fill or empty the pore. The fluid retained (mg) by each specimen during its first absorption cycle of decreasing differential pressures is measured, this is followed by measurement of fluid retained (mg) by the specimen during its first drainage or desorption cycle of increasing differential pressures. The sum of fluid retained (mg) by the specimen within the effective pore radius range of 2.5 to 160 microns for the absorption and desorption cycles, as well as a calculated hysteresis (difference of fluid retained during the absorption and desorption cycles) in the effective pore radius range of 2.5 to 100 microns are reported.

Method principle

For uniform cylindrical pores, the radius of a pore is related to the differential pressure required to fill or empty the pore by the equation

$$\text{Differential pressure} = (2 \gamma \cos \Theta) / r,$$

where γ = liquid surface tension, Θ = contact angle, and r = effective pore radius.

Pores contained in natural and manufactured porous materials are often thought of in terms such as voids, holes or conduits, and these pores are generally not perfectly cylindrical nor all uniform. One can nonetheless use the above equation to relate differential pressure to an effective pore radius, and by monitoring liquid movement into or out of the material as a function of differential pressure characterize the effective pore radius distribution in a porous material. (Because nonuniform pores are approximated as uniform by the use of an effective pore radius, this general methodology may not produce results precisely in agreement with measurements of void dimensions obtained by other methods such as microscopy.)

The Pore Volume Distribution Test Method uses the above principle and is reduced to practice using the apparatus and approach described in "Liquid Porosimetry: New Methodology and Applications" by B. Miller and I. Tyomkin published in The Journal of Colloid and Interface Science (1994), volume 162, pages 163-170, incorporated herein by reference. This method relies on measuring the increment of liquid volume that enters or leaves a porous material as the

differential air pressure is changed between ambient (“lab”) air pressure and a slightly elevated air pressure (positive differential pressure) surrounding the specimen in a sample test chamber. The specimen is introduced to the sample chamber dry, and the sample chamber is controlled at a positive differential pressure (relative to the lab) sufficient to prevent fluid uptake into the specimen

5 after the fluid bridge is opened. After opening the fluid bridge, the differential air pressure is decreased in steps to 0, and in this process subpopulations of pores acquire liquid according to their effective pore radius. After reaching a minimal differential pressure at which the mass of fluid within the specimen is at a maximum, differential pressure is increased stepwise again toward the starting pressure, and the liquid is drained from the specimen. It is during this latter draining

10 sequence (from minimal differential pressure, or largest corresponding effective pore radius, to the largest differential pressure, or smallest corresponding effective pore radius), that the fluid retention by the sample (mg) at each differential pressure is determined in this method. After correcting for any fluid movement for each particular pressure step measured on the chamber while empty, the fluid retention by the sample (mg) for each pressure step is determined. The fluid

15 retained may be normalized by dividing the equilibrium quantity of retained liquid (mg) associated with this particular step by the dry weight of the sample (mg).

Sample conditioning and specimen preparation

The Pore Volume Distribution Test Method is conducted on samples that have been

20 conditioned in a room at a temperature of $23^{\circ}\text{C} \pm 2.0^{\circ}\text{C}$ and a relative humidity of $50\% \pm 5\%$, all tests are conducted under the same environmental conditions and in such conditioned room. Any damaged product or samples that have defects such as wrinkles, tears, holes, and similar are not tested. Samples conditioned as described herein are considered dry samples for purposes of this invention. A 5.5cm square specimen to be tested is die cut from the conditioned product or sample.

25 The dry specimen weight is measured and recorded.

Apparatus

Apparatus suitable for this method is described in: "Liquid Porosimetry: New Methodology and Applications" by B. Miller and I. Tyomkin published in The Journal of Colloid and Interface

30 Science (1994), volume 162, pages 163-170. Further, any pressure control scheme capable of achieving the required pressures and controlling the sample chamber differential pressure may be used in place of the pressure-control subsystem described in this reference. One example of suitable overall instrumentation and software is the TRI/Autoporosimeter (Textile Research

Institute (TRI) / Princeton Inc. of Princeton, N.J., U.S.A.). The TRI/Autoporosimeter is an automated computer-controlled instrument for measuring pore volume distributions in porous materials (e.g., the volumes of different size pores within the range from 1 to 1000 μm effective pore radii). Computer programs such as Automated Instrument Software Releases 2000.1 or 2003.1/2005.1 or 2006.2; or Data Treatment Software Release 2000.1 (available from TRI Princeton Inc.), and spreadsheet programs may be used to capture and analyse the measured data.

Method procedure

The wetting liquid used is a degassed 0.2 weight % solution of octylphenoxy polyethoxy ethanol (Triton X-100 from Sigma-Aldrich) in distilled water. The instrument calculation constants are as follows: ρ (density) = 1 g/cm^3 ; γ (surface tension) = 31 dynes/cm; $\cos\Theta = 1$. A 90-mm diameter mixed-cellulose-ester filter membrane with a characteristic pore size of 1.2 μm (such Millipore Corporation of Bedford, MA, Catalogue #RAWP09025) is affixed to the porous frit (Monel plates with diameter of 90mm, 6.4mm thickness from Mott Corp., Farmington, CT, or equivalent) of the sample chamber. A plexiglass plate weighing about 34 g (supplied with the instrument) is placed on the sample to ensure the sample rests flat on the membrane/frit assembly. No additional weight is placed on the sample.

Someone skilled in the art knows that it is critical to degas the test fluid as well as the frit/membrane/tubing system such that the system is free from air bubbles.

The sequence of pore sizes (differential pressures) for this application is as follows (effective pore radius in μm): 2.5, 5, 10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100, 120, 140, 160, 180, 200, 225, 250, 275, 300, 350, 400, 500, 600, 800, 1000. This sequence is then replicated in reverse order. The criterion for moving from one pressure step to the next is that fluid uptake/drainage from the specimen is measured to be less than 10mg/min for 10s.

A separate “blank” measurement is performed by following this method procedure on an empty sample chamber with no specimen or weight present on the membrane/frit assembly. Any fluid movement observed is recorded (mg) at each of the pressure steps. Fluid retention data for a specimen are corrected for any fluid movement associated with the empty sample chamber by subtracting fluid retention values of this “blank” measurement from corresponding values in the measurement of the specimen.

Determination of Parameters

Data from the PVD instrument can be presented in a cumulative fashion, so that the cumulative mass absorbed is tabulated alongside the diameter of pore, which allow the following parameters to be calculated:

- 5 **2.5-160 micron PVD Absorption (mg)** = [mg at 160micron absorbed] – [mg at 2.5micron absorbed] from the advancing curve,
 2.5-160 micron PVD Desorption (mg) = [mg at 160micron desorbed] – [mg at 2.5 micron desorbed] from the receding curve, and
 2.5-100 micron hysteresis (mg) = [mg at 100 micron desorbed – mg at 2.5 micron desorbed] –
 10 [mg at 100 micron absorbed – mg at 2.5 micron absorbed]

Horizontal Full Sheet (HFS) Test Method:

The Horizontal Full Sheet (HFS) test method determines the amount of distilled water absorbed and retained by a fibrous structure of the present invention. This method is performed by
 15 first weighing a sample of the fibrous structure to be tested (referred to herein as the "dry weight of the sample"), then thoroughly wetting the sample, draining the wetted sample in a horizontal position and then reweighing (referred to herein as "wet weight of the sample"). The absorptive capacity of the sample is then computed as the amount of water retained in units of grams of water absorbed by the sample. When evaluating different fibrous structure samples, the same size of
 20 fibrous structure is used for all samples tested.

The apparatus for determining the HFS capacity of fibrous structures comprises the following:

An electronic balance with a sensitivity of at least ± 0.01 grams and a minimum capacity of 1200 grams. The balance should have a special balance pan to be able to handle the size of the
 25 sample tested (i.e.; a fibrous structure sample of about 27.9 cm by 27.9 cm).

A sample support rack (Figs. 14 and 14A) and sample support rack cover (Figs. 15 and 15A) is also required. Both the support rack (Figs. 14 and 14A) and support rack cover (Figs. 15 and 15A) are comprised of a lightweight metal frame, strung with 0.305 cm diameter monofilament so as to form a grid as shown in Fig. 14. The size of the support rack (Figs. 14 and 14A) and
 30 support rack cover (Figs. 15 and 15A) is such that the sample size can be conveniently placed between the two.

The HFS test is performed in an environment maintained at $23 \pm 1^\circ \text{C}$ and $50 \pm 2\%$ relative humidity. A water reservoir or tub is filled with distilled water at $23 \pm 1^\circ \text{C}$ to a depth of 3 inches (7.6 cm).

Samples are tested in duplicate. The dry weight of each sample is reported to the nearest 0.01 grams. The empty sample support rack (FIGS. 14 and 14A) is placed on the balance with the special balance pan described above. The balance is then zeroed (tared). One sample is carefully placed on the sample support rack (FIGS. 14 and 14A), "face up" or with the outside of the sample facing up, away from the sample support rack (FIGS. 14 and 14A). The support rack cover (FIGS. 15 and 15A) is placed on top of the support rack (FIGS. 14 and 14A). The sample (now sandwiched between the rack and cover) is submerged in the water reservoir. After the sample is submerged for 30 ± 3 seconds, the sample support rack (FIGS. 14 and 14A) and support rack cover (FIGS. 15 and 15A) are gently raised out of the reservoir.

The sample, support rack (FIGS. 14 and 14A) and support rack cover (FIGS. 15 and 15A) are allowed to drain horizontally for 120 ± 5 seconds, taking care not to excessively shake or vibrate the sample. While the sample is draining, the support rack cover (FIGS. 15 and 15A) is carefully removed and all excess water is wiped from the support rack (FIGS. 15 and 15A). The wet sample and the support rack (FIGS. 14 and 14A) are weighed on the previously tared balance. The weight is recorded to the nearest 0.01 g. This is the wet weight of the sample after horizontal drainage.

The HFS gram per gram fibrous structure sample absorptive capacity is defined as: absorbent capacity = (wet weight of the sample after horizontal drainage - dry weight of the sample) / (dry weight of the sample) and has a unit of gram/gram.

The HFS gram per sheet fibrous structure sample absorptive capacity is defined as (wet weight of the sample after horizontal drainage minus dry weight of the sample) and has a unit of gram/sheet.

25 Vertical Full Sheet (VFS) Test Method:

The Vertical Full Sheet (VFS) test method is similar to the HFS method described previously, and determines the amount of distilled water absorbed and retained by a fibrous structure when held at an angle of 75° .

After setting up the apparatus, preparing the sample, taking the initial weights, and submerging the sample, according to the HFS method, the support rack (FIGS. 14 and 14A) and sample are removed from the reservoir and inclined at an angle of 75° and allowed to drain for 60 ± 5 seconds. Care should be taken so that the sample does not slide or move relative to the support

rack (FIGS. 14 and 14A). If there is difficulty keeping the sample from sliding down the support rack (FIGS. 14 and 14A) sample can be held with the fingers.

At the end of this time frame (60 ± 5 seconds), carefully bring the sample and support rack (FIGS. 14 and 14A) to the horizontal position and wipe the bottom edge of the sample support rack (FIGS. 14 and 14A) that water dripped onto during vertical drainage. Return the sample and support rack (FIGS. 14 and 14A) to the balance and take the weight to the nearest 0.01 g. This value represents the wet weight of the sample after vertical drainage.

The VFS gram per gram fibrous structure sample absorptive capacity is defined as the wet weight of the sample after vertical drainage minus the dry weight of the sample divided by the dry weight of the sample, and has a unit of gram/gram (g/g).

The VFS gram per sheet fibrous structure sample absorptive capacity is defined as the wet weight of the sample after vertical drainage minus the dry weight of the sample, and has a unit of gram/sheet.

The calculated VFS is the average of the absorptive capacities of the two samples of the fibrous structure.

Dry Bulk Ratio Method:

“Dry Bulk Ratio” may be calculated as follows: (Dry Compression x Flexural Rigidity (avg))/TDT.

Wet Bulk Ratio Method:

“Wet Bulk Ratio” may be calculated as follows: (Wet Compression x Geometric Mean Wet Modulus)/Total Wet Tensile.

Fiber Length, Width, Coarseness, and Fiber Count Test Method:

Fiber Length values are generated by running the test procedure as defined in U.S. Patent Application No. 2004-0163782 and informs the following procedure:

The length, width, and coarseness of the-fibers (which are averages of the plurality of fibers being analyzed in a sample), as well as the fiber count (number and/or length average), may be determined using a Valmet FS5 Fiber Image Analyzer commercially available from Valmet, Kajaani Finland (as the Kajaani Fiber Lab is less available) following the procedures outlined in the manual. If in-going or raw pulp is not accessible, samples may be taken from commercially

available product (e.g., a roll of sanitary tissue product) to determine length, width, coarseness and fiber count (number and/or length average) using the FS5 by obtaining samples as outlined in the “Sample Preparation” section of the Coverage and Fiber Count Test Method in the Test Methods Section. As used herein, fiber length is defined as the “length weighted average fiber length”. The instructions supplied with the unit detail the formula used to arrive at this average. The length can be reported in units of millimeters (mm) or in inches (in). As used herein, fiber width is defined as the “width weighted average fiber width” and can be reported in units of micrometers (μm) or in millimeters (mm). The instructions supplied with the unit detail the formula used to arrive at this average. The width can be reported in units of millimeters (mm) or in inches (in). The instructions supplied with the unit detail the formula used to arrive at this average. Fiber count (number and/or length average) can be reported in units of million fibers/g. As used herein, fiber length/width ratio is defined as the “length weighted average fiber length (mm) / width weighted average fiber width (mm).”

Fiber count (length average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(l)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(l) \times \text{coarseness})$. And, fiber count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(n)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(n) \times \text{coarseness})$. ($L(l)$) means length weighted averaged and ($L(n)$) means number weighted averaged.

It should be understood that the values from different fiber image analyzers can differ significantly, even as much as 59% – see “Fiber Quality Analysis: OpTest Fiber Quality Analyzer versus L&W Fiber Tester,” Bin Li, Rohan Bandekar, Quanqing Zha, Ahmed Alsaggaf, and Yonghao Ni, *Industrial & Engineering Chemistry Research* 2011 50 (22), 12572-12578, DOI: 10.1021/ie201631q, which compares values from the FQA fiber analyzer to the FT fiber analyzer, stating: “These new instruments, such as PQM (pulp quality monitor), Galai CIS-100, Fiberlab, MorFi, FiberMaster, FQA (fiber quality analyzer), and L&W Fiber Tester (FT), provide fast measurements with the capability of both laboratory and online analysis. However, the measurement differences among these instruments are expected due to the different designs of hardware and software.”

Percent Roll Compressibility Method:

Percent Roll Compressibility (Percent Compressibility) is determined using the Roll Diameter Tester 1000 as shown in FIG. 7. It is comprised of a support stand made of two aluminum plates, a base plate 1001 and a vertical plate 1002 mounted perpendicular to the base, a sample shaft 1003 to mount the test roll, and a bar 1004 used to suspend a precision diameter tape 1005 that wraps around the circumference of the test roll. Two different weights 1006 and 1007 are suspended from the diameter tape to apply a confining force during the uncompressed and compressed measurement. All testing is performed in a conditioned room maintained at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about $50\% \pm 2\%$ relative humidity.

The diameter of the test roll is measured directly using a Pi[®] tape or equivalent precision diameter tape (e.g., an Executive Diameter tape available from Apex Tool Group, LLC, Apex, NC, Model No. W606PD) which converts the circumferential distance into a diameter measurement, so the roll diameter is directly read from the scale. The diameter tape is graduated to 0.01 inch increments with accuracy certified to 0.001 inch and traceable to NIST. The tape is 0.25 in wide and is made of flexible metal that conforms to the curvature of the test roll but is not elongated under the 1100 g loading used for this test. If necessary, the diameter tape is shortened from its original length to a length that allows both of the attached weights to hang freely during the test, yet is still long enough to wrap completely around the test roll being measured. The cut end of the tape is modified to allow for hanging of a weight (e.g., a loop). All weights used are calibrated, Class F hooked weights, traceable to NIST.

The aluminum support stand is approximately 600 mm tall and stable enough to support the test roll horizontally throughout the test. The sample shaft 1003 is a smooth aluminum cylinder that is mounted perpendicularly to the vertical plate 1002 approximately 485 mm from the base. The shaft has a diameter that is at least 90% of the inner diameter of the roll and longer than the width of the roll. A small steel bar 1004 approximately 6.3 mm diameter is mounted perpendicular to the vertical plate 1002 approximately 570 mm from the base and vertically aligned with the sample shaft. The diameter tape is suspended from a point along the length of the bar corresponding to the midpoint of a mounted test roll. The height of the tape is adjusted such that the zero mark is vertically aligned with the horizontal midline of the sample shaft when a test roll is not present.

Condition the samples at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about $50\% \pm 2\%$ relative humidity for 2 hours prior to testing. Rolls with cores that are crushed, bent, or damaged should not be tested. Place the test roll on the sample shaft 1003 such that the direction the paper was rolled onto its core is the same direction the diameter tape will be wrapped around the test roll. Align the midpoint of

the roll's width with the suspended diameter tape. Loosely loop the diameter tape 1004 around the circumference of the roll, placing the tape edges directly adjacent to each other with the surface of the tape lying flat against the test sample. Carefully, without applying any additional force, hang the 100 g weight 1006 from the free end of the tape, letting the weighted end hang freely without swinging. Wait 3 seconds. At the intersection of the diameter tape 1008, read the diameter aligned with the zero mark of the diameter tape and record as the Original Roll Diameter to the nearest 0.01 inches. With the diameter tape still in place, and without any undue delay, carefully hang the 1000 g weight 1007 from the bottom of the 100 g weight, for a total weight of 1100 g. Wait 3 seconds. Again read the roll diameter from the tape and record as the Compressed Roll Diameter to the nearest 0.01 inch. Calculate percent compressibility to the according to the following equation and record to the nearest 0.1%:

$$\% \text{ Compressibility} = \frac{(\text{Original Roll Diameter}) - (\text{Compressed Roll Diameter})}{\text{Original Roll Diameter}} \times 100$$

Repeat the testing on 10 replicate rolls and record the separate results to the nearest 0.1%. Average the 10 results and report as the Percent Compressibility to the nearest 0.1%.

Roll Firmness Method:

Roll Firmness is measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the MTS Alliance using Testworks 4.0 Software, as available from MTS Systems Corp., Eden Prairie, MN) using a load cell for which the forces measured are within 10% to 90% of the limit of the cell. The roll product is held horizontally, a cylindrical probe is pressed into the test roll, and the compressive force is measured versus the depth of penetration. All testing is performed in a conditioned room maintained at 23°C ± 2C° and 50% ± 2% relative humidity.

Referring to FIG. 8, the upper movable fixture 2000 consist of a cylindrical probe 2001 made of machined aluminum with a 19.00 ± 0.05 mm diameter and a length of 38 mm. The end of the cylindrical probe 2002 is hemispheric (radius of 9.50 ± 0.05 mm) with the opposing end 2003 machined to fit the crosshead of the tensile tester. The fixture includes a locking collar 2004 to stabilize the probe and maintain alignment orthogonal to the lower fixture. The lower stationary fixture 2100 is an aluminum fork with vertical prongs 2101 that supports a smooth aluminum sample shaft 2101 in a horizontal position perpendicular to the probe. The lower fixture has a

vertical post 2102 machined to fit its base of the tensile tester and also uses a locking collar 2103 to stabilize the fixture orthogonal to the upper fixture.

The sample shaft 2101 has a diameter that is 85% to 95% of the inner diameter of the roll and longer than the width of the roll. The ends of sample shaft are secured on the vertical prongs with a screw cap 2104 to prevent rotation of the shaft during testing. The height of the vertical prongs 2101 should be sufficient to assure that the test roll does not contact the horizontal base of the fork during testing. The horizontal distance between the prongs must exceed the length of the test roll.

Program the tensile tester to perform a compression test, collecting force and crosshead extension data at an acquisition rate of 100 Hz. Lower the crosshead at a rate of 10 mm/min until 5.00 g is detected at the load cell. Set the current crosshead position as the corrected gage length and zero the crosshead position. Begin data collection and lower the crosshead at a rate of 50 mm/min until the force reaches 10 N. Return the crosshead to the original gage length.

Remove all of the test rolls from their packaging and allow them to condition at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about $50\% \pm 2\%$ relative humidity for 2 hours prior to testing. Rolls with cores that are crushed, bent, or damaged should not be tested. Insert sample shaft through the test roll's core and then mount the roll and shaft onto the lower stationary fixture. Secure the sample shaft to the vertical prongs then align the midpoint of the roll's width with the probe. Orient the test roll's tail seal so that it faces upward toward the probe. Rotate the roll 90 degrees toward the operator to align it for the initial compression.

Position the tip of the probe approximately 2 cm above the surface of the sample roll. Zero the crosshead position and load cell and start the tensile program. After the crosshead has returned to its starting position, rotate the roll toward the operator 120 degrees and in like fashion acquire a second measurement on the same sample roll.

From the resulting Force (N) verses Distance (mm) curves, read the penetration at 7.00 N as the Roll Firmness and record to the nearest 0.1 mm. In like fashion analyze a total of ten (10) replicate sample rolls. Calculate the arithmetic mean of the 20 values and report Roll Firmness to the nearest 0.1 mm.

Slip Stick Coefficient of Friction and Kinetic Coefficient of Friction Method:

The Kinetic Coefficient of Friction values (actual measurements) and Slip Stick Coefficient of Friction (based on standard deviation from the mean Kinetic Coefficient of Friction) are generated by running the test procedure as defined in U.S. Patent No. 9,896,806.

Lint Value Test Method:

The amount of lint generated from a finished fibrous structure is determined with a Sutherland Rub Tester (available from Danilee Co., Medina, Ohio) and a color spectrophotometer (a suitable instrument is the HunterLab LabScan XE, as available from Hunter Associates Laboratory Inc., Reston, VA, or equivalent). such as the Hunter LabScan XE. The rub tester is a motor-driven instrument for moving a weighted felt test strip over a finished fibrous structure specimen (referred to throughout this method as the “web”) along an arc path. The Hunter Color L value is measured on the felt test strip before and after the rub test. The difference between these two Hunter Color L values is then used to calculate a lint value. This lint method is designed to be used with white or substantially white fibrous structures and/or sanitary toilet tissue products. Therefore, if testing of a non-white tissue, such as blue-colored or peach-colored tissue is desired, the same formulation should be used to make a sample without the colored dye, pigment, etc., using bleached kraft pulps.

15

i. Sample preparation

Prior to the lint rub testing, the samples to be tested should be conditioned according to Tappi Method T402OM-88. Here, samples are preconditioned for 24 hours at a relative humidity level of 10 to 35% and within a temperature range of 22°C to 40°C. After this preconditioning step, samples should be conditioned for 24 hours at a relative humidity of 48 to 52% and within a temperature range of 22°C to 24°C. This rub testing should also take place within the confines of the constant temperature and humidity room.

20

The web is first prepared by removing and discarding any product which might have been abraded in handling, e.g., on the outside of the roll. For products formed from multiple plies of webs, this test can be used to make a lint measurement on the multi-ply product, or, if the plies can be separated without damaging the specimen, a measurement can be taken on the individual plies making up the product. If a given sample differs from surface to surface, it is necessary to test both surfaces and average the values in order to arrive at a composite lint value. In some cases, products are made from multiple-ply webs such that the facing-out surfaces are identical, in which case it is only necessary to test one surface. If both surfaces are to be tested, it is necessary to obtain six specimens for testing (Single surface testing only requires three specimens). Each specimen should measure approximately 9.5 by 4.5 in. (241.3mm by 114mm) with the 9.5 in. (241.3 mm) dimension running in the machine direction (MD). Specimens can be obtained directly

25

30

from a finished product roll, if the appropriate width, or cut to size using a paper cutter. Each specimen should be folded in half such that the crease is running along the cross direction (CD) of the web sample. For two-surface testing, make up 3 samples with a first surface "out" and 3 with the second-side surface "out". Keep track of which samples are first surface "out" and which are second surface out.

Obtain a 30 in. by 40 in. piece of Crescent #300 cardboard. Using a paper cutter, cut out six pieces of cardboard to dimensions of 2.5 in. by 6 in. Puncture two holes into each of the six cards by forcing the cardboard onto the hold down pins of the Sutherland Rub tester.

Center and carefully place each of the 2.5 in. by 6 in. cardboard pieces on top of the six previously folded samples. Make sure the 6 in. dimension of the cardboard is running parallel to the machine direction (MD) of each of the tissue samples. Center and carefully place each of the cardboard pieces on top of the three previously folded samples. Once again, make sure the 6 in. dimension of the cardboard is running parallel to the machine direction (MD) of each of the web samples.

Fold one edge of the exposed portion of the web specimen onto the back of the cardboard. Secure this edge to the cardboard with adhesive tape obtained from 3M Inc. (3/4 in. wide Scotch Brand, St. Paul, Minn.). Carefully grasp the other over-hanging tissue edge and snugly fold it over onto the back of the cardboard. While maintaining a snug fit of the web specimen onto the board, tape this second edge to the back of the cardboard. Repeat this procedure for each sample.

Turn over each sample and tape the cross-direction edge of the web specimen to the cardboard. One half of the adhesive tape should contact the web specimen while the other half is adhering to the cardboard. Repeat this procedure for each of the samples. If the tissue sample breaks, tears, or becomes frayed at any time during the course of this sample preparation procedure, discard and make up a new sample with a new tissue sample strip.

There will now be 3 first-side surface "out" samples on cardboard and (optionally) 3 second-side surface "out" samples on cardboard.

ii. Felt preparation

Obtain a 30 in. by 40 in. piece of Crescent #300 cardboard. Using a paper cutter, cut out six pieces of cardboard to dimensions of 2.25 in. by 7.25 in. Draw two lines parallel to the short dimension and down 1.125 in. from the top and bottom most edges on the white side of the cardboard. Carefully score the length of the line with a razor blade using a straight edge as a guide. Score it to a depth about halfway through the thickness of the sheet. This scoring allows the

cardboard/felt combination to fit tightly around and rest flat against the weight of the Sutherland Rub tester. Draw an arrow running parallel to the long dimension of the cardboard on this scored side of the cardboard.

Cut six pieces of black felt (F-55, or equivalent) to the dimensions of 2.25 in. by 8.5 in.

- 5 Place a felt piece on top of the unscored, green side of the cardboard such that the long edges of both the felt and cardboard are parallel and in alignment. Make sure the fluffy side of the felt is facing up. Also allow about 0.5" to overhang the top and bottom most edges of the cardboard. Snugly fold over both overhanging felt edges onto the backside of the cardboard and attach with Scotch brand tape. Prepare a total of six of these felt/cardboard combinations. For best
10 reproducibility, all samples should be run with the same lot of felt.

iii. Care of 4-pound weight

- The four-pound weight has four square inches of effective contact area providing a contact pressure of one pound per square inch. Since the contact pressure can be changed by alteration of
15 the rubber pads mounted on the face of the weight, it is important to use only the rubber pads supplied by the instrument manufacturer and mounted according to their instructions. These pads must be replaced if they become hard, abraded, or chipped off. When not in use, the weight must be positioned such that the pads are not supporting the full weight of the weight. It is best to store the weight on its side.

20

iv. Rub tester instrument calibration

Set up and calibrate the Sutherland Rub Tester according to the manufacturer's instructions. For this method, the tester is preset to run for five strokes (one stroke is a full forward and reverse cycle of the movable arm) and operates at 42 cycles per minute.

25

v. Color spectrophotometer calibration

- Setup and standardize the color instrument using a 2 in. measurement area port size utilizing the manufacturer supplied black tile, then white tile. Calibrate the instrument according to
30 manufacturer's specifications using their supplied standard tiles and configure it to measure Hunter L, a, b values.

vi. Measurement of samples

The first step in the measurement of lint is to measure the Hunter color values of the black felt/cardboard samples prior to being rubbed on the web sample. Center a felt covered cardboard, with the arrow pointing to the back of the color meter, over the measurement port backing it with a standard white plate. Since the felt width is only slightly larger than the viewing area diameter, make sure the felt completely covers the measurement area. After confirming complete coverage, take a reading and record the Hunter L value.

Measure the Hunter Color L values for all the felt covered cardboards using this technique. If the Hunter Color L values are all within 0.3 units of one another, take the average to obtain the initial L reading. If the Hunter Color L values are not within the 0.3 units, discard those felt/cardboard combinations outside the limit. Prepare new samples and repeat the Hunter Color L measurement until all samples are within 0.3 units of one another.

For the rubbing of the web sample/cardboard combinations, secure a prepared web sample card on the base plate of the rub tester by slipping the holes in the board over the hold-down pins. Clip a prepared felt covered card (with established initial “L” reading) onto the four-pound weight by pressing the card ends evenly under the clips on the sides of the weight. Make certain the card is centered score bend to score bend on the weight, positioned flat against the rubber pads, with the felt side facing away from the rubber pads. Hook the weight onto the tester arm and gently lower onto the prepared web sample card. It is important to check that the felt is resting flat on the web sample and that the weight does not bind on the arm.

Next, activate the tester allowing the weighted felt test strip to complete five full rubbing strokes against the web sample surface. At the end of the five strokes the tester will automatically stop. Remove the weight with the felt covered cardboard. Inspect the web sample. If torn, discard the felt and web sample and start over. If the web sample is intact, remove the felt covered cardboard from the weight. Measure the Hunter Color L value on the felt covered cardboard in the same location as described above for the blank felts. Record the Hunter Color L readings for the felt after rubbing. Rub, measure, and record the Hunter Color L values for all remaining samples. After all web specimens have been measured, remove and discard all felt. Felts strips are not used again. Cardboards are used until they are bent, torn, limp, or no longer have a smooth surface.

vii. Calculations

For samples measured on both surfaces, subtract the average initial L reading found for the unused felts from each of the three first-side surface L readings and each of the three second-side

surface L readings. Calculate the average delta for the three first-side surface values. Calculate the average delta for the three second-side surface values. Finally, calculate the average of the lint value on the first-side surface and the second-side surface, and record as the lint value to the nearest whole unit.

- 5 For samples measured on only one surface, subtract the average initial L reading found for the unused felts from each of the three L readings. Calculate the average delta L for the three surface values and record as the lint value to the nearest whole unit.

Formation Index Test Method:

- 10 The formation index is a ratio of the contrast and size distribution components of the nonwoven substrate. The higher the formation index, the better the formation uniformity. Conversely, the lower the formation index, the worse the formation uniformity. The “formation index” is measured using a commercially available PAPRICAN Micro-Scanner Code LAD94, manufactured by OpTest Equipment, Incorporated, utilizing the software developed by
- 15 PAPRICAN & OpTest, Version 9.0, both commercially available from OpTest Equipment Inc., Ontario, Canada. The PAPRICAN Micro-Scanner Code LAD94 uses a video camera system for image input and a light box for illuminating the sample. The camera is a CCD camera with 65 $\mu\text{m}/\text{pixel}$ resolution.

- The video camera system views a nonwoven sample placed on the center of a light box
- 20 having a diffuser plate. To illuminate the sample for imaging, the light box contains a diffused quartz halogen lamp of 82V/250 W that is used to provide a field of illumination. A uniform field of illumination of adjustable intensity is provided. Specifically, samples for the formation index testing are cut from a cross direction width strip of the nonwoven substrate. The samples are cut into 101.6 mm (4 inches) by 101.6 mm (4 inches) squares, with one side aligned with the machine
- 25 direction of the test material. The side aligned with the machine direction of the test material is placed onto the testing area and held in place by the specimen plate with the machine direction pointed towards the instrument support arm that holds the camera. Each specimen is placed on the light box such that the side of the web to be measured for uniformity is facing up, away from the diffuser plate. To determine the formation index, the light level must be adjusted to indicate MEAN
- 30 LCU GRAY LEVEL of 128 ± 1 .

 The specimen is set on the light box between the specimen plate so that the center of the specimen is aligned with the center of the illumination field. All other natural or artificial room light is extinguished. The camera is adjusted so that its optical axis is perpendicular to the plane of

the specimen and so that its video field is centered on the center of the specimen. The specimen is then scanned and calculated with the OpTest Software.

Fifteen specimens of the nonwoven substrate were tested for each sample and the values were averaged to determine the formation index.

5

Density and Bulk (Dry) Test Method:

The density of a fibrous structure and/or sanitary tissue product is calculated as the quotient of the Basis Weight of a fibrous structure or sanitary tissue product expressed in lbs/3000 ft² divided by the Caliper (at 95 g/in²) of the fibrous structure or sanitary tissue product expressed in mils. The final Density value is calculated in lbs/ft³ and/or g/cm³, by using the appropriate converting factors. The bulk of a fibrous structure and/or sanitary tissue product is the reciprocal of the density method (i.e., Bulk = 1 / Density).

Dry Thick Compression and Recovery Test Method (“Dry Compression” or “Compressive Slope (Dry)”):

10 Dry Thick Compression and Dry Thick Compressive Recovery are measured using a constant rate of extension tensile tester (a suitable instrument is the EJA Vantage, Thwing-Albert, West Berlin NJ, or equivalent) fitted with compression fixtures, a circular compression foot having an area of 1.0 in² and a circular anvil having an area of at least 4.9 in². The thickness (caliper in mils) is measured at varying pressure values ranging from 10-1500 g/in² in both the compression and relaxation directions.

15 Four (4) samples are prepared by the cutting of a usable unit obtained from the outermost sheets of a finished product roll after removing at least the leading five sheets by unwinding and tearing off via the closest line of weakness, such that each cut sample is 2.5×2.5 inches, avoiding creases, folds, and obvious defects.

20 The compression foot and anvil surfaces are aligned parallel to each other, and the crosshead zeroed at the point where they are in contact with each other. The tensile tester is programmed to perform a compression cycle, immediately followed by an extension (recovery) cycle. Force and extension data are collected at a rate of 50 Hz, with a crosshead speed of 0.10 in/min. Force data is converted to pressure (g/in², or gsi). The compression cycle continues until a pressure of 1500 gsi is reached, at which point the crosshead stops and immediately begins the
25 extension (recovery) cycle with the data collection and crosshead speed remaining the same.

The sample is placed flat on the anvil fixture, ensuring the sample is centered beneath the foot so that when contact is made the edges of the sample will be avoided. Start the tensile tester and data collection. Testing is repeated in like fashion for all four samples.

The thickness (mils) vs. pressure (g/in², or gsi) data is used to calculate the sample's compressibility, near-zero load caliper, and compressive modulus. A least-squares linear regressions is performed on the thickness vs. the logarithm (base10) of the applied pressure data using nine discrete data points at pressures of 10, 25, 50, 75, 100, 125, 150, 200, 300 gsi and their respective thickness readings. Compressibility (m) equals the slope of the linear regression line, with units of mils/log (gsi). The higher the magnitude of the negative value the more "compressible" the sample is. Near-zero load caliper (b) equals the y-intercept of the linear regression line, with units of mils. This is the extrapolated thickness at log (1 gsi pressure). Compressive Modulus is calculated as the y-intercept divided by the negative slope (-b/m) with units of log (gsi).

Dry Thick Compression is defined as:

15

$$\text{Dry Thick Compression (mils} \cdot \text{mils} / \log (\text{gsi}) = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)}$$

Compression Slope is defined as -1 x Compressibility (m).

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied. Calculate the arithmetic mean of the four replicate values and report Dry Thick Compression to the nearest integer value mils* mils / log (gsi).

Dry Thick Compressive Recovery is defined as:

25

$$\begin{aligned} \text{Dry Thick Compressive Recovery (mils} \cdot \text{mils} / \log (\text{gsi}) \\ = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)} \times \frac{\text{Recovered Thickness at 10 gsi}}{\text{Compressed Thickness at 10 gsi}} \end{aligned}$$

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied and maintain fraction recovery at 10 g/in². Compressed thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the compressive portion of the test. Recovered thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the recovery portion of the test. Calculate the arithmetic mean of the four replicate values and report Dry Thick Compressive Recovery to the nearest integer value mils* mils /

log (gsi).

Wet Thick Compression and Recovery Test Method (Wet Compression):

5 Wet Thick Compression and Wet Thick Compressive Recovery are measured using a constant rate of extension tensile tester (a suitable instrument is the EJA Vantage, Thwing-Albert, West Berlin NJ, or equivalent) fitted with compression fixtures, a circular compression foot having an area of 1.0 in² and a circular anvil having an area of at least 4.9 in². The thickness (caliper in mils) is measured at varying pressure values ranging from 10-1500 g/in² in both the compression and relaxation directions.

10 Four (4) samples are prepared by the cutting of a usable unit obtained from the outermost sheets of a finished product roll after removing at least the leading five sheets by unwinding and tearing off via the closest line of weakness, such that each cut sample is 2.5×2.5 inches, avoiding creases, folds, and obvious defects.

15 The compression foot and anvil surfaces are aligned parallel to each other, and the crosshead zeroed at the point where they are in contact with each other. The tensile tester is programmed to perform a compression cycle, immediately followed by an extension (recovery) cycle. Force and extension data are collected at a rate of 50 Hz, with a crosshead speed of 0.10 in/min. Force data is converted to pressure (g/in², or gsi). The compression cycle continues until a pressure of 1500 gsi is reached, at which point the crosshead stops and immediately begins the
20 extension (recovery) cycle with the data collection and crosshead speed remaining the same.

The sample is placed flat on the anvil fixture, ensuring the sample is centered beneath the foot so that when contact is made the edges of the sample will be avoided. Using a pipette, fully saturate the entire sample with distilled or deionized water until there is no observable dry area remaining and water begins to run out of the edges. Start the tensile tester and data collection.
25 Testing is repeated in like fashion for all four samples.

The thickness (mils) vs. pressure (g/in², or gsi) data is used to calculate the sample's compressibility, "near-zero load caliper", and compressive modulus. A least-squares linear regressions is performed on the thickness vs. the logarithm (base10) of the applied pressure data using nine discrete data points at pressures of 10, 25, 50, 75, 100, 125, 150, 200, 300 gsi and their
30 respective thickness readings. Compressibility (m) equals the slope of the linear regression line, with units of mils/log (gsi). The higher the magnitude of the negative value the more "compressible" the sample is. Near-zero load caliper (b) equals the y-intercept of the linear regression line, with units of mils. This is the extrapolated thickness at log (1 gsi pressure).

Compressive Modulus is calculated as the y-intercept divided by the negative slope (-b/m) with units of log (gsi).

Wet Thick Compression is defined as:

$$5 \quad \text{Dry Thick Compression (mils} \cdot \text{mils} / \log (\text{gsi}) = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)}$$

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied. Calculate the arithmetic mean of the four replicate values and report Wet Thick Compression to the nearest integer value mils* mils / log (gsi).

10 Wet Thick Compressive Recovery is defined as:

$$\begin{aligned} &\text{Dry Thick Compressive Recovery (mils} \cdot \text{mils} / \log (\text{gsi}) \\ &= -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)} \times \frac{\text{Recovered Thickness at 10 gsi}}{\text{Compressed Thickness at 10 gsi}} \end{aligned}$$

15 Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied and maintain fraction recovery at 10 g/in². Compressed thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the compressive portion of the test. Recovered thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the recovery portion of the test. Calculate the arithmetic mean of the four replicate values and report Wet Thick Compressive Recovery to the nearest integer value mils* mils / log (gsi).

20

Moist Towel Surface Structure Test Method:

This test method measures the surface topography of a towel surface, both in a dry and moist state, and calculates the % contact area and the median depth of the lowest 10% of the projected measured area, with the test sample under a specified pressure using a smooth and rigid transparent plate with an anti-reflective coating (to minimize and/or eliminate invalid image pixels).

25

Condition the samples or useable units of product, with wrapper or packaging materials removed, in a room conditioned at 50 ± 2% relative humidity and 23°C ± 1°C (73° ± 2°F) for a minimum of two hours prior to testing. Do not test useable units with defects such as wrinkles, tears, holes, effects of tail seal or core adhesive, etc., and when necessary, replace with other useable units free of such defects. Test sample dimensions shall be of the size of the usable unit,

30

removed carefully at the perforations if they are present. If perforations are not present, or for samples larger than 8 inches MD by 11 inches CD, cut the sample to a length of approximately 6 inches in the MD and 11 inches in the CD. In this test only the inside surface of the usable unit(s) is analyzed. The inside surface is identified as the surface oriented toward the interior core when wound on a product roll (i.e., the opposite side of the surface visible on the outside roll as presented to a consumer).

The instrument used in this method is a Gocator 3210 Snapshot System (LMI Technologies, Inc., 9200 Glenlyon Parkway, Burnaby, BC V5J 5J8 Canada), or equivalent. This instrument is an optical 3D surface topography measurement system that measures the surface height of a sample using a projected structured light pattern technique. The result of the measurement is a topography map of surface height (z-directional or z-axis) versus displacement in the x-y plane. This particular system has a field of view of approximately 100 x 154 mm, however the captured images are cropped to 80 x 130 mm (from the center) prior to analysis. The system has an x-y pixel resolution of 86 microns. The clearance distance from the camera to the testing surface (which is smooth and flat, and perpendicular to the camera view) is 23.5 (+/- 0.2) cm – see FIG. 10. Calibration plates can be used to verify that the system is accurate to manufacturer's specifications. The system is set to a Brightness value of 7, and a Dynamic value of 3, in order to most accurately capture the surface topography and minimize non-measured pixels and noise. Other camera settings may be used, with the objective of most accurately measuring the surface topography, while minimizing the number of invalid and non-measurable points.

Test samples are handled only at their corners. The test sample is first weighted on a scale with at least 0.001 gram accuracy, and its dry weight recorded to the nearest 0.01 gram. It is then placed on the testing surface, with its inside face oriented towards the Gocator camera, and centered with respect to the imaging view. A smooth and rigid transparent plate (8 x 10 inches) is gently placed on top of the test sample, centered with respect to its x-y dimensions. Equal size weights are placed on the four corners of the transparent plate such that they are close to the four corners of the projected imaged area, but do not interfere in any way with the measurement image. The size of each equal sized weight is such that the total weight of transparent plate and the four weights delivers a total pressure of 25 (+/- 1) grams per square inch (gsi) to the test sample under the plate. Within 15 seconds of placing the four weights in their proper position, the Gocator system is then initiated to acquire the topography image of the test sample in its 'dry' state.

Immediately after saving the Gocator image of the 'dry' state image, the weights and plate are removed from the test sample. The test sample is then moved to a smooth, clean countertop

surface, with its inside face still up. Using a pipette, 15-30 ml of deionized water is distributed evenly across the entire surface of the test sample until it is visibly apparent that the water has fully wetted the entire test sample, and no unwetted area is observed. The wetting process is to be completed in less than a minute. The wet test sample is then gently picked up by two adjacent
5 corners, so that it hangs freely (dripping may occur), and carefully placed on a sheet of blotter paper (Whatman cellulose blotting paper, grade GB003, cut to dimensions larger than the test sample). The wet test sample must be placed flat on the blotting paper without wrinkles or folds present. A smooth, 304 stainless steel cylindrical rod (density of $\sim 8 \text{ g/cm}^3$), with dimensions of 1.75 inch diameter and 12 inches long, is then rolled over the entire test sample at a speed of 1.5 –
10 2.0 inches per second, in the direction of the shorter of the two dimensions of the test sample. If creases or folds are created during the rolling process, and are inside the central area of the sample to be measured (i.e., if they cannot slightly adjusted or avoided in the topography measurement), then the test sample is to be discarded for a new test sample, and the measurement process started over. Otherwise, the moist sample is picked up by two adjacent corners and weighed on the scale
15 to the nearest 0.01 gram (i.e., its moist weight). At this point, the moist test paper towel test sample will have a moisture level between 1.25 and 2.00 grams H_2O per gram of initial dry material.

The moist test sample is then placed flat on the Gocator testing surface (handling it carefully, only touching its corners), with its inside surface pointing towards the Gocator camera, and centered with respect to the imaging view (as close to the same position it was for the ‘dry’
20 state image). After ensuring that the sample is flat, and no folds or creases are present in the imaging area, the smooth and rigid transparent plate (8 x 10 inches) is gently placed on top of the test sample, centered with respect to its x-y dimensions. The equal size weights are placed on the four corners of the transparent plate (i.e., the same weights that were used in the dry sample testing) such that they are close to the four corners of the projected imaged area, but do not interfere in any
25 way with the measurement image. Within 15 seconds of placing the four weights in their proper position, the Gocator system is then initiated to acquire the topography image of the test sample in its ‘moist’ state.

At this point, the test sample has both ‘dry’ and ‘moist’ surface topography (3D) images. These are processed using surface texture analysis software such as MountainsMap® (available
30 from Digital Surf, France) or equivalent, as follows: 1) The first step is to crop the image. As stated previously, this particular system has a field of view of approximately 100 x 154 mm, however the image is cropped to 80 x 130 mm (from the center). 2) Remove ‘invalid’ and non-measured points. 3) Apply a 3x3 median filter (to reduce effects of noise). 4) Apply an ‘Align’

filter, which subtracts a least squares plane to level the surface (to create an overall average of heights centered at zero). 5) Apply a Gaussian filter (according to ISO 16610-61) with a nesting index (cut-off wavelength) of 25 mm (to flatten out large scale waviness, while preserving finer structure).

- 5 From these processed 3D images of the surface, the following parameters are calculated, using software such as MountainsMap® or equivalent: Dry Depth (um), Dry Contact Area (%), Moist Depth (um), and Moist Contact Area (%).

Height measurements are derived from the Areal Material Ratio (Abbott-Firestone) curve described in the ISO 13565-2:1996 standard extrapolated to surfaces. This curve is the cumulative
10 curve of the surface height distribution histogram versus the range of surface heights measured. A material ratio is the ratio, expressed as a percent, of the area corresponding to points with heights equal to or above an intersecting plane passing through the surface at a given height, or cut depth, to the cross-sectional area of the evaluation region (field of view area). For calculating contact area, the height at a material ratio of 2% is first identified. A cut depth of 100 µm below this height
15 is then identified, and the material ratio at this depth is recorded as the “Dry Contact Area” and “Moist Contact Area”, respectively, to the nearest 0.1%.

In order to calculate “Depth” (Dry and Moist, respectively), the depth at the 95% material ratio relative to the mean plane (centered height data) of the specimen surface is identified. This corresponds to a depth equal to the median of the lowest 10% of the projected area (valleys) of the
20 specimen surface and is recorded as the “Dry Depth” and “Moist Depth”, respectively, to the nearest 1 micron (um). These values will be negative as they represent depths below the mean plane of the surface heights having a value of zero.

Three replicate samples are prepared and measured in this way, to produce an average for each of the four parameters: Dry Depth (um), Dry Contact Area (%), Moist Depth (um), and Moist
25 Contact Area (%). Additionally, from these parameters, the difference between the dry and moist depths can be calculated to demonstrate the change in depth from the dry to the moist state.

Micro-CT Intensive Property Measurement Method:

The micro-CT intensive property measurement method measures the basis weight,
30 thickness and density values within visually discernable zones or regions of a substrate sample. It is based on analysis of a 3D x-ray sample image obtained on a micro-CT instrument (a suitable instrument is the Scanco µCT 50 available from Scanco Medical AG, Switzerland, or equivalent). The micro-CT instrument is a cone beam microtomograph with a shielded cabinet. A maintenance

free x-ray tube is used as the source with an adjustable diameter focal spot. The x-ray beam passes through the sample, where some of the x-rays are attenuated by the sample. The extent of attenuation correlates to the mass of material the x-rays have to pass through. The transmitted x-rays continue on to the digital detector array and generate a 2D projection image of the sample. A
5 3D image of the sample is generated by collecting several individual projection images of the sample as it is rotated, which are then reconstructed into a single 3D image. The instrument is interfaced with a computer running software to control the image acquisition and save the raw data. The 3D image is then analyzed using image analysis software (a suitable image analysis software is MATLAB available from The Mathworks, Inc., Natick, MA, or equivalent) to measure the basis
10 weight, thickness and density intensive properties of regions within the sample.

Sample Preparation

To obtain a sample for measurement, lay a single layer of the dry substrate material out flat and die cut a circular piece with a diameter of 16 mm. If the sample being measured is a 2 (or
15 more) ply finished product, carefully separate an individual ply of the finished product prior to die cutting. The sample weight is recorded. A sample may be cut from any location containing the region or cells to be analyzed. Regions, zones, or cells within different samples taken from the same substrate material can be analyzed and compared to each other. Care should be taken to avoid embossed regions, folds, wrinkles, or tears when selecting a location for sampling.

20

Image Acquisition

Set up and calibrate the micro-CT instrument according to the manufacturer's specifications. Place the sample into the appropriate holder, between two rings of low-density material, which have an inner diameter of 12 mm. This will allow the central portion of the sample
25 to lay horizontal and be scanned without having any other materials directly adjacent to its upper and lower surfaces. Measurements should be taken in this region. The 3D image field of view is approximately 20 mm on each side in the xy-plane with a resolution of approximately 3400 by 3400 pixels, and with a sufficient number of 6 micron thick slices collected to fully include the z-direction of the sample. The reconstructed 3D image contains isotropic voxels of 6 microns.
30 Images were acquired with the source at 45 kVp and 133 μ A with no additional low energy filter. These current and voltage settings should be optimized to produce the maximum contrast in the projection data with sufficient x-ray penetration through the sample, but once optimized held constant for all substantially similar samples. A total of 1700 projections images are obtained with

an integration time of 500 ms and 4 averages. The projection images are reconstructed into the 3D image and saved in 16-bit format to preserve the full detector output signal for analysis.

Image Processing

5 Load the 3D image into the image analysis software. The largest cross-sectional area of the sample should be nearly parallel with the x-y plane, with the z-axis being perpendicular. Threshold the 3D image at a value which separates, and removes, the background signal due to air, but maintains the signal from the sample fibers within the substrate.

10 Five 2D intensive property images are generated from the thresholded 3D image. The first is the Basis Weight Image, which is a projection image. Each x-y pixel in this image represents the summation of the intensity values along voxels in the z-direction. This results in a 2D image where each pixel now has a value equal to the cumulative signal through the entire sample.

15 The weight of the sample divided by the z-direction projected area of the punched sample provides the actual average basis weight of the sample. This correlates with the average signal intensity from the Basis Weight image described above, allowing it to be represented in units of g/m^2 (gsm).

20 The second intensive property 2D image is the Thickness Image. To generate this image the upper and lower surfaces of the sample are identified, and the distance between these surfaces is calculated giving the sample thickness. The upper surface of the sample is identified by starting at the uppermost z-direction slice and evaluating each slice going through the sample to locate the z-direction voxel for all pixel positions in the xy-plane where sample signal was first detected. The same procedure is followed for identifying the lower surface of the sample, except the z-direction voxels located are all the positions in the xy-plane where sample signal was last detected. Once the upper and lower surfaces have been identified they are smoothed with a 15x15 median filter to
25 remove signal from stray fibers. The 2D Thickness Image is then generated by counting the number of voxels that exist between the upper and lower surfaces for each of the pixel positions in the xy-plane. This raw thickness value is then converted to actual distance, in microns, by multiplying the voxel count by the 6 μm slice thickness resolution.

30 The third intensive property 2D image is the Density Image (see for example FIG. 12). To generate this image, divide each xy-plane pixel value in the Basis Weight Image, in units of gsm, by the corresponding pixel in the Thickness Image, in units of microns. The units of the Density Image are grams per cubic centimeter (g/cc).

For each x-y location, the first and last occurrence of a thresholded voxel position in the z-direction is recorded. This provides two sets of points representing the Top Layer and Bottom Layer of the sample. Each set of points are fit to a second-order polynomial to provide smooth top and bottom surfaces. These surfaces define fourth and fifth 2D intensive property images, the top-layer and bottom-layer of the sample. These surfaces are saved as images with the gray values of each pixel representing the z-value of the surface point.

Micro-CT Basis Weight, Thickness and Density Intensive Properties

This sub-section of the method may be used to measure zones or regions generally. Begin by identifying the zone or region to be analyzed. Next, identify the boundary of the identified region to be analyzed. The boundary of a region is identified by visual discernment of differences in intensive properties when compared to other regions within the sample. For example, a region boundary can be identified based by visually discerning a thickness difference when compared to another region in the sample. Any of the intensive properties can be used to discern region boundaries on either on the physical sample itself or any of the micro-CT intensive property images. Once the boundary of a zone or region has been identified draw the largest circular region of interest that can be inscribed within the region. From each of the first three intensive property images calculate the average basis weight, thickness, and density within the region of interest. Record these values as the region's micro-CT basis weight to the nearest 0.01 gsm, micro-CT thickness to the nearest 0.1 micron and micro-CT density to the nearest 0.0001 g/cc.

To calculate the percent difference between zones or regions may be calculated according to the "Percent (%) difference" definition above.

Concavity Ratio and Packing Fraction Measurements

As outlined above, five different types of 2D intensive property images are created. These images include: (1) a basis weight image, (2) a thickness image, (3) a density image, (4) a top-layer image, and (5) a bottom-layer image.

To measure discrete pillow and knuckle Concavity Ratio and Packing Fraction, begin by identifying the boundary of the selected discrete pillow or knuckle cells. The boundary of a cell is identified by visual discernment of differences in intensive properties when compared to other cells within the sample. For example, a cell boundary can be identified based by visually discerning a density difference when compared to another cell in the sample. Any of the intensive properties (basis weight, thickness, density, top-layer, and bottom-layer) can be used to discern cell

boundaries on either the physical sample itself or any of the micro-CT 2D intensive property images.

Using the image analysis software, manually draw a line tracing the identified boundary of each individual whole and partial discrete knuckle or discrete pillow cell 24 visible within the sample boundary 100, and generate a new binary image containing only the closed filled in shapes of all the identified discrete cells (see for example FIG. 13). Analyze all the individual discrete cell shapes in the binary image and record the following measurements for each: 1) Area and 2) Convex Hull Area.

The Concavity Ratio is a measure of the presence and extent of concavity within the shapes of the discrete knuckle or pillow cells. Using the recorded measurements calculate the Concavity Ratio for each of the analyzed discrete cells as the ratio of the shape area to its convex hull area. Identify ten substantially similar replicate discrete knuckle or pillow cells and average together their individual Concavity Ratio values and report the average Concavity Ratio as a unitless value to the nearest 0.01. If ten replicate cells cannot be identified in a single sample, then a sufficient number of replicate samples are to be analyzed according to the described procedure. If the sample contains discrete knuckle or pillow cells of differing size or shape, identify ten substantially similar replicates of each of the different shapes and sizes, calculate an average Concavity Ratio for each and report the minimum average Concavity Ratio value.

The Packing Fraction is the fraction of the sample area filled by the discrete knuckle and pillow shapes. The Packing Fraction value for the sample is calculated by summing all the recorded whole and partial identified shape areas, regardless of shape or size, and dividing that total by the sample area within the sample boundary 100. The Packing Fraction is reported as a unitless value to the nearest 0.01.

Continuous Region Density Difference Measurement

This sub-section of the method may be used when a continuous region is present. To measure the Continuous Region Density Difference, first identify a Cell Group 40 of four adjacent and nearest-neighboring discrete knuckle (e.g., FIG. 11, 20-A through 20-D) or pillow cells and their boundaries as described above, such that when the centroids of each of the four cells are connected a quadrilateral will be formed having four edges 90 and two diagonals 92 (see for example FIG. 11). Avoid analyzing any Cells Groups containing embossing. Within this Cell Group identify the continuous pillow or knuckle region. Select five locations to analyze within the identified continuous region: One will be located on each of the cell centroid connecting lines

forming the four edges of the quadrilateral, and one located in the middle where the quadrilateral diagonals intersect. At each of the selected locations draw the largest circular region of interest that can be inscribed within the continuous region, with the center of each of the four edge regions of interest lying on the centroid connecting line (e.g., pillow regions **22-1**, **22-3**, **22-8**, **22-9**) and the middle region of interest centered at the location where the diagonals intersect (e.g., **22-2**). From the density intensive property image calculate and record the average density within each of the five regions of interest. Calculate and record the percent difference between the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100. Perform this analysis for three substantially similar replicate Cell Groups of four discrete knuckle or pillow locations within the sample and report the average percent difference value to the nearest whole percent.

Continuous Region Density Difference Measurement

This sub-section of the method may be used when a continuous region is present. To measure the Continuous Region Density Difference, first identify a Cell Group 40 of four adjacent and nearest-neighboring discrete knuckle (e.g., FIG. 11, 20-A through 20-D) or pillow cells and their boundaries as described above, such that when the centroids of each of the four cells are connected a quadrilateral will be formed having four edges 90 and two diagonals 92 (see for example FIG. 11). Avoid analyzing any Cells Groups containing embossing. Within this Cell Group identify the continuous pillow or knuckle region. Select five locations to analyze within the identified continuous region: One will be located on each of the cell centroid connecting lines forming the four edges of the quadrilateral, and one located in the middle where the quadrilateral diagonals intersect. At each of the selected locations draw the largest circular region of interest that can be inscribed within the continuous region, with the center of each of the four edge regions of interest lying on the centroid connecting line (e.g., pillow regions 22-1, 22-3, 22-8, 22-9) and the middle region of interest centered at the location where the diagonals intersect (e.g., 22-2). From the density intensive property image calculate and record the average density within each of the five regions of interest. Calculate and record the percent difference between the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100. Perform this analysis for three substantially

similar replicate Cell Groups of four discrete knuckle or pillow locations within the sample and report the average percent difference value to the nearest whole percent.

Micro-CT Basis Weight, Thickness and Density Intensive Properties

5 This sub-section of the method may be used to measure zones or regions generally. Once the boundary of a zone or region has been identified draw the largest circular region of interest that can be inscribed within the region. From each of the first three intensive property images calculate the average basis weight, thickness and density within the region of interest. Record these values as the region's micro-CT basis weight to the nearest 0.01 gsm, micro-CT thickness to the nearest
10 0.1 micron and micro-CT density to the nearest 0.0001 g/cc. To calculate and record the percent difference between ZONES OR REGIONS: the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100.

15

Basis Weigh- Method:

Basis weight of a fibrous structure and/or sanitary tissue product (TAPPI conditioned as follows: Temperature is controlled from $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$ and Relative Humidity is controlled from $50\% \pm 2\%$) is measured on stacks of twelve usable units using a top loading analytical balance
20 with a resolution of ± 0.001 g. The balance is protected from air drafts and other disturbances using a draft shield. A precision cutting die, measuring 3.500 in ± 0.0035 in by 3.500 in ± 0.0035 in is used to prepare all samples.

With a precision cutting die, cut the samples into squares. Combine the cut squares to form a stack twelve samples thick. Measure the mass of the sample stack and record the result to the
25 nearest 0.001 g.

The Basis Weight is calculated in lbs/3000 ft² or g/m² as follows:

$$\text{Basis Weight} = (\text{Mass of stack}) / [(\text{Area of 1 square in stack}) \times (\text{No. of squares in stack})]$$

For example:

$$\text{Basis Weight (lbs/3000 ft}^2\text{)} = \frac{[\text{Mass of stack (g)} / 453.6 \text{ (g/lbs)}]}{[\text{12.25 (in}^2\text{)} / 144 \text{ (in}^2\text{/ft}^2\text{)} \times 12]} \times 3000$$

30

or,

$$\text{Basis Weight (g/m}^2\text{)} = \text{Mass of stack (g)} / [79.032 \text{ (cm}^2\text{)} / 10,000 \text{ (cm}^2\text{/m}^2\text{)} \times 12].$$

Report the numerical result to the nearest 0.1 lbs/3000 ft² or 0.1 g/m² or “gsm.” Sample dimensions can be changed or varied using a similar precision cutter as mentioned above, so as at least 100 square inches of sample area in stack.

5 Emtec Test Method:

TS7 and TS750 values are measured using an EMTEC Tissue Softness Analyzer ("Emtec TSA") (Emtec Electronic GmbH, Leipzig, Germany) interfaced with a computer running Emtec TSA software (version 3.19 or equivalent). According to Emtec, the TS7 value correlates with the real material softness, while the TS750 value correlates with the felt smoothness/roughness of the material. The Emtec TSA comprises a rotor with vertical blades which rotate on the test sample at a defined and calibrated rotational speed (set by manufacturer) and contact force of 100 mN. Contact between the vertical blades and the test piece creates vibrations, which create sound that is recorded by a microphone within the instrument. The recorded sound file is then analyzed by the Emtec TSA software. The sample preparation, instrument operation and testing procedures are performed according the instrument manufacture's specifications.

Sample Preparation

Test samples are prepared by cutting square or circular samples from a finished product. Test samples are cut to a length and width (or diameter if circular) of no less than about 90 mm, and no greater than about (“no greater than about” used interchangeably with “less than about” herein) 120 mm, in any of these dimensions, to ensure the sample can be clamped into the TSA instrument properly. Test samples are selected to avoid perforations, creases or folds within the testing region. Prepare 8 substantially similar replicate samples for testing. Equilibrate all samples at TAPPI standard temperature and relative humidity conditions (23 °C ± 2 C° and 50 % ± 2 %) for at least 1 hour prior to conducting the TSA testing, which is also conducted under TAPPI conditions.

Testing Procedure

Calibrate the instrument according to the manufacturer's instructions using the 1-point calibration method with Emtec reference standards (“ref.2 samples”). If these reference samples are no longer available, use the appropriate reference samples provided by the manufacturer. Calibrate the instrument according to the manufacturer's recommendation and instruction, so that

the results will be comparable to those obtained when using the 1-point calibration method with Emtec reference standards (“ref.2 samples”).

Mount the test sample into the instrument and perform the test according to the manufacturer’s instructions. When complete, the software displays values for TS7 and TS750.

- 5 Record each of these values to the nearest 0.01 dB V² rms. The test piece is then removed from the instrument and discarded. This testing is performed individually on the top surface (outer facing surface of a rolled product) of four of the replicate samples, and on the bottom surface (inner facing surface of a rolled product) of the other four replicate samples.

- 10 The four test result values for TS7 and TS750 from the top surface are averaged (using a simple numerical average); the same is done for the four test result values for TS7 and TS750 from the bottom surface. Report the individual average values of TS7 and TS750 for both the top and bottom surfaces on a particular test sample to the nearest 0.01 dB V² rms. Additionally, average together all eight test value results for TS7 and TS750, and report the overall average values for TS7 and TS750 on a particular test sample to the nearest 0.01 dB V² rms. Unless otherwise
15 specified, the reported values for TS7 and TS750 will be the overall average of the eight test values from the top and bottom surfaces.

SST Absorbency Rate Method:

- 20 This test incorporates the Slope of the Square Root of Time (SST) Test Method. The SST method measures rate over a wide spectrum of time to capture a view of the product pick-up rate over the useful lifetime. In particular, the method measures the absorbency rate via the slope of the mass versus the square root of time from 2-15 seconds.

Overview

- 25 The absorption (wicking) of water by a fibrous sample is measured over time. A sample is placed horizontally in the instrument and is supported with minimal contact during testing (without allowing the sample to droop) by an open weave net structure that rests on a balance. The test is initiated when a tube connected to a water reservoir is raised and the meniscus makes contact with the center of the sample from beneath, at a small negative pressure. Absorption is controlled by
30 the ability of the sample to pull the water from the instrument for approximately 20 seconds. Rate is determined as the slope of the regression line of the outputted weight vs sqrt(time) from 2 to 15 seconds.

Apparatus

Conditioned Room - Temperature is controlled from $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$). Relative Humidity is controlled from $50\% \pm 2\%$

Sample Preparation – Product samples are cut using hydraulic/pneumatic precision cutter
5 into 3.375 inch diameter circles.

Capacity Rate Tester (CRT) - The CRT is an absorbency tester capable of measuring capacity and rate. The CRT consists of a balance (0.001g), on which rests on a woven grid (using nylon monofilament line having a 0.014" diameter) placed over a small reservoir with a delivery tube in the center. This reservoir is filled by the action of solenoid valves, which help to connect
10 the sample supply reservoir to an intermediate reservoir, the water level of which is monitored by an optical sensor. The CRT is run with a -2mm water column, controlled by adjusting the height of water in the supply reservoir.

A diagram of the testing apparatus set up is shown in FIG. 9.

Software - LabView based custom software specific to CRT Version 4.2 or later.

15 Water - Distilled water with conductivity $< 10 \mu\text{S}/\text{cm}$ (target $< 5 \mu\text{S}/\text{cm}$) @ 25°C

Sample Preparation

For this method, a usable unit is described as one finished product unit regardless of the number of plies. Condition all samples with packaging materials removed for a minimum of 2
20 hours prior to testing. Discard at least the first ten usable units from the roll. Remove two usable units and cut one 3.375-inch circular sample from the center of each usable unit for a total of 2 replicates for each test result. Do not test samples with defects such as wrinkles, tears, holes, etc. Replace with another usable unit which is free of such defects

25 **Sample Testing**

Pre-test set-up

1. The water height in the reservoir tank is set -2.0 mm below the top of the support rack (where the towel sample will be placed).
2. The supply tube (8mm I.D.) is centered with respect to the support net.
- 30 3. Test samples are cut into circles of 3-3/8" diameter and equilibrated at Tappi environment conditions for a minimum of 2 hours.

Test Description

1. After pressing the start button on the software application, the supply tube moves to 0.33 mm below the water height in the reserve tank. This creates a small meniscus of water above the supply tube to ensure test initiation. A valve between the tank and the supply tube closes, and the scale is zeroed.
2. The software prompts you to “load a sample”. A sample is placed on the support net, centering it over the supply tube, and with the side facing the outside of the roll placed downward.
3. Close the balance windows and press the “OK” button -- the software records the dry weight of the circle.
4. The software prompts you to “place cover on sample”. The plastic cover is placed on top of the sample, on top of the support net. The plastic cover has a center pin (which is flush with the outside rim) to ensure that the sample is in the proper position to establish hydraulic connection. Four other pins, 1 mm shorter in depth, are positioned 1.25-1.5 inches radially away from the center pin to ensure the sample is flat during the test. The sample cover rim should not contact the sheet. Close the top balance window and click “OK”.
5. The software re-zeroes the scale and then moves the supply tube towards the sample. When the supply tube reaches its destination, which is 0.33 mm below the support net, the valve opens (i.e., the valve between the reserve tank and the supply tube), and hydraulic connection is established between the supply tube and the sample. Data acquisition occurs at a rate of 5 Hz and is started about 0.4 seconds before water contacts the sample.
6. The test runs for at least 20 seconds. After this, the supply tube pulls away from the sample to break the hydraulic connection.
7. The wet sample is removed from the support net. Residual water on the support net and cover are dried with a paper towel.
8. Repeat until all samples are tested.
9. After each test is run, a *.txt file is created (typically stored in the CRT/data/rate directory) with a file name as typed at the start of the test. The file contains all the test set-up parameters, dry sample weight, and cumulative water absorbed (g) vs. time (sec) data collected from the test.

Calculation of Rate of Uptake

Take the raw data file that includes time and weight data.

First, create a new time column that subtracts 0.4 seconds from the raw time data to adjust the raw time data to correspond to when initiation actually occurs (about 0.4 seconds after data collection begins).

Second, create a column of data that converts the adjusted time data to square root of time data (e.g., using a formula such as SQRT() within Excel).

Third, calculate the slope of the weight data vs the square root of time data (e.g., using the SLOPE() function within Excel, using the weight data as the y-data and the sqrt(time) data as the x-data, etc.). The slope should be calculated for the data points from 2 to 15 seconds, inclusive (or 1.41 to 3.87 in the sqrt(time) data column).

10

Calculation of Slope of the Square Root of Time (SST)

The start time of water contact with the sample is estimated to be 0.4 seconds after the start of hydraulic connection is established between the supply tube and the sample (CRT Time). This is because data acquisition begins while the tube is still moving towards the sample and incorporates the small delay in scale response. Thus, “time zero” is actually at 0.4 seconds in CRT Time as recorded in the *.txt file.

The slope of the square root of time (SST) from 2-15 seconds is calculated from the slope of a linear regression line from the square root of time between (and including) 2 to 15 seconds (x-axis) versus the cumulative grams of water absorbed. The units are g/sec^{0.5}.

20

Reporting Results

Report the average slope to the nearest 0.01 g/s^{0.5}.

Plate Stiffness Test Method:

As used herein, the “Plate Stiffness” test is a measure of stiffness of a flat sample as it is deformed downward into a hole beneath the sample. For the test, the sample is modeled as an infinite plate with thickness “t” that resides on a flat surface where it is centered over a hole with radius “R”. A central force “F” applied to the tissue directly over the center of the hole deflects the tissue down into the hole by a distance “w”. For a linear elastic material, the deflection can be predicted by:

30

$$w = \frac{3F}{4\pi Et^3} (1-\nu)(3+\nu)R^2$$

where “E” is the effective linear elastic modulus, “v” is the Poisson's ratio, “R” is the radius of the hole, and “t” is the thickness of the tissue, taken as the caliper in millimeters measured on a stack of 5 tissues under a load of about 0.29 psi. Taking Poisson's ratio as 0.1 (the solution is not highly sensitive to this parameter, so the inaccuracy due to the assumed value is likely to be minor), the previous equation can be rewritten for “w” to estimate the effective modulus as a function of the flexibility test results:

$$E \approx \frac{3R^2}{4t^3} \frac{F}{w}$$

The test results are carried out using an MTS Alliance RT/1, Insight Renew, or similar model testing machine (MTS Systems Corp., Eden Prairie, Minn.), with a 50 newton load cell, and data acquisition rate of at least 25 force points per second. As a stack of five tissue sheets (created without any bending, pressing, or straining) at least 2.5-inches by 2.5 inches, but no more than 5.0 inches by 5.0 inches, oriented in the same direction, sits centered over a hole of radius 15.75 mm on a support plate, a blunt probe of 3.15 mm radius descends at a speed of 20 mm/min. For typical perforated rolled bath tissue, sample preparation consists of removing five (5) connected usable units, and carefully forming a 5 sheet stack, accordion style, by bending only at the perforation lines. When the probe tip descends to 1 mm below the plane of the support plate, the test is terminated. The maximum slope (using least squares regression) in grams of force/mm over any 0.5 mm span during the test is recorded (this maximum slope generally occurs at the end of the stroke). The load cell monitors the applied force and the position of the probe tip relative to the plane of the support plate is also monitored. The peak load is recorded, and “E” is estimated using the above equation.

The Plate Stiffness “S” per unit width can then be calculated as:

$$S = \frac{Et^3}{12}$$

and is expressed in units of Newtons*millimeters. The Testworks program uses the following formula to calculate stiffness (or can be calculated manually from the raw data output):

$$S = \left(\frac{F}{w} \right) \left[\frac{(3+v)R^2}{16\pi} \right]$$

wherein “F/w” is max slope (force divided by deflection), “v” is Poisson's ratio taken as 0.1, and “R” is the ring radius.

The same sample stack (as used above) is then flipped upside down and retested in the same manner as previously described. This test is run three more times (with different sample stacks). Thus, eight S values are calculated from four 5-sheet stacks of the same sample. The numerical average of these eight S values is reported as Plate Stiffness for the sample.

5

Stack Compressibility and Resilient Bulk Test Method:

Stack thickness (measured in mils, 0.001 inch) is measured as a function of confining pressure (g/in^2) using a Thwing-Albert (14 W. Collings Ave., West Berlin, NJ) Vantage Compression/Softness Tester (model 1750-2005 or similar) or equivalent instrument, equipped with a 2500 g load cell (force accuracy is $\pm 0.25\%$ when measuring value is between 10%-100% of load cell capacity, and 0.025% when measuring value is less than 10% of load cell capacity), a 1.128 inch diameter steel pressure foot (one square inch cross sectional area) which is aligned parallel to the steel anvil (2.5 inch diameter). The pressure foot and anvil surfaces must be clean and dust free, particularly when performing the steel-to-steel test. Thwing-Albert software (MAP) controls the motion and data acquisition of the instrument.

The instrument and software are set-up to acquire crosshead position and force data at a rate of 50 points/sec. The crosshead speed (which moves the pressure foot) for testing samples is set to 0.20 inches/min (the steel-to-steel test speed is set to 0.05 inches/min). Crosshead position and force data are recorded between the load cell range of approximately 5 and 1500 grams during compression. The crosshead is programmed to stop immediately after surpassing 1500 grams, record the thickness at this pressure (termed $T_{\max}$), and immediately reverse direction at the same speed as performed in compression. Data is collected during this decompression portion of the test (also termed recovery) between approximately 1500 and 5 grams. Since the foot area is one square inch, the force data recorded corresponds to pressure in units of g/in^2 . The MAP software is programmed to select 15 crosshead position values (for both compression and recovery) at specific pressure trap points of 10, 25, 50, 75, 100, 125, 150, 200, 300, 400, 500, 600, 750, 1000, and 1250 g/in^2 (i.e., recording the crosshead position of very next acquired data point after the each pressure point trap is surpassed). In addition to these 30 collected trap points, $T_{\max}$ is also recorded, which is the thickness at the maximum pressure applied during the test (approximately 1500 g/in^2).

Since the overall test system, including the load cell, is not perfectly rigid, a steel-to-steel test is performed (i.e., nothing in between the pressure foot and anvil) at least twice for each batch of testing, to obtain an average set of steel-to-steel crosshead positions at each of the 31 trap points described above. This steel-to-steel crosshead position data is subtracted from the corresponding

crosshead position data at each trap point for each tested stacked sample, thereby resulting in the stack thickness (mils) at each pressure trap point during the compression, maximum pressure, and recovery portions of the test.

5 $\text{StackT (trap)} = \text{StackCP (trap)} - \text{SteelCP (trap)}$

Where:

trap = trap point pressure at either compression, recovery, or max

StackT = Thickness of Stack (at trap pressure)

StackCP = Crosshead position of Stack in test (at trap pressure)

10 $\text{SteelCP} = \text{Crosshead position of steel-to-steel test (at trap pressure)}$

A stack of five (5) usable units thick is prepared for testing as follows. The minimum usable unit size is 2.5 inch by 2.5 inch; however a larger sheet size is preferable for testing, since it allows for easier handling without touching the central region where compression testing takes place. For typical perforated rolled bath tissue, this consists of removing five (5) sets of 3 connected usable units. In this case, testing is performed on the middle usable unit, and the outer 2 usable units are used for handling while removing from the roll and stacking. For other product formats, it is advisable, when possible, to create a test sheet size (each one usable unit thick) that is large enough such that the inner testing region of the created 5 usable unit thick stack is never physically touched, stretched, or strained, but with dimensions that do not exceed 14 inches by 6 inches.

The 5 sheets (one usable unit thick each) of the same approximate dimensions, are placed one on top the other, with their MD aligned in the same direction, their outer face all pointing in the same direction, and their edges aligned +/- 3 mm of each other. The central portion of the stack, where compression testing will take place, is never to be physically touched, stretched, and/or strained (this includes never to 'smooth out' the surface with a hand or other apparatus prior to testing).

The 5 sheet stack is placed on the anvil, positioning it such that the pressure foot will contact the central region of the stack (for the first compression test) in a physically untouched spot, leaving space for a subsequent (second) compression test, also in the central region of the stack, but separated by 1/4 inch or more from the first compression test, such that both tests are in untouched, and separated spots in the central region of the stack. From these two tests, an average crosshead position of the stack at each trap pressure (i.e., StackCP(trap)) is calculated for compression,

maximum pressure, and recovery portions of the tests. Then, using the average steel-to-steel crosshead trap points (i.e., SteelCP(trap)), the average stack thickness at each trap (i.e., StackT(trap) is calculated (mils).

Stack Compressibility is defined here as the absolute value of the linear slope of the stack thickness (mils) as a function of the log(10) of the confining pressure (grams/in²), by using the 15 compression trap points discussed previously (i.e., compression from 10 to 1250 g/in²), in a least squares regression. The units for Stack Compressibility are [mils/(log(g/in²))], and is reported to the nearest 0.1 [mils/(log(g/in²))].

Resilient Bulk is calculated from the stack weight per unit area and the sum of 8 StackT(trap) thickness values from the maximum pressure and recovery portion of the tests: i.e., at maximum pressure (T_{max}) and recovery trap points at R1250, R1000, R750, R500, R300, R100, and R10 g/in² (a prefix of "R" denotes these traps come from recovery portion of the test). Stack weight per unit area is measured from the same region of the stack contacted by the compression foot, after the compression testing is complete, by cutting a 3.50 inch square (typically) with a precision die cutter, and weighing on a calibrated 3-place balance, to the nearest 0.001 gram. The weight of the precisely cut stack, along with the StackT(trap) data at each required trap pressure (each point being an average from the two compression/recovery tests discussed previously), are used in the following equation to calculate Resilient Bulk, reported in units of cm³/g, to the nearest 0.1 cm³/g.

$$\text{Resilient Bulk} = \frac{\text{SUM}(\text{StackT}(T_{\text{max}}, R1250, R1000, R750, R500, R300, R100, R10)) * 0.00254}{M/A}$$

Where:

StackT = Thickness of Stack (at trap pressures of T_{max} and recovery pressures listed above), (mils)

M = weight of precisely cut stack, (grams)

A = area of the precisely cut stack, (cm²)

Wet Burst Method:

"Wet Burst Strength" as used herein is a measure of the ability of a fibrous structure and/or a fibrous structure product incorporating a fibrous structure to absorb energy, when wet and subjected to deformation normal to the plane of the fibrous structure and/or fibrous structure

product. The Wet Burst Test is run according to ISO 12625-9:2005, except for any deviations or modifications described below.

Wet burst strength may be measured using a Thwing-Albert Burst Tester Cat. No. 177 equipped with a 2000 g load cell commercially available from Thwing-Albert Instrument
5 Company, Philadelphia, Pa, or an equivalent instrument.

Wet burst strength is measured by preparing four (4) multi-ply fibrous structure product samples for testing. First, condition the samples for two (2) hours at a temperature of $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) and a relative humidity of 50% ($\pm 2\%$). Take one sample and horizontally dip the center of the sample into a pan filled with about 25 mm of room temperature distilled water. Leave
10 the sample in the water four (4) (± 0.5) seconds. Remove and drain for three (3) (± 0.5) seconds holding the sample vertically so the water runs off in the cross-machine direction. Proceed with the test immediately after the drain step.

Place the wet sample on the lower ring of the sample holding device of the Burst Tester with the outer surface of the sample facing up so that the wet part of the sample completely covers
15 the open surface of the sample holding ring. If wrinkles are present, discard the samples and repeat with a new sample. After the sample is properly in place on the lower sample holding ring, turn the switch that lowers the upper ring on the Burst Tester. The sample to be tested is now securely gripped in the sample holding unit. Start the burst test immediately at this point by pressing the start button on the Burst Tester. A plunger will begin to rise (or lower) toward the wet surface of
20 the sample. At the point when the sample tears or ruptures, report the maximum reading. The plunger will automatically reverse and return to its original starting position. Repeat this procedure on three (3) more samples for a total of four (4) tests, i.e., four (4) replicates. Report the results as an average of the four (4) replicates, to the nearest gram.

25 Wet Tensile Method:

Wet Elongation, Tensile Strength, and TEA are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. West Berlin, NJ) using a load cell for which the forces measured are within
30 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 3.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

Program the tensile tester to perform an extension test (described below), collecting force and extension data at an acquisition rate of 100 Hz as the crosshead raises at a rate of 2.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops below 50% of the maximum peak force, after which the crosshead is returned to its original position.

Set the gage length to 2.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align the specimen vertically within the upper and lower jaws, then close the upper grip. Verify the specimen is hanging freely and aligned with the lower grip, then close the lower grip. Initiate the first portion of the test, which pulls the specimen at a rate of 0.5 in/min, then stops immediately after a load of 10 grams is achieved. Using a pipet, thoroughly wet the specimen with DI water to the point where excess water can be seen pooling on the top of the lower closed grip. Immediately after achieving this wetting status, initiate the second portion of the test, which pulls the wetted strip at 2.0 in/min until break status is achieved. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Wet Tensile Strength (g/in) is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 0.1 g/in.

Adjusted Gage Length (in) is calculated as the extension measured (from original 2.00 inch gage length) at 3 g of force during the test following the wetting of the specimen (or the next data point after 3 g force) added to the original gage length (in). If the load does not fall below 3 g force during the wetting procedure, then the adjusted gage length will be the extension measured at the point the test is resumed following wetting added to the original gage length (in).

Wet Peak Elongation (%) is calculated as the additional extension (in) from the Adjusted Gage Length (in) at the maximum peak force point (more specifically, at the last maximum peak force point, if there is more than one) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

5 Wet Peak Tensile Energy Absorption (TEA, $\text{g}\cdot\text{in}/\text{in}^2$) is calculated as the area under the force curve ($\text{g}\cdot\text{in}^2$) integrated from zero extension (i.e., the Adjusted Gage Length) to the extension at the maximum peak force elongation point (more specifically, at the last maximum peak force point, if there is more than one) (in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as $\text{g}\cdot\text{in}/\text{in}^2$ to the nearest 0.01 $\text{g}\cdot\text{in}/\text{in}^2$.

10 The Wet Tensile Strength (g/in), Wet Peak Elongation (%), Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

Calculations

15 Geometric Mean Initial Wet Tensile Strength = Square Root of [MD Wet Tensile Strength (g/in) x CD Wet Tensile Strength (g/in)]

Geometric Mean Wet Peak Elongation = Square Root of [MD Wet Peak Elongation (%) x CD Wet Peak Elongation (%)]

20 Geometric Mean Wet Peak TEA = Square Root of [MD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) x CD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$)]

Total Wet Tensile (TWT) = MD Wet Tensile Strength (g/in) + CD Wet Tensile Strength (g/in)

Total Wet Peak TEA = MD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) + CD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$)

25 Wet Tensile Ratio = MD Wet Peak Tensile Strength (g/in) / CD Wet Peak Tensile Strength (g/in)

Wet Tensile Geometric Mean (GM) Modulus = Square Root of [MD Modulus (at 38 g/cm) x CD Modulus (at 38 g/cm)]

30 This method is typically used for sanitary tissue products in the form of a paper towel. In the present application, unless the term “Finch” or “Finch cup” is coupled with wet tensile terminology, this is the method being referred to. If “Finch” or “Finch cup” is coupled with wet tensile terminology, the Finch Cup Wet Tensile Test Method should be referred to.

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper (for Paper Towels, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels;” for Facial Tissue, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue”):

5 Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design
10 suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

 Twenty usable units of fibrous structures are divided into four stacks of five usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). Two of the stacks are designated for testing in the MD and two
15 for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut two, 1.00 in $\pm$ 0.01 in wide by at least 3.0 in long strips from each CD stack (long dimension in CD). Each strip is five usable unit layers thick and will be treated as a unitary specimen for testing. In like fashion cut the remaining CD stack and the two MD stacks (long dimension in MD) to give a total of 8 specimens (five layers each), four CD and four MD.

20 Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 4.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

25 Set the gage length to 2.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile
30 tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

 Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the product of the specimen width (1 in) and the number of usable units in the specimen (5), and then reported as g/in to the nearest 1 g/in.

Adjusted Gage Length is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

Tensile Energy Absorption (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of the adjusted Gage Length (in), specimen width (in), and number of usable units in the specimen (5). This is reported as g*in/in² to the nearest 1 g*in/in².

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

Program the software to calculate the following from the constructed force (g) verses strain curve:

Tangent Modulus is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 190.5 g (38.1 g x 5 layers) force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the product of the specimen width (2.54 cm) and the number of usable units in the specimen (5), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA (g*in/in²) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

25 Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

30 Geometric Mean TEA = Square Root of [MD TEA (g*in/in²) x CD TEA (g*in/in²)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA (g*in/in²) + CD TEA (g*in/in²)

Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue (for Paper

- 5 Towels, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels;” for Toilet Paper, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper”):

10 Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

- 15 Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 5.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

- 25 Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 6.00 in/min (15.24 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

- 30 Set the gage length to 4.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

- 5 **Adjusted Gage Length** is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

- 10 **Tensile Energy Absorption** (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as g*in/in² to the nearest 1 g*in/in².

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

- 15 Program the software to calculate the following from the constructed force (g) verses strain curve:

- 20 **Tangent Modulus** is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 38.1 g force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the specimen width (2.54 cm), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA (g*in/in²) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

25 Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

- 30 Geometric Mean TEA = Square Root of [MD TEA (g*in/in²) x CD TEA (g*in/in²)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA (g*in/in²) + CD TEA (g*in/in²)

Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels (for Facial

5 Tissue, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue;” for Toilet Paper, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper”):

10 Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

15 Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 5.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

25 Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 4.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

30 Set the gage length to 4.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

- 5 **Adjusted Gage Length** is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

- 10 **Tensile Energy Absorption** (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as g*in/in² to the nearest 1 g*in/in².

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

- 15 Program the software to calculate the following from the constructed force (g) verses strain curve:

- 20 **Tangent Modulus** is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 38.1 g force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the specimen width (2.54 cm), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA (g*in/in²) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

25 Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

- 30 Geometric Mean TEA = Square Root of [MD TEA (g*in/in²) x CD TEA (g*in/in²)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA (g*in/in²) + CD TEA (g*in/in²)

Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Flexural Rigidity Method:

5 This test is based on the cantilever beam principle. A Cantilever Bending Tester such as described in ASTM Standard D1388 is used to measure the distance a strip of sample can be extended beyond a horizontal flat platform before it bends to a ramp angle of $41.5 \pm 0.5^\circ$. The measured Bend Length, in addition to the Basis Weight and Caliper, of the sample is used to calculate Flexural Rigidity.

10 Using a 1 inch (2.54 cm) JDC Cutter (available from Thwing-Albert Instrument Company, Philadelphia, PA), carefully cut eight (8) 1 inch (2.54 cm) wide test strips from a fibrous structure sample oriented in the MD direction. From a second fibrous structure sample from the same sample set, carefully cut eight (8) 1 inch (2.54 cm) wide strips of the fibrous structure in the CD direction.

15 The sample strip must be adjusted to 4.0 ± 0.1 in (101.5 ± 2.5 mm), or 6.0 ± 0.1 in (152 ± 2.5 mm) in length. Towel samples and those products which are perforated into usable units 6 inches (152mm) or greater in both dimensions without folds or perforations are tested as 6 in (152mm) strips. Toilet tissue samples and facial tissue samples are tested as 4 in (101.5mm) long strips. To adjust the strips to length, carefully make a cut exactly perpendicular to the long dimension of the strip near one end using a paper cutter. It is important that the cut be exactly perpendicular to the long dimension of the strip. Make a second cut exactly 4.0 ± 0.1 in (101.5mm), or 6.0 ± 0.1 in (152 ± 2.5 mm) along the strip, again being careful that the cut is exactly perpendicular to the long dimension of the strip. In the case of perforated or folded products, be sure that all cuts are made in such a way that perforations and/or folds are excluded from the 4.0 (101.5mm) or 6.0 in (152mm) strip which will be used for the test. All sample strips should be cut individually with minimal mechanical manipulation. No fibrous structure sample which is creased, bent, folded, perforated, or in any other way weakened should be tested using this test.

20 Mark the direction (MD or CD) very lightly on one end of the strip, keeping the same surface of the sample up for all strips. Later, half of the strips will be turned over for testing, thus it is important that one surface of the strip be clearly identified, however, it makes no difference which surface of the sample is designated as the upper surface.

 Using other portions of the fibrous structure sample (not the cut strips), determine the basis weight of the fibrous structure sample in lbs/3000 ft² and the caliper of the fibrous structure in mils

(thousandths of an inch) using the standard procedures disclosed herein. Place the Cantilever Bending Tester level on a bench or table that is relatively free of vibration, excessive heat and most importantly air drafts. Adjust the platform of the Tester to horizontal as indicated by the leveling bubble and verify that the ramp angle is at $41.5 \pm 0.5^\circ$. Remove the sample slide bar from the top of the platform of the Tester. Lay one of the strips flat on the horizontal platform using care to align the strip to be parallel with the movable sample slide. Align the end of the strip exactly even with the vertical edge of the Tester where the angular ramp is attached or where the zero mark line is scribed on the Tester. Carefully place the sample slide bar on top of the sample strip in the Tester. The sample slide bar must be carefully placed so that the strip is not wrinkled or moved from its initial position.

Using the sample slide bar, move the strip at a rate of approximately 0.5 ± 0.2 in/second (1.3 ± 0.5 cm/second) toward the end of the Tester to which the angular ramp is attached. This can be accomplished with either a manual or automatic Tester. Ensure that no slippage between the strip and movable sample slide occurs. As the sample slide bar and strip project over the edge of the Tester, the strip will begin to bend, or drape downward. Stop moving the sample slide bar the instant the leading edge of the strip falls level with the ramp edge. Read and record the overhang length from the linear scale to the nearest 0.5 mm. Record the distance the sample slide bar has moved in cm as overhang length. This test sequence is performed a total of eight (8) times for each fibrous structure in each direction (MD and CD). The first four strips are tested with the upper surface as the fibrous structure was cut facing up. The last four strips are inverted so that the upper surface as the fibrous structure was cut is facing down as the strip is placed on the horizontal platform of the Tester.

The average Overhang Lengths (MD, CD, and Avg) and Bend Lengths (MD, CD, and Avg) are determined by the following calculations:

$$\text{Overhang Length MD} = \frac{\text{Sum of 8 MD readings}}{8}$$

$$\text{Overhang Length CD} = \frac{\text{Sum of 8 CD readings}}{8}$$

$$\text{Overhang Length Average (Avg)} = \frac{\text{Sum of all 16 readings}}{16}$$

$$\text{Bend Length MD} = \frac{\text{Overhang Length MD}}{2}$$

$$\text{Bend Length CD} = \frac{\text{Overhang Length CD}}{2}$$

2

$$\text{Bend Length Average (Avg)} = \frac{\text{Overhang Length Total}}{2}$$

2

$$\text{Flexural Rigidity} = 0.1629 \times W \times C^3$$

- 5 Where W is the basis weight of the fibrous structure in lbs/3000 ft²; C is the Bend Length (MD, CD, or Avg) in cm; and the constant 0.1629 is used to convert the basis weight from English to metric units. The results are expressed in mg-cm to the nearest 0.1 mg-cm.

$$\text{GM Flexural Rigidity} = \text{Square root of (MD Flexural Rigidity} \times \text{CD Flexural Rigidity)}$$

10 CRT Rate and Capacity Method:

CRT Rate and Capacity values are generated by running the test procedure as defined in U.S. Patent Application No. US 2017-0183824.

Dry and Wet Caliper Test Methods:

- 15 Dry and Wet Caliper values are generated by running the test procedure as defined in U.S. Patent No. US 7,744,723 and states, in relevant part:

Dry Caliper Method:

- 20 Samples are conditioned at 23+/-1° C. and 50%+/-2% relative humidity for two hours prior to testing.

- Dry Caliper of a sample of fibrous structure product is determined by cutting a sample of the fibrous structure product such that it is larger in size than a load foot loading surface where the load foot loading surface has a circular surface area of about 3.14 in². The sample is confined between a horizontal flat surface and the load foot loading surface. The load foot loading surface applies a confining pressure to the sample of 14.7 g/cm² (about 0.21 psi). The caliper is the resulting gap between the flat surface and the load foot loading surface. Such measurements can be obtained on a VIR Electronic Thickness Tester Model II available from Thwing-Albert Instrument Company, Philadelphia, Pa. The caliper measurement is repeated and recorded at least five (5) times so that an average caliper can be calculated. The result is reported in mils.

30

Wet Caliper Method:

Samples are conditioned at 23+/-1° C. and 50% relative humidity for two hours prior to testing.

Wet Caliper of a sample of fibrous structure product is determined by cutting a sample of the fibrous structure product such that it is larger in size than a load foot loading surface where the load foot loading surface has a circular surface area of about 3.14 in². Each sample is wetted by submerging the sample in a distilled water bath for 30 seconds. The caliper of the wet sample is measured within 30 seconds of removing the sample from the bath. The sample is then confined between a horizontal flat surface and the load foot loading surface. The load foot loading surface applies a confining pressure to the sample of 14.7 g/cm² (about 0.21 psi). The caliper is the resulting gap between the flat surface and the load foot loading surface. Such measurements can be obtained on a VIR Electronic Thickness Tester Model II available from Thwing-Albert Instrument Company, Philadelphia, Pa. The caliper measurement is repeated and recorded at least five (5) times so that an average caliper can be calculated. The result is reported in mils.

Finch Cup Wet Tensile Test Method:

The Wet Tensile Strength test method is utilized for the determination of the wet tensile strength of a sanitary tissue product or web strip after soaking with water, using a tensile-strength-testing apparatus operating with a constant rate of elongation. The Wet Tensile Strength test is run according to ISO 12625-5:2005, except for any deviations or modifications described below. This method uses a vertical tensile-strength tester, in which a device that is held in the lower grip of the tensile-strength tester, called a Finch Cup, is used to achieve the wetting.

Using a one inch JDC precision sample cutter (Thwing Albert) cut six 1.00 in±0.01 in wide strips from a sanitary tissue product sheet or web sheet in the machine direction (MD), and six strips in the cross machine direction (CD). An electronic tensile tester (Model 1122, Instron Corp., or equivalent) is used and operated at a crosshead speed of 1.0 inch (about 1.3 cm) per minute and a gauge length of 1.0 inch (about 2.5 cm). The two ends of the strip are placed in the upper jaws of the machine, and the center of the strip is placed around a stainless steel peg. The strip is soaked in distilled water at about 20° C. for the identified soak time, and then measured for peak tensile strength. Reference to a machine direction means that the sample being tested is prepared such that the length of the strip is cut parallel to the machine direction of manufacture of the product.

The MD and CD wet peak tensile strengths are determined using the above equipment and calculations in the conventional manner. The reported value is the arithmetic average of the six strips tested for each directional strength to the nearest 0.1 grams force. The total wet tensile strength for a given soak time is the arithmetic total of the MD and CD tensile strengths for that

soak time. Initial total wet tensile strength ("ITWT") is measured when the paper has been submerged for 5 ± 0.5 seconds. Decayed total wet tensile ("DTWT") is measured after the paper has been submerged for 30 ± 0.5 minutes.

5 This method is typically used for sanitary tissue products in the form of toilet (or bath) tissue.

Wet Decay Test Method:

10 Wet decay (loss of wet tensile) for a sanitary tissue product or web is measured according to the Wet Tensile Test Method described herein and is the wet tensile of the sanitary tissue product or web after it has been standing in the soaked condition in the Finch Cup for 30 minutes. Wet decay is reported in units of "%". Wet decay is the % loss of Initial Total Wet Tensile after the 30 minute soaking.

Dry Burst ("Dry Burst Strength" or "Dry Burst (Peak Load) Strength") Test Method:

15 The Dry Burst Test is run according to ISO 12625-9:2005, except for any deviations described below. Sanitary tissue product samples or web samples for each condition to be tested are cut to a size appropriate for testing, a minimum of five (5) samples for each condition to be tested are prepared.

20 A burst tester (Burst Tester Intellect-II-STD Tensile Test Instrument, Cat. No. 1451-24PGB available from Thwing-Albert Instrument Co., Philadelphia, Pa., or equivalent) is set up according to the manufacturer's instructions and the following conditions: Speed: 12.7 centimeters per minute; Break Sensitivity: 20 grams; and Peak Load: 2000 grams. The load cell is calibrated according to the expected burst strength.

25 A sanitary tissue product sample or web sample to be tested is clamped and held between the annular clamps of the burst tester and is subjected to increasing force that is applied by a 0.625 inch diameter, polished stainless steel ball upon operation of the burst tester according to the manufacturer's instructions. The burst strength is that force that causes the sample to fail.

The burst strength for each sanitary tissue product sample or web sample is recorded. An average and a standard deviation for the burst strength for each condition is calculated.

30 The Dry Burst is reported as the average and standard deviation for each condition to the nearest gram.

Residual Water (R_w) Test Method:

This method measures the amount of distilled water absorbed by a paper product. In general a finite amount of distilled water is deposited to a standard surface. A paper towel is then placed over the water for a given amount of time. After the elapsed time the towel is removed and the amount of water left behind and amount of water absorbed are calculated.

The temperature and humidity are controlled within the following limits:

- Temperature: $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$)

- Relative humidity: $50\% \pm 2\%$

The following equipment is used in this test method. A top loading balance is used with sensitivity: ± 0.01 grams or better having the capacity of grams minimum A pipette is used having a capacity of 5 mL and a Sensitivity ± 1 mL. A Formica™ Tile 6 in x 7 in is used. A stop watch or digital timer capable of measuring time in seconds to the nearest 0.1 seconds is also used.

Sample and Solution Preparation

For this test method, distilled water is used, controlled to a temperature of $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$). For this method, a usable unit is described as one finished product unit regardless of the number of plies. Condition the rolls or usable units of products, with wrapper or packaging materials removed in a room conditioned at $50\% \pm 2\%$ relative humidity, $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$) for a minimum of two hours. Do not test usable units with defects such as wrinkles, tears, holes etc.

Paper Samples

Remove and discard at least the four outermost usable units from the roll. For testing remove usable units from each roll of product submitted as indicated below. For Paper Towel products, select five (5) usable units from the roll. For Paper Napkins that are folded, cut and stacked, select five (5) usable units from the sample stack submitted for testing. For all napkins, either double or triple folded, unfold the usable units to their largest square state. One-ply napkins will have one 1-ply layer; 2-ply napkins will have one 2-ply layer. With 2-ply napkins, the plies may be either embossed (just pressed) together, or embossed and laminated (pressed and glued) together. Care must be taken when unfolding 2-ply usable units to keep the plies together. If the unfolded usable unit dimensions exceed 279 mm (11 inches) in either direction, cut the usable unit down to 279 mm (11 inches). Record the original usable unit size if over 279 mm (11 inches). If the unfolded usable unit dimensions are less than 279 mm (11 inches) in either direction, record the usable unit dimensions.

- Place the Formica Tile (standard surface) in the center of the cleaned balance surface. Wipe the Formica Tile to ensure that it is dry and free of any debris. Tare the balance to get a zero reading. Slowly dispense 2.5 mL of distilled water onto the center of the standard surface using the pipette. Record the weight of the water to the nearest 0.001 g. Drop 1 usable unit of the
- 5 paper towel onto the spot of water with the outside ply down. Immediately start the stop watch. The sample should be dropped on the spot such that the spot is in the center of the sample once it is dropped. Allow the paper towel to absorb the distilled water for 30 seconds after hitting the stop watch. Remove the paper from the spot after the 30 seconds has elapsed. The towel must be removed when the stop watch reads 30 seconds ± 0.1 sec. The paper towel should be removed
- 10 using a quick vertical motion. Record the weight of the remaining water on the surface to the nearest 0.001 g.

Calculations

where:

- 15 n = the number of replicates which for this method is 5.
- Record the RWV to the nearest 0.001 g.

Breaking Length Test Method:

Handsheet Preparation

- 20 Low Density handsheets are made essentially according to TAPPI standard T205, with the following modifications which are believed to more accurately reflect the tissue manufacturing process.
- (1) tap water, with no pH adjustment, is used;
- (2) the embryonic web is formed in a 12 in. by 12 in. handsheet making apparatus on a
- 25 monofilament polyester wire supplied by Appelton Wire Co., Appelton, Wis. with the following specifications:

Size:	13.5 inch x 13.5 inch
Machine direction Warp Count:	84 $\pm$ 1.5 fibers/inch
Cross direction Warp Count:	76 $\pm$ 3.0 fibers/inch
Warp size/type:	0.17 millimeters/9FU
Shute size/type:	0.17 millimeters/WP-110
Caliper:	0.016 $\pm$ 0.0005 inch
Air permeability:	720 $\pm$ 25 cubic feet/minute

(3) the embryonic web is transferred by vacuum from the monofilament polyester wire to a monofilament polyester papermaking fabric supplied by Appelton Wire Co., Appelton, Wis. and dewatered by vacuum suction instead of pressing; Fabric specifications:

Size:	16 inch x 14 inch
Machine direction Warp Count:	36 ± 1 fibers/inch
Cross direction Warp Count:	30 ± 3 fibers/inch
Warp size/type: Shute size/type:	0.40 millimeters/WP-87-12A-W
0.40 millimeters/WP-801-12A-W	
Caliper:	0.0270 ± 0.001 inch
Air permeability:	397 ± 25 cubic feet/minute

Sheet side to be monoplane

- 5 Transfer and dewatering details: The embryonic web and papermaking wire are placed on top of the fabric such that the embryonic web contacts the fabric. The trilayer (wire, web, fabric with fabric side down) is then passed lengthwise across a 13 in. x 1/16 in. wide vacuum slot box with a 90 degree flare set at a peak gauge reading of approximately 4.0 in. of mercury vacuum. The rate of the trilayer passing across the vacuum slot should be uniform at a velocity of 16±5 in./sec.
- 10 The vacuum is then increased to achieve a peak gauge reading of approximately 9 in. of mercury vacuum and the trilayer is passed lengthwise across the same vacuum slot at the same rate of 16±5 in./sec 2 more times. Note that the peak gauge reading is the amount of vacuum measured as the trilayer passes across the slot. The web is carefully removed from the wire to ensure that no fibers stick to the wire.
- 15 (4) the sheet is then dried on a rotary drum drier with a drying felt by passing the web and fabric between the felt and drum with the fabric against the drum surface and again with a second pass with the web against the drum surface.

Dryer specifications:	Stainless steel polished finish cylinder with internal steam heating, horizontally mounted.
External dimensions:	17 inches length x 13 inches diameter
Temperature:	230 ± 5 degrees Fahrenheit.
Rotation speed:	0.90 ± 0.05 revolutions/minute
Dryer felt: Endless, 80 inches circumference by 16 inches	wide, No. 11614, style X225, all wool. Noble and Wood Lab Machine Company, Hoosick Falls, NY.
Felt tension:	As low and even as possible without any slippage occurring between the felt and dryer drum and uniform tracking.

(5) the resulting handsheet is 12 in. x 12 in. with a resulting target basis weight of 16.5 ± 1.5 pounds per 3,000 ft² and a target density of 0.15 ± 0.06 g/cc, unless otherwise noted.

Sample Preparation

- 5 Condition the handsheet to be tested for a minimum of 2 hours in a room controlled to $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) $50 \pm 2\%$ relative humidity. After conditioning the handsheet for at least the minimum time period, measure and record the Basis Weight of the handsheet. The Basis Weight should be within the range 15.0 – 18.0 pounds per 3000 square feet, if the Basis Weight of the handsheet falls outside of this range the handsheet should be discarded and a new one made.
- 10 From the handsheet, cut eight sample strips 1.00 inch wide and at least 6 - 7 inches long in the cross direction (only) using a precision 1" cutter or an appropriate die.

Measurement

- Using an electronic tensile tester (Thwing Albert EJA or Intellect II-STD, Corp., Philadelphia, Pa., or equivalent) measure the Tensile Strength of each of the eight sample strips. To perform the test, set the gage length to 4.00 inches, properly secure the sample strip into the upper and lower grips, and perform an extension test, collecting force and extension data as the crosshead raises at a rate of 0.5 in/min until the sample breaks. The resulting Tensile Strength values for each of the eight individual sample strips are recorded in g/in. The Tensile Strength is the
- 15
 - 20 maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

Calculations

Calculate the Average Tensile Strength of the eight test strips using the following formula:

25

$$\text{Average Tensile Strength} = \frac{\text{Sum of tensile strengths measured}}{\text{number of strips tested}}$$

Basis weight corrected tensile (BWCT) is calculated via the following formula:

30

$$\text{BWCT} = \text{Average Tensile Strength} \times \frac{10.5}{(\text{Basis Weight} - 6.0)}$$

Where Basis Weight has the units of pounds per 3000 ft² and Average Tensile Strength and BWCT have the units of g/in. This equation has the effect of normalizing the strength of the tensile strip to a standard 16.5 pound/3000 ft² weight when the handsheet is in the specified 15-18 pound/3000 ft² range.

5

Breaking Length is then calculated by the following formula:

$$\text{Breaking Length} = \text{BWCT} \times 1.4673$$

10 Where Breaking Length has the units of meters reported to the nearest whole meter.

REGARDING THE PRESENT DISCLOSURE

In the interests of brevity and conciseness, any ranges of values set forth in this specification are to be construed as written description support for Claims reciting any sub-ranges having endpoints which are whole number values within the specified range in question. By way of a hypothetical illustrative example, a disclosure in this specification of a range of 1-5 shall be considered to support Claims to any of the following sub-ranges: 1-4; 1-3; 1-2; 2-5; 2-4; 2-3; 3-5; 3-4; and 4-5.

The dimensions and values disclosed herein in this application are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "40 mm" is intended to mean "about 40 mm."

Every document cited herein, including any cross referenced or related patent or application is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise limited. The citation of any document is not an admission that it is prior art with respect to any example disclosed or claimed herein or that it alone, or in any combination with any other reference or references, teaches, suggests or discloses any such example. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

While particular examples of the present disclosure have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be

made without departing from the spirit and scope of the present disclosure. It is therefore intended to cover in the appended Claims all such changes and modifications that are within the scope of this disclosure.

CLAIMS

What is Claimed is:

1. A sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a TS7 of less than about 14 dB V² rms.
2. The sanitary tissue product of claim 1, wherein the non-wood fibers consist of bamboo fibers.
3. The sanitary tissue product of claim 1, wherein the sanitary tissue product is toilet tissue.
4. The sanitary tissue product of claim 1, comprising non-wood fibers greater than about 30%.
5. A sanitary tissue product, comprising:
 - bamboo fibers; and
 - a TS750 less than about 20 dB V² rms.
6. The sanitary tissue product of claim 5, wherein the sanitary tissue product is toilet tissue.
7. The sanitary tissue product of claim 5, wherein the bamboo fibers are greater than about 30% of the sanitary tissue product.
8. The sanitary tissue product of claim 5, wherein the bamboo fibers are greater than about 75% of the sanitary tissue product.
9. A structured sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a TS750 less than about 45 dB V² rms.
10. The sanitary tissue product of claim 9, wherein the non-wood fibers consist of bamboo fibers.
11. The sanitary tissue product of claim 9, wherein the sanitary tissue product is toilet tissue.

12. The sanitary tissue product of claim 9, comprising non-wood fibers greater than about 30%.
13. The sanitary tissue product of claim 9, wherein the TS750 is less than 40 dB V² rms.
14. The sanitary tissue product of claim 9, wherein the TS750 is from about 25 to about 35 dB V² rms.
15. A sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a slip stick less than about 435.
16. The sanitary tissue product of claim 15, wherein the non-wood fibers consist of bamboo fibers.
17. The sanitary tissue product of claim 15, wherein the slip stick is from about 235 to about 435.
18. A structured sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a slip stick less than about 605.
19. The sanitary tissue product of claim 18, wherein the slip stick is from about 235 to about 605.
20. The sanitary tissue product of claim 18, wherein the slip stick is from about 350 to about 500.
21. The sanitary tissue product of claim 18, wherein the sanitary tissue product comprises a through-air-dried (TAD) and uncreped web.

ABSTRACT

Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS7 of less than about 14 dB V^2 rms. Sanitary tissue products of the present disclosure may comprise bamboo fibers and may have a TS750 less than about 20 dB V^2 rms. Sanitary tissue products of the present disclosure may be structured and may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS750 less than about 45 dB V^2 rms. Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 435. Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 605.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application No. : 18/131,383
Inventor(s) : Christopher Michael YOUNG et al.
Filed : April 6, 2023
Art Unit :
Examiner :
Docket No. : 16255M3
Confirmation No. : 7685
Customer No. : 27752
Title : Soft Sanitary Tissue Products Comprising Non-wood Fibers

RESPONSE TO NOTICE TO FILE CORRECTED APPLICATION PAPERS

In response to the Notice to File Missing Parts of Application mailed April 26, 2023, the following item(s) is/are submitted herewith:

A substitute specification in compliance with 37 CFR 1.52, 1.121(b)(3), and 1.125 is submitted herewith with markings, and is accompanied by a clean version (without markings) as set forth in 37 CFR 1.125(c). The substitute specification contains no new matter. Please replace the specification originally filed in this application with this substitute specification;

Replacement drawings in compliance with 37 CFR §1.84 and 37 CFR §1.121(d). Please replace the drawings originally filed in this application with these replacement drawings;

The fully signed Declaration.

Authorization is hereby given to charge, any fees that may be required, or credit any overpayment, to Deposit Account No. 16-2480 in the name of The Procter & Gamble Company.

Respectfully submitted,
THE PROCTER & GAMBLE COMPANY

By /RLA/
Richard L. Alexander
Registration No. 52,463
(513) 983-7631

Date: June 26, 2023
Customer No. 27752

SOFT SANITARY TISSUE PRODUCTS COMPRISING NON-WOOD FIBERS

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 63/329,222, filed April 8, 2022, U.S. Provisional Application No. 63/329,718, filed April 11, 2022, U.S. Provisional Application No. 63/330,077, filed April 12, 2022, U.S. Provisional Application No. 63/353,183, filed June 17, 2022, and U.S. Provisional Application No. 63/456,020, filed March 31, 2023, the entire disclosures of which are fully incorporated by reference herein.

FIELD

The present disclosure generally relates to fibrous structures and, more particularly, to fibrous structures comprising non-wood fibers, including sanitary tissue products comprising non-wood fibers.

BACKGROUND

Of particular interest is the softness of sanitary tissue products. But, this is where so many sustainable sanitary tissue products comprising non-woods fail. The art does not disclose how to achieve soft fibrous structures comprising bamboo, abaca, or other sustainable non-wood fibers; incorporation of non-woods into sanitary tissue products is a real challenge, even for experienced papermakers. This becomes truer as non-wood fiber inclusion increases. The inventors of the present disclosure have, however, found that adding coarse bamboo fibers (bamboo is especially coarse versus eucalyptus) into the fibrous structure, even at high inclusion levels, and/or even disposed at a consumer-facing side of a sheet, can result in sanitary tissue products with good softness, even with premium softness. There are a number of ways the inventors have accomplished this, including creation of differential densities, utilizing unique layering, and/or fiber mixes, as well as other ways disclosed herein.

The inventors of the present disclosure have found that they are able to deliver soft sustainable fibrous structures that also have low lint values. Typically, higher lint values accompany greater softness values (e.g., TS7, TS750). Beyond the difficulties of processing fibrous structures that are linty, lint can cause unwanted debris at the point of use, which can be messy and can be aesthetically undesirable. Thus, it is a real benefit to achieve greater softness while maintaining lower lint values. The inventors of the present disclosure have not only improved sustainable fibrous structures, but have improved the general offering of fibrous

structures beyond what is otherwise available today, even versus what is available on the shelf today as high-tier offerings consisting only of wood fibers.

Related to softness, another consumer-desired characteristic is surface smoothness/glide. Slip-stick is a good metric for quantifying how much “glide” a substrate has. Low slip-stick values in a fibrous structure are consumer preferred. Typical design levers for improving the slip stick of a substrate include calendaring and/or to replace coarser softwood fibers with shorter, thinner, and lower coarseness hardwood fibers, such as eucalyptus. Conventionally, eucalyptus is used to balance softwood incorporation, such as NSK, which provides strength characteristics. However, upon experimentation, the inventors of the present disclosure have shown that the introduction of coarse, non-wood fibers such as bamboo (even at high inclusion amounts) can still create low slip stick substrates while still maintaining acceptable strength characteristics.

So, despite the shortcomings of so many manufacturers and the poorly performing non-wood products that they market, which are not soft and/or have higher lint values, the inventive sustainable offerings as disclosed herein may be used to offer the public the soft and/or low lint sanitary tissue products they desire. And, the inventive sanitary tissue products disclosed herein may, in many instances, be considered high-tier due to the properties (including improved TS7, TS750, slip stick, etc.) the inventors of the present disclosure have achieved.

SUMMARY

In a first aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS7 of less than about 14 dB V^2 rms.

In a second aspect of the present disclosure, a sanitary tissue product may comprise bamboo fibers and may have a TS750 less than about 20 dB V^2 rms.

In a third aspect of the present disclosure, a sanitary tissue product may be structured and may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS750 less than about 45 dB V^2 rms.

In a fourth aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 435.

In a fifth aspect of the present disclosure, a sanitary tissue product may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 605.

BRIEF DESCRIPTION OF THE DRAWINGS

The above-mentioned and other features and advantages of this disclosure, and the manner of attaining them, will become more apparent and the disclosure itself will be better understood by reference to the following description of non-limiting examples of the disclosure taken in conjunction with the accompanying drawings, wherein:

FIG. 1A is a TS7 (y-axis) graph illustrating inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.

FIG. 1B is a graph illustrating slip stick (y-axis) and dry caliper (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.

FIG. 1C is a graph illustrating TS7 (y-axis) and lint (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.

FIG. 1D is a graph illustrating TS7 (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.

FIG. 1E is a graph illustrating TS7 (y-axis) and TS750 (x-axis) values of inventive and comparative non-wood tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J.

FIG. 2A is a TS7 (y-axis) graph illustrating inventive and comparative non-wood (paper) towel samples of FIGS. 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 2B is a graph illustrating TS7 (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel samples of FIGS. 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 2C is a graph illustrating CD modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 2D is a graph illustrating MD modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 2E is a graph illustrating geometric mean (GM) dry modulus (y-axis) and total dry tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 2F is a graph illustrating TS7 (y-axis) and wet burst strength (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 2G is a graph illustrating TS7 (y-axis) and total wet tensile (x-axis) values of inventive and comparative non-wood (paper) towel samples of FIGS. 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 2H is a graph illustrating TS7 (y-axis) and Wet Bust Strength/Total Dry Tensile (x-axis) values of inventive and comparative non-wood (paper) towel and tissue (bath) samples of FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, 22F.

FIG. 3A is a photograph of a portion of a fibrous structure, particularly a paper towel, comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 3B is a photograph of a portion of a fibrous structure, particularly a WSO bath tissue, comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 3C is a photograph of a portion of a fibrous structure, particularly a FSO bath tissue, comprising non-wood fiber(s) and comprising knuckles and pillows.

FIG. 4A is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A. In FIG. 4A, each ply 53 is fabric side out (FSO).

FIG. 4B is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

FIG. 4C is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A. In FIG. 4C, ply 53 is wire side out (WSO) and ply 53' is FSO.

5 FIG. 4D is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C— this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

FIG. 4E is a representative cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C— this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

10 FIG. 4F is a representative cross-section view of a sanitary tissue product comprising knuckles and pillows and made according to a typical TAD process such as the one illustrated in FIG. 6A.

FIG. 4G is a cross-section view of a sanitary tissue product made according to an UCTAD process such as the one illustrated in FIGS. 6B and 6C – this sanitary tissue product does not have
15 distinct knuckle and pillow regions or zones.

FIG. 4H is a representative cross-section view of a sanitary tissue product made according to a conventional wet press process – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

FIG. 4I is a representative cross-section view of a sanitary tissue product made according
20 to a conventional wet press process – this sanitary tissue product does not have distinct knuckle and pillow regions or zones.

FIG. 5 is a plan view of a portion of a mask pattern used to make the papermaking belt that produced the fibrous structure of FIG. 3A.

FIG. 6A is a schematic representation of one method for making the new fibrous structures
25 detailed herein. Specific details of the process and equipment represented by FIG. 6A can be found in U.S. Patent Nos. 5,714,041; 9,217,226; 9,435,081; 9,631,323; 9,752,281; 10,240,296; and U.S. Publication Nos. 2013-0048239; 2022-0010497.

FIG. 6B is a schematic representation of one method for making the new fibrous structures detailed herein. Specific details of the process and equipment represented by FIG. 6B can be found
30 in U.S. Patent No. 7,972,474.

FIG. 6C is a schematic representation of one method for making the new fibrous structures detailed herein.

FIG. 7 is a perspective view of a test stand for measuring roll compressibility properties as detailed herein.

FIG. 8 is perspective view of the testing device used in the roll firmness measurement detailed herein.

5 FIG. 9 is a diagram of an SST Test Method set up as detailed herein.

FIG. 10 is a schematic illustrating the Position of Gocator camera to a testing surface relating to the Moist Towel Surface Structure Method.

FIG. 11 is an enlarged view of a cell group overlapped by a quadrilateral related to the Continuous Region Density Difference Measurement.

10 FIG. 12 is a density image for use in the Micro-CT Intensive Property Measurement Method.

FIG. 13 is a binary image for use in the Micro-CT Intensive Property Measurement Method.

FIG. 14 is an example of a sample support rack used in the HFS and VFS Test Methods.

FIG. 14A is a cross-sectional view of the sample support rack of FIG. 14.

15 FIG. 15 is an example of a sample support rack cover used in the HFS and VFS Test Methods.

FIG. 15A is a cross-sectional view of the sample support rack cover of Fig. 15.

FIG. 16A is a portion of a fibrous structure of the present disclosure comprising an emboss pattern.

20 FIG. 16B is a portion of a fibrous structure of the present disclosure comprising an emboss pattern.

FIG. 17 is a representative papermaking belt of the kind useful to make fibrous structures comprising non-wood fibers of the present disclosure.

25 FIGS. 18A-1 and 18A-2 are two segments of a table that details multiple inventive sanitary tissue product embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies of the sanitary tissue product.

FIGS. 18B-1 and 18B-2 are two segments of a table that details multiple inventive sanitary tissue product embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies of the sanitary tissue product.

30 FIG. 19 is a table that details multiple inventive sanitary tissue product embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies of the sanitary tissue product.

FIG. 20A is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

5 FIG. 20B is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 21A is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

10 FIGS. 21B-1, 21B-2, and 21B-3 are three segments of a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

15 FIGS. 21C-1, 21C-2, and 21C-3 are three segments of a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIGS. 21D-1, 21D-2, and 21D-3 are three segments of a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

20 FIGS. 21E-1, 21E-2, and 21E-3 are three segments of a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIGS. 21F-1 and 21F-2 are two segments of a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

25 FIGS. 21G-1 and 21G-2 are two segments of a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

30 FIGS. 21H-1 and 21H-2 are two segments of a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 21I is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 21J is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

5 FIG. 22A is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22B is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

10 FIG. 22C is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22D is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: 15 common numbers between the tables indicate the same sample).

FIG. 22E is a table that details multiple inventive and comparative sanitary tissue product embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 22F is a table that details multiple inventive and comparative sanitary tissue product 20 embodiments comprising non-wood fibers, specifically detailing multiple properties (note: common numbers between the tables indicate the same sample).

FIG. 23 is a table that details fiber morphology of the fibers used in sanitary tissue products comprising non-wood fibers (note: common numbers between the tables indicate the same sample). In FIG. 23, fiber count (length average, million/g) is calculated from length 25 weighted fiber average and coarseness via the following equation (where $L(1)$ has the units of mm/fiber and coarseness has the units of mg/m): $\text{Fiber count} = 1/(L(1) \times \text{coarseness})$. And, fiber count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(n)$ has the units of mm/fiber and coarseness has the units of mg/m): $\text{Fiber count} = 1/(L(n) \times \text{coarseness})$.

30 FIGS. 24A-1 and 24A-2 are two segments of a table that details PVD data of sanitary tissue products comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24B-1 and 24B-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24C-1 and 24C-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24D-1 and 24D-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24E-1 and 24E-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24F-1 and 24F-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIGS. 24G-1 and 24G-2 are two segments of a table that details PVD data of sanitary tissue products of the present disclosure comprising non-wood fibers (common numbers between the tables indicate the same sample).

FIG. 25 is a table that details the fiber characteristic differences between non-wood fibers that are never-dried and that have been once-dried.

Beyond the figures of the present application and their descriptions disclosed above, the figures and their descriptions, including FIGS. 1A – 2JJ, disclosed in U.S. Provisional Patent Application Serial No. 63/456,020, titled “Fibrous Structures Comprising Non-wood Fibers,” filed on March 31, 2023, Young as the first-named inventor, are herein incorporated by reference.

DETAILED DESCRIPTION

Various non-limiting examples of the present disclosure will now be described to provide an overall understanding of the principles of the structure, function, manufacture, and use of the fibrous structures comprising non-woods disclosed herein. One or more non-limiting examples are illustrated in the accompanying drawings. Those of ordinary skill in the art will understand that the fibrous structures described herein and illustrated in the accompanying drawings are non-limiting examples. The features illustrated and/or described in connection with one non-limiting

example can be combined with the features of other non-limiting examples. Such modifications and variations are intended to be included within the scope of the present disclosure.

MAKING FIBROUS STRUCTURES OF THE PRESENT DISCLOSURE

5 “Machine Direction” or “MD” as used herein means the direction parallel to the flow of the fibrous structure through the papermaking machine and/or product manufacturing equipment.

“Cross Machine Direction” or “CD” as used herein means the direction perpendicular to the machine direction in the same plane of the fibrous structure.

10 Generally, fibrous structures of the present disclosure are typically made in “wet-laid” papermaking processes. In such papermaking processes, a fiber slurry, usually wood pulp fibers, is deposited onto a forming wire and/or one or more papermaking belts such that an embryonic fibrous structure is formed. After drying and/or bonding the fibers of the embryonic fibrous structure together, a fibrous structure is formed. Further processing of the fibrous structure can then be carried out after the papermaking process. For example, the fibrous structure can be wound
15 on the reel and/or ply-bonded and/or embossed. As further discussed herein, visually distinct features may be imparted to the fibrous structures in different ways. In a first method, the fibrous structures can have visually distinct features added during the papermaking process. In a second method, the fibrous structures can have visually distinct features added during the converting process (*i.e.*, after the papermaking process). Some fibrous structure examples disclosed herein
20 may have visually distinct features added only during the papermaking process, and some fibrous structure examples may have visually distinct features added both during the papermaking process and the converting process.

Regarding the first method, a wet-laid papermaking process can be designed such that the fibrous structure has visually distinct features “wet-formed” during the papermaking process. Any
25 of the various forming wires and papermaking belts utilized can be designed to leave physical, three-dimensional features within the fibrous structure. Such three-dimensional features are well known in the art, particularly in the art of “through air drying” (TAD) papermaking processes, with such features often being referred to in terms of “knuckles” and “pillows.” “Knuckles” or “knuckle regions” or “knuckle zones” are typically relatively high-density regions that are wet-formed
30 within the fibrous structure (extending from a pillow surface of the fibrous structure) and correspond to the knuckles of a papermaking belt, *i.e.*, the filaments or resinous structures that are raised at a higher elevation than other portions of the belt. “Relatively high density” as used herein means a portion of a fibrous structure having a density that is higher than a relatively low-density

portion of the fibrous structure. Relatively high density zones or regions can be about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60, or about 65% higher than relatively low density regions or zones. For instance, discrete knuckles, measured according to Micro-CT Intensive Property Measurement Method, may have a density greater than about (“greater than about” used interchangeably with “at least about” herein) 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60, or about 65% higher than pillows. Whether one is substituting short or long wood fibers with non-wood fibers, there are not direct non-wood substitutions available for several reasons, such as morphology differences between wood and non-wood fibers. For instance, even when fiber length is matched by the non-wood replacing the wood fiber, said non-wood fiber likely has important differences such as fiber width, stiffness, etc. For some of these reasons, generally speaking, knuckles and pillows comprising non-wood fibers will be different (e.g., less dense) than knuckles and pillows consisting of non-wood fibers. These are some of the reasons that incorporation of non-wood fibers into established sanitary tissue products is not straightforward and creates unexpected outcomes. This is especially true as one tries to achieve parity (when using non-wood fibers) for multiple key parameters of sanitary tissue products.

Likewise, “pillows” or “pillow regions” or “pillow zones” are typically relatively low-density regions that are wet-formed within the fibrous structure and correspond to the relatively open regions between or around the knuckles of the papermaking belt. The pillow regions form a pillow surface of the fibrous structure from which the knuckle regions extend. “Relatively low density” as used herein means a portion of a fibrous structure having a density that is lower than a relatively high-density portion of the fibrous structure. Further, the knuckles and pillows wet-formed within a fibrous structure can exhibit a range of basis weights and/or densities relative to one another, as varying the size of the knuckles or pillows on a papermaking belt can alter such basis weights and/or densities. A fibrous structure (e.g., sanitary tissue products) made through a TAD papermaking process as detailed herein is known in the art as “TAD paper.”

Thus, in the description herein, the terms “knuckles” or “knuckle regions” or “knuckle zones” or the like can be used to reference either the raised portions of a papermaking belt or the densified, raised portions wet-formed within the fibrous structure made on the papermaking belt (*i.e.*, the raised portions that extend from a surface of the fibrous structure), and the meaning should be clear from the context of the description herein. Likewise “pillows” or “pillow regions” or “pillow zones” or the like can be used to reference either the portion of the papermaking belt between or around knuckles (also referred to in the art as “deflection conduits” or “pockets”), or the relatively uncompressed regions wet-formed between or around the knuckles within the fibrous

structure made on the papermaking belt, and the meaning should be clear from the context of the description herein. Knuckles or pillows can each be either continuous or discrete, as described herein. As shown in FIGS. 5, such illustrated masks may be used in producing papermaking belts that would create fibrous structures that have discrete knuckles and continuous/substantially continuous pillows. Like masks may be used in producing papermaking belts that would create fibrous structures that have discrete pillows and continuous/substantially continuous knuckles. The term “discrete” as used herein with respect to knuckles and/or pillows means a portion of a papermaking belt or fibrous structure that is defined or surrounded by, or at least mostly defined or surrounded by, a continuous/substantially continuous knuckle or pillow. The term “continuous/substantially continuous” as used herein with respect to knuckles and/or pillows means a portion of a papermaking belt or fibrous structure network that fully, or at least mostly, defines or surrounds a discrete knuckle or pillow. Further, the substantially continuous member can be interrupted by macro patterns formed in the papermaking belt, as disclosed in US Pat. No. 5,820,730 issued to Phan et al. on October 13, 1998.

Knuckles and pillows in paper towels (also referred to as “towel”) and bath tissue (also referred to as “toilet tissue,” “bath,” or “toilet paper”) can be visible to the retail consumer of such products. The knuckles and pillows can be imparted to a fibrous structure from a papermaking belt at various stages of the papermaking process (*i.e.*, at various consistencies and at various unit operations during the drying process) and the visual pattern generated by the pattern of knuckles and pillows can be designed for functional performance enhancement as well as to be visually appealing. Such patterns of knuckles and pillows can be made according to the methods and processes described in US. Pat. No. 6,610,173, issued to Lindsay et al. on August 26, 2003, or US Pat. No. 4,514,345 issued to Trokhan on April 30, 1985, or US Pat. No. 6,398,910 issued to Burazin et al. on June 4, 2002, or US Pub. No. 2013/0199741; published in the name of Stage et al. on August 8, 2013. The Lindsay, Trokhan, Burazin and Stage disclosures describe belts that are representative of papermaking belts made with cured resin on a woven reinforcing member, of which aspects of the present disclosure are an improvement. But in addition, the improvements detailed herein can be utilized as a fabric crepe belt as disclosed in US Pat. No. 7,494,563, issued to Edwards et al. on Feb. 24, 2009 or US 8,152,958, issued to Super et al. on April 10, 2012, as well as belt crepe belts, as described in US Pat. No. 8,293,072, issued to Super et al on October 23, 2012. When utilized as a fabric crepe belt, a papermaking belt of the present disclosure can provide the relatively large, recessed pockets and sufficient knuckle dimensions to redistribute the fiber upon high impact creping in a creping nip between a backing roll and the fabric to form additional

bulk in conventional wet-laid press processes. Likewise, when utilized as a belt in a belt crepe method, a papermaking belt of the present disclosure can provide the fiber enriched dome regions arranged in a repeating pattern corresponding to the pattern of the papermaking belt, as well as the interconnected plurality of surrounding areas to form additional bulk and local basis weight distribution in a conventional wet-laid process. In addition, the improvements detailed herein, can be utilized as an uncreped through air dried (UCTAD) belt. UCTAD (un-creped through air drying) is a variation of the TAD process in which the sheet is not creped, but rather dried up to 99% solids using thermal drying, removed from the structured fabric, and then optionally calendered and reeled. U.S. Pat. No. 6,808,599 describes an uncreped through air dried process. U.S. Pat. No. 10,610,063 describes an uncreped through air dried product made using a belt. In addition, the improvements herein can be utilized as an ATMOS belt. The ATMOS process has been developed by the Voith company and marketed under the name ATMOS. The process/method and paper machine system has several variations, but all involve the use of a structured fabric in conjunction with a belt press. This process is described in numerous patent publications including U.S. Pat. Nos. 7,510,631, 7,686,923, 7,931,781, 8,075,739, and 8,092,652. In addition, the improvements herein can be utilized as an NTT belt. The NTT process has been developed by the Metso company and marketed under the name NTT. The NTT process includes an extended press nip where the sheet is transferred from a press felt onto a texturing belt. Examples of texturing belts used in the NTT process can be viewed in International Publication Number WO 2009/067079 A1 and US Patent Application Publication No. 2010/0065234 A1. An example of a papermaking belt structure of the general type useful in the present disclosure and made according to the disclosure of US Pat. No. 4,514,345 is shown in FIG. 17. As shown, the papermaking belt 17 can include cured resin elements 4 forming knuckles 20 on a woven reinforcing member 6. The reinforcing member 6 can be made of woven filaments 8 as is known in the art of papermaking belts, for example resin coated papermaking belts. The papermaking belt structure shown in FIG. 17 includes discrete knuckles 20 and a continuous deflection conduit, or pillow region (pillow zone). The discrete knuckles 20 can wet-form densified knuckles within the fibrous structure made thereon; and, likewise, the continuous deflection conduit, *i.e.*, pillow region, can wet-form a continuous pillow region within the fibrous structure made thereon. The knuckles can be arranged in a pattern described with reference to an X-Y coordinate plane, and the distance between knuckles 20 in at least one of the X or Y directions can vary according to the examples disclosed herein. For clarity, a fibrous structure's visually distinct knuckle(s) and pillow(s) that are wet-formed in a wet-laid papermaking process are different from, and

independent of, any further structure added to the fibrous structure during later, optional, converting processes (e.g., one or more embossing process). For certain embodiments of the present disclosure, it may be desirable to use the belts disclosed in U.S. Patent Nos. 9,435,081; 9,631,323; 9,752,281; 10,240,296; and U.S. Publication Nos. 2022-0010497; and 2021-0140114 as some of these belts create sinusoidal and/or serpentine pillow and/or knuckle regions or zones; in some embodiments, these pillow and/or knuckle zones or regions may be continuous and/or semi-continuous. These patterns referenced in the patents and publication of the previous sentence can be particularly useful for achieving the most desirable properties from webs comprising non-woods, even including high non-wood (e.g., bamboo) inclusion.

After completion of the papermaking process, a second way to provide visually distinct features to a fibrous structure is through embossing. Embossing is a well-known converting process in which at least one embossing roll having a plurality of discrete embossing elements extending radially outwardly from a surface thereof can be mated with a backing, or anvil, roll to form a nip in which the fibrous structure can pass such that the discrete embossing elements compress the fibrous structure to form relatively high density discrete elements (“embossed regions”) in the fibrous structure while leaving an uncompressed, or substantially uncompressed, relatively low density continuous, or substantially continuous, network (“non-embossed regions”) at least partially defining or surrounding the relatively high density discrete elements.

As illustrated in FIGS. 6B and 6C, beyond creating knuckles and pillows with resinous belts described above, and beyond the various types of creping, paper may be transformed in other ways, such that beneficial properties are created, especially as the speed of a belt or a wire transfers the web to a belt or a wire of a different speed, such as, for example, the upstream belt or wire moving faster than the downstream belt or wire. It may be desirable to have multiple such transfers in the same papermaking process. Further, it may be desirable to have different speed differentials at different transfers in such a process. As a more specific example, referring to FIG. 6B, in a first rush transfer 175, the speed of the forming fabric 154 can be travelling at a first rate, while the transfer fabric 174 travels at a second rate (slower than the first rate, but faster than 2,000 feet per minute (fpm), 2,050 fpm, 2,100 fpm, 2,150 fpm, 2,200 fpm, 2,250 fpm, 2,300 fpm, 2,350 fpm, 2,400 fpm, 2,450 fpm, 2,500 fpm, 2,600 fpm, 2,700 fpm, 2,800 fpm, 2,900 fpm, or greater than 3,000 fpm); further, a second rush transfer 175' may occur where the transfer fabric is travelling at the second rate, while the TAD fabric 164 travels at a third rate, which may be the faster or slower (e.g., about 10%, about 15%, about 20%, about 25%, about 30%, about 40, about 50% faster or slower) than the second rate. While the UCTAD process does not form traditional density

differentials (e.g., such as knuckles and pillows), said rush transfers can, depending on the speed differentials of the transfers, create fiber orientations within the web such that performance of the fibrous structure is improved, such as, for example, stretch, tensile ratio, tensile, modulus, caliper, bulk.

5 Embossed features in paper towels and bath tissues can be visible to the retail consumer of such products. Emboss designs as disclosed in U.S. Design. Pat. App. Nos. 29/673,106; 29/673,105; and 29/673,107 may be used to make fibrous structures of the present disclosure. Emboss patterns can be made according to the methods and processes described in US Pub. No. US 2010-0028621 A1 in the name of Byrne et al. or US 2010-0297395 A1 in the name of Mellin,
10 or US Pat. No. 8,753,737 issued to McNeil et al. on June 17, 2014. For clarity, such embossed features originate during the converting process, and are different from, and independent of, the pillow and knuckle features that are wet-formed on a papermaking belt during a wet-laid papermaking process.

More particular papermaking processes are disclosed below and illustrated in FIGS. 6A
15 and 6B, versus the more general description above. FIGS. 6A and 6B are simplified, schematic representations of continuous fibrous structure making processes and machines useful in the practice of the present disclosure. The following description of the process and machine include non-limiting examples of process parameters useful for making a fibrous structure of the present invention.

20 As shown in FIG. 6A, process and equipment 150 for making fibrous structures according to the present disclosure comprises supplying an aqueous dispersion of fibers (a fibrous furnish) to a headbox 152 which can be of any design known to those of skill in the art. The aqueous dispersion of fibers can include wood and non-wood fibers, northern softwood kraft fibers (“NSK”), eucalyptus fibers, southern softwood kraft (SSK) fibers, Northern Hardwood Kraft
25 (NHK) fibers, acacia, bamboo, straw and bast fibers (wheat, flax, rice, barley, etc.), corn stalks, bagasse, abaca, kenaf, reed, synthetic fibers (PP, PET, PE, bico version of such fibers), regenerated cellulose fibers (viscose, lyocell, etc.), and other fibers known in the papermaking art, including short fibers having an average length less than 1.0 mm (Average Short Fiber Length-ASFL) and including long fibers having an average length greater than 1.0 mm, from
30 about 1.2 mm to about 3.5 mm, or from about 3 mm to about 10 mm (Average Long Fiber Length-ALFL). Depending on the non-wood fibers being used, they may be in the long fiber range of length. For instance, bamboo can have a length from 1.1 to 2.0 mm and sunn hemp is even longer, it can have a length from 2.8 to 3.0 mm and sisal hemp can have a length from 2.5

to 2.7 mm. Kenaf can have a length from 2.7 to 3.0 mm, abaca can have a length from 4.0 to 4.3 mm. This becomes significant when short fibers like eucalyptus are replaced with longer non-wood fibers.

From the headbox 152, the aqueous dispersion of fibers can be delivered to a foraminous member 154, which can be a Fourdrinier wire, to produce an embryonic fibrous web 156. Furnish mixes may be useful in the present disclosure may be from about 20% to about 50% short fibers and from about 40% to about 100% long fibers, specifically including all 1% increments between the recited ranges.

The foraminous member 154 can be supported by a breast roll 158 and a plurality of return rolls 160 of which only two are illustrated. The foraminous member 154 can be propelled in the direction indicated by directional arrow 162 by a drive means, not illustrated, at a predetermined velocity, V_1 . Optional auxiliary units and/or devices commonly associated with fibrous structure making machines and with the foraminous member 154, but not illustrated, comprise forming boards, hydrofoils, vacuum boxes, tension rolls, support rolls, wire cleaning showers, and other various components known to those of skill in the art.

After the aqueous dispersion of fibers is deposited onto the foraminous member 154, the embryonic fibrous web 156 is formed, typically by the removal of a portion of the aqueous dispersing medium by techniques known to those skilled in the art. Vacuum boxes, forming boards, hydrofoils, and other various equipment known to those of skill in the art are useful in effectuating water removal. The embryonic fibrous web 156 can travel with the foraminous member 154 about return roll 160 and can be brought into contact with a papermaking belt 164 in a transfer zone 136, after which the embryonic fibrous web travels on the papermaking belt 164. While in contact with the papermaking belt 164, the embryonic fibrous web 156 can be deflected, rearranged, and/or further dewatered. Depending on the process, mechanical and fluid pressure differential, alone or in combination, can be utilized to deflect a portion of fibers into the deflection conduits of the papermaking belt. For example, in a through-air drying process a vacuum apparatus 176 can apply a fluid pressure differential to the embryonic web 156 disposed on the papermaking belt 164, thereby deflecting fibers into the deflection conduits of the deflection member. The process of deflection may be continued with additional vacuum pressure 186, if necessary, to even further deflect and dewater the fibers of the web 184 into the deflection conduits of the papermaking belt 164.

The papermaking belt 164 can be in the form of an endless belt. In this simplified representation, the papermaking belt 164 passes around and about papermaking belt return

rolls 166 and impression nip roll 168 and can travel in the direction indicated by directional arrow 170, at a papermaking belt velocity V_2 , which can be less than, equal to, or greater than, the foraminous member velocity V_1 . In the present disclosure, the papermaking belt velocity V_2 is less than foraminous member velocity V_1 such that the partially-dried fibrous web is foreshortened in the transfer zone 136 by a percentage determined by the relative velocity differential between the foraminous member and the papermaking belt. Associated with the papermaking belt 164, but not illustrated, can be various support rolls, other return rolls, cleaning means, drive means, and other various equipment known to those of skill in the art that may be commonly used in fibrous structure making machines.

The papermaking belts 164 of the present disclosure can be made, or partially made, according to the process described in U.S. Patent No. 4,637,859, issued Jan. 20, 1987, to Trokhan, and having the patterns of cells as disclosed herein.

The fibrous web 192 can then be creped with a creping blade 194 to remove the web 192 from the surface of the Yankee dryer 190 resulting in the production of a creped fibrous structure 196 in accordance with the present disclosure. As used herein, creping refers to the reduction in length of a dry (having a consistency of at least about 90% and/or at least about 95%) fibrous web which occurs when energy is applied to the dry fibrous web in such a way that the length of the fibrous web is reduced and the fibers in the fibrous web are rearranged with an accompanying disruption of fiber-fiber bonds. Creping can be accomplished in any of several ways as is well known in the art, as the doctor blades can be set at various angles. The creped fibrous structure 196 is wound on a reel, commonly referred to as a parent roll, and can be subjected to post processing steps such as calendaring, tuft generating operations, embossing, and/or converting. The reel winds the creped fibrous structure at a reel surface velocity, V_4 .

The papermaking belts of the present disclosure can be utilized to form discrete elements and a continuous/substantially continuous network (*i.e.*, knuckles and pillows) into a fibrous structure during a through-air-drying operation. The discrete elements can be knuckles and can be relatively high density relative to the continuous/substantially continuous network, which can be a continuous/substantially pillow having a relatively lower density. In other examples, the discrete elements can be pillows and can be relatively low density relative to the continuous/substantially continuous network, which can be a continuous/substantially continuous knuckle having a relatively higher density. In the example detailed above, the fibrous structure is a homogenous fibrous structure, but such papermaking process may also be adapted to manufacture layered

fibrous structures, as is known in the art. As discussed above, the fibrous structure can be embossed during a converting operation to produce the embossed fibrous structures of the present disclosure.

Formation

5 An area of particular interest is formation of the fibrous structure. This is an area where, as evidenced in the detailed description, so many sustainable sanitary tissue products fail and the art does not disclose how to achieve well-formed fibrous structures comprising bamboo and/or other sustainable non-wood fibers. Formation of non-wood fibers can be challenging due to their morphology, which differs from wood fibers. For instance, bamboo fibers, which may be
10 considered flexible (relative to their length/width ratio versus certain wood fibers and versus their length/width ratio versus certain non-wood fibers such as straw fibers (e.g., wheat straw)) often flocculate in the headbox, which can result in a heterogeneously formed sheet. The inventors of the present disclosure have found ways of overcoming these challenges so that adding bamboo fibers into the fibrous structure, even at high(er) inclusion levels, can result in products having
15 good formation as evidenced by inventive formation index values, as well as by tensile ratio values disclosed herein. It should also be appreciated that the better a sheet's formation, the better its coverage. Such is important, of course, because formation and coverage directly impact hand protection for sanitary tissue products. Details are in the specification below.

 As described above, in part, fibers are delivered to and diluted in the headbox. All other
20 things being constant, increasing the dilution of the headbox (decreasing headbox consistency) results in improved formation. Without being bound by theory, one reason for this could be that as the headbox consistency decreases, the fibrous particles in the headbox have less interactions with each other as they flow through the headbox. Because fibers (wood and non-wood) are generally ribbon-like in cross section, if that fiber is allowed to rotate in all three axes then it creates
25 a sphere. This sphere of fibers can be referred to as the swept volume of the fiber. As the headbox consistency increases, assuming perfectly homogenous distribution of fibers in the solution, the spheres of swept volume begin to come closer together, eventually overlapping. As the spheres overlap more and more, the fibers have a higher probability of interacting with each other, creating flocculation, which results in a more heterogeneously formed sheet. This is also referred to as poor
30 formation.

 The jet-to-wire ("jet/wire") ratio is known in the art as a velocity ratio between the speed of the jet exiting the headbox and the speed of the wire(s) upon which the jet impinges. The main ways to adjust the jet/wire ratio are (1) to increase the flow rate through the headbox in a fixed

headbox geometry, while keeping wire speed constant, (2) to increase the wire speed while keeping the headbox flow and geometry constant, (3) to decrease the flow rate through the headbox in a fixed headbox geometry, while keeping the wire speed constant, or (4) to decrease the wire speed while keeping the headbox flow and geometry constant. Method (1) observes the incompressible fluid dynamic concept of continuity, which says that if the volumetric flow through a fixed area increases, the velocity must increase – the opposite is true for Method (3). For Methods (2) and (4), again via continuity, results in the jet velocity being constant while the wire velocity increases or decreases, respectively. This jet/wire ratio also affects the tensile ratio of the subsequently formed sheet. This mechanism is via fiber orientation on the wire as the fibers are deposited. It is generally known that the higher the speed difference is between the jet/wire (either a jet much faster or a jet much slower), the higher the tensile ratio will be, and that there will be a minimum tensile ratio between the extremes. For this reason, it may be desirable that fibrous structures of the present disclosure have certain tensile ratios, described in more detail below. Fiber orientation can also impact the formation of the sheet through increased heterogeneity of the substrate.

Finally, one of the major costs of papermaking is energy. Pumps, especially fan pumps, consume large amounts of power via the work of increasing the pressure of a volumetric flow (known as PV work). Lowering the flow through the headbox (thereby increasing the consistency and decreasing the jet/wire at constant throughput and headbox geometry) will lower the production costs for the papermaker. Additionally, all other things being equal, less headbox dilution would result in less drying energy and overall water consumption, which are significant cost elements in an increasingly resource constrained world.

Therefore, the papermaker strives to balance these competing priorities. Upon recent experimentation, it has surprisingly been found that the relationships between jet/wire, tensile ratio, and formation are different for non-wood fibers than they are for wood fibers. More specifically, the tensile ratios disclosed below may be achieved by, at least in part, by a jet flow that is slower than a forming wire speed.

As discussed previously in this section, creating premium levels of quality (softness, absorption, strength, bulk characteristics, etc.) toilet tissue by using high coarseness bamboo in the furnish mix is a challenge. It is generally known that substrates with a very even fiber distribution (good formation) are consumer preferred. One reason is that the even distribution of fibers is pleasing to the eye. Another reason is that the even distribution of fibers means that, at a given basis weight, there is a higher minimum fiber coverage area of the sheet, as there are less heavy and light spots of the sheet, contributing to better hand protection. Better formation also equates

to better absorbency characteristics through better pore connectivity and pore volume distributions. In most conventional wet press processes, having an even formation lends to better tensile efficiency, allowing for a stronger sheet at a given basis weight. In through-air-drying, sheets are produced that have higher bulk properties. Through conservation of volume, at a given basis weight, a through-air-dried sheet with higher bulk would tend to have a lower formation index than a conventional wet press sheet at similar basis weights and fiber compositions.

Another way to improve formation index is to choose fibers that allow for high coverage (i.e., fibers with low coarseness and wide fiber widths). Bamboo, for instance, is known in the art as a fiber with potential for tissue making use. However, the morphology of the bamboo fiber (high levels of fines, broad fiber length distribution, high coarseness, high fibrillation, etc.) make for a fiber that drains poorly, making it particularly unsuited for through-air-drying machines due to high energy costs associated with the drying of the nascent fiber web. The high coarseness of bamboo, as well as its wide fiber width, make for poorer fiber coverage than sheets that are comprised mainly of eucalyptus. This also leads to a lower formation index than eucalyptus or other high fiber coverage sheets. Thus, toilet tissue sheets that are comprised mostly of eucalyptus fibers, which are short, narrow, and exhibit low coarseness have improved fiber coverage in the sheet and a higher formation index. As the papermaker uses higher levels of bamboo inclusion, one is necessarily replacing the eucalyptus fibers with longer, wider, and coarser bamboo fibers. The fiber coverage in the substrate decreases, and the formation index decreases as well. This is not only true for bamboo, but many of the other non-woods. Surprisingly, the inventors of the present disclosure have discovered that decreasing the tensile ratio of structured fibrous structures comprising non-woods improves the formation index of said fibrous structures. This is the exact opposite of non-structured fibrous structures, in which increasing the tensile ratio improves the formation index. Without being bound by theory, it is thought that the interplay of fiber distribution on the wire, deformation of the sheet into a patterned fabric, and subsequent differential drying and creping of the resultant sheet, at least in part, results in this counterintuitive relationship.

A majority of webs comprising bamboo are made on conventional wet press machines. These machines generate webs of low caliper, and when converted into finished product rolls result in either low bulk and hard rolls or high bulk and extremely soft rolls. A few instances of products can be found comprising bamboo that are made on through-air-dried machines. These examples exhibit a lower formation index and also exhibit other non-consumer preferred characteristics, like low volumetric PVD absorption in the 2.5-160 um range. It is therefore surprising that a low

formation index substrate can be made with a coarse non-wood fiber, such as bamboo, and still be able to meet standards for premium quality tissue.

The inventors of the present disclosure have surprisingly shown that substrates comprising non-woods (e.g., bamboo, abaca, etc.) can be created that still maintain strong consumer appeal despite their lower formation indices. As described in greater detail herein, non-wood fibers may be run in a continuous papermaking process at high percentage inclusions of non-wood to form webs. These webs may then be pressed on a structured fabric, creating zones of differential density, which may, in part, contribute to the preferred characteristics of the resulting “structured” fibrous structures. Structured fibrous structures may be achieved using various papermaking processes such as, for example, TAD, fabric crepe, NTT, QRT, creped TAD and UCTAD.

Additionally, preferred characteristics may be achieved, at least in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface wire/belt interface and at creping, through creping geometry changes, and the judicious placement of high and low density zones in the substrate.

Fractionation

It is generally known that substrates comprised of virgin wood pulps are consumer preferred. The substrate developer undergoes a very deliberate process when choosing the fibers that they want to include in their substrate. Generally, for soft and strong tissue products, a blend of low coarseness, low length eucalyptus fibers are included for softness, while low coarseness softwood fibers, for example, NSK fibers, are included for strength, but still permitting good flexibility. In order to maintain the correct ratios of strength, softness, and flexibility, the substrate developer will vary chemistry inclusion, fiber composition by layers, and refining of the wood pulp. Choices in any of these variables (and more) will affect the resultant substrate characteristics, making the substrate more or less consumer desirable.

It is also generally known that non-wood fibers often have different characteristics than wood fibers. Fiber morphology characteristics such as length, cell wall thickness, width, Runkle Ratio, kink, curl, fibrillation, and other characteristics can vary significantly from non-wood to non-wood, as well as compared to wood pulps. It is, therefore, a current problem to develop sanitary tissue products having premium characteristics when utilizing non-wood fibers that have non-premium morphologies.

In order to address this problem, non-wood fibers may be passed through a hydrocyclone and separated in to two different streams and described as “accepts” and “rejects.” Despite this nomenclature, both outgoing streams can still be used by the substrate developer via different layering schemes. When passing non-woods through a fractionation unit, one important way that the unit separates the fibers is by degree of fibrillation. Since many non-woods are more fibrillated than wood fibers, choosing to place the less fibrillated non-wood stream close to the consumer may result in a more premium, wood fiber-like experience. Furthermore, it has been observed that less the fibrillated non-wood fraction ends up located in the reject stream, which is usually reserved for longer, denser, and more coarse fibers. Traditional thinking would be to place this reject stream away from the consumer-facing layer, but the inventors of the present disclosure have surprising found that the better option is to place the reject stream to the consumer-facing layer. Without being bound by theory, it is believed that the hydrodynamic differences of fiber fibrillation overcome the hydrodynamic differences of fiber density and length. With fiber fibrillation being dominant, the more fibrillated fibers will follow the majority of the fluid and be carried to the accept portion of the cyclone. The coarser, longer, and less fibrillated fibers will concentrate on the peripheral wall of the cyclone and preferentially go towards the reject stream at the bottom of the cyclone. Yet, these “reject” fibers have better mobility, lower bonding, and are more wood-like due to their lower degree of fibrillation. Using non-wood rejects in the consumer-facing layer can, thus, result in a sanitary tissue product that has premium characteristics (e.g. softness).

Once-dried Non-wood Fibers

The challenges associated with non-wood fiber morphology are further complicated by using once-dried (versus never-dried, which comprise greater than about 45% water content) fibers in the paper-making process. Although never-dried and once-dried fibers are chemically similar, they differ greatly in their physical properties. Never-dried fiber walls contain much more water per unit dry mass than those of dried fibers after reslushing. Being more swollen, the never-dried walls are more flexible or conformable. In contrast, the walls of once-dried (and rewetted or reslushed or repulped) fibers are stiff (compared to never-dried fibers). Significant changes in the papermaking properties of fibers occur with water removal as the walls become progressively more rigid and less conformable. FIG. 25 shows the fiber characteristic differences between non-wood fibers that are never-dried and that have been once-dried; see also, for example: A.M.Scallan and G.V.Laivins, The mechanism of hornification of wood pulps in

Products of Papermaking, Trans. of the Xth Fund. Res. Symp. Oxford, 1993, (C.F.Baker, ed.), pp 1235–1260, FRC, Manchester, 2018. DOI: 10.15376/frc.1993.2.1235, at page 1242 (Effect of Temperature) states: “Drying-and-reslushing at 25 °C dropped the breaking length from 7.3 km for the virgin sheet down to 2.7 km. Raising the drying temperature to 105° and to 150°C further lowered the breaking length to 1.6 and 0.6 km. From this study it is apparent that the major reduction in sheet strength is due to water removal and that heat causes an additional reduction which is much smaller in magnitude.” The same article further states: “Only a few investigations have been carried out, designed to separate the effects of temperature and water removal during drying. Lyne and Gallay avoided this problem by heating without drying; in their experiments wet handsheets were heated to 95 °C for three minutes in an atmosphere saturated with water vapour before air drying (19). The tensile strength of the sheet was lowered by 14% when compared to that of an unheated control. The result shows that the heat treatment led to a reduction in the extent of interfibre bonding which they attributed to a loss of swelling of the pulp upon heating.” FIG. 25 also illustrates that never-dried fibers bond to each other better than once-dried fibers. To overcome the effects of temperature and water removal, strength in the web (e.g., sanitary tissue product) may be achieved by temporary and/or permanent wet strength, dry strength additives, furnish blend ratios (e.g., softwood-to-hardwood ratios), process manipulations (refining, formation, calendaring, creping, etc.), etc.

While it may be desirable to use never-dried fibers (see, for example, the following publications assigned to Essity Hygiene and Health Aktiebolag: WO2023282811A1, WO2023282812A1, WO2023282813A1, WO2023282818A1), such requires the pulping facility to be close to the paper-making facility as wet fibers are too expensive to ship. Because this proximity is often impractical, the inventors of the present application used non-wood fibers that were at least once-dried and overcame not only the challenges associated with non-wood fibers, but also overcame the challenges of the non-wood fibers having been at least once-dried at the pulping facility and then shipped as dried sheets before incorporating the fibers into the paper-making process. That is, the non-wood fibers disclosed herein were reslushed from dried sheets before they were sent to a headbox in the paper-making process. Further, on a single fiber basis, the fiber length of once-dried non-wood fibers in the finished product (e.g., sanitary tissue product) will normally be shorter than never-dried non-wood fibers due to the extra processing necessary to rewet once-dried non-wood fibers. These shorter fibers have a materially different characteristics, which, among other things, will impact the strength of the final product.

When using once-dried non-wood pulp, the unit of pulp is typically in a bale, a sheet, or a block, which comprises less than about 45%, 40%, 35%, 25%, 15%, 10%, 5%, or 2% of water (water content). Water content (% moisture) of pulp is measured using an Ohaus MB45 moisture balance, or an equivalent instrument, set to a drying temperature of 130°C, with moisture
5 determined after the weight changes less than 1mg in 60 seconds (A60 hold time). The unit of once-fired non-wood pulp may then be placed into a repulping unit to be repulped (also called reslushed or rewetted). The repulped non-wood fibers may then be further refined or may be sent directly to a headbox. As referenced above, the reslushed non-wood fibers will likely be stiffer (versus like fibers that were never-dried) due to hornification.

10 Another benefit of using once-dried fibers instead of never-dried fibers is that once-dried fibers bond less during the paper-making process and are thus less connected, which results in a softer sanitary tissue product, which allows the sanitary tissue product to be more cloth-like and more desirable. For instance, once-dried fibers of the present disclosure may have a breaking
15 length of less than about 2700 m, less than about 2000 m, less than about 1700 m, less than about 1600 m, less than about 1400 m, less than about 1250 m, less than about 1100 m, less than about 900 m, less than about 750 m, or less than about 450 m, while never-dried fibers tend to have higher breaking lengths, such as greater than about 2700 m, greater than about 2800 m, greater than about 3000 m, greater than about 3200 m, or greater than about 3500 m, specifically reciting
20 all 1 m increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Further, once-dried fibers of the present disclosure may have a breaking length ratio (which is the breaking length (m) according to the Breaking Length Test Method divided by the length weighted fiber length (microns) according to the Fiber Length, Width, Coarseness, and
25 Fiber Count Test Method) of less than about 3.25 m/micron, less than about 2.7 m/micron, less than about 2.5 m/micron, less than about 2.0 m/micron, less than about 1.8 m/micron, less than about 1.6 m/micron, less than about 1.5 m/micron, less than about 1.0 m/micron, less than about 0.6 m/micron, or less than about 0.5 m/micron, while never-dried fibers tend to have higher breaking length ratios, such as greater than about 3.0 m/micron, greater than about 3.5 m/micron, greater than about 4.0 m/micron, greater than about 5.0 m/micron, or greater than about 6.0
30 m/micron, specifically reciting all 0.1 m/micron increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

In light of the paragraphs of this Section (Once-dried Non-wood Fibers), a desirable process for making sanitary tissue products of the present disclosure may comprise: re-slushing

pulp comprising non-wood fibers prior to sending the pulp to a headbox; forming a web comprising the non-wood fibers; creating zones of differential densities in the web; and creping the web. The once-dried non-wood pulp may be introduced into a repulping unit prior to the step of re-slushing the pulp. The once-dried non-wood pulp comprises non-wood fibers

5 having a water content of less than about 10%, 20%, or 40%. The once-dried non-wood pulp may be in the form of a bale, a sheet, or a block. The non-wood fibers may be selected from the group consisting of bamboo, abaca, and mixtures thereof. The web may be treated with permanent or temporary wet strength. This process of making sanitary tissue products of the present disclosure may further include harvesting non-wood fibers and pulping the non-wood fibers and drying the

10 non-wood fibers. The non-wood fibers may be dried (using, for example a pulp drier (e.g., from Andritz, Valmet, etc.)) at a facility other than a destination paper-making facility (i.e., where the pulp will be used to make the sanitary tissue products, including paper towels, toilet tissue, and/or facial tissue. The dried non-wood fibers may then be shipped to a destination paper-making facility. The shipping distance may be greater than: about 25, about 50, about 75, about

15 100, about 200, about 500, about 1,000 miles to reach the destination paper-making facility. In some instances, the dried non-wood fibers may be shipped as far as from Asia (e.g., China) to North America (e.g., US).

STRUCTURES OF THE PRESENT DISCLOSURE

20 “Fiber” as used herein means an elongate physical structure having an apparent length greatly exceeding its apparent diameter, i.e., a length to diameter ratio of at least about 10. Fibers having a non-circular cross-section and/or tubular shape are common; the “diameter” in this case may be considered to be the diameter of a circle having cross-sectional area equal to the cross-sectional area of the fiber. More specifically, as used herein, “fiber” refers to fibrous structure-

25 making fibers. The present disclosure contemplates the use of a variety of fibrous structure-making fibers, such as, for example, naturally-occurring fibers (wood and non-wood), synthetic (human-made) fibers, and/or any other suitable fibers, and any combination thereof.

“Fibrous structure” as used herein means a structure that comprises a plurality of fibers. In one example, a fibrous structure according to the present disclosure means an orderly arrangement

30 of fibers within a structure in order to perform a function. A bag of loose fibers is not a fibrous structure in accordance with the present disclosure. The terms “web,” “fibrous web,” “embryonic web,” and “embryonic fibrous web” are used to describe the web that is in the process of becoming

the fibrous structure. Further, fibrous structures may be rolled, interleaved, perforated, and/or packaged to form final product(s), such as a sanitary tissue product.

“Non-woven fibrous structure” as used herein means a fibrous structure wherein fibers forming the fibrous structure are not orderly arranged by weaving and/or knitting the fibers together. In other words, non-woven fibrous structures do not include textiles, garments, and/or apparel. The non-woven fibrous structures of the present disclosure are disposable (i.e., typically thrown away after one or two uses—unlike clothes, rags, cloths, etc.).

“Ply” or “Plies” as used herein means an individual fibrous structure optionally to be disposed in a substantially contiguous, face-to-face relationship with other plies, forming a multiple ply fibrous structure. It is also contemplated that a single fibrous structure can effectively form two “plies” or multiple “plies”, for example, by being folded on itself. A ply may comprise multiple layers. Multiple plies may, for example be formed as follows: fibrous structure of the present disclosure may be combined with one or more additional fibrous structures, which is the same or different from the fibrous structures of the present disclosure to form a multi-ply sanitary tissue product; said additional fibrous structure may be combined with the fibrous structure of the present disclosure by any suitable means.

“Sanitary tissue product” as used herein means a soft, low density (i.e., $< \text{about } 0.25 \text{ g/cm}^3$) fibrous structure useful as a wiping implement for post-urinary and post-bowel movement cleaning (toilet tissue), for otorhinolaryngological discharges (facial tissue), and multi-functional absorbent and cleaning uses (absorbent towels and napkins). The sanitary tissue product may be convolutedly wound upon itself about a core or without a core to form a roll of sanitary tissue product. Further, the fibrous structure making up the sanitary tissue product may be perforated to form interconnected sheets. Sanitary tissue products may consist of fibers having an average length of less than about 1 inch; further sanitary tissue products may not comprise any fibers (or filaments) having a length greater than 1 inch. Sanitary tissue products may be formed according to a wet-laid process as illustrated in FIGS. 6A-C.

“Clothlike” as used herein relates to the feel of the non-woven fibrous structure to a consumer, the appearance of the non-woven fibrous structure to a consumer, and/or the performance (e.g., absorbency, strength, durability, etc.) of the non-woven fibrous structure during use by a consumer.

“Lint” as used herein means any material that originated from a fibrous structure according to the present disclosure that remains on a surface after which the fibrous structure and/or sanitary tissue product has come into contact. The lint value of a fibrous structure and/or sanitary tissue

product comprising such fibrous structure is determined according to the Lint Test Method described herein.

“Differential density,” as used herein, means a fibrous structure and/or sanitary tissue product that comprises one or more regions of relatively low fiber density, which are referred to as pillow regions, and one or more regions of relatively high fiber density, which are referred to as knuckle regions. In one example, a fibrous structure of the present disclosure comprises a surface comprising a surface pattern comprising a continuous knuckle region and a plurality of discrete pillow regions that exhibit different densities, for example, one or more of the discrete pillow regions may exhibit a density that is different (e.g., 30% different) than the density of the continuous knuckle region.

“Densified,” as used herein means a portion of a fibrous structure and/or sanitary tissue product that is characterized by regions of relatively high fiber density (knuckle regions).

“Non-densified,” as used herein, means a portion of a fibrous structure and/or sanitary tissue product that exhibits a lesser density (one or more regions of relatively lower fiber density) (pillow regions) than another portion (for example a knuckle region) of the fibrous structure and/or sanitary tissue product.

“Dry fibrous structure” as used herein means that the fibrous structure exhibits a water content (% moisture) of less than 20% and/or less than 15% and/or less than 10% and/or less than 7% and/or less than 5% and/or less than 3% and/or less than 1% to 0% and or to greater than 0%. Water content (% moisture) of a fibrous structure is measured using an Ohaus MB45 moisture balance, or an equivalent instrument, set to a drying temperature of 130°C, with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time). Dry fibrous structures of the present disclosure may exhibit a water content (% moisture) of from about 0.0001% to about 20% and/or from about 0.001% to about 15% and/or from about 0.001% to about 12% and/or from about 0.001% to about 10% and/or from about 0.001% to about 7% and/or from about 0.001% to about 5%, by weight of the dry fibrous structure.

“Stacked product(s)” as used herein include fibrous structures, paper, and sanitary tissue products that are in the form of a web and cut into distinct separate sheets, where the sheets are folded (e.g., z-folded or c-folded) and may be interleaved with each other, such that a trailing edge of one is connected with a leading edge of another. Common examples of stacks of folded and/or interleaved sheets include facial tissues and napkins.

“Percent (%) difference,” “X% difference,” or “X% different” is calculated by: subtracting the lower value (e.g., common intensive property value) from the higher value (e.g., common

intensive property value) and then dividing that value by the average of the lower and higher values, and then multiplying the result by 100.

“Within X%” or “within X percent” is calculated by the following non-limiting example: If first and second sanitary tissue products have a common intensive property (e.g., lint), and if a second lint value of the second sanitary tissue product is 10, then “within 25%” of the second lint value is calculated as follows for this example: multiplying 10 (the second lint value) by 25%, which equals 2.5, and then adding 2.5 to 10 (the second lint value) and subtracting 2.5 from 10 (the second lint value) to get a range, so that “within 25%” of the second lint value for this example means a lint value of or between 12.5 and 7.5). The absolute value of “X% change” can be used to determine if “within X%” is satisfied; for example can also be determined by using the absolute For example, if “X% change” is -25%, then a “within 25%” is satisfied, but if “X% change” is -25%, a “within 20%” is not satisfied.

“Percent (%) change,” “X% change,” or “X% change” is calculated by: subtracting the reference value (e.g., common intensive property value of a sustainable sanitary tissue product) from the comparative value (e.g., common intensive property value of a sanitary tissue product) and then dividing by the reference value, and then multiplying the result by 100. For example, if a reference value is 18 (e.g., a basis weight of a sustainable sanitary tissue product) and the comparative value is 31 (e.g., a basis weight of a soft sanitary tissue product), then 18 should be subtracted from 31, which equals 13, which should be divided by 18, which equals 0.722, which should be multiplied by 100, which equals 72.2% change.

Fibrous structures of the present disclosure may be used to make sanitary tissue products, including paper towels, bath tissues, napkins, and facial tissues. The fibrous structures can be single-ply or multi-ply and may comprise cellulosic pulp fibers.

Fibrous structures of the present disclosure may be selected from the group consisting of: through-air-dried fibrous structures, differential density fibrous structures, differential basis weight fibrous structures, wet laid fibrous structures, air laid fibrous structures, conventional dried fibrous structures, creped or uncreped fibrous structures, patterned-densified or non-patterned-densified fibrous structures, compacted or uncompacted, especially high bulk uncompacted, fibrous structures, other nonwoven fibrous structures comprising synthetic or multicomponent fibers, homogeneous or multilayered fibrous structures, double re-creped fibrous structures, uncreped fibrous structures, co-form fibrous structures and combinations thereof.

As shown in FIGS. 3A-3C, fibrous structures and/or sanitary tissue products of the present disclosure may comprise a surface that comprises undulations (e.g., knuckles 20 and pillows 22)

and/or embossments (e.g., 32, 34). FIGS. 16A and 16B illustrate embossments 32 (where each line and dot illustrated in FIGS. 16A and 16B is an embossment) that may be desirable for use with fibrous structures 10 of the present disclosure.

5 Fibrous structures of the present disclosure may be air laid and may be selected from the group consisting of thermal bonded air laid (TBAL) fibrous structures, latex bonded air laid (LBAL) fibrous structures and mixed bonded air laid (MBAL) fibrous structures.

10 Fibrous structures of the present disclosure may exhibit a substantially uniform density or may exhibit differential density regions; in other words, regions of high density compared to other regions within the patterned fibrous structure. Typically, when a fibrous structure is not pressed against a cylindrical dryer, such as a Yankee dryer, while the fibrous structure is still wet and supported by a through-air-drying fabric or by another fabric or when an air laid fibrous structure is not spot bonded, the fibrous structure typically exhibits a substantially uniform density. Differential density regions may contribute to the softness of the fibrous structures of the present disclosure (especially when compared to conventional wet press). As a particular example, the
15 fibrous structures of the present disclosure may comprise knuckles and pillows, which can contribute to softness. Softness may be further enhanced when pillows are disposed on a consumer-facing surface of the fibrous structure, such as a consumer-facing surface of a sanitary tissue product.

20 As shown in FIGS. 4A, C, and E, fibrous structures of the present disclosure may comprise knuckles 20 and pillows 22, which is one way of achieving differential density. FIG. 5 shows a portion of the pattern on the mask 14 used to make a papermaking belt (not particularly shown, but of the type shown in FIG. 17) that is capable of making the sanitary tissue 12 shown in FIG. 3A. The sanitary tissue 12 of FIG. 3A exhibits a pattern of knuckles 20 and pillows 22 that were formed by discrete cured resin knuckles 20 on a papermaking belt, and which correspond to the white
25 areas, *i.e.*, the cells 24, of the mask 14 shown in FIG. 5.

As depicted in the exemplary fibrous structure shown in FIG. 3A, and more clearly depicted through the masks shown in FIG. 5, the fibrous structures of the present disclosure may have a pattern of discrete knuckles and a continuous/substantially continuous pillow region. However, in other examples the fibrous structures may also have a pattern of discrete pillows and a
30 continuous/substantially continuous knuckle regions.

As shown in FIGS. 4A-F, the fibrous structure may have first and second consumer-facing sides 50. It may be desirable that pillow regions face outwardly, indicated by directional arrow 51, such that the user of the fibrous structure feels the pillows with their skin. It should be understood,

that depending on the type of process used to make the fibrous structure, for multi-ply fibrous structures, the consumer-facing side may be the either fabric-side-out (“FSO”) or wire-side-out (WSO). For typical TAD, such as illustrated in FIG. 6A, “fabric side” means the side that touches the TAD fabric (164) and “wire side” means the side that touches the forming wire/forming fabric (154); for UCTAD, such as illustrated in FIG. 6B, “sides” are determined in the TAD section, where the “fabric” side touches the TAD fabric (164) and the “air” side does not. For a process like the one illustrated by FIG. 6A, the relevance of whether the consumer-facing side of the fibrous structure is wire side (WSO) or is fabric side (FSO) is whether a flatter surface (non-pillow-facing-outward surface) is desired, or whether a pillow-facing-outward surface is desired. When pillows face outwardly, TS7 values decrease (versus when knuckles are on the consumer-facing surface).

The fibrous structures of the present disclosure may be pattern densified. A pattern densified fibrous structure is characterized by having a relatively high-bulk field of relatively low fiber density and an array of densified zones (regions) of relatively high fiber density. The high-bulk field is alternatively characterized as a field of pillow zones (regions). The densified zones (regions) are alternatively referred to as knuckle zones (regions). The densified zones (regions) may be discretely spaced within the high-bulk field or may be interconnected, either fully or partially, within the high-bulk field.

The fibrous structures of the present disclosure may be uncompacted, non-pattern-densified. The fibrous structure may be of a homogenous or multi-layered construction. The fibrous structure may be made with a fibrous furnish that produces a single layer embryonic fibrous web or a fibrous furnish that produces a multi-layer embryonic fibrous web.

The fibrous structures of the present disclosure may comprise any suitable ingredients known in the art. Nonlimiting examples of suitable ingredients that may be included in the fibrous structures include permanent and/or temporary wet strength resins, dry strength resins (e.g., Carboxy Methyl Cellulose (CMC)), softening agents, wetting agents, lint resisting agents, absorbency-enhancing agents, immobilizing agents, especially in combination with emollient lotion compositions, antiviral agents including organic acids, antibacterial agents, polyol polyesters, antimigration agents, polyhydroxy plasticizers, opacifying agents, bonding agents, debonding agents, colorants, and mixtures thereof. Such ingredients, when present in the fibrous structure of the present disclosure, may be present at any level based on the dry weight of the fibrous structure. Such ingredients, when present, may be present at a level of from about 0.001 to about 50%, and/or from about 0.001 to about 20%, and/or from about 0.01 to about 5%, and/or from about 0.03 to about 3%, and/or from about 0.1 to about 1.0% by weight, on a dry fibrous

structure basis. It may be desirable to use one or a combination of said suitable ingredients on a fibrous structure comprising non-wood fibers, such as, for example, certain lotion(s) on a fibrous structures comprising bamboo, where the lotion improves softness or at least improves the perception of softness and may further decrease lint.

5

Non-wood Fibers

As used herein the term “non-wood fiber(s)” or “non-wood content” means naturally-occurring fibers derived from non-wood plants, including animal fibers, mineral fibers, plant fibers and mixtures thereof, and specifically excluding non-naturally-occurring fibers (e.g., synthetic fibers). Animal fibers may, for example, be selected from the group consisting of: wool, silk and other naturally-occurring protein fibers and mixtures thereof. The plant fibers may, for example, be obtained directly from a plant. Nonlimiting examples of suitable plants include cotton, cotton linters, flax, sisal, abaca, hemp, hesperaloe, jute, bamboo, bagasse, kudzu, corn, sorghum, gourd, agave, loofah, trichomes, seed-hairs, wheat, and mixtures thereof.

Non-wood fibers of the present disclosure may be derived from one or more non-wood plants of the family Asparagaceae. Suitable non-wood plants may include, but are limited to, one or more plants of the genus *Agave* such as *A. tequilana*, *A. sisalana* and *A. fourcroyde*, and one or more plants of the genus *Hesperaloe* such as *H. funifera*, *H. parviflora*, *H. nocturna*, *H. Changi*, *H. tenuifolia*, *H. engelmannii*, and *H. malacophylla*. Further, the non-wood fibers of the present disclosure may be prepared from one or more plants of the of the genus *Hesperaloe* such as *H. funifera*, *H. parviflora*, *H. nocturna*, *H. chiangii*, *H. tenuifolia*, *H. engelmannii*, and *H. malacophylla*.

As used herein the term “wood fiber(s)” or “wood content” means fibers derived from both deciduous trees (hereinafter, also referred to as “hardwood”) and coniferous trees (hereinafter, also referred to as “softwood”) may be utilized. Wood fibers may be short (typical of hardwood fibers) or long (typical of softwood fibers). Nonlimiting examples of short fibers include fibers derived from a fiber source selected from the group consisting of *Acacia*, *Eucalyptus*, *Maple*, *Oak*, *Aspen*, *Birch*, *Cottonwood*, *Alder*, *Ash*, *Cherry*, *Elm*, *Hickory*, *Poplar*, *Gum*, *Walnut*, *Locust*, *Sycamore*, *Beech*, *Catalpa*, *Sassafras*, *Gmelina*, *Albizia*, *Anthocephalus*, and *Magnolia*. Nonlimiting examples of long fibers include fibers derived from *Pine*, *Spruce*, *Fir*, *Tamarack*, *Hemlock*, *Cypress*, and *Cedar*.

As used herein the term “synthetic fiber(s)” or “synthetic content” means fibers human-made fibers, and specifically excludes “wood fibers” and “non-wood fibers.” Synthetic fibers can

be used, in combination with non-wood fibers (e.g., bamboo) in the fibrous structures of the present disclosure. Synthetic fibers may be polymeric fibers. Synthetic fibers may comprise elastomeric polymers, polypropylene, polyethylene, polyester, polyolefin, polyvinyl alcohol and nylon, which are obtained from petroleum sources. Additionally, synthetic fibers may be polymeric fibers comprising natural polymers, which are obtained from natural sources, such as starch sources, protein sources and/or cellulose sources may be used in the fibrous structures of the present disclosure. The synthetic fibers may be produced by any suitable methods known in the art.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 35% about 40%, about 50%, about 75%, about 80%, or about 100% non-wood content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 55% to about 95%, from about 65% to about 85%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% non-wood content (e.g., bamboo, abaca, hemp, etc.), specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Bamboo

Generally, the “bamboo,” “bamboo fibers,” “bamboo content,” or “bamboo fiber content” incorporated into fibrous structure(s) of the present disclosure are fibrous materials derived from any bamboo species. More particularly, the bamboo fiber species may be selected from the group consisting of: *Acidosasa* sp., *Ampleocalamus* sp., *Arundinaria* sp., *Bambusa* sp., *Bashania* sp., *Borinda* sp., *Brachystachyum* sp., *Cephalostachyum* sp., *Chimonobambusa* sp., *Chusquea* sp., *Dendrocalamus* sp., *Dinochloa* sp., *Drepanostachyum* sp., *Eremitis* sp., *Fargesia* sp., *Gaoligongshania* sp., *Gelidocalamus* sp., *Gigantocloa* sp., *Guadua* sp., *Hibanobambusa* sp., *Himalayacalamus* sp., *Indocalamus* sp., *Indosasa* sp., *Luhachne* sp., *Melocanna* sp., *Menstruocalamus* sp., *Nastus* sp., *Neohouzeaua* sp., *Neomicrocalamus* sp., *Ochlandra* sp., *Oligostachyum* sp., *Olmecea* sp., *Otatea* sp., *Oxytenanthera* sp., *Phyllostachys* sp., *Pleiolblastus* sp., *Pseudosasa* sp., *Raddia* sp., *Rhipidocladum* sp., *Sasa* sp., *Sasaella* sp., *Sasamorpha* sp., *Schizostachyum* sp., *Semiarundinaria* sp., *Shibatea* sp., *Sinobambusa* sp., *Thamnocalamus* sp., *Thyrsostachys* sp., *Yushania* sp. and mixtures thereof.

The bamboo fibers may be from temperate bamboos of the *Phyllostachys* species, for example *Phyllostachys heterocycla pubescens*, also known as Moso Bamboo. However, it is to be understood that the compositions disclosed herein, unless otherwise stated, are not limited to containing any one bamboo fiber and may comprise a plurality of fibers of different species. For example, the composition may comprise a bamboo from a *Phyllostachys heterocycla pubescens* and a bamboo from a different species such as, for example, *Phyllostachys bambusoides*.

Bamboo fibers for use in the webs, fibrous structures, and products of the present disclosure may be produced by any appropriate methods known in the art. The bamboo fibers may be pulped bamboo fibers, produced by chemical processing of crushed bamboo stalk. The chemical processing may comprise treating the crushed bamboo stalk with an appropriate alkaline solution. The skilled artisan will be capable of selecting an appropriate alkaline solution. Bamboo fiber may also be produced by mechanical processing of crushed bamboo stalk, which may involve enzymatic digestion of the crushed bamboo stalk. Although bamboo fiber may be produced by any appropriate methods known in the art, a desirable method for manufacturing the bamboo pulp may be as a chemical pulping method such as, but not limited to, kraft, sulfite or soda/AQ pulping techniques.

Bamboo fibers of the present disclosure may be bamboo pulp fibers and may have an average fiber length of at least about 0.8 mm. When blends of fibers from various bamboo species are employed, it is noted that blends may comprise two or more species of bamboo, or may comprise three or more species of bamboo, such that the average fiber length is at least about 1.1 mm, at least about 1.5 mm, or from about 1.1 to about 2 mm. Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 35%, about 40%, about 50%, about 75%, about 80%, or about 100% bamboo content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% bamboo content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Bamboo fibers may be more desirable to use than other non-wood fibers, such as various straws (e.g., wheat straw) for multiple reasons, one being that bamboo fibers are generally longer than straw fibers, which results in fibrous structures comprising bamboo fibers being stronger

(without using strength enhancing chemistry or process manipulations) than like fibrous structures comprising shorter straw fibers.

Abaca

5 Generally, the “abaca,” “abaca fibers,” “abaca content,” or “abaca fiber content” incorporated into fibrous structure(s) of the present disclosure are fibrous materials derived from *Musa textilis* (a species of banana native to the Philippines). Abaca may also be referred to as Manilla hemp, Cebu hemp, Davao hemp, Banana hemp or Musa hemp and can be used to derive abaca cellulose fibers.

10 Abaca may have a fiber coarseness of greater than 16 mg/100 m (or less than 20 mg/100 m) and a fiber length of 2.5 mm, 2.6 mm, 2.7 mm, 2.8 mm or more. Beyond abaca, sunn hemp, kenaf, and sisal hemp may have these characteristics.

 Abaca comprises characteristics that can make it challenging (especially at higher incorporation levels) for incorporating into sanitary tissue products of the present invention as it
15 is better known for being used to produce thin, strong, and porous paper capable of withstanding hard use.

 Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about
20 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% abaca content,
25 specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

 Abaca fibers may be more desirable to use than other non-wood fibers, such as various straws (e.g., wheat straw) for multiple reasons, one being that abaca fibers are generally longer than straw fibers, which results in fibrous structures comprising abaca fibers being stronger
30 (without using strength enhancing chemistry or process manipulations) than like fibrous structures comprising shorter straw fibers. Further, abaca’s length, width, and coarseness make it a more suitable softwood replacement, its higher fibrillation increases specific surface area of the fiber and its carboxyl groups make it better for attaching strength chemistries.

Hemp

Generally, the “hemp,” “hemp fibers,” “hemp content,” or “hemp fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of hemp cellulose fibers derived from the plants cannabis sativa or cannabis sativa indica. The hemp cellulose fibers may be processed to a particulate fiber pulp.

Hemp cellulose fibers may be derived from one or more of the plant sources cannabis, cannabis sativa, cannabis sativa indica, Agave Sisalana (i.e., Sisal hemp).

Cannabis is a genus of flowering plants that includes three different species, Cannabis sativa, Cannabis indica, and Cannabis ruderalis. The cannabis stalk (or stem) consists of an open cavity surrounded by an inner layer of core fiber, often referred to as hurd, and an outer layer referred to as the bast. Bast fibers are roughly 20% of the stalk mass and the hurd 80% of the mass. Cannabis bast fibers have a large range in length and diameter, but on average are very long with medium coarseness; suitable for making textiles, paper, and nonwovens. The hurd consists of very short, bulky fibers, typically 0.2-0.65 mm in length.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% hemp content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Bagasse

Generally, the “bagasse,” “bagasse fibers,” “bagasse content,” or “bagasse fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of “sugar cane bagasse” - the dry pulpy residue left after the extraction of juice from sugar cane or sorghum stalks to extract their juice. Agave bagasse is similar, but is the material remnants after extracting blue agave sap.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% bagasse content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Flax

Generally, the “flax,” “flax fibers,” “flax content,” or “flax fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of *Linum usitatissimum*, in the family Linaceae. Flax fiber is extracted from the bast beneath the surface of the stem of the flax plant.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% flax content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Cotton

Generally, the “cotton,” “cotton fibers,” “cotton content,” or “cotton fiber content” incorporated into fibrous structure(s) of the present disclosure may be made up of cotton linters, which are fine, silky fibers that adhere to the seeds of the cotton plant after ginning. These curly fibers typically are less than 1/8 inch (3.2 mm) long. The term also may apply to the longer textile fiber staple lint, as well as the shorter fuzzy fibers from some upland species.

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure may comprise at least about 5%, about 10%, about 15%, about 20%, about 30%, about 40%, about 50%, about 75%, about 80%, or about 100% abaca content, or from about 5% to about 15%, from about 10% to about 30%, from about 20% to about 40%, from about 30% to about 50%, from about 40% to about 60%, from about 50% to about 70%, from about 60% to about 80%, from about 70% to about 90%, from about 80% to about 100%, from about 90% to about 100%, from about 95% to about 100%, or from about 97.5% to about 100% cotton content, specifically reciting all 0.1% increments within the above-recited ranges of this paragraph and all ranges formed therein or thereby.

Morphology

Because non-wood fibers can have high coarseness, they may have poor surface feel and might not mold very well, thus may not have desirable caliper and bulk. Part of this dynamic is that certain non-woods, like bamboo, for instance, is often wider than the wood fibers it is used to replace. Further, bamboo also has a smaller lumen and thicker cell wall versus woods of same fiber width (i.e., a higher Runkel Ratio (i.e., ratio of twice the cell wall thickness to the diameter of the lumen), even greater than 1.0), so non-wood (e.g., bamboo) fibers can behave more stiffly, especially when using wood fiber knowledge. For these reasons, it may be desirable to spread apart knuckles and/or increase molding forces (pick-up shoe (molding vacuum)) and/or increase speed differential at transfer. With these differences, if nothing is done (i.e., if no adjustments are made for incorporating non-woods), caliper drops, and/or roll bulk drops, and/or the sheet is less compressible, and/or the sheet get stiffer (in-plane and/or bending).

Layers

As shown in FIGS. 4A-4F, and as described in FIGS. 18B-1, 18B-2, and 19, a ply of fibrous structures of the present disclosure may be homogeneous or may be layered. If layered, a ply of the fibrous structures may comprise at least two, at least three, least four, and/or at least five layers. The fibrous structures may comprise a single ply, or two, three plies, four, or five plies.

As used herein, the term "layer" means a plurality of strata of fibers, chemical treatments, or the like, within a ply. As used herein, the terms "layered," "multi-layered," and the like, refer to fibrous sheets prepared from two or more layers of aqueous papermaking furnish which may be

comprised of different fiber types. The layers may be formed from the deposition of separate streams of dilute fiber slurries, upon one or more endless foraminous screens. If the individual layers are initially formed on separate foraminous screens, the layers may be subsequently combined (while wet) to form a layered composite web. Naturally-occurring (e.g., wood and certain non-woods) and/or non-naturally (e.g., synthetic) occurring fibers can also be present in the fibrous structures, as will be disclosed in greater detail below. FIG. 4A illustrates a first ply 53 and a second ply 53 of a fibrous structure 10. Each of the plies may comprise 2 layers 55. The plies may be joined together 57 via adhesive, an emboss, or the like. The pillows 22 may face outwardly 51 toward the consumer-facing side 50 of the fibrous structure 10. Knuckles 20 may face inwardly toward the product-facing side 52 of the fibrous structure 10, which is more commonly associated with process and equipment such as disclosed in FIG. 6A. As illustrated in FIG. 4A, both plies 53 are FSO. FIG. 4B is similar to FIG. 4A, except that the fibrous structure 10 does not have distinct knuckle 20 and pillow 22 regions or zones, which is more commonly associated with process and equipment such as disclosed in FIGS. 6A and 6B. FIGS. 4B and 4C are much like FIGS. 4A and 4B, respectively, except that each ply comprises 3 layers 55. FIG. 4E illustrates a single ply comprising 3 layers and is representative of a fibrous structure resulting from process and equipment such as disclosed in FIGS. 6B and 6C; as such, the fibrous structure 10 does not have distinct knuckle 20 and pillow 22 regions or zones. FIG. 4F is like FIG. 4A, except that it comprises 3 plies and, ply 53''' is FSO and has outwardly-facing 51 pillows 22, while ply 53 is WSO and has outwardly-facing 51 knuckles. FIG. 4F may, alternatively, have both plies 53 and 53''' FSO or both plies WSO; and both plies 53 and 53''' may have outwardly-facing 51 pillows 22 or both plies may have outwardly-facing 51 knuckles 20 - these FSO/WSO alternatives and pillow/knuckle alternatives are also true for FIG. 4A and 4C.

It may be desirable to dispose the highest fiber count (million fibers/g) in a most consumer-facing layer of a ply comprising non-wood fibers. A higher fiber count (versus other layer(s) in a ply) may be done in combination with outwardly facing pillows of a consumer-facing side of a fibrous structure of a sanitary tissue product. The outwardly-facing pillow region of a layer (e.g., 55a) may comprise a higher fiber count than an adjacent region of an adjacent layer (e.g., 55b). Further, a pillow may have a greater basis weight than an adjacent knuckle. Alternatively, a knuckle may have a greater basis weight than an adjacent pillow.

PROPERTIES OF FIBROUS STRUCTURE(S)

Fibrous structure(s), web(s) that form the fibrous structure(s), layer(s) of a fibrous structure(s) (including at least one of or each of a first and a second layer of a ply), and/or sheet(s) of a fibrous structure(s) as disclosed herein, particularly including various inventive non-wood inclusions, even including greater than 80% non-woods by weight of the fibrous structure, and even including 100% non-woods by weight of the fibrous structure, may have one or a combination of the following properties: a VFS of greater than about 5.5 g/g, greater than about 6.0 g/g, greater than about 7.0 g/g, from about 3 g/g to about 20 g/g, from about 4 g/g to about 18 g/g, from about 5 g/g to about 16 g/g, from about 6 g/g to about 14 g/g, from about 8 g/g to about 12 g/g, or from about 5 g/g to about 6 g/g, specifically reciting all increments of 0.01 g/g within the above-recited ranges and all ranges formed therein or thereby;

an HFS of greater than about 13 g/g, or greater than about 14 g/g, or greater than about 15 g/g, or greater than about 16 g/g, or greater than about 16.5 g/g, or greater than about 17 g/g, or greater than about 17.5 g/g, or greater than about 18 g/g, or greater than about 18.5 g/g or greater than about 19 g/g, or greater than about 20 g/g, or greater than about 21 g/g, or from about 4 g/g to about 30 g/g, from about 6 g/g to about 28 g/g, from about 8 g/g to about 26 g/g, from about 10 g/g to about 24 g/g, from about 12 g/g to about 22 g/g, from about 13 g/g to about 20, from about 14 g/g to about 18 g/g, from about 13 g/g to about 15 g/g, or from about 13 g/g to about 14 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a stack compressibility of greater than about 40 mils/(log(g/in²)), greater than about 41 mils/(log(g/in²)), greater than about 45 mils/(log(g/in²)), greater than about 50 mils/(log(g/in²)), from about 25 mils/(log(g/in²)) to about 100 mils/(log(g/in²)), from about 30 mils/(log(g/in²)) to about 75 mils/(log(g/in²)), from about 40 mils/(log(g/in²)) to about 50 mils/(log(g/in²)), from about 41 mils/(log(g/in²)) to about 48, or from about mils/(log(g/in²)) to about 48 mils/(log(g/in²)), specifically reciting all increments of 0.1 mils/(log(g/in²)) within the above-recited ranges and all ranges formed therein or thereby;

an MD wet peak elongation of greater than about 18%, greater than about 20%, from about 10% to about 30%, from about 14% to about 25%, from about 18% to about 22%, or from about 18% to about 20%, specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed therein or thereby;

a CD wet peak elongation of greater than about 12%, from about 5% to about 30%, from about 10% to about 25%, from about 12% to about 20%, or from about 12% to about 15%,

specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed therein or thereby;

an MD wet peak TEA of greater than about 21 g*in/in², greater than about 22 g*in/in², from about 15 g*in/in² to about 50 g*in/in², from about 20 g*in/in² to about 40 g*in/in², from about 21
5 g*in/in² to about 30 g*in/in², or from about 21 g*in/in² to about 25 g*in/in², specifically reciting all increments of 1 g*in/in² within the above-recited ranges and all ranges formed therein or thereby;

a CD wet peak TEA of greater than about 7 g*in/in², from about 6 g*in/in² to about 40 g*in/in², from about 6.5 g*in/in² to about 30 g*in/in², from about 7 g*in/in² to about 20 g*in/in²,
10 or from about 7.5 g*in/in² to about 15 g*in/in², or from about 8 g*in/in² to about 12 g*in/in², specifically reciting all increments of 0.5 g*in/in² within the above-recited ranges and all ranges formed therein or thereby;

a CD elongation (dry) of greater than about 5%, of greater than about 8%, of greater than about 12%, of greater than about 13.5%, or from about 5% to about 25%, from about 10% to about
15 20%, from about 12 % to about 18%, from about 13% to about 17%, or from about 14% to about 16%, specifically reciting all increments of 0.5% within the above-recited ranges and all ranges formed therein or thereby;

a CD TEA of greater than about 35 in-g/in², of greater than about 32 in-g/in², or from about 5 in-g/in² to about 100 in-g/in², from about 15 in-g/in² to about 75 in-g/in², from about 25 in-g/in²
20 to about 50 in-g/in², from about 32 in-g/in² to about 45 in-g/in², from about 33 in-g/in² to about 40 in-g/in², from about 34 in-g/in² to about 38 in-g/in², specifically reciting all increments of 1 in-g/in² within the above-recited ranges and all ranges formed therein or thereby;

a dry CD tensile modulus / dry CD tensile peak load (derived from the appropriate of: 1) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper, 2) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels, or 3) Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue) less than about 5.0 g/g, less than about 4.5 g/g, less than about 4.0 g/g, less than about 3.5 g/g, less than about 3.0 g/g, from about 5.0 g/g to about 2.5 g/g, from about 4.0 g/g to about 2.0 g/g, or from about 3.5 g/g to about 1.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a wet CD tensile modulus / wet CD tensile peak load less than about 5.0 g/g, less than about 4.5 g/g, less than about 4.25 g/g, less than about 4.0 g/g, less than about 3.75 g/g, less than about 3.5 g/g, less than about 3.25 g/g, less than about 3.0 g/g, less than about 2.5 g/g, less than about 2

g/g, from about 5.0 g/g to about 2.5 g/g, from about 4.0 g/g to about 2.0 g/g, or from about 3.5 g/g to about 1.5 g/g, specifically reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a CD modulus (dry) of less than about 2000 g/cm, of less than about 2400 g/cm, of less than about 2500 g/cm, of less than about 3270 g/cm, or from about 200 g/cm to about 5000 g/cm, or from about 1000 g/cm to about 4500 g/cm, or from about 2000 g/cm to about 4000 g/cm, or from about 3000 g/cm to about 4000 g/cm, or from about 3270 g/cm to about 3800 g/cm, or from
5 about 3300 g/cm to about 3700 g/cm, or from about 3350 g/cm to about 3600 g/cm, or from about 3400 g/cm to about 3500 g/cm, specifically reciting all increments of 1 g/cm within the above-recited ranges and all ranges formed therein or thereby;

an MD modulus (dry) of less than about 3360 g/cm, or less than about 1750 g/cm or from about 500 g/cm to about 6000 g/cm, or from about 1000 g/cm to about 5000 g/cm, or from about
10 2000 g/cm to about 4000 g/cm, or from about 3000 g/cm to about 4000 g/cm, or from about 3360 g/cm to about 3800 g/cm, or from about 3400 g/cm to about 3700 g/cm, or from about 3450 g/cm to about 3600 g/cm, or from about 3500 g/cm to about 3600 g/cm, specifically reciting all increments of 1 g/cm within the above-recited ranges and all ranges formed therein or thereby;

a TS7 of less than about 40.00 dB V² rms, or less than about 30.00 dB V² rms, or less than
15 about 22.00 dB V² rms, or less than about 20.00 dB V² rms, or less than about 24.00 dB V² rms, or less than about 15.00 dB V² rms, or less than about 14.00 dB V² rms, or less than about 10.00 dB V² rms, or less than about 8.00 dB V² rms, or greater than about 5.00 dB V² rms, or between about 3.00 dB V² rms and about 40.00 dB V² rms (“between about ‘X’ and about ‘X’” is used interchangeably with “from about ‘X’ to about ‘X’”), or between about 3.00 dB V² rms and about
20 20.00 dB V² rms, or between about 4.00 dB V² rms and about 30 dB V² rms, or between about 15.00 dB V² rms and about 30.00 dB V² rms, or between about 5.00 dB V² rms and about 20.00 dB V² rms, or between about 6.00 dB V² rms and about 14 dB V² rms, or between about 7.00 dB V² rms and about 12.00 dB V² rms, or between about 8.00 dB V² rms and about 11.50 dB V² rms, or between about 9.0 dB V² rms and about 11.00 dB V² rms, or between about 9.50 dB V² rms and
25 about 10.50 dB V² rms, between about 9.50 dB V² rms and about 10.00 dB V² rms, between about 15 dB V² rms and about 17 dB V² rms, or between about 15 dB V² rms and about 16 dB V² rms, specifically reciting all increments of 0.01 dB V² rms within the above-recited ranges and all ranges formed therein or thereby;

a compressive slope of less than about 14.0 mil/g, or less than about 3.0 mil/g, or less than
30 about 4.0 mil/g, or less than about 5.0 mil/g, or less than about 6.0 mil/g, or less than about 7.0

mil/g, or less than about 8.0 mil/g, or less than about 9.0 mil/g, or greater than about 12.0 mil/g 8,
or greater than about 11.0 mil/g, or greater than about 12.0 mil/g, or between about 4.0 mil/g and
about 10.0 mil/g, or between about 8.0 mil/g and about 12.0 mil/g, or between about 6 mil/g and
about 14.0 mil/g, or between about 8.0 mil/g and about 14 mil/g, or between about 7.5 mil/g and
5 about 11 mil/g, or between about 12.0 mil/g and about 3.0 mil/g, or between about 11.0 mil/g and
about 5.0 mil/g ,or between about 10.0 mil/g and about 4.0 mil/g, or between about 8.0 mil/g and
about 5.0 mil/g, specifically reciting all increments of 0.01 mil/g within the above-recited ranges
and all ranges formed therein or thereby;

10 a formation index of less than about 170, or less than about 90, or less than about 65, or
greater than about 30, or greater than about 50, or between about 55 and about 165, or between
about 55 and about 85, or between about 60 and about 80, or between about 65 and about 75,
specifically reciting all increments of 0.1 within the above-recited ranges and all ranges formed
therein or thereby;

15 a coverage of less than about 10 fiber layers (making up a layer 55 of a ply 53), or less than
about 9 fiber layers, or less than about 8 fiber layers, or less than about 7 fiber layers, or less than
about 6 fiber layers, or less than about 5 fiber layers, or less than about 4 fiber layers, or greater
than about 2 fiber layers, or greater than about 4.75 fiber layers, or greater than about 5 fiber layers,
or greater than about 5,25 fiber layers, or greater than about 5.5 fiber layers, or greater than about
5.75 fiber layers, or greater than about 6 fiber layers, or greater than about 6.25 fiber layers, or
20 greater than about 6.5 fiber layers, or greater than about 7 fiber layers, or greater than about 7.25
fiber layers, or greater than about 7.5 fiber layers, or greater than about 7.75 fiber layers, or greater
than about 8 fiber layers, or greater than about 8.25 fiber layers, or greater than about 8.5 fiber
layers, or greater than about 9 fiber layers, or between about 2 and about 10 fiber layers, or between
about 4 and about fiber 9 fiber layers, or between about 5 and about fiber 8 fiber layers, or between
25 about 4 and about fiber 7 fiber layers, specifically reciting all increments of 1 fiber layer within the
above-recited ranges and all ranges formed therein or thereby;

a coarseness (according to the Coverage and Fiber Count Test Method) of less than about
0.35 mg/m, or less than about 0.30 mg/m, or less than about 0.25 mg/m, or less than about 0.20
mg/m, or greater than about 0.13 mg/m, or greater than about 0.14 mg/m, or greater than about
30 0.15 mg/m, or greater than about 0.16 mg/m, or greater than about 0.17 mg/m, or between about
0.15 mg/m and about 0.35 mg/m, or between about 0.15 mg/m and about 0.30 mg/m, or between
about 0.16 mg/m and about 1.7 mg/m, or between about 0.15 mg/m and about 0.17 mg/m, or
between about 0.15 mg/m and about 0.20 mg/m, or between about 0.25 mg/m and about 0.26 mg/m,

or between about 0.22 mg/m and about 0.3 mg/m, or between about 0.19 mg/m and about 0.32 mg/m, specifically reciting all increments of 0.01 mg/m within the above-recited ranges and all ranges formed therein or thereby;

5 a lint value of less than about 11, or less than about 10, or less than about 9, or less than about 8, or less than about 7, or less than about 6, or less than about 5, or greater than about 0.5, greater than about 4.1, greater than about 6, or between about 0.5 and about 11, or between about 0.7 and about 11, or between about 7.5 and about 10.5, or between about 4 and about 5.5, or between about 6.3 and about 7.7, or between about 3 and about 10, or between about 4 and about 9, or between about 5 and about 8, or between about 6 and about 8, specifically reciting all
10 increments of 0.01 (Hunter L value) within the above-recited ranges and all ranges formed therein or thereby;

a fiber length of less than about 4 mm, of less than about 3 mm, of less than about 2.3 mm, or less than about 2.2 mm, or less than about 2.1 mm, or less than about 2.0 mm, or less than about 1.9 mm, or less than about 1.5 mm, or less than about 1.4, or greater than about 0.7, or greater than
15 about 1, or greater than about 2 mm or between about 0.6 mm and about 2.4 mm, or between about 0.7 mm and about 2.2 mm, or between about 0.8 mm and about 2 mm, or between 2.5 mm and 3.7 mm, or between about 0.9 mm and about 1.8 mm, or between about 1 mm and about 1.6 mm, or between about 1.1 mm and about 1.5 mm, or between about 1.1 mm and about 1.4 mm, or between about 1.1 mm and about 1.3 mm, specifically reciting all increments of 0.01 mm within the above-
20 recited ranges and all ranges formed therein or thereby;

a fiber width of less than about 31 um, or less than about 28 um, or less than about 25 um, or less than about 22 um, or less than about 20 um, or greater than about 8 um, or between about 7 um and about 32 um, or between about 8 um and about 31 um, or between about 10 um and about 28 um, or between about 12 um and about 26 um, or between about 14 um and about 24 um, or
25 between about 16 um and about 22 um, or between about 22 um and about 27 um, or between about 25 um and about 31 um, or between about 15 um and about 19 um, or between about 18 um and about 20 um, or between about 7.5 um and about 9.5 um, specifically reciting all increments of 0.1 um within the above-recited ranges and all ranges formed therein or thereby;

a fiber length/width ratio (according to the Fiber Length, Width, Coarseness, and Fiber
30 Count Test Method) of less than about 190, or less than about 180, or less than about 170, or less than about 160, or less than about 150, or less than about 140, or less than about 130, or less than about 120, or less than about 110, or less than about 106, or less than about 100, or less than about 75, or less than about 50, or greater than about 40, or between about 190 and about 35, or between

about 185 and about 40, or between about 175 and about 50, or between about 150 and about 75, or between about 125 and about 100, specifically reciting all increments of 1 within the above-recited ranges and all ranges formed therein or thereby;

5 a fiber count (length average) of less than about 30 fibers/g, or less than about 25 fibers/g, or less than about 20 fibers/g, or less than about 16 fibers/g, or less than about 15 fibers/g, or less than about 14 fibers/g, or less than about 13 fibers/g, or less than about 10 fibers/g, or greater than about 3 fibers/g, or between about 2.75 fibers/g and about 5 fibers/g, or between about 3 fibers/g and about 35 fibers/g, or between about 3.5 fibers/g and about 30 fibers/g, or between about 5 fibers/g and about 25 fibers/g, or between about 10 fibers/g and about 20 fibers/g, or between about 10 fibers/g and about 15 fibers/g, specifically reciting all increments of 0.1 fibers/g within the above-recited ranges and all ranges formed therein or thereby;

15 a fiber count (number average) of less than about 30 fibers/g, or less than about 25 fibers/g, or less than about 20 fibers/g, or less than about 16 fibers/g, or less than about 15 fibers/g, or less than about 14 fibers/g, or less than about 13 fibers/g, or less than about 10 fibers/g, or greater than about 3 fibers/g, or greater than about 8.9 fibers/g, or between about 3 fibers/g and about 35 fibers/g, or between about 3.5 fibers/g and about 30 fibers/g, or between about 5 fibers/g and about 25 fibers/g, or between about 10 fibers/g and about 20 fibers/g, or between about 10 fibers/g and about 15 fibers/g, specifically reciting all increments of 0.1 fibers/g within the above-recited ranges and all ranges formed therein or thereby;

20 fiber count-area (C(n)) of greater than about 800 million/m², greater than about 830 million/m², greater than about 850 million/m², greater than about 900 million/m², greater than about 950 million/m², greater than about 1,000 million/m², or less than about 1,050 million/m², less than about 950 million/m², or from about 800 million/m² to about 1,000 million/m², from about 850 million/m² to about 975 million/m², specifically reciting all increments of 1 million/m² within the above-recited ranges and all ranges formed therein or thereby;

30 fiber count-area (C(1)) of greater than about 260 million/m², greater than about 280 million/m², greater than about 300 million/m², greater than about 350 million/m², greater than about 400 million/m², greater than about 450 million/m², greater than about 500 million/m², greater than about 525 million/m², or less than about 530 million/m², less than about 500 million/m², less than about 400 million/m², or from about 260 million/m² to about 530 million/m², from about 260 million/m² to about 400 million/m², from about 260 million/m²

to about 400 million/m², specifically reciting all increments of 1 million/m² within the above-recited ranges and all ranges formed therein or thereby;

a tensile ratio (also called “dry tensile ratio,” see the Dry Elongation, Tensile Strength, TEA and Modulus Test Methods below) of less than about 4.5, or less than about 4, or less than about 3.5, or less than about 3, or less than about 2.5, or less than about 2.1, or less than about 2, or less than about 1.9, or less than about 1.7, or greater than about 0.5, or greater than about 1.3, or greater than about 1.6, or greater than about 2, or greater than about 2.5, or between about 0.4 and about 0.5, or between about 0.5 and about 4.5, or between about 1.1 and about 1.6, or between about 1.25 and about 3, or between about 1.8 and about 2.4, or between about 1 and about 3, or between about 1.2 and about 2.1, or between about 1.5 and about 2, or between about 1.7 and about 2, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby;

an Emtec TS750 of greater than about 10 dB V² rms, or greater than about 20 dB V² rms, or greater than about 40 dB V² rms, or greater than about 47.7 dB V² rms, or greater than about 50 dB V² rms, or greater than about 75 dB V² rms, or less than about 115 dB V² rms, or less than about 20 dB V² rms, or less than about 40 dB V² rms, or less than about 45 dB V² rms, or less than about 60 dB V² rms, or less than about 80 dB V² rms, or between about 10 dB V² rms and about 120 dB V² rms, or between about 14 dB V² rms and about 113 dB V² rms, or between about 14 dB V² rms and about 75 dB V² rms, or between about 50 dB V² rms and about 112 dB V² rms, or between about 15 dB V² rms and about 50 dB V², or between about 16 dB V² rms and about 40 dB V², or between about 20 dB V² rms and about 30 dB V², or between about 25 dB V² rms and about 35 dB V², or between about 40 dB V² rms and about 55 dB V², specifically reciting all increments of 1 dB V² rms within the above-recited ranges and all ranges formed therein or thereby;

a slip stick of greater than about 235, or greater than about 270 greater than about 300, or greater than about 350, or greater than about 400, or greater than about 500, or greater than about 600, or greater than about 700, greater than about 800, or greater than about 900, or less than about 435, or less than about 605, or less than about 1000, or between about 230 and about 1400, or between about 235 and about 435, or between about 235 and about 605, or between about 280 and about 965, or between about 300 and about 800, or between about 350 and about 500, or between about 400 and about 600, specifically reciting all increments of 10 within the above-recited ranges and all ranges formed therein or thereby;

a density of a first zone (a first region) or a pillow zone may be different than a density of a second zone (a second region or a knuckle zone), which is adjacent to the first zone, such that the

density of a second zone (a second region or a knuckle zone) may be 5%, 10%, 15%, 20%, 30%, 40%, 50%, 75%, 100%, 125%, 150%, 175%, or 200% greater than the first zone (first region or pillow zone), specifically reciting all increments of 0.01% within the above-recited ranges and all ranges formed therein or thereby (the Micro-CT Intensive Property Measurement Method can be used to determine density of an area of interest);

a Runkel Ratio of greater than about 1, or greater than about 2, or greater than about 3, or greater than about 5, or greater than about 6, or greater than about 7, or less than about 10, between about 0.5 and about 10, or between about 1 and about 8, or between about 1.5 and about 6.5, specifically reciting all increments of 0.1 within the above-recited ranges and all ranges formed therein or thereby;

a 2.5-160 micron PVD desorption of less than about 1600 mg, or less than about 1550 mg, or less than about 1500 mg, or less than about 1400 mg, or less than about 1300 mg, or less than about 1200 mg, or less than about 1100 mg, or less than about 1000 mg, or less than about 900 mg, or less than about 800 mg, or less than about 700 mg, or less than about 600 mg, or greater than about 550 mg, or between about 550 mg and about 1600 mg, or between about 600 mg and about 1550 mg, or between about 700 mg and about 1550 mg, or between about 825 mg and about 1550 mg, or between about 850 mg and about 1500 mg, or between about 900 mg and about 1400 mg, or between about 1000 mg and about 1200 mg, specifically reciting all increments of 1 mg within the above-recited ranges and all ranges formed therein or thereby;

a 2.5-160 micron PVD absorption of less than about 1200 mg, or less than about 1100 mg, or less than about 1000 mg, or less than about 900 mg, or greater than about 400 mg, or greater than about 800 mg, or greater than about 825 mg, or between about 400 mg and about 1200 mg, or between about 500 mg and about 1200 mg, or between about 600 mg and about 1200 mg, or between about 700 mg and about 1200 mg, or between about 800 mg and about 1200 mg, or between about 900 mg and about 1100 mg, specifically reciting all increments of 1 mg within the above-recited ranges and all ranges formed therein or thereby;

a VFS of greater than about 4 g/g, or greater than about 5.5 g/g, or greater than about 6.0 g/g, or greater than about 7.0 g/g, or greater than about 7.3 g/g, or greater than about 7.5 g/g, or greater than about 8 mg, or greater than about 8.5 g/g, or greater than about 9 g/g, or greater than about 9.5 g/g, or greater than about 10 g/g, or greater than about 10.5 g/g, or greater than about 11 g/g, or greater than about 11.5 g/g, or greater than about 12 g/g, or greater than about 12.5 g/g, or less than about 13 g/g, or between about 4 g/g and about 15 g/g, or between about 5 g/g and about 11 g/g, or between about 10 g/g and about 15 g/g, or between about 7 g/g and about 13 g/g, or

between about 7.5 g/g and about 13 g/g, or between about 8 g/g and about 13 g/g, or between about 9 g/g and about 13 g/g, or between about 10 g/g and about 13 g/g, or between about 10.5 g/g and about 12.5 g/g, or between about 10 g/g and about 12 g/g, or between about 10.5 g/g and about 11.5 g/g, reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby;

a residual water of less than about 10%, less than about 9%, less than about 7%, less than about 5%, less than about 4%, less than about 3.5%, from about 1% to about 20%, from about 2% to about 18%, from about 3% to about 16%, from about 4% to about 14%, from about 5% to about 12%, from about 6% to about 10%, from about 1% to about 3%, or from about 1% to about 2%, specifically reciting all increments of 0.1% within the above-recited ranges and all ranges formed therein or thereby;

a basis weight of at least about 48 g/m² (i.e., gsm), of between about 10 g/m² and about 100 g/m², or between about 10 g/m² and about 45 g/m², between about 20 g/m² and about 40 g/m², or between about 24 g/m² and about 40 g/m², or between about 30 g/m² and about 32 g/m², or between about 40 g/m² and about 65 g/m², or between about 45 g/m² and about 60 g/m², or between about 50 g/m² and about 58 g/m², or between about 50 g/m² and about 55 g/m², or between about 50 g/m² and about 75 g/m², specifically reciting all increments of 0.1 g/m² within the above-recited ranges and all ranges formed therein or thereby;

a density (based on measuring caliper at 95 g/in²) of less than about 0.60 g/cm³ and/or less than about 0.30 g/cm³ and/or less than about 0.20 g/cm³ and/or less than about 0.10 g/cm³ and/or less than about 0.07 g/cm³ and/or less than about 0.05 g/cm³ and/or from about 0.01 g/cm³ to about 0.20 g/cm³ and/or from about 0.02 g/cm³ to about 0.10 g/cm³, specifically reciting all increments of 0.001 g/cm³ within the above-recited ranges and all ranges formed therein or thereby;

a bulk (also called “dry bulk,” based on measuring caliper at 95 g/in²) of greater than about 1.67 cm³/g and/or greater than about 3.33 cm³/g and/or greater than about 5.00 cm³/g and/or greater than about 10.00 cm³/g and/or greater than about 14.29 cm³/g and/or greater than about 15.0 cm³/g and/or greater than about 18.0 cm³/g and/or greater than about 20.00 cm³/g and/or from about 100.00 cm³/g to about 5.00 cm³/g and/or from about 50.00 cm³/g to about 10.00 cm³/g, specifically reciting all increments of 0.01 cm³/g within the above-recited ranges and all ranges formed therein or thereby (Note: This is distinct from “Dry Bulk Ratio” and “Resilient Bulk.”);

an SST (absorbency rate) of greater than about 0.3 g/sec^{0.5}, or greater than about 0.4 g/sec^{0.5}, or greater than about 0.45 g/sec^{0.5}, or greater than about 0.5 g/sec^{0.5}, or greater than about 0.75 g/sec^{0.5}, or greater than about 1.0 g/sec^{0.5}, or greater than about 1.60 g/sec^{0.5}, or greater than about 1.65 g/sec^{0.5}, or greater than about 1.70 g/sec^{0.5}, or greater than about 1.75 g/sec^{0.5}, or greater than about 1.80 g/sec^{0.5}, or greater than about 1.82 g/sec^{0.5}, or greater than about 1.85 g/sec^{0.5}, or greater than about 1.88 g/sec^{0.5}, or greater than about 1.90 g/sec^{0.5}, or greater than about 1.95 g/sec^{0.5}, or greater than about 2.00 g/sec^{0.5}, or between about 1.60 g/sec^{0.5} and about 2.50 g/sec^{0.5}, between about 1.0 g/sec^{0.5} and about 2.0 g/sec^{0.5}, or between about 2.0 g/sec^{0.5} and about 2.50 g/sec^{0.5}, or between about 0.3 g/sec^{0.5} and about 0.7 g/sec^{0.5}, or between about 1.0 g/sec^{0.5} and about 1.50 g/sec^{0.5}, or between about 0.3 g/sec^{0.5} and about 0.9 g/sec^{0.5}, or between about 1.65 g/sec^{0.5} and about 2.50 g/sec^{0.5}, or between about 1.70 g/sec^{0.5} and about 2.40 g/sec^{0.5}, or between about 1.75 g/sec^{0.5} and about 2.30 g/sec^{0.5}, or between about 1.80 g/sec^{0.5} and about 2.20 g/sec^{0.5}, or between about 1.82 g/sec^{0.5} and about 2.10 g/sec^{0.5}, or between about 1.85 g/sec^{0.5} and about 2.00 g/sec^{0.5}, specifically reciting all increments of 0.1 g/sec^{0.5} within the above-recited ranges and all ranges formed therein or thereby;

a plate stiffness of greater than about 0.3 N*mm, or greater than about 0.5 N*mm, or greater than about 1.0 N*mm, or greater than about 2.0 N*mm, or greater than about 4.0 N*mm, or greater than about 6.0 N*mm, or greater than about 8.0 N*mm, or greater than about 12.0 N*mm, or greater than about 12.5 N*mm, or greater than about 13.0 N*mm, or greater than about 13.5 N*mm, or greater than about 14 N*mm, or greater than about 14.5 N*mm, or greater than about 15 N*mm, or greater than about 15.5 N*mm, or greater than about 16 N*mm, or greater than about 16.5 N*mm, or greater than about 17 N*mm, or between about 0.3 N*mm and about 20 N*mm, or between about 1 N*mm and about 20 N*mm, or between about 2 N*mm and about 20 N*mm, or between about 4 N*mm and about 20 N*mm, or between about 6 N*mm and about 20 N*mm, or between about 8 N*mm and about 20 N*mm, or between about 10 N*mm and about 20 N*mm, or between about 12 N*mm and about 20 N*mm, or between about 12.5 N*mm and about 20 N*mm, or between about 13 N*mm and about 20 N*mm, or between about 13.5 N*mm and about 20 N*mm, or between about 14 N*mm and about 20 N*mm, or between about 14.5 N*mm and about 20 N*mm, or between about 15 N*mm and about 20 N*mm, or between about 15.5 N*mm and about 20 N*mm, or between about 16 N*mm and about 20 N*mm, or between about 16.5 N*mm and about 20 N*mm, or between about 17 N*mm and about 20 N*mm, specifically reciting all increments of 0.1 N*mm within the above-recited ranges and all ranges formed therein or thereby;

a resilient bulk of greater than about 25 cm³/g, or greater than about 29 cm³/g, or greater than about 40 cm³/g, or greater than about 50 cm³/g, or greater than about 60 cm³/g, or greater than about 62 cm³/g, or greater than about 75 cm³/g, or greater than about 85 cm³/g, or greater than about 90 cm³/g, or greater than about 95 cm³/g, or greater than about 100 cm³/g, or greater than about 102 cm³/g, or greater than about 105 cm³/g, or between about 29 cm³/g and about 112 cm³/g, or between about 29 cm³/g and about 103 cm³/g, or between about 40 cm³/g and about 100 cm³/g, or between about 50 cm³/g and about 75 cm³/g, or between about 55 cm³/g and 70 cm³/g, or between about 85 cm³/g and about 110 cm³/g, or between about 90 cm³/g and about 110 cm³/g, or between about 95 cm³/g and about 110 cm³/g, or between about 100 cm³/g and about 110 cm³/g, specifically reciting all increments of 1 cm³/g within the above-recited ranges and all ranges formed therein or thereby;

a total wet tensile of greater than about 50 g/in, or greater than about 75 g/in, or greater than about 100 g/in, or greater than about 200 g/in, or greater than about 300 g/in, or greater than about 400 g/in, or greater than about 450 g/in, or greater than about 470 g/in, or greater than about 500 g/in, or greater than about 550 g/in, or greater than about 600 g/in, or greater than about 650 g/in, or greater than about 700 g/in, or greater than about 750 g/in, or greater than about 758 g/in, or greater than about 800 g/in, or greater than about 850 g/in, or greater than about 900 g/in, or greater than about 2278, or between about 350 g/in and about 475 g/in, or between about 420 g/in and about 440 g/in, or between about 100 g/in and about 640 g/in, or between about 300 g/in and about 1000 g/in, or between about 400 g/in and about 900 g/in, or between about 500 g/in and about 900 g/in, or between about 550 g/in and about 900 g/in, or between about 600 g/in and about 900 g/in, or between about 650 g/in and about 900 g/in, or between about 700 g/in and about 900 g/in, specifically reciting all increments of 10 g/in within the above-recited ranges and all ranges formed therein or thereby;

a total wet tensile (Finch) of greater than about between about 10 g/in and about 125 g/in, or between about 20 g/in and about 55 g/in, or between about 30 g/in and about 100 g/in, or between about 10 g/in and about 65 g/in, specifically reciting all increments of 1 g/in within the above-recited ranges and all ranges formed therein or thereby;

a dry burst (peak load) strength of greater than about 250 g, or greater than about 400 g, or greater than about 600 g, or greater than about 800 g, or greater than about 1000 g, or greater than about 1200 g, or greater than about 1300 g, or greater than about 1400 g, or between about 250 g and about 1500 g, or between about 400 g and about 1500 g, or between about 600 g and about 1500 g, or between about 800 g and about 1450 g, or between about 1000 g and about 1400 g;

a wet burst (peak load) strength of greater than about 3 g, greater than about 5 g, or greater than about 10 g, or greater than about 20 g, or greater than about 50 g, or greater than about 55 g, or greater than about 75 g, or greater than about 100 g, or greater than about 115 g, or greater than about 150 g, or greater than about 177 g, or greater than about 200 g, or greater than about 300 g, or greater than about 350 g, or greater than about 400 g, or greater than about 450 g, or greater than about 478 g, or greater than about 500 g, or greater than about 550 g, or greater than about 600 g, or between about 20 g and about 530 g, or between about 3 g and about 22 g, or between about 25 g and about 52 g, or between about 230 g and about 525 g, or between about 180 g and about 525 g, or between about 200 g and about 700 g, or between about 350 g and about 600 g, or between about 350 g and about 550 g, or between about 400 g and about 550 g, or between about 400 g and about 525 g, or between about 50 g and about 220 g, or between about 50 g and about 60 g, or between about 50 g and 55 g, specifically reciting all increments of 10 g within the above-recited ranges and all ranges formed therein or thereby;

a flexural rigidity (avg.) of greater than about 40 mg-cm, greater than about 75 mg-cm, greater than about 175 mg-cm, 100, greater than about 125 mg-cm, greater than about 150 mg-cm, greater than about 175 mg-cm, greater than about 200 mg-cm, or greater than about 700 mg-cm, or greater than about 800 mg-cm, or greater than about 900 mg-cm, or greater than about 1000 mg-cm, or greater than about 1100 mg-cm, or greater than about 1200 mg-cm, or greater than about 1300 mg-cm, or greater than about 1400 mg-cm, or greater than about 1500 mg-cm, or greater than about 1600 mg-cm, or greater than about 1700 mg-cm, or between about 40 mg-cm and about 200 mg-cm, or between about 60 mg-cm and about 150 mg-cm, or between about 80 mg-cm and about 125 mg-cm, or between about 80 mg-cm and about 100 mg-cm, or between about 700 mg-cm and about 1800 mg-cm, or between about 800 mg-cm and about 1600 mg-cm, or between about 900 mg-cm and about 1400 mg-cm, or between about 1000 mg-cm and about 1350 mg-cm, or between about 1050 mg-cm and about 1350 mg-cm, or between about 1100 mg-cm and about 1350 mg-cm, or between about 1100 mg-cm and about 1300 mg-cm, specifically reciting all increments of 10 mg-cm within the above-recited ranges and all ranges formed therein or thereby;

a dry caliper of greater than about 4.0 mils, or greater than about 10.0 mils, or greater than about 15.0 mils, or greater than about 20.0 mils, or than about 26.0 mils, or than about 28.0 mils, or greater than about 40 mils, or greater than about 55 mils, or between about 4.0 mils and about 27.0 mils, or between about 18.0 mils and about 24.0 mils, or between about 45.0 mils and about 51.0 mils, or between about 29 mils and about 33.0 mils, or between about 19.0 mils and about 43.0 mils, or about 26.0 mils and about 80.0 mils, or between 40.0 mils and 60.0 mils, or between

about 50 and about 60 mils, specifically reciting all increments of 0.10 mils within the above-recited ranges and all ranges formed therein or thereby;

a wet caliper of greater than about 8.0 mils, or greater than about 10.0 mils, or greater than about 15.0 mils, or greater than about 17.0 mils, or greater than about 26 mils, or between about 10.0 mils and about 33.0 mils, or between about 15.0 mils and about 25.0 mils, or between about 8.0 mils and about 20.0 mils, or between about 26.0 mils and about 70.0 mils, or between about 26.0 mils and about 40.0 mils, specifically reciting all increments of 0.10 mils within the above-recited ranges and all ranges formed therein or thereby;

a total dry tensile (total tensile) of greater than about 250 g/in, or greater than about 400 g/in, or greater than about 500 g/in, or greater than about 700 g/in, or greater than about 800 g/in, or greater than about 1000 g/in, or greater than about 1200 g/in, or greater than about 1300 g/in, or greater than about 1700 g/in, or greater than about 2278 g/in, or between about 880 g/in and about 2570 g/in, or between about 1800 g/in and about 2485 g/in, or between about 1900 g/in and about 2300 g/in, or between about 250 g/in and about 1000 g/in, or between about 400 g/in and about 580 g/in, or between about 700 g/in and about 800 g/in, or between about 275 g/in and about 1310 g/in, or about 1300 g/in and about 4000 g/in, or between about 1800 g/in and about 2800 g/in, specifically reciting all increments of 10 g/in within the above-recited ranges and all ranges formed therein or thereby;

a geometric mean (GM) dry modulus of greater than about 1000 g/cm, or greater than about 1700 g/cm, or less than about 3320 g/cm, or less than about 2500 g/cm, or less than about 2400 g/cm, or less than about 2300 g/cm, or less than about 2000 g/cm, or less than about 1500 g/cm, or less than about 1000 g/cm, or between about 1800 g/cm and about 4000 g/cm, or between about 1800 g/cm and about 3500 g/cm, or between about 3300 g/cm and about 3350 g/cm, specifically reciting all increments of 10 g/cm within the above-recited ranges and all ranges formed therein or thereby;

a wet tensile geometric mean (GM) modulus of greater than about 250 g/cm, or greater than about 375 g/cm, or between about 250 g/cm and about 700 g/cm, or between about 250 g/cm and about 525 g/cm, or between about 375 g/cm and 525 g/cm, specifically reciting all increments of 10 g/cm within the above-recited ranges and all ranges formed therein or thereby;

a CRT rate of greater than about 0.30 g/sec, or greater than about 0.5 g/sec, or greater than about 0.55 g/sec, or greater than about 0.6 g/sec, or greater than about 0.61 g/sec, or greater than about 0.65 g/sec, or greater than about 0.7 g/sec, or greater than about 0.75 g/sec, or greater than about 0.8 g/sec, or between about 0.30 g/sec and about 1.00 g/sec, or between about 0.61 g/sec and

about 0.85 g/sec, specifically reciting all increments of 0.05 g/sec within the above-recited ranges and all ranges formed therein or thereby;

a CRT capacity of greater than about 10.0 g/g, or greater than about 12.5 g/g, or between about 12.5 g/g and about 23.0 g/g, or between about 16.5 g/g and about 21.5 g/g, specifically
5 reciting all increments of 0.1 g/g within the above-recited ranges and all ranges formed therein or thereby; a kinetic CoF of greater than about 0.75, or greater than about 0.85, or between about 0.85 and about 1.30, or between about 0.77 and about 1.7, or between about 0.85 and about 1.20, specifically reciting all increments of 0.05 within the above-recited ranges and all ranges formed therein or thereby;

10 a dry depth of more negative than -240 um, or more negative than -255um, or more negative than -265um, or more negative than -275um, or more negative than -285um, or more negative than -295um, or more negative than -300um, or between about -240um and about -310 um, or between about -245 um and about -305 um, or between about -255 um and about -303 um, or between about -265 um and about -302 um, or between about -275 um and about -300 um, specifically reciting
15 all increments of 20 um within the above-recited ranges and all ranges formed therein or thereby;

a moist depth of more negative than -275um, or more negative than -285 um, or more negative than -295 um, or more negative than -300 um, or more negative than -310 um, or more negative than -320 um, or more negative than -330 um, or between about -275 um and about -340 um, or between about -285 um and about -335 um, or between about -295 um and about -332 um,
20 or between about -300 um and about -330 um, or between about -305um and about -328 um, specifically reciting all increments of 20 um within the above-recited ranges and all ranges formed therein or thereby;

a moist contact area of greater than 25%, or greater than 27%, or greater than 29%, or greater than 31%, or greater than 32%, or greater than 34%, or greater than 36%, or between about
25 25% and about 38%, or between about 27% and about 37%, or between about 29% and about 36%, or between about 30% and about 35%, or between about 31% and about 34%, specifically reciting all increments of 1% within the above-recited ranges and all ranges formed therein or thereby;

a dry contact area of greater than 17%, or greater than 20%, or greater than 22%, or greater than 24%, or greater than 26%, or greater than 28%, or greater than 30%, or between about 17%
30 and about 33%, or between about 20% and about 31%, or between about 22% and about 30%, or between about 23% and about 30%, or between about 24% and about 29%, specifically reciting all increments of 1% within the above-recited ranges and all ranges formed therein or thereby;

a dry compression (at 10 g force in mils) of greater than about 30 mils, or greater than about 45 mils, or greater than about 50 mils, or greater than about 55 mils, or greater than about 60 mils, or greater than about 65 mils, or greater than about 70, or greater than about 85 mils, or between about 40 mils and about 100 mils, or between about 50 mils and about 80 mils, or between about 50 mils and about 65 mils, or between about 50 mils and about 60 mils, or between about 55 mils and about 60 mils, specifically reciting all increments of 5 mil within the above-recited ranges and all ranges formed therein or thereby;

a wet compression (at 10g force value) in mils of greater than about 30 mils, or greater than about 20 mils, or greater than about 30 mils, or greater than about 40 mils, or greater than about 50 mils, or greater than about 55, or greater than about 60 mils, or greater than about 70 mils, or between about 30 mils and about 100 mils, or between about 40 mils and about 70 mils, or between about 45 mils and about 60 mils, or between about 47 mils and about 58 mils, or between about 50 mils and about 55 mils, specifically reciting all increments of 5 mils within the above-recited ranges and all ranges formed therein or thereby;

a dry bulk ratio of greater than about 15, or greater than about 18, or greater than about 22, or greater than about 25, or greater than about 27, or greater than about 33, or greater than about 35, or greater than about 40, or greater than about 50, or between about 15 and about 60, or between about 22 and about 50, or between about 25 and about 35, or between about 27 and about 35, or between about 27 and about 33, specifically reciting all increments of 0.5 within the above-recited ranges and all ranges formed therein or thereby;

a wet bulk ratio of greater than about 20, or greater than about 22, or greater than about 25, or greater than about 28, or greater than about 30, or greater than about 34, or greater than about 40, or greater than about 45, or greater than about 50, or greater than about 55, or between about 22 and about 50, or between about 20 and about 50, or between about 25 and about 45, or between about 28 and about 40, or between about 30 and about 34, specifically reciting all increments of 0.5 inches within the above-recited ranges and all ranges formed therein or thereby;

a wet burst strength to dry tensile ratio ("wet burst/dry tensile ratio" which is wet burst strength divided by dry tensile) of greater than about 0.05, greater than about 0.09, greater than about 0.1, greater than about 0.15, greater than about 0.18, greater than about 0.20, greater than about 0.24, or greater than about 0.26, or between about 0.05 and about 0.27, or between about 0.15 and about 0.26, or between about 0.20 and about 0.26;

a wet burst strength to dry burst strength ratio ("wet/dry burst strength ratio" which is wet burst strength divided by dry burst strength) of greater than about 0.09, or greater than about 0.10,

or greater than about 0.18, or greater than about 0.19, or greater than about 0.20, or greater than about 0.30, or greater than about 0.40, or between about 0.10 and about 0.50, or between about 0.20 and about 0.48, or between about 0.30 and about 0.46, or between about 0.40 and about 0.46; a concavity ratio measurement of greater than about 0.1, or greater than about 0.15, or greater than about 0.20, or greater than about 0.25, or greater than about 0.30, or greater than about 0.35, or greater than about 0.40, or greater than about 0.45, or greater than about 0.50, or greater than about 0.55, or greater than about 1.0, or greater than about 1.25, or greater than about 1.5, or between about 0.10 and about 0.95, or between about 0.15 and about 0.90, or between about 0.20 and about 0.85, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby; and/or

a packing fraction measurement of greater than about 0.05, or greater than about 0.08, or greater than about 0.10, or greater than about 0.12, or greater than about 0.15, or greater than about 0.17, or between about 0.05 and about 0.75, or between about 0.10 and about 0.80, or between about 0.15 and about 0.85, specifically reciting all increments of 0.01 within the above-recited ranges and all ranges formed therein or thereby.

Fibrous structure(s) of the present disclosure comprising non-wood fibers may have one or a combination of the above properties (disclosed in this Properties of Fibrous Structure(s) Section).

Softness

Of particular interest is softness of the fibrous structure. This is where so many sustainable sanitary tissue products fail and the art does not disclose how to achieve soft fibrous structures comprising bamboo and/or other sustainable non-wood fibers. This becomes truer as non-wood fiber inclusion increases. Surprisingly, the inventors have found that adding coarse bamboo fibers (bamboo is especially coarse versus eucalyptus) into the fibrous structure, even at high inclusion levels, and/or even disposed at a consumer-facing side of a sheet, can result in products with good softness. There are a number of ways the inventors have accomplished this, including creation of differential densities, utilizing unique layering, and/or fiber mixes. Details of such are in the specification below.

Also, surprisingly, the inventors of the present disclosure have found that they are able to deliver soft fibrous structures that have low lint values. Typically, higher lint values accompany greater softness values (e.g., TS7, TS750). Beyond the difficulties of processing fibrous structures that are linty, lint can cause unwanted debris at the point of use, which can be messy and can be aesthetically undesirable. Thus, it is of great benefit to achieve greater softness while maintaining

lower lint values. Thus, the inventors have not only improved sustainable fibrous structures, but have improved the general offering of fibrous structures beyond what is otherwise available today, even including what is available on the shelf today as a high-tier offerings consisting only of wood fibers. FIG. 1A illustrates TS7 values of a sanitary tissue products of the present disclosure and
5 FIG. 1C illustrates TS7 and lint values of sanitary tissue products of the present disclosure.

Coverage

Sanitary tissue products (e.g., bath tissue sheets) are often comprised of substantial portions of eucalyptus fibers, especially at a consumer-facing layer. Thus, as one incorporates higher levels
10 of bamboo, one is necessarily replacing the short, narrow, and low coarseness eucalyptus fibers with longer, wider, and coarser bamboo fibers.

It is known in the art that fiber coverage is an important consideration when making premium sanitary tissue products. Fiber coverage can be thought of as the average number of fibers that would be encountered as one travels normal to the surface of the product (i.e., travels in
15 the z-direction). Included in the calculation of fiber coverage are fiber coarseness (mg/m), fiber width (mm), and basis weight (gsm). A contradiction that paper (fibrous structures and, more particularly, sanitary tissue products) makers contend with is how to design a strong, yet soft substrate. This has previously been achieved through the judicious choice and layering of wood-based fibers. Long and easily bonded fibers such as softwoods are used in a sheet for strength,
20 while short, thin, and low coarseness fibers such as eucalyptus are used for softness. These short, thin, and low coarseness eucalyptus fibers also provide a high level of fiber coverage in the sheet, aiding in hand protection and other aspects of absorbency.

While the art has disclosed that low coarseness bamboo can be used in toilet tissue, the inventors of the present disclosure have, surprisingly, found that adding much higher coarseness
25 bamboo into the sheet, even at high inclusion levels, and against the consumer (i.e., on a consumer-facing surface), can result in products with good softness and low levels of lint. The bamboo fibers tested are also wider (18.9 μm) than in previous examples. These coarse and wide bamboo fibers create substrates with lower fiber coverage at a given basis weight. Further, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo, which create lower fiber
30 coverage substates, can still create products that can successfully balance the traditional strength-softness contradiction. These improvements may be achieved, at least in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface and at creping, and through creping geometry changes.

As indicated in this section above, one key part of consumer acceptance is hand protection. One way to improve hand protection is via increased fiber coverage in the sheet. This can be done by increasing basis weight or by choosing fibers that have a high specific surface area per weight. Fiber attributes that are tied to specific surface area are length, width, and coarseness. These characteristics can be used to create a stochastic model that projects fibers as rectangles laid out as bricks. Knowing the length, width, and weight of each brick then allows one to determine how much area a given weight of fibers would cover if they were arranged perfectly flat next to each other. Dividing the coarseness by fiber width results in the g/m^2 -layer value. By comparing that weight per area (g/m^2) versus the actual weight per area of a sheet can give one the number of fiber layers (coverage) expected in the sheet. Of interest, when replacing eucalyptus with bamboo, the number of fiber layers (coverage) present at a given total sheet weight decreases.

Another way to address hand protection is to have a lower density sheet. At a given basis weight, lowering the density will increase the caliper of the sheet. This higher caliper will result in the hand being farther away from the material being removed, improving hand protection.

The papermaker is always conscious of manufacturing costs while striving to make superior products. Thus, the contradiction of increased weight versus fiber choice versus density is a consideration that should be kept in mind. It has surprisingly been found that the judicious layering of non-wood and/or wood fibers in a low-density sheet will allow for good hand protection.

Further relating to judicious layering, from a product quality perspective, there is a positive correlation between softness and lint. More lint generally means that the product is perceived as softer, but too much lint is not preferred by the consumer. One or two layer sanitary tissue products may be desirable because they require less equipment (fan pumps, stock chests, etc.) and simpler (single or dual layer headboxes versus a 3 layered headbox). In a one layer embodiment, and often in a two layer non-wood containing sanitary tissue product, the non-wood will be consumer facing – so, getting the right balance of softness, as characterized by lint, is critical. Adding a third layer gives another degree of freedom to the product designer, such that they could sequester part or all of the less desirable non-wood fibers in the center or non-consumer layers. A third layer also allows the Yankee contacting layer to have lower or no non-wood fibers contacting the surface. This results in a process which is easier to run, as the non-wood fibers have less interaction with the complex chemical and physical interactions with the glue coating and creping process. So, a three layered non-wood sanitary tissue product has more degrees of freedom from a design standpoint, is easier to run from a Yankee coating standpoint, and is more complex from an equipment standpoint. A one or two layer sanitary tissue product is more difficult to properly

design to meet the consumer needs and more difficult to run from a Yankee coating standpoint. However, if these hurdles of a one or two layer embodiment can be overcome, they are desirable because they are made by a less complex process.

5 Absorption

In the design of fibrous structures, particularly sanitary tissue products, such as paper towels, bath tissue, and facial tissue, there are many characteristics that must be met in order to make a consumer desirable product. A couple of those consumer-desired characteristics are good absorbency and hand protection.

10 It is believed that having high volumetric absorption capacity at relatively small pore radii is consumer preferred, especially for multi-ply products, as the water that is absorbed at those small pore sizes is tenaciously held onto by the absorbent material in the product. In multi-ply constructions, these “functional” pore sizes can be between 2.5 and 200 microns. When fluid is absorbed into these pores it tends to remain in the substrate more than fluid that is taken up by
15 larger pores.

One typical way to increase smaller pores is replacement of coarse softwood fibers with shorter, thinner, and lower coarseness hardwoods like eucalyptus. The increase in eucalyptus may be desirably balanced with the addition of softwoods such as NSK in order to maintain acceptable strength characteristics.

20 Upon experimentation, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo can still create a high level of 2.5-200 micron (and ranges therebetween) volumetric capacity while still maintaining acceptable strength characteristics.

Desorption

25 Continuing with the discussion in the previous section (Absorption), without being bound by theory, regarding desorption, it is believed that having a high volumetric desorption capacity at relatively small pore radii is consumer preferred, especially for multiply products, as the water that is desorbed at those small pore sizes is water that was initially absorbed in the functional structure itself. When a wetting fluid is absorbed into a substrate, the mechanically imparted features (those
30 imposed while the substrate is substantially dry, such as creping or embossing) relax, partially collapsing the structure. While these mechanically imparted features are important in the consumer experience, they are not resilient after fluid insult. Desorption curves can therefore be interpreted as a good characterization of the wet structure of the material. Maximizing the 2.5-200 micron

(and ranges therebetween) desorption volume will result in a sheet that has a greater “functional” absorbent volume. This is a good indicator of consumer-preferred absorbency, as water that is absorbed in the structure will be less likely to come back out of the material, better protecting the consumer from the mess.

5 As said in the Absorption Section above, upon experimentation, it has been surprisingly shown that the introduction of coarser, non-wood fibers such as bamboo can still create a high level of 2.5-200 micron (and ranges therebetween) volumetric capacity while still maintaining acceptable strength characteristics.

10 VFS

Continuing with the discussion in the three previous sections (Absorption, Desorption, and Desorption-Absorption Hysteresis), it is believed that having high vertical full sheet (“VFS”) absorbent capacity in a substrate is consumer preferred for absorption and hand protection. By its nature, the VFS measurement is believed to accurately characterize how much fluid is tightly held
15 within plies of a substrate, as fluid that is in between plies, or loosely held within a ply, will drain out when the sheet goes to the (near) vertical position. This remaining tightly held fluid is thought to be fluid that would more slowly reach the hand of a consumer, resulting in improved hand protection.

One typical way to increase the VFS of a substrate is to create structures of low coarseness
20 fibers, which are more prone to tightly holding onto water via a finer fiber network and pore structure. Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-wood fibers such as bamboo can still create high VFS capacity substrates while still maintaining acceptable strength characteristics.

Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-
25 wood fibers such as bamboo can still create high VFS capacity substrates while still maintaining acceptable strength characteristics.

Slip-Stick

Continuing with the discussion in the four previous sections (Absorption, Desorption,
30 Desorption-Absorption Hysteresis, and VFS), related to softness, another consumer-desired characteristic is surface smoothness/glide. It is thought that having low slip-stick values in a fibrous structure is consumer preferred, as the test is a good metric for quantifying how much “glide” a substrate has. Typical design levers for improving the slip stick of a substrate is to increase smoothness via calendaring, or to replace coarser softwood fibers with shorter, thinner, and lower

coarseness hardwood fibers such as eucalyptus. The increase in eucalyptus may desirably be balanced with the addition of softwoods such as NSK in order to maintain acceptable strength characteristics.

Upon experimentation, it has been surprisingly shown that the introduction of coarse, non-wood fibers such as bamboo can still create low slip stick substrates while still maintaining acceptable strength characteristics. FIG. 1B illustrates slip-stick values of a sanitary tissue products of the present disclosure.

Absorbent and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being absorbent. This combination is often a contradiction due to the underlying physics. In order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not absorb quickly or to a high capacity, as the aforementioned structure would also have minimal interplay voids, retarding water absorption into the substrate. Softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and width. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, lower coarseness, fibers that still exhibit superior strength when wet and absorbency. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of absorbency and wet strength in a non-wood containing substrate – see, for example, FIG. 2F.

Bidirectional Strength

Given the different nature of the wetlaid papermaking process to that of a woven substrate, there are many differences in the characteristics between durable substrates and sanitary tissue products. One difference in particular is the strength and durability of durable substrates vs. sanitary tissue products: the former, being comprised of woven filaments that are ostensibly continuous, exhibit very high strength when compared to the latter, which are comprised of hydrogen bonded cellulosic fibers. Directional differences in wetlaid structures are present due to the hydrodynamics of continuous forming, the use of discrete fibers, and the

nonisometric forces that are imparted on the substrate during making. Often, the weaker direction of a substrate is the CD, and improving strength and stretch characteristics in that direction improves the overall consumer experience by making the paper towel less prone to failure while in use. Ways to improve CD strength and stretch characteristics include the

5 judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing

10 environmental pressure. It is therefore desirable to develop wetlaid substrates with weaker, shorter, or lower coarseness fibers that can still be implemented in structures that exhibit high levels of bidirectional strength. It has surprisingly been found that, despite the lower coarseness, shorter fiber length, and/or narrower width of non-wood fibers, it is still possible to achieve high levels of bidirectional strength in a non-wood containing substrate— see, for example, FIGS. 2J,

15 2K, and 2L.

Bulky and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being bulky when dry. Being strong when wet

20 facilitates easy cleanup of messes, while having a high bulk sheet signals clothlike durability, spongelike absorbency, and other characteristics typical of durable substrates. However, this combination is often a contradiction due to the underlying physics. Typically, in order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been treated with a chemistry that protects the bonding between fibers

25 when wet. A structure that is designed to maximize those characteristics, however, will not be bulky. A monoplanar layer of tightly bonded cellulose fibers would result in a flat, dense sheet that, while strong when wet, would have a very low bulk when dry. Typically, ways to improve dry bulk include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as

30 refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are often desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with

weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and bulk when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of wet strength and dry bulk in a non-wood containing sanitary tissue product.

Durable and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be strong when wet, while also being durable (i.e., being able to maintain integrity during cyclic stressing of the substrate, for example during scrubbing). This combination is often a contradiction due to the underlying physics. In order to have a strong paper towel, it must be comprised of many fibers that are strong, that are strongly bonded together, and that have been treated with a chemistry that protects the bonding between fibers when wet. A structure that is designed to maximize those characteristics, however, will not be durable, as a sheet that is comprised of tightly bonded, millimeter sized fibers will pick up load quickly in a tensile test and fail at relatively low percentages of stretch, contributing to low durability. Ways to improve the wet durability include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and durability. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood fibers have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of durability in a non-wood containing substrate.

Soft (Dry) and Strong (Wet)

It may be desirable for sanitary tissue products of the present disclosure, such as paper towels, to be soft when dry, yet strong when wet. Being strong when wet facilitates easy cleanup of messes, yet due to the strong fibers, dense fiber network, and high levels of fiber bonding

needed, the resultant substrate will be very rough when dry. Conversely, a substrate that is soft when dry will have lower strength, lower coarseness fibers that are lightly bonded together with much interstitial space inside the ply. While cushiony and soft to the touch, such a substrate would be very weak when wet due to the aforementioned structure and low levels of bonding. Ways to
5 improve softness when dry include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution of the heterogenous density zones in the sheet. Combinations of hardwood and softwood fibers are often used to strike an appropriate balance. Refined softwood fibers, for example, are desirous for creating strength when
10 wet, due to their high fiber coarseness, long length, and high strength. Hardwood fibers are desirous for improving softness when dry, due to their low coarseness and length. These sources of fiber, however, are coming under increasing environmental pressures. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior wet strength and softness when dry. It has
15 surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of wet strength and dry softness in a non-wood (e.g., abaca) containing substrate— see, for example, FIG. 2G.

20 Strong and Durable

Given the different nature of the wetlaid papermaking process to that of a woven substrate, there are many differences in the characteristics between durable substrates and sanitary tissue products. One difference in particular is the strength and durability of durable substrates vs. sanitary tissue products: the former, being comprised of woven filaments that are
25 ostensibly continuous, exhibit very high strength when compared to the latter, which are comprised of hydrogen bonded cellulosic fibers. Directional differences in wetlaid structures are present due to the hydrodynamics of continuous forming, the use of discrete fibers, and the nonisometric forces that are imparted on the substrate during making. Often, the weaker direction of a substrate is the CD, and improving strength and stretch characteristics in that
30 direction improves the overall consumer experience by making the paper towel less prone to failure while in use. Ways to improve dry durability include the judicious choice of papermaking fibers, balancing the ability of the fibers to bond with their strength characteristics, process settings on the papermaking machine, such as refining or forming conditions, and the distribution

of the heterogenous density zones in the sheet. Refined softwood fibers, for example, are desirous for creating such structures, due to their fiber coarseness, length, and strength. This source of fiber, however, is coming under increasing environmental pressure. It is therefore desirable to develop wetlaid structures with weaker, shorter, or lower coarseness fibers that can still be implemented in a structure that exhibits superior strength and durability when dry. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to achieve high levels of strength and durability in a non-wood containing substrate.

Soft and Strong

Given the different nature of the wetlaid papermaking process to that of created a woven substrate, there are many differences in the characteristics between durable substrates and sanitary tissue products. One difference is the relationship between strength and softness. Since wetlaid materials are comprised of fibers of approximately 5mm or less, network strength is a function of both the fiber itself as well as the bonding between the fibers. Fiber to fiber bonding is typically improved through refining, a mechanical process that modifies the fibers. Without being bound by theory, it is believed that the mechanical energy from refining delaminates cell walls, externally fibrillates the fibers, and releases hemicellulose based gels, which improve the relative bonded area between fibers and the overall strength of the substrate. This increase in strength, however, is often at the cost of decreased softness, which can be described via tensile modulus. High tensile moduli are associated with lower softness sheets. Additionally, the strength of the fiber itself is typically a function of fiber cell wall thickness and fiber diameter. Non-woods have been found to typically have a higher degree of external fibrillation, shorter fiber lengths, and/or lower coarseness than softwoods. A substrate comprised of these fibers would therefore be expected to exhibit a lower strength, less soft sheet. It has surprisingly been found that, despite the often non-desirable (i.e., non-wood have much different characteristics versus conventional wood fibers and behave much differently) characteristics of non-wood fibers, it is still possible to create a substrate that has high levels of strength and is soft— see, for example, FIGS. 1D, 2B, 2C, 2D, and 2E.

Surprisingly, the inventors of the present disclosure have discovered that many of the above-referenced properties and characteristics can be achieved by replacing conventional wood fibers with non-wood fibers. For example, replacing refined long fiber northern and southern

softwood kraft with abaca can help to achieve the desired strength of the fibrous structure. It may be desirable to combine abaca with a sustainable hardwood (e.g., eucalyptus) that is short and coarse (i.e. stiff, capable of preventing collapse). Particularly regarding using abaca for its strength characteristics as described in this paragraph, it is desirable to keep it from collapsing into a tightly bonded, rough, thin network with little variation in pore size. It may be further desirable to form such fibrous structures with fiber in patterns comprising higher degrees of pillow modulation; such fiber mixes and belt patterns can result in surprisingly high dry strength, wet strength, caliper, and surface texture with surface softness and absorbency. This surprising result may be increased by increasing molding conditions such as structuring belt pattern, belt overburden, crepe and/or wire to press draw. The inventors hypothesize that the long, high carboxyl abaca readily bonds around the short, coarse fibers, thus maintaining strength but building caliper, porosity, absorbency, and softness. In this way, the non-wood (e.g., abaca) helps to maximize diversity in pore size to enhance softness and absorbency while maintaining strength. More particularly, structuring belt patterns with low density regions of at least 10 mils width, or at least 20 mils width, or at least 30 mils width, and patterns that combined different sizes of low density regions may exploit the benefit more. Structuring belt fiber molding depths, also known as overburden, that capitalizes on the fiber length of the non-wood inclusive fiber mixture also may increase the benefit. Without being bound by theory, it may be desirable to have the distance between belt structuring pattern protrusions be equal or greater than the average fiber length of the fiber mixture to increase diverse pore formation when using non-woods. Additionally, without being bound by theory, crepe impact angle and reel draw can be used to create regions of micro-disturbance to increase the variation of bonds, pores and sheet structure. Wet transfer or rush transfer can induce multiple planes and orientations of fiber as well, and may contribute to increasing the benefit of the non-wood inclusive mixtures. Moreover, combinations of one or all of these molding factors can enhance the surprising combination of substrate properties.

Roll Properties

Large rolls have a consumer perceived benefit on the shelf. A larger diameter roll at a given price is normally preferred by the consumer. When the consumer unpackages that roll and uses it, the consumer also wants that same large roll to have just the right level of firmness. Overly soft rolls connote inferiority, and overly firm rolls connote roughness and lack of absorbency. From a manufacturing perspective, however, a roll of toilet tissue can be most cost effectively

produced with a minimum amount of fiber mass, while effectively distributing that mass in such a way that the substrate still has superior strength, absorbency, and softness attributes.

The morphology of the bamboo fiber (high levels of fines, broad fiber length distribution, high coarseness, high fibrillation), as well as many other non-wood fibers, make for a fiber that drains poorly and makes it particularly unsuited for through-air-drying machines due to high energy costs associated with the drying of the nascent fiber web. Therefore, the majority of webs comprising bamboo are made on conventional wet press machines. These machines generate webs of low caliper and, when converted into finished product rolls, result in either low bulk and hard rolls or high bulk and extremely soft rolls. A few instances of products can be found comprising bamboo that are made on through-air-dried machines. These examples, however, when converted into a roll format, suffer from a non-consumer preferred roll structure that is high in bulk, yet still extremely soft.

The underlying cause of this roll bulk-roll firmness contradiction may be due to the compression/relaxation characteristics of the substrate. It is therefore an unmet consumer need to design a substrate that comprises bamboo fiber, yet can be wound into finished product rolls that are both bulky and firm.

As indicated in other parts of this disclosure, fibrous structures, such as sanitary tissue products, may be comprised of substantial amounts of eucalyptus fibers (especially at the consumer-facing layer of a sheet), which are short, narrow, and low exhibit low coarseness. These attributes allow for improved molding into a structured fabric, impacting density and compressibility/resiliency characteristics of the web. As one incorporates higher levels of non-wood (e.g., bamboo), one is replacing eucalyptus fibers with longer, wider, and coarser non-wood (e.g., bamboo) fibers. These attributes cause non-woods such as bamboo to be much less susceptible to molding into a structured fabric, resulting in less desirable properties, including, for instance, compression and resiliency characteristics.

The inventors of the present disclosure have surprisingly shown that substrates and rolls comprising non-woods (e.g., bamboo) can be created with good roll bulk and roll compression characteristics, despite the fact that introduction of non-woods (e.g., bamboo) results in substrates comprised of coarser, more fibrillated fibers, which are less prone to molding due to their morphological characteristics. These improvements may be achieved, in part, through jet/wire velocity adjustments, varying levels of foreshortening at the wire/belt interface and at creping, through creping geometry changes, and the judicious placement of high and low density zones in the substrate.

In addition to the beneficial properties as detailed in the disclosure above, the new fibrous structures detailed herein permit the fibrous structure manufacturer to wind rolls with high roll bulk (for example greater than 4 cm³/g), and/or greater roll firmness (for example between about 2.5 mm to about 15 mm), and/or lower roll percent compressibility (low percent compressibility, for example less than 10% compressibility).

“Roll Bulk” as used herein is the result of measuring finished product rolls. The rolls are placed into a controlled temperature and Humidity room (TAPPI conditions, about 23 °C ± 2 C° and about 50% ± 2% relative humidity) for at least 24 hours to equilibrate (equilibration can be monitored by measuring roll weight every 4 hours until the mass stabilizes;). If rolls have been stored in greater than 50% relative humidity conditions, then said rolls should first be equilibrated at conditions lower than 50% relative humidity and then equilibrated at TAPPI conditions – see T-402. The rolls are weighed with the weight recorded to the hundredths of grams. The width of the rolls are measured with a ruler that shows millimeters, width recorded to the tenths of centimeter. Roll Diameter is measured according to the Percent Roll Compressibility test method included herein. Roll Bulk (cm³/g) is then calculated by: multiplying the square of the radius of the roll (roll diameter (cm) / 2) by 3.14159 and by the roll width (cm), then dividing that by the mass of the roll (g):

$$\text{Roll Bulk} \left(\frac{\text{cc}}{\text{g}} \right) = \frac{3.14159 * \left(\frac{\text{roll diameter (cm)}}{2} \right)^2 * \text{roll width (cm)}}{\text{roll weight (g)}}$$

The measurements are done with the roll core in place. The units “cc/g” are used interchangeably herein with “cm³/g.”

The new rolled fibrous structures (e.g., sanitary tissue products) of the present disclosure may exhibit a roll bulk of greater than about 4 cm³/g, greater than about 5 cm³/g, greater than about 6 cm³/g, greater than about 7 cm³/g, greater than about 8 cm³/g, greater than about 9 cm³/g, greater than about 10 cm³/g, greater than about 12 cm³/g, greater than about 13 cm³/g, greater than about 14 cm³/g, greater than about 15 cm³/g, greater than about 16 cm³/g, greater than about 17 cm³/g, and/or less than about 30 cm³/g, less than about 25 cm³/g, less than about 22 cm³/g, less than about 20 cm³/g, and/or from about 10 cm³/g to about 25 cm³/g, specifically including all 0.1 increments between the recited ranges.

Additionally, examples of the new rolled fibrous structures detailed herein may exhibit a roll firmness less than about 10.5 mm, less than about 9.5 mm, less than 8.5 mm, less than about 7

mm, or from about 2.5 mm to about 15 mm and/or from about 3 mm to about 13 mm, from about 4 mm to about 10 mm, and/or from about 6 to about 9 mm, specifically including all 0.1 increments between the recited ranges.

Additionally, examples of the new fibrous structures detailed herein may be in the form of a rolled tissue products (single-ply or multi-ply), for example a dry fibrous structure roll, and may have a percent compressibility of less than about 10%, less than about 8%, less than about 7%, less than about 6%, less than about 5%, less than about 4.5%, less than about 4%, less than about 3%, about 0%, greater than about 0.25%, greater than about 1%, from about 2.5% to about 5%, from about 3% to about 5.5%, from about 4% to about 10%, from about 4% to about 8%, from about 4% to about 7%, and/or from about 4% to about 6%, as measured according to the Percent Compressibility Test Method described herein.

5 Additionally, examples of the new rolled tissue products as detailed herein can be individually packaged to protect the fibrous structure from environmental factors during shipment, storage, and shelving for retail sale. Any of known methods and materials for wrapping bath tissue or paper towels can be utilized. Further, the plurality of individual packages, whether individually wrapped or not, can be wrapped together to form a package having inside a plurality of the new rolled tissue products as detailed herein. The package can have 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16
10 or more rolls. In such packages, the roll bulk and percent compressibility can be important factors in package integrity during shipping, storage, and shelving for retail sale. Further, the plurality of individual packages, or the packages having a plurality of the new rolled tissue products as detailed herein, can be palletized (i.e., organized and/or transported on a pallet). In such pallets of the new rolled tissue products as detailed herein, the roll bulk and percent compressibility can be important
15 factors in package integrity during shipping, storage, and shelving for retail sale.

Further, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue products exhibits a roll bulk of greater than about 4 cm³/g or a percent compressibility of less than about 10%, or less than about 8%, is contemplated. In one example, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue
20 products exhibits a roll bulk of greater than about 4 cm³/g and a percent compressibility of less than about 10%, or less than about 8%, is contemplated. In another example, a package of a plurality of individual rolled tissue products, in which at least one of the rolled tissue products exhibits a roll bulk of greater than about 6 cm³/g and a percent compressibility of less than about 8%, or less than about 5%, is contemplated.

U.S. Publication No. 2022-0031531 discloses the packages that may be desirable for containing the rolled fibrous structures of the present disclosure, including sanitary tissue products (e.g., bath tissue). Said packages may comprise non-wood fibers, just like the rolled fibrous structures the package is used contained.

5

FIBROUS STRUCTURE EXAMPLES

Further nonlimiting examples of the new fibrous structures that include the various inventive non-wood fiber inclusion(s), as detailed herein, may have the properties disclosed in the tables of FIGS. 18A-1 through FIG. 25 and as illustrated in FIGS. 1 and 2 and may be used to form sanitary tissue products of the present disclosure. It should be noted that wheat straw fibers in the tables of FIGS. 18A-1 through FIG. 25 are never dried. The other fibers in the tables of FIGS. 18A-1 through FIG. 25 are once dried.

FIGS. 18A-1, 18A-2, 18B-1, 18B-2, and 19 are tables illustrating multiple inventive embodiments, specifically detailing fiber type and percent incorporation into specific layers and plies (note: common numbers between the tables indicate the same sample).

FIGS. 20A and 20B are tables illustrating multiple inventive and comparative embodiments, specifically detailing multiple properties for the purpose of comparing inventive versus comparative embodiments (note: common numbers between the tables indicate the same sample).

FIGS. 21A, 21B-1, 21B-2, 21B-3, 21C-1, 21C-2, 21C-3, 21D-1, 21D-2, 21D-3, 21E-1, 21E-2, 21E-3, 21F-1, 21F-2, 21G-1, 21G-2, 21H-1, 21H-2, 21I, 21J and 22A, 22B, 22C, 22D, 22E, and 22F are tables illustrating multiple inventive and comparative embodiments, specifically detailing multiple inventive and comparative embodiment properties, beyond the properties illustrated in FIGS. 20A and 20B (note: common numbers and letters between the tables indicate the same sample).

FIG. 23 is a table illustrating fiber morphology of the fibers used in fibrous structures of the present disclosure (note: common numbers between the tables indicate the same sample). In FIG. 23, fiber count (length average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(l)$ has the units of mm/fiber and coarseness has the units of mg/m): $\text{Fiber count} = 1/(L(l) \times \text{coarseness})$. And, fiber count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(n)$ has the units of mm/fiber and coarseness has the units of mg/m): $\text{Fiber count} = 1/(L(n) \times \text{coarseness})$.

FIGS. 24A-1, 24A-2, 24B-1, 24B-2, 24C-1, 24C-2, 24D-1, 24D-2, 24E-1, 24E-2, 24F-1, 24F-2, 24G-1, 24G-2 are tables illustrating PVD data of fibrous structures of the present disclosure (common numbers between the tables indicate the same sample).

FIG. 25 is a table that details the fiber characteristic differences between non-wood fibers that are never-dried and that have been once-dried.

Papermaking Example 1:

An example of fibrous structures in accordance with the present disclosure can be prepared using a papermaking machine as described above with respect to FIG. 6A, and according to the method described below:

A 3% by weight aqueous slurry of northern softwood kraft (NSK) pulp is made up in a conventional re-pulper. The NSK slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e., Cymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the NSK stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to NSK is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e., FinnFix 700 marketed by C.P. Kelco U.S. Inc. of Atlanta, GA) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 3% by weight aqueous slurry of non-wood (e.g., bamboo, abaca, etc.) pulp is made up in a conventional re-pulper. The non-wood slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e., Kymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the non-wood stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to non-wood is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e., FinnFix 700 marketed by C.P. Kelco U.S. Inc. of Atlanta, GA) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 3% by weight aqueous slurry of hardwood Eucalyptus fibers is made up in a conventional re-pulper. A 1% solution of defoamer (i.e., BuBreak 4330 marketed by Buckman Labs, Memphis TS) is added to the Eucalyptus stock pipe at a rate of 0.25% by weight of the dry fibers and its adsorption is enhanced by an in-line mixer.

The NSK, non-wood, and eucalyptus fibers are combined in the head box at various ratios and deposited onto a Fourdrinier wire, running at a first velocity V_1 , homogenously to form an embryonic web. The web is then transferred at the transfer zone from the Fourdrinier forming wire at a fiber consistency of about 15% to the papermaking belt, the papermaking belt moving at a

second velocity, V_2 . The papermaking belt has a pattern of raised portions (*i.e.*, knuckles) extending from a reinforcing member, the raised portions defining either a plurality of discrete or a continuous/substantially continuous deflection conduit portion, as described herein, particularly with reference to a mask such as FIG. 5. The transfer occurs in the transfer zone without precipitating substantial densification of the web. The web is then forwarded, at the second velocity, V_2 , on the papermaking belt along a looped path in contacting relation with a transfer head disposed at the transfer zone, the second velocity being from about 1% to about 40% slower than the first velocity, V_1 . Since the Fourdrinier wire speed is faster than the papermaking belt, wet shortening, *i.e.*, foreshortening, of the web occurs at the transfer point. In an example, the second velocity V_2 can be from about 0% to about 5% faster than the first velocity V_1 .

Further de-watering is accomplished by vacuum assisted drainage until the web has a fiber consistency of about 15% to about 30%. The patterned web is pre-dried by air blow-through, *i.e.*, through-air-drying (TAD), to a fiber consistency of about 65% by weight. The web is then adhered to the surface of a Yankee dryer with a sprayed creping adhesive comprising 0.25% aqueous solution of polyvinyl alcohol (PVA). The fiber consistency is increased to an estimated 95% - 97% before dry creping the web with a doctor blade. The doctor blade has a bevel angle of about 45 degrees and is positioned with respect to the Yankee dryer to provide an impact angle of about 101 degrees. This doctor blade position permits the adequate amount of force to be applied to the substrate to remove it off the Yankee while minimally disturbing the previously generated web structure. The dried web is reeled onto a take up roll (known as a parent roll), the surface of the take up roll moving at a fourth velocity, V_4 , that is faster than the third velocity, V_3 , of the Yankee dryer. By reeling at a fourth velocity, V_4 , that is about 1% to 20% faster than the third velocity, V_3 , some of the foreshortening provided by the creping step is "pulled out," sometimes referred to as a "positive draw," so that the paper can be more stable for any further converting operations. In other examples, a "negative draw" as is known in the art is also contemplated.

Two plies of the web can be formed into paper towel products by embossing and laminating them together using PVA adhesive. The paper towel has about 53 g/m² basis weight and contains 0-65% by weight Northern Softwood Kraft, 0-100% non-wood fiber, and 0-50% by weight Eucalyptus furnish. The sanitary tissue product is soft, flexible, and absorbent.

Papermaking Example 2

An example of fibrous structures in accordance with the present disclosure can be prepared using a papermaking machine as described above with respect to FIG. 6A, and according to the method described below:

5 An aqueous slurry of eucalyptus (Suzano Papel e Celulose Brazilian bleached hardwood kraft pulp) pulp fibers is prepared at about 3% fiber by weight using a conventional repulper, then transferred to a hardwood fiber stock chest. The eucalyptus fiber slurry of the hardwood stock chest is pumped through a stock pipe to a hardwood fan pump where the slurry consistency is reduced from about 3% by fiber weight to about 0.15% by fiber weight. The 0.15% eucalyptus slurry is then pumped and distributed in the top chamber of a multi-layered,
10 three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

Additionally, an aqueous slurry of eucalyptus (Suzano Papel e Celulose Brazilian bleached hardwood kraft pulp) pulp fibers is prepared at about 3% fiber by weight using a conventional repulper, then transferred to a hardwood fiber stock chest. The eucalyptus fiber slurry of the hardwood stock chest is pumped through a stock pipe and mixed with the aqueous slurry of
15 Northern Softwood Kraft (NSK), described in the next paragraph, to a fan pump where the slurry consistency is reduced from about 1.5% by fiber weight to about 0.15% by fiber weight. The 0.15% eucalyptus/NSK slurry is then pumped and distributed in the center and bottom chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

Additionally, an aqueous slurry of NSK (Northern Softwood Kraft) pulp fibers is prepared
20 at about 3% fiber by weight using a conventional repulper, then transferred to the softwood fiber stock chest. The NSK fiber slurry of the softwood stock chest is pumped through a stock pipe to be refined to a Canadian Standard Freeness (CSF) of about 630. The refined NSK fiber slurry is then mixed with the 1.5% aqueous slurry of Eucalyptus fibers (described in the preceding paragraph) and directed to a fan pump where the NSK slurry consistency is reduced from about
25 3% by fiber weight to about 0.15% by fiber weight. The 0.15% Eucalyptus/NSK slurry is then directed and distributed to the center and bottom chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

Additionally, an aqueous slurry of non-wood (e.g., bamboo, abaca, etc.) pulp fibers is prepared at about 1.5-3% fiber by weight using a conventional repulper, then transferred to a non-
30 wood fiber stock chest. The non-wood fiber slurry of the non-wood stock chest is pumped through a stock pipe to a refiner, where it is gently refined to a degree that is commensurate with the desired strength at the reel of the paper machine. The non-wood solution is then transported through a stock pipe to a fan pump where the slurry consistency is reduced from about 3% by fiber weight

to about 0.15% by fiber weight. The 0.15% non-wood slurry is then pumped and distributed in the top and or middle and or bottom chamber of a multi-layered, three-chambered headbox of a Fourdrinier wet-laid papermaking machine.

In order to impart temporary wet strength to the finished fibrous structure, a 1% dispersion of temporary wet strengthening additive (e.g., Fennorez[®]91 commercially available from Kemira) is prepared and is added to the NSK or non-wood or Eucalyptus fiber stock pipe at a rate sufficient to deliver 0.25% temporary wet strengthening additive based on the dry weight of the fibers. The absorption of the temporary wet strengthening additive is enhanced by passing the treated slurry through an in-line mixer.

The wet-laid papermaking machine has a layered headbox having a top chamber, a center chamber, and a bottom chamber where the chambers feed directly onto the forming wire (Fourdrinier wire). The eucalyptus fiber slurry of 0.15% consistency is directed to the top headbox chamber. Alternatively, a non-wood fiber slurry can be directed to the top headbox chamber. The NSK/Eucalyptus, NSK/non-wood, non-wood/eucalyptus, or non-wood fiber slurry is directed to the center and bottom headbox chambers. All three fiber layers are delivered simultaneously in superposed relation onto the Fourdrinier wire to form thereon a three-layer embryonic fibrous structure (web), of which about 40% of the top side is made up of the eucalyptus and or non-wood fibers, and about 60% of the sheet can be made of various blends of non-wood, NSK, and eucalyptus fibers, directed towards the center and bottom layers. Dewatering occurs through the Fourdrinier wire and is assisted by a deflector and wire table vacuum boxes. The Fourdrinier wire is a Legent 866A Dual Layer (0.11 mm x 0.18 mm, Asten Johnson). The speed of the Fourdrinier wire is about 800 feet per minute (fpm).

The embryonic wet fibrous structure is transferred from the Fourdrinier wire, at a fiber consistency of about 18-22% at the point of transfer, to a 3D patterned, continuous knuckle, through-air-drying belt as shown in Fig. 3. The speed of the 3D patterned through-air-drying belt is 800 feet per minute (fpm), which is the same speed of the Fourdrinier wire. The 3D patterned through-air-drying belt is designed to yield a fibrous structure comprising a pattern of continuous high density knuckle region oriented approximately 75 Degrees relative to the cross direction. Each continuous high density knuckle region oriented approximately 75 Degrees relative to the cross direction is separated by a low-density discrete pillow region oriented approximately 75 Degrees relative to the cross direction. This 3D patterned through-air-drying belt is formed by casting a layer of an impervious resin surface of a continuous knuckle onto a fiber mesh supporting fabric. The supporting fabric is a 98 x 52 filament, dual layer mesh. The

thickness of the resin cast is about 12.0 mils above the supporting fabric. Alternatively, the drying fabric is designed to yield a pattern of substantially machine direction oriented linear channels having a continuous network of high density (knuckle) areas. This drying fabric is formed by casting an impervious resin surface onto a fiber mesh supporting fabric. The supporting fabric is a
5 98 × 52 filament, dual layer mesh. The thickness of the resin cast is about 12 mils above the supporting fabric. The area of the continuous network is about 40 percent of the surface area of the drying fabric.

Further de-watering of the fibrous structure is accomplished by vacuum assisted drainage until the fibrous structure has a fiber consistency of about 20% to 30%.

10 While remaining in contact with the 3D patterned through-air-drying belt, the fibrous structure is pre-dried by air blow-through pre-dryers to a fiber consistency of about 50-65% by weight.

After the pre-dryers, the semi-dry fibrous structure is transferred to a Yankee dryer and adhered to the surface of the Yankee dryer with a sprayed creping adhesive. The creping adhesive
15 is an aqueous dispersion with the actives consisting of about 80% polyvinyl alcohol (PVA 88-44), about 20% CREPETROL® 5688. CREPETROL® 5688 is commercially available from Solenis. The creping adhesive is delivered to the Yankee surface at a rate of about 0.10-0.20% adhesive solids based on the dry weight of the fibrous structure. The fiber consistency is increased to about 96-98% before the fibrous structure is dry-creped from the Yankee with a doctor blade.

20 The doctor blade has a bevel angle of about 15-25° and is positioned with respect to the Yankee dryer to provide an impact angle of about 71-81°. The Yankee dryer is operated at a temperature of about 275-350°F and a speed of about 800 fpm. The fibrous structure is wound in a roll (parent roll) using a surface driven reel drum having a surface speed of about 550-700 fpm.

Two parent rolls of the fibrous structure are then converted into a sanitary tissue product
25 by loading the roll of fibrous structure into an unwind stand. The two parent rolls are converted with the low-density pillow side out. Alternatively, they can be converted with the high-density knuckle side out. The line speed is 550 ft/min. One parent roll of the fibrous structure is unwound and transported to an emboss stand where the fibrous structure is strained to form the emboss pattern in the fibrous structure via a 0.56" Pressure Roll Nip and then combined with the fibrous
30 structure from the other parent roll to make a multi-ply (2-ply) sanitary tissue product. Approximately 0.5% of a proprietary quaternary amine softener is added to the top side of the multi-ply sanitary tissue product. Approximately 0.5% of a proprietary quaternary amine softener may also be added to the bottom side of the multi-ply sanitary tissue product. The multi-

ply sanitary tissue product is then transported to a winder where it is wound onto a core to form a log. The log of multi-ply sanitary tissue product is then transported to a log saw where the log is cut into finished multi-ply sanitary tissue product rolls. The molding member used to make the multi-ply sanitary tissue product of this example exhibits the dimensions shown in Table 4 of U.S. Serial No. 17/238,527 filed April 23, 2021, and assigned to The Procter & Gamble Company.

Papermaking Example 3

Abaca and Eucalyptus are individually repulped at ~3% consistency with 2 min repulping time. The Abaca slurry is refined gently and a 2% solution of a permanent wet strength resin (i.e. Kymene 5221 marketed by Solenis incorporated of Wilmington, Del.) is added to the softwood stock pipe at a rate of 1% by weight of the dry fibers. Kymene 5221 is added as a wet strength additive. The adsorption of Kymene 5221 to Abaca is enhanced by an in-line mixer. A 1% solution of Carboxy Methyl Cellulose (CMC) (i.e. FinnFix 700 marketed by C. P. Kelco U.S. Inc. of Atlanta, Ga.) is added after the in-line mixer at a rate of 0.2% by weight of the dry fibers to enhance the dry strength of the fibrous substrate. A 1% solution of defoamer (i.e. Wicket 1285 marketed by Ivanhoe Industries, of Zion, IL) is added to the Eucalyptus stock pipe at a rate of 0.25% by weight of the dry fibers and its adsorption is enhanced by an in-line mixer.

The Abaca and the Eucalyptus fibers are combined in the headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire running 10% faster than successive structuring papermaking belt. The web is transferred at the transfer nip with approximately 14 in Hg vacuum to the structuring papermaking belt at approximately 20% solids. The web is then forwarded on the papermaking belt along a looped path, passing through a pre-dryer and drying the web to a consistency 75%. The web is then pressed & adhered via nip and chemistry on to the Yankee drier that is sprayed with creping adhesive comprising 0.25% aqueous solution of polyvinyl alcohol (PVA). The fiber consistency is increased to an estimated 97% before dry creping the web with a doctor blade. The doctor blade has a bevel angle of about 45 degrees and is positioned with respect to the Yankee dryer to provide an impact angle of about 101 degrees. This doctor blade position permits the adequate amount of force to be applied to the substrate to remove it off the Yankee while minimally disturbing the previously generated web structure. The web travels through a gapped calendar stack to smooth the web, reducing caliper by approximately 10% before the dried web is reeled onto a take up

roll (known as a parent roll), the surface of the take up roll moving approximately the same speed as the Yankee dryer.

Papermaking Example 4

5 Same as Papermaking Example 3, except: Abaca is not refined (vs. “refined gently”).

Papermaking Example 5

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits 40% Eucalyptus and 60% Abaca composition to the wire (vs. “headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire...”).

10

Papermaking Example 6

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits 45% Eucalyptus and 55% Abaca composition to the wire (vs. “headbox in a proportion of 65% Abaca and 35% Eucalyptus and deposited onto a wire...”).

15

Papermaking Example 7

Same as Papermaking Example 3, except: NSK and SSK in a ratio of 75%NSK/25%SSK are repulped at 3%, gently refined and have kymene & CMC added at similar weight percent as the Abaca stream; and the headbox deposits a 40% Eucalyptus, 50% Abaca, and 10% NSK/SSK composition to the wire.

20

Papermaking Example 8

Same as Papermaking Examples 3 and/or 4, except: the headbox deposits a 40% Eucalyptus, 20% Abaca, and 40% NSK/SSK composition to the wire.

25

Papermaking Example 9

Each of Papermaking Examples 3-8, further using the papermaking belt(s) described in U.S. Pub. No. 2021-0140115.

30

Papermaking Example 10

Each of Papermaking Examples 3-8, further using the papermaking belt(s) described in U.S. Pub. No. 2020-0181848.

Papermaking Example 11

Each of Papermaking Examples 3-10, where the wire moves 21% faster than the successive papermaking structuring belt.

5 Papermaking Example 12

Each of Papermaking Examples 3-11, where the structuring belt has a fiber forming depth of 30 mils.

Papermaking Example 13

10 Each of Papermaking Examples 3-11, where the structuring belt has a fiber forming depth of 25 mils.

Papermaking Example 14

15 Each of Papermaking Examples 3-13, where the substrate is embossed and laminated into a 2-ply finished fibrous structure, perforated to create sheets and rolled onto a core.

Papermaking Example 15

Each of Papermaking Examples 1 and 2, except: the headbox deposits 100% bamboo composition to the wire.

20

ARRAYS OF THE PRESENT DISCLOSURE

Sanitary tissue products within the scope of the present disclosure may be packaged in packages comprising sustainable materials (e.g., paper, recycled(able) plastic, corrugated cardboard, plant-based plastic, etc.) and displayed with other package(s) comprising sanitary tissue product(s) as an array(s) – see for example, U.S. Provisional Patent Application Serial Nos. 25 63/353,167 and 63/375,858, both titled “Sanitary Tissue Products and Arrays Comprising Non-wood Fibers,” filed on June 17, 2022 under Attorney Docket No. 16297P and filed on September 16, 2022 under Attorney Docket No. 16297P2, both by The Procter & Gamble Company and both naming Katherine Schwerdtfeger as the first-named inventor, and which are herein 30 incorporated by reference, for details regarding the different arrays that sanitary tissue products of the present disclosure may be used to form and for packages that sanitary tissue products of the present disclosure may be contained in; further, packages comprising sanitary tissue products of the present disclosure may convey or connote sustainability as disclosed in Attorney Docket Nos. 16297P and 16297P2.

ASPECTS OF THE PRESENT DISCLOSURE

The following aspects of the disclosure are exemplary only and not intended to limit the scope of the disclosure:

5

Aspect 1:

1. A sanitary tissue product, comprising:

non-wood fibers; and

a compressive slope (dry) of greater than about 8.0 mil/g.

2. The sanitary tissue product of claim 1, wherein the sanitary tissue product is a paper towel.

3. The sanitary tissue product of claim 1, wherein the compressive slope (dry) is greater than about 11.0 mil/g.

4. The sanitary tissue product of claim 3, wherein the sanitary tissue product is toilet paper.

5. A sanitary tissue product, comprising:

non-wood fibers;

a bulk (dry) greater than about 15 cm³/g.

6. The sanitary tissue product of claim 5, wherein the sanitary tissue product is a paper towel.

7. The sanitary tissue product of claim 1, wherein the bulk (dry) is greater than about 18.0 cm³/g.

8. The sanitary tissue product of claim 7, wherein the sanitary tissue product is toilet paper.

10

Beyond the “Aspects Of The Present Disclosure” disclosed above, the “Aspects Of The Present Disclosure,” including Aspects 1 – 20, disclosed in U.S. Provisional Patent Application Serial No. 63/456,020, titled “Fibrous Structures Comprising Non-wood Fibers,” filed on March 31, 2023, Young as the first-named inventor, are herein incorporated by reference.

15

TEST METHODS OF THE PRESENT DISCLOSURE

Unless otherwise specified, all tests described herein including those described under the Definitions section and the following test methods are conducted on samples that have been conditioned in a conditioned room at a temperature of $23^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$ and a relative humidity of $50\% \pm 2\%$ for a minimum of 2 hours prior to the test. The samples tested are “usable units.” “Usable units” as used herein means sheets, flats from roll stock, pre-converted flats, and/or single or multiply products. All tests are conducted in such conditioned room. Do not test samples that have defects such as wrinkles, tears, holes, and like. All instruments are calibrated according to manufacturer’s specifications.

10 Coverage and Fiber Count-Area Test Method:

Coverage and Fiber Count are calculated using measurements acquired by analyzing fibers obtained from fibrous structures, such as sanitary tissue products, with a Fiber Quality Analyzer (FQA), available from OpTest Equipment Inc., Ontario, Canada. Prior to analysis in the FQA fibers from a finished product specimen must be dispersed and diluted to get an accurate measurement of the oven dry fiber mass in an aliquot of very dilute fiber and distilled water, which is utilized during the FQA analysis to determine specimen coarseness and fiber width. The resultant FQA values, in conjunction with basis weight, are then used to calculate fiber coverage and fiber count in a specimen.

20 Sample Preparation

Allow the fibrous structure finished product to be tested to equilibrate in a temperature-controlled room at a temperature of $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) and a relative humidity of $50\% \pm 2\%$ for at least 24 hours. Further prepare the finished product for testing by removing and discarding any product which might have been abraded in handling, e.g., on the outside of the roll.

Determine the percent oven dry solids of the equilibrated test product. This is done on a moisture balance using least a 0.5 gram specimen from a selected usable unit of the test product. An exemplary balance is the Ohaus MB45 balance set to a drying temperature of 130°C , with moisture determined after the weight changes less than 1mg in 60 seconds (A60 hold time).

Using another usable unit from the same equilibrated finished product, gently pull approximately 0.03 grams of fiber specimen from the center. The specimen should be equally pulled from all plies and layers of the substrate. Place the collected fibers into a 27mm diameter, 70mm tall clear glass vial, or similar. Record the net weight of collected fibers to the nearest

0.001 gram as M_0 . The intent of this step is to get an even sampling across all plies and layers in the usable unit, pulled from the center of the usable unit so that no cutting of fibers at the end of the sheet or perforations is included.

The oven dry weight of the fiber specimen (M_1) is then calculated by multiplying the
5 fiber specimen weight (M_0) by the previously determined percent oven dry solids.

$$M_1 = M_0 \times \% \text{ oven dry solids}$$

To fully disperse the fiber specimen, begin by pouring DI or distilled water into the vial until approximately ½ full, adding about ten 5mm diameter glass beads, and then closing the vial
10 with a cap. Next, allow the specimen to sit for at least two hours with occasional shaking. Lastly, stir the vial with a Fisher Scientific vortex genie, or similar, until fiber clusters are dispersed, and the fibers appear fully individualized.

To quantitatively dilute the dispersed fiber sample, begin by transferring the entire vial contents into a 5L plastic beaker that has been weighed to the nearest 0.1g. To accomplish this,
15 slowly pour the contents of vial through a #6 US Standard Sieve (3.35mm), trying to keep the glass beads in the vial as long as possible. Then rinse the vial and cap at least three times with DI or distilled water and continue to pour the liquid slowly through the #6 sieve. Once the vial has been at least triple rinsed, pour the glass beads into the sieve and wash thoroughly with a DI water squeeze bottle, being sure to collect all water used to rinse the beads.

20 Continue with the dilution procedure by filling the 5L plastic beaker to approximately the 1.75L mark with DI or distilled water. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as $M_{2.1}$. Using a second clean 5L beaker, transfer the 1.75L of solution back and forth at least 3 times from beaker to beaker to ensure that the suspension is homogenously mixed. Next, transfer approximately 150g of the solution into a third clean 5L
25 beaker that has been weighed to the nearest 0.1g. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as $M_{2.2}$. Then add approximately 1600g of DI or distilled water to the third 5L beaker. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as $M_{2.3}$. With a fourth clean 5L beaker, transfer the approximately 1.75L of solution back and forth at least 3 times from beaker to beaker to ensure that the suspension is homogenously
30 mixed. Lastly, immediately after mixing, pour a 500mL aliquot of the diluted fiber solution into a 600mL plastic beaker that has been weighed to the nearest 0.1g. Weigh the beaker and record the net weight of the contents to the nearest 0.1g as M_3 .

Upon completion of the dilution procedure, calculate the oven dry weight of fibers present in the testing beaker (M_4) according to the following equation:

$$M_4 = M_1 \times \left(\frac{M_{2.2}}{M_{2.1}} \right) \times \left(\frac{M_3}{M_{2.3}} \right)$$

Measurement of samples

- 5 Set up, calibrate, and operate the Fiber Quality Analyzer (FQA) instrument according to the manufacturer's instructions. Place the beaker containing the diluted fiber suspension on carousel of the FQA, select the "Optest default" for coarseness method, and when prompted, enter M_4 (the oven dry weight of fibers present in the testing beaker) in the cell for "sample mass" to determine coarseness.

10

Calculations

Once the analysis has been performed, open the report file and record each of the following measurements: Arithmetic Mean Width, Coarseness, Arithmetic Mean Length, and Length Weighted Mean Length.

- 15 Calculate Coverage, which has the units of fiber layers, using the following equation:

$$\text{Coverage} = \frac{\text{Basis Weight of product tested}}{\frac{\text{Coarseness}}{\text{Arithmetic mean width}}}$$

Where basis weight has units of g/m^2 , Coarseness has units of mg/m , and Arithmetic Mean Width has the units of mm .

- 20 Calculate Fiber Count-Area, which has the units of millions fibers/ m^2 , using one of these two equations:

$$\text{Fiber Count} - \text{Area} (C(n)) = \frac{\text{Basis Weight of product tested}}{\text{Coarseness} \times \text{Arithmetic Mean Length}}$$

Where basis weight has the units of g/m^2 , Coarseness has the units of mg/m , and Arithmetic Mean Length has the units of mm .

$$\text{Fiber Count} - \text{Area} (C(l)) = \frac{\text{Basis Weight of product tested}}{\text{Coarseness} \times \text{Length Weighted Mean Length}}$$

- 25 Where basis weight has the units of g/m^2 , Coarseness has the units of mg/m , and Length Weighted Mean Length has the units of mm .

Pore Volume Distribution Test Method:

- 30 The Pore Volume Distribution (PVD) Test Method is used to determine the average amount of fluid (mg) retained by a specimen within an effective pore radius range of 2.5 to 160

microns. This method makes use of stepped, controlled differential pressure and measurement of associated fluid movement into and out of a porous specimen, where the radius of a pore is related to the differential pressure required to fill or empty the pore. The fluid retained (mg) by each specimen during its first absorption cycle of decreasing differential pressures is measured, this is followed by measurement of fluid retained (mg) by the specimen during its first drainage or desorption cycle of increasing differential pressures. The sum of fluid retained (mg) by the specimen within the effective pore radius range of 2.5 to 160 microns for the absorption and desorption cycles, as well as a calculated hysteresis (difference of fluid retained during the absorption and desorption cycles) in the effective pore radius range of 2.5 to 100 microns are reported.

Method principle

For uniform cylindrical pores, the radius of a pore is related to the differential pressure required to fill or empty the pore by the equation

$$\text{Differential pressure} = (2 \gamma \cos \Theta) / r,$$

where γ = liquid surface tension, Θ = contact angle, and r = effective pore radius.

Pores contained in natural and manufactured porous materials are often thought of in terms such as voids, holes or conduits, and these pores are generally not perfectly cylindrical nor all uniform. One can nonetheless use the above equation to relate differential pressure to an effective pore radius, and by monitoring liquid movement into or out of the material as a function of differential pressure characterize the effective pore radius distribution in a porous material. (Because nonuniform pores are approximated as uniform by the use of an effective pore radius, this general methodology may not produce results precisely in agreement with measurements of void dimensions obtained by other methods such as microscopy.)

The Pore Volume Distribution Test Method uses the above principle and is reduced to practice using the apparatus and approach described in "Liquid Porosimetry: New Methodology and Applications" by B. Miller and I. Tyomkin published in The Journal of Colloid and Interface Science (1994), volume 162, pages 163-170, incorporated herein by reference. This method relies on measuring the increment of liquid volume that enters or leaves a porous material as the differential air pressure is changed between ambient ("lab") air pressure and a slightly elevated air pressure (positive differential pressure) surrounding the specimen in a sample test chamber. The specimen is introduced to the sample chamber dry, and the sample chamber is controlled at a

positive differential pressure (relative to the lab) sufficient to prevent fluid uptake into the specimen after the fluid bridge is opened. After opening the fluid bridge, the differential air pressure is decreased in steps to 0, and in this process subpopulations of pores acquire liquid according to their effective pore radius. After reaching a minimal differential pressure at which the mass of fluid within the specimen is at a maximum, differential pressure is increased stepwise again toward the starting pressure, and the liquid is drained from the specimen. It is during this latter draining sequence (from minimal differential pressure, or largest corresponding effective pore radius, to the largest differential pressure, or smallest corresponding effective pore radius), that the fluid retention by the sample (mg) at each differential pressure is determined in this method. After correcting for any fluid movement for each particular pressure step measured on the chamber while empty, the fluid retention by the sample (mg) for each pressure step is determined. The fluid retained may be normalized by dividing the equilibrium quantity of retained liquid (mg) associated with this particular step by the dry weight of the sample (mg).

15 Sample conditioning and specimen preparation

The Pore Volume Distribution Test Method is conducted on samples that have been conditioned in a room at a temperature of $23^{\circ}\text{C} \pm 2.0^{\circ}\text{C}$ and a relative humidity of $50\% \pm 5\%$, all tests are conducted under the same environmental conditions and in such conditioned room. Any damaged product or samples that have defects such as wrinkles, tears, holes, and similar are not tested. Samples conditioned as described herein are considered dry samples for purposes of this invention. A 5.5cm square specimen to be tested is die cut from the conditioned product or sample. The dry specimen weight is measured and recorded.

25 Apparatus

Apparatus suitable for this method is described in: "Liquid Porosimetry: New Methodology and Applications" by B. Miller and I. Tyomkin published in The Journal of Colloid and Interface Science (1994), volume 162, pages 163-170. Further, any pressure control scheme capable of achieving the required pressures and controlling the sample chamber differential pressure may be used in place of the pressure-control subsystem described in this reference. One example of suitable overall instrumentation and software is the TRI/Autoporosimeter (Textile Research Institute (TRI) / Princeton Inc. of Princeton, N.J., U.S.A.). The TRI/Autoporosimeter is an automated computer-controlled instrument for measuring pore volume distributions in porous materials (e.g., the volumes of different size pores within the range from 1 to 1000 μm effective

pore radii). Computer programs such as Automated Instrument Software Releases 2000.1 or 2003.1/2005.1 or 2006.2; or Data Treatment Software Release 2000.1 (available from TRI Princeton Inc.), and spreadsheet programs may be used to capture and analyse the measured data.

5 Method procedure

The wetting liquid used is a degassed 0.2 weight % solution of octylphenoxy polyethoxy ethanol (Triton X-100 from Sigma-Aldrich) in distilled water. The instrument calculation constants are as follows: ρ (density) = 1 g/cm³; γ (surface tension) = 31 dynes/cm; $\cos\Theta = 1$. A 90-mm diameter mixed-cellulose-ester filter membrane with a characteristic pore size of 1.2 μm (such
10 Millipore Corporation of Bedford, MA, Catalogue #RAWP09025) is affixed to the porous frit (Monel plates with diameter of 90mm, 6.4mm thickness from Mott Corp., Farmington, CT, or equivalent) of the sample chamber. A plexiglass plate weighing about 34 g (supplied with the instrument) is placed on the sample to ensure the sample rests flat on the membrane/frit assembly. No additional weight is placed on the sample.

15 Someone skilled in the art knows that it is critical to degas the test fluid as well as the frit/membrane/tubing system such that the system is free from air bubbles.

The sequence of pore sizes (differential pressures) for this application is as follows (effective pore radius in μm): 2.5, 5, 10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100, 120, 140, 160, 180, 200, 225, 250, 275, 300, 350, 400, 500, 600, 800, 1000. This sequence is then replicated in reverse
20 order. The criterion for moving from one pressure step to the next is that fluid uptake/drainage from the specimen is measured to be less than 10mg/min for 10s.

A separate “blank” measurement is performed by following this method procedure on an empty sample chamber with no specimen or weight present on the membrane/frit assembly. Any fluid movement observed is recorded (mg) at each of the pressure steps. Fluid retention data for a
25 specimen are corrected for any fluid movement associated with the empty sample chamber by subtracting fluid retention values of this “blank” measurement from corresponding values in the measurement of the specimen.

Determination of Parameters

30 Data from the PVD instrument can be presented in a cumulative fashion, so that the cumulative mass absorbed is tabulated alongside the diameter of pore, which allow the following parameters to be calculated:

2.5-160 micron PVD Absorption (mg) = [mg at 160micron absorbed] – [mg at 2.5micron absorbed] from the advancing curve,

2.5-160 micron PVD Desorption (mg) = [mg at 160micron desorbed] – [mg at 2.5 micron desorbed] from the receding curve, and

5 **2.5-100 micron hysteresis (mg)** = [mg at 100 micron desorbed – mg at 2.5 micron desorbed] – [mg at 100 micron absorbed – mg at 2.5 micron absorbed]

Horizontal Full Sheet (HFS) Test Method:

10 The Horizontal Full Sheet (HFS) test method determines the amount of distilled water absorbed and retained by a fibrous structure of the present invention. This method is performed by first weighing a sample of the fibrous structure to be tested (referred to herein as the "dry weight of the sample"), then thoroughly wetting the sample, draining the wetted sample in a horizontal position and then reweighing (referred to herein as "wet weight of the sample"). The absorptive capacity of the sample is then computed as the amount of water retained in units of grams of water
15 absorbed by the sample. When evaluating different fibrous structure samples, the same size of fibrous structure is used for all samples tested.

The apparatus for determining the HFS capacity of fibrous structures comprises the following:

20 An electronic balance with a sensitivity of at least ± 0.01 grams and a minimum capacity of 1200 grams. The balance should have a special balance pan to be able to handle the size of the sample tested (i.e.; a fibrous structure sample of about 27.9 cm by 27.9 cm).

A sample support rack (Figs. 14 and 14A) and sample support rack cover (Figs. 15 and 15A) is also required. Both the support rack (Figs. 14 and 14A) and support rack cover (Figs. 15 and 15A) are comprised of a lightweight metal frame, strung with 0.305 cm diameter monofilament
25 so as to form a grid as shown in Fig. 14. The size of the support rack (Figs. 14 and 14A) and support rack cover (Figs. 15 and 15A) is such that the sample size can be conveniently placed between the two.

30 The HFS test is performed in an environment maintained at $23 \pm 1^\circ \text{C}$ and $50 \pm 2\%$ relative humidity. A water reservoir or tub is filled with distilled water at $23 \pm 1^\circ \text{C}$ to a depth of 3 inches (7.6 cm).

Samples are tested in duplicate. The dry weight of each sample is reported to the nearest 0.01 grams. The empty sample support rack (FIGS. 14 and 14A) is placed on the balance with the special balance pan described above. The balance is then zeroed (tared). One sample is carefully

placed on the sample support rack (FIGS. 14 and 14A), “face up” or with the outside of the sample facing up, away from the sample support rack (FIGS. 14 and 14A). The support rack cover (FIGS. 15 and 15A) is placed on top of the support rack (FIGS. 14 and 14A). The sample (now sandwiched between the rack and cover) is submerged in the water reservoir. After the sample is submerged for 30±3 seconds, the sample support rack (FIGS. 14 and 14A) and support rack cover (FIGS. 15 and 15A) are gently raised out of the reservoir.

The sample, support rack (FIGS. 14 and 14A) and support rack cover (FIGS. 15 and 15A) are allowed to drain horizontally for 120±5 seconds, taking care not to excessively shake or vibrate the sample. While the sample is draining, the support rack cover (FIGS. 15 and 15A) is carefully removed and all excess water is wiped from the support rack (FIGS. 15 and 15A). The wet sample and the support rack (FIGS. 14 and 14A) are weighed on the previously tared balance. The weight is recorded to the nearest 0.01 g. This is the wet weight of the sample after horizontal drainage.

The HFS gram per gram fibrous structure sample absorptive capacity is defined as: absorptive capacity = (wet weight of the sample after horizontal drainage - dry weight of the sample) / (dry weight of the sample) and has a unit of gram/gram.

The HFS gram per sheet fibrous structure sample absorptive capacity is defined as (wet weight of the sample after horizontal drainage minus dry weight of the sample) and has a unit of gram/sheet.

Vertical Full Sheet (VFS) Test Method:

The Vertical Full Sheet (VFS) test method is similar to the HFS method described previously, and determines the amount of distilled water absorbed and retained by a fibrous structure when held at an angle of 75°.

After setting up the apparatus, preparing the sample, taking the initial weights, and submerging the sample, according to the HFS method, the support rack (FIGS. 14 and 14A) and sample are removed from the reservoir and inclined at an angle of 75° and allowed to drain for 60±5 seconds. Care should be taken so that the sample does not slide or move relative to the support rack (FIGS. 14 and 14A). If there is difficulty keeping the sample from sliding down the support rack (FIGS. 14 and 14A) sample can be held with the fingers.

At the end of this time frame (60±5 seconds), carefully bring the sample and support rack (FIGS. 14 and 14A) to the horizontal position and wipe the bottom edge of the sample support rack (FIGS. 14 and 14A) that water dripped onto during vertical drainage. Return the sample and support rack (FIGS. 14 and 14A) to the balance and take the weight to the nearest 0.01 g. This value represents the wet weight of the sample after vertical drainage.

The VFS gram per gram fibrous structure sample absorptive capacity is defined as the wet weight of the sample after vertical drainage minus the dry weight of the sample divided by the dry weight of the sample, and has a unit of gram/gram (g/g).

5 The VFS gram per sheet fibrous structure sample absorptive capacity is defined as the wet weight of the sample after vertical drainage minus the dry weight of the sample, and has a unit of gram/sheet.

The calculated VFS is the average of the absorptive capacities of the two samples of the fibrous structure.

10 Dry Bulk Ratio Method:

“Dry Bulk Ratio” may be calculated as follows: (Dry Compression x Flexural Rigidity (avg))/TDT.

Wet Bulk Ratio Method:

15 “Wet Bulk Ratio” may be calculated as follows: (Wet Compression x Geometric Mean Wet Modulus)/Total Wet Tensile.

Fiber Length, Width, Coarseness, and Fiber Count Test Method:

20 Fiber Length values are generated by running the test procedure as defined in U.S. Patent Application No. 2004-0163782 and informs the following procedure:

The length, width, and coarseness of the-fibers (which are averages of the plurality of fibers being analyzed in a sample), as well as the fiber count (number and/or length average), may be determined using a Valmet FS5 Fiber Image Analyzer commercially available from Valmet, Kajaani Finland (as the Kajaani Fiber Lab is less available) following the procedures outlined in the manual. If in-going or raw pulp is not accessible, samples may be taken from commercially available product (e.g., a roll of sanitary tissue product) to determine length, width, coarseness and fiber count (number and/or length average) using the FS5 by obtaining samples as outlined in the “Sample Preparation” section of the Coverage and Fiber Count Test Method in the Test Methods Section. As used herein, fiber length is defined as the “length weighted average fiber length”. The instructions supplied with the unit detail the formula used to arrive at this average. The length can be reported in units of millimeters (mm) or in inches (in). As used herein, fiber width is defined as the “width weighted average fiber width” and can be reported in units of micrometers (μm) or in

25
30

millimeters (mm). The instructions supplied with the unit detail the formula used to arrive at this average. The width can be reported in units of millimeters (mm) or in inches (in). The instructions supplied with the unit detail the formula used to arrive at this average. Fiber count (number and/or length average) can be reported in units of million fibers/g. As used herein, fiber length/width ratio is defined as the “length weighted average fiber length (mm) / width weighted average fiber width (mm).”

Fiber count (length average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(l)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(l) \times \text{coarseness})$. And, fiber count (number average, million/g) is calculated from length weighted fiber average and coarseness via the following equation (where $L(n)$ has the units of mm/fiber and coarseness has the units of mg/m): Fiber count = $1/(L(n) \times \text{coarseness})$. ($L(l)$) means length weighted averaged and ($L(n)$) means number weighted averaged.

It should be understood that the values from different fiber image analyzers can differ significantly, even as much as 59% – see “Fiber Quality Analysis: OpTest Fiber Quality Analyzer versus L&W Fiber Tester,” Bin Li, Rohan Bandekar, Quanqing Zha, Ahmed Alsaggaf, and Yonghao Ni, *Industrial & Engineering Chemistry Research* 2011 50 (22), 12572-12578, DOI: 10.1021/ie201631q, which compares values from the FQA fiber analyzer to the FT fiber analyzer, stating: “These new instruments, such as PQM (pulp quality monitor), Galai CIS-100, Fiberlab, MorFi, FiberMaster, FQA (fiber quality analyzer), and L&W Fiber Tester (FT), provide fast measurements with the capability of both laboratory and online analysis. However, the measurement differences among these instruments are expected due to the different designs of hardware and software.”

Percent Roll Compressibility Method:

Percent Roll Compressibility (Percent Compressibility) is determined using the Roll Diameter Tester 1000 as shown in FIG. 7. It is comprised of a support stand made of two aluminum plates, a base plate 1001 and a vertical plate 1002 mounted perpendicular to the base, a sample shaft 1003 to mount the test roll, and a bar 1004 used to suspend a precision diameter tape 1005 that wraps around the circumference of the test roll. Two different weights 1006 and 1007 are suspended from the diameter tape to apply a confining force during the uncompressed and

compressed measurement. All testing is performed in a conditioned room maintained at about 23 °C $\pm$ 2 °C and about 50% $\pm$ 2% relative humidity.

The diameter of the test roll is measured directly using a Pi[®] tape or equivalent precision diameter tape (e.g., an Executive Diameter tape available from Apex Tool Group, LLC, Apex, NC, Model No. W606PD) which converts the circumferential distance into a diameter measurement, so the roll diameter is directly read from the scale. The diameter tape is graduated to 0.01 inch increments with accuracy certified to 0.001 inch and traceable to NIST. The tape is 0.25 in wide and is made of flexible metal that conforms to the curvature of the test roll but is not elongated under the 1100 g loading used for this test. If necessary, the diameter tape is shortened from its original length to a length that allows both of the attached weights to hang freely during the test, yet is still long enough to wrap completely around the test roll being measured. The cut end of the tape is modified to allow for hanging of a weight (e.g., a loop). All weights used are calibrated, Class F hooked weights, traceable to NIST.

The aluminum support stand is approximately 600 mm tall and stable enough to support the test roll horizontally throughout the test. The sample shaft 1003 is a smooth aluminum cylinder that is mounted perpendicularly to the vertical plate 1002 approximately 485 mm from the base. The shaft has a diameter that is at least 90% of the inner diameter of the roll and longer than the width of the roll. A small steel bar 1004 approximately 6.3 mm diameter is mounted perpendicular to the vertical plate 1002 approximately 570 mm from the base and vertically aligned with the sample shaft. The diameter tape is suspended from a point along the length of the bar corresponding to the midpoint of a mounted test roll. The height of the tape is adjusted such that the zero mark is vertically aligned with the horizontal midline of the sample shaft when a test roll is not present.

Condition the samples at about 23 °C $\pm$ 2 °C and about 50% $\pm$ 2% relative humidity for 2 hours prior to testing. Rolls with cores that are crushed, bent, or damaged should not be tested. Place the test roll on the sample shaft 1003 such that the direction the paper was rolled onto its core is the same direction the diameter tape will be wrapped around the test roll. Align the midpoint of the roll's width with the suspended diameter tape. Loosely loop the diameter tape 1004 around the circumference of the roll, placing the tape edges directly adjacent to each other with the surface of the tape lying flat against the test sample. Carefully, without applying any additional force, hang the 100 g weight 1006 from the free end of the tape, letting the weighted end hang freely without swinging. Wait 3 seconds. At the intersection of the diameter tape 1008, read the diameter aligned with the zero mark of the diameter tape and record as the Original Roll Diameter to the nearest 0.01 inches. With the diameter tape still in place, and without any undue delay, carefully hang the

1000 g weight 1007 from the bottom of the 100 g weight, for a total weight of 1100 g. Wait 3 seconds. Again read the roll diameter from the tape and record as the Compressed Roll Diameter to the nearest 0.01 inch. Calculate percent compressibility to the according to the following equation and record to the nearest 0.1%:

5

$$\% \text{ Compressibility} = \frac{(\text{Original Roll Diameter}) - (\text{Compressed Roll Diameter})}{\text{Original Roll Diameter}} \times 100$$

Repeat the testing on 10 replicate rolls and record the separate results to the nearest 0.1%.

Average the 10 results and report as the Percent Compressibility to the nearest 0.1%.

10

Roll Firmness Method:

Roll Firmness is measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the MTS Alliance using Testworks 4.0 Software, as available from MTS Systems Corp., Eden Prairie, MN) using a load cell for which the forces measured are within 10% to 90% of the limit of the cell. The roll product is held horizontally, a cylindrical probe is pressed into the test roll, and the compressive force is measured versus the depth of penetration. All testing is performed in a conditioned room maintained at $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and $50\% \pm 2\%$ relative humidity.

Referring to FIG. 8, the upper movable fixture 2000 consist of a cylindrical probe 2001 made of machined aluminum with a 19.00 ± 0.05 mm diameter and a length of 38 mm. The end of the cylindrical probe 2002 is hemispheric (radius of 9.50 ± 0.05 mm) with the opposing end 2003 machined to fit the crosshead of the tensile tester. The fixture includes a locking collar 2004 to stabilize the probe and maintain alignment orthogonal to the lower fixture. The lower stationary fixture 2100 is an aluminum fork with vertical prongs 2101 that supports a smooth aluminum sample shaft 2101 in a horizontal position perpendicular to the probe. The lower fixture has a vertical post 2102 machined to fit its base of the tensile tester and also uses a locking collar 2103 to stabilize the fixture orthogonal to the upper fixture.

The sample shaft 2101 has a diameter that is 85% to 95% of the inner diameter of the roll and longer than the width of the roll. The ends of sample shaft are secured on the vertical prongs with a screw cap 2104 to prevent rotation of the shaft during testing. The height of the vertical prongs 2101 should be sufficient to assure that the test roll does not contact the horizontal base of

the fork during testing. The horizontal distance between the prongs must exceed the length of the test roll.

Program the tensile tester to perform a compression test, collecting force and crosshead extension data at an acquisition rate of 100 Hz. Lower the crosshead at a rate of 10 mm/min until
5 5.00 g is detected at the load cell. Set the current crosshead position as the corrected gage length and zero the crosshead position. Begin data collection and lower the crosshead at a rate of 50 mm/min until the force reaches 10 N. Return the crosshead to the original gage length.

Remove all of the test rolls from their packaging and allow them to condition at about 23 °C $\pm$ 2 C° and about 50% $\pm$ 2% relative humidity for 2 hours prior to testing. Rolls with cores that
10 are crushed, bent, or damaged should not be tested. Insert sample shaft through the test roll's core and then mount the roll and shaft onto the lower stationary fixture. Secure the sample shaft to the vertical prongs then align the midpoint of the roll's width with the probe. Orient the test roll's tail seal so that it faces upward toward the probe. Rotate the roll 90 degrees toward the operator to align it for the initial compression.

15 Position the tip of the probe approximately 2 cm above the surface of the sample roll. Zero the crosshead position and load cell and start the tensile program. After the crosshead has returned to its starting position, rotate the roll toward the operator 120 degrees and in like fashion acquire a second measurement on the same sample roll.

From the resulting Force (N) verses Distance (mm) curves, read the penetration at 7.00 N
20 as the Roll Firmness and record to the nearest 0.1 mm. In like fashion analyze a total of ten (10) replicate sample rolls. Calculate the arithmetic mean of the 20 values and report Roll Firmness to the nearest 0.1 mm.

Slip Stick Coefficient of Friction and Kinetic Coefficient of Friction Method:

25 The Kinetic Coefficient of Friction values (actual measurements) and Slip Stick Coefficient of Friction (based on standard deviation from the mean Kinetic Coefficient of Friction) are generated by running the test procedure as defined in U.S. Patent No. 9,896,806.

Lint Value Test Method:

30 The amount of lint generated from a finished fibrous structure is determined with a Sutherland Rub Tester (available from Danilee Co., Medina, Ohio) and a color spectrophotometer (a suitable instrument is the HunterLab LabScan XE, as available from Hunter Associates Laboratory Inc., Reston, VA, or equivalent). such as the Hunter LabScan XE. The rub tester is a

motor-driven instrument for moving a weighted felt test strip over a finished fibrous structure specimen (referred to throughout this method as the “web”) along an arc path. The Hunter Color L value is measured on the felt test strip before and after the rub test. The difference between these two Hunter Color L values is then used to calculate a lint value. This lint method is designed to be used with white or substantially white fibrous structures and/or sanitary toilet tissue products. Therefore, if testing of a non-white tissue, such as blue-colored or peach-colored tissue is desired, the same formulation should be used to make a sample without the colored dye, pigment, etc., using bleached kraft pulps.

10 i. Sample preparation

Prior to the lint rub testing, the samples to be tested should be conditioned according to Tappi Method T402OM-88. Here, samples are preconditioned for 24 hours at a relative humidity level of 10 to 35% and within a temperature range of 22°C to 40°C. After this preconditioning step, samples should be conditioned for 24 hours at a relative humidity of 48 to 52% and within a temperature range of 22°C to 24°C. This rub testing should also take place within the confines of the constant temperature and humidity room.

The web is first prepared by removing and discarding any product which might have been abraded in handling, e.g., on the outside of the roll. For products formed from multiple plies of webs, this test can be used to make a lint measurement on the multi-ply product, or, if the plies can be separated without damaging the specimen, a measurement can be taken on the individual plies making up the product. If a given sample differs from surface to surface, it is necessary to test both surfaces and average the values in order to arrive at a composite lint value. In some cases, products are made from multiple-pplies of webs such that the facing-out surfaces are identical, in which case it is only necessary to test one surface. If both surfaces are to be tested, it is necessary to obtain six specimens for testing (Single surface testing only requires three specimens). Each specimen should measure approximately 9.5 by 4.5 in. (241.3mm by 114mm) with the 9.5 in. (241.3 mm) dimension running in the machine direction (MD). Specimens can be obtained directly from a finished product roll, if the appropriate width, or cut to size using a paper cutter. Each specimen should be folded in half such that the crease is running along the cross direction (CD) of the web sample. For two-surface testing, make up 3 samples with a first surface "out" and 3 with the second-side surface "out". Keep track of which samples are first surface "out" and which are second surface out.

Obtain a 30 in. by 40 in. piece of Crescent #300 cardboard. Using a paper cutter, cut out six pieces of cardboard to dimensions of 2.5 in. by 6 in. Puncture two holes into each of the six cards by forcing the cardboard onto the hold down pins of the Sutherland Rub tester.

Center and carefully place each of the 2.5 in. by 6 in. cardboard pieces on top of the six
5 previously folded samples. Make sure the 6 in. dimension of the cardboard is running parallel to the machine direction (MD) of each of the tissue samples. Center and carefully place each of the cardboard pieces on top of the three previously folded samples. Once again, make sure the 6 in. dimension of the cardboard is running parallel to the machine direction (MD) of each of the web samples.

10 Fold one edge of the exposed portion of the web specimen onto the back of the cardboard. Secure this edge to the cardboard with adhesive tape obtained from 3M Inc. (3/4 in. wide Scotch Brand, St. Paul, Minn.). Carefully grasp the other over-hanging tissue edge and snugly fold it over onto the back of the cardboard. While maintaining a snug fit of the web specimen onto the board, tape this second edge to the back of the cardboard. Repeat this procedure for each sample.

15 Turn over each sample and tape the cross-direction edge of the web specimen to the cardboard. One half of the adhesive tape should contact the web specimen while the other half is adhering to the cardboard. Repeat this procedure for each of the samples. If the tissue sample breaks, tears, or becomes frayed at any time during the course of this sample preparation procedure, discard and make up a new sample with a new tissue sample strip.

20 There will now be 3 first-side surface "out" samples on cardboard and (optionally) 3 second-side surface "out" samples on cardboard.

ii. Felt preparation

Obtain a 30 in. by 40 in. piece of Crescent #300 cardboard. Using a paper cutter, cut out
25 six pieces of cardboard to dimensions of 2.25 in. by 7.25 in. Draw two lines parallel to the short dimension and down 1.125 in. from the top and bottom most edges on the white side of the cardboard. Carefully score the length of the line with a razor blade using a straight edge as a guide. Score it to a depth about halfway through the thickness of the sheet. This scoring allows the cardboard/felt combination to fit tightly around and rest flat against the weight of the Sutherland
30 Rub tester. Draw an arrow running parallel to the long dimension of the cardboard on this scored side of the cardboard.

Cut six pieces of black felt (F-55, or equivalent) to the dimensions of 2.25 in. by 8.5 in. Place a felt piece on top of the unscored, green side of the cardboard such that the long edges of

both the felt and cardboard are parallel and in alignment. Make sure the fluffy side of the felt is facing up. Also allow about 0.5" to overhang the top and bottom most edges of the cardboard. Snugly fold over both overhanging felt edges onto the backside of the cardboard and attach with Scotch brand tape. Prepare a total of six of these felt/cardboard combinations. For best reproducibility, all samples should be run with the same lot of felt.

iii. Care of 4-pound weight

The four-pound weight has four square inches of effective contact area providing a contact pressure of one pound per square inch. Since the contact pressure can be changed by alteration of the rubber pads mounted on the face of the weight, it is important to use only the rubber pads supplied by the instrument manufacturer and mounted according to their instructions. These pads must be replaced if they become hard, abraded, or chipped off. When not in use, the weight must be positioned such that the pads are not supporting the full weight of the weight. It is best to store the weight on its side.

iv. Rub tester instrument calibration

Set up and calibrate the Sutherland Rub Tester according to the manufacturer's instructions. For this method, the tester is preset to run for five strokes (one stroke is a full forward and reverse cycle of the movable arm) and operates at 42 cycles per minute.

v. Color spectrophotometer calibration

Setup and standardize the color instrument using a 2 in. measurement area port size utilizing the manufacturer supplied black tile, then white tile. Calibrate the instrument according to manufacturer's specifications using their supplied standard tiles and configure it to measure Hunter L, a, b values.

vi. Measurement of samples

The first step in the measurement of lint is to measure the Hunter color values of the black felt/cardboard samples prior to being rubbed on the web sample. Center a felt covered cardboard, with the arrow pointing to the back of the color meter, over the measurement port backing it with a standard white plate. Since the felt width is only slightly larger than the viewing area diameter,

make sure the felt completely covers the measurement area. After confirming complete coverage, take a reading and record the Hunter L value.

Measure the Hunter Color L values for all the felt covered cardboards using this technique. If the Hunter Color L values are all within 0.3 units of one another, take the average to obtain the
5 initial L reading. If the Hunter Color L values are not within the 0.3 units, discard those felt/cardboard combinations outside the limit. Prepare new samples and repeat the Hunter Color L measurement until all samples are within 0.3 units of one another.

For the rubbing of the web sample/cardboard combinations, secure a prepared web sample card on the base plate of the rub tester by slipping the holes in the board over the hold-down pins.
10 Clip a prepared felt covered card (with established initial “L” reading) onto the four-pound weight by pressing the card ends evenly under the clips on the sides of the weight. Make certain the card is centered score bend to score bend on the weight, positioned flat against the rubber pads, with the felt side facing away from the rubber pads. Hook the weight onto the tester arm and gently lower onto the prepared web sample card. It is important to check that the felt is resting flat on the web
15 sample and that the weight does not bind on the arm.

Next, activate the tester allowing the weighted felt test strip to complete five full rubbing strokes against the web sample surface. At the end of the five strokes the tester will automatically stop. Remove the weight with the felt covered cardboard. Inspect the web sample. If torn, discard the felt and web sample and start over. If the web sample is intact, remove the felt covered
20 cardboard from the weight. Measure the Hunter Color L value on the felt covered cardboard in the same location as described above for the blank felts. Record the Hunter Color L readings for the felt after rubbing. Rub, measure, and record the Hunter Color L values for all remaining samples. After all web specimens have been measured, remove and discard all felt. Felts strips are not used again. Cardboards are used until they are bent, torn, limp, or no longer have a smooth surface.

25

vii. Calculations

For samples measured on both surfaces, subtract the average initial L reading found for the unused felts from each of the three first-side surface L readings and each of the three second-side surface L readings. Calculate the average delta for the three first-side surface values. Calculate the
30 average delta for the three second-side surface values. Finally, calculate the average of the lint value on the first-side surface and the second-side surface, and record as the lint value to the nearest whole unit.

For samples measured on only one surface, subtract the average initial L reading found for the unused felts from each of the three L readings. Calculate the average delta L for the three surface values and record as the lint value to the nearest whole unit.

5 Formation Index Test Method:

The formation index is a ratio of the contrast and size distribution components of the nonwoven substrate. The higher the formation index, the better the formation uniformity. Conversely, the lower the formation index, the worse the formation uniformity. The “formation index” is measured using a commercially available PAPRICAN Micro-Scanner Code LAD94,
10 manufactured by OpTest Equipment, Incorporated, utilizing the software developed by PAPRICAN & OpTest, Version 9.0, both commercially available from OpTest Equipment Inc., Ontario, Canada. The PAPRICAN Micro-Scanner Code LAD94 uses a video camera system for image input and a light box for illuminating the sample. The camera is a CCD camera with 65 $\mu\text{m}/\text{pixel}$ resolution.

15 The video camera system views a nonwoven sample placed on the center of a light box having a diffuser plate. To illuminate the sample for imaging, the light box contains a diffused quartz halogen lamp of 82V/250 W that is used to provide a field of illumination. A uniform field of illumination of adjustable intensity is provided. Specifically, samples for the formation index testing are cut from a cross direction width strip of the nonwoven substrate. The samples are cut
20 into 101.6 mm (4 inches) by 101.6 mm (4 inches) squares, with one side aligned with the machine direction of the test material. The side aligned with the machine direction of the test material is placed onto the testing area and held in place by the specimen plate with the machine direction pointed towards the instrument support arm that holds the camera. Each specimen is placed on the light box such that the side of the web to be measured for uniformity is facing up, away from the
25 diffuser plate. To determine the formation index, the light level must be adjusted to indicate MEAN LCU GRAY LEVEL of 128 ± 1 .

The specimen is set on the light box between the specimen plate so that the center of the specimen is aligned with the center of the illumination field. All other natural or artificial room light is extinguished. The camera is adjusted so that its optical axis is perpendicular to the plane of
30 the specimen and so that its video field is centered on the center of the specimen. The specimen is then scanned and calculated with the OpTest Software.

Fifteen specimens of the nonwoven substrate were tested for each sample and the values were averaged to determine the formation index.

Density and Bulk (Dry) Test Method:

The density of a fibrous structure and/or sanitary tissue product is calculated as the quotient of the Basis Weight of a fibrous structure or sanitary tissue product expressed in lbs/3000 ft² divided by the Caliper (at 95 g/in²) of the fibrous structure or sanitary tissue product expressed in mils. The final Density value is calculated in lbs/ft³ and/or g/cm³, by using the appropriate converting factors. The bulk of a fibrous structure and/or sanitary tissue product is the reciprocal of the density method (i.e., Bulk = 1 / Density).

Dry Thick Compression and Recovery Test Method (“Dry Compression” or “Compressive Slope (Dry)”):

5 Dry Thick Compression and Dry Thick Compressive Recovery are measured using a constant rate of extension tensile tester (a suitable instrument is the EJA Vantage, Thwing-Albert, West Berlin NJ, or equivalent) fitted with compression fixtures, a circular compression foot having an area of 1.0 in² and a circular anvil having an area of at least 4.9 in². The thickness (caliper in mils) is measured at varying pressure values ranging from 10-1500 g/in² in both the compression and relaxation directions.

10 Four (4) samples are prepared by the cutting of a usable unit obtained from the outermost sheets of a finished product roll after removing at least the leading five sheets by unwinding and tearing off via the closest line of weakness, such that each cut sample is 2.5×2.5 inches, avoiding creases, folds, and obvious defects.

15 The compression foot and anvil surfaces are aligned parallel to each other, and the crosshead zeroed at the point where they are in contact with each other. The tensile tester is programmed to perform a compression cycle, immediately followed by an extension (recovery) cycle. Force and extension data are collected at a rate of 50 Hz, with a crosshead speed of 0.10 in/min. Force data is converted to pressure (g/in², or gsi). The compression cycle continues until 20 a pressure of 1500 gsi is reached, at which point the crosshead stops and immediately begins the extension (recovery) cycle with the data collection and crosshead speed remaining the same.

 The sample is placed flat on the anvil fixture, ensuring the sample is centered beneath the foot so that when contact is made the edges of the sample will be avoided. Start the tensile tester and data collection. Testing is repeated in like fashion for all four samples.

25 The thickness (mils) vs. pressure (g/in², or gsi) data is used to calculate the sample's compressibility, near-zero load caliper, and compressive modulus. A least-squares linear

regressions is performed on the thickness vs. the logarithm (base10) of the applied pressure data using nine discrete data points at pressures of 10, 25, 50, 75, 100, 125, 150, 200, 300 gsi and their respective thickness readings. Compressibility (m) equals the slope of the linear regression line, with units of mils/log (gsi). The higher the magnitude of the negative value the more “compressible” the sample is. Near-zero load caliper (b) equals the y-intercept of the linear regression line, with units of mils. This is the extrapolated thickness at log (1 gsi pressure). Compressive Modulus is calculated as the y-intercept divided by the negative slope (-b/m) with units of log (gsi).

Dry Thick Compression is defined as:

$$\text{Dry Thick Compression (mils} \cdot \text{mils} / \log (\text{gsi}) = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)}$$

Compression Slope is defined as -1 x Compressibility (m).

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied. Calculate the arithmetic mean of the four replicate values and report Dry Thick Compression to the nearest integer value mils* mils / log (gsi).

Dry Thick Compressive Recovery is defined as:

$$\text{Dry Thick Compressive Recovery (mils} \cdot \text{mils} / \log (\text{gsi})$$

$$= -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)} \times \frac{\text{Recovered Thickness at 10 g/in}^2}{\text{Compressed Thickness at 10 g/in}^2}$$

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied and maintain fraction recovery at 10 g/in². Compressed thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the compressive portion of the test. Recovered thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the recovery portion of the test. Calculate the arithmetic mean of the four replicate values and report Dry Thick Compressive Recovery to the nearest integer value mils* mils / log (gsi).

Wet Thick Compression and Recovery Test Method (Wet Compression):

Wet Thick Compression and Wet Thick Compressive Recovery are measured using a constant rate of extension tensile tester (a suitable instrument is the EJA Vantage, Thwing-Albert,

West Berlin NJ, or equivalent) fitted with compression fixtures, a circular compression foot having an area of 1.0 in² and a circular anvil having an area of at least 4.9 in². The thickness (caliper in mils) is measured at varying pressure values ranging from 10-1500 g/in² in both the compression and relaxation directions.

- 5 Four (4) samples are prepared by the cutting of a usable unit obtained from the outermost sheets of a finished product roll after removing at least the leading five sheets by unwinding and tearing off via the closest line of weakness, such that each cut sample is 2.5×2.5 inches, avoiding creases, folds, and obvious defects.

10 The compression foot and anvil surfaces are aligned parallel to each other, and the crosshead zeroed at the point where they are in contact with each other. The tensile tester is programmed to perform a compression cycle, immediately followed by an extension (recovery) cycle. Force and extension data are collected at a rate of 50 Hz, with a crosshead speed of 0.10 in/min. Force data is converted to pressure (g/in², or gsi). The compression cycle continues until a pressure of 1500 gsi is reached, at which point the crosshead stops and immediately begins the
15 extension (recovery) cycle with the data collection and crosshead speed remaining the same.

The sample is placed flat on the anvil fixture, ensuring the sample is centered beneath the foot so that when contact is made the edges of the sample will be avoided. Using a pipette, fully saturate the entire sample with distilled or deionized water until there is no observable dry area remaining and water begins to run out of the edges. Start the tensile tester and data collection.
20 Testing is repeated in like fashion for all four samples.

The thickness (mils) vs. pressure (g/in², or gsi) data is used to calculate the sample's compressibility, "near-zero load caliper", and compressive modulus. A least-squares linear regressions is performed on the thickness vs. the logarithm (base10) of the applied pressure data using nine discrete data points at pressures of 10, 25, 50, 75, 100, 125, 150, 200, 300 gsi and their
25 respective thickness readings. Compressibility (m) equals the slope of the linear regression line, with units of mils/log (gsi). The higher the magnitude of the negative value the more "compressible" the sample is. Near-zero load caliper (b) equals the y-intercept of the linear regression line, with units of mils. This is the extrapolated thickness at log (1 gsi pressure). Compressive Modulus is calculated as the y-intercept divided by the negative slope (-b/m) with
30 units of log (gsi).

Wet Thick Compression is defined as:

$$\text{Dry Thick Compression (mils} \cdot \text{mils} / \log (\text{gsi}) = -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)}$$

Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied. Calculate the arithmetic mean of the four replicate values and report Wet Thick Compression to the nearest integer value mils* mils / log (gsi).

Wet Thick Compressive Recovery is defined as:

5

Dry Thick Compressive Recovery (mils · mils / log (gsi)

$$= -1 \times \text{Near Zero Load Caliper (b)} \times \text{Compressibility (m)} \times \frac{\text{Recovered Thickness at 10 gsi}}{\text{Compressed Thickness at 10 gsi}}$$

10 Multiplication by -1 turns formula into a positive. Larger results represent thick products that compress when a pressure is applied and maintain fraction recovery at 10 g/in². Compressed thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the compressive portion of the test. Recovered thickness at 10 g/in² is the thickness of the material at 10 g/in² pressure during the recovery portion of the test. Calculate the arithmetic mean of the four replicate values and report Wet Thick Compressive Recovery to the nearest integer value mils* mils / log
15 (gsi).

Moist Towel Surface Structure Test Method:

This test method measures the surface topography of a towel surface, both in a dry and moist state, and calculates the % contact area and the median depth of the lowest 10% of the
20 projected measured area, with the test sample under a specified pressure using a smooth and rigid transparent plate with an anti-reflective coating (to minimize and/or eliminate invalid image pixels).

Condition the samples or useable units of product, with wrapper or packaging materials removed, in a room conditioned at 50 ± 2% relative humidity and 23°C ± 1°C (73° ± 2°F) for a
25 minimum of two hours prior to testing. Do not test useable units with defects such as wrinkles, tears, holes, effects of tail seal or core adhesive, etc., and when necessary, replace with other useable units free of such defects. Test sample dimensions shall be of the size of the usable unit, removed carefully at the perforations if they are present. If perforations are not present, or for
30 samples larger than 8 inches MD by 11 inches CD, cut the sample to a length of approximately 6 inches in the MD and 11 inches in the CD. In this test only the inside surface of the usable unit(s) is analyzed. The inside surface is identified as the surface oriented toward the interior core when wound on a product roll (i.e., the opposite side of the surface visible on the outside roll as presented to a consumer).

The instrument used in this method is a Gocator 3210 Snapshot System (LMI Technologies, Inc., 9200 Glenlyon Parkway, Burnaby, BC V5J 5J8 Canada), or equivalent. This instrument is an optical 3D surface topography measurement system that measures the surface height of a sample using a projected structured light pattern technique. The result of the measurement is a topography map of surface height (z-directional or z-axis) versus displacement in the x-y plane. This particular system has a field of view of approximately 100 x 154 mm, however the captured images are cropped to 80 x 130 mm (from the center) prior to analysis. The system has an x-y pixel resolution of 86 microns. The clearance distance from the camera to the testing surface (which is smooth and flat, and perpendicular to the camera view) is 23.5 (+/- 0.2) cm – see FIG. 10. Calibration plates can be used to verify that the system is accurate to manufacturer's specifications. The system is set to a Brightness value of 7, and a Dynamic value of 3, in order to most accurately capture the surface topography and minimize non-measured pixels and noise. Other camera settings may be used, with the objective of most accurately measuring the surface topography, while minimizing the number of invalid and non-measurable points.

Test samples are handled only at their corners. The test sample is first weighted on a scale with at least 0.001 gram accuracy, and its dry weight recorded to the nearest 0.01 gram. It is then placed on the testing surface, with its inside face oriented towards the Gocator camera, and centered with respect to the imaging view. A smooth and rigid transparent plate (8 x 10 inches) is gently placed on top of the test sample, centered with respect to its x-y dimensions. Equal size weights are placed on the four corners of the transparent plate such that they are close to the four corners of the projected imaged area, but do not interfere in any way with the measurement image. The size of each equal sized weight is such that the total weight of transparent plate and the four weights delivers a total pressure of 25 (+/- 1) grams per square inch (gsi) to the test sample under the plate. Within 15 seconds of placing the four weights in their proper position, the Gocator system is then initiated to acquire the topography image of the test sample in its 'dry' state.

Immediately after saving the Gocator image of the 'dry' state image, the weights and plate are removed from the test sample. The test sample is then moved to a smooth, clean countertop surface, with its inside face still up. Using a pipette, 15-30 ml of deionized water is distributed evenly across the entire surface of the test sample until it is visibly apparent that the water has fully wetted the entire test sample, and no unwetted area is observed. The wetting process is to be completed in less than a minute. The wet test sample is then gently picked up by two adjacent corners, so that it hangs freely (dripping may occur), and carefully placed on a sheet of blotter paper (Whatman cellulose blotting paper, grade GB003, cut to dimensions larger than the test

sample). The wet test sample must be placed flat on the blotting paper without wrinkles or folds present. A smooth, 304 stainless steel cylindrical rod (density of $\sim 8 \text{ g/cm}^3$), with dimensions of 1.75 inch diameter and 12 inches long, is then rolled over the entire test sample at a speed of 1.5 – 2.0 inches per second, in the direction of the shorter of the two dimensions of the test sample. If
5 creases or folds are created during the rolling process, and are inside the central area of the sample to be measured (i.e., if they cannot slightly adjusted or avoided in the topography measurement), then the test sample is to be discarded for a new test sample, and the measurement process started over. Otherwise, the moist sample is picked up by two adjacent corners and weighed on the scale to the nearest 0.01 gram (i.e., its moist weight). At this point, the moist test paper towel test sample
10 will have a moisture level between 1.25 and 2.00 grams H_2O per gram of initial dry material.

The moist test sample is then placed flat on the Gocator testing surface (handling it carefully, only touching its corners), with its inside surface pointing towards the Gocator camera, and centered with respect to the imaging view (as close to the same position it was for the ‘dry’ state image). After ensuring that the sample is flat, and no folds or creases are present in the
15 imaging area, the smooth and rigid transparent plate (8 x 10 inches) is gently placed on top of the test sample, centered with respect to its x-y dimensions. The equal size weights are placed on the four corners of the transparent plate (i.e., the same weights that were used in the dry sample testing) such that they are close to the four corners of the projected imaged area, but do not interfere in any way with the measurement image. Within 15 seconds of placing the four weights in their proper
20 position, the Gocator system is then initiated to acquire the topography image of the test sample in its ‘moist’ state.

At this point, the test sample has both ‘dry’ and ‘moist’ surface topography (3D) images. These are processed using surface texture analysis software such as MountainsMap® (available from Digital Surf, France) or equivalent, as follows: 1) The first step is to crop the image. As
25 stated previously, this particular system has a field of view of approximately 100 x 154 mm, however the image is cropped to 80 x 130 mm (from the center). 2) Remove ‘invalid’ and non-measured points. 3) Apply a 3x3 median filter (to reduce effects of noise). 4) Apply an ‘Align’ filter, which subtracts a least squares plane to level the surface (to create an overall average of heights centered at zero). 5) Apply a Gaussian filter (according to ISO 16610-61) with a nesting
30 index (cut-off wavelength) of 25 mm (to flatten out large scale waviness, while preserving finer structure).

From these processed 3D images of the surface, the following parameters are calculated, using software such as MountainsMap® or equivalent: Dry Depth (um), Dry Contact Area (%), Moist Depth (um), and Moist Contact Area (%).

Height measurements are derived from the Areal Material Ratio (Abbott-Firestone) curve described in the ISO 13565-2:1996 standard extrapolated to surfaces. This curve is the cumulative curve of the surface height distribution histogram versus the range of surface heights measured. A material ratio is the ratio, expressed as a percent, of the area corresponding to points with heights equal to or above an intersecting plane passing through the surface at a given height, or cut depth, to the cross-sectional area of the evaluation region (field of view area). For calculating contact area, the height at a material ratio of 2% is first identified. A cut depth of 100 µm below this height is then identified, and the material ratio at this depth is recorded as the “Dry Contact Area” and “Moist Contact Area”, respectively, to the nearest 0.1%.

In order to calculate “Depth” (Dry and Moist, respectively), the depth at the 95% material ratio relative to the mean plane (centered height data) of the specimen surface is identified. This corresponds to a depth equal to the median of the lowest 10% of the projected area (valleys) of the specimen surface and is recorded as the “Dry Depth” and “Moist Depth”, respectively, to the nearest 1 micron (um). These values will be negative as they represent depths below the mean plane of the surface heights having a value of zero.

Three replicate samples are prepared and measured in this way, to produce an average for each of the four parameters: Dry Depth (um), Dry Contact Area (%), Moist Depth (um), and Moist Contact Area (%). Additionally, from these parameters, the difference between the dry and moist depths can be calculated to demonstrate the change in depth from the dry to the moist state.

Micro-CT Intensive Property Measurement Method:

The micro-CT intensive property measurement method measures the basis weight, thickness and density values within visually discernable zones or regions of a substrate sample. It is based on analysis of a 3D x-ray sample image obtained on a micro-CT instrument (a suitable instrument is the Scanco µCT 50 available from Scanco Medical AG, Switzerland, or equivalent). The micro-CT instrument is a cone beam microtomograph with a shielded cabinet. A maintenance free x-ray tube is used as the source with an adjustable diameter focal spot. The x-ray beam passes through the sample, where some of the x-rays are attenuated by the sample. The extent of attenuation correlates to the mass of material the x-rays have to pass through. The transmitted x-rays continue on to the digital detector array and generate a 2D projection image of the sample. A

3D image of the sample is generated by collecting several individual projection images of the sample as it is rotated, which are then reconstructed into a single 3D image. The instrument is interfaced with a computer running software to control the image acquisition and save the raw data. The 3D image is then analyzed using image analysis software (a suitable image analysis software is MATLAB available from The Mathworks, Inc., Natick, MA, or equivalent) to measure the basis weight, thickness and density intensive properties of regions within the sample.

Sample Preparation

To obtain a sample for measurement, lay a single layer of the dry substrate material out flat and die cut a circular piece with a diameter of 16 mm. If the sample being measured is a 2 (or more) ply finished product, carefully separate an individual ply of the finished product prior to die cutting. The sample weight is recorded. A sample may be cut from any location containing the region or cells to be analyzed. Regions, zones, or cells within different samples taken from the same substrate material can be analyzed and compared to each other. Care should be taken to avoid embossed regions, folds, wrinkles, or tears when selecting a location for sampling.

Image Acquisition

Set up and calibrate the micro-CT instrument according to the manufacturer's specifications. Place the sample into the appropriate holder, between two rings of low-density material, which have an inner diameter of 12 mm. This will allow the central portion of the sample to lay horizontal and be scanned without having any other materials directly adjacent to its upper and lower surfaces. Measurements should be taken in this region. The 3D image field of view is approximately 20 mm on each side in the xy-plane with a resolution of approximately 3400 by 3400 pixels, and with a sufficient number of 6 micron thick slices collected to fully include the z-direction of the sample. The reconstructed 3D image contains isotropic voxels of 6 microns. Images were acquired with the source at 45 kVp and 133 μ A with no additional low energy filter. These current and voltage settings should be optimized to produce the maximum contrast in the projection data with sufficient x-ray penetration through the sample, but once optimized held constant for all substantially similar samples. A total of 1700 projections images are obtained with an integration time of 500 ms and 4 averages. The projection images are reconstructed into the 3D image and saved in 16-bit format to preserve the full detector output signal for analysis.

Image Processing

Load the 3D image into the image analysis software. The largest cross-sectional area of the sample should be nearly parallel with the x-y plane, with the z-axis being perpendicular. Threshold the 3D image at a value which separates, and removes, the background signal due to air, but maintains the signal from the sample fibers within the substrate.

5 Five 2D intensive property images are generated from the thresholded 3D image. The first is the Basis Weight Image, which is a projection image. Each x-y pixel in this image represents the summation of the intensity values along voxels in the z-direction. This results in a 2D image where each pixel now has a value equal to the cumulative signal through the entire sample.

10 The weight of the sample divided by the z-direction projected area of the punched sample provides the actual average basis weight of the sample. This correlates with the average signal intensity from the Basis Weight image described above, allowing it to be represented in units of g/m^2 (gsm).

15 The second intensive property 2D image is the Thickness Image. To generate this image the upper and lower surfaces of the sample are identified, and the distance between these surfaces is calculated giving the sample thickness. The upper surface of the sample is identified by starting at the uppermost z-direction slice and evaluating each slice going through the sample to locate the z-direction voxel for all pixel positions in the xy-plane where sample signal was first detected. The same procedure is followed for identifying the lower surface of the sample, except the z-direction voxels located are all the positions in the xy-plane where sample signal was last detected. Once
20 the upper and lower surfaces have been identified they are smoothed with a 15x15 median filter to remove signal from stray fibers. The 2D Thickness Image is then generated by counting the number of voxels that exist between the upper and lower surfaces for each of the pixel positions in the xy-plane. This raw thickness value is then converted to actual distance, in microns, by multiplying the voxel count by the 6 μm slice thickness resolution.

25 The third intensive property 2D image is the Density Image (see for example FIG. 12). To generate this image, divide each xy-plane pixel value in the Basis Weight Image, in units of gsm, by the corresponding pixel in the Thickness Image, in units of microns. The units of the Density Image are grams per cubic centimeter (g/cc).

30 For each x-y location, the first and last occurrence of a thresholded voxel position in the z-direction is recorded. This provides two sets of points representing the Top Layer and Bottom Layer of the sample. Each set of points are fit to a second-order polynomial to provide smooth top and bottom surfaces. These surfaces define fourth and fifth 2D intensive property images, the top-

layer and bottom-layer of the sample. These surfaces are saved as images with the gray values of each pixel representing the z-value of the surface point.

Micro-CT Basis Weight, Thickness and Density Intensive Properties

5 This sub-section of the method may be used to measure zones or regions generally. Begin by identifying the zone or region to be analyzed. Next, identify the boundary of the identified region to be analyzed. The boundary of a region is identified by visual discernment of differences in intensive properties when compared to other regions within the sample. For example, a region boundary can be identified based by visually discerning a thickness difference when compared to
10 another region in the sample. Any of the intensive properties can be used to discern region boundaries on either on the physical sample itself or any of the micro-CT intensive property images. Once the boundary of a zone or region has been identified draw the largest circular region of interest that can be inscribed within the region. From each of the first three intensive property images calculate the average basis weight, thickness, and density within the region of interest.
15 Record these values as the region's micro-CT basis weight to the nearest 0.01 gsm, micro-CT thickness to the nearest 0.1 micron and micro-CT density to the nearest 0.0001 g/cc.

To calculate the percent difference between zones or regions may be calculated according to the "Percent (%) difference" definition above.

20 Concavity Ratio and Packing Fraction Measurements

As outlined above, five different types of 2D intensive property images are created. These images include: (1) a basis weight image, (2) a thickness image, (3) a density image, (4) a top-layer image, and (5) a bottom-layer image.

To measure discrete pillow and knuckle Concavity Ratio and Packing Fraction, begin by
25 identifying the boundary of the selected discrete pillow or knuckle cells. The boundary of a cell is identified by visual discernment of differences in intensive properties when compared to other cells within the sample. For example, a cell boundary can be identified based by visually discerning a density difference when compared to another cell in the sample. Any of the intensive properties (basis weight, thickness, density, top-layer, and bottom-layer) can be used to discern cell
30 boundaries on either the physical sample itself or any of the micro-CT 2D intensive property images.

Using the image analysis software, manually draw a line tracing the identified boundary of each individual whole and partial discrete knuckle or discrete pillow cell 24 visible within the

sample boundary 100, and generate a new binary image containing only the closed filled in shapes of all the identified discrete cells (see for example FIG. 13). Analyze all the individual discrete cell shapes in the binary image and record the following measurements for each: 1) Area and 2) Convex Hull Area.

5 The Concavity Ratio is a measure of the presence and extent of concavity within the shapes of the discrete knuckle or pillow cells. Using the recorded measurements calculate the Concavity Ratio for each of the analyzed discrete cells as the ratio of the shape area to its convex hull area. Identify ten substantially similar replicate discrete knuckle or pillow cells and average together their individual Concavity Ratio values and report the average Concavity Ratio as a unitless value
10 to the nearest 0.01. If ten replicate cells cannot be identified in a single sample, then a sufficient number of replicate samples are to be analyzed according to the described procedure. If the sample contains discrete knuckle or pillow cells of differing size or shape, identify ten substantially similar replicates of each of the different shapes and sizes, calculate an average Concavity Ratio for each and report the minimum average Concavity Ratio value.

15 The Packing Fraction is the fraction of the sample area filled by the discrete knuckle and pillow shapes. The Packing Fraction value for the sample is calculated by summing all the recorded whole and partial identified shape areas, regardless of shape or size, and dividing that total by the sample area within the sample boundary **100**. The Packing Fraction is reported as a unitless value to the nearest 0.01.

20

Continuous Region Density Difference Measurement

This sub-section of the method may be used when a continuous region is present. To measure the Continuous Region Density Difference, first identify a Cell Group 40 of four adjacent and nearest-neighboring discrete knuckle (e.g., FIG. 11, 20-A through 20-D) or pillow cells and
25 their boundaries as described above, such that when the centroids of each of the four cells are connected a quadrilateral will be formed having four edges 90 and two diagonals 92 (see for example FIG. 11). Avoid analyzing any Cells Groups containing embossing. Within this Cell Group identify the continuous pillow or knuckle region. Select five locations to analyze within the identified continuous region: One will be located on each of the cell centroid connecting lines
30 forming the four edges of the quadrilateral, and one located in the middle where the quadrilateral diagonals intersect. At each of the selected locations draw the largest circular region of interest that can be inscribed within the continuous region, with the center of each of the four edge regions of interest lying on the centroid connecting line (e.g., pillow regions **22-1**, **22-3**, **22-8**, **22-9**) and the

middle region of interest centered at the location where the diagonals intersect (e.g., **22-2**). From the density intensive property image calculate and record the average density within each of the five regions of interest. Calculate and record the percent difference between the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100. Perform this analysis for three substantially similar replicate Cell Groups of four discrete knuckle or pillow locations within the sample and report the average percent difference value to the nearest whole percent.

10 Continuous Region Density Difference Measurement

This sub-section of the method may be used when a continuous region is present. To measure the Continuous Region Density Difference, first identify a Cell Group 40 of four adjacent and nearest-neighboring discrete knuckle (e.g., FIG. 11, 20-A through 20-D) or pillow cells and their boundaries as described above, such that when the centroids of each of the four cells are connected a quadrilateral will be formed having four edges 90 and two diagonals 92 (see for example FIG. 11). Avoid analyzing any Cells Groups containing embossing. Within this Cell Group identify the continuous pillow or knuckle region. Select five locations to analyze within the identified continuous region: One will be located on each of the cell centroid connecting lines forming the four edges of the quadrilateral, and one located in the middle where the quadrilateral diagonals intersect. At each of the selected locations draw the largest circular region of interest that can be inscribed within the continuous region, with the center of each of the four edge regions of interest lying on the centroid connecting line (e.g., pillow regions 22-1, 22-3, 22-8, 22-9) and the middle region of interest centered at the location where the diagonals intersect (e.g., 22-2). From the density intensive property image calculate and record the average density within each of the five regions of interest. Calculate and record the percent difference between the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100. Perform this analysis for three substantially similar replicate Cell Groups of four discrete knuckle or pillow locations within the sample and report the average percent difference value to the nearest whole percent.

Micro-CT Basis Weight, Thickness and Density Intensive Properties

This sub-section of the method may be used to measure zones or regions generally. Once the boundary of a zone or region has been identified draw the largest circular region of interest that can be inscribed within the region. From each of the first three intensive property images calculate the average basis weight, thickness and density within the region of interest. Record these values as the region's micro-CT basis weight to the nearest 0.01 gsm, micro-CT thickness to the nearest 0.1 micron and micro-CT density to the nearest 0.0001 g/cc. To calculate and record the percent difference between ZONES OR REGIONS: the highest and lowest recorded density values. Percent difference is calculated by: subtracting the lowest density value from the highest density value and then dividing that value by the average of the lowest and highest density values, and then multiplying the result by 100.

Basis Weigh- Method:

Basis weight of a fibrous structure and/or sanitary tissue product (TAPPI conditioned as follows: Temperature is controlled from $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$ and Relative Humidity is controlled from $50\% \pm 2\%$) is measured on stacks of twelve usable units using a top loading analytical balance with a resolution of ± 0.001 g. The balance is protected from air drafts and other disturbances using a draft shield. A precision cutting die, measuring 3.500 in ± 0.0035 in by 3.500 in ± 0.0035 in is used to prepare all samples.

With a precision cutting die, cut the samples into squares. Combine the cut squares to form a stack twelve samples thick. Measure the mass of the sample stack and record the result to the nearest 0.001 g.

The Basis Weight is calculated in lbs/3000 ft² or g/m² as follows:

$$\text{Basis Weight} = (\text{Mass of stack}) / [(\text{Area of 1 square in stack}) \times (\text{No. of squares in stack})]$$

For example:

$$\text{Basis Weight (lbs/3000 ft}^2\text{)} = [(\text{Mass of stack (g)} / 453.6 \text{ (g/lbs)}) / [12.25 \text{ (in}^2\text{)} / 144 \text{ (in}^2\text{/ft}^2\text{)} \times 12]] \times 3000$$

or,

$$\text{Basis Weight (g/m}^2\text{)} = \text{Mass of stack (g)} / [79.032 \text{ (cm}^2\text{)} / 10,000 \text{ (cm}^2\text{/m}^2\text{)} \times 12].$$

Report the numerical result to the nearest 0.1 lbs/3000 ft² or 0.1 g/m² or "gsm." Sample dimensions can be changed or varied using a similar precision cutter as mentioned above, so as at least 100 square inches of sample area in stack.

Emtec Test Method:

TS7 and TS750 values are measured using an EMTEC Tissue Softness Analyzer ("Emtec TSA") (Emtec Electronic GmbH, Leipzig, Germany) interfaced with a computer running Emtec

TSA software (version 3.19 or equivalent). According to Emtec, the TS7 value correlates with the real material softness, while the TS750 value correlates with the felt smoothness/roughness of the material. The Emtec TSA comprises a rotor with vertical blades which rotate on the test sample at a defined and calibrated rotational speed (set by manufacturer) and contact force of 100 mN.

- 5 Contact between the vertical blades and the test piece creates vibrations, which create sound that is recorded by a microphone within the instrument. The recorded sound file is then analyzed by the Emtec TSA software. The sample preparation, instrument operation and testing procedures are performed according the instrument manufacture's specifications.

10 Sample Preparation

- Test samples are prepared by cutting square or circular samples from a finished product. Test samples are cut to a length and width (or diameter if circular) of no less than about 90 mm, and no greater than about ("no greater than about" used interchangeably with "less than about" herein) 120 mm, in any of these dimensions, to ensure the sample can be clamped into the TSA instrument properly. Test samples are selected to avoid perforations, creases or folds within the testing region. Prepare 8 substantially similar replicate samples for testing. Equilibrate all samples at TAPPI standard temperature and relative humidity conditions ($23\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ and $50\text{ \%} \pm 2\text{ \%}$) for at least 1 hour prior to conducting the TSA testing, which is also conducted under TAPPI conditions.

20

Testing Procedure

- Calibrate the instrument according to the manufacturer's instructions using the 1-point calibration method with Emtec reference standards ("ref.2 samples"). If these reference samples are no longer available, use the appropriate reference samples provided by the manufacturer.
- 25 Calibrate the instrument according to the manufacturer's recommendation and instruction, so that the results will be comparable to those obtained when using the 1-point calibration method with Emtec reference standards ("ref.2 samples").

- Mount the test sample into the instrument and perform the test according to the manufacturer's instructions. When complete, the software displays values for TS7 and TS750.
- 30 Record each of these values to the nearest 0.01 dB V^2 rms. The test piece is then removed from the instrument and discarded. This testing is performed individually on the top surface (outer facing surface of a rolled product) of four of the replicate samples, and on the bottom surface (inner facing surface of a rolled product) of the other four replicate samples.

The four test result values for TS7 and TS750 from the top surface are averaged (using a simple numerical average); the same is done for the four test result values for TS7 and TS750 from the bottom surface. Report the individual average values of TS7 and TS750 for both the top and bottom surfaces on a particular test sample to the nearest 0.01 dB V² rms. Additionally, average
5 together all eight test value results for TS7 and TS750, and report the overall average values for TS7 and TS750 on a particular test sample to the nearest 0.01 dB V² rms. Unless otherwise specified, the reported values for TS7 and TS750 will be the overall average of the eight test values from the top and bottom surfaces.

10 SST Absorbency Rate Method:

This test incorporates the Slope of the Square Root of Time (SST) Test Method. The SST method measures rate over a wide spectrum of time to capture a view of the product pick-up rate over the useful lifetime. In particular, the method measures the absorbency rate via the slope of the mass versus the square root of time from 2-15 seconds.

15

Overview

The absorption (wicking) of water by a fibrous sample is measured over time. A sample is placed horizontally in the instrument and is supported with minimal contact during testing (without allowing the sample to droop) by an open weave net structure that rests on a balance. The test
20 is initiated when a tube connected to a water reservoir is raised and the meniscus makes contact with the center of the sample from beneath, at a small negative pressure. Absorption is controlled by the ability of the sample to pull the water from the instrument for approximately 20 seconds. Rate is determined as the slope of the regression line of the outputted weight vs sqrt(time) from 2 to 15 seconds.

25

Apparatus

Conditioned Room - Temperature is controlled from 73°F ± 2°F (23°C ± 1°C). Relative Humidity is controlled from 50% ± 2%

Sample Preparation – Product samples are cut using hydraulic/pneumatic precision cutter
30 into 3.375 inch diameter circles.

Capacity Rate Tester (CRT) - The CRT is an absorbency tester capable of measuring capacity and rate. The CRT consists of a balance (0.001g), on which rests on a woven grid (using nylon monofilament line having a 0.014" diameter) placed over a small reservoir with a delivery

tube in the center. This reservoir is filled by the action of solenoid valves, which help to connect the sample supply reservoir to an intermediate reservoir, the water level of which is monitored by an optical sensor. The CRT is run with a -2mm water column, controlled by adjusting the height of water in the supply reservoir.

- 5 A diagram of the testing apparatus set up is shown in FIG. 9.
- Software - LabView based custom software specific to CRT Version 4.2 or later.
- Water - Distilled water with conductivity < 10 $\mu\text{S}/\text{cm}$ (target <5 $\mu\text{S}/\text{cm}$) @ 25°C

Sample Preparation

- 10 For this method, a usable unit is described as one finished product unit regardless of the number of plies. Condition all samples with packaging materials removed for a minimum of 2 hours prior to testing. Discard at least the first ten usable units from the roll. Remove two usable units and cut one 3.375-inch circular sample from the center of each usable unit for a total of 2 replicates for each test result. Do not test samples with defects such as wrinkles, tears, holes, etc.
- 15 Replace with another usable unit which is free of such defects

Sample Testing

Pre-test set-up

1. The water height in the reservoir tank is set -2.0 mm below the top of the support rack
20 (where the towel sample will be placed).
2. The supply tube (8mm I.D.) is centered with respect to the support net.
3. Test samples are cut into circles of 3-3/8" diameter and equilibrated at Tappi environment conditions for a minimum of 2 hours.

Test Description

- 25 1. After pressing the start button on the software application, the supply tube moves to 0.33 mm below the water height in the reserve tank. This creates a small meniscus of water above the supply tube to ensure test initiation. A valve between the tank and the supply tube closes, and the scale is zeroed.
- 30 2. The software prompts you to "load a sample". A sample is placed on the support net, centering it over the supply tube, and with the side facing the outside of the roll placed downward.

3. Close the balance windows and press the “OK” button -- the software records the dry weight of the circle.
4. The software prompts you to “place cover on sample”. The plastic cover is placed on top of the sample, on top of the support net. The plastic cover has a center pin (which is flush with the outside rim) to ensure that the sample is in the proper position to establish hydraulic connection. Four other pins, 1 mm shorter in depth, are positioned 1.25-1.5 inches radially away from the center pin to ensure the sample is flat during the test. The sample cover rim should not contact the sheet. Close the top balance window and click “OK”.
5. The software re-zeroes the scale and then moves the supply tube towards the sample. When the supply tube reaches its destination, which is 0.33 mm below the support net, the valve opens (i.e., the valve between the reserve tank and the supply tube), and hydraulic connection is established between the supply tube and the sample. Data acquisition occurs at a rate of 5 Hz and is started about 0.4 seconds before water contacts the sample.
6. The test runs for at least 20 seconds. After this, the supply tube pulls away from the sample to break the hydraulic connection.
7. The wet sample is removed from the support net. Residual water on the support net and cover are dried with a paper towel.
8. Repeat until all samples are tested.
9. After each test is run, a *.txt file is created (typically stored in the CRT/data/rate directory) with a file name as typed at the start of the test. The file contains all the test set-up parameters, dry sample weight, and cumulative water absorbed (g) vs. time (sec) data collected from the test.

Calculation of Rate of Uptake

- 25 Take the raw data file that includes time and weight data.

First, create a new time column that subtracts 0.4 seconds from the raw time data to adjust the raw time data to correspond to when initiation actually occurs (about 0.4 seconds after data collection begins).

- 30 Second, create a column of data that converts the adjusted time data to square root of time data (e.g., using a formula such as SQRT() within Excel).

Third, calculate the slope of the weight data vs the square root of time data (e.g., using the SLOPE() function within Excel, using the weight data as the y-data and the sqrt(time) data as the

x-data, etc.). The slope should be calculated for the data points from 2 to 15 seconds, inclusive (or 1.41 to 3.87 in the sqrt(time) data column).

Calculation of Slope of the Square Root of Time (SST)

- 5 The start time of water contact with the sample is estimated to be 0.4 seconds after the start of hydraulic connection is established between the supply tube and the sample (CRT Time). This is because data acquisition begins while the tube is still moving towards the sample and incorporates the small delay in scale response. Thus, “time zero” is actually at 0.4 seconds in CRT Time as recorded in the *.txt file.
- 10 The slope of the square root of time (SST) from 2-15 seconds is calculated from the slope of a linear regression line from the square root of time between (and including) 2 to 15 seconds (x-axis) versus the cumulative grams of water absorbed. The units are g/sec^{0.5}.

Reporting Results

- 15 Report the average slope to the nearest 0.01 g/s^{0.5}.

Plate Stiffness Test Method:

- As used herein, the “Plate Stiffness” test is a measure of stiffness of a flat sample as it is deformed downward into a hole beneath the sample. For the test, the sample is modeled as an
- 20 infinite plate with thickness “t” that resides on a flat surface where it is centered over a hole with radius “R”. A central force “F” applied to the tissue directly over the center of the hole deflects the tissue down into the hole by a distance “w”. For a linear elastic material, the deflection can be predicted by:

$$w = \frac{3F}{4\pi Et^3} (1-\nu)(3+\nu)R^2$$

- 25 where “E” is the effective linear elastic modulus, “ν” is the Poisson's ratio, “R” is the radius of the hole, and “t” is the thickness of the tissue, taken as the caliper in millimeters measured on a stack of 5 tissues under a load of about 0.29 psi. Taking Poisson's ratio as 0.1 (the solution is not highly sensitive to this parameter, so the inaccuracy due to the assumed value is likely to be minor), the previous equation can be rewritten for “w” to estimate the effective modulus as a function of the
- 30 flexibility test results:

$$E \approx \frac{3R^2}{4t^3} \frac{F}{w}$$

The test results are carried out using an MTS Alliance RT/1, Insight Renew, or similar model testing machine (MTS Systems Corp., Eden Prairie, Minn.), with a 50 newton load cell, and data acquisition rate of at least 25 force points per second. As a stack of five tissue sheets (created without any bending, pressing, or straining) at least 2.5-inches by 2.5 inches, but no more than 5.0 inches by 5.0 inches, oriented in the same direction, sits centered over a hole of radius 15.75 mm on a support plate, a blunt probe of 3.15 mm radius descends at a speed of 20 mm/min. For typical perforated rolled bath tissue, sample preparation consists of removing five (5) connected usable units, and carefully forming a 5 sheet stack, accordion style, by bending only at the perforation lines. When the probe tip descends to 1 mm below the plane of the support plate, the test is terminated. The maximum slope (using least squares regression) in grams of force/mm over any 0.5 mm span during the test is recorded (this maximum slope generally occurs at the end of the stroke). The load cell monitors the applied force and the position of the probe tip relative to the plane of the support plate is also monitored. The peak load is recorded, and “E” is estimated using the above equation.

The Plate Stiffness “S” per unit width can then be calculated as:

$$S = \frac{Et^3}{12}$$

and is expressed in units of Newtons*millimeters. The Testworks program uses the following formula to calculate stiffness (or can be calculated manually from the raw data output):

$$S = \left(\frac{F}{w} \right) \left[\frac{(3 + \nu)R^2}{16\pi} \right]$$

wherein “F/w” is max slope (force divided by deflection), “ν” is Poisson's ratio taken as 0.1, and “R” is the ring radius.

The same sample stack (as used above) is then flipped upside down and retested in the same manner as previously described. This test is run three more times (with different sample stacks). Thus, eight S values are calculated from four 5-sheet stacks of the same sample. The numerical average of these eight S values is reported as Plate Stiffness for the sample.

Stack Compressibility and Resilient Bulk Test Method:

Stack thickness (measured in mils, 0.001 inch) is measured as a function of confining pressure (g/in^2) using a Thwing-Albert (14 W. Collings Ave., West Berlin, NJ) Vantage Compression/Softness Tester (model 1750-2005 or similar) or equivalent instrument, equipped with a 2500 g load cell (force accuracy is $\pm 0.25\%$ when measuring value is between 10%-100% of load cell capacity, and 0.025% when measuring value is less than 10% of load cell capacity), a 1.128 inch diameter steel pressure foot (one square inch cross sectional area) which is aligned parallel to the steel anvil (2.5 inch diameter). The pressure foot and anvil surfaces must be clean and dust free, particularly when performing the steel-to-steel test. Thwing-Albert software (MAP) controls the motion and data acquisition of the instrument.

The instrument and software are set-up to acquire crosshead position and force data at a rate of 50 points/sec. The crosshead speed (which moves the pressure foot) for testing samples is set to 0.20 inches/min (the steel-to-steel test speed is set to 0.05 inches/min). Crosshead position and force data are recorded between the load cell range of approximately 5 and 1500 grams during compression. The crosshead is programmed to stop immediately after surpassing 1500 grams, record the thickness at this pressure (termed $T_{\max}$), and immediately reverse direction at the same speed as performed in compression. Data is collected during this decompression portion of the test (also termed recovery) between approximately 1500 and 5 grams. Since the foot area is one square inch, the force data recorded corresponds to pressure in units of g/in^2 . The MAP software is programmed to select 15 crosshead position values (for both compression and recovery) at specific pressure trap points of 10, 25, 50, 75, 100, 125, 150, 200, 300, 400, 500, 600, 750, 1000, and 1250 g/in^2 (i.e., recording the crosshead position of very next acquired data point after the each pressure point trap is surpassed). In addition to these 30 collected trap points, $T_{\max}$ is also recorded, which is the thickness at the maximum pressure applied during the test (approximately 1500 g/in^2).

Since the overall test system, including the load cell, is not perfectly rigid, a steel-to-steel test is performed (i.e., nothing in between the pressure foot and anvil) at least twice for each batch of testing, to obtain an average set of steel-to-steel crosshead positions at each of the 31 trap points described above. This steel-to-steel crosshead position data is subtracted from the corresponding crosshead position data at each trap point for each tested stacked sample, thereby resulting in the stack thickness (mils) at each pressure trap point during the compression, maximum pressure, and recovery portions of the test.

$$\text{StackT (trap)} = \text{StackCP (trap)} - \text{SteelCP (trap)}$$

Where:

trap = trap point pressure at either compression, recovery, or max

StackT = Thickness of Stack (at trap pressure)

StackCP = Crosshead position of Stack in test (at trap pressure)

SteelCP = Crosshead position of steel-to-steel test (at trap pressure)

5

A stack of five (5) usable units thick is prepared for testing as follows. The minimum usable unit size is 2.5 inch by 2.5 inch; however a larger sheet size is preferable for testing, since it allows for easier handling without touching the central region where compression testing takes place. For typical perforated rolled bath tissue, this consists of removing five (5) sets of 3 connected usable units. In this case, testing is performed on the middle usable unit, and the outer 2 usable units are used for handling while removing from the roll and stacking. For other product formats, it is advisable, when possible, to create a test sheet size (each one usable unit thick) that is large enough such that the inner testing region of the created 5 usable unit thick stack is never physically touched, stretched, or strained, but with dimensions that do not exceed 14 inches by 6 inches.

The 5 sheets (one usable unit thick each) of the same approximate dimensions, are placed one on top the other, with their MD aligned in the same direction, their outer face all pointing in the same direction, and their edges aligned +/- 3 mm of each other. The central portion of the stack, where compression testing will take place, is never to be physically touched, stretched, and/or strained (this includes never to 'smooth out' the surface with a hand or other apparatus prior to testing).

The 5 sheet stack is placed on the anvil, positioning it such that the pressure foot will contact the central region of the stack (for the first compression test) in a physically untouched spot, leaving space for a subsequent (second) compression test, also in the central region of the stack, but separated by ¼ inch or more from the first compression test, such that both tests are in untouched, and separated spots in the central region of the stack. From these two tests, an average crosshead position of the stack at each trap pressure (i.e., StackCP(trap)) is calculated for compression, maximum pressure, and recovery portions of the tests. Then, using the average steel-to-steel crosshead trap points (i.e., SteelCP(trap)), the average stack thickness at each trap (i.e., StackT(trap)) is calculated (mils).

Stack Compressibility is defined here as the absolute value of the linear slope of the stack thickness (mils) as a function of the log(10) of the confining pressure (grams/in²), by using the 15 compression trap points discussed previously (i.e., compression from 10 to 1250 g/in²), in a least

squares regression. The units for Stack Compressibility are [mils/(log(g/in²))], and is reported to the nearest 0.1 [mils/(log(g/in²))].

Resilient Bulk is calculated from the stack weight per unit area and the sum of 8 StackT(trap) thickness values from the maximum pressure and recovery portion of the tests: i.e., at maximum pressure (T_{max}) and recovery trap points at R1250, R1000, R750, R500, R300, R100, and R10 g/in² (a prefix of “R” denotes these traps come from recovery portion of the test). Stack weight per unit area is measured from the same region of the stack contacted by the compression foot, after the compression testing is complete, by cutting a 3.50 inch square (typically) with a precision die cutter, and weighing on a calibrated 3-place balance, to the nearest 0.001 gram. The weight of the precisely cut stack, along with the StackT(trap) data at each required trap pressure (each point being an average from the two compression/recovery tests discussed previously), are used in the following equation to calculate Resilient Bulk, reported in units of cm³/g, to the nearest 0.1 cm³/g.

$$\text{Resilient Bulk} = \frac{\text{SUM}(\text{StackT}(T_{\text{max}}, R1250, R1000, R750, R500, R300, R100, R10)) * 0.00254}{M/A}$$

Where:

StackT = Thickness of Stack (at trap pressures of T_{max} and recovery pressures listed above), (mils)

M = weight of precisely cut stack, (grams)

A = area of the precisely cut stack, (cm²)

Wet Burst Method:

"Wet Burst Strength" as used herein is a measure of the ability of a fibrous structure and/or a fibrous structure product incorporating a fibrous structure to absorb energy, when wet and subjected to deformation normal to the plane of the fibrous structure and/or fibrous structure product. The Wet Burst Test is run according to ISO 12625-9:2005, except for any deviations or modifications described below.

Wet burst strength may be measured using a Thwing-Albert Burst Tester Cat. No. 177 equipped with a 2000 g load cell commercially available from Thwing-Albert Instrument Company, Philadelphia, Pa, or an equivalent instrument.

Wet burst strength is measured by preparing four (4) multi-ply fibrous structure product samples for testing. First, condition the samples for two (2) hours at a temperature of $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$ ($23^{\circ}\text{C} \pm 1^{\circ}\text{C}$) and a relative humidity of 50% ($\pm 2\%$). Take one sample and horizontally dip the center of the sample into a pan filled with about 25 mm of room temperature distilled water. Leave the sample in the water four (4) (± 0.5) seconds. Remove and drain for three (3) (± 0.5) seconds holding the sample vertically so the water runs off in the cross-machine direction. Proceed with the test immediately after the drain step.

Place the wet sample on the lower ring of the sample holding device of the Burst Tester with the outer surface of the sample facing up so that the wet part of the sample completely covers the open surface of the sample holding ring. If wrinkles are present, discard the samples and repeat with a new sample. After the sample is properly in place on the lower sample holding ring, turn the switch that lowers the upper ring on the Burst Tester. The sample to be tested is now securely gripped in the sample holding unit. Start the burst test immediately at this point by pressing the start button on the Burst Tester. A plunger will begin to rise (or lower) toward the wet surface of the sample. At the point when the sample tears or ruptures, report the maximum reading. The plunger will automatically reverse and return to its original starting position. Repeat this procedure on three (3) more samples for a total of four (4) tests, i.e., four (4) replicates. Report the results as an average of the four (4) replicates, to the nearest gram.

Wet Tensile Method:

Wet Elongation, Tensile Strength, and TEA are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. West Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, $1.00\text{ in} \pm 0.01$ in wide by at least 3.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD

and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

Program the tensile tester to perform an extension test (described below), collecting force and extension data at an acquisition rate of 100 Hz as the crosshead raises at a rate of 2.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops below 50% of the maximum peak force, after which the crosshead is returned to its original position.

Set the gage length to 2.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align the specimen vertically within the upper and lower jaws, then close the upper grip. Verify the specimen is hanging freely and aligned with the lower grip, then close the lower grip. Initiate the first portion of the test, which pulls the specimen at a rate of 0.5 in/min, then stops immediately after a load of 10 grams is achieved. Using a pipet, thoroughly wet the specimen with DI water to the point where excess water can be seen pooling on the top of the lower closed grip. Immediately after achieving this wetting status, initiate the second portion of the test, which pulls the wetted strip at 2.0 in/min until break status is achieved. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Wet Tensile Strength (g/in) is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 0.1 g/in.

Adjusted Gage Length (in) is calculated as the extension measured (from original 2.00 inch gage length) at 3 g of force during the test following the wetting of the specimen (or the next data point after 3 g force) added to the original gage length (in). If the load does not fall below 3 g force during the wetting procedure, then the adjusted gage length will be the extension measured at the point the test is resumed following wetting added to the original gage length (in).

Wet Peak Elongation (%) is calculated as the additional extension (in) from the Adjusted Gage Length (in) at the maximum peak force point (more specifically, at the last maximum peak force point, if there is more than one) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

Wet Peak Tensile Energy Absorption (TEA, g*in/in²) is calculated as the area under the force curve (g*in²) integrated from zero extension (i.e., the Adjusted Gage Length) to the extension at the maximum peak force elongation point (more specifically, at the last maximum peak force

point, if there is more than one) (in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as $\text{g}\cdot\text{in}/\text{in}^2$ to the nearest $0.01 \text{ g}\cdot\text{in}/\text{in}^2$.

The Wet Tensile Strength (g/in), Wet Peak Elongation (%), Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

Calculations

Geometric Mean Initial Wet Tensile Strength = Square Root of [MD Wet Tensile Strength (g/in) x CD Wet Tensile Strength (g/in)]

Geometric Mean Wet Peak Elongation = Square Root of [MD Wet Peak Elongation (%) x CD Wet Peak Elongation (%)]

Geometric Mean Wet Peak TEA = Square Root of [MD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) x CD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$)]

Total Wet Tensile (TWT) = MD Wet Tensile Strength (g/in) + CD Wet Tensile Strength (g/in)

Total Wet Peak TEA = MD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$) + CD Wet Peak TEA ($\text{g}\cdot\text{in}/\text{in}^2$)

Wet Tensile Ratio = MD Wet Peak Tensile Strength (g/in) / CD Wet Peak Tensile Strength (g/in)

Wet Tensile Geometric Mean (GM) Modulus = Square Root of [MD Modulus (at 38 g/cm) x CD Modulus (at 38 g/cm)]

This method is typically used for sanitary tissue products in the form of a paper towel. In the present application, unless the term “Finch” or “Finch cup” is coupled with wet tensile terminology, this is the method being referred to. If “Finch” or “Finch cup” is coupled with wet tensile terminology, the Finch Cup Wet Tensile Test Method should be referred to.

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper (for Paper Towels, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels;” for Facial Tissue, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue”):

Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and

stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

Twenty usable units of fibrous structures are divided into four stacks of five usable units
5 each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). Two of the stacks are designated for testing in the MD and two for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut two, 1.00 in ± 0.01 in wide by at least 3.0 in long strips from each CD stack (long dimension in CD). Each strip is five usable unit layers thick and will be treated as a unitary specimen for testing. In like
10 fashion cut the remaining CD stack and the two MD stacks (long dimension in MD) to give a total of 8 specimens (five layers each), four CD and four MD.

Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 4.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the
15 measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

Set the gage length to 2.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify
20 specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

25 **Tensile Strength** is the maximum peak force (g) divided by the product of the specimen width (1 in) and the number of usable units in the specimen (5), and then reported as g/in to the nearest 1 g/in.

Adjusted Gage Length is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

30 **Elongation** is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

Tensile Energy Absorption (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of

the adjusted Gage Length (in), specimen width (in), and number of usable units in the specimen (5). This is reported as $\text{g}\cdot\text{in}/\text{in}^2$ to the nearest 1 $\text{g}\cdot\text{in}/\text{in}^2$.

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

- 5 Program the software to calculate the following from the constructed force (g) verses strain curve:

Tangent Modulus is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 190.5 g (38.1 g x 5 layers) force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the product of the specimen width (2.54 cm) and the number of usable units in the specimen (5), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA ($\text{g}\cdot\text{in}/\text{in}^2$) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

15

Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

Geometric Mean TEA = Square Root of [MD TEA ($\text{g}\cdot\text{in}/\text{in}^2$) x CD TEA ($\text{g}\cdot\text{in}/\text{in}^2$)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA ($\text{g}\cdot\text{in}/\text{in}^2$) + CD TEA ($\text{g}\cdot\text{in}/\text{in}^2$)

25 Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue (for Paper Towels, use: "Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels;" for Toilet Paper, use: "Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper"):

Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from

the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 5.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 6.00 in/min (15.24 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

Set the gage length to 4.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

Adjusted Gage Length is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

Tensile Energy Absorption (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force (g*in), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as g*in/in² to the nearest 1 g*in/in².

- 5 Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

Program the software to calculate the following from the constructed force (g) verses strain curve:

- Tangent Modulus** is calculated as the least squares linear regression using the first data point
10 from the force (g) verses strain curve recorded after 38.1 g force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the specimen width (2.54 cm), and then reported to the nearest 1 g/cm.

- The Tensile Strength (g/in), Elongation (%), TEA (g*in/in²) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each
15 parameter separately for the CD and MD specimens.

Calculations

- Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]
- 20 Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]
- Geometric Mean TEA = Square Root of [MD TEA (g*in/in²) x CD TEA (g*in/in²)]
- Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]
- Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)
- 25 Total TEA = MD TEA (g*in/in²) + CD TEA (g*in/in²)
- Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)
- Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

- Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Paper Towels (for Facial
30 Tissue, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Facial Tissue;” for Toilet Paper, use: “Dry Elongation, Tensile Strength, TEA and Modulus Test Methods for Toilet Paper”):

Elongation, Tensile Strength, TEA and Tangent Modulus are measured on a constant rate of extension tensile tester with computer interface (a suitable instrument is the EJA Vantage from the Thwing-Albert Instrument Co. Wet Berlin, NJ) using a load cell for which the forces measured are within 10% to 90% of the limit of the load cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with smooth stainless steel faced grips, with a design suitable for testing 1 inch wide sheet material (Thwing-Albert item #733GC). An air pressure of about 60 psi is supplied to the jaws.

Eight usable units of fibrous structures are divided into two stacks of four usable units each. The usable units in each stack are consistently oriented with respect to machine direction (MD) and cross direction (CD). One of the stacks is designated for testing in the MD and the other for CD. Using a one inch precision cutter (Thwing Albert) take a CD stack and cut one, 1.00 in $\pm$ 0.01 in wide by at least 5.0 in long stack of strips (long dimension in CD). In like fashion cut the remaining stack in the MD (strip long dimension in MD), to give a total of 8 specimens, four CD and four MD strips. Each strip to be tested is one usable unit thick, and will be treated as a unitary specimen for testing.

Program the tensile tester to perform an extension test, collecting force and extension data at an acquisition rate of 20 Hz as the crosshead raises at a rate of 4.00 in/min (10.16 cm/min) until the specimen breaks. The break sensitivity is set to 50%, i.e., the test is terminated when the measured force drops to 50% of the maximum peak force, after which the crosshead is returned to its original position.

Set the gage length to 4.00 inches. Zero the crosshead and load cell. Insert the specimen into the upper and lower open grips such that at least 0.5 inches of specimen length is contained each grip. Align specimen vertically within the upper and lower jaws, then close the upper grip. Verify specimen is aligned, then close lower grip. The specimen should be under enough tension to eliminate any slack, but less than 0.05 N of force measured on the load cell. Start the tensile tester and data collection. Repeat testing in like fashion for all four CD and four MD specimens.

Program the software to calculate the following from the constructed force (g) verses extension (in) curve:

Tensile Strength is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

Adjusted Gage Length is calculated as the extension measured at 11.12 g of force (in) added to the original gage length (in).

Elongation is calculated as the extension at maximum peak force (in) divided by the Adjusted Gage Length (in) multiplied by 100 and reported as % to the nearest 0.1 %.

Tensile Energy Absorption (TEA) is calculated as the area under the force curve integrated from zero extension to the extension at the maximum peak force ($\text{g}\cdot\text{in}$), divided by the product of the adjusted Gage Length (in) and specimen width (in). This is reported as $\text{g}\cdot\text{in}/\text{in}^2$ to the nearest 1 $\text{g}\cdot\text{in}/\text{in}^2$.

Replot the force (g) verses extension (in) curve as a force (g) verses strain curve. Strain is herein defined as the extension (in) divided by the Adjusted Gage Length (in).

Program the software to calculate the following from the constructed force (g) verses strain curve:

Tangent Modulus is calculated as the least squares linear regression using the first data point from the force (g) verses strain curve recorded after 38.1 g force and the 5 data points immediately preceding and the 5 data points immediately following it. This slope is then divided by the specimen width (2.54 cm), and then reported to the nearest 1 g/cm.

The Tensile Strength (g/in), Elongation (%), TEA ($\text{g}\cdot\text{in}/\text{in}^2$) and Tangent Modulus (g/cm) are calculated for the four CD specimens and the four MD specimens. Calculate an average for each parameter separately for the CD and MD specimens.

Calculations

Geometric Mean Tensile = Square Root of [MD Tensile Strength (g/in) x CD Tensile Strength (g/in)]

Geometric Mean Peak Elongation = Square Root of [MD Elongation (%) x CD Elongation (%)]

Geometric Mean TEA = Square Root of [MD TEA ($\text{g}\cdot\text{in}/\text{in}^2$) x CD TEA ($\text{g}\cdot\text{in}/\text{in}^2$)]

Geometric Mean Modulus = Square Root of [MD Modulus (g/cm) x CD Modulus (g/cm)]

Total Dry Tensile Strength (TDT) = MD Tensile Strength (g/in) + CD Tensile Strength (g/in)

Total TEA = MD TEA ($\text{g}\cdot\text{in}/\text{in}^2$) + CD TEA ($\text{g}\cdot\text{in}/\text{in}^2$)

Total Modulus = MD Modulus (g/cm) + CD Modulus (g/cm)

Tensile Ratio = MD Tensile Strength (g/in) / CD Tensile Strength (g/in)

Flexural Rigidity Method:

This test is based on the cantilever beam principle. A Cantilever Bending Tester such as described in ASTM Standard D1388 is used to measure the distance a strip of sample can be

extended beyond a horizontal flat platform before it bends to a ramp angle of $41.5 \pm 0.5^\circ$. The measured Bend Length, in addition to the Basis Weight and Caliper, of the sample is used to calculate Flexural Rigidity.

Using a 1 inch (2.54 cm) JDC Cutter (available from Thwing-Albert Instrument Company, Philadelphia, PA), carefully cut eight (8) 1 inch (2.54 cm) wide test strips from a fibrous structure sample oriented in the MD direction. From a second fibrous structure sample from the same sample set, carefully cut eight (8) 1 inch (2.54 cm) wide strips of the fibrous structure in the CD direction.

The sample strip must be adjusted to 4.0 ± 0.1 in (101.5 ± 2.5 mm), or 6.0 ± 0.1 in (152 ± 2.5 mm) in length. Towel samples and those products which are perforated into usable units 6 inches (152mm) or greater in both dimensions without folds or perforations are tested as 6 in (152mm) strips. Toilet tissue samples and facial tissue samples are tested as 4 in (101.5mm) long strips. To adjust the strips to length, carefully make a cut exactly perpendicular to the long dimension of the strip near one end using a paper cutter. It is important that the cut be exactly perpendicular to the long dimension of the strip. Make a second cut exactly 4.0 ± 0.1 in (101.5mm), or 6.0 ± 0.1 in (152 ± 2.5 mm) along the strip, again being careful that the cut is exactly perpendicular to the long dimension of the strip. In the case of perforated or folded products, be sure that all cuts are made in such a way that perforations and/or folds are excluded from the 4.0 (101.5mm) or 6.0 in (152mm) strip which will be used for the test. All sample strips should be cut individually with minimal mechanical manipulation. No fibrous structure sample which is creased, bent, folded, perforated, or in any other way weakened should be tested using this test.

Mark the direction (MD or CD) very lightly on one end of the strip, keeping the same surface of the sample up for all strips. Later, half of the strips will be turned over for testing, thus it is important that one surface of the strip be clearly identified, however, it makes no difference which surface of the sample is designated as the upper surface.

Using other portions of the fibrous structure sample (not the cut strips), determine the basis weight of the fibrous structure sample in lbs/3000 ft² and the caliper of the fibrous structure in mils (thousandths of an inch) using the standard procedures disclosed herein. Place the Cantilever Bending Tester level on a bench or table that is relatively free of vibration, excessive heat and most importantly air drafts. Adjust the platform of the Tester to horizontal as indicated by the leveling bubble and verify that the ramp angle is at $41.5 \pm 0.5^\circ$. Remove the sample slide bar from the top of the platform of the Tester. Lay one of the strips flat on the horizontal platform using care to align the strip to be parallel with the movable sample slide. Align the end of the strip exactly even

with the vertical edge of the Tester where the angular ramp is attached or where the zero mark line is scribed on the Tester. Carefully place the sample slide bar on top of the sample strip in the Tester. The sample slide bar must be carefully placed so that the strip is not wrinkled or moved from its initial position.

- 5 Using the sample slide bar, move the strip at a rate of approximately 0.5 ± 0.2 in/second (1.3 ± 0.5 cm/second) toward the end of the Tester to which the angular ramp is attached. This can be accomplished with either a manual or automatic Tester. Ensure that no slippage between the strip and movable sample slide occurs. As the sample slide bar and strip project over the edge of the Tester, the strip will begin to bend, or drape downward. Stop moving the sample slide bar the
- 10 instant the leading edge of the strip falls level with the ramp edge. Read and record the overhang length from the linear scale to the nearest 0.5 mm. Record the distance the sample slide bar has moved in cm as overhang length. This test sequence is performed a total of eight (8) times for each fibrous structure in each direction (MD and CD). The first four strips are tested with the upper surface as the fibrous structure was cut facing up. The last four strips are inverted so that the upper
- 15 surface as the fibrous structure was cut is facing down as the strip is placed on the horizontal platform of the Tester.

The average Overhang Lengths (MD, CD, and Avg) and Bend Lengths (MD, CD, and Avg) are determined by the following calculations:

$$\begin{aligned} \text{Overhang Length MD} &= \frac{\text{Sum of 8 MD readings}}{8} \\ \text{Overhang Length CD} &= \frac{\text{Sum of 8 CD readings}}{8} \\ \text{Overhang Length Average (Avg)} &= \frac{\text{Sum of all 16 readings}}{16} \\ \text{Bend Length MD} &= \frac{\text{Overhang Length MD}}{2} \\ \text{Bend Length CD} &= \frac{\text{Overhang Length CD}}{2} \\ \text{Bend Length Average (Avg)} &= \frac{\text{Overhang Length Total}}{2} \\ \text{Flexural Rigidity} &= 0.1629 \times W \times C^3 \end{aligned}$$

Where W is the basis weight of the fibrous structure in lbs/3000 ft²; C is the Bend Length (MD, CD, or Avg) in cm; and the constant 0.1629 is used to convert the basis weight from English to metric units. The results are expressed in mg-cm to the nearest 0.1 mg-cm.

GM Flexural Rigidity = Square root of (MD Flexural Rigidity x CD Flexural Rigidity)

5

CRT Rate and Capacity Method:

CRT Rate and Capacity values are generated by running the test procedure as defined in U.S. Patent Application No. US 2017-0183824.

10

Dry and Wet Caliper Test Methods:

Dry and Wet Caliper values are generated by running the test procedure as defined in U.S. Patent No. US 7,744,723 and states, in relevant part:

Dry Caliper Method:

15

Samples are conditioned at 23+/-1° C. and 50%+/-2% relative humidity for two hours prior to testing.

20 Dry Caliper of a sample of fibrous structure product is determined by cutting a sample of the fibrous structure product such that it is larger in size than a load foot loading surface where the load foot loading surface has a circular surface area of about 3.14 in². The sample is confined between a horizontal flat surface and the load foot loading surface. The load foot loading surface applies a confining pressure to the sample of 14.7 g/cm² (about 0.21 psi). The caliper is the resulting gap between the flat surface and the load foot loading surface. Such measurements can be obtained on a VIR Electronic Thickness Tester Model II available from Thwing-Albert Instrument Company, Philadelphia, Pa. The caliper measurement is repeated and recorded at least five (5)

25 times so that an average caliper can be calculated. The result is reported in mils.

Wet Caliper Method:

Samples are conditioned at 23+/-1° C. and 50% relative humidity for two hours prior to testing.

30

Wet Caliper of a sample of fibrous structure product is determined by cutting a sample of the fibrous structure product such that it is larger in size than a load foot loading surface where the load foot loading surface has a circular surface area of about 3.14 in². Each sample is wetted by submerging the sample in a distilled water bath for 30 seconds. The caliper of the wet sample is

measured within 30 seconds of removing the sample from the bath. The sample is then confined between a horizontal flat surface and the load foot loading surface. The load foot loading surface applies a confining pressure to the sample of 14.7 g/cm^2 (about 0.21 psi). The caliper is the resulting gap between the flat surface and the load foot loading surface. Such measurements can be obtained

5 on a VIR Electronic Thickness Tester Model II available from Thwing-Albert Instrument Company, Philadelphia, Pa. The caliper measurement is repeated and recorded at least five (5) times so that an average caliper can be calculated. The result is reported in mils.

Finch Cup Wet Tensile Test Method:

10 The Wet Tensile Strength test method is utilized for the determination of the wet tensile strength of a sanitary tissue product or web strip after soaking with water, using a tensile-strength-testing apparatus operating with a constant rate of elongation. The Wet Tensile Strength test is run according to ISO 12625-5:2005, except for any deviations or modifications described below. This method uses a vertical tensile-strength tester, in which a device that is held in the

15 lower grip of the tensile-strength tester, called a Finch Cup, is used to achieve the wetting.

Using a one inch JDC precision sample cutter (Thwing Albert) cut six $1.00 \text{ in} \pm 0.01 \text{ in}$ wide strips from a sanitary tissue product sheet or web sheet in the machine direction (MD), and six strips in the cross machine direction (CD). An electronic tensile tester (Model 1122, Instron Corp., or equivalent) is used and operated at a crosshead speed of 1.0 inch (about 1.3 cm) per

20 minute and a gauge length of 1.0 inch (about 2.5 cm). The two ends of the strip are placed in the upper jaws of the machine, and the center of the strip is placed around a stainless steel peg. The strip is soaked in distilled water at about 20° C . for the identified soak time, and then measured for peak tensile strength. Reference to a machine direction means that the sample being tested is prepared such that the length of the strip is cut parallel to the machine direction of manufacture

25 of the product.

The MD and CD wet peak tensile strengths are determined using the above equipment and calculations in the conventional manner. The reported value is the arithmetic average of the six strips tested for each directional strength to the nearest 0.1 grams force. The total wet tensile strength for a given soak time is the arithmetic total of the MD and CD tensile strengths for that

30 soak time. Initial total wet tensile strength ("ITWT") is measured when the paper has been submerged for 5 ± 0.5 seconds. Decayed total wet tensile ("DTWT") is measured after the paper has been submerged for 30 ± 0.5 minutes.

This method is typically used for sanitary tissue products in the form of toilet (or bath) tissue.

Wet Decay Test Method:

- 5 Wet decay (loss of wet tensile) for a sanitary tissue product or web is measured according to the Wet Tensile Test Method described herein and is the wet tensile of the sanitary tissue product or web after it has been standing in the soaked condition in the Finch Cup for 30 minutes. Wet decay is reported in units of “%”. Wet decay is the % loss of Initial Total Wet Tensile after the 30 minute soaking.

10

Dry Burst (“Drv Burst Strength” or “Dry Burst (Peak Load) Strength”) Test Method:

- The Dry Burst Test is run according to ISO 12625-9:2005, except for any deviations described below. Sanitary tissue product samples or web samples for each condition to be tested are cut to a size appropriate for testing, a minimum of five (5) samples for each condition to be tested are prepared.

- 15 A burst tester (Burst Tester Intellect-II-STD Tensile Test Instrument, Cat. No. 1451-24PGB available from Thwing-Albert Instrument Co., Philadelphia, Pa., or equivalent) is set up according to the manufacturer's instructions and the following conditions: Speed: 12.7 centimeters per minute; Break Sensitivity: 20 grams; and Peak Load: 2000 grams. The load cell is calibrated according to the expected burst strength.

- 20 A sanitary tissue product sample or web sample to be tested is clamped and held between the annular clamps of the burst tester and is subjected to increasing force that is applied by a 0.625 inch diameter, polished stainless steel ball upon operation of the burst tester according to the manufacturer's instructions. The burst strength is that force that causes the sample to fail.

- 25 The burst strength for each sanitary tissue product sample or web sample is recorded. An average and a standard deviation for the burst strength for each condition is calculated.

 The Dry Burst is reported as the average and standard deviation for each condition to the nearest gram.

30

Residual Water (R_w) Test Method:

 This method measures the amount of distilled water absorbed by a paper product. In general a finite amount of distilled water is deposited to a standard surface. A paper towel is then

placed over the water for a given amount of time. After the elapsed time the towel is removed and the amount of water left behind and amount of water absorbed are calculated.

The temperature and humidity are controlled within the following limits:

- Temperature: $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$.)

5 - Relative humidity: $50\% \pm 2\%$

The following equipment is used in this test method. A top loading balance is used with sensitivity: ± 0.01 grams or better having the capacity of grams minimum A pipette is used having a capacity of 5 mL and a Sensitivity ± 1 mL. A Formica™ Tile 6 in x 7 in is used. A stop watch or digital timer capable of measuring time in seconds to the nearest 0.1 seconds is also used.

10 Sample and Solution Preparation

For this test method, distilled water is used, controlled to a temperature of $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$.) For this method, a usable unit is described as one finished product unit regardless of the number of plies. Condition the rolls or usable units of products, with wrapper or packaging materials removed in a room conditioned at $50\% \pm 2\%$ relative humidity, $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$. ($73^{\circ}\text{F} \pm 2^{\circ}\text{F}$.) for a minimum of two hours. Do not test usable units with defects such as wrinkles, tears, holes etc.

Paper Samples

Remove and discard at least the four outermost usable units from the roll. For testing remove usable units from each roll of product submitted as indicated below. For Paper Towel products, select five (5) usable units from the roll. For Paper Napkins that are folded, cut and stacked, select five (5) usable units from the sample stack submitted for testing. For all napkins, either double or triple folded, unfold the usable units to their largest square state. One-ply napkins will have one 1-ply layer; 2-ply napkins will have one 2-ply layer. With 2-ply napkins, the plies may be either embossed (just pressed) together, or embossed and laminated (pressed and glued) together. Care must be taken when unfolding 2-ply usable units to keep the plies together. If the unfolded usable unit dimensions exceed 279 mm (11 inches) in either direction, cut the usable unit down to 279 mm (11 inches). Record the original usable unit size if over 279 mm (11 inches). If the unfolded usable unit dimensions are less than 279 mm (11 inches) in either direction, record the usable unit dimensions.

30 Place the Formica Tile (standard surface) in the center of the cleaned balance surface. Wipe the Formica Tile to ensure that it is dry and free of any debris. Tare the balance to get a zero reading. Slowly dispense 2.5 mL of distilled water onto the center of the standard surface using the pipette. Record the weight of the water to the nearest 0.001 g. Drop 1 usable unit of the

paper towel onto the spot of water with the outside ply down. Immediately start the stop watch. The sample should be dropped on the spot such that the spot is in the center of the sample once it is dropped. Allow the paper towel to absorb the distilled water for 30 seconds after hitting the stop watch. Remove the paper from the spot after the 30 seconds has elapsed. The towel must be removed when the stop watch reads 30 seconds $\pm$ 0.1 sec. The paper towel should be removed using a quick vertical motion. Record the weight of the remaining water on the surface to the nearest 0.001 g.

Calculations

10

where:

n=the number of replicates which for this method is 5.

Record the RWV to the nearest 0.001 g.

Breaking Length Test Method:

15

Handsheet Preparation

Low Density handsheets are made essentially according to TAPPI standard T205, with the following modifications which are believed to more accurately reflect the tissue manufacturing process.

(1) tap water, with no pH adjustment, is used;

20

(2) the embryonic web is formed in a 12 in. by 12 in. handsheet making apparatus on a monofilament polyester wire supplied by Appelon Wire Co., Appelon, Wis. with the following specifications:

Size:	13.5 inch x 13.5 inch
Machine direction Warp Count:	84 $\pm$ 1.5 fibers/inch
Cross direction Warp Count:	76 $\pm$ 3.0 fibers/inch
Warp size/type:	0.17 millimeters/9FU
Shute size/type:	0.17 millimeters/WP-110
Caliper:	0.016 $\pm$ 0.0005 inch
Air permeability:	720 $\pm$ 25 cubic feet/minute

(3) the embryonic web is transferred by vacuum from the monofilament polyester wire to a monofilament polyester papermaking fabric supplied by Appelon Wire Co., Appelon, Wis. and dewatered by vacuum suction instead of pressing; Fabric specifications:

25

Size:	16 inch x 14 inch
Machine direction Warp Count:	36 $\pm$ 1 fibers/inch
Cross direction Warp Count:	30 $\pm$ 3 fibers/inch

Warp size/type:	Shute size/type:	0.40 millimeters/WP-87-12A-W
		0.40 millimeters/WP-801-12A-W
Caliper:		0.0270 ± 0.001 inch
Air permeability:		397 ± 25 cubic feet/minute

Sheet side to be monoplanar

- Transfer and dewatering details: The embryonic web and papermaking wire are placed on top of the fabric such that the embryonic web contacts the fabric. The trilayer (wire, web, fabric with fabric side down) is then passed lengthwise across a 13 in.×1/16 in. wide vacuum slot box with a
- 5 90 degree flare set at a peak gauge reading of approximately 4.0 in. of mercury vacuum. The rate of the trilayer passing across the vacuum slot should be uniform at a velocity of 16±5 in./sec.

- The vacuum is then increased to achieve a peak gauge reading of approximately 9 in. of mercury vacuum and the trilayer is passed lengthwise across the same vacuum slot at the same rate of 16±5 in./sec 2 more times. Note that the peak gauge reading is the amount of vacuum measured
- 10 as the trilayer passes across the slot. The web is carefully removed from the wire to ensure that no fibers stick to the wire.

(4) the sheet is then dried on a rotary drum drier with a drying felt by passing the web and fabric between the felt and drum with the fabric against the drum surface and again with a second pass with the web against the drum surface.

15

Dryer specifications:	Stainless steel polished finish cylinder with internal steam heating, horizontally mounted.
External dimensions:	17 inches length × 13 inches diameter
Temperature:	230 ± 5 degrees Fahrenheit.
Rotation speed:	0.90 ± 0.05 revolutions/minute
Dryer felt: Endless, 60 inches circumference by 16 inches	wide, No. 11614, style X225, all wool. Noble and Wood Lab Machine Company, Hoosick Falls, NY.
Felt tension:	As low and even as possible without any slippage occurring between the felt and dryer drum and uniform tracking.

- (5) the resulting handsheet is 12 in.×12 in. with a resulting target basis weight of 16.5 ± 1.5 pounds per 3,000 ft² and a target density of 0.15 ± 0.06 g/cc, unless otherwise noted.

20

Sample Preparation

Condition the handsheet to be tested for a minimum of 2 hours in a room controlled to 73° F ± 2° F (23° C ± 1° C) 50 ± 2% relative humidity. After conditioning the handsheet for at least the minimum time period, measure and record the Basis Weight of the handsheet. The Basis Weight

should be within the range 15.0 – 18.0 pounds per 3000 square feet, if the Basis Weight of the handsheet falls outside of this range the handsheet should be discarded and a new one made.

From the handsheet, cut eight sample strips 1.00 inch wide and at least 6 - 7 inches long in the cross direction (only) using a precision 1" cutter or an appropriate die.

5

Measurement

Using an electronic tensile tester (Thwing Albert EJA or Intellect II-STD, Corp., Philadelphia, Pa., or equivalent) measure the Tensile Strength of each of the eight sample strips. To perform the test, set the gage length to 4.00 inches, properly secure the sample strip into the upper and lower grips, and perform an extension test, collecting force and extension data as the crosshead raises at a rate of 0.5 in/min until the sample breaks. The resulting Tensile Strength values for each of the eight individual sample strips are recorded in g/in. The Tensile Strength is the maximum peak force (g) divided by the specimen width (1 in), and reported as g/in to the nearest 1 g/in.

15

Calculations

Calculate the Average Tensile Strength of the eight test strips using the following formula:

$$\text{Average Tensile Strength} = \frac{\text{Sum of tensile strengths measured}}{\text{number of strips tested}}$$

20

Basis weight corrected tensile (BWCT) is calculated via the following formula:

$$BWCT = \text{Average Tensile Strength} \times \frac{10.5}{(\text{Basis Weight} - 6.0)}$$

25 Where Basis Weight has the units of pounds per 3000 ft² and Average Tensile Strength and BWCT have the units of g/in. This equation has the effect of normalizing the strength of the tensile strip to a standard 16.5 pound/3000 ft² weight when the handsheet is in the specified 15-18 pound/3000 ft² range.

30 Breaking Length is then calculated by the following formula:

$$\text{Breaking Length} = BWCT \times 1.4673$$

Where Breaking Length has the units of meters reported to the nearest whole meter.

REGARDING THE PRESENT DISCLOSURE

5 In the interests of brevity and conciseness, any ranges of values set forth in this specification are to be construed as written description support for Claims reciting any sub-ranges having endpoints which are whole number values within the specified range in question. By way of a hypothetical illustrative example, a disclosure in this specification of a range of 1-5 shall be considered to support Claims to any of the following sub-ranges: 1-4; 1-3; 1-2; 2-5; 2-4;
10 2-3; 3-5; 3-4; and 4-5.

 The dimensions and values disclosed herein in this application are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about
15 40 mm.”

 Every document cited herein, including any cross referenced or related patent or application is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise limited. The citation of any document is not an admission that it is prior art with respect to any example disclosed or claimed herein or that it alone, or in any combination with any other reference
20 or references, teaches, suggests or discloses any such example. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

 While particular examples of the present disclosure have been illustrated and described, it
25 would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the present disclosure. It is therefore intended to cover in the appended Claims all such changes and modifications that are within the scope of this disclosure.

CLAIMS

What is Claimed is:


1. A sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a TS7 of less than about 14 dB V² rms.
2. The sanitary tissue product of claim 1, wherein the non-wood fibers consist of bamboo fibers.
3. The sanitary tissue product of claim 1, wherein the sanitary tissue product is toilet tissue.
4. The sanitary tissue product of claim 1, comprising non-wood fibers greater than about 30%.
5. A sanitary tissue product, comprising:
 - bamboo fibers; and
 - a TS750 less than about 20 dB V² rms.
6. The sanitary tissue product of claim 5, wherein the sanitary tissue product is toilet tissue.
7. The sanitary tissue product of claim 5, wherein the bamboo fibers are greater than about 30% of the sanitary tissue product.
8. The sanitary tissue product of claim 5, wherein the bamboo fibers are greater than about 75% of the sanitary tissue product.
9. A structured sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a TS750 less than about 45 dB V² rms.
10. The sanitary tissue product of claim 9, wherein the non-wood fibers consist of bamboo fibers.
11. The sanitary tissue product of claim 9, wherein the sanitary tissue product is toilet tissue.


12. The sanitary tissue product of claim 9, comprising non-wood fibers greater than about 30%.
13. The sanitary tissue product of claim 9, wherein the TS750 is less than 40 dB V² rms.
14. The sanitary tissue product of claim 9, wherein the TS750 is from about 25 to about 35 dB V² rms.
15. A sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a slip stick less than about 435.
16. The sanitary tissue product of claim 15, wherein the non-wood fibers consist of bamboo fibers.
17. The sanitary tissue product of claim 15, wherein the slip stick is from about 235 to about 435.
18. A structured sanitary tissue product, comprising:
 - non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof; and
 - a slip stick less than about 605.
19. The sanitary tissue product of claim 18, wherein the slip stick is from about 235 to about 605.
20. The sanitary tissue product of claim 18, wherein the slip stick is from about 350 to about 500.
21. The sanitary tissue product of claim 18, wherein the sanitary tissue product comprises a through-air-dried (TAD) and uncreped web.

ABSTRACT

Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS7 of less than about 14 dB V^2 rms. Sanitary tissue products of the present disclosure may comprise bamboo fibers and may have a TS750 less than about 20 dB V^2 rms. Sanitary tissue products of the present disclosure may be structured and may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a TS750 less than about 45 dB V^2 rms. Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 435. Sanitary tissue products of the present disclosure may comprise non-wood fibers selected from the group consisting of bamboo, abaca, and mixtures thereof, and may have a slip stick less than about 605.

FIG. 1A

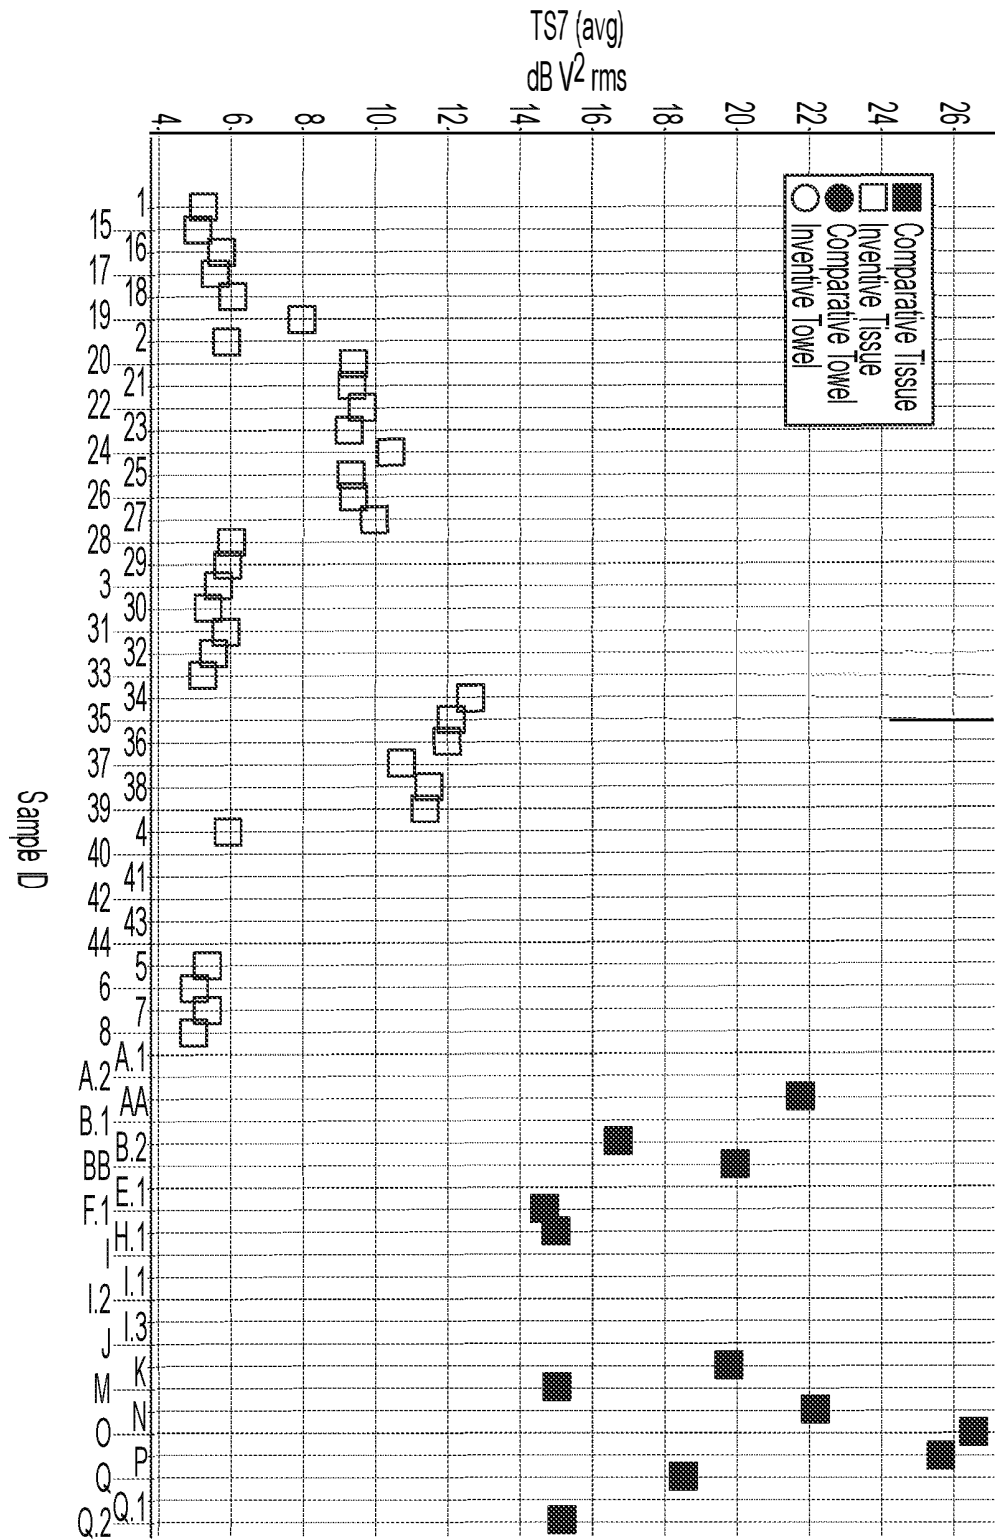

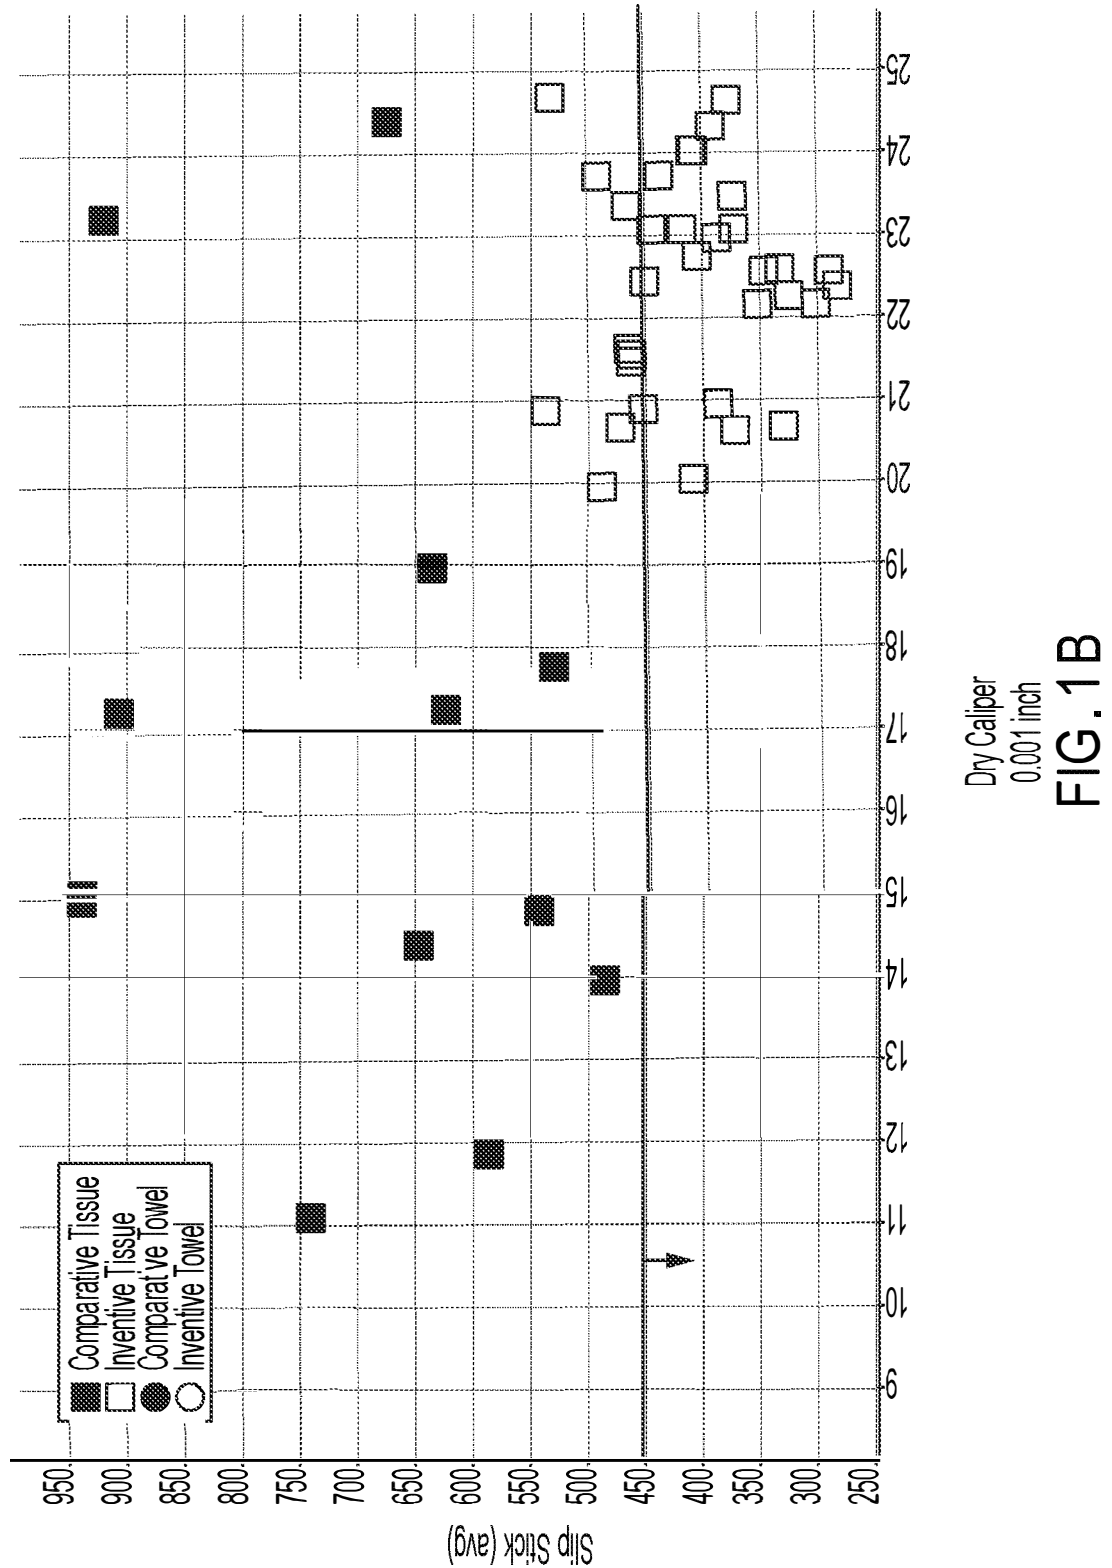

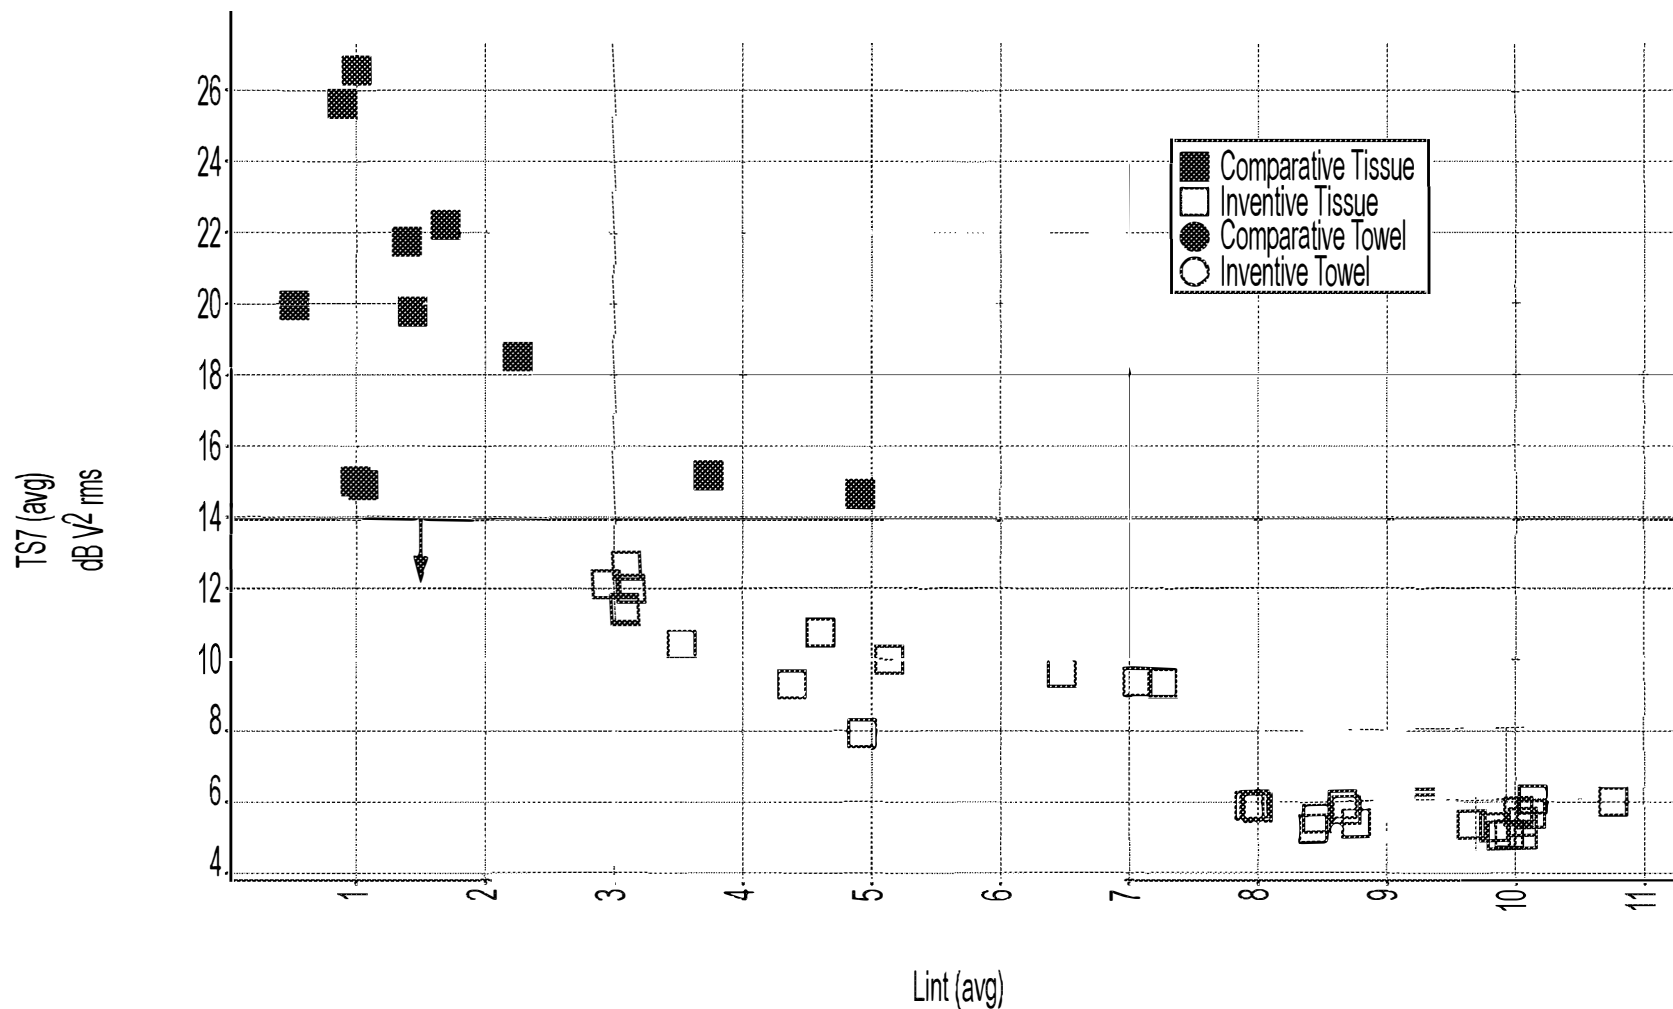
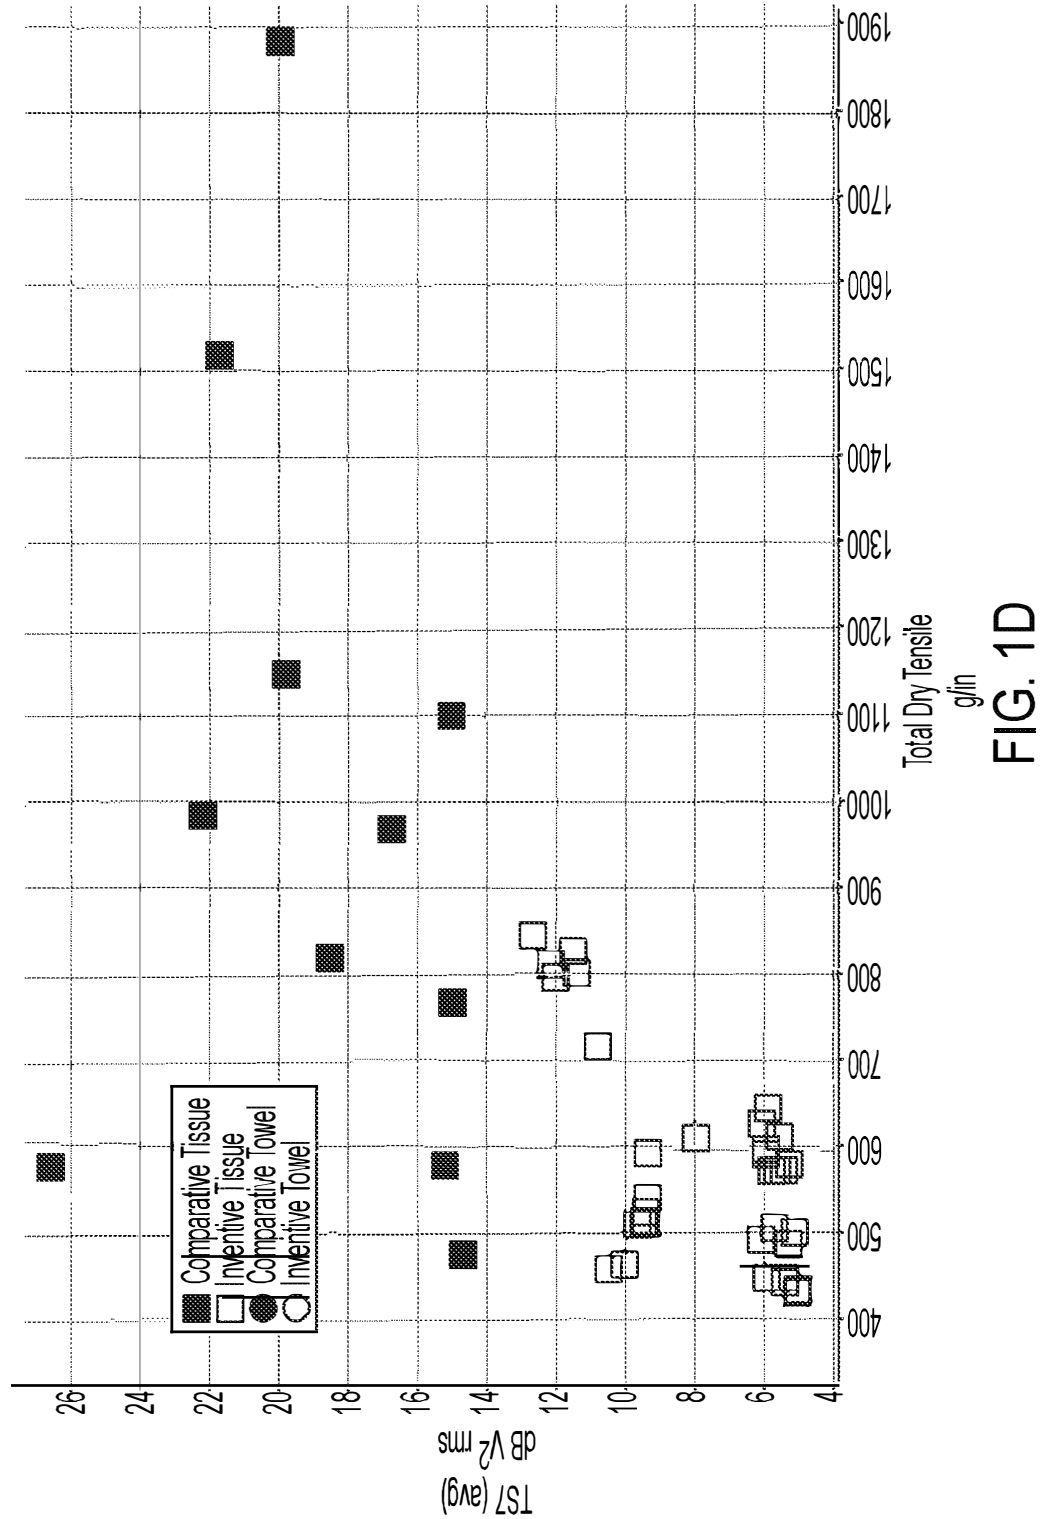


FIG. 1C



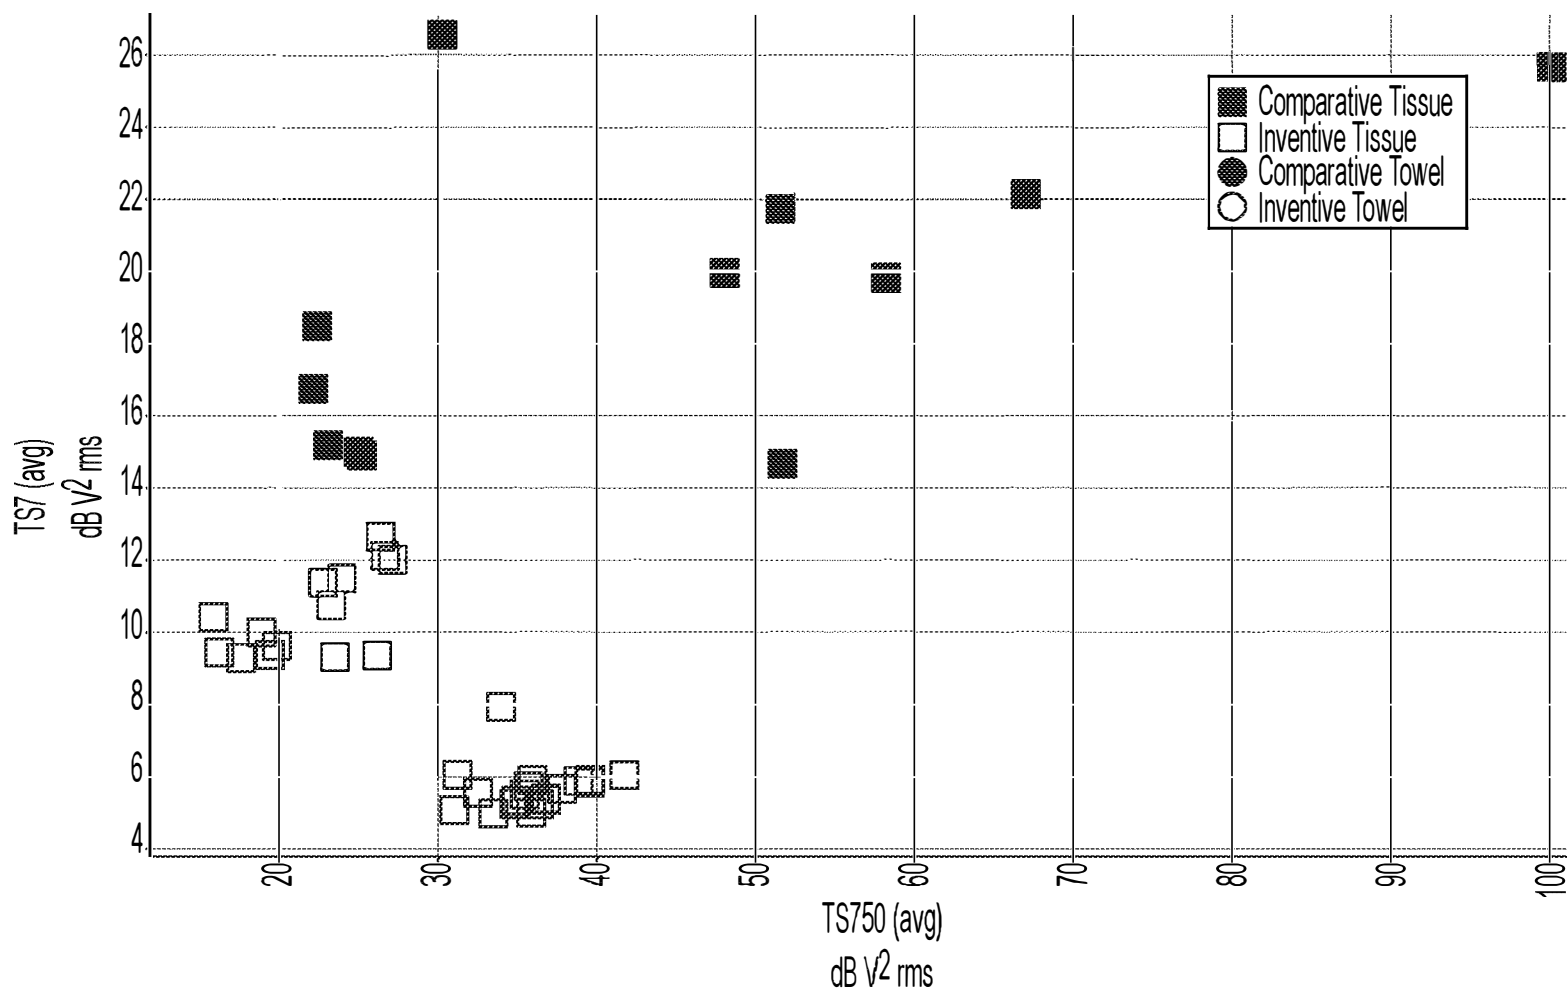


FIG. 1E

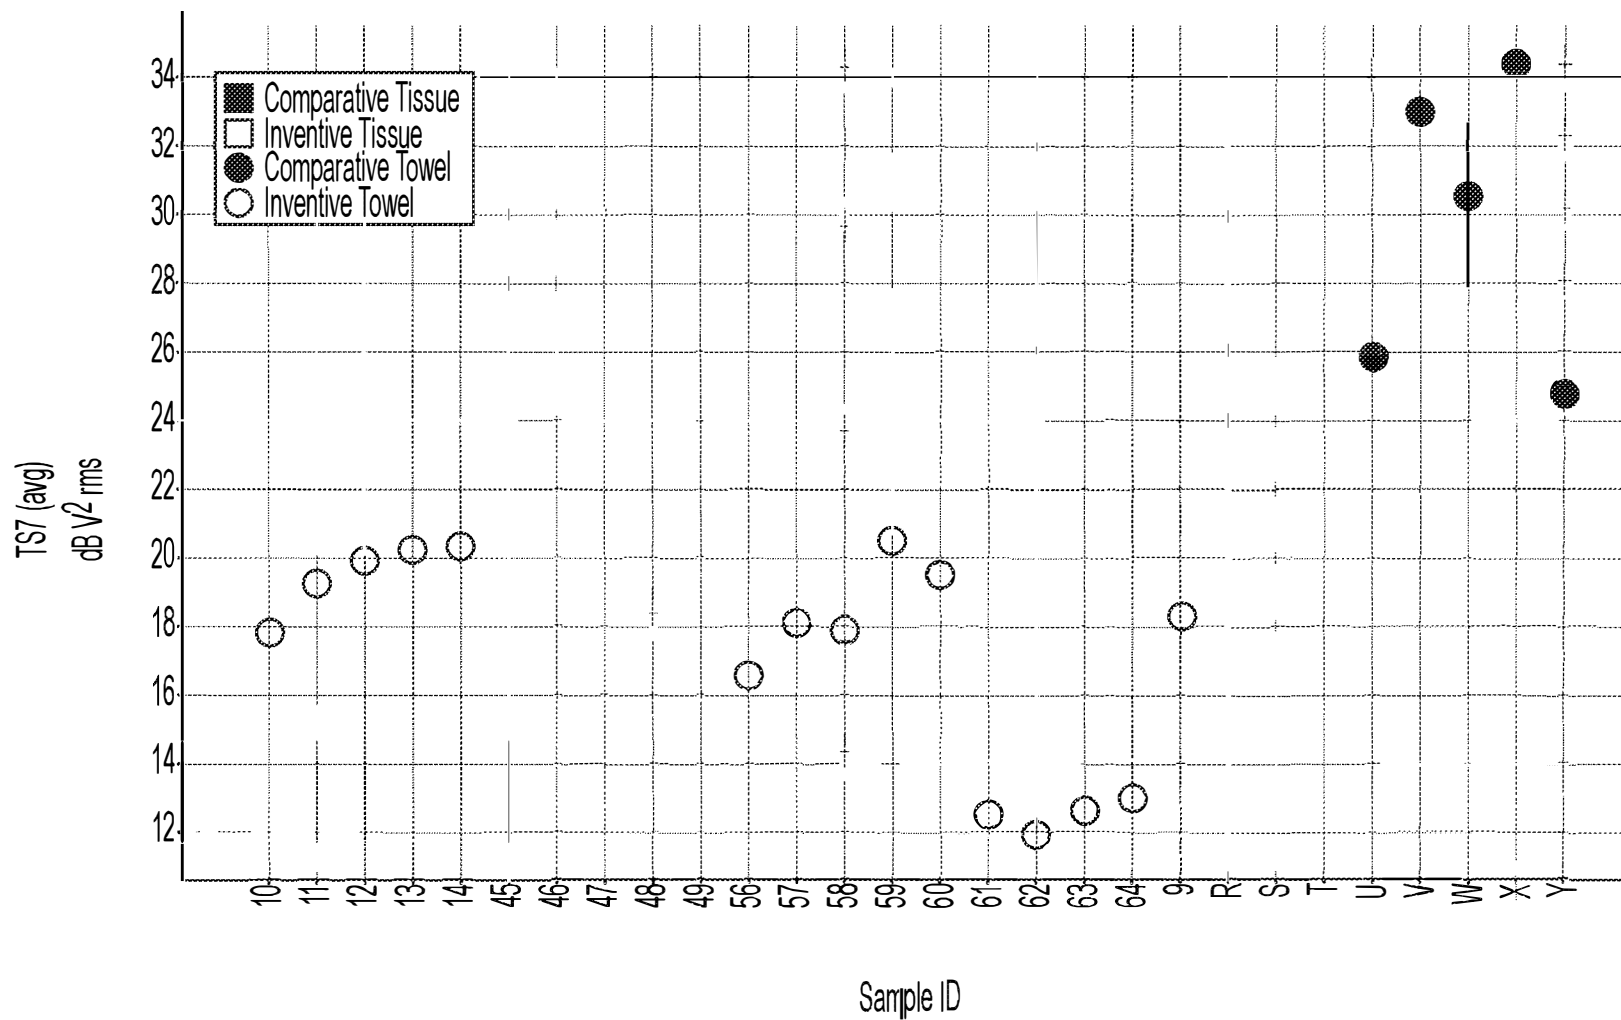


FIG. 2A

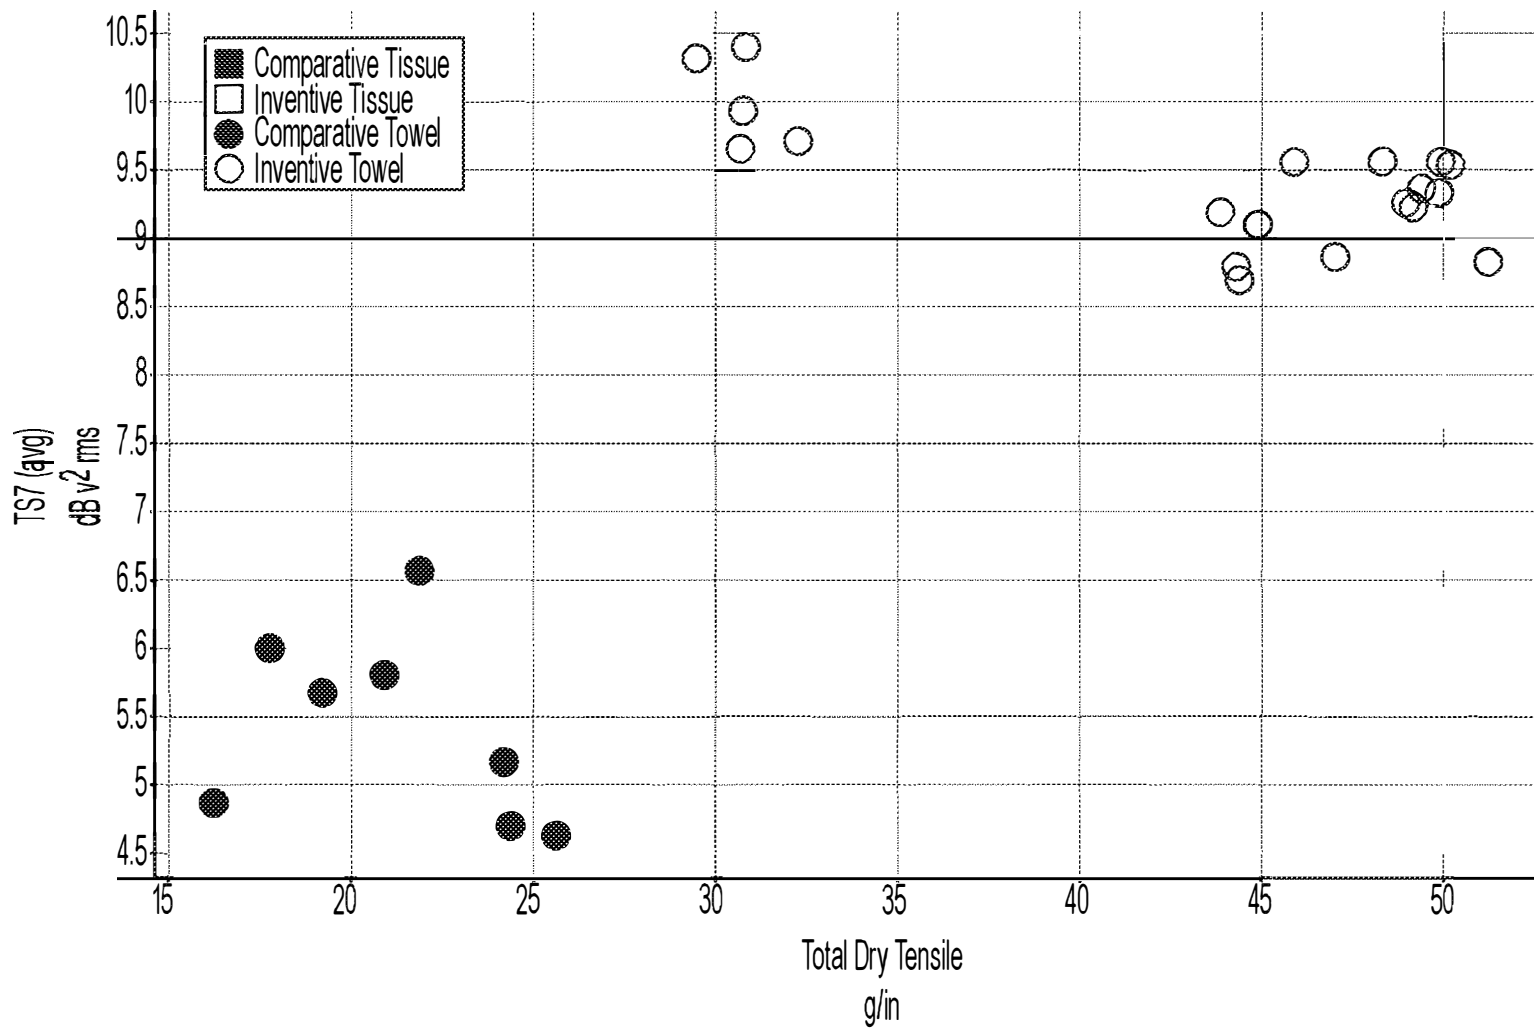


FIG. 2B

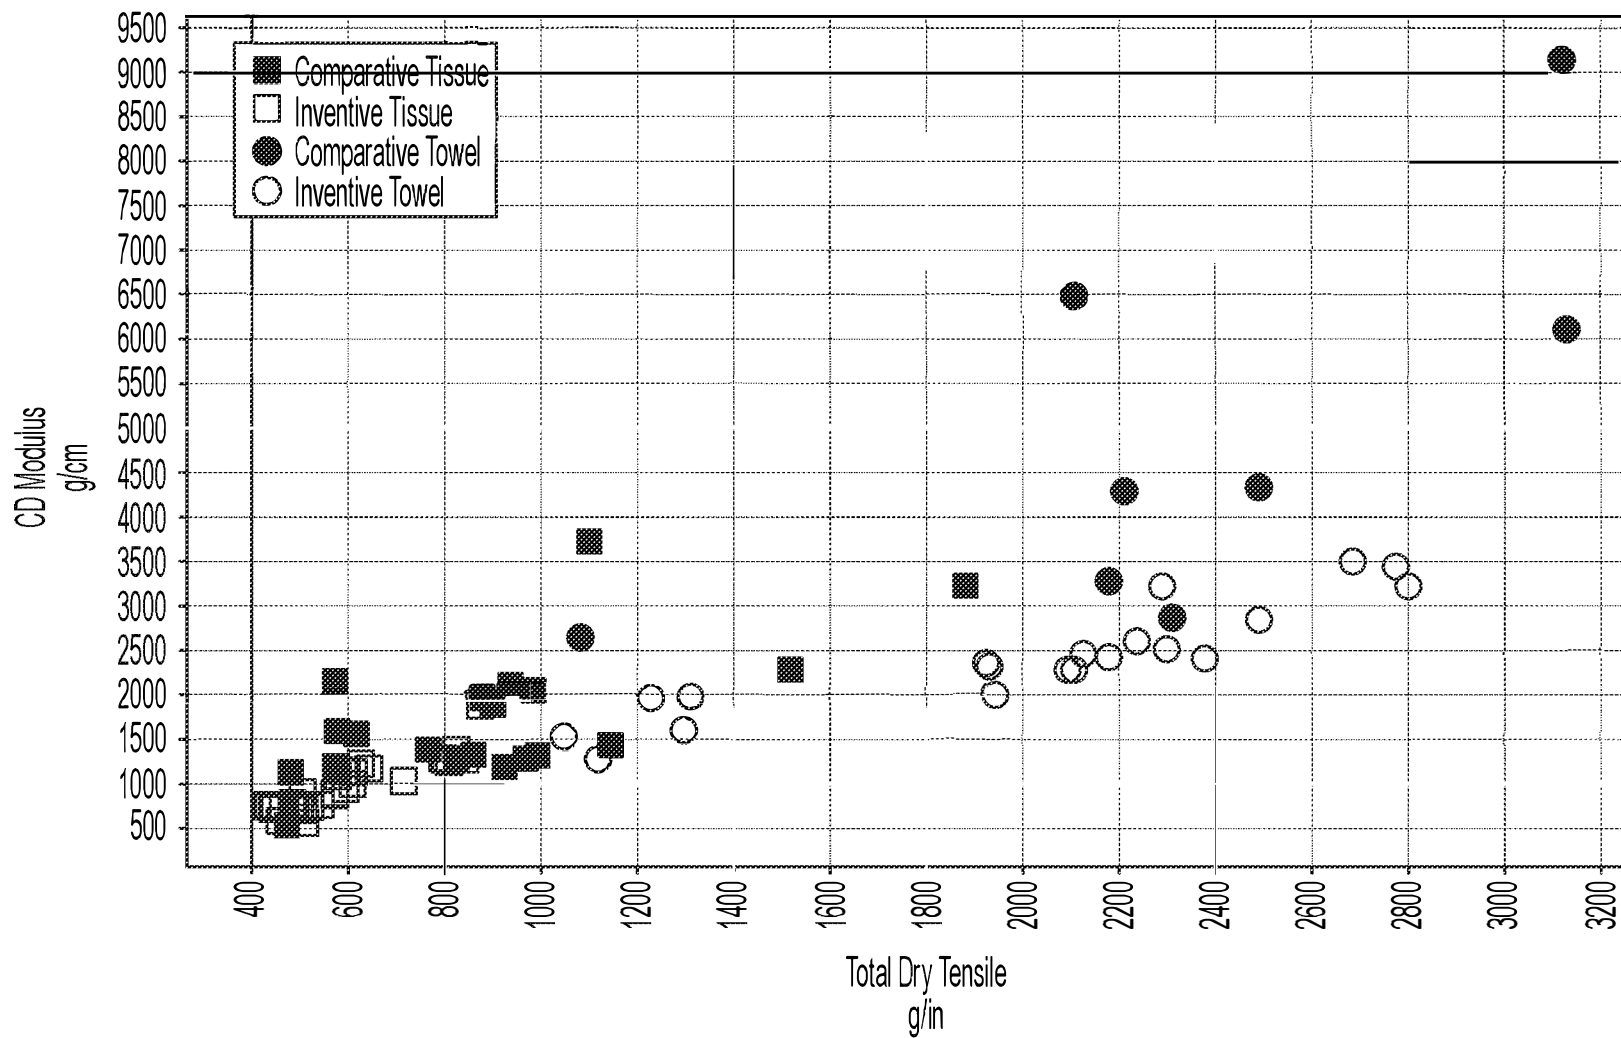


FIG. 2C

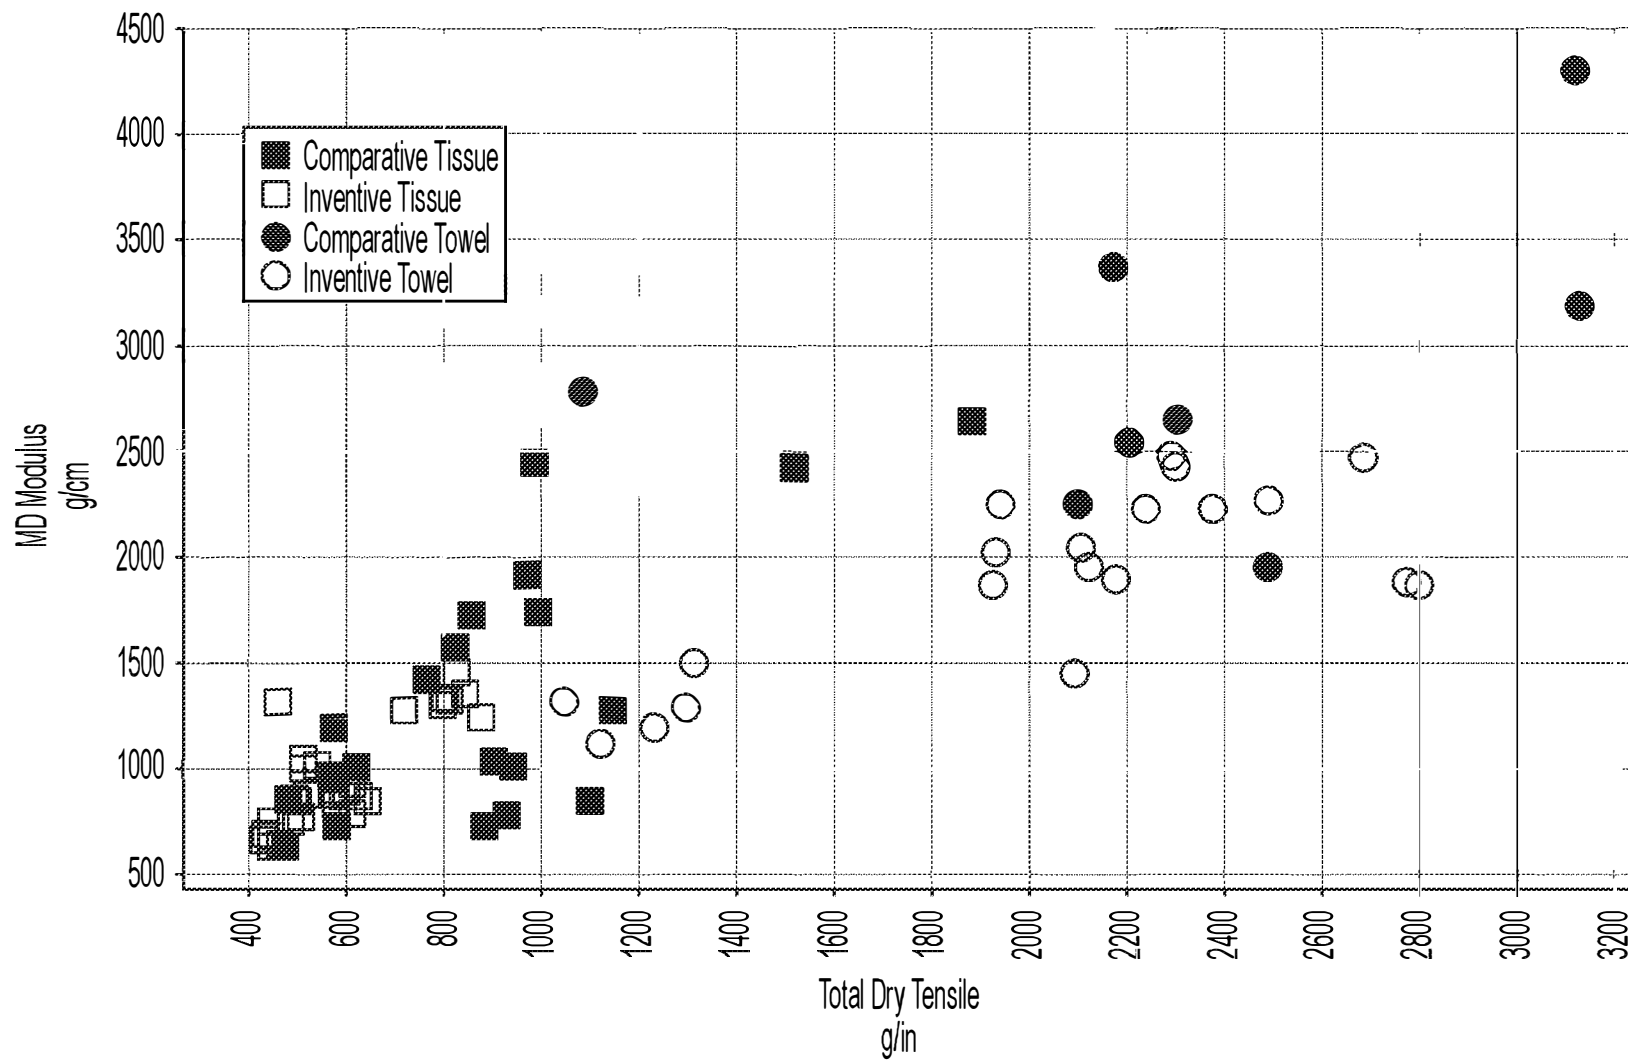


FIG. 2D

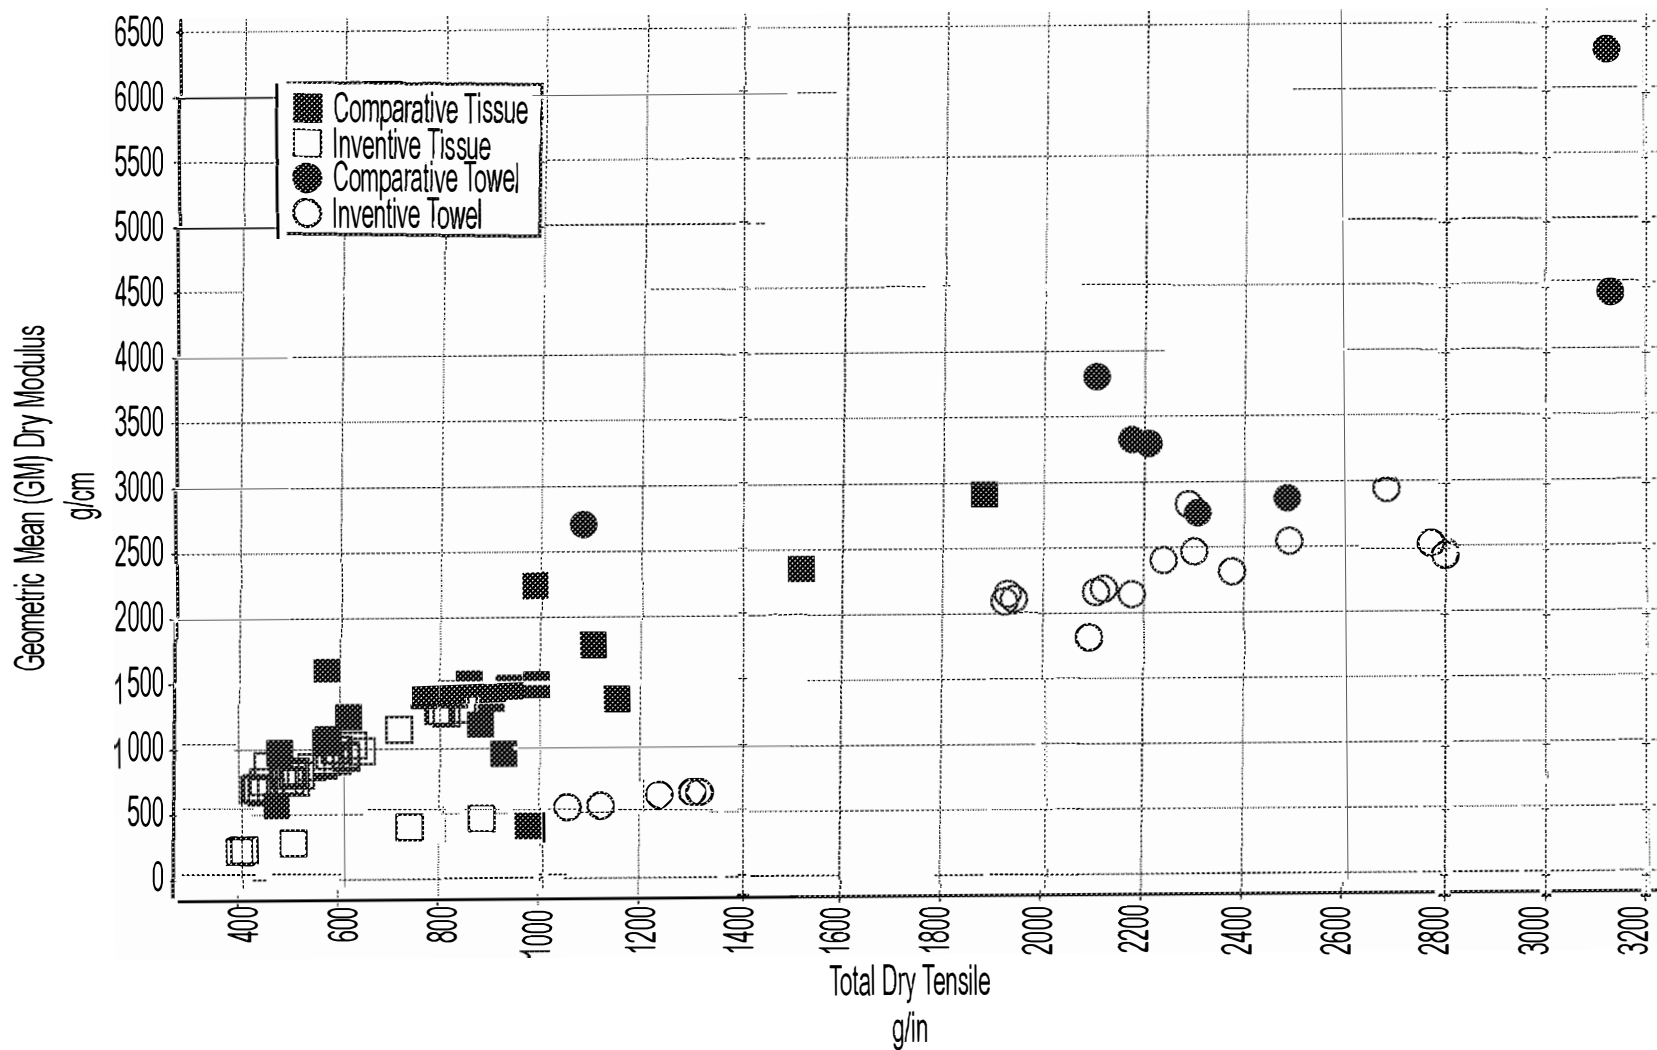



FIG. 2E



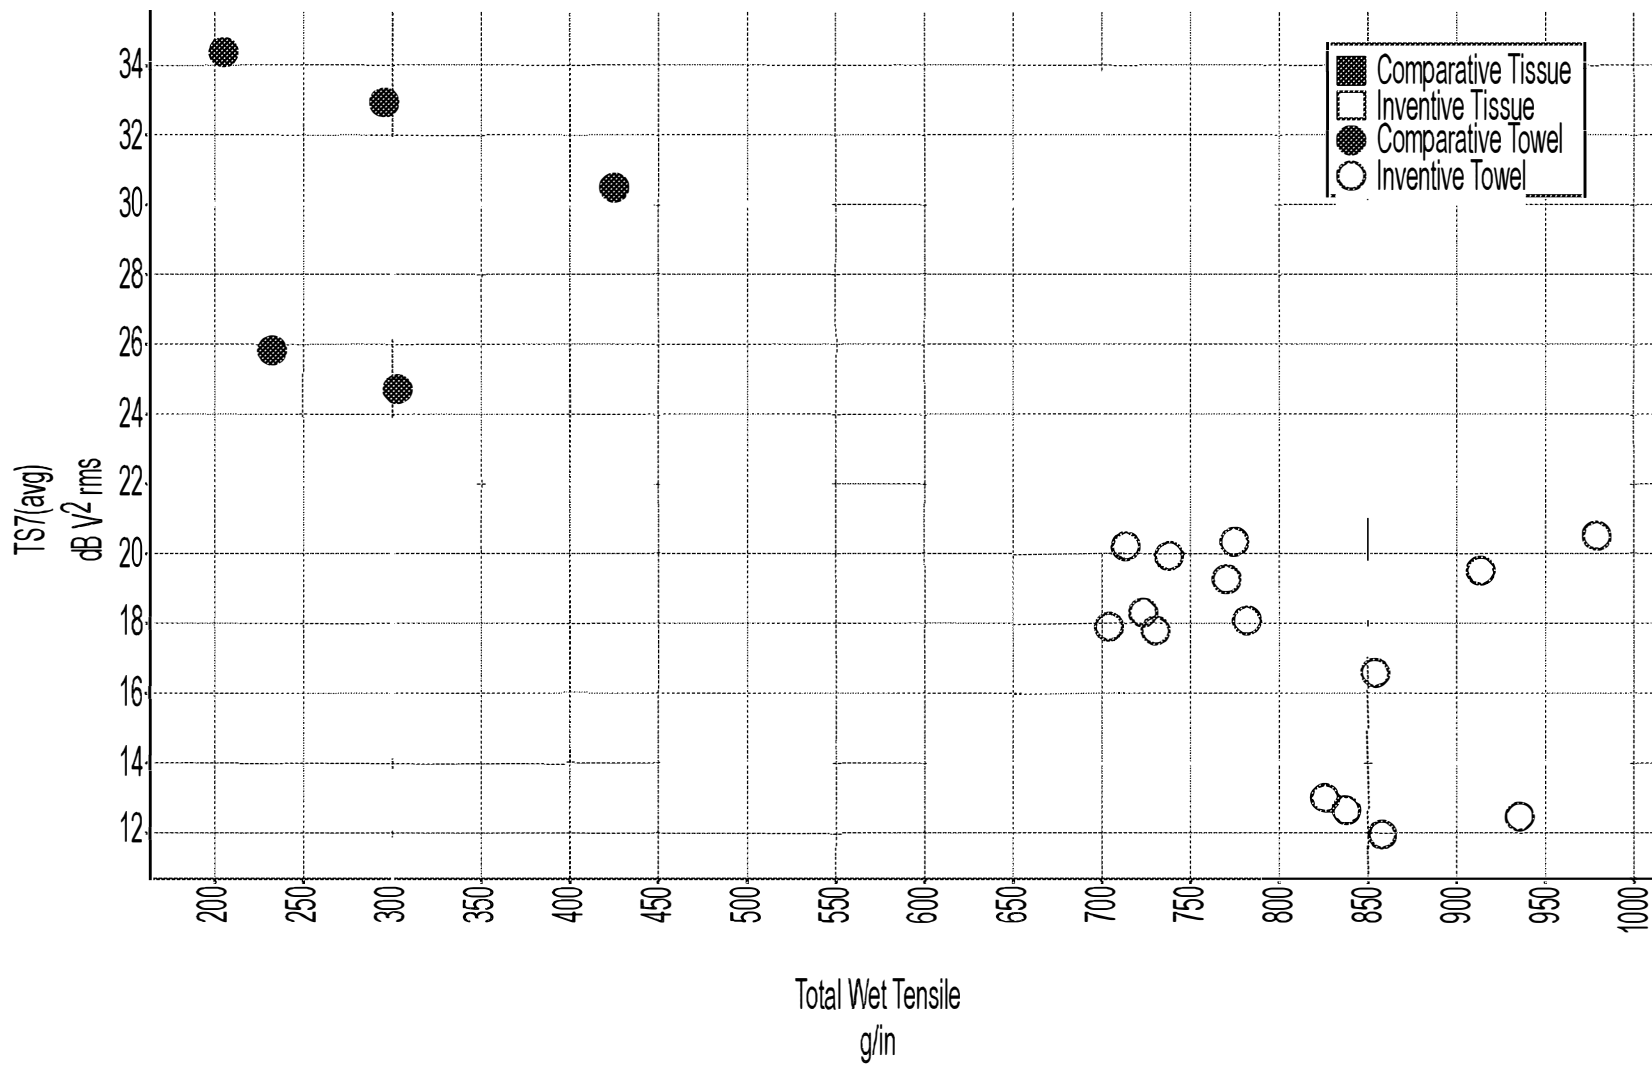


FIG. 2G

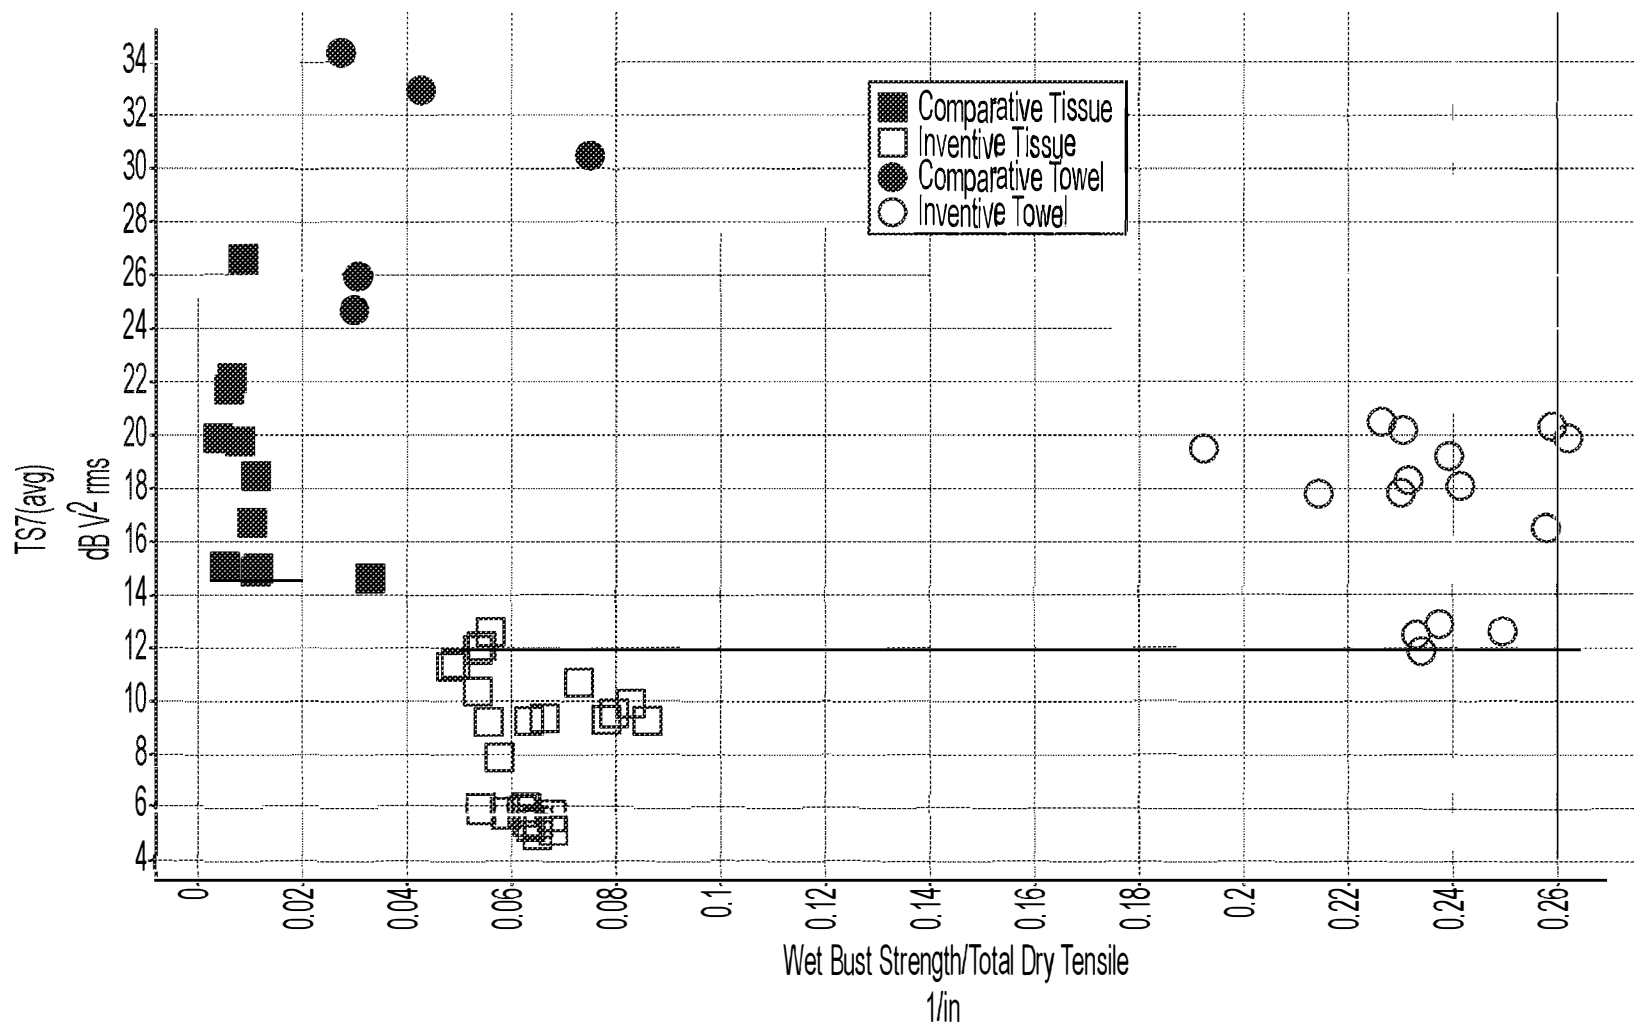


FIG. 2H

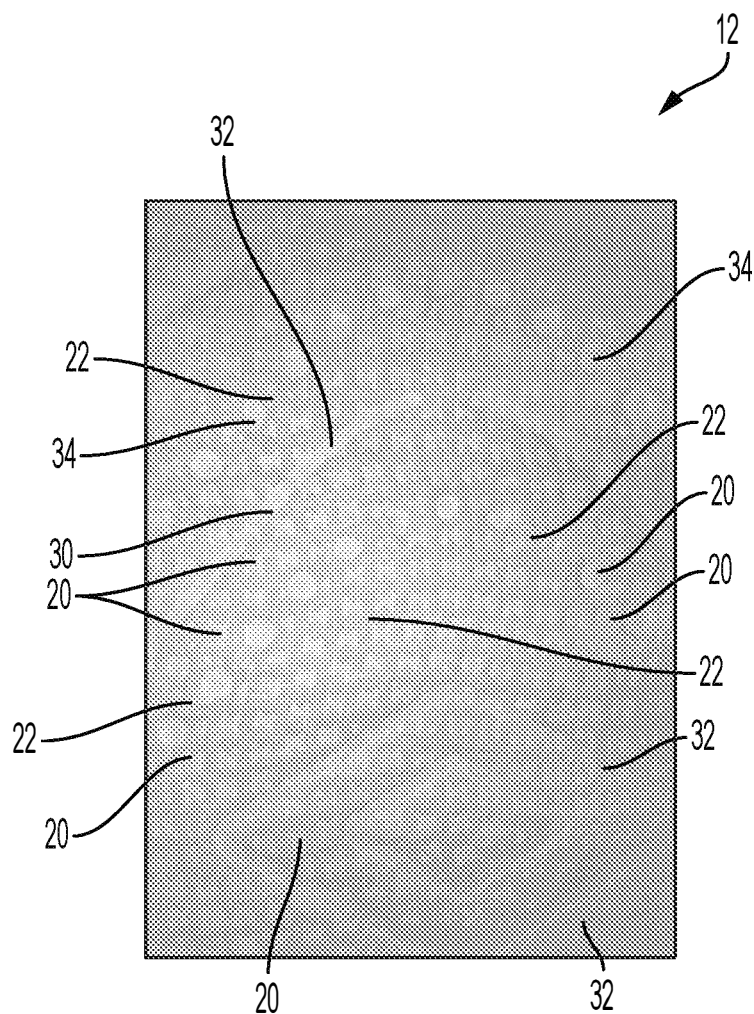


FIG. 3A

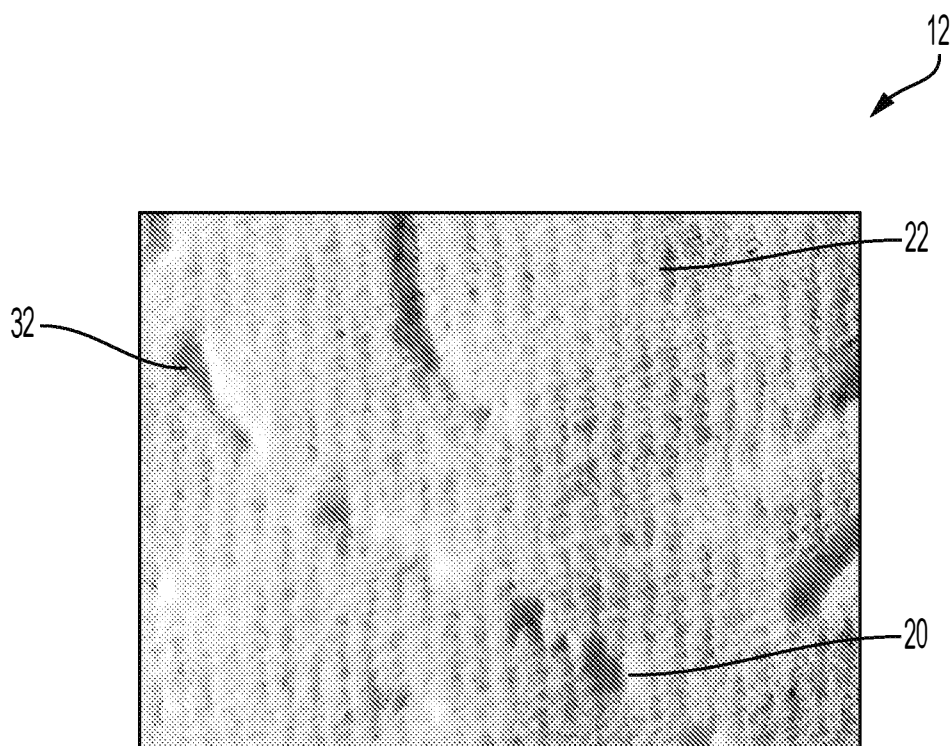


FIG. 3B

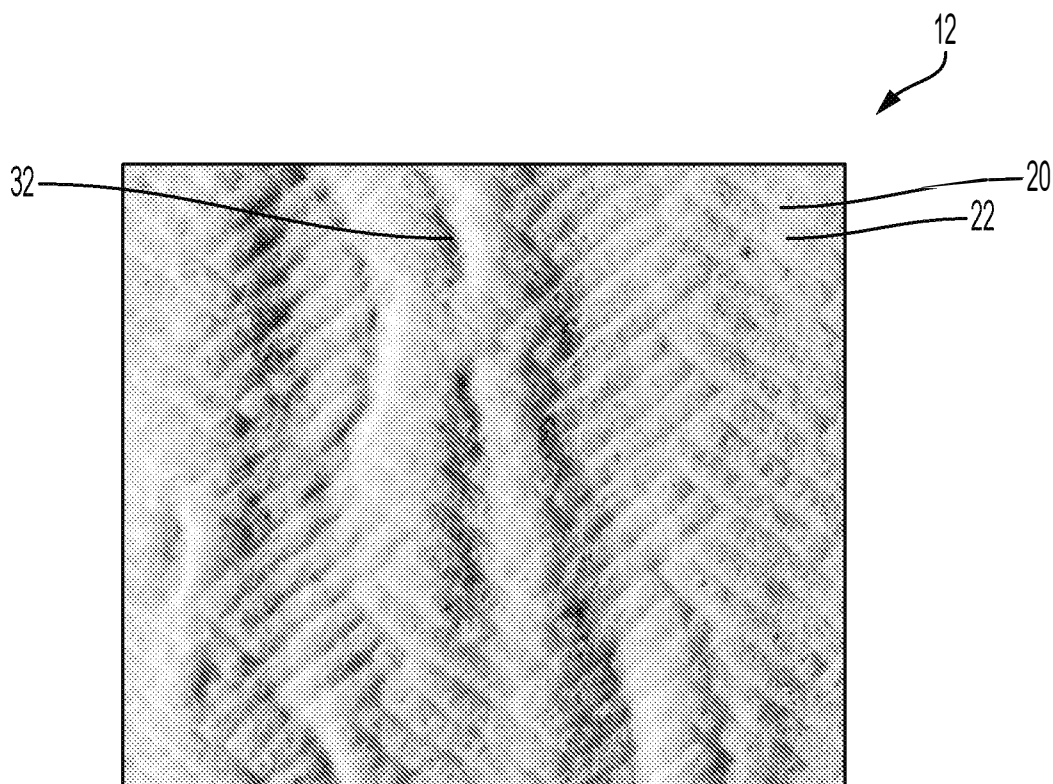


FIG. 3C

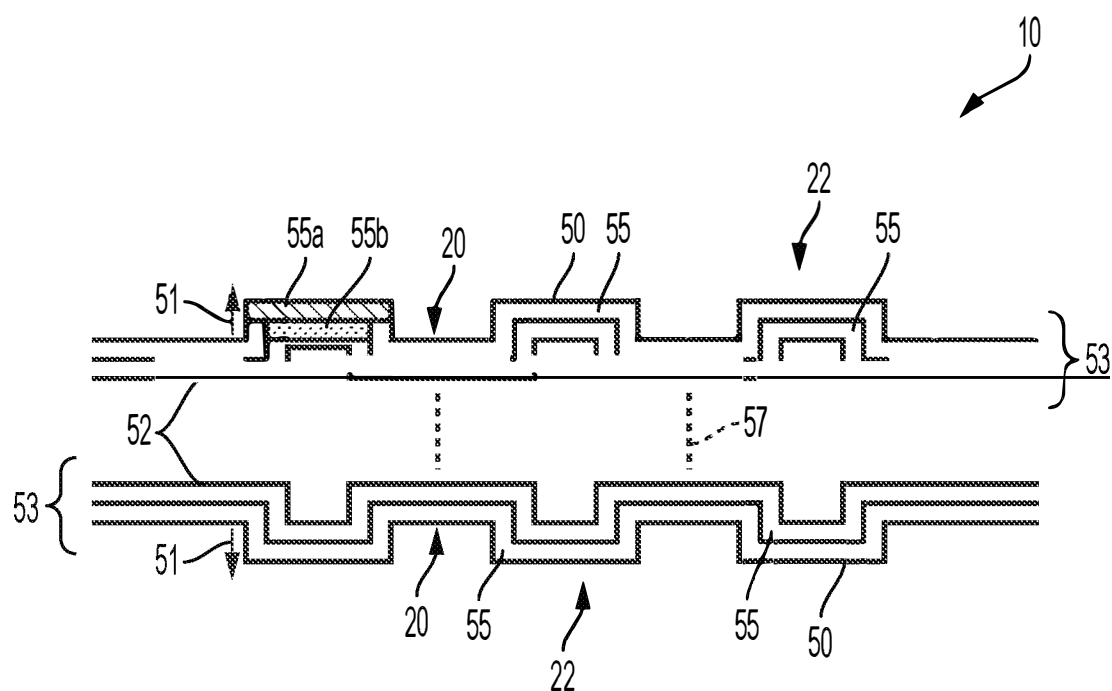


FIG. 4A

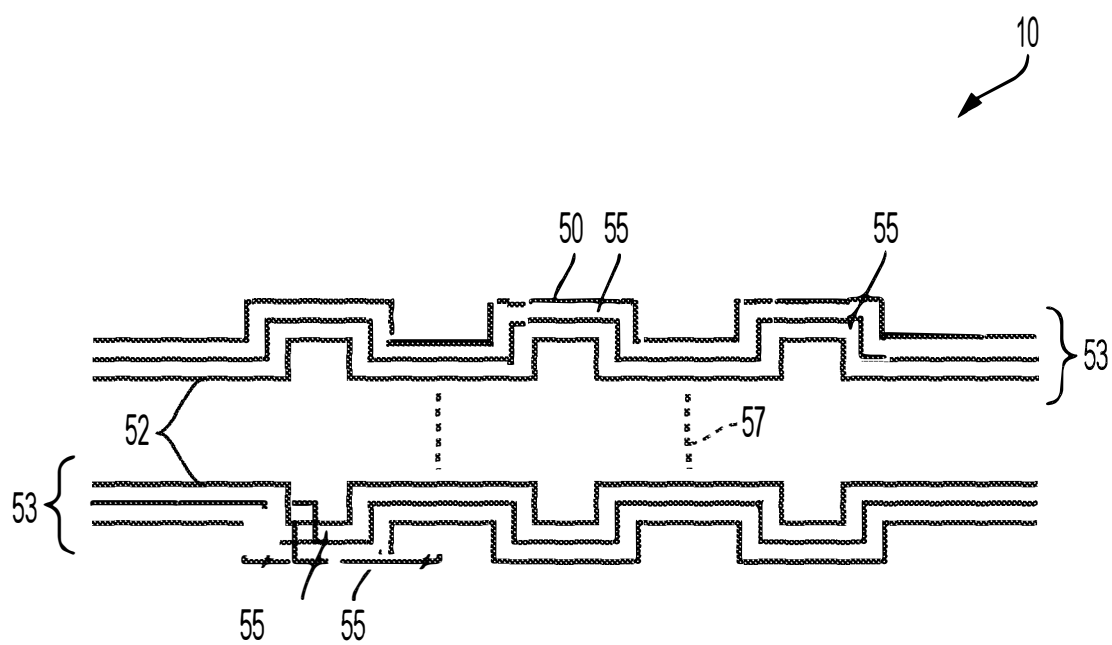


FIG. 4B

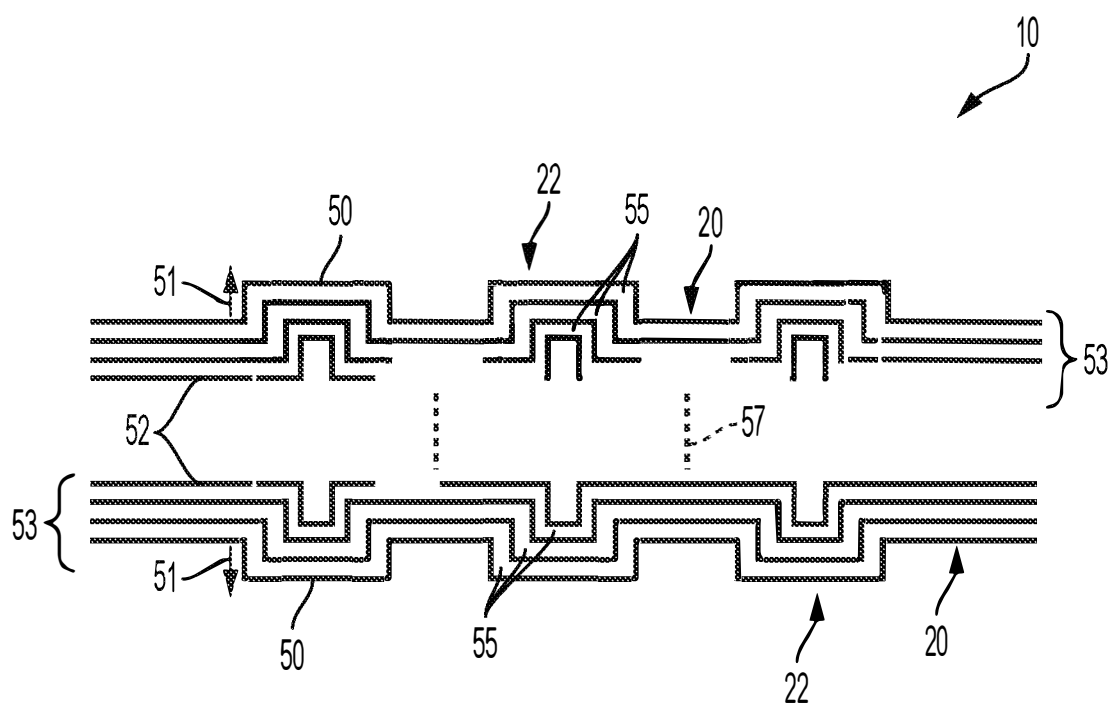


FIG. 4C

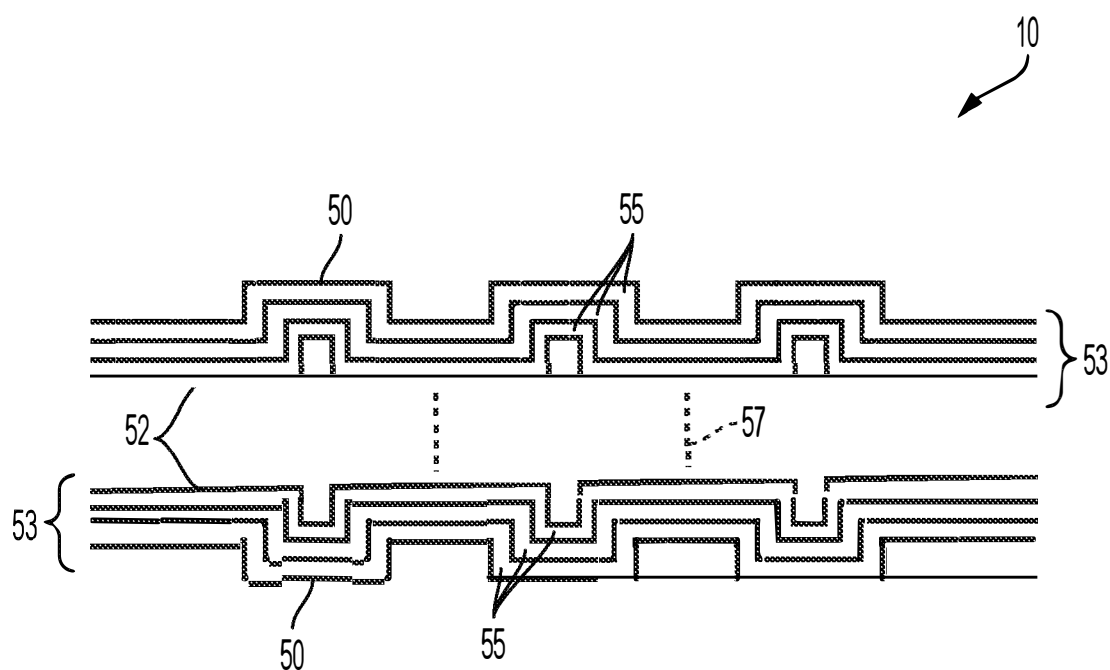


FIG. 4D

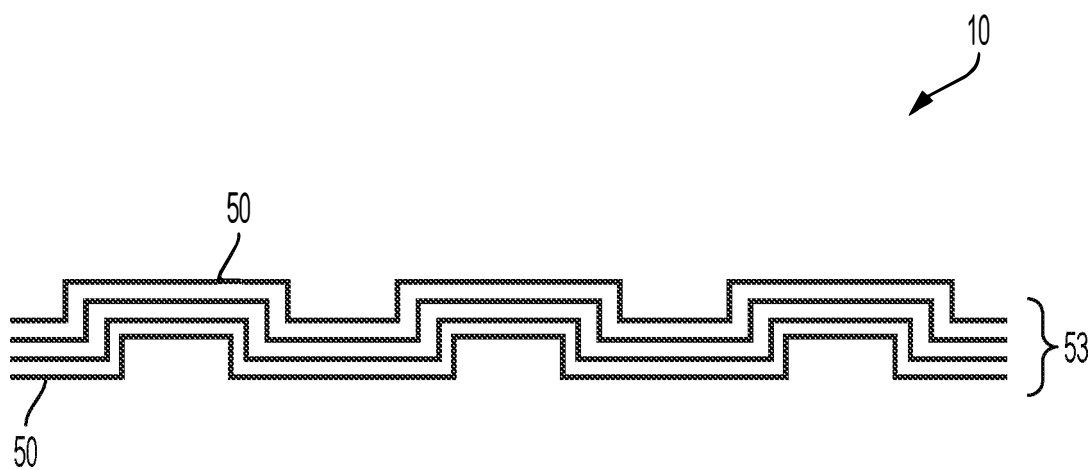


FIG. 4E

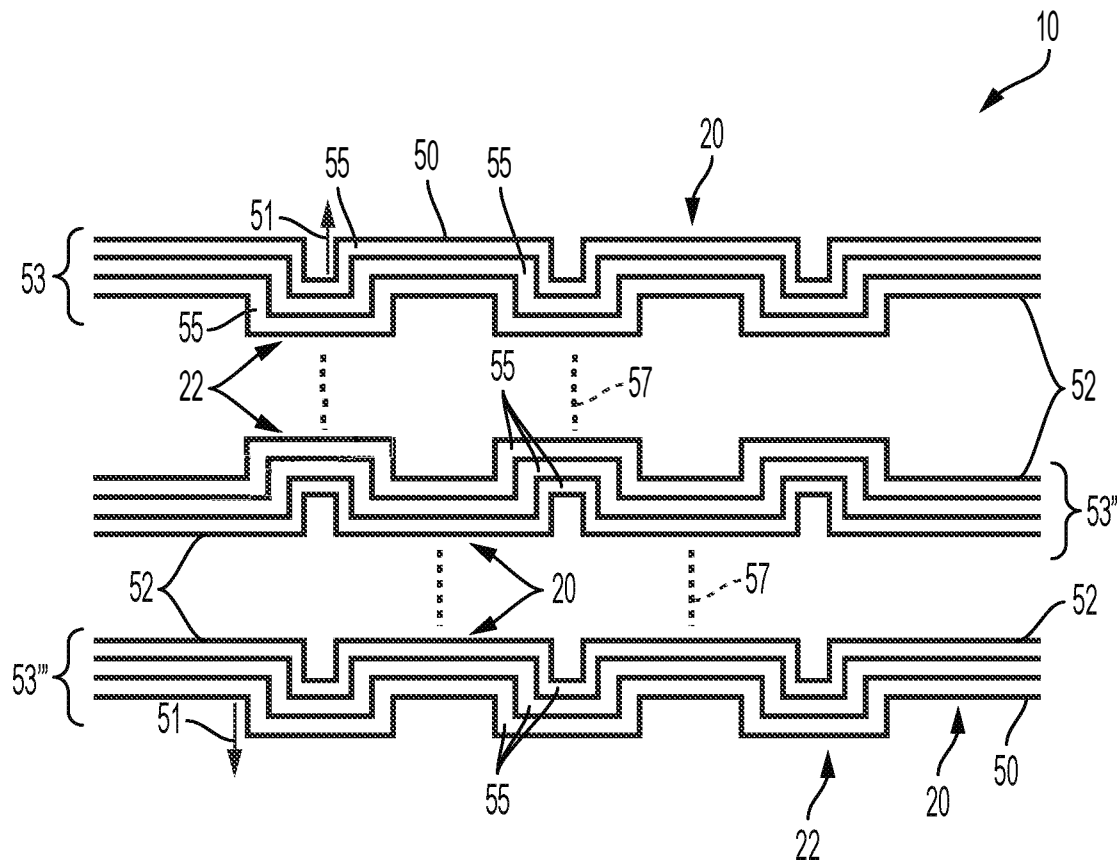


FIG. 4F

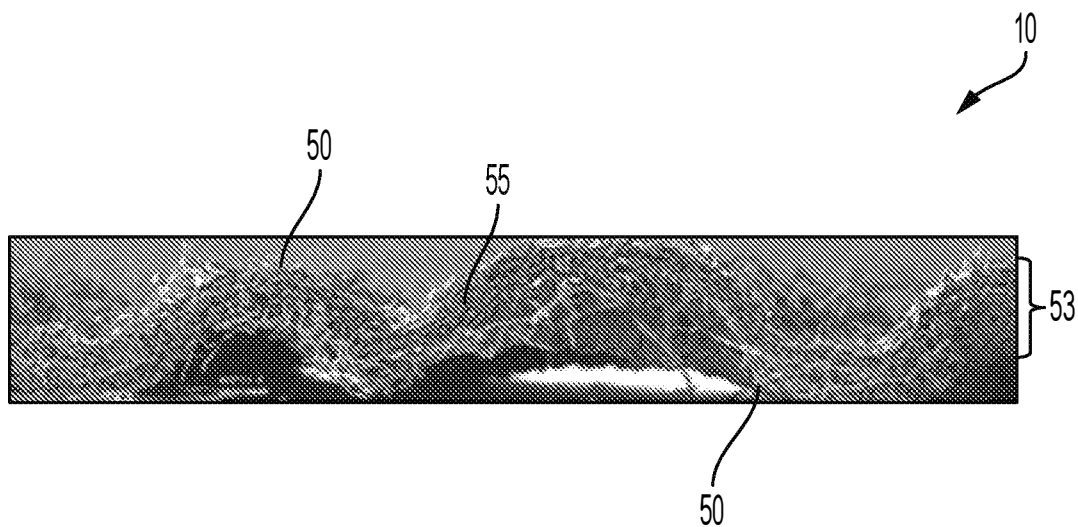


FIG. 4G

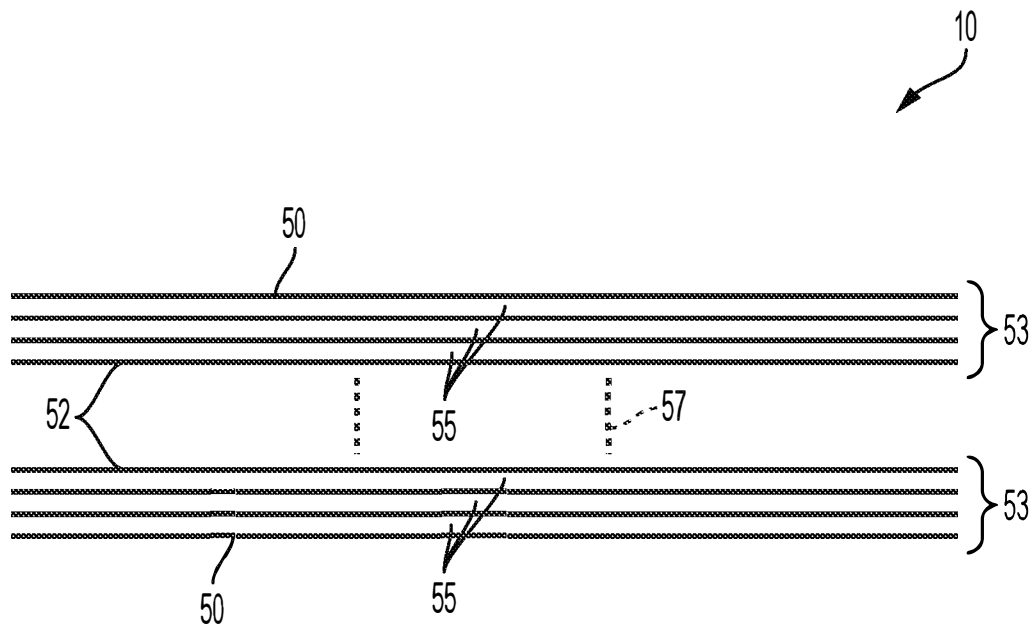


FIG. 4H

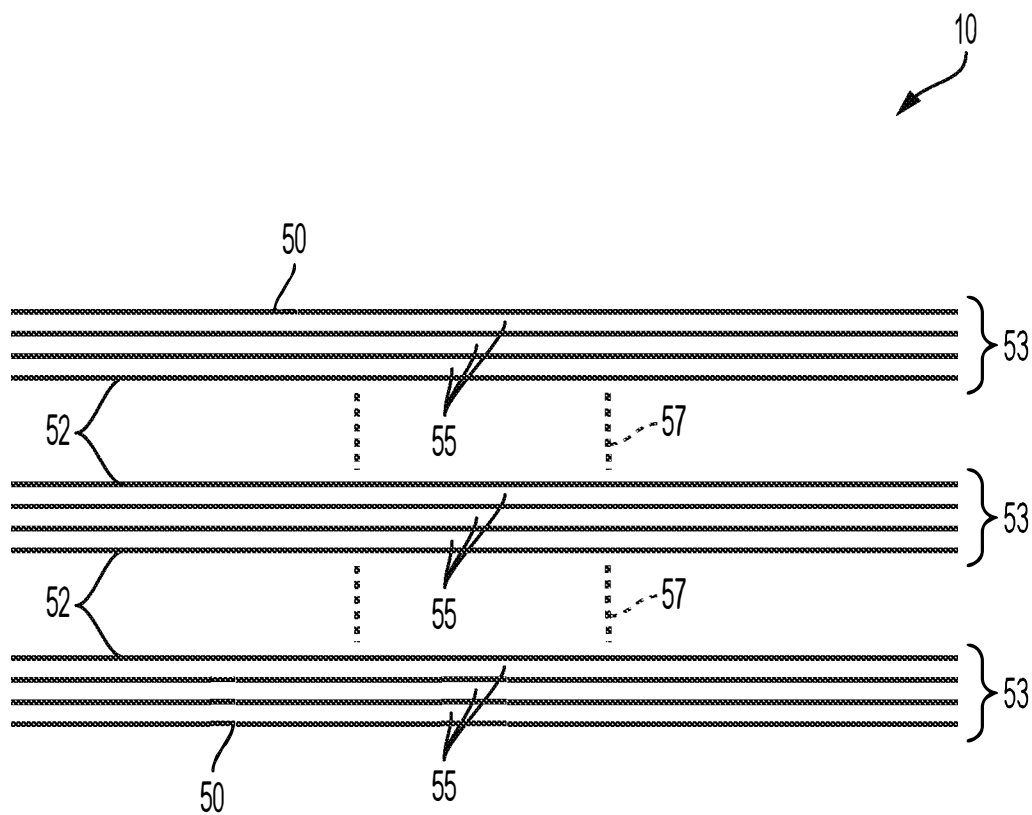


FIG. 4I

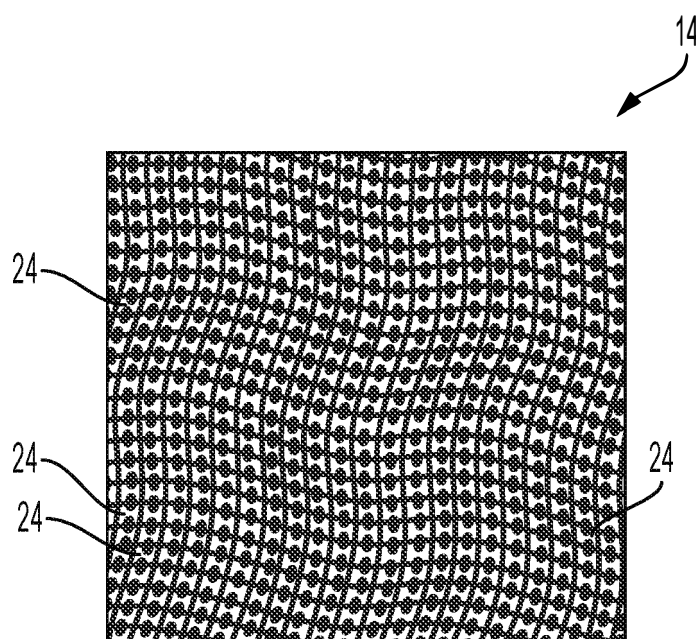


FIG. 5

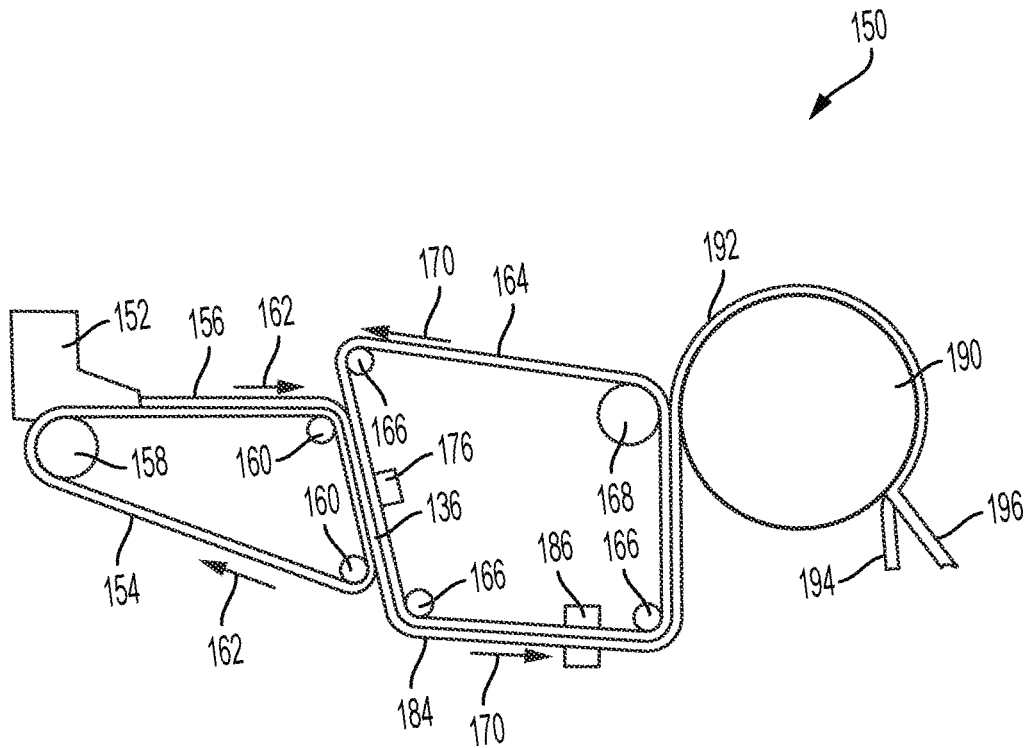


FIG. 6A

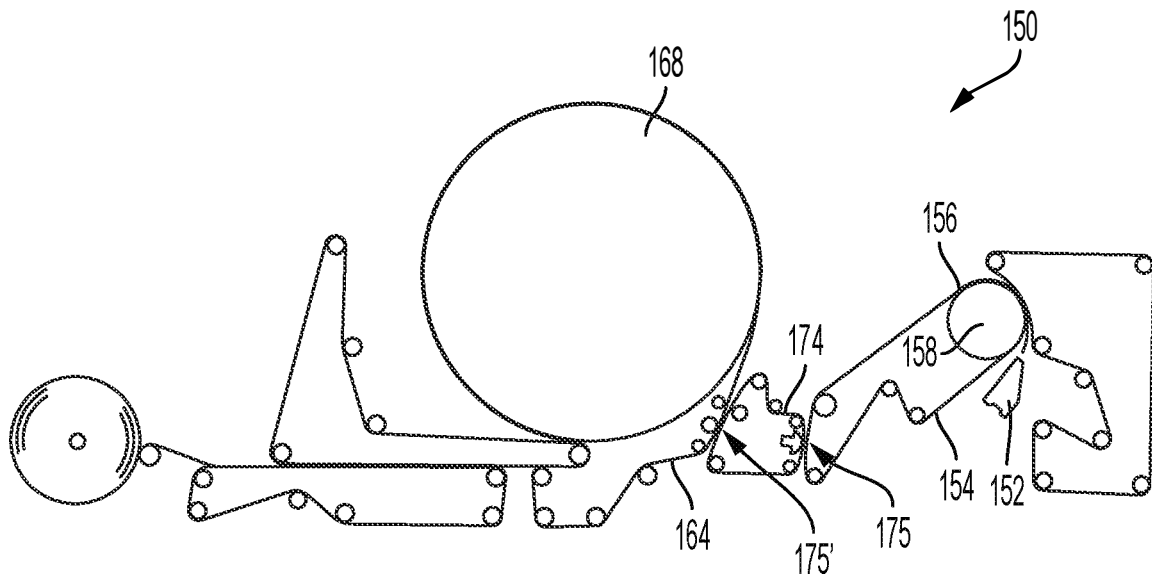


FIG. 6B

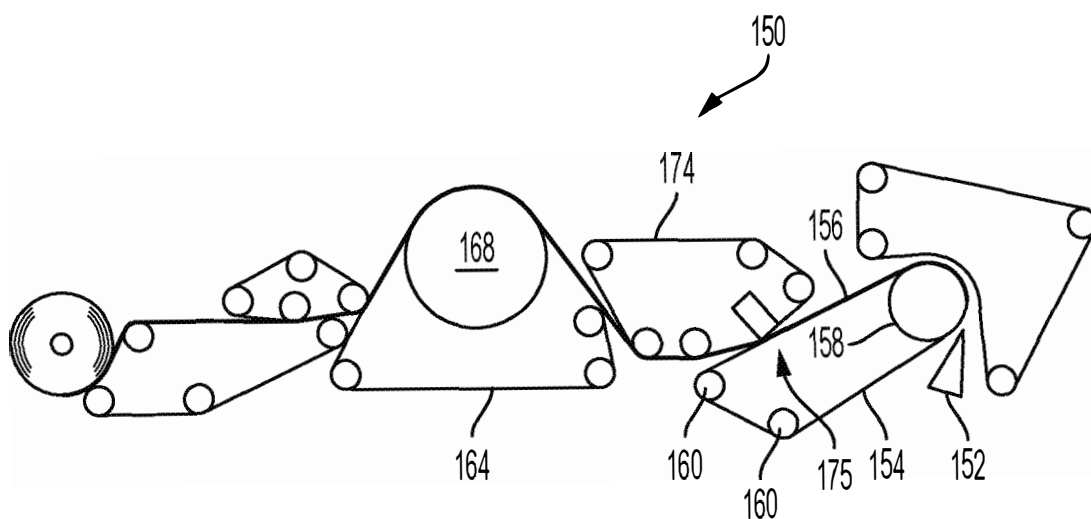


FIG. 6C

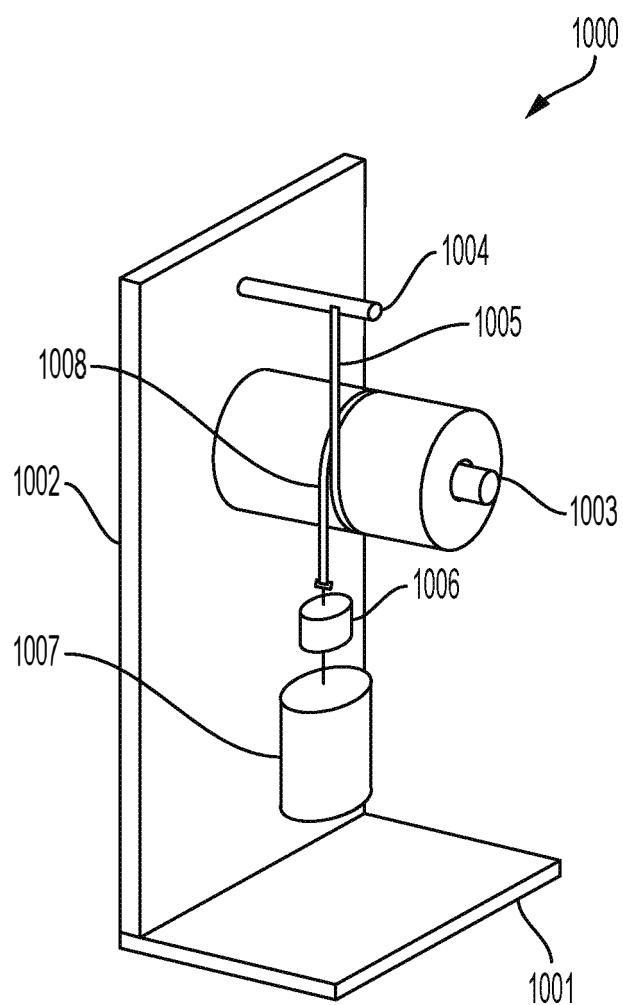


FIG. 7



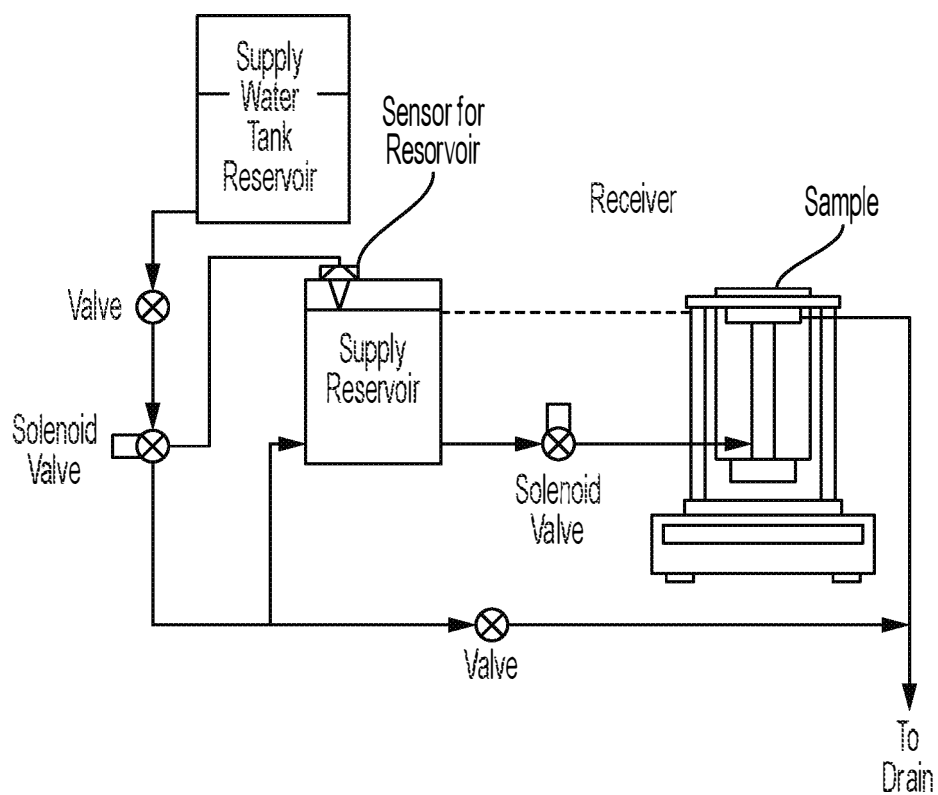


FIG. 9

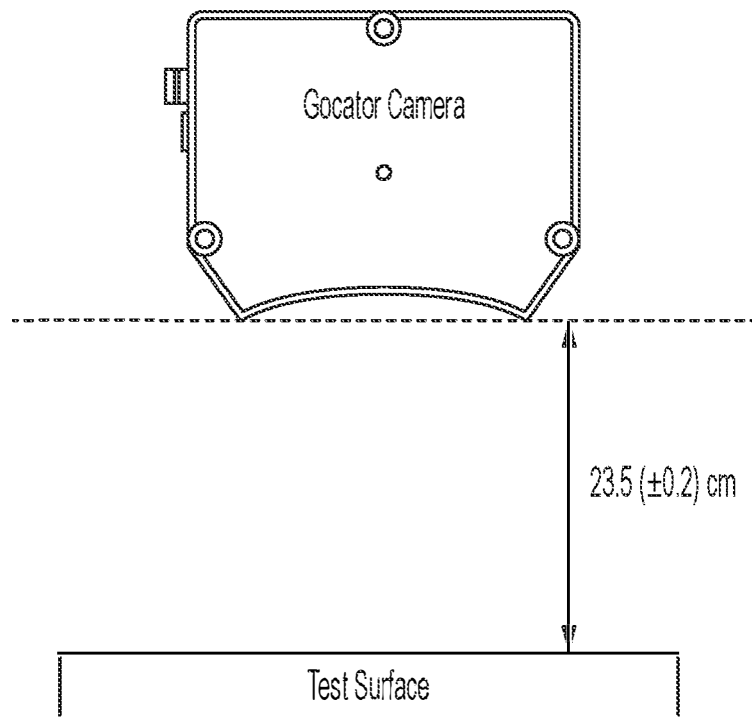


FIG. 10

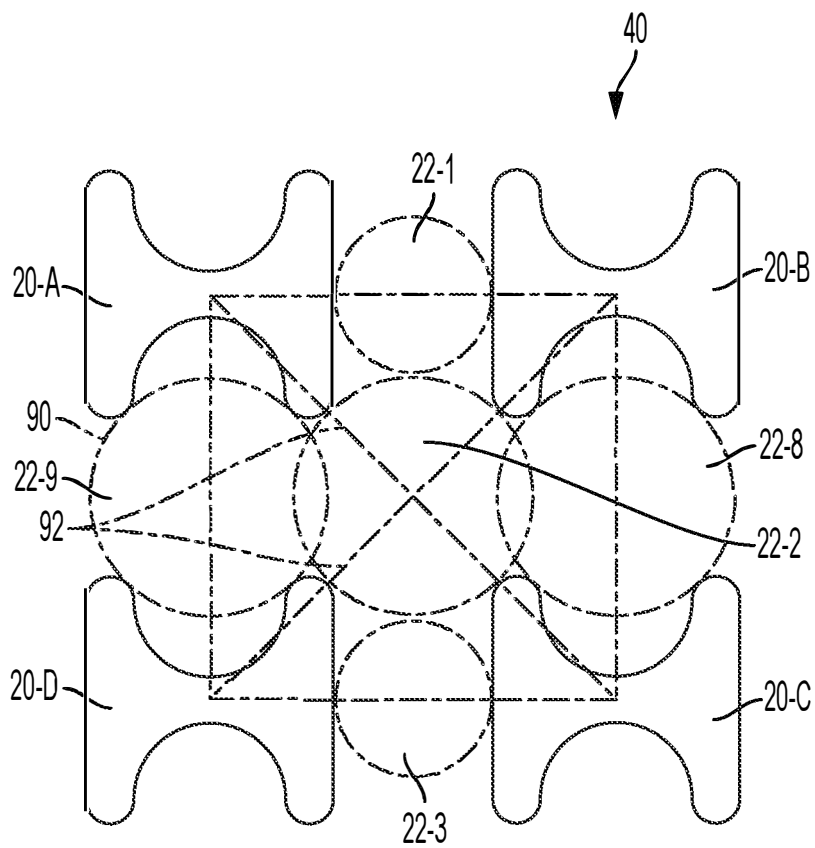


FIG. 11

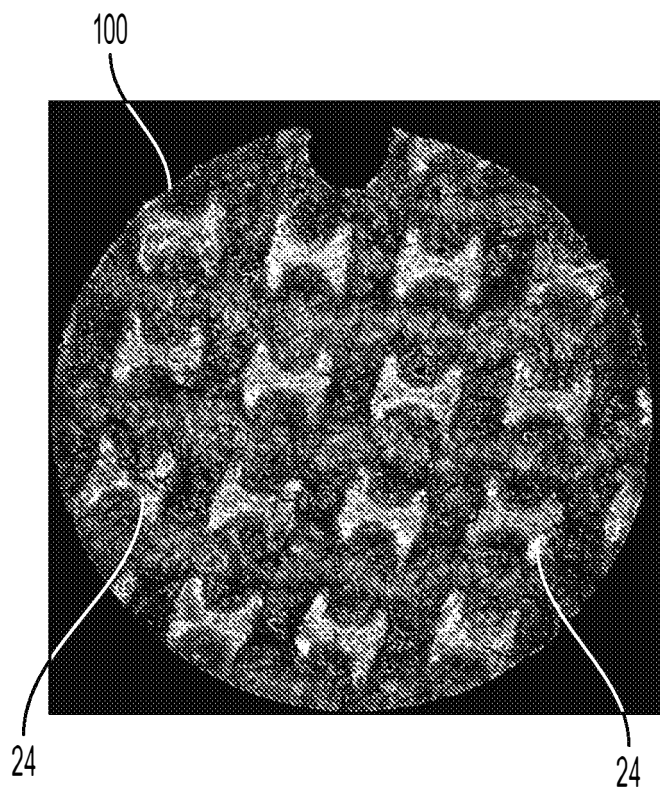


FIG. 12

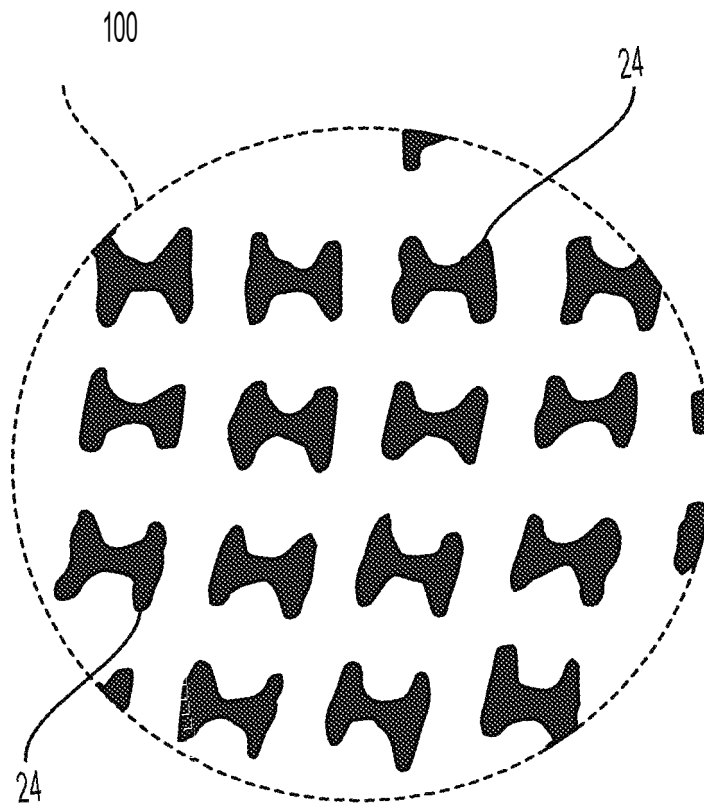


FIG. 13

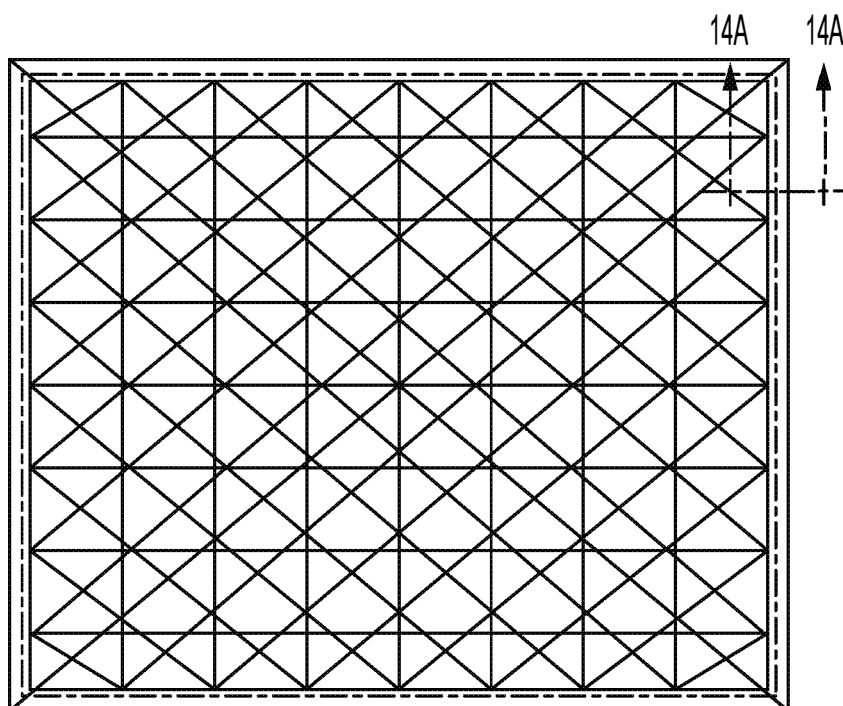


FIG. 14

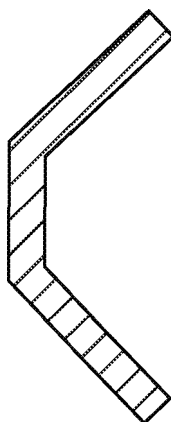


FIG. 14A

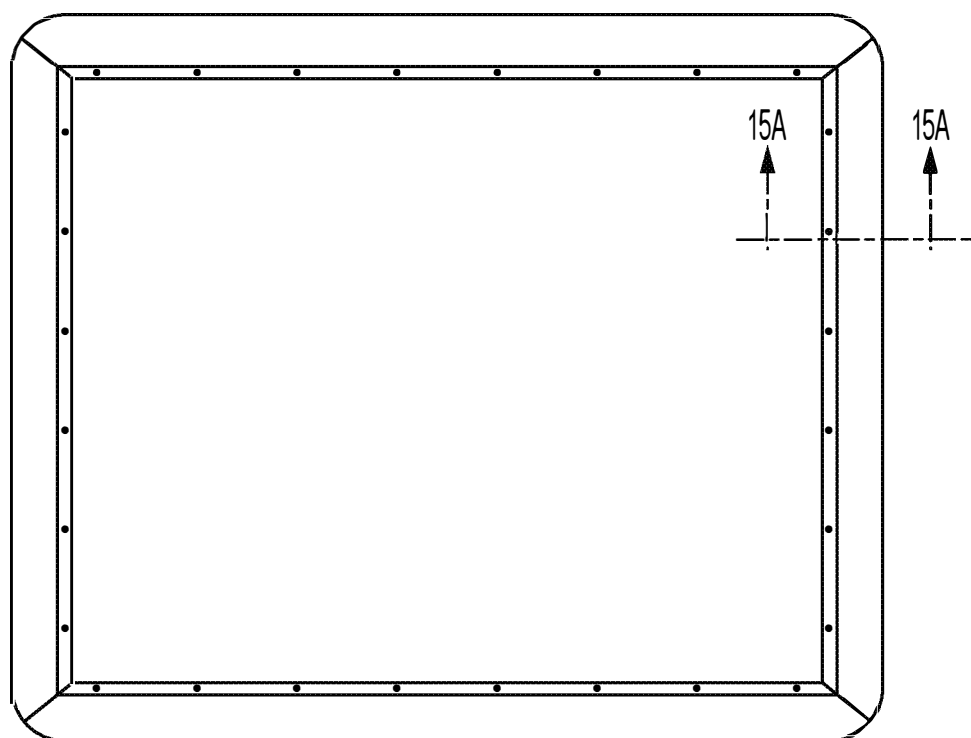


FIG. 15

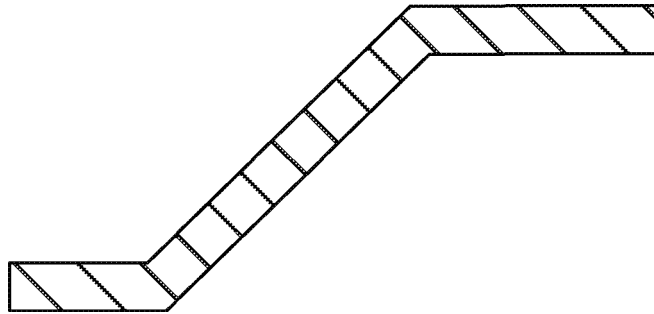


FIG. 15A

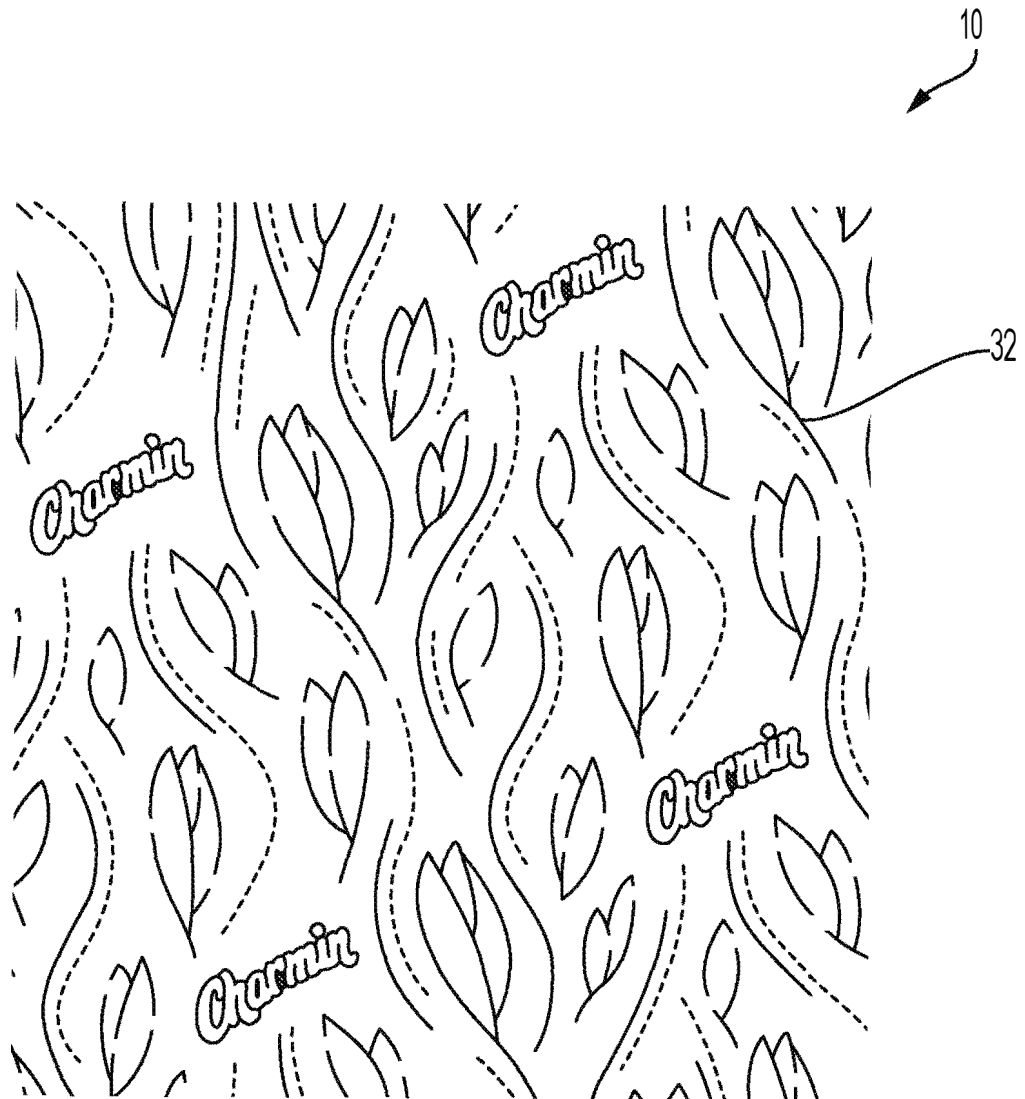


FIG. 16A

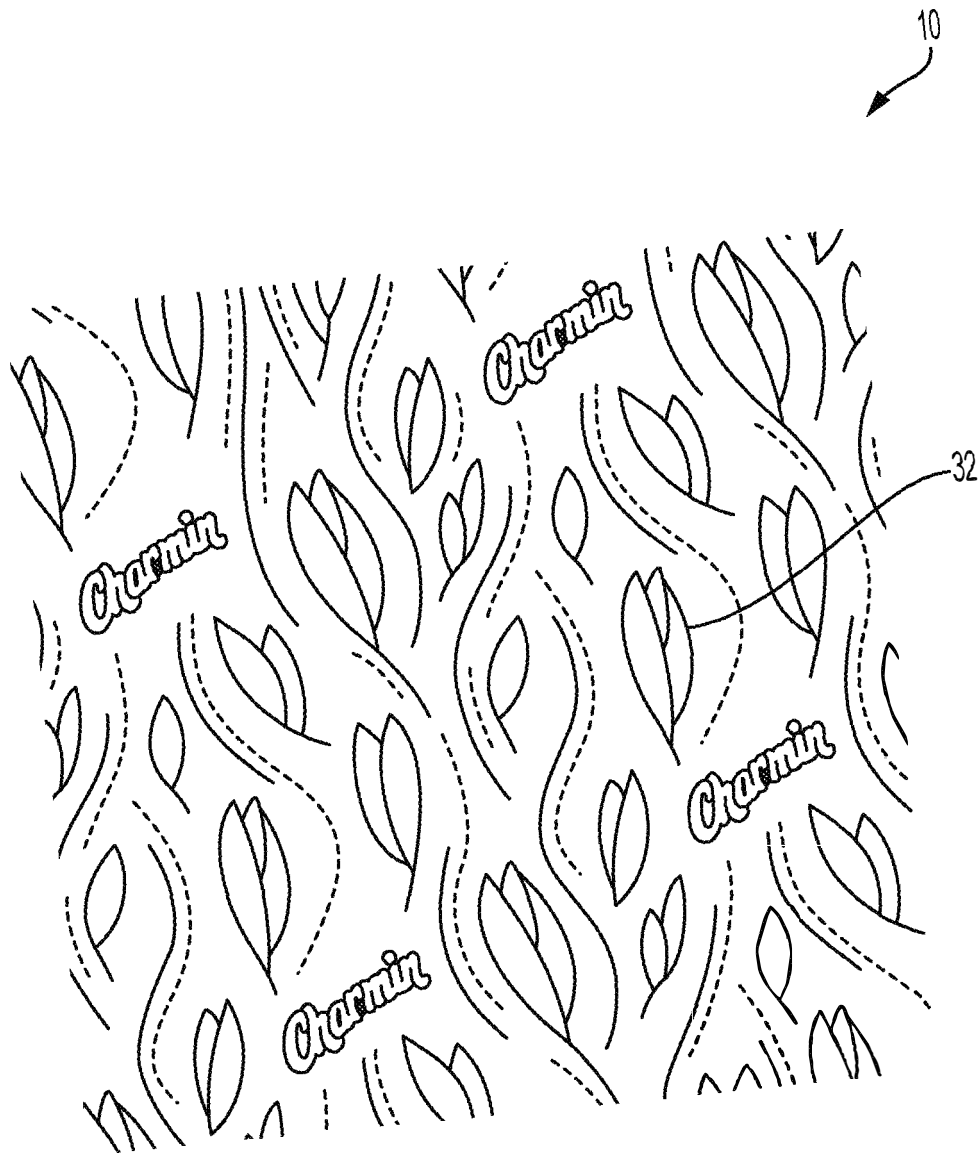


FIG. 16B

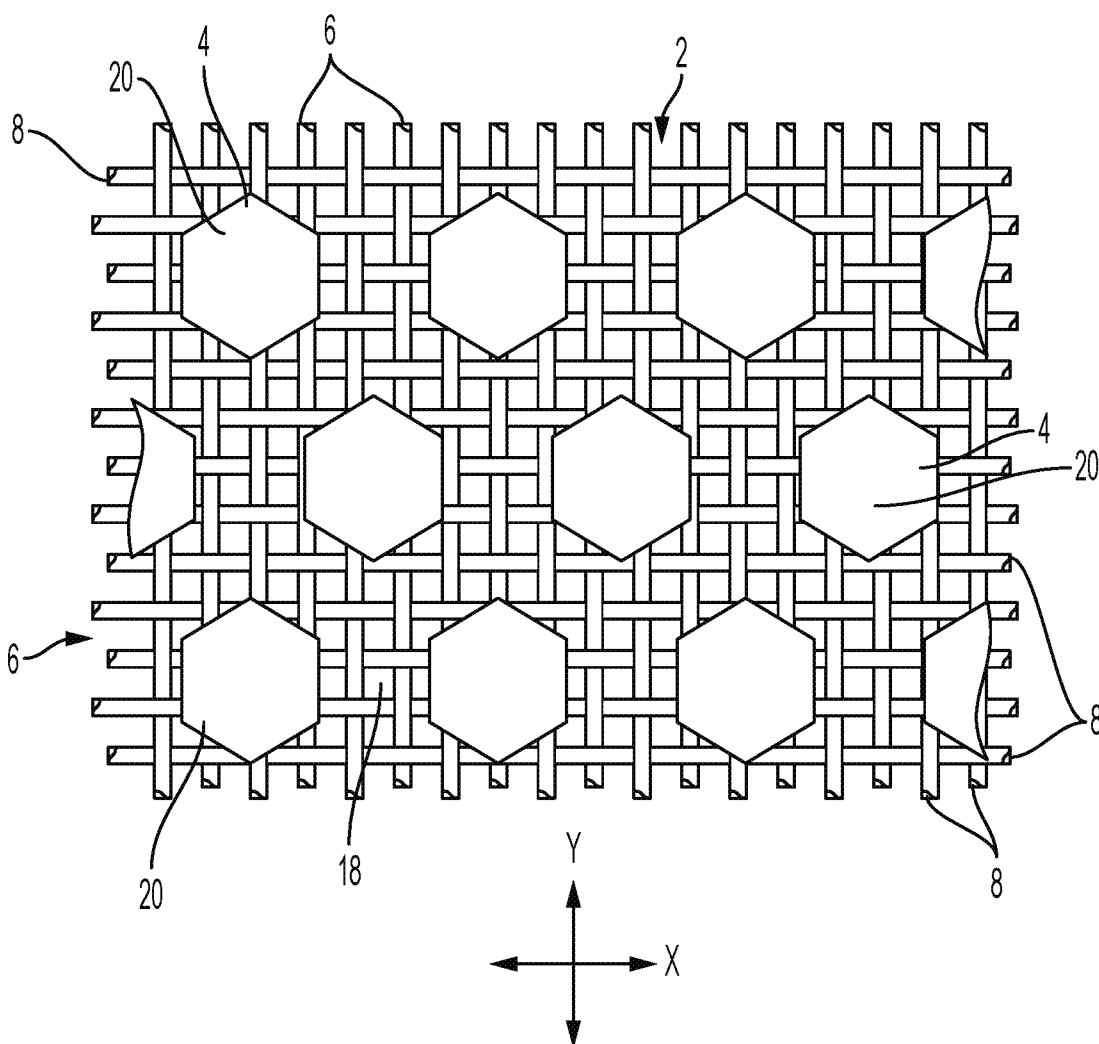


FIG. 17

Substrate	Type	Sample ID	Fractionation	# Unique Layers	Non-wood	Fabric Layer			Center Layer			Wire Layer			% of total Sheet			FSO/ WSO
						EUC	NSK /SW	Non-wood	EUC	NSK /SW	Non-wood	EUC	NSK /SW	Non-wood	EUC	Softwood	Non-wood	
Bath tissue	Inventive	1	Accepts to fabric	2	Bamboo	84%	0%	16%	32%	54%	14%	32%	54%	14%	52%	33%	15%	FSO
Bath tissue	Inventive	2	Accepts to fabric	2	Bamboo	69%	0%	31%	32%	39%	29%	32%	39%	29%	46%	24%	30%	FSO
Bath tissue	Inventive	3	Rejects to fabric	2	Bamboo	77%	0%	23%	32%	59%	10%	32%	59%	10%	49%	36%	15%	FSO
Bath tissue	Inventive	4	Rejects to fabric	2	Bamboo	53%	0%	47%	32%	49%	19%	32%	49%	19%	40%	30%	30%	FSO
Bath tissue	Inventive	5	Accepts to C/W, sewer rejects	2	Bamboo	100%	0%	0%	27%	49%	24%	27%	49%	24%	55%	30%	15%	FSO
Bath tissue	Inventive	6	Accepts to C/W, sewer rejects	2	Bamboo	100%	0%	0%	13%	39%	48%	13%	39%	48%	46%	24%	30%	FSO
Bath tissue	Inventive	7	No fractionation	2	Bamboo	100%	0%	0%	27%	49%	24%	27%	49%	24%	55%	30%	15%	FSO
Bath tissue	Inventive	8	No fractionation	2	Bamboo	100%	0%	0%	13%	39%	48%	13%	39%	48%	46%	24%	30%	FSO
Bath tissue	Inventive	15	No fractionation	2	Bamboo	100%	0%	0%	13%	39%	48%	13%	39%	48%	46%	24%	30%	FSO
Bath tissue	Inventive	16	Rejects to fabric	2	Bamboo	53%	0%	47%	32%	49%	19%	32%	49%	19%	40%	30%	30%	FSO
Bath tissue	Inventive	17	Rejects to fabric	2	Bamboo	53%	0%	47%	32%	49%	19%	32%	49%	19%	40%	30%	30%	FSO
Bath tissue	Inventive	18	Rejects to fabric	2	Bamboo	21%	0%	79%	32%	36%	32%	32%	36%	32%	28%	22%	50%	FSO
Bath tissue	Inventive	19	Rejects to fabric	2	Bamboo	0%	0%	100%	0%	0%	100%	0%	0%	100%	0%	0%	100%	FSO
Bath tissue	Inventive	20	Rejects to Wire	2	Bamboo	47%	35%	18%	47%	35%	18%	47%	0%	53%	47%	23%	30%	WSO
Bath tissue	Inventive	21	No frac, C/F only	2	Bamboo	20%	35%	45%	20%	35%	45%	100%	0%	0%	47%	23%	30%	WSO
Bath tissue	Inventive	22	No frac, both layers	2	Bamboo	47%	35%	18%	47%	35%	18%	47%	0%	53%	47%	23%	30%	WSO
Bath tissue	Inventive	23	Rejects to wire	2	Bamboo	0%	0%	100%	0%	0%	100%	0%	0%	100%	0%	0%	100%	WSO

FIG. 18A-1

[illegible]

						Fabric Layer			Center Layer			Wire Layer			% of total Sheet			
Substrate	Type	Sample ID	Fractionation	# Unique Layers	Non-wood	EUC	NSK /SW	Non-wood	EUC	NSK /SW	Non-wood	EUC	NSK /SW	Non-wood	EUC	Softwood	Non-wood	FSO/ WSO
Bath tissue	Inventive	34		2	Abaca	23%	65%	12%	23%	65%	12%	100%	0%	0%	50%	42.5%	7.5%	WSO
Bath tissue	Inventive	35		2	Abaca	23%	54%	23%	23%	54%	23%	100%	0%	0%	50%	35%	15%	WSO
Bath tissue	Inventive	36		2	Abaca	23%	38%	38%	23%	38%	38%	100%	0%	0%	50%	25%	25%	WSO
Bath tissue	Inventive	37		2	Abaca	23%	38%	8%	23%	38%	8%	100%	0%	0%	50%	25%	25%	WSO
Bath tissue	Inventive	38		2	Abaca	23%	0%	77%	23%	0%	77%	100%	0%	0%	50%	0%	50%	WSO
Bath tissue	Inventive	39		2	Abaca	23%	0%	77%	23%	0%	77%	100%	0%	0%	50%	0%	50%	WSO
Bath tissue	Inventive	40		2	Unbleached Bamboo	67%	33%	0%	67%	33%	0%	0%	0%	100%	43%	21%	36%	WSO
Bath tissue	Inventive	41		2	Hemp	67%	33%	0%	67%	33%	0%	0%	0%	100%	44%	22%	34%	WSO
Bath tissue	Inventive	42		2	Bamasse	75%	25%	0%	75%	25%	0%	0%	0%	100%	47%	16%	37%	WSO
Bath tissue	Inventive	43		2	Cotton	67%	33%	0%	67%	33%	0%	0%	0%	100%	34%	17%	49%	WSO
Bath tissue	Inventive	44		3	Bleached Bamboo	0%	0%	100%	0%	100%	0%	0%	0%	100%	0%	11%	89%	WSO
Bath tissue	Inventive	50		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	WSO
Bath tissue	Inventive	51		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	WSO
Bath tissue	Inventive	52		1	Bamboo										0%	0%	100%	WSO
Bath tissue	Inventive	53		1	Bamboo										0%	0%	100%	WSO
Bath tissue	Inventive	54		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	WSO
Bath tissue	Inventive	55		2	Bamboo	0%	0%	100%	0%	0%	100%	80%	0%	20%	20%	0%	80%	WSO

FIG. 18B-1

Bath tissue	Traditional	Z01		2		100%	0%	0%	32%	68%	0%	32%	68%	0%	58%	42%	0%	FSO
Bath tissue	Traditional	Z03		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	65%	35%	0%	WSO
Bath tissue	Traditional	Z04		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	65%	35%	0%	WSO
Bath tissue	Traditional	Z05		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	65%	35%	0%	WSO
Bath tissue	Traditional	Z06		2		47%	53%	0%	47%	53%	0%	100%	0%	0%	65%	35%	0%	WSO
Bath tissue	Traditional	Z07		2		100%	0%	0%	25%	75%	0%	25%	75%	0%	55%	45%	0%	FSO
Bath tissue	Traditional	Z08		2		23%	77%	0%	23%	77%	0%	100%	0%	0%	50%	50%	0%	WSO
Bath tissue	Traditional	Z09		2		68%	32%	0%	68%	32%	0%	100%	0%	0%	79%	21%	0%	WSO
Bath tissue	Traditional	Z10		2		66%	34%	0%	66%	34%	0%	100%	0%	0%	78%	22%	0%	WSO
Bath tissue	Traditional	Z11		3		100%	0%	0%	0%	100%	0%	100%	0%	0%	80%	20%	0%	WSO
Bath tissue	Traditional	Z13		2		100%	0%	0%	32%	68%	0%	32%	68%	0%	58%	42%	0%	FSO

FIG. 18B-2

FIG. 19

Substrate	Type	Sample ID	# Unique Layers	Non-wood	Euc	Softwood	Non-wood	FSO/WSO
							% of total Sheet	
Towel	Inventive	9	1	Bamboo	37%	53%	10%	FSO
Towel	Inventive	10	1	Bamboo	42%	48%	10%	FSO
Towel	Inventive	11	1	Bamboo	34%	46%	20%	FSO
Towel	Inventive	12	1	Bamboo	44%	36%	20%	FSO
Towel	Inventive	13	1	Bamboo	31%	40%	30%	FSO
Towel	Inventive	14	1	Bamboo	46%	24%	30%	FSO
Towel	Inventive	45	1	Bagasse	40%	25%	35%	WSO
Towel	Inventive	46	1	Flax	40%	25%	35%	WSO
Towel	Inventive	47	1	Hemp	40%	25%	35%	WSO
Towel	Inventive	48	1	Unbleached Bamboo	40%	25%	35%	WSO
Towel	Inventive	49	1	Abaca	40%	25%	35%	WSO
Towel	Inventive	56	1	Abaca	35%	0%	65%	FSO
Towel	Inventive	57	1	Abaca	34%	36%	30%	FSO
Towel	Inventive	58	1	Abaca	36%	33%	31%	FSO
Towel	Inventive	59	1	Abaca	36%	33%	31%	FSO
Towel	Inventive	60	1	Abaca	36%	33%	31%	FSO
Towel	Inventive	61	1	Abaca	35%	0%	65%	FSO
Towel	Inventive	62	1	Abaca	40%	0%	60%	FSO
Towel	Inventive	63	1	Abaca	45%	0%	55%	FSO
Towel	Inventive	64	1	Abaca	35%	0%	65%	FSO
Towel	Traditional	Z02	1		40%	60%	0%	FSO
Towel	Traditional	Z12	1		40%	60%	0%	WSO
Towel	Traditional	Z14	1		35%	65%	0%	FSO
Towel	Traditional	Z15	1		35%	65%	0%	FSO
Towel	Traditional	Z16	1		35%	65%	0%	FSO

Substrate	Type	Non-wood	Sample ID	Ply Count	Process	Crepe	Differential Density	Dry Tensile Ratio	PVD		
									2.5-100 micron PVD Hysteresis	2.5-160 micron PVD Absorption	2.5-160 micron PVD Desorption
Bath tissue	Comparative	Bamboo	A	2	CWP	Y	N	3.9	236	621	702
Bath tissue	Comparative	Bamboo	B	2	CWP	Y	N	4.4	110	791	814
Bath tissue	Comparative	Bamboo	C	2	CWP	Y	N	2.2	139	449	561
Bath tissue	Comparative	Bamboo	D	3	CWP	Y	N	2.2	50	797	828
Bath tissue	Comparative	Bamboo	E	3	CWP	Y	N	2.8	47	633	671
Bath tissue	Comparative	Bamboo	F	1	UCTAD	N	N	1.1	42	656	667
Bath tissue	Comparative	Bamboo	G	2	CWP	Y	N	3.4	79	402	536
Bath tissue	Comparative	Bamboo/Sugarcane	H	2	CWP	Y	N	4.1	82	439	573
Bath tissue	Comparative	Wheat Straw	AA	3	CWP	Y	N	2.7	92	725	691
Bath tissue	Comparative	Wheat Straw	BB	4	CWP	Y	N	2.4	292	993	1062
Bath tissue	Inventive	Bamboo	16	2	TAD	Y	Y	1.5	492	1095	1411
Bath tissue	Inventive	Bamboo	18	2	TAD	Y	Y	1.5	545	1034	1373
Bath tissue	Inventive	Bamboo	19	2	TAD	Y	Y	1.4	573	933	1453
Bath tissue	Inventive	Bamboo	22	2	TAD	Y	Y	2	517	1173	1372
Bath tissue	Inventive	Bamboo	25	2	TAD	Y	Y	1.2	645	1177	1444
Bath tissue	Inventive	Bamboo	26	2	TAD	Y	Y	1.3	629	1192	1490
Bath tissue	Traditional		26	2	TAD	Y	Y	1.7	390	1132	1279
Bath tissue	Inventive	Bamboo	27	2	TAD	Y	Y	1.4	765	967	1526
Bath tissue	Inventive	Bamboo	20	2	TAD	Y	Y	2.1	587	1037	1352
Bath tissue	Inventive	Bamboo	21	2	TAD	Y	Y	1.9	512	1024	1296
Bath tissue	Inventive	Bamboo	21	2	TAD	Y	Y	1.9	482	1036	1262
Bath tissue	Inventive	Bamboo	23	2	TAD	Y	Y	1.7	720	956	1433
Bath tissue	Inventive	Bamboo	24	2	TAD	Y	Y	1.6	816	896	1557
Towel	Inventive	Abaca	59	2	TAD	Y	Y		292	785	1496
Towel	Inventive	Abaca	56	2	TAD	Y	Y		435	874	1618
Towel	Inventive	Abaca	57	2	TAD	Y	Y		362	787	1631
Towel	Inventive	Abaca	61	2	TAD	Y	Y	1.35	421	1060	1599
Towel	Inventive	Abaca	64	2	TAD	Y	Y	1.38	423	1023	1551
Towel	Inventive	Bamboo	10	2	TAD	Y	Y	1.44	552	885	1611
Towel	Inventive	Bamboo	12	2	TAD	Y	Y	1.41	519	835	1583
Towel	Inventive	Bamboo	14	2	TAD	Y	Y	1.68	430	835	1561
Bath tissue	Inventive	Abaca	31	2	TAD	Y	Y	1.51	473	1296	1487
Bath tissue	Traditional		28	2	TAD	Y	Y	1.73	405	812	1088
Bath tissue	Inventive	Abaca	39	2	TAD	Y	Y	1.83	383	844	1075
Towel	Comparative	Bamboo/Sugarcane	U	2	CWP	Y	N		147	582	735
Towel	Comparative	Bamboo	V	2	CWP	Y	N		138	466	696
Towel	Comparative	Bamboo	W	2	CWP	Y	N		17	482	745
Towel	Comparative	Bamboo/Sugarcane	X	2	CWP	Y	N		133	524	689
Towel	Comparative	Bamboo	Y	2	CWP	Y	N		130	502	679

FIG. 20A

Substrate	Type	Non-wood	Sample Id	Roll Bulk	Percent Roll Compressibility	Roll Firmness Index	Formation Outside Index	Formation Inside Index	Formation Average (Fiber Layers)	Coverage (Fiber Layers)	Fiber Count/area (G/)	Fiber Count/area (G/)
Bath tissue	Comparative	Bamboo	A	7.1	1.24	3.38	157	171	164	4.21	714	265
Bath tissue	Comparative	Bamboo	B	8.3	4.81	7.52	141	130	135	4.67	779	294
Bath tissue	Comparative	Bamboo	C	8.4	3.07	7.03	115	113	114	3.22	550	210
Bath tissue	Comparative	Bamboo	D	6.1	1.54	3.09	123	116	120	6.39	762	534
Bath tissue	Comparative	Bamboo	E	7.7	2.22	4.50	98	103	101	4.71	865	288
Bath tissue	Comparative	Bamboo	F	12.5	6.36	10.55	73	67	70	4.94	815	266
Bath tissue	Comparative	Bamboo	G	8.0	3.76	6.15	149	142	146	2.88	582	177
Bath tissue	Comparative	Bamboo/Sugarcane	H	8.3	3.32	5.65	142	136	139	2.80	374	162
Bath tissue	Comparative	Wheat Straw	AA	10.0	2.82	8.14	111.5	110	111	6.38	714	367
Bath tissue	Comparative	Wheat Straw	BB	9.0	3.46	9.25	113	94	104	6.84	723	374
Bath tissue	Inventive	Bamboo	16	9.0	3.88	7.83	72	72	72	8.34	895	457
Bath tissue	Inventive	Bamboo	18	9.3	3.90	8.22	68	68	68	7.27	872	391
Bath tissue	Inventive	Bamboo	19	9.3	4.07	7.21	64	60	65	6.89	1027	367
Bath tissue	Inventive	Bamboo	22	9.4	2.88	5.27	56	57	57	8.23	923	491
Bath tissue	Inventive	Bamboo	23	8.9	2.58	5.54	74	67	71	5.00	779	281
Bath tissue	Inventive	Bamboo	26	10.0	3.27	6.54	69	67	68	6.07	860	291
Bath tissue	Traditional		26	9.7	3.20	6.14	78	79	79	8.83	834	527
Bath tissue	Inventive	Bamboo	27	9.8	2.99	6.23	67	65	66	5.14	806	285
Bath tissue	Inventive	Bamboo	28				60	56	58			
Bath tissue	Inventive	Bamboo	21									
Bath tissue	Inventive	Bamboo	21				64	62	63			
Bath tissue	Inventive	Bamboo	23				69	63	66			
Bath tissue	Inventive	Bamboo	24				52	50	51			
Bath tissue	Inventive	Alfalfa	58									
Towel	Inventive	Alfalfa	58									
Towel	Inventive	Alfalfa	58	19.2	4.13	10.12	47	47	47			47
Towel	Inventive	Alfalfa	57	19.3	4.13	10.07	48	47	48			48
Towel	Inventive	Alfalfa	61	17.4	3.86	7.97	38	38	38			38
Towel	Inventive	Alfalfa	64	18.0	3.78	8.87	37	36	37			37
Towel	Inventive	Bamboo	10	18.9	3.70	8.68	51	50	51			51
Towel	Inventive	Bamboo	12									
Towel	Inventive	Bamboo	14	20.9	4.03	9.70	47	43	45			45
Bath tissue	Inventive	Alfalfa	31	9.3	3.33	6.83	76	76	76			76
Bath tissue	Traditional		28	12.4	4.55	8.97	74	72	73			73
Bath tissue	Inventive	Alfalfa	39	12.1	4.36	8.19	55	53	54			54
Towel	Comparative	Bamboo/Sugarcane	U	8.3	4.48	6.88	120	115.5	118			118
Towel	Comparative	Bamboo	V	10.1	4.12	6.22	99	102	100			100
Towel	Comparative	Bamboo	W	8.8	3.02	5.67	67.5	71	69			69
Towel	Comparative	Bamboo/Sugarcane	X	7.7	2.28	4.77	121	118	120			120
Towel	Comparative	Bamboo	Y	7.8	1.98	3.81	102	101	102			102

FIG. 20B

Sample ID	Type	Non-wood	Substrate	Basis Weight	Compressive Modulus slope	Dry Caliper	Wet Caliper	Peak Load CD Tensile	CD Elongation (dry)	CD TEA	CD Modulus
1	Inventive	Bamboo	Bath tissue	33.3	-7.8	22.6		190	11.4	13.2	784
2	Inventive	Bamboo	Bath tissue	32.9	-7.8	22.2		188	11.4	13.0	769
3	Inventive	Bamboo	Bath tissue	33.0	-8.1	22.6		212	11.1	14.0	900
4	Inventive	Bamboo	Bath tissue	33.7	-8.6	22.3		256	11.4	17.7	1120
5	Inventive	Bamboo	Bath tissue	33.0	-8.8	23.0		180	11.6	12.7	705
6	Inventive	Bamboo	Bath tissue	33.7	-8.6	22.6		181	11.9	13.3	739
7	Inventive	Bamboo	Bath tissue	33.3	-9.0	22.4		184	11.6	13.0	756
8	Inventive	Bamboo	Bath tissue	33.0	-8.8	22.2		182	11.8	13.3	746
15	Inventive	Bamboo	Bath tissue	31.2	-9.4	20.7		206	14.2	16.7	697
16	Inventive	Bamboo	Bath tissue	32.7	-9.7	20.6		233	12.9	17.0	870
17	Inventive	Bamboo	Bath tissue	32.7	-9.4	21.0		229	12.3	15.9	886
18	Inventive	Bamboo	Bath tissue	32.0	-8.4	20.1		194	12.2	13.4	755
19	Inventive	Bamboo	Bath tissue	32.8	-9.1	20.9		260	11.4	17.1	1135
20	Inventive	Bamboo	Bath tissue	28.7	-6.0	22.8		166	14.5	13.7	549
21	Inventive	Bamboo	Bath tissue	31.1	-5.5	23.1		179	11.8	12.0	732
22	Inventive	Bamboo	Bath tissue	31.0	-5.5	23.1		171	14.4	14.1	561
23	Inventive	Bamboo	Bath tissue	31.5	-5.6	23.7		223	11.3	14.1	945
24	Inventive	Bamboo	Bath tissue	32.3	-5.9	24.7		177	15.2	15.6	589
25	Inventive	Bamboo	Bath tissue	34.7	-5.4	23.4		247	15.0	20.8	751
26	Inventive	Bamboo	Bath tissue	30.2	-4.8	21.6		225	14.9	18.8	703
27	Inventive	Bamboo	Bath tissue	29.9	-6.1	21.5		194	12.5	13.6	761
28	Inventive	Abaca	Bath tissue	34.7	-9.0	24.3		264	9.6	15.2	1220
29	Inventive	Abaca	Bath tissue	33.6	-9.0	23.5		246	9.7	14.3	1149
30	Inventive	Abaca	Bath tissue	33.1	-8.7	24.1		235	11.1	15.3	897
31	Inventive	Abaca	Bath tissue	34.3	-7.7	24.1		257	10.5	16.6	1170
32	Inventive	Abaca	Bath tissue	33.0	-7.3	23.8		234	10.9	15.7	1003
33	Inventive	Abaca	Bath tissue	32.6	-9.0	24.7		234	10.3	15.2	1081
34	Inventive	Abaca	Bath tissue	24.7	-7.9	20.7		307	9.7	17.2	1261
35	Inventive	Abaca	Bath tissue	24.8	-8.0	20.9		295	9.6	16.5	1240
36	Inventive	Abaca	Bath tissue	25.1	-7.2	23.1		293	9.2	15.7	1283
37	Inventive	Abaca	Bath tissue	24.5	-8.1	22.5		254	10.4	15.7	1035
38	Inventive	Abaca	Bath tissue	24.5	-6.5	20.0		297	9.0	15.9	1396
39	Inventive	Abaca	Bath tissue	24.8	-6.7	21.6		283	10.0	17.1	1250
40	Inventive	Unbleached Bamboo	Bath tissue	29.0	-4.87	21.1		149			
41	Inventive	Hemp	Bath tissue	28.9	-5.17	20.7		310			
42	Inventive	Bagasse	Bath tissue	28.6	-4.27	20.8		198			
43	Inventive	Cotton	Bath tissue	29.6	-6.10	21.4		128			
44	Inventive	Bleached Bamboo	Bath tissue	29.8	-5.03	23.5		365	10.5	22.4	1874

FIG. 21A

Sample ID	Peak Load MD Tensile	MD Elongation (dry)	MD TEA	MD Modulus	Total Dry Tensile	Geometric Mean (GM) Dry Modulus	Tensile Ratio	Flexural Rigidity- MD mg-cm	Flexural Rigidity- CD mg-cm	Flexural Rigidity- Avg mg-cm
1	297	21.5	36.9	747	487	765	1.57			
2	259	19.2	29.9	747	447	758	1.38			
3	293	20.7	35.3	770	505	832	1.38			
4	340	20.9	41.9	897	596	1002	1.33			
5	262	20.4	31.1	673	443	689	1.45			
6	250	20.5	30.6	656	431	696	1.38			
7	263	20.4	30.9	628	446	689	1.43			
8	251	19.0	28.5	691	433	718	1.38			
15	294	18.7	31.7	842	500	766	1.43	42.4	46.3	44.3
16	339	18.2	35.7	962	572	914	1.46	45.6	52.3	49.0
17	345	19.9	38.5	875	573	880	1.51	48.9	57.2	53.0
18	299	17.6	29.5	845	493	797	1.55	44.2	50.0	47.1
19	354	23.1	45.1	777	614	939	1.36	51.9	71.5	61.7
20	346	24.1	49.0	1044	512	756	2.09	225.6	94.2	159.9
21	345	22.8	43.3	877	523	801	1.93	201.9	117.8	159.9

FIG. 21B-1

22	339	25.8	52.5	1002	509	750	1.99	263.7	121.8	192.7
23	370	26.1	53.2	907	593	915	1.66	256.9	186.3	221.6
24	281	20.5	39.0	1310	458	878	1.59	338.1	150.2	244.1
25	295	19.5	38.4	1012	541	872		207.2	139.9	173.5
26	287	20.4	39.4	1000	512	837		221.7	138.0	179.8
27	269	29.0	45.2	636	463	693	1.39			
28	363	25.5	54.3	866	627	1028	1.37	64.8	98.0	81.4
29	345	24.9	51.0	861	591	994	1.40	58.7	80.1	69.4
30	338	24.1	48.4	892	573	893	1.44	57.5	70.7	64.1
31	387	27.2	59.6	842	645	992	1.51	58.5	82.5	70.5
32	378	25.8	55.8	918	612	959	1.62	56.4	66.8	61.6
33	344	25.1	49.7	843	579	954	1.47	52.2	68.7	60.5
34	537	19.4	56.7	1348	844	1303	1.75	248.0	201.2	224.6
35	515	19.3	54.2	1320	810	1279	1.74	243.3	201.4	222.3

FIG. 21B-2

36	504	19.7	54.7	1298	797	1290	1.72	273.9	226.5	250.2
37	463	18.9	48.7	1272	717	1146	1.82	249.0	208.2	228.6
38	530	18.6	54.5	1447	827	1420	1.79	251.1	207.5	229.3
39	519	19.5	55.3	1335	802	1291	1.83	273.8	199.3	236.5
40	254				403	195	1.71			
41	421				731	361	1.36			
42	302				500	245	1.53			
43	265				393	184	2.08			
44	491	19.0	49.3	1236	876	435	1.28			

FIG. 21B-3

Sample ID	L	A	B	Lint- outside	Lint- Average	HFS g/sht	HFS g/g	VFS g/sht	VFS g/g	CRT capacity g/g	CRT capacity g/in	CRT rate g/s	Residual Water (%)	Wet Burst Strength	Wet Burst Strength/ Total Dry Tensile
1	97.0	-0.8	3.6	9.6	9.1	11.1	19.5	6.2	11.0						
2	96.9	-0.9	3.7	7.9	7.9	10.8	18.7	6.0	10.3						
3	96.9	-0.7	3.4	9.1	9.3	10.7	18.4	6.0	10.3						
4	96.9	-0.8	3.6	7.5	8.0	10.5	17.6	5.7	9.6						
5	96.8	-0.7	3.5	9.6	9.4	11.5	19.8	6.4	11.0						
6	96.8	-0.7	3.5	9.6	9.4	11.5	19.4	6.5	11.0						
7	96.8	-0.8	3.6	9.5	9.0	11.1	18.5	6.4	10.6						
8	96.8	-0.8	3.6	9.2	9.2	11.3	19.3	6.3	10.8						
15	96.7	-0.9	3.8	10.1	10.0	10.2	19.8	5.8	11.2					33	0.065
16	96.9	-0.9	3.8	8.8	8.7	9.6	17.9	5.5	10.3					39	0.068
17	96.7	-0.7	3.5	9.4	9.4	9.7	17.9	5.5	10.2					36	0.063
18	96.8	-0.9	3.7	10.3	10.1	9.4	17.8	5.3	10.1					31	0.063
19	96.5	-0.9	3.7	4.7	4.9	8.9	16.1	5.1	9.2					36	0.058
20	96.7	-0.8	3.0	6.1	7.1	11.0	17.5	6.2	9.8					40	0.078

FIG. 21C-1

FIG. 21C-2

36	95.1	-0.2	4.1	3.0	3.1	10.4	24.3	5.4	12.6					43	0.054
37	95.1	-0.6	4.3	4.6	4.6	10.7	25.2	5.4	12.8					52	0.073
38	94.6	-0.1	5.0	3.0	3.1	9.6	23.2	4.9	12.0					41	0.049
39	94.6	-0.1	4.9	3.0	3.1	9.9	23.7	5.1	12.1					39	0.049
40				7.5	7.2	11.1	21.2	6.5	12.5					27	0.067
41				2.5	2.7	11.3	21.7	6.2	11.9					43	0.058
42				2.9	2.9	11.4	22.2	6.5	12.6					30	0.060
43				8.0	7.8	12.5	24.0	6.8	13.0					28	0.072
44				2.8		11.5	20.8	6.4	11.5					37	0.042

FIG. 21C-3

Sample ID	CD Wet Tensile Strength-Finch	CD Wet Peak Elongation-Finch	CD Wet Peak TEA-Finch	MD Wet Tensile Strength-Finch	MD Wet Peak Elongation-Finch	MD Wet Peak TEA-Finch	Total Wet Tensile-Finch	Total Wet Tensile Decay-Finch	SST
1	19.0	12.9	1.9	30.3	13.9	2.7	49.3		0.38
2	17.7	12.0	1.7	25.3	12.7	2.1	43.0		0.38
3	20	12.3	1.9	30	14.7	2.8	50.7		0.41
4	23	12.5	2.1	34	15.1	3.1	57.7		0.38
5	17	12.0	1.7	27	13.6	2.4	44.0		0.43
6	16	12.5	1.7	24	12.5	2.1	40.3		0.41
7	18	12.3	1.8	28	13.1	2.4	46.3		0.42
8	18	12.9	1.8	26	14.2	2.4	44.3		0.45
15	19	12.3	1.8	28	13.8	2.7	46.8	21.0	0.42
16	22	12.2	2.0	34	15.0	3.3	56.5	24.5	0.37
17	22	12.6	2.2	33	14.6	3.0	55.0	23.0	0.36
18	18	12.3	1.9	27	13.4	2.4	45.0	20.8	0.36
19	25	12.1	2.2	34	14.6	3.2	58.0	28.0	0.34
20	15	12.1	1.6	31	14.1	2.9	45.3	15.8	0.57
21	19	11.8	1.8	35	12.1	2.7	53.8	18.8	0.52

FIG. 21D-1

22	18	13.4	2.0	36	15.2	3.3	535	193	0.59
23	17	9.6	1.4	27	9.7	1.9	438	223	0.71
24	13	11.1	1.4	23	14.1	2.4	355	205	0.70
25	20	12.9	2.0	32	18.0	3.6			
26	23	13.9	2.4	35	19.9	4.2			
27	21	12.6	2.0	32	13.3	2.6	527		
28	27	11.9	2.2	40	15.9	3.5	663	218	0.39
29	24	11.1	1.9	38	16.2	3.5	613	200	0.41
30	22	11.7	2.0	35	14.8	3.0	568	188	0.43
31	23	11.5	2.0	41	15.0	3.3	635	225	0.40
32	23	13.6	2.3	41	15.9	3.4	635	223	0.47
33	23	12.1	2.1	38	16.0	3.2	608	220	0.43
34	36	12.8	2.9	58	16.1	4.9	935	260	0.65
35	35	13.0	2.9	56	15.6	4.7	905	235	0.66

FIG. 21D-2

36	33	12.7	2.8	55	16.0	4.7	88.0	24.3	0.61
37	28	12.4	2.4	45	14.3	3.6	72.3	24.5	0.68
38	31	11.6	2.4	53	14.5	4.2	84.0	25.3	0.53
39	28	12.2	2.4	52	15.0	4.2	79.8	23.0	0.52
40							52	12.7	
41							66	16.0	
42							56	15.7	
43							53	13.0	
44	32	10.8	2.2	39	12.7	2.7	71	26.7	

FIG. 21D-3

Sample ID	Stack Compressibility	Resilient Bulk	Stack Compressibility x Resilient Bulk	TS7 Avg	TS750 Avg	Plate Stiffness	Slip Stick CoF Avg	Kinetic CoF Avg	Bulk (cc/g)
1	37.0	50.8	1881	5.2	36.4	1.9	346	0.96	10.6
2	36.0	50.2	1806	5.9	38.9	2.1	353	1.01	10.5
3	40.0	51.5	2063	5.6	37.8	2.1	333	1.02	10.7
4	35.9	49.3	1771	5.9	36.0	2.2	325	0.98	10.3
5	38.5	52.5	2020	5.3	36.8	1.9	387	1.07	10.9
6	38.9	51.3	1997	5.0	35.9	2.1	290	1.00	10.5
7	39.9	52.0	2074	5.3	34.9	2.1	282	0.98	10.5
8	37.2	51.6	1918	5.0	33.5	2.0	301	1.04	10.5
15	33.8	53.0	1792	5.1	31.0	1.8	331	1.00	10.3
16	34.2	51.2	1748	5.7	35.7	1.9	373	0.94	9.9
17	33.8	51.6	1743	5.5	32.5	2.1	388	1.04	10.0
18	33.9	51.4	1742	6.0	31.2	2.0	410	1.03	9.8
19	34.9	50.7	1770	7.9	34.0	2.1	537	1.03	9.9
20	30.3	65.9	1993	9.4	19.4	3.2	404	0.94	12.4
21	30.0	62.0	1859	9.3	26.1	3.1	371	0.90	11.6

FIG. 21E-1

22	29.0	63.0	1828	9.6	19.9	3.6	417	0.95	11.6
23	32.1	62.9	2016	9.3	17.6	3.9	491	0.99	11.7
24	31.9	65.4	2082	10.4	15.9	4.4	534	0.96	11.9
25	29.2	58.2	1697	9.3	23.5	3.2	465	1.06	10.5
26	28.2	60.1	1695	9.4	16.2	3.3	462	1.01	11.1
27	30.1	61.4	1847	10.0	18.9	3.2	463	1.02	11.2
28	33.4	56.2	1876	6.0	41.7	2.2	391	0.95	10.9
29	33.1	56.8	1882	5.9	39.6	2.1	373	0.96	10.9
30	37.6	57.5	2159	5.4	36.8	2.3	407	1.03	11.3
31	32.2	58.3	1878	5.8	39.6	2.5	410	0.99	10.9
32	34.1	59.1	2014	5.5	35.5	2.2	437	0.99	11.2
33	34.4	60.5	2081	5.2	34.8	2.1	378	1.02	11.8
34	43.0	67.2	2887	12.6	26.3	4.9	472	0.88	13.0
35	40.6	67.9	2756	12.1	26.6	4.8	452	0.93	13.2

FIG. 21E-2

36	41.4	68.6	2841	12.0	27.1	5.3	443	0.87	14.3
37	35.2	64.9	2283	10.7	23.3	5.2	450	0.89	14.3
38	36.4	66.7	2427	11.4	23.9	5.0	489	0.90	12.7
39	39.1	67.6	2640	11.4	22.7	4.7	464	0.87	13.5
40									11.4
41									11.2
42									11.4
43									11.3
44									12.3

FIG. 21E-3

Sample ID	Type	Non-wood	Substrate	Basis Weight	Compressive Modulus slope	Dry Caliper	Wet Caliper	Peak Load CD Tensile	CD Elongation (dry)	CD TEA	CD Modulus
A.1	Comparative	Bamboo	Bath Tissue	17.2	-4.0	8.9		251	7.6	12.2	2119
A.2	Comparative	Bamboo	Bath Tissue	16.4				232	9.0	14.2	1953
B.1	Comparative	Bamboo	Bath Tissue	27.1				185	8.6	10.0	1308
B.2	Comparative	Bamboo	Bath Tissue	26.3		14.4		178	8.5	9.5	1285
E.1	Comparative	Bamboo	Bath Tissue	26.2				218	11.5	15.7	1188
F.1	Comparative	Bamboo	Bath Tissue	23.7	-9.8	24.4		226	11.3	9.8	534
H.1	Comparative	Bamboo/Sugar Cane	Bath Tissue	20.5		11.8		151	3.4	5.8	1394
I	Comparative	Bamboo	Bath Tissue	18.1	-4.1	12.7		172	6.8	7.1	1561
I.1	Comparative	Bamboo	Bath Tissue	18.2				213	5.5	7.4	2148
I.2	Comparative	Bamboo	Bath Tissue	18.1	-4.6			148	8.3	8.0	1128
I.3	Comparative	Bamboo	Bath Tissue	19.1		11.9		199	9.8	12.3	1322
J	Comparative	Bamboo	Bath Tissue	18.0				180	5.1	5.3	1903
K	Comparative	Bamboo/Sugar Cane	Bath Tissue	28.4		17.2		212	9.3	12.2	1428
M	Comparative	Bamboo/Sugar Cane	Bath Tissue	27.0		17.2		411	4.8	11.6	3729
N	Comparative	Bamboo	Bath Tissue	27.2	-4.3	15.0		285	9.0	16.8	2056

FIG. 21F-1

O	Comparative	Bamboo/Sugar Cane	Bath Tissue	17.3		11.1		151	7.3	6.8	1193
P	Comparative	Bamboo/Sugar Cane	Bath Tissue	27.3		23.2		340	12.0	21.7	1134
Q	Comparative	Bamboo/Sugar Cane	Bath Tissue	25.7		14.0		162	6.8	6.4	1288
Q.1	Comparative	Bamboo	Bath Tissue	27.4				217	10.1	13.9	1392
Q.2	Comparative	Bamboo/Sugar Cane	Bath Tissue	23.3		14.8		210	7.7	10.1	1587
AA	Comparative	Wheat Straw	Bath Tissue	29.6	-5.2	17.8		407	7.9	18.3	2289.8
BB	Comparative	Wheat Straw	Bath Tissue	30.2	-3.4	19.0		555	6.5	20.2	3232.9
Z01	Traditional		Bath Tissue	32.9	-7.8	23.0		216	11.8	15.4	847
Z03	Traditional		Bath Tissue	30.4	-5.9	22.6		189	10.5	11.3	860
Z06	Traditional		Bath Tissue	31.3	-5.1	22.1		198	9.4	10.6	994
Z07	Traditional		Bath Tissue	33.2	-7.9	23.4		221	10.2	13.4	964
Z08	Traditional		Bath Tissue	24.4	-8.6	20.3		298	10.6	18.2	1157
Z09	Traditional		Bath Tissue	28.6	-4.37	21.8		227			
Z10	Traditional		Bath Tissue	29.4	-4.53	20.8		251			
Z11	Traditional		Bath Tissue	29.8	-6.43	23.5		215	10.5	13.3	1176
Z13	Traditional		Bath Tissue	31.9	-8.7	21.1		242	12.1	16.0	914

FIG. 21F-2

Sample ID	Peak Load MD Tensile	MD Elongation (dry)	MD TEA	MD Modulus	Total Dry Tensile	Geometric Mean (GM) Dry Modulus	Tensile Ratio	Flexural Rigidity- MD mg-cm	Flexural Rigidity- CD mg-cm	Flexural Rigidity- Avg mg-cm
A.1	687	63.3	233.4	1011	937	1460	2.74	44.2	59.3	51.8
A.2	648	72.6	236.4	720	881	1186	2.79			
B.1	817	22.0	96.3	1735	992	1487	4.41			
B.2	792	22.9	105.3	1919	970	375	4.46	79.2	68.4	73.8
E.1	708	57.0	203.1	778	926	960	3.25			
F.1	248	19.4	25.8	622	475	576	1.10	112.8	40.3	76.6
H.1	617	19.7	64.7	1425	768	1409	4.10	26.7	44.7	35.7
I	445	19.6	44.0	1004	618	1252	2.58	58.9	50.9	54.9
I.1	359	22.4	51.0	1190	572	1599	1.68			
I.2	332	19.4	35.8	853	480	979	2.24	30.5	46.2	38.4
I.3	659	22.4	85.3	1719	858	1497	3.31	57.2	44.8	51.0
J	722	33.7	114.5	1030	902	1389	4.02			
K	935	39.2	169.6	1274	1147	1349	4.42	84.0	79.0	81.0
M	688	33.9	112.1	839	1099	1769	1.67	37.0	243.0	140.0

FIG. 21G-1

N	699	18.1	78.9	2444	984	2239	2.45	114.7	83.0	98.9
O	421	33.0	76.9	943	572	1061	2.79	30.0	49.0	40.0
P								194.2	76.4	135.3
Q	660	19.1	64.9	1574	822	1424	4.07	30.5	56.7	43.6
Q.1										
Q.2	368	23.6	46.2	727	578	1074	1.75	65.0	89.6	77.3
AA	1111.0	14.4	83	2426	1518	2357	2.7	206.1	314.8	260.5
BB	1325.5	17.0	114	2638	1880	2920	2.4	238.4	391.8	315.1
Z01	316	22.9	40.2	698	532	769	1.46			
Z03	306	22.4	39.9	892	495	875	1.62	205.8	128.7	167.3
Z06	340	25.4	46.2	741	538	858	1.72	170.5	164.9	167.7
Z07	301	23.3	42.6	816	521	886	1.36	56.5	75.3	65.9
Z08	516	19.5	54.4	1281	814	1217	1.73	234.4	183.2	208.8
Z09	336				562	276	1.48			
Z10	315				566	281	1.25			
Z11	344	18.8	32.0	772	559	272	1.60			
Z13	331	17.4	33.3	992	572	952	1.37	46.9	59.9	53.4

FIG. 21G-2

Sample ID	L	A	B	Lint- outside	Lint- Average	HFS g/sht	HFS g/g	VFS g/sht	VFS g/g	CRT capacity g/g	CRT capacity g/in	CRT rate g/s	Residual Water (%)	Wet Burst Strength	Wet Burst Strength/ Total Dry Tensile
A.1	95.1	-0.9	4.4	1.1	1.1	6.7	24.3	2.7	9.7					16	0.017
A.2															
B.1															
B.2				2.0										10	0.010
E.1															
F.1				5.4	4.9	7.4	18.5	3.4	8.7					16	0.033
H.1				1.0	1.0	5.0	17.6	2.3	8.1					9	0.011
I	93.9	-0.9	5.6	1.3	1.3	6.4	20.9	2.5	8.3					4	0.007
I.1															
I.2				1.2	1.2	7.2	23.6	2.9	9.6					3	0.006
I.3				1.1	1.1	6.3	18.6	2.9	8.5					4	0.005
J															
K				1.4	1.4	8.7	4.2	17.5	8.5					9	0.008

FIG. 21H-1

FIG. 21H-2

Sample ID	CD Wet Tensile Strength - Finch	CD Wet Peak Elongation - Finch	CD Wet Peak TEA - Finch	MD Wet Tensile Strength - Finch	MD Wet Peak Elongation - Finch	MD Wet Peak TEA - Finch	Total Wet Tensile - Finch	Total Wet Tensile Decay - Finch	SST
A.1	11	6.1	0.73	43	15.1	3.6	53.7		
A.2	10	5.6	0.63	38	15.3	3.5	48.0		
B.1	8	2.8	0.37	32	5.9	1.3	39.7		
B.2	7.3	2.6	0.40	21.3	5.1	0.9	28.6		
E.1	6	2.4	0.40	20	8.1	1.3	26.0		
F.1	13	5.1	0.77	14	12.4	1.6	27.3	19.0	
H.1	6	1.6	0.37	16	5.8	0.8	21.7		
I	8	3.4	0.43	13	4.4	0.7	21.3		
I.1	7	2.1	0.33	13	4.2	0.6	19.7		
I.2	3		0.15	8	2.0	0.4	10.5		
I.3	4		0.23	11	3.5	0.5	15.0		
J	8	2.1	0.27	26	5.3	1.0	34.0		
K	7	2.6	0.40	25	5.9	1.1	31.3		
M	18	4.3	0.67	31	6.9	1.4	48.7		
N	7	3.2	0.28	17	4.0	0.6	23.8	20.3	
O	5		0.30	16	6.3	0.9	21.3		
P	15	7.6	1.00	48	10.6	3.1	63.3		
Q	5		0.20	21	4.4	0.7	25.5		
Q.1	6	2.6	0.20	22	4.8	0.9	27.3		
Q.2	3	13.8	0.20	9	17.7	0.6	11.5		
AA	7.4	2.5	0.3	20.3	5.3	1.0	27.7		
BB	7.1	2.6	0.3	14.3	5.1	0.7	21.4		
Z01	22.0	12.9	2.1	33.0	14.5	2.9	55.0	22.0	0.44
Z03	13	8.9	1.2	21	11.0	1.9	34.5	9.8	0.47
Z06	21	10.3	1.7	37	11.6	2.6	57.3	17.0	
Z07	21	11.7	1.9	31	16.3	3.0	52.3	17.0	0.35
Z08	35	13.4	3.0	53	16.1	4.7	88.5	25.0	0.73
Z09							60	16.7	
Z10							57	14.7	
Z11	21	11.5	1.6	30	13.5	2.1	52	15.3	
Z13	23	11.7	2.0	34	14.5	3.1	56.5	22.8	0.38

FIG. 211

Sample ID	Stack Compressibility	Resilient Bulk	Stack Compressibility x Resilient Bulk	TS7 Avg	TS750 Avg	Plate Stiffness	Slip Stick CoF Avg	Kinetic CoF Avg	Bulk (cc/g)
A.1									8.1
A.2									
B.1									
B.2	16.5	45.9		16.7	22.2	1.49	647		8.5
E.1									
F.1	44.8	59.0	2647	14.7	51.7	3.5	675	1.00	16.1
H.1	15.6	47.5	741	15.0	25.2	1.4	587		9.0
I									11.0
I.1									
I.2									
I.3									9.7
J									
K	23.1	64.6	1492	19.8	58.3	2.3	907		9.4
M	16.3	49.8	812	15.0	25.0	1.5	625		10.0
N	17.67	45.85	810	22.2	66.9	4.12	940	1.01	8.6
O	13.3	52.6	700	26.6	30.2	1.2	741		10.0
P	31.5	53.7	1692	25.7	100.1	3.6	920		13.3
Q	10.8	34.6	374	18.5	22.4	1.1	486		8.5
Q.1									
Q.2	13.6	46.1	627	15.2	23.1	1.2	543		9.9
AA	10.2	50.8	518	21.8	51.6	7.0	529	0.69	9.4
BB	17.0	47.1	807	19.9	48.1	6.2	636	0.82	9.8
Z01	35.8	52.0	1860	5.6	38.1	2.3	305	1.03	10.9
Z03	28.9	63.9	1848	8.1	21.9	2.8	327	0.92	11.6
Z06	28.2	60.5	1708	7.8	22.5	2.9	333	0.96	11.0
Z07	34.2	57.3	1958	5.8	40.8	2.2	325	0.95	11.0
Z08	44.3	68.6	3039	12.3	24.5	4.7	487	0.91	13.0
Z09									11.9
Z10									11.0
Z11									12.3
Z13	31.9	53.9	1719	5.4	35.8	2.0	303	0.92	10.3

FIG. 21J

Sample ID	Type	Non-wood	Substrate	Basis Weight	Compressive Modulus slope	Dry Caliper	Wet Caliper	Peak Load CD Tensile	CD Elongation (dry)
9	Inventive	Bamboo	Towel	35.0	-10.8	45.9	35.2	855	12.3
10	Inventive	Bamboo	Towel	35.2	-11.3	47.0	34.0	871	12.2
11	Inventive	Bamboo	Towel	35.1	-10.9	51.2	35.2	904	12.9
12	Inventive	Bamboo	Towel	35.0	-10.8	49.9	33.8	800	14.9
13	Inventive	Bamboo	Towel	34.5	-10.7	48.3	31.3	794	12.2
14	Inventive	Bamboo	Towel	35.0	-11.3	50.2	34.7	723	16.3
45	Inventive	Bagasse	Towel	33.2	-8.07	32.3	29.6	644	13.5
46	Inventive	Flax	Towel	33.2	-7.17	30.7	27.3	480	13.7
47	Inventive	Hemp	Towel	32.7	-8.60	30.8	28.2	563	13.3
48	Inventive	Unbleached Bamboo	Towel	32.6	-8.17	30.8	28.1	478	14.8
49	Inventive	Abaca	Towel	34.3	-7.67	29.5	24.6	499	10.3
56	Inventive	Abaca	Towel	34.6	-12.1	43.9	32.4	978	11.5
57	Inventive	Abaca	Towel	34.1	-12.4	44.3	32.3	871	10.8
58	Inventive	Abaca	Towel	34.3	-10.6	44.9	32.2	799	13.2
59	Inventive	Abaca	Towel	34.8	-10.5	44.3	33.4	1081	12.2
60	Inventive	Abaca	Towel	34.6	-10.8	44.4	32.6	1110	11.3
61	Inventive	Abaca	Towel	38.9	-11.8	49.2	30.6	1061	9.1
62	Inventive	Abaca	Towel	38.8	-12.4	49.0	32.0	961	9.9
63	Inventive	Abaca	Towel	39.2	-12.1	49.4	32.5	961	9.9
64	Inventive	Abaca	Towel	38.2	-13.4	49.9	34.3	998	10.2
R	Comparative		Towel	28.9	-4.6	24.3	8.93	311	7.2
S	Comparative	Bamboo	Towel	31.3	-6.9	24.1667	13.6	442	6.2
T	Comparative	Bamboo	Towel	27.2	-4.8	16.1667	8.3	1057	4.8
U	Comparative	Bamboo/Sugar Cane	Towel	32.7	-5.7	20.9	11.2	720	4.7
V	Comparative	Bamboo	Towel	27.7	-5.7	21.8	11.5	699	6.0
W	Comparative	Bamboo	Towel	34.2	-5.4	25.6	13.4	509	6.3
X	Comparative	Bamboo/Sugar Cane	Towel	30.4	-5.3	19.1	10.6	672	6.0
Y	Comparative	Bamboo	Towel	28.0	5.8	17.7	11.5	836	5.1
Z02	Traditional		Towel	35.5	-11.3	46.4	35.9	935	12.7
Z12	Traditional		Towel	33.4	-8.3	28.0	26.6	616	14.5
Z14	Traditional		Towel	34.1	-11.5	45.2	30.6	1034	10.7
Z15	Traditional		Towel	34.8	-11.3	47.0	34.6	1144	11.9
Z16	Traditional		Towel	39.0	-14.2	50.3	35.2	840	11.2

FIG. 22A

Sample ID	CD TEA	CD Modulus	Peak Load MD Tensile	MD Elongation (dry)	MD TEA	MD Modulus	Total Dry Tensile	Geometric Mean (GM) Dry Modulus	Tensile Ratio
9	55.3	2289	1250	14.8	94.4	2043	2105	2163	1.46
10	56.3	2460	1250	16.3	104.3	1949	2121	2189	1.44
11	62.2	2434	1272	16.6	106.7	1893	2176	2146	1.41
12	66.0	2305	1131	16.0	94.4	2020	1931	2157	1.41
13	51.3	2349	1129	15.8	90.9	1866	1923	2093	1.42
14	65.0	1998	1218	15.5	98.8	2247	1942	2118	1.68
45	44.9	1970	587	18.7	56.7	1190	1231	615	0.91
46	33.8	1266	639	17.9	57.1	1116	1119	554	1.33
47	38.5	1605	733	18.8	68.5	1281	1295	642	1.30
48	38.5	1526	570	17.6	54.0	1311	1047	522	1.19
49	28.7	1982	813	16.1	65.3	1490	1312	637	1.63
56	65.7	3500	1705	15.2	131.7	2470	2683	2941	1.74
57	53.0	3229	1418	13.4	96.8	2482	2289	2831	1.63
58	60.5	2273	1292	17.8	112.9	1446	2090	1812	1.62
59	75.7	3234	1720	18.4	152.9	1868	2800	2457	1.59
60	70.9	3442	1600	18.2	144.7	1883	2771	2545	1.44
61	47.1	2842	1428	13.0	90.2	2269	2489	2539	1.35
62	47.0	2511	1338	13.1	88.4	2433	2300	2472	1.39
63	48.4	2601	1277	13.6	86.8	2226	2238	2407	1.33
64	51.1	2403	1377	13.4	92.1	2227	2375	2313	1.38
R	14.3	2653	773	12.6	51.1	2782	1084	2717	2.49
S	16.5	3280	1731	17.8	154.5	3367	2174	3323	3.9
T	30.8	9159	2062	22.7	244.9	4301	3119	6276	2.0
U	21.0	6481	1384	28.7	200.3	2248	2104	3808.6	1.9
V	24.3	4333	1786	35.9	284.3	1949	2485	2876.0	2.6
W	18.6	2876	1797	20.0	167.3	2654	2306	2762.7	3.5
X	22.5	4313	1535	30.1	252.6	2540	2207	3289.2	2.3
Y	25.0	6121	2291	27.7	286.9	3184	3127	4409.6	2.7
Z02	63.1	2553	1373	14.7	102.5	2069	2308	2295	1.47
Z12	46.3	1727	767	19.7	76.6	1285	1383	687	1.24
Z14	60.1	3439	1368	12.9	86.1	2305	2401	1189	1.32
Z15	73.6	3034	1525	18.6	136.8	1653	2669	1321	1.33
Z16	46.8	1936	1309	12.9	84.2	2535	2149	2215	1.56

FIG. 22B

Sample ID	Flexural Rigidity - MD mg-cm	Flexural Rigidity - CD mg-cm	Flexural Rigidity - Avg mg-cm	L	A	B	Lint - outside	Lint - Average	HFS g/sht	HFS g/g
9	922.9	1356.5	1139.7						55.4	23.9
10	902.2	1447.7	1174.9						56.5	23.7
11	1091.1	1616.1	1353.6						52.5	22.0
12	1382.6	1478.7	1430.6						56.4	25.0
13	964.7	1438.3	1201.5						55.9	25.4
14	1361.6	1420.2	1390.9				1.5		54.7	24.8
45							1.7		92.3	23.6
46							1.5		88.8	23.5
47							1.6		90.7	24.3
48							2.6		95.0	25.3
49									81.5	20.9
56	744.1	1209.5	977						52.4	22.8
57	727.1	1003.3	865						53.7	23.7
58			717						51.2	22.4
59			1091						51.5	22.0
60			1073						49.2	21.5
61	845.7	1259.7	1052.7	92.0	-0.5	5.8			57.5	22.2
62	865.8	1077.4	971.6	92.2	-0.6	5.8			58.3	22.9
63	817.6	1162.2	989.9	92.6	-0.6	5.6			59.6	22.7
64	755.7	1004.8	880.2	92.0	-0.6	5.8			56.5	22.2
R									32.0	10.6
S	670.9	693.5	682.2						23.0	12.4
T	242.0	617.0	429.5						20.8	11.3
U	167.0	591.1	379.0						40.6	12.8
V	213.3	754.2	483.7						27.8	15.1
W	350.7	486.6	418.6						23.7	11.5
X	280.5	575.4	427.9						26.7	12.6
Y	279.5	692.6	486.1						23.3	12.3
Z02	966.5	1683.6	1325.0						58.6	24.0
Z12							1.8		85.0	22.9
Z14	678.5	1203.8	941.2						54.6	24.5
Z15			1342						52.9	23.4
Z16	765.8	824.4	795.1	94.17	-0.83	3.1			59.9	23.0

FIG. 22C

Sample ID	VFS g/sht	VFS g/g	CRT capacity g/g	CRT capacity g/in	CRT rate g/s	Residual Water(%)	Wet Burst Strength	Wet Burst Strength/Total Dry Tensile	SST
9	22.1	9.6	22.0	0.8	0.93	2.7	488	0.232	2.06
10	21.1	8.9	21.8	0.8	0.87	2.8	455	0.214	2.09
11	21.1	8.8	22.2	0.8	0.89	3.4	521	0.239	2.19
12	21.7	9.6	22.9	0.8	0.93	3.1	506	0.262	2.35
13	21.1	9.6	22.1	0.8	0.83	3.3	443	0.231	2.10
14	21.0	9.5	23.4	0.9	0.84	3.8	503	0.259	2.40
45	37.9	9.7	21.1		0.51		273	0.222	
46	36.6	9.7	21.0		0.38		292	0.261	
47	37.0	9.9	20.2		0.44		320	0.247	
48	39.1	10.4	21.6		0.47		233	0.223	
49	40.2	10.3	17.2		0.38		307	0.234	
56	21.2	9.2	19.0	0.67	0.58	2.5	692	0.258	1.69
57	19.9	8.8	19.6	0.69	0.62	2.6	553	0.242	1.80
58	20.9	9.1	18.9	0.67	0.60	2.5	481	0.230	1.58
59	20.6	8.8	18.6	0.67	0.58	2.7	634	0.226	1.67
60	20.0	8.7	18.3	0.65	0.57	2.7	533	0.192	1.61
61	24.0	9.2		0.8	0.7	1.6	580	0.233	2.01
62	23.6	9.3		0.8	0.7	1.7	539	0.234	2.06
63	24.6	9.4		0.8	0.7	1.8	558	0.249	1.98
64	23.7	9.3		0.8	0.8	1.7	565	0.238	1.99
R	14.1	4.7					50	0.046	
S	9.5	5.2	7.1	0.23	0.24	5.33	176.7	0.081	
T	9.0	4.9	5.4	0.15	0.13	12.1	98.3	0.032	
U	18.4	5.8	7.2	0.2	0.2	5.1	64.2	0.031	0.26
V	12.1	6.6	8.4	0.2	0.2	3.8	105.9	0.043	0.29
W	9.5	4.6	6.3	0.2	0.3	3.8	172.9	0.075	0.38
X	12.1	5.7	8.0	0.3	0.2	3.8	60.6	0.027	0.27
Y	11.4	6.0	7.7	0.2	0.2	6.4	93.4	0.030	0.27
Z02	22.6	9.3	22.3	0.8	0.89	2.5	497	0.215	2.07
Z12	37.9	10.2	19.6		0.39		282	0.204	
Z14	21.0	9.4	18.5	0.64	0.66	2.8	488	0.203	1.73
Z15	20.3	8.9	19.2	0.68	0.68	2.8	492	0.184	1.72
Z16	24.1	9.3		0.84	0.94	2.19	414	0.193	2.34

FIG. 22D

Sample ID	Stack Compressibility	Resilient Bulk	Stack Compressibility x Resilient Bulk	TS7 Avg	TS750 Avg	Plate Stiffness	Slip Stick CoF Avg	Kinetic CoF Avg	Bulk (cc/g)
9	70.6	100.4	7086	18.3	43.6	12.5	964	0.99	20.5
10	71.6	100.8	7218	17.8	43.0	13.8	812	0.94	20.8
11	76.9	108.6	8354	19.3	41.5	15.9	810	0.94	22.8
12	75.4	107.9	8140	19.9	45.0	15.2	766	0.91	22.3
13	69.8	97.6	6812	20.2	43.3	13.5	827	0.94	21.9
14	71.6	105.0	7514	20.3	49.7	15.2	808	0.90	22.4
45									15.2
46									14.4
47									14.7
48									14.8
49									13.4
56	73.4	96.7	7098	16.6	49.3	11.3	1329	1.311	19.8
57	72.3	99.9	7223	18.1	49.8	11.2	1034	1.129	20.3
58	68.8	97.1	6680	17.9	43.95	10.2	1227	1.181	20.4
59	66.6	99	6593	20.52	52.89	13.2	872	1.06	19.9
60	67.3	96.9	6521	19.53	50.82	13.6	1117	1.059	20.0
61	80.2	92.4	7415	12.50	47.46	14.0	932	1.247	19.7
62	80.6	91.5	7375	11.94	45.20	13.5	990	1.240	19.7
63	74.1	91.7	6792	12.66	50.83	13.2	910	1.140	19.7
64	79.9	92.5	7388	12.97	44.31	13.1	892	1.154	20.4
R									13.1
S									12.0
T									9.3
U	35.1	43.6	1533	25.86	95.12	6.6	573	0.732	
V	30.9	51.4	1588	32.97	132.16	7.0	808	0.754	
W	40.6	56.2	2282	30.51	242.26	11.1	711	0.728	
X	27.3	42.4	1158	34.39	113.71	6.8	679	0.741	
Y	22.5	47.0	1057	24.74	87.06	7.6	764	0.749	
Z02	72.7	97.8	7115	17.3	45.9	14.3	812	0.95	20.4
Z12									13.1
Z14	68.3	101.2	6913	15.7	62.2	11.6	899.0	1.17	20.7
Z15	71	106.3	7547	19.5	53.67	14.0	1071	1.023	21.1
Z16	80.3	86.2	6918	13.62	41.17	11.7	845	1.053	20.2

FIG. 22E

Sample ID	Total Wet Tensile	Wet Tensile Geometric Mean Modulus (38.1g/in)	MD Wet Tensile Strength	CD Wet Tensile Strength	MD Wet Peak Elongation	CD Wet Peak Elongation	MD Wet Peak TEA	CD Wet Peak TEA	MD Wet Modulus (38.1g/in)	CD Wet Modulus (38.1g/in)
9	723	401	424	299	23.2	18.4	37.5	22.9	380	423
10	730	404	419	311	23.0	19.3	37.4	25.3	389	420
11	770	395	451	319	24.0	19.2	40.6	25.7	372	420
12	738	370	428	310	23.5	22.6	38.5	29.8	375	364
13	713	390	423	290	22.9	19.3	36.0	23.9	374	406
14	774	347	472	302	24.6	24.8	43.5	32.2	359	335
45										
46										
47										
48										
49										
56	854	464	555	299	21.7	17.6	45.6	24.5	428	502
57	782	440	491	291	21.3	18.9	38.4	26.2	420	460
58	704	390	440	263	24.7	21.7	38.5	28.7	363	420
59	979	442	606	373	24.1	19.3	48.9	34.4	382	512
60	914	459	526	388	24.6	17.2	46.9	29.7	380	554
61	936	569	534	402	18.8	13.8	37.5	24.5	502	646
62	858	525	489	370	19.0	15.7	34.9	26.6	477	578
63	838	521	481	357	20.0	15.4	36.5	24.7	473	574
64	826	522	474	352	18.7	15.3	33.4	23.8	484	563
R										
S										
T										
U	232	421	144.8	87.6	14.1	8.8	8.5	3.9	325.5	544.4
V	295	385	194.0	101.1	17.8	11.4	14.2	6.4	306.9	481.8
W	426	494	332.0	93.8	15.4	10.8	20.0	5.7	519.8	470.2
X	205	336	135.5	69.5	16.6	8.2	9.9	3.0	255.3	443.0
Y	303	498	196.4	107.1	15.1	9.6	12.8	5.7	405.3	611.2
Z02	733	420	431	303	21.6	18.9	36.2	24.8	416	424
Z12										
Z14										
Z15	791	425	450	341	21.5	17.1	33.7	26.0	362	500
Z16	660	450	390	270	18.0	16.3	25.9	18.7	452	447

FIG. 22F

FIG. 23

Fiber	Description	Sample IDs	Length-weighted Fiber Length L(f)	Fiber Width (microns)	Cell Wall Thickness (microns)	Coarseness mg/m	LW	Fiber Count (million/g) number average	Fiber Count (million/g) length average	Instrument
Bamboo	Bleached	1-19	1.42	18.7		0.170	76	11.5	4.14	Valmet FS5
Bamboo	Bleached	20-24	1.51	19.0		0.200	80	14.0	3.31	Valmet FS5
Bamboo	Bleached	25-27, 50-55	1.54	19.4		0.210	80	13.5	3.09	Valmet FS5
Bamboo	Unbleached		1.51	19.1		0.204	79	13.5	3.25	Valmet FS5
Hemp	Bleached		1.26	23.9	6.66	0.216	53	10.1	3.67	Valmet FS5
Hemp	Unbleached		1.26	25.5	5.09	0.211	49	10.4	3.76	Valmet FS5
Bağasse	Bleached		0.92	18.5	3.27	0.094	50	30.3	11.51	Valmet FS5
Abaca	Bleached	28-39	2.55	22.5	5.46	0.170	114	7.5	2.31	Valmet FS5
NSK		1-39, 50-55	2.21	22.9	4.2	0.153	96	5.6	2.96	Valmet FS5
SSK			2.38	27.5	5.2	0.246	87	4.3	1.71	Valmet FS5
Euc		1-39, 50-55	0.72	15.7	3.0	0.060	46	39.4	23.31	Valmet FS5
Wheat Straw	Never dried		0.839	20.69			41	14.3	5.30	Valmet FS5
Bamboo	Unbleached	40, 48	0.88	16.7	7.3		53			Kajaani Fiber Lab
Bamboo	Unbleached		0.88	16.4	7.3	0.099	54	18.1	11.48	Kajaani Fiber Lab
Bamboo	Bleached	44	0.93	19.8	7.7		47			Kajaani Fiber Lab
NSK			2.24	24.7	6.9	0.162	91		2.75	Kajaani Fiber Lab
SSK			2.29	29.1	8.2	0.250	78		1.75	Kajaani Fiber Lab
SSK			2.40	28.3	11.9	0.308	85	3.7	1.35	Kajaani Fiber Lab
Hemp		41	0.96	19.0	7.1	0.101	51	17.7	10.31	Kajaani Fiber Lab
Abaca		49	3.13	19.3	7.8	0.185	162	4.8	1.73	Kajaani Fiber Lab
Bağasse		42, 45	0.96	19.0	7.1	0.101	51	15.4	10.31	Kajaani Fiber Lab
Bamboo (edulis)	Bamboo		1.23	8.4		0.105	146		7.72	Kajaani FS-100 or FS-200
Bamboo (vulgaris)	Bamboo		2.09	10.9		0.104	192		4.61	Kajaani FS-100 or FS-200
Bamboo (nigra)	Bamboo		1.65	9.0		0.109	183		5.59	Kajaani FS-100 or FS-200
Bamboo			1.3			0.092			8.39	FQA

Effective Radius μm	Sample ID	26		27		16		18		19	
	Direction	weight (mg)	147	weight (mg)	149	weight (mg)	163	weight (mg)	156.2	weight (mg)	162.2
		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	13	645	17.9	677	18.9	654	16.9	616	15.9	653
5		19	652	23	686	23	663	21	624	21	663
10		28	660	33	698	28	670	25	629	25	671
15		61	672	66	717	139.9	707	29	634	100.9	719
20		121.7	684	120.9	732	195.5	707	137.5	664	156.5	722
30		196.9	684	191.9	734	279.1	707	221.9	664	236.9	722
40		252.9	682	243.9	734	362.9	705	290.9	662	303.6	722
50		289.9	680	276.9	733	422.8	703	342.8	659	346.8	721
60		337	678	321.2	731	495.8	699	403.8	656	395.8	720
70		402.8	675	386.8	730	572.8	697	483	654	461.8	719
80		467.9	673	451.9	728	653.8	694	566.9	651	528.8	717
90		534.9	671	520.9	727	723.8	692	639	649	588.8	716
100		598.9	669	586.9	725	788.8	690	712.8	646	647.8	715
120		724.9	666	720.8	722	909.7	687	837.7	643	755.7	712
140		858.8	663	856	719	1013.7	685	953.7	640	857.7	710
160		998.8	658	984.8	716	1113.6	683	1050.9	638	948.8	709
180		1136.8	655	1109.7	714	1196.6	682	1143.6	637	1035.8	708
200		1265.9	653	1220.7	712	1273.6	681	1221.6	636	1122.6	707
225		1402.7	650	1341.7	710	1355.5	680	1306.5	635	1220.5	706
250		1474.7	650	1421.6	710	1413.5	680	1382.9	635	1311.5	705
275		1522.7	650	1484.6	710	1453.5	680	1427.5	635	1387.4	705
300		1549.6	650	1533.6	710	1483.5	681	1460.5	635	1449.4	705
350		1575	651	1602.6	710	1523.4	681	1502.4	636	1544.3	705
400		1594.6	652	1647.5	710	1553.4	682	1523.4	637	1610.3	705
500		1609.6	654	1705.5	712	1584.4	684	1544.4	639	1670.3	707
600		1619.7	655	1739.6	713	1602.5	685	1554.5	640	1692.4	707
800		1628.7	657	1771.6	714	1615.5	687	1564.5	642	1707.4	709
1000		1639.3	659	1784.2	715	1623.1	689	1570.1	644	1716	710

FIG. 24A-1

1000	Receding	1639.3	659	1784.2	715	1623.1	689	1570.1	644	1716	710
800		1635.7	658	1781.6	715	1623.5	689	1569.5	643	1714.4	710
600		1629.7	658	1776.5	715	1620.5	688	1565.5	642	1708.4	709
500		1625.6	657	1769.5	714	1616.9	687	1562.5	642	1703.3	708
400		1618	655	1757.5	712	1610.4	686	1554.4	640	1695.3	707
350		1611.6	654	1746.5	711	1604.4	685	1549.4	639	1687.3	706
300		1602	652	1733.5	709	1596.4	683	1541.4	638	1677.3	704
275		1595.6	650	1720.5	707	1589.4	682	1535.4	636	1668.3	703
250		1586.6	648	1709.5	705	1580.4	681	1528.4	635	1656.3	701
225		1576.6	646	1690.5	702	1570.4	679	1518.4	633	1644.3	699
200		1563.7	643	1667.2	699	1553.5	676	1506.5	630	1624.4	697
180		1548.7	640	1643.5	695	1537.5	674	1494.5	628	1595	694
160		1524.2	634	1618.5	691	1515.5	670	1474.3	624	1557.3	690
140		1495.6	628	1579.5	685	1475.4	665	1447.4	619	1506.3	686
120		1455.6	618	1523.5	677	1432.4	658	1405	612	1430.1	681
100		1395.6	606	1426.5	667	1366.4	648	1342.4	602	1309.5	674
90		1337.6	599	1335.4	663	1317.4	642	1292.4	595	1218.3	672
80		1199.5	594	1208.4	658	1258.8	635	1249.4	590	1110.2	671
70		1006.5	594	1055.4	657	1173.9	631	1140.3	585	1004.2	671
60		839.5	594	862.3	658	1057.3	627	1013.3	583	897.2	670
50		697.4	595	726.3	659	919.3	627	885.3	582	773.2	670
40		577.4	594	598.3	659	779.3	627	746.3	582	656.2	670
30		459.4	594	471.3	659	635.2	627	601.3	581	538.1	670
20		316.5	595	322.4	660	437.3	627	405.3	581	378.2	670
15		237.5	595	241.4	660	319.3	627	296.3	582	283.2	670
10		167.5	595	169.4	660	213.5	627	200.3	582	196.2	670
5		115.5	594	114.3	660	132.3	626	127.3	581	128.2	669
2.5		94.4	592	92.3	656	103.9	623	101.3	578	104.2	666

FIG. 24A-2

Effective Radius μm	Sample ID	22		A		H		C		D	
	Direction	weight (mg)	154.8	weight (mg)	95	weight (mg)	91	weight (mg)	81	weight (mg)	135
		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	11.9	620	12	248	17	331	11.9	364	12.9	498
5		17	630	23	287	28.4	352	23	372	34	560
10		51	658	71	338	67	371	66	382	114	609
15		138.9	682	92	341	94	373	84	382	159	613
20		186.5	683	108.6	343	110.6	373	100.6	382	192.5	613
30		266.9	683	137	343	137	373	129	381	247.9	613
40		342.1	681	157	343	156.9	373	153	380	301.9	611
50		395.9	679	161.9	343	160.9	371	156.9	379	348.9	608
60		456.8	676	178.9	342	173.9	370	169.9	378	406.9	606
70		534.6	673	220.9	341	206.9	370	200.9	376	479.3	606
80		610.9	671	270	340	241	369	235	376	544	605
90		685.9	668	319	340	273	369	267	375	592.9	605
100		757.9	666	366	339	302	368	297	374	636.1	605
120		909.8	662	459	339	358	368	353	374	706.9	605
140		1055.8	658	547.9	338	409	368	406	373	761.9	605
160		1184.8	656	632.9	337	456	368	461	372	809.5	605
180		1296.7	654	683.9	337	502.9	368	512.9	372	848.9	605
200		1363.7	653	716.9	337	545.9	368	558.9	372	885.9	605
225		1416.7	653	746.9	338	602.9	368	607.9	372	932.4	605
250		1447.7	654	769.9	338	660.9	368	650.9	372	974.8	605
275		1468.7	654	785.9	339	736.9	368	693.9	372	1013.8	605
300		1487.6	655	795.8	339	820.8	368	726.9	372	1056.2	605
350		1509.6	657	806.8	340	888.8	368	755.9	373	1212.8	606
400		1523	658	813.8	341	905.8	368	764.9	374	1350.7	606
500		1539.6	660	822.8	342	914.8	369	773.9	375	1446.7	607
600		1550.7	662	827.9	343	917.9	370	779.9	376	1479.8	608
800		1563.7	664	833.7	345	920.9	371	785.9	377	1491.8	610
1000		1573.3	667	837.5	346	922.5	371	791.5	378	1502.4	611

FIG. 24B-1

1000	Receding	1573.3	667	837.5	346	922.5	371	791.5	378	1502.4	611
800		1570.7	667	835.9	346	921.9	372	788.9	379	1498.8	611
600		1565.6	666	833.9	346	921.9	372	783.9	378	1492.7	611
500		1561.6	665	830.9	345	919.9	371	780.9	378	1485.7	610
400		1553.6	664	827.8	344	917.8	371	773.9	377	1475.7	609
350		1547.6	662	823.8	344	913.8	370	768.9	376	1465.5	608
300		1540.6	661	819.8	343	908.8	369	760.9	375	1438.7	607
275		1533.6	659	814.8	343	901.8	368	752.9	374	1388.7	606
250		1524.6	658	809.8	342	892.8	367	738.8	373	1326.7	605
225		1516.6	656	804.8	342	866.8	366	716.8	372	1227.7	605
200		1504.7	653	795.9	341	815.9	365	685.9	370	1127.7	604
180		1488.7	650	785.9	340	739.9	364	654.9	369	1015.7	603
160		1470.6	646	767.9	339	644	363	614.9	368	932.7	603
140		1450.6	642	740.9	337	556.8	362	568.9	366	883.7	602
120		1407.6	633	701.6	335	498.8	362	532.9	364	827.7	602
100		1361.6	623	655.8	332	437.8	362	477.9	361	777.7	602
90		1322.6	615	617.8	331	414.8	361	450.8	360	754.6	601
80		1276.5	607	568.8	330	385.8	361	421.8	359	730.6	601
70		1180.5	600	466.8	331	354.8	361	372.8	359	698.6	600
60		1028.5	598	393.8	332	320.7	361	316.8	359	667.6	600
50		826.5	599	310.8	333	272.7	361	265.8	359	631.6	599
40		690.4	599	242.7	333	233.7	361	222.8	360	578.6	598
30		563.4	600	199.7	333	204.7	360	192.8	360	469.6	597
20		400.5	600	157.8	334	163.8	361	151.9	360	315.6	597
15		298.5	600	133.8	334	138.8	360	122.9	360	248.6	597
10		203.5	600	109.8	334	113.8	360	95.8	360	192.6	597
5		128.5	600	82.8	333	87.8	360	69.8	359	136.6	597
2.5		98.4	597	65.8	330	70.8	357	53.8	356	104.6	594

FIG. 24B-2

Effective Radius μm	Sample ID Direction	F		G		E		B		25	
		weight (mg)	120.5	weight (mg)	75.4	weight (mg)	123	weight (mg)	134	weight (mg)	166
		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	10.9	704	15.9	357	11.9	563	10.9	397	16.5	699
5		16	709	24	366	23	578	18	412	21	707
10		38	717	75	377	102	620	80	458	28	717
15		121.9	726	95	378	132	620	125	461	70	738
20		158.5	725	114.4	378	161.6	621	159.5	461	152.9	750
30		227.9	724	147	376	210.9	620	211.9	461	226.5	750
40		298.9	722	175	374	257.9	619	261.9	458	290.9	749
50		344.9	720	182.9	373	285.9	618	301.9	455	332.8	748
60		385.9	717	195.9	372	320.9	617	353.9	453	381.8	746
70		432.8	714	225.9	371	370.9	616	427.9	451	457.9	743
80		473.9	712	254	371	418	615	497.9	449	539.9	741
90		508.9	710	280	370	460	614	558.5	448	624.9	738
100		539.9	709	303	370	497	614	605.9	448	707.8	735
120		589.9	707	344	370	557	614	690.9	447	870.8	730
140		630.9	706	382	369	604.9	613	755.9	447	1036.8	725
160		666.9	705	418	369	644.9	613	801.9	447	1193.7	721
180		698.9	704	455.5	369	679.9	613	833.9	447	1314.9	719
200		726.9	703	495.3	369	715.7	613	858.9	447	1406.7	718
225		761.8	702	548.9	369	759.5	613	883.8	448	1471.7	717
250		792.8	702	623.9	369	799.9	612	909.8	449	1509.6	718
275		823.8	702	725.9	369	840.9	612	924.8	449	1530.6	718
300		854.8	701	792.9	369	894.9	612	939	450	1548.6	718
350		913.8	701	833.8	369	1012.8	612	954.8	451	1564.6	719
400		977.6	701	845.8	370	1151.2	612	961.8	452	1577.6	720
500		1487.7	694	854.8	370	1370.8	612	971.8	453	1592.7	722
600		1974.7	692	861.5	371	1397.9	612	979.9	455	1604.1	724
800		2093.7	692	866.9	372	1416.9	613	989.9	457	1615.6	726
1000		2098.3	693	870.9	373	1424.4	614	999.5	459	1626.6	728

FIG. 24C-1

1000	Receding	2098.3	693	870.9	373	1424.4	614	999.5	459	1626.6	728
800		2093.7	692	869.9	373	1420.8	614	995.8	459	1626.6	729
600		2080.7	691	865.9	373	1410.8	613	990.8	458	1623.6	728
500		2065.5	689	861.9	372	1401.4	612	985.8	458	1618.2	727
400		2005.6	683	852.9	371	1364.8	610	979.8	456	1611.6	725
350		1908.6	680	847.8	371	1323.6	609	975.2	456	1605.6	724
300		1443.6	678	838.8	370	1246.4	607	969.8	455	1596.6	722
275		1146.5	679	831.8	369	1167.7	606	964.8	454	1589.7	721
250		992.5	679	817.8	368	1079.7	605	958.8	453	1583.7	720
225		846.5	679	799.2	367	988.7	604	951.8	452	1575.6	718
200		805.6	679	767.9	366	897.8	603	937.9	451	1564.6	715
180		779.6	679	717.9	365	836.8	602	920.8	450	1553.6	712
160		752.6	678	597.9	365	770.8	602	899.8	448	1538.4	708
140		723.6	678	497.8	364	716.8	602	870.8	446	1512.6	703
120		691.5	678	456.8	363	667.8	602	840.8	443	1480.4	695
100		656.5	677	427.8	362	631.7	601	791	439	1430.6	682
90		635.5	677	408.8	361	613.7	601	758.8	437	1388.5	673
80		613.5	676	387.8	360	589.7	601	721.8	436	1337.3	666
70		587.5	676	347.8	360	561.7	601	669.7	435	1242.5	657
60		559.5	675	312.8	360	524.7	600	622.7	434	1002.1	657
50		524.5	675	269.8	360	465.7	600	544.7	435	815.4	658
40		487.1	675	238.8	360	403.7	600	476.7	435	675.4	658
30		434.5	674	212.8	360	337.7	600	389.7	435	531.5	658
20		318.5	674	169.8	360	250.4	600	275.8	435	352.5	659
15		234.5	674	139.8	360	201.7	600	218.8	436	262.5	659
10		162.5	674	110.8	360	157.7	600	165.7	436	181.5	659
5		107.5	673	79.8	359	118.9	599	112.7	435	118.5	659
2.5		85.5	670	61.8	357	99.7	596	85.7	432	94.4	656

FIG. 24C-2

Effective Radius μm	Sample ID	20		23		24		21		59	
	Direction	weight (mg)	145	weight (mg)	156.5	weight (mg)	154	weight (mg)	151.2	weight (mg)	167.7
		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	9.9	661	10.9	629	12.9	728	10.9	597	12.8	1155
5		15	668	17	636	18	738	16	604	17	1154
10		21	675	29	648	31	754	55	626	25.8	1154
15		86	701	68	667	59	767	131.9	641	134.7	1155
20		148.9	705	129.1	683	118.3	788	180.9	641	193.7	1155
30		223.9	704	194.9	684	193.9	789	257.9	641	260.7	1154
40		290.9	702	252.9	684	254.9	789	328.9	640	310.8	1153
50		334	699	288.8	682	290.8	787	372.8	638	344.6	1152
60		375.8	696	321.8	681	322.8	785	419	635	361.6	1151
70		438.9	694	377.9	679	375.9	784	480.9	633	397.6	1149
80		507.9	692	439.9	678	433.9	783	547.3	631	443.7	1147
90		575.9	689	504.3	676	491.9	781	615.9	629	489.7	1146
100		642.8	686	569.8	674	551.8	780	680	627	535.7	1145
120		780.8	682	702.8	671	670.8	777	805.8	624	623.6	1143
140		920.8	678	828.8	669	785.8	775	929.8	620	711.6	1140
160		1046.7	674	966.7	666	908.7	772	1046.7	617	797.6	1139
180		1170.7	671	1094.7	664	1040.7	769	1145.7	616	884	1136
200		1270.7	669	1213.7	661	1165.1	767	1216.7	615	972.6	1134
225		1346.8	669	1329.6	660	1315.6	765	1273.6	615	1080.6	1132
250		1392	669	1392.6	660	1439.6	763	1305.6	615	1197.7	1131
275		1425.6	670	1439.6	660	1523.5	763	1334.6	615	1331.5	1128
300		1447.6	670	1479.6	660	1571.5	763	1355.6	616	1463.7	1127
350		1477.6	671	1533.5	661	1642.5	764	1382.6	617	1736.5	1125
400		1502.6	672	1567.5	662	1699.4	764	1402.6	618	1918	1124
500		1533.6	674	1619.6	664	1779.5	765	1422.7	620	2100.5	1124
600		1549.6	676	1639.6	665	1815.5	766	1435.6	622	2214.3	1125
800		1567.6	678	1657.6	667	1848.5	768	1448.6	624	2319.5	1127
1000		1580.6	680	1671.6	668	1868.5	769	1461.6	626	2339.4	1128

FIG. 24D-1

1000	Receding	1580.6	680	1671.6	668	1868.5	769	1461.6	626	2339.4	1128
800		1576.6	680	1667.6	668	1861.5	769	1459.6	626	2326.4	1128
600		1569.6	679	1660.5	667	1850.5	768	1456.6	625	2302.8	1126
500		1563.6	678	1653.5	666	1840.4	766	1451.6	624	2265.4	1124
400		1553.6	676	1642.5	664	1824.4	765	1443.6	623	2184.4	1121
350		1545.6	675	1634.5	663	1810.4	764	1436.6	622	2133.4	1119
300		1534.5	673	1622.5	661	1793.4	762	1426.6	620	2021.4	1116
275		1524.6	671	1613.6	660	1780.5	760	1418.7	619	1969.3	1113
250		1514.6	670	1602.6	658	1762.5	758	1411.6	618	1934.4	1110
225		1502.6	668	1588.6	656	1737.5	755	1401.6	616	1883.2	1105
200		1485.6	665	1568.6	652	1713.5	752	1388.6	613	1817.4	1101
180		1466.6	661	1549.5	648	1687.4	747	1375.6	611	1733	1097
160		1442	656	1527.3	644	1650.2	742	1357.4	607	1598.4	1093
140		1408.6	650	1495.5	639	1607.4	736	1328.6	602	1284.3	1093
120		1367.3	642	1450.3	630	1554.2	727	1299.4	596	1108.3	1092
100		1309.5	631	1373.5	620	1448	717	1246.5	584	917.3	1093
90		1269.5	623	1320.5	613	1341.3	711	1214.5	578	848.3	1093
80		1217.5	616	1231.4	606	1159.1	711	1166.5	569	777.9	1093
70		1143.4	607	1085.4	603	973.3	712	1079.5	563	708.3	1093
60		965.4	604	865.4	605	823.3	713	915	561	635.3	1094
50		773.4	607	710.1	606	697.2	713	756.4	563	556.2	1094
40		650.4	607	591.3	606	589.2	713	644.4	564	481.2	1094
30		533.5	608	474.4	606	478.3	713	538.5	564	407.3	1094
20		368.3	608	322.4	607	326.3	713	380.5	565	300.3	1095
15		272.5	608	244.4	607	246.3	713	288.5	565	240.3	1095
10		185.4	609	173.4	607	172.7	714	198.5	565	178.3	1095
5		116.4	608	116.4	607	116.3	712	124.4	565	121.3	1094
2.5		89.4	604	94.3	604	93.2	709	95.4	562	102.2	1091

FIG. 24D-2

Effective Radius μm	Direction	Sample ID 61		10		12		14		39	
		weight (mg)	120.5	weight (mg)	75.4	weight (mg)	123	weight (mg)	134	weight (mg)	166
		Pore Vol. mg	Thickness μm	Pore Vol. mg	Thickness μm	Pore Vol. mg	Thickness μm	Pore Vol. mg	Thickness μm	Pore Vol. mg	Thickness μm
2.5	Advancing	12.2	1347	12.2	1309	14.2	1341	12.3	1325	12.2	573
5		16.4	1346	16.4	1310	18.4	1341	16.4	1327	16.4	578
10		22.2	1346	26.2	1311	32.2	1345	36.2	1337	42.2	586
15		117.1	1347	150.7	1329	154.1	1358	189.1	1356	114.2	600
20		217.5	1346	209.1	1329	219.7	1358	241.1	1356	156.1	600
30		312	1345	281.1	1329	293.1	1358	311.1	1355	226.1	598
40		391	1343	333.1	1328	345	1357	359.1	1354	293.7	596
50		455	1341	366	1328	376	1356	388	1354	346.3	594
60		499	1339	382	1327	387	1355	398	1353	380.1	592
70		559	1337	418	1326	418	1354	427	1352	432	589
80		626	1335	466.1	1324	461.1	1353	469.1	1351	488.1	587
90		690	1333	517.1	1322	506.1	1351	513.1	1349	541.1	585
100		750	1330	569.1	1320	554.1	1348	558.1	1347	591.1	583
120		865	1327	681.1	1317	653	1346	655.1	1344	685.1	581
140		971	1324	792	1314	755	1343	756.1	1342	774	579
160		1072	1322	897	1311	849	1341	847	1340	856	577
180		1170.9	1319	991	1310	934	1339	930	1338	941	575
200		1270.9	1316	1080.4	1308	1012	1338	1006	1337	1015	574
225		1387.9	1314	1183	1306	1103	1336	1096	1336	1077.9	574
250		1503.9	1311	1284.6	1305	1191	1335	1184.6	1335	1129.7	574
275		1617.9	1310	1385.9	1304	1278.9	1334	1278	1333	1161.9	574
300		1728.2	1308	1487.9	1303	1371.9	1333	1367.9	1332	1182.9	574
350		1951.8	1306	1748.9	1301	1592.9	1331	1592.3	1331	1211.9	575
400		2153.8	1305	2087.8	1298	1892.8	1329	1920.8	1329	1230.3	576
500		2448.6	1305	2597.9	1298	2651.9	1325	2648.9	1327	1253.9	578
600		2536.6	1306	2703.7	1298	2943.6	1325	2840.5	1327	1261.7	579
800		2598.8	1309	2741.9	1300	3117.8	1326	2886.9	1328	1273.9	581
1000		2633.8	1311	2765.8	1302	3139.8	1328	2910.8	1330	1282.9	583

FIG. 24E-1

Receding

FIG. 24E-2

Effective Radius μm	Sample ID Direction	64		56		57		31		V	
		weight (mg)	184	weight (mg)	172.2	weight (mg)	166.5	weight (mg)	167	weight (mg)	133
		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	9.9	1352	10.9	1147	12.9	1151	10.4	685	11.9	570
5		15	1350	16	1144	18	1149	15.4	691	33	624
10		20	1348	21	1142	22	1148	19.4	696	110.2	674
15		126.9	1345	66	1140	69.4	1148	80.4	729	140	674
20		206.9	1342	152.9	1137	160.3	1144	164.3	735	157	674
30		289.8	1340	226.9	1135	227.9	1143	260.5	734	181.9	675
40		360.8	1338	277.8	1134	274.3	1141	356.3	732	198.9	674
50		406.8	1337	305.8	1132	295.8	1140	440.2	729	194.9	674
60		456.8	1335	339.8	1130	322.8	1138	525.2	726	199.9	672
70		521.8	1332	392.8	1128	367.8	1137	630.2	721	223.9	671
80		586.8	1330	449.9	1126	415.9	1135	727.2	718	250	671
90		648.8	1327	506.9	1124	464.9	1133	816.2	715	280	670
100		708.8	1325	563.9	1122	512.9	1132	904.2	712	309	669
120		821.8	1322	674.8	1119	610.8	1129	1063.1	707	364	668
140		928.8	1319	778.8	1116	704.8	1127	1188.1	705	421.9	667
160		1032.8	1316	884.8	1113	799.8	1124	1306	703	477.9	667
180		1131.8	1313	989.8	1110	894.8	1121	1396.2	702	538.9	666
200		1227.7	1311	1093.8	1108	991.8	1118	1469.9	701	603.9	666
225		1343.7	1309	1233.7	1104	1119.7	1115	1529.9	701	692.9	665
250		1461.7	1306	1374.7	1102	1249.7	1113	1563.9	701	782.9	665
275		1590.7	1303	1518.7	1100	1393.7	1110	1589.9	702	869.8	664
300		1725.6	1300	1662.7	1098	1563.7	1107	1606.3	703	948.4	664
350		1967.6	1298	1889.6	1097	1863.6	1104	1631.8	704	1091	664
400		2171.6	1297	2001.6	1097	2039.6	1104	1650.8	705	1226.8	664
500		2391.1	1298	2128.6	1097	2218.1	1104	1675.8	707	1374.9	665
600		2484.6	1299	2190.7	1099	2308.6	1105	1687.9	709	1407.8	665
800		2547.6	1301	2226.7	1101	2378.6	1107	1703.9	712	1433.8	667
1000		2576.6	1304	2238.7	1102	2393.6	1108	1713.9	714	1447.8	668

FIG. 24F-1

1000	2576.6	1304	2238.7	1102	2393.6	1108	1713.9	714	1447.8	668
800	2560.6	1303	2228.6	1102	2382.6	1108	1711.9	714	1436.4	668
600	2532.6	1301	2209.6	1101	2362.6	1106	1709.8	713	1420.8	667
500	2502.6	1298	2189.6	1099	2331.6	1104	1705.8	712	1406.8	666
400	2422.3	1294	2151.4	1096	2256.4	1101	1698.6	711	1369.6	664
350	2372.1	1290	2102.6	1093	2194.5	1098	1690.8	709	1316.7	663
300	2246.5	1285	2061.4	1089	2101.5	1094	1681.8	708	1235.7	661
275	2206.5	1281	2018.6	1086	2057.5	1091	1674.8	706	1189.7	660
250	2143.4	1276	1987.5	1082	2019.5	1088	1666.8	705	1139.7	658
225	2063.5	1271	1922.6	1078	1954.6	1083	1655.1	703	1098.8	657
200	1943.5	1266	1878.6	1073	1899.5	1079	1639.9	700	975.8	656
180	1828.5	1263	1807.6	1068	1824.5	1074	1623.9	698	866.7	655
160	1659.9	1260	1719.4	1061	1732.9	1068	1588.2	693	800.1	654
140	1512.2	1257	1592.5	1056	1378.5	1067	1572.8	689	736.7	653
120	1354.4	1255	1275.5	1056	1159.4	1067	1535.8	682	668.7	652
100	1231.4	1252	1089.5	1056	964.4	1067	1478.8	672	539.3	653
90	1140.4	1251	992.5	1056	893.2	1067	1444.4	666	494.7	653
80	1040.4	1251	893.5	1056	798.4	1067	1397.8	659	456.7	653
70	952.4	1251	804.5	1056	720.4	1067	1342.7	651	405.6	653
60	864.3	1251	715.4	1056	636.4	1067	1254.7	642	352.6	653
50	761.3	1251	617.4	1056	547.4	1068	1083.7	642	279.6	654
40	663.3	1251	524.4	1056	469.4	1068	924.7	641	253.6	654
30	544.3	1251	422.4	1057	387.3	1068	727.6	641	238.6	655
20	379.4	1252	293.5	1057	280.4	1068	477.7	641	200.7	655
15	291.4	1252	228.5	1057	222.4	1068	342.7	641	178.7	656
10	208.4	1252	167.5	1057	168.4	1068	226.7	641	155.7	656
5	133.3	1251	117.4	1057	118.4	1068	140.7	640	126.6	655
2.5	109.3	1248	101.4	1054	102.4	1065	111.7	638	104.6	653

FIG. 24F-2

Effective Radius μm	Sample ID	U		Y		W		X		AA		BB	
	Direction	weight (mg)	160.1	weight (mg)	137.1	weight (mg)	171	weight (mg)	151.1	weight (mg)	148.2	weight (mg)	151.1
		Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness	Pore Vol.	Thickness
		mg	μm	mg	μm	mg	μm	mg	μm	mg	μm	mg	μm
2.5	Advancing	10.9	456	10.9	444	11.5	673	8.9	529	12.9	424	14.9	598
5		43	523	46	514	47	684	25	563	27	435	30	612
10		130	556	126	544	153	684	98	619	140	462	160.9	652
15		161	557	147	545	187	684	131.9	621	173	462	206.9	654
20		182.9	558	163.9	546	204.9	683	151.9	622	197	462	237.9	654
30		212.9	558	187.9	546	231.9	682	176.9	623	242.9	459	284.9	653
40		232.9	558	205.5	546	248.9	680	193.9	623	282.9	456	327.9	650
50		232.5	558	202.9	546	243.9	679	191.9	622	321.9	454	371.8	647
60		241.9	557	208.9	545	243.9	677	199.9	622	366.9	451	420.8	644
70		272.9	557	233.9	544	263.9	676	227.9	621	409.5	449	473	642
80		308	556	263	543	286	675	260	620	456	447	536.9	639
90		347	555	292	543	310	674	294.9	620	502.8	446	595.9	637
100		382.9	554	323	542	334	673	328.9	619	548.9	445	658.3	635
120		457.9	554	384.9	541	384.9	672	399.9	618	632.9	445	771.9	633
140		524.9	553	446.9	540	437.9	670	466.9	618	699.9	445	893.8	631
160		592.9	552	512.9	540	493.9	669	532.9	617	737.9	445	1007.4	630
180		662.9	552	584.9	539	555.9	668	602.1	617	762.3	445	1101.2	629
200		730.9	551	649.3	539	618.9	667	665.9	617	779.9	446	1159.8	629
225		803.9	551	729.9	539	699.9	666	743.8	616	799.9	447	1205.7	630
250		865.8	551	805.9	539	781.8	665	819.8	616	812.9	448	1226.7	630
275		911.8	551	869.8	539	870.8	664	888.8	616	822.8	448	1248.7	631
300		965.8	552	934.8	539	936.8	663	957.8	616	830.8	449	1260.7	632
350		1049.8	552	1058.8	539	1029.8	663	1081.8	616	842.9	450	1278.8	633
400		1098.8	553	1111.8	539	1096.8	663	1219.9	616	851.9	452	1291.8	634
500		1124.8	554	1136.8	540	1211.7	663	1368.7	617	859.9	453	1305.8	636
600		1134.9	555	1148.8	541	1231.8	664	1389.8	618	868.9	455	1317.8	638
800		1148.8	557	1161.8	543	1254.8	665	1409.4	619	875.9	457	1331.8	640
1000		1156.8	558	1167.8	544	1265.8	665	1418.8	620	882.9	459	1343.7	642

FIG. 24G-1

1000		1156.8	558	1167.8	544	1265.8	665	1418.8	620	882.9	459	1343.7	642
800		1151.8	558	1162.8	544	1253.8	664	1412.8	620	881.9	459	1340.7	642
600		1147.8	557	1157.8	543	1242.8	663	1404.7	620	879.7	458	1335.5	641
500		1141.8	557	1151.8	542	1228.8	661	1395.7	619	876.8	458	1331.7	641
400		1131.6	556	1140.6	541	1201.6	658	1374.5	617	872.8	457	1324.7	639
350		1120.8	555	1125.4	540	1169.7	656	1340.7	616	868.9	456	1317.8	638
300		1097.8	553	1099.8	538	1115.7	654	1275.7	615	862.9	455	1308.8	637
275		1075.8	552	1075.7	537	1088.7	653	1216.7	614	855.9	455	1300.8	636
250		1037.7	551	1041.1	536	1042.5	651	1147.7	613	850.9	454	1291.8	634
225		993.8	550	976.8	535	1003.8	649	1073.7	612	840.9	453	1279.7	633
200		953.4	548	917.8	534	960.8	646	955.7	610	832.9	451	1262.7	631
180		902.2	546	851.8	533	917.2	643	878.7	610	821.9	450	1245.7	629
160		848.2	545	788.2	532	868.1	640	791.1	609	809.3	448	1220.7	626
140		794.8	543	726.8	530	785.7	638	709.5	609	792.8	446	1187.7	623
120	Receiving	724.7	541	640.7	530	626.7	633	642.7	609	774.8	444	1145.3	617
100		632.3	541	551.7	530	462.7	641	555.6	609	746.8	440	1093.7	611
90		584.7	541	505.7	530	421.7	641	528.6	609	729.8	437	1051.6	607
80		532.7	541	455.7	530	382.7	641	482.2	609	710.8	434	1000.6	602
70		467.7	542	398.7	530	348.7	641	445.6	609	684.8	431	877.6	600
60		417.7	542	341.7	530	315.6	642	390.6	609	614.9	429	745.7	600
50		365.7	543	283.7	531	280.6	642	308.6	609	497.8	430	626.7	601
40		311.7	544	256.7	531	275.6	643	252.6	609	433.8	431	522.7	603
30		278.6	544	231.6	532	276.6	643	229.5	610	380.8	431	421.6	604
20		234.7	545	202.7	532	249.7	644	192.6	611	284.8	431	330.6	605
15		210.7	545	183.7	533	228.3	644	173.6	611	243	432	285.8	606
10		181.7	545	162.7	533	201.7	644	152.6	611	198.8	432	240.6	607
5		140.7	544	132.7	532	158.7	643	123.6	610	148.8	432	189.6	607
2.5		113.7	541	109.7	529	123.6	640	102.6	606	118.7	430	158.6	605

FIG. 24G-2

Fiber	Never Dried?	BWCT		Breaking Length m	Fiber Length [L(l)] -- FS5		Breaking Length/ Fiber Length (Breaking Length Ratio)
		g/in	kN/m		mm	micron	
Wheat Straw	Y	1857	0.717	2725	0.839	839	3.25
Bagasse	N	1132	0.437	1661	0.924	924	1.90
Hemp	N	915	0.353	1343	1.26	1260	1.07
Abaca	N	712	0.275	1045	2.55	2550	0.41
Bamboo	N	461	0.178	676	1.51	1510	0.45
Acacia	N	558	0.215	819	0.722	722	1.13
SSK	N	485	0.187	712	2.38	2380	0.30
NSK	N	821	0.317	1205	2.205	2205	0.55
Euc	N	428	0.165	628	0.715	715	0.88

FIG. 25

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers
<p>As the below named inventor, I hereby declare that:</p> <p>This declaration is directed to: ☐ The attached application, or ☒ United States application or PCT international application number <u>18/131383</u> filed on <u>April 6, 2023</u>.</p> <p>The above-identified application was made or authorized to be made by me.</p> <p>I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.</p> <p>I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.</p> <p style="text-align: center;">WARNING:</p> <p>Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.</p>	
<p>LEGAL NAME OF INVENTOR</p> <p>Inventor: <u>Christopher Michael YOUNG</u> Date (Optional): <u>11-Apr-2023</u></p> <p>Signature: <u><i>Christopher Michael Young</i></u> <small>Christopher Michael Young (Apr 11, 2023) E002 E011</small></p>	
<p>Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.</p>	

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN
APPLICATION DATA SHEET (37 CFR 1.76)**

Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers
-------------------------------	--

As the below named inventor, I hereby declare that:

This declaration is directed to: ☐ The attached application, or

☒ United States application or PCT international application number 18/131383
filed on April 6, 2023.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTOR	
Inventor: <u>Jeffrey Glen SHEEHAN</u>	Date (Optional) : <u>10-Apr-2023</u>
Signature: <u><i>Jeffrey Glen Sheehan</i></u> <small>Jeffrey Glen Sheehan Date 10, 2023 18/131383</small>	

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers
---------------------------	--

As the below named inventor, I hereby declare that:

This declaration is directed to: ☐ The attached application, or

☒ United States application or PCT international application number 18/131383

filed on April 6, 2023.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTOR

Inventor: Kathryn Christian KIEN Date (Optional) : 10-Apr-2023

Signature: *Kathryn Christian Kien*
Kathryn Christian Kien Apr 10, 2023 10:25 EST

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of Invention	Soft Sanitary Tissue Products Comprising Non-wood Fibers
---------------------------	--

As the below named inventor, I hereby declare that:

This declaration is directed to: ☐ The attached application, or ☒ United States application or PCT international application number 18/131383 filed on April 6, 2023.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTOR

Inventor: Ward William OSTENDORF Date (Optional): 05-May-2023

Signature: *Ward William Ostendorf*
Ward William Ostendorf May 5, 2023 05:38 EST

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

16255M3-Decs for Adobe Sign-

Final Audit Report

2023-05-05

Created:	2023-04-10
By:	Bonnie Combs (combs.bs@pg.com)
Status:	Signed
Transaction ID:	CBJCHBCAABAAIRisDaIXeNwWv3yxqFKHNacxLcslgRB

"16255M3-Decs for Adobe Sign-" History

-  Document created by Bonnie Combs (combs.bs@pg.com)
2023-04-10 - 2:19:29 PM GMT- IP address: 165.225.60.49
-  Document emailed to young.cm@pg.com for signature
2023-04-10 - 2:20:37 PM GMT
-  Document emailed to sheehan.jg@pg.com for signature
2023-04-10 - 2:20:37 PM GMT
-  Document emailed to kien.kc@pg.com for signature
2023-04-10 - 2:20:37 PM GMT
-  Document emailed to ostendorf.ww@pg.com for signature
2023-04-10 - 2:20:37 PM GMT
-  Email viewed by kien.kc@pg.com
2023-04-10 - 2:25:10 PM GMT- IP address: 104.47.74.126
-  Signer kien.kc@pg.com entered name at signing as Kathryn Christian Kien
2023-04-10 - 2:25:25 PM GMT- IP address: 165.225.59.93
-  Kathryn Christian Kien (kien.kc@pg.com) has agreed to the terms of use and to do business electronically with The Procter & Gamble Company FPSS
2023-04-10 - 2:25:27 PM GMT- IP address: 165.225.59.93
-  Document e-signed by Kathryn Christian Kien (kien.kc@pg.com)
Signature Date: 2023-04-10 - 2:25:27 PM GMT - Time Source: server- IP address: 165.225.59.93
-  Email viewed by sheehan.jg@pg.com
2023-04-10 - 2:31:48 PM GMT- IP address: 104.47.73.254
-  Signer sheehan.jg@pg.com entered name at signing as Jeffrey Glen Sheehan
2023-04-10 - 2:32:06 PM GMT- IP address: 165.225.59.65



Powered by
Adobe
Acrobat Sign

 Jeffrey Glen Sheehan (sheehan.jg@pg.com) has agreed to the terms of use and to do business electronically with The Procter & Gamble Company FPSS

2023-04-10 - 2:32:08 PM GMT- IP address: 165.225.59.65

 Document e-signed by Jeffrey Glen Sheehan (sheehan.jg@pg.com)

Signature Date: 2023-04-10 - 2:32:08 PM GMT - Time Source: server- IP address: 165.225.59.65

 Email viewed by young.cm@pg.com

2023-04-11 - 12:21:46 PM GMT- IP address: 104.47.73.254

 Signer young.cm@pg.com entered name at signing as Christopher Michael Young

2023-04-11 - 12:22:12 PM GMT- IP address: 136.226.84.168

 Christopher Michael Young (young.cm@pg.com) has agreed to the terms of use and to do business electronically with The Procter & Gamble Company FPSS

2023-04-11 - 12:22:14 PM GMT- IP address: 136.226.84.168

 Document e-signed by Christopher Michael Young (young.cm@pg.com)

Signature Date: 2023-04-11 - 12:22:14 PM GMT - Time Source: server- IP address: 136.226.84.168

 Email viewed by ostendorf.ww@pg.com

2023-05-05 - 12:39:13 PM GMT- IP address: 104.47.73.126

 Signer ostendorf.ww@pg.com entered name at signing as Ward William Ostendorf

2023-05-05 - 12:39:35 PM GMT- IP address: 136.226.84.165

 Ward William Ostendorf (ostendorf.ww@pg.com) has agreed to the terms of use and to do business electronically with The Procter & Gamble Company FPSS

2023-05-05 - 12:39:37 PM GMT- IP address: 136.226.84.165

 Document e-signed by Ward William Ostendorf (ostendorf.ww@pg.com)

Signature Date: 2023-05-05 - 12:39:37 PM GMT - Time Source: server- IP address: 136.226.84.165

 Agreement completed.

2023-05-05 - 12:39:37 PM GMT



Powered by
Adobe
Acrobat Sign

Electronic Patent Application Fee Transmittal				
Application Number:		18131383		
Filing Date:		06-Apr-2023		
Title of Invention:		Soft Sanitary Tissue Products Comprising Non-wood Fibers		
First Named Inventor/Applicant Name:		Christopher Michael YOUNG		
Filer:		Richard Lee Alexander/Bonnie Combs		
Attorney Docket Number:		16255M3		
Filed as Large Entity				
Filing Fees for Utility under 35 USC 111(a)				
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Pages:				
Claims:				
Miscellaneous-Filing:				
LATE FILING FEE FOR OATH OR DECLARATION	1051	1	160	160
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				160

Electronic Acknowledgement Receipt

EFS ID: 48206036

Application Number: 18131383

International Application Number:

Confirmation Number: 7685

Title of Invention: Soft Sanitary Tissue Products Comprising Non-wood Fibers

First Named Inventor/Applicant Name: Christopher Michael YOUNG

Customer Number: 27752

Filer: Richard Lee Alexander/Bonnie Combs

Filer Authorized By: Richard Lee Alexander

Attorney Docket Number: 16255M3

Receipt Date: 26-JUN-2023

Filing Date: 06-APR-2023

Time Stamp: 14:20:12

Application Type: Utility under 35 USC 111(a)

Payment information:

Submitted with Payment yes

Payment Type DA

Payment was successfully received in RAM \$160

RAM confirmation Number E20236PE20399414

Deposit Account 162480

Authorized User Bonnie Combs

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

37 CFR 1.16 (National application filing, search, and examination fees)

37 CFR 1.17 (Patent application and reexamination processing fees)

Kimberly Clark EX1002, p. 620
PGR2026-00078

37 CFR 1.19 (Document supply fees)					
37 CFR 1.20 (Post Issuance fees)					
37 CFR 1.21 (Miscellaneous fees and charges)					
File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Miscellaneous Incoming Letter	16255M3-Rsp-filed-06-23-23.pdf	14244	no	1
			deb4945cd7431059deea178fdd4621461fdb1a83		
Warnings:					
Information:					
2		16255M3-PATENT-APP-CLEAN-Copy-filed-06-23-23.pdf	898488	yes	139
			b4a9e42604168c002059def12e0b04aa24c11640		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	137	
	Claims		138	138	
	Abstract		139	139	
Warnings:					
Information:					
3	Specification	16255M3-PATENT-APP-Marked-Up-filed-06-23-23.pdf	900788	no	140
			53c497f419cbbabd775b5537abe608379c29c28ab		
Warnings:					
Information:					
4	Drawings-only black and white line drawings	16255M3-DRAWINGS-Replacement-filed-06-23-23.pdf	10616006	no	93
			fca0a9b3610fe56497da3f5f18e7ce48b4b78ca0		
Warnings:					
Information:					
5	Oath or Declaration filed	16255M3-FULLY-SIGNED-Decs-for-ALL-filed-06-23-23.pdf	3313504	no	6
			1113bf12761d928c2b65104f39a7ddc57cefba82		

Warnings:					
Information:					
6	Fee Worksheet (SB06)	fee-info.pdf	38257	no	2
			cd9bf0bd37891e06f6552be29a7b4154f549ec70		
Warnings:					
Information:					
Total Files Size (in bytes):				15781287	
<p>This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.</p> <p><u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.</p> <p><u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.</p> <p><u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.</p>					



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
18/131,383	04/06/2023		3880	16255M3	21	5

27752
THE PROCTER & GAMBLE COMPANY
GLOBAL IP SERVICES
CENTRAL BUILDING, C9
ONE PROCTER AND GAMBLE PLAZA
CINCINNATI, OH 45202

CONFIRMATION NO. 7685
UPDATED FILING RECEIPT



0000000058848937

Date Mailed: 06/30/2023

Receipt is acknowledged of this non-provisional utility patent application. The application will be taken up for examination in due course. Applicant will be notified as to the results of the examination. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF FIRST INVENTOR, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection.

Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please submit a written request for a corrected Filing Receipt, including a properly marked-up ADS showing the changes with strike-through for deletions and underlining for additions. If you received a "Notice to File Missing Parts" or other Notice requiring a response for this application, please submit any request for correction to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections provided that the request is grantable.

Inventor(s)

Christopher Michael YOUNG, Loveland, OH;
Jeffrey Glen SHEEHAN, Symmes Township, OH;
Kathryn Christian KIEN, Cincinnati, OH;
Ward William OSTENDORF, West Chester, OH;

Applicant(s)

The Procter & Gamble Company, Cincinnati, OH;

Power of Attorney: The patent practitioners associated with Customer Number 27752

Domestic Priority data as claimed by applicant

This appln claims benefit of 63/329,222 04/08/2022
and claims benefit of 63/329,718 04/11/2022
and claims benefit of 63/330,077 04/12/2022
and claims benefit of 63/353,183 06/17/2022
and claims benefit of 63/456,020 03/31/2023

Foreign Applications for which priority is claimed (You may be eligible to benefit from the **Patent Prosecution Highway** program at the USPTO. Please see <http://www.uspto.gov> for more information.) - None.

Foreign application information must be provided in an Application Data Sheet in order to constitute a claim to foreign priority. See 37 CFR 1.55 and 1.76.

Permission to Access Application via Priority Document Exchange: Yes

Permission to Access Search Results: Yes

Applicant may provide or rescind an authorization for access using Form PTO/SB/39 or Form PTO/SB/69 as appropriate.

If Required, Foreign Filing License Granted: 04/21/2023

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 18/131,383**

Projected Publication Date: 10/12/2023

Non-Publication Request: No

Early Publication Request: No

Title

Soft Sanitary Tissue Products Comprising Non-wood Fibers

Preliminary Class

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications: No

PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific

countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4258).

LICENSE FOR FOREIGN FILING UNDER
Title 35, United States Code, Section 184
Title 37, Code of Federal Regulations, 5.11 & 5.15

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The U.S. offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to promote and facilitate business investment. SelectUSA provides information assistance to the international investor community; serves as an ombudsman for existing and potential investors; advocates on behalf of U.S. cities, states, and regions competing for global investment; and counsels U.S. economic development organizations on investment attraction best practices. To learn more about why the United States is the best country in the world to develop

technology, manufacture products, deliver services, and grow your business, visit <http://www.SelectUSA.gov> or call +1-202-482-6800.

PATENT APPLICATION FEE DETERMINATION RECORD Substitute for Form PTO-875						Application or Docket Number 18/131,383					
APPLICATION AS FILED - PART I											
(Column 1)		(Column 2)		SMALL ENTITY		OR OTHER THAN SMALL ENTITY					
FOR	NUMBER FILED	NUMBER EXTRA	RATE(\$)	FEE(\$)		RATE(\$)	FEE(\$)				
BASIC FEE <small>(37 CFR 1.16(a), (b), or (c))</small>	N/A	N/A	N/A			N/A	320				
SEARCH FEE <small>(37 CFR 1.16(k), (l), or (m))</small>	N/A	N/A	N/A			N/A	700				
EXAMINATION FEE <small>(37 CFR 1.16(o), (p), or (q))</small>	N/A	N/A	N/A			N/A	800				
TOTAL CLAIMS <small>(37 CFR 1.16(j))</small>	21 minus 20 =	*	1			x 100 =	100				
INDEPENDENT CLAIMS <small>(37 CFR 1.16(h))</small>	5 minus 3 =	*	2			x 480 =	960				
APPLICATION SIZE FEE <small>(37 CFR 1.16(s))</small>	If the specification and drawings exceed 100 sheets of paper, the application size fee due is \$310 (\$155 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).						840				
MULTIPLE DEPENDENT CLAIM PRESENT (37 CFR 1.16(j))							0				
* If the difference in column 1 is less than zero, enter "0" in column 2.				TOTAL		TOTAL	3620				
APPLICATION AS AMENDED - PART II											
AMENDMENT A	(Column 1)		(Column 2)		(Column 3)		SMALL ENTITY		OR OTHER THAN SMALL ENTITY		
		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE(\$)	ADDITIONAL FEE(\$)		RATE(\$)	ADDITIONAL FEE(\$)
	Total <small>(37 CFR 1.16(i))</small>	*	Minus	**	=	x	=		OR	x	=
	Independent <small>(37 CFR 1.16(h))</small>	*	Minus	***	=	x	=		OR	x	=
	Application Size Fee (37 CFR 1.16(s))								OR		
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))								OR		
						TOTAL ADD'L FEE			OR	TOTAL ADD'L FEE	
AMENDMENT B	(Column 1)		(Column 2)		(Column 3)		SMALL ENTITY		OR OTHER THAN SMALL ENTITY		
		CLAIMS REMAINING AFTER AMENDMENT		HIGHEST NUMBER PREVIOUSLY PAID FOR	PRESENT EXTRA		RATE(\$)	ADDITIONAL FEE(\$)		RATE(\$)	ADDITIONAL FEE(\$)
	Total <small>(37 CFR 1.16(i))</small>	*	Minus	**	=	x	=		OR	x	=
	Independent <small>(37 CFR 1.16(h))</small>	*	Minus	***	=	x	=		OR	x	=
	Application Size Fee (37 CFR 1.16(s))								OR		
	FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM (37 CFR 1.16(j))								OR		
						TOTAL ADD'L FEE			OR	TOTAL ADD'L FEE	
* If the entry in column 1 is less than the entry in column 2, write "0" in column 3. ** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 20, enter "20". *** If the "Highest Number Previously Paid For" IN THIS SPACE is less than 3, enter "3". The "Highest Number Previously Paid For" (Total Or Independent) is the highest found in the appropriate box in column 1.											



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING OR 371(C) DATE	FIRST NAMED APPLICANT	ATTY. DOCKET NO./TITLE
18/131,383	04/06/2023	Christopher Michael YOUNG	16255M3

CONFIRMATION NO. 7685

27752
THE PROCTER & GAMBLE COMPANY
GLOBAL IP SERVICES
CENTRAL BUILDING, C9
ONE PROCTER AND GAMBLE PLAZA
CINCINNATI, OH 45202

PUBLICATION NOTICE



OC000000063166256

Date Mailed: 10/12/2023

Title:Soft Sanitary Tissue Products Comprising Non-wood Fibers

Publication No.US-2023-0323604-A1

Publication Date:10/12/2023

NOTICE OF PUBLICATION OF APPLICATION

The above-identified application will be electronically published as a patent application publication pursuant to 37 CFR 1.211, et seq. The patent application publication number and publication date are set forth above.

The publication may be accessed through the USPTO's publically available Searchable Databases via the Internet at www.uspto.gov. The direct link to access the publication is currently <http://www.uspto.gov/patft/>.

The publication process established by the Office does not provide for mailing a copy of the publication to applicant. A copy of the publication may be obtained from the Office upon payment of the appropriate fee set forth in 37 CFR 1.19(a)(1). Orders for copies of patent application publications are handled by the USPTO's Public Records Division. The Public Records Division can be reached by telephone at (571) 272-3150 or (800) 972-6382, by facsimile at (571) 273-3250, by mail addressed to the United States Patent and Trademark Office, Public Records Division, Alexandria, VA 22313-1450 or via the Internet.

In addition, information on the status of the application, including the mailing date of Office actions and the dates of receipt of correspondence filed in the Office, may also be accessed via the Internet through the Patent Electronic Business Center at www.uspto.gov using the public side of the Patent Application Information and Retrieval (PAIR) system. The direct link to access this status information is currently <https://portal.uspto.gov/pair/> PublicPair. Prior to publication, such status information is confidential and may only be obtained by applicant using the private side of PAIR.

Further assistance in electronically accessing the publication, or about PAIR, is available by calling the Patent Electronic Business Center at 1-866-217-9197.

Office of Data Management, Application Assistance Unit (571) 272-4000, or (571) 272-4200, or 1-888-786-0101

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 January 2008 (10.01.2008)

PCT

(10) International Publication Number
WO 2008/003343 A1

(51) International Patent Classification:

D21H 27/38 (2006.01) B32B 29/00 (2006.01)
D21H 27/00 (2006.01)

(21) International Application Number:

PCT/EP2006/006630

(22) International Filing Date: 6 July 2006 (06.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): SCA
HYGIENE PRODUCTS GMBH [DE/DE]; Sandhofer
Strasse 176, 68305 Mannheim (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LAMB, Hans-Jürgen
[DE/DE]; Berliner Strasse 16 A, 64579 Gernsheim (DE).

(74) Agents: HOFFMANN . EITLE et al.; Arabellastrasse 4,
81925 München (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT,
LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA,
NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC,
SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ,
UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF MAKING AN ABSORBENT STRUCTURE AS A MULTI LAYER PAPER, ESPECIALLY A TISSUE
PAPER

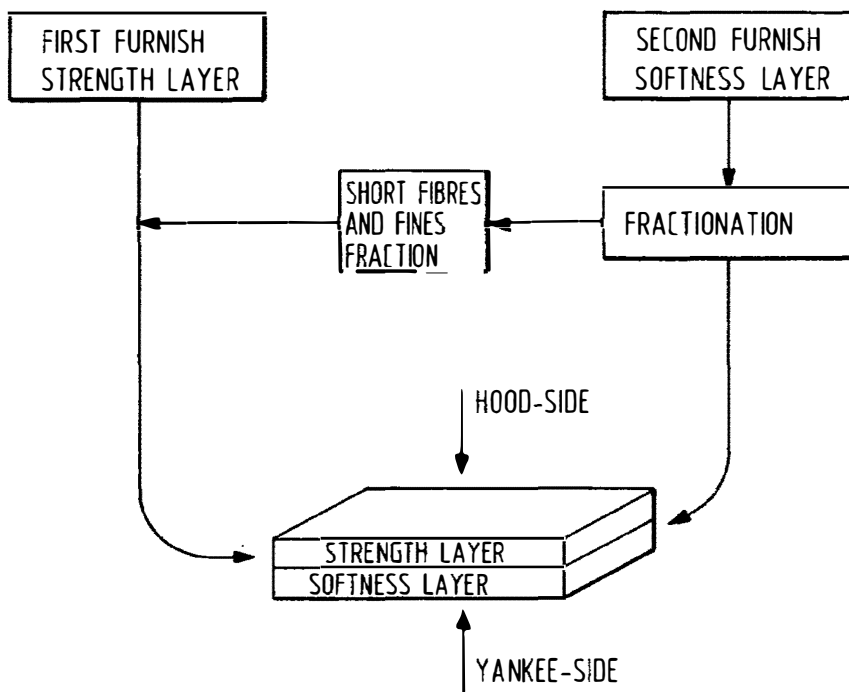

(57) Abstract: The invention relates to a method of manufacturing a multi-layer tissue paper, in which one layer is a strength layer primarily destined for strength and at least one of the layers is a softness layer being primarily destined for softness. Improved softness, strength, haptic, absorptions speed, absorption capacity, thickness is achieved by fractionation of the furnish for the softness layer in that fractionated short fibers/fines are added to the other furnish being destined for a strength layer.

WO 2008/003343 A1

Method of making an absorbent structure as a multi layer
paper, especially a tissue paper

Technical field

The technical field to which the present invention relates is the field of making absorbent structures such as paper and especially tissue paper, including pulp or furnish preparation and paper-making on a paper machine as generally known in the art.

A tissue paper is defined as a soft absorbent paper having a low basis weight. One generally selects a basis weight of 8 to 30 g/m², especially 10 to 25 g/m² per ply. The total basis weight of multiple-ply tissue products is preferably equal to a maximum of 65 g/m², more preferably to a maximum of 50 g/m². Its density is typically below 0.6 g/cm³, preferably below 0.30 g/cm³ and more preferably between 0.08 and 0.20 g/cm³.

The production of tissue is distinguished from paper production by its extremely low basis weight and its much higher tensile energy absorption index (see DIN EN 12625-4 and DIN EN 12625-5). Paper and tissue paper also differ in general with regard to the modulus of elasticity that characterizes the stress-strain properties of these planar products as a material parameter.

A tissue's high tensile energy absorption index results from the outer or inner creping. The former is produced by compression of the paper web adhering to a drying cylinder as a result of the action of a creping doctor or in the latter instance as a result of a difference e.g. in speed between two wires ("fabrics"). This causes the still moist, plastically deformable paper web to be internally broken up