




US 20050223001A1

(19) **United States**(12) **Patent Application Publication****Kester et al.**(10) **Pub. No.: US 2005/0223001 A1**(43) **Pub. Date:****Oct. 6, 2005**(54) **SYSTEM AND METHOD OF MONITORING
AND CONTROLLING APPLICATION FILES**(52) **U.S. Cl. 707/6**(76) Inventors: **Harold M. Kester**, Cardiff, CA (US);
Ronald B. Hegli, San Diego, CA (US);
John Ross Dimm, La Jolla, CA (US);
Mark Richard Anderson, Tempe, AZ
(US)(57) **ABSTRACT**

A system and method for updating a system that controls files executed on a workstation. The workstation includes a workstation management module configured to detect the launch of an application. A workstation application server receives data associated with the application from the workstation. This data can include a hash value. The application server module can determine one or more categories to associate with the application by referencing an application inventory database or requesting the category from an application database factory. The application database factory can receive applications from multiple application server modules. The application database factory determines whether the application was previously categorized by the application database factory and provides the category to the application server module. Once the application server module has the category, it forwards a hash/policy table to the workstation management module. Upon receipt of the hash/policy table, the workstation management module applies the policy that is associated with the launched application to control access to the application on the workstation.

Correspondence Address:

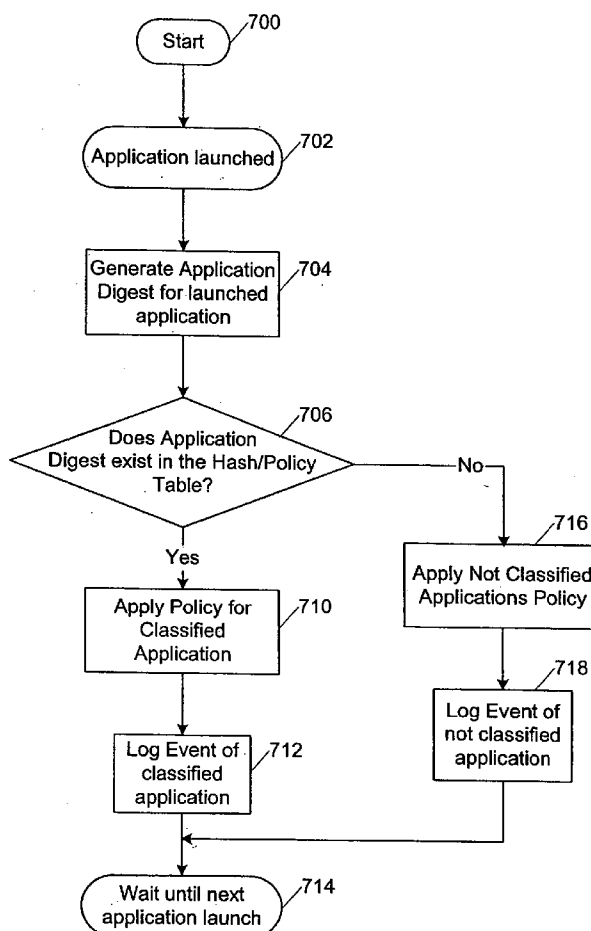KNOBBE MARTENS OLSON & BEAR LLP
2040 MAIN STREET
FOURTEENTH FLOOR
IRVINE, CA 92614 (US)(21) Appl. No.: **11/143,006**(22) Filed: **Jun. 1, 2005****Related U.S. Application Data**(63) Continuation of application No. 10/390,547, filed on
Mar. 14, 2003.**Publication Classification**(51) **Int. Cl.⁷ G06F 7/00**

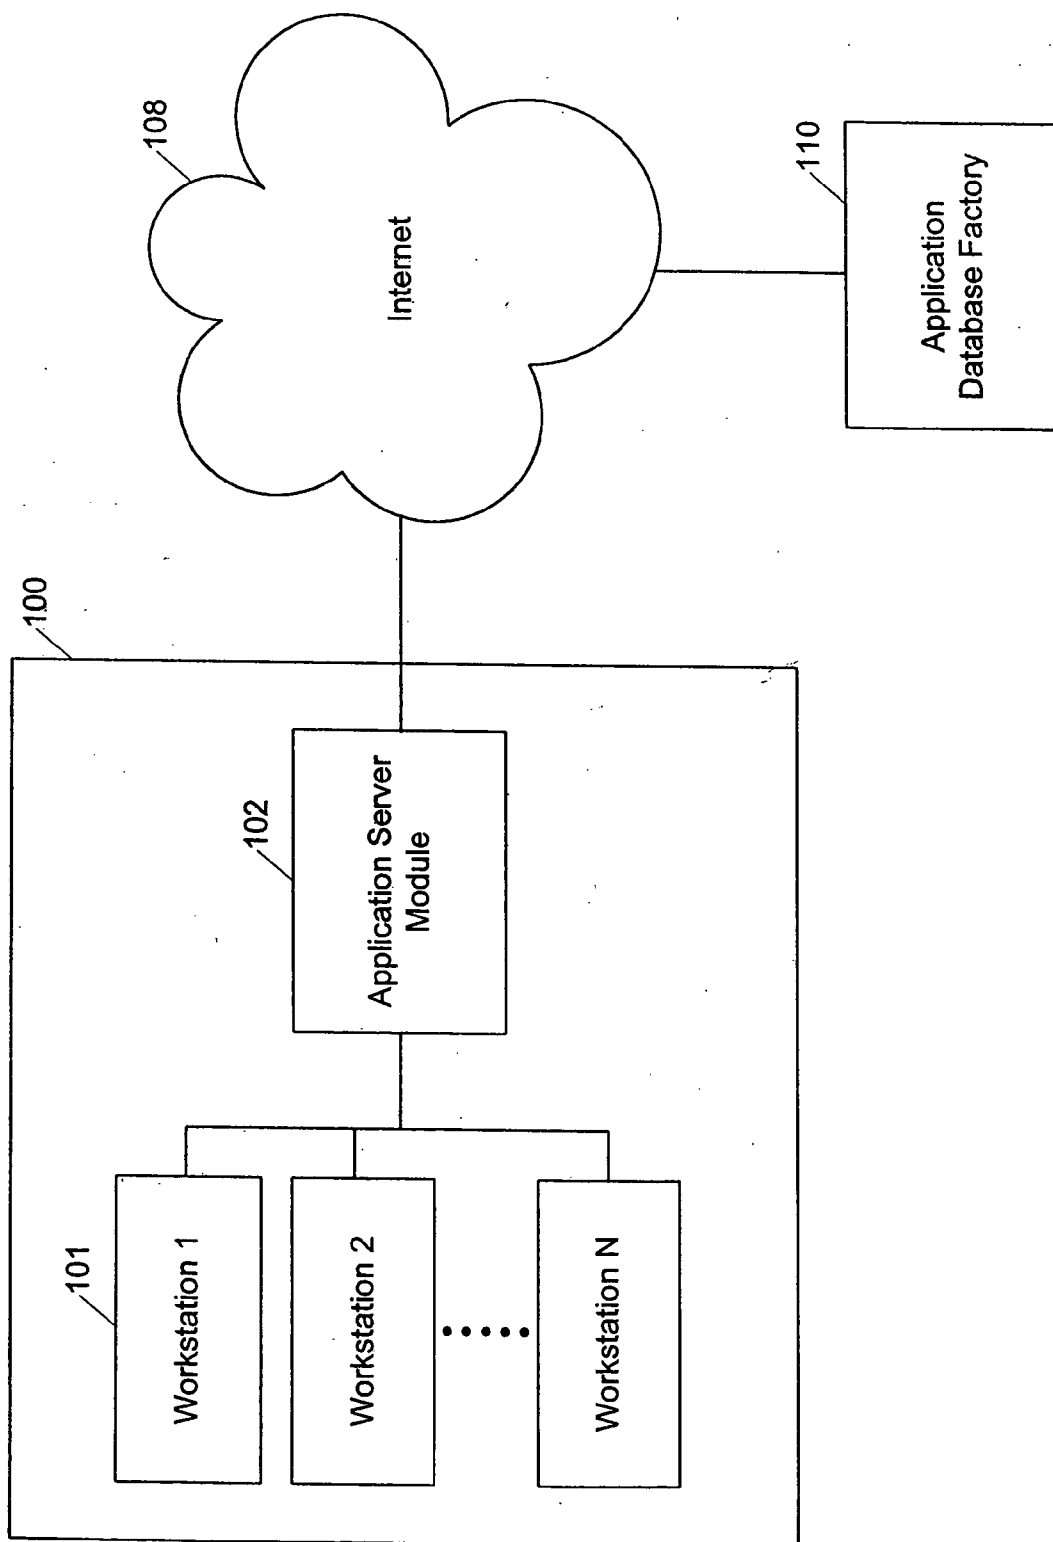


FIG. 1

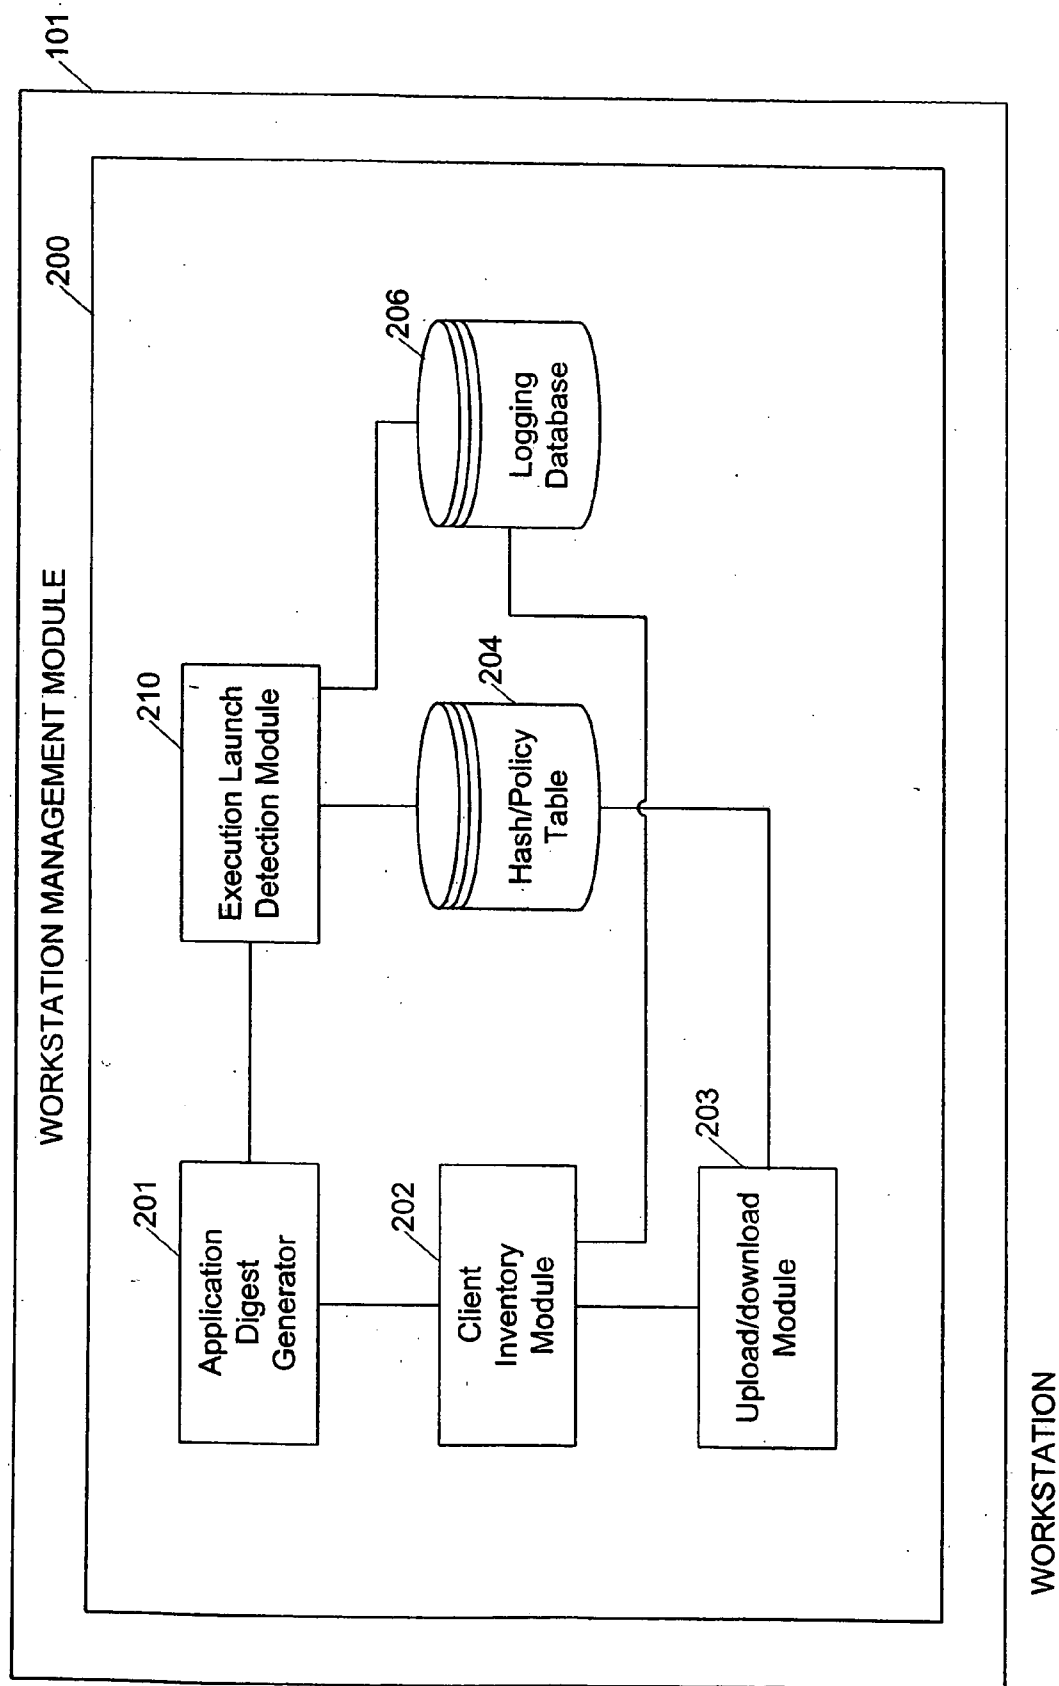


FIG. 2

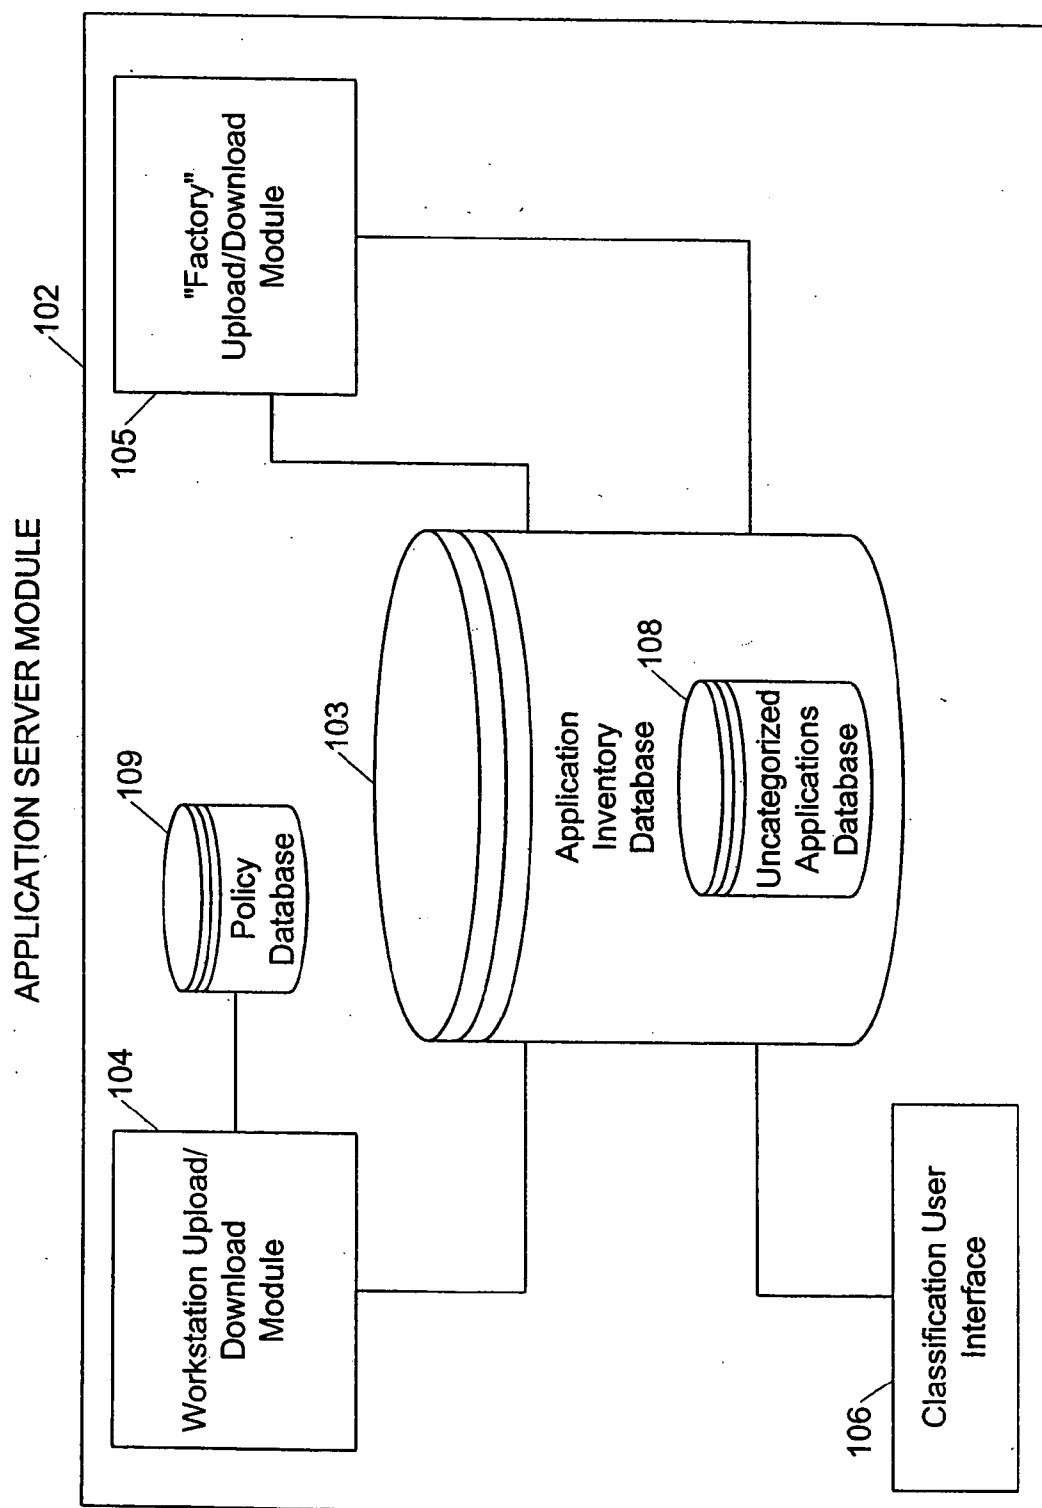


FIG. 3

Parent group	Category	Security VC	Liability VC	Productivity VC
System	Operating Systems			
	Device Drivers			
	File Management			
	Installers			
	Miscellaneous Utilities			
Access/Privacy	Anti-virus Software			
	Authentication			
	Encryption			
	Firewalls			
	Hacking	X	X	
	Remote Access			
	Spyware	X		
	System Audit			
Productivity	Contact Managers			
	CRM			
	Data Warehousing, Analytics, Reporting			
	Database			
	Document Viewers			
	ERP/SCM			
	Graphics			
	Infrastructure			
	Presentation			
	Project Managers			
	Proprietary			
	Reference			
	Search/Retrieval/Knowledge Management			
	Software Development			
	Spreadsheets			
	Suite/integrated			
	Web/Desktop Publishing			
	Word Processing			
Communication	Collaboration			
	Dedicated Browsers			X
	Email			
	Instant Messaging			
	P2P Filesharing		X	
	Telephony/Conference/Fax			
	Web Browsers			
Audio/Video	Media Players			X
	Imaging			X
Entertainment	Adult		X	
	Gambling		X	
	Games			X
Malware	Malicious Applets and Scripts	X		

FIG. 4

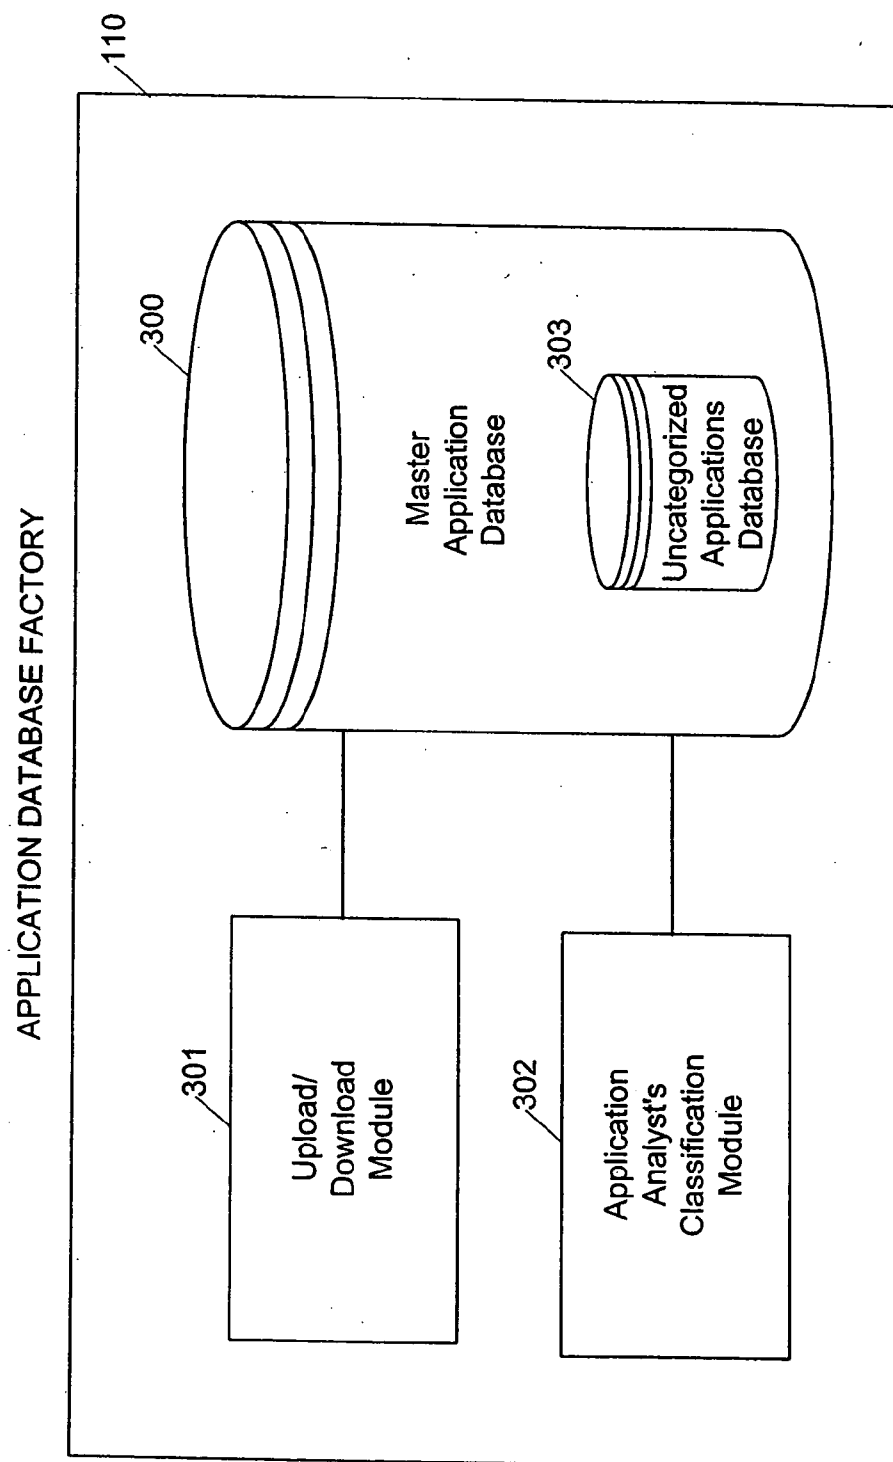
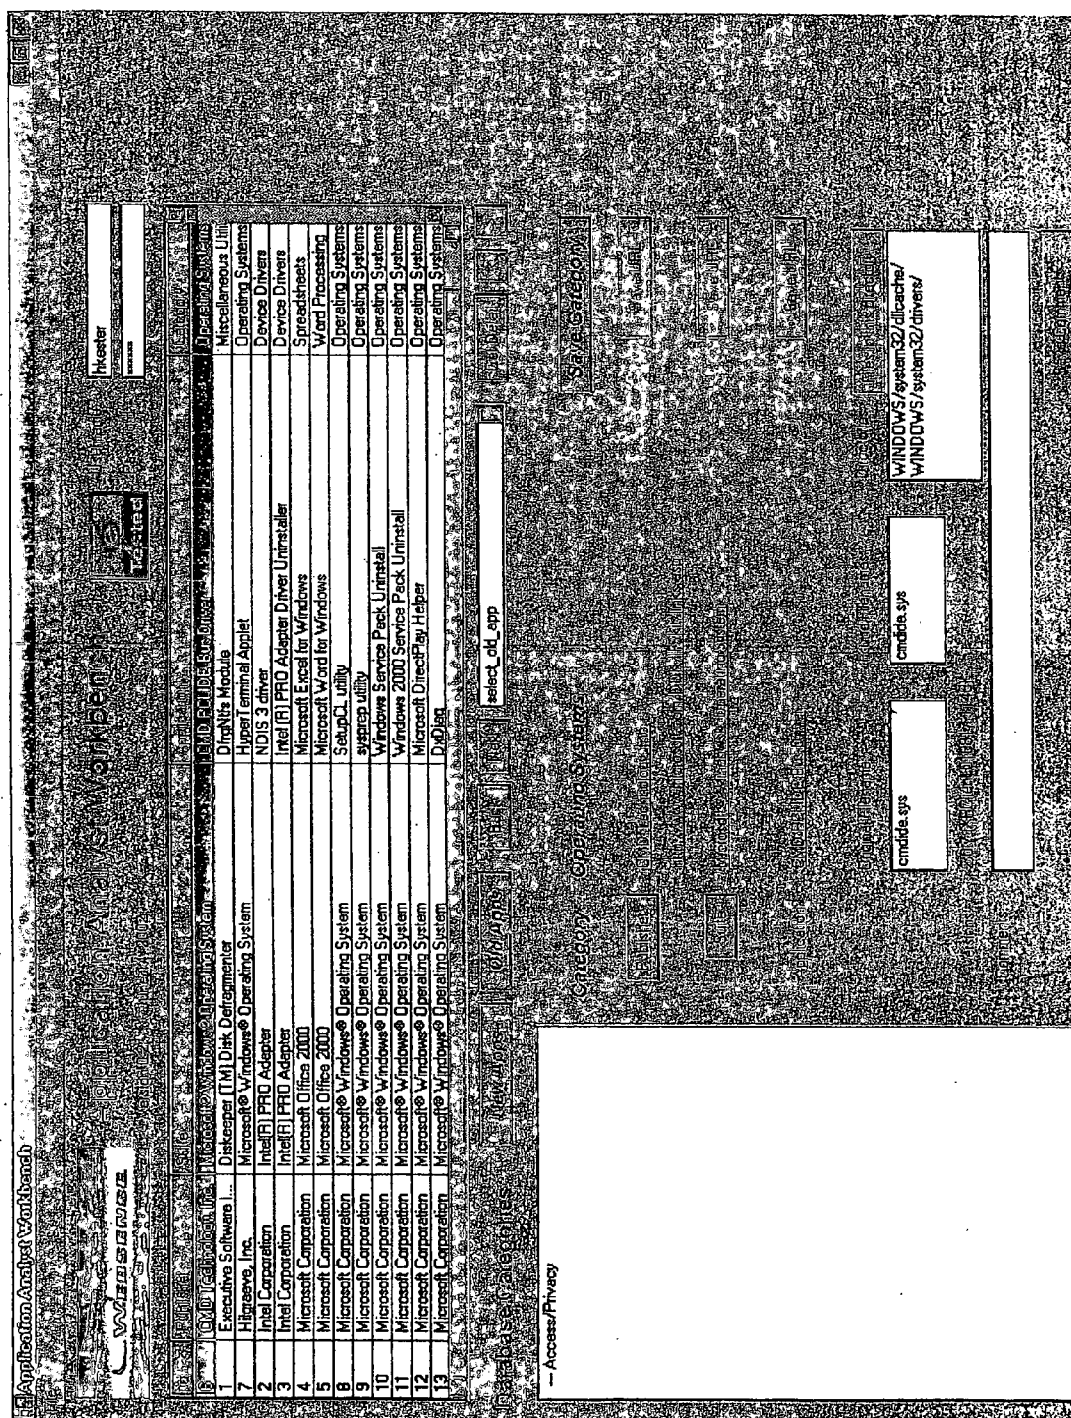


FIG. 5



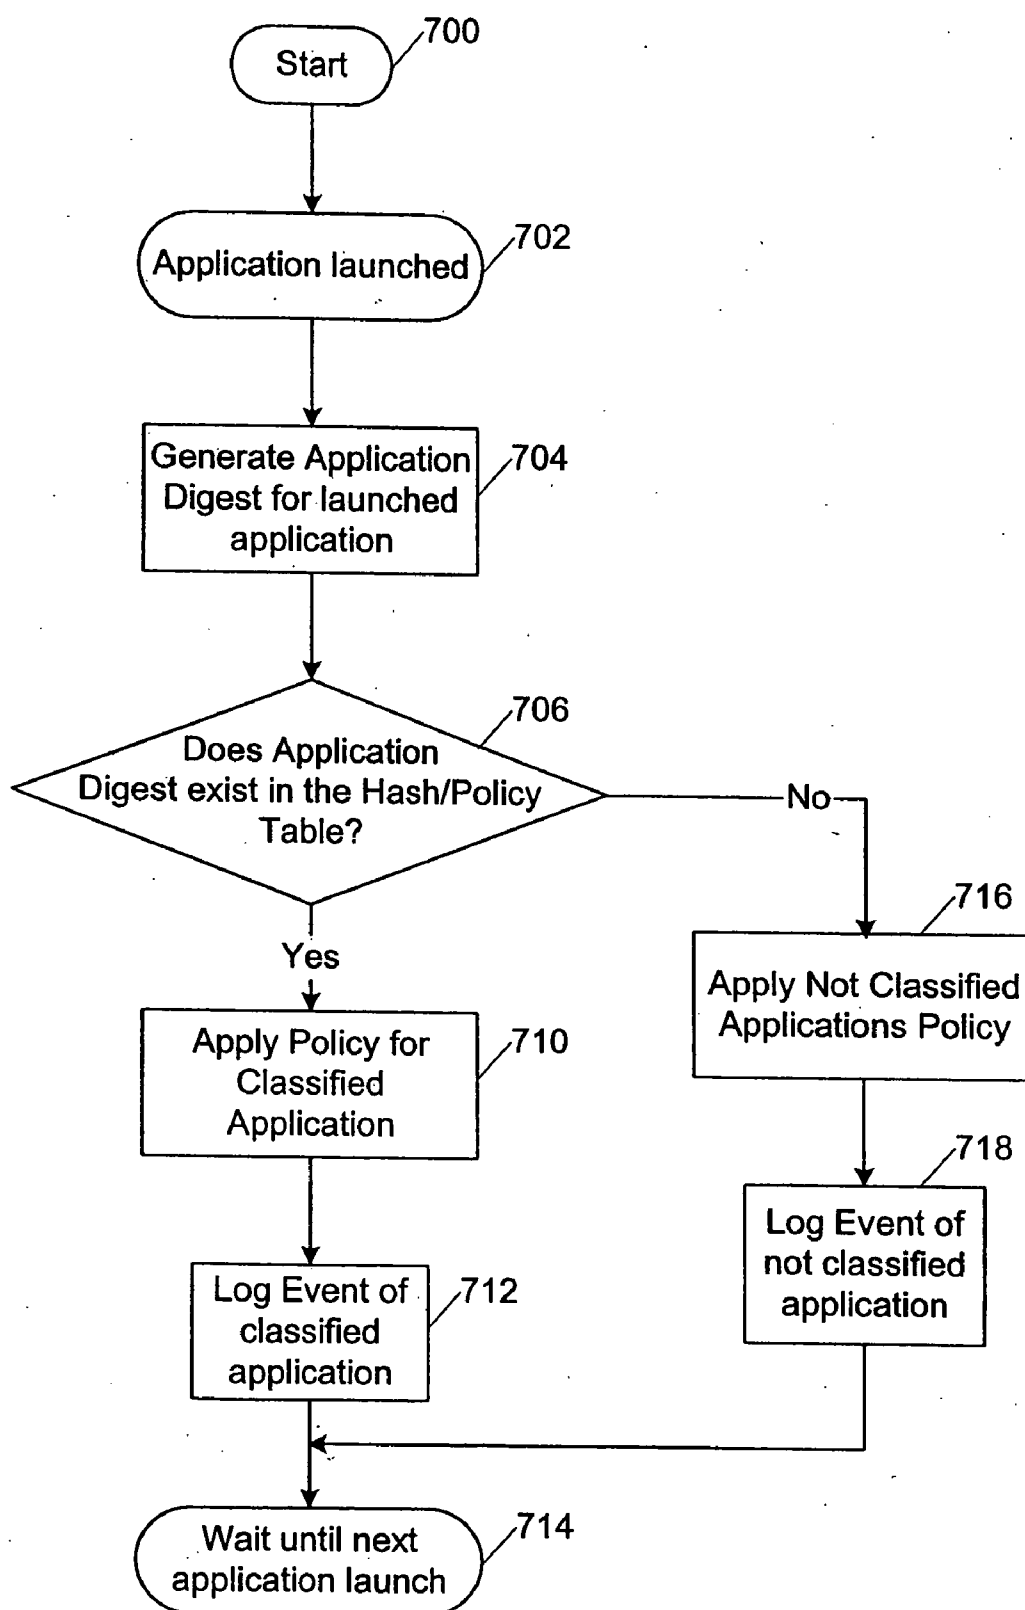


FIG. 7

FIG. 8

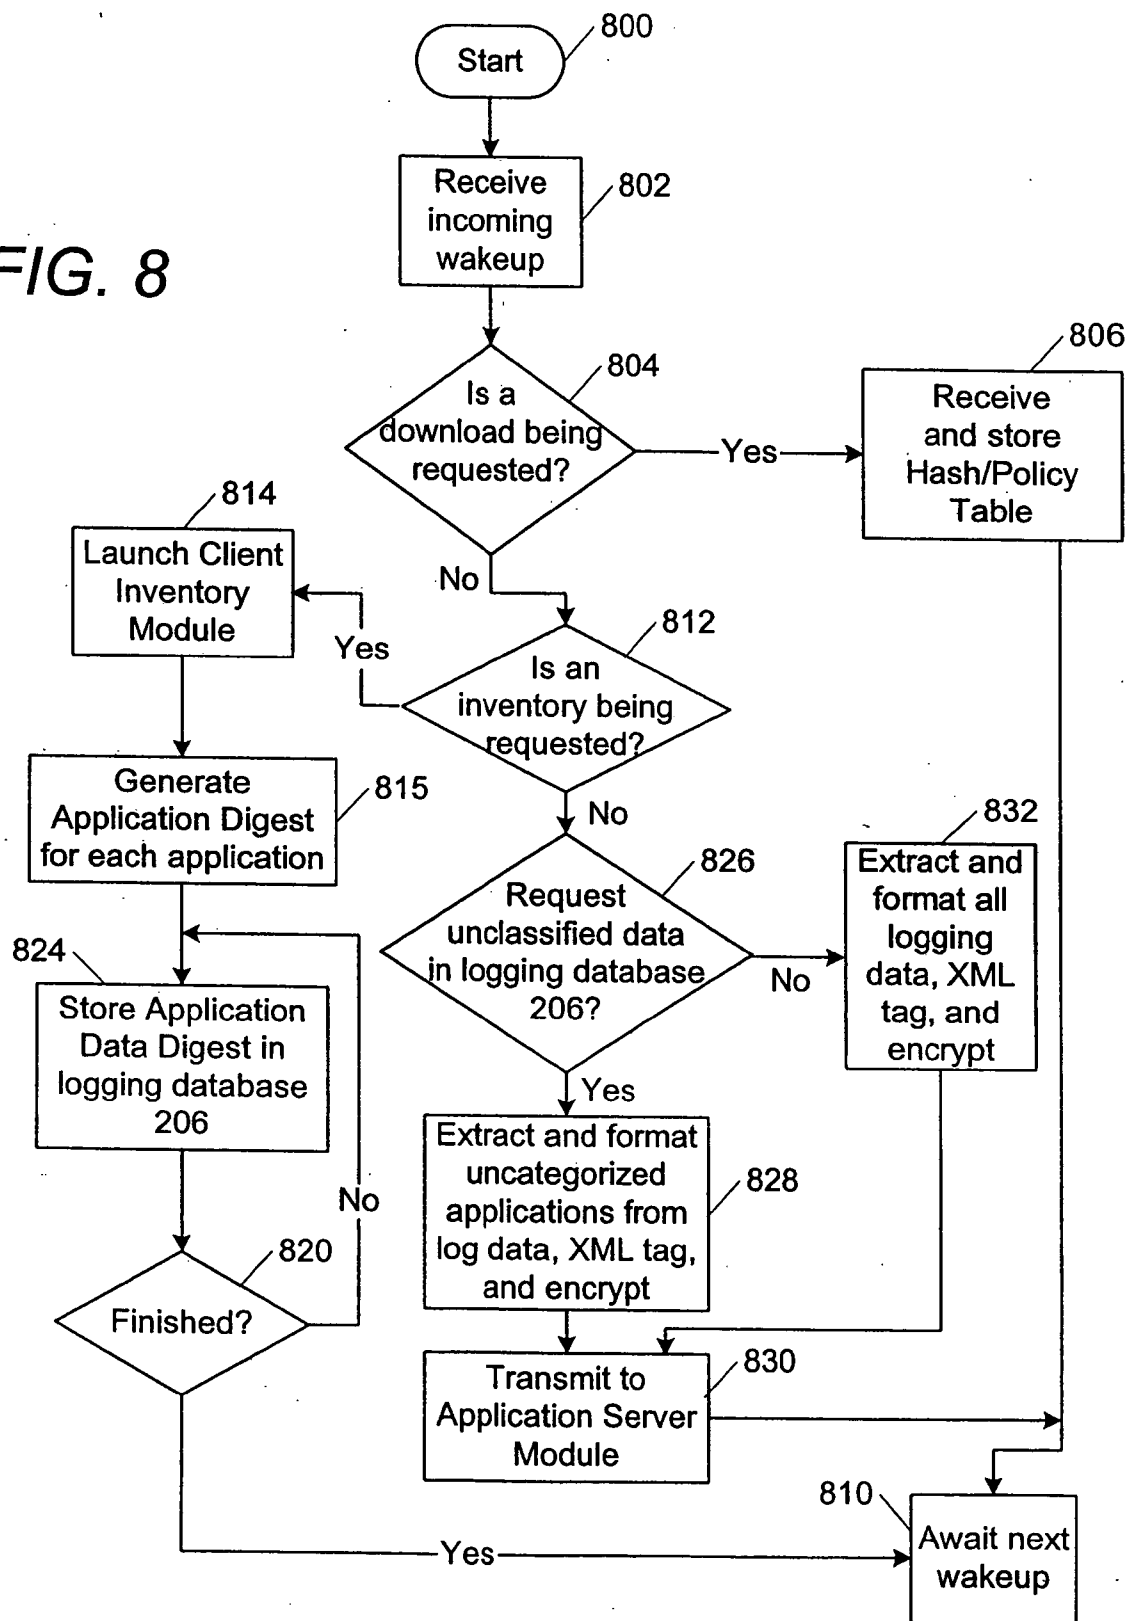
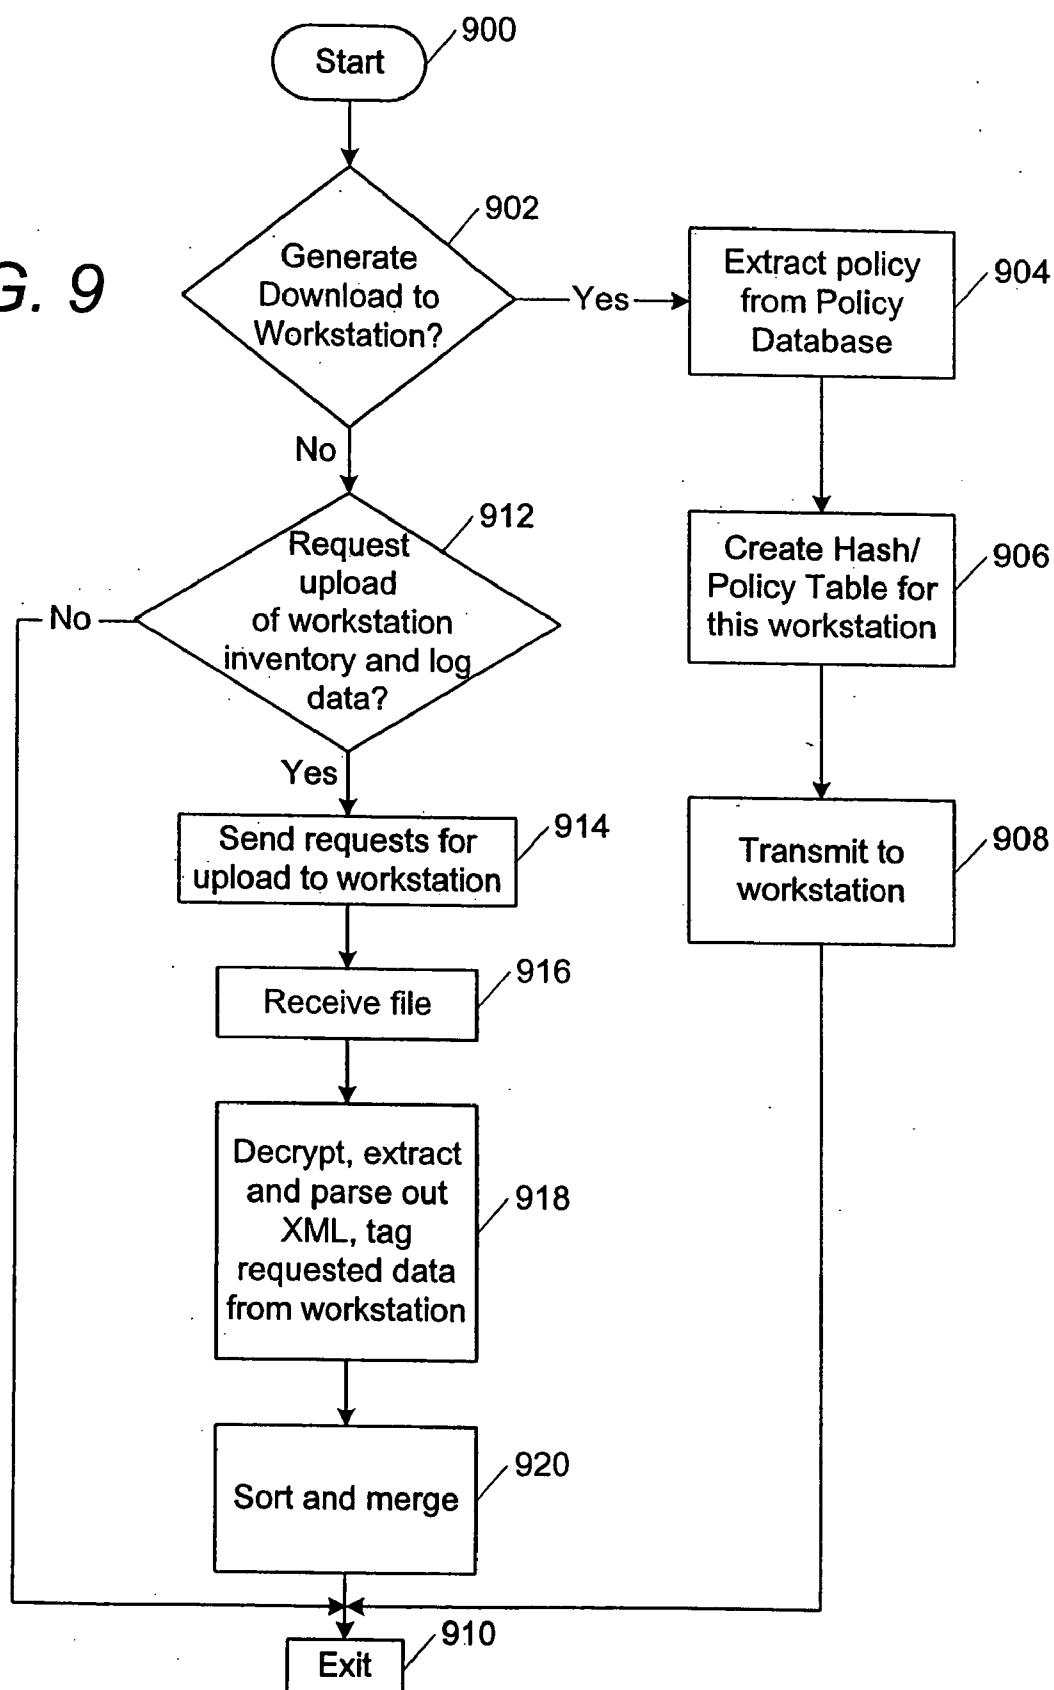


FIG. 9



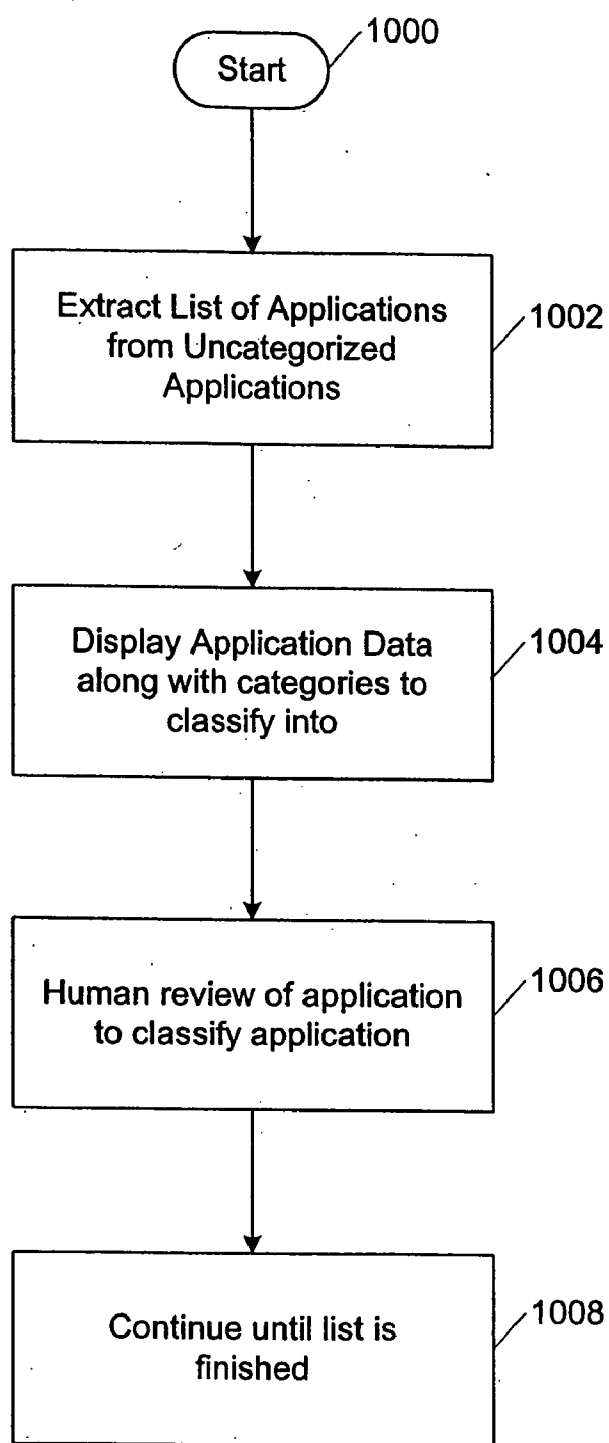
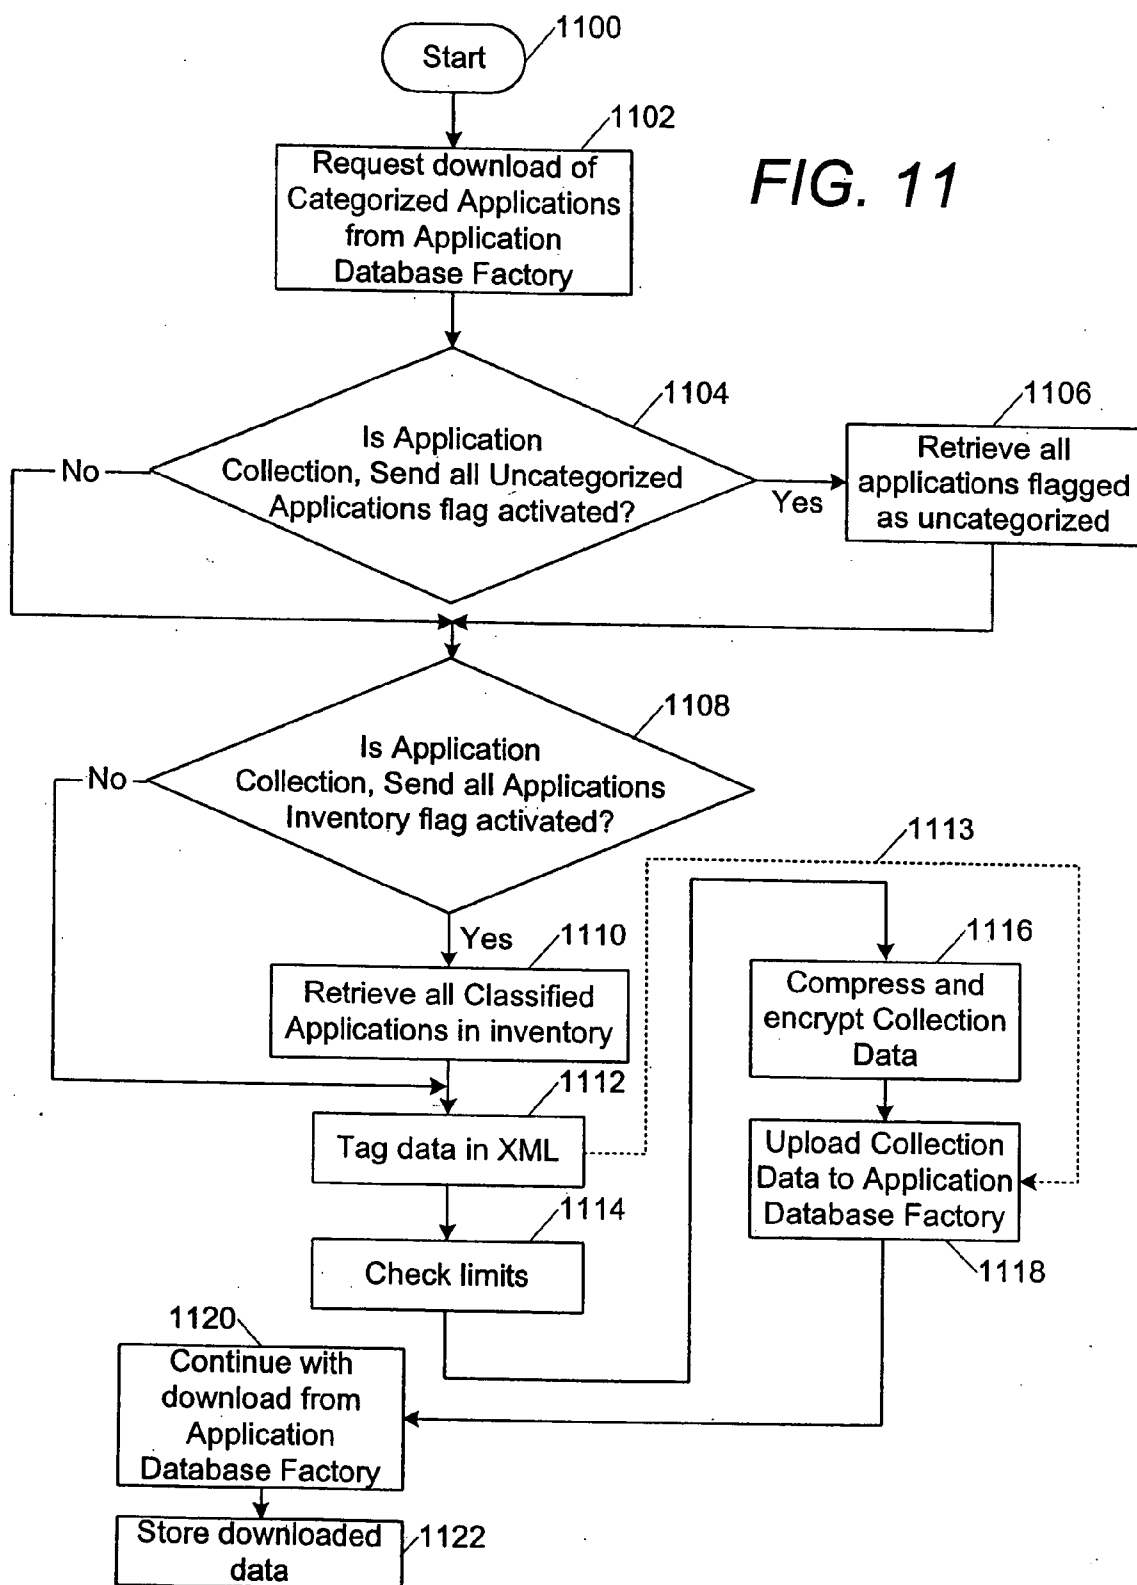
**FIG. 10**

FIG. 11



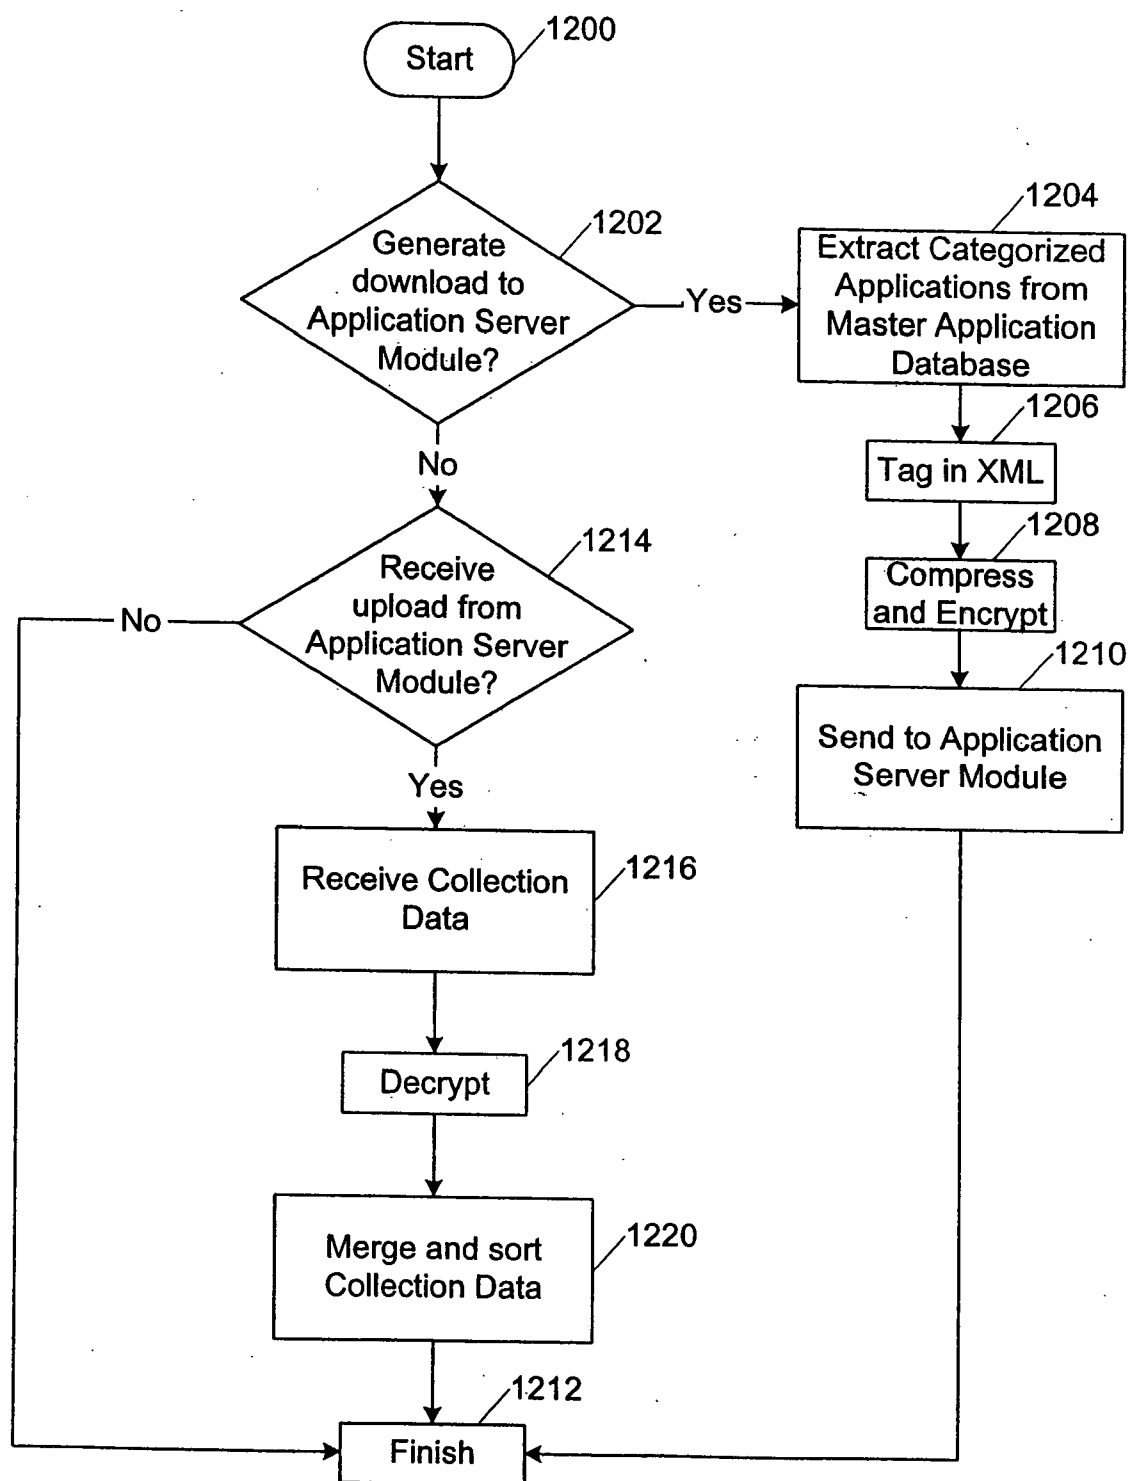
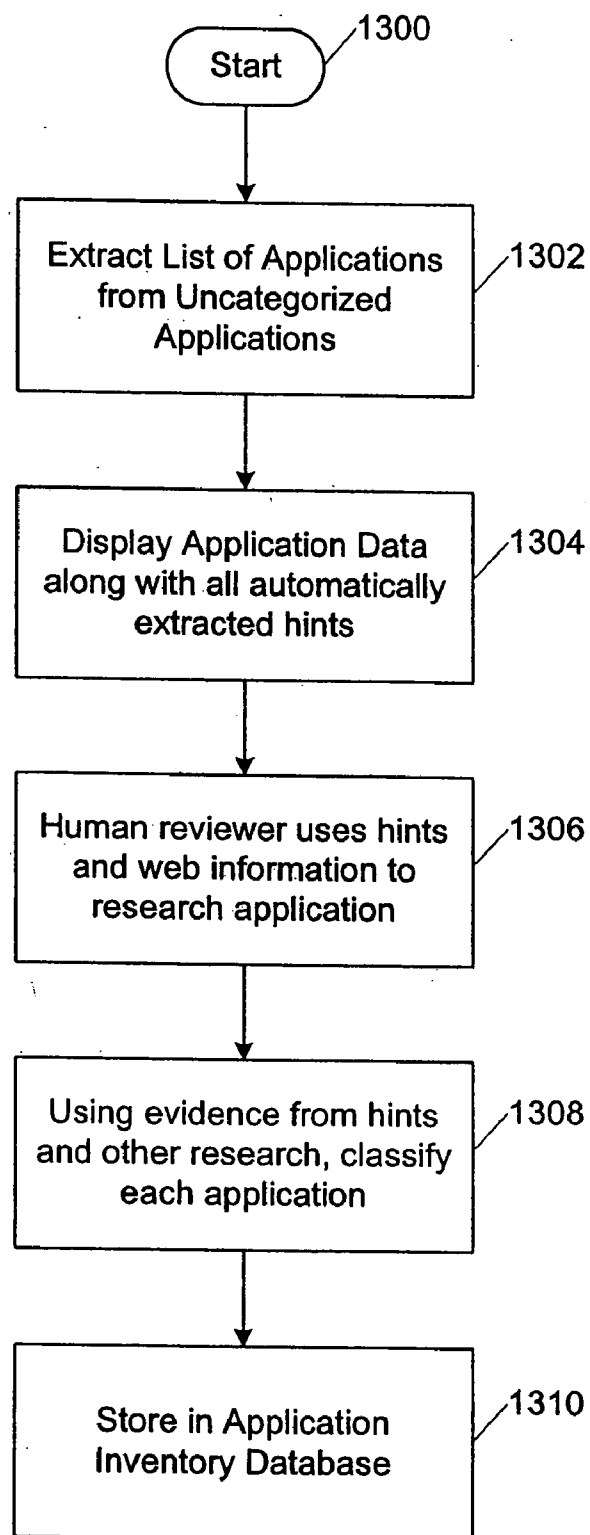


FIG. 12

**FIG. 13**

SYSTEM AND METHOD OF MONITORING AND CONTROLLING APPLICATION FILES

[0001] This application is a continuation of copending application Ser. No. 10/390,547, filed Mar. 14, 2003, and titled SYSTEM AND METHOD OF MONITORING AND CONTROLLING APPLICATION FILES, which is hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The invention is related to computing devices and, more particularly to monitoring and controlling application files operating thereon.

[0004] 2. Description of the Related Art

[0005] The Internet is a global system of computers that are linked together so that the various computers can communicate seamlessly with one another. Employees can access server computers to download and execute rogue programs and also operate peer-to-peer file sharing in the workplace, both of which pose new threats to an employer. For example, instant messaging (IM) can pose a security risk to an employer's company since many IM system allow file transfer among computers. Because the employees can activate IM themselves, the employer does not know who sees sensitive data transmitted between the computers. However, IM can be a productive tool, when used in accordance with company policy. In addition, streaming media is a growing concern because of its drain on network bandwidth. Finally, employees that have illegal or unlicensed software on their workstations can present undesirable liability risks to the company because the company can be held responsible for the employee's use of the illegal or unlicensed software.

[0006] Software is available to manage how employees access the Internet in the workplace, preserving employee productivity, conserving network bandwidth and storage costs, limiting legal liabilities and improving network security. However, with the growth of the new threats described above which extend beyond the Internet web browser, employers need new solutions to manage the broader intersection of employees with their computing environments.

SUMMARY OF THE INVENTION

[0007] The systems and methods of the invention have several features, no single one of which is solely responsible for its desirable attributes. Without limiting the scope of the invention as expressed by the claims which follow, its more prominent features will now be discussed briefly. After considering this discussion, and particularly after reading the section entitled "Detailed Description of the Invention" one will understand how the features of the system and methods provide several advantages over traditional filter systems.

[0008] One aspect is a system for collecting program data for use in updating a monitoring system which controls programs operating on a workstation. The system comprises a workstation having a database of categorized application programs along with one or more policies associated with each program, the workstation being configured for a user to request execution of a program. The system further comprises a workstation management module coupled to the

workstation and configured to detect the program requested by the user, determine whether the program is in the categorized application database, send the program and program data associated with the program to an application server module if the program is not in the categorized application database, and apply one or more policies that are associated with the program, wherein the one or more policies are received from the application server module. The system further comprises an application server module coupled to the workstation and configured to receive the program data from the workstation management module if the program was not in the categorized application database at the workstation management module, determine whether the program was previously categorized at the application server module, if the program was not previously categorized at the application server module, then send the program data to an application database factory. Alternatively, if the program was previously categorized at the application server module, then the system provides the one or more policies associated with one or more categories that were previously associated with the program to the workstation management module.

[0009] Another aspect of the invention is a method of updating a system which controls operation of programs on a workstation. The method comprises detecting a launch of an application on the workstation, generating an application digest for the launched application, determining whether the application is categorized, wherein a categorized application is associated with one or more policies, and if the application is categorized, then applying the one or more policies that are associated with the application. Alternatively, if the application is not categorized, then the method further comprises posting the application to a logging database, uploading the logging database to an application server module, and determining whether the application is in an application inventory database of categorized applications, wherein a categorized application is associated with one or more categories. If the application is not in the application inventory database of the application server module, then the method further comprises posting the application to an uncategorized application database. Alternatively, if the application is in the application inventory database, the method further comprises applying one or more policies associated with the application.

[0010] Still another aspect of the invention is a method of updating a system which controls operation of programs on a workstation. The method comprises detecting a launch of an application on the workstation, generating a hash value for the launched application, comparing the generated hash value to one or more hash values in a hash/policy table that includes one or more policies associated with the one or more hash values, and if the generated hash value matches one or more of the hash values in the hash/policy table, then applying the one or more policies that are associated with the one or more hash values. Alternatively, if the generated hash value does not match one or more hash values in the hash/policy table, then the method comprises posting the application to a logging database, uploading the logging database to an application server module, and determining whether the application from the logging database is in an application inventory database. If the application is not in the application inventory database, then the method comprises posting the application to an uncategorized application database.

[0011] Yet another aspect of the invention is a method of collecting collection data for use in updating a system which controls execution of programs on a workstation. The method comprises launching a program at the workstation, determining whether the program is stored in a table, and if the program is stored, applying a first rule that is associated with the program. Alternatively, if the program is not stored, the method further comprises posting the program to a database.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is a block diagram of a site collection system for controlling application files on a workstation.

[0013] FIG. 2 is a block diagram of a work station management module.

[0014] FIG. 3 is a block diagram of an application server module.

[0015] FIG. 4 is an illustration of a database of parent groups and categories that can be associated with an application file.

[0016] FIG. 5 is a block diagram of an application database factory.

[0017] FIG. 6 is an illustration of a screen shot of one embodiment of a graphical user interface (GUI) for an application analyst's classification module.

[0018] FIG. 7 is a flow diagram illustrating a process for monitoring and controlling the launch of an application on the workstation.

[0019] FIG. 8 is a flow diagram illustrating a process performed by the workstation for uploading and downloading collection data with the application server module.

[0020] FIG. 9 is a flow diagram illustrating a process performed by the application server module for uploading and downloading collection data with the workstation.

[0021] FIG. 10 is a flow diagram illustrating a process for classifying an uncategorized application at the application server module.

[0022] FIG. 11 is a flow diagram illustrating a process for uploading application data from the application server module to the application database factory.

[0023] FIG. 12 is a flow diagram illustrating a process for downloading application data from the application database factory to the application server module.

[0024] FIG. 13 is a flow diagram illustrating a process for classifying an uncategorized application at the application database factory.

DETAILED DESCRIPTION OF THE INVENTION

[0025] The following detailed description is directed to certain specific embodiments of the invention. However, the invention can be embodied in a multitude of different systems and methods. In this description, reference is made to the drawings wherein like parts are designated with like numerals throughout.

[0026] In connection with the following description, many of the components of the various systems which may be

included in the entire system, some of which are referred to as modules, can be implemented as software, firmware or a hardware component, such as a field programmable gate array (FPGA) or application specific integrated circuit (ASIC), which performs certain tasks. Such components or modules may be advantageously configured to reside on the addressable storage medium and configured to execute on one or more processors. Thus, a module may include, by way of example, components such as software components, object oriented software components, class components and task components, processes, functions, attributes, procedures, subroutines, segments of program code, drivers, firmware, microcode, circuitry, data, databases, data structures, tables, arrays and variables. The functionality provided for in the components and modules may be combined into fewer components and modules or further separated into additional components and modules. Additionally, the components and modules may advantageously be implemented to execute on one or more computers.

[0027] FIG. 1 is a block diagram of a local area network (LAN) 100 coupled to an Internet 108 and an application database factory 110, which is also coupled to the Internet 108. For ease of explanation, only a single LAN is shown, though two or numerous such networks would more typically be included. Similarly, two or more application database factories could also be deployed.

[0028] The LAN 100 includes one or more workstations 101 coupled to an application server module 102. The application server module 102 communicates via the Internet 108 in order to upload and download applications and application related data with the application database factory 110. The LAN 100 can have an Ethernet 10-base T topology, or be based on any networking protocol, including wireless networks, token ring network and the like.

[0029] The workstation 101 is coupled to the application server module 102. The workstation 101 can be a personal computer operating, for example, under the Microsoft Windows operating system, however, other computers, such as those manufactured by Apple or other systems, can be used.

[0030] The application server module 102 couples the LAN 100 with the Internet 108. The application server module 102 communicates with the Internet 108 via connection devices, such as routers or other data packet switching technology, for translating Internet TCP/IP protocols into the proper protocols for communicating with the Internet 108. The connection devices used to implement a given system can vary as well as its location within the LAN 100. For example, the connection devices could be located at the workstation(s) 101 or connected peripherally to the Internet 108. An exemplary connection device includes a firewall module (not shown) coupled to a router module (not shown).

[0031] FIG. 2 is a block diagram of the workstation management module 101 from FIG. 1. The workstation management module 101 can detect the launch of an application on the workstation 101 and determine an access privilege for the workstation 101 and/or user. For example, an access privilege can include allowing the launched application to run on the workstation 101. Access privileges can be in the form of one or more policies or rules. To determine the access privilege for the workstation 101 and/or user, the workstation management module 101 can utilize a predetermined association between the launched application and

one or more categories. The one or more categories can be further associated with the policies or rules for the workstation **101** and/or user.

[0032] The workstation management module can include an application digest generator **201**, a client inventory module **202**, an upload/download module **203**, a hash/policy table **204**, a logging database **206**, and an execution launch detection module **210**.

[0033] When a program on a computer or workstation is launched, the execution launch detection module **210** detects the launch and directs the application digest generator **201** to analyze data related to the requested application. As part of its analysis, the execution launch detection module **210** can generate a hash for the application using the application digest generator **201**. The application digest generator **201** parses properties from the requested application. Examples of such properties include the name, publisher, suite, hash, file size, version, and additional information or properties which are associated with the launched application.

[0034] The hash for the launched application is determined by transforming the binary associated with the launched application into a unique set of bits. A hash function, which is a form of encryption known in the art, is employed in determining the hash for the launched application. In this way, the hash function takes selected binary input from the application and transforms the binary into a fixed-length encrypted output called a hash. The result is a hash with a fixed-size set of bits that serves as a unique "digital fingerprint" for the launched application. Two exemplary hash algorithms include MD-5 and Secure Hash Algorithm-1 (SHA-1). The MD-5 hash algorithm produces a 128-bit output hash. The SHA-1 algorithm produces a 160-bit output hash.

[0035] The parsed properties and/or application associated with the parsed properties are provided to the execution launch detection module **210**. The execution launch detection module **210** analyzes the application request from the workstation **101** and then compares the application request with the hash/policy table **204**. The hash/policy table **204** includes one or more predetermined parsed properties and one or more policies associated therewith. As will be explained with reference to FIG. 3, the application server module **102** provides the hash/policy table **204** to the workstation management module **200**.

[0036] The hash/policy table **204**, which is received from the application server module **102**, can include a list of application names, publishers, suites, hashes, categories, and rules or policies associated therewith. In one embodiment, the one or more parsed properties in the hash/policy table **204** include a list of hash values. Continuing with this embodiment, the hash/policy table **204** further includes a list of policies that are associated with the hash values in the list. In addition to hash values and policies in this embodiment, the hash/policy table **204** could further include a list of categories that are associated with the hash values and/or policies. Moreover, in another embodiment, the hash/policy table **204** does not include hash values. Instead, the hash/policy table **204** includes the names/publishers/suites or other properties which identify the applications in the hash/policy table **204**.

[0037] Once the application that is being requested to run on the workstation is identified, the policy from the hash/

policy table **204** which corresponds to that application is also identified. The execution launch detection module **210** compares the properties of the application to the properties in the hash/policy table **204** to determine what access privileges or policies should be applied to the request to run the application. These policies or rules can include, for example, allowing the execution of the program, denying execution of the program, alerting the user that the request to run the application will be logged, and allowing the user a specific amount of time in which to run the application.

[0038] In addition to the policies and rules listed above, the workstation management module **200** can employ other actions, cumulatively referred to as selectable filters, in response to a request to run the application. Examples of selectable filters include postponing the running of the application, allowing the user to override denial to run the application, limiting the user's access to the application based on a quota, and limiting the user's access to the application based on a network load. Each requested application can be associated with one or more policies or rules.

[0039] In one embodiment, the execution launch module **210** checks to see if the generated hash matches any hashes stored in the hash/policy table **204**. If a match between the requested application and a hash in the hash/policy table **204** is found, the execution launch detection module **210** applies the policy(s)/rule(s) associated with the hash that matches the requested application and/or the user requesting the application. For example, if application of the rule by the execution launch detection module **210** indicates that the requested application is not allowed to run on the workstation **101** or to be run by the user, a predefined block page can be sent to the user interface explaining that the requested application is not allowed to run and why. Alternatively, the execution launch detection module **210** simply stops the requested application from running on the workstation **101**.

[0040] If the execution launch detection module **210** does not find the application hash in the hash/policy table **204** (for example, the application is uncategorized), the execution launch detection module **210** then determines how to proceed with the uncategorized application. For example, running of the application could be allowed when the execution launch detection module **210** determines that the application requested is uncategorized. Alternatively, the execution launch detection module **210** can stop execution of the requested application depending on policy for this user at this workstation.

[0041] The one or more policies identified for the requested application is applied in response to the request to run the application. In this way, the execution launch detection module **210** filters each request to run an application using the parsed properties, the hash/policy table **204**, and the policies/rules from the hash/policy table. A policy can be provided and utilized even if the application is not found in the hash/policy table **204**.

[0042] If the requested application is found in the hash/policy table **204**, the event is logged in the logging database **206**. Information that is logged in the logging database **206** can include, for example, the application name, time of day, and the hash associated with the application. The logging database **206** can also include additional data associated with the application requested. For example, a request frequency or a time of execution for the application requested can be included in the logging database **206**.

[0043] If the hash of the uncategorized application is not represented in the logging database 206, the execution launch detection module 210 can store the application name, hash, and information parsed by the application digest generator 201 in the logging database 206. In this way, the logging database 206 can include additional information associated with the requested application. For example, the publisher, suite, file size, hash, and directory location can be included in the logging database 206.

[0044] Still referring to FIG. 2, in one embodiment, the client inventory module 202 is configured to inventory the applications on the workstation 101. To that end, the client inventory module 202 can access the hash/policy table 204 to determine whether the applications on the workstation 101 are classified and/or uncategorized. The client inventory module 202 can be configured to perform the inventory of the workstation 101 on a periodic basis. For example, the client inventory module 202 can inventory the applications on the workstation 101 once a day or on any other interval selected. Advantageously, the client inventory module 202 can perform the inventory during non-working hours. The inventory can be determined when the workstation 101 is powered up by the user or powered down by the user. Depending on the configuration of the LAN 100, a network administrator can instruct the client inventory module 202 to perform the inventory. In addition, the inventory can be performed in response to polling by the application server module 102 (see FIG. 1).

[0045] Still referring to FIG. 2, the upload/download module 203 can transmit data to and receive data from the application server module 102 (see FIG. 1). For example, the upload/download module 203 can transmit data from the logging database 206 to the application server module 102. In an embodiment where the client inventory module 202 performs an inventory of the applications on the workstation 101, the results of the inventory can be uploaded to the application server module 102 by the upload/download module 203.

[0046] The upload performed by the upload/download module 203 can be immediate or periodic depending on the desires of the network administrator. For example, a daily upload after normal business hours could be used. The upload/download module 203 can compute the request frequency from scanning the logging database 206, to prioritize the applications in the logging database 206 for their transmission to the application server module 102. In another embodiment, a frequency count database (not shown) is updated for each entry in the logging database 206. The frequency count database maintains the request frequency for each entry in the logging database 206. In this embodiment, the upload/download module 203 accesses the frequency count database to prioritize the applications.

[0047] If data from the logging database 206 is to be uploaded to the application server module 102, the upload/download module 203 can refer to a request frequency for applications found from scanning the logging database 206. The request frequency can be used to prioritize the applications in the logging database 206 for their transmission to the application server module 102.

[0048] FIG. 3 is a block diagram of an application server module 102 which communicates with the workstation management module 200 (FIG. 2) to upload and download

a list of applications comprising properties of applications as well as policies associated with the applications once categorized. For example, parsed properties from requested applications can be uploaded to the application server module 102 while a list of hash values and policies associated therewith are downloaded to the workstation management module 200. In addition, the category associated with the application can be transmitted to the workstation management module 200. If the category associated with the application is available to the workstation management module 200, the workstation management module can select the access privilege for the workstation and/or user that corresponds to the one or more categories associated with the application. When more than one category is associated with the application and the categories have different policies associated thereto, one or both rules/policies can be used for the access privilege.

[0049] The application server module 102 can include an application inventory database 103, a workstation upload/download module 104, a factory upload/download module 105, a classification user interface 106, and a policy database 109. The application inventory database 103 can further include an uncategorized application database 108. Alternatively, the uncategorized application database 108 can be a separate database from the application inventory database 103.

[0050] The network administrator, or the like, interfaces with the application server module 102 via the classification user interface 106. The network administrator can classify uncategorized applications from the application inventory database 103 via the classification user interface 106. The network administrator can further interface through the classification user interface 106 to select or create access privileges/policies/rules for users, workstation, and/or groups of users/workstations. These rules are stored in the policy database 109. These rules can include, for example, allowing applications associated with selected categories to execute on a given workstation 101. Rules can also include selectable filters. For example, rather than simply not allowing the application to execute, the network administrator may select or create a selectable filter which is applied when the application is requested. The rules are provided to the workstation management module 200 via the workstation upload/download module 104. In this way, the execution launch detection module 210 (see FIG. 2) applies the rule that is associated with the category of the requested application.

[0051] One function of the workstation upload/download module 104 is to receive identifiers for the application names and any additional data or parsed properties which are associated with the application names from the workstation management module 200. For example, the identifier for an application name could be a hash value or the name of the application itself. In one embodiment, the application names include names from the logging database 206. The additional data can also include a request frequency for an application found in the logging database 206, the request frequency for an application found in the logging database 206, a trace ID, and a primary language used by the workstation management module 200. For ease of explanation, the term "collection data" will be used to include applications and any additional data associated with the application. Additionally, the workstation upload/download

module **104** downloads all or portions of the application inventory database **103** to the workstation management module **200** as will be described more fully below.

[0052] The workstation upload/download module **104** receives the collection data from the upload/download module **203** (see FIG. 2) and processes the collection data. Processing can include merging and sorting the collection data from multiple workstation management modules. The workstation upload/download module **104** determines whether each application in the collection data requires categorization. If an application has not been previously categorized, the collection data associated with that application is stored in the uncategorized application database **108**. The network administrator can receive the collection data (for example, application information and any additional data associated with the application) from the uncategorized application database **108**. The network administrator, via the classification user interface **106**, is then able to categorize the uncategorized application and/or associate a policy with the category or application. Once categorized, the application is stored in the application inventory database **103**. As will be described below, if the network administrator does not classify the application, the application database factory **110** can classify the collection data.

[0053] Once the application has been classified or categorized by the network administrator, the application and the associated category are posted to the application inventory database **103**. The workstation upload/download module **104** thereafter routinely copies the application inventory database **103** or a portion thereof to the workstation management module **200** (see FIG. 2). For example, data from the application inventory database **103** can be copied to the hash/policy table **204**. The policies in the policy database **109** can be incorporated into the downloaded data from the application inventory database **103** or downloaded separately from the application inventory database **103**. As can be imagined, the system can include thousands of workstation management modules **200**, each of which is updated regularly by the workstation upload/download module **104** to provide updated data to the hash/policy table **204**. In some embodiments, the workstation upload/download module **104** transfers portions of the application inventory database **103**. For example, the workstation management module **200** can receive updates so that the entire database need not be transmitted. In other embodiments, the workstation management module **104** receives a subset of the data from the application inventory database **103**. For example, the selected data could be the hash values. The policies from the policy database **109** could then be incorporated with the hash values and downloaded to the workstation management module **104**. A flowchart of the process performed by the application server module **102** is shown in, and will be described with reference to, FIG. 9.

[0054] Still with reference to FIG. 3, the factory upload/download module **105** is configured to transmit data from the application inventory database **103** to the application database factory **110**. The upload could be immediate or periodic depending on the level of service required by the network administrator. For example, a daily upload after normal business hours could be used. The factory upload/download module **105** can refer to the request frequency to prioritize the applications in the application inventory database **103** for their transmission to the application database

factory **110**. The factory upload/download module **105** can refer to the uncategorized application database **108** to select collection data for uploading to the application database factory **110**. If data from the uncategorized application database **108** is to be uploaded to the application database factory **110**, the factory upload/download module **105** can refer to a request frequency to select applications from the uncategorized application database **108** for uploading to the application database factory **110**. In this way, the request frequency can be used to prioritize the applications in the uncategorized application database **108** for their transmission to the application database factory **110**.

[0055] The factory upload/download module **105** can further upload applications that have been classified by the network administrator. As described above, the network administration can classify or categorize applications via the classification user interface **106**. In this way, the application database factory **110** receives the newly classified applications from the application server module **102**. As can be imagined, the application database factory **110** can receive applications and associated categories from thousands of application server modules **102**.

[0056] The workstation upload/download module **104** can receive an inventory taken by the client inventory module **202** from the upload/download module **203** (see FIG. 2). Once uploaded to the application server module **102**, the network administrator can review one or more inventories to determine what applications are being used by each workstation **101**. The inventory can include categorized as well as uncategorized applications. Depending on the configuration of the LAN **100**, the network administrator can review the one or more inventories at the workstation management module **200** (see FIG. 2).

[0057] FIG. 4 is an illustration of one embodiment of a database of parent groups and categories that are associated with the applications. In the illustrated embodiment, one or more of the categories listed in the database are further associated with risk classes. Examples of risk classes include security, liability, and productivity. The risk classes can be useful to the network administrator when associating rules/policies with each application. Moreover, in some embodiments each rule/policy is associated with the applications based on the risk class that is associated with each category.

[0058] Still referring to FIG. 4, exemplary categories of applications include operating systems, anti-virus software, contact managers, collaboration, media players, adult, and malicious applets and scripts. The categories can be further grouped into parent groups. For example, parent groups might include system, access/privacy, productivity, communication, audio/video, entertainment, and malware. For each one of the parent groups and/or categories, the network administrator can select an individual policy or rule to associate therewith. Thus, once the requested application is categorized, the application server module **102** can select the policy or rule that is associated with that category.

[0059] FIG. 5 is a block diagram of the application database factory **110** connected to the Internet **108**. The application database factory can be implemented as one or more computers or servers with related data storage. The application database factory **110** provides the application inventory database to the application server module **102** and

processes data that is associated with uncategorized applications and other information. For example, frequency usage from the application inventory database 103 can be processed. In one embodiment, the application database factory 110 receives uncategorized applications and any additional data associated with the application from the application server module 102 and downloads categorized applications to the application server module. The application database factory 110 can also upload the request frequency for the applications.

[0060] The application database factory 110 can include an upload/download module 301, a master application database 300, and an application analyst's classification module 302. The master application database 300 can further include an uncategorized applications database 303.

[0061] One function of the upload/download module 301 is to receive collection data (for example, applications and any additional data associated with the application) from the application server module 102. In one embodiment, the collection data includes applications from the uncategorized application database 108 and applications from the application inventory database 103. The collection data can include a request frequency for an application found in the application inventory database 103 (see FIG. 3), a request frequency for an application found in the uncategorized application database 108, a trace ID, and a primary language used by the application server module 102.

[0062] The upload/download module 301 receives the collection data from the factory upload/download module 105. The upload/download module 301 processes the collection data. Processing can include merging, sorting, and determining a language for the collection data from multiple application server modules 102. The upload/download module 301 determines whether each application in the collection data requires categorization. If the application has not been previously categorized, the application analyst's classification module 302 receives the application and any additional data associated with the application from the upload/download module 301.

[0063] The application analyst classification module 302 is coupled to the master application database 300. The application analyst classification module 302 is configured to manipulate and manage data from the master application database 300. The application analyst classification module 302 receives applications and their associated data from the master application database 300. The associated data can include, for example, a publisher and suite that correspond to the application.

[0064] The application analyst's classification module 302 classifies or categorizes applications which are then added to the master application database 300 of categorized applications. A human reviewer interacts with the application analyst's classification module 302 to perform the categorization or recategorization. The process for classifying or categorizing applications at the application database factory is described with reference to FIG. 13.

[0065] For a human reviewer, a set of PC-based software tools can enable the human reviewer to manipulate, scrutinize, and otherwise manage the applications from the master application database 300. The human reviewer can interact with the application analyst classification module 302 via a

graphical user interface (GUI). In this way, the GUI provides a graphical interface tool for the human reviewer to manipulate and manage the master application database 300. The GUI includes a representation of the application ID and the related textual information. The GUI can include buttons preloaded with algorithmically derived hints to enhance productivity of the human reviewer. These identities can be selected based on, for example, the URL that is identified as the source of the application. An exemplary GUI will be described below with reference to FIG. 6.

[0066] The application analyst's classification module 302 is configured to select applications and their associated data from the master application database 300. The application analyst classification module 302 can apply rules to select a subset of applications from the master application database 300. These rules can be dependent upon, for example, categories, languages, suites, dates, and source directories. The application analyst classification module 302 can use SQL queries, in conjunction with the rules, to select the subset for categorization or recategorization from the master application database 300.

[0067] The application analyst classification module 302 can analyze each application, the collection data, any text objects associated with the application, any additional data associated with the application, and any additional data retrieved independent of the collection data to determine one or more appropriate categories. Exemplary independent data includes data from an Internet search that utilizes the collection data. Categorization can be based upon word analysis, adaptive learning systems, and image analysis.

[0068] In one embodiment, the application analyst classification module 302 accesses the Internet 108 and performs a search based on the application and the collection data. In one embodiment, a GUI button preloaded with the publisher of the application is selected by the human reviewer to initiate an Internet search. The Internet search can provide the application analyst's classification module 302 with additional information to the application analyst classification module 302 for categorizing the application. For example, the search can identify a uniform resource locator (URL) which is the address of a computer or a document on the Internet that is relevant to the categorization process for the application. The URL consists of a communications protocol followed by a colon and two slashes (e.g.,: http://), the identifier of a computer, and usually a path through a directory to a file. The identifier of the computer can be in the form of a domain name, for example, www.m-w.com, or an Internet protocol (I.P.) address, for example, 123.456.789.1. There are often addresses, components thereof (for example, I.P. address, domain name, and communication protocol), or other location identifiers can be used to identify computers or documents on the Internet, for ease of description, the term URL is used hereafter. The application analyst's classification module 302 can utilize the hash and/or URL associated with the application to aid in categorizing the application.

[0069] Once categorized, the application analyst classification module 302 posts the application along with its associated one or more categories into the master application database 300 of applications. The master application database of applications can include applications and their associated categories. The master application database 300

can be stored in a relational database management system, such as Oracle, Sybase, Informix, Microsoft Server, and Access. A text object posting system can perform this posting. A more detailed block diagram of the process performed via the application analyst's classification module 302 is shown in FIG. 13.

[0070] Once the application analyst classification module 302 has posted the application and its associated category or categories into the master application database 300, the upload/download module 301 thereafter routinely copies the master application database 300 to the application server module(s) 102. As can be imagined, the system can include thousands of application server modules 102, each of which is updated regularly by the upload/download module 301 to provide an updated database of categorized applications. Moreover, the upload/download module 301 can transfer portions of the master application database 300, such as updates, to the application server module 102 so that the entire database does not need to be transmitted. A flowchart of the process performed by the application database factory 110 is shown in, and will be described with reference to, FIG. 11.

[0071] In some embodiments, the application analyst classification module 302 can process the categorized applications selected from the master application database 300 for their subsequent download to the application server module 102.

[0072] Referring now to FIGS. 5 and 6, a screen shot of one embodiment of a graphical user interface for the application analyst's classification module 302 is shown. In FIG. 6, the highlighted application filename is "cmdide.sys." The name of the application is "CMD PCI IDE Bus Driver." In this example, additional information uploaded to the application database factory 110 includes the publisher CMD Technology, Inc. and the related suite, Microsoft Windows Operating System. The application analyst's classification module 302 displays this information to the human reviewer to aid in categorizing the application.

[0073] As shown in FIG. 6, the application, CMD PCI IDE bus driver, was associated with the URL "http://www.microsoft.com/ddk/ifsdkit/links.asp". In this example, the application analyst's classification module 302 classified the application in the parent group titled access/privacy. The application analyst classification module 302 can perform further categorization of the application. For example, in the parent group titled access/privacy, the application could be classified under anti-virus software, authentication, encryption, firewalls, hacking, remote access, spy ware, or system audit. One or more risk classes can be used to group categories. The risk classes can be useful to the network administrator when associating rules/policies with each application. As mentioned above, one or more categories can be associated with a single application or hash value.

[0074] FIG. 7 is a flow diagram illustrating the process of monitoring and controlling the execution of a requested application on the workstation 101. The process begins at a start state 700. Next, at a state 702, the user of the workstation 101 launches an application. The launched application can be in response to a predetermined startup sequence for the workstation 101. For example, the workstation 101 could be programmed to launch one or more applications upon power-on startup. The execution launch detection

module 210 (see FIG. 2) detects the launch of the application. Next, at a state 704, the application digest generator 201 generates a digest of data relating to the launched application. The digested data can be in the form of collection data. The collection data can include, for example, the publisher, suite, one or more hashes, and source directory.

[0075] The process moves to a decision state 706 where the execution launch detection module 210 compares the application digest prepared by the application digest generator 201 to the hash/policy table 204. For example, a hash generated by the application digest generator 201 can be compared to hashes from the hash/policy table 204. In one embodiment, a plurality of different hashes is generated and compared to hashes from the hash/policy table 204. For example, an MD-5 hash and an SHA-1 hash could be generated for the requested application and compared to MD-5 hashes and SHA-1 hashes from the hash/policy table 204.

[0076] If the hash corresponds to a hash stored in the hash/policy table 204, the process continues to a state 710 where the policy associated with the hash is applied in response to the launch of the requested application. For example, these policies can include allowing the execution of the application, denying execution of the application, alerting the user that the execution of the application may receive further scrutiny by the network administrator, or allow for a certain amount of time for running the application. In this instance, at the end of the specified time, the execution launch detection module 210 does not permit the application to continue running on the workstation 101. Next, at a state 712, the execution launch detection module 210 logs the event to the logging database 206. In this way, a record is maintained of the applications that are allowed to execute on the workstation 101. The process then moves to a state 714 where the execution launch detection module 210 monitors the system in order to detect the launch of another application on the workstation 101.

[0077] The retrieved information from the hash/policy table 204 further includes a policy associated with the hash value. In one embodiment, category information, which corresponds to the hash value, is utilized in selecting the policy. For example, a hash value could be associated with a parent group and/or category. The parent group and/or category could then be associated with the policy.

[0078] Returning to the decision state 706, if the application digest does not correspond with an application or hash classified in the hash/policy table 204, flow moves to a state 716 where the execution launch detection module 210 applies a not-classified application policy to the request to execute the application. The not-classified application policy can include, for example, allowing the application to execute, denying execution, or alerting the user that additional scrutiny will be applied to the requesting of the application, while limiting the amount of time that the application is allowed to run on the workstation 101.

[0079] Flow moves to a state 718 where the request to execute the application is logged to the logging database 206. The process continues to state 714 as described above where the execution launch detection module 210 awaits the launch of another application on the workstation 101.

[0080] FIG. 8 is a flow diagram illustrating a process performed by the workstation 101 for uploading and down-

loading collection data with the application server module 102. The process begins at a start state 800. Next, at a state 802, the upload/download module 203 receives an incoming signal from the workstation upload/download module 104. The process proceeds to a decision state 804 where the upload/download module 203 receives a request to download the hash/policy table 204 from the application server module 102. The time for receiving the download file can be periodic, random, added set time, or in response to polling. The upload/download module 203 and/or the workstation upload/download module 104 can initiate the download to the workstation management module 200.

[0081] If it is determined in state 804 that the upload/download module 203 is receiving a request to download from the application server module 102, the process moves to a state 806 where the upload/download module 203 receives and stores the hash/policy table 204 or a portion thereof.

[0082] For example, the application server module 102 can select data from the application inventory database 103 and policies from the policy database 109 for copying to the hash/policy table 204. The application inventory database 103 can include applications that have been categorized by the application database factory 110 as well as applications that have been categorized via the classification user interface 106. In some embodiments, the workstation upload/download module 104 transfers a portion of the hash/policy table 204. For example, the upload/download module 203 can receive an update so that the entire database need not be transmitted. In other embodiments, the upload/download module 203 receives a subset of the data from the application inventory database 103. For example, the selected data could be the hash values which are combined with the policies.

[0083] The downloaded data can update the existing hash/policy table 204. The downloaded data can be in the form of collection data from one or more sources. The sources can include the classification user interface 106 and the application database factory 110. As explained above, the collection data can include any additional data associated with the applications, for example, request frequencies associated with the applications from the application inventory database and/or request frequencies associated with the applications from the uncategorized application database 108, and/or indicators. The process moves to a state 810 where the upload/download module 203 awaits a wake-up signal from the application server module 102.

[0084] Returning to the decision state 804, if the upload/download module 203 is not requesting a download from the application server module 102, the process moves to a decision state 812 where the application server module 102 can request an inventory of the applications on the workstation 101. If the application server module 102 requests an inventory of the applications on the workstation 101, the process moves to a state 814 where the client inventory module 202 inventories the applications on the workstation 101. Once the client inventory module 202 compiles a list of the applications on the workstation 101, the process moves to a state 815 where the application digest generator 201 generates a digest of data relating to each application. The application digest generator 201 parses properties from the

applications. Examples of such properties include the name, publisher, suite, hash, and version, which are associated with the applications.

[0085] The process then moves to a state 824 where the application and the digest are stored in the logging database 206. The process then moves to decision state 820 where the client inventory module 202 determines whether all of the inventoried applications have been stored in the logging database 206. If all of the inventoried applications have not been processed, flow returns to state 824 where the next application inventoried by the client inventory module 202 is processed as described above.

[0086] Returning to decision state 820, if all of the applications have been processed, the process moves to state 810 where the upload/download module 203 awaits a wake-up signal from the application server module 102.

[0087] Returning to decision state 812, if an inventory is not requested by the application server module 102, the process moves to a decision state 826 to determine whether the application server module 102 is only requesting collection data from the logging database 206 for uncategorized applications. If the application server module 102 only requests data for uncategorized applications, the process moves to a state 828 wherein the upload/download module 203 extracts and formats data associated with the uncategorized applications from the logging database 206 for uploading to the application server module 102. The process next moves to a state 830 where the data associated with the uncategorized applications is transmitted to the application server module 102. The collection data uploaded to the application server module 102 can be formatted or unformatted. Additionally, the collection data can be encrypted and/or compressed or not. The workstation upload/download module 104 decrypts and uncompresses the collection data if decryption and/or uncompression is required. The workstation upload/download module 104 reassembles the collection data into a list of applications and any additional data associated with the applications. The workstation upload/download module 104 merges and sorts the collection data.

[0088] Next, the process moves to the state 810 where the workstation management module 200 awaits the next wake-up signal from the application server module 102.

[0089] Returning to the decision state 826, if the application server module 102 is not requesting only the collection data for the uncategorized applications from the logging database 206, the process moves to a state 832 where the upload/download module 203 extracts and formats all of the application data in the logging database 206. This data can include categorized data for applications that are listed in the hash/policy table 204 and uncategorized data for applications that are not listed in the hash/policy table 204. The collection data can be formatted or unformatted. Additionally, the collection data can be encrypted and/or compressed or not. Flow then proceeds to state 830 where the data from the logging database 206 is uploaded to the application server module 102. The flow then proceeds as described above to state 810 where the workstation management module 200 awaits a wake-up signal from the application server module 102.

[0090] FIG. 9 is a flow diagram illustrating a process performed by the application server module 102 for upload-

ing and downloading collection data with the workstation **101**. The process begins at a start state **900**. Next, at a decision state **902**, the workstation upload/download module **104** determines whether to generate a download to the workstation management module **200**. The time for receiving the download can be periodic, random, at a set time, or in response to polling. The workstation upload/download module **104** and/or the upload/download module **203** can initiate the download to the workstation management module **200**. If the workstation upload/download module **104** is to download to the workstation management module **200**, the process moves to a state **904** where the workstation upload/download module **104** extracts policy data from the policy database **109**. The policy database **109** associates access permissions to the parent groups and/or categories associated with each application based on the workstation receiving the download. For example, if a workstation were not designated to run applications relating to games, the policy database **109** would identify the parent groups/or categories which are associated with games for that workstation. The network administrator, via the classification user interface **106**, can update the policy database **109**. The policy database **109** can include different access privileges for each workstation **101**. In this way, different workstations **101** can have different policies associated with the applications running thereon.

[0091] The process moves to a state **906** where the workstation upload/download module **104** creates a hash/policy table from the application inventory database **103** in conjunction with the designated policies for this workstation. Each parent group and/or category is associated with the policies extracted from the policy database **109** for each of the one or more workstations receiving a download. Each application or hash in the application inventory database **103** can be associated with a parent group and/or category. Continuing with the example above, the workstation upload/download module **104** selects the hash values from the application inventory database **103** for applications that are associated with the parent group/or categories relating to games. Thus, the same application may be allowed to run on a workstation but not allowed to run on a different workstation. Flow continues to a state **908** where the workstation upload/download module **104** transmits the hash/policy table **204** or a portion thereof to the upload/download module **203**. The download file can include the application names, hash values, associated categories, and/or associated policies. Flow then proceeds to end state **910**.

[0092] Returning to decision state **902**, if the workstation upload/download module **104** is not generating a download for the workstation **101**, the process moves to a decision state **912** where the workstation upload/download module **104** determines whether to request an upload of the workstation inventory. The workstation inventory can include all, or a portion of, the logging database **206**.

[0093] If the workstation upload/download module **104** requests an upload from the workstation **101**, the process moves to a state **914** where a request is sent by the application server module **102** to the upload/download module **203**. Next, at a state **916**, the workstation upload/download module **104** receives the requested upload from the workstation **101**. The uploaded data can be formatted or unformatted. Additionally, the uploaded data can be encrypted and/or compressed or not. The workstation

upload/download module **104** decrypts and uncompresses the uploaded data if decryption and/or uncompression is required at next state **918**.

[0094] Flow continues to state **920** where the workstation upload/download module **104** reassembles the uploaded data into a list of applications and any additional data associated with the applications. The workstation upload/download module **104** merges and sorts the collected data including the frequency count with other workstation inventories. The system can include thousands of workstation management modules, each of which is regularly uploading data from its logging database **206**. As explained above, the uploaded data can include any additional data associated with the application, for example, directory location. The workstation upload/download module **104** can merge and sort the uploaded data based on the application or any additional data associated with the application. For example, the workstation upload/download module **104** can refer to a request frequency to sort and merge the applications from one or more workstations **101**.

[0095] FIG. 10 is a flow diagram illustrating the process of categorizing the applications at the application server module **102**. The process begins at a start state **1000**. Next, at a state **1002**, a network administrator launches the classification user interface **106** via the GUI. The GUI provides a graphical interface tool for the network administrator to manipulate and manage the application inventory database **103**. The network administrator extracts a list of applications and/or associated data from the uncategorized application database **108** for review and categorization. The process moves to a state **1004** where the application and any related data is displayed for review by the network administrator. Next, at a state **1006**, the network administrator classifies the application based on the displayed data. The process then moves to a state **1008** where the process returns to states **1004** and **1006** for each application extracted from the uncategorized application database **108**.

[0096] FIG. 11 is a flow diagram illustrating the process of downloading the master application database **300** to the application server module **102** and for uploading inventoried application data from the application server module **102**. The process begins at a start state **1100**. Next, at a state **1102**, the factory upload/download module **105** requests a download of the categorized applications from the application database factory **110**. The categorized applications are stored in the master application database **300** at the application database factory **110**. The time for receiving the categorized applications can be periodic, random, at a set time, or in response to polling. The factory upload/download module **105** and/or the upload/download module **301** can initiate the download to the application server module **102**. As explained above, the downloaded data can include any additional data associated with the application.

[0097] Flow continues to decision state **1104** where the factory upload/download module **105** (see FIG. 3) determines whether a send all uncategorized application flag has been activated. The send all uncategorized application flag can be selected by the network administrator via the classification user interface **106**. If the send all uncategorized application flag has been activated, the process moves to a state **1106** where the factory upload/download module **105** retrieves all applications from the uncategorized application

database 108. Flow continues to decision state 1108 where the factory upload/download module 105 determines if the send all application inventory flag has been activated. The send all application inventory flag can be activated by the network administrator via the classification user interface 106. If the send all application inventory flag has been activated, the process moves to a state 1110 where the factory upload/download module 105 retrieves the data from the application inventory database 103. Flow moves to a state 1112 where the uncategorized applications and any additional data associated with the applications, for example, collection data, can be formatted. The additional data can include request frequencies and/or indicators associated with the applications. The collection data is not required to be formatted and thus may be directly uploaded to the application database factory 110. Moreover, the selection of a format for the collection data can depend on the type of data connection that the application database factory 110 has with the application server module 102. For a data connection via the Internet 108, the factory upload/download module 105 can use a markup language, for example, extensible markup language (XML), standard generalized markup language (SGML), and hypertext markup language (HTML), to format the collection data.

[0098] The collection data can be further processed prior to its upload to the application database factory 110. For example, check limit state 1114 and compression and encryption state 1116 can be performed to process the collection data prior to uploading to the application database factory 110. While these blocks may facilitate the upload of the collection data, they are not required to be performed. The collection data can be uploaded without applying states 1114 and 1116. In this way the process can follow alternate path 1113. Thus, the collection data can be directly uploaded to the application database factory 110 without applying states 1114 and 1116.

[0099] If further processing is desired, the process moves to a state 1114 where the factory upload/download module 105 can limit the collection data to a maximum size for uploading to the application database factory 110. For example, the collection data from a single workstation could be limited to a maximum of 20 megabytes. The process continues to a state 1116 where the collection data is compressed so that the collection data takes up less space. Further, the collection data is encrypted so that it is unreadable except by authorized users, for example, the application database factory 110.

[0100] Flow continues to a state 1118 where the collection data is uploaded to the application database factory 110. As explained above, the collection data can include any additional data associated with the application, for example, suite information. The process moves to a state 1120 where the upload/download module 301 continues with the download to the factory upload/download module 105. The process moves to a state 1122 where the downloaded data is stored in the application inventory database 103.

[0101] Returning to decision state 1108, if the send all application inventory flag is not activated, flow moves to state 1112 as described above. Since the send all application inventory flag was not activated, the factory upload/download module 105 formats the data retrieved at state 1106 for its upload to the application database factory 110 as described with reference to states 1112, 1114, 1116 and 1118.

[0102] Returning to decision state 1104, if the send all uncategorized application flag was not activated, the process moves to decision state 1108 as described above where the factory upload/download module 105 determines if the send all application inventory flag has been activated. Depending on whether the send all application inventory flag was activated, the process then continues as described above.

[0103] FIG. 12 is a flow diagram illustrating processing of collecting data by the application database factory 110. The process begins at a state 1200. Next, at a decision state 1202, the application database factory 110 can download the master application database 300 to the application server module 102. If the application database factory 110 is to download the master application database 300 to the application server module 102, the process moves to a state 1204 where the upload/download module 301 extracts categorized applications from the master application database 300. A subset of the categorized applications can be selected for download to the application server module 102. The subset can include only categorized applications that have been deemed ready for publishing.

[0104] The process moves to a state 1206 where the application data retrieved from the master application database 300 can be formatted. The application data is not required to be formatted and this may be directly downloaded to the application server module 102. Moreover, the selection of a format for the data can depend on the type of data connection that the application database factory 110 has with the application server module 102. For a data connection via the Internet 108, the upload/download module 301 can use a markup language, for example, XML, SGML and HTML, to format the collection data.

[0105] The data to be downloaded can be further processed prior to its download to the application server module 102. The process continues to a state 1208 where the application data is compressed so that the application data takes up less space. Further, the application data is encrypted so that it is unreadable except by authorized users, for example, the application server module 102. Flow continues to a state 1210 where the application data is downloaded to the application server module 102. The process then moves to state 1212 which is an end state.

[0106] Returning to decision state 1202, if application data from the master application database 300 is not being downloaded to the application server module 102, the process moves to a decision state 1214 where the application database factory 110 can receive an upload from the application server module 102. If the application database factory 110 is not to receive an upload from the application server module 102, the process moves to end state 1212.

[0107] Returning to decision state 1214, if the application database factory 110 is to receive an upload from the application server module 102, the process moves to a state 1216 where the upload/download module 301 receives the upload from the factory upload/download module 105. The time for receiving the collection data can be periodic, random, at a set time, or in response to polling. The upload/download module 301 and/or the factory upload/download module 105 can initiate the upload to the application database factory 110. As explained above, the collection can include any additional data associated with the application, for example, request frequencies associated

with the application from the application inventory database **103** and/or request frequencies associated with applications from the uncategorized application database **108**. The collection data can be formatted or unformatted. Additionally, the collection data can be encrypted and/or compressed or not.

[**0108**] The process continues to a state **1218** where the upload/download module **301** decrypts and uncompresses the collection data if decryption and/or uncompression is required. The process moves to a state **1220** where the collection data is merged and sorted into the master application database **300** and the uncategorized application database **303**. The process then continues to end state **1212**.

[**0109**] FIG. 13 is a flowchart illustrating the process of classifying applications from the uncategorized application database **303**. The process begins at start state **1300**. The process moves to a state **1302** where a list of applications is extracted from the uncategorized application database **303** for classification by the human reviewer via the application analyst's classification module **302**. The application analyst classification module **302** interfaces with the human reviewer to determine the appropriate category or categories of the application. Next, at a state **1304**, the application analyst's classification module **302** is utilized to display the application and any related data on the GUI. The related data can indicate to the human reviewer the category or categories with which the application should be associated. As explained above, the application analyst classification module **302** allows the human reviewer to analyze each application and any additional data that is associated with the application to determine its appropriate category or categories.

[**0110**] The process continues to a state **1306** where the human reviewer uses the application, related information, and any Internet information to research the application. The Internet information can be derived from a search using a web browser search engine. The application name and any of the related application data can be used for the Internet search. The human reviewer can further review documents, specifications, manuals, and the like to best determine the category or categories to associate with the application. The process continues to a state **1308** where the human reviewer classifies each application using the evidence associated with the application, any hints from the related information, and/or other research.

[**0111**] The process finally moves to a state **1310** where the selected category or categories that the human reviewer associated with the given application is stored in the master application database **300**.

[**0112**] While the above detailed description has shown, described, and pointed out novel features of the invention as applied to various embodiments, it will be understood that various omissions, substitutions, and changes in the form and details of the device or process illustrated may be made by those skilled in the art without departing from the spirit of the invention. The scope of the invention is indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1. A method of adapting a system over the Internet which protects computers from malicious software programs, the method comprising:

identifying a malicious software program stored on a first computer;

determining whether the malicious software program is identified in a first database;

if the malicious software program is identified in the first database, applying one or more policies associated with the identified malicious software program;

if the malicious software program is not identified in the first database, adding an identifier indicative of the malicious software program to a second database;

uploading the second database including the identifier to a database factory over an Internet;

determining whether the malicious software program associated with the identifier has been previously analyzed by the database factory;

for each identifier that was not previously analyzed, associating the identifier with a digital fingerprint;

adding the digital fingerprint to a third database;

downloading the third database to a second computer; and

scanning the second computer for the malicious software program associated with the digital fingerprint in the third database.

2. The method of claim 1, wherein the malicious software program is a spyware program.

3. The method of claim 1, wherein the malicious software program is an anti-virus program.

4. The method of claim 1, wherein the malicious software program is a hacking program.

5. The method of claim 1, wherein the malicious software program is a remote access program.

6. The method of claim 1, wherein if the scanning of the second computer determines that the malicious software program is stored on the second computer, then disallowing the malicious software program from running on the second computer.

7. The method of claim 1, wherein if the scanning of the second computer determines that the malicious software program is stored on the second computer, then notifying a user of the second computer that the malicious software program is stored on the second computer.

8. The method of claim 1 further comprising:

classifying the malicious software program; and

downloading the classification to the second computer.

9. The method of claim 1 further comprising:

identifying a malicious software program stored on a third computer;

determining whether the malicious software program is identified in a third database;

if the malicious software program is identified in the third database, applying one or more policies associated with the identified malicious software program;

if the malicious software program is not identified in the third database, adding an identifier indicative of the malicious software program to a fourth database; and uploading the fourth database including the identifier to the database factory over the Internet.

10. The method of claim 9, wherein the malicious software program scanned for on the second computer is in the second and fourth databases.

11. The method of claim 9 wherein downloading the third database is based at least in part upon a request frequency that is associated with the number of times that the identifier associated with the malicious software program is in the second and fourth databases.

12. The method of claim 9 further comprising merging and sorting the identifiers in the second and fourth databases.

13. The method of claim 9, wherein the identifiers in the second database are the same as the identifiers in the fourth database.

14. The method of claim 9, wherein the second database is different than the fourth database.

15. A method of processing software programs to update a system which controls spyware programs on a computer, the method comprising:

receiving an identifier from a first computer at a database factory, wherein the identifier is associated with a spyware program;

determining whether the identifier has been previously analyzed;

for each identifier that was not previously analyzed by the database factory, categorizing each of the identifiers;

downloading the identifier and a category associated with the identifier to a second computer; and

scanning the second computer for the spyware program associated with the identifier.

16. The method of claim 15, wherein if the scanning of the second computer identifies that the spyware program associated with the identifier is stored on the second computer, then notifying a user of the second computer that the spyware program is stored on the second computer.

17. The method of claim 15 further comprising:

identifying a second spyware program stored on a third computer;

determining whether the second spyware program is categorized;

if the second spyware program is categorized, applying one or more policies associated with the category;

if the second spyware program is not categorized, adding an identifier indicative of the second spyware program to a database; and

uploading the database including the identifier to the database factory over the Internet.

18. The method of claim 17, wherein the second spyware program scanned for on the second computer is in the database.

19. A method of updating a system which controls operation of programs on a workstation based at least partially on information from another workstation, the method comprising:

detecting a malicious software program on a first workstation;

detecting a second malicious software program on a second workstation;

generating a first application digest for the first malicious software program;

generating a second application digest for the second malicious software program;

determining whether the first and second malicious software programs are categorized, wherein a categorized malicious software program is associated with one or more policies;

if the first or second malicious software programs are categorized, then applying the one or more policies that are associated with the categorized malicious software program;

if the first or second malicious software programs are not categorized, then posting information relating to the uncategorized malicious software program to a logging database;

uploading the logging database to a database factory over an Internet;

downloading a database of identifiers from the database factory over the Internet, wherein the identifiers are associated with the first and second malicious software programs along with at least one policy to a third workstation;

scanning the third workstation for the first and second malicious software programs; and

applying the at least one policy if the first or second malicious software programs are found on the third workstation.

20. The method of claim 19, further comprising:

updating a request frequency if identification of the first or second malicious software programs is already in the logging database.

21. The method of claim 19, wherein the at least one policy includes allowing or disallowing the malicious software program to run on the third workstation.

22. The method of claim 19, wherein the logging database further includes additional data associated with the first or second malicious software programs.

23. A method of updating a system which controls operation of programs on a workstation, the method comprising:

detecting a program on the workstation;

generating a hash value for the program;

comparing the generated hash value to one or more hash values in a hash/policy table that includes one or more policies associated with the one or more hash values;

if the generated hash value matches one or more of the hash values in the hash/policy table, then applying the one or more policies that are associated with the one or more hash values;

if the generated hash value does not match one or more hash values in the hash/policy table, then posting an identifier associated with the program to a logging database;

uploading the logging database to an application server module;

determining whether the program from the logging database is in an application inventory database;

if the program is not in the application inventory database, then posting the identifier associated with the program to an uncategorized application database;

uploading the uncategorized application database to an application database factory;

determining whether the program has been previously categorized by the application database factory;

if the program was not previously categorized, categorizing the program as a spyware program;

posting the identifier as a spyware program in a database of categorized programs;

receiving the database of categorized programs over the Internet; and

scanning a second workstation for the program based at least partially on the received database of categorized programs.

* * * * *