



US 20070201745A1

(19) **United States**

(12) **Patent Application Publication**

Wang et al.

(10) **Pub. No.: US 2007/0201745 A1**

(43) **Pub. Date: Aug. 30, 2007**

(54) **IMAGE-BASED CAPTCHA GENERATION SYSTEM**

Publication Classification

(75) Inventors: **James Z. Wang**, State College, PA (US); **Ritendra Datta**, State College, PA (US); **Jia Li**, State College, PA (US)

(51) **Int. Cl.**
G06K 9/00 (2006.01)
(52) **U.S. Cl.** **382/181**

Correspondence Address:
GIFFORD, KRASS, SPRINKLE, ANDERSON & CITKOWSKI, P.C
PO BOX 7021
TROY, MI 48007-7021 (US)

(57) **ABSTRACT**
In a system and method for the generation of attack-resistant, user-friendly, image-based CAPTCHAs (Completely Automated Public test to Tell Computers and Humans Apart), controlled distortions are applied to randomly chosen images and presented to a user for annotation from a given list of words. An image is presented that contains multiple connected but independent images with the borders between them distorted or otherwise visually obfuscated in a way that a computer cannot distinguish the borders and a user selects near the center of one of the images. The distortions are performed in a way that satisfies the incongruous requirements of low perceptual degradation and high resistance to attack by content-based image retrieval systems. Word choices are carefully generated to avoid ambiguity as well as to avoid attacks based on the choices themselves.


(73) Assignee: **The Penn State Research Foundation**, University Park, PA (US)


(21) Appl. No.: **11/668,853**

(22) Filed: **Jan. 30, 2007**

Related U.S. Application Data

(60) Provisional application No. 60/763,811, filed on Jan. 31, 2006.

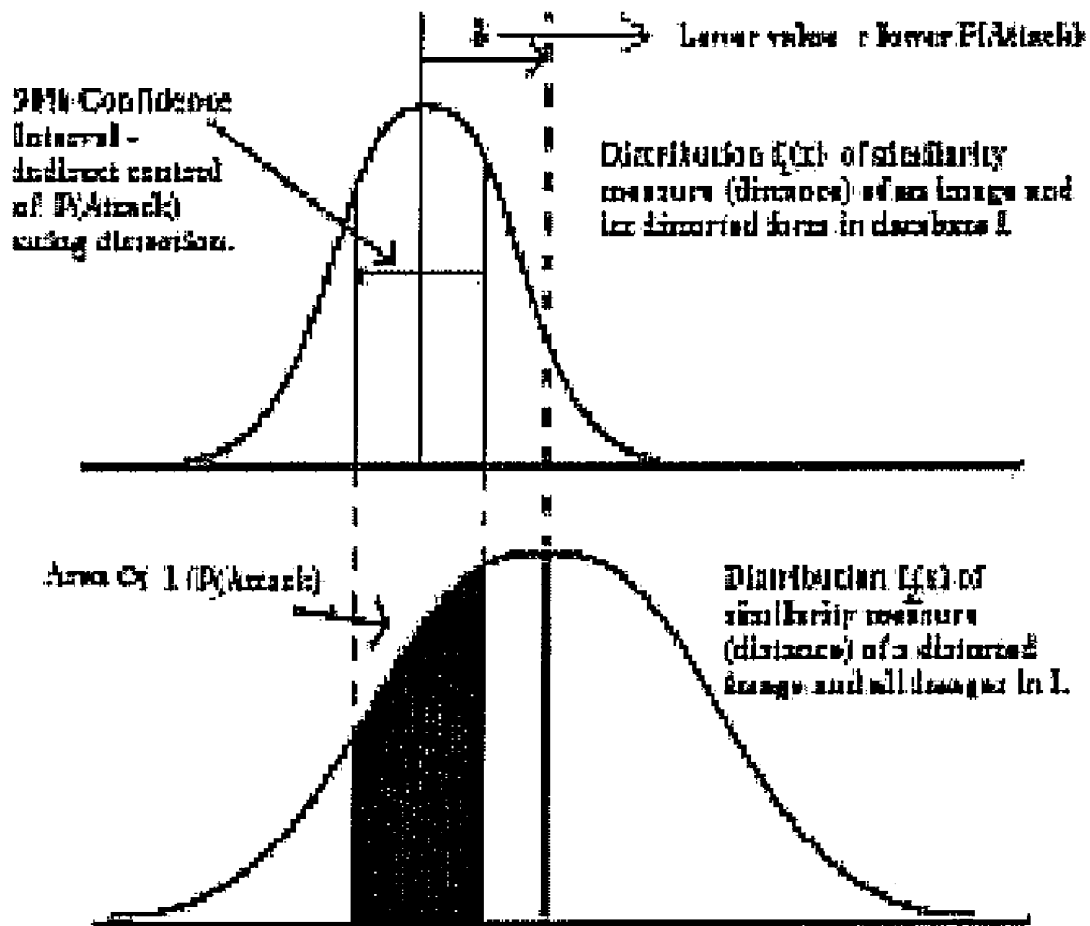

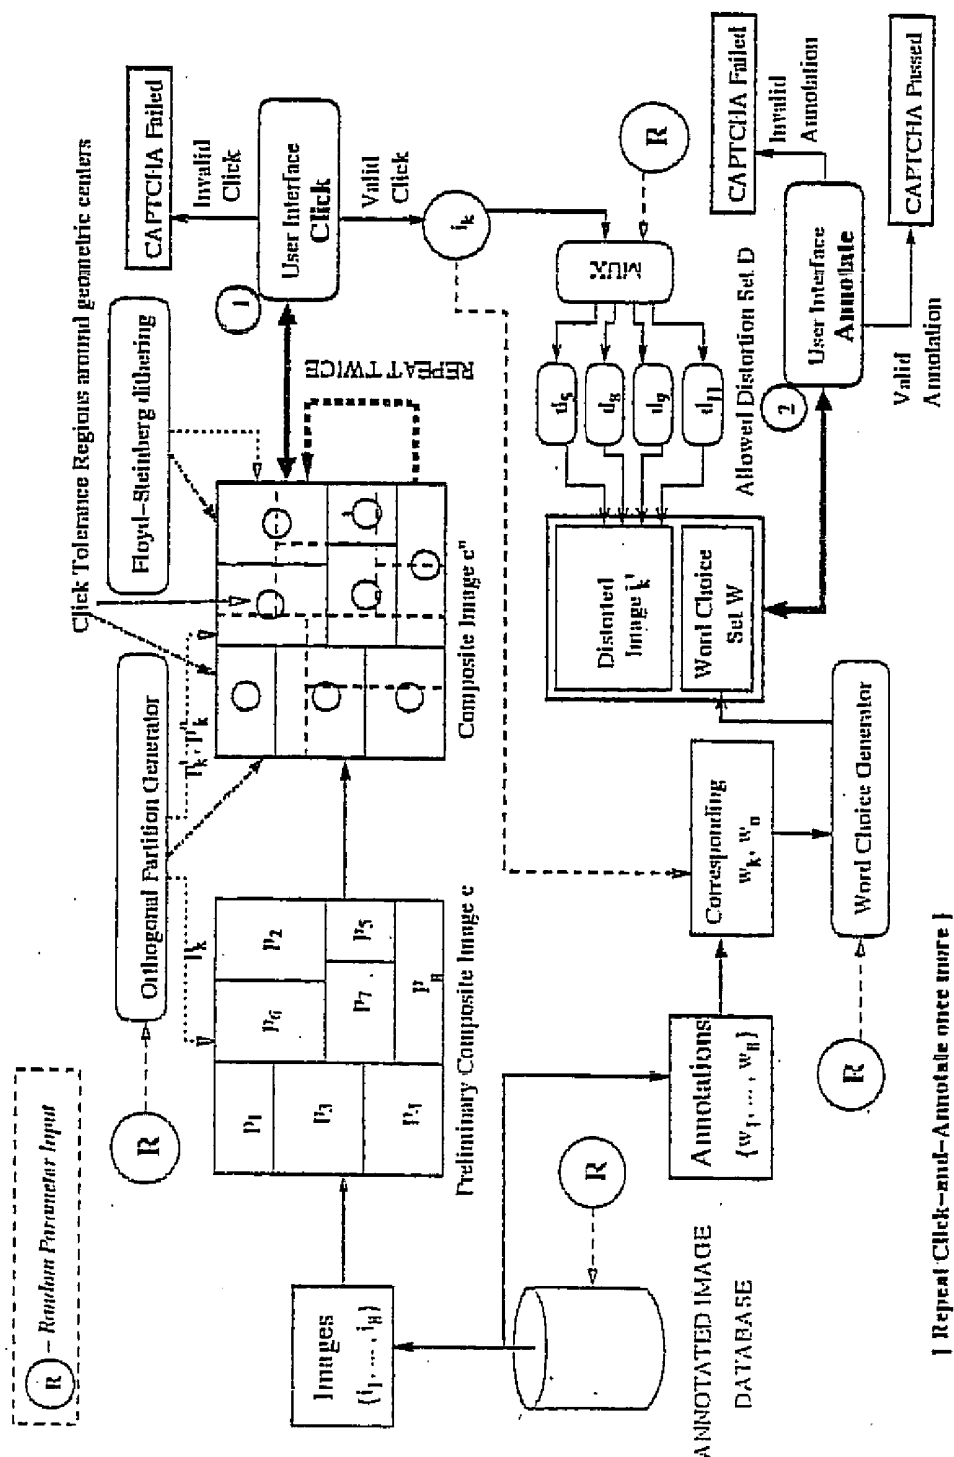

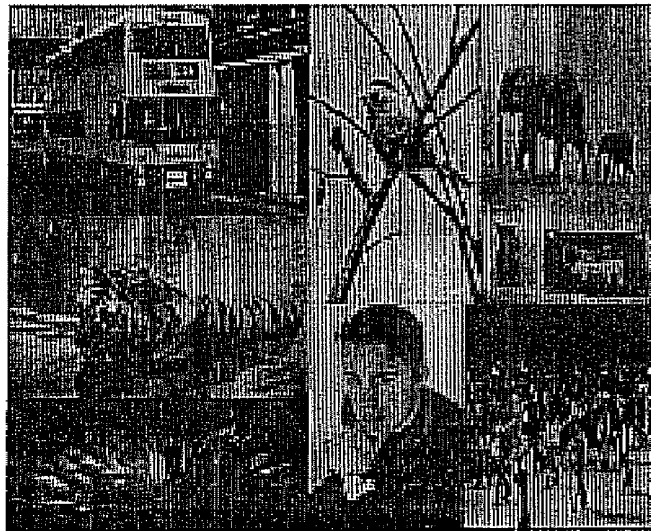


FIGURE 2

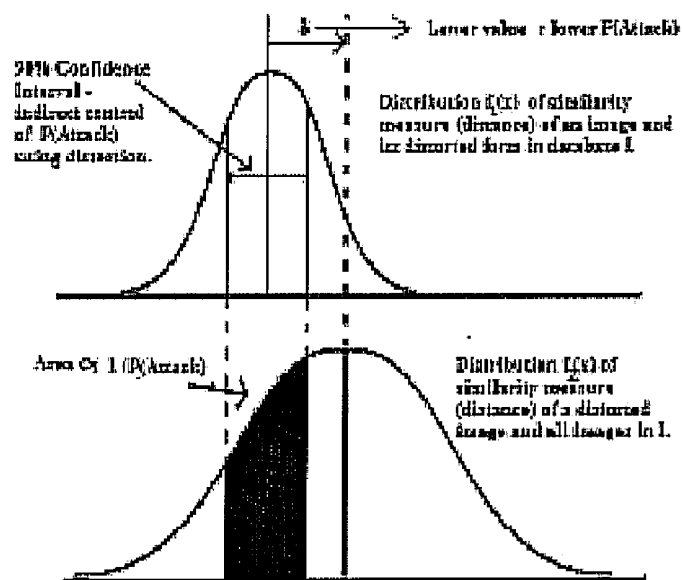


FIGURE 3

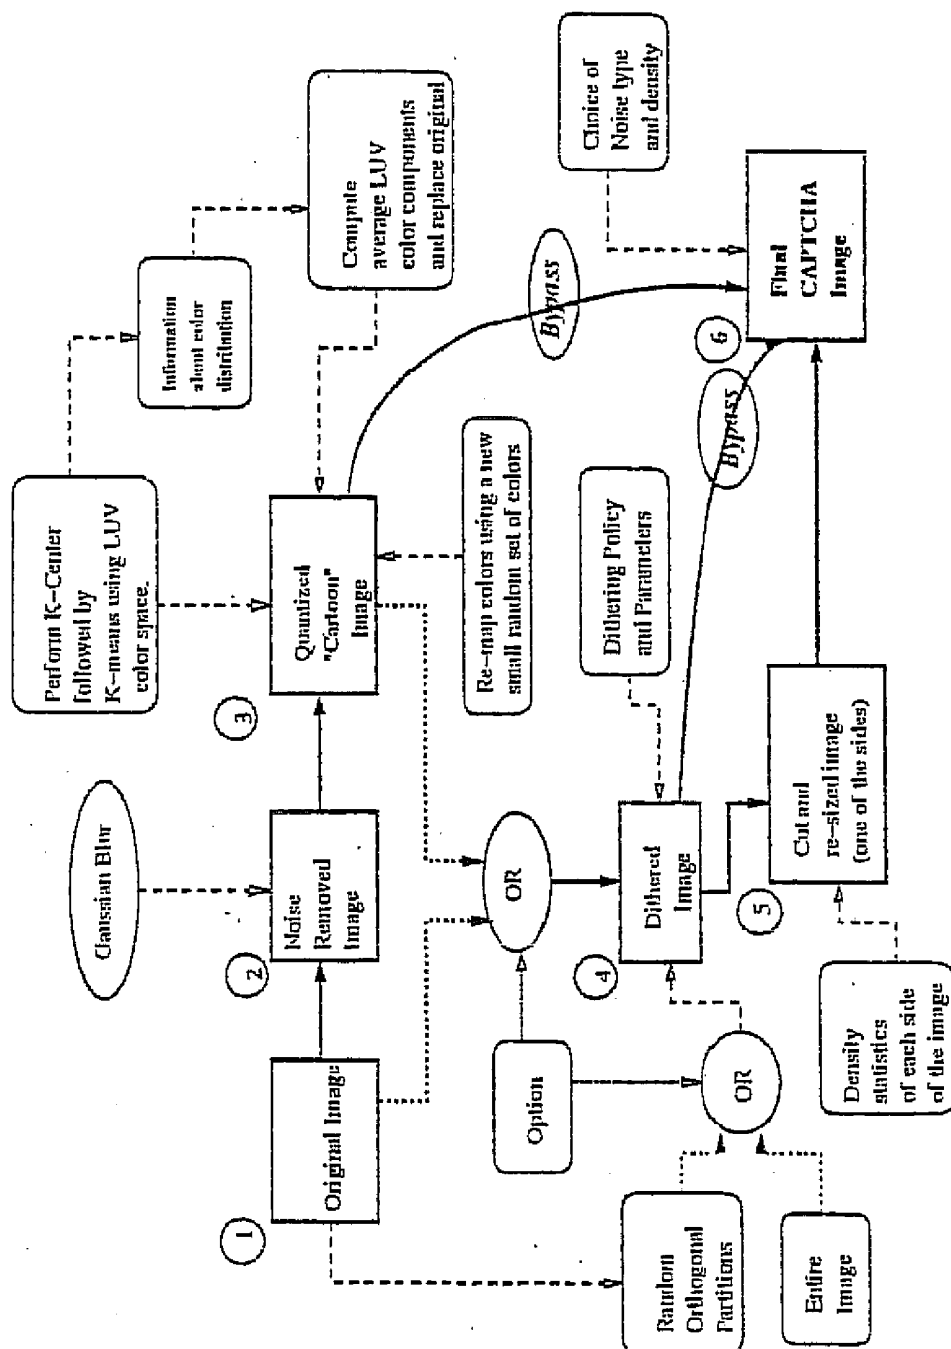


FIGURE 4

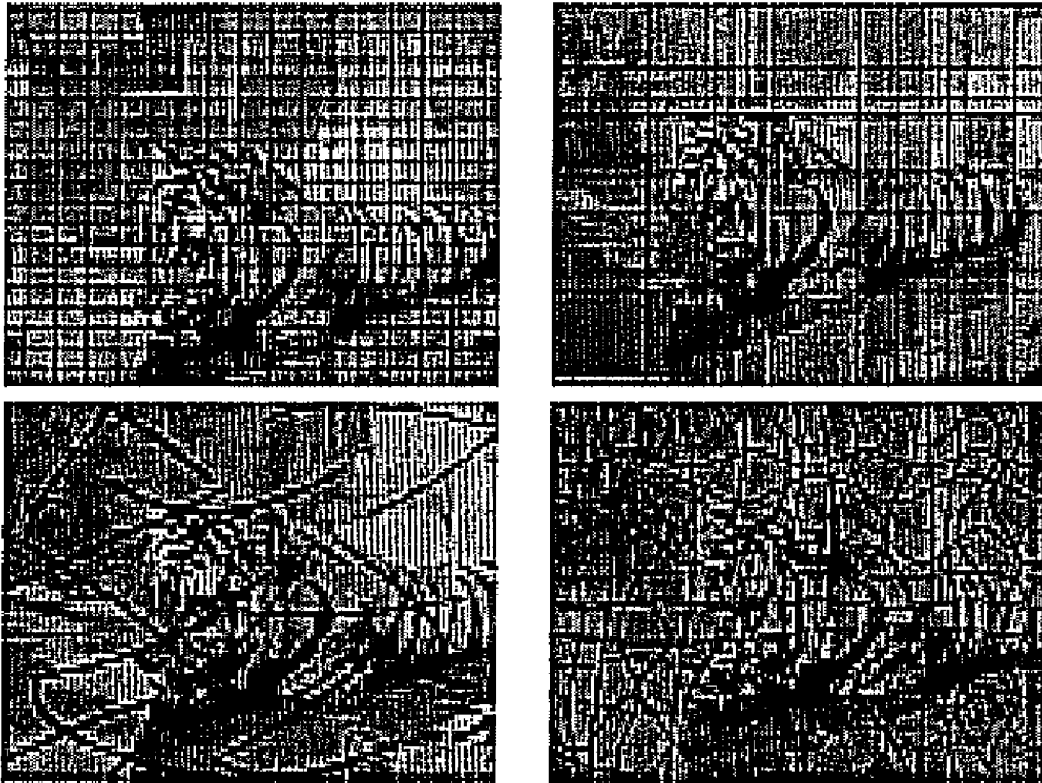


FIGURE 5

IMAGE-BASED CAPTCHA GENERATION SYSTEM

REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from U.S. Provisional Patent Application Ser. No. 60/763,811, filed Jan. 31, 2006, the entire content of which is incorporated herein by reference.

GOVERNMENT SPONSORSHIP

[0002] The subject invention was made with United States government support under a grant from the National Science Foundation, Grant No. IIS-0347148. Accordingly, the United States government has certain rights in the invention.

FIELD OF THE INVENTION

[0003] This invention relates generally to CAPTCHAs and, in particular, to the generation of attack-resistant, user-friendly, image-based CAPTCHAs.

BACKGROUND OF THE INVENTION

[0004] A way to tell apart a human from a computer by a test is known as a Turing Test [10]. When a computer program is able to generate such tests and evaluate the result, it is known as a CAPTCHA (Completely Automated Public test to Tell Computers and Humans Apart) [1]. In the past, Websites have often been attacked by malicious programs that register for service on massive scale. Programs can be written to automatically consume large amount of Web resources or bias results in on-line voting. This has driven researchers to the idea of CAPTCHA-based security, to ensure that such attacks are not possible without human intervention, which in turn makes them ineffective. CAPTCHA-based security protocols have also been proposed for related issues, e.g., countering Distributed Denial-of-Service (DDoS) attacks on Web servers [6].

[0005] A CAPTCHA acts as a security mechanism by requiring a correct answer to a question which only a human can answer any better than a random guess. Humans have speed limitation and hence cannot replicate the impact of an automated program. Thus the basic requirement of a CAPTCHA is that computer programs must be slower than humans in responding correctly. To that purpose, the semantic gap [9] between human understanding and the current level of machine intelligence can be exploited. Most current CAPTCHAs are text-based.

[0006] Commercial text-based CAPTCHAs have been broken using object-recognition techniques [7], with accuracies of up to 99 percent on EZ-Gimpy. This reduces the reliability of security protocols based on text-based CAPTCHAs. There have been attempts to make these systems harder to break by systematically adding noise and distortion, but that often makes them hard for humans to decipher as well. Image-based CAPTCHAs have been proposed as alternatives to the text media [1, 3, 8]. State-of-the-art content-based image retrieval (CBIR) and annotation techniques have shown great promise at automatically finding semantically similar images or naming them, both of which allow means of attacking image-based CAPTCHAs. User-friendliness of the systems are potentially compromised when repeated responses are required [3] or deformed face images are shown [8].

[0007] One solution is to randomly distort the images before presenting them. However, current image matching techniques are robust to various kinds of distortions, and hence a systematic distortion is required. In summary, more robust and user-friendly systems can be developed.

SUMMARY OF THE INVENTION

[0008] This invention resides in a system for the generation of attack-resistant, user-friendly, image-based CAPTCHAs. In our system, called IMAGINATION IMAge Generation for Internet AuthenticaTION), we produce controlled distortions on randomly chosen images and present them to the user for annotation from a given list of words. An image is presented that contains multiple connected but independent images with the borders between them distorted or otherwise visually obfuscated in a way that a computer cannot distinguish the borders and a user selects near the center of one of the images.

[0009] The distortions are performed in a way that satisfies the incongruous requirements of low perceptual degradation and high resistance to attack by content-based image retrieval systems. Word choices are carefully generated to avoid ambiguity as well as to avoid attacks based on the choices themselves. Preliminary results demonstrate the attack-resistance and user-friendliness of our system compared to text-based CAPTCHAs.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a diagram that depicts an architecture according to the present invention;

[0011] FIG. 2 shows a sample image that is generated by the IMAGINATION system.

[0012] FIG. 3 is a set of graphs that shows how effective the distortions can be to automatic attacks by automated systems;

[0013] FIG. 4 is a framework for generating candidate composite distortions; and

[0014] FIG. 5 shows distorted images produced using different inventive methods.

DETAILED DESCRIPTION OF THE INVENTION

[0015] Given a database of images of simple concepts, a two-step user-interface allows quick testing for humans while being expensive for machines. Controlled composite distortions on the images maintain visual clarity for recognition by humans while making the same difficult for automated systems.

[0016] Requiring the user to type in the annotation may lead to problems like misspelling and polysemy [3]. In our system, we present to the user a set of word choices, and the user must choose the most suitable image descriptor. A problem with generating word choices is that we might end up with, for example, the word "dog" and the word "wolf" in the list, and this may cause ambiguity in labeling. To avoid this problem, we propose a WordNet-based [5] algorithm to generate a semantically non-overlapping set of word choices while preventing odd-oid-olite attacks using the choices themselves. Because the number of choices are limited, the location of the mouse-click on the composite

image acts as additional user input, and together with the annotation, it forms the two-step mechanism to reduce the rate of random attacks. A reason for naming our system IMAGINATION is that it aims to exploit human imagination power gained through exposure/experience, allowing interpretation of pictures amidst distortion/clutter.

[0017] The overall system architecture is shown in FIG. 1. We have a two-round click-and-annotate process in which a user needs to click on the interface 4 times in all. The system presents the user with a set of 8 images tiled to form a single composite image. The user must then select an image she wants to annotate by clicking near its geometric center. If the location of the click is near one of the centers, a controlled distortion is performed on the selected image and displayed along with a set of word choices pertaining to it, and the user must choose the appropriate one. If the click is not near any of the centers or the choice is invalid, the test restarts. Otherwise, this click-and-annotate process is repeated one more time, passing which the CAPTCHA is considered cleared. The reason for having the click phase is that the word choices are limited, making random attack rate fairly high. Instead of having numerous rounds of annotate, user clicks tend to make the system more user-friendly, while decreasing the attack rate.

[0018] The first step is the composite image generation. Given an annotated database of images I consisting of simple concepts and objects, the system randomly selects a set of 8 images $\{i_1, \dots, i_8\}$ with their corresponding annotations $\{w_1, \dots, w_8\}$. A rectangular region is divided into 8 random orthogonal partitions $\{p_1, \dots, p_8\}$ and by a one-to-one mapping $i_k \rightarrow p_k$, each image is placed into a partition, scaled as necessary, forming a preliminary composite image c . A two-stage dithering using the Floyd-Steinberg error-diffusion algorithm is then performed. The image c is randomly divided into two different sets of 8 orthogonal partitions $\{p'_1, \dots, p'_8\}$ and $\{p''_1, \dots, p''_8\}$, and dithering is applied on these two sets sequentially, forming the required composite image c'' . Dithering parameters that are varied independently over each partition include the base colors used (18, randomly chosen in RGB space), resulting in different color gamuts, and the coefficients used for spreading the quantization error. The same ratio of coefficients 7/16, 1/16, 5/16 and 3/16 are used for neighboring pixels, but they are multiplied by a factor ok , which is chosen randomly in the range of 0.5-1.5. These steps ensure that the task of automatically determining the geometric centers of the images remain challenging, while human imagination continues to steer rough identification.

[0019] The difficulty in automated detection arises from the fact that partitioning and subsequent dithering cuts the original image tiling arbitrarily, making techniques such as edge/rectangle detection generate many false boundaries (see example in FIG. 2 for an idea). Let the location of the actual user click be (X, Y) . Suppose the corner coordinates of the 8 images within the composite image be

$$\{(x_1^k, y_1^k, x_2^k, y_2^k), k = 1, \dots, 8\}.$$

[0020] The user's click is considered valid if

$$\min_k \left\{ \left(X - \frac{x_1^k + x_2^k}{2} \right)^2 + \left(Y - \frac{y_1^k + y_2^k}{2} \right)^2 \right\} \leq R^2$$

[0021] where tolerance R is a constant determining the radius around the actual geometric centers of each image up to which this validity holds. Note that this parameter adjusts the wall between user-friendliness and reliability (larger tolerance R also means higher random attack rate).

[0022] Suppose the response is valid and the minimum is achieved for image i_k . Then a randomly chosen composite distortion from among an allowed distortion set D is performed on i_k and displayed in its original size and aspect ratio. Based on the corresponding annotation w_k , a word choice set W is generated. Generation of D and W are described below.

Determining the Allowed Distortion Set

[0023] Images can be distorted in various ways. Our design of an allowed distortion set D requires the inclusion of distortions that maintain good visual clarity for recognition by humans while making automated recognition hard. CAPTCHA requires that the annotated database and relevant code be publicly available, for added security. If undistorted images from the database were presented as CAPTCHAs, attacks would be trivial. Previous systems proposed [3] are liable to such attacks. If the images are randomly distorted before being presented to the user [1], it may still be possible to perform attacks using computer vision techniques such as affine/scale invariant features and CBIR.

[0024] We aim at building image-based CAPTCHAs secure against such attacks. Certain assumptions about possible attack strategies are needed in order to design attack-resistant distortions. Here, we assume that the only feasible way is to use CBIR (content-based image retrieval) to perform inexact matches between the distorted image and the set of images in the database, and use the label associated with an appropriately matched one for attack. This assumption is reasonable since attack strategy needs to work on the entire image database in real-time in order to be effective, and image retrieval usually scales better than other techniques.

[0025] Suppose $d(i_k)$ indicates the application of distortion d on image i_k , and $Sp(i_j, i_k)$ denotes the similarity measure between images i_j and i_k using image retrieval system S_p . Considering the worst-case scenario where the attacker has access to the database I , the CBIR system S_p , and the distortion algorithms in D , a good attack strategy can be as follows: The attacker studies the distribution of the distances between (1) a distorted image and its original, $f_1(7)$, and (2) a distorted image and all other images in I , $f_2(X)$. For a given distorted image $d(i_j)$, she can then compute $Sp(d(i_j), i_k) \forall i_k \in I$. If there are significant differences between $f_1(X)$ and $f_2(X)$, the attacker can exploit this to eliminate images in I that are unlikely to be i_j . One way to do this is to set a confidence interval $[a, b]$ at say 90% level around the mean of distribution f_1 and then eliminating all images i_k except those with $a \leq Sp(d(i_j), i_k) \leq b$. With N images contained in I , and a random guess, $P(\text{Attack}) = N^{-1}$, while after elimination,

$$P(\text{Attack}) = \left(0.9N \int_a^b f_2(x) dx \right).$$

[0026] This idea is illustrated in FIG. 3. Our goal is to counter such attacks by choosing distortions d that minimize $P(\text{Attack})$, i.e. maximize

$$\int_a^b f_2(x) dx.$$

Although $f_2(X)$ is dependent on $d(i_i)$, there is no easy way to control f_2 directly through a choice of d . Instead, we design D by choosing distortions d that give a value for $P(\text{Attack})$ below a chosen threshold T . In this way, we ensure that probabilistically, given distorted image $d(i_i)$ and all data/code, the attacker can identify the original image i , in I (and hence successfully attack) with a probability of at most T . We found through experiments that while $f_2(X)$ tends to be a wider distribution, $f_1(X)$ is usually a narrow band with mean closer to the origin, and both are only slightly skewed from Gaussian distributions. Intuitively, under such circumstances, if $\delta = |T_1 - T_2|$, $P(\text{Attack})$ decreases as $\delta \rightarrow 0$ (see FIG. 3). One underlying assumption for our probabilistic criteria is that distributions $f_1(X)$ and $f_2(X)$ are invariant to the choice of i_i . Though this does not hold precisely, it does so for a majority of the i_j in I , allowing us the liberty to make the assumption to get a significantly simpler criteria.

[0027] For experiments, our choice of S_p is a state-of-the-art similarity measure (or image distance), the Integrated Region Matching (IRM) used in the SIMPLcity system [11]. While other image comparison methods exist [9], IRM produces relatively fast (speed of attack is critical here) and accurate inexact matches. Note that the actual features or systems to be used by the attacker is unknown, but for the purpose of launching effective attacks, alternate choices seem unlikely. If there are better ways to attack the system, then these in turn improve the state-of-the-art in retrieving distorted images, and new sets of distortions need to be included in D . We have not considered attacks based on interest points or other such features.

[0028] Our experiments revealed that isolated distortions are insufficient in fooling the retrieval systems. Considering attack chances and visual clarity after distortion, we came up with a set of 11 candidate composite distortions $\{d_1, \dots, d_{11}\}$ along the framework shown in FIG. 4. Each one is composed of a combination of dithering, partitioning, quantization, noise addition, color re-mapping, and selective cut-and-resize. Dithering seemed particularly suitable since clarity was retained while low-level feature extraction (and thus image matching) was affected. We applied the distortions to 300 Corel images and used IRM to calculate $f_1(X)$ and $f_2(X)$ for each d_k . Based on our criteria, a suitable threshold T , and a 90% confidence interval around f_1 , distortions d_5 , d_8 , d_9 and d_{11} were chosen as part of the allowed distortion set D . Note that we define here a formal procedure for choosing composite distortions, and select 4 acceptable ones out of a set of 11 ad-hoc distortions. Details

of these distortions are not critical to the invention, since other distortions can be added to D by this procedure.

Determining the Word Choice Set

[0029] For word choice generation, factors related to image-based CAPTCHAs that have not been previously addressed are (1) it may be possible to remove ambiguity in labeling images (hence making annotation easier for humans) by the choices themselves, (2) the images might seem to have multiple valid labels (e.g. a tiger in a lake can be seen as “tiger” and “lake” as separate entities), and this may cause ambiguity, and (3) the choices themselves may result in odd-one-out attacks if the correct choice is semantically different from all others. We propose an algorithm to generate the word choice set W containing unambiguous choices for the ease of users, while ensuring that word-based attacks are ineffective. For this we use a WordNet-based [5] semantic word similarity measure [4], denoted by $d(w_1, w_2)$ where w_1 and w_2 are English words. Given the correct annotation w_k (e.g. “tiger”) of image i_k , and optionally, other words W_0 (e.g. {“lake”}) with the requirement of N_w choices, the algorithm for determining W is as follows:

- [0030]** 1. Set $W \Leftarrow \{w_k\} + W_0, t \Leftarrow 1$.
- [0031]** 2. Choose a word $w_1 \notin W$ randomly from the database.
- [0032]** 3. $\text{flag} \Leftarrow 0$.
- [0033]** 4. For each word $w_1 \in W$
- [0034]** if $d(w_k, w_1) < \theta$ then $\text{flag} \Leftarrow 1$.
- [0035]** 5. If $\text{flag} = 1$ then go to step 2.
- [0036]** 6. $W \Leftarrow W + \{w_1\}; t \Leftarrow t + 1$
- [0037]** 7. If $t < N_w$ then go to step 2.
- [0038]** 8. $W \Leftarrow W = W_0$

[0039] The value of θ depends on what range of values the word similarity measure yields and can be determined empirically or based on user surveys (i.e. what values of θ causes ambiguity). Geometrically speaking, this method yields word choices like as if all the words lie beyond the boundaries of a (N_w) -dimensional simplex or hyper-tetrahedron.

RESULTS AND CONCLUSION

[0040] Distorted images produced using the 4 chosen methods in D are shown in FIG. 5. Clearly, perceptual quality of the images have not deteriorated beyond recognition. User-friendliness of image-based CAPTCHAs has been studied before [3]. Hence we conducted a user survey only on the ease of use of our click-and-annotate process. We chose 8 distorted images each of 8 different concepts from the Corel database, and arbitrarily chose 5 users and asked them to annotate the images (40 responses per concept). On an average, 95 percent were correct responses. Another survey was conducted on the ease of clicking near geometric centers in our composite images, using an 800×600 composite image consisting of 8 images ($R=15$), yielding 90 percent accuracy in user clicks.

[0041] An appropriate choice of threshold T in choosing distortion set D ensures that automated annotation is not noticeably better than a random guess among the N_w

possible word choices. With $N_w=15$, the random attack success rate for two rounds of click-and-annotate is thus

$$\left(\frac{8\pi R^2}{800 \times 600} \times \frac{1}{N_w} \right)^2,$$

[0042] or 0.000062 percent. This is significantly lower than the attack rates of up to 99 percent on current text-based CAPTCHAs. Without the click phase, attack rate would still be pretty high at $1/N_w^2$ or 0.44 percent, which justifies the need for the click phase. Because cracking our proposed system will require solving two distinct hard AT problems, with our design being aimed at ensuring attack-resistance to state-of-the-art image matching, we do not expect this CAPTCHA to be broken to any sizable extent in the near future, unless there is considerable progress in image understanding technology. Our system generates distortions in less than 1 sec. on a 450 MHz Sun Ultra 60 Server. Word choice set takes about 20 sec. to generate using a Perl interface to WordNet (the algorithm makes iterative calls to the word similarity interface, which is slow), but that can be sped up easily using pre-processing.

[0043] In conclusion, we have invented a new CAPTCHAs generation system using a considerable amount of pseudo-randomness. A novel word-choice generation algorithm is proposed that tackles issues related to user-friendliness and security. A formal method for choosing composite distortion for inclusion in the allowed distortions set is proposed, and four such distortions are obtained through experimentation. Under certain assumptions about the best possible feasible attack strategy, our system is much more secure compared to text-based CAPTCHAs. User-friendliness has been carefully considered in our design, and preliminary results suggest that a simple interface and just four mouse-clicks make it favorable. Greater attack-resistance is possible by considering other possible attack strategies such as interest points, scale/affine invariants, and other object-recognition techniques.

REFERENCES

- [0044] [1] L. von Ahn et al., "Telling Humans and Computers Apart (Automatically) or How Lazy Cryptographers do AI," *Comm. Of the ACM*, 47(2):57-60, 2004.
- [0045] [2] "The CAPTCHA Project," <http://www.captcha.net>.
- [0046] [3] M. Chew et al., "Image Recognition CAPTCHAs," *Proc. 7th Info. Security Conf.*, 2004.
- [0047] [4] J. J. Jiang et al., "Semantic Similarity Based on Corpus Statistics and Lexical Taxonomy," *Proc. Intl. Conf. Research in Computational Linguistics*, 1997.
- [0048] [5] G. Miller, "WordNet: A Lexical Database for English," *Comm. Of the ACM*, 38(11):39-41, 1995.
- [0049] [6] W. G. Morein et al., "Using Graphic Turing Tests To Counter Automated DDoS Attacks Against Web-Servers," *Proc. ACM Conf. Computer and Comm. Security*, 2003.
- [0050] [7] G. Mon et al., "Recognizing Objects in Adversarial Clutter: Breaking a Visual CAPTCHA," *Proc. IEEE Conf. Computer Vision and Pattern Recognition*, 2003.
- [0051] [8] Y. Rui et al., "ARTiFACIAL: Automated Reverse Turing Test using FACIAL features," *Multimedia Systems*, 9(6):493-502, 2004.
- [0052] [9] A. W. M. Smeulders et al., "Content-Based Image Retrieval at the End of the Early Years," *IEEE Trans. Pattern Analysis and Machine Intelli.*, 22(12):1349-1380, 2000.
- [0053] [10] A. Turing, "Computing Machinery and Intelligence," *Mind*, 59(236):433-460, 1950.
- [0054] [11] J. Z. Wang et al., "SIMPVicity: Semantics-Sensitive Integrated Matching for Picture Libraries," *IEEE Trans. Pattern Analysis and Machine Intelli.*, 23(9):947-963, 2001

We claim:

1. A method of generating a Completely Automated Public test to Tell Computers and Humans Apart (CAPTCHA), comprising the steps of:

presenting at least one distorted photographic or graphical image along with a list of words, one of which best corresponds to the image; and

assuming that the recipient of the image is a human as opposed to a machine if the correct word is selected.

2. The method of claim 1, wherein the image is distorted using one or more of the following:

dithering, partitioning, quantization, noise addition, color re-mapping, and selective cut-and-resize.

3. The method of claim 1, further including the step of:

presenting a plurality of different images to a recipient to select a single one thereof.

4. The method of claim 1, further including the step of:

presenting a plurality of different images to choose from, the images being separated by borders which are distorted or otherwise visually obfuscated.

5. The method of claim 1, wherein the words are generated to avoid ambiguity with respect to the selected image.

6. A method of generating a Completely Automated Public test to Tell Computers and Humans Apart (CAPTCHA), comprising the steps of:

presenting a plurality of different images to a recipient to select a single one thereof;

distorting the image selected, and presenting the distorted image along with a list of words, one of which best corresponds to the image; and

assuming that the recipient of the image is a human as opposed to a machine if the correct word is selected.

7. The method of claim 6, wherein the image is distorted using one or more of the following:

dithering, partitioning, quantization, noise addition, color re-mapping, and selective cut-and-resize.

8. The method of claim 6, further including the step of:

presenting a plurality of different images to a recipient to select a single one thereof.

9. The method of claim 6, further including the step of: presenting a plurality of different images to choose from, the images being separated by borders which are distorted or otherwise visually obfuscated.

10. The method of claim 6, wherein the words are generated to avoid ambiguity.

11. The method of claim 6, wherein the image is distorted using content-based image retrieval and annotation.

12. The method of claim 5, wherein the process is repeated.

13. A Completely Automated Public test to Tell Computers and Humans Apart (CAPTCHA) system, comprising:

a database for storing annotated images;

a processor for distorting one or more of the images;

a display for presenting one or more of the distorted images to a user along with a plurality of annotations to choose from; and

an input allowing a user to select the annotation that best corresponds to the image.

14. The CAPTCHA system of claim 13, wherein the processor is operative to: display a composite containing a plurality of images.

15. The CAPTCHA system of claim 13, wherein the input allows a user to select one or more of the images from the composite prior to annotation.

16. The CAPTCHA system of claim 13, wherein the processor is operative to:

present a plurality of different images to choose from, the images being separated by borders which are distorted or otherwise visually obfuscated.

* * * * *