


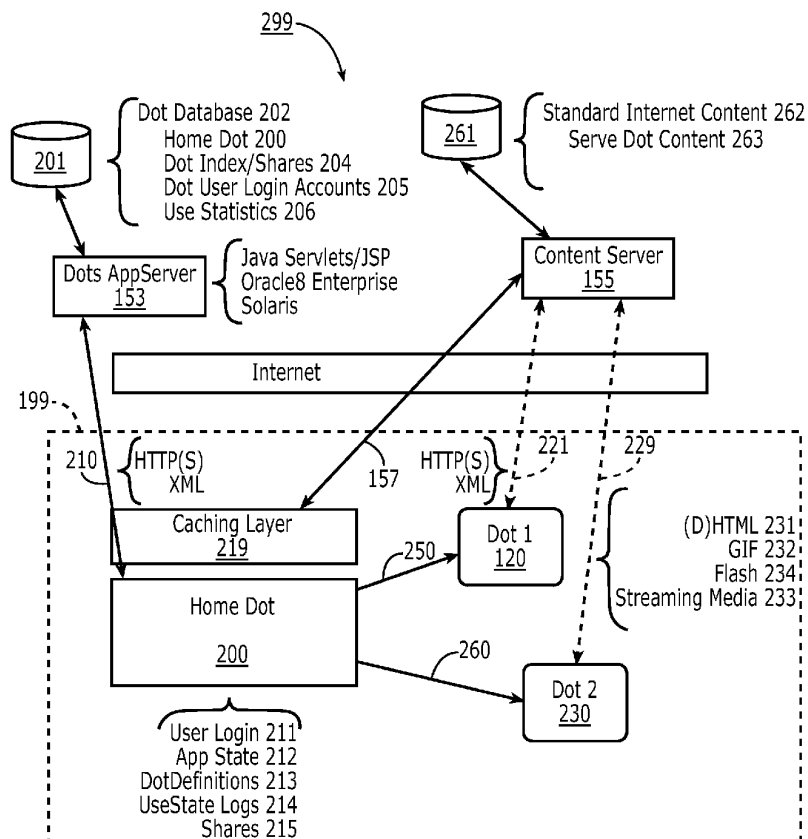

US 20080134018A1

(19) **United States**(12) **Patent Application Publication**
Kembel et al.(10) **Pub. No.: US 2008/0134018 A1**(43) **Pub. Date: Jun. 5, 2008**(54) **COMPONENT FOR COORDINATING THE
ACCESSING AND RENDERING OF AN
APPLICATION MEDIA PACKAGE**(75) Inventors: **John Albert Kembel**, Palo Alto,
CA (US); **George Andrew Kembel**,
Menlo Park, CA (US); **Daniel S.
Kim**, Palo Alto, CA (US); **John
Russell**, Palo Alto, CA (US); **Jake
Wobbrock**, Palo Alto, CA (US);
Geoffrey S. Kembel, Menlo Park,
CA (US); **Jeremy L. Kembel**, Palo
Alto, CA (US); **Lynn D. Gabbay**,
Sunnyvale, CA (US)Correspondence Address:
JAS IP CONSULTING
309 2nd STREET, SUITE 8
LOS ALTOS, CA 94022(73) Assignee: **Mainstream Scientific, LLC**,
Mountain View, CA (US)(21) Appl. No.: **11/932,427**(22) Filed: **Oct. 31, 2007****Related U.S. Application Data**(63) Continuation of application No. 09/558,925, filed on
Apr. 26, 2000.(60) Provisional application No. 60/131,083, filed on Apr.
26, 1999, provisional application No. 60/131,115,
filed on Apr. 26, 1999, provisional application No.
60/131,114, filed on Apr. 26, 1999, provisional appli-
cation No. 60/176,687, filed on Jan. 18, 2000, provi-
sional application No. 60/176,699, filed on Jan. 18,
2000.**Publication Classification**(51) **Int. Cl.**
G06F 17/00 (2006.01)
G06F 9/445 (2006.01)
G06F 3/00 (2006.01)(52) **U.S. Cl. 715/234; 715/200; 717/178; 715/760**(57) **ABSTRACT**

A software application component for coordinating the
accessing and displaying of Internet content operates to
acquire and render media packages which include a definition
of a graphical user interface and a network reference, such as
a URL, pointing to Internet content to be downloaded and
presented within said user interface. The application compo-
nent may also manage the collection, organization, sharing,
and rendering of a plurality of such media packages.



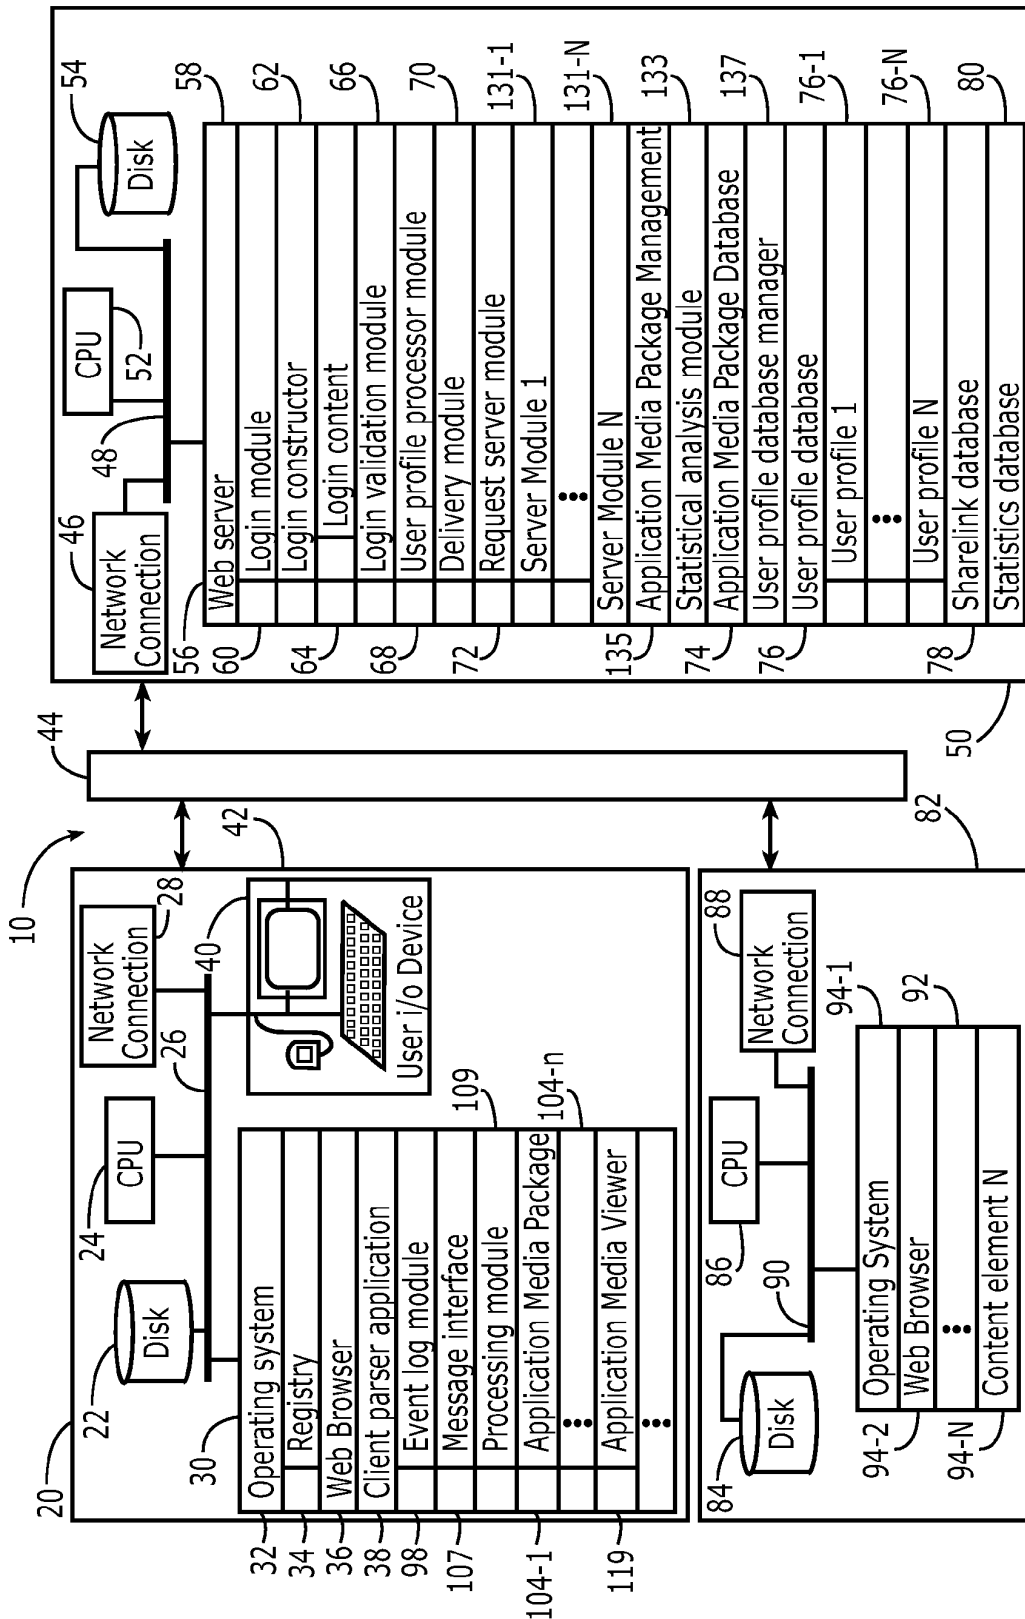
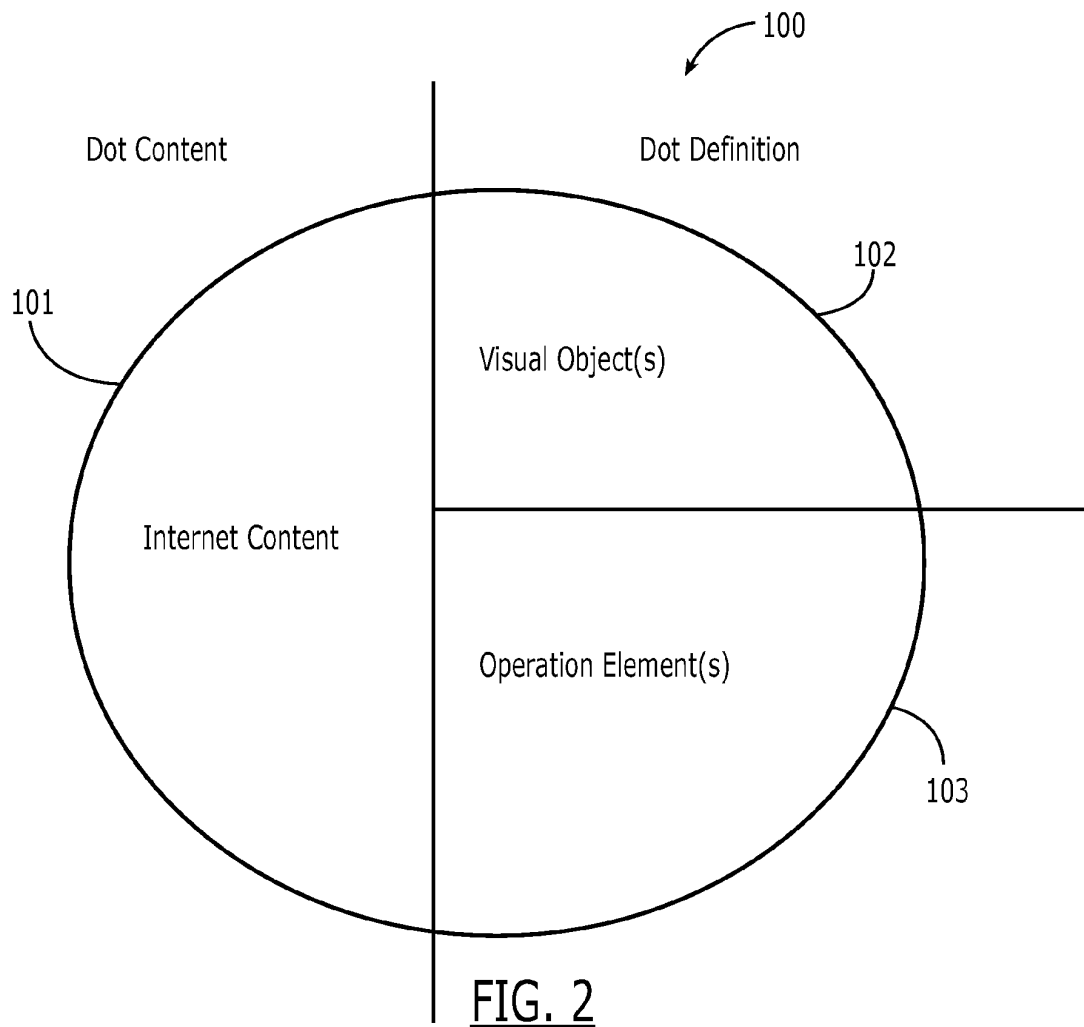


FIG. 1



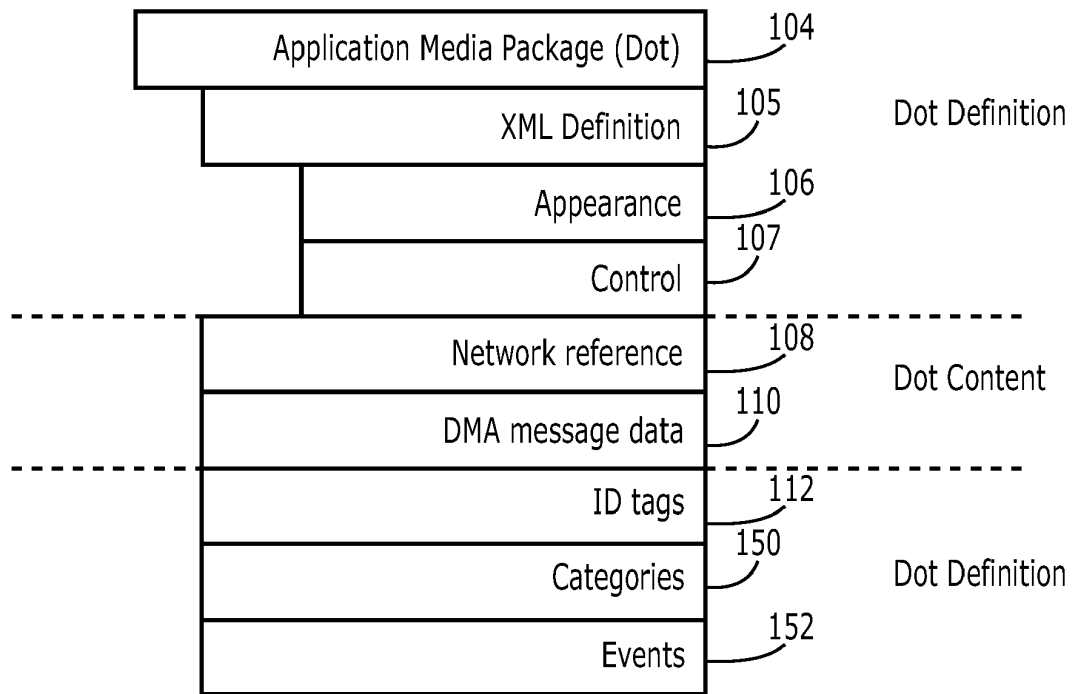
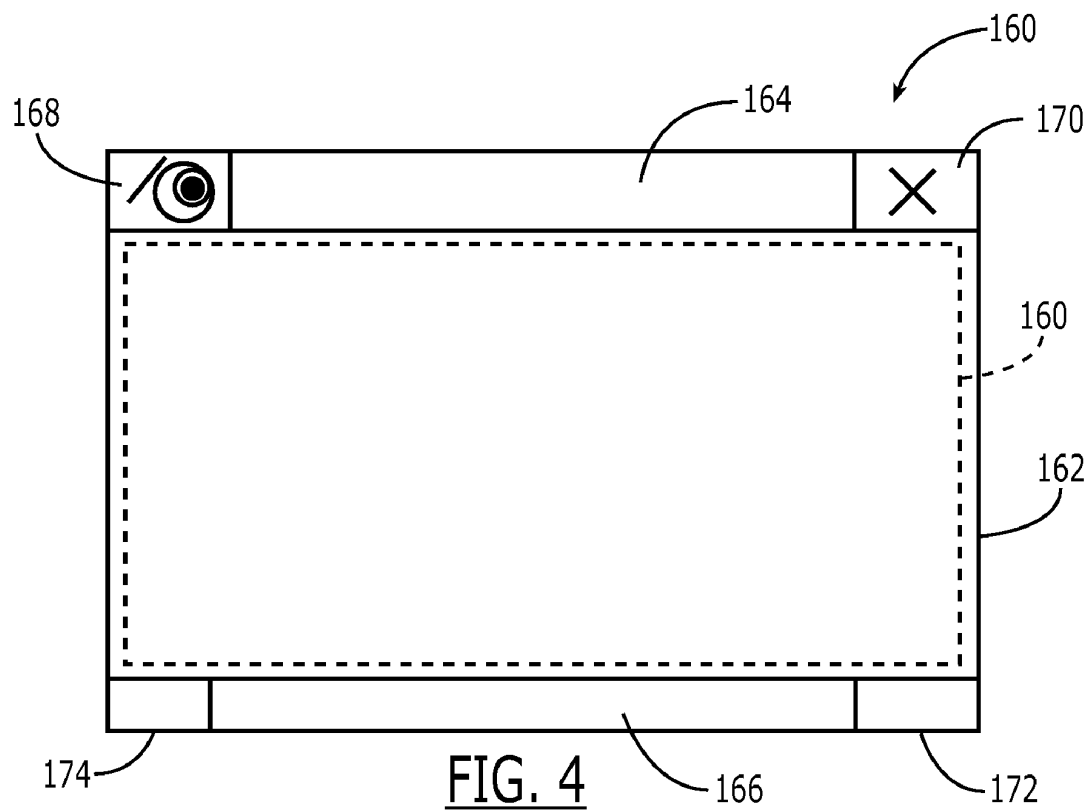
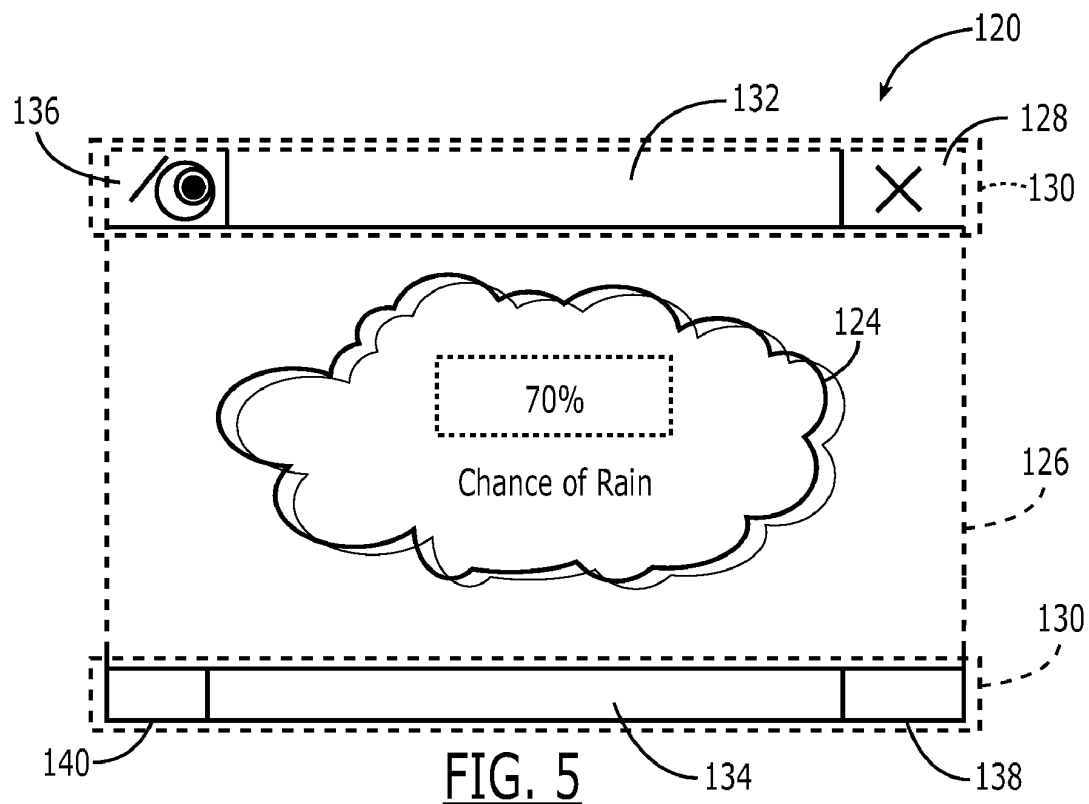


FIG. 3





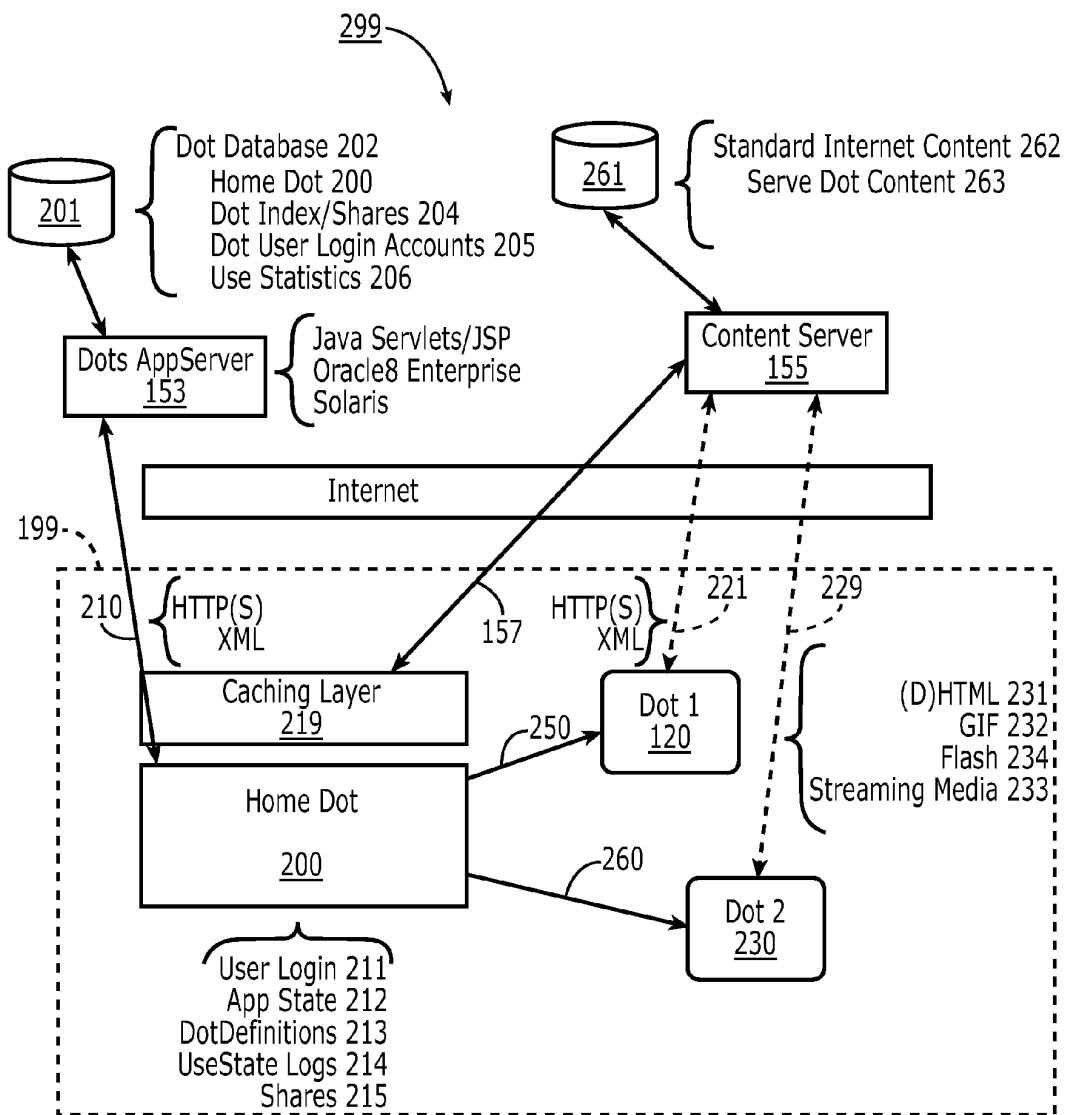


FIG. 6

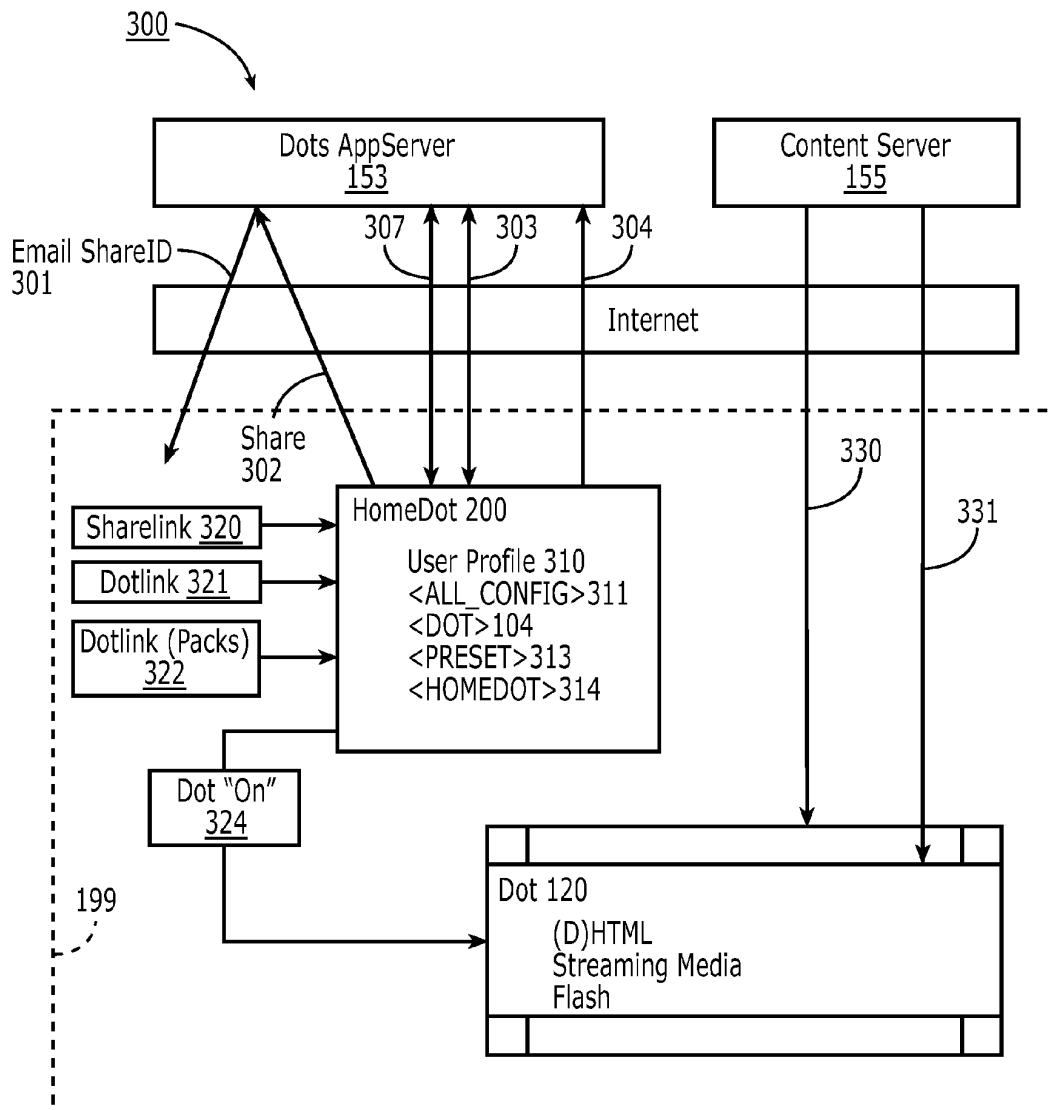


FIG. 7

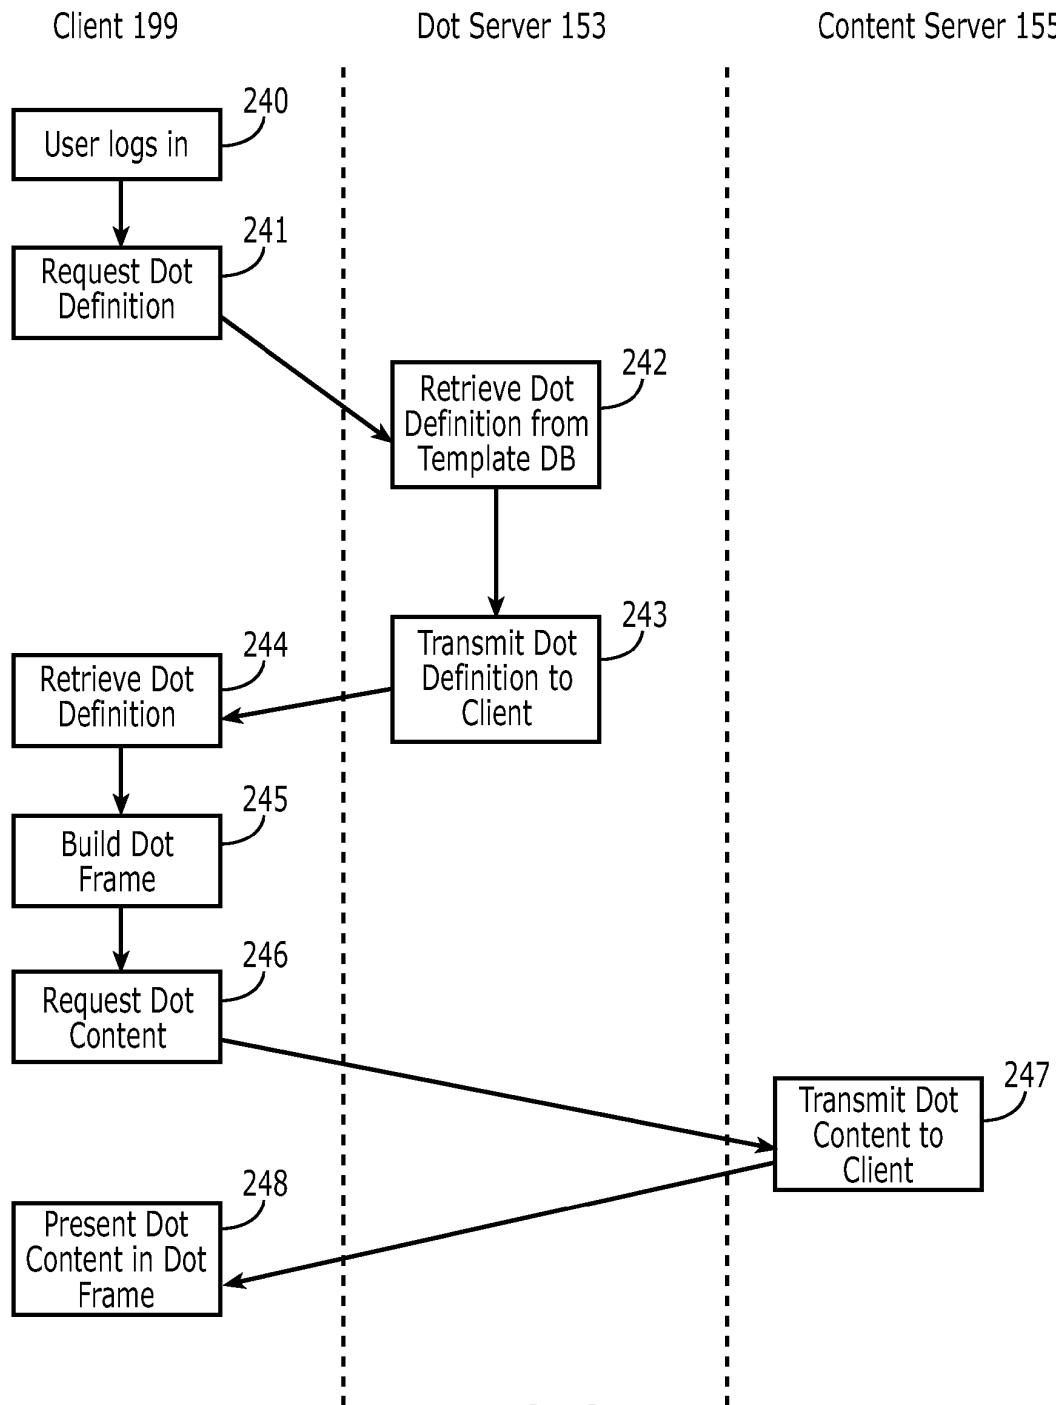
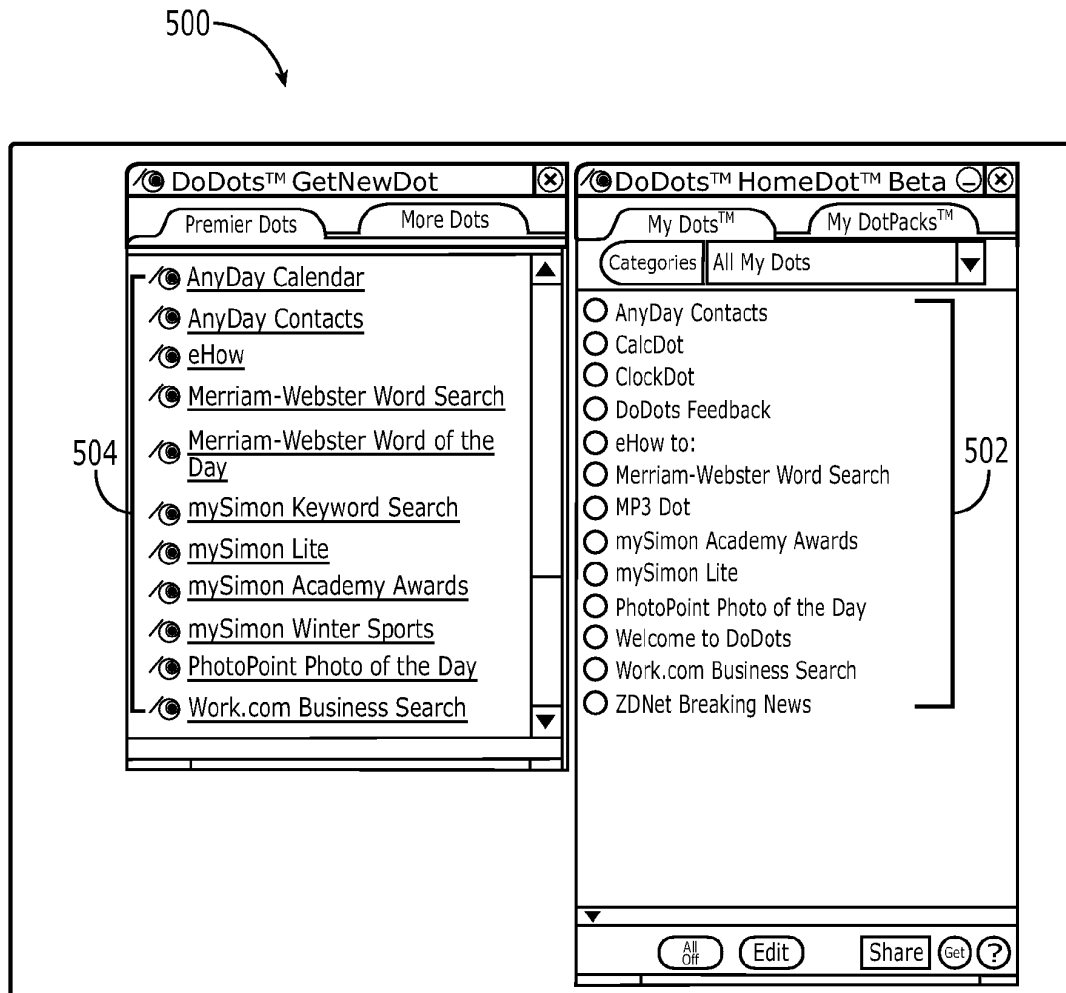


FIG. 8



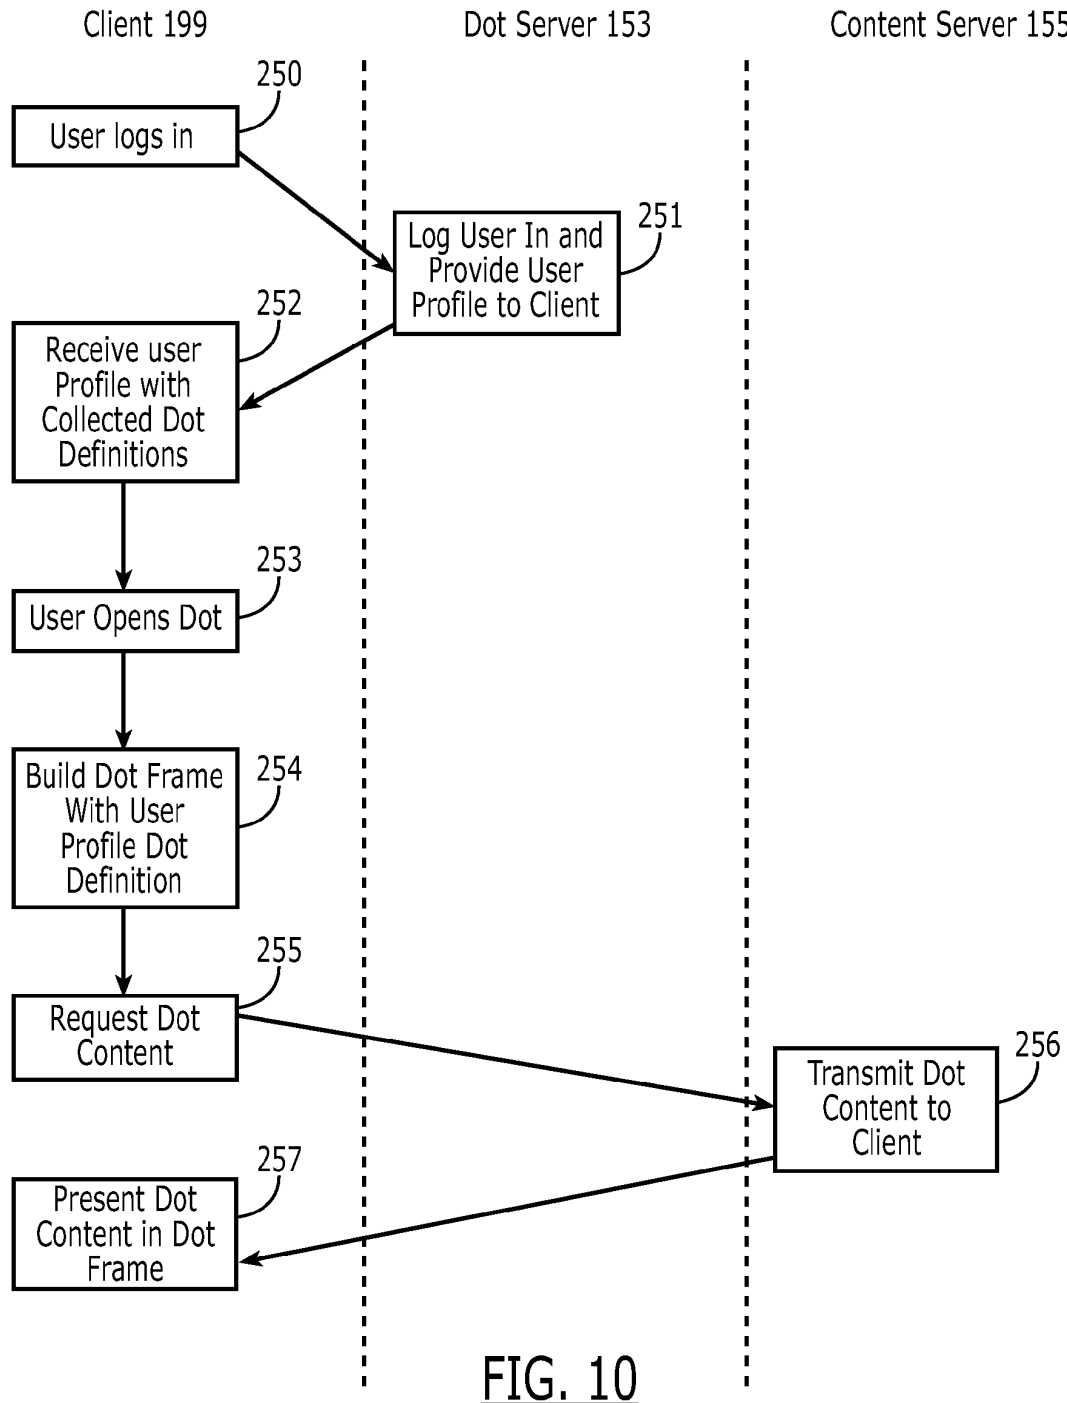
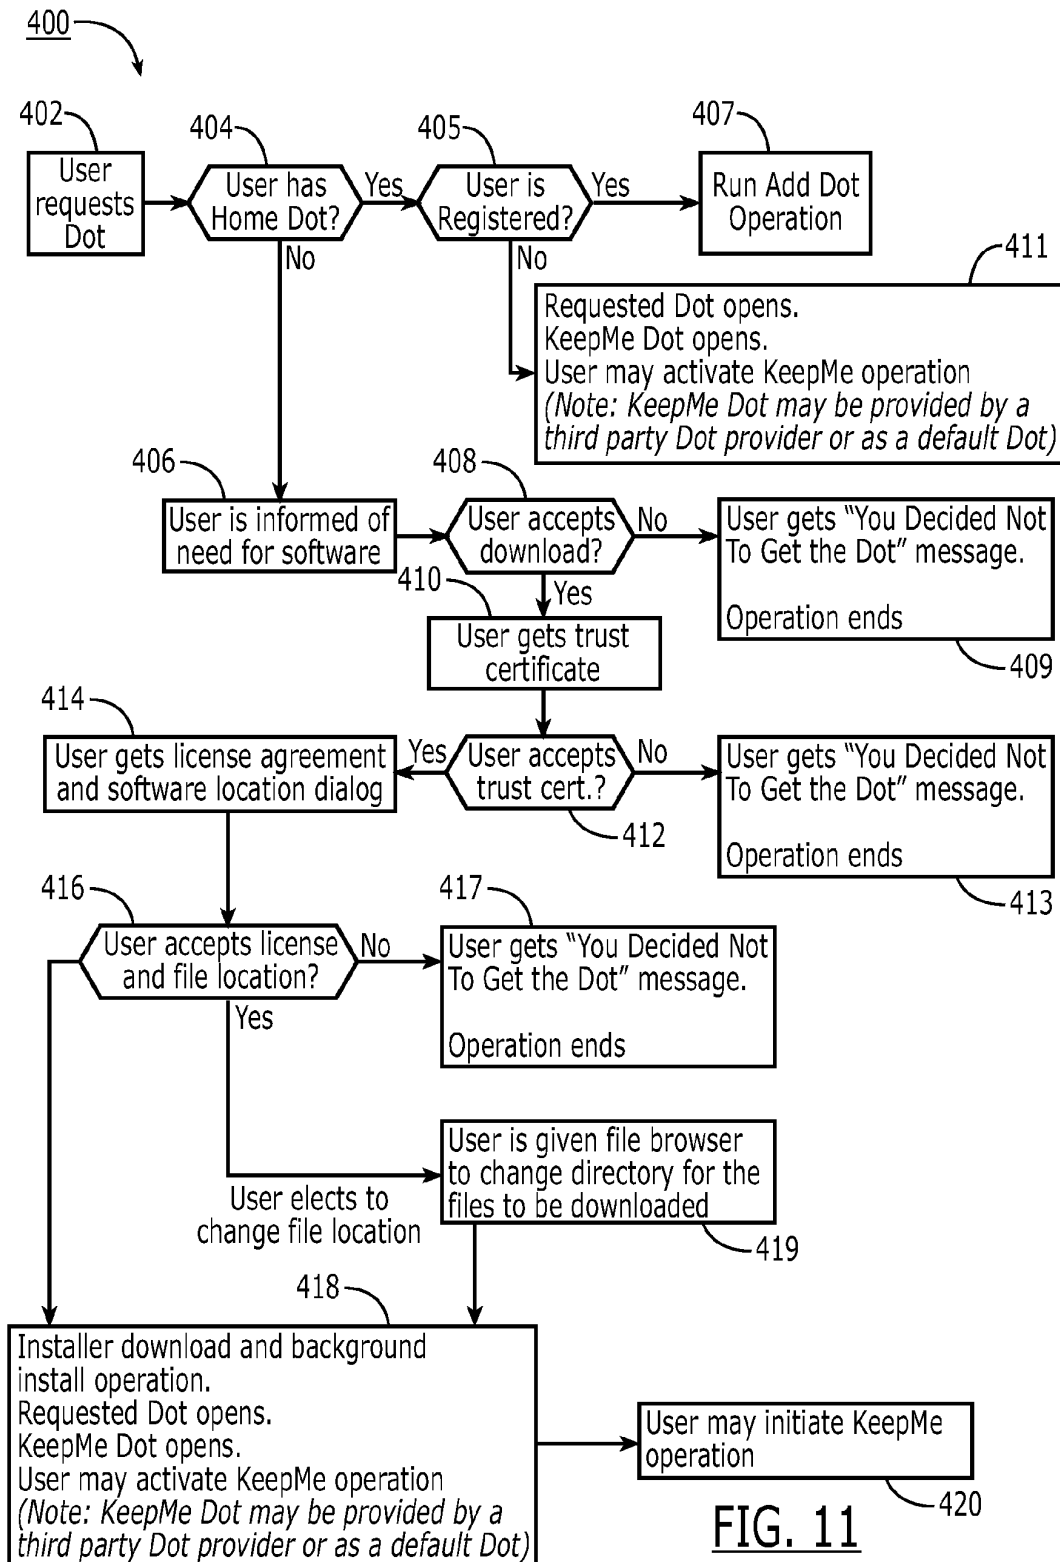
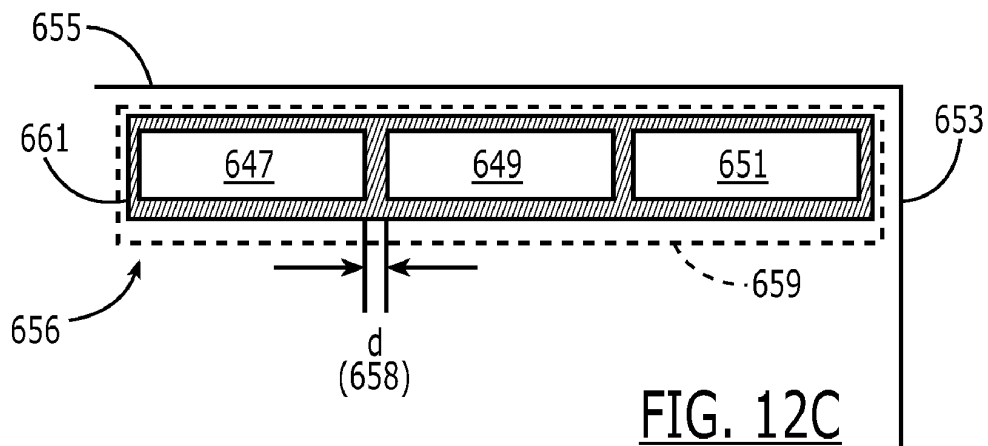
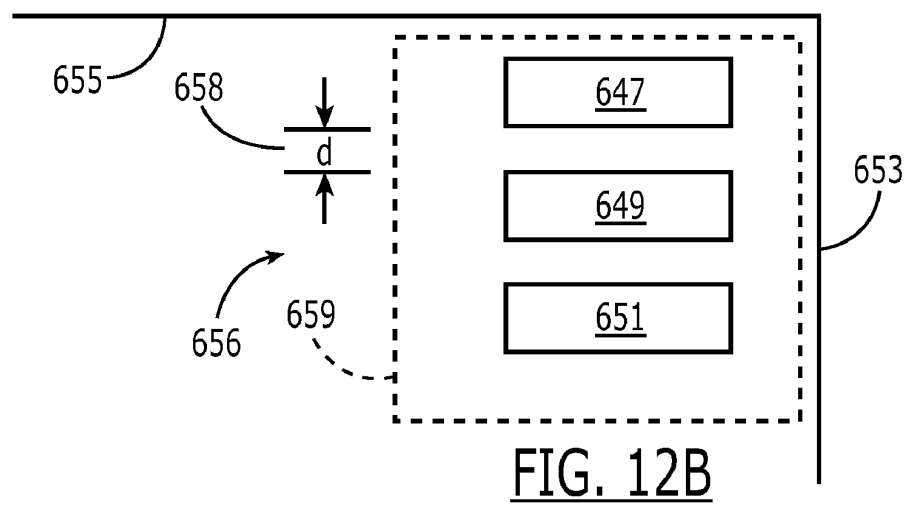
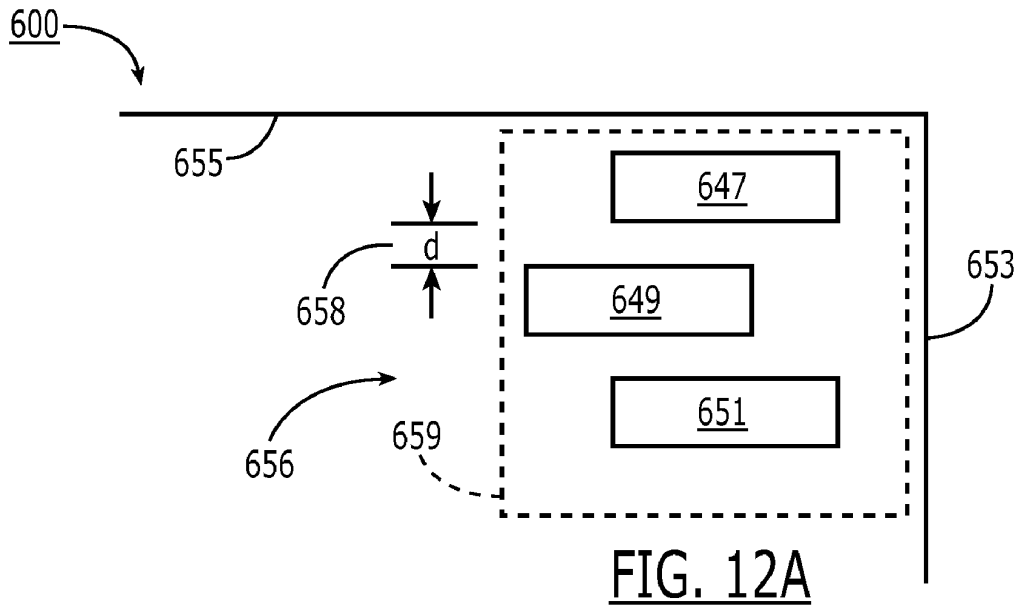


FIG. 10





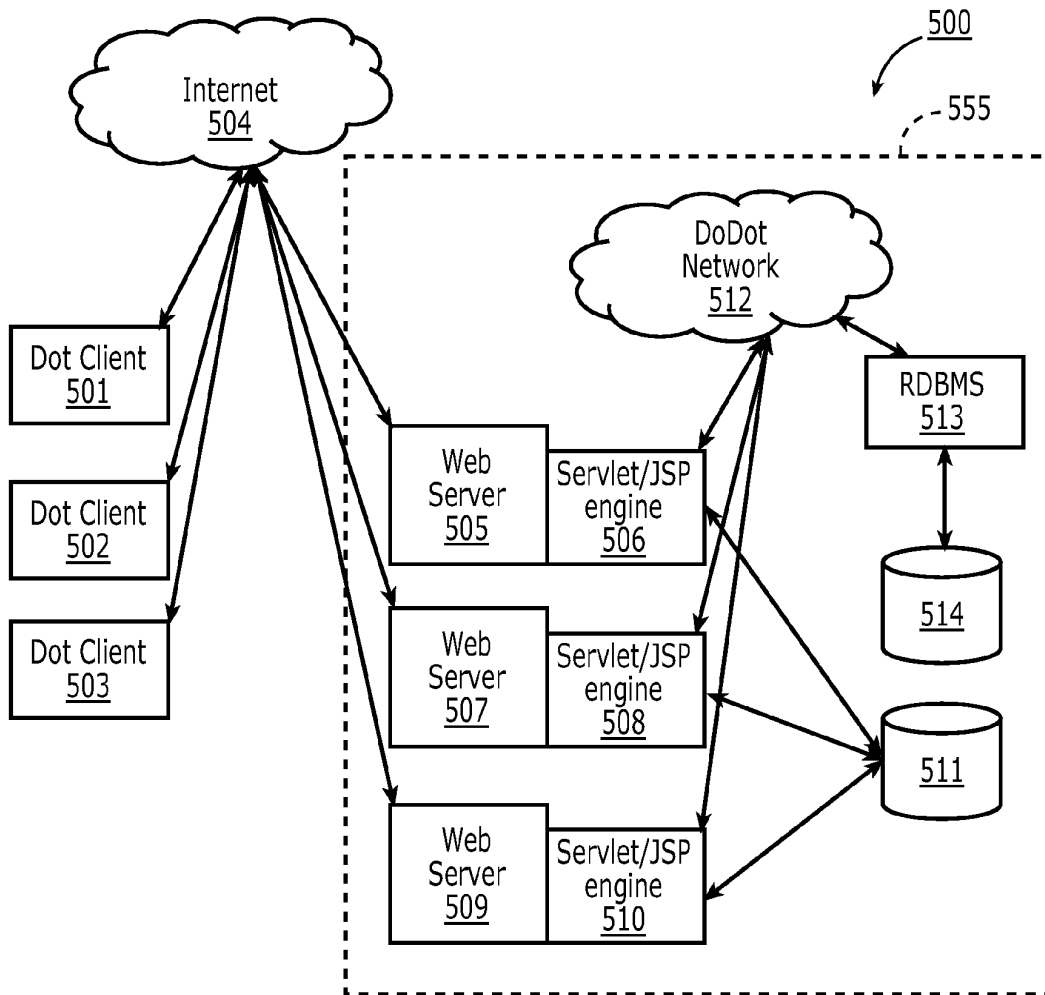


FIG. 13

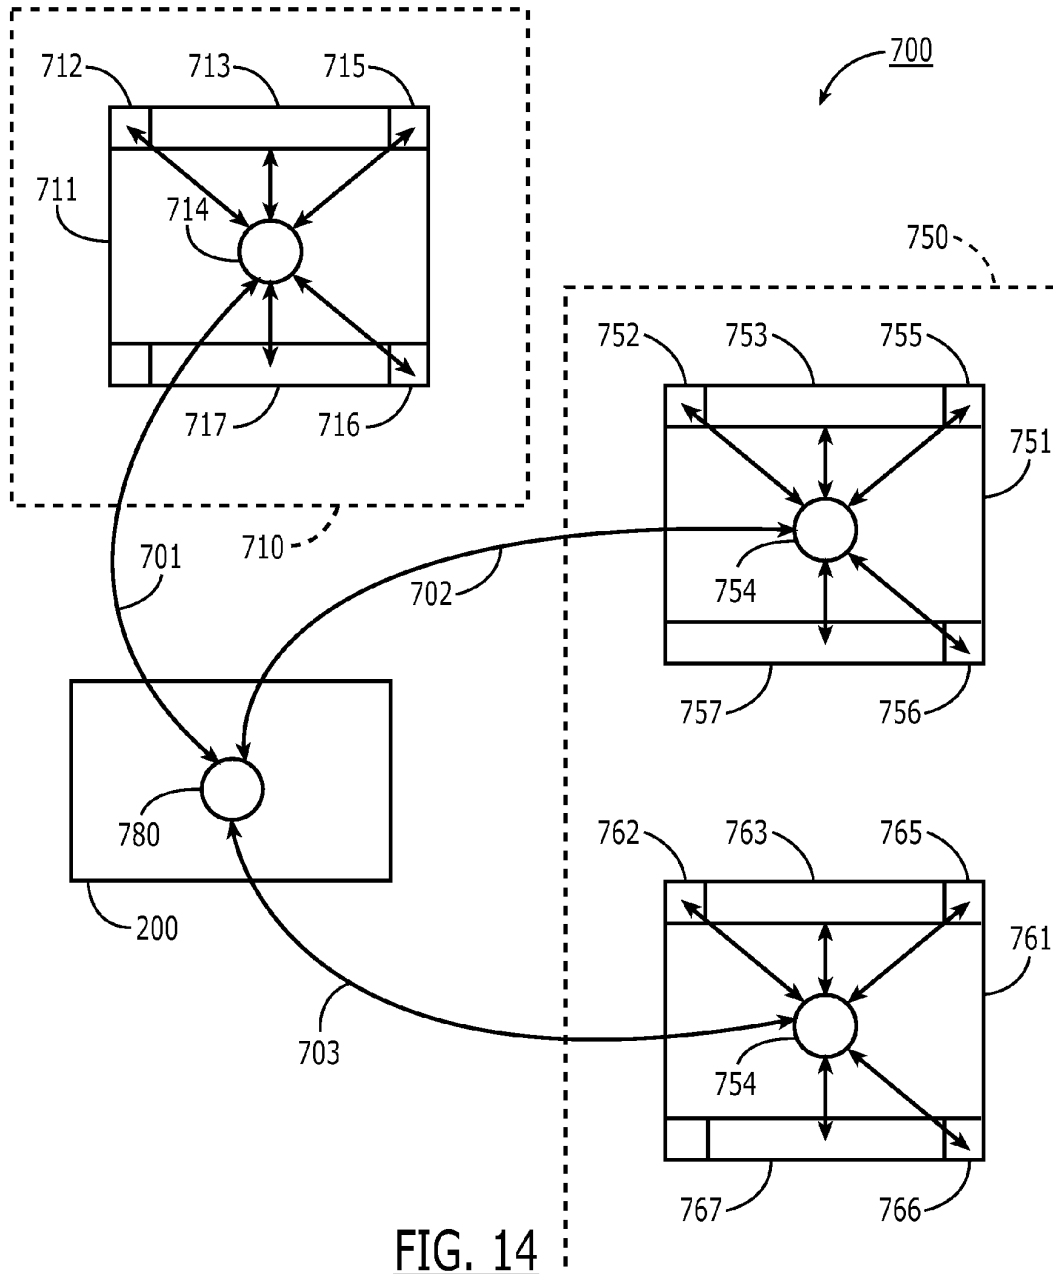


FIG. 14

COMPONENT FOR COORDINATING THE ACCESSING AND RENDERING OF AN APPLICATION MEDIA PACKAGE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of and incorporates by reference U.S. Non-Provisional patent application Ser. No. 09/558,925, filed Apr. 26, 2000, which claims priority from and incorporates by reference U.S. Provisional Application Ser. Nos. 60/131,083, filed Apr. 26, 1999, 60/131,114, filed Apr. 26, 1999, 60/131,115, filed Apr. 26, 1999, 60/176,687, filed Jan. 18, 2000, and 60/176,699, filed Jan. 18, 2000. The present application claims priority to U.S. Non-Provisional patent application Ser. No. 09/558,925, filed Apr. 26, 2000 and each of the aforementioned applications to which it claims priority.

[0002] The present application is also related to and incorporates by reference the following U.S. patent applications: Non-Provisional application Ser. No. 09/558,922, filed Apr. 26, 2000; Non-Provisional application Ser. No. 09/558,923, filed Apr. 26, 2000; Non-Provisional application Ser. No. 09/558,924, filed Apr. 26, 2000; Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "Component For Accessing And Displaying Internet Content" (attorney docket no. IMS 07-05-01); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "Server Including Components For Accessing And Displaying Internet Content And For Providing Same To A Client" (attorney docket no. IMS 07-05-02); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "CMethod for Accessing Displaying Internet Content" (attorney docket no. IMS 07-05-03); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "Tracking and Tracing User Activity with Application Media Packages" (attorney docket no. IMS 07-05-05); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "Displaying Time-varying Internet based Data using Media Application Packages" (attorney docket no. IMS 07-05-06); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "System and Methods for Creating and Authoring Internet Content using Application Media Packages" (attorney docket no. IMS 07-05-07); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "Methods of Obtaining Application Media Packages" (attorney docket no. IMS 07-05-08); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "Indexing, Sorting, and Categorizing Dots" (attorney docket no. IMS 07-05-09); Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "System and Methods of Messaging between Application Media Packages" (attorney docket no. IMS 07-05-10); and, Non-Provisional Application Ser. No. _____, filed Oct. 31, 2007, titled "Component For Accessing And Displaying Internet Content In Association With a Web Browser Application" (attorney docket no. IMS 07-05-11).

COPYRIGHT NOTICE

[0003] A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent dis-

closure as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

[0004] 1. Field of the Invention

[0005] The present invention is related to accessing and viewing Internet content, and more specifically to a method and apparatus for providing a unique frame, independent of a Web Browser application and window, for the retrieval and display of such content.

[0006] 2. Description of the Prior Art

[0007] A user operating a client computer typically accesses the Internet by using a viewer application, such as a browser to view Internet content provided at a destination address, typically a web page. In this context, Internet content and web applications are designed to fill the entire web page. It is known to divide the Internet content into different regions of a single web page. For example, personalized web pages can be specified, such that a user views a variety of content sources in a single page, such as stock information, weather information, and sports information, which is aggregated at the server that delivers the web page to the user, who then views the aggregated content in a single web page. Observe that even when disparate content is aggregated, in this manner, it is reassembled into a full web page and is served through a full-screen browser.

[0008] Users and application developers therefore have limited control over the presentation of internet content: content is typically trapped within the frame of the browser. A developer's only alternative to engaging a user page-by-page in a browser is to develop, distribute, and support custom client software. In the Web browser scenario, it is the content provider, not the user that aggregates the information that is viewed by the user. Thus, the user is not in a position to separately aggregate the content at a client computer, instead the user is constrained to view the content that has been delivered in the manner provided by the server computer hosting the web page. There is a growing desire for individual users to fully control the aggregation and presentation of content and web applications that appears on a client computer.

[0009] A user who wishes to view multiple web pages or applications can open multiple instances of a browser. However, the user will not be able to view each "full-screen" page at the same time. Instead, the user must adjust the windows corresponding to each browser instance and view only part of each page. The information appearing in each browser is not designed for viewing in this manner. Thus, the user cannot create an optimized display of content from multiple sources.

[0010] Currently, content providers and end users have limited tools to alter the browser in which content appears. That is, the controls associated with a browser are not fully configurable. Thus, the vendor of a browser is in a position to brand the browser and regulate the controls associated with the browser. There is a growing desire for content providers to not only fill a browser with their content, but to also fully brand and control the frame in which the content appears. Further, in some instances, content providers desire to limit the controls associated with a browser or viewer, so that a user is more inclined to view a single set of content, for example, by having limited access to previously viewed content. However, the current browser applications provide very limited

control to a user or content provide to alter the frame and controls provided by the browser window.

[0011] In summary, therefore, the current model of the Internet has the following attributes and limitations:

[0012] a) Internet content is typically viewed one page at a time, with each page displayed serially displayed in a browser application window which typically takes up the majority of the user's computer screen real estate.

[0013] b) Internet content is designed for delivery in web pages. Even if content is modularized, it is reassembled into a full web page and viewed serially in the window of browser application taking up a significant portion of the user's desktop.

[0014] c) There is a distinction both visually and architecturally between the "viewer application" (browser) and the "content/document" (web page) such that a browser window is not tailored to the content being displayed, but rather is capable of displaying any web content.

[0015] d) Internet content is effectively limited and trapped within the "frame" of the browser (viewer application). Therefore, content developers, users and web-application developers are limited in how the user experience is controlled.

[0016] e) Although internet programming technologies (such as java script, CSS, layers, flash, etc.) are giving web pages more functionality, the pages have limited access to application functionality such as access and control of the window and frame, the size of the frame, branding, application behavior such as size and menu items, etc.

[0017] f) "Web-applications" such as web-mail and web calendars are being packaged and viewed through the page-by-page web model. Even though web-applications are being implemented by many online companies, the web is currently a destination page-based model where, for example, a user visits one page, then goes to another page and so on. It is therefore a sequential, linear experience, e.g., one full page at a time.

[0018] In view of the foregoing, there is a need in the art to provide a technique for accessing multiple instances of distributable computer readable web content in which these instances are typically smaller than the full pages used in current web pages and web applications, and which may be displayed in user- or content provider-controlled frames. Preferably, such techniques allow such access to be done simultaneously. There is a further need for providing the user with flexibility in selecting, collecting, relating and viewing such web content and for giving the content provider flexibility in directing media to a specific user and controlling the framework in which media, such as web content, is presented. Finally, there is a need to gather more accurate information regarding the type of content that a user enjoys, so that the user can be automatically provided with this content.

SUMMARY OF THE INVENTION

[0019] Accordingly, the present invention is directed to systems and methods by which predefined web content or predefined references to web content may be accessed and displayed on a web-connected client computer. The method relies on the structure defined herein as an Application Media Package. Application Media Packages are web browser-readable code that is executed on a non-browser-based installed client application. The client application, referred to herein as

an Application Media Viewer, executes independently from a web browser. The Application Media Viewer parses and executes the Application Media Package code to create the user experience. The Application Media Viewer is capable of loading and simultaneously running a plurality of different Application Media Packages.

[0020] Application Media Packages are programmed to access and display web data including media content. By design, Application Media Packages may graphically reflect the type of data as well as time varying changes in the data. Unlike web pages which have formatting restrictions that are dictated by the browsers into which they are loaded, Application Media Packages have a graphically definable format which is the graphical user interface (GUI) as presented on a user's client computer. Furthermore, unlike web pages together with browsers, Application Media Packages are not generally navigable. They are typically constructed to represent specific data for a specific application.

[0021] Each Application Media Package contains both code and presentation display data or network reference to that data. Together with the Application Media Viewer, the program combination is capable of accessing remote server data that may be processed and/or displayed, modifying on-screen appearance or functionality according to user events, processing web events, client computer events, etc.

[0022] The Application Media Package may operate in a windowed operating system and uniquely operate without the use of a generalized application window. Therefore the Application Media Package graphical user interface is wholly definable by the Application Media Package software developer. It may therefore be designed to exclude the window display requirements associated with the conventional window based operating system applications.

[0023] Application Media Packages may be coded independently of the Application Media Viewer client platform. Thus, independent third party developers may create and post Application Media Packages according to guidelines provided by the creator of the Application Media Viewer. As Web users are increasingly reluctant to download applications from the Web and onto their computers, the Application Media Viewer provides a single trusted application that is downloaded and installed one time.

[0024] The Application Media Viewer then provides a layer of security for Web users so that they may download Application Media Packages without the same exposure to compromising their computer as with installed applications. This security is provided by virtue of a trusted module platform together with the module's web browser readable code. This is in contrast to a typical client application which is directly machine executable and may have broader access privileges to the client computer's resources.

[0025] According to one aspect of the present invention, a physical memory device has stored thereon a software component (Application Media Viewer) for coordinating the accessing and rendering of an application media package. The component comprises: instructions for accessing an application media package definition; instructions for parsing said application media package definition; instructions for rendering, using said parsed application media package definition, a graphical user interface outside of the window of and independent of a web browser application; instructions for accessing Internet content from a network reference specified by said parsed application media package definition; and

instructions for presenting said Internet content such that it is associated with said graphical user interface.

[0026] The above is a summary of a number of the unique aspects, features, and advantages of the present invention. However, this summary is not exhaustive. Thus, these and other aspects, features, and advantages of the present invention will become more apparent from the following detailed description and the appended drawings, when considered in light of the claims provided herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] In the drawings appended hereto like reference numerals denote like elements between the various drawings. While illustrative, the drawings are not drawn to scale. In the drawings:

[0028] FIG. 1 is an illustration of the overall architecture of a network in which the present invention may operate.

[0029] FIG. 2 is an illustration of the elements of an Application Media Package (Dot) according to one embodiment of the present invention.

[0030] FIG. 3 is an illustration of the elements of an Application Media Package (Dot) definition according to one embodiment of the present invention.

[0031] FIG. 4 is an illustration of an instantiation of a generic GUI according to one embodiment of the present invention.

[0032] FIG. 5 is an example of an instance of an Application Media Package (Dot) according to one embodiment of the present invention.

[0033] FIG. 6 is an illustration of the communication flow associated with the acquisition and instantiation of an Application Media Package (Dot) according to one embodiment of the present invention.

[0034] FIG. 7 is all illustration of the communication pathways associated with the building of a user profile, and the acquisition of Dots through links, packs, and sharelinks according to one embodiment of the present invention.

[0035] FIG. 8 is an illustration of the communication pathways associated with the acquisition and instantiation of an Application Media Package (Dot) according to one embodiment of the present invention.

[0036] FIG. 9 is an example of a display showing Application Media Packages (Dot) available for downloading as well as Application Media Packages (Dots) already downloaded according to one embodiment of the present invention.

[0037] FIG. 10 is an illustration of the communication pathways associated with the instantiation of an already-acquired Application Media Package (Dot) according to one embodiment of the present invention.

[0038] FIG. 11 is a flow chart illustrating the download process of an Application Media Package (Dot) and Application Media Viewer (Home Dot) according to an embodiment of the present invention.

[0039] FIGS. 12A, 12B, and 12C are illustrations of Application Media Packages arranged in groups, and arranged in vertical and horizontal Blocks (position-justified groups), respectively, according to an embodiment of the present invention.

[0040] FIG. 13 is an illustration of the client-server model of a system according to the present invention.

[0041] FIG. 14 is an illustration of the message routing paths and elements of a Dot Messaging Architecture according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0042] The present invention discloses a technology that is capable of processing distributable computer readable media. Distributable computer readable media includes, but is not limited to, standard Internet content, such as HTML, dHTML, images, imbedded ActiveX and Java applications, JavaScript, CSS, Perl scripts, Streaming Media, and/or Flash. The present invention is advantageous relative to prior art systems and methods because it provides improved mechanisms for simultaneously interacting with several independent sources of distributable computer readable media, collecting references to such media, and sharing such references with other users. The disclosed technology is further advantageous because it provides improved systems and methods for on screen management of distributable computer readable media.

[0043] Central to the present invention is the concept of an Application Media Package. As used herein, the term Application Media Package refers to a component which includes a fully configurable frame with one or more controls; the frame through which content is optionally presented. The fully configurable frame utilized in accordance with the invention stands in contrast to present web browsers, which are branded by the browser vendor and which have limited means by which to alter the controls associated with the browser.

Absence of Web Browser

[0044] The Application Media Package is a file that is comprised of web browser readable language. According to the preferred embodiment, the present invention renders, displays, and updates Internet data without the use of a browser. In fact, no browser need be installed on the client computer on which the Application Package is instantiated. The present invention produces a user experience by parsing and rendering the Application Media Package through the Application Media Viewer. The Application Media Viewer is an installed client application which renders the Application Media Package as well as provides additional functionality to the user experience (hence, it is more than simply a viewer application). The Application Media Viewer may render web browser readable content (of the type typically supported by a browser application) due to it being programmed utilizing the Microsoft IE4 object for receiving, parsing and rendering web content. It will be understood by one skilled in the art that, despite its name, the Microsoft IE4 object is not a web browser application. One apparent difference between the Application Media Viewer and a typical web browser application is that the Application Media Viewer of the present invention is not designed to provide user web navigation and page control typically provided by a web browser.

[0045] FIG. 1 is a general illustration of a system in accordance with one embodiment of the present invention. In FIG. 1, a network 10 is operated in accordance with the present invention. Network 10 includes at least one user or client computer 20, at least one server computer of class 50, and optionally one or more server computers of class 82. User computer 20 as well as server computers of class 50 and 82 are

each connected by transmission channel **44**, which is any wired or wireless transmission channel.

[0046] User computer **20** is any device that includes a Central Processing Unit (CPU) **24** connected to a random access memory **30**, a network connection **28**, and one or more user input/output (“i/o”) devices **40** including output means **42**. Thus, the term “computer,” as used herein, is intended in its broadest sense to include not only traditional workstations, laptops and similar devices, but any device containing a CPU of sufficient operability to utilize Internet data, such as web-enabled cell phones, personal digital assistants (PDAs), and so forth.

[0047] Output means **42** is any device capable of communicating with a user and includes, for example, a video monitor, a liquid crystal display, voice user interfaces, and/or integrated graphic means such as mini-displays present in web-enabled cell phones, PDAs, etc.

[0048] Typically, user computer **20** includes a main non-volatile storage unit **22**, preferably a hard disk drive, for storing software and data. Further, user computer **20** includes one or more internal buses **26** for interconnecting the aforementioned elements. In a typical embodiment, memory **30** includes an operating system **32** for managing files and programs associated with user computer **20**. In some embodiments, operating system **32** includes a registry **34** that has one or more references to specified locations in system **10**.

[0049] The exemplary memory **30** of FIG. **1** further includes a web browser **36** for viewing Internet content and a separate collection of items, referred to herein as a client parser application **38**. In some embodiments, client parser application **38** uses the one or more references in registry **34** to obtain a login construct from server **50**. In various embodiments, in accordance with the present invention, client parser application **38** runs in conjunction with one or more software modules, such as an event log module **98**, which tracks user activity, a message interface module **107**, which serves as a communication interface between the client parser application **38** and web server **58** and/or external web servers, an application media processing module **109**, one or more Application Media Packages **104-1** to **104-n**, and an Application Media Viewer **119** which, among other functions, regulates the characteristics of visual manifestations of Application Media Packages **104-1** to **104-n** when displayed on output device **42**.

[0050] Server computer **50** includes standard server components, including a network connection device **46**, a CPU **52**, a main non-volatile storage unit **54**, and a random access memory **56**. Further, server computer **50** includes one or more internal buses **48** for interconnecting the aforementioned elements. Memory **56** stores a set of computer programs, modules and data to implement the processing associated with the present invention.

[0051] The embodiment of memory **56** illustrated in FIG. **1** includes a web server **58** for processing requests received from client computer **20**. Web server **58** has many components, including a variety of modules and data structures to assist users that want to log into system **10**. Namely, login module **60** handles an entry request from a client computer **20** and accepts a login identifier that corresponds to a user from client computer **20**.

[0052] Once a user has successfully logged into system **10**, request server module **72** handles requests for specified Application Media Packages **104-1** to **104-n** from client **20**. When such a request is received, request server module **72**

routes the request to an address that corresponds to the specified Application Media Packages **104-1** to **104-n** and transmits the specified Application Media Packages **104-1** to **104-n** to client **20**. One class of specified networked information handled by request server module **72** is requests for Application Media Packages **104-1** to **104-n**. When such a request is received, request server module **72** searches Application Media Packages database **74** for the specified Application Media Package. Application Media Package templates database **74** includes a large number of Application Media Package templates. Each Application Media Package template defines the characteristics of a specific Application Media Package, including fully configurable frame characteristics, viewer and control characteristics, and Application Media Package content references.

[0053] The web server **58** illustrated in FIG. **1** further includes additional modules **131** to handle specialized features of the present invention. For example, one embodiment of the present invention provides a mechanism that allows users to distribute Application Media Packages to each other. In such embodiments, a special server module **131** provides instructions for storing the Application Media Packages, which are to be distributed, using a sharelink database **78**. Advantageously, Application Media Packages that are distributed to other users are customizable. A user can, for example, resize and position a particular Application Media Packages prior to sharing it with another user. Indeed, it is possible, in such embodiments, for a user to arrange a series of Application Media Packages in a unique arrangement and then distribute the collection of Application Media Packages in the designated arrangement. As an illustration, a user arranges a first Application Media Package that represents a scrolling stock ticker at the bottom of an output means, such as a computer screen, a second Application Media Package that tracks the NASDAQ top ten most heavily traded stocks in the upper left corner of the output means, and a third Application Media Package that tracks headline news on the upper right hand corner of the output means. Then, the user distributes the three Application Media Packages in this customized arrangement to other users. Observe that in this example a user of a client computer is aggregating separate sets of information in different Application Media Packages. This stands in contrast to prior art approaches where a web server running on a server computer aggregates information in a single page.

[0054] System **10** is highly scalable and thus supports a large number of users. This scalability stems from the fact that the server **50** is delivering the definition associated with an Application Media Package. The content displayed in the Application Media Package may be located on a separate computer. Memory **56** may provide a statistical analysis module **133** for tracking key events associated with users. This information is stored in statistics database **80**. The information collected by statistical analysis module **133** is used for a wide variety of purposes, including server load optimization and directed advertising, as discussed below. As described below, the statistical information gathered in accordance with the invention includes fully traced events defining the type of content and the duration over which all content is viewed by a user. This type of comprehensive information is not available using present techniques. Much of the distributable computer readable media that is available for processing is stored as content elements **94** on server **82**. Server **82** is a standard web server that includes components such as a network connection device **88**, a CPU **86**, a main non-volatile storage unit

84, a random access memory (RAM) 92, and one or more internal buses 90 for interconnecting the aforementioned elements. RAM 92 includes some of the content elements 94 stored by server 82. Other content elements 94 are stored in storage unit 84. In some embodiments, a single web server 58 is capable of directly accessing content elements 94 located on one or more servers 82. In other embodiments, each server 82 has a resident web server module that works in conjunction with server 50 to identify, optionally dynamically generate, and serve content elements 94 upon demand.

[0055] With the general architecture of a system within which the present invention may operate provided with reference to FIG. 1, we next turn to a number of definitions of key terms used herein. Terms not specifically defined herein shall be understood to have their broadest, generally accepted meaning. Other terms may be defined elsewhere in the present disclosure. (See also Appendix A and B herein.)

[0056] Application Media Package—An Application Media Package, also referred to herein as a Dot, is computer software component, such as XML code and data, representing the definition of a client-side mini-application, which displays information and/or provides functionality to an end user. The Application Media Package combines the packaging, application behavior, and the presentation of Internet content with the content itself, creating one integrated unit—a Dot. Therefore, Dots are the integration of application and media. A Dot may be viewed as a free-floating mini-site. It is frame in which Internet content is presented (although lacking the most common functionality typically associated with a browser, navigation).

[0057] In one embodiment, Dots are programmed with browser readable language that is parsed to the Microsoft Internet Explorer (IE) rendering object (referenced within a control, so named the Dot Web Conduit) and are capable of displaying any Internet content supported by IE 4 (however, not necessarily requiring use of Internet Explorer or any browser for such display). This browser readable language defines the appearance of a Dot, its functionality, and what content is presents. This browser readable language includes XML, streaming media, dHTML, etc.

[0058] Structurally, the Dot or media application package comprises initialization data, control calls, and a frame. Content, such as that obtained from a network reference, is rendered within the frame. The control calls may include the web conduit, base controls such as “close” and “resize”, base GUI elements such as a title bar, Dot menu, and Dot bottom bar, as well as XML Dot calls that are made by the Dot Definition and executed by the Home Dot. Unlike a downloadable, custom, client-application (e.g., for delivering custom web applications to users’ desktops), an Application Media Package is entirely content. That is, the entirety of a Dot package, referred to as its definition, is in a browser-readable language.

[0059] All that is required to instantiate an Application Media Package (on the client computer) is its definition assuming that the client computer has an Application Media Viewer (discussed below) installed. That is, no browser is needed to render an Application Media Package. No browser need be running or be present on the client machine in order to render an Application Media Package.

[0060] Application Media Package Content—Application Media Package content, also referred to as Dot Content, is Internet content served off of partner/Dot Developer servers or another third party server. While in some cases a party developing and making a Dot available (from a partner/Dot

Developer server) may also host (on the server) content for that Dot, the developer is free to cause the Dot to point to content from another party/site for rendering as part of an instantiated Dot. It is an attribute of the present invention that any internet content can be accessed, processed, and/or displayed as Dot Content or Application Media Package Content.

[0061] Application Media Viewer—The Application Media Viewer, also referred to herein as the Home Dot, is a network enabled, client application that loads and displays an Application Media Package on a client computer. Data contained within the Application Media Package is parsed by the Application Media Viewer and rendered within the extent of the Application Media Package’s frame as defined therein. Data is web browser readable language including media and Internet references thereto, as well as control calls. These control calls contained within an Application Media Package are also parsed and executed. The Application Media Viewer is required to instantiate an Application Media Package (i.e., to create a Dot and provide any associated functionality on a client display device). The Application Media Viewer effectively takes the place of a browser application when rendering Internet content via an Application Media Package. However, an Application Media Package contains Internet data and as such, this data may also be referenced by a browser. In the preferred embodiment, a browser is not employed to instantiate an Application Media Package, nor to invoke any functionality they may provide. Also in the preferred embodiment, the Application Media Viewer is a compiled application, programmed using MFC (Microsoft Foundation Class) or the like. The Application Media Viewer need only be downloaded to the client computer one time and may be used to instantiate any number of Application Media Packages. More than one Application Media Package may be instantiated at a time, i.e. the Application Media Viewer is capable of executing and displaying multiple instantiated Application Media Packages. The Application Media Viewer is also capable of checking for updated versions of itself (and any Application Media Package) on the server. The Application Media Viewer supports a number of facilities including support for standard internet protocols (http, https, etc.) Additionally, the Application Media Viewer also supports collecting and organizing Application Media Packages, user login, user activity statistics collecting and reporting, and messaging between Application Media Packages.

[0062] Block—A group of Dots. Blocks are created and destroyed by the user through the dragging and positioning of individual Dots or other blocks.

[0063] Computer—as used herein, the term computer is meant to refer to any device that includes a Central Processing Unit (CPU) connected to a random access memory, a network connection, connected and rendering to one or more output devices, which has sufficient operability to utilize Internet data, such as web-enable cell phones, personal digital assistants (PDAs), etc. Thus, the term is intended in its broadest sense to include not only traditional workstations, laptops and similar devices, but web-enabled cell phones, PDAs, etc.

[0064] Content Server—Also called a Partner Web Server, used to deliver Internet content to a Dot on a client machine.

[0065] Controls—A Dot comprises of at least one control, each of which is arranged within the frame according to the Dot Definition. In the preferred embodiment, this minimum control is the Web Conduit which is the Internet data rendering portion of the frame. Controls are calls that are contained

within the Dot content that enable a Dot, for example with application behavior amongst other attributes and explained further herein. The Dot Definition may contain base control (close, resize) overrides such that the controls are not rendered or are rendered only upon mouse over events rather than persistent display. Additional media elements and network referenced media may also be contained within the Dot Definition.

[0066] DoDots—The working product name of the invention described herein.

[0067] Dot Class—An instance of a particular set of binaries to create a particular type of Dot.

[0068] Dot Definition—This software entity contains enough information to instantiate an Application Media Package (a Dot) and pointers to location of Application Media Package content (Dot content). A Dot is defined by its dimensions and a set of four attributes called Dot components, as will be later described. A Dot Definition also defines access to Dot Web Conduit, which is a control element of a Dot and is a fully functional rendering element that can access available Internet content.

[0069] Dot Link—Hyperlink or URL on a server for downloading a Dot. Based on standard Internet links, these point to or reference particular Dot Definitions and enable the Home Dot to quickly access (using standard HTTP/HTTPS requests, for example) the frame and initialization pointers/URLs in the Dot Definition to instantiate the Dot and render it.

[0070] Dot Messaging Architecture (DMA)—Elements within Dots and the Home Dot application create a messaging architecture (the Dot Messaging Architecture) that enables elements of the system including Dots, controls within Dots, and the Home Dot application, to communicate with one another. The DMA enables these elements to exchange information, request actions or functionality, and respond to system, element, or content events.

[0071] Dot Pack—A group of Dot templates specified by a particular Dot developer, provider or aggregator that complement each other in some way.

[0072] Dot Server—Also called an Internet Application Server, used to deliver Dots to a client machine.

[0073] Dot Template—The XML definition of a particular Dot provider's Dot in its default state. Information includes the Dot size, Dot class, starting URL, etc. The Dot template may be defined by a third party Dot provider. The Dot template is used as the starting point for a particular Dot, which may be customized by the user in some way after the first instantiation.

[0074] Frame—The frame, also referred to as a Graphical User Interface (GUI), defines that area upon a display of the Dot instantiation in which data may be rendered. As previously described, the frame may contain rendered Internet data. A Dot is comprised of a frame or GUI, initialization input data including data and network references to data displayed in said frame. The appearance of the frame (if any) together with data that is displayed therein is the visible instantiation of the Dot. Any Internet data or media data may be contained within the frame such as an image, Internet content, etc. Additionally the frame shape and content may be wholly defined by the Dot developer.

[0075] Lead Dot—The controlling Dot within a block. A lead Dot is the only Dot within a group that presents a control and close box. The lead Dot is the leftmost, topmost Dot (in that order).

[0076] Share—A Share is a XML file that represents a collection of one or more Dots and/or one or more Snapshots.

[0077] Snapshot—A point-in-time data set describing an individual user's overall visible Dot configuration. This includes location and configuration information on the user's overall configuration, and all blocks and Dots.

[0078] Web Browser Readable Language—standard Internet content that is capable of being parsed by a browser, such content including HTML, java script, XML, CSS, streaming media, Flash, HTTPS, cookies, etc.

[0079] Web Conduit—a control that accesses and renders standard Internet content. Dots in conjunction with the Web Conduit control can render or process anything a browser application can render or process. That is, the web conduit is an entity which processes or handles standard Internet content for rendering the GUI (graphical user interface).

[0080] The present invention discloses a technology that is capable of distributing standard Internet content without the use of and restrictions imposed by a browser as detailed hereinabove, in a manner that enables developer control of the user interface. The present invention includes a method and system in which Internet content is developed, packaged and delivered from a server. The present invention further describes methods and systems in which the user obtains content, interacts with it, and is presented with updates to the content either in part or including the entire Application Media Package.

[0081] The present invention provides an alternative model of viewing content obtained from the Internet. Unlike the web page model requiring a web browser, the present invention is founded on the premise that the basic unit of the Web and its media should not be limited or restricted to a webpage-based display for presentation in a conventional browser nor should the user's experience of the Web be limited to one page at a time as defined by a conventional browser (such as Microsoft's Internet Explorer™).

[0082] Furthermore, the present invention enables efficient placement of web applications directly onto users' desktops. The present invention enables content providers to: break their Internet-based content up into smaller pieces; package this content as Application Media Packages (Dots); give Dots an application behavior through a Dot Messaging Architecture; and to distribute Dots from one user to another (Viral Distribution Architecture).

[0083] The ability to break web-based internet content into smaller packages (e.g., Dots) for transfer independent of a conventional browse enables content providers to distribute their media to: fully brand and control a user's experience; obtain direct access to consumers; secure longer on-screen presence; give application-media viral characteristics; and eliminate the need to maintain a software application in order to achieve these characteristics.

[0084] With regard to viral characteristics, for example, the present invention allows content providers to enable users to: collect Dots; use Dots in groups (Dot Packs); and share Dots with others. Therefore, Dots are passed from server to user and also from user to user via email links. Not only are may single Dot links be virally distributed, but also collections of Dots and their links may also be virally distributed from user to user. Because Dots reference web data including media, Dots enable the viral distribution of said media although the media may reside on a server.

[0085] Software application download is eliminated because Dot content is based on standard Internet content

(HTML, dHTML, flash, streaming media, java, etc.), providing Dots with certain browser-like functionality. By this virtue, Dots may be distributed not as software application downloads but as Internet media downloads, similar to web page downloads. As a Dot may define the frame within which content is to be rendered, the visual extent of a Dot is not bound within the borders of a browser window. Unlike a web page in a third party browser, a Dot's graphical user interface may be wholly defined and/or branded by the developer.

[0086] Because Dots are instantiated and rendered upon a client computer as separate and independent graphical user interfaces, and because they may be continuously refreshed with new internet content, Dots may persist on a user's screen. Therefore Dots may possess a longer desktop presence (i.e., remain in place, or "On", while a user attends to other tasks on a device, such as interacting with different applications, making phone calls, etc.

[0087] The present invention therefore also allows for persistence of displayed Internet content. For example, a dedicated frame may be rendered on a user's display, Internet content obtained from a server, the obtained Internet content presented in the frame (and possibly periodically updated), and the frame and content positioned and sized such that it may remain, unobtrusively, open on the user's desktop, even when other windows are open. This is fundamentally different than today's model where users visit websites and leave them due to size of the browser window, full use of the content displayed, etc.)

[0088] Dots provide Internet content developers and web application developers: a unique way to package their content as custom client application experiences without having to develop, distribute, and support their own custom client application. Developers may repurpose the Internet content that they have developed and used in web pages to form Dots. In doing so, according to the present invention, developers may also add application behavior to Dots such that the user experience includes interactive graphical user interface elements, likened more to a custom desktop client application rather than to a web page. Thus, Dots enable Internet media to possess application behavior without the use of a browser or custom application.

[0089] From a Dot provider's perspective, Dots provide direct access to users; and a persistent branded presence on users' desktops beyond and without the browser, thus providing full control of the user's experience. That is, a Dot that is instantiated on a user's client computer has the user's display real estate. Conversely, a web page typically must be navigated to through the use of a web browser each time a user views the web page media, and once the user navigates to a new page, the display space (browser window) effectively belongs to the new web page content. As previously described, the branded experience may be wholly defined by the Dot developer, thus removing the rendering and branding limitations of a web page in a browser. Without the present invention, an alternative available to the Internet content developer is to develop a custom application that must be downloaded each time it is changed or alternate content is desired to be displayed.

[0090] In summary, Dots give users a unique way to experience web media by virtue of its: (1) flexible frame definition; and (2) a Dot's persistence when instantiated. Because of their ability to persist on a user's desktop apart from a browser, Dots also provide a convenient method to access content and services (without separate user selection of a

URL). With a Dot for each of a user's specific Internet data needs, Dots eliminate the need to download custom software from multiple sites for various content. Rather than implementing custom client applications in java, C++, etc., Dots are defined using XML and filled with standard Internet content such as HTML, GIFs, and the like.

[0091] The present invention also provides for the ability to collect and share favorite content and application-like behavior (i.e., sharing Dots). Links to Dots may be easily emailed between friends. Dots may be collected according to common interest, usage requirements or the like and defined as groups called Dot Packs. These Dot Packs may also be shared as links via email or server.

[0092] A fundamental aspect of the present invention is the creation of a Dot, including packaging of Internet content. The goal is to create an Application Media Packages (Dots) which combine the packaging, application behavior, and presentation of Internet content with the content itself (or typically a pointer thereto), as a single integrated unit (a Dot). Therefore, Dots are the integration of application and media.

[0093] This is fundamentally different than rendering internet content in a viewer application or alternatively, developing, distributing, and supporting a custom client-side application. Typically, a Dot definition includes details regarding a window "frame," and the Dot content has access to the entirety of this frame. The details regarding the frame is itself Internet content, so that the entire Dot "package" (including the definition of the package) is Internet content. Thus, the Internet content is not trapped in a third party viewer (e.g., Stock Trading site's web page in Microsoft's browser).

[0094] Dot content has access to application behaviors of the window frame (size, position, look and feel) and of the Dot application system (show other Dots, delete Dots, etc.) For example, a Dot may change color according to ongoing data updates that it receives over the Internet. A Dot designed to display weather information may become increasingly red as temperature data received for a particular city or region increases.

[0095] Furthermore, a Dot may communicate with other Dots. Communication between Dots is typically carried out by two or more Dots that are instantiated on the same client and enabled such that they may participate in inter-Dot communication. In one embodiment, communication is carried out by messages that are passed between Dots via the Home Dot that instantiated them. These messages may pass data, alter controls, or result in behavior change for example. Not only may Dots of the same kind communicate but in one example, Dots formed between different developers may also communicate and affect one another. Such communication may be apparent or may be a background function supporting some aspect of a Dot's functionality.

Dot and Dot Definition

[0096] With the above general description in mind, we now turn to a description of a Dot and its definition. With reference to FIG. 2, the primary components of a Dot **100** are: Internet content **101**, a visual object(s) **102** within which the Internet Content **101** may be rendered, and operation element(s) **103**, which perform certain functions, each discussed further below.

[0097] A Dot **100** is an instantiation of a Dot Definition **104**, the components of which are illustrated in FIG. 3. At its broadest, Dot Definition **104** comprises an XML (or similar) definition **105** (which may include initialization data, control

calls, and a frame definition, discussed further below) and a Network Reference **108** (e.g., a URL) to Internet content **101**. (See, for example, Appendix A—DoDots XML Specification.)

[0098] XML definition **105** includes an appearance definition **106** for defining the appearance of a GUI (discussed further below), and a control definition **107** for defining controls associated with the GUI. Definitions **106** and **107** will typically include initialization data, control calls, and other elements. Optionally, a Dot may include message data **110** (e.g., access to the Dot Messaging Architecture). Application Media Package **104** (or “Dot Definition”) may also include tags **112** to identify the Dot.

[0099] The XML definition **106** of the appearance of the GUI typically includes a frame definition, specifying size, location, etc. FIG. 4 is an illustration of an instantiation of a generic GUI **160**, which comprises a frame **162** typically divided into a number of control regions. For example, Frame **162** may include a title bar **164**, a bottom bar **166**, a menu control region **168**, and other definable control regions **170**, **172**, and **174**. One critical control region, referred to herein as the Web Conduit **176**, is a regions in which many Dots will present Internet content. Returning to FIG. 3, definition **106** is responsible for providing the dimensions and general shape of the GUI.

[0100] The control definition **107** defines the layout (arrangement of the controls) and functional routines or pointers to functional routines (what the controls do when accessed by a user). Control definition **107** may also include XML Dot calls that are made by the Dot Definition and executed by the Home Dot (not shown here).

[0101] Network reference **108** will typically be a URL containing the address of a server having stored thereon data (Internet content) for retrieval and display within the GUI. Functionality typically provided by an associated Application Media Viewer controls the accessing of the server at the URL and the retrieval and processing of the Internet content for display. Importantly, retrieval and display of the Internet content may take place without resort to a Web browser application. Indeed, no Web browser application need be executing or even present on the client to support the Dot functionality (although embodiments in which Dot functionality is operational in conjunction with browser functionality is within the scope of the present invention). Internet content obtained from network reference **108** may be rendered within the frame defined by and according to the layout definition dictated by the frame appearance definition **106**. Internet content obtained from reference **108** may itself include XML calls providing certain functionality.

[0102] As previously mentioned, Dot Definition **104** is typically XML code. These definitions are quite simple to author, and to edit if needed. The definition is content, rather than compiled code, which provides additional flexibility at the client side should it be desired to modify the definition (e.g., allow a user to edit the network reference). As will be described further below, when an Application Media Viewer is operating on the client computer, the Dot is effectively both content and instructions. This is therefore a method of packaging internet content as an application (as compared to a hard coded custom client application) for operation on Internet content.

[0103] FIG. 5 illustrates a rendering or instantiation of a Dot Definition as a Dot **120**, in this case a visual indicator of likelihood of rain, expressed as a percentage **122**, and ren-

dered against an image of a cloud **124**. According to the above, a definition for Dot **120** includes a definition of the size, configuration, and location of a first control space **126**, a specification of the layout and functionality of control interfaces (or simply controls) located in a second control space **130**. Examples of such controls include a “close” button, a “resize” handle, etc.

[0104] The image of a cloud **124** against which the likelihood of rain is rendered is a static image. The data representing the instructions for rendering the cloud may be found in the appearance definition **106**, and thus resides within the Dot Definition **104**. Alternatively, the data representing the image of the cloud **124** may be obtained from the location to which network reference **108** points. In either case, the data representing the cloud is utilized by the Application Media Viewer **104** to render the cloud image.

[0105] The actual data representing the likelihood of rain may be standard Internet content, and will change periodically as controlled by the source (e.g., the Internet content itself obtained from a server at network reference **108**) of the data. Since this data changes as controlled by the source, the data is considered dynamic. This dynamic data is obtained by the Application Media Viewer from the source, and rendered atop the static image of the cloud. The frequency of updating and re-rendering of the dynamic data may be under the control of the Dot Definition or the source of the data, as a developer deems appropriate. The data to be rendered with the image may for example overlay, or be rendered in a layer on top of the image, beside the image, in the same layer or otherwise, in a layer under the image layer, etc. However, there is generally an intended relationship between the position of rendered Internet content and other items rendered in the graphical user interface. For this reason, we say that the Internet content is rendered “in association with” the image within the graphical user interface.

[0106] It will be appreciated that Dot **120** is merely on illustration of a Dot, and many other types of content, format, layout, controls, functionality, etc. are contemplated by the present invention. For example, additional display of information and/or control may also be presented in top/bottom bars **132**, **134**, respectively, as will be understood by one skilled in the art.

[0107] Thus, a Dot is defined using, for example, an XML file which is the embodiment of a Dot Definition **104**. The definition contains enough information that, when instantiated, the Dot may be rendered and filled with Internet content from a source. The Dot Definition contains data used to define and configure a frame and its elements, specify and lay out the controls, and specify parameters that initialize all the Dot’s components with content and data.

[0108] Frame Definition

[0109] A frame can be defined to have a configuration (e.g., base shape), size (e.g., dimensions), and initial location (which may be changed by a user upon instantiation). In additional, a simple Dot may be defined to have four default functional frame definition controls, for example to encourage user interface consistency between different Dots. These four default functional controls include a title bar **132** (Gif rendered with title bar properties), a Dot menu **136** (with flexible menu entries), an exit control **128**, and a bottom bar **124** (Gif rendered with bottom bar properties) with corner elements **138**, **140** (for sizing and consistent user interface). A default layout of these functional components may be set, such as positions for the title bar **132** at the top of a Dot (Dot

Menu **130** on its left, exit control **128** on its right) and the bottom bar **134** at the bottom of a Dot (with corner elements on either side). It will be appreciated that this is one form of layout, of which many others are within contemplated within the scope of the present invention.

[0110] Title Bar

[0111] The title bar **132** may contain a reference title for the Dot and may provide for a place for a user to grab and drag the Dot in a windowed environment. It may be implemented as a GIF rendering control that can be targeted to a local/remote title bar **132** image (an embodiment supports four title bar images—normal, mouse-down, mouse-over or hover, inactive). In this embodiment, the title bar **132** has a fixed height and width that is a function of the frame's width. The Dot Definition allows the title bar **132** image to be justified left, right, or center and for specified number of repeat-pixels, the title bar image may be tiled the full width of the Dot. Overlay text can also be specified to layer on top of the title bar **132** image.

[0112] The default size and the default position of the Dot are defined as part of the appearance definition **106** in the Dot Definition **104**. The Dot size can be specified in pixels, or Dot Units (1 Dot Unit is 40 pixels), etc. Dot Units can define a grid that keeps Dots sized on the same units so that they more easily and neatly align as well as cleanly snap to each other when Dots are used together. Dots can be sizeable or fixed-size in either dimension or both. The default screen position for a Dot can also be specified in pixels, or in relative position—top, left, center as provided for in the appearance definition **106** in the Dot Definition **104**.

[0113] Menus

[0114] One embodiment of the present invention reserves the four corners of a Dot for functional branding elements. The upper left corner is currently reserved for the menu control **136**. The upper right corner is currently reserved for the Dot exit **128** control. The lower corners **138**, **140** are for sizing the Dot if the Dot is resizeable. Menu entries for branded menu control **136** (upper-left) can be specified in the Dot Definition **104**, for example at **112**. The menu items can be named, assigned images and tooltips, and assigned a specific and targeted action, for example a DotMessage **110** sent to a specified element (address). (See DMA messages hereinbelow). The Dot exit **128** button (upper-right) closes the Dot. An on-close action (such as a message and address pair) can be assigned to the Dot close event.

[0115] Bottom Bar

[0116] The bottom bar **134** may be implemented much like the title bar **132**, including supporting text overlay and additional functionality. (See Appendix A—DoDots XML Specification for a list of controls with XML call and their definitions)

ALTERNATIVE EMBODIMENTS FOR CONTROLS

[0117] Dots may be defined so as not to require a rectangular title bar **132** or bottom bar **134** (at top and bottom). Indeed, either or both of title bar **132** and bottom bar **134** may be omitted in a Dot Definition. Other controls (**128**, **130**, **138**, **140**) may also be omitted, provided certain functionality (e.g., exit or close) is otherwise provided. Furthermore, every functional element in a Dot may be defined as a control element that is relatively positioned and layered (in z order)—much like layers in HTML. Transparency may also be a given property. Different layers and controls may be given Dot

properties (such as a title-bar-move-property or Dot-menu-property). Very flexible Dot interfaces may therefore be provided. (See the specification for the <DOT> and <CONTROL> DTDs in Appendix A—XML Specification.)

Control Space

[0118] Between the title bar **132** and the bottom bar **134** is a control space **126** where one or more controls, images, data, etc., can be flexibly positioned. For example, control space **126** may include a web rendering control referred to herein as a Web Conduit (described further below). The Dot framework supports any Active-X based control which may be positioned and initialized in a Dot (e.g., an on-line stock trading company may implement a custom stock chart-rendering control and define a Dot to permit a user to interface with this control).

[0119] A Dot may be defined to include a static image over which dynamic data may be displayed, such as the example of FIG. 3 in which a static image of a cloud has rendered there-over dynamic (changing) data relating to likelihood of rain. Alternatively, the Web Conduit may render in control space **126** purely static data obtained from the Dot Definition, a URL, or the client device, as well as dynamic data resulting from client-run processes, pushed or pulled Internet content, etc.

[0120] The Web Conduit control is just one of many controls that may be included and positioned in a Dot's control space **126**. For example, Active-X based control can also be referenced and inserted. This capability allows a Dot developer to implement a custom control. For example, a stock ticker display may be implemented as a custom secure chart control that renders stock tracking charts with small streams of secure xml data. Such a custom control can be laid out with a Web Conduit control next to it if the Dot developer chooses to do so. Also, just like a browser, a Dot developer may embed an active-x control in an HTML page rendered in the Web Conduit control as is the practice for use with full screen browsers.

[0121] Web Conduit Control

[0122] The Web Conduit (mentioned above) control can render Internet content in a fashion similar to Microsoft's Internet Explorer™ (IE). This control functionality may be provided, for example, by utilizing Microsoft's Internet Explorer's (IE4+) WebBrowser object. Note that the IE4+ object does not constitute a browser. The Web Conduit merely uses rendering tools of the object—it does not invoke or require the Internet Explorer application or any other web browser application. Rather, functionality is provided to support rendering of Internet content so as to integrate this control with the Dot framework and to receive and transmit messages in and out of the HTML rendered in the control.

[0123] Dot Identification

[0124] A Dot can be identified (in the Dot Definition **104**) by three ID strings: GlobalID, Domain, and Kind reference. These are defined as follows:

[0125] GlobalID—A Dot's GlobalID is used when a Dot Definition is within a Share (described further below); this ID is unique with respect to other Dot tags in the Share.

[0126] Domain—A Dot's Domain is a unique label for the owning company Dot developer of the Dot.

[0127] Kind—A Dot's Kind (specified by the Dot developer) is a helpful identifier for finding the Dot; A Dot's Kind does not have to be unique.

Categories

[0128] In an embodiment of the present invention, categories are used as an organizational tool. A Dot Definition **104** (FIG. 3) may be provided with an element **150** defining the category(ies) with which that Dot is associated. A mechanism is provided to allow identification of categories of Dots, useful for selecting, sorting, organizing, etc. The categories that a Dot belongs may be edited by editing the string elements in the Categories element **150** of the Dot Definition **104**. (See the specifications for the <ALL-CONFIG> and <DOT> DTDs in Appendix B.)

Events

[0129] A Dot Definition may also include an Events element **152** in which actions can be assigned to certain Dot Events such as the Dot's ONCLOSE event. DotEvents can be assigned a specific and targeted action much like a menu control **136** item; currently this action is implemented as a DotMessage sent to a specified recipient (see DMA messages, below). When the specified DotEvent occurs, for example ONCLOSE when the Dot closes, the specified message is sent to the specified recipient.

Hosting and Serving Dots

[0130] Referring again to FIG. 1, web server **50** may serve the Dot Definitions **104** as an XML file to client computer **20**. The Dot Definition **104** may be served elsewhere such as a third party or partner server (not shown) along with the Dot content that fills in the Dot. In one embodiment, this XML specification may be kept proprietary and Dot developers define and package Dots indirectly without having to author XML Dot Definitions. In another embodiment, the xml specification is open, and content providers (and others) have complete control of the authoring of Dots.

[0131] Dot Definitions **104** are indexed and stored in server **50** in database **74**, and are accessible to Dot-rendering and Dot-management applications (the Application Media Viewer) via "DotLinks". These DotLinks, based on standard Internet links, point to particular Dot Definitions and enable the Application Media Viewer (using standard HTTP/HTTPS requests) to quickly access the frame and initialization pointers or URLs in the Dot Definition to instantiate the Dot and render it, filling with DotContent (Internet content served by a partner Dot Developer servers **82**).

[0132] Dot developers (e.g., content and/or service providers) serve the Dot content obtained from source or reference **108** (the standard internet content that fills in the Dot). According to one embodiment, Dots may be served by numerous different non-proprietary servers **50**. Content may also be provided by a non-proprietary server, as specified by the Dot developer. Of course, it is possible that in other embodiments specific Dots may only be obtained from certain sources.

[0133] Because the Dot Definition **104** contains enough information to instantiate the Dot as well as the reference **108** that address the location at which the Dot content is located, a Dot is easily and quickly distributed, as well as collected and shared by users. (This is discussed further herein with regard

to Viral Distribution Architecture.) It is therefore easier and faster to get information delivered in a Dot than in a web page.

[0134] This Dot-based architecture is very different than the current model of Internet content. Today, users visit web sites, following a destination-based model of content access. The process of accessing media therefore is sequential or linear, resulting in user viewing of one full-screen web page at a time. Furthermore, there is no simple to use or inherent mechanism in place today to share sites short of sending URL's.

Enhanced Dot Content

[0135] The Dot Definition **104** code is accessible, flexible and dynamic, enabling it to be modified at any time, even after it is rendered. For example, Internet content **101** (HTML) can access and modify its associated Dot Definition **104** by sending messages to other portions of the definition, such as the definitions of appearance **106** or control **107**. Other application system-level functionality is also available by sending messages to the Application Media Viewer **199**, discussed further below.

[0136] By using an architecture, referred to as Dot Messaging Architecture, for communication between Dots, and between a Dot and the Home Dot, standard Internet content can access and enable Dots to exhibit application behavior. That is, content can provide functionality typically associated with applications, such as dynamic refresh, contextual presentation, interactive response between user actions and changes in the graphical user interface or frame, etc. (See "Dot Messaging Architecture" below.)

EXAMPLES

[0137] The following examples are used to demonstrate key features of the present invention. Some of these features include: a new way to view standard internet content, a fully branded experience for the user, and a web experience that delivers true application behavior. Sample companies are used in these examples to demonstrate branding together with the use of internet content to produce a novel user experience that transcends the web page. Trademarks are those of the respective companies.

[0138] E*Trade

[0139] E*Trade's primary business is to enable users to execute securities trading online. Therefore stock information and notification are essential elements to their business, as are the transactions themselves. Persistent display is an important aspect of Dots as is the ability to provide ongoing data updates. Below is a list of aspects that illustrate novel advantages that Dots provide for a possible E*Trade Dots system.

[0140] E*Trade can leverage their existing content through Dots (Dots are built on top of standard HTML)

[0141] E*Trade can break their content into smaller pieces and package them into Dots.

[0142] E*Trade can give their Dots application behavior. Instead of being trapped inside a viewer window, content providers have access to the entire frame, which enables them to brand the Dot, access to application and system features. Content providers can also enable users to resize the Dot click, to open E*Trade Dot, ability to execute operations in the Dot such as trading stocks as opposed to only monitoring stock prices.

[0143] Because Dots can be left on or actively running and displayed on a client computer, they can notify users of coming/pending/immediate content events. A Dot can notify a user in many ways, including: popping up a message box or another Dot. A Dot can resize itself and show new content and/or bring itself into focus, as a window application may also do.

[0144] Merriam-Webster

[0145] In this example, Merriam-Webster has word definition content that is useful for users to access. Users may be better served by the Dot format of presenting as opposed to traditional web pages. Below is a list of features that illustrate this point.

[0146] Merriam-Webster can leverage their existing content to provide a dictionary "application" in a Dot; the content is HTML delivered from their servers. In a Dot, Merriam-Webster can provide direct access to just the information users are interested in viewing without requiring them to disengage in other operations such as word processing work in order to actively seek information from Merriam-Webster's servers. Additionally, content providers can add new functionality to their Dot applications just by changing the HTML files on their servers that are delivered to Dots or as Dot Definitions **104**. They do not need to revise and redistribute custom client software.

[0147] eBay

[0148] A single company such as eBay can use multiple Dots to engage users from many points at the same time to facilitate a more complex process, such as online auctions or shopping. Many companies have an enormous amount of assets (content, services, and applications) that can only be exposed to users one page at a time. Featuring and exposing new or important functionality is often difficult to do if they are buried several pages deep.

[0149] Dots enable content providers to feature and expose functionality and services in a new form, leveraging and featuring all of a company's assets in a consistent way. eBay, for example, might provide a "MyBids" Dot that allows users to more closely follow those items they have bid on (the current asking price and when the auction will expire).

[0150] eBay can also provide a Gallery Dot. Instead of wading through thousands of thumbnails in the gallery section to find what their looking for, users can identify categories they are interested in and window shop these items, click on a particular item to add new item to MyBids Dot. When a user finds something that interests him, it's added to the MyBids Dot with a single click.

[0151] There is a messaging architecture (DMA) that may be enabled by the Dots architecture disclosed herein which enables Dots to communicate with each other, thus facilitating operations between Dots without user intervention. For example, a user finds an item of interest in a "Gallery" Dot. He clicks on that item and it is added to the "MyBids" Dot with a single click. Additionally, a "BidDot" may be caused to pop up for that single item, allowing a user to directly bid and monitor the auction process. He clicks on a second item in the "MyBids" Dot and another "BidDot" pops up.

[0152] MP3 Dot

[0153] By using an embedded MP3 playing control, an MP3 playing Dot can access, play, and manipulate MP3 files and playlists from a local hard drive or the web, just like a

custom MP3 client application. The significant difference is that the GUI & controls (the Dot Definition **104**) are entirely Internet content (HTML, javascript, etc.) and can change simply by modifying HTML files online.

Mobile/Other Platforms

[0154] Dots can be viewed as a smaller-format package for internet application media. This package is more portable than executable applications as well as full screen formatted media for browsers. Portability across platforms requires consideration of diverse screen sizes and resolutions as well as operating systems and user interface controls. This diversity requires companies or users who require cross platform media distribution to scale down their existing content for portability to mobile devices. No such scaling down is required when deploying Dots and the Dot architecture.

Application Media Viewer (Home Dot)

[0155] As previously mentioned with regard to FIG. 1, a client computer **20** will ideally have stored thereon a software component referred to as an Application Media Viewer (or Home Dot) **119**. As Application Media Viewer **119** performs a number of functions in the process of acquiring, instantiating, modifying, etc. Dots, in addition to simply viewing Dot content, we also refer to an Application Media Viewer as Home Dot herein. The Home Dot **119** is effectively a client application that contains the procedures or calls to procedures for rendering and managing Dots on the client computer. It therefore has attributes of an application. The Home Dot is designed to operate in conjunction with a Dot Definition, and vice versa.

[0156] Data contained within an Application Media Package (Dot) is parsed by the Home Dot. Control calls contained within the Dot are also parsed and executed. The Home Dot may then instantiate a Dot without relying on functionality provided by a browser. In fact, in a preferred embodiment, a browser is not employed to instantiate or operate an Application Media Package.

[0157] The Home Dot is a compiled application, and can be programmed using, for example, MFC (Microsoft Foundation Class) or the like. The Home Dot need only be downloaded to the client computer one time and may be used to instantiate any number of Dots. The Home Dot is capable of executing and displaying multiple Dots simultaneously.

[0158] The Home Dot may be provided with the ability to automatically or manually check for updated versions of itself on a server. If a newer version is detected, the user may be provided with the opportunity to download and install the updated version of the Home Dot.

[0159] The Home Dot supports a number of functionalities, including support for standard internet protocols (http, https, etc.) Additionally, the Home Dot supports collecting and organizing Dots, user login to a Dot server, user activity statistics collecting and reporting, and messaging between Dots, as discussed further below.

Network Distribution of Dot and Home Dot

[0160] Referring now to FIG. 6, a communication flow diagram **299** is shown for an exemplary system enabling the distribution and use of Dots between a client computer **199**, a server (Dot server) **153** making available one or more Dots including a Home Dot, and content server **155**, each with a network address or IP address. It will be assumed for this

particular example that a Home Dot **200** has previously been downloaded and installed on client computer **199**. It will also be assumed for this example that Dots **120** and **230** have been previously requested (the mechanism for this request is described further below).

[0161] Accordingly, Home Dot client application **200** utilizes Dot Definitions to instantiate Dots **120**, **230**. There may be ongoing communication **250**, **260** between Home Dot **200** and Dots **120**, **230**, respectively. This communication may include data for the presentation of Internet content, messages, and/or state information. Furthermore, the Home Dot client application **200** executing on a client computer **199** communicates with Dot server **153** through a channel **210** (such as a broadband Internet connection) as well as Content server **155** through channel **157**. Internet content is received by Home Dot **200** and rendered into the instantiated Dots **120**, **230**, as appropriate. The Internet content may be one or more of many formats, such as XML, HTML, GIF, Streaming Media, Flash, HTTP, HHTP(S), etc.

[0162] The Dot server **153** is communicatively connected to a physical memory device **201** which holds a database **202** containing software objects for downloading to or access by a client device such as client computer **199**. This physical memory device **201** may be a RAID hard drive system, a standard hard drive, removable media, or any other type of volatile or non-volatile memory known in the art. Database **202** may contain one or more Dot Definitions **104**, the Home Dot client application **200**, available for download to the client device, as well as user account data **205**, state data including use statistics **206** and Dot index/shares **204** (each described in further detail herein).

[0163] The content server **155** is communicatively connected to a physical memory device **261** which holds the Internet content **262** as well as other forms of data **263**. Content/data **262**, **263** is communicated to the instantiated Dots **120**, **230** where it is rendered on the client computer **199**. In general, content passes first through the Home Dot application **200** or a similar client computer **199** program that is capable of receiving and parsing Internet content. Therefore, the connections between content server **155** and Dots **120**, **230** are shown as dashed lines, indicating that for this figure the connection is indirect.

[0164] Unlike a downloadable custom client application, the Dot Definition **104** is comprised entirely of Internet content in a web browser readable language. To instantiate a Dot on a client device or computer, only its definition is required (assuming that the computer is Dot-enabled, i.e., that the Home Dot client application **119** has been installed). The Dot Definition **104** contains just enough information to define, layout, and initialize a Dot's components (frame, controls, etc.); this information configures the graphical user interface which may then present Internet content therein. Consequently, a Dot Definition typically has a small file size (~2 KB), and is therefore a quickly accessible and loaded XML file.

[0165] One aspect of software distribution according to the present invention may proceed as illustrated in FIG. 7. A user first requests a Dot, or more specifically its Dot Definition **104**, by clicking on a Dot link **321** which may be a hyperlink on the web page of a Dot server **153**, a web page of a partner or content server **155**, or selectable menu item on the client computer **199**. A Dot link **321** is an Internet link to a Dot Definition **104**. A Dot link operates in a manner similar to an HTML link. One added feature associated with a Dot link is

that the server that serves the Dot Definition **104** typically has a sensing mechanism that can determine whether or not a user has the Home Dot application **200** installed on his computer or device **199**.

[0166] If the user does not have the Home Dot application **200**, then it is downloaded and installed with a first set of Dots (e.g., **120**, **230**) that may be user-selected or part of an initialization set. This download process is discussed in further detail below. From that point forward, the client computer **199** is Dot-enabled and does not require a subsequent download and install of the Home Dot. In short, only a single application-like software product need be downloaded and installed on a client device to enable a variety of different Dots, as opposed to requiring a user to download a different custom client application for different types of Internet content.

[0167] Once a client machine **199** is Dot enabled, (Home Dot application **200** installed), Dot **120** may be rendered by simply clicking on Dot link **321**. This rendering is typically faster than it takes to load and render a small web page. Furthermore, once the Home Dot application is installed on the client no additional executable software need be downloaded or install to view and interact with a Dot. The Home Dot application **200** accomplishes this by retrieving the Dot Definition **104** specified by the Dot Link **321**, instantiating the Dot **120**, obtaining the Internet content specified by the Dot Definition **104**, and presenting the Internet content (standard Internet content from DoDots' partner servers **155**) within the Dot.

[0168] Once a user has received a Dot Definition **104**, the Home Dot application **200** remembers the Dot's Dot Definition **104** as part of a user-profile **310** so that it can instantiate the Dot and begin filling it with Internet content immediately. Because a Dot Definition **104** becomes part of a user-profile **310**, it can be modified by use (e.g., the image of its default title bar **125** may be changed, its Web conduit control may be navigated to a different URL using DMA messages, etc.) and the Dot will initialize from its last state stored in user profile **310** the next time the Dot is to be instantiated (or "turned on") at **324**.

[0169] A Dot Link **321** represents a Dot. Therefore, this Dot Link **321** (and hence the Dot **120**) can be easily and instantly distributed; the Dot Link **321** can be posted on web sites to promote the Dot, or shared with friends via email. This is viral distribution of a Dot, via distribution of the Dot Link **321**—the Dot server hosts and serves the Dot Definitions **104** to which the Dot Links **321** point. Dots may also be aggregated into packs by content providers, or other aggregator, grouped for example by like subject or perceived common user interest, and the packs of links acquired by a user at **322** as if they were single Dots. A user may also provide others with access to Dots when the actual Dot Definition is located on a remote third party Dot server. This may be accomplished by way of a Sharelink, which may be provided by a user at **302**. Others may then access the Dot, including setting changes that may have been made by the user, by accessing the Sharelink provided at **320**.

[0170] From the client perspective, one example of a process of acquiring and instantiating a Dot is illustrated in FIG. 8. According to this process, a Home Dot is employed to acquire a new Dot, however it is within the scope of the present invention to acquire new Dots through other mechanisms, such as through a web browser application (with utilization of the Home Dot ultimately required in order to

instantiate and populate the Dot). After logging in at step **240** the user clicks on the Dot Link signaling a request to acquire the Dot. The Home Dot application then sends a request to download the Dot to the Dot server **153** at step **241**. Alternatively, the user may click on a Dot link before logging in, for example if the link has been e-mailed to the user, and then, after clicking on the link, log in. In another aspect, the user could view, but not collect, a transient Dot without ever logging in.

[0171] After the user is logged in and has clicked on the Dot, the Dot server **153** retrieves the Dot template from its Dot database, and provides it to the client in step **243**. The client receives the Dot template from the Dot server **153** in step **244**.

[0172] For display of the new Dot, the Home Dot creates a frame in the display of the user interface (**42**, FIG. **1**) in step **245**. In step **246**, the client **199** requests the necessary Internet content stored at the URL(s) identified in the Dot Definition from the corresponding content server **155**. The content server **155** transmits the content in step **247**, and in step **248** the Home Dot presents the content in the viewer. As the type of content may vary greatly, the content may appear within the frame (such as text or images) or may be independent of the frame (such as audio) but the frame including controls for controlling aspects of the presentation of the content. In one embodiment, Internet content is presented such that it is enclosed by the frame, allowing the user to preview the Dot. Alternatively, the Home Dot may simply collect the Dot, adding it to the user's processed user profile **310**.

[0173] The user may then view the Dot on the user interface display **42**, and may interact with the Dot much in the same way as a user may interact with typical Internet content or web applications. This may change the Dot from its present, "raw" state to a used state reflecting alteration or use of the Dot by the user. Thus, the user has stored on client **199** a Dot Definition rather than a Dot template. For example, the user may direct the Dot to display different content within the Dot if the Dot content enables the user to do so. Or, the user may provide information to the content server **155** which allows the Dot to be personalized. The user may additionally be given the option of changing the size or location of the frame, etc.

[0174] If the user collects the Dot, the Dot will be added to a user's list of collected Dots. For example, the Home Dot may add the Dot's definition to a processed user profile (discussed further below). Thus, the Dot's "state" will be preserved. Alternatively, the Home Dot may collect the Dot automatically, without waiting for a user command, by adding the Dot Definition directly to the processed user profile.

[0175] If the Dot's state has been altered by the user or by the content—if, for example, the user has directed the Dot to Internet content other than the initially-displayed content, provided personalizing information, or changed the properties of the frame, or if the content itself has caused an alteration in the Dot—this alteration will be reflected in the Dot Definition stored in the user profile. Information which personalizes the resulting content, instead of being stored in a "cookie" on the client device, can be stored as part of the Dot Definition. This advantageously permits personalization of content, such as Internet content that is associated with the Dot content and the user, without storing a cookie on the client **199**. One advantage this provides is that the state of a Dot can be returned for a user no matter which computer the user accesses the dot from.

[0176] A user may also access a Dot which has been previously collected, and possibly altered by use as explained above. As previously described, the user profile includes Dot Definitions for Dots which have been viewed and collected by the user. A screen shot showing Dots **502**, which have been previously collected by a user is shown in FIG. **9**. Also shown are Dot Links **504** available from a Dot server for download to the client.

[0177] One embodiment of the steps taken to provide the user with Dots which have been previously collected are shown in FIG. **10**. According to this process, acquired Dot Definitions are maintained on a central server, and a user profile identifies which Dot Definitions are associated with particular users. This is useful when a user may be using more than one computer and wishes to have access to her collection of Dots on any machine she is using. However, it is equally within the scope of the present invention that Dot Definitions may remain resident on a user's computer and not be stored for that user on a central server or the like.

[0178] As discussed above, on login at step **250** the user's profile is retrieved by the Home Dot stored on the client (step **251** and **252**). The user's profile, stored in the user profile database, includes the Dot Definition for each of the Dots previously collected, and possibly altered, by each user. The Dot Definition, as discussed above, includes the Dot frame definition and the definition of the controls for filling the viewer within the frame with content. After log in, a local copy of the processed user profile is stored on the client **199**, and this copy is further processed as the user collects new Dots, or uses new or collected Dots such that the Dots are altered.

[0179] When the user clicks on the name or icon of a collected Dot at step **253**, the Home Dot creates a frame in the display of the user interface (**40**, FIG. **1**) in step **254**. At step **255**, the Home Dot causes the client **199** to request the Internet content from the URL identified in the Dot Definition from the corresponding content server **155**. This content is provided in step **256**. It will be appreciated that the URL need not be the same as the initialization URL in the Dot template stored in the Dot template database **202** on Dot server **153**, and in fact the content server need not be the same content server corresponding to the initialization URL. In step **257**, the Home Dot places the content in the Dot frame, and the Dot is then fully instantiated with content.

Hosting Dot Definitions

[0180] Dot web servers **153** host and serve the XML Dot Definitions **104** and provide the Dot Links **321**, Dot Packs **322**, and sharelinks **320** that point to the Dots so that a user can easily and instantly add the Dot **104** to their Home Dot application **200** (adds Dot **104** to their user-profile **310**) simply by clicking on the Dot Link **321**, pack link **322**, or sharelink **320**. The Home Dot application **200** registers with the local browser/computer so that Dot Links **321** are handled by the Home Dot application **200** (and not by the browser).

[0181] Dot Templates and the Dot Index

[0182] New Dot Definitions **104** get published to a Dot index **204**. A Dot Definition can be modified by a user once downloaded. Since these new Dot Definitions are resident on the server for downloading, they are also referred to herein as Dot templates. The Dot index stores Dots definitions or templates **104** in database **202** on Dot server **153** by category (such as sports, finance, games, etc.) with descriptions and images for each Dot. In the preferred embodiment, Dot Defi-

nitions **104** are published to categories specified by the Dot developer. Categories can also be automatically created to support indexing Dots that are most popular (most commonly accessed, most commonly shared, or other sorting criteria).

[0183] Dots as well as their index are formatted as Internet content. Therefore, users can browse or search the Dot index for new Dots using either a browser or using their Home Dot application **200** application (via an AddNewDot Dot or like functionality).

[0184] Each of these Dot templates (Dots definitions **104**) are pointed to by a Dot link **321**; the Dot link **321** for each Dot is generated automatically by the server **153** (when the Dot is published or previewed) to reference that Dot. Clicking this Dot link **321** adds the Dots definition **104** to the user's Home Dot application **200** (via the user profile **310**) and turns the Dot on (instantiates it and fills it in with internet Dot content).

[0185] Once a user receives a new Dot (Dots definition **104**) by clicking on a Dot link **321**, the Dot template is downloaded and becomes a Dot Definition **104** forming part of their user profile **310** (the XML data that defines which Dots the user has, which Dots they left open, what the state of the Home Dot application **200** last was, etc.).

[0186] The Dot server **153** may optionally host Dot Definitions **104** as part of user profiles **310**. Every Home Dot application **200** user has a user profile (expressed in XML) that stores the Dot Definitions **104** that the user has collected as well as the last state of the Home Dot application **200**. (See also the specification of the <ALL-CONFIG> DTD in Appendix B.)

[0187] In an additional optional embodiment, when a user successfully logs into the Home Dot application **200**, state restoration may be provided by Dot server **153**. In this embodiment, authentication may be handled by the Dot application server **153** (as opposed to the user device and Home Dot). The Home Dot application **200** requests the user profile's <ALL-CONFIG> file **311** by communicating with Dot server **153** at **303**. The Home Dot application **200** then receives the <ALL-CONFIG> file **311** from Dot server **153** at **303**, and restores its state (from the <ALL-CONFIG> **311**) presenting last user state, i.e., which Dots were ON, where the Home Dot application **200** was positioned on the screen, etc.)

[0188] The Home Dot application user interface (UI) enables a user to turn a Dot ON **324**; in this case the Home Dot application **200** has the Dot Definition **104** (part of the user profile **310** that was retrieved on login) that contains enough initialization data to instantiate the Dot and fill it with content just as the user left it.

[0189] As previously mentioned, Dot Definitions **104** that are part of a user's profile **310** may differ with use. In other words, the Dot Template from which they were originally created may have a different state than a Dot Definition **104** that has been modified through use. The user profile could also be implemented to point to Dot Definitions **104** that are always hosted remotely (and/or not entirely part of the user profile).

[0190] Centralization of Dots within the Home Dot **200** enables users to collect Dots. This feature is significantly different than today's model of the Internet in which users visit a page one at a time, and then leave. Users collect Dots, keep them running, and share them with others. By packaging Internet content as a Dot and referencing it by a Dot link **321**, Internet content is given viral characteristics (i.e., Dots can be instantly distributed). (See also the Session_Config Example found in Appendix B.)

[0191] Shares

[0192] Dot servers **153** also host Dot Definitions **104** as part of Shares. Because a Dot link **321** represents a Dot, this Dot link **321** (and hence the Dot) can be easily shared (distributed via email) from one user to other users.

[0193] If a user receives a Home Dot application share and has the Home Dot application **200** installed (their machine is Dot enabled) then clicking on the Share Link Dot link **320** in the share will add the Dot(s) in the share to the user's Home Dot application **200**. If a recipient of a Share Link doesn't have the Home Dot application **200** installed, then the Home Dot application **200** is downloaded and installed (with the user's cooperation) with the first Dot(s).

[0194] When a user shares Dots, their Home Dot application **200** generates a share file (XML file) that contains the Dot Definitions **104** of the Dot(s) included in that share. The Share XML is then sent to Dot server **153**; the Dot server **153** automatically generates the Share Link **320** that references the Share XML. This Share Link **320** rather than the Share XML is sent or distributed (via email or posted on a web site) to other users. (See also the specification of the <SHARE> DTD found in Appendix B.)

Software Product Download Process to Client

[0195] Reference is now made to FIG. **11**, which is a flow chart **400** illustrating the software product client download process. According to one embodiment, to begin, a user makes a request for a Dot at step **402**. At step **402** it is determined that the user does not have the Home Dot application **200** installed. Step **406** comprises of the following:

[0196] User is informed of need to download software to view Dot. The message could be from the site owner (content provider) or from a Dot server.

[0197] "Do you trust [provider/Dot server host]?" dialog is presented to user at **405**. A dialog then tells the user the size of download and approximate time for download.

[0198] In step **408**, the user clicks the "Yes" button. (Alternatively, if the user clicks the "No" button, step **409** executes with an exit message such as "You decided not to get the Dot"). Proceeding now to step **410**, the user gets a Trust Certificate (a security process well understood in the art). The user accepts the Trust Certificate in step **412**. (Alternatively, if the user declines, step **413** executes with an exit message such as "You decided not to get the Dot"). In step **414**, the user accepts and receives the license agreement and is presented with a dialog that asks the user to confirm the directory for download location. (Alternatively, if the user declines, step **417** executes with an exit message such as "You decided not to get the Dot"). In step **416**, the user accepts the license and confirms the file location, and proceeds now to step **418**. The download process begins, followed by the installer download and background install operation. The requested Dot opens, and the "KeepMe" Dot opens. Note that the "KeepMe" Dot may be provided by a third party such as a content provider. If no third party-provided "KeepMe" Dot exists, a default "KeepMe" will open.

[0199] In step **420**, if the user decides to keep the Dot, the KeepMe (Dot) Operation initiates (see below). If the user decides to close the requested Dot before selecting "KeepMe" and then decides to select "KeepMe" the requested Dot will close, the Keep Dot operation will initiate and the requested Dot will be added to the Dot list. Alternatively, if the user closes the requested Dot and the "KeepMe" Dot without selecting "KeepMe" the Home Dot application **200** will

remain installed but the Home Dot application **200** UI will not be available to the user. Lastly, if the user decides to close the “KeepMe” Dot before closing the requested Dot the user will not be able to initiate the Keep Dot operation.

[0200] The other branches of the flow chart **400** will now be described. Beginning once again with step **402**, the user requests Dot. According to the alternate branch leaving step **404**, the Home Dot application **200** is found on user’s machine. In step **405**, it is indicated that the user is not registered. (Alternatively, if the user is registered, the Add Dot operation is executed step **407** and the process terminates). Proceeding therefore to step **411**, the requested Dot opens. The “KeepMe” Dot opens (“KeepMe” Dot may be a default Dot or a “KeepMe” Dot provided by the Dot/content provider). If the user decides to keep the Dot, the Keep Dot operation then initiates (see below). Alternatively, if the user decides to close the requested Dot before selecting “KeepMe” and then decides to select “KeepMe” the requested Dot will close, the Keep Dot operation will initiate and the requested Dot will be added to the Dot list. In another scenario, if the user closes the requested Dot and the “KeepMe” Dot without selecting “KeepMe” the Home Dot will remain installed but the Home Dot UI will not be available to the user. If the user decides to close the “KeepMe” Dot before closing the requested Dot the user will not be able to initiate the “KeepMe” operation.

[0201] The following is a summary of the “KeepMe” registration operation (assuming an unregistered user has a partner’s Dot open):

[0202] User clicks “KeepMe” button of “KeepMe” Dot.

[0203] User registration form launches.

[0204] User form displays in “KeepMe” Dot.

[0205] User form includes link to privacy statement.

[0206] User completes user registration form and submits.

[0207] Home Dot appears.

[0208] Welcome Dot appears.

[0209] In one embodiment of the present invention, it is possible to track the referring partner, for example for awarding incentives for referring a user. The form of the incentive is a matter of business choice. However, in such an embodiment, the registration operation will comprise the additional step of:

[0210] Crediting the referring party (e.g., partner) with the referral and/or converting user.

[0211] For an alternative software download process, refer to U.S. Provisional Patent Application Ser. No. 60/176,687, Appendix F—DoDots Feature Priority List PPA.

[0212] It will be appreciated that the present invention addresses scaling issues by breaking content up into smaller, more focused software components. These smaller software components (Dot Definitions **104**) may thus be served to mobile devices to compensate for bandwidth and content feature support issues, to overcome a lack of browser functionality and processing overhead, etc. Furthermore, the architecture supporting Application Media Packages or Dots offer a consistent experience with application media or Dot content **104** across device types, e.g., similar experiences as between desktop, laptop, web-enabled phone, PDA, etc. As Dots are distributed as easily as web pages are viewed/visited, Dots can be instantly distributed and users can stay connected with content providers of their choice without having to download custom client software from each provider, and without regard to the device type being operated.

[0213] For further details on the structure of the XML structure used for Dots according to one embodiment of the present invention, see Appendix A hereof. For further details on the functions and design of Dot server **153**, see Appendix B hereof.

Application Media Viewer—The Home Dot

[0214] One unique aspect of the present invention is the interaction between the application media package **104** and the application media viewer **119**. This aspect is now discussed.

[0215] As mentioned, the application media viewer, or Home Dot, is a network enabled client application. With respect to the user experience, the Home Dot provides the parsing and rendering function of the application media packages or Dots. It also provides for the application behavior of Dots by executing calls or methods that are parsed from the Dot by the Dot Definition, user events, system events, or the like. That is, at a minimum, a Dot comprises a definition of a graphical user interface (frame) and content to be rendered within or associated with that frame. Thus, a critical function of the Home Dot is to parse the Dot definition, render the frame, obtain the content, and render the content in or associated with the frame.

[0216] As previously discussed, the Home Dot comprises Internet content. Thus, the Home Dot is in part a content parser, providing rendering of the graphical user interface (GUI) from Internet content.

[0217] Furthermore, Dots originate on remote network devices. Thus, another function of the Home Dot (client-side) is to obtain and organize Dots on the computer on which the Home Dot resides.

[0218] The Home Dot is a part of a client/server system. As a client installed in one of a multitude of client computers, all communicating with a Dot server, the Home Dot maintains communication with that server to perform system functions for the client. These system functions require a defined command set or functions calls between the client and server. Such functions may include user login, user account status, use statistics, Dot downloads, individual Dot configurations or user customizations, Dot organization, revision updates for both Dot and Home Dot installations.

[0219] Because the present invention enables versatility in the manner of packaging and operating with Internet media (forming application media packages), and because the breadth of internet media and the scope of available information is expansive, the present invention also provides for methods of Dot organization on a user’s client computer. More specifically, the Home Dot provides for Dot management for a large number of Dots. Such methods of management include grouping Dots into an organized layout for persistent display, categorizing and grouping Dots into Dot Packs, opening and closing sets of Dots or Dot Packs according to a user’s current information requirements, and configuring individual Dots either by user defined categorization or customization parameters that have been enabled by a Dot’s developer.

[0220] The Home Dot according to the present invention provides for methods for grouping Dots, sharing information between Dots, and sharing these groupings with others. In other words, the present invention provides for methods by which a user or other third party or collectively, third parties, may build upon the utility of Dots as an atomic media element by adding their context through grouping and configuration.

In doing so, the present invention enables the addition of third party knowledge that may or may not include the participation of the original Dot developers. Furthermore, the present invention provides for mechanisms by which this knowledge is shared. These mechanisms include saving the customization states of individual Dots, grouping of a plurality of Dots and saving them to a Dot server, and emailing links to other users or installing these links in a web page. Additionally, the present invention provides for third parties to share collaborative efforts by posting such groupings and customizations on a Dot server for general availability.

[0221] In addition to grouping and customization, sharing information and events between Dots is provided for by the present invention. The Home Dot routes messages between Dots and the system. Messaging enables Dots to act upon one another such that an action or event that affects one Dot may also be routed to another Dot, thus affecting a change to it or an action to be taken by it. The resulting actions or changes of the individual Dots may not be the same. To support messaging generally, levels of restrictions are also provided for. It is therefore possible to control the scope of messages received by a Dot from other Dots according to membership or domains. Likewise, it is possible to control transmission of messages to other Dots. Therefore, the present invention provides for cooperative messaging and information sharing between Dots as enabled by Dot developers.

[0222] In one embodiment, the server is a high availability system comprising a plurality of individual servers functioning together on a server network. Such a configuration advantageously services a large number of simultaneously executing client Home Dots. Whereas the client application or Home Dot provides for those services surrounding enabled or instantiated Dots, the server network and its applications as embodied in a web site, java servlets, an RDBMS, Dot and Home Dot distribution support, provides for the development and distribution of Dots. Additionally, as the Home Dot performs the optional features of collecting statistics surrounding Dot usage and posting these statistics to the server, the server may aggregate these statistics for reporting. According to one aspect of the invention, the server operating together with the Home Dot, may source or enable messages to specific Dots based upon real-time context of user interaction with Dots. This function enables, for example, real-time context based advertising. (See also the Client-Server Protocols section of Appendix B.)

[0223] Method of Delivering Dynamic Web Data without Web Browser

[0224] With reference again to FIG. 6, according to one embodiment of the present invention, Home Dot application 200 enables users to collect Dots 120, 230, etc., organize those Dots into collections, manage the collections with organizational and workspace management functionality (e.g., categories, Snapshots, group-move), and easily share Dots, Dotpacks, and Snapshots with others. Also, the Home Dot application 200 implements and enables a Dot Messaging Architecture (DMA, discussed further below) providing messaging between Dots and the Dot server system.

[0225] When Dots are instantiated on a client machine, the Home Dot application 200 collects usage statistics (211, 212, 213, 214, 215) and keeps an event log (in XML format) that is intermittently sent to Dot application servers 153 and stored, for example as part of the Dot database 202 as use statistics 206. This enables the Dot server to track how the Home Dot application 200 and the Dots are being used and shared. In one

embodiment this is implemented as a local MFC (Microsoft Foundation Class) application on the Windows platform, thus enabling rapid user response (no Internet delay for functional UI components). Home Dot application 200 functionality may also be provided across platforms (MAC O/S, Linux, unix, mobile, wap, etc.)

[0226] Home Dot Operation

[0227] Each user of a Home Dot application 200 has a Home Dot application login account 205 that accesses (step 303 of FIG. 7) a personal user profile stored on a Dot server 153 that stores the last state 212 of the Home Dot application 200 along with which Dots a user has collected 213, and how the user has organized their collection according to categories, Snapshots or packs.

[0228] When the Home Dot application 200 is launched, it queries the network for configuration information, enables a user to login, retrieves the user's profile from the Dot application server 153, and restores the Home Dot application 200 to the last state that was stored to the application server 153.

[0229] The method used by Home Dot 200 to access remote configuration information (again, step 303 of FIG. 7) creates a very flexible application that can be configured to support different application looks, different login sequences, dynamically by session and for each for each user. The user profile retrieved at login 303 enables the application to be personalized for a user, and allows that user to access that personalized application state on different client computers or devices 199.

[0230] Launching the Home Dot Application

[0231] When the Home Dot application 200 is launched, it reads the registry on the client machine to find the location of a configuration file (session-config). The session-config (XML file) directs the Home Dot application 200 to an application server using a URL as the server address that will handle its servlet requests. The URL points the Home Dot application 200 to a default graphic element (skin) and generic Dot graphic elements for controls such as the Title Bar 164 (FIG. 4), Bottom bar 166 (FIG. 4), etc. and it points to Dot definitions 213 for several default Dots, such as a Help Dot, Add New Dot, and Login Dot (i.e., System Dots that support the Home Dot application 200, as described further below).

[0232] For security, the session-config is served by a servlet method operating on the Dot application server 153 that only responds to authorized Home Dot applications 200. The session-config can also be served as a flat file from a standard web/local directory.

[0233] The session-config file contains a mechanism to redirect the Home Dot application 200 to another session-config file. This mechanism may look like:

[0234] <REDIRECT>="URL" attribute:

When the Home Dot application 200 reads the redirect attribute, it ignores the current configuration (session-config file) and attempts to retrieve the configuration stored at the redirect URL. The Home Dot application 200 will not redirect if this tag is omitted, if the URL is empty, or if the URL is the same URL used to retrieve this configuration in the first place. (This last state is recursive; therefore if redirection were carried out, the two configuration files redirect to each other, resulting in an endless loop within the Home Dot application 200.)

[0235] The session-config file contains a mechanism to force or provide an option to upgrade the Home Dot application. This mechanism employs a version tracking, such as:

[0236] <VERSION>="string" attribute:

This attribute is required and must match the version of the Home Dot application **200**. According to one embodiment, if this attribute is omitted or differs from the Home Dot application's **200** version, the Home Dot application **200** will download the executable specified in the UPGRADE attribute and execute it. The mechanism for performing the upgrade may look something like the following:

[0237] <UPGRADE>="URL" attribute:

This is used only if the VERSION attribute differs from the Home Dot application's **200** version. This URL specifies the location of an executable that will upgrade the Home Dot application. The Home Dot application **200** will quit, then run the upgrade executable automatically.

[0238] System Dots

[0239] According to one embodiment of the present invention three system-level Dots are provided with a Home Dot: the AddNew Dot; the Help Dot; and the Login Dot. Dot definitions for these System Dots are referenced in the session-config. System Dots are Dot definitions that are not explicitly listed in the Home Dot application **200** or a user's ALL-CONFIG, but are accessible via the Home Dot user interface.

[0240] The AddNew Dot enables users to access the Dot Index through the Home Dot application **200** and find new Dots and Snapshots to collect. The Help Dot contains help content for the Home Dot application **200**.

[0241] The Login Dot is what first comes up when the Home Dot application **200** is launched. It enables the user to login to the Home Dot application **200**.

[0242] Sampling Dots—Trial Dots

[0243] One feature of the present invention is the ability to provide a user with the option to try, or sample Dots. According to one implementation of this feature, if a user doesn't have a Home Dot application login account (or is not logged in), then the Home Dot application **200** is in trial mode. Dots can be sampled (by clicking on Dot links **321**) but not kept.

[0244] Keeping Dots

[0245] A user may decide to keep or not keep a Dot. According to one embodiment, to keep a Dot, a KeepMe Dot is displayed with Dots that are sampled (unique to Dot developer or provider) that informs the user that a Home Dot application **200** login account is required to keep the Dots. The KeepMe Dot has a mechanism (link) that enables users to create a new Home Dot application **200** login account **205** and keep the Dots by adding them to the new user's Dot definitions **213** or user-profile **310** (FIG. 7).

[0246] User Log In

[0247] Each Home Dot application user has a Home Dot application login account that accesses a personal user profile (stored server **153**). When a user launches and logs in to the Home Dot application **200**, it retrieves the user profile from server **153** and restores the Home Dot application **200** to the state in which the user left it, thus recovering their personal application experience. When the user logs out, their user profile is updated on server **153**.

[0248] This mechanism enables different users to use the same client computer **199** and receive different application experiences or the same user to use different client computers or devices **199** and receive the same coherent experience. The application **200** restores itself to its last saved state no matter where a user may log in.

[0249] After the Home Dot application **200** retrieves its configuration information, it renders the Login Dot from the

Dot definition specified in the SESSION-CONFIG. The Login Dot's Dot content asks the user for login and password, sends the login request to the Dot server servlet (also specified in the SESSION_CONFIG), and retrieves the user's profile required to restore the Home Dot application.

[0250] User Profile (<ALL_CONFIG>)

[0251] A Home Dot user's profile holds the state of the user's Home Dot application **200** (size, position on the screen, which Dots were open) along with which Dots **213** the user has collected, and how the user has organized their collection (categories, Snapshots or packs). The profile is stored in an XML file called the user's <ALL_CONFIG>. The ALL_CONFIG file contains a SHARE and a LASTSTATE element as described below. The Share may look something like the following:

[0252] ALL_CONFIG's<SHARE> attribute:

Since a Share can contain Dots and Snapshots, the Home Dot **200** uses the SHARE XML DTD to represent the user's collection of Dots and Snapshots. The LASTSTATE element may look something like the following:

[0253] ALL_CONFIG's<LASTSTATE> attribute:

It contains a PRESET element **313** and a HOMEDOT **314** element (FIG. 7). The Home Dot **200** uses the PRESET XML DTD (Snapshot) to represent the Dot's that are left open. The Home Dot application element holds the position/size/state of the Home Dot itself. (See also the All_Config Example found in Appendix B.)

[0254] The Home Dot Application Server

[0255] The Dot application server **153** support much of the functionality of Home Dot application **200** (such as logging in/out, collecting, adding, and sharing Dots and Snapshots, Home Dot usages logging, etc.)

[0256] All communication **210** between Home Dot application **200** and the Dot application server **153** is secure and occurs over standard communication protocols (HTTPS). HTTP/HTTPS is chosen for the socket level client/server communication protocol because of its simplicity and more importantly, because most firewalls typically leave the default handling of the HTTP/HTTPS communication with the client.

[0257] The Home Dot **200** communicates to the server **153** via an HTTP request. The HTTP request URL contains an API call. Any API calls that require the uploading of data to the server place the data in the message body of the request. API calls that require uploading/downloading of data send/receive that data in XML format. All API calls are the end part of a complete URL that begins with:

[0258] <http://<someservername>.DoDots.com/DoDots/> where <someservername> is variable and DoDots is an alias for the DoDots servlet/JSP servlet or servlets directory. Arguments to any of the methods are passed in as name value pairs in the query string portion or the URL.

[0259] The preferred embodiment of the Dot application server application that supports the Home Dot application **200** currently supports a number of servlet methods including the following:

[0260] AddUser

[0261] The adduser method is used to create a new Dot user account. Note that this is available as an end-user API to allow new users to add themselves rather than wait for an administrator to do it for them.

GetUser

[0262] The getuser method retrieves the user's own demographic data. This method supports the ability of the Home Dot application **200** to then allow updates to the user's demographic information using the setUser method (see below).

[0263] SetUser

[0264] The setUser method is used to update an existing user account. Note that this is available as an end-user API to allow existing users to update themselves rather than wait for an administrator to do it for them.

[0265] GetSession Config

[0266] The getsession Config method is used to retrieve general Home Dot application configuration information.

Set Password

[0267] The setPassword method provides a mechanism for the user to change their associated Dot server account password.

[0268] getMasterDotList

[0269] The getMasterDotlist method requests the list of all Dot templates known by the server **153**. The server **153** returns a message body in predefined XML format (see the DOT_MASTERLIST DTD and example) of all possible Dots and their default template values. Note that included in each Dot element are a version stamp and dotclass ID's which allows the Home Dot application **200** to determine if it has the most up-to-date Dot template and Dot class binaries for that Dot. The Home Dot application **200** may then request the updated Dot template (see the getDotTemplate method) and/or dotclass binary zip file (see the getDotClassBinaries method).

[0270] setAllConfig

[0271] The setAllConfig method sends, at **303**, the entire body of user-specific client-side configuration information **310** including all Snapshots, Dots, general settings, etc. to the server **153** for persistent storage on behalf of the user. The user profile data **310** is sent as the message body in a predefined XML format (see the ALL-CONFIG DTD and example). The response returned by the server **153** indicates success or failure.

[0272] getAllConfig

[0273] The getAllConfig method retrieves, at **303**, the last user-specific, server-side saved client side configuration information **310** (all Snapshots, Dots, general settings, etc) from the server **153**. The data is sent as the message body in a predefined XML format (see the ALL-CONFIG DTD and example).

[0274] SetAllEvents

[0275] The setAllEvents method sends, at **307**, usage information (**211**, **212**, **213**, **214**, **215**, FIG. **6**) that has accumulated since the last call to setAllEvents to the server **153** for later use in statistical usage report generation (for DoDots's own use). The data is sent as the message body in a predefined XML format (see the ALL-EVENTS DTD and example). The response returned by the server indicates success or failure.

[0276] GetDotTemplate

[0277] The getDotTemplate method requests from the server **153** a specific Dot Template (Dot definition) from the Dot database. The server **153** returns the XML that describes the Dot. This method is called when the Home Dot application **200** has determined that it does not have the current version of the Dot and the user wants the most recent version. (NOTE: this includes when the user is downloading the Dot for the first time)

[0278] Addshare

[0279] The addshare method stores at **302** a specific shared Dot(s) or Snapshot(s). The server **153** takes the XML that was uploaded by the Home Dot application **200** for sharing and returns the unique id of the share. The Home Dot application **200** puts the XML stream to be shared in the request body.

[0280] GetShare

[0281] The getshare method requests from the server **153** a specific shared Dot(s) or Snapshot(s). The server **153** returns the XML that was stored for sharing by the original sending user. The format of the returned XML stream is dependent on what has been shared.

Caching Layer

[0282] Returning to FIG. **6**, the Home Dot application **200** may advantageously implement a caching layer **219** between its network requests and the network **210**. The Home Dot application **200** sends network requests to the caching layer and the caching layer is responsible for completing those requests (retrying if necessary).

[0283] This is used in the event that the Dot application server **153** does not respond. If a user is attempting to log in and the server **153** does not respond, then the Home Dot application **200** logs in using a locally cached <ALL-CONFIG> (the last written user application state can be saved in the caching layer **219**). If a user attempts to log out and the server **153** does not respond, then the caching layer **219** retries at a later time to write the logout application state to the server **153**.

Add New Dots/Snapshots (Packs)

[0284] To get a Dot and invoke it—that is, turn it on—the Home Dot application **200** requires the Dot's definition (XML file with the information necessary to instantiate a Dot and point it to Internet content). With reference again to FIG. **7**, a user collects Dots from multiple sources: by clicking on Dot links **321** (Internet link to a Dot's Dot definition) and/or by receiving a Share **320** (Dots and Snapshots shared from other users). In both cases, the Dot definitions for the Dots involved are hosted and served by a Dot application server **153**.

[0285] Users can find Dots (Dot links) in the Dot server **153** DotIndex **204** (online Database of Dots via a web browser or the AddNew Dot) and/or promoted on a content provider server **155**, e.g., via a web site. When a user clicks on a DotLink **321** and the Home Dot application **200** is installed, the Home Dot application **200** retrieves the Dot definition that the DotLink **321** points to, adds it to the current user's ALL-CONFIG file **311** of user profile **310**, and turns the Dot on **324**. The Dot instantiates the UI and begins filling it with the Dot content (Internet content) as defined in the Dot definition.

[0286] Once a user receives a Dot, the Home Dot application **200** saves the Dot's definition as part of the user's ALL-CONFIG file **311**. Because a Dot definition becomes part of a user profile **310**, it can be modified by use e.g., its default

TitleBar image **132** may be changed or its WebConduit control may be navigated to a different URL using DMA messages. The Dot will pick up where it left off next time it is turned on.

[0287] Dots can also be received in the form of Shares. A Share **320** is a XML file that represents a collection of one or more Dots and/or one or more Snapshots. A Share **320** may be shared, for example by attaching a Share Link **320** to a standard email message. When a user receives an emailed Share Link **320** from another user and clicks on the Share Link **320** in the email:

[0288] The Home Dot application **200** retrieves the share XML file from the Dot application server **153** using the getshare servlet method to which the Share Link **320** points.

[0289] The Home Dot application **200** parses the share package and adds the new Dots and Snapshots to the Share recipient's ALL-CONFIG. **311**. The Share recipient can now turn on any Dot and Snapshot received as part of the share.

[0290] According to one embodiment of the present invention, every Dot that a user gets is added to and becomes part of the user's ALL-CONFIG. **311** and becomes accessible to the user anywhere they can login to a Home Dot application **200**. According to another embodiment, a user is provided with the option to keep or discard a sampled Dot prior to adding it the user's ALL-CONFIG. **311**.

[0291] If the Home Dot application **200** is not installed on a client computer **199** when a user first attempts to get/receive Dots, then the Home Dot application **200** is downloaded and installed with the first Dots that are received. From that point forward, the client machine **199** is Dot-enabled and the user is not required to download and install the Home Dot **200** again (subject to updates). This method removes the alternative approach known today in the art which is to download a custom client application from each company's web server **105** that is visited.

[0292] Once a client machine **199** is Dot-enabled, (i.e. the Home Dot application **200** technology installed), then every time that a user clicks on a Dot link **321**, the Dot **120** pops up immediately (faster than it would take to load a small web page). Rather than download and install software for different Dots, only the Dot definitions **102** which are packaged web readable content is collected.

Dot Categories

[0293] The Home Dot application **200** enables users to organize Dots that they have collected (in their ALL-CONFIG **311**) by categories. A Dot can be a member of more than one category. Alternatively, a Dot is not required to be categorized (i.e., set attribute categorized=uncategorized). The Home Dot application **200** enables the user to Add/Remove/Rename categories and edit a category's contents (those Dots that are members of that category). Categories may also be assigned by the Dot creator (which may or may not be over-written.)

[0294] In the preferred embodiment, Dots keep track of the categories to which they are members (e.g., there is no master category list). The categories to which a Dot belongs are added to the Dot's definition (in the user's ALL-CONFIG **311**).

[0295] The Home Dot application **200** has one unique category: the ALL MY DOTS category (users cannot rename or remove this category). This category contains all the Dots that

the user currently has in their collection (in their ALL-CONFIG **311**). Removing Dots from the ALL MY DOTS category removes it from ALL-CONFIG **311**. A user can duplicate a Dot from within the ALL MY DOTS category in the event they want two of the same Dot (e.g., 2 stock watching Dots—one for monitoring a first security, and the other for tracking a second security).

Managing Dots

[0296] The Home Dot application **200** provides for several features enabling visually organizing, collecting, and working with Dots **102** individually and as a system. Referring to FIGS. **12A**, **12B**, and **12C**, a series of drawings depicting a user interface **600** for the organization of Dots on a computer desktop is shown.

[0297] To improve ease of use when working with Dots in groups, the Home Dot application **200** enables users to capture an image, or Snapshot, of a workspace that they have defined with Dots. Such Snapshots may include, for example, which Dots are on and where they are positioned on a display screen **656**. Users can instantly recall these Snapshots to restore the previously defined set of Dots to their captured locations on screen **656**.

[0298] Snapshots can be created to support different work tasks (e.g., morning news pack, web development pack), different user groups (e.g., small business pack, runners health pack, school study pack), or different activities (e.g., day-trading, dream team sports tracking). Within a Snapshot may be user-created Share Packs **659** (groupings) of Dots (created, for example, using Share Links **320**). In addition, Dot developers can create and publish Packs, which are groups of Dots designed to work together or which may be of similar/related interest to a user, and online content providers can offer their users pre-made Packs.

[0299] Users can easily and quickly create and configure/reconfigure their own aggregation of content and functionality as Dots, thus providing a user-aggregated content/application system. This is significantly different than current Internet functions of offering users "My-" versions of a full-screen Internet site in which the choice of content, arrangement, presentation style, etc. are quite limited.

[0300] Dots may be aggregated together and manipulated as a block. Blocks are defined as linear clusters of Dots (snapped together vertically or horizontally). An example of a group **659** of Dots **647**, **649**, **651** not in a block is shown in FIG. **12A**. That is, in FIG. **12A** the group **659** of Dots are not aligned with one another with reference to either a horizontal or vertical axis. Two examples of the Dots **647**, **649**, **651** comprising group **659** arranged in a blocks are shown in FIGS. **12B** and **12C**, respectively.

[0301] Blocks of Dots have an orientation: vertical (Dots snapped to each other in a vertical column as in FIG. **12B**) or horizontal (Dots snapped to each other in a horizontal row as in FIG. **12C**). In one embodiment, the Home Dot application **200** or Dots (**647**, **649**, or **651**) expose a UI mechanism (e.g., CTRL+O, see slamming) to enable users to change the orientation of Blocks of Dots.

[0302] Blocks of Dots can have a justification. When a block of Dots are "justified", they share a common edge such that all edges on one side of the Dots are lined up. For example, a vertical block of Dots all snapped toward the right side of the screen **653** is right justified as shown in FIG. **12B**. In one possible embodiment, the Home Dot application **200** or the Dots exposes a UI mechanism (e.g., SHIFT+CTRL,

CTRL+J, see slamming) to enable users to change the justification of Blocks of Dots (left, center, right).

[0303] Slamming blocks of Dots against screen edges (653, 655) or other window edges is used as a mechanism to alter the justification and/or orientation of a Block of Dots. For example, a user may slam a horizontal block against the left edge of the screen and the Block's orientation could swing vertical and justified to the left with all Dots snapped to the left of the screen. Likewise, a horizontal block that is bottom justified may be slammed against the top edge 655 of the screen changing it to a top justified Block.

[0304] One feature provided by an embodiment of the present invention to assist a user with the organization and presentation of Dots is the snap feature. A Dot (649 for example) "snaps" to other Dots (647 and 651 for example), other windows (not shown), and screen boundaries (edges) 653, 655. When Dots 120 are dragged (moved) near an edge (653 or 655), a magnetism behavior is exhibited and the Dot 649 accelerates towards and "snaps" to that edge (653 or 655). The present invention provides for a magnetic gap 658 such that even when Dots are snapped to edges, there still exists a gap (~5 pixels). This gap is supported so that the user may easily visually recognize independent Dots.

[0305] The snapping feature simplifies the task for users to quickly and neatly align Dots. (See FIGS. 12B and 12C). When Dots (647, 649, and 651) are snapped together and a Dot is collapsed or resized, then a Dot that is snapped to another Dot can move accordingly; for example, staying snapped or not, according to user preference.

[0306] The user interface of the present invention supports the movement of Dots (647, 649, or 651) in clusters. All Dots (647, 649, or 651) that share an edge (snapped together=cluster/group) can be grabbed and moved as a group 659 (which may, but need not be, a block).

[0307] The present invention teaches multiple methods of selecting a cluster of Dots 659 (as opposed to a single Dot 651 for example). The simplest method comprises of pressing the CTRL key before grabbing a member Dot (any one of 647, 649, or 651) of the cluster 659. This method selects the entire cluster and moves all Dots 120 as one unit.

[0308] Another way is to change the user's selection, that is which Dots (647, 649, or 651) in the cluster 659 are selected for moving, by the number of times a user clicks before grabbing a member Dot (647, 649, or 651) of the cluster 659. For example:

[0309] 0 clicks before grabbing a member Dot (647, 649, or 651) selects and moves the entire cluster 659 of Dots.

[0310] 1 click before grabbing a member Dot (647, 649, or 651) selects and moves just the member Dot.

[0311] Additional clicks could select all vertical, all horizontal, etc.

[0312] The present invention provides for a unique method of indicating which Dots (647, 649, 651) in a cluster 659 are selected (for a group action such as move, or minimize). When multiple Dots are selected (by either method: CTRL+Select or Click+Select), a halo 661 appears around the selected Dots. In one embodiment halo 661 (shown only in FIG. 12A) is a contrastingly shaded or brightly colored line (~3 pixels wide) floating around the outer perimeter edges of

the Dots selected (647, 649, 651) in a cluster 659. The halo remains visible as the Dots (647, 649, 651) are moved.

Dot Sharing

[0313] The Home Dot application 200 provides methods for users to easily and quickly Share the Dots that they have collected and the Snapshots that they have created with others. An exemplary delivery mechanism is email. The user's default mail client application is used (a user can use their existing address book and add a detailed message); a web-based mail service extended through the Home Dot application 200 or Dots may also be used. To share and convey shared Dots or Snapshots in an email, a Share Link 320 is required (an Internet link that points to stored Share data on the Dot application server 153).

[0314] When a user sends a Share or Snapshots to another user:

[0315] 1) A Share XML file 302 is constructed employing the shared Dots and Snapshots from the sharing user's ALL-CONFIG 311.

[0316] 2) The Share XML file 302 is stored in Dot database 202 on Dot application server 153 in exchange for a unique shareID (using the addshare servlet method).

[0317] 3) An email is constructed with a Sharelink 301 (an Internet link that points to the stored Share) and placed in a new email using the user's default mail client.

[0318] When a user receives a Share of Dots/Snapshots from another user and clicks on the ShareLink 320 in the email:

[0319] 1) The recipient's Home Dot application 200 retrieves the Share XML file from the Dot application server 153 (using the getshare servlet method) to which the Share Link 320 points.

[0320] 2) The Home Dot application 200 parses the Share package and adds the new Dots and Snapshots to the Share recipient's ALL-CONFIG 311.

[0321] The Share recipient can now turn on any Dot and Snapshot received as part of the Share. Because the Share was constructed from Dot definitions that were part of the Sharing user's ALL-CONFIG. 311, the recipient receives the Dots just as the Sharing user had configured them at the time of building the Share.

PREFERRED EMBODIMENT OF CLIENT/SERVER SYSTEM

[0322] The client/server model 500 of the preferred embodiment is described to according to FIG. 13. Paramount for the successful implementation of a consumer or high volume system is the proper separation of responsibilities between Dot clients (501, 502, 503) and the Dot server system 555. The architecture presented herein supports the primary operations of Dot distribution, client installation, use statistics collection, as well as Dot developer activities. These operations, as described above, are supported in part by the XML structure and calls as listed in the attached appendices A and B. It will be appreciated by one skilled in the art that the list is not exhaustive but descriptive of an implementation of certain features of the present invention.

[0323] The Dot server system 555 which is required for support of the general Dot functionality provides for persistent storage and retrieval of configuration and statistical (usage) information and for intelligent software upgrade service for the Dot clients 501, 502, 503. Users are required to login

to the Dot server system **555** with a username and password to access this information. The server **555** also provides for generating statistical analysis reports. The server **555** is used to provide small, persistent data storage areas for third-party Dots. The server **555** may be maintained by a single administration entity and does not require third-party Dot providers for its support. The content contained by the Dot however, may be provided by the third party developers, with the initial content optionally being supplied by existing or re-purposed web pages served by the third party web servers. An administrative interface is therefore provided according to the present invention which is used by the administration entity to maintain the software upgrade information, manage users and generate statistical usage reports.

[0324] The software portion of Dot server system **555** consists of several architectural components, including:

[0325] Web servers (**505**, **507**, **509**), Servlet JSP Engines (**506**, **508**, **510**) which maintain a Java based XML Parser with SAX (Simple API for XML) and DOM (Document Object Model) interfaces, all of which share a common file system, and at least one Relational Database Management System (RDBMS) Server **513** which supports the RDBMS file system **514**.

[0326] According to one embodiment of the present invention, there are no specific operating systems, application server, or database server constraints placed on the server **555** (e.g. the operating system (O/S) may be NT, Solaris, HP-UX, Linux or FreeBSD, or any other viable server O/S. The RDBMS may be Oracle, Sybase, Informix, SQLServer etc.).

[0327] The client and server transmit and receive data on the internet **504** in XML format over standard HTTP/HTTPS. An XML parser residing on the Servlet JSP Engine (**506**, **508**, **510**) assists in deconstructing and reconstructing the XML into and out of the RDBMS Server **513** when the XML stream contains information that is needed for report generation. XML parsers with DOM and SAX interfaces are freely available for most major programming languages. HTTP/HTTPS, and therefore a web server (**505**, **507**, **509**), is chosen for the socket level client/server communication protocol because of its simplicity and more importantly, because most firewalls typically leave the default TCP ports for HTTP/HTTPS (ports **80** and **443** respectively) unblocked.

[0328] The Web servers (**505**, **507**, **509**) provide the default handling of the HTTP/HTTPS communication with the Dot client **501**, **502**, **503**. The Servlet JSP Engine (**506**, **508**, **510**) functions as an in-process extension of the Web servers (**505**, **507**, **509**) and provides the infrastructure for the application logic layer (servlets) and the presentation layer (Java Server pages). Servlet/JSP is chosen over the architecturally similar ASP due to consideration in performance, maintenance costs, and the variety of O/S and application server vendor choices.

[0329] The persistent storage mechanism for everything except the binary software components (client component updates) is Relational Database Management System (RDBMS) **513**. The binary software component for client updates are stored in the file system **514** with a pointer (full pathname) which is stored in the database to each component file. The binary software components are not stored directly in the RDBMS in so as to improve performance.

[0330] Since the configuration data need not be manipulated or reported on by the server, the configuration data is stored directly in the RDBMS **513** as a small text file, in the form by which it is transmitted from the client **501**, **502**, **503**. The configuration data is not deconstructed and reconstructed

into its constituent parts by the XML parser on the servers (**505**, **507**, **509**). The statistical data is used to generate reports on the server-side by a servlet JSP-based administrative interface. SQL queries are used for statistical report generation to provide simplicity and flexibility. Therefore, a single statistical data XML stream is deconstructed upon receipt by an XML parser residing on the Servlet JSP Engine (**506**, **508**, **510**) and stored as discrete RDBMS columns (the entire stream instance is the RDBMS row) rather than storing the entire stream in a single text column.

Development and Testing of Dots

[0331] It is possible to provide for the development and testing of new Dots, Categories, Packs, etc. in a physically separate system that is a superset (duplicate with additional testing support) of the production system **500**. The development and testing (dev/test) system has additional server methods and interfaces, not present in the production system **500** which requires higher security and simplified maintenance, to facilitate the development and testing process. The interfaces to these additional server methods are HTML/JSP pages to allow for easy accommodation of new, geographically distributed Dot content providers.

[0332] The development and test system allows the Dot content providers to easily build and test new Dots and Dot Packs. When tested to their satisfaction, the Dot content providers can then, through the interface, submit their Dots/packs for inclusion in the production system. The Dot administrator will be able to periodically run a report to see which Dots/packs were submitted. The Dot administrator is then able to decide whether or not to approve a Dot/pack for import into the production system. Migration of an approved Dot/pack will involve exporting the appropriate data from the RDBMS on the development and test system, moving the export file from the development and test system and importing the export file into the production system.

Dot Messaging Architecture (DMA)

[0333] Dots and the Home Dot application have a messaging architecture (Dot Messaging Architecture—DMA) that enables elements of the system including Dots, controls within Dots, and the Home Dot application, to communicate with one another. This enables these elements to exchange information, request actions or functionality, and respond to system, element, or content events.

[0334] FIG. 14 illustrates the message routing paths and elements **700** of the Dot Messaging Architecture. The Dot Messaging Architecture (DMA) has a messaging addressing and routing scheme, defined messages, and an extensible message format (as defined in further detail below) that provides each component with access to component, application, and system features and true application behavior. Also, Dot content has access to the application rendering system within the Home Dot **200** and other Dots (**711**, **751**, **761**) via the DMA.

[0335] All elements of the system can send and receive (via paths **701**, **702**, and **703**) DMA messages. In this embodiment, these elements fall into three groups: the Dots (**711**, **751**, **761**); the Controls in the Dot's control space including the WebConduit control (**714**, **754**, **764**) and base controls that encompass menu controls and window operations controls; and the system control **780** embodied within the Home Dot application **200**.

[0336] The DMA enables controls to send and receive messages. Controls can exchange messages with other elements in the same Dot (controls in the control space, Dot frame, System) or in a different Dot (the addressing scheme supports addressing elements in other Dots. All Dot controls share a set of common messages. They also can provide messages that are unique to that control (see WebConduit Control). Common control messages include messages such as:

[0337] #show
[0338] #hide
[0339] #get-width
[0340] #get-height
[0341] #get-size
[0342] #is-open
[0343] #get-address

These messages query/effect properties/methods of a control within its Dot's control space such as layout, size, etc.

[0344] The Web Conduit control (**714**, **754**, **764**) supports additional messages (in addition to the common control messages explained previously). These unique Web Conduit messages enable other elements in the Dot System (Controls, Dot frames, Home Dot application **200**) to interact with WebConduit functionality (request actions or functions, and respond to events). Messages unique to the WebConduit control which is a wrapped Microsoft IE web control in the preferred embodiment, include:

[0345] ##<any javascript>
[0346] #navigate.

[0347] One of the most significant features of the WebConduit control is that DMA enables messages to flow IN and OUT of standard HTML rendered within a control. The preferred embodiment currently extends DHTML and javascript to send and respond to DMA messages. The present invention supports SendMessage (a synchronous method which is used if return result is required) and PostMessage (an asynchronous method in which no return result required) methods that can be called using a window.external.<method> call from DHTML in the Web Conduit control (**714**, **754**, **764**).

[0348] The preferred embodiment of the message format (explained in more detail in the following sections) allows for two types of messages to be sent IN and OUT of HTML with respect to the WebConduit control. Specific messages and functions can be called (e.g., #navigate) that cause a WebConduit to perform a specific action or function. In addition, any javascript (e.g., ##<any javascript>) can be called within a WebConduit's document as well.

[0349] This provides the messaging architecture with exceptional flexibility and extensibility in which data can be passed, functions can be called, and variables can be set. Integrating DMA with standard Web content by enabling DMA messages to call into HTML and for DMA messages to be initiated from HTML within the WebConduit control is the basis that enables Dots to exhibit true application behavior.

[0350] Any DMA message that is defined can be sent or called from DHTML. This, in conjunction with the application logic capability that is provided by javascript (and other HTML scripting languages), provides the application media development environment (which includes application development platform and language). A Dot developer can thus author a new Dot application by developing web content (HTML, GIF files, etc.) and by packaging that content in a Dot Definition, eliminating the need for compilers and consequently, downloading executables. Therefore, if a client

device **199** has been Dot-enabled (the Home Dot application **200** is installed) then that device can instantaneously view, open, run Dots as well as modify and save their configurations.

[0351] DMA messages can be sent to and received from a Dot. This enables elements of the system that can send and receive DMA messages to interact with a Dot. Elements of a Dot's definition can be accessed/modified using Dot messages. Examples of Dot Properties/Dot methods that can be accessed and modified via the DMA include:

[0352] #set-title
[0353] #get-title
[0354] #set-size <width> <height>
[0355] #is-open
[0356] #close
[0357] #collapse
[0358] #uncollapse
[0359] #set-title-images <up-URL> <down-url> <over-url> <inactive-url>

[0360] Since a message can originate from DHTML content which is rendered in the Web Conduit control as Dot content, standard web content when rendered in a Dot can therefore access properties and behaviors of its packaging (the Dot). Internet content can therefore do such things as modify the size of the Dot that is rendering it. It can move it or collapse it.

[0361] The present invention therefore enables properties and behaviors to be tied to and between any Dot content event, even outside of a Dot affecting another Dot (e.g., an internet content (DHTML) mouse-over event can change the size and position of another Dot, etc.)

[0362] Most of the DMA examples thus presented are of other elements sending messages to the Dot frame (**711** for example). An example of a Dot frame **711** sending messages can be seen in the case of the menu control **712** (discussed further below). The Dot frame **711** may also send messages (as can the menu control **712**) based upon the occurrence of certain events such as Dot-moving, Dot-collapsed/expanded, Dot-infocus/inactive, etc.

[0363] The preferred embodiment has the menu control **712** implemented as part of the Dot Frame **711**. Menu control **712** entries are given/tied-to actions using the DMA. Each menu entry may consist of, inter alia, a text-title, an icon, a tooltip, an ID, and an action. The action is simply a DMA message that has a recipient specified address. Dot menu control **712** items are defined as part of a Dot definition.

[0364] When a menu entry within a menu control **712** is selected by a user, the specified Dot Message is sent to the specified recipient (DMA address). This illustrates an example of the true application behavior that is exhibited by Dot Content having access to DMA.

[0365] As with the functionality described in the previous sections, the following are examples of types of additional application behaviors that are possible:

[0366] A menu control **712** entry (e.g., refresh) can send a message (to refresh) to a Web Conduit control and cause an action (e.g., refresh content).

[0367] A menu control **712** entry can send a message to the Dot (itself) and cause it to collapse, or resize, or exit.

[0368] A menu control **712** entry can call any javascript (##<any javascript>) in the HTML of Dot content rendered in the same Dot or a different Dot to set variables, change images, call functions, etc.

[0369] DMA messages can also be sent to and received (701, 702, 703) from the system (720)—the functional layer above and between individual Dots. Some aspects for which the system is responsible include DMA message routing, adding, removing, opening, closing Dots, etc. In the preferred embodiment, the system includes the Home Dot application 200 or equivalent Dot-rendering and Dot-management client application.

[0370] Examples of system functions and behaviors that can be accessed and called using DMA messages include:

[0371] #refresh

[0372] #install-dot <dot-url>

[0373] #have-dot <dot-address>

[0374] #delete-dot <dot-address>

[0375] #quit

[0376] #save-to-server

[0377] #get-screen-width

[0378] #get-screen-height

[0379] #close-all-dots

[0380] #open-preset <preset-name>

[0381] #take-preset <preset-name>

[0382] #get-dot-ids <dot-address>

[0383] Messages can be sent to/from controls (WebConduit control—in and out of HTML), to and from the Dot (Dot-Frame—menu control 712, Titlebar 713, bottom bar 717, flexible Dot Definition), to and from the system (Home Dot application 200—open and close Dots, system variables and data). The DMA addressing scheme also provides for messages to be sent to any Dot, to any control in any Dot, to any HTML, in any control, in any Dot. This enables Dots to work together as an application system, enables Dot developers to share functionality and leverage and build on the functionality of other Dots.

[0384] In the preferred embodiment, a DMA message has two components: a recipient address and the message body itself. Both are represented as strings. The addressing scheme is explained in the next section.

[0385] The body of a DMA messages is, at its simplest, a text string which may represent any javascript, for example, sent to a Web Conduit control. For defined messages, there is a method element to define the function/behavior call/request [e.g., #set-size] followed by arguments if the method element requires them (e.g., height in DotUnits; width in DotUnits).

[0386] The present invention provides for two functions that enable messages to be generated from within DHTML in the WebConduit control: SendMessage and PostMessage. SendMessage, which is synchronous, is used if a return value is required. PostMessage, which is asynchronous, is used otherwise.

[0387] Below are examples of messages generated with DHTML within the WebConduit control:

[0388] window.external.PostMessage (“#.”, “#set-position 350 500”)

This message is sent to a Dot and causes it to move to a new screen position, for example 350x500 pixels.

[0389] window.external.SendMessage (“#system, “#get-screen-width”)

This message asks the system for the current screen’s width in pixels.

[0390] Messages are routed according to three pieces of information: Domain, Dot Specifier, Control Specifier.

[0391] One of the ways that a Dot is identified is by a Domain. In the preferred embodiment, the Domain is the same as a Dot provider’s ID (developer ID). Generally this is a unique identifier for each company or developer and is specified in a Dot’s definition.

[0392] Dots in the same domain, by default, can communicate to one another without explicitly specifying the domain in the address. When no messaging access restrictions are placed on addressing a Dot according to its domain (by default there are restrictions), then a Dot can also send messages to another Dot belonging to a different domain by explicitly addressing that Dot by its domain and Dot specifier.

[0393] Dots are further identified with a kind attribute as a part of the Dot Definition, and by an ID attribute. The ID is volatile and is not typically hard-coded into DHTML scripts. The addressing scheme allows for a Dot to be specified by explicitly referencing or querying a Dot’s kind or ID identifier attribute.

[0394] Similarly, controls are identified by kind and by ID (also a part of the Dot Definition). Controls can also be specified by explicitly referencing or querying its kind or ID.

[0395] In the preferred embodiment, there are several permitted forms for the address of a message recipient. The fundamental one is:

[0396] #<dot specifier>:<control specifiers

Other accepted address forms are:

[0397] #<domain>:<dot specifier>:<control specifiers

[0398] #<domain>:<dot kind>:<dot id>:<control kind>:<control id>

[0399] #system

If an address does not match any of these forms, the address defaults to #system.

[0400] Specifiers have four different forms: The first form specifies the unique ID of the Dot/control/domain in question. An example of this first form is:

[0401] <specifier>:=<ID>

[0402] The second form allows the sender to address a message to the closest matching recipient by some form of search criteria. Multiple Dots or controls might be of the same kind, enabling broadcasting a message to these elements. An example of this second form is:

[0403] <specifier>:=<kind><#search criteria>

Search criteria can be one of:

[0404] <search criteria>:=any

[0405] <search criteria>:=open

[0406] <search criteria>:=closed

Controls that are hidden are considered closed, and controls that are visible are considered open.

[0407] The third form enables reference to a specific Dot or control, allowing messages to be sent within a Dot. If a particular control is specified, then it must be specifically referenced in the Dot. An example of this third form is:

[0408] <specifier>:=dot

[0409] The final form is specifically for the control specifier. If a message is to be directed to a Dot and not a control, the control specifier must be empty. An example of this last form is:

[0410] <specifier>:=

[0411] The current embodiment supports messages to a specific recipient: the addressing/routing scheme could support messages addressed to multiple simultaneous recipients

(broadcast). Similarly, Dots can address Dots on the same platform or client (computer or device); the addressing or routing scheme may also support messages addressed to Dots/Controls/Home Dot applications **200** on other devices or by user. The Home Dot application **200** routes messages sent between Dots (**711**, **751**, **761**) and resolves addressing queries (e.g., address: “#A#Any.”=first Dot of kind “A” found in the Home Dot application **200**).

[0412] Since the Home Dot application **200** routes messages between Dots (**711**, **751**, **761**), it can allow or restrict Dots from addressing and sending messages to other Dots outside their own domain (the Home Dot application **200** could also restrict messages to within the same Dot). For example, Dot2 (**751**) is a member of domain B (**750**) as is Dot 3 (**761**), whereas Dot 1 (**711**) is a member of Domain A. Home Dot **200** can permit or deny messaging between Dot 1 (**711**) and Dots 2 and 3 (**751**, **761**) and vice versa.

[0413] The Home Dot application **200** acts to enforce the access rights to and between published messages built on the DMA API. In one embodiment, the Home Dot application **200** accesses a database of published message methods implemented by Dot Developers and restricts/allows messages to pass based on access criteria data posted to the data base.

[0414] For example, a Dot developer could specify 2 public functions, 2 functions with access restricted by partner (Domain **710** or **750** for example), and 2 functions with access restricted by Dot address. The Home Dot application **200** may allow or restrict messages to be sent to one Dot from other Dots according to access criteria specified by the Dot developer.

[0415] The Home Dot application **200** also responds to messages sent to #system. Access to system features/functions/behaviors is one aspect of the present invention that enables extensibility of the Home Dot application system.

[0416] System messages include:

[0417] #REFRESH—Refreshes the user’s ALL-CONFIG **311**.

[0418] #INSTALL-DOT<DOT-URL>—Adds the specified Dot to the user’s Home Dot application **200** (ALL-CONFIG) using the same mechanism that Dot definitions are added to the system.

[0419] #HAVE-DOT<DOT-ADDRESS>—Checks if the user currently has the specified Dot in their Home Dot application **200** (as part of the ALL-CONFIG).

[0420] #DELETE-DOT<DOT-ADDRESS>—Removes the specified Dot from the Home Dot application **200** (and the user’s ALL-CONFIG).

[0421] #QUIT—Quits the Home Dot application **200**.

[0422] #SAVE-TO-SERVER—Saves the user’s ALL-CONFIG to the Dot application server **153**.

[0423] #GET-SCREEN-WIDTH—Returns the width of the screen in pixels.

[0424] #GET-SCREEN-HEIGHT—Returns the height of the screen in pixels.

[0425] #CLOSE-ALL-DOTS—Closes all open Dots.

[0426] #OPEN-PRESET<PRESET-NAME>—Opens the specified user’s Snapshot.

[0427] #TAKE-PRESET <PRESET-NAME>—Capture a Snapshot.

[0428] #GETDOT-IDS <DOT-ADDRESS>—Returns the DotID of the specified Dot.

Statistics Collection/Analysis

[0429] The Home Dot application/Dot system and method of collecting use statistics from Home Dot applications (and application servers) enables the present invention to build and query a multidimensional use-profiling database. Because Dots are used in groups and used more often for longer periods of time than web pages/sites, the present invention may collect real-time multidimensional use statistics **206** (according to which Dots are ON, for example together or simultaneously) that over time becomes a valuable multi-dimensional user behavior profiling database. The Dot server **153** collects use statistics **206** from its Home Dot application **200** on clients **199** and manages and tracks Home Dot application downloads, access to Dot Index **204**, etc.

[0430] Information on a Dots user can be monitored in a multi-dimensional fashion. Instead of classifying a user based solely on their demographic characteristics and linear use of the internet, the present invention enables tracking on an additional dimension. A user can be classified according to which Dots they use at the same time, instead of only how they navigate within an individual viewer (the browser). This user information can be packaged and sold to content providers so that they can better provide services to their users.

[0431] Because the present invention enables multi-dimensional profiling, a service may be provided by the operator of this system and its partners to customize advertisements and offerings to users in a more efficient and targeted manner. Tracking this profiling data in real-time allows the operator to tailor these offerings to users of specific Dots in a way that is not otherwise possible today. For example, one content provider partner can be informed that users of a certain Dot are also disproportionately monitoring content about a specific topic through another Dot. This information is then used to target ads at the moment the peripheral interests of that content providers Dot users are known. The present invention enables this information to be tracked as a complete system. The system can be utilized to facilitate serving advertisements and offerings based on the information that it collects.

[0432] The Home Dot application **200** records application events in an XML log that intermittently gets uploaded to the Dot application server **153**. Application events that are logged include the following (by timestamp and by session):

[0433] When a Dot is opened and when it is closed (particularly, when Home Dot **200** is opened and closed)

[0434] When a Dot is added from a Dot Template or a Share

[0435] The number of times a user clicks through from a Dot to a full-screen web page (and to which URLs)

[0436] The number of page views in a Dot-by-Dot session

[0437] When and from which URL did a user download a Home Dot application **200**

[0438] The following outlines the types of questions the use statistics of the present invention can answer regarding Home Dot application **200** and Dot use:

[0439] Duration and frequency of opening Home Dot applications and Dots—How often is the Home Dot application **200**/Dot used on average (optionally, by user group) during the parts of a day (e.g., morning)?

- [0440] Duration: What was the average amount of time that users leave the Home Dot application 200/Dot ON 324 during the day
- [0441] Distribution of Home Dot application 200 and Dots (Point of Distribution including Shares)—How many users have downloaded the Home Dot application during a set period of time? From which URL were they referenced?
- [0442] How many times has this Dot's DotTemplate been installed (from the DotIndex)?
- [0443] From which web site were users referred? How many times has the Dot been installed from a Share?
- [0444] Page views in Dots, Click-throughs/URL's—How does the page-view performance of a Dot compare to the comparable content on a full-screen web site?
- [0445] List the full-screen URLs most often clicked through to (in ranking order) from this Dot.
- [0446] Dots used in Groups—Which Dots are used most frequently together? Which Dots do users most often use with Dot.
- [0447] The Home Dot application 200 intermittently sends its event logs to the Dot application server 153 using the setAllEvents servlet method. The Home Dot application's events are logged and sent as an XML file in a format specified by the CALL-EVENTS.
- [0448] Categorizing Dots and/or Dotcontent by "context keywords" (e.g., CNN Dot and FoxNews Dot="News"; CBS Sportsline Dot="Sports") enables the Home Dot application 200 to build a real-time (accessible via the DMA) multi-dimensional use context on-the-fly, based on which Dots the user currently has ON (e.g., assemble the keywords of the currently open Dots into a multi-dimensional keyword string). This highly resolved view of a user's behavior enables the Home Dot application 200 to source a very targeted offering (commerce opportunity or ad) and/or enable Dot developers to do the same. In one embodiment, the Home Dot application 200 supports a DMA message (pay to access) that provides Dot developers with access to this type of information (e.g., Send Message "#system" "#get-use-context-string")
- [0449] The Home Dot application 200 supports a developer toolkit service that sources ads targeted according to this multi-dimensional use context generated by the Home Dot application 200 (more targeted than currently possible with singular contexts such as text strings, e.g., searched on "toys"=serve a toy ad). The Home Dot application 200 and/or Dot application server 153 monitors/tracks, and handles incremental billing for all parties (e.g., anonymously).

Variations

- [0450] Many variations on the above description are contemplated and within the scope of the present disclosure. For example, in an alternate embodiment, the Home Dot application 200 interface is implemented entirely as Dot content served from Dot application server 153. Furthermore, the Home Dot application 200 itself may be packaged as a Dot. The Home Dot application Dot has special responsibilities and rights, but otherwise, it could be as much a Dot as any other Dot. This embodiment enables the application executable to be significantly smaller and the Home Dot application 200 UI to be significantly more flexible.
- [0451] In yet another alternate embodiment, the Home Dot application 200 is implemented as a plug-in to the web browser.

[0452] In still another alternate embodiment, the Home Dot application 200 is implemented in java, thus enabling it to be more easily portable to other platforms.

[0453] Additionally, in another embodiment, a subset of the Home Dot application 200 functionality is implemented through the browser using pop-ups; this would be particularly valuable to mobile Home Dot application 200 users who don't always have easy access to a computer with the Home Dot application 200 installed.

[0454] The present invention enables the definition of an interface that groups Dots together from different content providers and offers them to end users as part of a unique system of content. Content from different internet companies can be made to interact with each other using aspects of the present invention provided for in the Dot messaging architecture (DMA). The Dot server 153 may therefore be provided with functionality to broker these relationships and facilitate this interaction in Internet content between companies and between Dot-enabled internet sites.

[0455] Because Dots can work together (via DMA and packs), the present invention enables companies or content providers to enable their Dots to work together. The present invention provides for another layer built upon the DMA API (application programming interface) that specifies how different kinds and types of Dots from different companies or developers communicate/work together. This layer is optionally open source so that a large portion of it is self-published by the Dot Developers themselves.

[0456] Dot Developers implement, specify, and publish in a database DMA message methods that other Dot Developers implement through calls made within their published Dots. These Dot developer methods may be aggregated and published for use in a database provided by the Home Dot publisher for example and sourced within a developer zone, or as part of a Dot Definition.

[0457] Dot developers may implement these DMA message methods as java script functions that other Dot Developers calls with the DMA's ##<any javascript> message. Dot Developers would need to be able to address a particular Dot's Web Conduit control that supports a page implementing the specified javascript function and address by domain if different from their domain. Restricted or variable permissions may be provided via a web server or defined in a Dot's Dot Definition to restrict/enable routing of messages.

[0458] A Dot Developer has the option to restrict access to certain methods according to some criteria e.g., public, partners, domain. Different types of restriction criteria schemes may be implemented. A Dot may send a message to another Dot and query for methods accessible to it. An example of access levels for functions is provided below.

[0459] Public functions—Dot Developer implements and publishes DMA message methods that any other Dot Developer could call (e.g., what-time-is-it for a Clock Dot).

[0460] Reserved functions—Dot Developer implements, specifies, and publishes a set of DMA message methods that may be called only by certain types of Dot Developers (e.g. premier partner), specific Dot Developers, or specific Dots.

[0461] Private functions within the same domain—A Dot Developer restricts access to certain DMA message methods that may only be implemented by other Dots in the same domain. The preferred embodiment provides

for the option to either allow all messages to flow between domains, or to fully restrict messages to within a domain.

[0462] Local Private functions within Dot—At the most restricted level, access is specified such that DMA messages may only be accessed from within the same Dot.

[0463] A published API that specifies ways for Dots to extend functionality to other Dots enables Dot Developers to leverage the development work and functionality of other Dots. As an example, a Dot Developer may implement a credit card processing Dot. In one embodiment, this Dot is implemented as a javascript function that checks the credit available on a credit card. This developer could specify this as a public function (in the Dot Definition for example) and publish this function in a Server Dot Index. Other Dot Developers send a message to this Dot and call “check-credit”, thus leveraging the development carried out from the first Dot Developer.

[0464] In the above example, the messaging architecture may provide revenue generation by way of monthly fees, per-access fees, etc. The Home Dot application 200 and/or Dot application servers could monitor/track and automatically handle incremental billing for all parties. By applying this method to the previous example, a Dot Developer who calls a credit card processing Dot for a credit check may be incrementally billed for each such call.

[0465] It will be appreciated that the methods, in the form of instructions having a sequence, syntax, and content, of the present invention may be stored on (or equivalently, in) any of a wide variety of computer-readable media such as magnetic media, optical media, magneto-optical media, electronic media (e.g., solid state ROM or RAM), etc., the form of which media not limiting the scope of the present invention. A data processor reading said media is operable to either transfer (e.g., download) said instructions thereto and then operate on those instructions, or cause said instructions to be read from the media and operate in response thereto. Furthermore, devices (e.g., a reader) for accessing the instructions on said media may be contained within or connected directly to the data processor residing on a device on which those instructions operate, or may be connected via a network or other communication pathway to said data processor.

[0466] While a plurality of preferred exemplary embodiments have been presented in the foregoing detailed description, it should be understood that a vast number of variations exist, and these preferred exemplary embodiments are merely representative examples, and are not intended to limit the scope, applicability or configuration of the invention in any way. Rather, the foregoing detailed description provides those of ordinary skill in the art with a convenient guide for implementation of the invention, by way of examples, and contemplates that various changes in the functions and arrangements of the described embodiments may be made without departing from the spirit and scope of the invention defined by the claims thereto.

APPENDIX A

[0467] This appendix contains an exemplary definition of an XML structure used for Dots. Generally, there are four top XML structures that are read from URL/file. These are:

Session Configuration	<SESSION _CONFIG>
User configuration	<ALL _CONFIG>
shares	<SHARE>
Dot templates	<DOT>

These structures are described below. Some structures reuse other structure formats.

<DOT>

GLOBALID=“String”

[0468] Used only within <SHARE> tags. This GLOBALID must be unique with respect to other <DOT> tags in the <SHARE>.

DOMAIN=“string”

[0469] Unique label for the owning company of this Dot. In one embodiment, Dots are limited to communicating with Dots only from their own domain.

KIND=“String”

[0470] Helpful identifier for finding such a Dot from another Dot. Does not have to be unique.

<FRAME>

<TITLE>

[0471] TEXT=“string”

[0472] JUSTIFY=“LEFT”|“CENTER”|“RIGHT”

[0473] COLOR=“#XXXXXX”

PIXELWIDTH=“integer”

[0474] Width in pixel units. Overrides WIDTH attribute.

PIXELHEIGHT=“integer”

[0475] Height in pixel units. Overrides HEIGHT attribute.

WIDTH=“Integer”

[0476] Width in Dot units. Default value is 1.

HEIGHT=“integer”

[0477] Height in Dot units. Default value is 1.

X=“integer”|“LEFT”|“CENTER”|“RIGHT”

[0478] Initial X position in screen coordinates. Default is center.

Y=“INTEGER”|“TOP”|“CENTER”|“BOTTOM”

[0479] Initial Y position in screen coordinates. Default is center.

FIXWIDTH=“TRUE”|“FALSE”

[0480] Default is false.

FIXWIDTH=“TRUE”|“FALSE”

[0481] Default is false.

BACKGROUNDCOLOR=“#XXXXXX”

[0482] Default is white.

<TITLEBARIMAGE>

[0483] JUSTIFY=“LEFT”|“CENTER”|“RIGHT”

[0484] TILELEFT=“integer”

[0485] TILERIGHT="integer"

[0486] NORMAL="url"

[0487] DOWN="URL"

[0488] HOVER="URL"

[0489] INACTIVE="URL"

<BOTTOMARIMAGE>

[0490] JUSTIFY="LEFT"|"CENTER"|"RIGHT"

[0491] TILELEFT="integer"

[0492] TILERGHT="integer"

[0493] NORMAL="URL"

[0494] DOWN="URL"

[0495] HOVER="URL"

[0496] INACTIVE="URL"

<MENU>

[0497] Contains zero or more <ITEM> tags.

[0498] <ITEM>

[0499] TITLE="string"

[0500] TOOLTIP="string"

[0501] ICON="URL"

[0502] ID="string"

[0503] Must be unique.

[0504] <ACTION>

[0505] RECIPIENT="address"

[0506] MESSAGE="string"

<CONTROL_LAYOUT>

[0507] Contains zero or more <CONTROL> tags.

[0508] WIDTH="integer"

[0509] Divides control space into this many evenly spaced columns. Default is 1.

HEIGHT="integer"

[0510] Divides control space into this many evenly spaced rows. Default is 1.

WIDTHSCALES="TRUE"|"FALSE"

[0511] Default is true.

HEIGHTSCALES="TRUE"|"FALSE"

[0512] Default is true.

<CONTROL>

[0513] See external definition.

<CATEGORIES>

[0514] Contains zero or more <CATEGORY> tags.

[0515] <CATEGORY>

Adds the Dot to this category. This is the only way categories are specified; i.e. there is no master category list.

[0516] NAME="string"

[0517] This is the name of the category.

<EVENTS>

[0518] <ONCLOSE>

[0519] Executes this action list on close.

[0520] <ACTION-LIST>

[0521] See external definition.

<CONTROLS>

[0522] The only understood value for this is "Browser". Currently, any other value is overridden and "Browser" is assumed. All specifications should explicitly specify "Browser".

KIND="string"

ID="string"

[0523] Must be unique with other controls in this Dot.

LEFT="integer"

[0524] X position in container units. Default is 0.

TOP="integer"

[0525] Y position in container units. Default is 0.

WIDTH="integer"

[0526] Width in container units. Default is 1.

HEIGHT="integer"

[0527] Height in container units. Default is 1.

URL="URL"

This is read if and only if this control is of class "Browser". This is the URL to which this control navigates.

<PRESET>

Contains zero or more <DOT> tags.

TITLE="string"

<DOT>

This tag specification is specific to the <PRESET> tag, i.e. it is not the same tag as the full <DOT> specification described elsewhere.

[0528] GLOBALID="string"

Used only within <SHARE> tags. This <SHARE> must contain a <DOT> with a matching GLOBALID.

[0529] X="integer"|"LEFT"|"CENTER"|"RIGHT"

[0530] Y="integer"|"TOP"|"CENTER"|"BOTTOM"

<SHARE>

[0531] Contains zero or more <DOT> and <PRESET> tags. GLOBALID attributes are valid and consistent only within this share.

<DOT>

[0532] See external definition.

<PRESET>

[0533] See external definition.

<ACTION_LISTS>

Contains zero or more <ACTION> tags.

<ACTION>

[0534] RECIPIENT="address"

[0535] MESSAGE="string"

<SESSION_CONFIG>

REDIRECT="URL"

[0536] The client reading this will ignore this configuration and try again with the configuration stored at this URL. The client will not redirect if this tag is omitted, if the URL is empty, or if the URL is the same URL used to retrieve this configuration in the first place. This step is recursive, so if two configuration files are redirecting to each other, the client will get stuck in an endless loop.

VERSION="string"

[0537] This attribute is required and must match the version of the client. Currently, the client is compiled with the version "alpha:1". If this attribute is omitted or differs from the client's version, the client will download the executable specified in the UPGRADE attribute and execute it.

UPGRADE="URL"

[0538] This is used only if the VERSION attribute differs from the client's version. This URL specifies the location of an executable that will upgrade the client's application. The client will quit, and then run the upgrade executable automatically.

<Methods>

Baseurl="url"

[0539] All the tags encapsulated here represent servlet methods. The URLs specified by the method are relative to this base URL.

<ADD_USER>

[0540] URL="URL"

<GET_USER>

[0541] URL="URL"

<SET_USER>

[0542] URL="URL"

<GET_SESSION_CONFIG>

[0543] URL="URL"

<SET_PASSWORD>

[0544] URL="URL"

<GET_MASTER_DOT_LIST>

[0545] URL="URL"

<SET_ALLCONFIG>

[0546] URL="URL"

<GET_ALL_CONFIG>

[0547] URL="URL"

<SET_ALL_STATS>

[0548] URL="URL"

<GET_DOT_TEMPLATE>

[0549] URL="URL"

<ADD_SHARE>

[0550] URL="URL"

<GET_SHARE>

[0551] URL="URL"

<AUTH_TEST>

[0552] URL="URL"

<DO_REDIR>

[0553] URL="URL"

<SKELETONS>

[0554] <HOMEDOT>

[0555] <IMAGES>

[0556] BASEURL="URL"

This is the URL of the root directory for where the HomeDots images are stored.

[0557] <DOT>

[0558] <IMAGES>

[0559] BASEURL="URL"

This is the URL of the root directory for where the default images for Dots are stored.

<DOTS>

<ADD>

TEMPLATE="URL"

[0560] This is the URL for the XML specification of the "add" Dot.

<HELP>

TEMPLATE="URL"

[0561] This is the URL for the XML specification of the "help" Dot.

<LOGIN>

TEMPLATE="URL"

[0562] This is the URL for the XML specification of the "login" Dot

<ALL_CONFIG>

<SHARE>

[0563] This contains all the installed Dots and presets in this users configuration. See external definition.

<LASTSTATE>

<PRESET>

This preset uses the GLOBALID values in the above <SHARE>. This represents the last known position of the open Dots when the user last quit the application.

<HOMEDOT>

This represents the last position of the HomeDot when the user quit his application.

X="integer"|"left"|"center"|"right"

Y="integer"|"top"|"center"|"bottom"

APPENDIX B

Client-Server Protocols

HTTP/HTTPS

[0564] HTTP/HTTPS is the chosen basic request-response protocol for client/server communications for Dots. HTTP/HTTP by default runs on port **80/443** and is typically left unblocked on the firewall by most network administrators (and by default by the firewall vendors). It is also the logical choice given that web servers and web client libraries are cheap and often freely available. This choice effectively removes the burden of creating and maintaining code to the low level TCP/IP socket connections as well as the basic request-response framework. For security reasons, it is suggested that all user-specific data exchanges be done through HTTPS (as opposed to HTTP).

XML

XML is the chosen data exchange format between the client and the server.

Session_Config DTD

[0565]

```
<!ELEMENT session_config
  add_user,
  set_password,
  set_session_config,
  get_master_dot_list,
  get_dot_template,
  get_all_config,
  get_all_events,
  dotdots_navigation
>
<!ELEMENT add_user EMPTY>
<!-- ATTLIST add_user
  url CDATA #REQUIRED
-->
<!ELEMENT set_password EMPTY>
<!-- ATTLIST set_password
  url CDATA #REQUIRED
-->
<!-- ELEMENT get_session_config EMPTY>
<!-- ATTLIST get_session_config
  url CDATA #REQUIRED
-->
<!-- ELEMENT get_master_dot_list EMPTY>
<!-- ATTLIST get_master_dot_list
  url CDATA #REQUIRED
  refresh CDATA #REQUIRED
-->
<!-- ELEMENT get_dot_template EMPTY>
```

-continued

```
<!-- ATTLIST get_dot_template
  url CDATA #REQUIRED
-->
<!-- ELEMENT get_all_config EMPTY>
<!-- ATTLIST get_all_config
  url CDATA #REQUIRED
-->
<!-- ELEMENT set_all_config EMPTY>
<!-- ATTLIST set_all_config
  url CDATA #REQUIRED
  refresh CDATA #REQUIRED
-->
<!-- ELEMENT set_all_events EMPTY>
<!-- ATTLIST set_all_events
  url CDATA #REQUIRED
-->
<!-- ELEMENT dotdots_navigation EMPTY>
<!-- ATTLIST dotdots_navigation
  url CDATA #REQUIRED
-->
```

Session_Config Example

[0566]

```
<?xml version="1.0"?>
<!DOCTYPE SESSION_CONFIG SYSTEM
"SESSION_CONFIG.DTD">
<SESSION_CONFIG>
  <ADD_USER
    url=http://scot:8080/servlet/DoDotsServer/addUser" />
  <SET_PASSWORD
    url=http://scot:8080/servlet/DoDotsServer/setPassword" />
  <GET_SESSION_CONFIG
    url=http://scot:8080/servlet/DoDotsServer/getSessionConfig" />
    refresh="1" />
  <GET_MASTER_DOT_LIST
    url=http://scot:8080/servlet/DoDotsServer/getMasterDotList" />
    refresh="-1" />
  <GET_DOT_TEMPLATE
    url=http://scot:8080/servlet/DoDotsServer/getDotTemplate" />
    refresh="1" />
  <GET_ALL_CONFIG
    url=http://scot:8080/servlet/DoDotsServer/getAllConfig" />
    refresh="600" />
  <SET_ALL_EVENTS
    url=http://scot:8080/servlet/DoDotsServer/setAllEvents" />
    refresh="600" />
  <DODOTS_NAVIGATION
    url=http://www.DoDots.com/" />
</SESSION_CONFIG>
```

User DTD

[0567]

```
<!-- ELEMENT user EMPTY>
<!-- ATTLIST user
  uid CDATA #IMPLIED
  password CDATA #IMPLIED
  dpid CDATA #IMPLIED
  title CDATA #IMPLIED
  prefix CDATA #IMPLIED
  firstname CDATA #IMPLIED
  mi CDATA #IMPLIED
  lastname CDATA #IMPLIED
  suffix CDATA #IMPLIED
```

-continued

email	CDATA	#IMPLIED
street1	CDATA	#IMPLIED
street2	CDATA	#IMPLIED
city	CDATA	#IMPLIED
state	CDATA	#IMPLIED
country	CDATA	#IMPLIED
birthdate	CDATA	#IMPLIED
sex	CDATA	#IMPLIED

>

User Example

[0568]

```
<?xml version="1.0" ?>
<GETDOCTYPE USER SYSTEM "USER.DTD">
<USER>
  uid ="joeblack"
  password ="morte"
  dpid ="321"
  title ="Chief Dot Developer"
  prefix ="Mr."
  firstname ="Joe"
  mi ="D"
  lastname      ="Black"
  suffix ="Sr."
  email ="reaper@otherside.org"
  street1 ="1 KickTheBucket Street"
```

-continued

```
street2 =""
city ="Mordor"
state ="DC"
country=""
birthdate=""
sex ="N"
/>
```

Dot_Master DTD

[0569]

```
<!ELEMENT dot_master(
  dot+
)
>
<!ATTLIST dot_master
>
<!ELEMENT dot EMPTY>
<!ATTLIST dot
  dtid ID #REQUIRED
  name CDATA #REQUIRED
  desc CDATA #IMPLIED
>
```

Dot_Master Example

[0570]

```
<?xml version="1.0" ?>
<GETDOCTYPE DOT_MASTER SYSTEM "DOT_MASTER.DTD">
<DOT_MASTER>
  <DOT DTID="1" NAME="Scot's DoDots stock tracker" DESC="Tracks and
graphs the stock performance of the DoDots corporation"
  />
  <DOT DTID="32" NAME="ACME Wonder Dot" DESC="The most amazing
dot in the world. This one does tricks like you've never seen before"
  />
  <DOT DTID="33" NAME="ACME Wonder Dot version 2" DESC="The most
amazing Dot in the world. This one actually works the way the first one was supposed
to."
  />
  <DOT DTID="40" NAME="Roadrunner's Coyote trap watcher" DESC="Up to
the minute alerts on new traps set by all coyotes within a 100 mile radius"
  />
</DOT_MASTER>
```

Dot_Template DTD

[0571]

```
<!ELEMENT dot_template (
  menu*,
  controls
)
>
<!ATTLIST dot
  uid ID #REQUIRED
  debug ("TRUE"|"FALSE") "FALSE"
  type ("ACTIVE"|"JAVA") "ACTIVE"
  class CDATA #REQUIRED
  title CDATA #REQUIRED
```

-continued

titlebarimage	CDATA	#REQUIRED
bottombarimage	CDATA	#REQUIRED
width	CDATA	#REQUIRED
height	CDATA	#REQUIRED
resizable	("TRUE" "FALSE")	"FALSE"

```

>
<!ELEMENT menu (
  menuitem+
)
>
<!ATTLIST menu
  id ID #REQUIRED
>
<!ELEMENT controls (
  control+
)
>
<!ATTLIST controls
  layouts ("flow" #IMPLIED "flow"
    !"grid"
    : !"gridbag")
>
<!ELEMENT menuitem EMPTY>
<!ATTLIST menuitem
  id ID #REQUIRED
  title CDATA #REQUIRED
  icon CDATA #IMPLIED
  tooltip CDATA #IMPLIED
  enabled ("TRUE"|"FALSE") #IMPLIED "FALSE"
  action CDATA #REQUIRED
>
<!ELEMENT control EMPTY>
<!ATTLIST control
  id ID #REQUIRED
  type ("ACTIVE"|"JAVA") "ACTIVE"
  class CDATA #REQUIRED
  width CDATA #REQUIRED
  height CDATA #REQUIRED
  location CDATA #REQUIRED
>

```

Dot_Template Example

[0572]

```

<?xml version="1.0"?
<!DOCTYPE DOT_TEMPLATE SYSTEM
  "DOT_TEMPLATE.DTD">
<DOT_TEMPLATE
  DEBUG="TRUE"
  TYPE="ACTIVE"
  CLASS="12939-292939-93939-29292"
  TITLE="Ebay"
  TITLEBARIMAGE=http://www.ebay.com/image/foo"
  BOTTOMBARIMAGE="someurl"
  WIDTH=2
  HEIGHT=1
  RESIZABLE="TRUE"
>
  <MENU>
    <MENUITEM
      ID="NEW_AUCTION_WINDOW"
      TITLE="New Auction Window"
      ICON="http://www.ebay.com/images/new_auction.gif"
      TOOLTIP="Open up a new auction window to use"
      ACTION="someaction.exe"
    />
    <MENUITEM
      ID="DISPLAY_CLOSE"
      TITLE="Close display"
      ICON="http://www.ebay.com/images/menuitem.gif"

```

-continued

```

      TOOLTIP="Close the display field"
      ACTION="someaction.exe"
    />
  </MENU>
</CONTROLS LAYOUT="FLOW">
  <CONTROL
    ID="SEARCH_FIELD"
    TYPE="ACTIVE"
    CLASS="33333-1111111-222222-33333"
    WIDTH="80"
    HEIGHT="20"
    LOCATION="TOP"
    URL=http://www.webster.com/searchField.html
  />
  <CONTROL
    ID="RESULT_DISPLAY"
    TYPE="ACTIVE"
    CLASS="33333-1111111-222222-33333"
    WIDTH="80"
    HEIGHT="100"
    LOCATION="TOP"
    VISIBILITY="FALSE"
  />
</CONTROLS>
</DOT_TEMPLATE>

```

All_Config DTD

[0573]

```

<!--DTD for the All_Config element used in the configuration of
DoDots's Snapshot, block and dot objects -->
<!ELEMENTS all_config (
  Snapshot*
)
>
<!--ATTLIST all_config
>
<!--ELEMENT Snapshot (
  block*,
  dot*
)
>
<!--ATTLIST Snapshot
id ID #REQUIRED
>
<!--ELEMENT block(
  dot*
)
>
<!--ELEMENT dot (
  menu*,
  controls
)
>
<!--ATTLIST dot
id ID #REQUIRED
debug ("TRUE"|"FALSE") "FALSE"
type ("ACTIVE"|"JAVA") "ACTIVE"
class CDATA #REQUIRED
title CDATA #REQUIRED
titlebarimage CDATA #REQUIRED
bottombarimage CDATA #REQUIRED
width CDATA #REQUIRED
height CDATA #REQUIRED
resizable ("TRUE"|"FALSE") "FALSE"
<!--ELEMENT menu (
  menuitem+
)
>
<!--ATTLIST menu
id ID #REQUIRED
>
<!--ELEMENT controls (
  control+
)
>
<!--ATTLIST control
layout ("flow"
|"grid"
|"gridbag"
)
>
<!--ELEMENT menuitem EMPTY>
<!--ATTLIST menuitem
id ID #REQUIRED
type ("ACTIVE"|"JAVA") "ACTIVE"
class CDATA #REQUIRED
width CDATA #REQUIRED
height CDATA #REQUIRED
location CDATA #REQUIRED
>

```

All_Config Example

[0574]

```

<?xml version="1.0"?>
<!DOCTYPE ALL_CONFIG SYSTEM "ALL_CONFIG.DTD">

```

-continued

```

<ALL_CONFIG>
<SNAPSHOT ID="1"
<DOT
  DEBUG="TRUE"
  TYPE="ACTIVE"
  CLASS="12939-292939-93939-29292"
  TITLE="Ebay"
  TITLEBARIMAGE=http://www.ebay.com/image/foo"
  BOTTOMBARIMAGE="someurl"
  WIDTH=2
  HEIGHT=1
  RESIZABLE="TRUE"
>
<MENU>
<MENUITEM
  ID="NEW_AUCTION_WINDOW"
  TITLE="New Auction Window"
  ICON="
http://www.ebay.com/images/new_auction.gif"
  TOOLTIP="Open up a new auction window to use"
  ACTION="someaction.exe"
/>
<MENUITEM
  ID="DISPLAY_CLOSE"
  TITLE="Close display"
  ICON=" http://www.ebay.com/images/menuitem.gif"
  TOOLTIP="Close the display field"
  ACTION="someaction.exe
/>
</MENU>
<CONTROLS LAYOUT="FLOW">
<CONTROL
  ID="SEARCH_FIELD"
  TYPE="ACTIVE"
  CLASS="33333-111111-22222-33333"
  WIDTH="80"
  HEIGHT="20"
  LOCATION="TOP"
  URL=http://www.webster.com/searchField.html
/>
<CONTROL
  ID="RESULT_DISPLAY"
  TYPE="ACTIVE"
  CLASS="33333-111111-22222-33333"
  WIDTH="80"
  HEIGHT="100"
  LOCATION="TOP"
  VISIBILITY="FALSE"
/>
</CONTROLS>
</DOT>
</SNAPSHOT>
</ALL_CONFIG>

```

All_Events DTD

[0575]

```

<!--ELEMENT dot_events
dot_event*
>
<!--ATTLIST dot_events
>
<!--ELEMENT dot_events EMPTY>
<!--ATTLIST dot_events
deid CDATA #REQUIRED
dtid CDATA #IMPLIED
dpkid CDATA #IMPLIED
dpid CDATA #IMPLIED
start_time CDATA #REQUIRED

```

-continued

end_time	CDATA	#IMPLIED
url1	CDATA	#IMPLIED
>		

NOTES:

All data/time data transmitted must conform to the W3C HTTP1.1 specification's HTTP-date grammar (IETF RFC 1123 format is strongly preferred). This means, among other things, that all date/time data will be represented in GMT/UTC time. See RFC 1123 for specific details. Simplified format string: Wdy, dd MON yyyy HH:MM:SS GMT

The valid even ids (deid) will be stored in the DOT_EVENTS table described later in this appendix.

- [0576] 0—Download of homedot/native code
 [0577] 1—Download of Dot
 [0578] 2—download of Dotpack
 [0579] 3—Use of Dot (home Dot is special dtid “-1” for this event)
 [0580] 4—Click thru to browser
 [0581] 5—Page view

DEID and start_time are always required, but other required attributes are actually variable based on record type/deid:

- [0582] 0—dpid, end-time
 [0583] 1—dpid, dtid, end, time
 [0584] 2—dpid, dpkid, end_time
 [0585] 3—dtid, end-time
 [0586] 4—dtid, url1
 [0587] 5—dtid

All_Events Example

[0588]

```
<DOT_EVENTS>
  <DOT_EVENT DEID="0" DPID="10" START_TIME="Sat, 10 APR 1999 09:15:08
GMT" END_TIME="Sat, 10 APR 1999 09:16:55 GMT" />
  <DOT_EVENT DEID="2" DPKID="5" DPID="10" START_TIME="Sat, 10 APR
1999 09:17:08 GMT" END_TIME="Sat, 10 APR 1999 09:19:55 GMT" />
  <DOT_EVENT DEID="1" DTID="49" DPID="1" START_TIME="Sat, 10 APR 1999
09:30:08 GMT" END_TIME="Sat, 10 APR 1999 09:30:55 GMT" />
  <DOT_EVENT DEID="1" DTID="51" DPID="1" START_TIME="Sat, 10 APR 1999
09:31:08 GMT" END_TIME="Sat, 10 APR 1999 09:32:55 GMT" />
  <DOT_EVENT DEID="1" DTID="59" DPID="1" START_TIME="Sat, 10 APR 1999
09:33:08 GMT" END_TIME="Sat, 10 APR 1999 09:34:55 GMT" />
  <DOT_EVENT DEID="3" DTID="49" START_TIME="Sat, 10 APR 1999 09:35:08
GMT" END_TIME="Sat, 10 APR 1999 12:29:55 GMT" />
  <DOT_EVENT DEID="3" DTID="51" START_TIME="Sat, 10 APR 1999 09:35:08
GMT" END_TIME="Sat, 10 APR 1999 12:29:55 GMT" />
  <DOT_EVENT DEID="3" DTID="59" START_TIME="Sat, 10 APR 1999 09:35:08
GMT" END_TIME="Sat, 10 APR 1999 12:29:55 GMT" />
  <DOT_EVENT DEID="5" DTID="59" START_TIME="Sat, 10 APR 1999 09:15:08
GMT" />
  <DOT_EVENT DEID="5" DTID="59" START_TIME="Sat, 10 APR 1999 11:34:08
GMT" />
  <DOT_EVENT DEID="5" DTID="59" START_TIME="Sat, 10 APR 1999 12:15:08
GMT" />
</DOT_EVENTS>
```

AddShare_Response DTD

[0589]

```
<!ELEMENT addshare_response EMPTY>
<!--ATTLIST addshare_response
  dusid CDATA #REQUIRED
-->
```

AddShare_Response example

<ADDSHARE_RESPONSE DUSID="123456"/>

8 Server API

[0590] As indicated previously in this document, the client communicates to the server via an HTTP request. The HTTP request URL will effectively contain an “API call”. Any API calls that require the uploading of data to the server will place the data in the message body of the request. This implies that these (uploader) HTTP requests will be POSTs and not GETs. API calls that require uploading/downloading of data will send/receive that data in XML, in the format as is indicated previously in this document. The server will support message body compression (i.e., content-encoding) to help reduce network traffic. Content compression will be in the commonly supported HTTP forms of :gzip, zip, or zlib and will be chosen on a user by user basis based on standard HTTP response and request header values for content encoding. All “API Ccalls” listed below are the end part of a complete URL that starts with: http://<someservername>.DoDots.com/DoDots/, where <servername> is variable and DoDots is an alias for the DoDots servlet/JSP servlet or servlets directory. Arguments to any of the methods are passed in as name

value pairs in the query string portion of the URL. Note that data intended to be persistently stored on the server are not considered “arguments” to the server API method. The arguments are used only to allow the servlet implementing the API call to perform the requested action, not to encode the data uploaded.

In every case, the client will receive an HTTP response code of: “401 Not Authorized” if the client does not provide a valid username and password in every request. To avoid the possibility of a username/password combination persistently stored in the clear (i.e., a directory entry on windows), the standard HTTP headers of “Authorization:” and “WWW-Authenticate:” will be used to carry the username and password information in every request with the exception of the DoAddUser method. The security scheme used will be the “BASIC” scheme as detailed in IETF RFC 1521 and RFC 2617. This has the two added advantages of: a) an ordinary web browser can then be used as an impromptu debugging tool for the client/server communication; and, b) user sessions can be silently reestablished when the session has timed-out due to inactivity and the user causes a call to the server to happen without restarting the client WinInet, like MSIE, will keep resending the Authorization header with every request until the hosting application exits. It is suggested that the application server handle the authentication via the HTTP header information rather than configuring the web server for authentication—this way the authentication scheme can change over time by module replacement (both on the server and the client) and the user can be offered the ability to change passwords. The BASIC authentication method is recommended for the initial release due to the readily available BASE64 decoders, including the built-in support for BASIC auth in most client-side libraries (like WinInet). Other, more secure authentication schemes (such as MD5 or X509) may be substituted or added in, if desired. All successful requests will return a standard HTTP response with a result code of “200 OK” unless otherwise specified in the method descriptions below. The server should pay careful attention to the HTTP “content-length” and the actual request body lengths to confirm that the client message has not been truncated or the connection dropped. The server may be designed and implemented with localization and internationalization of returned error, warning and status messages. Given that certain XML streams may be of great length, the server should support inbound and outbound handling of message body compression/decompression when requested by the client. Compression types that should be supported are: GZIP, ZIP, and ZLIB. The client indicates requested/supported compression types thru the standard HTTP headers of “Content-Encoding”, “Accept-Encoding”, and “Vary” as described in the W3C HTTP 1.1 specification. Note that the client may indicate or not indicate compression on a request by request basis. The server should not assume that the client can handle a compressed response body unless indicated in the request header.

Server API Methods for the End-User Client

[0591] addUser

The addUser method is used to create a new DoDots user account. Note that this is available as an end-user api in cases

in which it is desired to allow new users to add themselves rather than wait for an administrator to do it for them.

Arguments:

- [0592] uid—unique username
- [0593] password—password for the user account
- [0594] dpid (optional)—Dot provider id user is also a Dot content developer
- [0595] title (optional)—title if user is also a Dot content developer
- [0596] prefix (optional)—name, prefix (i.e., Mr., Ms., Mrs., Dr., etc . . .)
- [0597] firstname—First name
- [0598] mi (optional)—Middle initial
- [0599] lastname—Last name
- [0600] suffix (optional)—name suffix (i.e. III, Jr., PhD., etc . . .)
- [0601] email (optional)—E-mail address
- [0602] street1 (optional)—first line of the street address
- [0603] street2 (optional)—second line of street address
- [0604] city (optional)—city
- [0605] state (optional)—state
- [0606] country (optional)—country
- [0607] birthdate (optional)—birthdate (i.e. Apr. 10, 1965)
- [0608] sex (optional)—sex (i.e. male, female)

Example

Request:

[0609] `http://dots1.DoDots.com/DoDots/addUser?uid=Smith&password=scotchromanian&prefix=Mr&firstname=Scot&mi=`

Response:

Standard HTTP success with no response body.

[0610] getUser

The getUser method retrieves the user’s own demographic data. This method supports the ability of the client application to then allow updates to the user’s demographic information using the setUser method (see below).

Arguments:

- [0611] uid (optional)—username. uid is required when the issuer is a Dot developer or the DoDots admin. If the method is invoked by an end-user, this argument is ignored and the server identifies the user from the Authorization information.

Example

Request:

[0612] `http://dots1.DoDots.com/DoDots/getUser`

Response:

[0613] The expected response is an xml stream containing the user’s current demographic information. This xml stream is the USER DTD as defined earlier in this document.

setUser

- [0614] uid (optional)—username. uid is required when the issuer is a Dot developer or the DoDots admin. If the

method is invoked by an end-user, this argument is ignored and the server identifies the user from the Authorization information.

- [0615] password—password for the user account
- [0616] dpid (optional)—Dot provider id user is also a Dot content developer
- [0617] title (optional)—title if user is also a Dot content developer
- [0618] prefix (optional)—name, prefix (i.e., Mr., Ms., Mrs., Dr., etc . . .)
- [0619] firstname—First name
- [0620] mi (optional)—Middle initial
- [0621] lastname—Last name
- [0622] suffix (optional)—name suffix (i.e. III, Jr., PhD., etc . . .)
- [0623] email (optional)—E-mail address
- [0624] street1 (optional)—first line of the street address
- [0625] street2 (optional)—second line of street address
- [0626] city (optional)—city
- [0627] state (optional)—state
- [0628] country (optional)—country
- [0629] birthdate (optional)—birthdate (i.e. Apr. 10, 1965)
- [0630] sex (optional)—sex (i.e. male, female)

Example

Request:

[0631] `http://dots1.DoDots.com/DoDots/setUser?uid=smith&password=scotchmanian&prefix=Mr&firstname=Scot&mi=J&lastname=Smith&email=smith@newco.com`

Response:

Standard HTTP success with no response body.

[0632] getSessionConfig

The getSessionConfig method is used to retrieve general configuration information. Arguments:

- [0633] None

Example

Request:

[0634] `http://dots1.DoDots.com/DoDots/getSessionConfig`

Response:

[0635] The expected response is an xml stream containing the high level configuration information for the session. This xml stream is the SESSION_CONFIG DTD as defined earlier in this document.

setPassword

The setPassword method provides a mechanism for the user to change their associated DoDots server account password.

Arguments:

- [0636] Newpass—the new password

Example

Request:

[0637] `http://dots1.DoDots.com/DoDots/setPassword?newpass=bar`

Response if successful:

Standard HTTP success with no response body.

[0638] getMasterDotList

The getMasterDotList method requests the list of all Dot templates known by the server. The server returns a message body in predefined XML format (set the DOT/MASTERLIST DTD and example) of all possible Dots and their default template values. Note that included in each DOT element are a version stamp and Dot class ids which allows the client to determine if they have the most up-to-date Dot template and Dot class binaries for the dot. The client may then decide to request the updated Dot template (see the getDotTemplate method) and/or Dot class binary zip file (see the getDotClassBinaries method).

Arguments:

- [0639] None.

Example

Request:

[0640] `http://dots1.DoDots.com/DoDots/getMasterDotList`

Response:

Standard HTTP success with response body as an xml stream in the predefined XML format of the DOT/MASTERLIST DTD defined earlier in this document.

[0641] setAllConfig

The setAllConfig method sends the entire body of user-specific client-side configuration information (all Snapshots, blocks, Dots, general settings, etc.) to the server for persistent storage on behalf of the user. The data is sent as the message body in a predefined XML format (see the ALL_CONFIG DTD and example). The response returned by the server indicates success or failure.

Arguments:

- [0642] none (request body contains the xml stream in the predefined XML format of the ALL_CONFIG DTD defined earlier in this document.)

Example

[0643] Request: `http://dots1.DoDots.com/DoDots/setAllConfig`

Response:

Standard HTTP success with no response body.

[0644] getAllConfig

The getAllConfig method retrieves the last user-specific, server-side saved, client-side configuration information (all Snapshots, blocks, Dots, general settings, etc.) from the

server. The data is sent as the message body in a predefined XML format (see the ALL_CONFIG DTD and example).

Arguments:

[0645] none

Example

Request:

[0646] `http://dots1.DoDots.com/DoDots/getAllConfig`

Response:

Standard HTTP success with response body as an xml stream in the predefined XML format of the ALL_CONFIG DTD defined earlier in this document.

[0647] `setAllEvents`

The `setAllEvents` method sends usage information that has accumulated since the last call to `setAllEvents` to the server for later use in statistical usage report generation. The data is sent as the message body in a predefined XML format (see the ALL_EVENTS DTD and example). The response returned by the server indicates success or failure.

Arguments:

[0648] none

Example

Request:

[0649] `http://dots1.DoDots.com/DoDots/setAllEvents`

Response:

Standard HTTP success with no response body.

[0650] `getDotTemplate`

The `getDotTemplate` method asks the server for a specific Dot template. The server returns the XML that describes the default state of the Dot. This method is called when the client has determined that it does not have the current version of the Dot and the user wants the most recent version (NOTE: this includes when the user is downloading the Dot for the first time)

Arguments:

[0651] DTID—The unique Dot id for the Dot being requested. This value is extracted from the Dot master list xml stream returned by the `getMasterDotList` method for each Dot.

Example

Request:

[0652] `http://dots1.DoDots.com/DoDots/getDotTemplate?dtid=1234`

Response:

Standard HTTP success with response body as an xml stream in the predefined XML format of the DOT_TEMPLATE DTD defined earlier in this document.

[0653] `addShare`

The `addShare` method stores a specific shared Dot, pack, or Snapshot. The server takes the XML that was uploaded by the

client for sharing and returns the unique id of the share. The client should put the XML stream to be shared in the request body.

Arguments:

[0654] none

Example

Request:

[0655] `http://dots2.DoDots.com/DoDots/addShare`

Response:

Standard HTTP success with response body as an xml stream in the predefined XML format of the ADDSHARE_RESPONSE DTD defined earlier in this document.

[0656] `getShare`

The `getshare` method asks the server for a specific shared Dot, pack or Snapshot. The server returns the XML that was stored for sharing by the original sending user. The format of the returned XML stream is dependent on what has been “shared”.

Arguments:

[0657] usid—The unique share id for the share being requested.

Example

Request:

[0658] `http://dots1.DoDots.com/DoDots/getShare-?dusid=1234`

Response:

[0659] Standard HTTP success with response body as an xml stream in the predefined XML format. The content is returned as it was uploaded by the client.

Additional server APIs and Interfaces for Dot Providers

[0660] Dot providers can make use of all the end-user APIs by using the client application. Dot Providers may also make use of additional APIs for Dot development and testing. Interfaces that call these API methods will be JSP pages. These additional APIs and JSPs will reside on the dev/test system only. Following are a number of examples of same.

`addDotTemplate`

The `addDotTemplate` method is used to add a Dot template to the database of Dot templates. This method is used by third party Dot content providers or DoDots staff.

Arguments:

[0661] dpid (optional)—A valid Dot provider id. This argument is used to associate the uploaded Dot template with a specific Dot provider. This argument is ignored if the user is not a DoDots staff member. If the user is a third party Dot provider, the user's associate dpid stored in the database is used instead.

- [0662] Dcid—A valid Dot category id.
[0663] Name—The name of the Dot. The name must be unique for the given Dot provider.
[0664] Desc—The extended description of the Dot.

Example

Request:

[0665] [http://dots1.DoDots.com/DoDots/AddDotTemplate?d_pid=2&name=scots %2dtest %2ddot &desc=The %2dfirst %2 dbogus %2ddot %2dused %2dfor %2dtesting](http://dots1.DoDots.com/DoDots/AddDotTemplate?d_pid=2&name=scots%2dtest%2ddot&desc=The%2dfirst%2dbogus%2ddot%2dused%2dfor%2dtesting)

Response:

Standard HTTP success with no response body.

Additional Server APIs and Interfaces for DoDots Administrator


[0666] A set of administrative functions may be provided to a DoDots administrator for high level control of the system. The DoDots administrator will have access to the end-user and Dot provider APIs as well as the admin APIs listed below.

Generally, only the DoDots can make use of 100% of the server APIs. Interfaces that call these API methods will be JSP pages. These additional APIs and JSPs will reside on the dev/test system only. Due to the time-to-market constraints, in the first version of the system the interface and APIs will be the bare minimum required to allow for effective Dot system management. It is expected that more complex and complete functionality will be added to the system in subsequent releases (as loosely defined in the future sections of this document).

Database Schema

[0667] General notes on database schema and design: Usually, columns ending in “ID” are unique id columns for a particular entity class. The row values for these columns may be auto-generated by the RDBMS on insert. Primary key (PK) and foreign key (FK) constraints and uniques (non-key indices) are indicated below. Primary Keys may be ordered concatenated columns in some cases as indicated by the PK Pos designation.

9.1 Entity Relationship Diagram

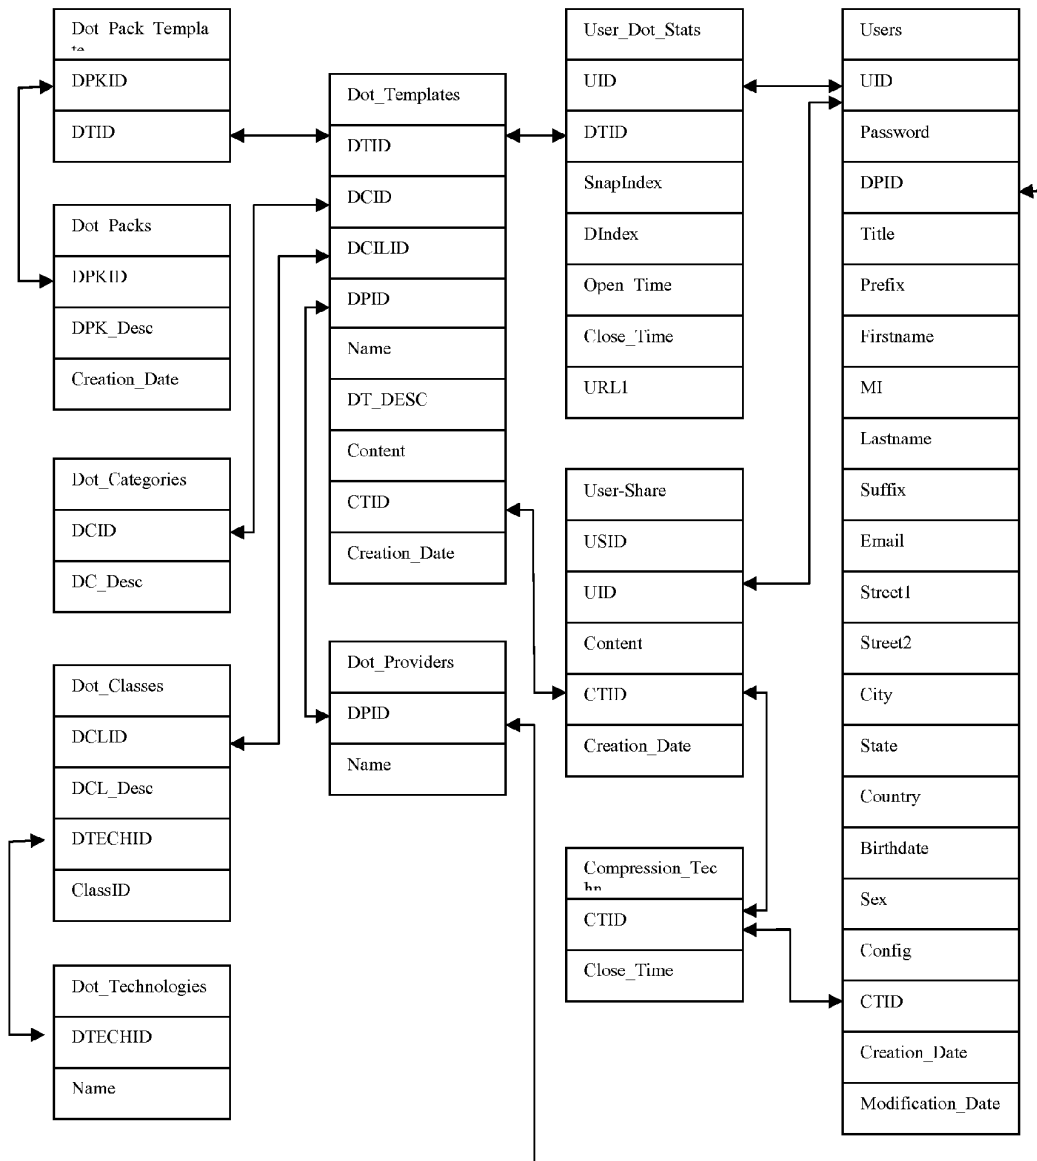

9.2 Dot_Pack_Templates

[0668]

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DPKID	Dot pack ID	Smallint		No	No	1/2	Dot_pack
DTID	Dot Template	int		No	No	2/2	Dot_Templates

9.3 Dot_Packs Table

[0669]

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DPKID	Dot pack ID	Smallint		No	Yes	1/1	
DPK_Desc	Dot Pack description	nvarchar		No	No		
Creation_Date	State of pack creation	datetime		No	No		

9.4 Dot_Categories Table

[0670]

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DCID	Dot Category ID	Smallint		No	Yes	1/1	
DC_Desc	Dot Category Description	Nvarchar		No	No		

[0671] 9.5 Dot_Classes Table

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DCLID	Dot Class ID	Smallint		No	Yes	1/1	
DCL_Desc	Dot Class Description	Nvarchar		No	No		
DTECHID	Technology description (ie. ActiveX, Java)	nchar		No	Yes		
ClassID	Class id. (tech specific, ie. A guid or java class spec)	nvarchar		No	Yes		

9.6 Compression_Technologies

[0672]

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DTECHID	Compression Technology ID	Smallint		No	Yes	1/1	
Name	Compression Technology Name	Nvarchar		No	Yes		

9.7 Dot_Technologies

[0673]

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DTECHID	Dot Technology ID	Smallint		No	Yes	1/1	
Name	Dot Technology Name	Nvarchar		No	Yes		

9.8 Dot_Template Table

[0674]

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DTID	Dot Template ID	int		No	Yes	1/1	
DCID	Dot Category ID	Smallint		No	No		Dot_categories
DCILID	Dot Class ID	Smallint		No	No		Dot_Classes
DPID	DotProvider ID	Smallint		No	No		Dot_Providers
Name	Name of the Dot	nvarchar		No	No		
DT_DESC	Dot Description	nvarchar		No	No		
Content	Dot Template Content	Varbinary		No	No		
Content_Compression CTID	Type of compression the content is stored in	Nvarchar		No	No		
Creation_Date	Date of creation of the Dot template	datetime		No	No		

9.9 Dot_Providers Table

[0675]

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
DPID	Dot provider ID	Smallint		No	Yes	1/1	

-continued

Column Name	Description	Datatype	Length	Allow nulls	Unique	PK Pos	FK Table
Name	Dot Provider Name	Nvarchar		No	Yes		

9.10 Dot_User_Events Table

[0676]

Column Name	Description	Datatype	Length	Allow Nulls	Unique	PK Pos	FK Table
DUID	UserID	Int		No	No		Dot_Users
DEID	Dot event ID	Int		No	No		Dot_Events
DTID	Dot template ID	Int		Yes	No		Dot_Templates
DPID	Dot Provider ID	Int		Yes	No		Dot_Providers
Start_Time	Start Time info for Dot event in UTC/GMT time	Datetime		No	No		
End_Time	End Time info for Dot event in UTC/GMT time	Datetime		Yes	No		
URL1	URL info 1 for Dot event (fully qualified) for events that involve URLs	String		Yes	No		

9.11 Dot_Events Table

[0677]

Column Name	Description	Datatype	Length	Allow Nulls	Unique	PK Pos	FK Table
DEID	Dot Event ID	Int		No	Yes	1	
DE_Name	Dot Event Name	String		No	Yes		
DE_Desc	Dot Event Description	String		No	Yes		

9.12 Dot_User_Shares Table

[0678]

Column Name	Description	Datatype	Length	Allow Nulls	Unique	PK Pos	FK Table
DUSID	UserShare ID	Int		No	Yes	1/1	
DUID	User ID	Int		No	No		Users
DUS_Content	The content of the shared item. This could be a dot, Dot	Varbinary		No	No		

-continued

Column Name	Description	Datatype	Length	Allow Nulls	Unique	PK Pos	FK Table
DCTID	pack, or Snapshot The type of compression used to store to share	Number	9	No	No		
DUS_Creation_Date	Date of creation of the share	Datetime		No	No		
DUS Download_Date		Datetime		No	No		

9.13 Users Table

[0679]

Column Name	Description	Datatype	Length	Allow Nulls	Unique	PK Pos	FK Table
Username	User ID	Nvarchar		No	Yes	1/1	
Password	User's Password	Nvarchar		No	No		
DPID	Dot Provider ID (only in dev/test and only if user is a Dot provider developer)	Smallint		Yes	No		Dot_Providers
Title	Business Title, if applicable	Nvarchar		Yes	No		
Prefix	Prefix to name (i.e., Mr., Mrs., Dr., etc . . .)	Nchar	10	Yes	No		
Firstname	First Name	Nvarchar	25	No	No		
MI	Middle Initial	Nvarchar	1	Yes	No		
Lastname	Last Name	Nchar	25	No	No		
Suffix	Name Suffix (i.e. Jr., Sr., III, PhD.)	Nchar	10	Yes	No		
Email	Email Address	Nvarchar		No	No		
Street1	First line of street address	Nvarchar		Yes	No		
Street2	Second line of street address	Nvarchar		Yes	No		
City	City	Nvarchar		Yes	No		
State	State	Nvarchar		Yes	No		
Country	Country	Nvarchar		Yes	No		
Birthdate	Birthdate	Datetime		Yes	No		
Sex	Sex (m, f, n)	Nchar		Yes	No		
Config	Last uploaded configuration dump	Nvarchar		No	No		
Config_Compression	Compression format of the config content	Nchar	10	No	No		
Creation_Date	Date of creation of the user	Datetime		No	No		
Modification_Date	Date of last activity	Datetime		No	No		

What is claimed is:

1. A physical memory device having stored thereon a software component for coordinating the accessing and rendering of an application media package, said component comprising:

- instructions for accessing an application media package definition;
- instructions for parsing said application media package definition;
- instructions for rendering, using said parsed application media package definition, a graphical user interface outside of the window of and independent of a web browser application;
- instructions for accessing Internet content from a network reference specified by said parsed application media package definition; and
- instructions for presenting said Internet content such that it is associated with said graphical user interface.

2. The physical memory device of claim 1, wherein said instructions for presenting said Internet content render said internet content within said graphical user interface.

3. The physical memory device of claim 1, wherein said software component further comprises instructions for rendering as a part of said graphical user interface a control, said control operable on said Internet content presented in association with said graphical user interface.

4. The physical memory device of claim 3, wherein said Internet content includes audio data, and wherein said control is operable to control the state of presentation of said audio data.

5. The physical memory device of claim 1, wherein said software component further comprises instructions associated with a link to said application media package definition for invoking operation of said software component when said link is selected.

6. The physical memory device of claim 1, wherein said physical memory device forms a portion of a client computer, and said application media package is stored on a physical memory device forming a portion of a server computer, and wherein said instructions for accessing said application media package definition comprise instructions for retrieving said application media package definition from said physical memory device of said server computer.

7. The physical memory device of claim 6, wherein said software component further comprises a user profile, said user profile comprising:

- a reference to said application media package if said application media package has been previously retrieved by said software component;
- state information regarding the immediately previous or default state of said referenced application media package; and
- state information regarding the immediately previous or default state of said software component.

8. The physical memory device of claim 7, wherein said software component further comprises:

- instructions for retrieving said user profile from a server computer when operation of said software component is invoked;
- instructions for updating said user profile based on interactions with said at least one application media package; and

instructions for storing said user profile on said server when operation of said software component is to be shut down.

9. The physical memory device of claim 8, wherein said software component further comprises instructions for sending login data, including data for use in authenticating a user, to said server computer for authenticating said user prior to retrieving said user profile from said server computer.

10. The physical memory device of claim 1, wherein said instructions for parsing said application media package definition comprise instructions for parsing extensible markup language (XML) code.

11. The physical memory device of claim 1, wherein said software component further comprises instructions for presenting on a display device of a client computer a plurality of links, each link associated with an application media package, such that selection of at least one of said links causes an application media package definition associated with said at least one link to be installed on said client computer.

12. The physical memory device of claim 11, wherein said instructions for installing further comprise instructions which, in response to said selection of at least one link, parse and render said application media package definition associated with said at least one link, and access and present Internet content specified by said parsed application media package definition, following installation of said application media package associated with said at least one link.

13. The physical memory device of claim 11, wherein said software component further comprises instructions for presenting on said display device at least one link to at least one selected application media package installed on said client computer associated with said at least one link.

14. The physical memory device of claim 13, wherein said instructions for presenting said at least one link further comprise instructions which, in response to a selection of one of said at least one links, parse and render said application media package definition associated with said selected link on said display device, and access and present Internet content specified by said parsed application media package definition.

15. The physical memory device of claim 14, wherein said software component includes instructions permitting multiple links to be selected, application media package definitions associated with said selected links parsed and rendered as frames on said display device, and Internet content associated with each said parsed and rendered application media package definition accessed and presented in association with its associated rendered frame such that such that frames for a plurality of definitions may be displayed on said display device simultaneously.

16. The physical memory device of claim 1, wherein said software component further comprises instructions for checking with a server computer to determine whether it is a current version of said software component and for causing the downloading and installation of said current version if it is determined that said software component is not said current version.

17. A physical memory device associated with a client computer, said client computer arranged to be communicatively coupled with a plurality of content server computers, said physical memory device having stored thereon a software component for coordinating the accessing and rendering of an application media package, said component comprising:

instructions for obtaining from a first of said content server computers, in response to a user selection, an application media package definition;
 instructions for parsing said obtained application media package definition;
 instructions for rendering on said client computer, using said parsed application media package definition, a graphical user interface rendered outside of the window of a web browser application, and said instructions for rendering operable without invoking a web browser application to render said graphical user interface;
 instructions for obtaining from a second of said server computers Internet content, said second server computer identified by a network reference specified in said parsed application media package definition;
 instructions for parsing said obtained Internet content; and
 instructions for presenting said parsed Internet content on said client computer such that it is associated with said graphical user interface.

18. The physical memory device of claim 17, wherein said software component further comprises instructions for maintaining a user profile, said user profile comprising:
 a reference to said application media package if said application media package has been previously retrieved by said software component;
 state information regarding the immediately previous or default state of said referenced application media package;
 state information regarding the immediately previous or default state of said software component; and
 wherein said software component further comprises:
 instructions for retrieving said user profile from a third of said server computers when operation of said software component is invoked;
 instructions for updating said user profile within said software component based on interactions with said at least one application media package; and
 instructions for storing said user profile on said third server when operation of said software component is to be shut down.

19. The physical memory device of claim 18, wherein said instructions for parsing said application media package definition comprise instructions for parsing extensible markup language (XML) code.

20. A physical memory device associated with a client computer, said client computer arranged to be communicatively coupled with a plurality of server computers, said physical memory device having stored thereon a software component for coordinating the accessing and rendering of an application media package, said component comprising:
 instructions for receiving login data, including data for use in authenticating a user, from said client computer;
 instructions for sending said login data to a first of said server computers for authenticating said user;
 instructions for retrieving, if authenticated, a user profile from said first server computer;
 instructions for using said user profile to obtain from a second of said server computers, in response to a user selection, an extensible markup language (XML) application media package definition;
 instructions for parsing on said client computer said obtained XML application media package definition;

instructions for rendering on a display device of said client computer, using said parsed XML application media package definition, a graphical user interface, said graphical user interface rendered outside of the window of a web browser application, and said instructions for rendering operable without invoking a web browser application to render said graphical user interface;
 instructions for rendering as a part of said graphical user interface a control;
 instructions for obtaining from a third said server computer Internet content, said third server computer identified by a network reference specified in said parsed XML application media package definition;
 instructions for parsing on said client computer said obtained Internet content;
 instructions for presenting said parsed Internet content on said display device of said client computer within said graphical user interface; and
 wherein said control is operable on said Internet content to control the presentation of said Internet content within said graphical user interface.

21. The physical memory device of claim 20, wherein said software component further comprises:

instructions for updating said user profile based on interactions with said application media package definition; and

instructions for storing said user profile on said first server computer when operation of said software component is to be shut down.

22. The physical memory device of claim 21, wherein said software component further comprises instructions for presenting on said display device a plurality of links, each link associated with an application media package, such that selection of at least one of said links causes an application media package definition associated with said at least one link to be installed on said client computer.

23. The physical memory device of claim 22, wherein said instructions for installing further comprise instructions which, in response to said selection of at least one link, parse said application media package definition associated with said at least one link and thereby render a graphical user interface, and access and present Internet content specified by said parsed application media package definition, following installation of said application media package associated with said at least one link.

24. The physical memory device of claim 20, wherein said software component further comprises instructions for presenting on said display device at least one link to at least one selected application media package installed on said client computer associated with said at least one link.

25. The physical memory device of claim 24, wherein said instructions for presenting said at least one link further comprise instructions which, in response to a selection of one of said at least one links, parse said application media package definition associated with said selected link and thereby render a graphical user interface on said display device, and access and present Internet content specified by said parsed application media package definition within said graphical user interface.

* * * * *