

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

BEFORE THE PATENT TRIAL AND APPEAL BOARD

SERVICENOW, INCORPORATED,

Petitioner,

v.

INQUISIENT INCORPORATED

Patent Owner.

Case No. IPR2023-01072

U.S. Patent No. 8,219,585

**PETITION FOR *INTER PARTES* REVIEW
OF U.S. PATENT NO. 8,219,585**

TABLE OF CONTENTS

I.	Introduction.....	1
II.	Standing	1
III.	Identification of Challenge And Relief Requested.....	1
IV.	The '585 patent.....	1
	A. Overview	1
	B. Prosecution History of the '585 patent.....	2
V.	Level Of Ordinary Skill In The Art.....	3
VI.	Claim Construction.....	3
	A. “module”	4
VII.	Overview Of The Prior Art.....	4
	A. Althoff (Ex. 1006).....	4
	B. Moore (Ex. 1007)	5
	C. Nye (Ex. 1005)	5
	D. Surjanto (Ex. 1008)	6
VIII.	Detailed Explanation of Invalidity Grounds.....	9
	A. Ground 1: Althoff in view of Moore renders obvious claims 1, 4-11, 14-17, 20-27, 30-32, 33, 36-43, 46-47.....	9
	1. Rationale to Combine Althoff and Moore	10
	2. Claim 1	13
	3. Claim 4: The computerized system of claim 1, wherein the type definition module defines a type including at least one of a boolean type, a picklist type, and a state machine type.	34

4. Claim 5: The computerized system of claim 4, wherein the data repository further comprises: a list option module configured to enumerate one or more picklist attributes of the picklist type.....35
5. Claim 6: The computerized system of claim 1, wherein the data repository further comprises: a tuple module configured to generate and store one or more tuples, wherein the tuples associate subsets of the plurality of elements in accordance with types associated with the subsets of the plurality of elements.....36
6. Claim 7: The computerized system of claim 1, wherein the named text module includes one or more data entries that define a SQL statement; and the SQL statement returns a set of elements that includes reference to one or more unique ID columns.....39
7. Claim 8: The computerized system of claim 1, wherein the one or more folders include data that is represented by one or more tuple entries between a named text entry representing a folder and an ID of the named text entry stored in the folder. 40
8. Claim 9: The computerized system of claim 6, wherein the one or more tuples are associated with a unique ID. 41
9. Claim 10: The computerized system of claim 1, wherein the one or more class-attribute associations are identified by logical names and class names.....42
10. Claim 11: The computerized system of claim 10, wherein the data repository further comprises: 43
11. Claim 14: The computerized system of claim 1, wherein the processor is configured to generate a data model of the plurality of elements based on the one or more layers of metadata. 45
12. Claim 15: The computerized system of claim 1, wherein the processor is configured to generate a dynamic user-

	interface for manipulating the plurality of elements based on the one or more layers of metadata.....	46
13.	Claim 16: The computerized system of claim 1, wherein the at least one class is defined by two or more SQL picklist types that are contained in the same class.....	48
14.	Claims 17, 20-27, 30-33, 36-43, 46-47.....	48
B.	Ground 2: Althoff in view of Moore in further view of Nye renders obvious claims 2-3, 18-19, 34-35.....	51
1.	Rationale to Combine Althoff, Moore and Nye	51
2.	Claim 2: The computerized system of claim 1, wherein the data repository further comprises:	54
3.	Claim 3: The computerized system of claim 2, wherein the state machine module defines and stores at least one forward transition connection, the at least one forward transition connection restricting the transition from the first status of the one element to the second status of the one element.	59
4.	Claims 18-19, 34-35.....	61
C.	Ground 3: Althoff in view of Moore in further view of Surjanto renders obvious claims 12-13, 28-29, 44-45.....	62
1.	Rationale to Combine Althoff, Moore and Surjanto	62
2.	Claim 12: The computerized system of claim 11, wherein the data repository further comprises: an element history module configured to store one or more indicators of modification to the plurality of elements.....	66
3.	Claim 13: The computerized system of claim 12, wherein the data repository further comprises: an element document module configured to store one or more formatting data for grouping a subset of the plurality of elements.	67
4.	Claims 28-29, 44-45.....	68

IX.	The Board Should Not Exercise Its Discretion to Deny the Petition	68
X.	Mandatory Notices And Fees	69
A.	Real Party-In-Interest	69
B.	Related Matters.....	69
1.	Related Patent Office Proceedings.....	69
2.	Related Litigation.....	69
C.	Counsel and Service Information	69
D.	Payment of Fees	71
XI.	Conclusion	71

EXHIBIT LIST

Ex.	Description
1001	U.S. Patent No. 8,219,585 (“585 patent”)
1002	File History for U.S. Patent No. 8,219,585
1003	Declaration of Dr. Jules White
1004	Curriculum Vitae of Dr. Jules White
1005	U.S. Patent No. 6,341,279 (“Nye”)
1006	U.S. Patent No. 6,374,252 (“Althoff”)
1007	U.S. Patent No. 7,627,552 (“Moore”)
1008	XML Content Management Based on Object-Relational Database Technology, Surjanto <i>et al.</i> , January 2000 (“Surjanto”)
1009	Intentionally Left Blank
1010	Declaration of Dr. Sylvia Hall-Ellis, Library Information Science Professor (“Hall-Ellis Declaration”)
1011	Joint Claim Construction Statement, Case No. 1:22-cv-00900-CJB (D. Del.), ECF No. 85 (“Claim Construction”)
1012	Scheduling Order, Case No. 1:22-cv-00900-CJB (D. Del.), ECF No. 36 (“Scheduling Order”)
1013	Transcript of Motion to Dismiss, Case No. 1:22-cv-00900-CJB (D. Del.), (“Section 101 Hearing”)
1014	Complaint, Case No. 1:22-cv-00900-CJB (D. Del.), ECF No. 1 (“Complaint”)
1015	Notice of Service, Case No. 1:22-cv-00900-CJB (D. Del.), ECF No. 6 (“Notice of Service”)

LIST OF CHALLENGED CLAIMS

Claim	Limitation
1pre	A computerized system for manipulating data sets, comprising:
1a	a hardware-based processor; and
1b	a data repository adapted to process, retrieve, and store: data contained in the data sets; and one or more layers of metadata included in the data sets, wherein the data repository comprises:
1c	an element module configured to store and identify a plurality of elements, wherein the plurality of elements are identified by unique element identification;
1d	an element relation module configured to store one or more relationships among the plurality of elements stored in the element module;
1e	a class module configured to define at least one class of the plurality of elements and store the at least one class;
1f	an attribute module configured to define one or more attributes and store the one or more attributes;
1g	a class attribute module configured to define and store one or more class-attribute associations between at least one of the attributes and the class;
1h	a type definition module configured to define and store one or more types of the at least one class, a plurality of attributes related to the at least one class and the one or more relationships among the plurality of elements;
1i	a named text module configured to store textual representations of query, control, and display mechanisms that relate to the plurality of elements, wherein the named text module defines one or more folders and one or more filters; and
1j	a tuple module configured to generate and store one or more tuples, wherein the one or more tuples link the one or more

Claim	Limitation
	folders and the one or more filters to generate a hierarchy of one or more data entries.
2	The computerized system of claim 1, wherein the data repository further comprises: a state machine module including a state machine transition module and a status module, the state machine module configured to define and store a state machine type, the state machine type storing a first status of one element of the plurality of elements and a transition to a second status of the one element.
3	The computerized system of claim 2, wherein the state machine module defines and stores at least one forward transition connection, the at least one forward transition connection restricting the transition from the first status of the one element to the second status of the one element.
4	The computerized system of claim 1, wherein the type definition module defines a type including at least one of a boolean type, a picklist type, and a state machine type.
5	The computerized system of claim 4, wherein the data repository further comprises: a list option module configured to enumerate one or more picklist attributes of the picklist type.
6	The computerized system of claim 1, wherein the data repository further comprises: a tuple module configured to generate and store one or more tuples, wherein the tuples associate subsets of the plurality of elements in accordance with types associated with the subsets of the plurality of elements.
7	The computerized system of claim 1, wherein the named text module includes one or more data entries that define a SQL statement; and

Claim	Limitation
	the SQL statement returns a set of elements that includes reference to one or more unique ID columns.
8	The computerized system of claim 1, wherein the one or more folders include data that is represented by one or more tuple entries between a named text entry representing a folder and an ID of the named text entry stored in the folder.
9	The computerized system of claim 6, wherein the one or more tuples are associated with a unique ID.
10	The computerized system of claim 1, wherein the one or more class-attribute associations are identified by logical names and class names.
11	The computerized system of claim 10, wherein the data repository further comprises: an element attribute module for the at least one class, the element attribute module configured to define and store one or more element attributes of the plurality of elements in the at least one class, wherein the element attribute module is identified using the name of the at least one class.
12	The computerized system of claim 11, wherein the data repository further comprises: an element history module configured to store one or more indicators of modification to the plurality of elements.
13	The computerized system of claim 12, wherein the data repository further comprises: an element document module configured to store one or more formatting data for grouping a subset of the plurality of elements.

Claim	Limitation
14	The computerized system of claim 1, wherein the processor is configured to generate a data model of the plurality of elements based on the one or more layers of metadata.
15	The computerized system of claim 1, wherein the processor is configured to generate a dynamic user-interface for manipulating the plurality of elements based on the one or more layers of metadata.
16	The computerized system of claim 1, wherein the at least one class is defined by two or more SQL picklist types that are contained in the same class.
17pre	A method for manipulating data sets, the method comprising:
17a	storing and identifying a plurality of elements in a data repository, the plurality of elements being identified by unique element identification, wherein the data repository is adapted to process, retrieve, and store data contained in data sets and one or more layers of metadata of the data in the data sets;
17b	storing, in the data repository, one or more relationships among the plurality of elements;
17c	defining at least one class of the plurality of elements and storing the at least one class in the data repository;
17d	defining one or more attributes and storing the one or more attributes in the data repository;
17e	defining one or more class-attribute associations between at least one of the one or more attributes and the at least one class and storing the one or more class-attribute associations in the data repository;
17f	defining one or more types of the at least one class, a plurality of attributes related to the at least one class, and the one or more relationships among the plurality of elements, and storing the one or more types of the at least one class in the data repository;

Claim	Limitation
17g	defining one or more folders and one or more filters;
17h	generating and storing one or more tuples, wherein the one or more tuples link the one or more folders and the one or more filters to generate a hierarchy of one or more data entries; and
17i	storing, in the data repository, textual representations of query, control, and display mechanisms that relate to the plurality of elements.
18	The method of claim 17, further comprising: defining a state machine type, the state machine type storing a first status of one element of the plurality of elements and a transition to a second status of the one element, and storing the state machine type in the data repository.
19	The method of claim 18, wherein the state machine type comprises at least one forward transition connection, the at least one forward transition connection restricting the transition from the first status of the one element to the second status of the one element.
20	The method of claim 17, wherein the state machine type comprises a type including at least one of a boolean type, a picklist type, and a state machine type.
21	The method of claim 20, further comprising: enumerating one or more picklist attributes of the picklist type and storing the enumerated one or more picklist attributes in the data repository.
22	The method of claim 17, further comprising: generating one or more tuples, each of the one or more tuples associating a subset of the plurality of elements in accordance with one or more types associated with the subset of the plurality

Claim	Limitation
	of elements, and storing the one or more tuples in the data repository.
23	The method of claim 17, further comprising: storing, in the data repository, one or more data entries that define a SQL statement; and returning elements based on the SQL statement, wherein the elements includes reference to one or more unique ID columns.
24	The method of claim 17, wherein the one or more folders include data that is represented by one or more tuple entries between a named text entry representing a folder and an ID of the named text entry stored in the folder.
25	The method of claim 22, wherein the one or more tuples are associated with a unique ID.
26	The method of claim 17, wherein the class-attribute associations are identified by logical names and class names.
27	The method of claim 16, further comprising: defining, for the at least one class, a set of attributes of the elements in the class, wherein the set is identified using the name of the class; and storing the set in the data repository.
28	The method of claim 27, further comprising: storing, in the data repository, one or more indicators of modification to the plurality of elements.
29	The method of claim 28, further comprising: storing, in the data repository, one or more formatting data for grouping a subset of the plurality of elements.

Claim	Limitation
30	The method of claim 17, further comprising: generating a data model of the plurality of elements based on the one or more layers of metadata.
31	The method of claim 17, further comprising: generating a dynamic user interface for manipulating the plurality of elements based on the one or more layers of metadata.
32	The method of claim 17, further comprising: defining the at least one class by two or more SQL picklist types that are contained in the same class.
33pre	A non-transitory computer-readable medium storing a computer-executable program which, when executed by a processor, performs a method, the method comprising:
33a	storing and identifying a plurality of elements in a data repository, the plurality of elements identified by unique element identification, wherein the data repository is adapted to process, retrieve, and store data contained in data sets and one or more layers of metadata of the data in the data sets;
33b	storing, in the data repository, one or more relationships among the plurality of elements;
33c	defining at least one class of the plurality of elements and storing the at least one class in the data repository;
33d	defining one or more attributes and storing the one or more attributes in the data repository;
33e	defining one or more class-attribute associations between at least one of the one or more attributes and the at least one class and storing the class-attribute associations in the data repository;

Claim	Limitation
33f	defining one or more types of the at least one class, a plurality of attributes related to the at least one class, and the one or more relationships among the plurality of elements, and storing the one or more class types in the data repository;
33g	defining one or more folders and one or more filters;
33h	generating and storing one or more tuples, wherein the one or more tuples link the one or more folders and the one or more filters to generate a hierarchy of one or more data entries; and
33i	storing, in the data repository, textual representations of query, control, and display mechanisms that relate to the plurality of elements.
34	The computer-readable medium of claim 33, wherein the method further comprises: defining a state machine type, the state machine type storing a first status of one element of the plurality of elements and a transition to a second status of the one element, and storing the state machine type in the data repository.
35	The computer-readable medium of claim 34, wherein the state machine type comprises at least one forward transition connection, the at least one forward transition connection restricting the transition from the first status of the one element to the second status of the one element.
36	The computer-readable medium of claim 33, wherein the class type comprises a type including at least one of a boolean type, a picklist type, and a state machine type.
37	The computer-readable medium of claim 36, wherein the method further comprises: enumerating one or more picklist attributes of the picklist type and storing the enumerated one or more picklist attributes in the data repository.

Claim	Limitation
38	The computer-readable medium of claim 33, wherein the method further comprises: generating one or more tuples, the one or more tuples associating subsets of the elements in accordance with one or more types associated with the subsets of the plurality of elements, and storing the one or more tuples in the data repository.
39	The computer-readable medium of claim 33, wherein the method further comprises: storing, in the data repository, one or more data entries that define a SQL statement; and returning a set of elements based on the SQL statement, wherein the set of elements includes reference to one or more unique ID columns.
40	The computer-readable medium of claim 33, wherein the one or more folders include data that is represented by one or more tuple entries between a named text entry representing a folder and an ID of the named text entry stored in the folder.
41	The computer-readable medium of claim 38, wherein the one or more tuples are associated with a unique ID.
42	The computer-readable medium of claim 33, wherein the one or more class-attribute associations are identified by logical names and class names.
43	The computer-readable medium of claim 42, wherein the method further comprises: defining, for the at least one class, a set of the one or more attributes of the plurality of elements in the class, wherein the set is identified using the name of the at least one class, and storing the set in the data repository.

Claim	Limitation
44	The computer-readable medium of claim 43, wherein the method further comprises: storing, in the data repository, one or more indicators of modification to the plurality of elements.
45	The computer-readable medium of claim 44, wherein the method further comprises: storing, in the data repository, one or more formatting data for grouping a subset of the plurality of elements.
46	The computer-readable medium of claim 33, wherein the method further comprises: generating a data model of the plurality of elements based on the one or more layers of metadata.
47	The computer-readable medium of claim 33, wherein the method further comprises: generating a dynamic user interface for manipulating the plurality of elements based on the one or more layers of metadata.

I. INTRODUCTION

ServiceNow, Inc. (“ServiceNow” or “Petitioner”) respectfully requests *inter partes* review of claims 1–47 (the “Challenged Claims”) of U.S. Patent No.

8,219,585 (the “’585 patent”) pursuant to 35 U.S.C. §311 and 37 C.F.R. §42.100.

II. STANDING

Petitioner certifies that the ’585 patent is available for IPR and that Petitioner is not barred or estopped from presenting the grounds identified in this Petition.

III. IDENTIFICATION OF CHALLENGE AND RELIEF REQUESTED

Petitioner requests cancellation of claims 1–47 on the following grounds:

Ground	Reference(s)	Basis	Claims
1	Althoff, Moore	§103	1, 4-11, 14-17, 20-27, 30-32, 33, 36-43, 46-47
2	Althoff, Moore, Nye	§103	2-3, 18-19, 34-35
3	Althoff, Moore, Surjanto	§103	12-13, 28-29, 44-45

IV. THE ’585 PATENT

A. Overview

U.S. Pat. No. 8,219,585 (the “’585 patent”) is directed to object-oriented (“OO”) data modeling, known in application software development since the ’80s. Ex. 1003, ¶¶32-44. OO data models abstract engineering by abstracting interactions using classes of objects. *Id.*, ¶33. These developments began in the 1980s. *Id.*, ¶34. The ’585 patent discloses basic OO concepts, *e.g.* objects, classes, attributes, and relationships. *Id.*, ¶¶35-37. OO model databases since the early 1990s allowed

developers to directly store classes, objects, attributes, relationships, etc. in the underlying databases. *Id.*, ¶40.

The '585 patent purports to provide “systems and methods that store, manage, index, interrelate, and/or retrieve data sets in a manner independent of the data model.” *Id.*, 1:52-54. The '585 patent discloses OO modeling stored in database tables that store *inter alia* (1) object types called classes, (2) class attributes, and (3) relationships between classes. Ex. 1003, ¶¶25-27. Figure 2 depicts a “class table 150,” which stores classes, and “[a] class_attribute table 112 may associate a given attribute to one or more classes (in class table 150).” Ex. 1001, 5:10-11. Multiple classes can have the same attribute (a well-known feature of class inheritance) using the “class_attribute table.” *Id.*, 5:14-16; Ex. 1003, ¶27.

B. Prosecution History of the '585 patent

The '585 patent was filed on June 3, 2011 as Application No. US13/067,482. Ex. 1001; Ex. 1003, ¶¶28-29. The independent claims were amended to overcome prior art in an March 9, 2012 examiner amendment, and imported limitations from the dependent claims, specifically the “named text module defin[ing] one or more folders and one or more filters” and the “tuple module.” Ex. 1002, 40-41.

a named text module configured to store textual representations of query,
control, and display mechanisms that relate to the plurality of
elements, wherein the named text module defines one or more
folders and one or more filters; and
a tuple module configured to generate and store one or more tuples,
wherein the one or more tuples link the one or more folders and the
one or more filters to generate a hierarchy of one or more data
entries.

V. LEVEL OF ORDINARY SKILL IN THE ART

A person of ordinary skill in the art at the time of the alleged invention (“POSITA”) would have a Bachelor’s degree in Computer Science and three to five years of industry experience in application development, database development, enterprise application management; or a Ph.D. specializing in the field.¹ Ex. 1003, ¶23. Petitioner further proposes that more education could compensate for less experience and vice versa. *Id.*

VI. CLAIM CONSTRUCTION

With the exception of the claim term “module”, Petitioner has applied the ordinary and customary meaning as it would have been understood by a POSITA at the time of the alleged invention, in the context of the ’585 patent and its prosecution history. *Phillips v. AWH Corp.*, 415 F.3d 1303 (Fed. Cir. 2005) (*en banc*).

¹ Petitioner’s expert, Dr. Jules White, surpasses this level of skill in the art. *Id.*, ¶24.

A. “module”

The challenged claim terms recite several “modules.” The ’585 patent specification describes the “data repository including” each of these “modules.” Ex. 1001, 1:65-2:12. A POSITA would thus understand “module” to be a portion of a data repository. Ex. 1003, ¶¶30-31. Indeed, in the parallel litigation, counsel for Patent Owner conceded that “an example of a “module” is “a table or a portion of a table” (*i.e.*, a data repository). Ex. 1013, 78. Petitioner applies Patent Owner’s own definition of “module” throughout this Petition.

VII. OVERVIEW OF THE PRIOR ART

A. Althoff (Ex. 1006)

Althoff is directed towards a database system and methods that “obtains the advantages of object-oriented database applications, while retaining the ability to use present relational database management systems.” Ex. 1006, 3:6-9; Ex. 1003, ¶¶45-46. Althoff further notes that it “would be advantageous to obtain the advantages of object-oriented database management, while retaining the efficiency of, and the installed investment in, relational database management systems.” Ex. 1006, 2:5-8. Althoff discloses that the “advantages of object-oriented” databases “including dynamically modifying the object hierarchy and object relationships, populating the database, dynamically populating and editing the objects in the database, and dynamically generating and performing searches against the database.” *Id.*, 2:28-33. Althoff discloses “[a]t least two types of relationship are

modeled by the system, inheritance relationships and data-model relationships.” *Id.*, 3:61-63.


B. Moore (Ex. 1007)

Moore teaches a system that “is able to take a property that is stored in the [relational] database and represent it as a container that is like a folder.” Ex. 1007, 3:39-41. Moore provides this using a virtual folder system, which “expose[s] regular files and folders (also known as directories) to users in different views based on their metadata instead of the actual physical underlying file system structure on the disk.” *Id.*, 5:51-54; Ex. 1003, ¶¶47-48.

C. Nye (Ex. 1005)

Nye discloses an event model “which allows a developer to add complex dependency logic to an existing database without having to modify the underlying structure of the database.” Ex. 1005, 5:34-37 Nye discloses that the event model “contains one or more events.” *Id.*, 10:58-61. Such event model and events are used to “represent[] a set of actions that are optionally contingent upon a condition.” *Id.*, 10:62-63. *Id.*, 12:39-41; Ex. 1003, ¶¶49-51.

Figure 4, reproduced below, depicts the system for the event model, events, and event states.

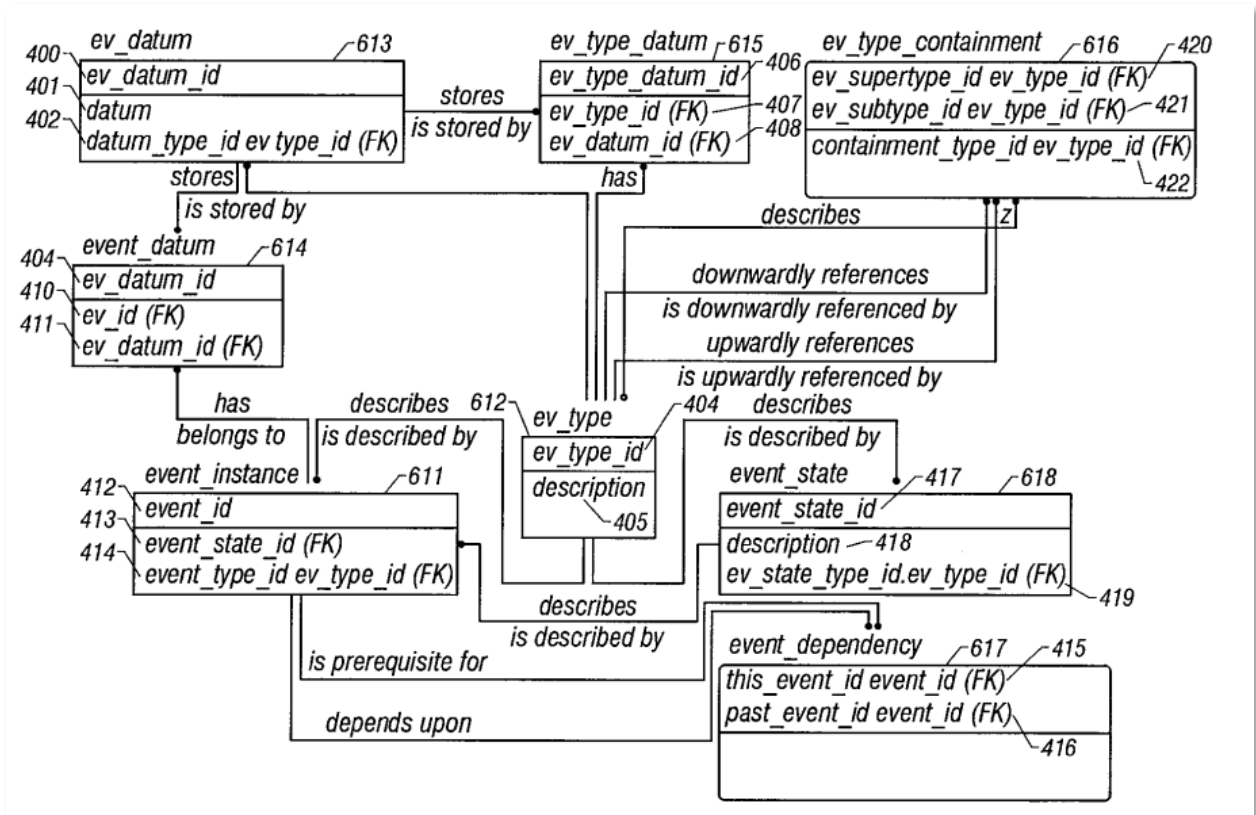

D. Surjanto (Ex. 1008)

Surjanto discloses an “object-relational database management system” that “improves content management of XML documents” by “exploiting their structural information.” Ex. 1008, Abstract. In particular, Surjanto discloses that “[w]ith the advent of object-relational database management systems (ORDBMSs) [Sto98], developers can extend the database system.” *Id.*, 9. Surjanto “develop[ed] XCoP as part of an integrated Web database framework ... which is built by our database research group using the extensibility features of an ORDBMS.” *Id.*, 9-10. By doing this, Surjanto provides benefits such as content reuse, exploitation of structural information, content consistency enforcement, etc. *Id.*, 10; Ex. 1003, ¶¶52-53.

Surjanto published in 2000, and is a printed publication that qualifies as prior art. As shown on the cover page of Exhibit 1008 and as set forth in the accompanying Dr. Hall-Ellis declaration, Surjanto qualifies as a printed publication because it was published in the Proceedings of the First International Conference on Web Information Systems Engineering (“WISE”). Ex. 1008, 1-2; Ex. 1010, ¶39. Surjanto was made available in university libraries including the Linda Hall Library of Science, Engineering & Technology. Ex. 1010, ¶41. A copy from that library’s online catalog and records thereof demonstrate that the conference proceedings were available as of October 6, 2000. *Id.*, ¶¶41-42. Library records from Columbia University Libraries also indicate that a copy of the conference proceedings were available at that library on October 6, 2000. *Id.*, ¶43. Further supporting the public availability of these proceedings is that a copy of these conference proceedings was indexed by the Library of Congress. *Id.*, ¶¶44-45. Based on this and other library records, Dr. Hall-Ellis concludes that Surjanto “was published and publicly accessible by October 6, 2000.” Ex. 1010, ¶45.

The well-known nature of IEEE publications is confirmed by Dr. Jules White. Dr. White states in his declaration that he is familiar with the WISE conference and its publication practices, and that (as with all IEEE-published papers) papers presented at the WISE conference would have been published in its proceedings and readily available as of the publication of those proceedings. Ex.

1003, ¶¶54-56. Moreover, Surjanto and the proceedings it appears in bears a 2000 date throughout the publication, further indicating its reliability. Ex. 1008, 1-2, 9. Dr. White also confirms that Surjanto is available on IEEE Xplore (<https://ieeexplore.ieee.org/abstract/document/882377>), which states that a copy has been available on that site since August 6, 2002. Ex. 1003, ¶55. Dr. White testifies that the IEEE Xplore provides reliable dates indicative of their publication status. *Id.*

Surjanto was presented in an IEEE conference and published by the IEEE. The Surjanto conference proceedings bears a publication date of 2000 which is inherently reliable and trustworthy given the publication source, the IEEE. Ex. 1008, 1-2; Ex. 1003, ¶¶54-57. Indeed, the Board has stated that the “IEEE is a well-known, reputable compiler and publisher of scientific and technical publications, and we take Official Notice that members in the scientific and technical communities who both publish and engage in research rely on information published on the copyright line of IEEE publications.” *Ericsson Inc. v. Intellectual Ventures I LLC*, IPR2014-00527, Paper 41, at 11 (PTAB May 18, 2015). The Board has further found that “[a]llowing IPR petitioners to rely on the IEEE publication date in an IPR proceeding ... serves the interests of justice.” *Id.*, 12. Dr. White agrees with these statements from the Board. Ex. 1003, ¶57.

Moreover, Exhibit 1008 is an authentic copy of Surjanto as it was published in 2000. Ex. 1003, ¶58; Ex. 1010, ¶39. Both Dr. White and Dr. Hall-Ellis have examined Exhibit 1008 and, based on their experience with the reliability of published dates within IEEE-publications and the lack of any visible alterations, conclude it is the authentic copy as published in 2000 in the WISE proceedings. *Id.* Dr. White also confirms that the Surjanto paper within Exhibit 1008 is identical to the version available on IEEE Xplore, and because of the reliability of IEEE Xplore dates, concludes that Exhibit 1008 is an authentic copy as was published in 2002 on IEEE Xplore. *Id.*

Further, pursuant to FRE § 901(b)(8), Exhibit 1008 qualifies as an “ancient document,” and is, for this additional reason, authentic.

VIII. DETAILED EXPLANATION OF INVALIDITY GROUNDS

The following grounds establish a reasonable likelihood that the Petitioner will prevail with respect to the Challenged Claims.

A. Ground 1: Althoff in view of Moore renders obvious claims 1, 4-11, 14-17, 20-27, 30-32, 33, 36-43, 46-47

Ground 1 relies on the OO relational databases of Althoff modified to include the dynamic folder system of Moore to render obvious claims 1, 4-11, 14-17, 20-27, 30-32, 33, 36-43, and 46-47. Ex. 1003, ¶¶59-164.

1. Rationale to Combine Althoff and Moore

A POSITA would have found it obvious to combine Althoff's relational database with Moore's virtual folder system. Ex. 1003, ¶¶60-69. A POSITA would be motivated to do this in order to provide the well-known benefit of giving end-users a familiar, folder-based user interface to navigate hierarchical database objects, such as those taught in Althoff. Ex. 1003, ¶62. This provides a superior experience to the end-user than requiring users to use complicated SQL queries, or navigate complicated tables, in order to view objects stored in Althoff's database. *Id.*

Moore teaches a system that “is able to take a property that is stored in the database and represent it as a container that is like a folder.” Ex. 1007, 3:39-41. Moore provides this using a virtual folder system, which “expose[s] regular files and folders (also known as directories) to users in different views based on their metadata instead of the actual physical underlying file system structure on the disk.” *Id.*, 5:51-54. This “virtual folder system 200” comprises a number of components, most notably a “folder processor 210, a relational database 230, [and] a virtual folder descriptions database 232.” *Id.*, 8:5-9. One component of the system is a “query builder component 220 [that] builds SQL queries” from “data from the virtual folder descriptions database 232, including a list of types to display in the folder, the initial filter, and the physical location to show results from (the scopes).” *Id.*, 9:19-25. The

“query builder component 220 sends the SQL queries to the relational database 230.”

Id., 9:25-27.

A POSITA would be motivated to incorporate Moore’s teachings of a virtual folder system with Althoff in order to view items in the database with the familiarity of folders and to separate subsets of the elements into folders, especially where Althoff’s OO database is used to store files or other items like contacts. Ex. 1003, ¶¶62-66. Indeed, Moore notes that its virtual folder system “is able to take a property that is stored in the database and represent it as a container that is like a folder.” *Id.*, 3:39-41. By storing files (and non-file items such as contacts) in a database, and presenting them as virtual folders, “files and folders” are shown to users “based on their metadata instead of the actual physical underlying file system structure on the disk.” *Id.*, 3:36-39. A benefit of using virtual folders is that “users are already familiar with working with folders, by presenting the virtual folders in a similar manner, users can adapt to the new system more quickly.” *Id.*, 3:41-45.

A POSITA would have also known that allowing a user to view database items using the familiar folder-based interface would greatly improve a user’s ability to visualize and access database objects. Ex. 1003, ¶65. A POSITA would understand that a typical database system requires complicated SQL queries to access database information, which would have been beyond the abilities of the average user. *Id.* Moore teaches a system that automatically generates SQL queries based on user-

defined filters and displays the results in a virtual folder system. Thus, for example, an object-oriented database like that in Althoff could store a company's employee directory, and through the teachings of Moore, display it like a folder of employee items, including the use of hierarchical folders for different departments. *Id.* And even though Althoff does disclose a GUI for "creating and editing the user database model 230," (Ex. 1006, 6:55-63), Moore's virtual folder system still provides a simpler, and more user-friendly interface for viewing items that does not require any familiarity with databases. Ex. 1003, ¶65.

A POSITA would have combined Althoff and Moore with a reasonable expectation of success. Ex. 1003, ¶67. The use of Moore's virtual folder system was compatible with relational databases and database structures, including those disclosed in Althoff. *Id.* Moore provides numerous implementation details for incorporating a virtual folder system with a databases and database structures, including the use of various components in Moore's Figure 2. *Id.* The implementation of Moore's virtual folder system into the combination of Althoff was well within the capabilities of a POSITA at the time of the '585 patent. *Id.* A POSITA would understand that Moore was compatible with Althoff's relational database structure, since Moore discloses that it queries a relational database, the kind disclosed in Althoff. *Id.*, ¶68.

Moreover, the combination of Althoff and Moore would have yielded predictable results. Ex. 1003, ¶69. A POSITA would have readily understood that combining Althoff with Moore would result in an object database system and database structures as taught by Althoff with the capability of displaying the objects in the database using a virtual folder system as taught by Moore. *Id.* Moore teaches that “the system is able to take a property that is stored in the database and represent it as a container that is like a folder.” Ex. 1007, 3:39-41. Thus, Moore would have been readily combined with other database platforms, such as Althoff, to achieve the predictable benefits taught by Moore.

Like Althoff and Moore, the ’585 patent is directed to the field of computer data storage, more specifically storing and managing data sets in a database system. Ex. 1001, 1:59-63. All three references, therefore, are directed to the same field of endeavor, and are analogous art. Ex. 1003, ¶61.

2. Claim 1

(a) 1[pre] A computerized system for manipulating data sets, comprising:

To the extent the preamble is limiting, Althoff discloses a ***computerized system for manipulating datasets***. Althoff teaches the use of “a general purpose ***computer***, or a set of general purpose computers” (*i.e.*, computerized system). Ex. 1006, 5:22-31. Althoff further teaches “allow[ing] a user to create, edit, and

manipulate a user's object database." *Id.*, 3:15-18. A POSITA would understand that Althoff's object database includes **datasets**. Ex. 1003, ¶¶70-71.

(b) 1[a] a hardware-based processor; and

Althoff discloses a **hardware-based processor**. Ex. 1003, ¶¶72-73. Althoff teaches "using a general purpose **computer**, or a set of general purpose computers." Ex. 1006, 5:21-31. A POSITA would understand that a general purpose computer includes a hardware-based CPU, *i.e.* a **hardware-based processor**. Ex. 1003, ¶73.

(c) 1[b] a data repository adapted to process, retrieve, and store: data contained in the data sets; and one or more layers of metadata included in the data sets, wherein the data repository comprises:

Data Repository: Althoff discloses the data repository as a "relational **database** ... implemented using a relational database engine." Ex. 1006, 6:42-55. A POSITA would understand that a relational database is a specific implementation of a **data repository**. Ex. 1003, ¶¶74-75.

[A]dapted to store data contained in the data sets and one or more layers of metadata included in the data sets: Althoff teaches a "user's object **database**." Ex. 1006, 3:25-29. A POSITA would understand that an object database **contains data sets** in the form of objects and the data associated with those objects. Ex. 1003, ¶¶76-77. Althoff further teaches "a **meta-model of the user's object database**, which is itself an object database [and which] comprises a set of classes, objects, and relationships between classes which model the classes and relationships between

classes of the system.” Ex. 1006, 3:25-32. A POSITA would understand that a meta-model of the user’s object database would contain ***one or more layers of metadata of the data in the data sets*** because the meta-model includes data about the data sets (*i.e.*, ***a layer of metadata***). Ex. 1003, ¶¶78-80.

[A]dapted to process, retrieve, and store data contained in the data sets:

Althoff teaches that it “allows a user to ***create, edit and manipulate a user’s object database*** (which the method and system dynamically translates into a set of ***relational database structures***).” Ex. 1006, 3:15-21. Thus, a POSITA would understand that Althoff’s relational database is a data repository that ***processes and retrieves data*** stored in the user’s objects database (*i.e.*, ***data contained in the data sets***), by enabling the user to create, edit, and manipulate the object database. Ex. 1003, ¶81. Further, Althoff’s relational database ***stores data contained in the data sets*** by translating the user’s object database into a set of relational database structures. *Id.*

[A]dapted to process, retrieve, and store one or more layers of metadata included in the data sets: As described above, Althoff teaches a meta-model of the user’s object database that includes ***one*** or more layers of metadata of the data in the data sets. Althoff further teaches that the meta-model “may be ***manipulated in the same manner as the user’s object database***.” Ex. 1006, 3:41-44. Thus, a POSITA would understand that Althoff’s relational database (*i.e.*, data repository) is adapted

to *process, retrieve, and store one or more layers of metadata included in the datasets* in the same manner as described above with respect to the data contained in the data sets because the meta-model stores meta-data for objects in the user's object database. Ex. 1003, ¶82.

- (d) 1[c] **an element module configured to store and identify a plurality of elements, wherein the plurality of elements are identified by unique element identification;**

[A]n element module configured to store a plurality of elements: Althoff teaches representing classes and objects from an object oriented database within a relational database by explaining that “each class ... is modeled by a relational database table ... and *each object that class is modeled by a row in that table.*” Ex. 1006, 3:45-46; Ex. 1003, ¶83. As discussed below, Althoff describes a system of classes that are defined in a “class Class” table. For each of these classes, “the system 200 creates a table in the corresponding relational database 203 to correspond to the selected class 101.” Ex. 1006, 23:10-12. Each table is linked to their particular class in the “class Class” table with a column containing the “class identifier” for each object. *Id.*, 23:33-34.

Althoff further teaches that these individual class tables *store objects (i.e., elements)* by explaining that “[w]hen an object is populated into the corresponding relational database 203, the system 200 will create a row in the table corresponding to the object's class 101 [and thus] *each object will correspond to one row in each*

table corresponding to each class 101.” *Id.*, 23:19-25; Ex. 1003, ¶84. Thus, a Althoff’s individual class tables are **element modules** because each row of the table stores objects (*i.e.*, elements). Ex. 1003, ¶85.

[A]n element module configured to identify a plurality of elements, wherein the plurality of elements are identified by unique element identification: Althoff teaches that, for each of the individual class tables, “[t]he first column in each table is for the **UID for each object** [and thus], in each table in which a row is created for the object, the first column corresponds to the UID for the object.” Ex. 1006, 23:26-29; *see also* 3:50-52 (“Each such table comprises an ‘object-ID’ column generated by the system, comprising a unique ID for each object in the system.”). Althoff explains that the “UID” is a “**unique identifier** ... for each object.” *Id.*, 23:14-15. In other words, each object (*i.e.*, **element**) in the individual class table (*i.e.*, **element module**) has a unique identifier (*i.e.*, **is identified by unique element identification**). Ex. 1003, ¶86.

- (e) **1[d] an element relation module configured to store one or more relationships among the plurality of elements stored in the element module;**


[A]n element relation module: Althoff discloses **an element relation module** as columns in a class table that stores the relationship between that class and a related class. Ex. 1003, ¶¶87-91. As discussed above, Althoff’s system creates a table for each class which is populated with instance objects of that class

corresponding to each row of the table. Althoff discloses that Figure 8 is an example of those tables. Ex. 1003, ¶87. Ex. 1006, 23:66-24:2 (“As described with regard to FIG. 7, the user relational database 230 corresponding to the user’s **object database 100 comprises a set of relational tables 800**, each corresponding to a class 101.”).

[C]onfigured to store one or more relationships: According to Althoff, in Figure 8, “inheritance **relationships** are modeled by providing a column 810 ‘Object ID’ in each table 800.” Ex. 1006, Fig. 8, 30:10-12; *see also* 23:51-53 (“[T]he system 200 creates a column in the table for each **relationship 103** between the class 101 and a related class 101.”). Thus, column 810 (*i.e.* the **element relationship module**) stores inheritance relationships between objects. Ex. 1003, ¶88.

[A]mong the plurality of elements stored in the element module: Althoff teaches objects (*i.e.*, **elements**) as “row 820 in the table 800,” where each class table includes a UID column “OBJ ID” that uniquely identifies each element, and where each class table 800 also includes a “MFR” column that stores UIDs for elements in other class tables. *Id.*, 24:9-31; *see also* 23:53-55 (“In the column for this relationship 103, the system 200 places the UID of the object in the related class 101 which is related to the object in the class 101 for this table.”); Ex. 1003, ¶88. Althoff explains that distinct elements in each table can share the same “object UID” to **store one or more relationships between** objects (*i.e.*, **the elements**) as data-model relationships (*i.e.*, **an element relation module**): “data-model relationships 103

between source and target classes 101 are modeled by providing a column 810 in the source table 800 pointing to an object in the target table 800, i.e., having the object UID of a row 820 in the target table 800.” Ex. 1006, 30:37-41.

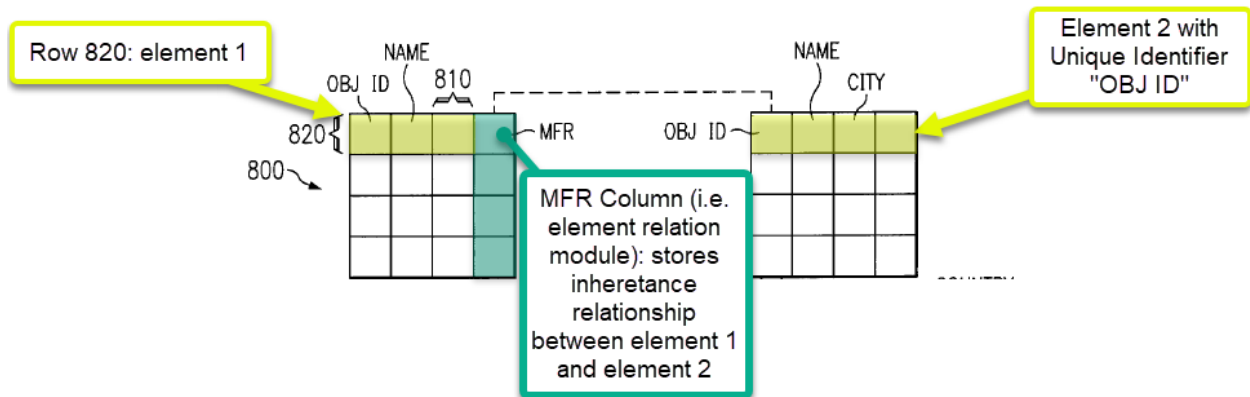

Althoff teaches an exemplary embodiment that corresponds to the two relational tables shown above in Figure 8: a class Manufacturer table (right), and a class Component table (left), with each table including a column for OBJ ID (left most column) and populated with rows 820 (*i.e.*, elements). *Id.*; Ex. 1003, ¶89. The dotted line connecting the MFR of an object (*i.e.*, element) of the class Manufacturer table with the OBJ ID of an element of the class Component table “establish[es] the **relationship 103 between objects** of the class 101 component and objects of the class 101 manufacturer.” *Id.*; Ex. 1006, 24:26-31.

Althoff further teaches a “class Class Link 302,” which is also an **element relation module**. Ex. 1003, ¶90. Althoff teaches that in “meta-model 220, each object of class Class 301 may have zero or more parent objects of class Class 301, and may have zero or more child objects of class Class 301” and that these

“**relationships 103** are represented using a cross-link class Class Link 302.” *Id.*, 12:28-31. Althoff teaches that “[e]ach object in the class Class Link 302 links a child class 101 to a parent class 101. A child class 101 may have more than one parent class 101 due to multiple inheritance.” *Id.*, 12:34-36. A POSITA would understand that since the table depicted in Figure 8 “correspond[s] to a class 101” and contains rows of “object[s] of a derived class 101,” the “class Class Link 302,” which defines relationships between classes, also defines **relationships among the elements** (which are instance objects of those classes) of the relational table in Figure 8. *Id.*, 24:1-2, 30:10-15; Ex. 1003, ¶91. For example, as discussed above, Figure 8’s relational table 800 contains a column that represents the relationship between a Component object and a Manufacturer object. Ex. 1003, ¶91. This relationship between objects (*i.e.* **elements**) reflects a class relationship between the Component class and the Manufacturer class, which is a relationship stored in the “class Class Link 302.” *Id.*; Ex. 1006, 6:12-16 (“[T]he class 101 component has a data-model relationship with the class 101 manufacturer ... each object of the class 101 component has a related object of the class 101 manufacturer.”). Thus, the “class Class Link 302” **stores one or more relationships among the plurality of elements stored in** tables—including **the element module** which is defined in Althoff as a specific implementation of a table (*i.e.*, the class tables). Ex. 1003, ¶91.

- (f) **1[e] a class module configured to define at least one class of the plurality of elements and store the at least one class;**

Class module: Althoff discloses a ***class module*** as a “class Class 301” table.

As discussed above, the ***plurality of elements*** stored in the ***elements module*** are instanced objects of a class. See Ex. 1006, 3:45-46 (“each class ... is modeled by a relational database table ... and each object of that class is modeled by a row in that table.”). In other words, Althoff discloses that these classes are ***classes of the plurality of elements*** (for example, a Manufacturer class of the plurality of Manufacturer objects). Ex. 1003, ¶92.

[Classes that are] defin[ed] and stor[ed]: Althoff teaches that these classes are defined and stored in a “class Class 301” table (*i.e.* ***class module***). Ex. 1003, ¶93. Althoff teaches that “in the meta-model 220, ***each class of the user’s object database 100 is modeled*** by an object of class Class 301.” Ex. 1006, 11:13-14. Althoff further teaches that these “***classes***” ***of elements*** can be “***defined*** by a user of the system.” *Id.*, 1:31-32. Althoff explains that it creates classes (*i.e.*, “class Class” objects) defined by the user by “provid[ing] a capability for the user 201 to select values for the properties 102 of the new object of ***class Class 301 which has just been created.***” *Id.*, 28:28-52.

Althoff discloses that these classes and their definitions are ***stored*** in the “class Class 301” table, where “each class ... is modeled by an object [*i.e.* row] of class

Class 301” and “each object of class Class 301 comprises information in table 3-2.”

Id., 11:12-16; Ex. 1003, ¶94. Such information includes the “name to be displayed for the class” and a “description of the class.” Ex. 1006, 11:18-48.

(g) **1[f] an attribute module configured to define one or more attributes and store the one or more attributes;**

[A]n attribute module configured to define one or more attributes: Althoff teaches that searchable properties define information about a class: “a user's object database 100 comprises a set of classes 101, each comprising a ***set of searchable properties 102, and each representing a type of data*** for an object oriented database to store, manipulate, or retrieve.” Ex. 1006, 5:39-42; Ex. 1003, ¶95. A POSITA would understand that in OO software development models, ***attributes are collections of data*** associated with each class. Ex. 1003, ¶96. A POSITA would further understand that Althoff's ***searchable properties are the one or more attributes defined*** for each class because they comprise a collection of data associated with each class. Ex. 1003, ¶97. Indeed, Figure 3 of Althoff teaches that a “Class Property” object “is an attribute of” a “Class” object. *Id.*

[A]ttribute module configured to store the one or more attributes: Althoff teaches “Class Property 303” and “Pointer Class Property 304” tables that ***store the attributes***: “[i]n the meta-model 220, searchable properties comprising built-in data types are represented by a class Class Property 303, while searchable properties comprising user-defined data types (implemented by pointers to objects of the user-

defined data types) are represented by a class 101 Pointer Class Property 304.” Ex. 1006, 13:2-7. ***Attributes are stored*** within the Class Property and Pointer Class Property classes as objects of the respective classes. Ex. 1003, ¶98. For example, “[t]he class Pointer ***Class Property 304 includes one object for each searchable property 102*** for any object of class Class 301 having a user-defined data type, and each object of class Class 301 may have zero or more associated objects of class Pointer Class Property 304. Each object of class Pointer Class Property 304 has a pointer to an object of the user-defined type; the pointer is an object of class Pointer Valid Class 305.” *Id.*, 13:16-23. Moreover, at a higher level, Althoff discloses that searchable properties (*i.e.*, ***attributes***) are stored in the object database: “set of ***searchable properties 102*** ... for an object oriented database ***to store.***” *Id.*, 5:39-42; Ex. 1003, ¶99.

- (h) 1[g] a class attribute module configured to define and store one or more class-attribute associations between at least one of the attributes and the class;

[C]lass-attribute associations between at least one of the attributes and the class: Althoff discloses relationships between classes, referred to as class objects, and attributes, referred to as searchable properties of class objects. Ex. 1003, ¶¶100-105. Specifically, Althoff teaches that “class Class 301 has a relationship 103 ... which ***links a class 101 to its searchable properties***” (*i.e.*, ***attributes***). Ex. 1006, 13:8-9. A POSITA would understand that relationships (*i.e.*, “relationship 103”) in

object oriented-programming databases encompass both associations, which describes how object use or contain other objects, and inheritance relationships, which describes “is a” relationships between objects (*e.g.* an F150 “is a” Ford Truck). Ex. 1003, ¶101. Thus, Althoff’s “relationship 103” which “links a class 101 to its searchable properties” (*i.e.*, attributes) discloses ***one or more associations*** (*i.e.*, a type of relationship) ***between at least one of the attributes and the class*** for linking a class to its searchable properties.² Ex. 1003, ¶102.

[A] class attribute module configured to define and store one or more class-attribute associations: This limitation is met by Althoff’s “relationships 103.” Ex. 1003, ¶106. Althoff teaches ***relational database structures*** comprising “a set of classes 101, ***a set of searchable properties for each class 101***, and a set of relationships 103 between classes 101.” *Id.*, 10:12-16. The association between a class (*i.e.*, class Class) and its attributes (*i.e.*, class Class Property and class Class Pointer Property) is defined as a “***data-model relationships 103 between classes 101***.” *Id.*, 30:9. A POSITA would understand that the data model relationships

² This understanding—that Althoff’s disclosure of “relationship 103” encompasses both associations and inheritance relationships—applies throughout this Petition for claim limitations that rely on Althoff.

between classes and attributes ***define and store the class-attribute associations***. Ex. 1003, ¶104.

Althoff also discloses a “class Pointer Valid Class 305,” which is also a ***class attribute module***. Ex. 1003, ¶105. The “class Pointer Valid Class 305” “links a class 101 to its searchable properties with user-defined data types.” Ex. 1006, 13:7-9; *see also* 14:34-36 (“Each object of class Pointer Valid Class 305 links an object of class Pointer Class Property 304 to a target class 101.”). Specifically, the “class Pointer Valid Class 305” has relationships with both “class Class 301” and “class Pointer Class Property 304.” *Id.*, 13:10-14. Thus, the “class Pointer Valid Class 305” ***defines and stores associations between a class and its attributes***. Ex. 1003, ¶105.

- (i) **1[h] a type definition module configured to define and store one or more types of the at least one class, a plurality of attributes related to the at least one class and the one or more relationships among the plurality of elements;**

[A] type definition module configured to define and store one or more types of the at least one class: Althoff’s Class Type, Property Type, and Object Type columns are the ***type definition module***. Ex. 1003, ¶¶106-115. As described above, Althoff’s class Class table defines and stores classes of the elements. *Supra*, limitation 1[e]. The class Class table contains a Class Type column which ***defines and stores one or more types of the class*** by indicating “whether the class is part of

the meta-model, a cross-link class, a base class ... or any other class created by the user.” Ex. 1006, Tab. 3-2; Ex. 1003, ¶106.

[A] type definition module configured to define and store a plurality of attributes related to the at least one class: As described above, Althoff’s class Class Property defines and stores the attributes related to the class. *Supra*, limitation 1[f]. Althoff further teaches that the class Class Property contains a column named Property Data Type (*i.e.*, a type definition module) that **defines and stores the attributes related to the class** by “indicat[ing] data type this property is stored as.” Ex. 1006, Tab. 3-6; Ex. 1003, ¶107.

[A] type definition module configured to define and store the relationships among the plurality of elements: As described above, the class tables store elements and relationships between the elements. Althoff teaches that each class table has a set of “specified columns” which include “a column for the ‘object type’ of each object.” Ex. 1006, 23:13-16; Ex. 1003, ¶108. The “the ‘object type’ column indicates whether this particular object (as opposed to an entire class)” is of a given type. *Id.*, 23:40-42. A POSITA would understand that determining whether or not elements are of the same type **defines the relationships among the elements, which is stored** in the “object type” column. Ex. 1003, ¶109. In object oriented programming, objects (*i.e.* elements) have a type which can have an inheritance relationships with one or more classes and describes relationships between the

objects. The object type contains metadata about the object (i.e. element), including the relationship between the object and other objects (i.e. elements). *Id.*

Alternatively, Althoff's class Pointer Valid Class discloses ***a type definition module configured to define and store one or more types of the at least one class, a plurality of attributes related to the at least one class and the one or more relationships among the plurality of elements;***, as claimed. Ex. 1003, ¶¶110-115. The class Pointer Valid Class contains a field "Valid Class Description" that defines and stores "the relation between the pointing and target classes" Ex. 1006, Tab. 3-5; Ex. 1003, ¶111. Althoff teaches that the Valid Class Description field enables the user to specify the nature of the relationship between classes. *Id.* Althoff teaches a relationship between classes with the Valid Class Description of "is manufactured by" that defines and stores the type of relationship between the "pointing and target" as type "is-manufactured-by". Ex. 1006, Tab. 3-5. Thus, the class Pointer Valid Class and its Valid Class Description define and store one or more types of the relationships between the elements, as claimed. Ex. 1003, ¶111.

Althoff's class Pointer Valid Class discloses ***a type definition module configured to define and store the attributes related to the class***, as claimed. Ex. 1003, ¶112. As described above, Althoff's Pointer Class Property ***define and store attributes***. *Supra*, limitation 1[f]. The Pointer Class Property (i.e. attributes) are ***related to the class*** by Althoff's class Pointer Valid Class which "links an object of

class Pointer Class Property 304 to a target class 101.” Ex. 1006, 14:34-36; Ex. 1003, ¶112.

Finally, Althoff’s class Pointer Valid Class ***defines and stores the relationships between the elements***, as claimed. Ex. 1003, ¶¶113-115. As noted above, Althoff discloses elements as objects (*i.e.* rows) in the class tables. *Supra*, limitation 1[b]. A POSITA would understand that elements (*i.e.* objects) have properties of their class, such as type. Ex. 1003, ¶114. Storing one or more types of the class and the relationships between classes also ***defines and stores the relationships between the elements*** that belong to those classes. *Id.*

- (j) 1[i] a named text module configured to store textual representations of query, control, and display mechanisms that relate to the plurality of elements, wherein the named text module defines one or more folders and one or more filters; and

[A] named text module configured to store textual representations of query, control, and display mechanisms that relate to the plurality of elements, wherein the named text module defines one or more folders and one or more filters: In the Althoff-Moore combination, this limitation is disclosed by Moore’s virtual folder system. Ex. 1003, ¶¶116-25. Moore discloses a “virtual folder descriptions database” and a “folder processor” (together a ***named text module***) that stores SQL queries (*i.e.* ***textual representations of query, control, and display mechanisms***) in order to create hierarchical virtual folders for listing/viewing database objects (*i.e.*

defines one or more folders and one or more filters). Ex. 1003, ¶117. A virtual folder can “take a property that is stored in the database and represent it as a container that is like a folder.” Ex. 1007, 9:66-10:1. Put differently, Moore’s system “expose[s] regular files and folders (also known as directories) to users in different views based on their metadata instead of the actual physical underlying file system structure on the disk.” *Id.*, 9:63-66.

An embodiment of Moore’s system is depicted in Figure 2, reproduced below.

Ex. 1003, ¶118.

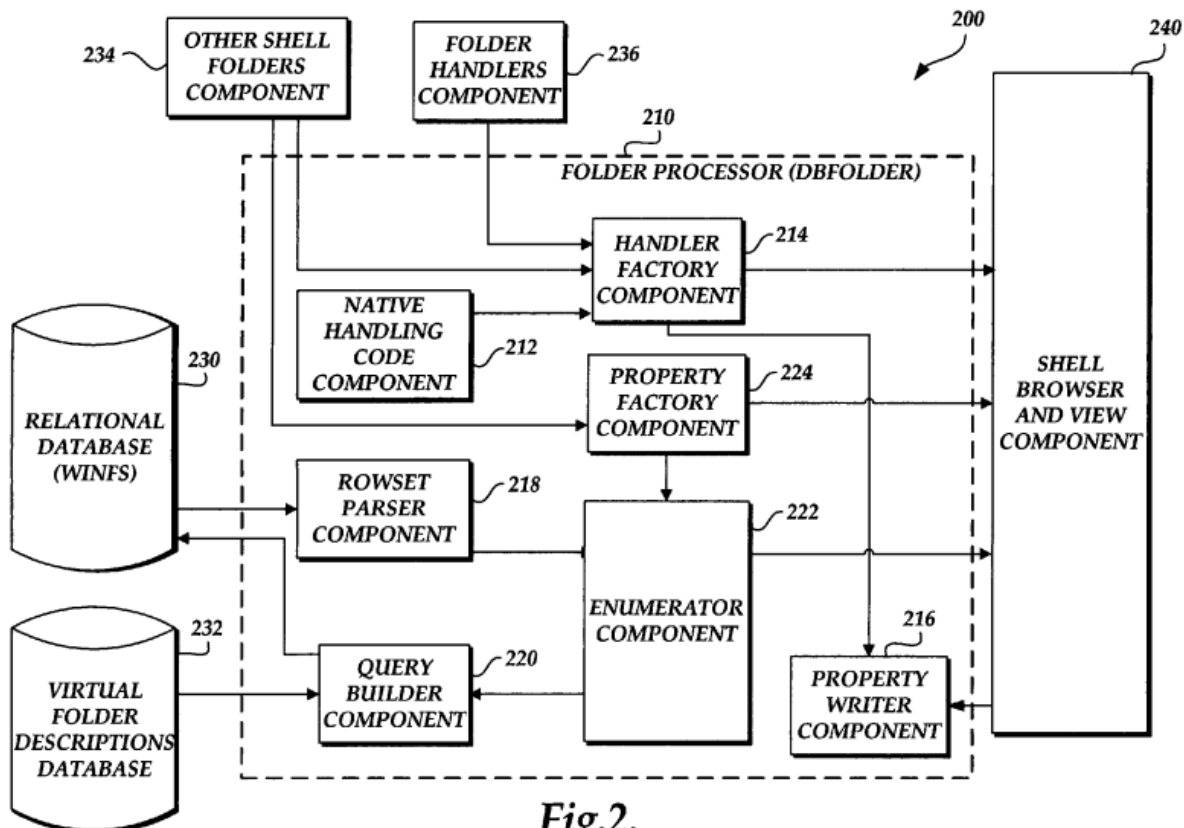


Fig.2.

As explained by Moore, this “virtual folder system 200” comprises a number of components, most notably a “folder processor 210, a relational database 230, [and] a virtual folder descriptions database 232.” *Id.*, 8:5-9.

The “virtual folder descriptions database” and “virtual folder system” together make up a ***named text module***. The “virtual folder descriptions database 232 sends data to the query build component 220 [within the virtual folder system], including a list of types to ***display in the folder, the initial filter***, and the physical locations to show results from.” *Id.*, 8:24-28. Thus, the virtual folder descriptions database defines virtual folders (*i.e. one or more folders*) using at least a filter (*i.e. one or more filters*). Ex. 1003, ¶119.

The virtual folder system’s “query builder component 220 builds SQL queries” from “data from the virtual folder descriptions database 232, including a list of types to display in the folder, the initial filter, and the physical location to show results from (the scopes).” Ex. 1007, 9:19-25. The “query builder component 220 sends the SQL queries to the relational database 230.” *Id.*, 9:25-27; Ex. 1003, ¶120.

A POSITA would understand that a SQL query is a “string which can ... be issued to the database” and results in a “set of rows (in other words a table).” Ex. 1007, 9:11-13, 9:28-29; Ex. 1003, ¶¶121-22. Thus, a SQL query is a ***textual representation of query, control, and display mechanisms that relate to the***

plurality of elements because a SQL query is a string (*i.e.* **textual representation**) query for filtering data (*i.e.* **plurality of elements**) in a database (*i.e.* **control mechanism**) that can also return a table of data for display (or feed the data to another component that displays it) (*i.e.* **display mechanism**). *Id.*, ¶123. Because the query builder component builds SQL queries, it **stores the textual representations** (*i.e.* SQL queries). *Id.*

To the extent Patent Owner argues that the SQL query is not stored because it is dynamically generated, alternatively, the “virtual folder descriptions database 232 includes the virtual folder descriptions,” *i.e.* **textual representations**. Ex. 1007, 8:23-24; Ex. 1003, ¶124. The virtual folder descriptions constitute “a list of types to display in the folder” and “the initial filter,” which are used by the query builder to build the SQL query. Ex. 1007, 8:24-28, 8:18-20. Thus, since the “virtual folder descriptions” is converted into a SQL query (*i.e.* **query, control and display mechanisms that relate to the plurality of elements**), the “virtual folder descriptions” is a **textual representation** of those mechanisms. Ex. 1003, ¶124.

Moore teaches that “[t]he relational database 230 stores properties about all files in the system” but also “non-file items” “like contacts.” Ex. 1007, 8:15-17. The relational database also “stores metadata about the types of files and items that it contains.” *Id.*, 8:17-18. When it receives SQL queries, it responds with “SQL rowsets ... with one row per item column, columns being the item properties.” *Id.*,

8:20-22. Thus, Moore’s relational database of file and non-file items is much like Althoff’s database of objects, containing *elements* (e.g. *file and non-file items*) and *attributes* about those elements (e.g. *item properties*). Ex. 1003, ¶125. As already discussed, a POSITA would have known that Moore’s virtual folder system of generating SQL queries for displaying of items in a virtual folder could be used with Althoff’s database of objects. *Id.*

- (k) 1[j] a tuple module configured to generate and store one or more tuples, wherein the one or more tuples link the one or more folders and the one or more filters to generate a hierarchy of one or more data entries.

[A] tuple module configured to generate and store one or more tuples, wherein the one or more tuples link the one or more folders and the one or more filters: In the Althoff-Moore combination, this limitations disclosed by Moore. Ex. 1003, ¶¶126-131. Moore teaches that the “virtual folder descriptions database” (i.e. *tuple module*) stores “folder descriptions” such as “a list of types to display in the folder, the initial filter, and the physical locations to show results from.” Ex. 1007, 8:23-28. Thus, the virtual folder descriptions database *links* the folder descriptions (i.e. *one or more folders*) with an initial filter (i.e. *one or more filters*). Ex. 1003, ¶127.

[T]uples to generate a hierarchy of one or more data entries: Moore teaches that linking folder with filter *generates a hierarchy of one or more data entries*.

Ex. 1003, ¶¶128-29. Moore teaches that a virtual folders can “further include[] virtual folders.” Ex. 1007, 11:63-64. For example, as depicted in Figure 7 (reproduced below), “[a] virtual folder 500 is an ‘all items’ folder” that further “contains virtual folders 510, 520, and 530, corresponding to clients, contracts, and year, respectively.” *Id.*, 11:56-59. Moore further discloses that “at a second level, the virtual folder 510 further includes virtual folders 511 and 512, which correspond to contracts and year, respectively.” *Id.*, 11:65-65. Moore depicts and describes several over examples of hierarchical virtual folders in Figures 6-9. Ex. 1003, ¶129.

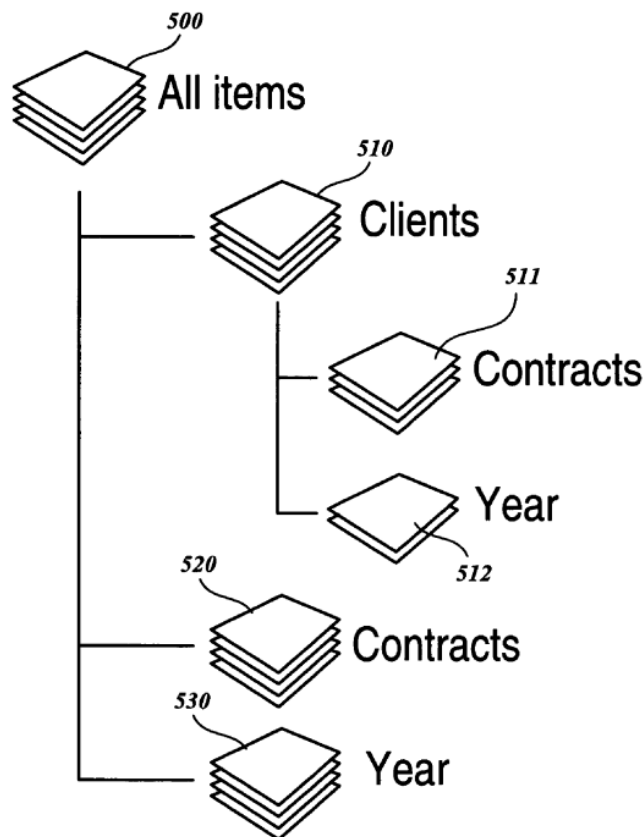


Fig.7.

Moore also teaches that “the virtual folders explore regular files ***and folders*** (also known as directories) to users in different views based on their metadata instead of the actual physical underlying file system structure on the disk.” *Id.*, 9:63-66. Since the virtual folder can itself contain folders (and folders can further contain more folders), that results in a ***hierarchy of one or more data entries*** (since the folders are items in the relational database). Ex. 1003, ¶130.

Another example of a hierarchy of data entries provided by Moore’s virtual folder system is where “a user could view their music” in multiple ways, such as “a flat list of all the songs” or a hierarchical view that “show[s] only the genres or artists or years, etc.” Ex. 1007, 7:59-63; Ex. 1003, ¶131.

3. Claim 4: The computerized system of claim 1, wherein the type definition module defines a type including at least one of a boolean type, a picklist type, and a state machine type.

[W]herein the type definition module defines a type including at least one of a boolean type, a picklist type, and a state machine type: In the Althoff-Moore combination, this limitation is disclosed by Althoff’s class Class Property table. Ex. 1003, ¶¶132-35. As described above, Althoff’s class Class Property table discloses a ***type definition module that defines a type***.

Althoff’s class Class Property defines types ***including a boolean type and a picklist type***, as claimed. Ex. 1003, ¶133. Althoff discloses that the class Class Property table includes a column “Property Data Type” that “indicates data type this

property is stored as: **boolean**, character, date, integer, monetary, numeric, or timestamp.” Ex. 1007, 14:47-15:30 (Table 3-6).


Further, Althoff’s class Class Property table also includes a column “Valid Value Type” that “indicates if value is **restricted to certain valid values**, e.g., enumerated **valid value or range valid value**.” *Id.* As noted below, Althoff teaches a picklist as an Enumerated Valid Value object and a Range Valid Value object. *Infra*, claim 5. By restricting the value of the Property Data Type to a predefined set of choices of an Enumerated Valid Value or Range Valid Value, Althoff teaches that the class Class Property table defines a type including picklist type. Ex. 1003, ¶134. A POSITA would understand that this includes ranges for collection of event states defined by state machine types. Ex. 1003, ¶135.

4. **Claim 5: The computerized system of claim 4, wherein the data repository further comprises: a list option module configured to enumerate one or more picklist attributes of the picklist type.**

[A] list option module configured to enumerate one or more picklist attributes of the picklist type: In the Althoff-Moore combination, this limitation is disclosed by Althoff’s Enumerated Valid Value and Range Valid Value. Ex. 1003, ¶¶136-37. Althoff teaches a database record that “may have its value restricted to a specific range or to a specific set of enumerated values” (*i.e.*, **a list option module**). Ex. 1006, 16:17-18. Althoff’s Enumerated Valid Value and Range Valid Value classes include a “a set of enumerated values, or a range of values” (*i.e.*, **a picklist**

type) “as the only valid values for a searchable property 102” (i.e., **one or more picklist attributes** of a picklist type). *Id.*, 9:5-11. Althoff further explains that “[w]hen the user 201 so specifies, the system 200 creates an object ... describing the valid set of enumerated values or the valid range of values, and associates that object with the searchable property 102.” *Id.*


Althoff discloses that the objects of class Enumerated Valid Value and class Range Valid Value are **stored in the meta model**: “[i]n the meta-model 220, a class Enumerated Valid Value 308 includes one object for each set of enumerated valid values. ... Similarly, a class Range Valid Value 309 includes one object for each set of range valid values.” *Id.*, 16:19-27; Ex. 1003, ¶133. Further, as shown below in Figure 2, Althoff discloses that the **meta-model is stored in the relational database**.

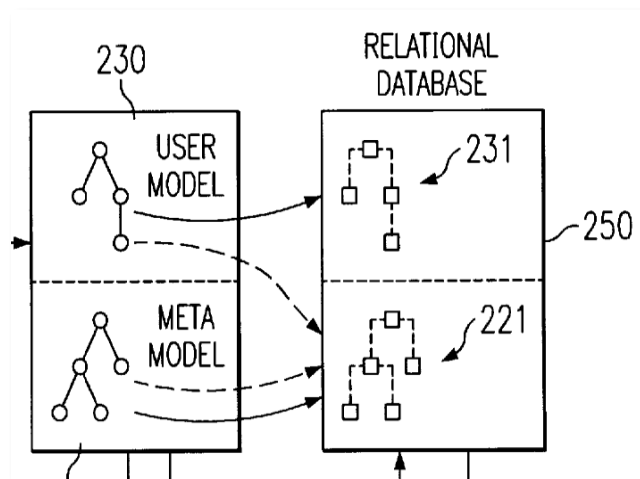

5. **Claim 6: The computerized system of claim 1, wherein the data repository further comprises: a tuple module configured to generate and store one or more tuples, wherein the tuples associate subsets of the plurality of elements in**

accordance with types associated with the subsets of the plurality of elements.

[A] tuple module configured to generate and store one or more tuples: In the Althoff-Moore combination, this limitation is disclosed by Althoff's Class Link. Ex. 1003, ¶¶138-43. As shown below in Figure 3, Althoff's Class Link class (*i.e.*, **a tuple module**) is **configured to store** objects that link a parent class to a child class (*i.e.*, **one or more tuples**). Ex. 1006, Fig. 3. A POSITA would understand that Althoff's Class Link class is also **configured to generate** these one or more tuples because it provides linking functionality. Ex. 1003, ¶139.

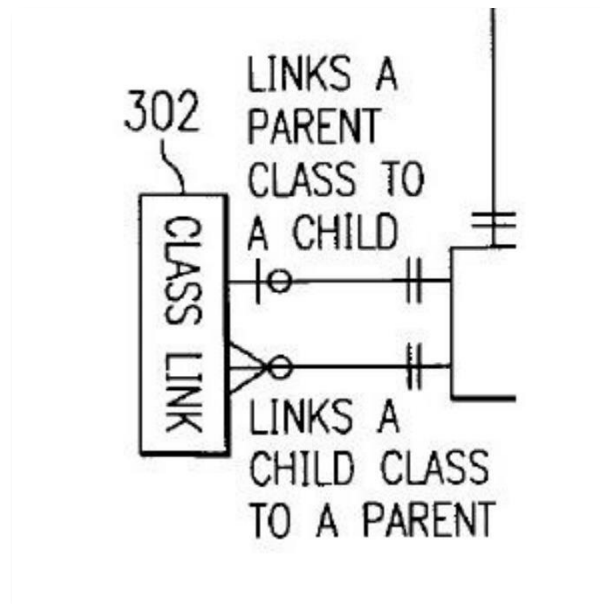

As shown below in Table 3-3, Althoff further teaches the link between the parent class and child class (*i.e.*, **one or more tuples**) through the properties Parent Class and Child Class stored for each object (*i.e.*, **element**) in the Class Link class. Ex.

1003, ¶139. Thus, Althoff's Class Link discloses a tuple module configured to generate and store one or more tuples.

40

TABLE 3-3

Property	Description
Object ID	unique ID for this object
Parent Class	object ID for parent class
45 Child Class	object ID for child class
Distributed DB Node	node in a distributed database for which this object is a link

Ex. 1006, Tab. 3-3.

[W]herein the tuples associate subsets of the elements in accordance with types associated with the subsets of the elements: In the Althoff-Moore combination, this limitation is disclosed by Althoff's objects in the Class Link. Ex. 1003, ¶140. As explained above, Althoff teaches that elements are objects of a given Class class. Althoff further teaches that "each class comprises zero or more parent classes (base classes from which that class is derived), and zero or more child classes (derived classes for which that class is a base class). Ex. 1006, 12:25-28. Althoff's objects of Class Link class "**links a child class 101 to a parent class 101.**" *Id.*, 12:34-35. Althoff explains that the elements (*i.e.*, objects of class Class) "may have zero or more parent objects of class Class 301, and may have zero or more child objects of class Class 301. These many-to-many parent/child class relationships 103 are represented using a cross-link class Class Link 302." *Id.*, 12:29-34. A POSITA

would understand that a class is a user defined ***type used for associating subsets of*** objects (*i.e.*, ***elements***) that belong to each parent class and child class. Ex. 1003, ¶112. Thus, the linking of parent class to child class for the objects of class Class (*i.e.*, the elements) discloses ***tuples that associate subsets of the elements in accordance with types associated with the subsets of the elements.*** *Id.*, ¶141.

In the alternative, Moore also discloses ***a tuple module configured to generate and store one or more tuples, wherein the tuples associate subsets of the plurality of elements in accordance with types associated with the subsets of the plurality of elements,*** as claimed. Ex. 1003, ¶¶142-43.

As discussed above for limitation 1[j], Moore teaches that the “virtual folder descriptions database” (*i.e.*, ***tuple module***) stores “folder descriptions” such as “a ***list of types to display in the folder***, the initial filter, and the physical locations to show results from.” Ex. 1007, 8:23-28. These filters can include filtering items based on the type of object, for example different folders “corresponding to clients, contracts, and year,” or, when viewing music, folders that “show only the genres or artists or years, etc.” *Id.*, 11:56-59, 7:59-63, Fig. 7. Thus, the virtual folder descriptions database links the folder descriptions (*i.e.*, ***folders for each type associated with a subset of the elements***) with an initial filter (*i.e.*, ***associates a subset of the elements in accordance to one of the types***). Ex. 1003, ¶143.

6. **Claim 7: The computerized system of claim 1, wherein the named text module includes one or more data entries that**

define a SQL statement; and the SQL statement returns a set of elements that includes reference to one or more unique ID columns.

[W]herein the named text module includes one or more data entries that define a SQL statement: As discussed above for limitation 1[i], Moore’s *named text module* includes a “query builder component 220 [that] builds SQL queries” from “data from the virtual folder descriptions database 232, including a list of types to display in the folder, the initial filter, and the physical location to show results from (the scopes),” and thus includes data entries that define SQL statements. Ex. 1007, 9:19-25. These SQL queries are sent to the relational database, which returns “SQL rowsets ... with one row per item column, columns being the item properties.” *Id.*, 9:17-18; Ex. 1003, ¶¶144-45.

[A]nd the SQL statement returns a set of elements that includes reference to one or more unique ID columns: When combined with Althoff, such SQL queries are sent to Althoff’s individual class tables, which include a “unique identifier” for each object in the class tables. See limitation 1[c]. Thus the returned rowsets will include objects (*i.e. elements*) and *reference to one or more unique ID columns*. Ex. 1003, ¶146.

7. **Claim 8: The computerized system of claim 1, wherein the one or more folders include data that is represented by one or more tuple entries between a named text entry**

representing a folder and an ID of the named text entry stored in the folder.

[W]herein the one or more folders include data that is represented by one or more tuple entries between a named text entry representing a folder and an ID of the named text entry stored in the folder: In the Althoff-Moore combination, Moore discloses this limitation. Ex. 1003, ¶¶147-48. Moore teaches that the “virtual folder descriptions database” stores “folder descriptions” (*i.e. named text entry representing a folder*) such as “a list of types to display in the folder, the initial filter, and the physical locations to show results from.” Ex. 1007, 8:26-28. These virtual folders result in SQL rowsets that, when sent to “rowset parser component 218,” “takes each row and using the column names transforms the row into an ID list,” which “is a well-known shell structure which is used to reference items in a namespace.” *Id.*, 9:30-33. The “ID list” includes *an ID of the named text entry stored in the folder*. Ex. 1003, ¶148.

8. Claim 9: The computerized system of claim 6, wherein the one or more tuples are associated with a unique ID.

[W]herein the one or more tuples are associated with a unique ID. In the Althoff-Moore combination, Althoff discloses this limitation. Ex. 1003, ¶¶149-50. As discussed for Claim 6, Althoff teaches the link (*i.e. tuple*) between parent class and child class through the properties Parent Class and Child Class stored for each

object in the Class Link class. *Id.* Also stored with this relationship is a “unique ID for this object”:

40

TABLE 3-3

Property	Description
Object ID	unique ID for this object
Parent Class	object ID for parent class
45 Child Class	object ID for child class
Distributed DB Node	node in a distributed database for which this object is a link

Ex. 1006, Table 3-3.

9. **Claim 10: The computerized system of claim 1, wherein the one or more class-attribute associations are identified by logical names and class names.**

[W]herein the class attribute associations are identified by logical names and class names: In the Althoff-Moore combination, this limitation is disclosed by Althoff. Ex. 1003, ¶¶151-52. Althoff’s Class Property objects and Pointer Class Property objects are the attributes, and Althoff’s class Class objects are the classes. Ex. 1003, ¶151. Each Class Property object (*i.e.*, ***attribute***) is ***identified by a logical name*** called Property Label that is the “name to be displayed for the property.” Ex. 1006, Tab. 3-6; Ex. 1003, ¶151. Similarly, each Pointer Class Property object (*i.e.*, ***attribute***) is ***identified by a logical name*** called Pointer Property Label that is the “name to be displayed for the property,” and each Class class object (*i.e.*, ***class***) is ***identified by a class name*** called Class Label that is the “name to be displayed for

the class.” *Id.*, Tabs. 3-2, 3-4; Ex. 1003, ¶151. A POSITA would understand that the names to be displayed for the attributes and classes are the ***logical and class names that identify class attribute associations*** because Althoff discloses attributes associated with objects (*i.e.*, elements) that belong to classes. Ex. 1003, ¶152.


10. Claim 11: The computerized system of claim 10, wherein the data repository further comprises:

- (a) **11[a]: an element attribute module for the at least one class, the element attribute module configured to define and store one or more element attributes of the plurality of elements in the at least one class,**

[E]lement attribute module for the at least one class, the element attribute module configured to define and store one or more element attributes of the plurality of elements in the at least one class: In the Althoff-Moore combination, this limitation is disclosed by Althoff. Ex. 1003, ¶¶153-54. As explained above, Althoff teaches classes as objects stored in the class Class table, with each class Class object being represented by a separate individual class table. Althoff further teaches ***elements as objects stored in the individual class tables***, where each element is “a row in the table corresponding to the object's class.” Ex. 1006, 23:20-21.


Althoff discloses that each class table contains “searchable property” columns that ***define and store*** “a value for a ***searchable property for the class 101***” (*i.e.*, ***attributes***). *Id.*, 23:44-45; Ex. 1003, ¶154. For example, Althoff teaches a class named manufacturer, represented by an individual class table named manufacturer.

Id., 6:5-18. As shown below in Figure 8, Althoff's ***class manufacturer includes two attributes, "name" and "city," for each element of the class manufacturer***, and the manufacturer table includes a column for each of these attributes. *Id.*

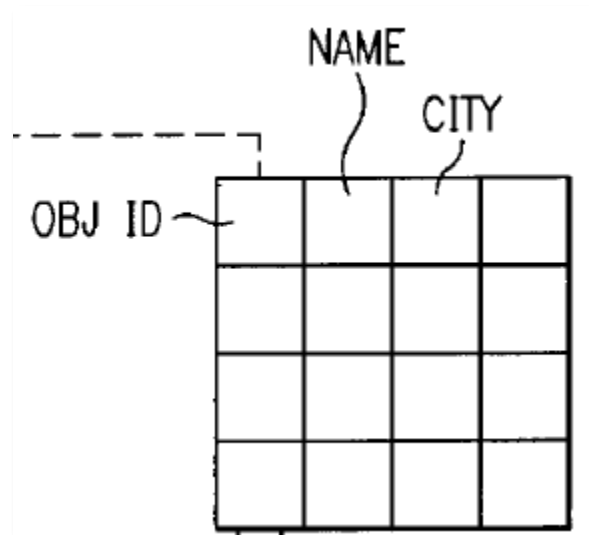

(b) [11b]: wherein the element attribute module is identified using the name of the at least one class.

[W]herein the element attribute module is identified using the name of the at least one class: In the Althoff-Moore combination, this limitation is disclosed by Althoff. Ex. 1003, ¶¶155-56. As explained above, Althoff's individual class tables are the ***element attribute module***. As shown below in Figure 1, Althoff teaches an example with eight classes: component, analog component, memory, dynamic memory, static memory, manufacturers, domestic manufacturer, and foreign manufacturer. Ex. 1003, ¶155.

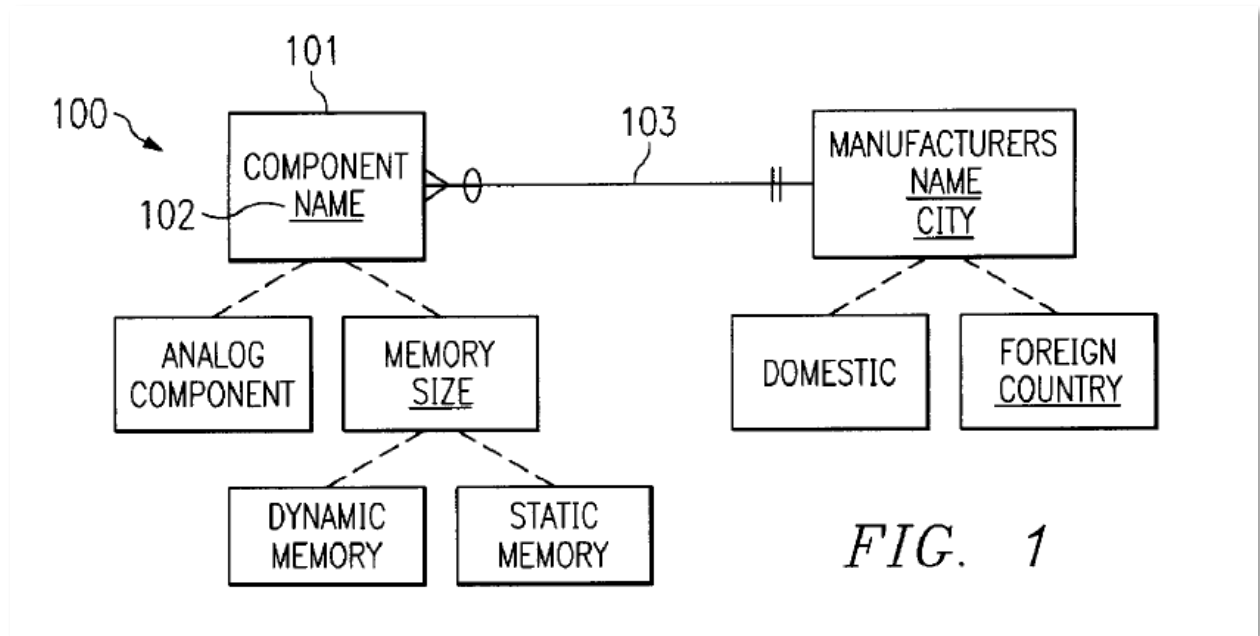

Each class is represented by an individual class table of the same *name of the classes*: “table 800 component, a table 800 analog component, a table 800 memory, a table 800 dynamic memory, a table 800 static memory, a table 800 manufacturer, a table 800 domestic manufacturer, and a table 800 foreign manufacturer.” *Id.*, 23:67-24:8. Indeed, for each “table 800,” the system creates “a column 810 ‘name’.” *Id.*, 24:18-19. Thus, Althoff’s individual class tables (*i.e.*, *the element attribute module*) are each *identified using the name of the class that they represent*. Ex. 1003, ¶156.

11. **Claim 14:** The computerized system of claim 1, wherein the processor is configured to generate a data model of the plurality of elements based on the one or more layers of metadata.

Generating a data model of the plurality of elements based on the one or more layers of metadata stored in the data repository: In the Althoff-Moore

combination, Althoff's meta-model discloses this limitation. Ex. 1003, ¶¶157-58.


As described above, Althoff discloses a general purpose computer that includes a hardware-based **processor** and objects (*i.e.* **elements**) that are part of the "user's object database." Althoff's teaches the **data model** as "a meta-model of the user's object database, which is itself an object database, and has been translated into a set of relational database structures for manipulation by a relational database engine." Ex. 1006, Abstract. Althoff further discloses **one or more layers of meta data** of the objects (*i.e.*, elements) stored in "a meta-model of the user's object database." *Id.*, 3:25-29. Thus, a POSITA would understand that Althoff's meta-model (*i.e.*, data model) of objects (*i.e.*, elements) is **generated by the processor based on the one or more layers of meta-data**, when the object database is translated into a set of relational database structures. Ex. 1003, ¶158.

12. **Claim 15: The computerized system of claim 1, wherein the processor is configured to generate a dynamic user-interface for manipulating the plurality of elements based on the one or more layers of metadata.**

[G]enerating a dynamic user-interface for manipulating the plurality of elements based on the one or more layers of metadata: In the Althoff-Moore combination, this limitation is disclosed by Althoff's GUI. Ex. 1003, ¶¶159-61. Althoff's database meta-model stores meta-data (*i.e.*, **the layers of metadata**). Althoff also teaches a Graphic User Interface (GUI) (*i.e.*, **a dynamic user interface**) that enables **manipulating the elements** stored in the database model: "In a preferred

embodiment, the user interface 210 comprises a graphical user interface 211 ('GUI'), having editing tools for creating and editing the user database model 230.” Ex. 1006, 6:55-63; Ex. 1003, ¶159.

Althoff further teaches that “[t]he functions provided by the GUI 211 ... are further described with regard to FIG. 6.” *Id.*, 19-22. As shown below in Figure 6, the GUI include functions for **manipulating data stored in the database** through the ability to create, edit, and delete classes, class properties, and relationships. Ex. 1003, ¶160. A POSITA would understand that Althoff’s GUI is **based on the layers of metadata** because the interface displays information about the object-database that is included in Althoff’s meta-model. Ex. 1003, ¶161.

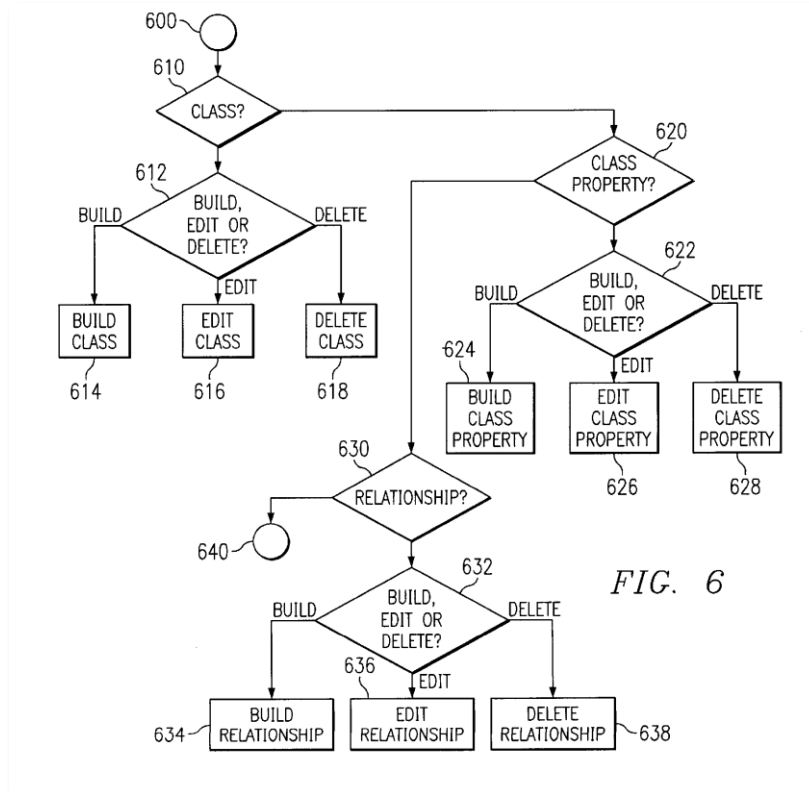

Ex. 1006, Fig. 6.

- 13. Claim 16: The computerized system of claim 1, wherein the at least one class is defined by two or more SQL picklist types that are contained in the same class.**

[W]herein the at least one class is defined by two or more SQL picklist types that are contained in the same class: In the Althoff-Moore combination, this limitation is disclosed by Althoff. Ex. 1003, ¶¶162-63. As discussed above for claim 4, Althoff discloses a class can restrict its values to an Enumerated Valid Value or a Range Valid Value type, which are SQL picklist types. A POSITA would understand that a value could specify both an enumerated value and a range value, such as an Enumerated Valid Value of {1, 2, 4, 10} and a Range Valid Value of {13-18}. Ex. 1003, ¶163. Moreover, Althoff discloses that its meta-model 220 has both “Enumerated Valid Value” and “Range Valid Value” objects. See Ex. 1006, Table 3-1.

14. Claims 17, 20-27, 30-33, 36-43, 46-47

Claims 17, 20-27, 30-32 and claims 33, 36-43, 46-47 mirror claims 1, 4-11, 14-16 as set forth in the following chart. The combination of Althoff and Moore renders these claims obvious for the same reasons set forth above. Ex. 1003, ¶164.

Claim Limitation	Corresponding Claim Limitation(s)
17pre	1pre
17a	1b, 1c

Claim Limitation	Corresponding Claim Limitation(s)
17b	1d
17c	1e
17d	1f
17e	1g
17f	1h
17g	1i
17h	1j
17i	1i
20	4
21	5
22	6
23	7
24	8
25	9
26	10
27	11
30	14
31	15
32	16
33pre	1pre, 1a
33a	1b, 1c

Claim Limitation	Corresponding Claim Limitation(s)
33b	1d
33c	1e
33d	1f
33e	1g
33f	1h
33g	1i
33h	1j
33i	1i
36	4
37	5
38	6
39	7
40	8
41	9
42	10
43	11
46	14
47	15

B. Ground 2: Althoff in view of Moore in further view of Nye renders obvious claims 2-3, 18-19, 34-35

Ground 2 further modifies the Althoff-Moore combination with Nye’s event model. The resulting combination renders obvious claims 2-3, 18-19, and 34-35. Ex. 1003, ¶¶165-90.

1. Rationale to Combine Althoff, Moore and Nye

A POSITA would have found it obvious to modify Althoff’s object-oriented relational database (as modified by Moore’s virtual folder system) to include Nye’s teachings of an event model. Ex. 1003, ¶¶165-76.

Specifically, a POSITA would have been motivated to combine Nye’s teachings of an event model into Althoff’s database (as modified by Moore’s virtual folder system) to achieve the known benefits of combining a state machine with the OO model. *Id.*, ¶¶168-173, 175. As Nye itself explains, its event model “allows a developer to **add complex dependency logic** to an existing database without having to modify the underlying structure of the database.” Ex. 1005, Abstract. In particular, by “using an event model,” a database can “flexibly handle state transitions,” *i.e.* when “the records [in a database] change over time.” *Id.*, 5:38-42. Since Nye’s event model models state transitions, a POSITA would understand that it is a state machine. Ex. 1003, ¶168. A POSITA would understand that the integration of state machines into the OO model taught by Althoff provides many additional benefits. One such benefit is that state machines are a very clear way to

describe behavior of a system. At a high-level, a state machine allows a developer to describe the different “modes” of operation of the system and how the system transitions through each mode. Ex. 1003, ¶171. A POSITA would have also understood that a state machine has the added benefit of making an OO database more robust, easier to maintain and work with, as a state machine presents data in a far more readable fashion than underlying software source code. *Id.* Likewise, state machines describe the behavior of the system independently of the code. *Id.* This enables developers to subsequently translate the state machine into code in multiple languages or dynamically change the behavior of the system by changing the model of states. *Id.* Given the known benefits of state machines, it is unsurprising that they were commonly combined with the OO model. *Id.*

As explained by Dr. White, it had been “long-standing practice to integrate state machines such as the one taught by Nye’s event model into object-oriented software development systems.” *Id.* Such state machines were long-known and common in the field of software development. *Id.* The integration of the state machine model to define and manage a process where an object has a defined state, and transitions between states, referred to as the *State Pattern*, was common practice in the industry at least by the 1990s. *Id.*

A POSITA would have been further motivated to combine Nye’s teachings of an event model into Althoff’s relational database because it would further Althoff’s

goal of representing the OO model in a relational model. Ex. 1003, ¶172; Ex. 1006, 3:4-9 (“[I]t would be advantageous to provide a method of compilation and translation ... which obtains the advantages of objec-oriented database applications, while retaining the ability to use present relational database management system.”). A POSITA knew that state machines provided such advantages. Ex. 1003, ¶172.

A POSITA would have combined Althoff, Moore and Nye with a reasonable expectation of success. Ex. 1003, ¶174. The use of Nye’s event model was compatible with Althoff’s objected-oriented database (as well as Moore’s virtual folder system used with a relational database), as Nye’s event model was used with “relational databases, object-oriented databases, or other database environments.” *Id.*; Ex. 1005, 6:41-43. Further, Nye disclosed that the event model was used “without having to modify the underlying structure of the database.” *Id.*, 6:47-48. The implementation of Nye’s event model was well within the capabilities of a POSITA at the time of the ’585 patent. Ex. 1003, ¶175.

Moreover, the combination of Althoff, Moore, and Nye would have yielded predictable results. A POSITA would have readily understood that combining Althoff, Moore and Nye would enable event modeling in Althoff’s database, and would thus further the functionality of Althoff’s system. *Id.*, ¶176. Further, a POSITA would have understood that this result would be predictable because Nye specifically discloses how to implement the event model in other databases and the

results that would be achieved in existing database environments, such as the environment taught by Althoff. *Id.*

Moreover, Althoff, Moore, Nye, and the '585 patent are analogous art because they are all directed to the same field of computer data storage, more specifically storing and managing data sets in a database system. Ex. 1001, 1:61-65; Ex. 1003, ¶167.

2. Claim 2: The computerized system of claim 1, wherein the data repository further comprises:


- (a) 2[a]: a state machine module including a state machine transition module and a status module, the state machine module configured to define and store a state machine type,**

[A] state machine module including a state machine transition module configured to define and store a state machine type: In the Althoff-Moore-Nye combination, Nye's collection of event states discloses this limitation. Ex. 1003, ¶¶177-81. Nye teaches that the elements, referred to as records in a database, may be updated and that the "***status of records in a database change over time.***" Ex. 1005, 5:28-42. Nye refers to a status of a record as the "state" of a record. *Id.* Nye further teaches that the event model "***provides a way to flexibly handle state transitions.***" *Id.* For example, Nye teaches that "if a set of events relating to credit card authorization system is modeled, then the developer might choose to create the following event states: 'authorization approved,' 'authorization declined,' 'hardware

error—cannot retry,’ ‘line is busy—retry later.’” *Id.*, 12:39-46. Nye’s collection of event states is a **state machine module** that represents the various event states and the transitions between those states, and Nye’s state transitions describe the functionality of **a state machine transition module** included in the state machine module. Ex. 1003, ¶178. Nye also teaches **defining and storing** different **state machine types** consisting of different collections of event states by explaining that “the event model is flexible and may ‘represent anything it is defined to represent.’” *Id.*, Abstract.

[A] state machine module including a status module: As noted above, Nye teaches **a state machine**, referred to in Nye as a collection of possible event states for a record as shown through the example of a credit card authorization process. Ex. 1003, ¶180. The **status of the state machine** is the current event status for a given event from the collection of possible event statuses: “The events 301-308 illustrated in FIG. 3 each have an event state 310. An event state 310 is defined by the developer and varies according to the event that is created.” *Id.*, 12:39-41. Nye refers to this as the record state (*i.e.*, **status module**) that changes over time based on state transitions: “Over time the status of a record in the database changes. A record that was once the newest record is no longer the newest record when another record is entered. The **status of a record is referred to as the records state.**” *Id.*, 7:10-13.

Nye teaches that the ***record status is stored in the database*** and can be used to categorize elements (e.g., “users”) according to their record status: “In one embodiment of the invention the data contained in a database is categorized according to its status. Referring now to FIG. 8 for example, a database of users 800 can be categorized according to the users 801-806 current status.” *Id.*, 7:23-26. As shown below in Figure 8, Nye teaches a ***state machine*** comprised of ***three event states for a user’s record status***: “Free trial subscription category 820 ... paying subscribers category 830 ... canceled subscriptions category 840.” *Id.*, 7:26-37. Nye’s ***record status stores the status of the state machine*** for a given user by storing one of the three event states that correspond to the user. Ex. 1003, ¶181.

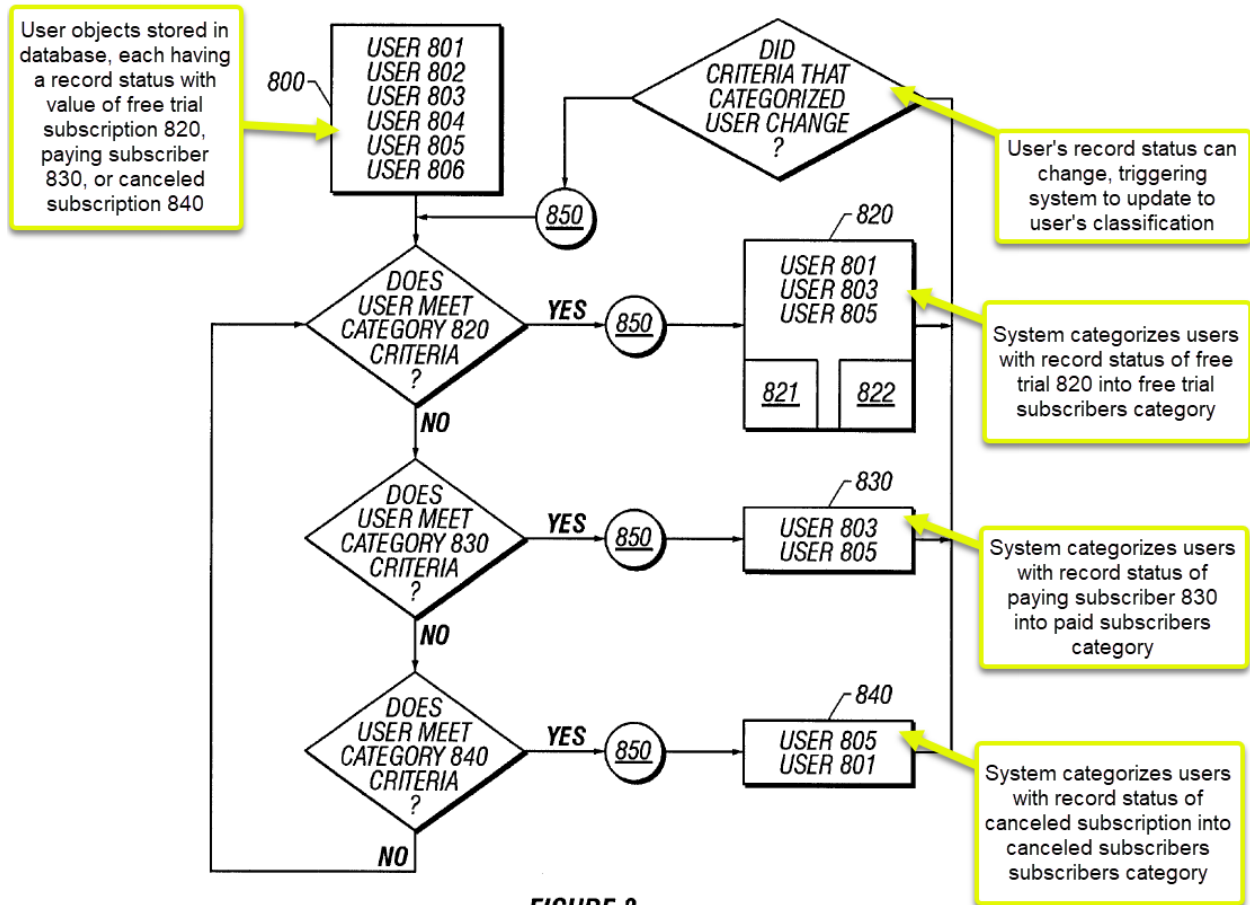

Id., Fig. 8.

- (b) 2[b]: the state machine type storing a first status of one element of the plurality of elements and a transition to a second status of the one element.

[T]he state machine type storing a first status of one element of the plurality of elements and a transition to a second status of the one element: In the Althoff-Moore-Nye combination, Nye's event_dependency table discloses this limitation. Ex. 1003, ¶¶182-85. Nye's event model teaches a state machine as an event comprised of a collection of event states, and the record status of the event state at a given time as the status of the state machine. Ex. 1003, ¶¶183-84. Nye teaches that

Id., Fig. 4.



3. **Claim 3: The computerized system of claim 2, wherein the state machine module defines and stores at least one forward transition connection, the at least one forward transition connection restricting the transition from the first status of the one element to the second status of the one element.**

[W]herein the state machine module defines at least one forward transition connection, the at least one forward transition connection restricting the transition from the first status of the one element to the second status of the one element: In the Althoff-Moore-Nye combination, this limitation is disclosed by Nye’s event trigger. Ex. 1003, ¶¶186-89. As described above, Nye teaches that the event is comprised of possible event states for each record at a given time, and the status for each record at a given time. *Id.*, ¶187. As shown below in Figure 5, Nye further teaches that transitions between event states are “***optionally contingent upon a condition.***” Ex. 1005, 10:62-67. For example, “[e]vent 503 ... has a ***condition 532 that causes an action 533 to occur.***” *Id.*

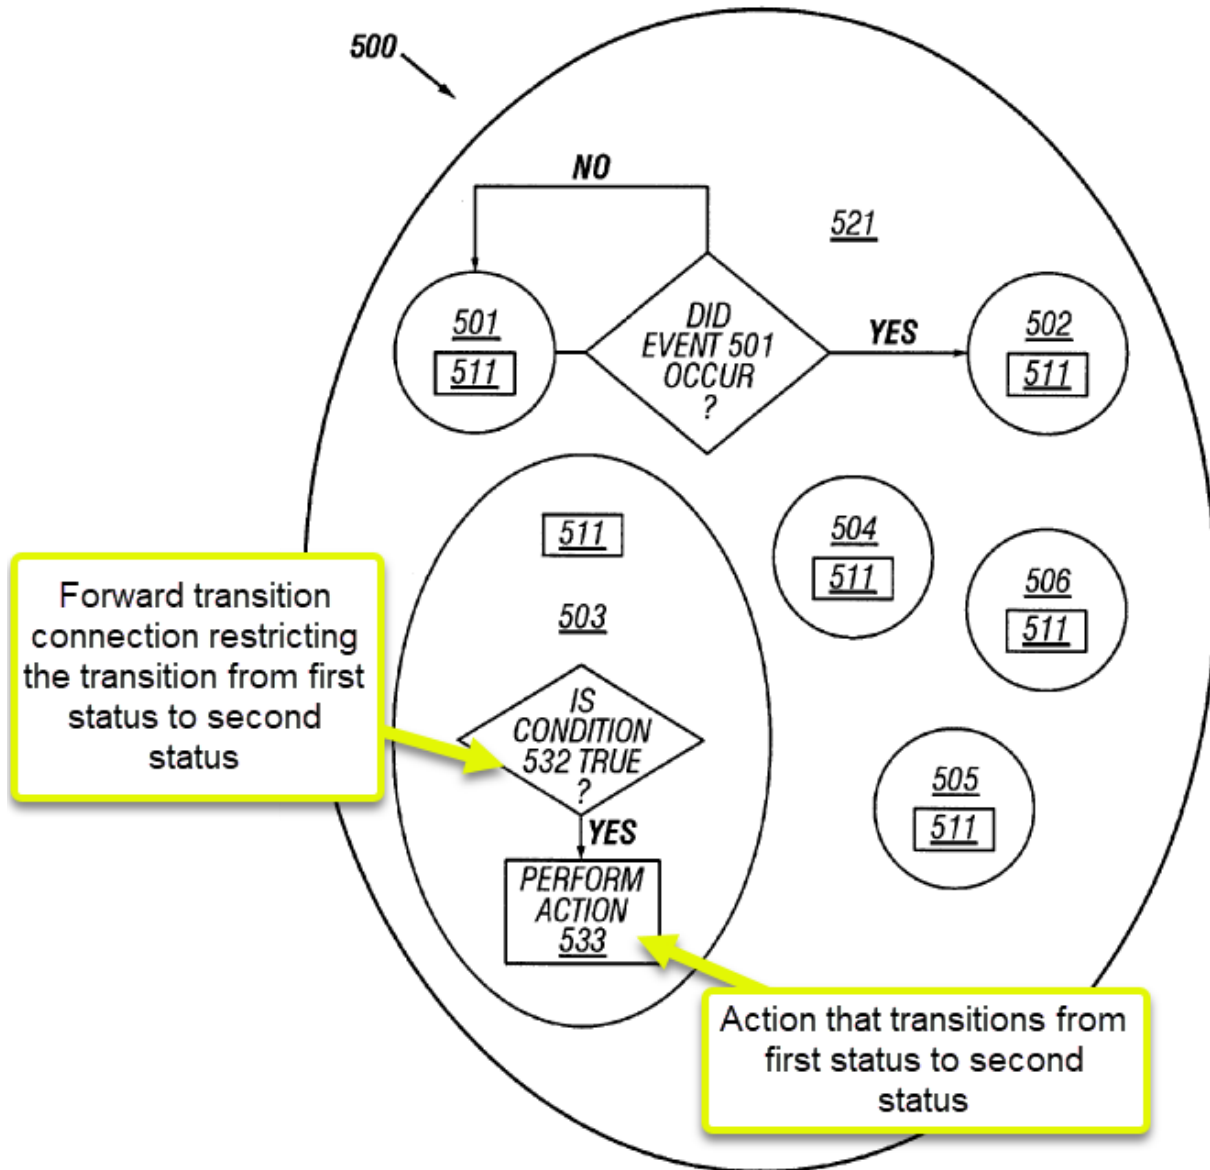


FIGURE 5

Id., Fig. 5. Nye teaches that the action is an “an **event trigger function** ... which takes as input the set of events upon which E depends and their respective states, and which returns a value of one or zero **indicating whether the event E is triggered or not triggered.**” *Id.*, 15:42-46.

[R]estricting the transition from the first status of the one element to the second status of the one element: Nye’s event trigger performs this limitation: “In one embodiment of the invention the ***state of an event is computed only if the event is triggered.*** ... An event state function is a stored procedure which computes an event_state and event_state_id based on the outcome of the actions it attempts to perform.” *Id.*, 15:48-55. Thus, Nye’s event trigger function ***defines a forward transition connection*** that restricts the transition from the first state to the second state (*i.e.*, status), as claimed. Ex. 1003, ¶188.

[S]tores at least one forward transition connection: Nye’s teaches that an event function is a “***stored procedure.***” *Id.*, 15:48-55. A POSITA would understand that the stored procedure stores the event function in the relational database because it must be referenced for conditional state transitions, as described above. Ex. 1003, ¶189.

4. Claims 18-19, 34-35

The limitations of 18-19 and 34-35 are rendered obvious by Althoff, Moore, and Nye for the same reasons as discussed in connection with claims 2 and 3. Ex. 1003, ¶190.

C. Ground 3: Althoff in view of Moore in further view of Surjanto renders obvious claims 12-13, 28-29, 44-45

Ground 3 further modifies the Althoff-Moore combination with Surjanto's document management extensions. The resulting combination renders obvious claims 12-13, 28-29, and 44-45. Ex. 1003, ¶¶191-207.

1. Rationale to Combine Althoff, Moore and Surjanto

A POSITA would have found it obvious to further modify Althoff's database (as modified by Moore's virtual folder system) with Surjanto's XML document management extensions. Ex. 1003, ¶¶191-201. A POSITA would have been motivated to make this combination because of the well-known benefits of Surjanto's extensions, which were specifically designed to extend OO databases like Althoff's to provide the known benefits of XML document support, such as "allow[ing] users to reuse and process textual portions of document contents," "enabl[ing] collaborative development of documents" and in general "offer[ing] comprehensive content management functionality." Ex. 1008, 9; Ex. 1003, ¶193. By supporting Surjanto's extensions, developers could, for example, build XML-supporting web applications using Althoff's database. Ex. 1003, ¶199.

Surjanto teaches database extensions called "XCoP (XML Content Repository)," which "manages textual XML document contents together with their structural information." Ex. 1008, 9. In particular, "XCoP manages both the textual representation of XML document contents ... and the corresponding structural

information” by providing “a conceptual model and a set of operations that support the processing of textual contents and structural information.” *Id.*, 11. In other words, Surjanto teaches how to extend OO databases to support storage and manipulation of complex XML documents, both their text and their structure. Ex. 1003, ¶195.

A POSITA would be motivated to modify Althoff (and Moore) to include Surjanto’s XCoP extensions because of the well-known benefits of XML document support. Ex. 1003, ¶¶193-99. Surjanto itself notes XCoP allows “users to reuse and process textual portions of document contents.” Ex. 1008, 9. Indeed, Surjanto provides an entire list of benefits from its extensions. *Id.*, 10-11 (describing benefits for “Content Ruse,” “Exploitation of Structural Information,” “Content Consistency Enforcement,” etc.); Ex. 1003, ¶¶194-95.

One reason a POSITA would have incorporated Surjanto is because it enables developers to build web applications on top of the Althoff/Moore database. Ex. 1003, ¶199. A web application is application software that is accessed over the internet using a web browser. *Id.* In the 1990s and early 2000s, the use of web applications was rapidly growing. A POSITA would have been motivated to integrate Surjanto’s XML extensions into the combined database system of Althoff/Moore to extend the types of applications that could be built ontop of the database to include web applications. At the time of the invention of Althoff, it was

commonly understood that “XML is the key technology for the next generation of Web applications and will become the standard format for data representation and data exchange on the Web.” Ex. 1008, 10; Ex. 1003, ¶199. It was well-known that “[t]he potential impact of XML is obvious” since XML is “a single language for specifying the huge amount of information produced and consumed over the Web” and “provide[s] better interoperability among information providers as well as easier handling of documents by applications.” *Id.* Thus, a POSITA using Althoff’s OO database for web applications, would have readily looked to XML, such as disclosed Surjanto, for storage in its database system. Ex. 1003, ¶199.

Also, Althoff is exactly the type of object-relational database similar to ORDBMS databases which Surjanto sought to extend. Ex. 1003, ¶196. Surjanto notes that “[w]ith the advent of object-relational database management systems (ORDBMSs) [Sto98], developers can extend the database system.” Ex. 1008, 9. Surjanto “develop[ed] XcoP as part of an integrated Web database framework ... which is built by our database research group using the extensibility features of an ORDBMS.” *Id.*, 9-10. Althoff likewise discloses “object-oriented database structures,” including “[a] meta-model of the user’s object database,” provides “a set of classes, objects, and relationships between classes.” Ex. 1006, Abstract. A POSITA would readily understand Althoff’s “object-oriented database” is a type of

the “object-relational database management systems” that Surjanto sought to extend.

Ex. 1003, ¶197, Ex. 1008, 9.

A POSITA would have combined Althoff, Moore, and Surjanto with a reasonable expectation of success. Ex. 1003, ¶200. Althoff’s OO database and database model was compatible with Surjanto, as expressly taught by Surjanto—and the use of Moore’s virtual folder system would also be compatible. *Id.* Indeed, Surjanto provides detailed instructions for implementing its extensions into a database like Althoff’s as modified by Moore’s virtual folder system. Ex. 1008, 14-17. The implementation of Surjanto’s extensions was well within the capabilities of a POSITA at the time of the ’585 patent, and nothing in Surjanto indicates that a POSITA would have found implementation difficult or unpredictable. Ex. 1003, ¶165.

Moreover, the combination of Althoff, Moore, and Surjanto would have yielded predictable results. Ex. 1003, ¶201. A POSITA would have readily understood that combining Althoff, Moore, and Surjanto would result in a platform for storing the contents of Althoff’s database in a web application, and would further allow for interoperability between data from different sources, as expressly taught by Surjanto—while also providing for Moore’s virtual folder representation of the data taught by Surjanto. Ex. 1003, ¶201. Indeed, Surjanto explains that this result would be predictable because “XcoP is flexibly configurable.” Ex. 1008, Abstract.

Thus, Surjanto would have been readily combined with other database platforms like Althoff and Moore to achieve the predictable benefits taught by Surjanto. Ex. 1003, ¶201.

Additionally, Althoff, Moore, and Surjanto are all directed to the same endeavor, a data model for a database system. Ex. 1003, ¶191. Althoff specifically teaches representing data and relationships from the OO model to a relational database. Moore specifically teaches an event model to add complex dependency logic to an existing database including relational databases, OO databases, or other database environments. Surjanto specifically teaches a database management system that improves content management of documents. Like Althoff, Moore, and Surjanto, the '585 patent is directed to the field of computer data storage, more specifically storing and managing data sets in a database system. Ex. 1001, 1:61-65. All four references, therefore, are directed to the same field of endeavor, and are analogous art. Ex. 1003, ¶192.

2. **Claim 12: The computerized system of claim 11, wherein the data repository further comprises: an element history module configured to store one or more indicators of modification to the plurality of elements.**

[A]n element history module configured to store one or more indicators of modification to plurality of elements: In the Althoff-Moore-Surjanto combination, this limitation is disclosed by Surjanto's fragments. Ex. 1003, ¶¶202-205. Surjanto teaches various *element types* referred to as "object types" including "documents"

and “fragments.” Ex. 1008, 11. Surjanto teaches that “fragments” are “textual portions of document contents.” *Id.*, Abstract. Surjanto further teaches that it “enables collaborative development of documents and facilitates synchronization of fragment **modification and versioning**.” *Id.*, 11. A POSITA would understand that a system for fragment versioning corresponds to an element history module configured to store one or more indicators of modifications to different versions of the same fragment (*i.e.*, **the elements**). Ex. 1003, ¶203. Thus, Surjanto’s system that facilitates “fragment modification and versioning” discloses an element history module that stores indicators of modification to the elements because a fragment is defined in Surjanto as an object type (*i.e.*, element), and version control requires storing one or more indicators of modifications to each of the fragments. Ex. 1003, ¶204.

A POSITA would have been motivated to combine Surjanto’s disclosure of an element history module with Althoff’s relational database to monitor indicators of modifications to the objects (*i.e.*, elements) in Althoff’s relational database. *Id.*, ¶205. This would enable a specific implementation of version control which was a well-known technique at the time of the ’585 Patent. *Id.*

3. Claim 13: The computerized system of claim 12, wherein the data repository further comprises: an element document

module configured to store one or more formatting data for grouping a subset of the plurality of elements.

[A]n element document module configured to store one or more formatting data for grouping and displaying a subset of the elements: In the Althoff-Moore-Surjanto combination, this limitation is disclosed by Althoff's class Class Configuration. Ex. 1003, ¶206. Althoff's class Class Configuration is configured to store "one object for each ***description of a display configuration*** of a class." Ex. 1006, 18:41-43. Althoff's class tables contain objects (*i.e.*, rows) that are ***a subset of the plurality of elements***. *Id.*, 23:23-25. Althoff's class Class Configuration objects include ***formatting data for grouping and displaying a subset of the elements***, including the "maximum display width" of each element, the "relative order for displaying row[s]" of elements, the "relative order for displaying column[s]" of elements, and a "Custom Label" for displaying the elements. *Id.*, Tab. 3-11.

4. Claims 28-29, 44-45

The limitations of 28-29 and 44-45 are rendered obvious by Althoff, Moore, and Surjanto for the same reasons as discussed in connection with claims 12 and 13. Ex. 1003, ¶207.

IX. THE BOARD SHOULD NOT EXERCISE ITS DISCRETION TO DENY THE PETITION

The Board has discretion to deny institution under §314(a) and/or §325(d). However, in addition to the strong merits presented herein, Petitioner also hereby provides a *Sotera*-type stipulation and stipulates that if the PTAB institutes *inter*

partes review in relation to any petition filed by ServiceNow with respect to the '468 Patent, Petitioner will not pursue in the district court litigation any ground raised or that could have been reasonably raised in the instituted IPR with respect to the patent claim subject to the instituted IPR.

Regarding §325(d), the '468 Patent has not previously been challenged at the PTAB. The examiner did not cite or consider any reference in this petition's grounds. Discretionary denial under § 325(d) and *General Plastic* is not warranted.

X. MANDATORY NOTICES AND FEES

A. Real Party-In-Interest

The real party-in-interest for Petitioner is ServiceNow, Inc.

B. Related Matters

1. Related Patent Office Proceedings

Petitioner has filed petitions against the related '468 and '585 patents, which are captioned IPR2023-01071 and IPR2023-01073.

2. Related Litigation

Patent Owner is currently asserting the '585 patent against Petitioner in *InQuisient Inc. v. Servicenow, Inc.*, Case No. 1:22-cv-00900 (D. Del.).

C. Counsel and Service Information

Petitioner provides the following counsel and service information.

Petitioner consents to electronic service to qe-servicenow-inquisient-

iprs@quinnemanuel.com and the email addresses listed in the table below.

Pursuant to 37 C.F.R. § 42.10(b), a Power of Attorney accompanies this Petition.

LEAD COUNSEL	BACK-UP COUNSEL
James M. Glass (Reg. No. 46729) jimglass@quinnemanuel.com QUINN EMANUEL URQUHART & SULLIVAN, LLP 51 Madison Avenue, 22nd Floor New York, NY 10010 Tel: (212) 849-7000 Fax: (212) 849-7100	John T. McKee (Reg. No. 65,926) johnmckee@quinnemanuel.com QUINN EMANUEL URQUHART & SULLIVAN, LLP 51 Madison Avenue, 22nd Floor New York, NY 10010 Tel: (212) 849-7000 Fax: (212) 849-7100 Quincy Lu (Reg. No 76,954) quincylu@quinnemanuel.com QUINN EMANUEL URQUHART & SULLIVAN, LLP 1109 First Avenue, Suite 210 Seattle, WA 98101 Tel: (206) 905-7000 Fax: (206) 905-7100 Joshua Parzivand (Reg. No. 80,650) joshuaparzivand@quinnemanuel.com QUINN EMANUEL URQUHART & SULLIVAN, LLP 555 Twin Dolphin Drive, 5th Floor Redwood City, CA 94065 Tel: (650) 801-5000 Fax: (650) 801-5100

D. Payment of Fees

The undersigned authorizes the Office to charge the fee required for this Petition for *Inter Partes* Review to Deposit Account No. 50-5708. Any additional fees that might be due are also authorized.

XI. CONCLUSION

For at least the foregoing reasons, Petitioner requests institution of an IPR and cancellation of the Challenged Claims.

Date: June 22, 2023

Respectfully submitted,

By: /s/ James M. Glass
James M. Glass

Counsel for Petitioner

**CERTIFICATE OF COMPLIANCE WITH
TYPE-VOLUME LIMITATION, TYPEFACE REQUIREMENTS,
AND TYPE STYLE REQUIREMENTS**

1. This Petition complies with the type-volume limitation of 14,000 words, comprising 13,979 words, as counted using the Microsoft Word software that was used to prepare this paper, excluding the parts exempted by 37 C.F.R. § 42.24(a).

2. This Petition complies with the general format requirements of 37 C.F.R. § 42.6(a) and has been prepared using Microsoft® Word 2016 in 14-point Times New Roman.

Date: June 22, 2023

By: /s/ James M. Glass
James M. Glass
QUINN EMANUEL URQUHART
& SULLIVAN, LLP
51 Madison Avenue, 22nd Floor
New York, NY 10010
Tel: (212) 849-7000
Fax: (212) 849-7100

Counsel for Petitioner

CERTIFICATE OF SERVICE

The undersigned hereby certifies that on June 22, 2023, true and correct copies of the foregoing document and supporting materials were served in its entirety on the Patent Owner at the following address of record as listed on PAIR via Priority Mail Express® or Express Mail:

Finnegan, Henderson, Farabow,
Garrett & Dunner LLP
901 New York Ave., NW
Washington, DC
Official Correspondence Address

Courtesy copies of the same documents were served on Patent Owner by email at the following address of record for Plaintiff in the concurrent litigation matters:

Susan Morrison: morrison@fr.com
Frank Scherkenbach: scherkenbach@fr.com
Adam Kessel: kessel@fr.com
Andrew Pearson: pearson@fr.com
Jason W. Wolff: wolff@fr.com
Excylyn Hardin-Smith: hardin-smith@fr.com
Adil Shaikh: shaikh@fr.com

Date: June 22, 2023

By: /s/ James M. Glass
James Glass
QUINN EMANUEL URQUHART
& SULLIVAN, LLP
51 Madison Avenue, 22nd Floor
New York, NY 10010
Tel: (212) 849-7000
Fax: (212) 849-7100

Counsel for Petitioner