



US007082427B1

(12) **United States Patent**
Seibel et al.

(10) **Patent No.:** **US 7,082,427 B1**
(45) **Date of Patent:** ***Jul. 25, 2006**

(54) **TEXT INDEXING SYSTEM TO INDEX,
QUERY THE ARCHIVE DATABASE
DOCUMENT BY KEYWORD DATA
REPRESENTING THE CONTENT OF THE
DOCUMENTS AND BY CONTACT DATA
ASSOCIATED WITH THE PARTICIPANT
WHO GENERATED THE DOCUMENT**

(75) Inventors: **John C Seibel**, Austin, TX (US); **Yu
Feng**, Maplewood, NJ (US); **Robert L.
Foster**, Austin, TX (US)

(73) Assignee: **ReachForce, Inc.**, Austin, TX (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 324 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **09/865,805**

(22) Filed: **May 24, 2001**

Related U.S. Application Data

(60) Provisional application No. 60/206,772, filed on May
24, 2000.

(51) **Int. Cl.**
G06F 17/30 (2006.01)

(52) **U.S. Cl.** **707/4; 707/6; 707/10; 707/104.1;
709/203; 705/26**

(58) **Field of Classification Search** **707/1-10,
707/100-104.1, 200-205; 715/501.1, 510-513;
709/220-235, 203; 704/235, 251, 246; 345/968;
705/26-27, 1-2, 10-11**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,914,586 A 4/1990 Swinehart et al. 364/200
5,619,648 A 4/1997 Canale et al. 395/200.01

5,630,121 A * 5/1997 Braden-Harder et al. ... 707/102
5,649,114 A 7/1997 Deaton et al. 395/214
5,659,469 A 8/1997 Deaton et al. 395/214
5,742,816 A * 4/1998 Barr et al. 707/3
5,787,422 A 7/1998 Tukey et al. 707/5
5,809,481 A 9/1998 Baron et al. 705/14
5,897,622 A 4/1999 Blinn et al. 705/26
5,924,068 A * 7/1999 Richard et al. 704/260
5,924,105 A 7/1999 Punch, III et al. 707/513
5,974,398 A 10/1999 Hanson et al. 705/14
5,986,690 A * 11/1999 Hendricks 725/60

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1118952 A2 * 7/2001

(Continued)

OTHER PUBLICATIONS

Ian Watson, "A case-based reasoning application for engi-
neering sales support using introspective reasoning", 2000
American association for artificial intelligence, 6 pages.*


(Continued)

Primary Examiner—Srirama Channavajjala

(57) **ABSTRACT**

A text indexing system for collecting business intelligence
about a client, as well as for identifying prospective cus-
tomers of the client, for use in a lead generation system
accessible by the client via the Internet. The text indexing
system has various components, including a data acquisition
process that extracts textual data from various Internet
sources, a database for storing the extracted data, a text
indexing server that executes keyword searches of the
database, and an output repository. A web server provides
client access to the repository, and to the indexing server.

11 Claims, 11 Drawing Sheets

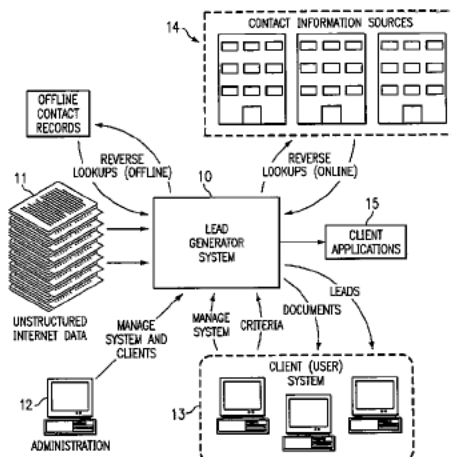

U.S. PATENT DOCUMENTS

5,987,247	A	11/1999	Lau	395/702	6,609,124	B1	8/2003	Chow et al.	707/5
5,999,927	A	12/1999	Tukey et al.	707/5	6,611,839	B1	8/2003	Nwabueze	707/101
6,006,242	A *	12/1999	Poole et al.	715/531	6,615,184	B1 *	9/2003	Hicks	705/26
6,026,433	A *	2/2000	D'Arlach et al.	709/217	6,621,505	B1	9/2003	Beauchamp et al.	345/764
6,029,141	A	2/2000	Bezos et al.	705/27	6,625,598	B1	9/2003	Krafft	707/3
6,029,164	A	2/2000	Birrell et al.	707/3	6,651,048	B1	11/2003	Agrwal et al.	707/2
6,029,174	A	2/2000	Sprenger et al.	707/103	6,651,055	B1	11/2003	Kilmer et al.	707/3
6,029,195	A	2/2000	Herz	709/219	6,651,065	B1 *	11/2003	Brown et al.	707/10
6,034,970	A	3/2000	Levac et al.	370/466	6,665,658	B1 *	12/2003	DaCosta et al.	707/3
6,055,510	A	4/2000	Henrick et al.	705/14	6,668,259	B1	12/2003	Ventura et al.	707/103
6,058,398	A *	5/2000	Lee	707/104.1	6,677,963	B1	1/2004	Mani et al.	345/764
6,058,418	A	5/2000	Kobata	709/221	6,684,207	B1	1/2004	Greenfield et al.	707/3
6,078,891	A	6/2000	Riordan et al.	705/10	6,684,218	B1 *	1/2004	Santos et al.	707/102
6,105,055	A	8/2000	Pizano et al.	709/204	6,700,575	B1	3/2004	Bovarnick et al.	345/440
6,119,101	A *	9/2000	Peckover	705/26	6,700,590	B1	3/2004	DeMesa et al.	345/744
6,134,548	A	10/2000	Gottzman et al.	707/5	6,714,979	B1	3/2004	Brandt et al.	709/225
6,145,003	A	11/2000	Sanu et al.	709/225	6,721,689	B1	4/2004	Markle et al.	702/188
6,148,289	A	11/2000	Virdy	705/1	6,757,689	B1	6/2004	Battas et al.	707/101
6,151,582	A	11/2000	Huang et al.	705/8	6,769,010	B1 *	7/2004	Knapp et al.	709/203
6,151,601	A	11/2000	Papierniak et al.	707/10	6,772,196	B1	8/2004	Kirsch et al.	709/206
6,154,766	A	11/2000	Yost et al.	709/201	6,795,830	B1	9/2004	Banerjee et al.	707/200
6,170,011	B1	1/2001	Macleod Beck et al.	709/224	6,799,221	B1 *	9/2004	Kenner et al.	709/245
6,199,081	B1	3/2001	Meyerzon et al.	707/513	6,804,704	B1	10/2004	Bates et al.	709/217
6,202,210	B1	3/2001	Ludtke	725/20	6,845,370	B1	1/2005	Burkey et al.	707/3
6,205,432	B1	3/2001	Gabbard et al.	705/14	6,868,395	B1	3/2005	Szlam et al.	705/27
6,212,178	B1	4/2001	Beck et al.	370/352	2001/0020242	A1	9/2001	Gupta et al.	707/501.1
6,226,623	B1	5/2001	Schein et al.	705/35	2001/0032092	A1	10/2001	Calver	705/1
6,233,575	B1	5/2001	Agrawal et al.	707/6	2001/0034663	A1	10/2001	Teveler et al.	705/26
6,236,975	B1	5/2001	Boe et al.	705/7	2001/0052003	A1	12/2001	Seki et al.	709/219
6,249,764	B1	6/2001	Kamae et al.	704/270.1	2001/0054004	A1	12/2001	Powers	705/14
6,256,623	B1 *	7/2001	Jones	707/3	2001/0056366	A1	12/2001	Naismith	705/10
6,262,987	B1	7/2001	Mogul	370/400	2002/0016735	A1	2/2002	Runge et al.	705/14
6,263,334	B1	7/2001	Fayyad et al.	707/5	2002/0032603	A1	3/2002	Yeiser	705/14
6,282,548	B1	8/2001	Burner et al.	707/104	2002/0032725	A1	3/2002	Araujo et al.	709/203
6,289,342	B1 *	9/2001	Lawrence et al.	707/7	2002/0035501	A1	3/2002	Handel et al.	705/10
6,332,154	B1	12/2001	Beck et al.	709/204	2002/0035568	A1	3/2002	Benthin et al.	707/102
6,338,066	B1	1/2002	Martin et al.	707/10	2002/0038299	A1	3/2002	Zernik et al.	707/3
6,363,377	B1 *	3/2002	Kravets et al.	707/4	2002/0046138	A1	4/2002	Fitzpatrick et al.	705/27
6,377,993	B1	4/2002	Brandt et al.	709/227	2002/0049622	A1	4/2002	Lettich et al.	705/7
6,381,599	B1 *	4/2002	Jones et al.	707/5	2002/0072982	A1	6/2002	Barton et al.	705/26
6,393,465	B1	5/2002	Leeds	709/207	2002/0073058	A1	6/2002	Kremer et al.	707/1
6,401,091	B1	6/2002	Butler et al.	707/10	2002/0087387	A1	7/2002	Calver et al.	705/10
6,401,118	B1	6/2002	Thomas	709/224	2002/0107701	A1	8/2002	Batty et al.	705/1
6,405,197	B1	6/2002	Gilmour	707/5	2002/0116362	A1	8/2002	Li et al.	707/1
6,430,545	B1	8/2002	Honarvar et al.	706/47	2002/0116484	A1 *	8/2002	Podracky	709/223
6,434,544	B1	8/2002	Bakalash et al.	707/2	2002/0143870	A1	10/2002	Rau	709/204
6,434,548	B1 *	8/2002	Emens et al.	707/3	2002/0161685	A1	10/2002	Dwinnell	705/36
6,438,543	B1 *	8/2002	Kazi et al.	707/5	2002/0178166	A1	11/2002	Hsia	707/100
6,460,069	B1	10/2002	Berlin et al.	709/201	2003/0028896	A1 *	2/2003	Swart et al.	725/127
6,473,756	B1 *	10/2002	Ballard	707/6	2003/0040845	A1	2/2003	Spool et al.	700/291
6,477,536	B1	11/2002	Pasumansky et al.	707/102	2003/0065805	A1	4/2003	Barnes, Jr.	709/231
6,480,842	B1	11/2002	Agassi et al.	707/4	2003/0083922	A1	5/2003	Reed	705/9
6,480,885	B1	11/2002	Olivier	709/207	2003/0120502	A1	6/2003	Robb et al.	705/1
6,490,582	B1	12/2002	Fayyad et al.	707/6	2003/0139975	A1	7/2003	Perkowski	705/26
6,490,620	B1	12/2002	Ditmer et al.	709/224	2004/0002887	A1	1/2004	Fliess et al.	705/9
6,493,703	B1	12/2002	Knight et al.	707/3	2005/0021611	A1 *	1/2005	Knapp et al.	709/203
6,510,432	B1	1/2003	Doyle	707/10	2005/0044280	A1 *	2/2005	Reisman	710/1
6,519,571	B1	2/2003	Guheen et al.	705/14					
6,523,021	B1 *	2/2003	Monberg et al.	707/2					
6,546,416	B1	4/2003	Kirsch	709/206					
6,555,738	B1 *	4/2003	Hughes et al.	84/609					
6,557,008	B1	4/2003	Temple, III et al.	707/104.1					
6,564,209	B1 *	5/2003	Dempski et al.	707/3					
6,567,797	B1	5/2003	Schuetze et al.	707/2					
6,567,803	B1	5/2003	Ramasamy et al.	707/4					
6,571,234	B1 *	5/2003	Knight et al.	707/3					
6,574,619	B1	6/2003	Reddy et al.	707/2					
6,578,009	B1	6/2003	Shinozaki	705/10					
6,581,054	B1	6/2003	Boggett	707/4					
6,598,054	B1	7/2003	Schuetze et al.	707/103					
6,606,644	B1	8/2003	Ford et al.	709/203					

FOREIGN PATENT DOCUMENTS

EP	1 162 558	A1	12/2001	
EP	1555626	A2 *	7/2005	17/30
WO	95/30201		11/1995	
WO	98/21679		5/1998	
WO	98/49641		11/1998	
WO	99/01826	*	1/1999	
WO	99/66446		12/1999	
WO	00/23929		4/2000	
WO	01/22692		3/2001	
WO	01/77935	A2 *	10/2001	

OTHER PUBLICATIONS

80-20 Retriever enterprise edition, End email and file chaos, 80-20 software, 2003, 4 pages.*

Nick Elprin et al. "an analysis of database-driven mail servers", LISA XVII-Oct. 2003, pp. 15-22.*

An Insuma GmbH White Paper, "OASIS Distributed Search Engine", no date, pp. 1-11.*

Mouri,T et al. "extracting new topic contents from hidden web sites", Information technology, coding and computing 2004, proceedings, vol. 1, 2004, pp. 314-319.*

Michael F Schwartz et al. "applying an information gathering architecture to netfind: a white pages tool for a changing and growing internet", IEEE/ACM transactions on networking (TON), vol. 2, issue 5, Oct. 1994, pp. 426-439.*

Luis Gravano et al. "GIOSS: Text-source discovery over the internet", ACM transactions on database systems (TODS), vol. 24, issue 2, 1999, pp. 229-264.*

U.S. Pending Appl. No. 09/862,832 entitled "Web-Based Customer Lead Generator System" filed May 21, 2001, by Seibel, et al.

U.S. Pending Appl. No. 09/862,814 entitled "Web-Based Customer Prospects Harvester System" filed May 21, 2001, filed by Seibel, et al.

Paul Dean, "Browsable OLAP Apps on SQL Server Analysis Services," Intelligent Enterprise Magazine, product review, 5 pages, May 7, 2001.

Journyx and IBM team to deliver enterprise project and time tracking software, article, 3 pages, Apr. 5, 1999.

Optio Software, Inc. NEWS: Optio Software and Syntax.net Reseller Partnership Offers a Robust Solution to Provider and Deliver Customized Documents to Support E-Business and Extend the Reach of the Global Enterprise, 2 pages, Dec. 20, 1999.

Andreas Geyer-Schultz et al., "A customer purchase incidence model applied to recommender services" WEBKDD 2001 Mining Log data across all customer touch points, third international workshop, p. 1-11.

Beantree, "Enterprise Business Application Architecture" Enterprise Business Components Whitepaper, 5 pages, Sep. 1999.

Lee et al., "An enterprise intelligence system integrating WWW intranet resource" IEEE Xplore Release 1.8, pp. 28-35 with abstract, 1999.

Mathur, Srita, "Creating Unique Customer Experiences: The New Business Model of Cross-Enterprise Integration" IEEE Xplore Release 1.8, pp. 76-81 with abstract, 2000.

Pervasive Solution Sheet "Harvesting Unstructured Data", 5 pages, 2003.

Warlick, David, "Searching the Internet: Part III", Raw Materials for the Mind: Teaching & Learning in Information & Technology Rich Schools, ISBN 0-9667432-0-2, Mar. 18, 1999.

Key Building Blocks for Knowledge Management Solutions, "IBM Intelligent Miner for Text" 2 pages, 1999.

Wood, David, "Metadata Searches of Unstructured Textual Content," Tucana Plugged in Software white Paper, 4 pages, Sep. 26, 2002.

Adomavicius et al., "Using Data Mining Methods to Build Customer Profiles", IEEE 2001 computer, pp. 74-82, 2001.

Delen et al., "An Integrated Toolkit for Enterprise Modeling and Analysis", Proceedings of the 1999 winter Simulation Conference, pp. 289-297, 1999.

Griffin et al., "Enterprise Customer Relationship Management", DM review, 15 pages, Dec. 1999.

Parkhomenko et al., "Personalization Using Hybrid Data Mining Approaches in E-Business Applications", Amer. assoc. for Artificial Intelligence, 7 pages, 2002.

Weiss, Gary M., "Data Mining in Telecommunications", 13 pages, no date.

Murtagh, Fionn, "Distributed Information Search and Retrieval for Astronomical Resource Discovery and Data Mining", Library and Information Services in Astronomy III, ASP Conference Series, vol. 153, 1998, pp. 51-60.

* cited by examiner

FIG. 1

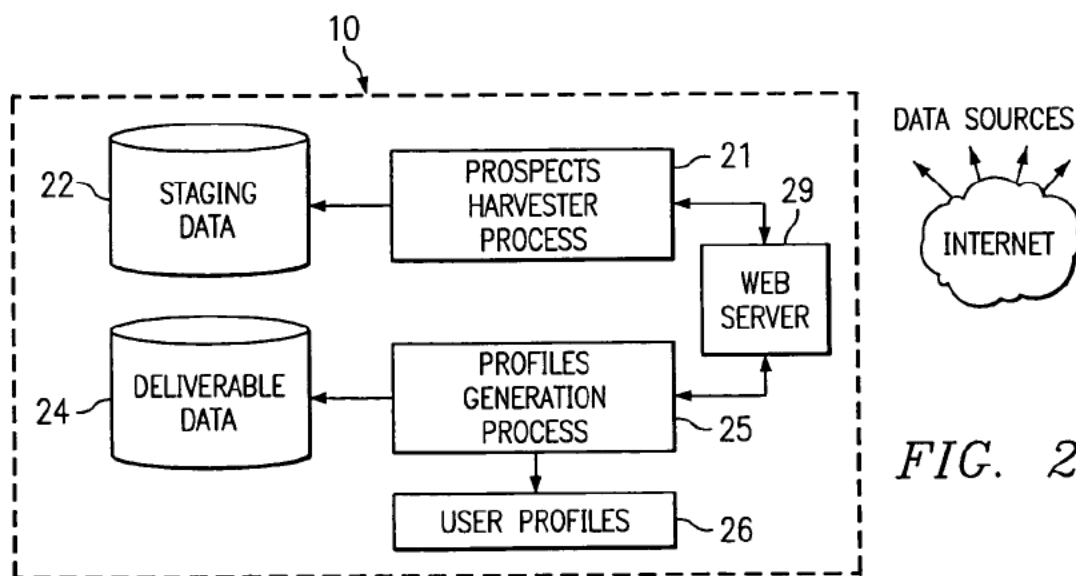
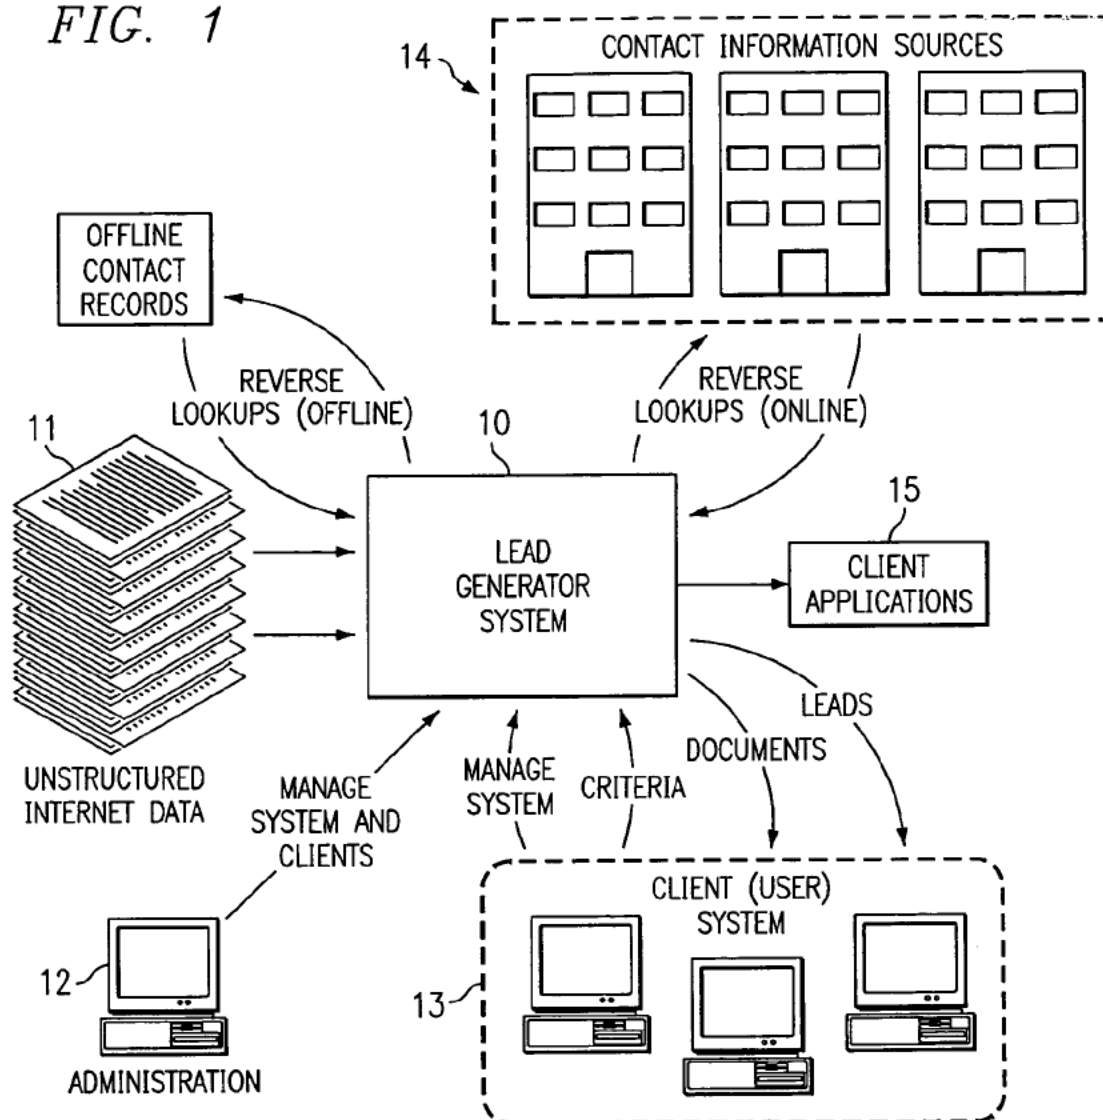


FIG. 2

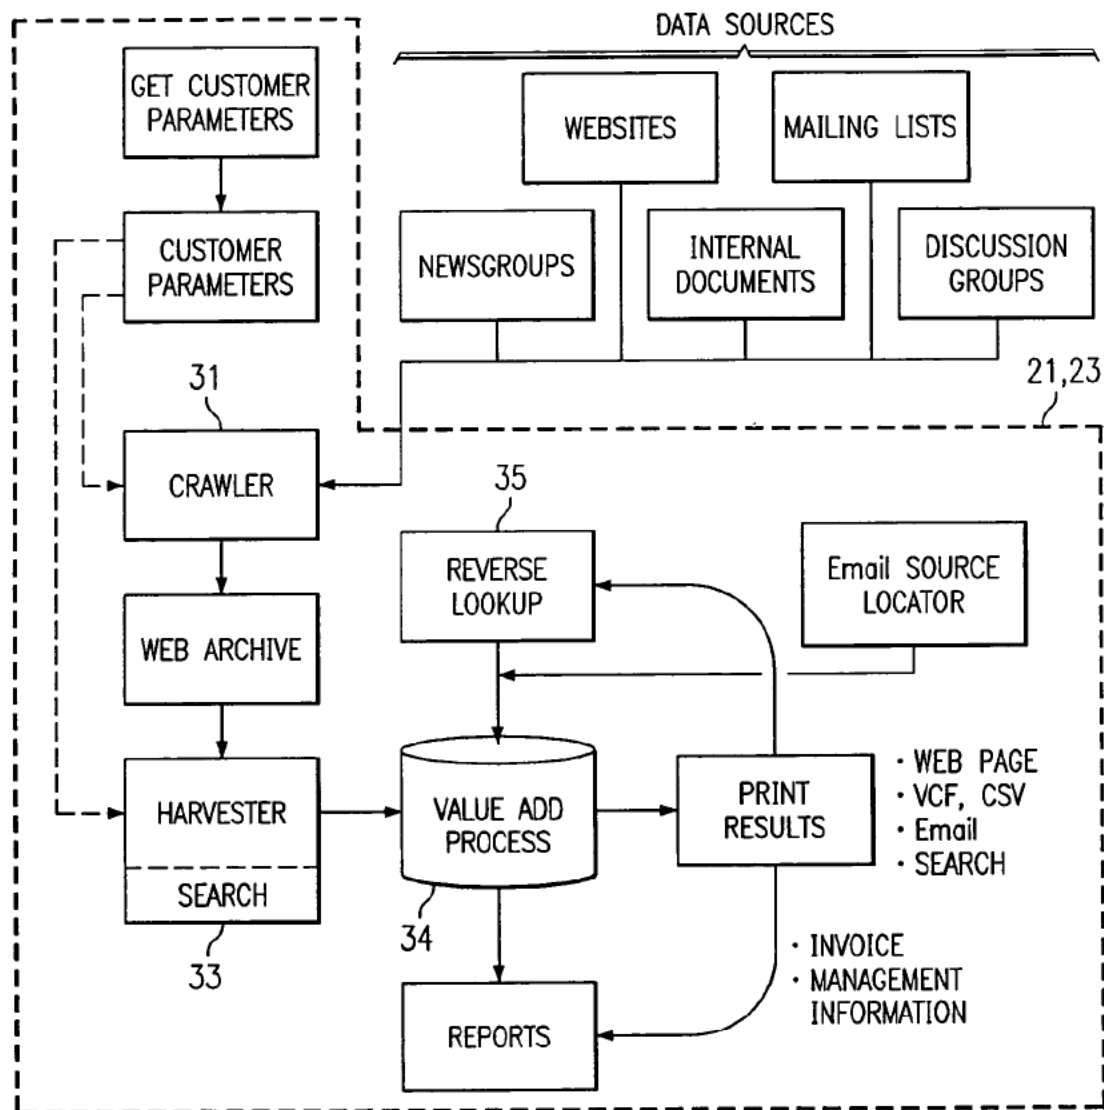


FIG. 3

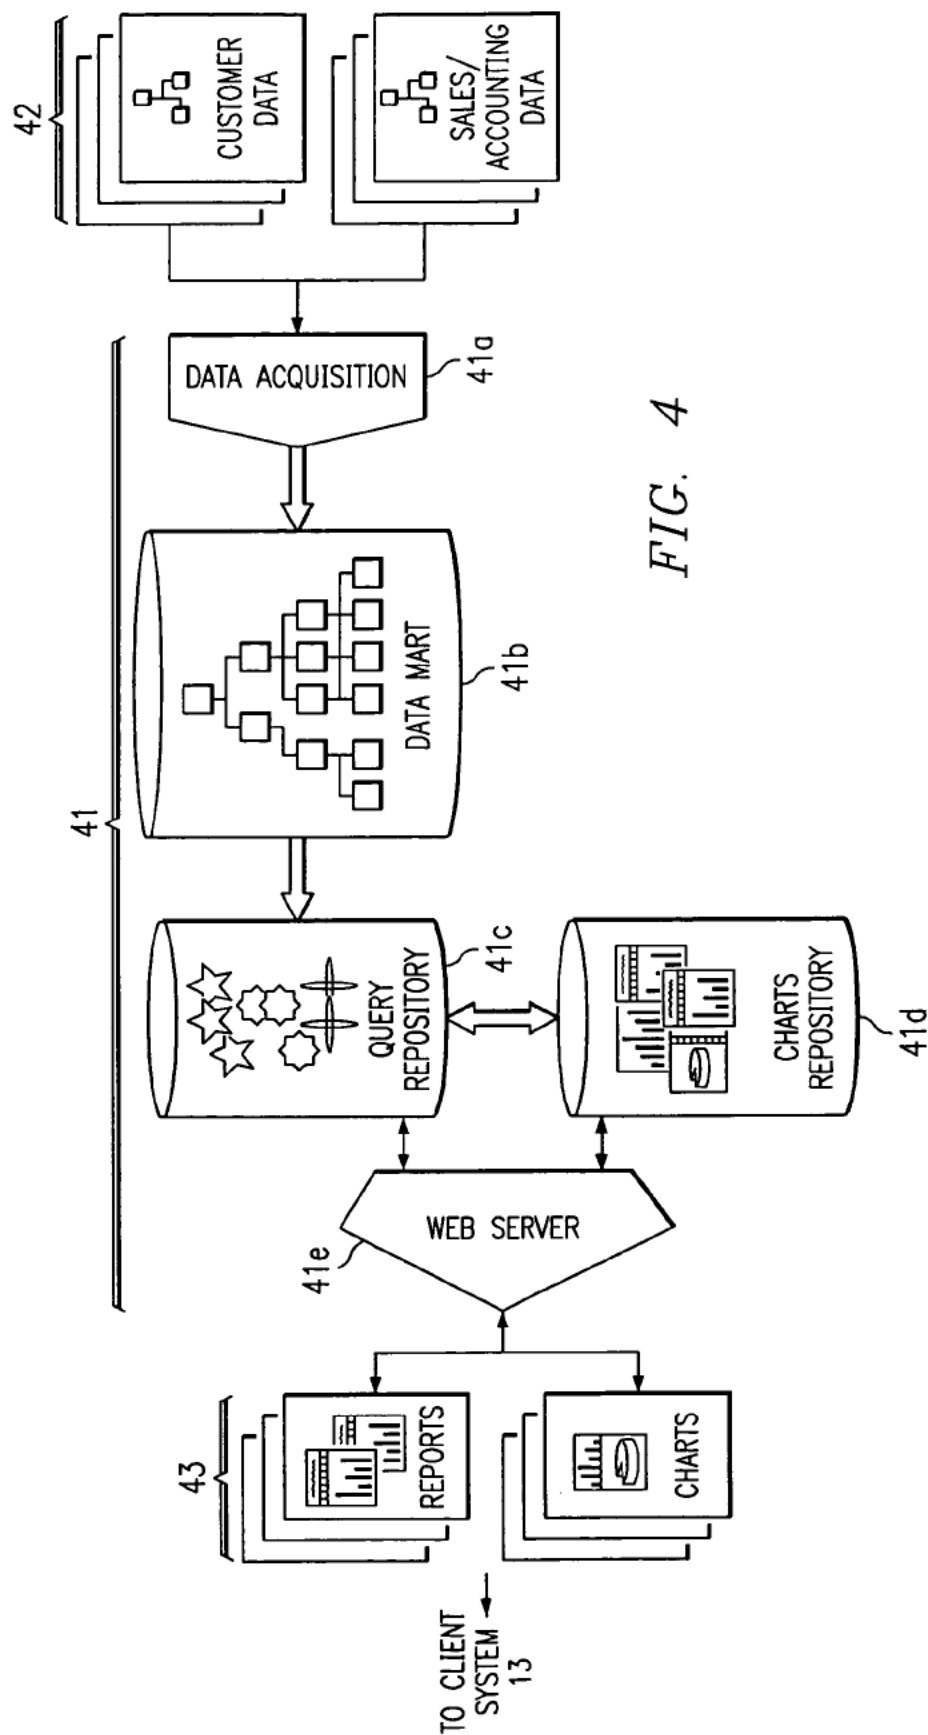
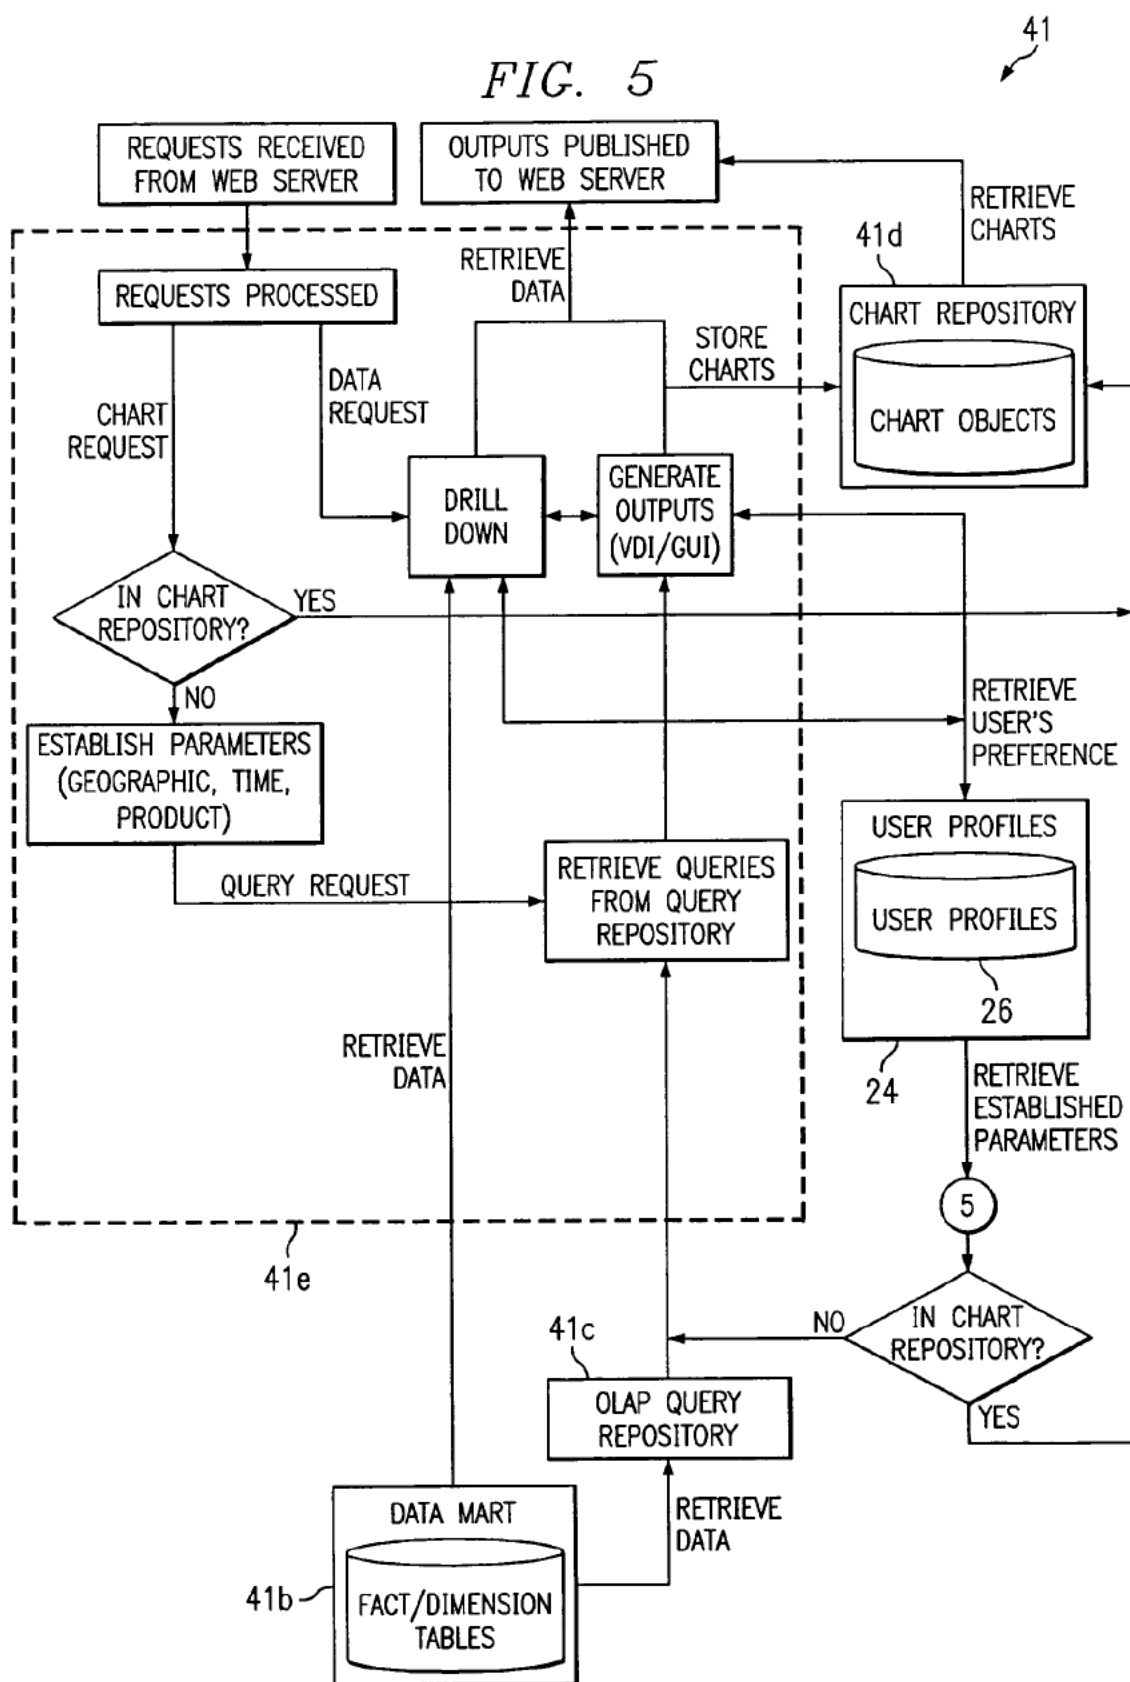


FIG. 5



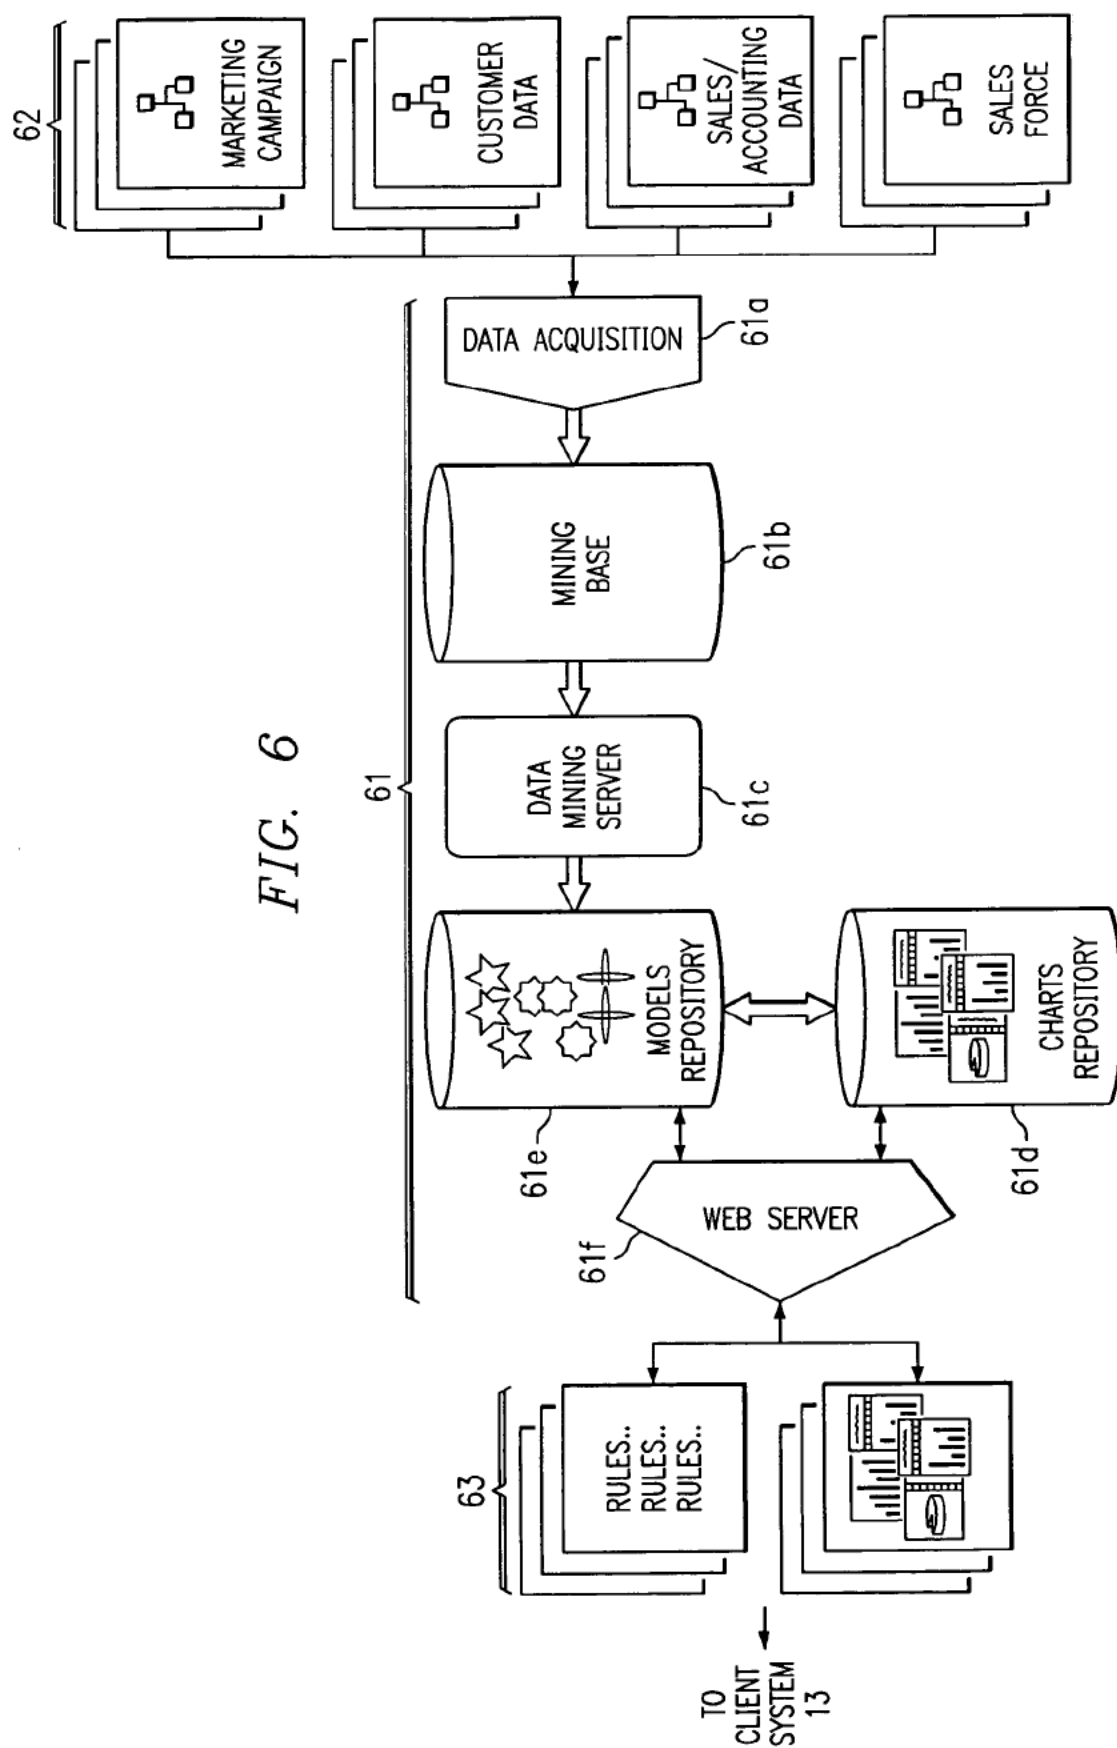
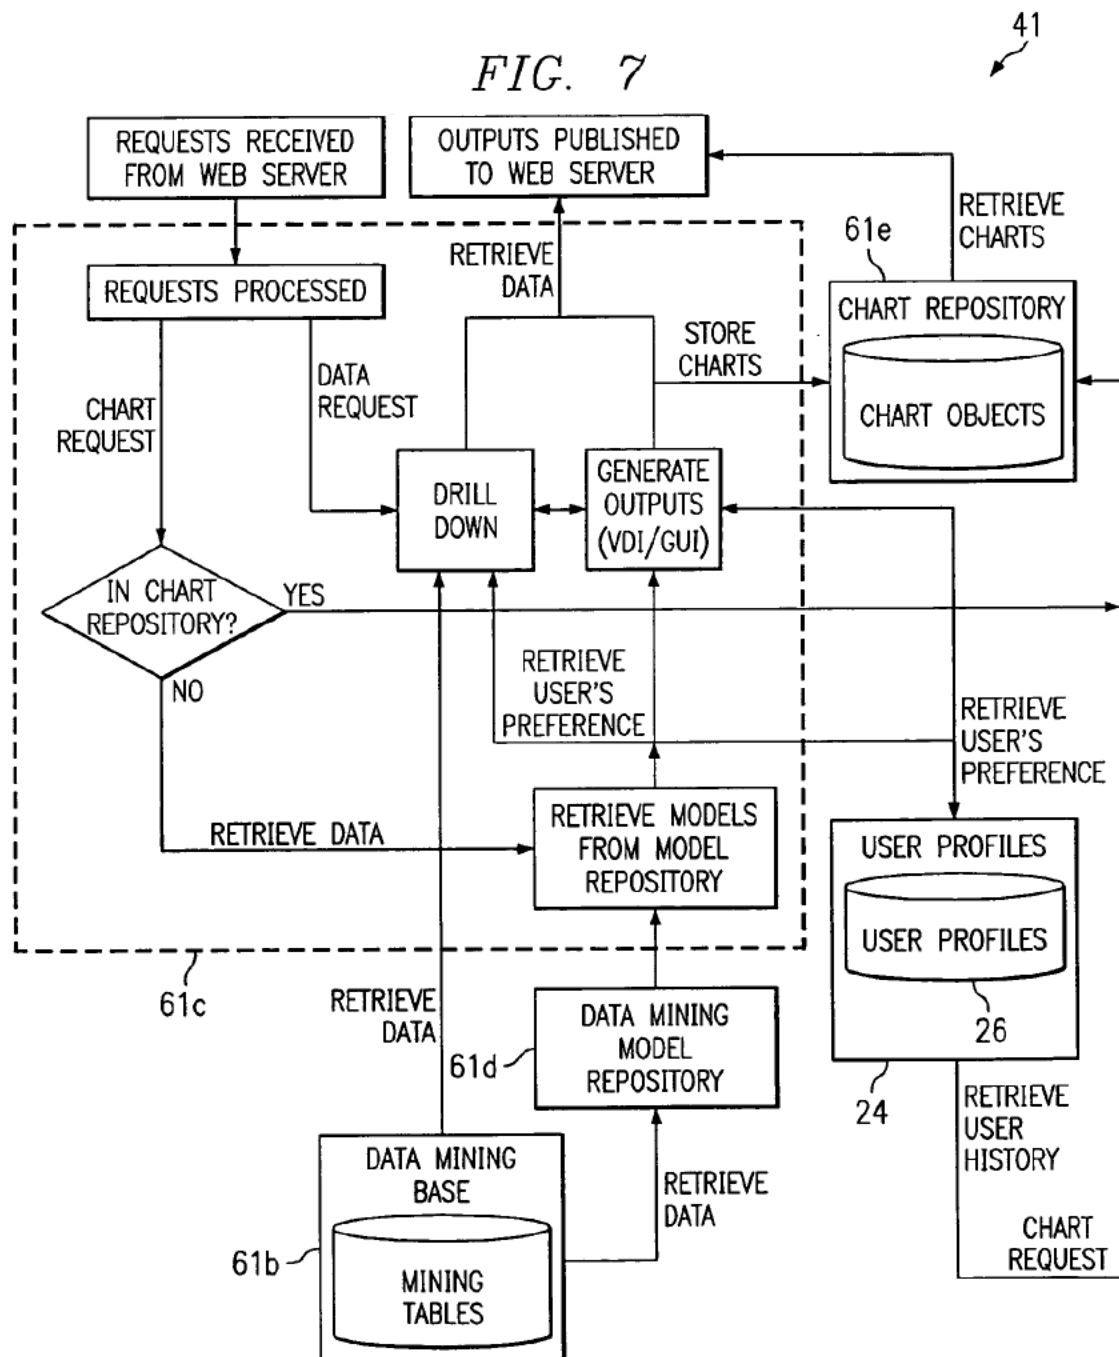


FIG. 7



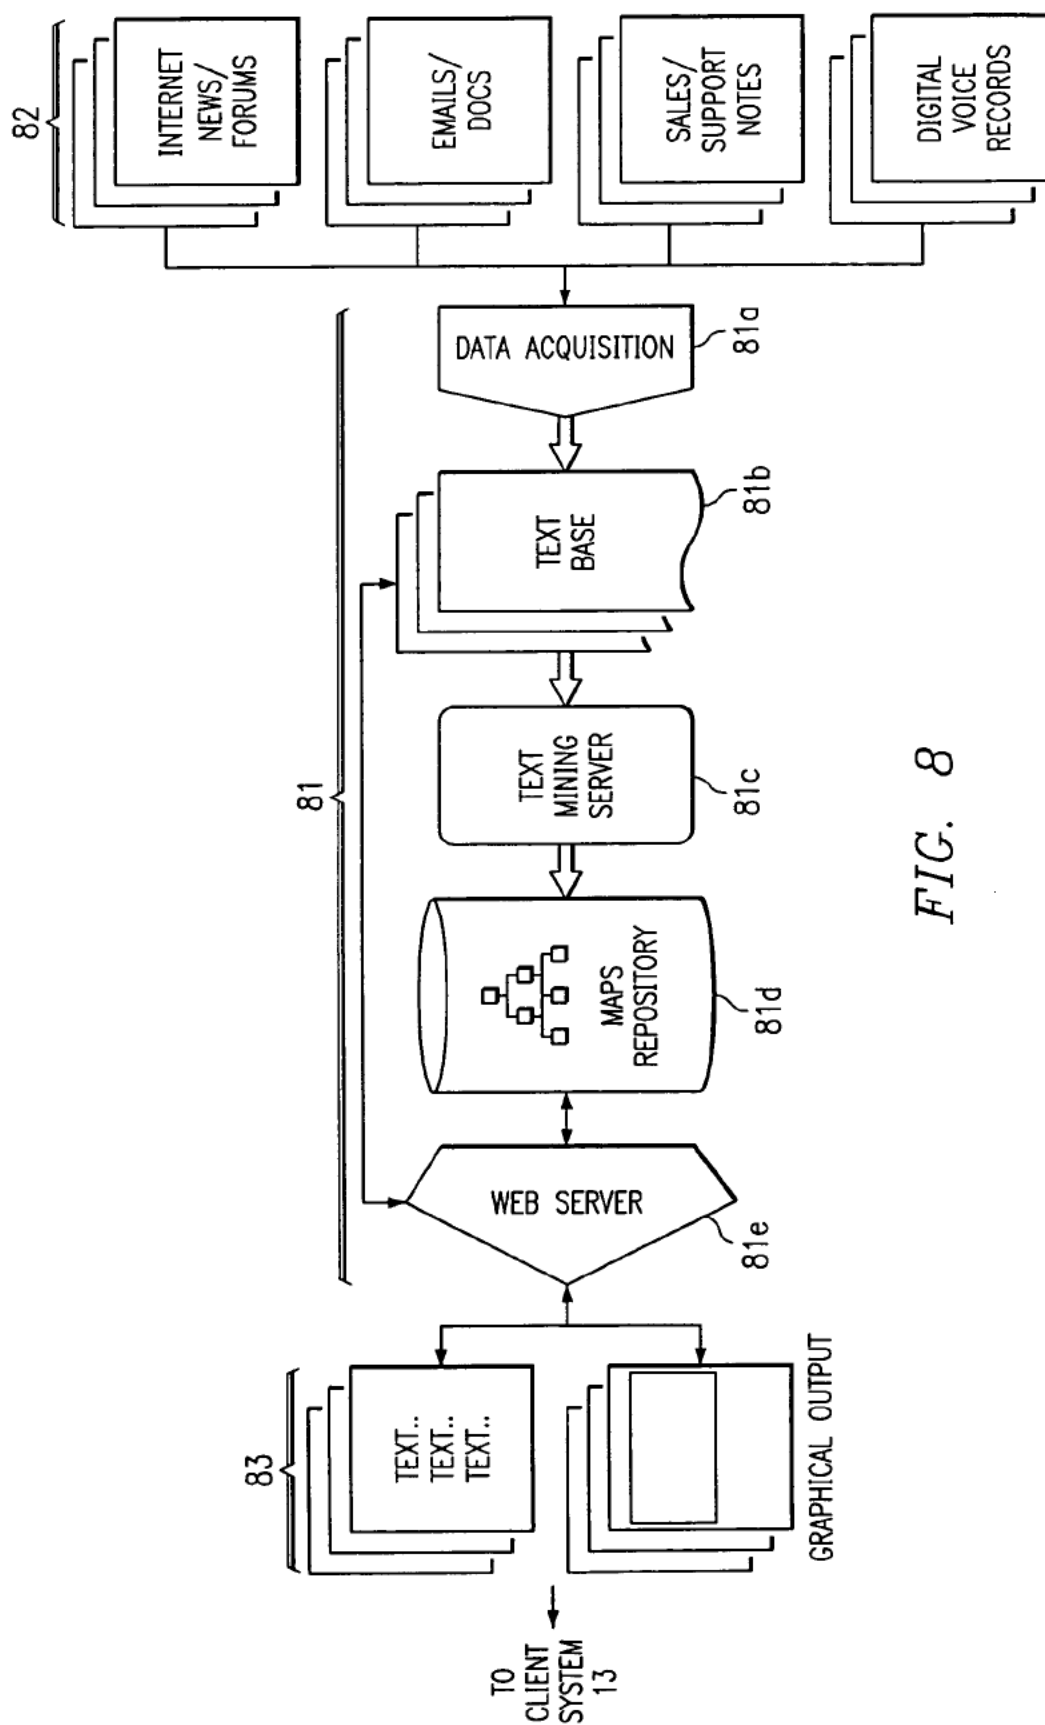


FIG. 8

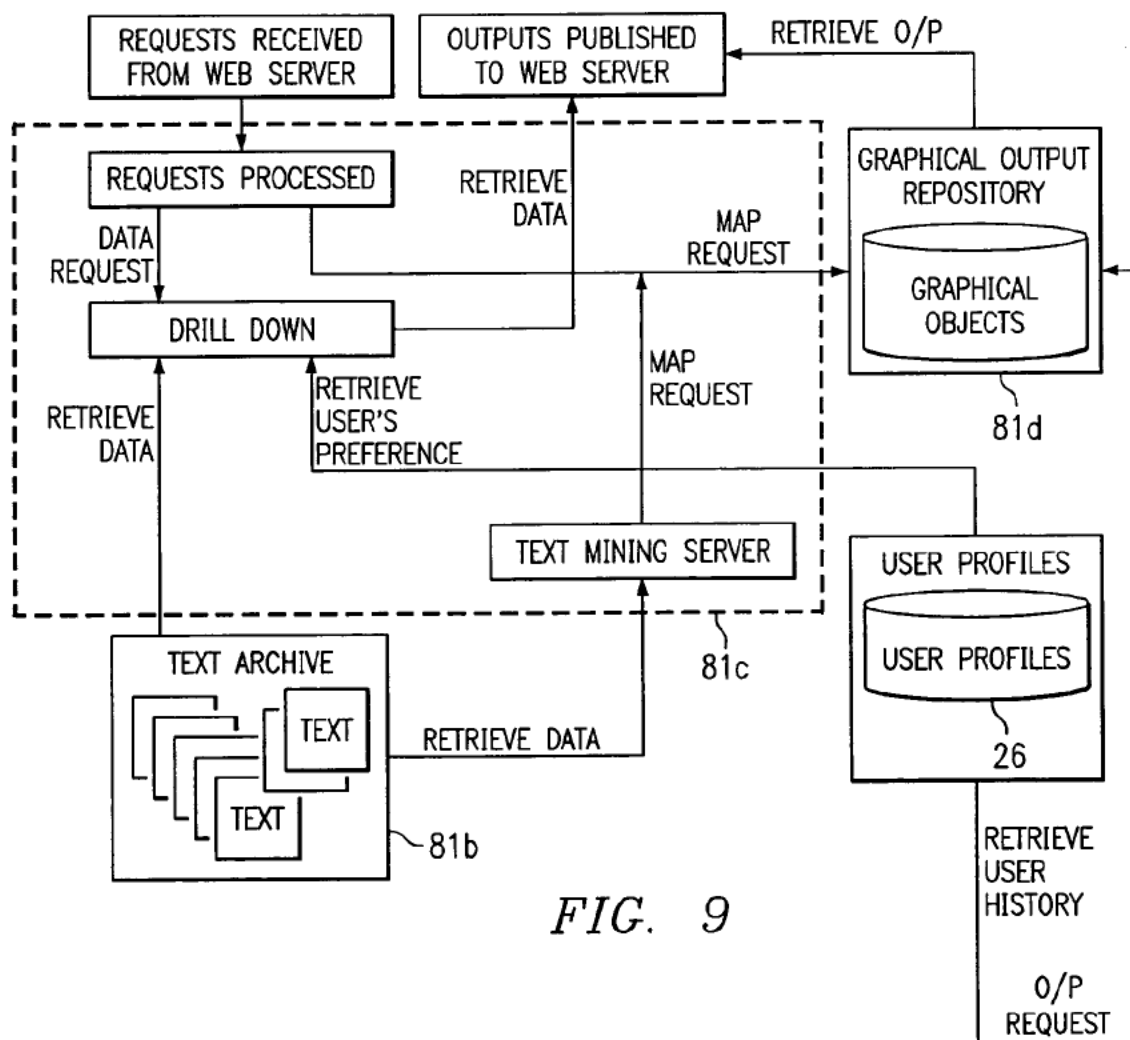


FIG. 9



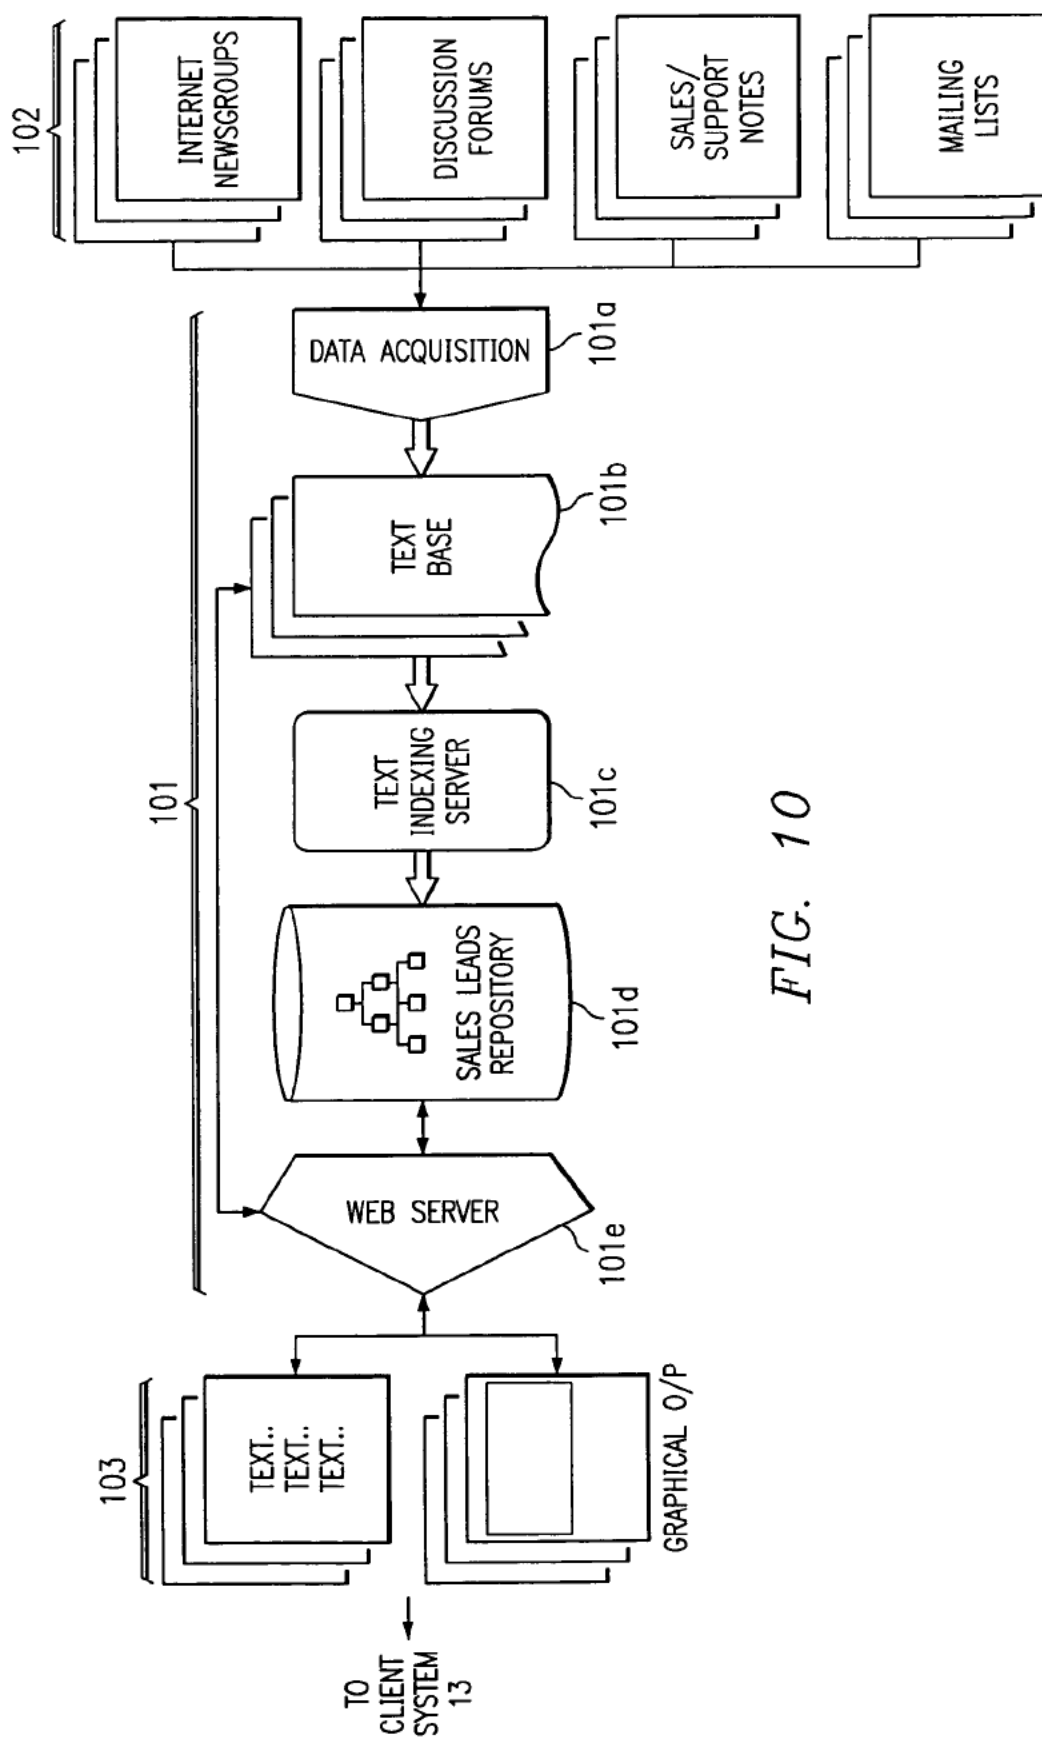


FIG. 11

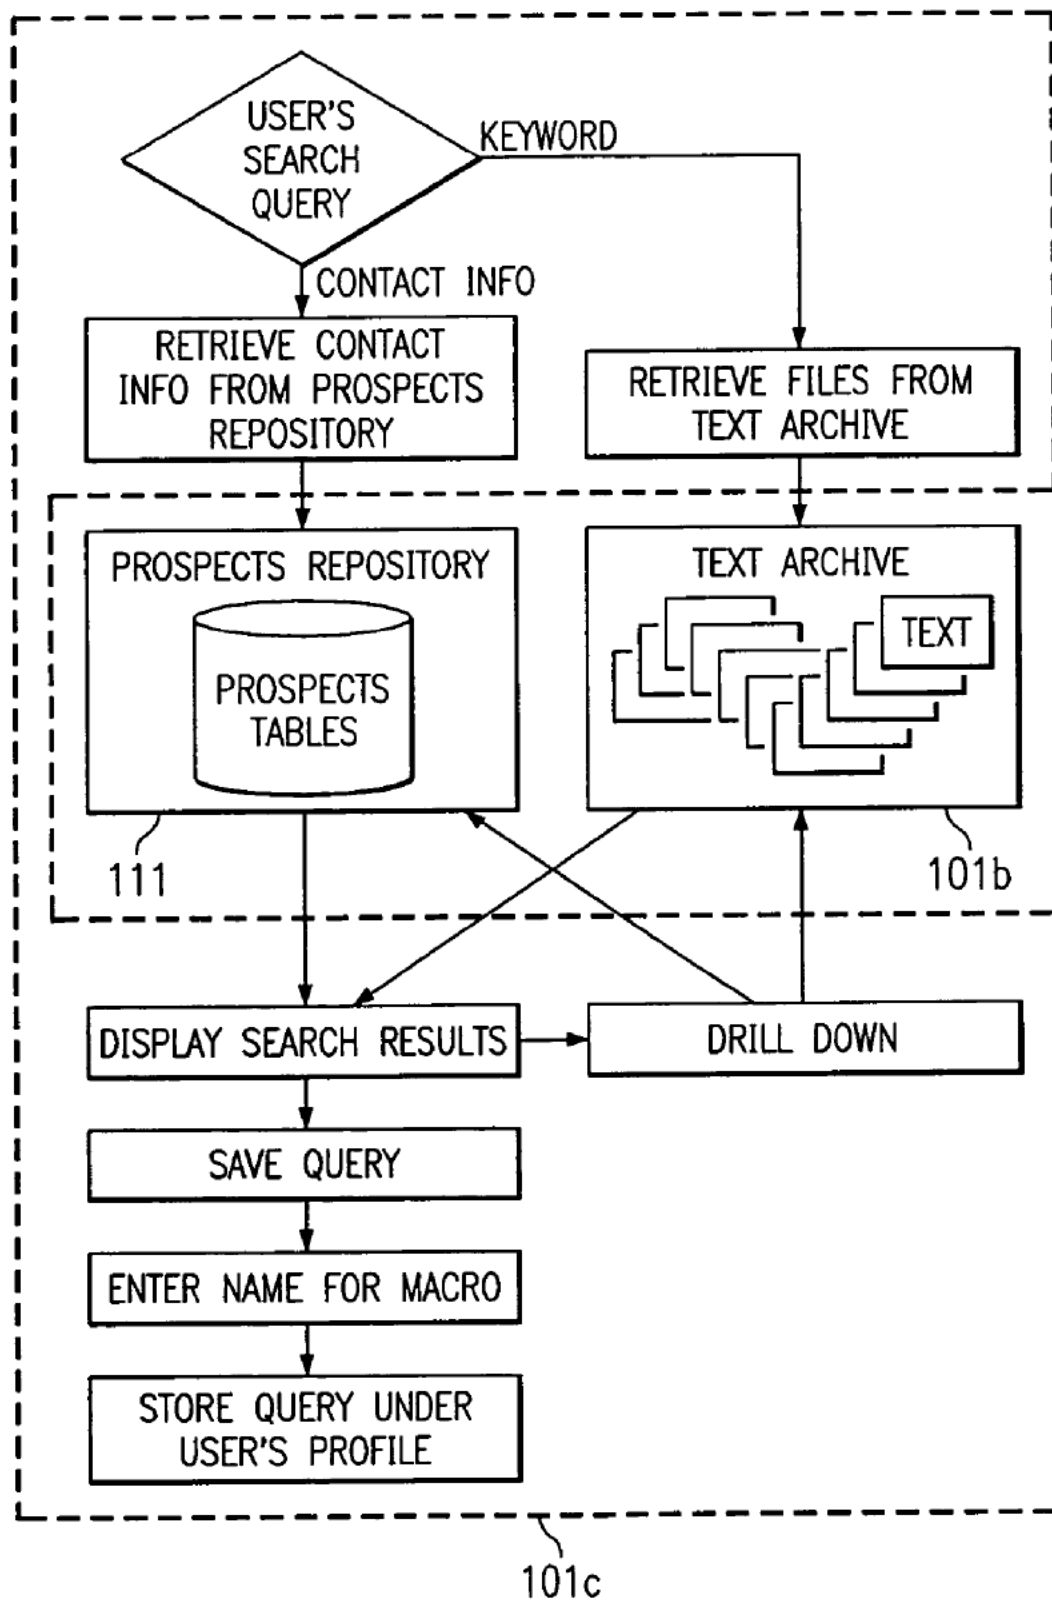

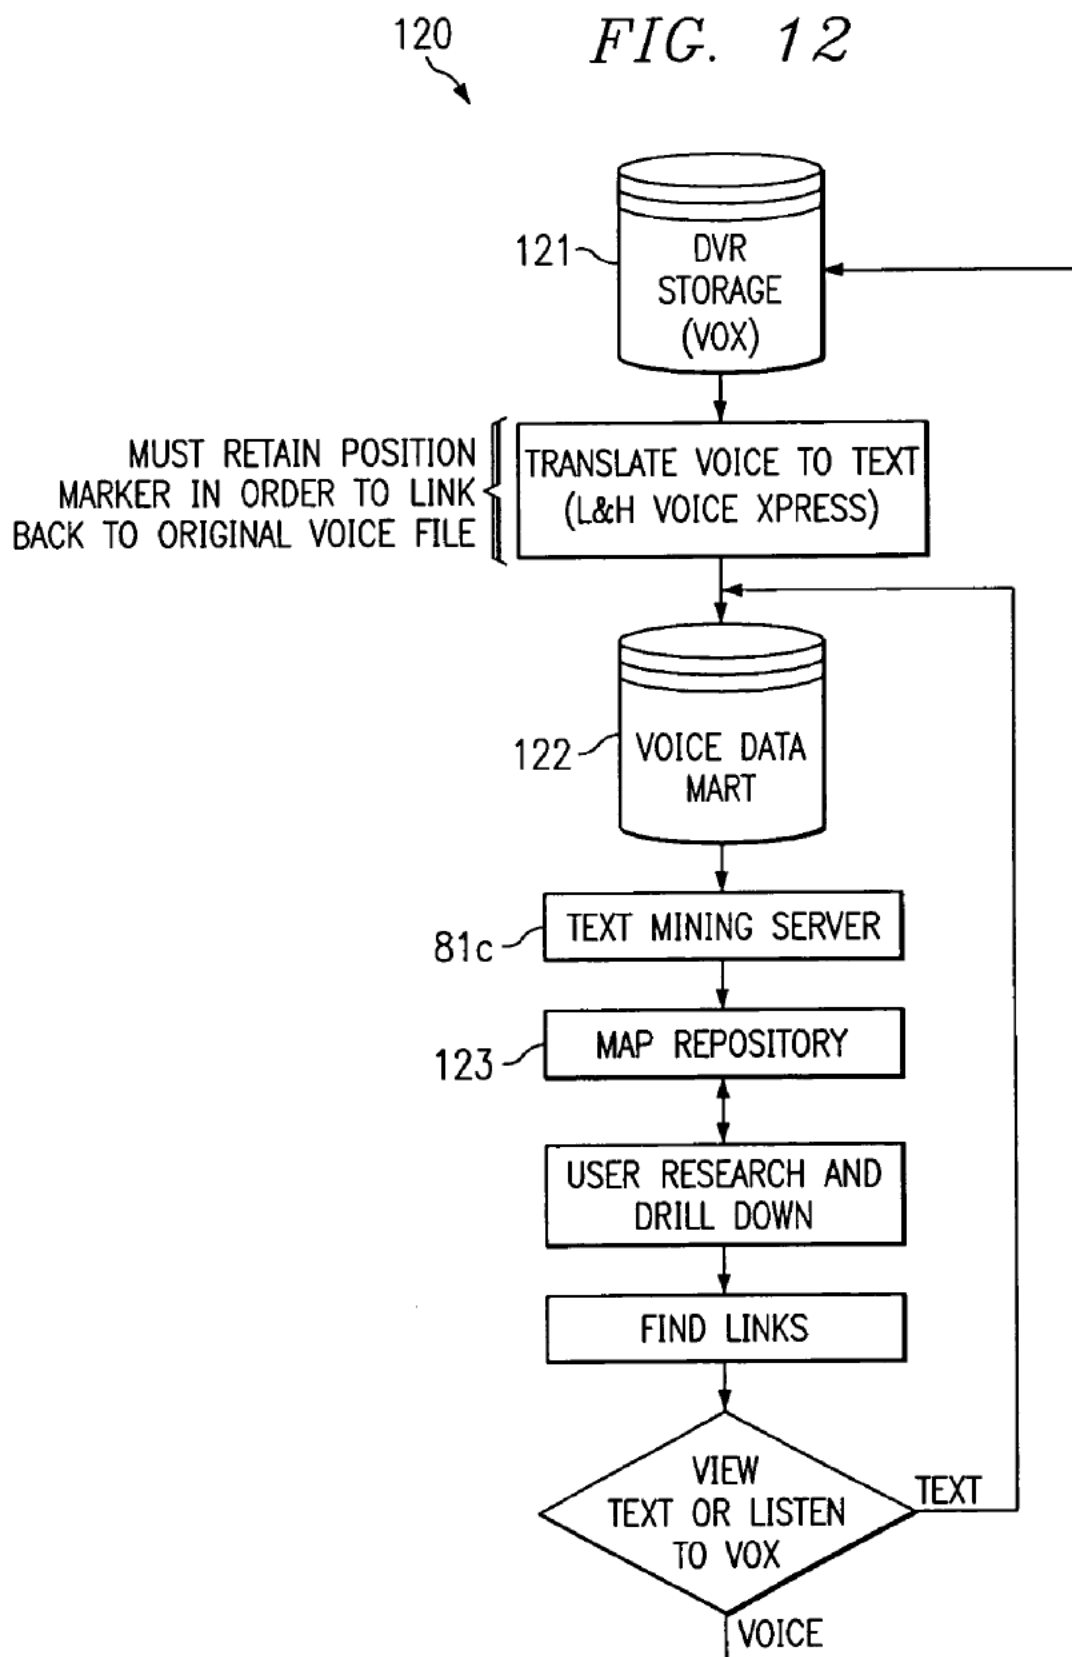

1

**TEXT INDEXING SYSTEM TO INDEX,
QUERY THE ARCHIVE DATABASE
DOCUMENT BY KEYWORD DATA
REPRESENTING THE CONTENT OF THE
DOCUMENTS AND BY CONTACT DATA
ASSOCIATED WITH THE PARTICIPANT
WHO GENERATED THE DOCUMENT**

RELATED PATENT APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 60/206,772, filed May 24, 2000 and entitled "Web-Based Customer Lead Generator". The present patent application and additionally the following patent applications are each conversions from the foregoing provisional filing: patent application Ser. No. 09/862,832 entitled "Web-Based Customer Lead Generator System" and filed May 21, 2001; patent application Ser. No. 09/862,814 entitled "Web-Based Customer Prospects Harvester System" and filed May 21, 2001, patent application Ser. No. 09/865,802 entitled "Database Server System for Web-Based Business Intelligence" and filed May 24, 2001; patent application Ser. No. 09/865,804 entitled "Data Mining System for Web-Based Business Intelligence" and filed May 24, 2001; patent application Ser. No. 09/865,735 entitled "Text Mining System for Web-Based Business Intelligence" and filed May 24, 2001.

TECHNICAL FIELD OF THE INVENTION

This invention relates to electronic commerce, and more particularly to business intelligence software tools for acquiring leads for prospective customers, using Internet data sources.

BACKGROUND OF THE INVENTION

Most small and medium sized companies face similar challenges in developing successful marketing and sales campaigns. These challenges include locating qualified prospects who are making immediate buying decisions. It is desirable to personalize marketing and sales information to match those prospects, and to deliver the marketing and sales information in a timely and compelling manner. Other challenges are to assess current customers to determine which customer profile produces the highest net revenue, then to use those profiles to maximize prospecting results. Further challenges are to monitor the sales cycle for opportunities and inefficiencies, and to relate those findings to net revenue numbers.

Today's corporations are experiencing exponential growth to the extent that the volume and variety of business information collected and accumulated is overwhelming. Further, this information is found in disparate locations and formats. Finally, even if the individual data bases and information sources are successfully tapped, the output and reports may be little more than spreadsheets, pie charts and bar charts that do not directly relate the exposed business intelligence to the companies' processes, expenses, and to its net revenues.

With the growth of the Internet, one trend in developing marketing and sales campaigns is to gather customer information by accessing Internet data sources. Internet data intelligence and data mining products face specific challenges. First, they tend to be designed for use by technicians, and are not flexible or intuitive in their operation; secondly, the technologies behind the various engines are changing rapidly to take advantage of advances in hardware and

2

software, and finally, the results of their harvesting and mining are not typically related to a specific department goals and objectives.

SUMMARY OF THE INVENTION

One aspect of the invention is a text indexing system for collecting business intelligence about a client, as well as for identifying prospective customers of the client. The text indexing system is used in a lead generation system accessible by the client via the Internet.

The indexing system has various components, including a data acquisition process that extracts textual data from various Internet sources, a database for storing the extracted data, a text indexing server that executes keyword searches of the database, and an output repository. A web server provides client access to the repository, and to the mining server.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates the operating environment for a web based lead generator system in accordance with the invention.

FIG. 2 illustrates the various functional elements of the lead generator system.

FIG. 3 illustrates the various data sources and a first embodiment of the prospects harvester.

FIGS. 4 and 5 illustrate a database server system, which may be used within the lead generation system of FIGS. 1 and 2.

FIGS. 6 and 7 illustrate a data mining system, which may be used within the lead generation system of FIGS. 1 and 2.

FIGS. 8 and 9 illustrate a text mining system, which may be used within the lead generation system of FIGS. 1 and 2.

FIGS. 10 and 11 illustrate a text indexing system, which may be used within the lead generation system of FIGS. 1 and 2.

FIG. 12 illustrates a digital voice recording mining system, which may be used within the lead generation system of FIGS. 1 and 2.

**DETAILED DESCRIPTION OF THE
INVENTION**

Lead Generator System Overview

FIG. 1 illustrates the operating environment for a web-based customer lead generation system 10 in accordance with the invention. System 10 is in communication, via the Internet, with unstructured data sources 11, an administrator 12, client systems 13, reverse look-up sources 14, and client applications 15.

The users of system 10 may be any business entity that desires to conduct more effective marketing campaigns. These users may be direct marketers who wish to maximizing the effectiveness of direct sales calls, or e-commerce web site who wish to build audiences.

In general, system 10 may be described as a web-based Application Service Provider (ASP) data collection tool. The general purpose of system 10 is to analyze a client's marketing and sales cycle in order to reveal inefficiencies and opportunities, then to relate those discoveries to net revenue estimates. Part of the latter process is proactively harvesting prequalified leads from external and internal data sources. As explained below, system 10 implements an automated process of vertical industry intelligence building that involves automated reverse lookup of contact informa-

3

tion using an email address and key phrase highlighting based on business rules and search criteria.

More specifically, system 10 performs the following tasks:

Uses client-provided criteria to search Internet postings for prospects who are discussing products or services that are related to the client's business offerings

Selects those prospects matching the client's criteria

Pushes the harvested prospect contact information to the client, with a link to the original document that verifies the prospects interest

Automatically opens or generates personalized sales scripts and direct marketing materials that appeal to the prospects' stated or implied interests

Examines internal sales and marketing materials, and by applying data and text mining analytical tools, generates profiles of the client's most profitable customers

Cross-references and matches the customer profiles with harvested leads to facilitate more efficient harvesting and sales presentations

In the audience building environment, requests permission to contact the prospect to offer discounts on services or products that are directly or indirectly related to the conversation topic, or to direct the prospect to a commerce source.

System 10 provides open access to its web site. A firewall (not shown) is used to prevent access to client records and the entire database server. Further details of system security are discussed below in connection with FIG. 5.

Consistent with the ASP architecture of system 10, interactions between client system 13 and system 10 will typically be by means of Internet access, such as by a web portal. Authorized client personnel will be able to create and modify profiles that will be used to search designated web sites and other selected sources for relevant prospects.

Client system 11 may be any computer station or network of computers having data communication to lead generator system 10. Each client system 11 is programmed such that each client has the following capabilities: a master user account and multiple sub user accounts, a user activity log in the system database, the ability to customize and personalize the workspace; configurable, tiered user access; online signup, configuration and modification, sales territory configuration and representation, goals and target establishment, and online reporting comparing goals to target (e.g., expense/revenue; budget/actual).

Administration system 14 performs such tasks as account activation, security administration, performance monitoring and reporting, assignment of master userid and licensing limits (user seats, access, etc.), billing limits and profile, account termination and lockout, and a help system and client communication.

System 10 interfaces with various client applications 15. For example, system 10 may interface with commercially available enterprise resource planning (ERP), sales force automation (SFA), call center, e-commerce, data warehousing, and custom and legacy applications.

Lead Generator System Architecture

FIG. 2 illustrates the various functional elements of lead generator system 10. In the embodiment of FIG. 2, the above described functions of system 10 are partitioned between two distinct processes.

A prospects harvester process 21 uses a combination of external data sources, client internal data sources and user-parameter extraction interfaces, in conjunction with a search, recognition and retrieval system, to harvest contact information from the web and return it to a staging data base

4

22. In general, process 21 collects business intelligence data from both inside the client's organization and outside the organization. The information collected can be either structured data as in corporate databases/spreadsheet files or unstructured data as in textual files.

Process 21 may be further programmed to validate and enhance the data, utilizing a system of lookup, reverse lookup and comparative methodologies that maximize the value of the contact information. Process 21 may be used to elicit the prospect's permission to be contacted. The prospect's name and email address are linked to and delivered with ancillary information to facilitate both a more efficient sales call and a tailored e-commerce sales process. The related information may include the prospect's email address, Web site address and other contact information. In addition, prospects are linked to timely documents on the Internet that verify and highlight the reason(s) that they are in fact a viable prospect. For example, process 21 may link the contact data, via the Internet, to a related document wherein the contact's comments and questions verify the high level value of the contact to the user of this system (the client).

A profiles generation process 25 analyzes the user's in-house files and records related to the user's existing customers to identify and group those customers into profile categories based on the customer's buying patterns and purchasing volumes. The patterns and purchasing volumes of the existing customers are overlaid on the salient contact information previously harvested to allow the aggregation of the revenue-based leads into prioritized demand generation sets. Process 25 uses an analysis engine and both data and text mining engines to mine a company's internal client records, digital voice records, accounting records, contact management information and other internal files. It creates a profile of the most profitable customers, reveals additional prospecting opportunities, and enables sales cycle improvements. Profiles include items such as purchasing criteria, buying cycles and trends, cross-selling and up-selling opportunities, and effort to expense/revenue correlations. The resulting profiles are then overlaid on the data obtained by process 21 to facilitate more accurate revenue projections and to enhance the sales and marketing process. The client may add certain value judgments (rankings) in a table that is linked to a unique lead id that can subsequently be analyzed by data mining or OLAP analytical tools. The results are stored in the deliverable database 24.

Profiles generation process 25 can be used to create a user (client) profiles database 26, which stores profiles of the client and its customers. As explained below, this database 26 may be accessed during various data and text mining processes to better identify prospective customers of the client.

Web server 29 provides the interface between the client systems 13 and the lead generation system 10. As explained below, it may route different types of requests to different sub processes within system 10. The various web servers described below in connection with FIGS. 4-11 may be implemented as separate servers in communication with a front end server 29. Alternatively, the server functions could be integrated or partitioned in other ways.

Data Sources

FIG. 3 provides additional detail of the data sources of FIGS. 1 and 2. Access to data sources may be provided by various text mining tools, such as by the crawler process 31 or 41 of FIGS. 3 and 4.

One data source is newsgroups, such as USENET. To access discussion documents from USENET newsgroups

such as "news.giganews.com", NNTP protocol is used by the crawler process to talk to USENET news server such as "news.giganews.com." Most of the news servers only archive news articles for a limited period (giganews.com archives news articles for two weeks), it is necessary for the iNet Crawler to incrementally download and archive these newsgroups periodically in a scheduled sequence. This aspect of crawler process 31 is controlled by user-specified parameters such as news server name, IP address, newsgroup name and download frequency, etc.

Another data source is web-Based discussion forums. The crawler process follows the hyper links on a web-based discussion forum, traverse these links to user or design specified depths and subsequently access and retrieve discussion documents. Unless the discussion documents are archived historically on the web site, the crawler process will download and archive a copy for each of the individual documents in a file repository. If the discussion forum is membership-based, the crawler process will act on behalf of the authorized user to logon to the site automatically in order to retrieve documents. This function of the crawler process is controlled by user specified parameters such as a discussion forum's URL, starting page, the number of traversal levels and crawling frequency.

A third data source is Internet-based or facilitated mailing lists wherein individuals send to a centralized location emails that are then viewed and/or responded to by members of a particular group. Once a suitable list has been identified a subscription request is initiated. Once approved, these emails are sent to a mail server where they are downloaded, stored in system 10 and then processed in a fashion similar to documents harvested from other sources. The system stores in a database the filters, original URL and approval information to ensure only authorized messages are actually processed by system 10.

A fourth data source is corporations' internal documents. These internal documents may include sales notes, customer support notes and knowledge base. The crawler process accesses corporations' internal documents from their Intranet through Unix/Windows file system or alternately be able to access their internal documents by riding in the databases through an ODBC connection. If internal documents are password-protected, crawler process 31 acts on behalf of the authorized user to logon to the file systems or databases and be able to subsequently retrieve documents. This function of the crawler process is controlled by user-specified parameters such as directory path and database ODBC path, starting file id and ending file id, and access frequency. Other internal sources are customer information, sales records, accounting records, and digitally recorded correspondence such as e-mail files or digital voice records.

A fifth data source is web pages from Internet web sites. This function of the crawler process is similar to the functionality associated with web-discussion-forums. Searches are controlled by user-specified parameters such as web site URL, starting page, the number of traversal levels and crawling frequency.

Database Server System

FIGS. 4 and 5 illustrate a database server system 41, which may be used within system 10 of FIGS. 1 and 2. FIG. 4 illustrates the elements of system 41 and FIG. 5 is a data flow diagram. Specifically, system 41 could be used to implement the profiles generation process 25, which collects profile data about the client.

The input data 42 can be the client's sales data, customer-contact data, customer purchase data and account data etc. Various data sources for customer data can be contact

management software packages such as ACT, MarketForce, Goldmine, and Remedy. Various data sources for accounting data are Great Plains, Solomon and other accounting packages typically found in small and medium-sized businesses. If the client has ERP (enterprise resource planning) systems (such as JD Edwards, PeopleSoft and SAP) installed, the data sources for customer and accounting data will be extracted from ERP customer and accounting modules. This data is typically structured and stored in flat files or relational databases. System 41 is typically an OLAP (On-line analytic processing) type server-based system. It has five major components. A data acquisition component 41a collects and extracts data from different data sources, applying appropriate transformation, aggregation and cleansing to the data collected. This component consists of predefined data conversions to accomplish most commonly used data transformations, for as many different types of data sources as possible. For data sources not covered by these predefined conversions, custom conversions need to be developed. The tools for data acquisition may be commercially available tools, such as Data Junction, ETI*EXTRACT, or equivalents. Open standards and APIs will permit employing the tool that affords the most efficient data acquisition and migration based on the organizational architecture.

Data mart 41b captures and stores an enterprise's sales information. The sales data collected from data acquisition component 41a are "sliced and diced" into multidimensional tables by time dimension, region dimension, product dimension and customer dimension, etc. The general design of the data mart follows data warehouse/data mart Star-Schema methodology. The total number of dimension tables and fact tables will vary from customer to customer, but data mart 41b is designed to accommodate the data collected from the majority of commonly used software packages such as PeopleSoft or Great Plains.

Various commercially available software packages, such as Cognos, Brio, Informatica, may be used to design and deploy data mart 41b. The Data Mart can reside in DB2, Oracle, Sybase, MS SQL server, PSQL or similar database application. Data mart 41b stores sales and accounting fact and dimension tables that will accommodate the data extracted from the majority of industry accounting and customer contact software packages.

A Predefined Query Repository Component 41c is the central storage for predefined queries. These predefined queries are parameterized macros/business rules that extract information from fact tables or dimension tables in the data mart 41b. The results of these queries are delivered as business charts (such as bar charts or pie charts) in a web browser environment to the end users. Charts in the same category are bounded with the same predefined query using different parameters. (i.e. quarterly revenue charts are all associated with the same predefined quarterly revenue query, the parameters passed are the specific region, the specific year and the specific quarter). These queries are stored in either flat file format or as a text field in a relational database.

A Business Intelligence Charts Repository Component 41d serves two purposes in the database server system 41. A first purpose is to improve the performance of chart retrieval process. The chart repository 41d captures and stores the most frequently visited charts in a central location. When an end user requests a chart, system 41 first queries the chart repository 41d to see if there is an existing chart. If there is a preexisting chart, server 41e pulls that chart directly from the repository. If there is no preexisting chart, server 41e runs the corresponding predefined query from the query

repository **41c** in order to extract data from data mart **41b** and subsequently feed the data to the requested chart. A second purpose is to allow chart sharing, collaboration and distribution among the end users. Because charts are treated as objects in the chart repository, users can bookmark a chart just like bookmarking a regular URL in a web browser. They can also send and receive charts as an email attachment. In addition, users may logon to system **41** to collaboratively make decisions from different physical locations. These users can also place the comments on an existing chart for collaboration.

Another component of system **41** is the Web Server component **41e**, which has a number of subcomponents. A web server subcomponent (such as Microsoft IIS or Apache server or any other commercially available web servers) serves HTTP requests. A database server subcomponent (such as Tango, Cold Fusion or PHP) provides database drill-down functionality. An application server subcomponent routes different information requests to different other servers. For example, sales revenue chart requests will be routed to the database system **41**; customer profile requests will be routed to a Data Mining server, and competition information requests will be routed to a Text Mining server. The latter two systems are discussed below. Another subcomponent of server **41e** is the chart server, which receives requests from the application server. It either runs queries against data mart **41b**, using query repository **41c**, or retrieves charts from chart repository **41c**.

As output **43**, database server system **41** delivers business intelligence about an organization's sales performance as charts over the Internet or corporate Intranet. Users can pick and choose charts by regions, by quarters, by products, by companies and even by different chart styles. Users can drill-down on these charts to reveal the underlying data sources, get detailed information charts or detailed raw data. All charts are drill-down enabled allowing users to navigate and explore information either vertically or horizontally. Pie charts, bar charts, map views and data views are delivered via the Internet or Intranet.

As an example of operation of system **41**, gross revenue analysis of worldwide sales may be contained in predefined queries that are stored in the query repository **41c**. Gross revenue queries accept region and/or time period as parameters and extract data from the Data Mart **41b** and send them to the web server **41e**. Web server **41e** transforms the raw data into charts and publishes them on the web.

Data Mining System

FIGS. 6 and 7 illustrate a data mining system **61**, which may be used within system **10** of FIGS. 1 and 2. FIG. 6 illustrates the elements of system **61** and FIG. 7 is a data flow diagram. Specifically, system **61** could be used to implement the profiles process **25**, which collects profile data about the client.

Data sources **62** for system **61** are the Data Mart **41b**, e.g., data from the tables that reside in Data Mart **41b**, as well as data collected from marketing campaigns or sales promotions.

For data coming from the Data Mart **41b**, data acquisition process **61a** between Mining Base **61b** and Data Mart **41b** extract/transfer and format/transform data from tables in the Data Mart **41b** into Data Mining base **61b**. For data collected from sales and marketing events, data acquisition process **61a** may be used to extract and transform this kind of data and store it in the Data Mining base **61b**.

Data Mining base **61b** is the central data store for the data for data mining system **61**. The data it stores is specifically prepared and formatted for data mining purposes. The Data

Mining base **61b** is a separate data repository from the Data Mart **41b**, even though some of the data it stores is extracted from Data Mart's tables. The Data Mining base **61b** can reside in DB2, Oracle, Sybase, MS SQL server, PSQL or similar database application.

Chart repository **61d** contains data mining outputs. The most frequently used decision tree charts are stored in the chart repository **61d** for rapid retrieval.

Customer purchasing behavior analysis is accomplished by using predefined Data Mining models that are stored in a model repository **61e**. Unlike the predefined queries of system **41**, these predefined models are industry-specific and business-specific models that address a particular business problem. Third party data mining tools such as IBM Intelligent Miner and Clementine, and various integrated development environments (IDEs) may be used to explore and develop these data mining models until the results are satisfactory. Then the models are exported from the IDE into standalone modules (in C or C++) and integrated into model repository **61e** by using data mining APIs.

Data mining server **61c** supplies data for the models, using data from database **61c**. FIG. 7 illustrates the data paths and functions associated with server **61c**. Various tools and applications that may be used to implement server **61c** include VDI, EspressoChart, and a data mining GUI.

The outputs of server **61e** may include various options, such as decision trees, Rule Sets, and charts. By default, all the outputs have drill-down capability to allow users to interactively navigate and explore information in either a vertical or horizontal direction. Views may also be varied, such as by influencing factor. For example, in bar charts, bars may represent factors that influence customer purchasing (decision-making) or purchasing behavior. The height of the bars may represent the impact on the actual customer purchase amount, so that the higher the bar is the more important the influencing factor is on customers' purchasing behavior. Decision trees offer a unique way to deliver business intelligence on customers' purchasing behavior. A decision tree consists of tree nodes, paths and node notations. Each individual node in a decision tree represents an influencing. A path is the route from root node (upper most level) to any other node in the tree. Each path represents a unique purchasing behavior that leads to a particular group of customers with an average purchase amount. This provides a quick and easy way for on-line users to identify where the valued customers are and what the most important factors are when customer are making purchase decisions. This also facilitates tailored marketing campaigns and delivery of sales presentations that focus on the product features or functions that matter most to a particular customer group. Rules Sets are plain-English descriptions of the decision tree. A single rule in the RuleSet is associated with a particular path in the decision tree. Rules that lead to the same destination node are grouped into a RuleSet. RuleSet views allow users to look at the same information presented in a decision tree from a different angle. When users drill down deep enough on any chart, they will reach the last drill-down level that is data view. A data view is a table view of the underlying data that supports the data mining results. Data Views are dynamically linked with Data Mining base **61b** and Data Mart **41b** through web server **61f**.

Web server **61f**, which may be the same as database server **41e**, provides Internet access to the output of mining server **61c**. Existing outputs may be directly accessed from storage in charts repository **61d**. Or requests may be directed to models repository **61e**. Consistent with the application ser-

vice architecture of lead generation system 10, access by the client to web server 61f is via the Internet and the client's web browser.

Text Mining System

FIGS. 8 and 9 illustrate a text mining system 81, which may be used within system 10 of FIGS. 1 and 2. FIG. 8 illustrates the elements of system 81 and FIG. 9 is a data flow diagram. As indicated in FIG. 8, the source data 82 for system 81 may be either external and internal data sources. Thus, system 81 may be used to implement both the prospects system and profiles system of FIG. 2.

The source data 82 for text mining system 81 falls into two main categories, which can be mined to provide business intelligence. Internal documents contain business information about sales, marketing, and human resources. External sources consist primarily of the public domain in the Internet. Newsgroups, discussion forums, mailing lists and general web sites provide information on technology trends, competitive information, and customer concerns.

More specifically, the source data 82 for text mining system 81 is from five major sources. Web Sites: on-line discussion groups, forums and general web sites. Internet News Group: Internet newsgroups for special interests such as alt.ecommerce and microsoft.software.interdev. For some of the active newsgroups, hundreds of news articles may be harvested on a weekly basis. Internet Mailing Lists: mailing lists for special interests, such as e-commerce mailing list, company product support mailing list or Internet marketing mailing list. For some of the active mailing lists, hundreds of news articles will be harvested on a weekly basis. Corporate textual files: internal documents such as emails, customer support notes sales notes, and digital voice records.

For data acquisition 81a from web sites, user-interactive web crawlers are used to collect textual information. Users can specify the URLs, the depth and the frequency of web crawling. The information gathered by the web crawlers is stored in a central repository, the text archive 81b. For data acquisition from newsgroups, a news collector contacts the news server to download and transform news articles in an html format and deposit them in text archive 81b. Users can specify the newsgroups names, the frequency of downloads and the display format of the news articles to news collector. For data acquisition from Internet mailing lists, a mailing list collector automatically receives, sorts and formats email messages from the subscribed mailing lists and deposit them into text archive 81b. Users can specify the mailing list names and address and the display format of the mail messages. For data acquisition from client text files, internal documents are sorted, collected and stored in the Text Archive 81b. The files stored in Text Archive 81b can be either physical copies or dynamic pointers to the original files.

The Text Archive 81b is the central data store for all the textual information for mining. The textual information it stores is specially formatted and indexed for text mining purpose. The Text Archive 81b supports a wide variety of file formats, such plain text, html, MS Word and Acrobat.

Text Mining Server 81c operates on the Text Archive 81b. Tools and applications used by server 81c may include ThemeScape and a Text Mining GUI 81c. A repository 81d stores text mining outputs. Web server 81e is the front end interface to the client system 13, permitting the client to access database 81b, using an on-line search executed by server 81c or server 81e.

The outputs of system 81 may include various options. Map views and simple query views may be delivered over

the Internet or Intranet. By default, all the outputs have drill-down capability to allow users to reach the original documents. HTML links will be retained to permit further lateral or horizontal navigation. Keywords will be highlighted or otherwise pointed to in order to facilitate rapid location of the relevant areas of text when a document is located through a keyword search. For example, Map Views are the outputs produced by ThemeScape. Textual information is presented on a topological map on which similar "themes" are grouped together to form "mountains." On-line users can search or drill down on the map to get the original files. Simple query views are similar to the interfaces of most of the Internet search engines offered (such as Yahoo, Excite and HotBot). It allows on-line users to query the Text Archive 81b for keywords or key phrases or search on different groups of textual information collected over time.

A typical user session using text-mining system 81 might follow the following steps. It is assumed that the user is connected to server 81e via the Internet and a web browser, as illustrated in FIG. 1. In the example of this description, server 81e is in communication with server 81c, which is implemented using ThemeScape software.

1. Compile list of data sources (Newsgroups, Discussion Groups, etc)
2. Start ThemeScape Publisher or comparable application
3. Select "File"
4. Select "Map Manager" or comparable function
5. Verify that server and email blocks are correctly set. If not, insert proper information.
6. Enter password.
7. Press "Connect" button
8. Select "New"
9. Enter a name for the new map
10. If duplicating another maps settings, use drop down box to select the map name.
11. Select "Next"
12. Select "Add Source"
13. Enter a Source Description
14. Source Type remains "World Wide Web (WWW)"
15. Enter the URL to the site to be mined.
16. Add additional URLs, if desired.
17. Set "Harvest Depth." Parameters range from 1 level to 20 levels.
18. Set "Filters" if appropriate. These include Extensions, Inclusions, Exclusions, Document Length and Ratios.
19. Set Advanced Settings, if appropriate. These include Parsing Settings, Harvest Paths, Domains, and Security and their sub-settings.
20. Repeat steps 14 through 20 for each additional URL to be mined.
21. Select "Advanced Settings" if desired. These include Summarization Settings, Stopwords, and Punctuation.
22. Select "Finish" once ready to harvest the sites.
23. The software downloads and mines (collectively known as harvesting) the documents and creates a topographical map.
24. Once the map has been created, it can be opened and searched.

Access to User Profiles Database

As explained above in connection with FIG. 2, the profiles generation process 25 may be used to generate a profiles database 26. This database 26 stores information about the client and its customers that may be used to better identify prospective customers.

Referring again to FIGS. 5, 7 and 9, various mining processes used to implement system 10 may access and use the data stored in database 26. For example, as illustrated in

11

FIG. 5, the database server **41e** of database server system **41** may access database **24** to determine user preferences in formulating queries and presenting outputs. As illustrated in FIG. 7, the data mining server **61c** of data mining system **61** may access database **24** for similar purposes. Likewise, as illustrated in FIG. 9, the text mining server **81c** of system **81** may access database **24** to determine preferences in formulating queries, especially during query drill downs.

Text Indexing System

FIGS. 10 and 11 illustrate a text indexing system **101**, which may be used within system **10** of FIGS. 1 and 2. FIG. 10 illustrates the elements of system **101** and FIG. 11 is a data flow diagram. Like system **81**, system **101** may be used to implement either the prospects process **21** or profiles process **25** of FIG. 2.

Text mining system **81** and text indexing system **101** are two different systems for organizing mass textual information. Text mining system **81** identifies and extracts key phrases, major topics, and major themes from a mass amount of documents. The text mining system **81** is suitable for those on-line users who want to perform thorough research on the document collection. Text indexing system **101** is similar to text mining system **81** but is simpler and faster. It only identifies and extracts syntax information such as key words/key phrases. It provides a simple and fast alternative to users who just want to perform keyword searches.

The data sources **102** for Text Indexing system **101** are similar to those described above for Text Mining system **81**. For data acquisition **101a**, various software may be used. These include web crawlers and mailing list collecting agents. These are similar to those described above in connection with Text Mining system **81**.

The text archive **101b** is the central data store for all the textual information for indexing. The textual information it stores is specially formatted and indexed for text mining or indexing purpose. The Text archive **101b** supports a wide variety of file formats, such plain text, html, MS Word and Acrobat. Text archive **101b** may be the same text archive as used in system **81**.

Server **101c** indexes the document collection in a multi-dimensional fashion. It indexes documents not only on keywords/key phrases but also on contact information associated within the documents. In other words, the server **101c** allows on-line users to perform cross-reference search on both keywords and contact information. As an example, when users perform a keyword search on a collection of documents, the text indexing server returns a list of hits that consist of relevance (who-when-what), hyperlink, summary, timestamp, and contact information. Alternately, when users perform contact information search on a collection of documents, the text indexing server **101c** yields a list of documents associated with that individual.

Using Text Indexing Server **101c**, users may navigate documents easily and quickly and find information such as "who is interested in what and when."

Contact information and links to the associated documents are migrated into a Sales Prospects repository **101d** (a relational database). This contact information can be exported into normal contact management software from the repository **101d**.

The outputs **103** of system **101** are varied. Simple Query Views may be delivered to the client over the Internet or Intranet. By default, all the outputs have drill-down capability to allow users to reach the original documents. The Query Views may be similar to the interfaces of commonly used Internet search engines offered, such as Yahoo, Excite

12

and HotBot. It allows on-line users to query the Text Archive **101b** for keywords/key phrases and contact information search on different groups of textual information collected over time.

FIG. 11 illustrates the operation of text indexing server **115**, which may be used to integrate queries from both text database **101b** and another database **111** that stores information about prospective customers. For example, database **111** might be any one of the databases **26**, **41b**, **61b**, or **81b** of FIGS. 2, 4, 6, or 8. Server **115** accepts query parameters from the client, which may specify both contact parameters and keywords for searching database **111** and database **101b**, respectively. The search results are then targeted toward a particular category of prospects. FIG. 11 also illustrates how server **115** may be used to store, identify, and reuse queries. The queries for a particular client may be stored in user profiles database **26**.

Digital Voice Recording Mining System

FIG. 12 illustrates a digital voice recording mining system **120**. System **120** may be used to implement the prospects process **21** of FIG. 2, or it may be integrated into the text mining system of FIGS. 8 and 9.

Digital Voice Records (DVR) are increasing in use as companies move to sell and market over increasing boundaries, improve customer relations and provide a variety of support functions through call centers and third-party vendors. Present technology allows calls to be recalled through date-time stamps and a variety of other positional indicators but there are no means to analyze the content and context of the massive amount of this audio media.

System **120** uses speech-to-text translation capability to convert the digitally recorded voices, most often Vox or Wave (wav) format, into machine-readable text. A positional locator is created in the header file to facilitate direct linking back to the voice record, if needed. Accuracy of the recording on the receiving end is enhanced through training of the voice engine; an acceptable margin of error is expected on the incoming voice. The text files are stored in a Data Mart **122** where they may be mined using a search engine. Search engines such as ThemeScape are especially suitable in that they do more than simply count words and index frequently occurring phrases; they find "themes" by examining where words appear in the subject, text and individual sentence structure.

A typical user session of system **120** might follow the following steps: Call is either received or initiated. Depending on state law, the parties are advised that the call may be recorded for quality control purposes. Call is digitally recorded using existing technology from providers such as 1DigiVoice. Vox or Wave (voice) files **121** are translated using speech-to-text conversion programs. Text files are stored in logical areas in Data Mart **122**, for mining with a search engine. Maps or similar visual/graphical representations are placed in a Map or Image Repository **123**. Users search maps using the search engines browser plug-in. When the user finds documents to review, the user is prompted to select "voice" or "text." If text, the original document/file in the Data Mart is displayed in the browser window. If voice, the positional indicator is pumped to the Digital Voice Record application that locates, calls and then plays to voice file segment.

Referring again to FIG. 8, the voice data mart **122** may be one of the data sources for text mining system **81**. Text mining server **81c** is programmed to execute the functions of FIG. 12 as well as the other functions described above in connection with FIGS. 8 and 9. Similarly, the text in Data Mart **120** could be indexed using server **101c** of FIGS. 10

13

and 11. In today's technological environment, the DVR storage 121 would originate from internal storage of the client, but Internet retrieval is also a possibility.

OTHER EMBODIMENTS

Although the present invention has been described in detail, it should be understood that various changes, substitutions, and alterations can be made hereto without departing from the spirit and scope of the invention as defined by the appended claims.

What is claimed is:

1. A text indexing system that permits an application service provider to provide data identifying prospective customers of a product or service provided by a product/service provider, comprising:

a data acquisition process for extracting text documents from unstructured Internet discussion sites selected from the group of: newsgroups, discussion forums, and mailing lists;

wherein the data acquisition process operates by intruding into the Internet discussion site independently of, and without activation by the participants of the discussion site;

wherein each discussion site comprises a collection of text documents generated by participants of the text sources and simultaneously received by multiple participants of the discussion site;

an archive database for storing the extracted text documents;

a text indexing server for receiving queries from the product/service provider, each query representing a request for information about participants who are prospective customers of the product or service;

wherein the text indexing server is further operable to index the archive database such that each document is indexed by keyword data representing the content of the documents and by contact data associated with the participant who generated the document;

wherein the text indexing server responds to each query by accessing the archive database;

wherein the text indexing server is further operable to perform keyword searches of the archive database in response to the queries, and to provide the product/service provider with at least one link to a document stored in the database that contains contact information for a prospective customer who is discussing the product or service and at least one item of contact data for the prospective customer;

wherein the text indexing server is further operable to perform contact data searches of the archive database in response to the queries, and to provide the product/server provider with a list of documents associated with a specified contact;

a web server for providing access to the text indexing server via a web browser and the Internet, such that the product/service provider may interact with the text indexing server to make the requests online via the Internet and to receive the outputs generated by the text indexing server;

wherein the at least one link enables the product/service provider to access a text document from the database via the web browser.

2. The text indexing system of claim 1, wherein at least some of the text files are items of digitally recorded correspondence.

14

3. The text indexing system of claim 1, wherein at least some of the text files are digital voice records.

4. The text indexing system of claim 1, wherein the data acquisition process is implemented with a web crawler.

5. The text indexing system of claim 1, further comprising a user profiles database, and wherein the mining server further accesses the user profiles database for use in formulating queries.

6. The text indexing system of claim 1, wherein the data acquisition process further accesses Internet voice to text files.

7. A text indexing method performed by an information service provider of providing data identifying prospective customers of a product or service provided by the product/service provider, comprising the steps of:

identifying at least one Internet discussion site selected from the group of: newsgroups, discussion forums and mailing lists;

wherein the discussion site comprises a collection of text documents generated by participants of the discussion site and simultaneously received by multiple participants of the discussion site;

storing extracted text documents in an archive database; receiving a query from the product/service provider, via a web browser and a text indexing server, the query representing a subject of discussion by participants of the discussion site;

using a text indexing server to index the archive database such that each document is indexed by content keyword data and by contact data associated with the participant who generated the document;

wherein the text indexing server is further used to receive queries from the product/service provider, each query representing a request for information about participants who are prospective customers of the product or service, and to respond to each query by accessing the archive database;

wherein the text indexing server may respond to a query with a content search of the archive database, and provide the product/service provider with a link to at least one document stored in the database that contains contact information for a prospective customer who is discussing the product or service and at least one item of contact information for the prospective customer;

wherein the text indexing server may alternatively respond to a query with a contact data search of the archive data, and provide the product/server provider with a list of text documents associated with a specified contact person;

delivering to the product/service provider, via a web browser, a query response to the product/service provider, the query response containing a description of the text source and a link to the document.

8. The text indexing method of claim 7, wherein at least some of the text files are items of digitally recorded correspondence.

9. The text indexing method of claim 7, wherein at least some of the text files are digital voice records.

10. The text indexing method of claim 7, wherein the data acquisition process is implemented with a web crawler.

11. The text indexing method of claim 7, further comprising the steps of storing user profiles in a user profiles database, and of accessing the user profiles database during the step of formulating queries.

* * * * *