


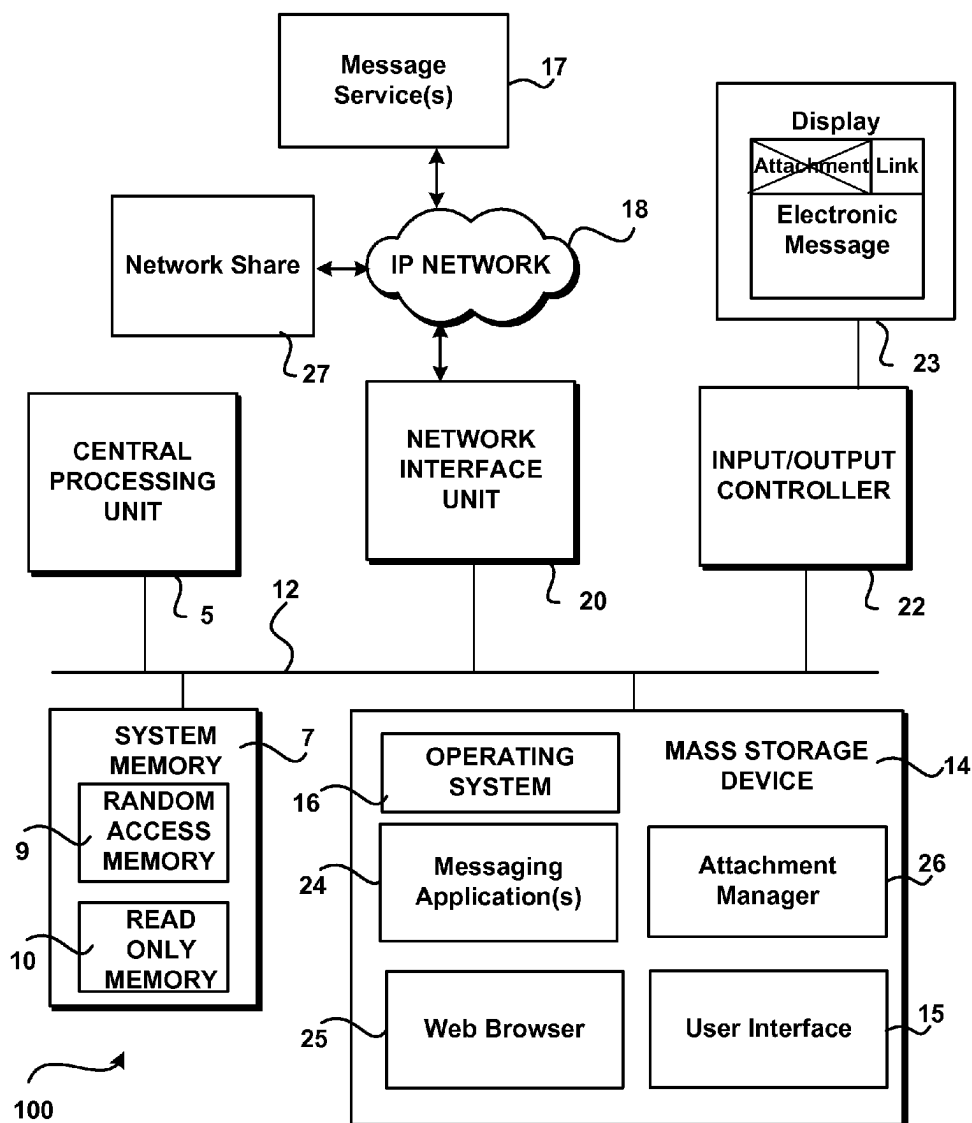

US 20120278404A1

(19) **United States**(12) **Patent Application Publication**
Meisels et al.(10) **Pub. No.: US 2012/0278404 A1**(43) **Pub. Date: Nov. 1, 2012**(54) **UPLOAD OF ATTACHMENT AND INSERTION
OF LINK INTO ELECTRONIC MESSAGES****Publication Classification**(51) **Int. Cl.**
G06F 15/16 (2006.01)
(52) **U.S. Cl.** **709/206**
(57) **ABSTRACT**(75) **Inventors:** **Joshua Adam Meisels**, Seattle, WA
(US); **Daniel Paul Costenaro**,
Bellevue, WA (US); **Jedidiah**
Brown, Seattle, WA (US)(73) **Assignee:** **MICROSOFT CORPORATION**,
Redmond, WA (US)(21) **Appl. No.:** **13/096,880**(22) **Filed:** **Apr. 28, 2011**

An option is presented with an electronic message to automatically upload and permission an attachment to the electronic message. A single click may be received to upload the attachment to a shared location (e.g. network share, online service, and the like). Permissions may be automatically set for the message recipients of the electronic message. For example, a default set of permissions and/or custom permissions may be set for each of the recipients listed on the To:/Cc:/Bcc: lines. A link to the shared location may also be automatically inserted into the electronic message along with or in place of the attachment.



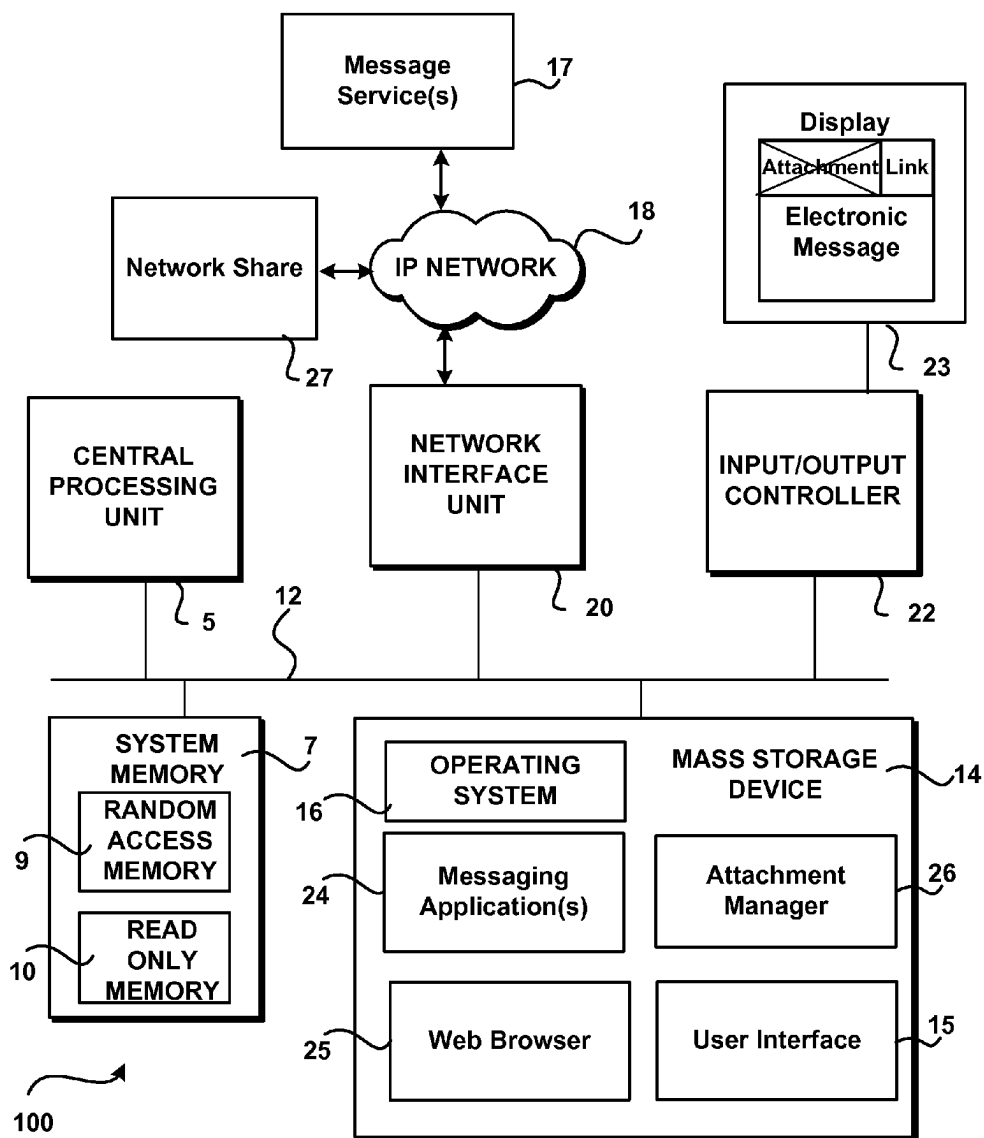
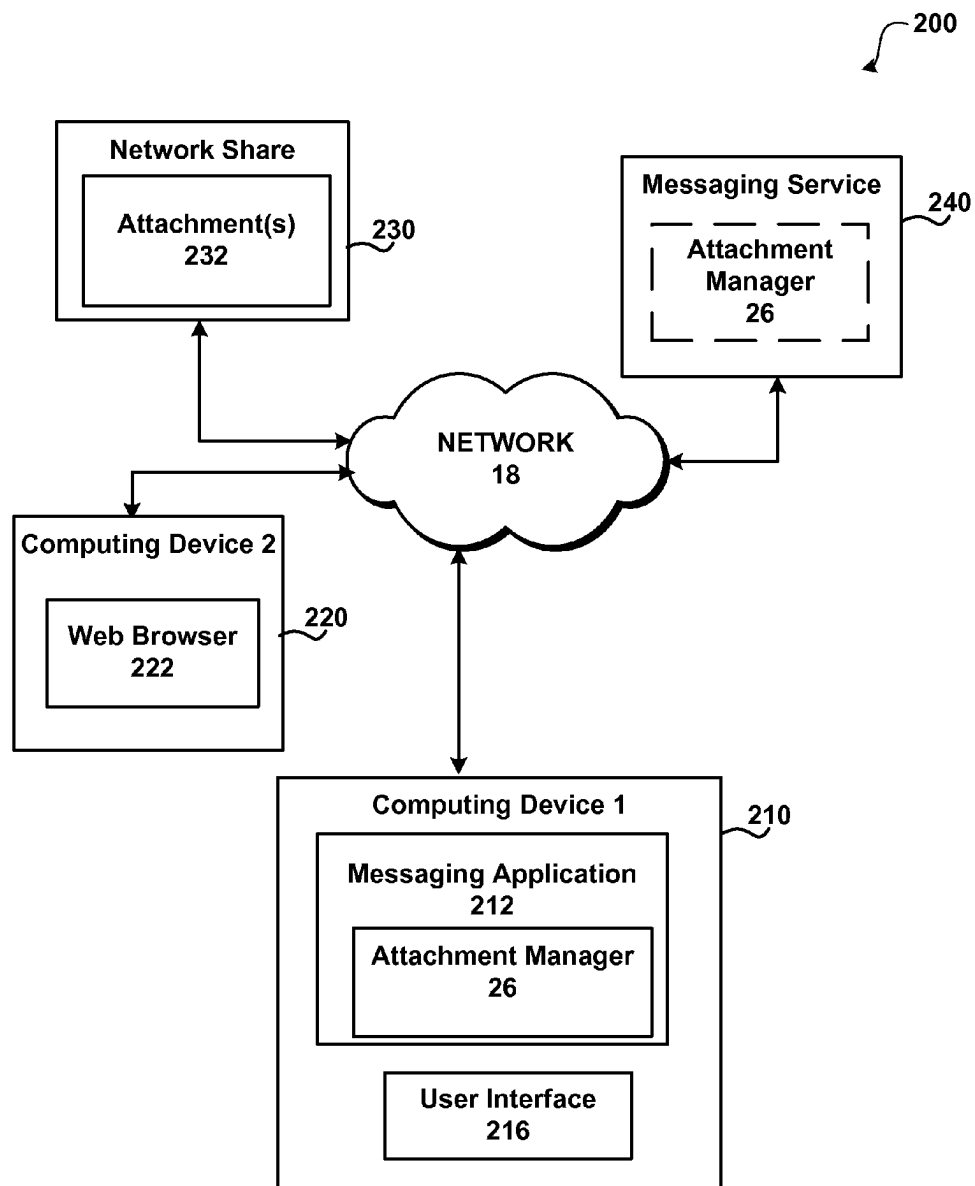


FIG.1

**FIG.2**

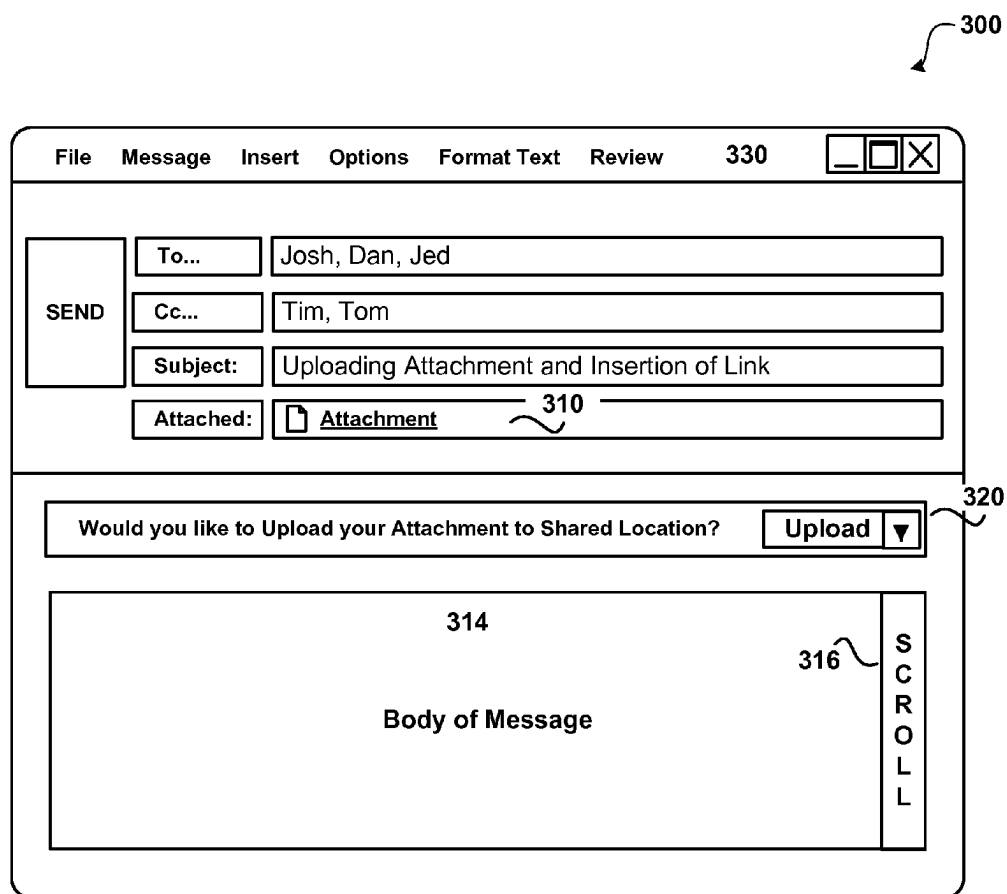


FIG.3

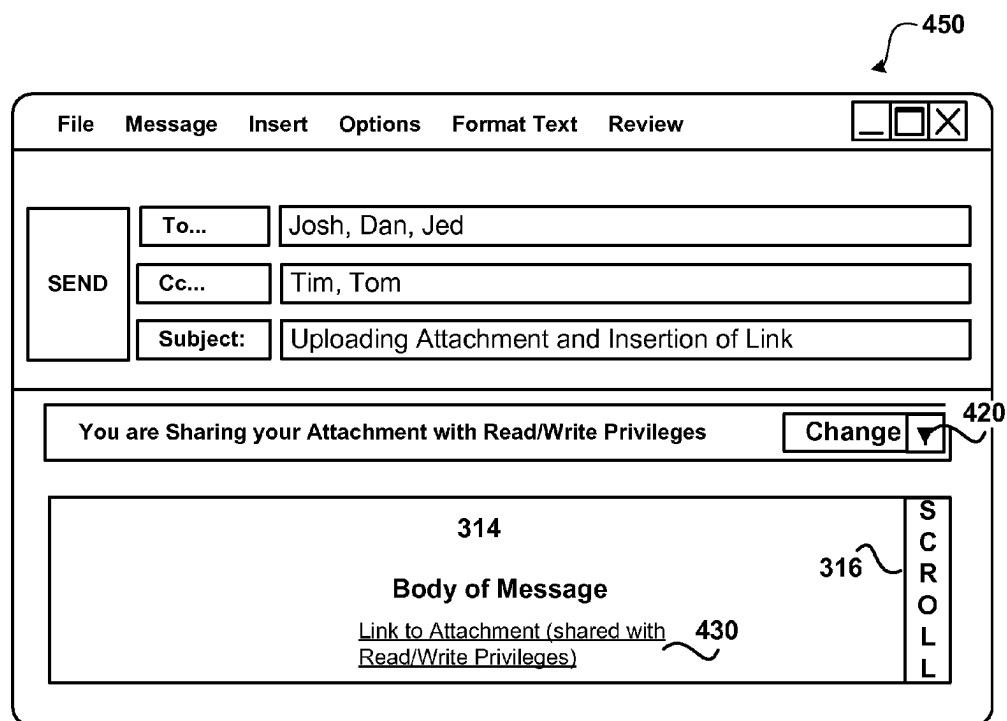
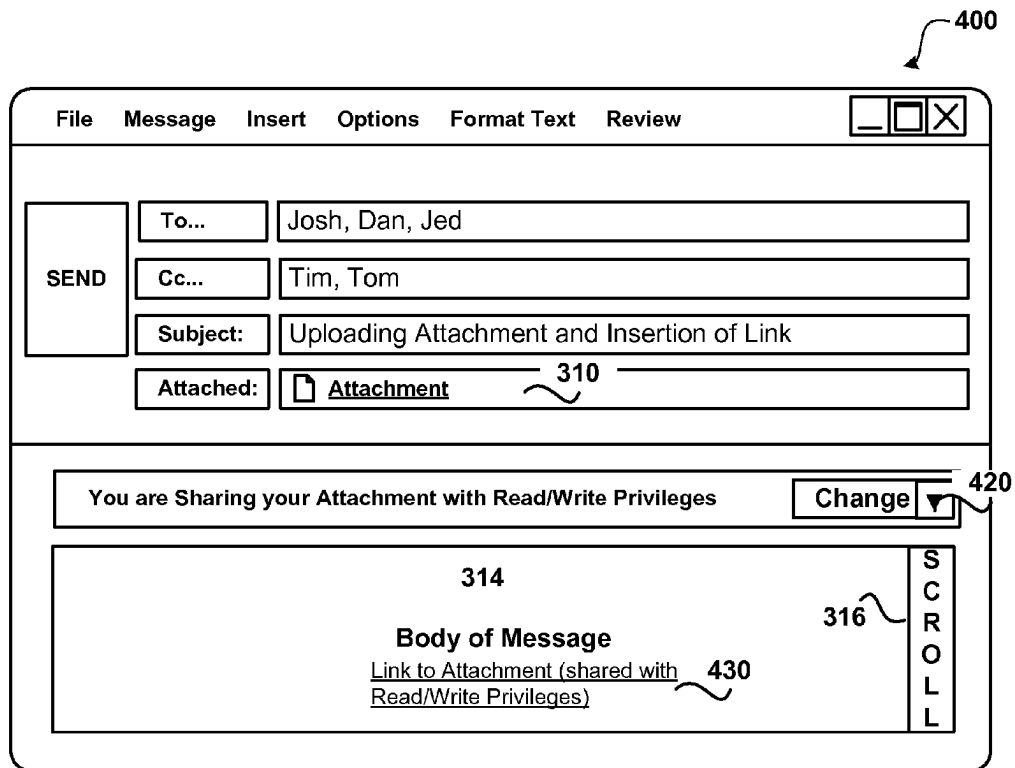


FIG.4

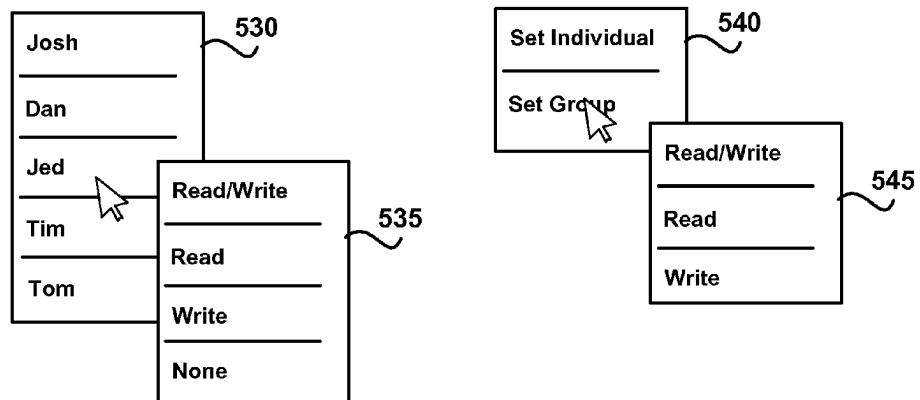
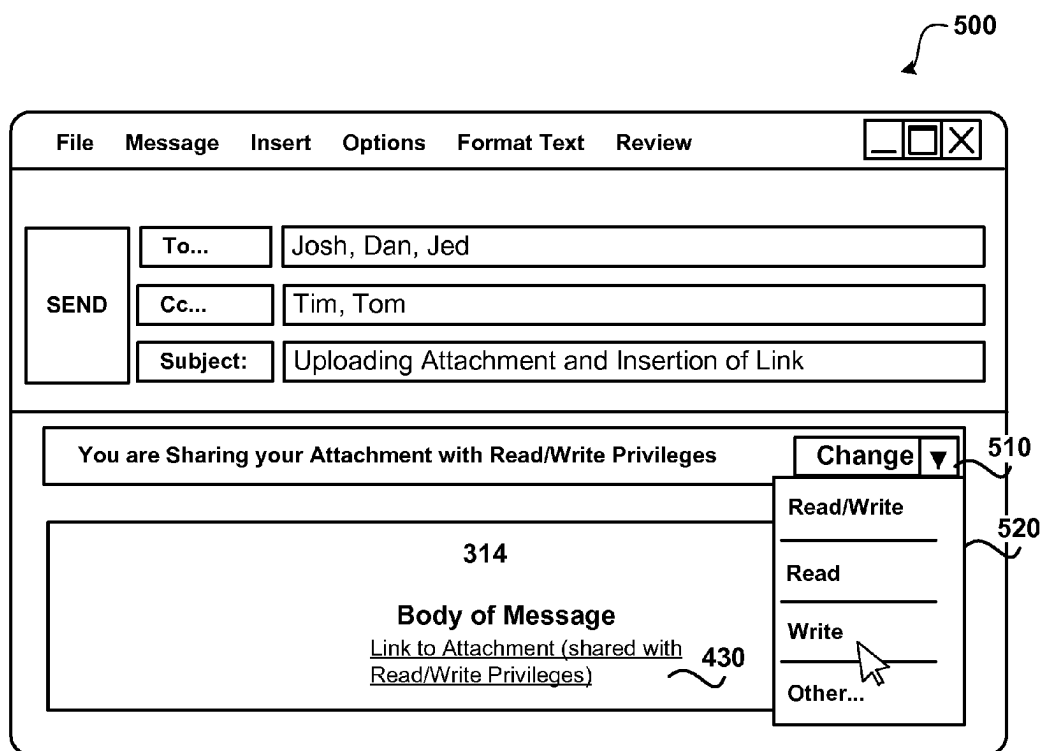


FIG.5

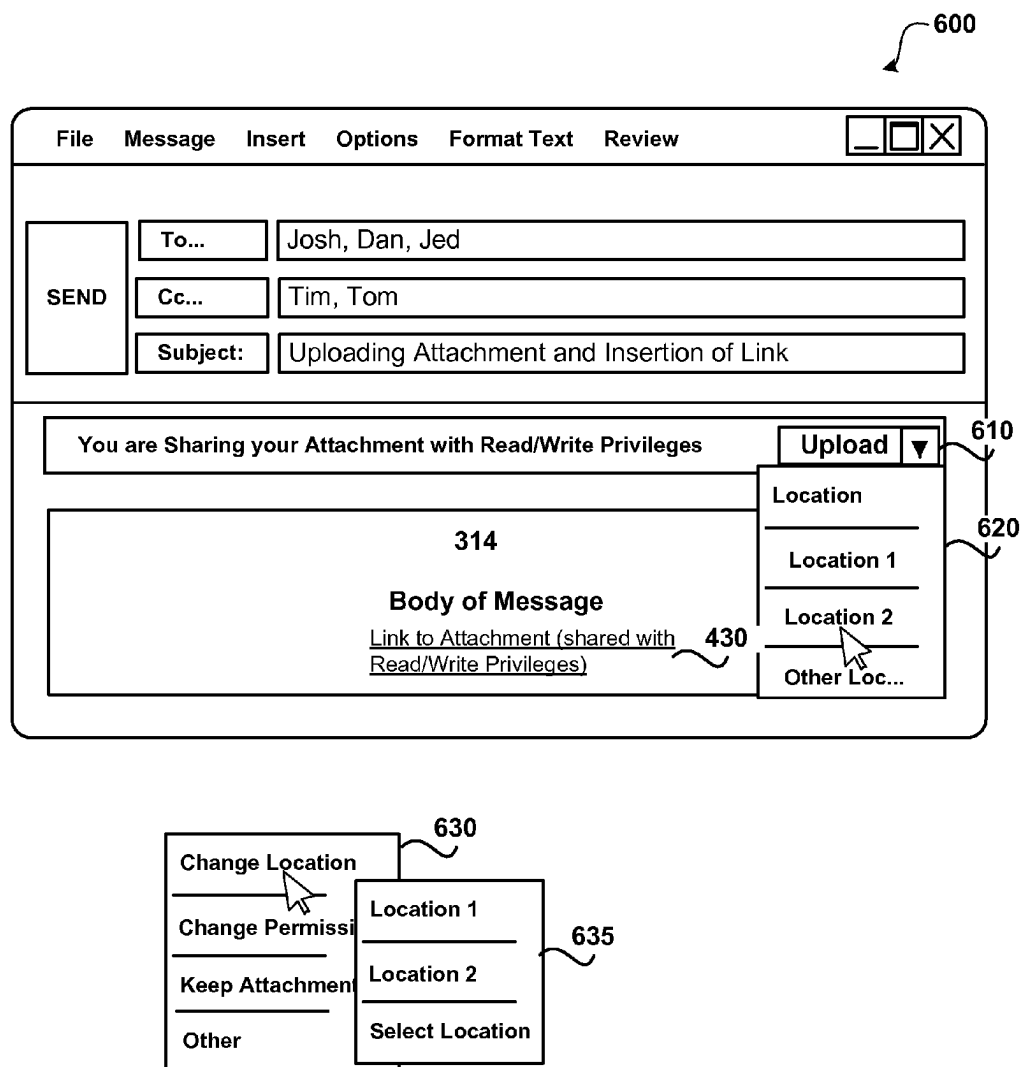


FIG.6

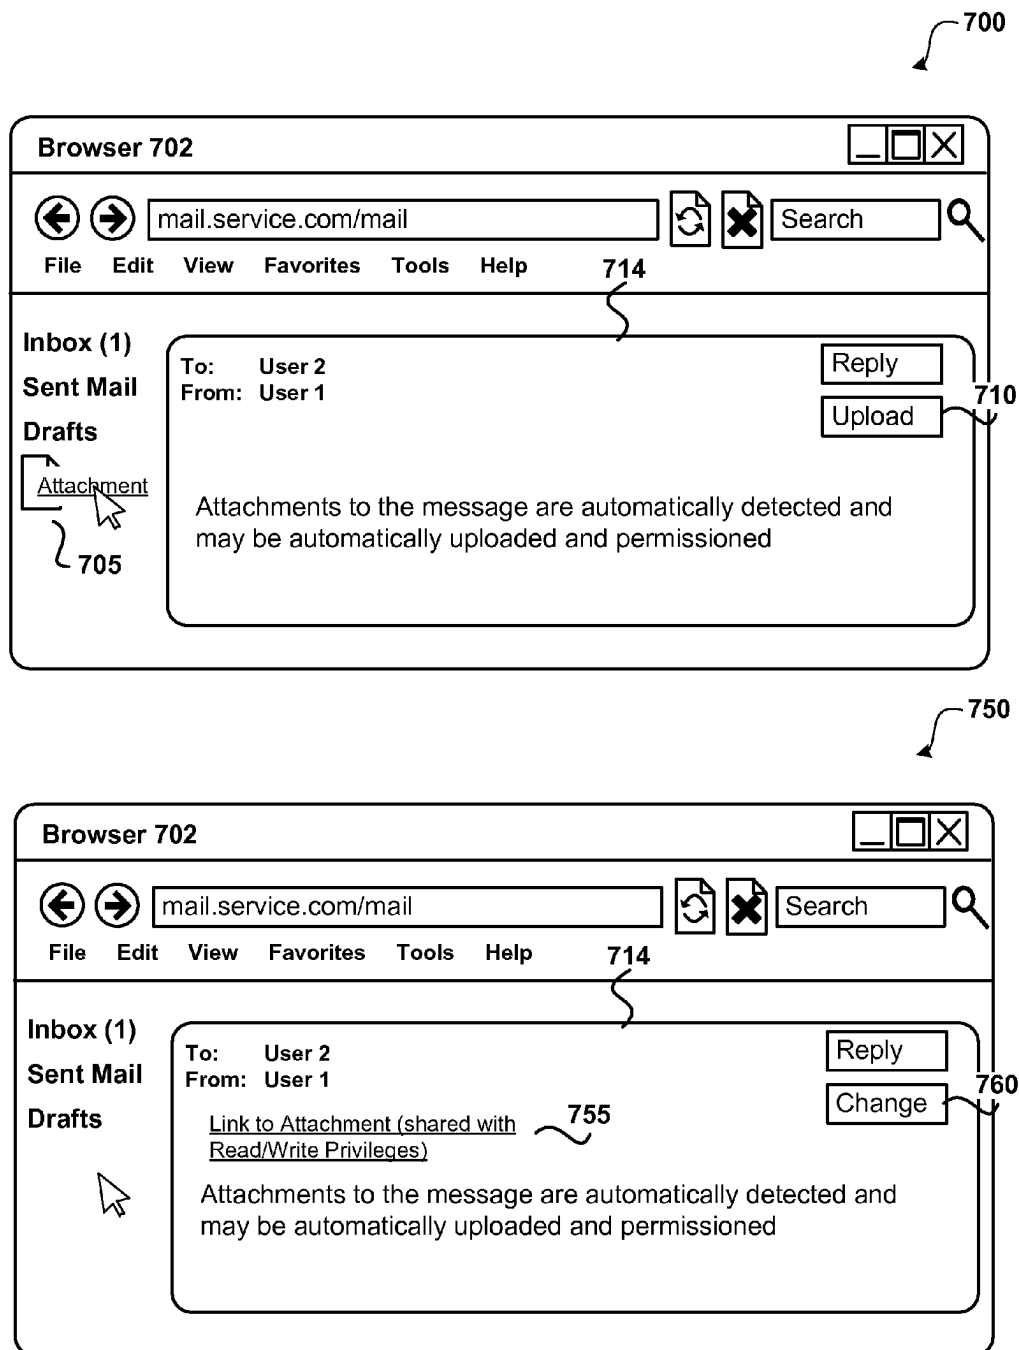
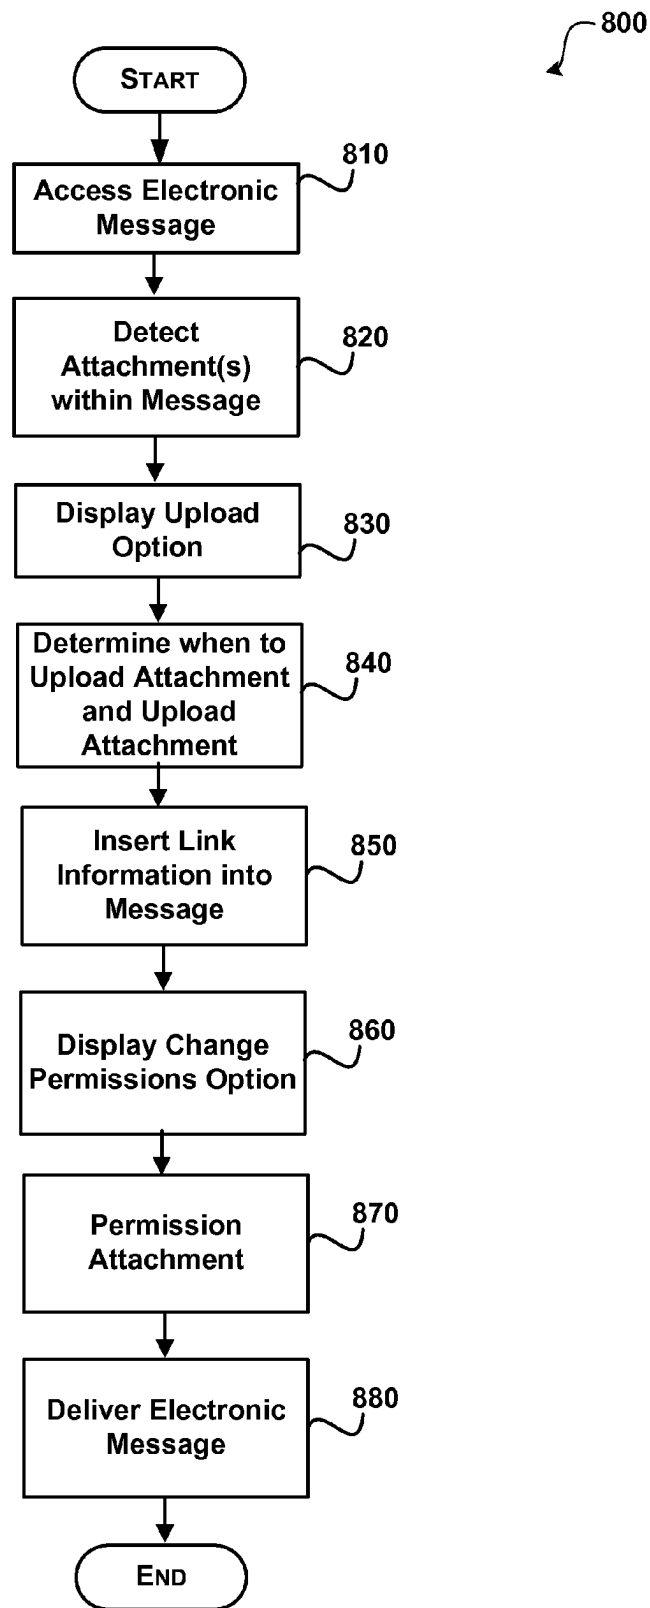


FIG.7

**FIG. 8**

UPLOAD OF ATTACHMENT AND INSERTION OF LINK INTO ELECTRONIC MESSAGES

BACKGROUND

[0001] When users send files that are attached to an electronic message, they create multiple copies of a given file. Not only does a copy of the attachment exist in each recipient's mailbox, the attachment is often stored in other locations such as a local hard drive or file share when the user chooses to save an attachment. When a user replies with changes to the attachment they create yet another copy of the attachment.

SUMMARY

[0002] This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

[0003] An option is presented when composing an electronic message to automatically upload and permission an attachment to the electronic message. A single click may be received to upload the attachment to a shared location (e.g. network share, online service, and the like). Permissions may be automatically set for the message recipients of the electronic message. For example, a default set of permissions and/or custom permissions may be set for each of the recipients listed on the To:/Cc:/Bcc: lines. A link to the shared location may also be automatically inserted into the electronic message along with or in place of the attachment.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] FIG. 1 illustrates an exemplary computing environment;

[0005] FIG. 2 shows a system for uploading and setting permissions for attachments to a shared location and inserting links within electronic messages;

[0006] FIG. 3 shows a display of an electronic message including a detected attachment that may be uploaded to a shared location;

[0007] FIG. 4 shows displays of an electronic message after a user action is received to upload an attachment;

[0008] FIG. 5 shows an exemplary message that include different change permission options and menus;

[0009] FIG. 6 shows an exemplary message that include different upload options and menus;

[0010] FIG. 7 shows electronic messages within a browser window that include an option to upload and permission an attachment to a shared location; and

[0011] FIG. 8 shows an illustrative process for automatic upload and setting permissions for an attachment to an electronic message.

DETAILED DESCRIPTION

[0012] Referring now to the drawings, in which like numerals represent like elements, various embodiment will be described. In particular, FIG. 1 and the corresponding discussion are intended to provide a brief, general description of a suitable computing environment in which embodiments may be implemented.

[0013] Generally, program modules include routines, programs, components, data structures, and other types of structures that perform particular tasks or implement particular

abstract data types. Other computer system configurations may also be used, including hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, mainframe computers, and the like. Distributed computing environments may also be used where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

[0014] Referring now to FIG. 1, an illustrative computer environment for a computer 100 utilized in the various embodiments will be described. The computer environment shown in FIG. 1 includes computing devices that each may be configured as a mobile computing device (e.g. phone, tablet, net book, laptop), server, a desktop, or some other type of computing device and includes a central processing unit 5 ("CPU"), a system memory 7, including a random access memory 9 ("RAM") and a read-only memory ("ROM") 10, and a system bus 12 that couples the memory to the central processing unit ("CPU") 5.

[0015] A basic input/output system containing the basic routines that help to transfer information between elements within the computer, such as during startup, is stored in the ROM 10. The computer 100 further includes a mass storage device 14 for storing an operating system 16, messaging application(s) 24, Web browser 25, and attachment manager 26 which will be described in greater detail below.

[0016] The mass storage device 14 is connected to the CPU 5 through a mass storage controller (not shown) connected to the bus 12. The mass storage device 14 and its associated computer-readable media provide non-volatile storage for the computer 100. Although the description of computer-readable media contained herein refers to a mass storage device, such as a hard disk or CD-ROM drive, the computer-readable media can be any available media that can be accessed by the computer 100.

[0017] By way of example, and not limitation, computer-readable media may comprise computer storage media and communication media. Computer storage media includes volatile and non-volatile, removable and non-removable media implemented in any method or technology for storage of information such as computer-readable instructions, data structures, program modules or other data. Computer storage media includes, but is not limited to, RAM, ROM, Erasable Programmable Read Only Memory ("EPROM"), Electrically Erasable Programmable Read Only Memory ("EEPROM"), flash memory or other solid state memory technology, CD-ROM, digital versatile disks ("DVD"), or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the computer 100.

[0018] Computer 100 operates in a networked environment using logical connections to remote computers through a network 18, such as the Internet. The computer 100 may connect to the network 18 through a network interface unit 20 connected to the bus 12. The network connection may be wireless and/or wired. The network interface unit 20 may also be utilized to connect to other types of networks and remote computer systems. The computer 100 may also include an input/output controller 22 for receiving and processing input from a number of other devices, including a keyboard, mouse, or electronic stylus (not shown in FIG. 1). Similarly, an input/

output controller **22** may provide input/output to a display screen **23**, a printer, or other type of output device.

[0019] As mentioned briefly above, a number of program modules and data files may be stored in the mass storage device **14** and RAM **9** of the computer **100**, including an operating system **16** suitable for controlling the operation of a computer, such as the WINDOWS PHONE 7®, WINDOWS 7®, or WINDOWS SERVER® operating system from MICROSOFT CORPORATION of Redmond, Wash. The mass storage device **14** and RAM **9** may also store one or more program modules. In particular, the mass storage device **14** and the RAM **9** may store one or more application programs, including one or more messaging application(s) **24** and Web browser **25**.

[0020] A user interface **15** is used by a user to interact with applications and documents. Messaging application(s) **24** may be one or more different messaging applications. For example, computing device **100** may include an email application, an Instant Messaging (IM) application, an SMS, MMS application, a real-time information network (e.g. Twitter® interface), a social networking application, and the like. According to an embodiment, messaging application **24** is an email application, such as MICROSOFT OUTLOOK®. The messaging application(s) may be client based and/or web based. For example, a network based message service **17** may be used, such as: MICROSOFT WINDOWS LIVE or some other network based email and messaging service.

[0021] Network share **27** is configured to store content (e.g. documents, spreadsheet, Web content, and the like) that are accessible to one or more users through IP network **18**. For example, network share **27** may store content that is accessible by users located at one or more locations.

[0022] Attachment manager **26** is configured to detect attachments that are associated with an electronic message and provide an option to share the attachment. Attachment manager **26** may be located externally from an application, e.g. messaging application **24**, as shown or may be a part of an application. Further, all/some of the functionality provided by attachment manager **26** may be located internally/externally from a messaging application.

[0023] Attachment manager **26** is configured to detect one or more attachments to an electronic message and to present an option that when selected automatically uploads and permissions the attachment. A single click may be received to upload the attachment to a shared location (e.g. network share **27**, online service, and the like). Permissions may be automatically set based on the message recipients of the electronic message. For example, a default set of permissions and/or custom permissions may be set for each of the recipients listed on the To:/Cc:/Bcc: lines. A link to the shared location may also be automatically inserted into the electronic message along with or in place of the attachment. The term “link” refers to an address that represents a location of content. For example, a link may be in the form of a Uniform Resource Locator (URL) that specifies a network location of where the content is stored. Using the link generally retrieves the content that is pointed to by the link. More details regarding the attachment manager are disclosed below.

[0024] FIG. 2 shows a system for uploading and setting permissions for attachments to a shared location and inserting links within electronic messages. As illustrated, system **200** includes computing device **1** (**210**), computing device **2** (**220**), network share **230** and messaging service **240**.

[0025] The computing devices may be any type of computing device that is configured to perform the operations relating to sending and receiving electronic messages that include attachments and/or links to content. For example, some of the computing devices may be: mobile computing devices (e.g. cellular phones, tablets, smart phones, laptops, and the like); desktop computing devices and servers. Some computing devices may be arranged to provide an online service (e.g. messaging service **240** that is configured for sending and receiving electronic messages), some may be arranged as data shares, some may be arranged in local networks, some may be arranged in networks accessible through the Internet, and the like.

[0026] The computing devices are coupled through network **18**. Network **18** may be many different types of networks. For example, network **18** may be an IP network, a carrier network for cellular communications, and the like. Generally, network **18** is used to transmit data between computing devices, such as computing device **1**, computing device **2**, network share **230** and messaging service **240**.

[0027] Computing device **1** includes messaging application **212** and user interface **216**. As illustrated, computing device **1** is used by a user to interact with electronic messages, content in a network share (e.g. content **232**) and the like.

[0028] User interface (UI) **216** is used to interact with an applications and content, such as messaging application **212** and attachments that are attached to electronic messages. One or more user interfaces of one or more types may be used to interact with the content. For example, UI **216** may include the use of a context menu, a menu within a menu bar, a menu item selected from a ribbon user interface, a graphical menu, and the like. Generally, UI **216** is configured such that a user may easily interact with content and electronic messages. For example, a user may simply select an option within UI **216** to automatically upload an attachment to an electronic message to a shared data store (e.g. attachment **232** at network share **230**). UI **216** may also be used to display information relating to attachments and links within an electronic message. For example, upon detection of an attachment to an electronic message, a selectable option may be shown within the message (or near the message) that allows a user to upload the attachment to a shared network location. UI **216** may also present a link in place of and/or in addition to the attachment that is uploaded to the network share. UI **216** may also be used to set/change permissions that are to be associated with the shared attachment. For example, UI **216** may be used to change read/write permissions for one or more recipients of an electronic message that includes an attachment to be shared.

[0029] Messaging application **212** may be a client based application, such as an email application, an Instant Messaging Application, a social media application, and the like. Generally, messaging application **212** is used to send and receive electronic messages of one or more types. A network based messaging service **240** may be used in addition to messaging application **212** or instead of one or more of the different messaging applications. For example, a web interface may be used to access messaging service **240**.

[0030] Messaging service **240** may be used to process electronic messages between one or more computing devices, such as computing device **1** and computing device **2**. Messaging service **240** may be configured to process different message types, such as SMS, MMS, email, messages for social networks and the like. Messaging service **240** may be

configured with the functionality of attachment manager **26** and one or more message types may be used to communicate the electronic messages including links to shared content that are related to attachments that were included within the electronic message before being sent.

[0031] Computing device **2** includes one or more applications, such as a web browser **222** that may be configured to access a messaging service, such as a web based email service and to interact with content. For example, a web browser may be used to access an electronic message through an email service and then access content **232** stored in network share **230**.

[0032] One or more network shares (e.g. Network share **230**) may be used to store content to be shared between users and/or accessed remotely, such as different attachments that were initially included within an electronic message and were selected to be shared. The content may be any type of content (e.g. files such as word processing documents, spreadsheets, slides, website content and the like). Network share **230** is accessible by the computing devices that interact with the content. The network share may be associated with an online service that supports online access/interaction with content.

[0033] Attachment manager **26** is configured to detect any attachments to an electronic message and to provide an option to automatically upload the attachments to a network share and permission the attachments for sharing between users. The attachments may be to any type of content, such as word processing documents, spreadsheets, slides, website content and the like. Generally, the attachment may be to any type of content that is accessible by a computing device.

[0034] Attachment manager **26** presents one or more selectable options that when selected automatically upload the attachment(s) to a shared network location. For example, a separate option may be presented for each attachment, an option may be presented for each type of content (e.g. documents, photos, music, etc.), a single option may be presented for all of the attachments and the like. According to an embodiment, the option is a selectable menu option that allows one click uploading and setting the sharing permissions of attachment(s) to a network share. Upon selecting the upload option, a link is inserted within the electronic message that provides a recipient with a link to the shared attachment. The attachment may/may not be automatically removed from the electronic message. According to an embodiment, the attachment is removed from the electronic message before it is sent to the recipients.

[0035] Attachment manager **26** is also configured to automatically permission the attachment at the shared network location. The permissions to be set for an attachment may be predetermined. For example, all attachments may be initially set for read/write access or read access or write access. Permissions may be set based on the type of attachment (e.g. word processing documents may be set to read/write whereas photos or pictures may be set to read only). The default permissions may be set by a user. According to an embodiment, attachment manager **26** is configured to present an option to change the default permissions. For example, a user may select a change permissions option to modify the permissions for one or more of the attachments for one or more of the recipients (e.g. some recipients have read/write access whereas other recipients have read access). When the user does not select the upload option, the electronic message is sent without uploading the attachment to the network share.

[0036] Upon receipt of the message that originally included an attachment that was uploaded to the shared location, the link within the message may be used to access the attachment at the shared location.

[0037] According to an embodiment, the attachments are uploaded to the shared location before the electronic message is sent. The attachment(s) may be uploaded upon selection of the upload option or at a point before the message is delivered to the recipients. For example, the attachment(s) designated to be uploaded may be uploaded in response to the send option being selected. In this way, if a user changes their mind in uploading an attachment and/or sending the message, the attachment will not be uploaded to the shared location until the message is instructed to be sent.

[0038] FIGS. **3-7** show exemplary electronic messages including an attachment detected for automatic uploading and setting permissions. FIGS. **3-7** are for exemplary purpose and are not intended to be limiting.

[0039] FIG. **3** shows a display of an electronic message including a detected attachment that may be uploaded to a shared location. As illustrated, message **300** comprises a To: field, a Cc: field, a Subject field, and a body of the message **314** and attachment **310**. More or fewer fields may be included with the electronic message.

[0040] The electronic message may be accessed a number of ways. For example, a web browser may access an electronic mail service, an email application on a computing device may be configured to receive emails from one or more different services, and the like.

[0041] When electronic message **300** is created, one or more files may be attached to the message. The attachments may be to any type of content, such as word processing documents, spreadsheets, slides, websites and the like.

[0042] When an attachment is detected for the electronic message, an upload option **320** is presented with the display of electronic message **300**. Upload option **320** may be displayed in different locations of electronic message. For example, the upload option may be displayed in the attachment area, to the side of message, within the message, below the message, and the like. Upload option **320** may also be displayed within the menu bar **330** and/or displayed as a different type of menu (e.g. a context menu). Upload option may include one or more options. For example, a single selectable option may be displayed to upload an attachment or one or more other options may be included in an upload option menu for setting other options (e.g. changing shared location, changing permissions, including attachment with/without link to shared content, and the like).

[0043] FIG. **4** shows displays of an electronic message after a user action is received to upload an attachment. As illustrated, message **400** and message **450** show a link to an attachment **430** that has been shared at a shared location that includes read/write privileges. Along with the link to attachment **430**, message **400** includes attachment **310**. As discussed, an attachment may be included with a link to the attachment at a shared location. According to another embodiment, the attachment may be automatically downloaded when it is received by a recipient. Link to attachment **430** may include a description of the sharing privileges for the attachment (e.g. read/write, read, write).

[0044] In response to a user selection (e.g. cursor selecting change option **420**), options for changing sharing permissions is displayed to the user. Change option **420** provides an interface for a user to change the sharing privileges for an

attachment. The sharing privileges may change for all/portion of the users. For example, one of the recipients may be allowed read/write privileges while other recipients are allowed read privileges. According to an embodiment, change option **420** is displayed in response to the attachment (s) being uploaded to the shared location. According to another embodiment, change option **420** may be displayed after receiving an indication to upload the attachment to the shared location but before the attachment is uploaded to the shared location or permissions set at the shared location.

[0045] Message **450** illustrates attachment **310** being automatically removed before it is sent to the recipient.

[0046] FIG. **5** shows an exemplary message that include different change permission options and menus.

[0047] Message **500** shows an exemplary change menu **520** being shown in response to change option **510** being selected. As illustrated, change menu **520** includes different sharing options (read/write, read, and write) that may be associated with one or more of the recipients and an other option for providing other options to a user. Generally, change menu **520** includes a user interface that allows a user to change the sharing permissions of an attachment to be shared. Many type of user interfaces may be created for setting sharing options. For example, in response to selecting change option **510** change menu **530** or change menu **540** may be displayed.

[0048] Change menu **530** shows a menu option for each recipient to whom the message is addressed. In response to selecting a recipient from menu **530**, the different sharing options for that user are displayed (e.g. read/write, read, write, none). Other options may also be provided. For example, permissions may be set such that users that are in a same group as a recipient receive the same permissions as the recipient.

[0049] Change menu **540** shows options for setting individual permissions and setting group permissions. In response to selecting the set group option, menu **545** is displayed that allows a user to change the sharing permissions for the group (e.g. read/write, read, and write). Selecting the set individual option displays one or more user interfaces that allow the user to change sharing options for one or more of the individual recipients (e.g. menu **530** may be displayed).

[0050] FIG. **6** shows an exemplary message that include different upload options and menus. Message **600** shows an exemplary update menu **620** being shown in response to update option **610** being selected. As illustrated, update menu **620** includes different location options (location **1**, location **2**, other locations) that may be used to set a shared location for the attachment. Generally location menu **620** displays a user interface that allows a user to change the shared location for an attachment. Many type of user interfaces may be created for setting shared locations. For example, in response to selecting upload option **610** update menu **630** may be displayed.

[0051] Update menu **630** shows a menu option for changing the shared location, a menu option to change sharing permissions (e.g. see FIG. **5**), a keep attachment option, and other options. In response to selecting change location option, menu **635** may be displayed that allows a user to select a shared location. Selecting the change permissions options displays options that may be selected to set permissions for one or more of the recipients. The keep attachment option may be used to indicate when an attachment is not to be

removed before the message is sent and the attachment has been uploaded to the shared location. Other options may also be provided.

[0052] FIG. **7** shows electronic messages within a browser window that include an option to upload and permission an attachment to a shared location.

[0053] Message **700** shows an upload option **710** being shown in response to an attachment (e.g. attachment **705**) being detected. The attachment may be detected at different times. The attachment may be automatically detected in response to a scan of the message at predetermined times and/or when the content is attached to the message. For example, an attachment may have been included within a message that is forwarded to another user in another message. In this way, an attachment that does not originally originate with the sending user may be shared to different users. In response to selecting the upload option menu **710**, the attachment is automatically uploaded and permissions set for sharing at a shared location.

[0054] Message **750** shows a change option **760** that may be selected to change the sharing options for the attachment(s). A link to the attachment **755** is also shown with the display of the message **714** that includes a brief description of the sharing permissions for the attachment. As illustrated, attachment **705** has been removed from message **750**. As discussed herein, various options may also be presented to a user for changing uploading/sharing options that are associated with the attachment(s) to the message (See FIGS. **5** and **6** and related discussion).

[0055] FIG. **8** shows an illustrative process for automatic upload and setting permissions for an attachment to an electronic message. When reading the discussion of the routines presented herein, it should be appreciated that the logical operations of various embodiments are implemented (1) as a sequence of computer implemented acts or program modules running on a computing system and/or (2) as interconnected machine logic circuits or circuit modules within the computing system. The implementation is a matter of choice dependent on the performance requirements of the computing system implementing the invention. Accordingly, the logical operations illustrated and making up the embodiments described herein are referred to variously as operations, structural devices, acts or modules. These operations, structural devices, acts and modules may be implemented in software, in firmware, in special purpose digital logic, and any combination thereof.

[0056] After a start block, process **800** moves to operation **810**, where the electronic message is accessed. The electronic message may be any electronic message that includes an attachment. According to an embodiment, the electronic messages are email messages. Other messages may also include links, such as SMS, MMS, Instant Messages, social network messages, and the like.

[0057] Flowing to operation **820**, any attachments that are associated with the electronic message are detected. The detection may occur at different times. For example, the detection may occur: in response to a user attaching an attachment to the message; in response to a message being created to send the attachment to another recipient (e.g. forwarding a message, replying to a message); in response to a user input (e.g. a menu option is selected) and the like. The attachment may be contained anywhere within a thread of the electronic message (e.g. within a first reply to a message, a third reply, the original message, and the like). The attachments may be to

any type of content, such as word processing documents, spreadsheets, slides, website content and the like. Generally, the attachment may be to any type of content that is accessible by a computing device.

[0058] Moving to operation **830**, an upload option is displayed. According to an embodiment, the upload option is displayed with a display of the message in response to an attachment being detected. When the upload option is selected by a user, the attachment is uploaded to a shared location and sharing permissions are set for the attachment in the shared location. A single click may be used to upload one or more of the detected attachment(s) to an electronic message.

[0059] Flowing to operation **840**, a determination is made as to when to upload the attachment(s) to the shared location (s). According to an embodiment, the attachments are uploaded to the network share before the electronic message is sent. The attachment(s) may be uploaded upon selection of the upload option or at a point before the message is delivered to the recipients. For example, the attachment(s) designated to be uploaded may be uploaded in response to the send option being selected. In this way, if a user changes their mind in uploading an attachment and/or sending the message, the attachment will not be uploaded to the network share until the message is instructed to be sent. The attachment is uploaded at the determined time.

[0060] Transitioning to operation **850**, a link is inserted into the electronic message that when used accesses the attachment at the shared location. According to an embodiment, when the link is inserted into the electronic message, the corresponding attachment is removed from the message. According to another embodiment, the attachment is not removed from the message.

[0061] Moving to operation **860**, a change permissions option is displayed. The change permission option is selected by a user to permission the attachment at the shared location in a different manner than is set by default. For example, a user may select the change permissions option to modify the permissions for one or more of the attachments for one or more of the recipients (e.g. some recipients have read/write access whereas other recipients have read access).

[0062] Flowing to operation **870**, the permissions for the attachment are set at the shared location. According to an embodiment, the permissions are set using a default set of permissions in response to the attachment being uploaded to the shared location. The permissions to be set for an attachment may be predetermined. For example, all attachments may be initially set for read/write access or read access or write access. Permissions may be set based on the type of attachment (e.g. word processing documents may be set to read/write whereas photos or pictures may be set to read only). According to an embodiment, when the permissions are not successfully set at the shared location, a warning message is provided that indicates that the permissions were not configured as specified.

[0063] Transitioning to operation **880**, the electronic message is delivered to the recipients. When the upload option was selected before the message was sent, the recipient of the message will be able to access the attachment at the shared location using the provided link that is within the electronic message.

[0064] The process then flows to an end block and returns to processing other actions.

[0065] The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

What is claimed is:

1. A method for uploading an attachment to an electronic message to a shared location, comprising:
 - detecting an attachment within an electronic message;
 - displaying an upload option to upload the attachment to a shared location; and
 - in response to receiving a selection of the upload option, uploading the attachment to the shared location and automatically setting permissions for the uploaded attachment at the shared location.
2. The method of claim 1, further comprising removing the attachment from the electronic message and inserting a link to the uploaded attachment at the shared location.
3. The method of claim 2, wherein automatically setting permissions for the uploaded attachment comprises setting default permissions for each recipient of the electronic message.
4. The method of claim 1, wherein automatically setting permissions for the uploaded attachment comprises receiving a custom permission for at least one of the recipients.
5. The method of claim 1, wherein automatically setting permissions for the uploaded attachment comprises displaying a change option within the electronic message that when selected presents options to change the permissions for the attachment at the shared location.
6. The method of claim 3, further comprising providing a warning when the default permissions are unable to be set.
7. The method of claim 1, further comprising sending the electronic message to the recipients and in response to sending the electronic message uploading the attachment to the shared location.
8. The method of claim 1, further comprising inserting an indication within the electronic message indicating that the attachment is stored at the shared location.
9. The method of claim 7, wherein displaying the upload option comprises displaying a choice of shared network locations when the upload option is selected.
10. A computer-readable storage medium storing computer-executable instructions for uploading an attachment to a shared location, comprising:
 - detecting an attachment within an electronic message that is addressed to recipients;
 - displaying an upload option to upload the attachment to a shared location;
 - in response to receiving a selection of the upload option, uploading the attachment to the shared location and automatically setting permissions for the uploaded attachment at the shared location; and
 - sending the message to the recipients.
11. The computer-readable storage medium of claim 10, further comprising removing the attachment from the electronic message and inserting a link to the uploaded attachment at the shared location.
12. The computer-readable storage medium of claim 10, wherein automatically setting permissions for the uploaded attachment comprises setting default permissions for each of the recipients.

13. The computer-readable storage medium of claim **10**, wherein automatically setting permissions for the uploaded attachment comprises receiving a custom permission for at least one of the recipients.

14. The computer-readable storage medium of claim **10**, wherein automatically setting permissions for the uploaded attachment comprises displaying a change option within the electronic message that when selected presents options to change the permissions for the attachment at the shared location.

15. The computer-readable storage medium of claim **10**, wherein displaying the upload option comprises displaying a choice of shared network locations when the upload option is selected.

16. The computer-readable storage medium of claim **10**, wherein automatically setting permissions for the uploaded attachment comprises selecting the permissions based on a type of attachment.

17. A system for uploading an attachment to a shared location, comprising:

- a network connection that is configured to connect to a network;
- a processor, memory, and a computer-readable storage medium;
- an operating environment stored on the computer-readable storage medium and executing on the processor;

a messaging application; and
an attachment manager operating in conjunction with the messaging application that is configured to perform actions comprising:

- detecting an attachment within an electronic message that is addressed to recipients;
- displaying an upload option to upload the attachment to a shared location;
- in response to receiving a selection of the upload option, uploading the attachment to the shared location and automatically setting permissions for the uploaded attachment at the shared location; and
- sending the message to the recipients.

18. The system of claim **17**, further comprising removing the attachment from the electronic message and inserting a link to the uploaded attachment at the shared location.

19. The system of claim **17**, wherein automatically setting permissions for the uploaded attachment comprises displaying a change option within the electronic message that when selected presents options to change the permissions for the attachment at the shared location.

20. The system of claim **17**, wherein automatically setting permissions for the uploaded attachment comprises selecting the permissions based on a type of attachment.

* * * * *